



**FCC 47 CFR Parts 1 & 2
Published RF Exposure KDB Procedures
IEEE Std 1528-2013**

SAR EVALUATION REPORT

For
GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC

**Model: SM-G3586V
FCC ID: A3LSMG3586V**

**Report Number: 14I17354-6A
Issue Date: 4/18/2014**

Prepared for
**Samsung Electronics Co., Ltd.
416, Maetan 3-Dong, Yeongtong-Gu
Suwon-City, Gyeonggi-Do 443-742, South Korea**

Prepared by
**UL Verification Services Inc.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	4/16/2014	Initial Issue	--
A	4/18/2014	Report revised based on the Reviewer's comments: 1. Sec. 7.5.: added (5MHz) Channel Bandwidth for LTE Band 41.	Art Thammanavarat

Table of Contents

1. Attestation of Test Results.....	5
2. Test Methodology	6
3. Facilities and Accreditation	6
4. Calibration and Uncertainty	7
4.1. Measuring Instrument Calibration	7
4.2. Measurement Uncertainty	7
5. Measurement System Description and Setup.....	8
6. SAR Measurement Procedure.....	9
6.1. Normal SAR Measurement Procedure.....	9
6.2. Volume Scan Procedures	11
7. Device Under Test.....	12
7.1. General Information	12
7.2. Wireless Technologies.....	13
7.3. RF Output Power Tolerance	14
7.4. Simultaneous Transmission Condition.....	15
7.5. General LTE SAR Test and Reporting Considerations.....	16
7.5.1. TDD LTE Considerations	17
8. RF Exposure Conditions	18
8.1. Head Exposure Conditions	18
8.2. Body-worn Accessory Exposure Conditions.....	18
8.3. Hotspot Exposure Conditions and Wi-Fi Direct	19
9. RF Output Power Measurement.....	20
9.1. GSM	20
9.2. W-CDMA	22
9.3. LTE Band.....	27
9.4. Wi-Fi (2.4 GHz Band).....	36
9.5. Bluetooth	36
10. Tissue Dielectric Properties	37
10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests	38
10.2. Tissue Dielectric Parameter Check Results.....	39
11. System Performance Check	41
11.1. System Performance Check Measurement Conditions.....	41

11.2.	Reference SAR Values for System Performance Check.....	42
11.3.	System Performance Check Results	42
12.	SAR Test Results	43
12.1.	GSM850.....	44
12.2.	GSM1900.....	44
12.3.	W-CDMA Band II.....	44
12.4.	LTE Band 41 (20MHz Bandwidth)	45
12.5.	Wi-Fi (DTS Band).....	45
12.6.	Bluetooth.....	46
12.6.1.	Standalone SAR Test Exclusion Considerations	46
12.6.2.	Estimated SAR.....	46
13.	SAR Measurement Variability.....	47
13.1.	The Highest Measured SAR Configuration in Each Frequency Band	47
13.2.	Repeated Measurement Results	47
14.	Simultaneous Transmission SAR Analysis.....	48
14.1.	Sum of the SAR for GSM850 & Wi-Fi & BT	49
14.2.	Sum of the SAR for GSM1900 & Wi-Fi & BT	49
14.3.	Sum of the SAR for WCDMA Band II & Wi-Fi & BT	50
14.4.	Sum of the SAR for LTE Band 41 & Wi-Fi & BT	50
15.	Appendixes.....	51
15.1.	Photos and Antenna Locations.....	51
15.2.	System Performance Check Plots	51
15.3.	Highest SAR Test Plots.....	51
15.4.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3871	51
15.5.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3772	51
15.6.	Calibration Certificate for E-Field Probe EX3DV3 - SN 3749	51
15.7.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3751	51
15.8.	Calibration Certificate for D835V2 - SN 4d117	51
15.9.	Calibration Certificate for D1900V2- SN 5d140	51
15.10.	Calibration Certificate for D2450V2 - SN 899	51
15.11.	Calibration Certificate for D2600V2 - SN 1036	51

1. Attestation of Test Results

Applicant	Samsung Electronics Co., Ltd.			
DUT description	GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC			
Model	SM-G3586V			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	3/26/2014 – 4/15/2014			
The highest reported SAR values	RF exposure condition	Licensed	DTS	UNII
	Head	1.189 W/kg	0.146 W/kg	NA
	Body-worn Accessory	0.646 W/kg	0.105 W/kg	NA
	Wireless Router (Hotspot)	0.646 W/kg	0.105 W/kg	NA
	Simultaneous Transmission	1.276 W/kg	1.276 W/kg	NA
Applicable Standards	FCC 47 CFR Parts 1 & 2 Published RF Exposure KDB Procedures, and TCB workshop updates IEEE Std 1528-2013			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:

Prepared By:




Bobby Bayani
WiSE Senior Engineer
UL Verification Services Inc.

Chakrit Thammanavarat
WiSE Engineer
UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR Parts 1 & 2, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D06 Hotspot Mode SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Tissue Dielectric Properties

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	7/11/2014
Dielectronic Probe kit	SPEAG	DAK-3.5	1082	9/10/2014
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529162	9/19/2014

System Performance Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	3744A01084	5/7/2014
Power Meter	HP	437B	3125U12345	7/29/2014
Power Meter	HP	437B	3125U11364	8/26/2014
Power Sensor	HP	8481A	2702A76223	9/17/2014
Power Sensor	HP	8481A	1926A27048	7/29/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A
E-Field Probe	SPEAG	EX3DV4	3871	7/29/2014
E-Field Probe	SPEAG	EX3DV4	3772	2/26/2015
E-Field Probe	SPEAG	EX3DV4	3749	1/29/2015
E-Field Probe	SPEAG	EX3DV4	3751	11/21/2014
Data Acquisition Electronics	SPEAG	DAE4	1239 *	4/9/2014
Data Acquisition Electronics	SPEAG	DAE4	1259	1/23/2015
Data Acquisition Electronics	SPEAG	DAE4	1352	9/11/2014
Data Acquisition Electronics	SPEAG	DAE3	500	5/28/2014
System Validation Dipole	SPEAG	D835V2	4d117	5/28/2014
System Validation Dipole	SPEAG	D1900V2	5d140	4/18/2014
System Validation Dipole	SPEAG	D2450V2	899	9/10/2014
System Validation Dipole	SPEAG	D2600V2	1036	3/12/2015

Notes:

* SAR Testing was performed initially using DAE S/N 1239 on 3/31/2014 only. DAE S/N 1239 was then replaced with DAE S/N 1259 to continue with the rest of the SAR Testing.

Others


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMU200	106301	7/3/2014
Base Station Simulator	R & S	CMW500	124595-SS	7/25/2014
Power Meter	Agilent	N1912A	MY52310061	12/12/2014
Power Sensor	Agilent	N1921A	MY52200012	9/25/2014

4.2. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

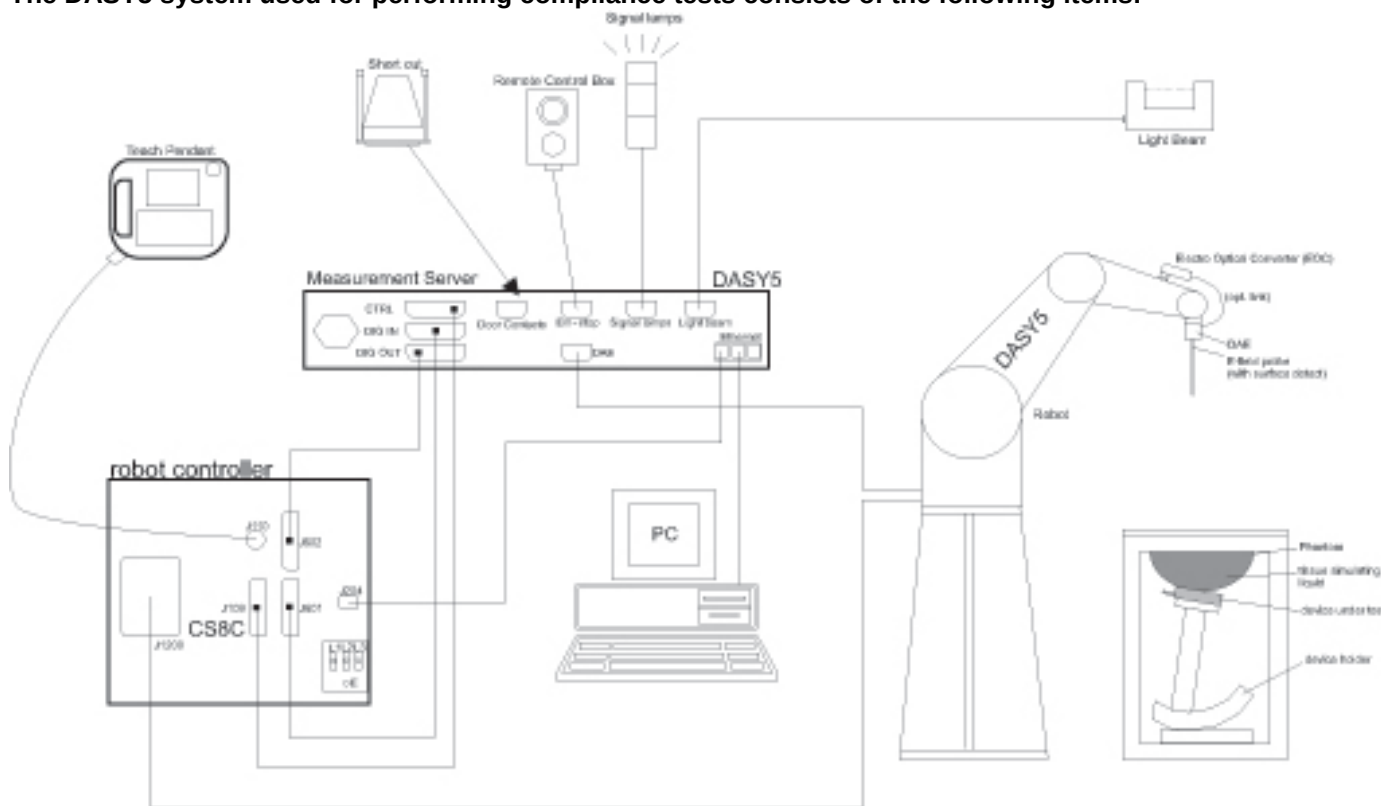

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

Operating Configuration(s)	Held to head, Body-worn (Voice call)
Mobile Hotspot	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi -enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☐ Wi-Fi Direct (Wi-Fi 5 GHz)
Device dimension	Overall (Length x Width): 132 mm x 69mm Overall Diagonal: 140mm Display Diagonal: 118mm
Back Cover	☐ Normal Battery Cover ☐ Wireless Charger Battery Cover ☒ Normal Battery Cover with NFC
Accessory	☒ Headset
Battery Options	☒ Standard – Lithium-ion battery, Rating 3.8Vdc, 7.6Wh ☐ Extended (large capacity)

7.2. Wireless Technologies

Wireless Technology and Frequency Bands	GSM: 850 / 1900 W-CDMA Band: II LTE Band 41 Wi-Fi : 2.4 GHz Bluetooth: 2.4 GHz
Mode	GSM ☒ Voice (GMSK) ☒ GPRS (GMSK) ☒ EGPRS (8PSK) W-CDMA ☒ UMTS Rel. 99 (Voice & Data) ☒ HSDPA (Rel. 5) ☒ HSUPA (Rel. 6) ☒ DC-HSDPA (Rel. 8) ☒ HSPA+ (Rel. 7) LTE ☒ QPSK ☒ 16QAM Wi-Fi 2.4GHz (802.11b/g/n) ☒ 802.11b ☒ 802.11g ☒ 802.11n (HT20) Bluetooth Ver. 4.0 (LE)
Duty Cycle	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%, W-CDMA: 100% LTE : 63.33% Wi-Fi 802.11b/g/n: 100%
GPRS Multi-Slot Class	☐ Class 8 - One Up ☐ Class 10 - Two Up ☐ Class 12 - Four Up ☒ Class 33 - Four Up
DTM (Dual Transfer Mode)	☐ Supported
VoIP (GPRS)	☒ Supported
SV-LTE & SV-DO	☐ Supported

7.3. RF Output Power Tolerance

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
GSM850	Voice	33.5	34.0
	GPRS 1 slot	33.5	34.0
	GPRS 2 slots	30.5	31.0
	GPRS 3 slots	29.0	29.5
	GPRS 4 slots	27.5	28.0
	EGPRS 1 slot	26.5	27.0
	EGPRS 2 slots	26.5	27.0
	EGPRS 3 slots	24.0	24.5
	EGPRS 4 slots	24.0	24.5
GSM1900	Voice	30.0	30.5
	GPRS 1 slot	30.0	30.5
	GPRS 2 slots	29.0	29.5
	GPRS 3 slots	26.0	26.5
	GPRS 4 slots	25.0	25.5
	EGPRS 1 slot	26.5	27.0
	EGPRS 2 slots	26.5	27.0
	EGPRS 3 slots	24.0	24.5
	EGPRS 4 slots	24.0	24.5
W-CDMA Band II	R99	22.5	23.0
	HSDPA	21.5	22.0
	HSUPA	21.5	22.0
	DC-HSDPA	21.5	22.0
LTE Band 41	QPSK	20.5	21.0

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	17.0	17.5
	802.11g	14.0	14.5
	802.11n HT20	13.0	13.5
Bluetooth		10.0	10.5
Bluetooth LE		2.5	3.0

7.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	1. GSM 850/1900 Voice + Wi-Fi 2.4GHz 2. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz (VoIP) 3. WCDMA Band II + Wi-Fi 2.4GHz 4. LTE B41 + Wi-Fi 2.4GHz
Body-worn Accessory	5. GSM 850/1900 Voice + Wi-Fi 2.4GHz 6. GSM 850/1900 Voice + BT 7. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz (VoIP) 8. GSM 850/1900 (GPRS/EDGE) + BT(VoIP) 9. WCDMA Band II + Wi-Fi 2.4GHz 10. WCDMA Band II + BT 11. LTE B41 + Wi-Fi 2.4GHz 12. LTE B41 + BT
Wireless Router (Hotspot) & Wi-Fi Direct	13. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz 14. WCDMA Band II + Wi-Fi 2.4GHz 15. LTE B41 + Wi-Fi 2.4GHz
Notes: 1. Wi-Fi 2.4GHz supports Hotspot and Wi-Fi Direct. 2. GPRS/EDGE, WCDMA and LTE support Hotspot. 3. VoIP is support in GPRS/EDGE, WCDMA and LTE. 4. Wi-Fi 2.4 GHz Radio cannot transmit simultaneously with Bluetooth Radio.	

7.5. General LTE SAR Test and Reporting Considerations

Item	Description																																												
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 41	Frequency range: Tx: 2496 to 2690 MHz - Rx: 2496 to 2690 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	39750	39725	39700	39675																																								
	Low-Mid	40185	40173	40160	40160																																								
	Mid	40620	40620	40620	40620																																								
	Mid-High	41055	41068	41080	41080																																								
	High	41490	41515	41540	41564																																								
LTE transmitter and antenna implementation	LTE has one TX/RX antenna and one Rx only antenna. Refer to Appendix “Antenna Locations and Separation Distances” for antenna locations																																												
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	No																																												
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

7.5.1. TDD LTE Considerations

According to KDB 941225 D05 SAR for LTE Devices v02r02, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \# \text{ of S} + \# \text{ of U}$

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

8. RF Exposure Conditions

Refer to Appendix "Antenna Locations and Separation Distances" for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Conditions

For WWAN, LTE and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

8.3. Hotspot Exposure Conditions and Wi-Fi Direct

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	
Edge 1 (Top)	120 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 2 (Right)	1 mm	Yes	
Edge 3 (Bottom)	2 mm	Yes	
Edge 4 (Left)	38 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR

For LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	6 mm	Yes	
Edge 1 (Top)	3 mm	Yes	
Edge 2 (Right)	54 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 3 (Bottom)	123 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 4 (Left)	4 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	8 mm	Yes	
Edge 1 (Top)	10 mm	Yes	
Edge 2 (Right)	2 mm	Yes	
Edge 3 (Bottom)	107 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 648474 D04 Handset SAR
Edge 4 (Left)	59 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 648474 D04 Handset SAR

9. RF Output Power Measurement

9.1. GSM

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
850	GSM (Voice)	CS1	1	128	824.2	32.9	23.9
				190	836.6	32.9	23.9
				251	848.8	32.8	23.8
	GPRS (GMSK)	CS1	1	128	824.2	33.0	23.9
				190	836.6	32.9	23.9
				251	848.8	32.8	23.8
			2	128	824.2	29.9	23.9
				190	836.6	29.9	23.9
				251	848.8	29.9	23.9
			3	128	824.2	29.3	25.0
				190	836.6	29.5	25.2
				251	848.8	29.5	25.2
			4	128	824.2	27.6	24.6
				190	836.6	27.5	24.5
				251	848.8	27.4	24.4
	EGPRS (8PSK)	MCS5	1	128	824.2	27.0	18.0
				190	836.6	27.0	18.0
				251	848.8	27.0	18.0
			2	128	824.2	26.6	20.6
				190	836.6	26.7	20.6
				251	848.8	26.7	20.7
			3	128	824.2	24.1	19.8
				190	836.6	24.1	19.8
				251	848.8	24.1	19.8
			4	128	824.2	23.9	20.9
				190	836.6	23.9	20.8
				251	848.8	23.9	20.9

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	30.1	21.1
				661	1880.0	30.0	20.9
				810	1909.8	30.0	21.0
	GPRS (GMSK)	CS1	1	512	1850.2	30.1	21.1
				661	1880.0	30.1	21.0
				810	1909.8	30.0	21.0
			2	512	1850.2	27.5	21.5
				661	1880.0	27.6	21.6
				810	1909.8	27.5	21.5
			3	512	1850.2	25.3	21.0
				661	1880.0	25.3	21.0
				810	1909.8	25.2	21.0
			4	512	1850.2	24.0	21.0
				661	1880.0	24.1	21.1
				810	1909.8	24.1	21.1
	EGPRS (8PSK)	MCS5	1	512	1850.2	26.2	17.2
				661	1880.0	26.2	17.2
				810	1909.8	26.2	17.2
			2	512	1850.2	25.9	19.9
				661	1880.0	25.9	19.9
				810	1909.8	25.9	19.9
			3	512	1850.2	23.3	19.0
				661	1880.0	23.3	19.0
				810	1909.8	23.2	18.9
			4	512	1850.2	23.1	20.1
				661	1880.0	23.2	20.2
				810	1909.8	23.1	20.1

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	22.5
		9400	1880.0	22.5
		9538	1907.6	22.5

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121-1. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	21.4
		9400	1880.0	21.4
		9538	1907.6	21.4
	Subtest 2	9262	1852.4	21.2
		9400	1880.0	21.3
		9538	1907.6	21.5
	Subtest 3	9262	1852.4	20.6
		9400	1880.0	20.6
		9538	1907.6	20.7
	Subtest 4	9262	1852.4	20.6
		9400	1880.0	20.5
		9538	1907.6	20.7

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	11/15	15/9	2/15	15/0
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelisation Codes	2xSF2				SF4

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	21.4
		9400	1880.0	21.4
		9538	1907.6	21.2
	Subtest 2	9262	1852.4	20.5
		9400	1880.0	20.4
		9538	1907.6	20.3
	Subtest 3	9262	1852.4	20.4
		9400	1880.0	20.2
		9538	1907.6	20.2
	Subtest 4	9262	1852.4	20.4
		9400	1880.0	20.6
		9538	1907.6	20.7
	Subtest 5	9262	1852.4	21.4
		9400	1880.0	21.3
		9538	1907.6	21.4

DC-HSDPA

The following 4 Sub-tests were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121-1, since DC-HSDPA has only one transmitting uplink. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	20.3
		9400	1880.0	20.2
		9538	1907.6	20.4
	Subtest 2	9262	1852.4	20.1
		9400	1880.0	20.0
		9538	1907.6	20.1
	Subtest 3	9262	1852.4	20.0
		9400	1880.0	20.0
		9538	1907.6	20.1
	Subtest 4	9262	1852.4	20.0
		9400	1880.0	20.0
		9538	1907.6	20.2

9.3. LTE Band

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 41 Measured Results

Procedure used to establish SAR test signal for LTE TDD Band 41

Set to CMW-500 with following parameters:

- Turn the LTE Signaling off using “ON | OFF” key
- Operating Band: Select Band 41 and TDD
- Go to “Config....”

LTE Signaling 1 - X3.2.10.6

Connection Status

Cell: **OFF**

Packet Switched: **OFF**

RRC State: **Idle**

Event Log

- 03:21:26 State 'Cell Off'
- 03:21:17 State 'Cell On'
- 03:21:16 Signaling Failure
- 03:21:13 Network Originated Detach
- 03:21:02 State 'Connection Established'
- 03:21:02 EPS Dedicated Bearer Established
- 03:20:57 State 'Attached'
- 03:20:57 EPS Default Bearer Established

UE Info

IMEI: ---

IMSI: ---

UE IPv4 Address [0]: ---

UE IPv6 Prefix [0]: ---

Connection Setup

Scheduling: **RMC**

	Downlink	Uplink
Channel	40620 Ch	40620 Ch
Frequency	2593.0 MHz	2593.0 MHz
Cell Bandwidth	20.0 MHz	20.0 MHz
RS EPRE	-85.8 dBm/15kHz	
Full Cell BW Pow.	-55.0 dBm	
PUSCH Open Loop Nom. Power		23 dBm
PUSCH Closed Loop Target Power		23.0 dBm
#RB	100	100
RB Pos./Start RB	low 0	low 0
Modulation	QPSK	QPSK
TBS Idx / Value	5 8760	2 4584
Throughput	3.970 Mbit/s	1.834 Mbit/s

LTE Signaling
OFF

Config ...

- Go to "Physical Cell Setup"
- Select "TDD" and Set "Uplink Downlink Configuration" to "0"
- Turn the cell on using "ON | OFF" key

The screenshot shows the "LTE Signaling Configuration" window with the "PCC" tab selected. The "Path" is set to "Physical Cell Setup/TDD/Uplink Downlink Configuration". The "Duplex Mode" is set to "TDD". The "Scenario" is set to "Standard Cell". The "DL Cell Bandwidth" is set to "20.0 MHz" and the "UL Cell Bandwidth" is set to "20.0 MHz". The "Physical Cell ID" is set to "0" and the "Cyclic Prefix" is set to "Normal". The "Sounding RS (SRS)" checkbox is unchecked. The "TDD" section is expanded, and the "Uplink Downlink Configuration" is set to "0". The "Subframe Number" is set to "0" and the "Direction" is set to "S" (downlink). The "Special Subframe" is set to "7". The "PRACH" section is expanded. The "Network" section is expanded. The "Connection" section is expanded. The "CQI Reporting" section is expanded. The "UE Measurement Report" section is expanded. The "LTE Signaling" button on the right is highlighted with a red box and labeled "ON".

Path: Physical Cell Setup/TDD/Uplink Downlink Configuration

Duplex Mode: TDD

Scenario: Standard Cell

DL Cell Bandwidth: 20.0 MHz #RB Max: 100

UL Cell Bandwidth: 20.0 MHz

Physical Cell ID: 0

Cyclic Prefix: Normal

Sounding RS (SRS): ☐

TDD

Uplink Downlink Configuration: 0

Subframe Number: 0 1 2 3 4 5 6 7 8 9

Direction: ↓ S ↑ ↑ ↓ S ↑ ↑

Special Subframe: 7

PRACH

Network

Connection

CQI Reporting

UE Measurement Report

LTE Signaling: ON

Connect to EUT

- Turn the cell on using "ON | OFF" key
- After EUT is Attached
- Select "Connect"

The screenshot displays the 'LTE Signaling 1 - X3.2.10.6' application window. The interface is divided into several sections:

- Connection Status:** Shows 'Cell' with a signal icon, 'Packet Switched' status, and 'RRC State' as 'Connected'. A red box highlights the 'Attached' status.
- Event Log:** Lists recent events such as 'State 'Attached'', 'EPS Default Bearer Established', and 'RRC Connection Established'.
- UE Info:** Displays UE details including IMEI (001027009999998), IMSI (001010123456789), UE IPv4 Address (192.168.48.129), and UE IPv6 Prefix (fc01:abab:cdcd:efe0::).
- Connection Setup:** Shows parameters for PCC and SCC bearers. Key settings include Operating Band (Band 41), Channel (40620 Ch), Frequency (2593.0 MHz), Cell Bandwidth (20.0 MHz), RS EPRE (-85.8 dBm/15kHz), Full Cell BW Pow. (-55.0 dBm), PUSCH Open Loop Nom. Power (23 dBm), and PUSCH Closed Loop Target Power (23.0 dBm).
- Buttons:** At the bottom, there are buttons for 'Detach', 'Connect' (highlighted with a red box), 'Send SMS', 'Handover ...', and 'Config ...'.
- Right Panel:** Contains a vertical stack of buttons including 'LTE 1 TX Meas.', 'LTE 1 Ext.BLER', 'Go to...', 'Routing', and 'LTE Signaling ON' (highlighted with a red box).

Max Power Setting

- Select "LTE 1 TX Meas."
- Press "RESTART | STOP" Soft key

The screenshot displays the 'LTE Signaling 1 - X3.2.10.6' application window. The interface is divided into several sections:

- Connection Status:** Shows 'Cell' with a signal icon, 'Packet Switched' with a laptop icon, and 'RRC State' as 'Connected'. A 'Connection Established' message is visible.
- Event Log:** A list of system events with timestamps, such as '03:33:07 State 'Connection Established'', '03:33:07 EPS Dedicated Bearer Established', and '03:31:31 State 'Attached''.
- UE Info:** A dropdown menu showing 'UE Info' with a checkbox. Below it, fields for IMEI (001027009999998), IMSI (001010123456789), UE IPv4 Address [0] (192.168.48.129), and UE IPv6 Prefix [0] (fc01:abab:cdcd:efe0::) are listed.
- Connection Setup:** A section for configuring the connection. It includes a 'Scheduling' dropdown set to 'RMC'. Below this, there are two columns for 'Downlink' and 'Uplink' settings:
 - Downlink:** # RB (100), RB Pos./Start RB (low), Modulation (QPSK), TBS Idx / Value (5 / 8760), Throughput (3.970 Mbit/s).
 - Uplink:** # RB (100), RB Pos./Start RB (low), Modulation (QPSK), TBS Idx / Value (2 / 4584), Throughput (1.834 Mbit/s).
- Power Settings:** A section showing 'Operating Band' as 'Band 41', 'TDD' mode, 'Channel' as '40620 Ch', 'Frequency' as '2593.0 MHz', 'Cell Bandwidth' as '20.0 MHz', 'RS EPRE' as '-85.8 dBm/15kHz', 'Full Cell BW Pow.' as '-55.0 dBm', 'PUSCH Open Loop Nom.Power' as '23 dBm', and 'PUSCH Closed Loop Target Power' as '23.0 dBm'.
- Right Sidebar:** A vertical stack of buttons including 'LTE', 'LTE 1 TX Meas.' (highlighted with a red box), 'LTE 1 Ext.BLER', 'Go to...', 'Routing', and 'LTE Signaling ON' (highlighted with a red box).
- Bottom Bar:** A row of buttons: 'Detach', 'Disconnect', 'Send SMS', 'Handover ...', and 'Config ...'.

- Select “Signaling Parameter”
- Select “TX Power Control (TPC)” > Select “Active TPC Setup” to “Max Power” > Set “Closed Loop Target Power” to “23 dBm”


The screenshot displays the 'LTE Measurement - X3.2.10.6 - TX Measurement' window. The main interface includes several measurement plots: EVM, Inband Emissions, Equalizer Spectrum Flatness, Spectrum ACLR, and Spectrum. A 'Signaling TPC' dialog box is open, showing the 'TX Power Control (TPC)' settings. The 'Active TPC Setup' is set to 'Max Power', and the 'Closed Loop Target Power' is set to '23.0 dBm'. The 'Signaling Parameter' button on the right sidebar is highlighted with a red box. The 'Multi Evaluation' button is also highlighted with a yellow 'RUN' label. The 'LTE Signaling' status is 'ON'.

Signaling TPC

TX Power Control (TPC)	
Active TPC Setup	Max Power
Closed Loop Target Power	23.0 dBm

View TX Power

- Go to "Display"
- Select "Select View..."
- Select "Spectrum Emission Mask"

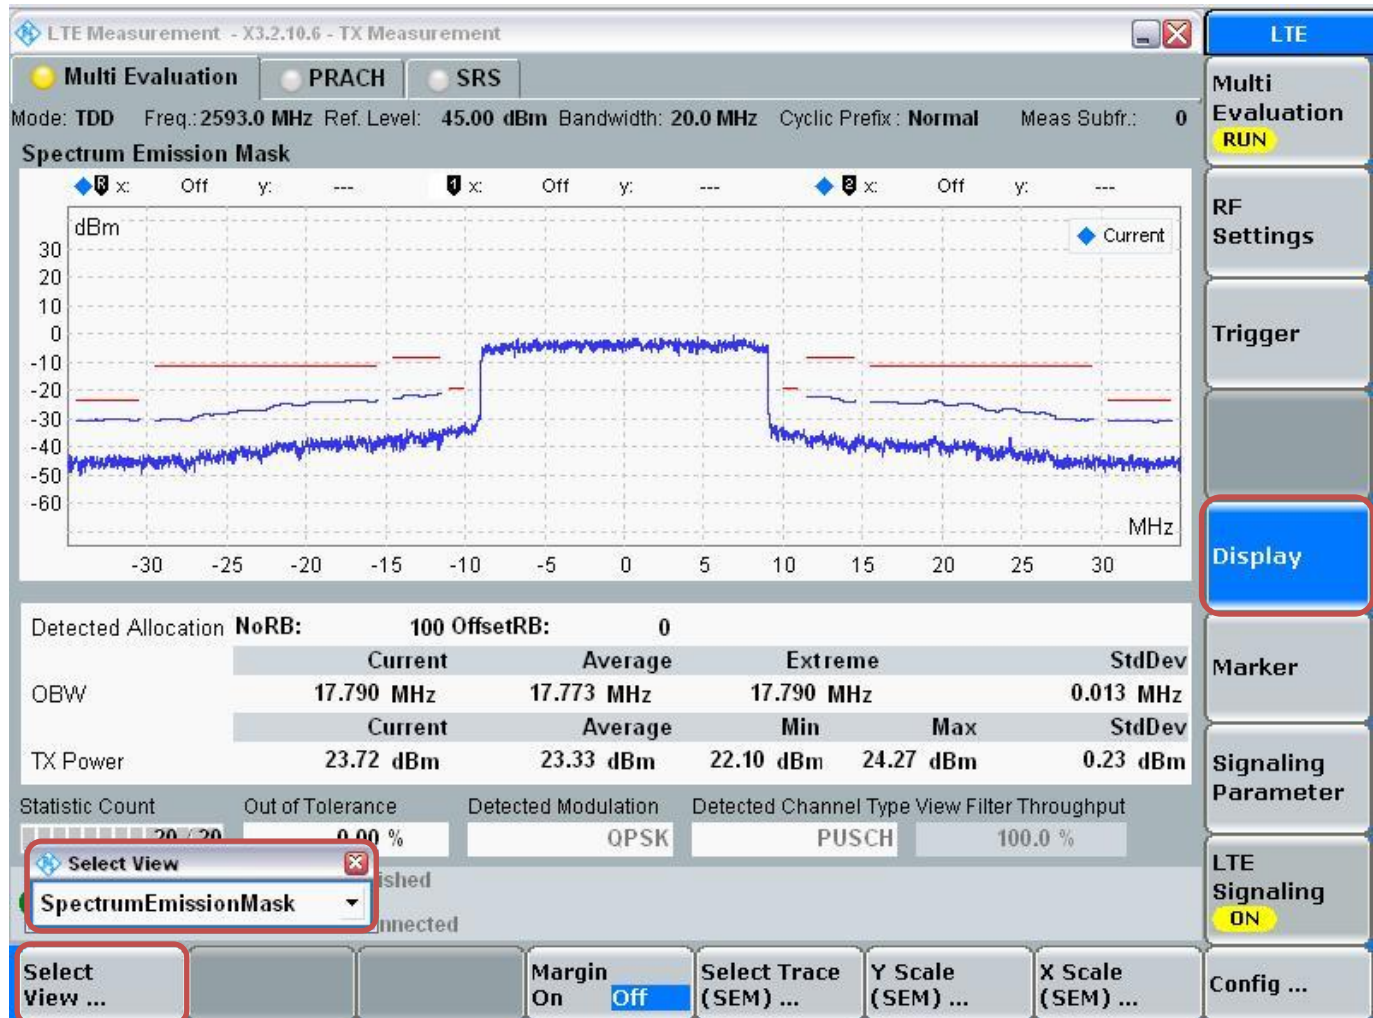

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)				
							2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	0	20.5	20.5	20.5	20.5	20.5
			1	50	0	0	20.4	20.4	20.4	20.4	20.3
			1	99	0	0	20.5	20.4	20.4	20.4	20.0
			50	0	1	1	19.5	19.3	19.5	19.5	19.4
			50	25	1	1	19.5	19.3	19.4	19.4	19.3
			50	50	1	1	19.5	19.3	19.5	19.4	19.5
			100	0	1	1	19.5	19.4	19.5	19.5	19.5
		16QAM	1	0	1	1	19.2	19.2	19.5	19.5	19.1
			1	50	1	1	19.5	19.1	19.5	19.5	19.0
			1	99	1	1	19.4	19.1	19.5	19.4	19.0
			50	0	2	1	19.4	19.3	19.5	19.5	19.4
			50	25	2	1	19.3	19.3	19.5	19.5	19.3
			50	50	2	1	19.5	19.3	19.4	19.4	19.2
			100	0	2	1	19.5	19.4	19.5	19.5	19.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)				
							2503.5 MHz	2548.3 MHz	2593 MHz	2637.75 MHz	2682.5 MHz
LTE Band 41	15	QPSK	1	0	0	0	20.4	20.5	20.5	20.5	20.5
			1	36	0	0	20.5	20.5	20.5	20.5	20.4
			1	74	0	0	20.5	20.4	20.4	20.5	20.4
			36	0	1	1	19.5	19.4	19.5	19.5	19.4
			36	18	1	1	19.5	19.5	19.5	19.5	19.3
			36	37	1	1	19.5	19.5	19.5	19.5	19.3
			75	0	1	1	19.5	19.5	19.5	19.5	19.2
		16QAM	1	0	1	1	19.4	19.5	19.5	19.5	19.5
			1	36	1	1	19.5	19.5	19.5	19.5	19.5
			1	74	1	1	19.5	19.5	19.5	19.5	19.4
			36	0	2	1	19.5	19.4	19.5	19.5	19.3
			36	18	2	1	19.5	19.4	19.5	19.5	19.2
			36	37	2	1	19.5	19.4	19.4	19.5	19.1
			75	0	2	1	19.5	19.5	19.5	19.5	19.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)				
							2501 MHz	2547 MHz	2593 MHz	2639 MHz	2685 MHz
LTE Band 41	10	QPSK	1	0	0	0	20.5	20.5	20.5	20.5	20.5
			1	25	0	0	20.5	20.4	20.5	20.4	20.5
			1	49	0	0	20.4	20.3	20.4	20.4	20.3
			25	0	1	1	19.5	19.4	19.5	19.5	19.3
			25	12	1	1	19.5	19.4	19.5	19.5	19.2
			25	25	1	1	19.5	19.4	19.5	19.5	19.2
			50	0	1	1	19.5	19.5	19.5	19.5	19.3
		16QAM	1	0	1	1	19.5	19.5	19.5	19.5	19.5
			1	25	1	1	19.5	19.5	19.5	19.5	19.5
			1	49	1	1	19.5	19.5	19.5	19.5	19.4
			25	0	2	1	19.4	19.3	19.5	19.4	19.4
			25	12	2	1	19.5	19.3	19.5	19.5	19.2
			25	25	2	1	19.5	19.3	19.4	19.5	19.2
			50	0	2	1	19.5	19.4	19.5	19.5	19.3

LTE Band 41 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)				
							2498.5 MHz	2547 MHz	2593 MHz	2639 MHz	2687.5 MHz
LTE Band 41	5	QPSK	1	0	0	0	20.5	20.5	20.5	20.5	20.4
			1	12	0	0	20.5	20.5	20.4	20.4	20.2
			1	24	0	0	20.5	20.5	20.5	20.5	20.2
			12	0	1	1	19.3	19.2	19.4	19.5	19.4
			12	6	1	1	19.3	19.4	19.4	19.4	19.3
			12	13	1	1	19.5	19.5	19.5	19.5	19.4
			25	0	1	1	19.4	19.4	19.2	19.3	19.5
		16QAM	1	0	1	1	19.4	19.5	19.5	19.5	19.5
			1	12	1	1	19.4	19.5	19.5	19.5	19.4
			1	24	1	1	19.5	19.5	19.5	19.5	19.3
			12	0	2	1	19.0	19.3	19.4	19.3	19.3
			12	6	2	1	19.1	19.2	19.3	19.2	19.4
			12	13	2	1	19.1	19.2	19.2	19.2	19.3
			25	0	2	1	19.2	19.0	19.3	19.3	19.4

9.4. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	▽
		2.437	6	√	▽
		2.462	11 [#]	√	▽

Notes:
√ = "default test channels"
▽ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"
[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	17.2	Yes
			6	2437	17.5	
			11	2462	17.5	
	802.11g	6 Mbps	1	2412	14.5	No
			6	2437	14.5	
			11	2462	14.5	
	802.11n (HT20)	MCS0	1	2412	13.4	No
			6	2437	13.5	
			11	2462	13.5	

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	17.5	Yes
			2 Mbps	17.0	No
			5.5 Mbps	17.2	No
			11 Mbps	17.1	No

9.5. Bluetooth

Maximum tune-up tolerance limit is 10.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

Refer to Standalone SAR Test Exclusion Considerations Section.

10. Tissue Dielectric Properties

IEEE Std 1528-2013

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1500	40.4	1.23
1640	40.2	1.31
1750	40.1	1.37
1800	40.0	1.40
1900	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2300	39.5	1.67
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48

NOTE—For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

MSL/HSL750 (Body and Head liquids for 700 – 800 MHz)

Item	Head Tissue Simulation Liquids HSL750 Muscle (body) Tissue Simulation Liquids MSL750
Type No	SL AAH 075
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H ₂ O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40-60%
NaCl	Sodium Chloride, 0-6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1-0.7%

MSL/HSL1750 (Body and Head liquids for 1700 – 1800 MHz)

Item	Head Tissue Simulation Liquids HSL1750 Muscle (body) Tissue Simulation Liquids MSL1750
Type No	SL AAM 175
Manufacturer	SPEAG
-The item is composed of the following ingredients:	
H ₂ O	Water, 52 – 75%
C8H18O3	Diethylene glycol monobutyl ether (DGBE), 25-48%
NaCl	Sodium Chloride, <1.0%

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Lab A

Date Tested	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
3/31/2014	Body 2450	e'	51.4300	Relative Permittivity (ϵ_r):	51.43	52.70	-2.41	5
		e"	13.8800	Conductivity (σ):	1.89	1.95	-3.03	5
	Body 2410	e'	51.5500	Relative Permittivity (ϵ_r):	51.55	52.76	-2.29	5
		e"	13.7100	Conductivity (σ):	1.84	1.91	-3.68	5
	Body 2475	e'	51.3500	Relative Permittivity (ϵ_r):	51.35	52.67	-2.50	5
		e"	13.9600	Conductivity (σ):	1.92	1.99	-3.22	5
3/31/2014	Head 2450	e'	38.1300	Relative Permittivity (ϵ_r):	38.13	39.20	-2.73	5
		e"	13.2200	Conductivity (σ):	1.80	1.80	0.05	5
	Head 2410	e'	38.2700	Relative Permittivity (ϵ_r):	38.27	39.28	-2.57	5
		e"	13.1000	Conductivity (σ):	1.76	1.76	-0.28	5
	Head 2475	e'	38.0300	Relative Permittivity (ϵ_r):	38.03	39.17	-2.91	5
		e"	13.2800	Conductivity (σ):	1.83	1.83	0.03	5
4/15/2014	Head 2600	e'	39.5100	Relative Permittivity (ϵ_r):	39.51	39.01	1.28	5
		e"	13.0800	Conductivity (σ):	1.89	1.96	-3.63	5
	Head 2500	e'	39.8600	Relative Permittivity (ϵ_r):	39.86	39.14	1.85	5
		e"	12.7700	Conductivity (σ):	1.78	1.85	-4.26	5
	Head 2700	e'	39.1300	Relative Permittivity (ϵ_r):	39.13	38.88	0.63	5
		e"	13.3600	Conductivity (σ):	2.01	2.07	-3.12	5
4/15/2014	Body 2600	e'	50.7600	Relative Permittivity (ϵ_r):	50.76	52.51	-3.33	5
		e"	15.3700	Conductivity (σ):	2.22	2.16	2.83	5
	Body 2500	e'	51.2600	Relative Permittivity (ϵ_r):	51.26	52.64	-2.62	5
		e"	15.1200	Conductivity (σ):	2.10	2.02	4.04	5
	Body 2700	e'	50.4200	Relative Permittivity (ϵ_r):	50.42	52.38	-3.75	5
		e"	15.7200	Conductivity (σ):	2.36	2.30	2.55	5

SAR Lab B

Date Tested	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
3/24/2014	Head 835	e'	41.7700	Relative Permittivity (ϵ_r):	41.77	41.50	0.65	5
		e"	19.7100	Conductivity (σ):	0.92	0.90	1.68	5
	Head 820	e'	41.9800	Relative Permittivity (ϵ_r):	41.98	41.60	0.91	5
		e"	19.7400	Conductivity (σ):	0.90	0.90	0.18	5
	Head 850	e'	41.6000	Relative Permittivity (ϵ_r):	41.60	41.50	0.24	5
		e"	19.6800	Conductivity (σ):	0.93	0.92	1.65	5
3/26/2014	Body 835	e'	54.0700	Relative Permittivity (ϵ_r):	54.07	55.20	-2.05	5
		e"	21.7300	Conductivity (σ):	1.01	0.97	4.01	5
	Body 820	e'	54.2400	Relative Permittivity (ϵ_r):	54.24	55.28	-1.88	5
		e"	21.8000	Conductivity (σ):	0.99	0.97	2.63	5
	Body 850	e'	53.9500	Relative Permittivity (ϵ_r):	53.95	55.16	-2.19	5
		e"	21.6600	Conductivity (σ):	1.02	0.99	3.70	5

Tissue Dielectric Parameter Check Results (continued)

SAR Lab C

Date Tested	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
3/26/2014	Body 1900	e'	53.0100	Relative Permittivity (ϵ_r):	53.01	53.30	-0.54	5
		e"	14.5300	Conductivity (σ):	1.54	1.52	0.99	5
	Body 1850	e'	53.2200	Relative Permittivity (ϵ_r):	53.22	53.30	-0.15	5
		e"	14.4100	Conductivity (σ):	1.48	1.52	-2.48	5
	Body 1910	e'	52.9800	Relative Permittivity (ϵ_r):	52.98	53.30	-0.60	5
		e"	14.5500	Conductivity (σ):	1.55	1.52	1.66	5
3/26/2014	Head 1900	e'	40.2200	Relative Permittivity (ϵ_r):	40.22	40.00	0.55	5
		e"	13.5500	Conductivity (σ):	1.43	1.40	2.25	5
	Head 1850	e'	40.4400	Relative Permittivity (ϵ_r):	40.44	40.00	1.10	5
		e"	13.4500	Conductivity (σ):	1.38	1.40	-1.18	5
	Head 1910	e'	40.1800	Relative Permittivity (ϵ_r):	40.18	40.00	0.45	5
		e"	13.5500	Conductivity (σ):	1.44	1.40	2.79	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D835V2	4d117	5/28/2013	835	1g	9.54	9.40
				10g	6.21	6.16
D1900V2	5d140	4/18/2013	1900	1g	41.2	41.5
				10g	21.5	22.0
D2450V2	899	09/10/2013	2450	1g	51.3	49.7
				10g	23.9	23.3
D2600V2	1036	3/12/2014	2600	1g	57.4	56.4
				10g	25.7	25.0

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab A

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
3/31/2014	D2450V2	899	Head	1g	5.27	5.15	51.5	51.3	0.39	2.28
				10g	2.27	2.32	23.2	23.9	-2.93	
3/31/2014	D2450V2	899	Body	1g	5.14	5.08	50.8	49.7	2.21	1.17
				10g	2.24	2.32	23.2	23.3	-0.43	
4/15/2014	D2600V2	1036	Head	1g	6.02	5.67	56.7	57.4	-1.22	5.81
				10g	2.64	2.47	24.7	25.7	-3.89	
4/15/2014	D2600V2	1036	Body	1g	6.06	5.73	57.3	56.4	1.60	5.45
				10g	2.63	2.52	25.2	25.0	0.80	

SAR Lab B

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
3/24/2014	D835V2	4d117	Head	1g	1.040	1.000	10.00	9.54	4.82	3.85
				10g	0.697	0.658	6.58	6.21	5.96	
3/26/2014	D835V2	4d117	Body	1g	0.893	0.918	9.2	9.40	-2.34	-2.80
				10g	0.597	0.602	6.0	6.16	-2.27	

SAR Lab C

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
3/26/2014	D1900V2	5d140	Body	1g	4.32	4.29	42.9	41.50	3.37	0.69
				10g	2.16	2.23	22.3	22	1.36	
3/26/2014	D1900V2	5d140	Head	1g	4.39	4.33	43.3	41.2	5.10	1.37
				10g	2.32	2.23	22.3	21.5	3.72	

12. SAR Test Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least $\frac{1}{4}$ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	34.0	32.9	0.153	0.197	
			Left Tilt	190	836.6	34.0	32.9	0.074	0.095	
			Right Touch	190	836.6	34.0	32.9	0.115	0.148	
			Righttt Tilt	190	836.6	34.0	32.9	0.074	0.095	
Head VoIP	GPRS 3 Slots	0	Left Touch	190	836.6	29.5	29.5	0.160	0.160	1
			Left Tilt	190	836.6	29.5	29.5	0.085	0.085	
			Right Touch	190	836.6	29.5	29.5	0.119	0.119	
			Righttt Tilt	190	836.6	29.5	29.5	0.075	0.075	
Body-worn	Voice	10	Rear	190	836.6	34.0	32.9	0.298	0.384	2
			Front	190	836.6	34.0	32.9	0.228	0.294	
Body-worn(VoIP) & Hotspot	GPRS 3 Slots	10	Rear	190	836.6	29.5	29.5	0.307	0.307	3
			Front	190	836.6	29.5	29.5	0.209	0.209	
Hotspot			Edge 3	190	836.6	29.5	29.5	0.031	0.031	
			Edge 4	190	836.6	29.5	29.5	0.220	0.220	

12.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	30.5	30.0	0.232	0.260	
			Left Tilt	661	1880.0	30.5	30.0	0.051	0.057	
			Right Touch	661	1880.0	30.5	30.0	0.157	0.176	
			Righttt Tilt	661	1880.0	30.5	30.0	0.075	0.084	
Head VoIP	GPRS 2 Slots	0	Left Touch	661	1880.0	29.5	27.6	0.242	0.375	4
			Left Tilt	661	1880.0	29.5	27.6	0.050	0.078	
			Right Touch	661	1880.0	29.5	27.6	0.158	0.245	
			Righttt Tilt	661	1880.0	29.5	27.6	0.075	0.115	
Body-worn	Voice	10	Rear	661	1880.0	30.5	30.0	0.289	0.324	
			Front	661	1880.0	30.5	30.0	0.298	0.334	5
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	10	Rear	661	1880.0	29.5	27.6	0.304	0.471	6
Front			661	1880.0	29.5	27.6	0.292	0.452		
Hotspot			Edge 3	661	1880.0	29.5	27.6	0.208	0.322	
			Edge 4	661	1880.0	29.5	27.6	0.100	0.154	

12.3. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	23.0	22.5	0.501	0.562	7
			Left Tilt	9400	1880.0	23.0	22.5	0.106	0.119	
			Right Touch	9400	1880.0	23.0	22.5	0.335	0.376	
			Right Tilt	9400	1880.0	23.0	22.5	0.156	0.175	
Body-worn & Hptspot	Rel 99 RMC	10	Rear	9400	1880.0	23.0	22.5	0.576	0.646	8
			Front	9400	1880.0	23.0	22.5	0.560	0.628	
Hotspot	Rel 99 RMC	10	Edge 3	9400	1880.0	23.0	22.5	0.357	0.401	
			Edge 4	9400	1880.0	23.0	22.5	0.142	0.159	

12.4. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	39750	2506.0	1	0	21.0	20.5	0.312	0.350	
						50	50	20.0	19.5	0.256	0.287	
			Left Tilt	39750	2506.0	1	0	21.0	20.5	0.298	0.334	
						50	50	20.0	19.5	0.266	0.298	
			Right Touch	39750	2506.0	1	0	21.0	20.5	0.939	1.054	
						50	50	20.0	19.5	0.804	0.902	
				40620	2593.0	1	0	21.0	20.5	0.775	0.870	
						50	50	20.0	19.5	0.923	1.036	
						100	0	20.0	19.5	0.774	0.868	
				41490	2680.0	1	0	21.0	20.5	1.060	1.189	9
						50	50	20.0	19.5	0.862	0.967	
			Right Tilt	39750	2506.0	1	0	21.0	20.5	0.525	0.589	
						50	50	20.0	19.5	0.438	0.491	
Body-worn & Hptspot	QPSK	10	Rear	39750	2506.0	1	0	21.0	20.5	0.173	0.194	
						50	50	20.0	19.5	0.146	0.164	
			Front	39750	2506.0	1	0	21.0	20.5	0.192	0.215	10
						50	50	20.0	19.5	0.157	0.176	
Hotspot	QPSK	10	Edge 1	39750	2506.0	1	0	21.0	20.5	0.135	0.151	
						50	50	20.0	19.5	0.126	0.141	
			Edge 4	39750	2506.0	1	0	21.0	20.5	0.161	0.181	
						50	50	20.0	19.5	0.143	0.160	

12.5. Wi-Fi (DTS Band)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	802.11b 1 Mbps	0	Left Touch	6	2437.0	17.5	17.5	0.146	0.146	11
			Left Tilt	6	2437.0	17.5	17.5	0.077	0.077	
			Right Touch	6	2437.0	17.5	17.5	0.087	0.087	
			Right Tilt	6	2437.0	17.5	17.5	0.083	0.083	
Body-worn & Hptspot	802.11b 1 Mbps	10	Rear	6	2437.0	17.5	17.5	0.105	0.105	12
			Front	6	2437.0	17.5	17.5	0.041	0.041	
Hotspot	802.11b 1 Mbps	10	Edge 1	6	2437.0	17.5	17.5	0.014	0.014	
			Edge 2	6	2437.0	17.5	17.5	0.037	0.037	

12.6. Bluetooth

12.6.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
10.5	11	10	2.480	1.8

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

12.6.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	11	10	2.480	0.231

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Hotspot/Wi-Fi Direct (W/kg)	Repeated SAR (Yes/No)
850	GSM 850	NA	NA	NA	No
1900	GSM 1900	NA	NA	NA	No
	WCDMA Band II	NA	NA	NA	No
2400	Wi-Fi 802.11b/g/n	NA	NA	NA	No
2600	LTE Band 41	1.060	NA	NA	Yes

13.2. Repeated Measurement Results

Head Exposure Condition

Frequency band	Test Position	Mode	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
							Original	Repeated		
LTE Band 41	Right Touch	QPSK	41490	2680.0	1	0	1.060	1.060	1.00	1

Body-worn Accessory Exposure Condition

Not Applicable.

Hotspot Mode Exposure Conditions

Not Applicable.

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured for both antennas in the pair, it is determined by the actual x, y, and z coordinates in the 1-g SAR for each SAR Peak Location; based on the extrapolated and interpolated result in the zoom scan measurement using the formula:

$$[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$$

A new threshold of 0.04 is also introduced in the KDB 447498. Thus, in order for a pair of simultaneously transmitting antennas, with the sum of 1-g SAR > 1.6 W/kg, to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			GSM 850	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.197	0.146		0.343	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.095	0.077		0.172	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.148	0.087		0.235	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.095	0.083		0.178	No
Body-worn Accessory & Hotspot	Rear	WWAN + Wi-Fi(DTS)	0.384	0.105		0.489	No
		WWAN + BT	0.384		0.231	0.615	No
	Front	WWAN + Wi-Fi(DTS)	0.294	0.041		0.335	No
		WWAN + BT	0.294		0.231	0.525	No
Hotspot	Edge 1	WWAN + Wi-Fi(DTS)	0.000	0.014		0.014	No
	Edge 2	WWAN + Wi-Fi(DTS)	0.000	0.037		0.037	No
	Edge 3	WWAN + Wi-Fi(DTS)	0.031	0.000		0.031	No
	Edge 4	WWAN + Wi-Fi(DTS)	0.220	0.000		0.220	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			GSM 1900	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.375	0.146		0.521	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.078	0.077		0.155	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.245	0.087		0.332	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.115	0.083		0.198	No
Body-worn Accessory & Hotspot	Rear	WWAN + Wi-Fi(DTS)	0.471	0.105		0.576	No
		WWAN + BT	0.471		0.231	0.702	No
	Front	WWAN + Wi-Fi(DTS)	0.452	0.041		0.493	No
		WWAN + BT	0.452		0.231	0.683	No
Hotspot	Edge 1	WWAN + Wi-Fi(DTS)	0.000	0.014		0.014	No
	Edge 2	WWAN + Wi-Fi(DTS)	0.000	0.037		0.037	No
	Edge 3	WWAN + Wi-Fi(DTS)	0.322	0.000		0.322	No
	Edge 4	WWAN + Wi-Fi(DTS)	0.154	0.000		0.154	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.3. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			W-CDMA Band II	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.562	0.146		0.708	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.119	0.077		0.196	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.376	0.087		0.463	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.175	0.083		0.258	No
Body-worn Accessory & Hotspot	Rear	WWAN + Wi-Fi(DTS)	0.646	0.105		0.751	No
		WWAN + BT	0.646		0.231	0.877	No
	Front	WWAN + Wi-Fi(DTS)	0.628	0.041		0.669	No
		WWAN + BT	0.628		0.231	0.859	No
Hotspot	Edge 1	WWAN + Wi-Fi(DTS)	0.000	0.014		0.014	No
	Edge 2	WWAN + Wi-Fi(DTS)	0.000	0.037		0.037	No
	Edge 3	WWAN + Wi-Fi(DTS)	0.401	0.000		0.401	No
	Edge 4	WWAN + Wi-Fi(DTS)	0.159	0.000		0.159	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.4. Sum of the SAR for LTE Band 41 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			LTE Band 41	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.350	0.146		0.496	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.334	0.077		0.411	No
	Right Touch	WWAN + Wi-Fi(DTS)	1.189	0.087		1.276	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.589	0.083		0.672	No
Body-worn Accessory & Hotspot	Rear	WWAN + Wi-Fi(DTS)	0.194	0.105		0.299	No
		WWAN + BT	0.194		0.231	0.425	No
	Front	WWAN + Wi-Fi(DTS)	0.215	0.041		0.256	No
		WWAN + BT	0.215		0.231	0.446	No
Hotspot	Edge 1	WWAN + Wi-Fi(DTS)	0.151	0.014		0.165	No
	Edge 2	WWAN + Wi-Fi(DTS)	0.000	0.037		0.037	No
	Edge 3	WWAN + Wi-Fi(DTS)	0.000	0.000		0.000	No
	Edge 4	WWAN + Wi-Fi(DTS)	0.160	0.000		0.160	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. Photos and Antenna Locations**
- 15.2. System Performance Check Plots**
- 15.3. Highest SAR Test Plots**
- 15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3871**
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3772**
- 15.6. Calibration Certificate for E-Field Probe EX3DV3 - SN 3749**
- 15.7. Calibration Certificate for E-Field Probe EX3DV4 - SN 3751**
- 15.8. Calibration Certificate for D835V2 - SN 4d117**
- 15.9. Calibration Certificate for D1900V2- SN 5d140**
- 15.10. Calibration Certificate for D2450V2 - SN 899**
- 15.11. Calibration Certificate for D2600V2 - SN 1036**

END OF REPORT