



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth, WLAN b/g/n & NFC

MODEL NUMBER: SM-G360G

FCC ID: A3LSMG360G

REPORT NUMBER: 14I18853-E4 Revision A

ISSUE DATE: SEPTEMBER 29, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	9/17/14	Initial Issue	P. Zhang
A	9/29/14	Revised Page 18-19	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. MEASUREMENT METHODS	12
8. SUMMARY TABLE	13
9. ANTENNA PORT TEST RESULTS	14
9.1. 6 dB BANDWIDTH	14
9.1.1. 802.11b MODE IN THE 2.4 GHz BAND	14
9.1.2. 802.11g MODE IN THE 2.4 GHz BAND	14
9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	14
9.1.4. 6 dB BANDWIDTH MID CH PLOTS	15
9.2. 99% BANDWIDTH	16
9.2.1. 802.11b MODE IN THE 2.4 GHz BAND	16
9.2.2. 802.11g MODE IN THE 2.4 GHz BAND	16
9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	16
9.2.4. 99% BANDWIDTH MID CH PLOTS	17
9.3. OUTPUT POWER	18
9.3.1. 802.11b MODE IN THE 2.4 GHz BAND	18
9.3.2. 802.11g MODE IN THE 2.4 GHz BAND	19
9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	19
9.4. PSD	20
9.4.1. 802.11b MODE IN THE 2.4 GHz BAND	20
9.4.2. 802.11g MODE IN THE 2.4 GHz BAND	21
9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	21
9.4.4. PSD Chain 0 MID CH PLOTS	22

9.5.	OUT-OF-BAND EMISSIONS	23
9.5.1.	802.11b MODE IN THE 2.4 GHz BAND	24
9.5.2.	802.11g MODE IN THE 2.4 GHz BAND	30
9.5.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND	36
10.	RADIATED TEST RESULTS	42
10.1.	LIMITS AND PROCEDURE	42
10.2.	TRANSMITTER ABOVE 1 GHz	43
10.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND	43
10.2.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND	56
10.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND	69
10.3.	WORST-CASE BELOW 1 GHz	82
11.	AC POWER LINE CONDUCTED EMISSIONS	85
12.	SETUP PHOTOS	88

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n, & NFC

MODEL: SM-G360G

SERIAL NUMBER: 1958413 (Radiated), 1958409 (Conducted)

DATE TESTED: September 16 - 17, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released
For UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.



CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.4-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☐ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☐ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n, & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	16	39.81
2412 - 2462	802.11g	13.1	20.42
2412 - 2462	802.11n HT20	12.2	16.60

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of 2.29 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	ETA0U10HBE	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

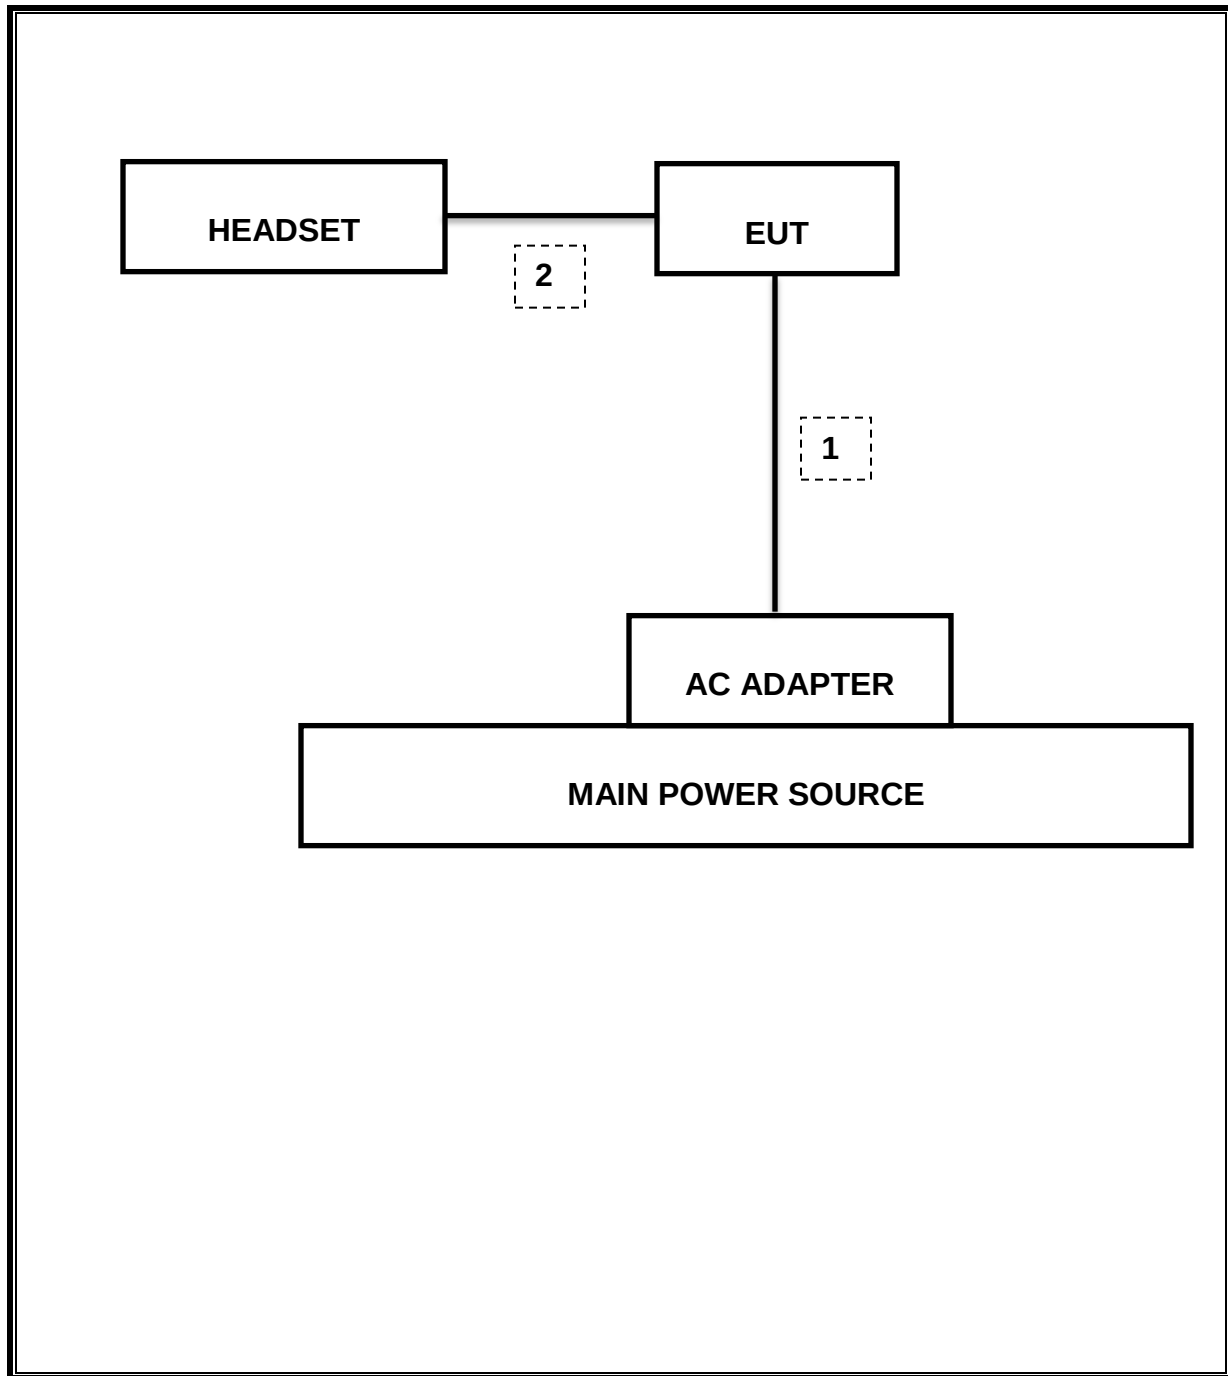

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
Spectrum Analyzer, 9KHz-40GHz	HP	8564E	C00986	04/01/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	08/13/15
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/18/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
Antenna, Horn, 1-18 GHz	ETS	3117	C01022	02/21/15
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	03/06/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	03/23/15
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 40GHz	Miteq	NSP4000-SP2	C00990	08/20/15
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGPM-G is used for power and AVGPS-3 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.

8. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	8.0MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-31.75dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	16.0dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-13.32dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	55.18dBuV(PK)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	48.05dBuV/m

9. ANTENNA PORT TEST RESULTS

9.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r02: The transmitter output is connected to a spectrum analyzer with the RBW set to 100 kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

9.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.03	0.5
Mid	2437	8.00	0.5
High	2462	8.07	0.5
Worst		8.00	


9.1.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.43	0.5
Mid	2437	16.50	0.5
High	2462	16.47	0.5
Worst		16.43	

9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.63	0.5
Mid	2437	17.63	0.5
High	2462	17.63	0.5
Worst		17.63	

9.1.4. 6 dB BANDWIDTH MID CH PLOTS

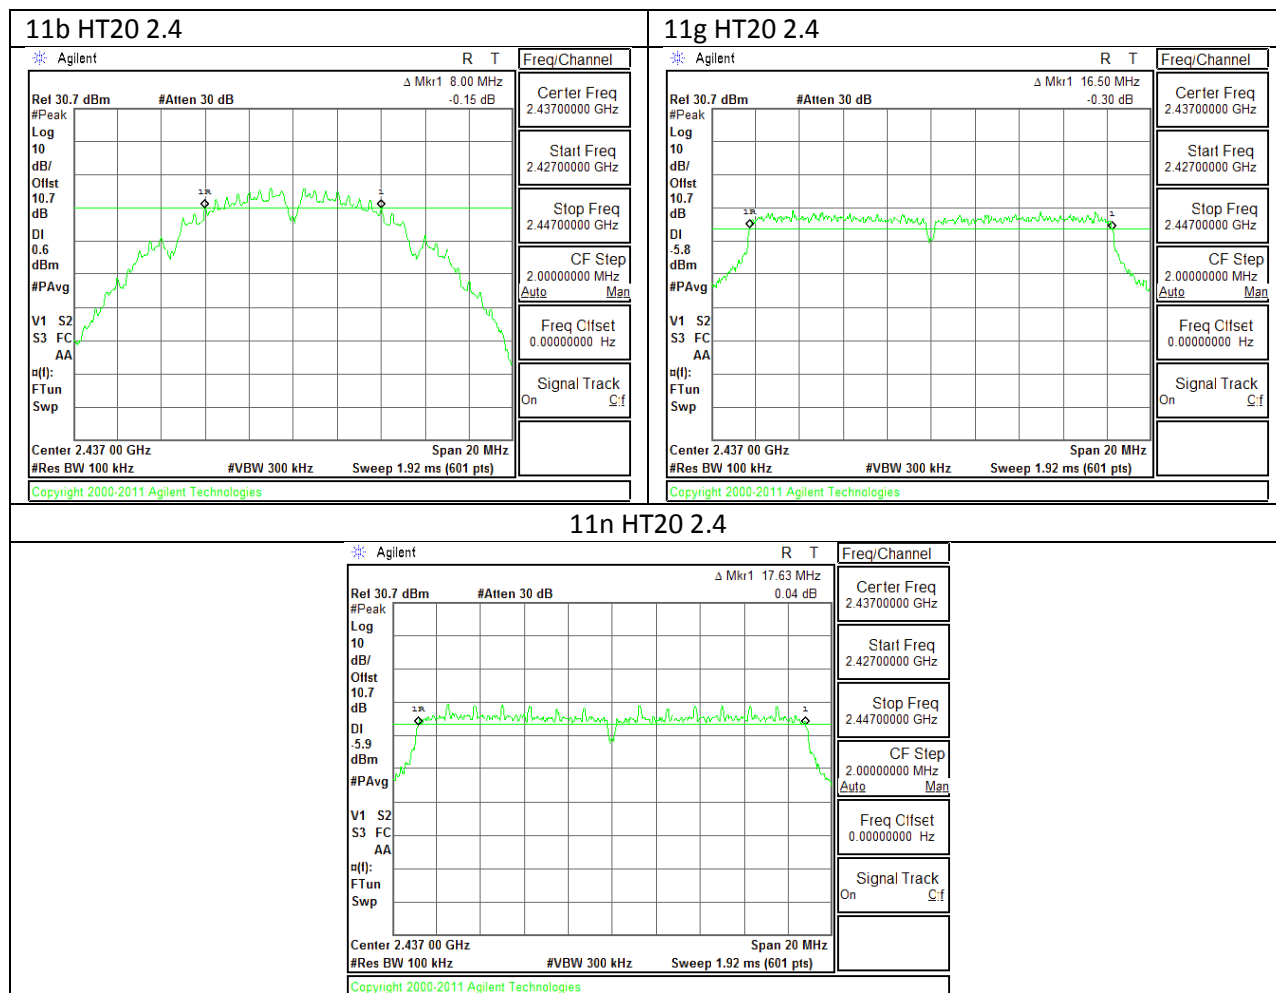

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

9.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.22
Mid	2437	12.21
High	2462	12.41
Worst		12.41


9.2.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.42
Mid	2437	16.44
High	2462	16.45
Worst		16.45

9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.69
Mid	2437	17.70
High	2462	17.56
Worst		17.70

9.2.4. 99% BANDWIDTH MID CH PLOTS

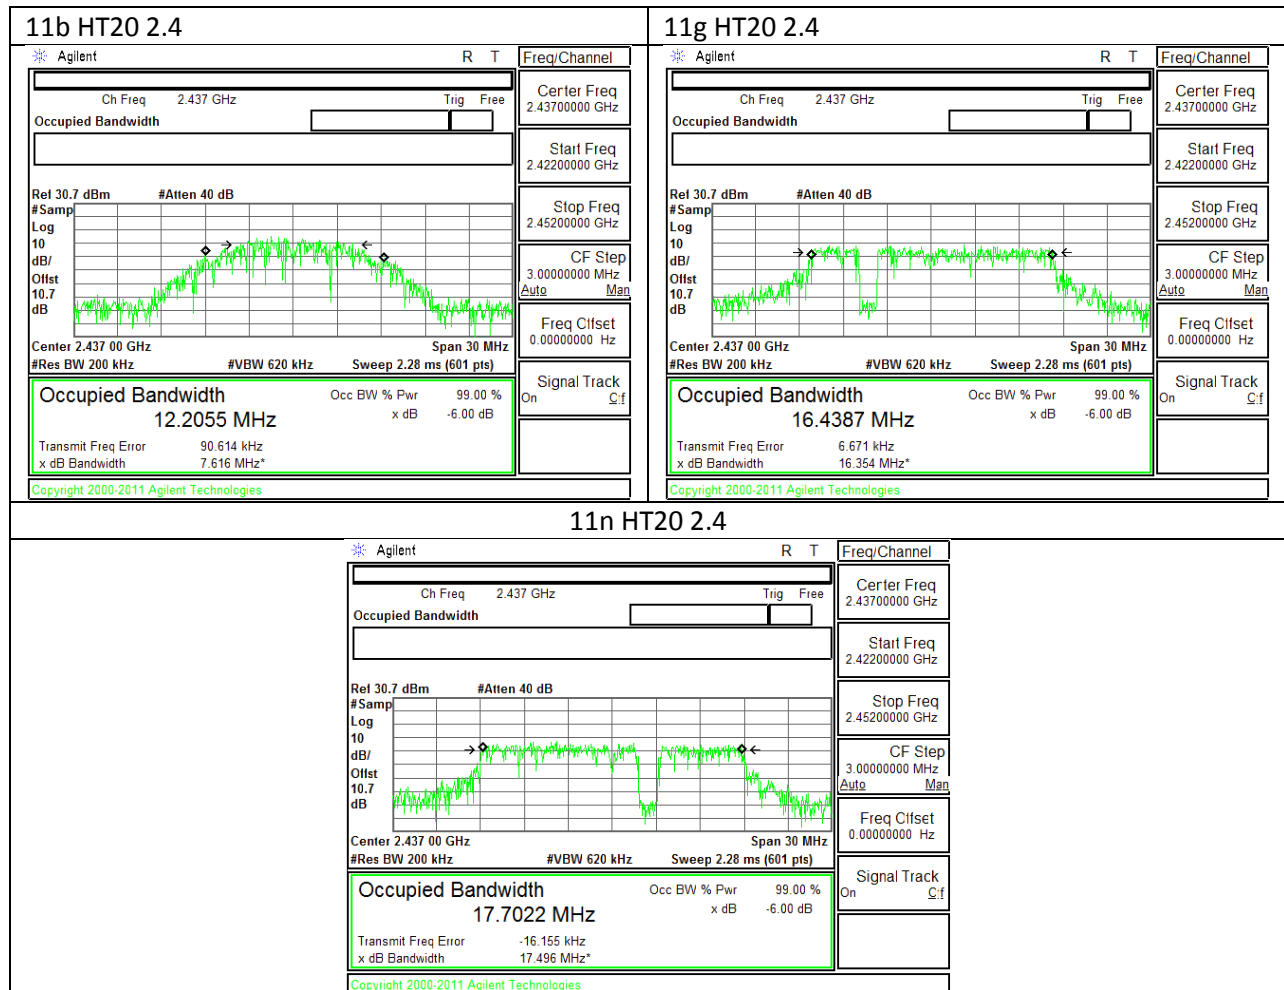

9.3. OUTPUT POWER

LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

TEST PROCEDURE

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGP-M-G is used for power. The transmitter output is connected to a power meter. The cable assembly insertion loss of 0.2 dB (including 10 dB pad and 0.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.3.1. 802.11b MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	2.29	30.00	30	36	30.00
Mid	2437	2.29	30.00	30	36	30.00
High	2462	2.29	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	16.00	16.00	30.00	-14.00
Mid	2437	15.90	15.90	30.00	-14.10
High	2462	15.40	15.40	30.00	-14.60
Worst			16.00		

9.3.2. 802.11g MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	2.29	30.00	30	36	30.00
Mid	2437	2.29	30.00	30	36	30.00
High	2462	2.29	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	13.10	13.10	30.00	-16.90
Mid	2437	13.10	13.10	30.00	-16.90
High	2462	13.10	13.10	30.00	-16.90
Worst			13.10		

9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	2.29	30.00	30	36	30.00
Mid	2437	2.29	30.00	30	36	30.00
High	2462	2.29	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	12.10	12.10	30.00	-17.90
Mid	2437	12.20	12.20	30.00	-17.80
High	2462	12.10	12.10	30.00	-17.90
Worst			12.20		

9.4. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

9.4.1. 802.11b MODE IN THE 2.4 GHz BAND

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-13.32	8.0	-21.3
Mid	2437	-13.75	8.0	-21.8
High	2462	-13.33	8.0	-21.3

9.4.2. 802.11g MODE IN THE 2.4 GHz BAND

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-19.97	8.0	-28.0
Mid	2437	-20.68	8.0	-28.7
High	2462	-20.31	8.0	-28.3

9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-21.44	8.0	-29.4
Mid	2437	-21.78	8.0	-29.8
High	2462	-21.32	8.0	-29.3

9.4.4. PSD Chain 0 MID CH PLOTS

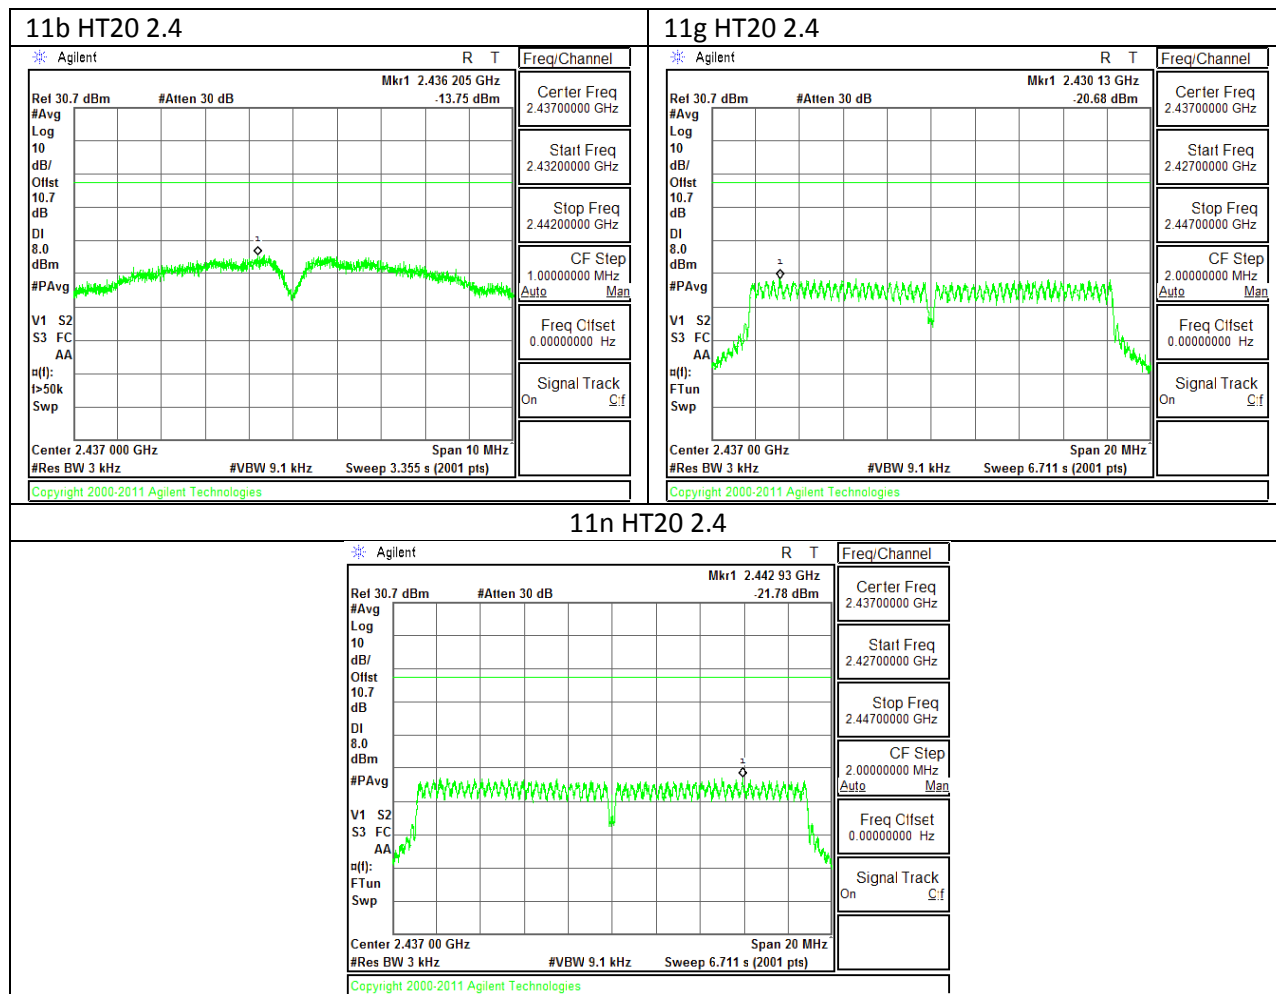

9.5. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


RESULTS

9.5.1. 802.11b MODE IN THE 2.4 GHz BAND


IN-BAND REFERENCE LEVEL

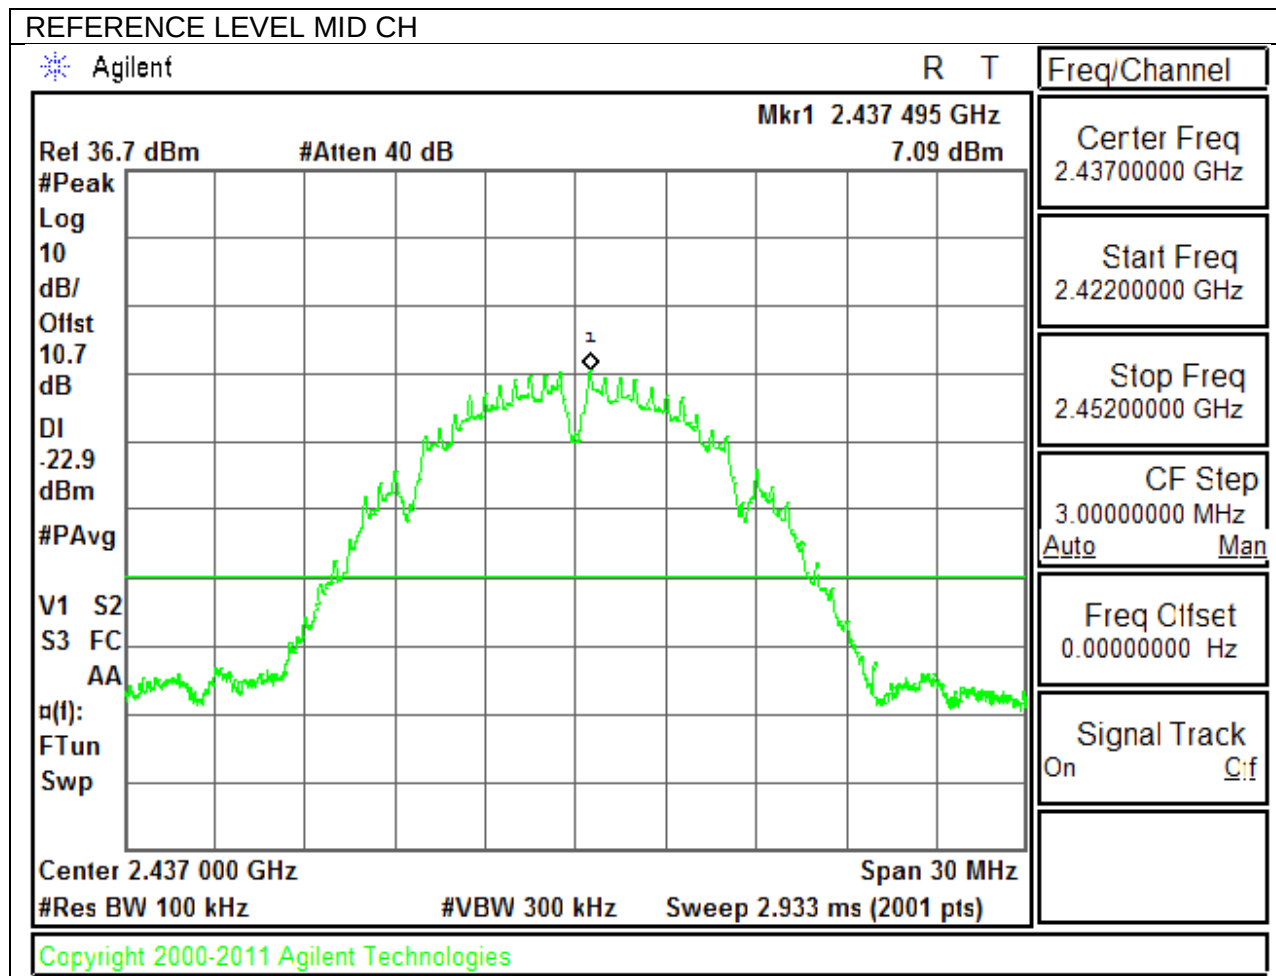


LOW CHANNEL BANDEDGE

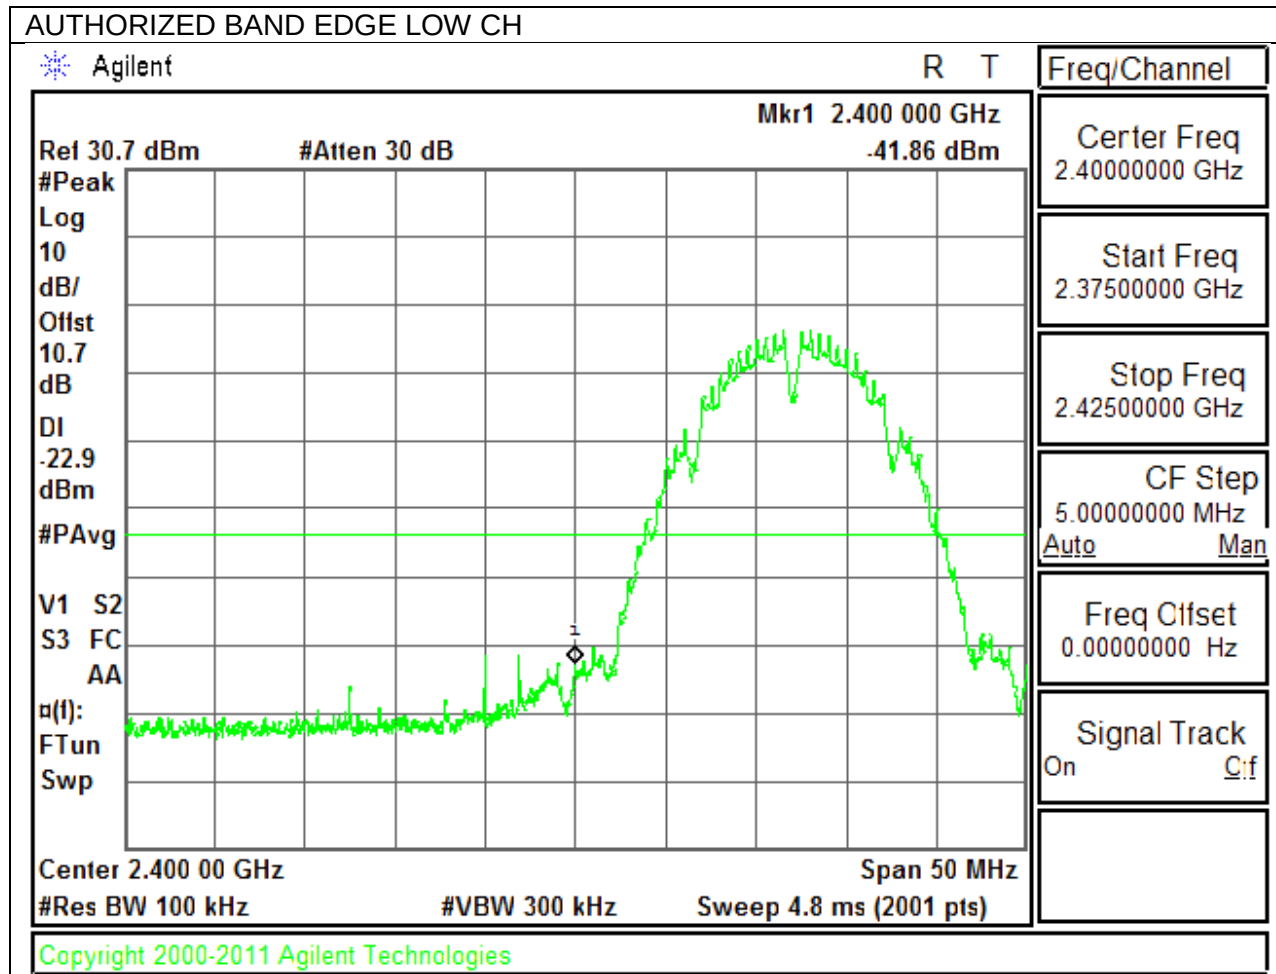


HIGH CHANNEL BANDEDGE

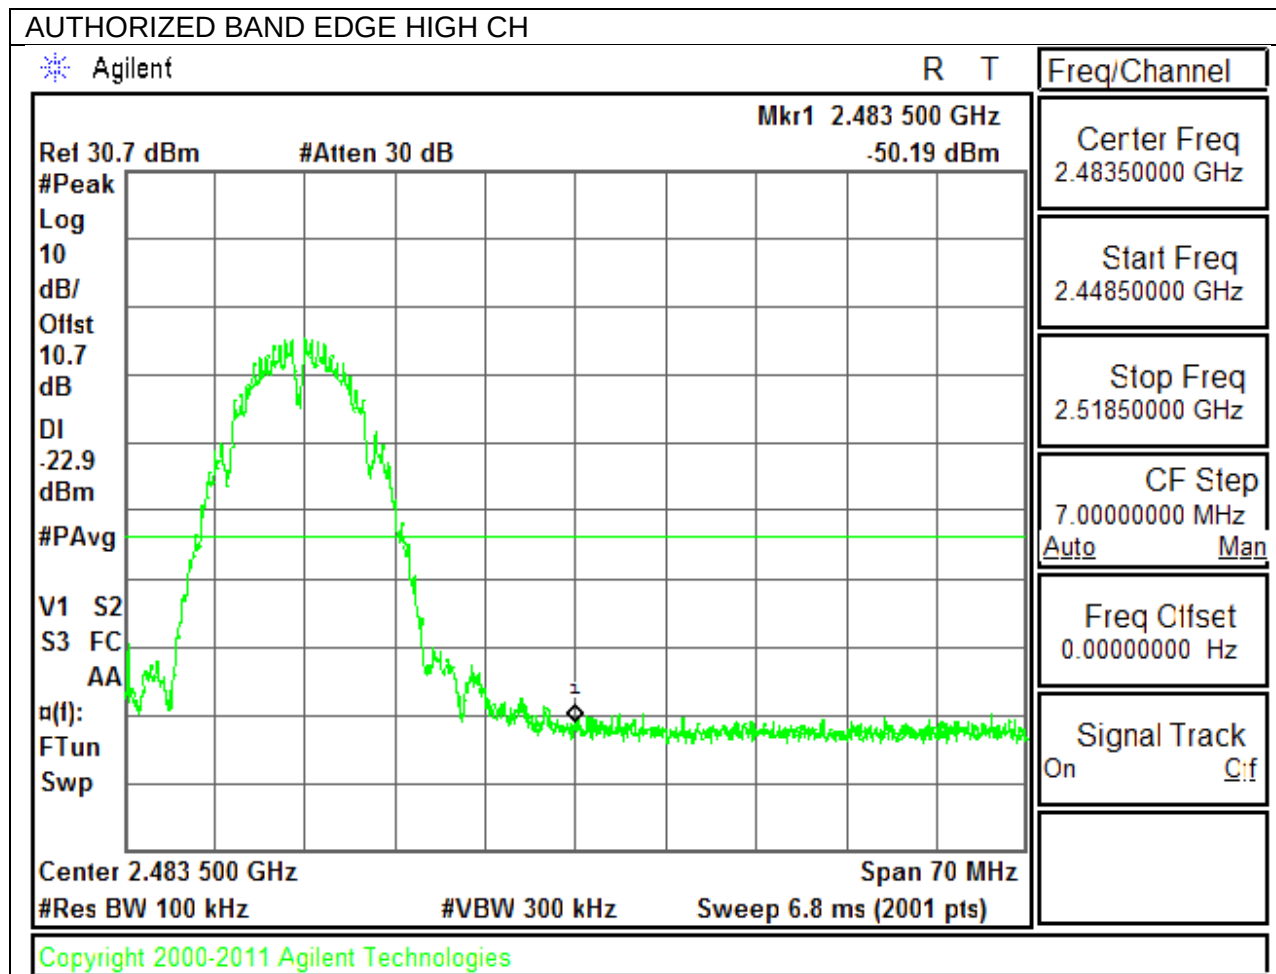


OUT-OF-BAND EMISSIONS

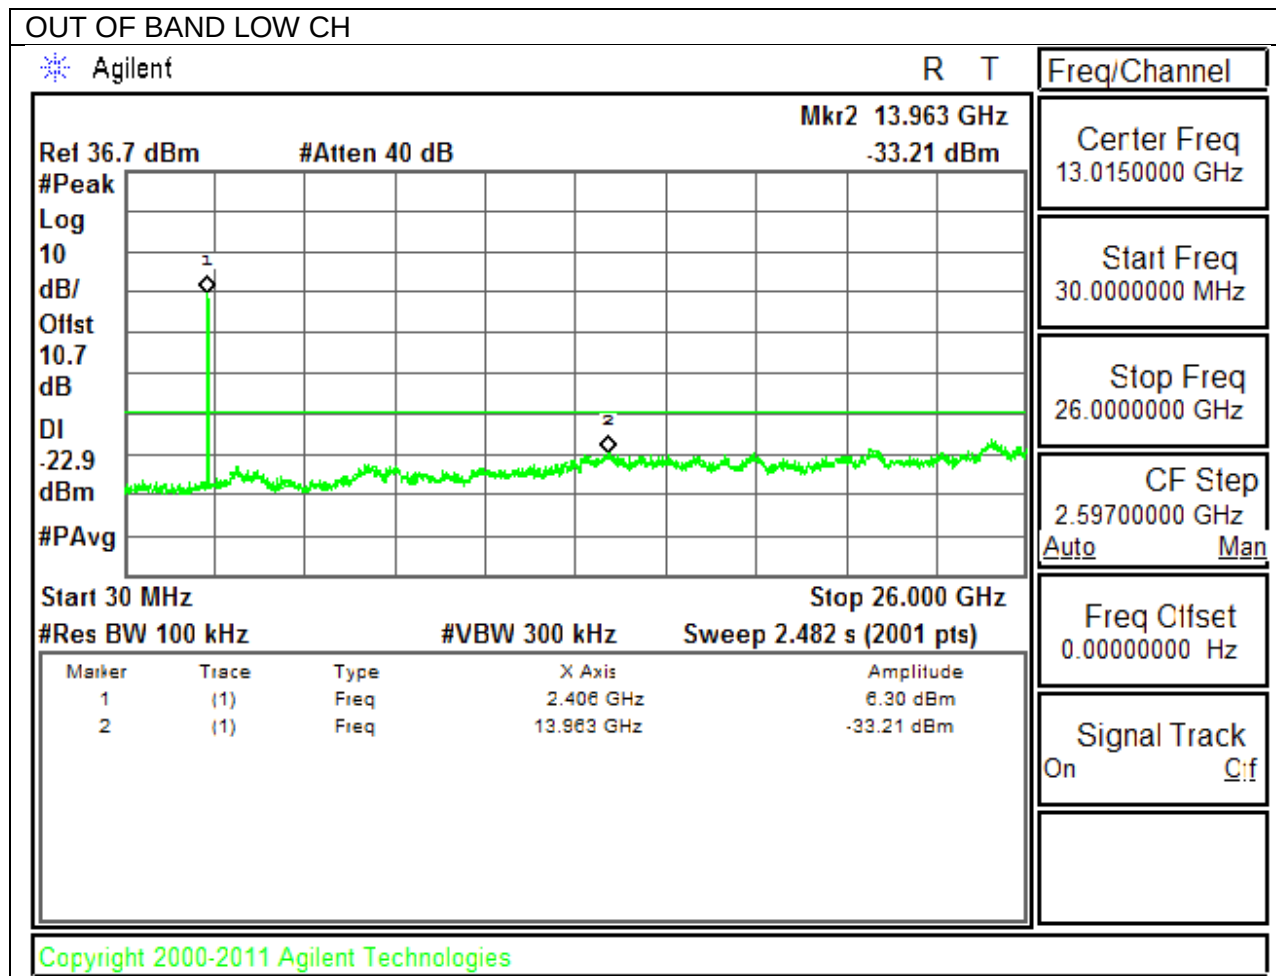


OUT OF BAND MID CH

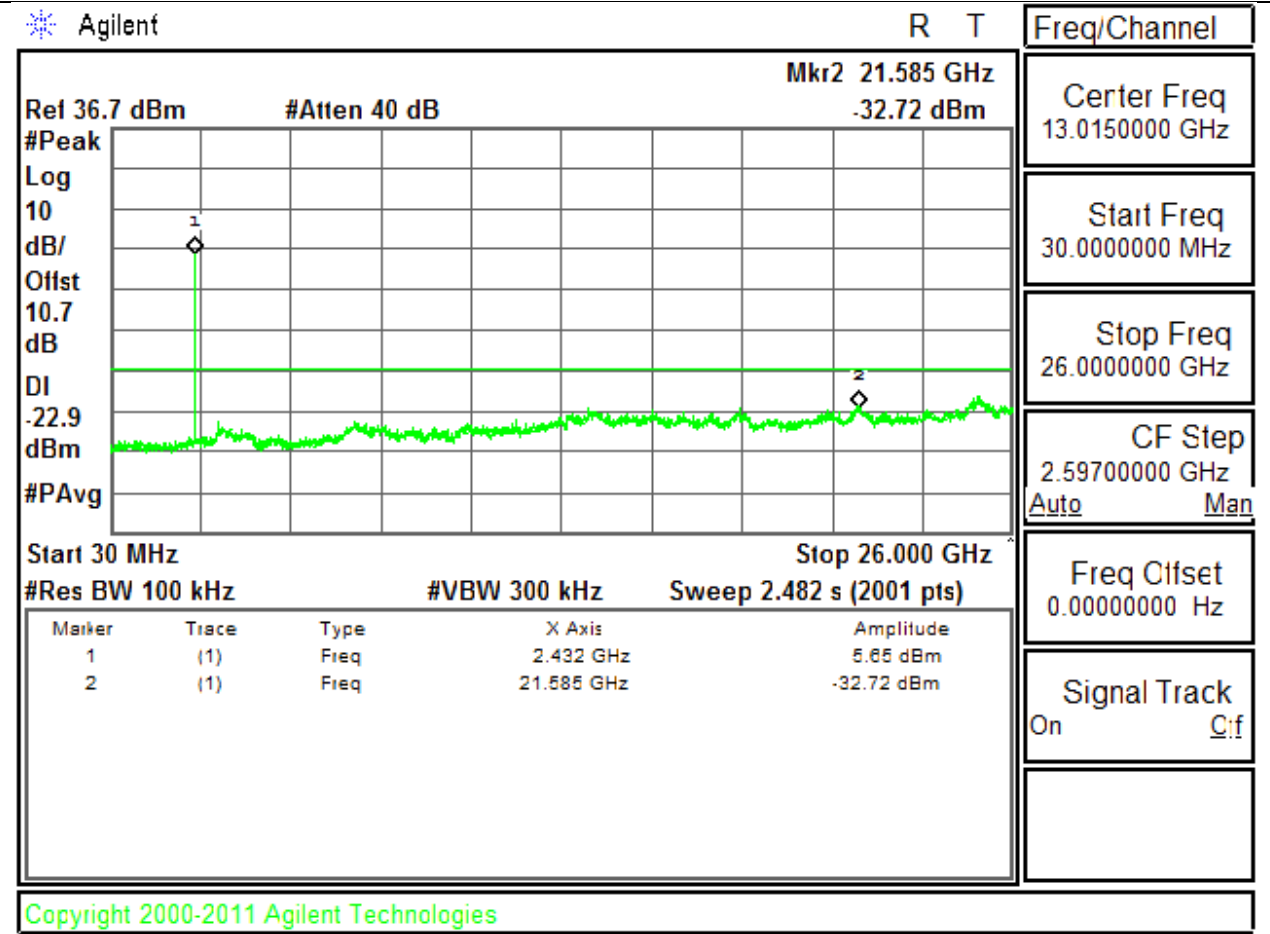

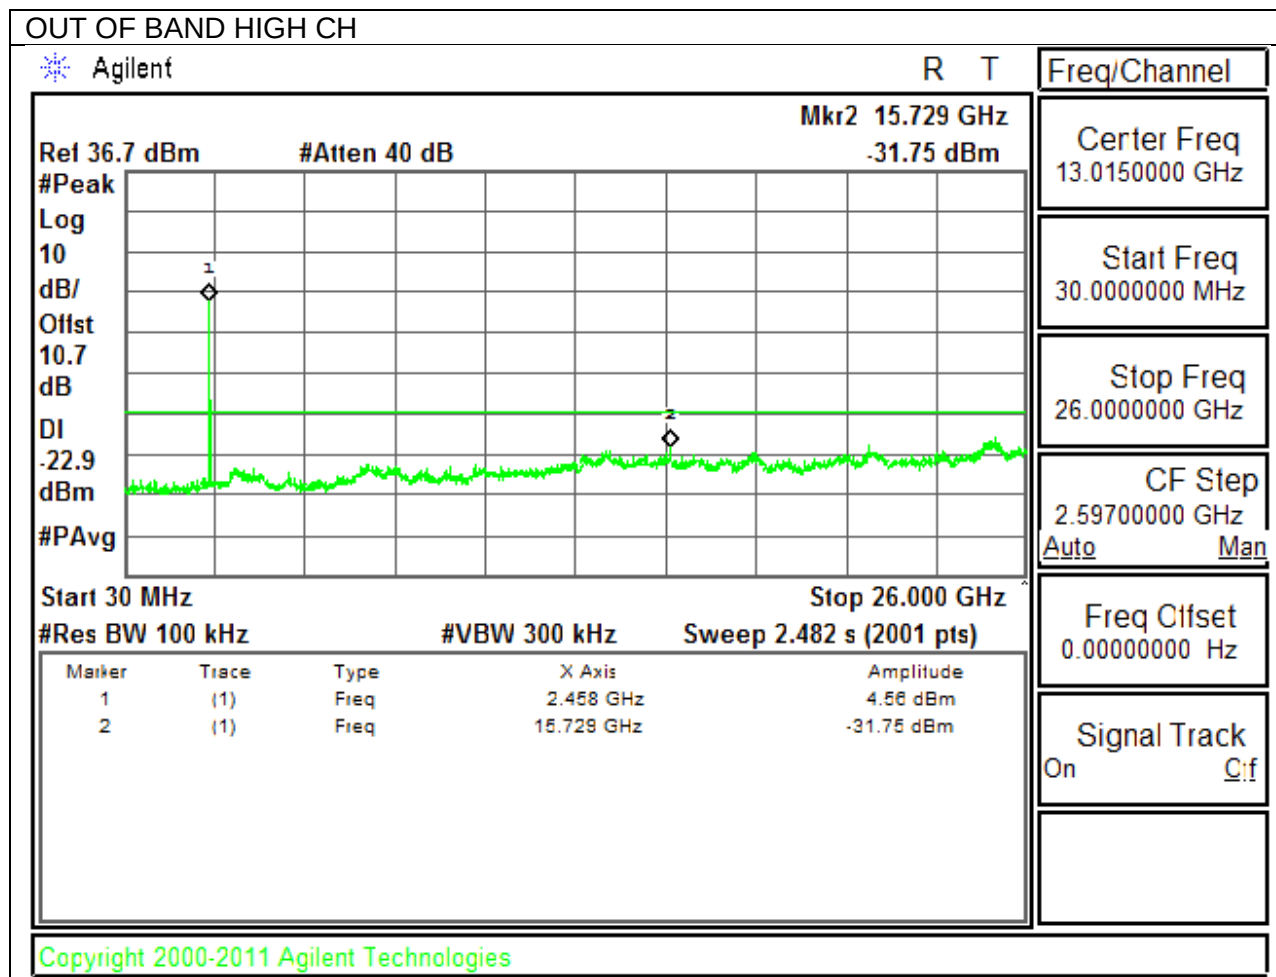


9.5.2. 802.11g MODE IN THE 2.4 GHz BAND


IN-BAND REFERENCE LEVEL

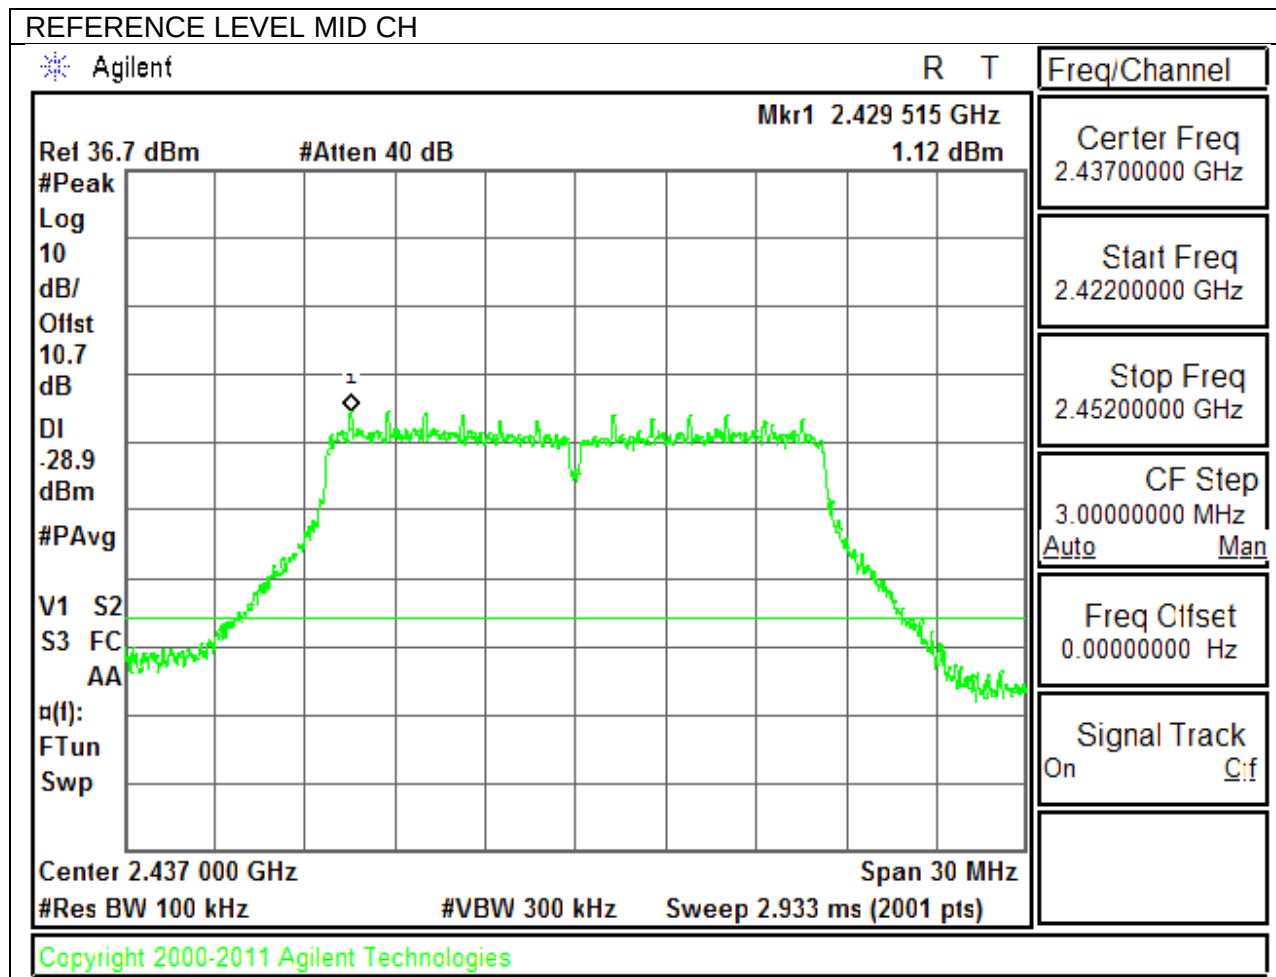


LOW CHANNEL BANDEDGE

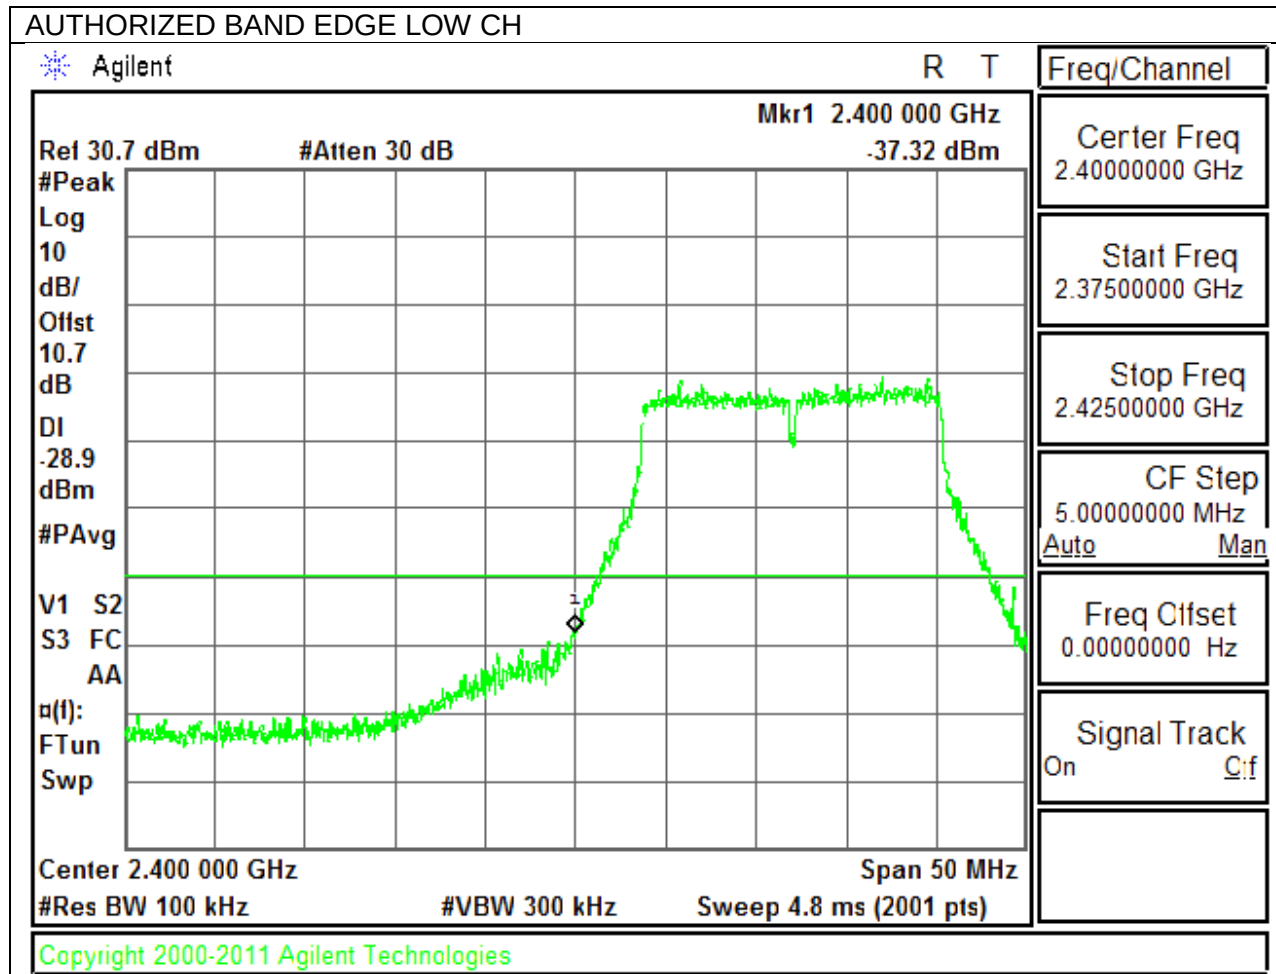


HIGH CHANNEL BANDEDGE

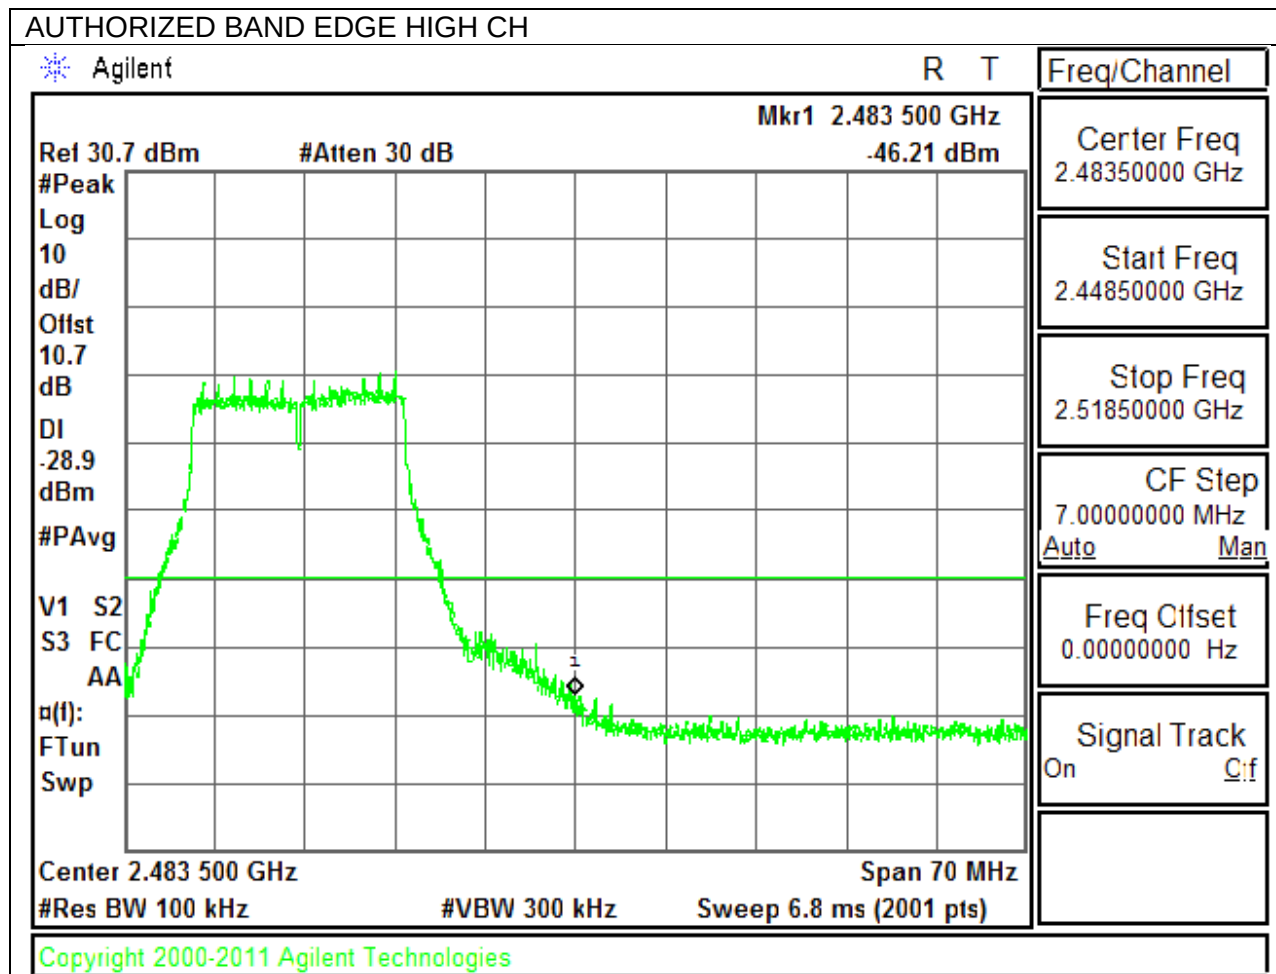


OUT-OF-BAND EMISSIONS

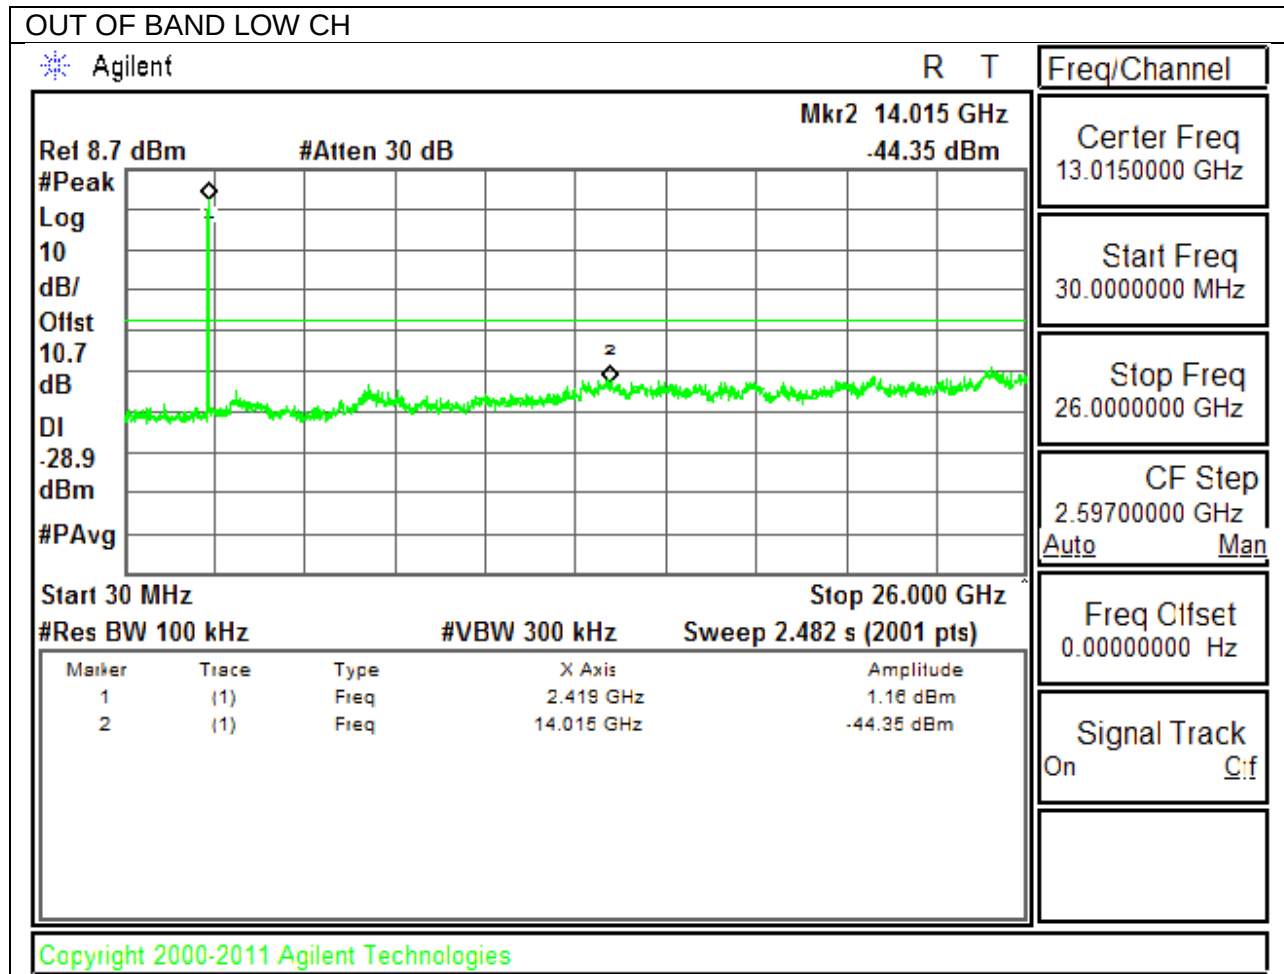

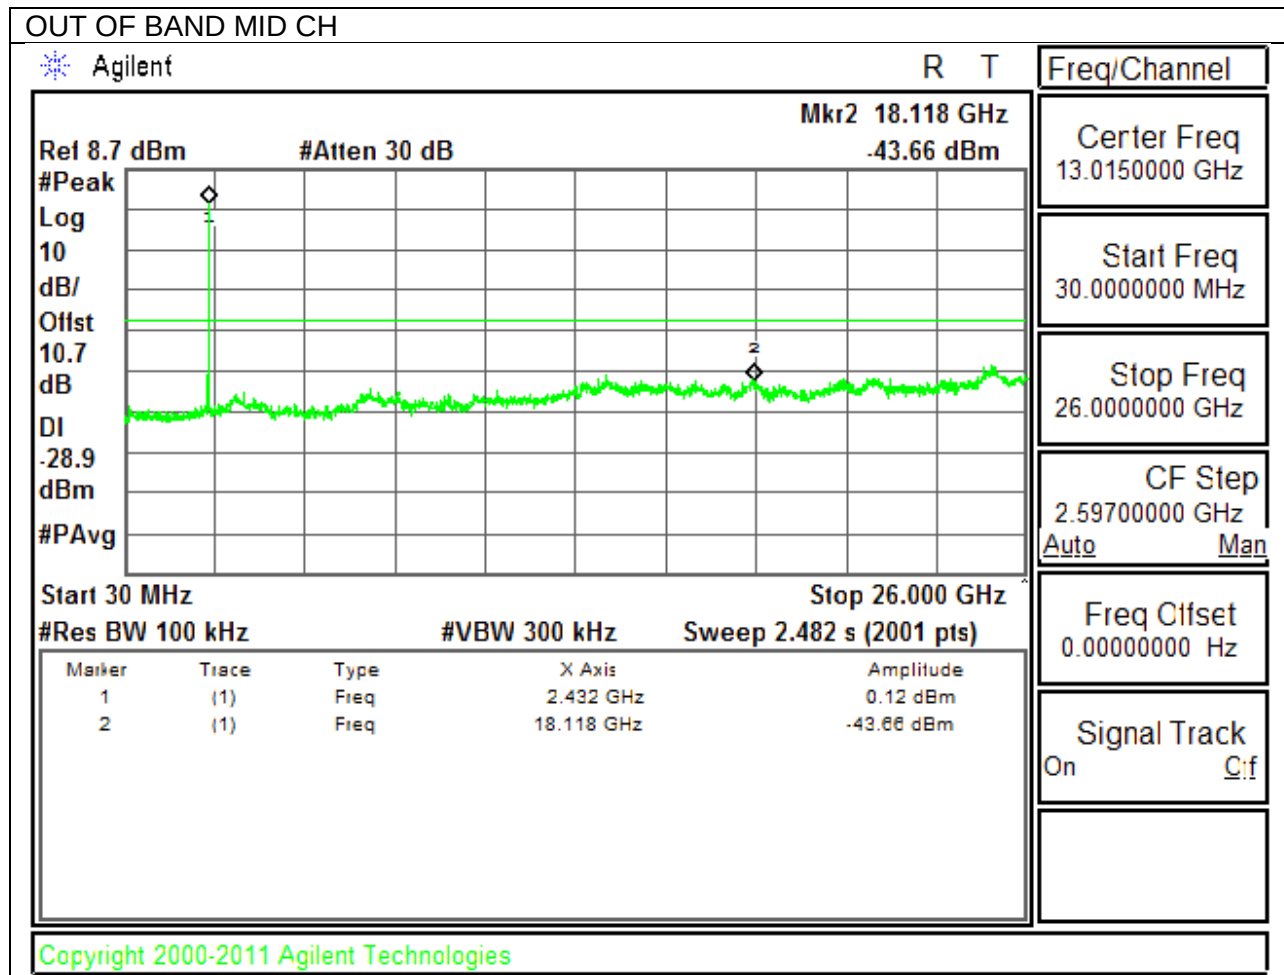


OUT OF BAND HIGH CH

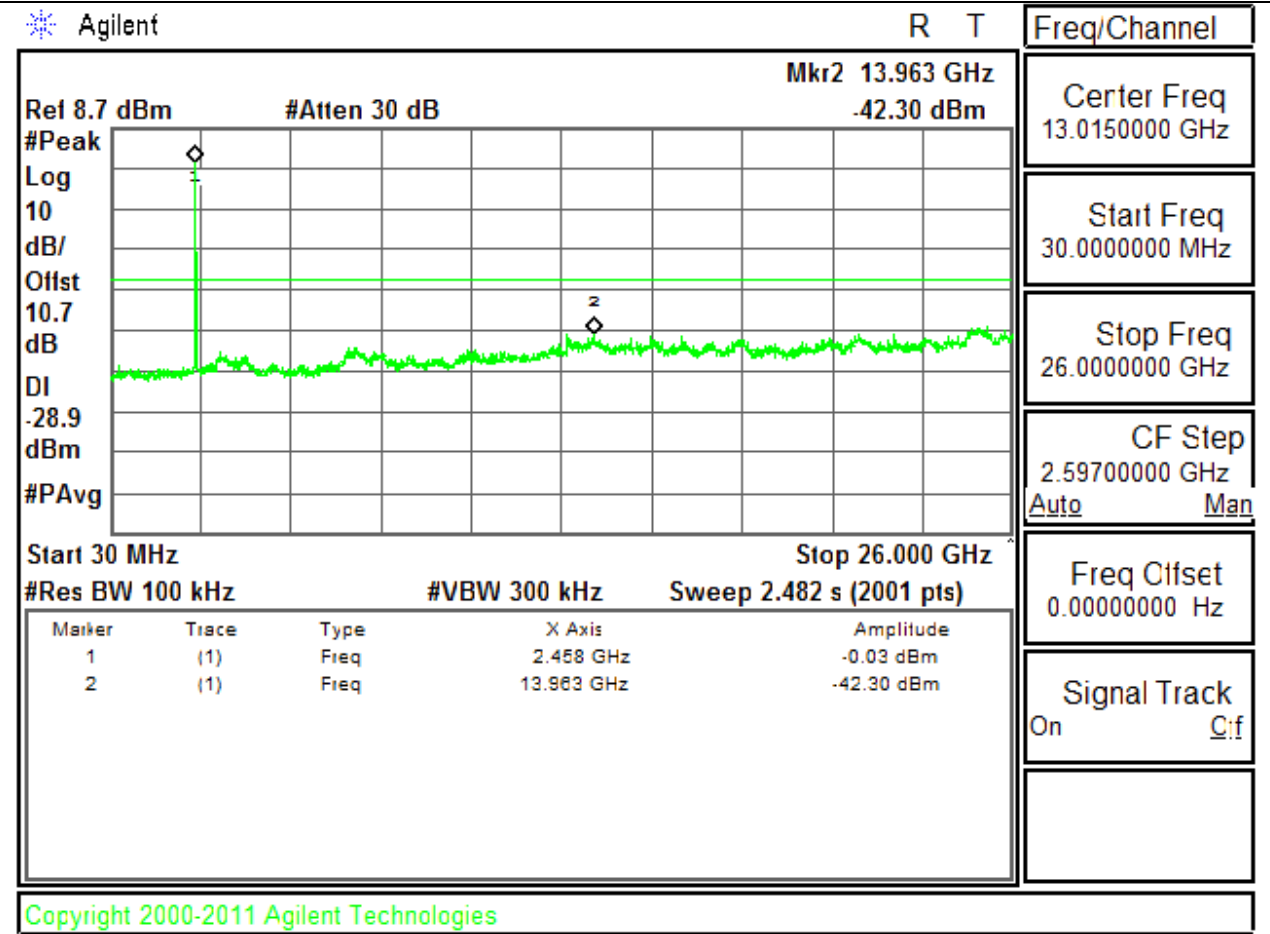


9.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


IN-BAND REFERENCE LEVEL

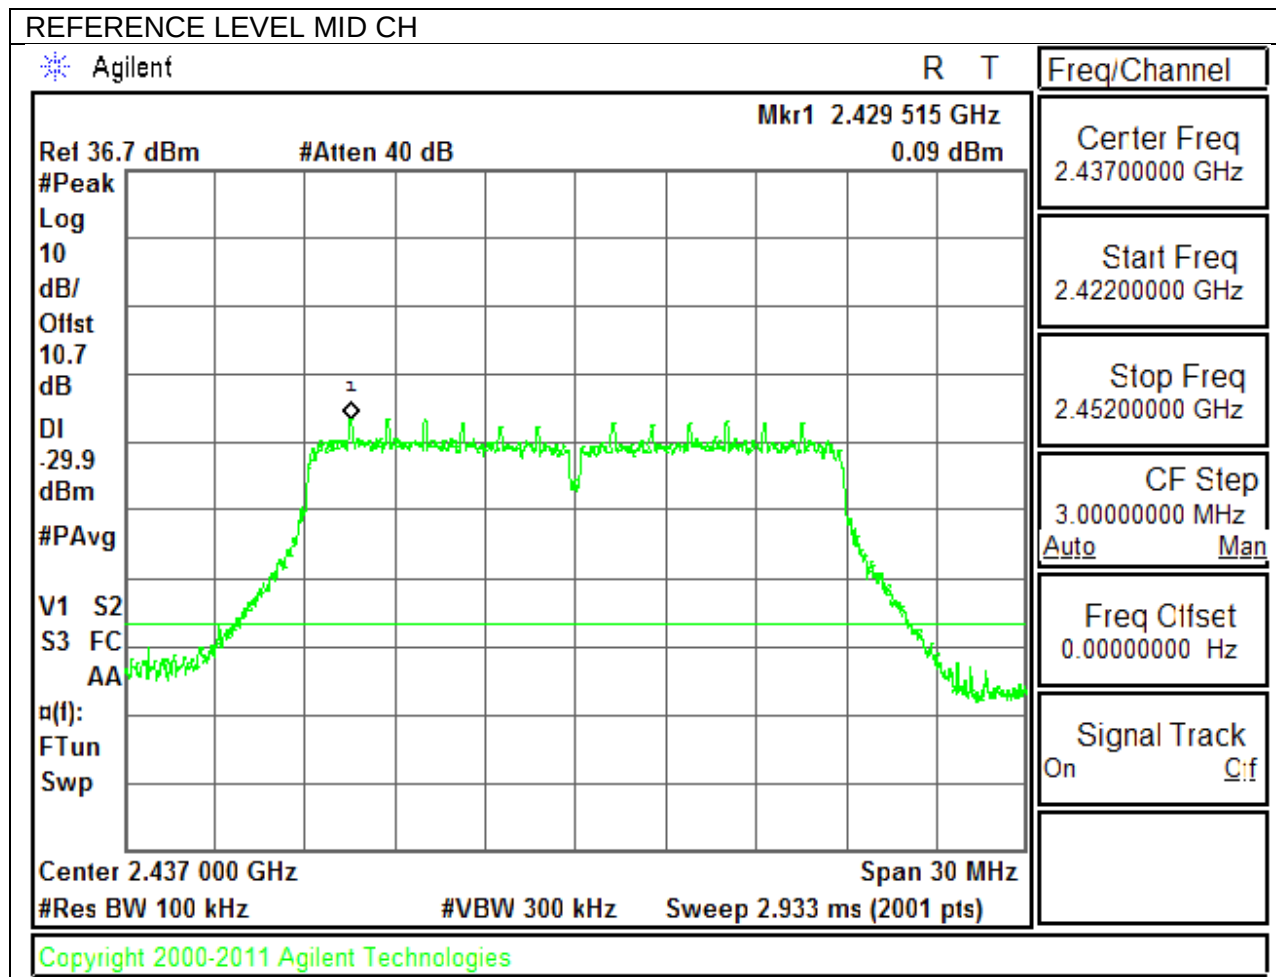


LOW CHANNEL BANDEDGE

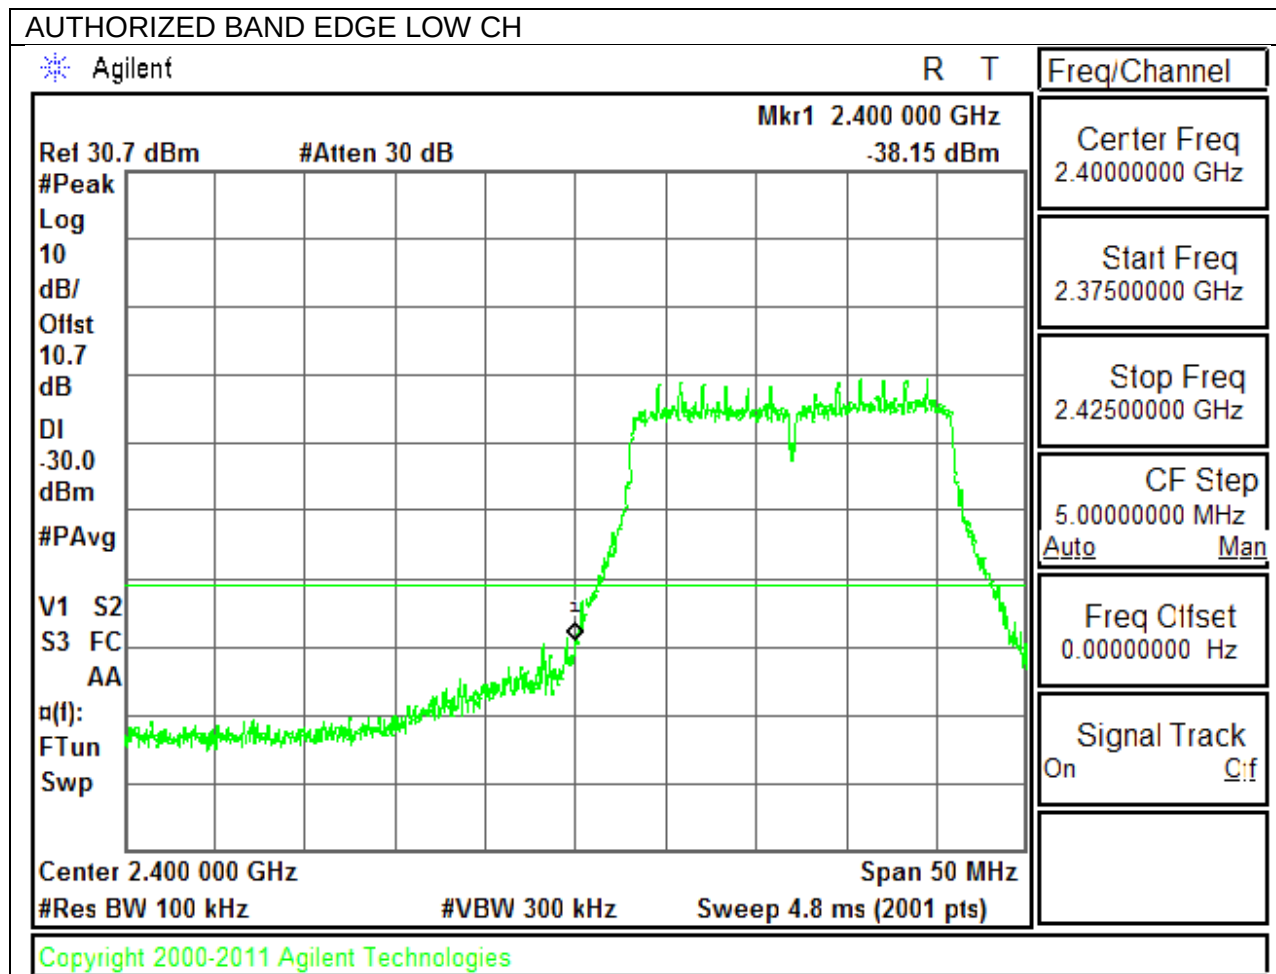


HIGH CHANNEL BANDEDGE

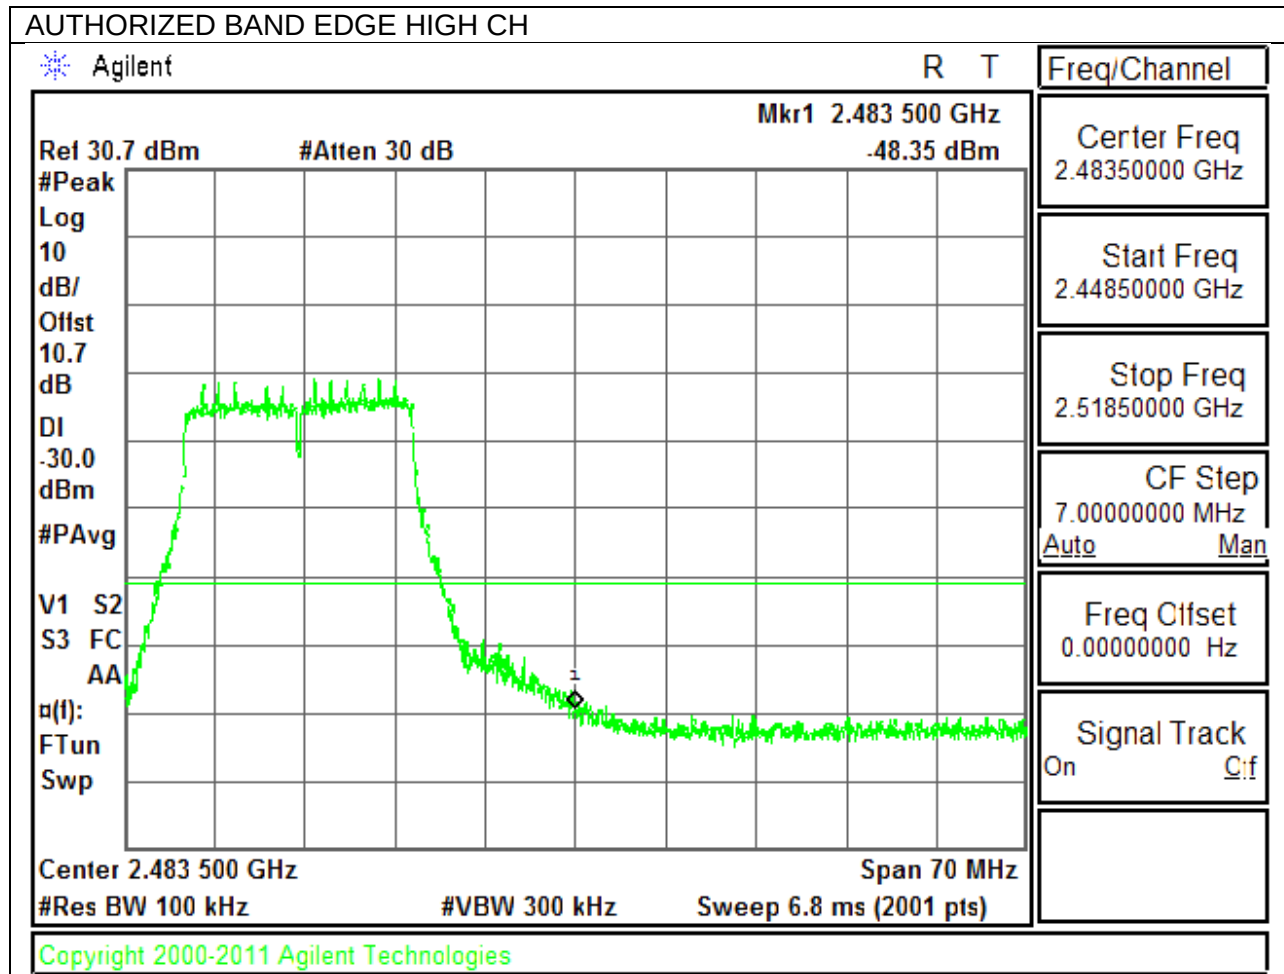


OUT-OF-BAND EMISSIONS

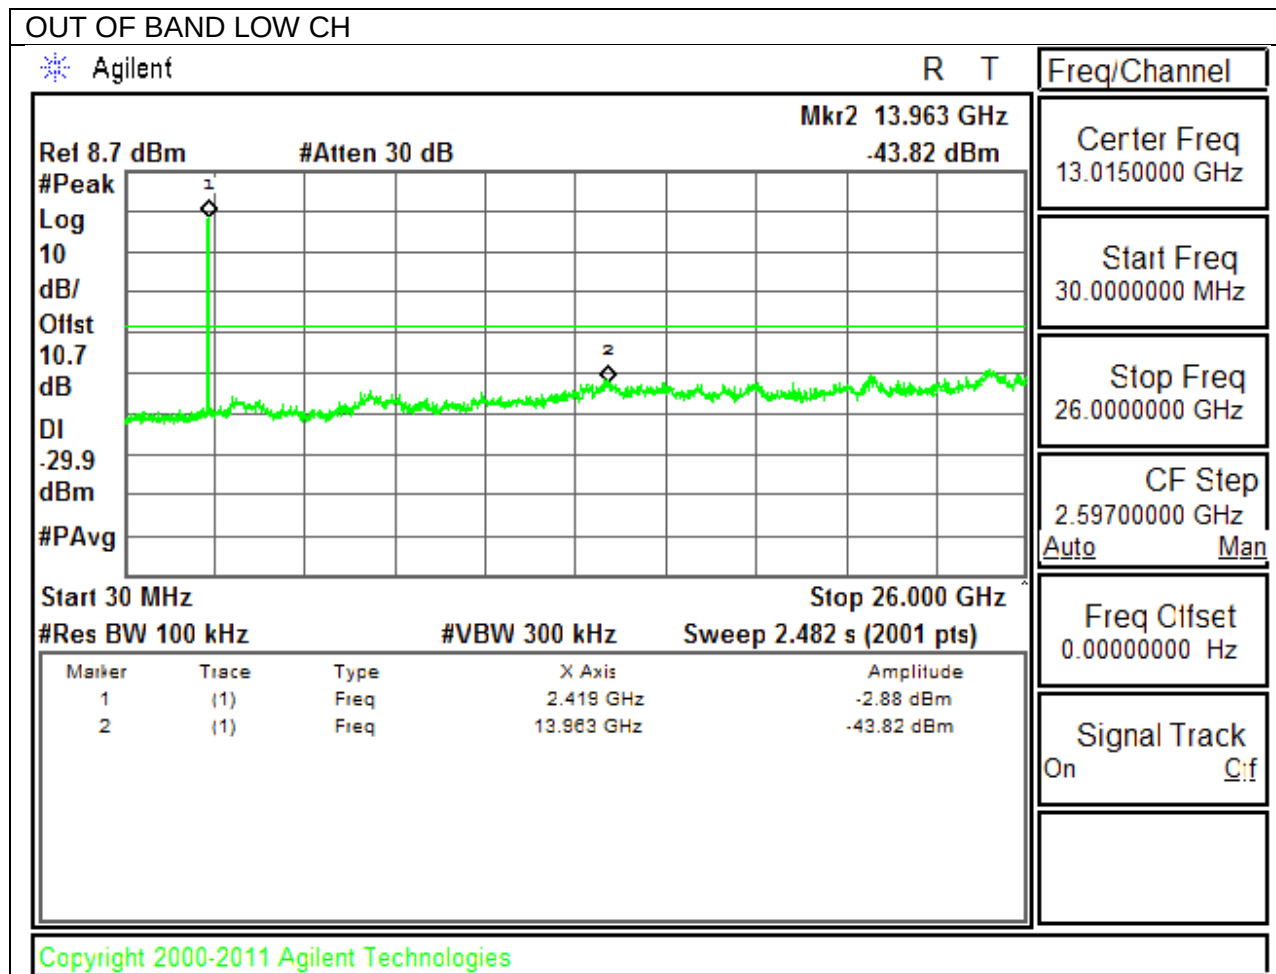

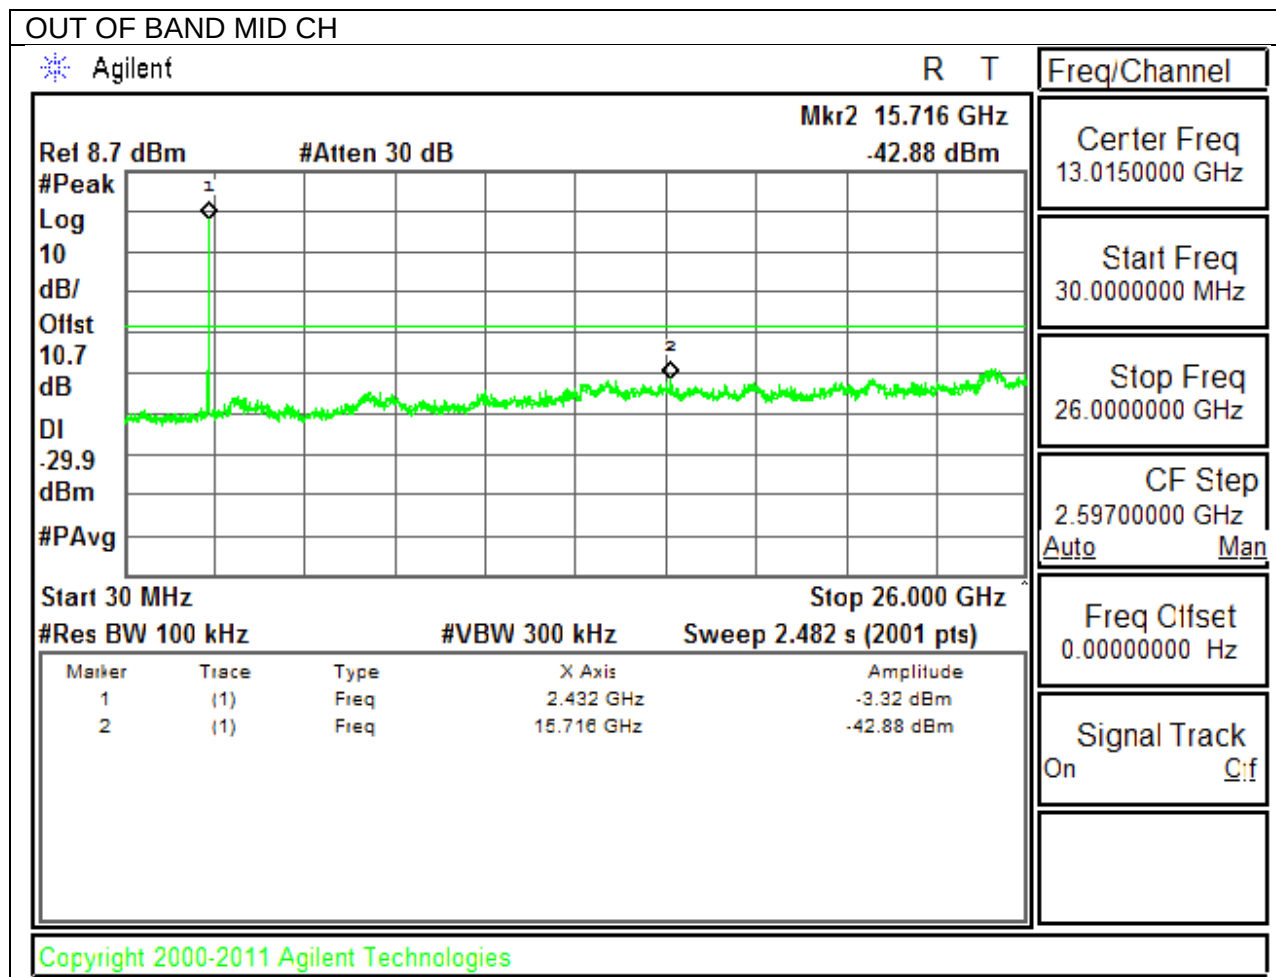

OUT OF BAND HIGH CH

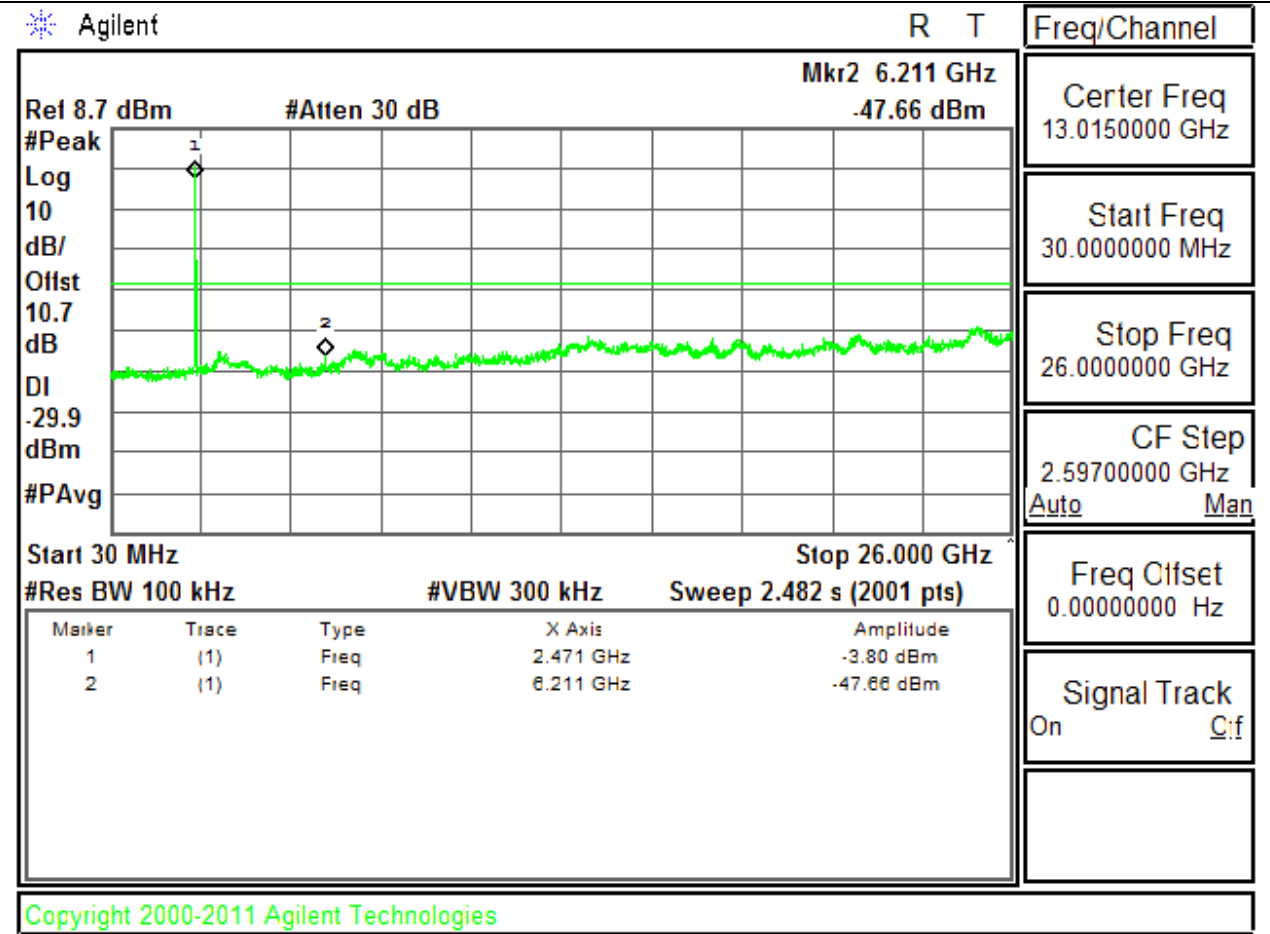

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor= $10\log(1/x)$ For this sample B mode = 0dB (duty cycle >98%); G mode = 0.31dB; N mode = 0.34dB.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

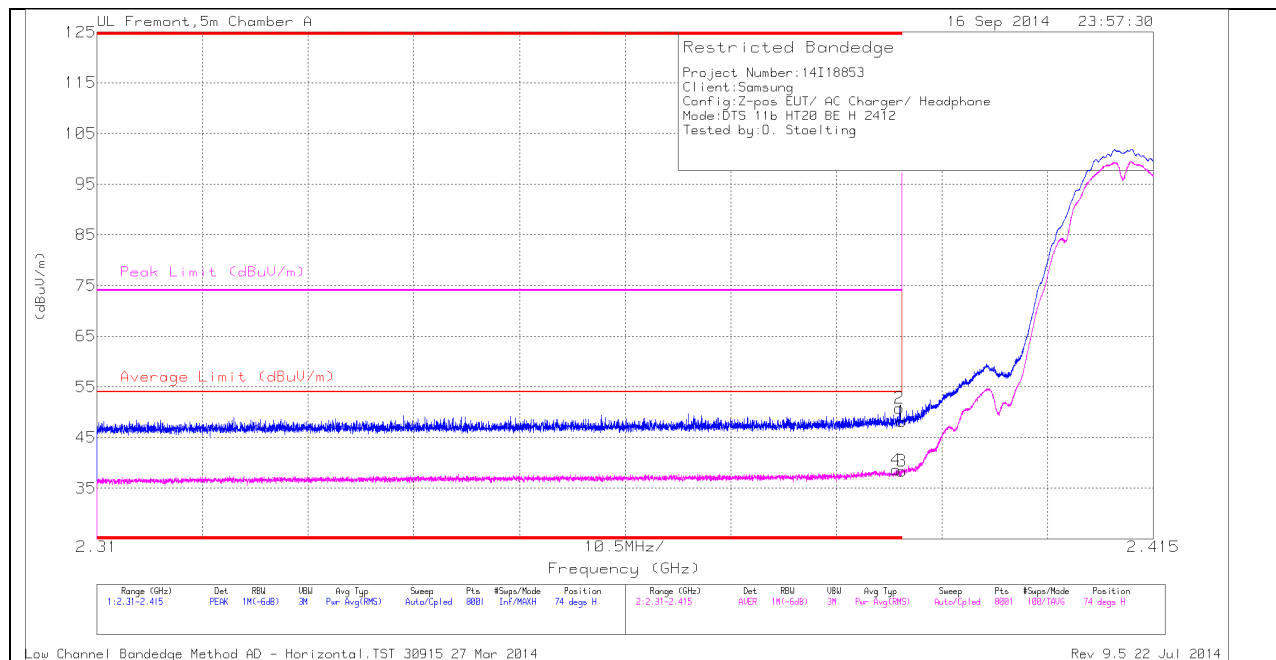

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.09	PK	32.2	-24.1	48.19	-	-	74	-25.81	74	315	H
2	* 2.39	42.72	PK	32.2	-24.1	50.82	-	-	74	-23.18	74	315	H
3	* 2.39	30.26	RMS	32.2	-24.1	38.36	54	-15.64	-	-	74	315	H
4	* 2.389	30.49	RMS	32.2	-24.1	38.59	54	-15.41	-	-	74	315	H

VERTICAL PEAK AND AVERAGE PLOT

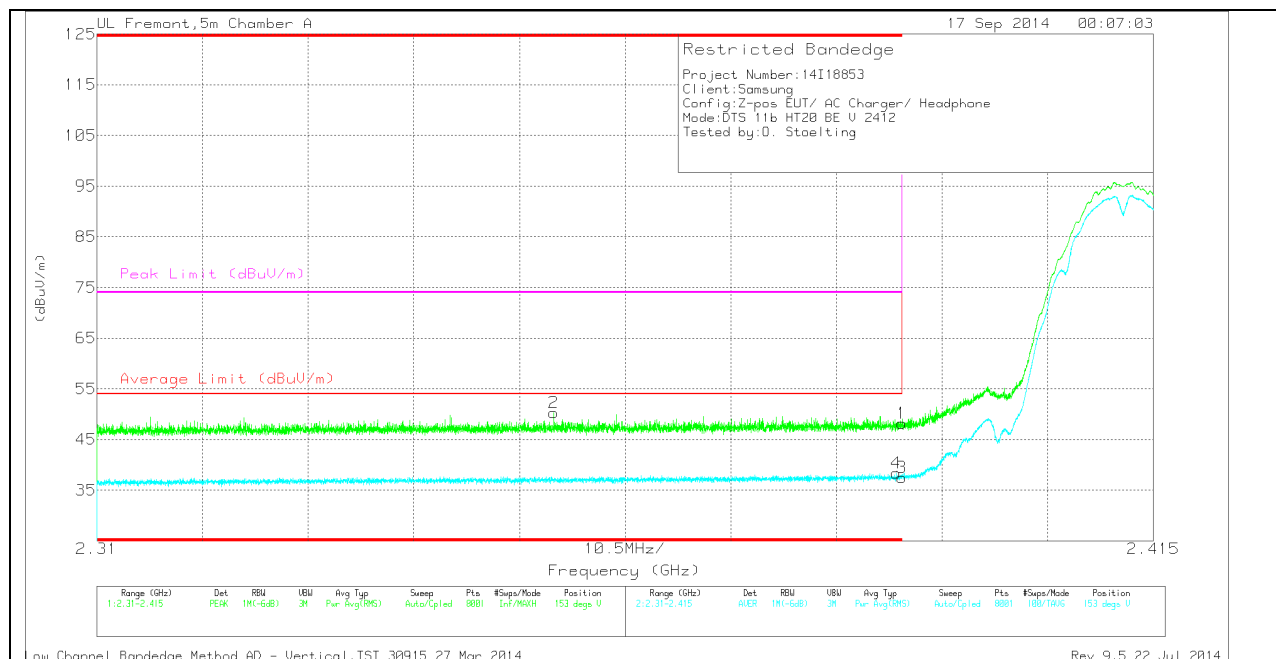


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.355	42.48	PK	31.9	-24.1	50.28	-	-	74	-23.72	153	332	V
4	* 2.389	30.27	RMS	32.2	-24.1	38.37	54	-15.63	-	-	153	332	V
1	* 2.39	40.1	PK	32.2	-24.1	48.2	-	-	74	-25.8	153	332	V
3	* 2.39	29.42	RMS	32.2	-24.1	37.52	54	-16.48	-	-	153	332	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

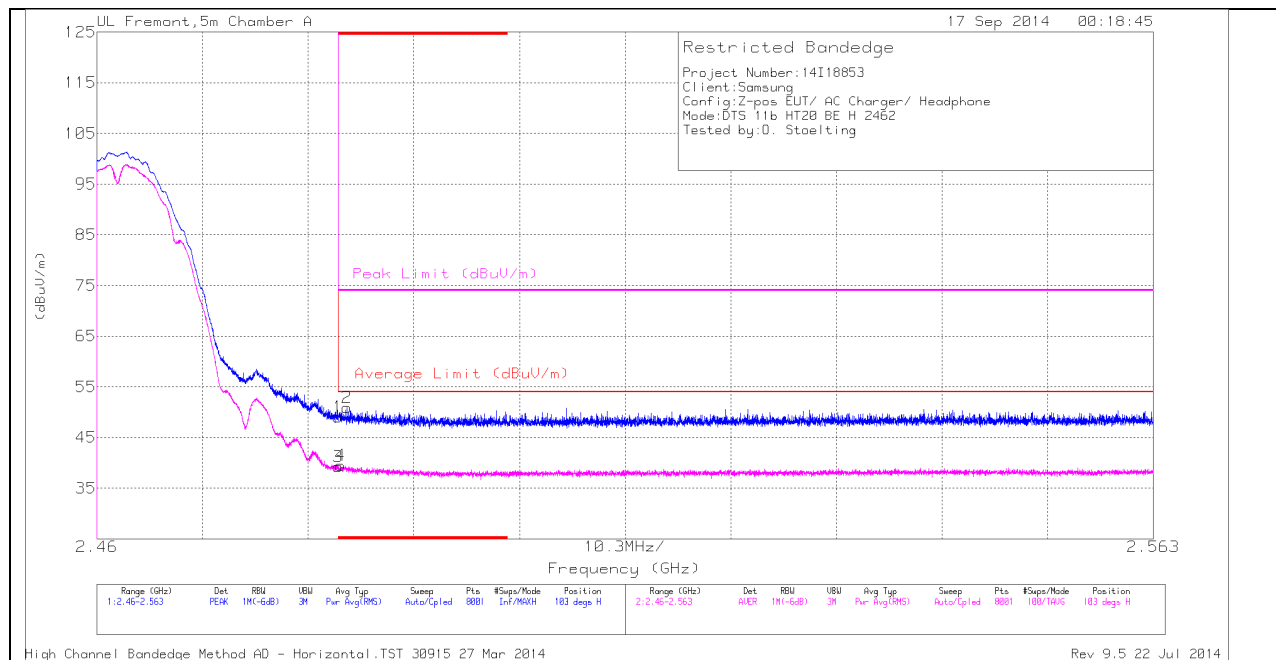

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.58	PK	32.7	-24.2	49.08	-	-	74	-24.92	103	316	H
2	* 2.484	42.28	PK	32.7	-24.1	50.88	-	-	74	-23.12	103	316	H
3	* 2.484	30.7	RMS	32.7	-24.2	39.2	54	-14.8	-	-	103	316	H
4	* 2.484	30.84	RMS	32.7	-24.1	39.44	54	-14.56	-	-	103	316	H


VERTICAL PEAK AND AVERAGE PLOT

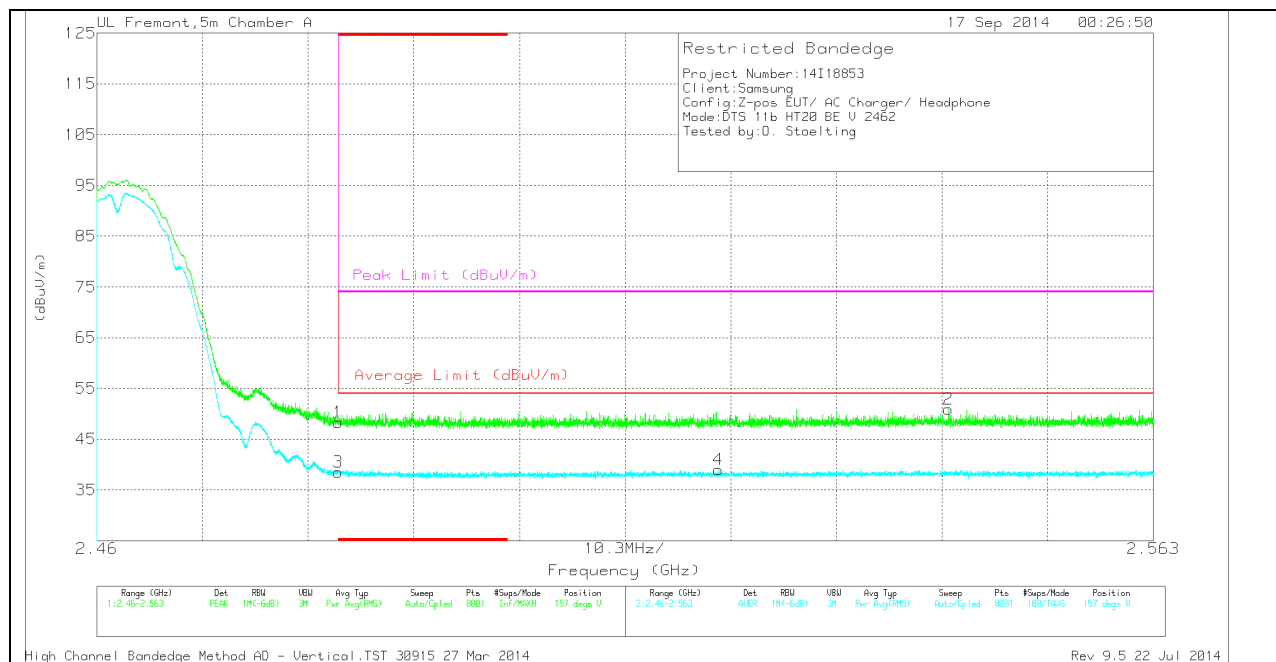

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.84	PK	32.7	-24.2	48.34	-	-	74	-25.66	157	316	V
3	* 2.484	30.02	RMS	32.7	-24.2	38.52	54	-15.48	-	-	157	316	V
4	2.521	30.14	RMS	32.9	-24	39.04	54	-14.96	-	-	157	316	V
2	2.543	41.77	PK	32.9	-23.8	50.87	-	-	74	-23.13	157	316	V

HARMONICS AND SPURIOUS EMISSIONS

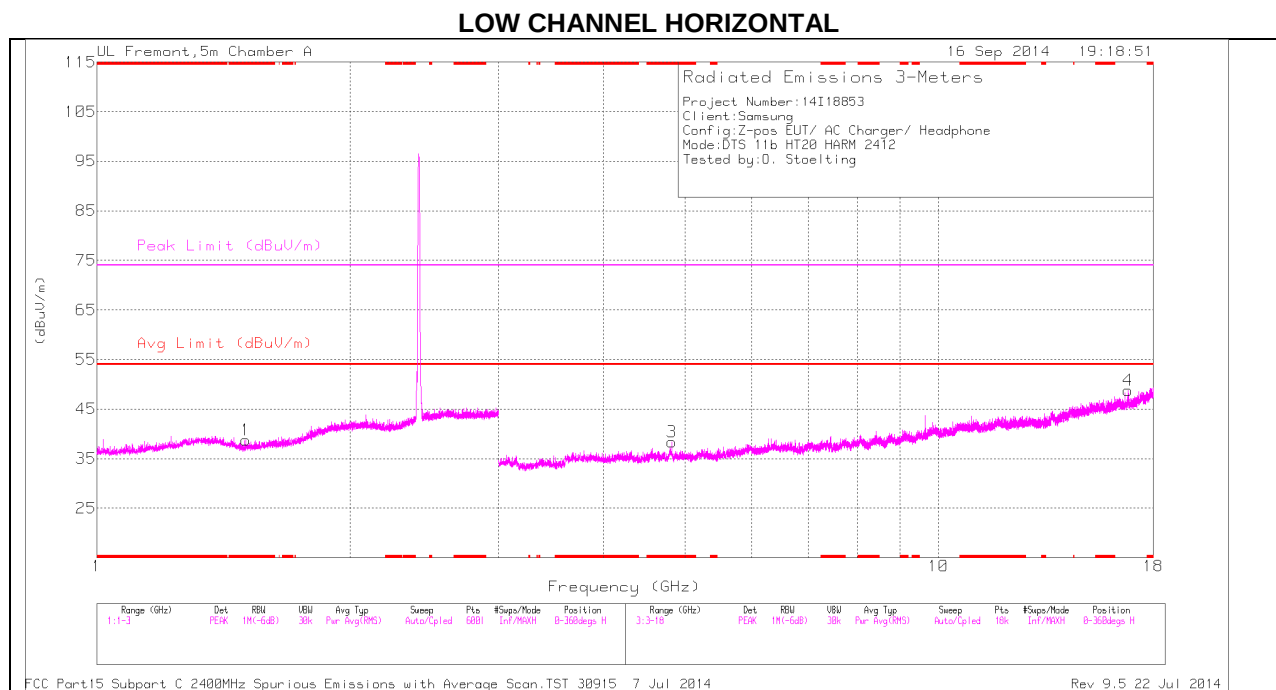

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

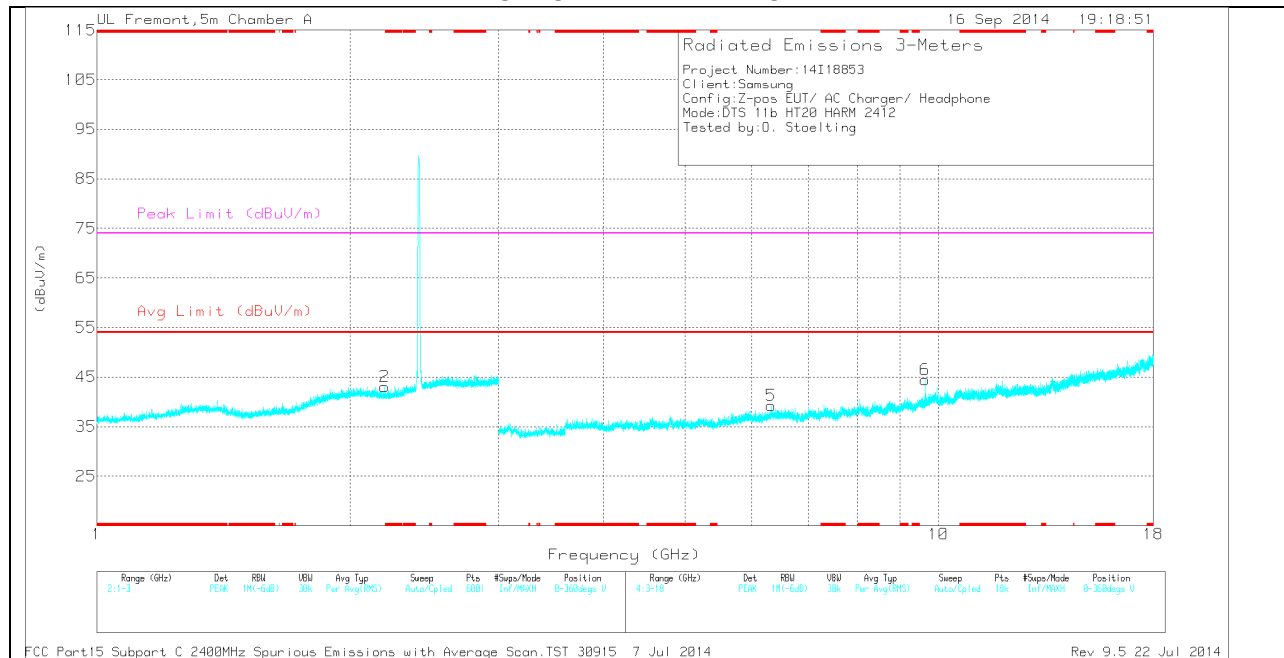

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.503	36.69	PK	28.7	-26.7	38.69	-	-	74	-35.31	0-360	100	H
3	* 4.824	33.51	PK	34	-29.2	38.31	-	-	74	-35.69	0-360	201	H
2	2.199	36.43	PK	31.3	-24.7	43.03	-	-	-	-	0-360	201	V
5	6.328	31.47	PK	35.5	-27.7	39.27	-	-	-	-	0-360	201	V
6	9.648	31.78	PK	36.8	-24.1	44.48	-	-	-	-	0-360	201	V
4	16.813	26.37	PK	40.4	-18	48.77	-	-	-	-	0-360	201	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.648	36.55	PK2	36.8	-24.1	49.25	-	-	-	-	102	256	V
9.648	31.06	MAV1	36.8	-24.1	43.76	-	-	-	-	102	256	V

MID CHANNEL HORIZONTAL

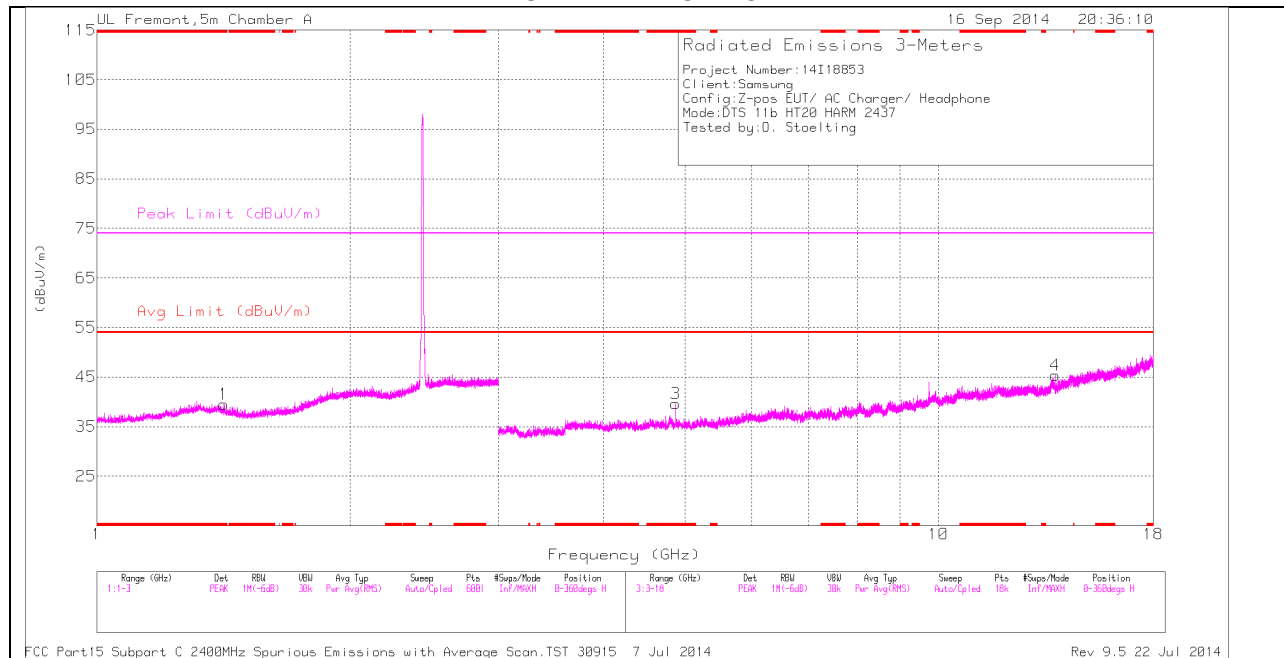

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

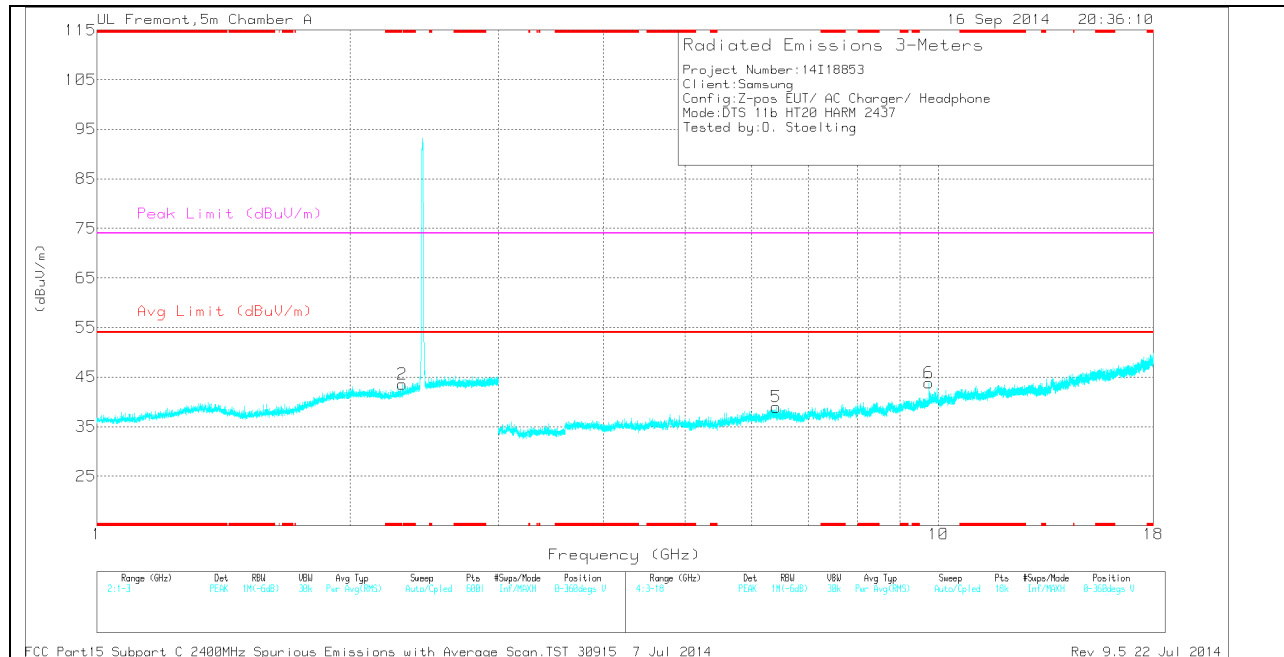

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.414	36.46	PK	29.7	-26.6	39.56	-	-	74	-34.44	0-360	201	H
3	* 4.874	34.2	PK	34	-28.6	39.6	-	-	74	-34.4	0-360	201	H
2	2.305	36.32	PK	31.5	-24.3	43.52	-	-	-	-	0-360	201	V
5	6.418	31.84	PK	35.5	-28.4	38.94	-	-	-	-	0-360	201	V
6	9.748	30.46	PK	36.9	-23.5	43.86	-	-	-	-	0-360	100	V
4	13.759	29.05	PK	38.8	-22.5	45.35	-	-	-	-	0-360	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.874	40.93	PK2	34	-28.6	46.33	-	-	74	-27.67	3	141	H
* 4.874	32.13	MAV1	34	-28.6	37.53	54	-16.47	-	-	3	141	H
9.748	37.54	PK2	36.9	-23.5	50.94	-	-	-	-	358	100	V
9.748	29.86	MAV1	36.9	-23.5	43.26	-	-	-	-	358	100	V

HIGH CHANNEL HORIZONTAL

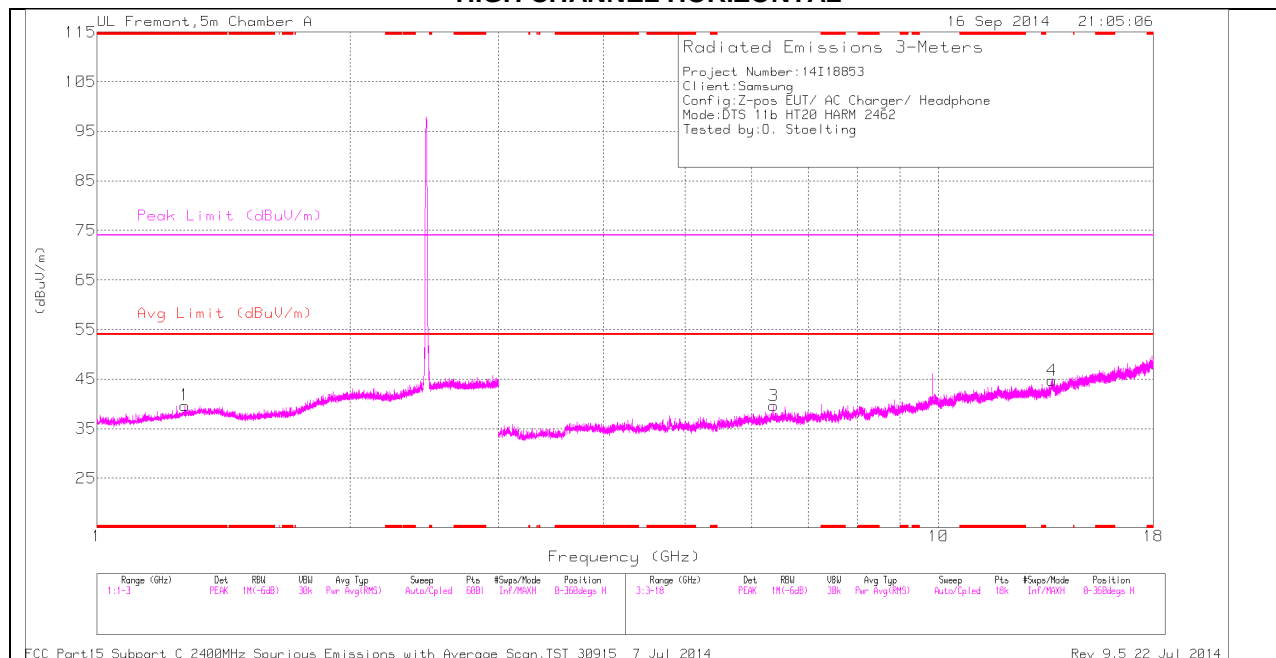

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

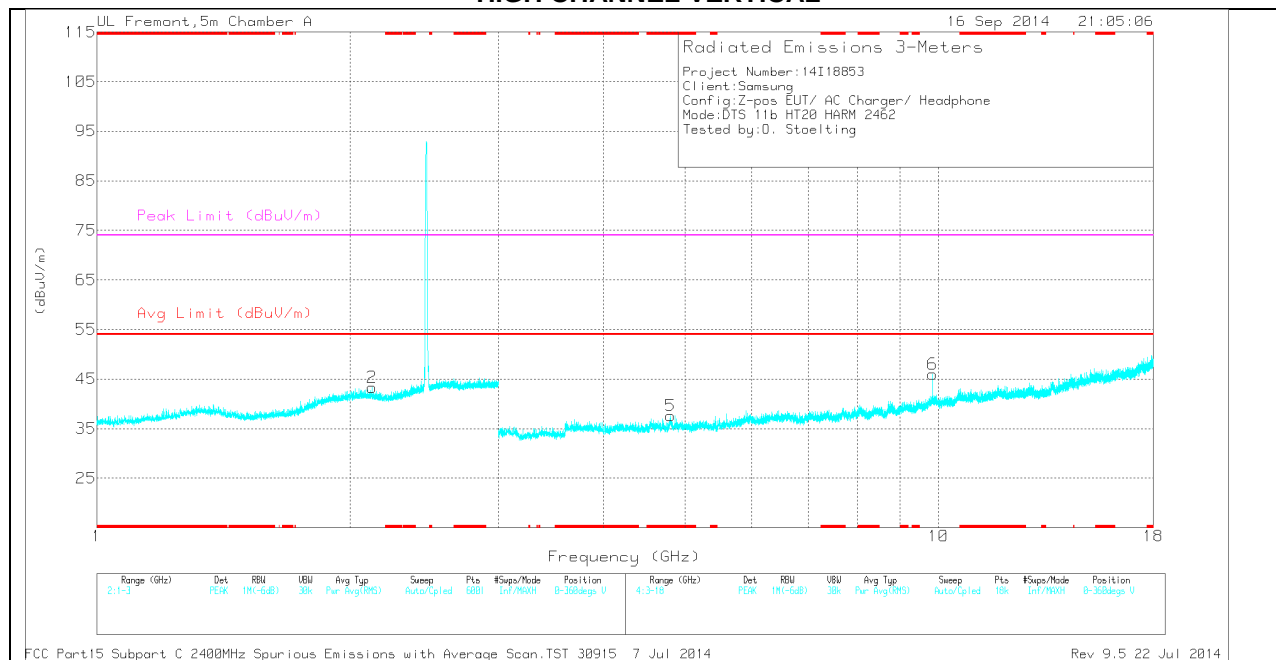

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.273	36.9	PK	30	-27.2	39.7	-	-	74	-34.3	0-360	100	H
5	* 4.804	32.85	PK	34	-29.2	37.65	-	-	74	-36.35	0-360	201	V
2	2.123	36.26	PK	31.6	-24.6	43.26	-	-	-	-	0-360	100	V
3	6.37	31.69	PK	35.5	-27.6	39.59	-	-	-	-	0-360	100	H
6	9.848	31.34	PK	37	-22.4	45.94	-	-	-	-	0-360	100	V
4	13.654	27.41	PK	38.8	-21.5	44.71	-	-	-	-	0-360	201	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.848	37.58	PK2	37	-22.4	52.18	-	-	-	-	359	103	V
9.848	30.26	MAV1	37	-22.4	44.86	-	-	-	-	359	103	V

10.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

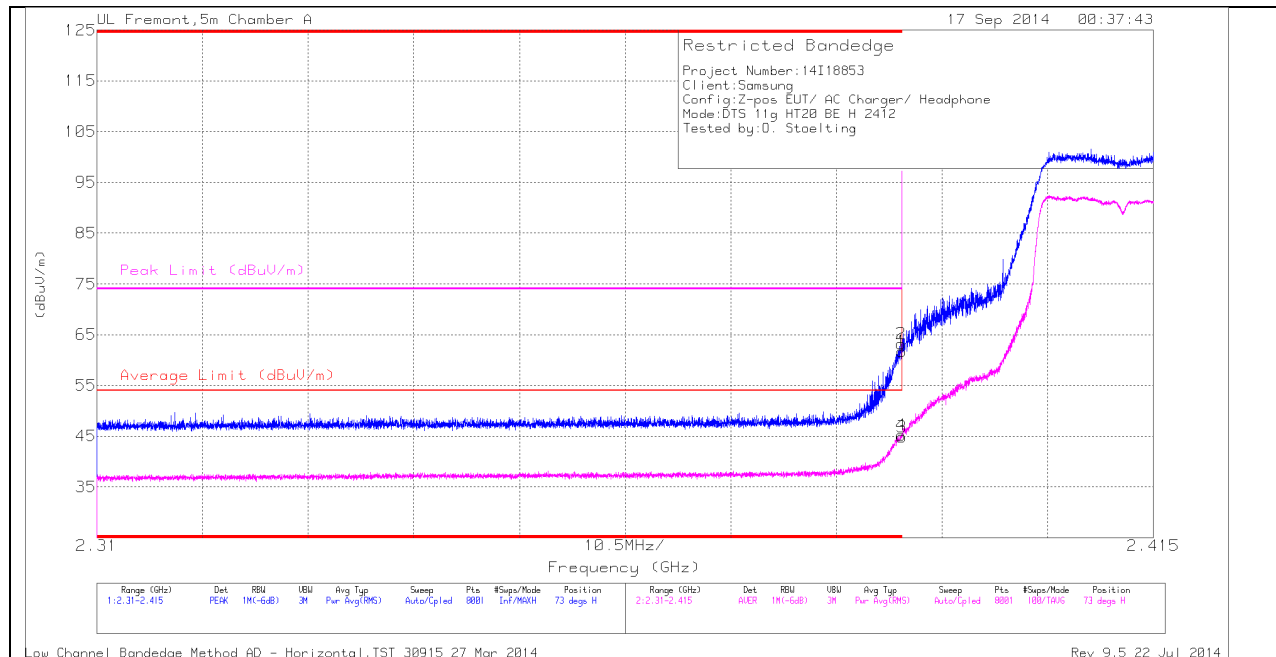

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.57	PK	32.2	-24.1	0	61.67	-	-	74	-12.33	73	269	H
2	* 2.39	55.14	PK	32.2	-24.1	0	63.24	-	-	74	-10.76	73	269	H
3	* 2.39	36.4	RMS	32.2	-24.1	.31	44.81	54	-9.19	-	-	73	269	H
4	* 2.39	36.82	RMS	32.2	-24.1	.31	45.23	54	-8.77	-	-	73	269	H

VERTICAL PEAK AND AVERAGE PLOT

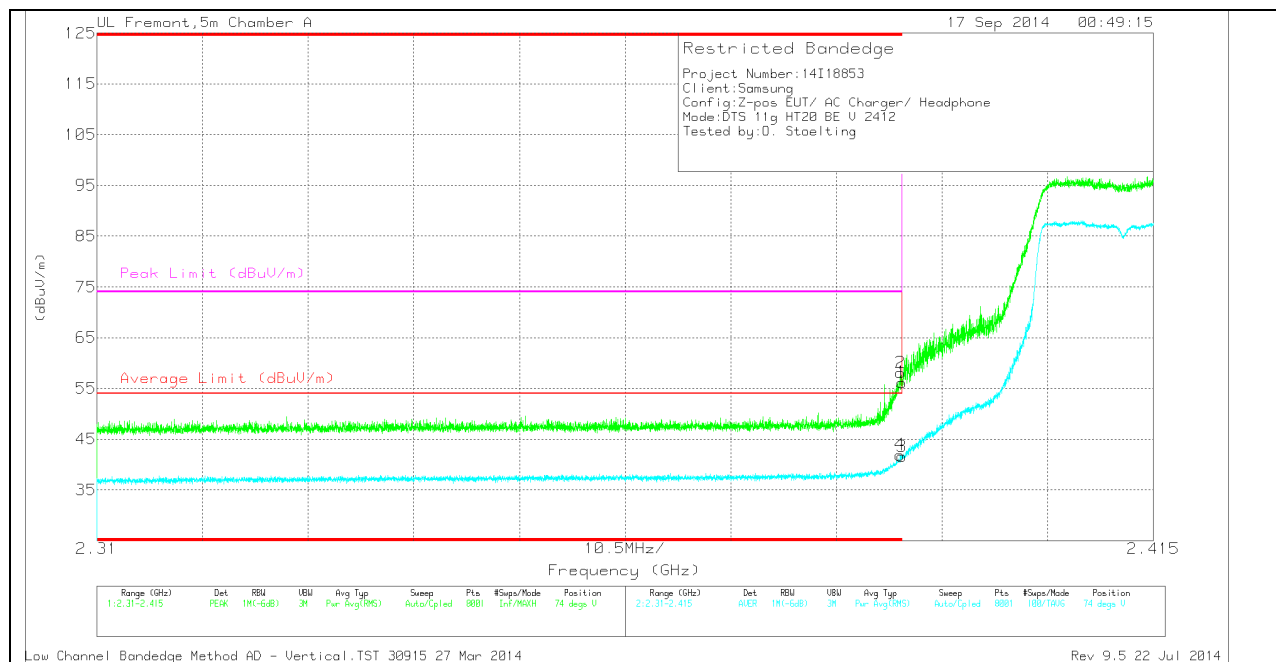


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.09	PK	32.2	-24.1	0	56.19	-	-	74	-17.81	74	342	V
2	* 2.39	50.06	PK	32.2	-24.1	0	58.16	-	-	74	-15.84	74	342	V
3	* 2.39	33.17	RMS	32.2	-24.1	.31	41.58	54	-12.42	-	-	74	342	V
4	* 2.39	33.5	RMS	32.2	-24.1	.31	41.91	54	-12.09	-	-	74	342	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

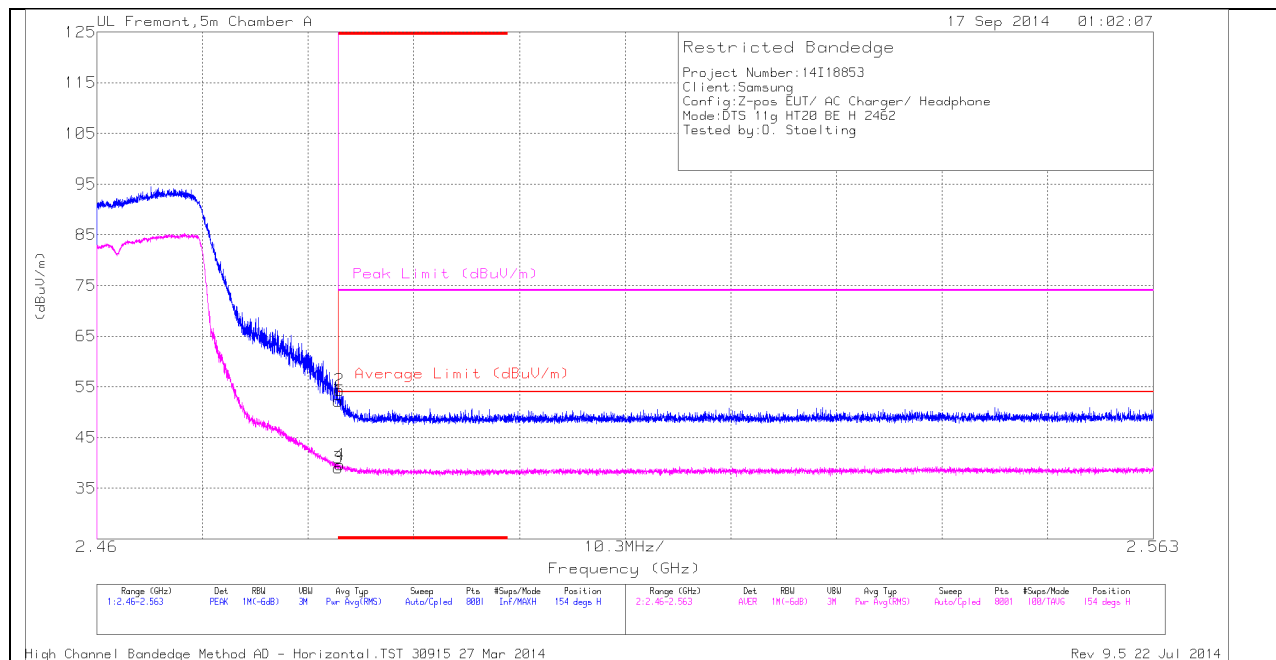

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.72	PK	32.7	-24.2	0	52.22	-	-	74	-21.78	154	335	H
2	* 2.484	45.83	PK	32.7	-24.2	0	54.33	-	-	74	-19.67	154	335	H
3	* 2.484	30.2	RMS	32.7	-24.2	.31	39.01	54	-14.99	-	-	154	335	H
4	* 2.484	30.83	RMS	32.7	-24.2	.31	39.64	54	-14.36	-	-	154	335	H


VERTICAL PEAK AND AVERAGE PLOT

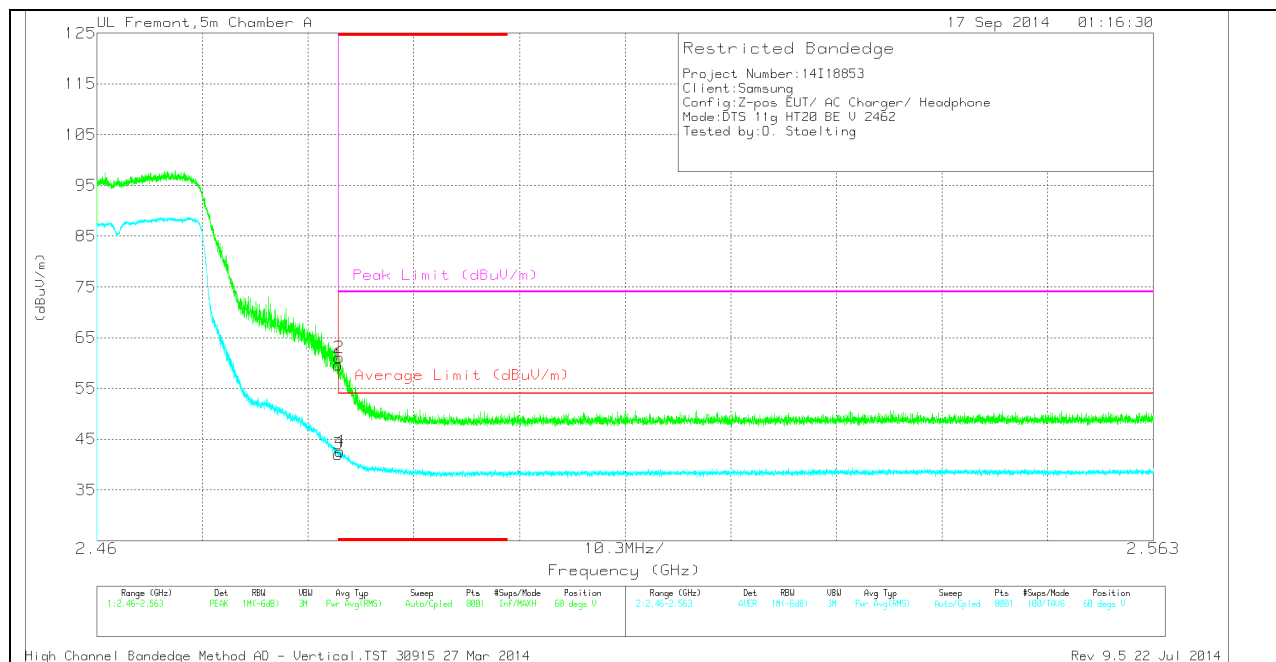

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.11	PK	32.7	-24.2	0	59.61	-	-	74	-14.39	60	328	V
2	* 2.484	52.54	PK	32.7	-24.2	0	61.04	-	-	74	-12.96	60	328	V
3	* 2.484	33.23	RMS	32.7	-24.2	.31	42.04	54	-11.96	-	-	60	328	V
4	* 2.484	33.78	RMS	32.7	-24.2	.31	42.59	54	-11.41	-	-	60	328	V

HARMONICS AND SPURIOUS EMISSIONS

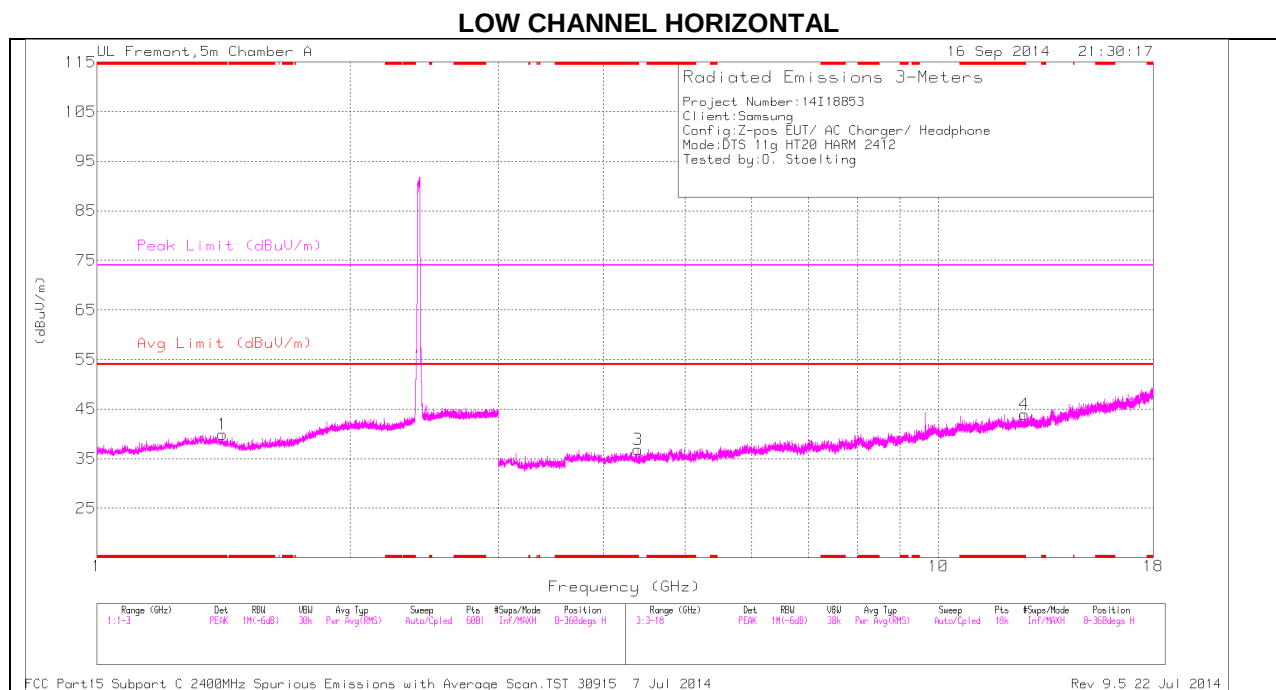

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

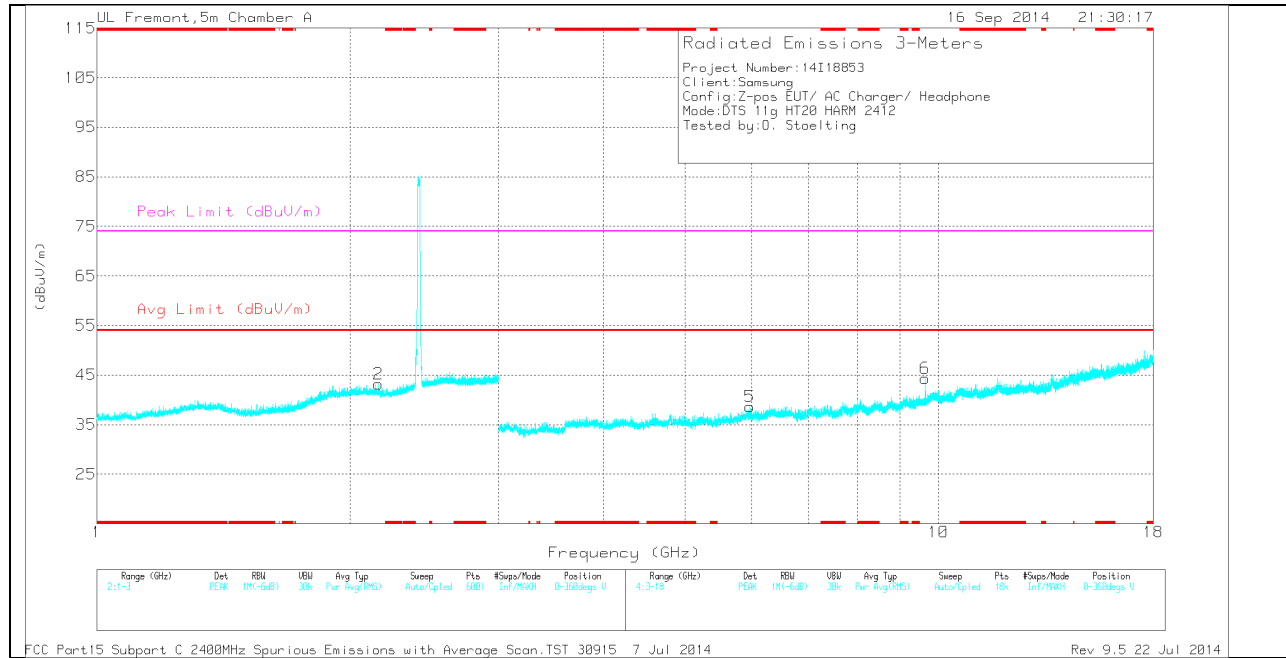

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.41	36.8	PK	29.7	-26.6	0	39.9	-	-	74	-34.1	0-360	201	H
3	* 4.394	33.51	PK	33.9	-30.6	0	36.81	-	-	74	-37.19	0-360	100	H
4	* 12.656	27.25	PK	39	-22.3	0	43.95	-	-	74	-30.05	0-360	100	H
2	2.16	36.29	PK	31.5	-24.6	0	43.19	-	-	-	-	0-360	201	V
5	5.967	31.24	PK	35.2	-27.8	0	38.64	-	-	-	-	0-360	100	V
6	9.648	31.68	PK	36.8	-24.1	0	44.38	-	-	-	-	0-360	201	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.648	38.02	PK2	36.8	-24.1	0	50.72	-	-	-	-	94	244	V
9.648	31.08	MAV1	36.8	-24.1	.31	44.09	-	-	-	-	94	244	V

MID CHANNEL HORIZONTAL

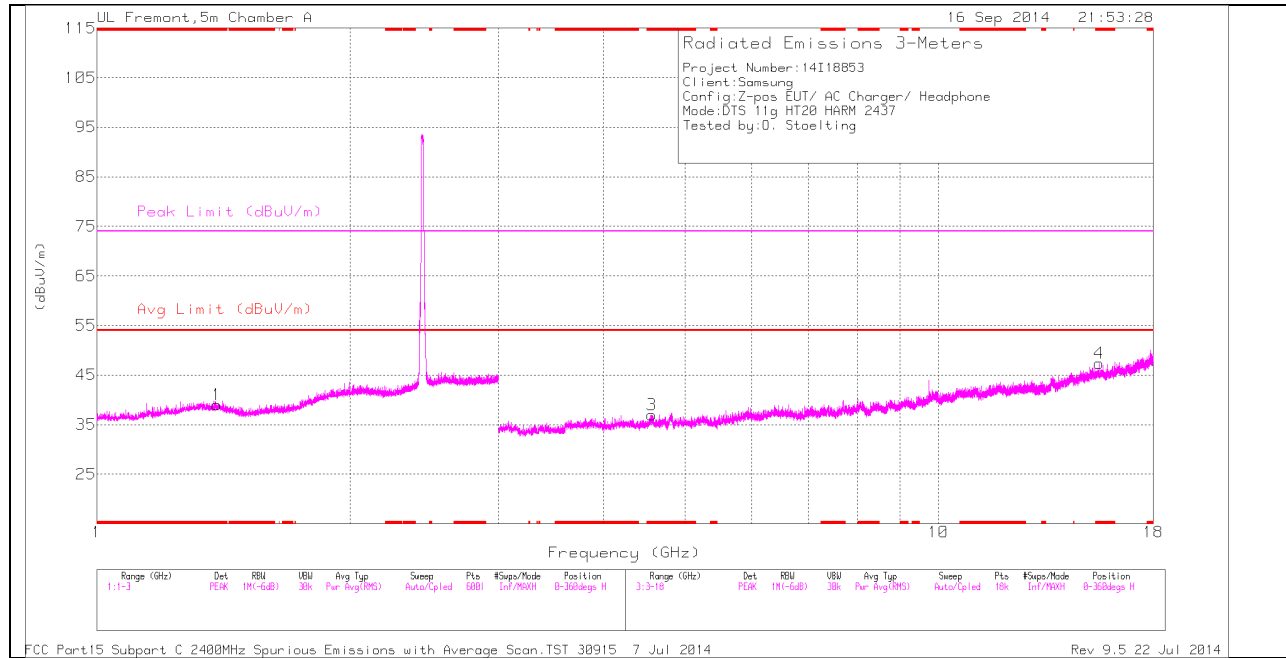

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

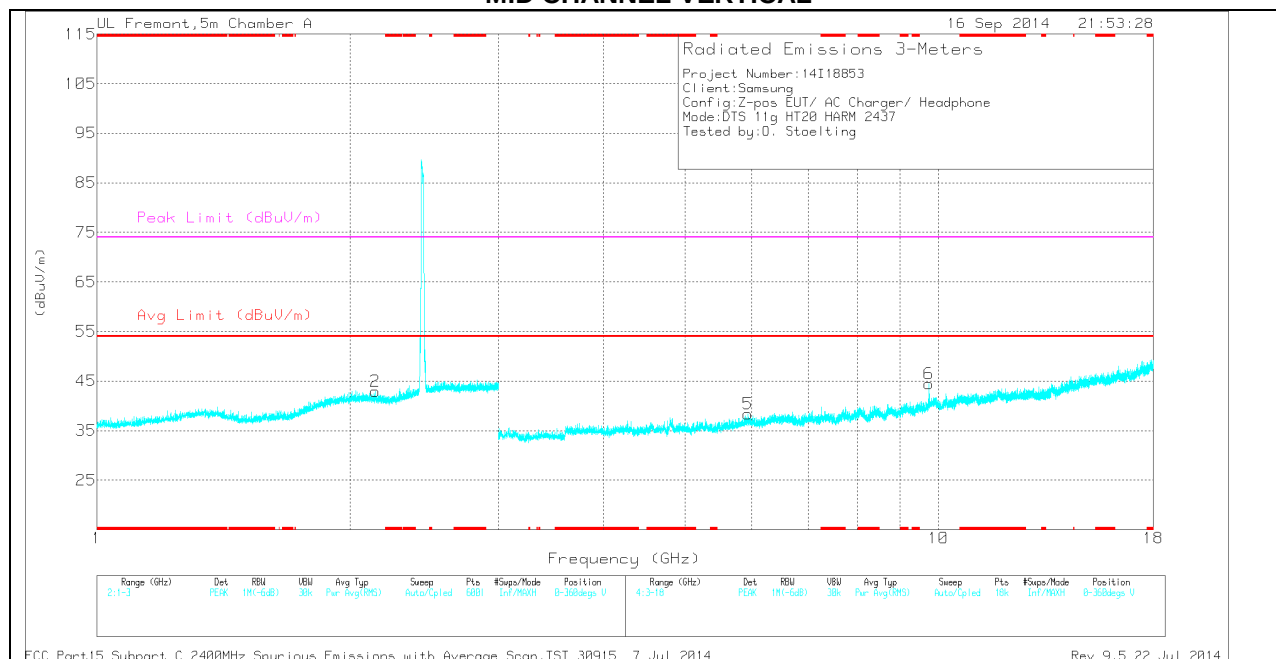

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.389	35.67	PK	29.9	-26.6	0	38.97	-	-	74	-35.03	0-360	201	H
3	* 4.566	32.12	PK	33.9	-29.1	0	36.92	-	-	74	-37.08	0-360	201	H
4	* 15.523	27.61	PK	40.6	-20.8	0	47.41	-	-	74	-26.59	0-360	201	H
2	2.142	35.91	PK	31.6	-24.6	0	42.91	-	-	-	-	0-360	201	V
5	5.938	31.02	PK	35.1	-27.7	0	38.42	-	-	-	-	0-360	100	V
6	9.748	31.03	PK	36.9	-23.5	0	44.43	-	-	-	-	0-360	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.748	38.06	PK2	36.9	-23.5	0	51.46	-	-	-	-	360	100	V
9.748	29.95	MAV1	36.9	-23.5	.31	43.66	-	-	-	-	360	100	V

HIGH CHANNEL HORIZONTAL

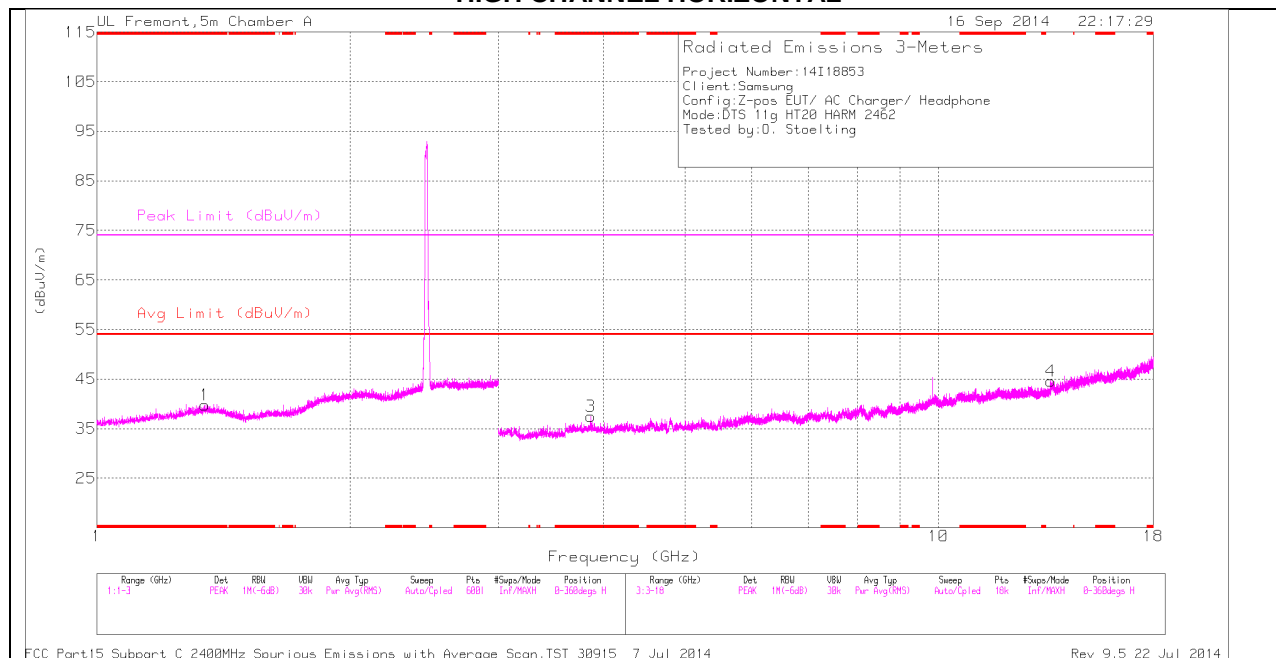

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

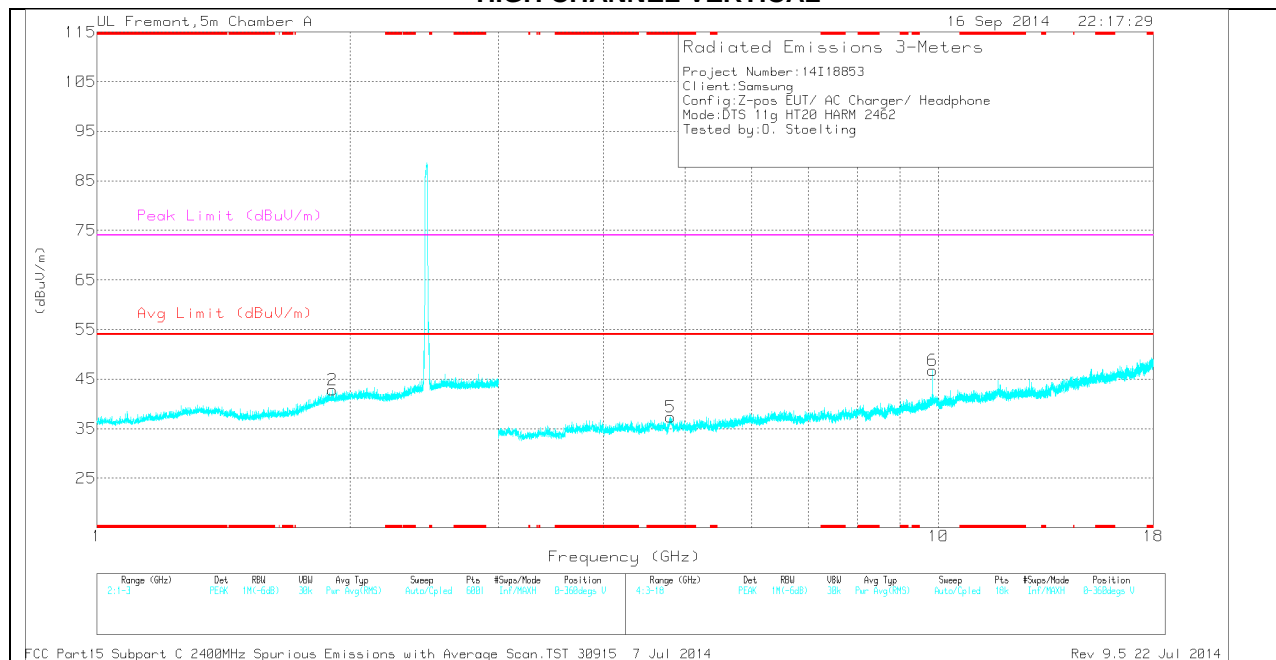

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.343	36.41	PK	30.1	-26.7	0	39.81	-	-	74	-34.19	0-360	100	H
3	* 3.859	34.41	PK	33.7	-30.6	0	37.51	-	-	74	-36.49	0-360	100	H
5	* 4.805	32.52	PK	34	-29.2	0	37.32	-	-	74	-36.68	0-360	100	V
2	1.906	36.42	PK	31.7	-25.3	0	42.82	-	-	-	-	0-360	100	V
6	9.848	32.1	PK	37	-22.4	0	46.7	-	-	-	-	0-360	100	V
4	13.604	27.68	PK	38.8	-21.9	0	44.58	-	-	-	-	0-360	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.848	37.52	PK2	37	-22.4	0	52.12	-	-	-	-	356	111	V
9.848	29.45	MAv1	37	-22.4	.31	44.36	-	-	-	-	356	111	V

10.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

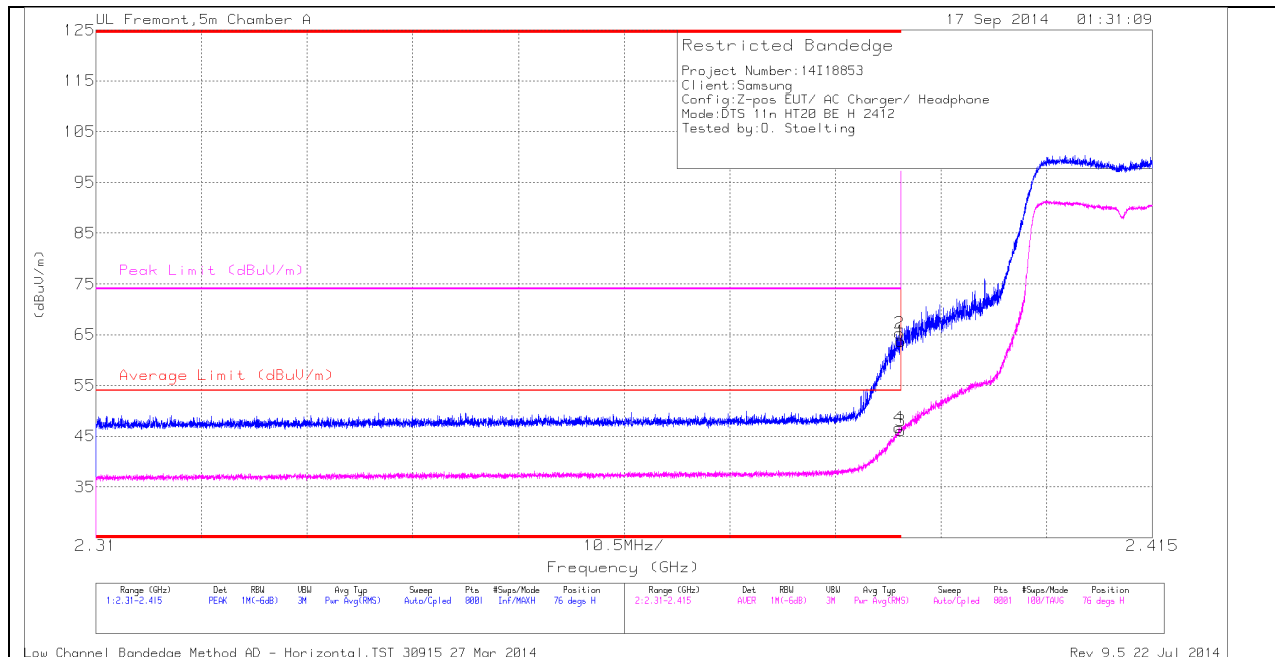

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	55.61	PK	32.2	-24.1	0	63.71	-	-	74	-10.29	76	325	H
2	* 2.39	57.16	PK	32.2	-24.1	0	65.26	-	-	74	-8.74	76	325	H
3	* 2.39	37.58	RMS	32.2	-24.1	.34	46.02	54	-7.98	-	-	76	325	H
4	* 2.39	38.25	RMS	32.2	-24.1	.34	46.69	54	-7.31	-	-	76	325	H

VERTICAL PEAK AND AVERAGE PLOT

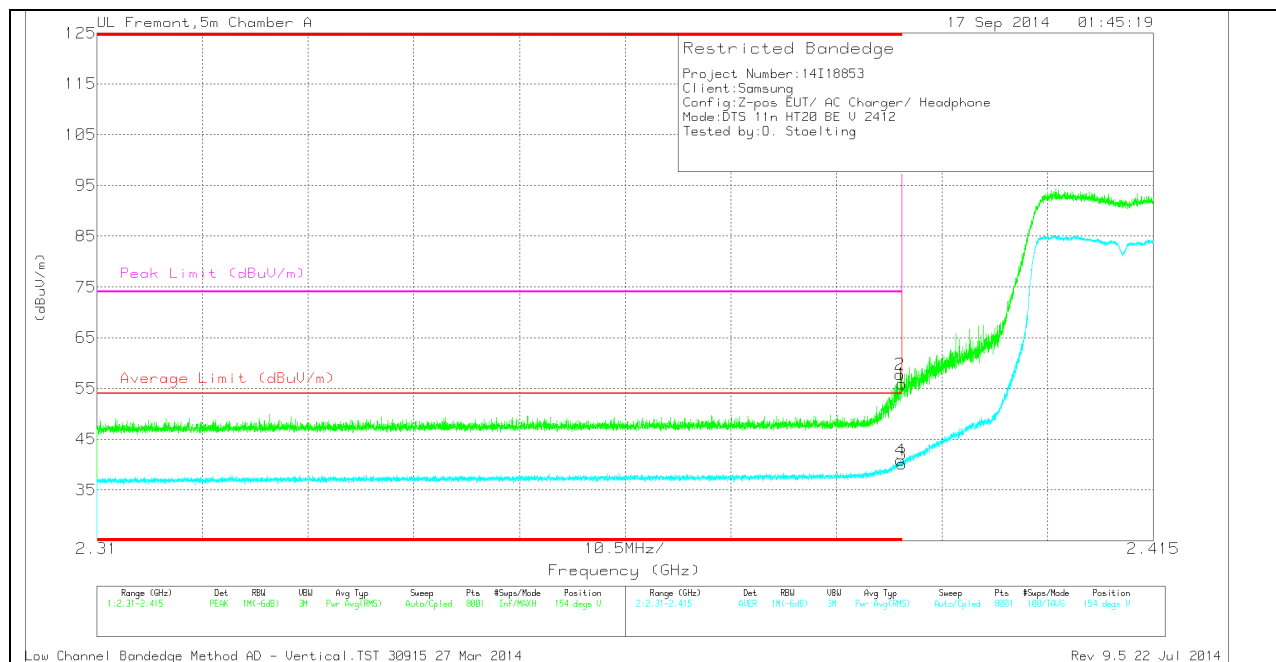


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT136 (dB/m)	Amp/Cbl/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.76	PK	32.2	-24.1	0	55.86	-	-	74	-18.14	154	330	V
2	* 2.39	49.62	PK	32.2	-24.1	0	57.72	-	-	74	-16.28	154	330	V
3	* 2.39	31.66	RMS	32.2	-24.1	.34	40.1	54	-13.9	-	-	154	330	V
4	* 2.39	32.37	RMS	32.2	-24.1	.34	40.81	54	-13.19	-	-	154	330	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

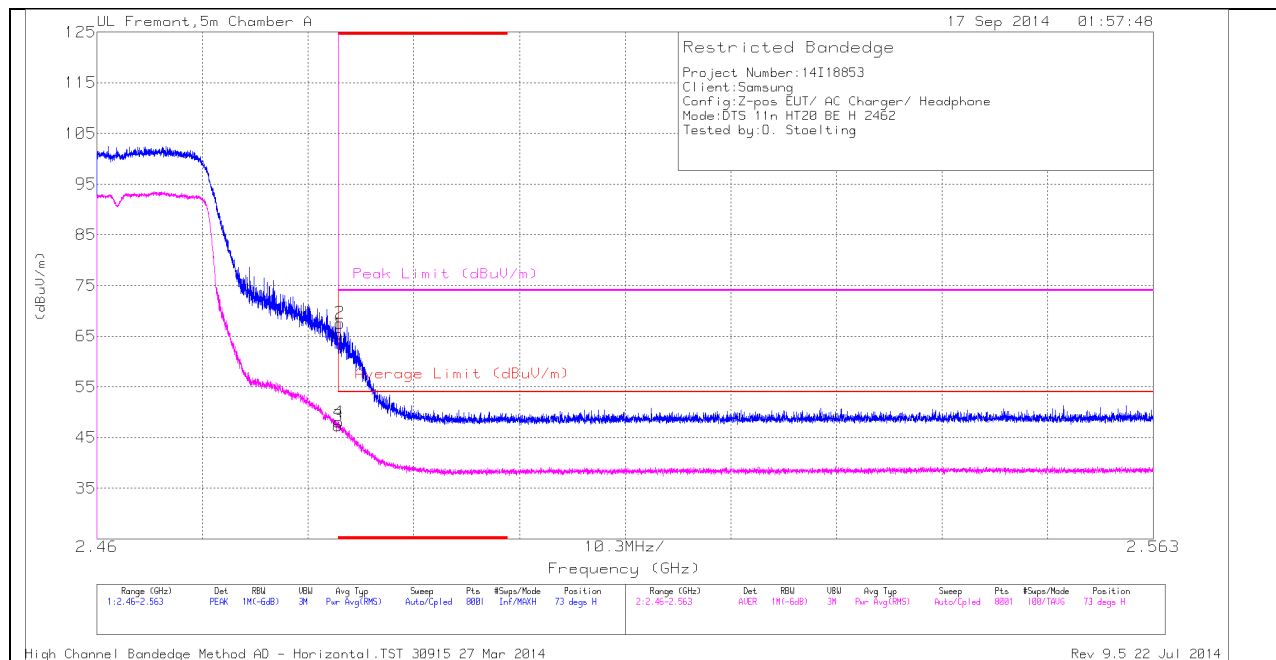

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.89	PK	32.7	-24.2	0	65.39	-	-	74	-8.61	73	314	H
2	* 2.484	59.11	PK	32.7	-24.2	0	67.61	-	-	74	-6.39	73	314	H
3	* 2.484	38.49	RMS	32.7	-24.2	.34	47.33	54	-6.67	-	-	73	314	H
4	* 2.484	39.21	RMS	32.7	-24.2	.34	48.05	54	-5.95	-	-	73	314	H


VERTICAL PEAK AND AVERAGE PLOT

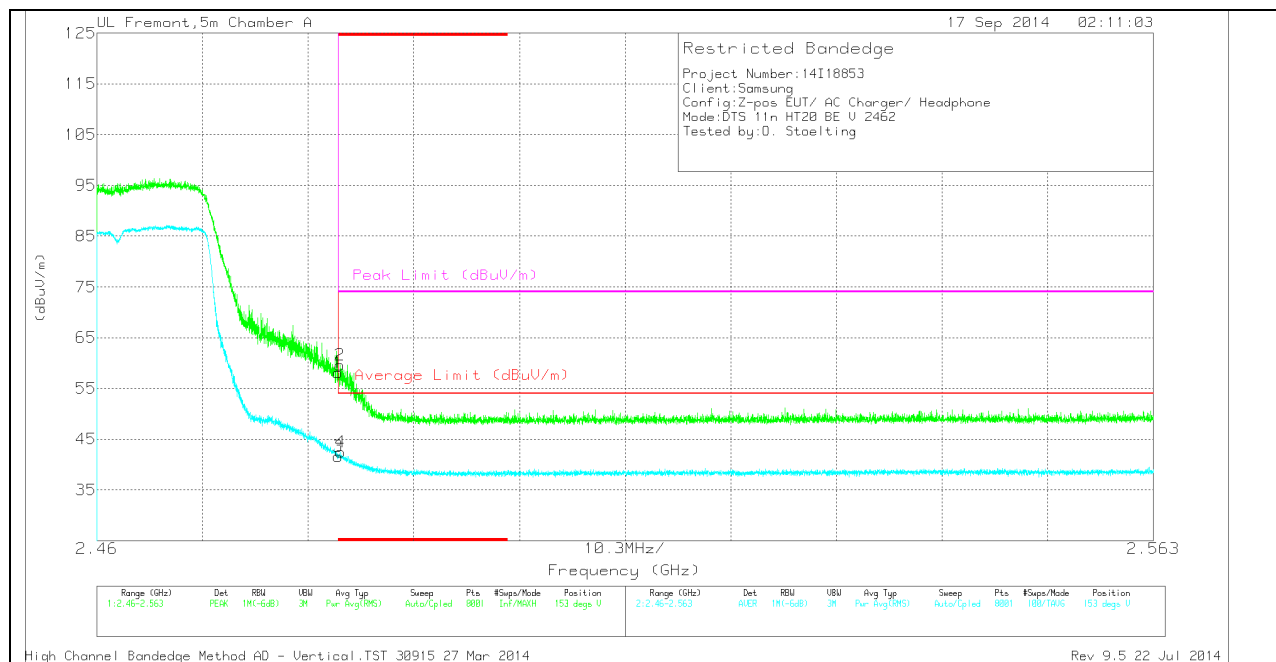

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.56	PK	32.7	-24.2	0	58.06	-	-	74	-15.94	153	314	V
2	* 2.484	51.14	PK	32.7	-24.2	0	59.64	-	-	74	-14.36	153	314	V
3	* 2.484	32.75	RMS	32.7	-24.2	.34	41.59	54	-12.41	-	-	153	314	V
4	* 2.484	33.5	RMS	32.7	-24.1	.34	42.44	54	-11.56	-	-	153	314	V

HARMONICS AND SPURIOUS EMISSIONS

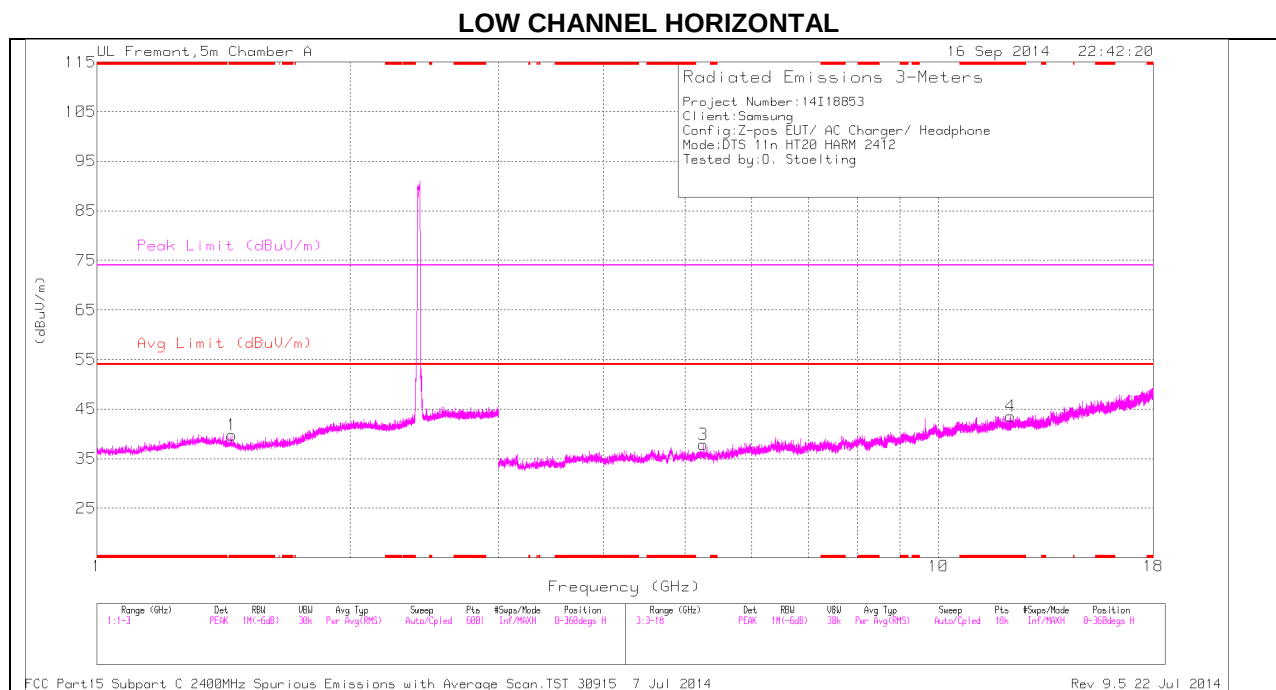

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

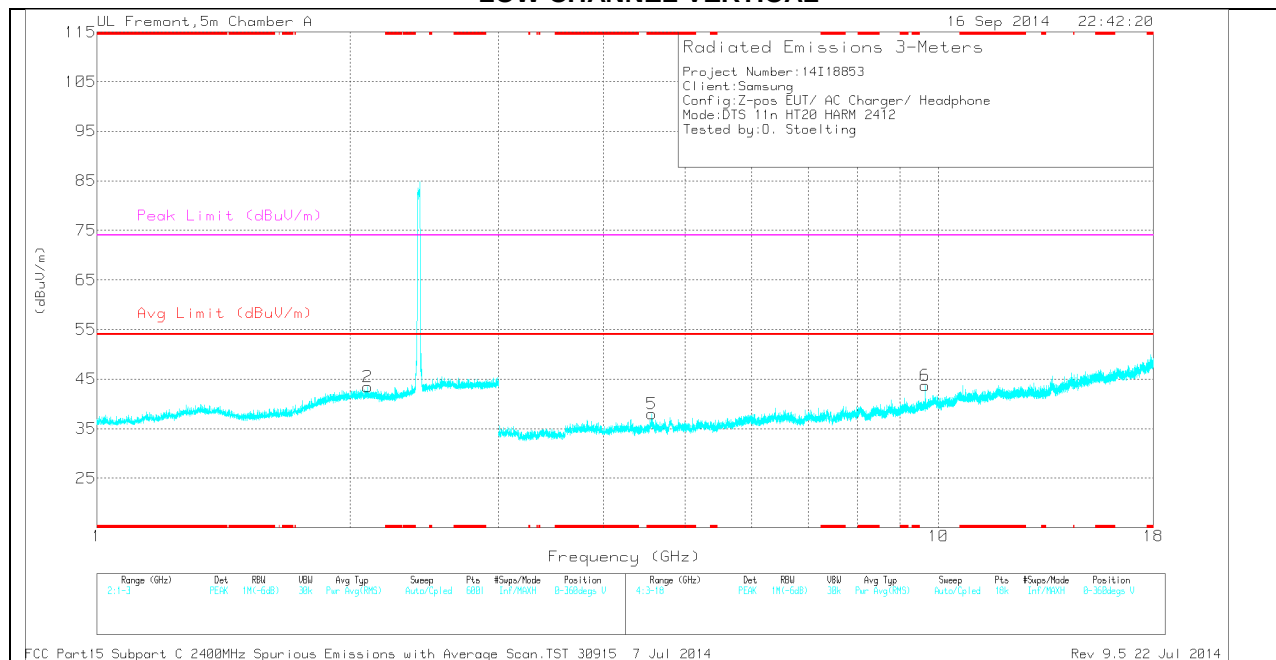

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.446	37.12	PK	29.3	-26.7	0	39.72	-	-	74	-34.28	0-360	100	H
4	* 12.189	27.22	PK	38.8	-22.4	0	43.62	-	-	74	-30.38	0-360	100	H
5	* 4.563	33.19	PK	33.9	-29.1	0	37.99	-	-	74	-36.01	0-360	100	V
2	2.096	36.37	PK	31.8	-24.7	0	43.47	-	-	-	-	0-360	100	V
3	5.257	32.1	PK	34.2	-28.5	0	37.8	-	-	-	-	0-360	201	H
6	9.647	31	PK	36.8	-24.1	0	43.7	-	-	-	-	0-360	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.647	36.72	PK2	36.8	-24.1	0	49.42	-	-	-	-	335	106	V
9.648	28.46	MAV1	36.8	-24.1	.34	41.5	-	-	-	-	335	106	V

MID CHANNEL HORIZONTAL

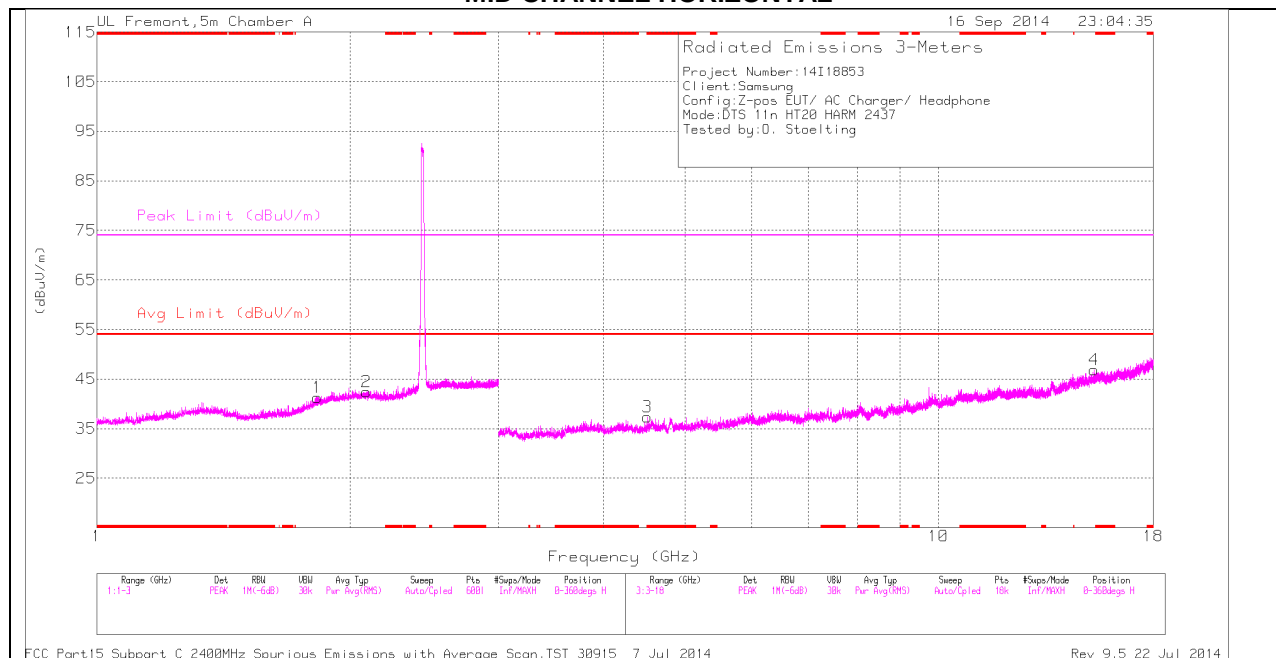

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

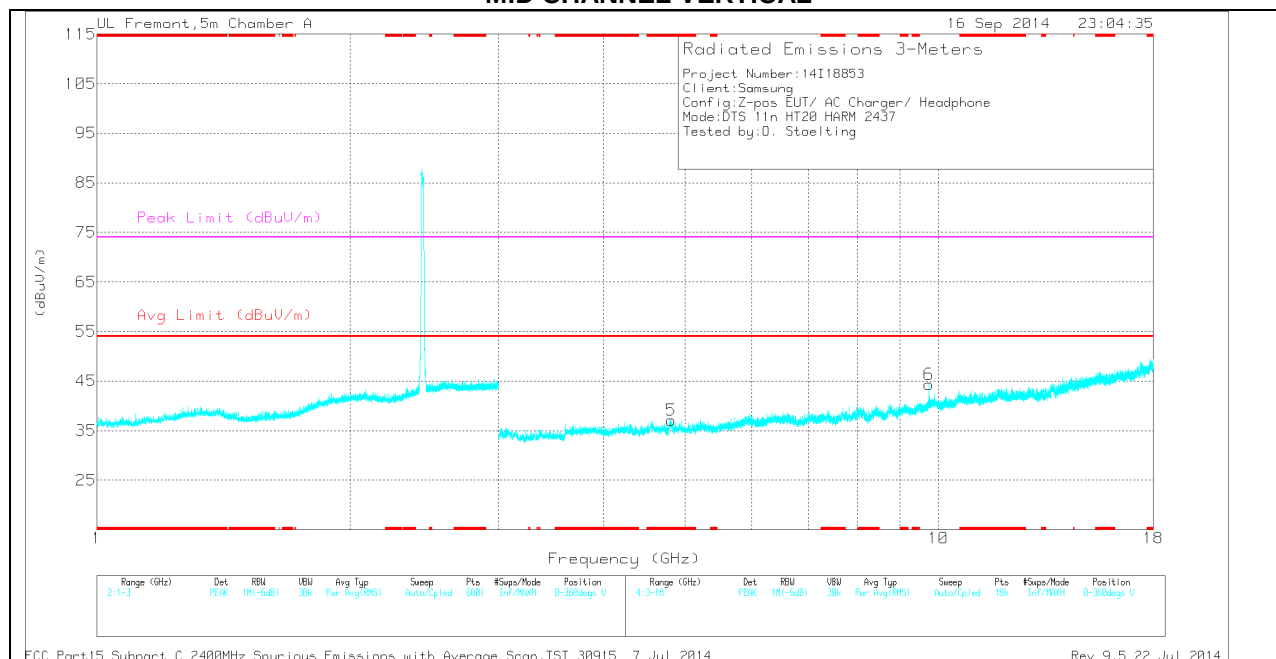

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.509	33.1	PK	33.9	-29.7	0	37.3	-	-	74	-36.7	0-360	201	H
5	* 4.812	32.3	PK	34	-29.2	0	37.1	-	-	74	-36.9	0-360	100	V
1	1.829	35.77	PK	30.9	-25.4	0	41.27	-	-	-	-	0-360	201	H
2	2.09	35.27	PK	31.8	-24.7	0	42.37	-	-	-	-	0-360	201	H
6	9.747	30.89	PK	36.9	-23.5	0	44.29	-	-	-	-	0-360	100	V
4	15.306	27.68	PK	40.7	-21.5	0	46.88	-	-	-	-	0-360	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.748	37	PK2	36.9	-23.5	0	50.4	-	-	-	-	356	101	V
9.748	29.62	MAV1	36.9	-23.5	.34	43.36	-	-	-	-	356	101	V

HIGH CHANNEL HORIZONTAL

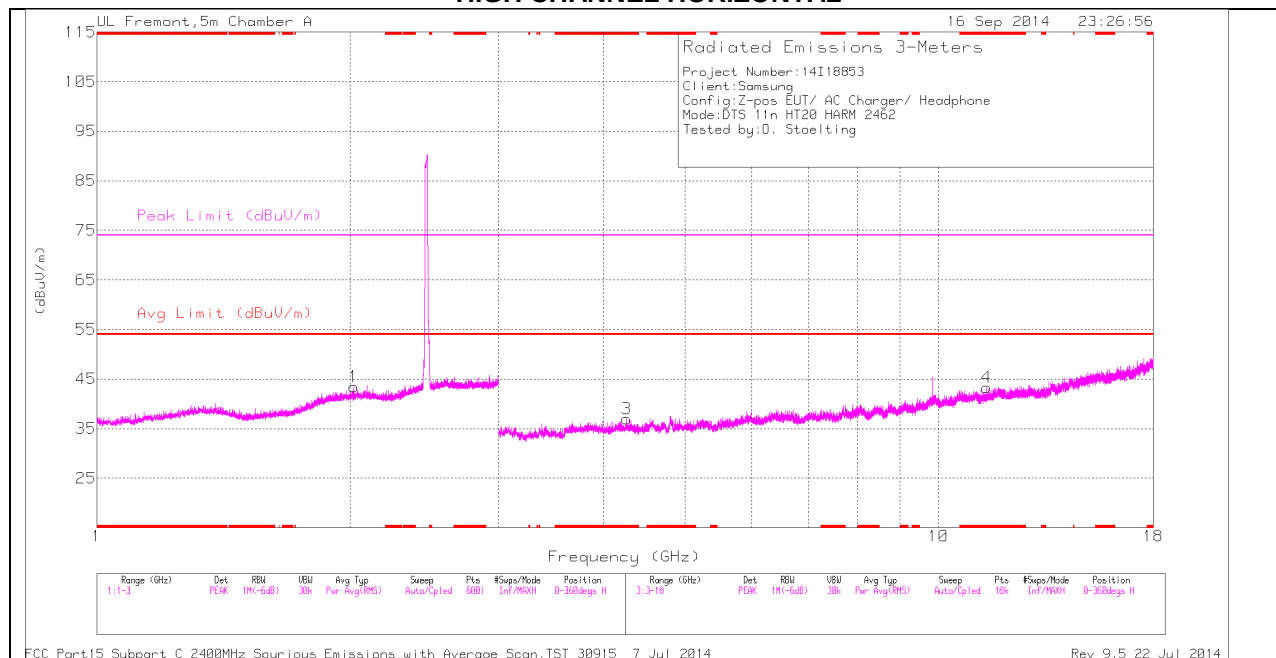

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

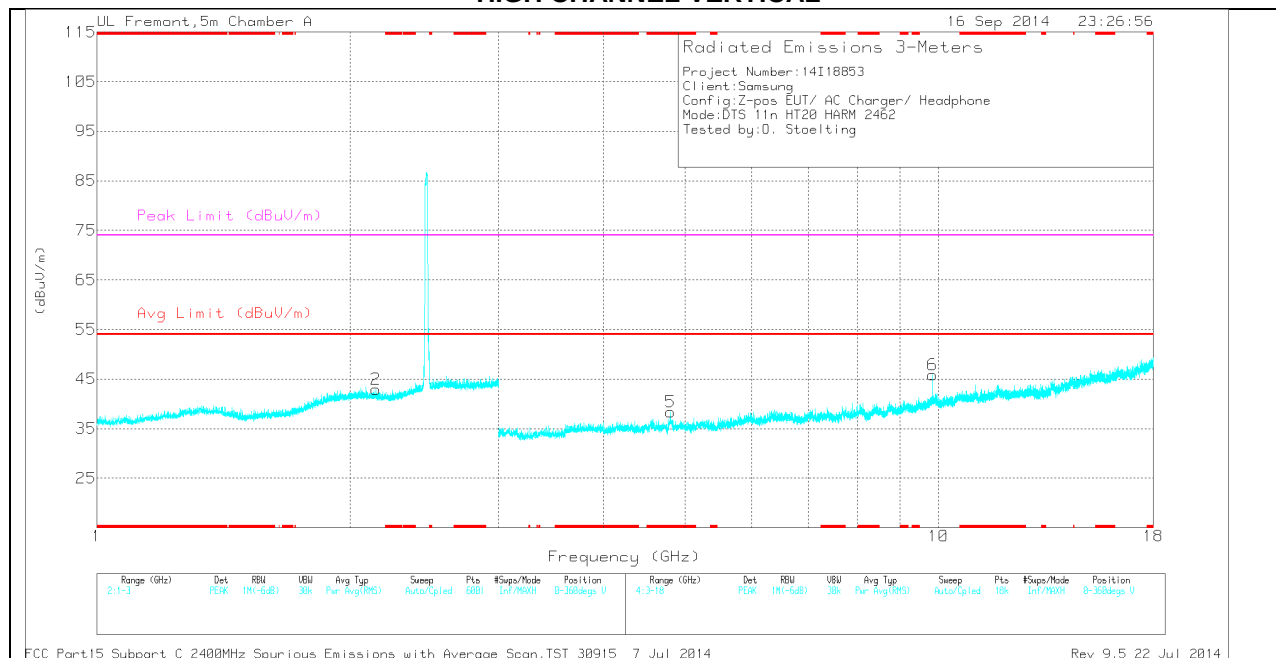

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.262	32.7	PK	34	-29.7	0	37	-	-	74	-37	0-360	100	H
4	* 11.417	27.28	PK	38.1	-22.1	0	43.28	-	-	74	-30.72	0-360	201	H
5	* 4.804	33.51	PK	34	-29.2	0	38.31	-	-	74	-35.69	0-360	100	V
1	2.018	36.67	PK	32	-25.2	0	43.47	-	-	-	-	0-360	201	H
2	2.146	36.19	PK	31.5	-24.7	0	42.99	-	-	-	-	0-360	201	V
6	9.847	31.21	PK	37	-22.4	0	45.81	-	-	-	-	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
9.848	37.66	PK2	37	-22.4	0	52.26	-	-	-	-	359	103	V
9.848	30.33	MAV1	37	-22.4	.34	45.27	-	-	-	-	359	103	V

10.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

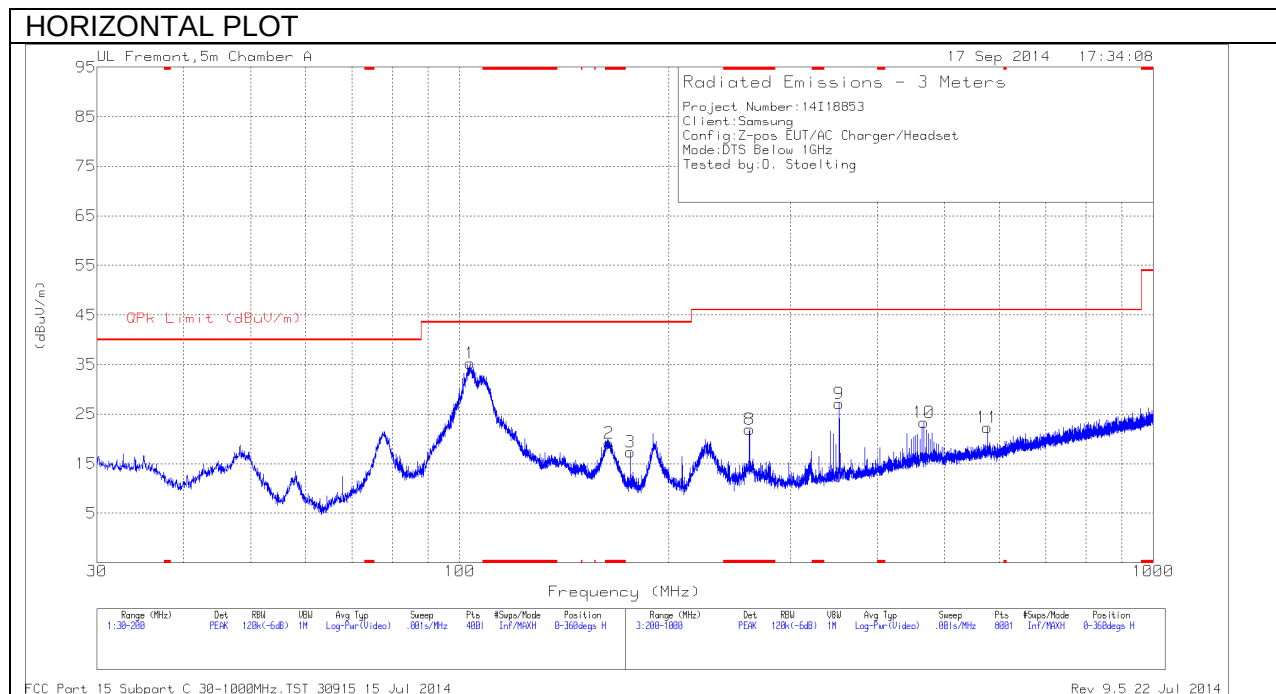

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

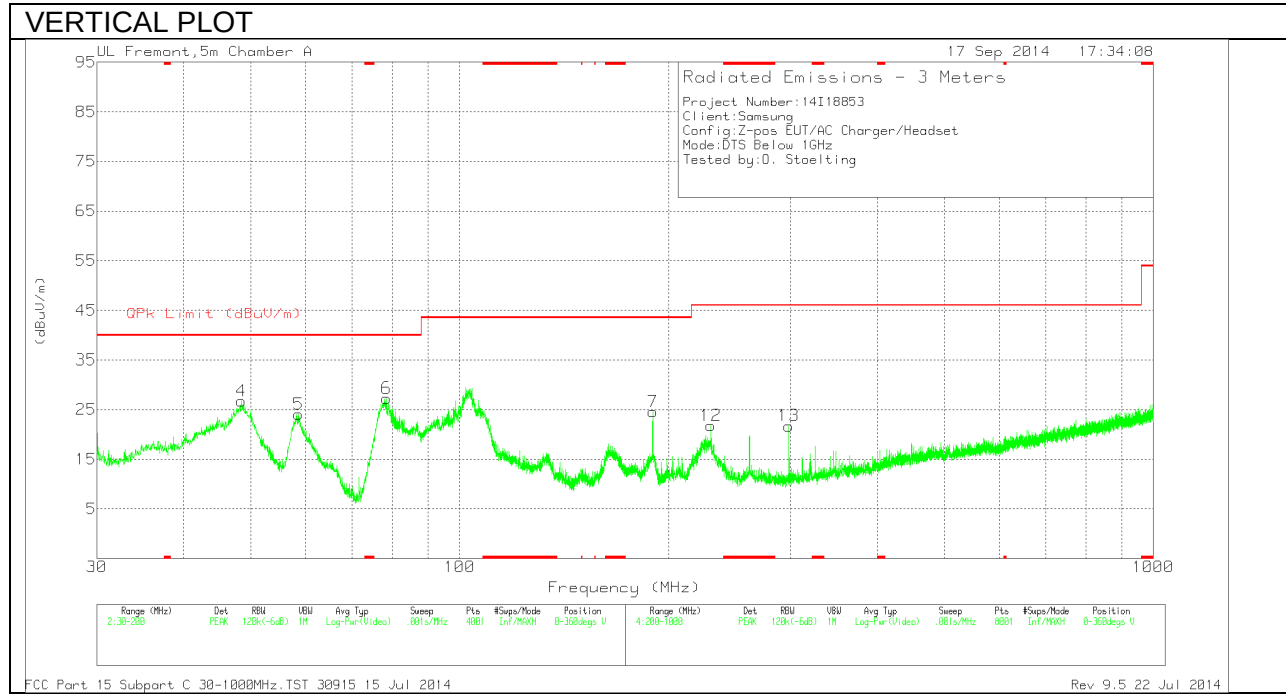

Below 1G Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 164.2575	37.17	PK	12.1	-30.1	19.17	43.52	-24.35	0-360	101	H
8	* 261.7	39.07	PK	12.3	-29.5	21.87	46.02	-24.15	0-360	101	H
4	48.445	49.34	PK	8.4	-31	26.74	40	-13.26	0-360	101	V
5	58.645	47.15	PK	7.4	-30.5	24.05	40	-15.95	0-360	101	V
6	78.4075	50.31	PK	7.9	-30.9	27.31	40	-12.69	0-360	101	V
1	103.5675	54.38	PK	11.3	-30.4	35.28	43.52	-8.24	0-360	300	H
3	176.285	36.03	PK	11.4	-30.1	17.33	43.52	-26.19	0-360	101	H
7	189.8425	43.09	PK	11.3	-29.8	24.59	43.52	-18.93	0-360	101	V
12	230.4	40.24	PK	11.1	-29.6	21.74	46.02	-24.28	0-360	101	V
13	298.3	37.63	PK	13.4	-29.3	21.73	46.02	-24.29	0-360	101	V
9	352.5	41.71	PK	14.5	-29.1	27.11	46.02	-18.91	0-360	101	H
10	467.2	34.67	PK	17.3	-28.6	23.37	46.02	-22.65	0-360	200	H
11	576	32	PK	18.8	-28.5	22.3	46.02	-23.72	0-360	400	H

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4 2009.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS


LINE 1 PLOT

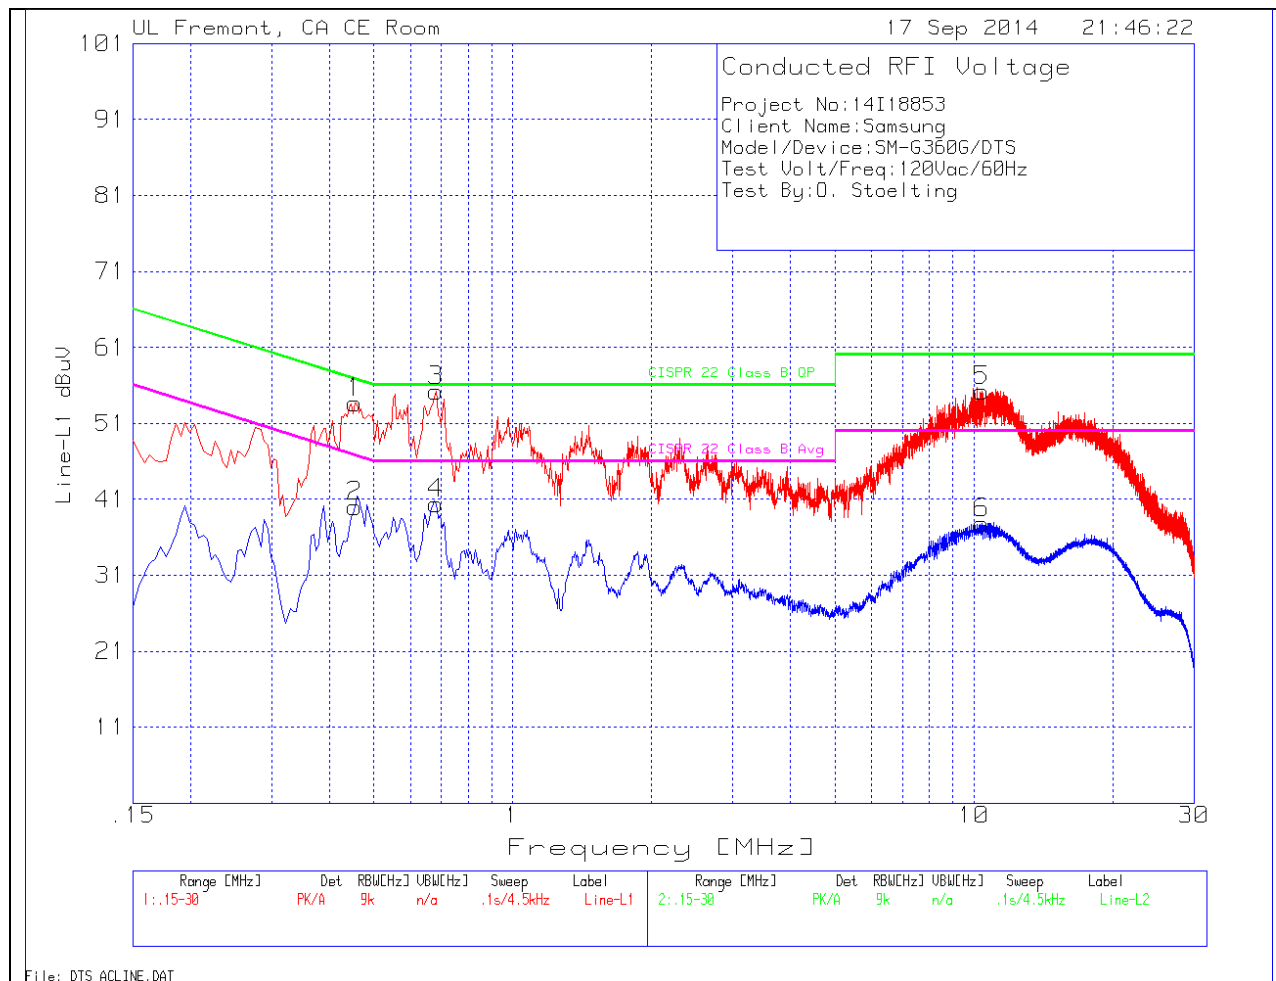

LINE 1 RESULTS

Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.456	53.3	PK	.4	0	53.7	56.8	-3.1	-	-
2	.456	39.58	Av	.4	0	39.98	-	-	46.8	-6.82
3	.681	54.88	PK	.3	0	55.18	56	-.82	-	-
4	.681	40.13	Av	.3	0	40.43	-	-	46	-5.57
5	10.4235	54.84	PK	.2	.2	55.24	60	-4.76	-	-
6	10.4235	37.4	Av	.2	.2	37.8	-	-	50	-12.2

LINE 2 PLOT

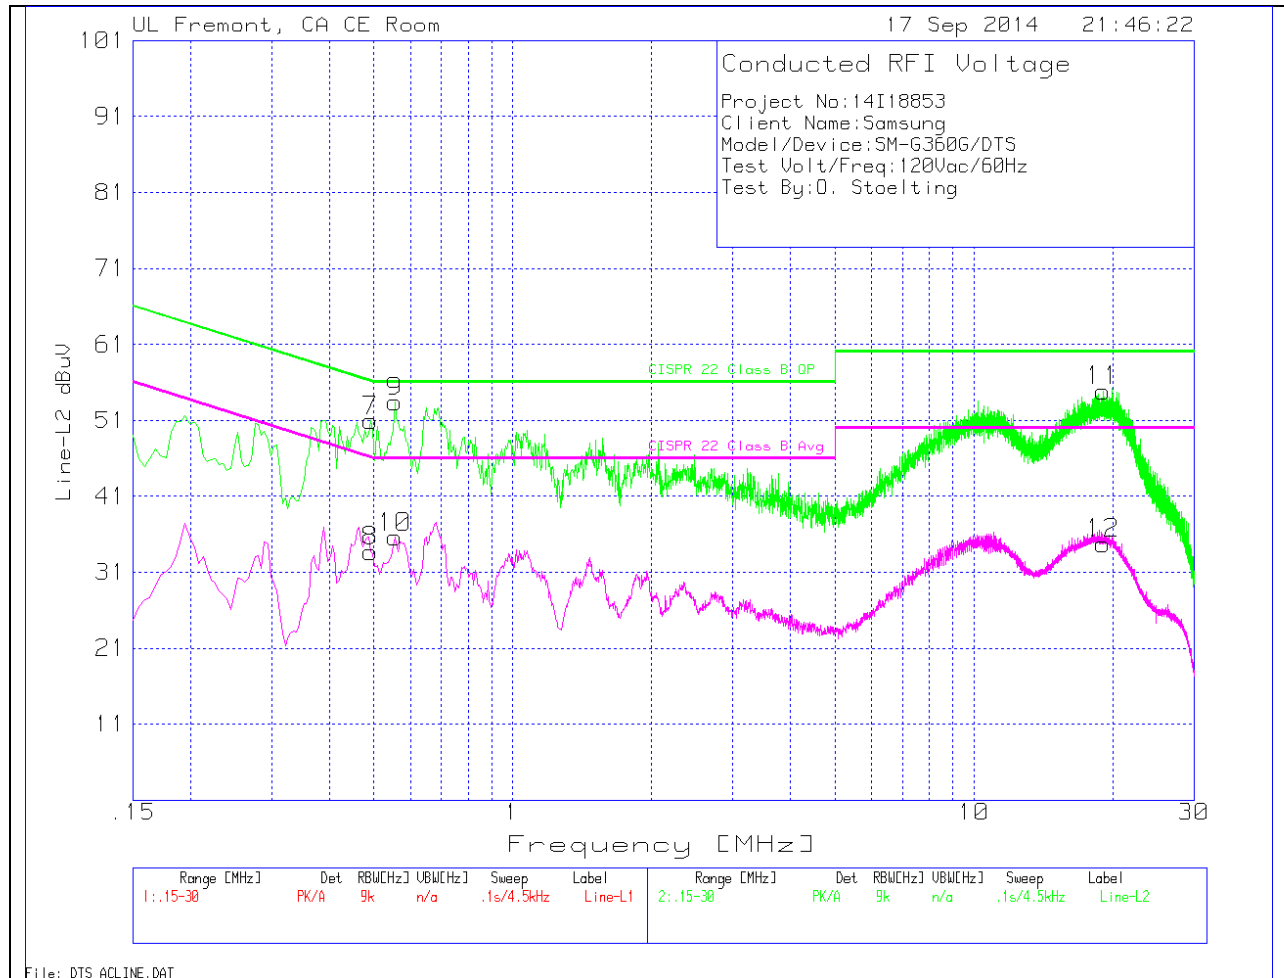

LINE 2 RESULTS

Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	.492	50.51	PK	.4	0	50.91	56.1	-5.19	-	-
8	.492	33.33	Av	.4	0	33.73	-	-	46.1	-12.37
9	.555	53.06	PK	.3	0	53.36	56	-2.64	-	-
10	.555	35.27	Av	.3	0	35.57	-	-	46	-10.43
11	19.0545	54.34	PK	.3	.2	54.84	60	-5.16	-	-
12	19.0545	34.26	Av	.3	.2	34.76	-	-	50	-15.24