

GSM 850

Frequency: 848.8 MHz; Duty Cycle: 1:1.99986; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.588$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.64, 9.64, 9.64) @ 848.8 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

RHS/Touch GPRS 4slot ch.251/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.133 W/kg


RHS/Touch GPRS 4slot ch.251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.33 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

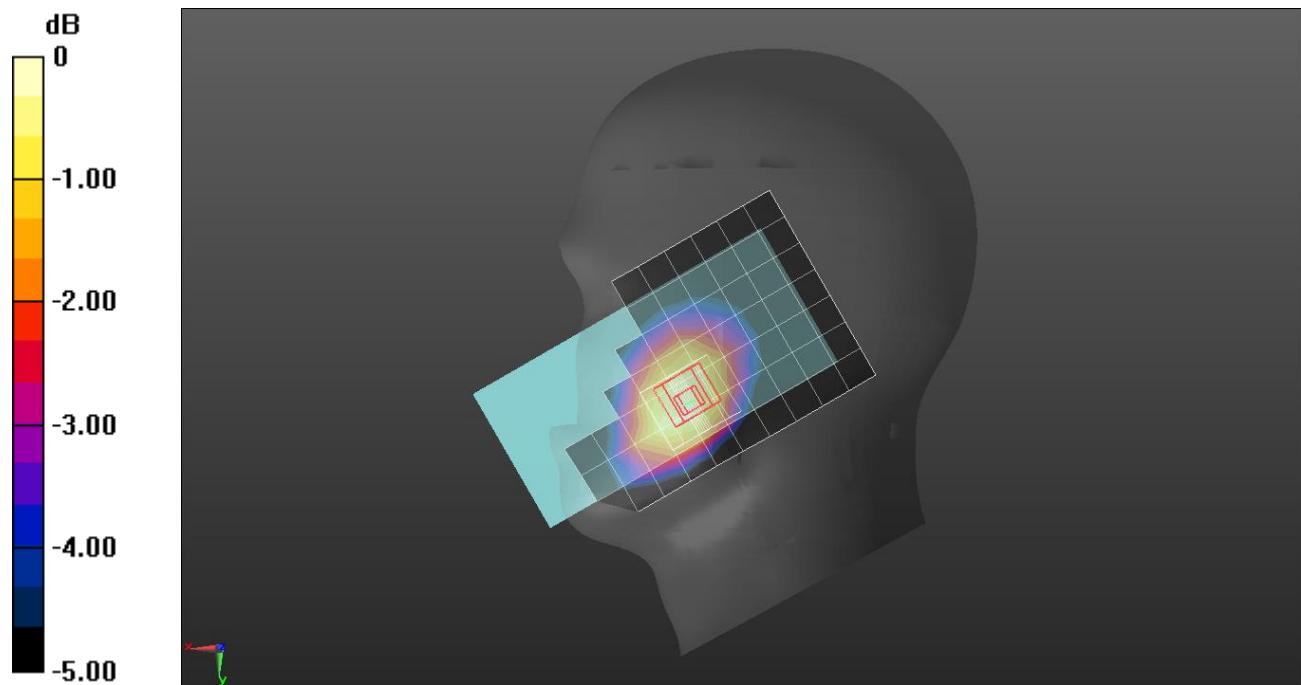

0 dB = 0.135 W/kg = -8.70 dBW/kg

GSM 850

Frequency: 848.8 MHz; Duty Cycle: 1:1.99986; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 40.69$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 848.8 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/GPRS 4slots ch.251/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.292 W/kg


Rear/GPRS 4slots ch.251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.75 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

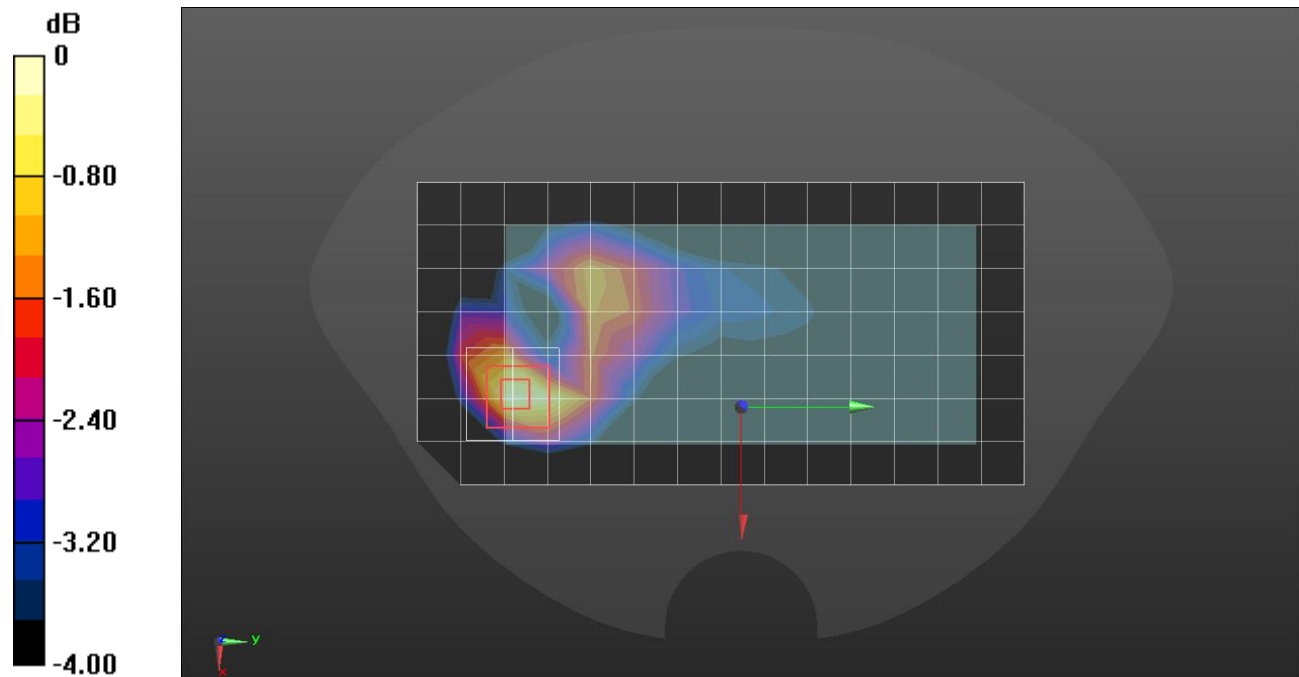

0 dB = 0.301 W/kg = -5.21 dBW/kg

GSM 850

Frequency: 836.6 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.014$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 836.6 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/GPRS 2slots ch.190/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.564 W/kg


Rear/GPRS 2slots ch.190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.98 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.806 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

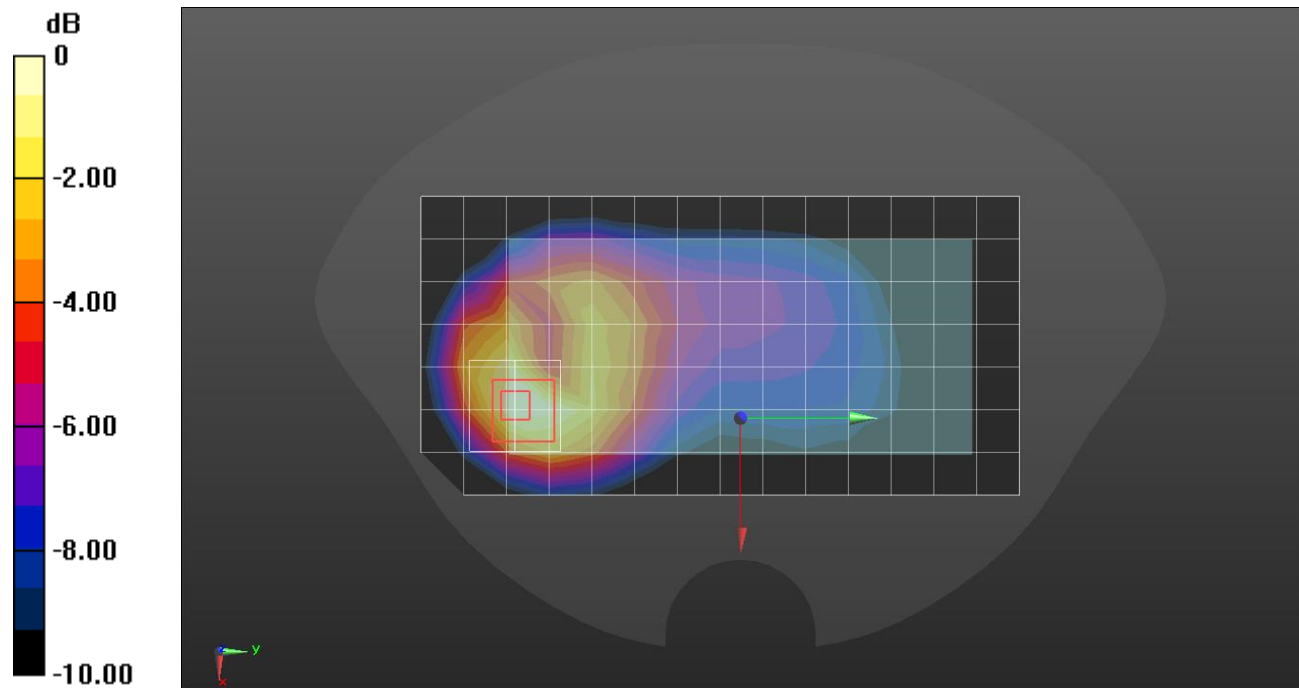

0 dB = 0.592 W/kg = -2.28 dBW/kg

GSM 1900

Frequency: 1909.8 MHz; Duty Cycle: 1:2.60016; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 39.635$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(8.63, 8.63, 8.63) @ 1909.8 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

LHS/Touch GPRS 3slot ch.810/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0324 W/kg


LHS/Touch GPRS 3slot ch.810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.811 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0337 W/kg

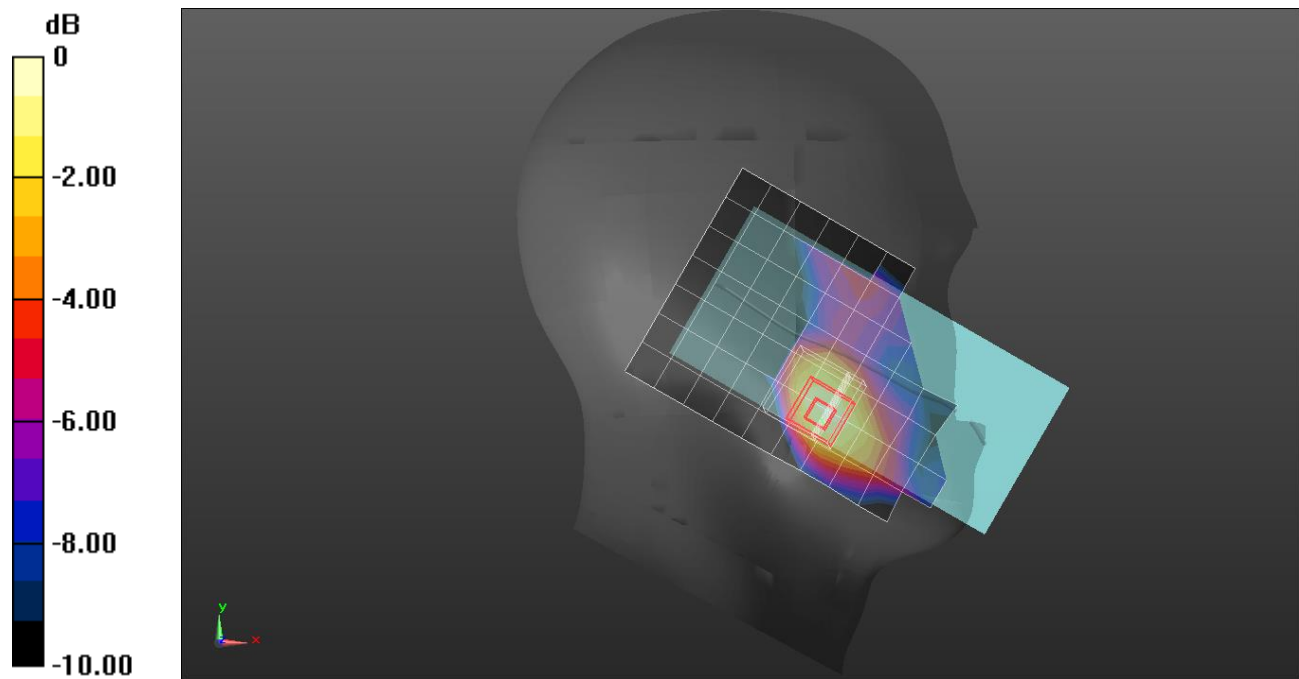

0 dB = 0.0337 W/kg = -14.72 dBW/kg

GSM 1900

Frequency: 1909.8 MHz; Duty Cycle: 1:2.60016; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 39.635$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(8.63, 8.63, 8.63) @ 1909.8 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Front/GPRS 3slots ch.810/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.169 W/kg


Front/GPRS 3slots ch.810//Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.506 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

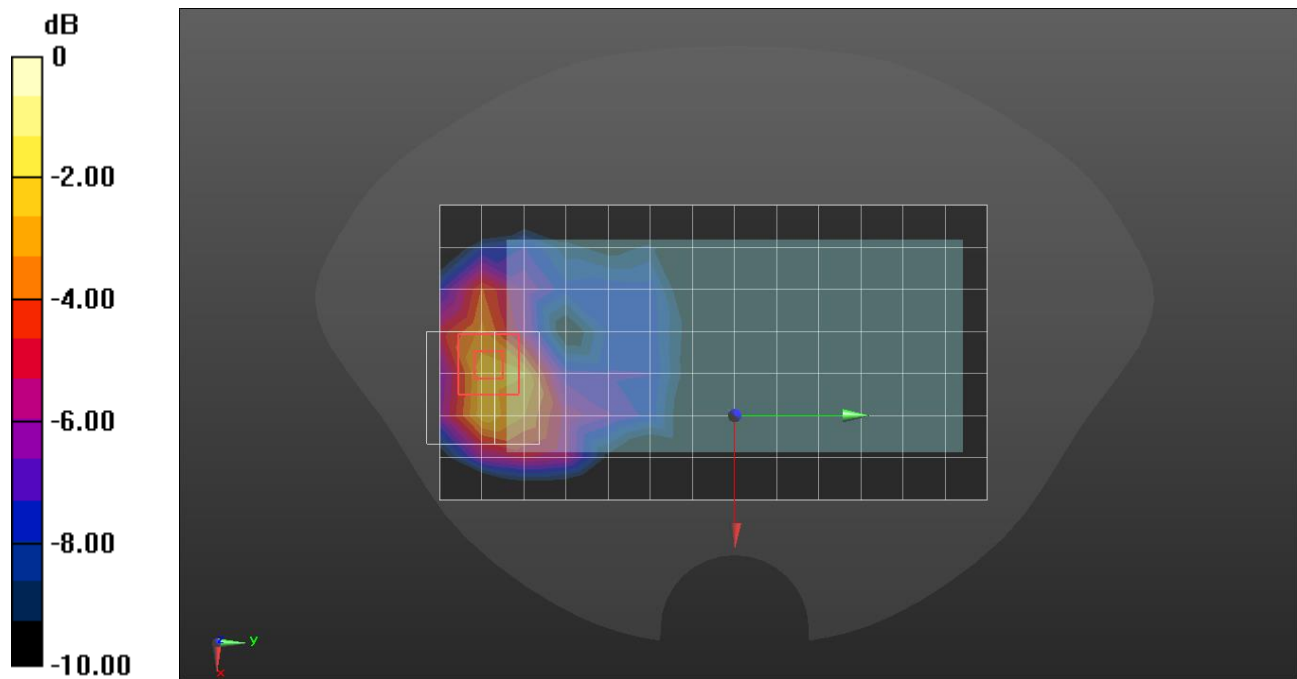

0 dB = 0.276 W/kg = -5.59 dBW/kg

GSM 1900

Frequency: 1850.2 MHz; Duty Cycle: 1:1.99986; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.594$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(7.95, 7.95, 7.95) @ 1850.2 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Edge 3/GPRS 4slots ch.512/Area Scan (8x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.13 W/kg


Edge 3/GPRS 4slots ch.512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.10 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.954 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

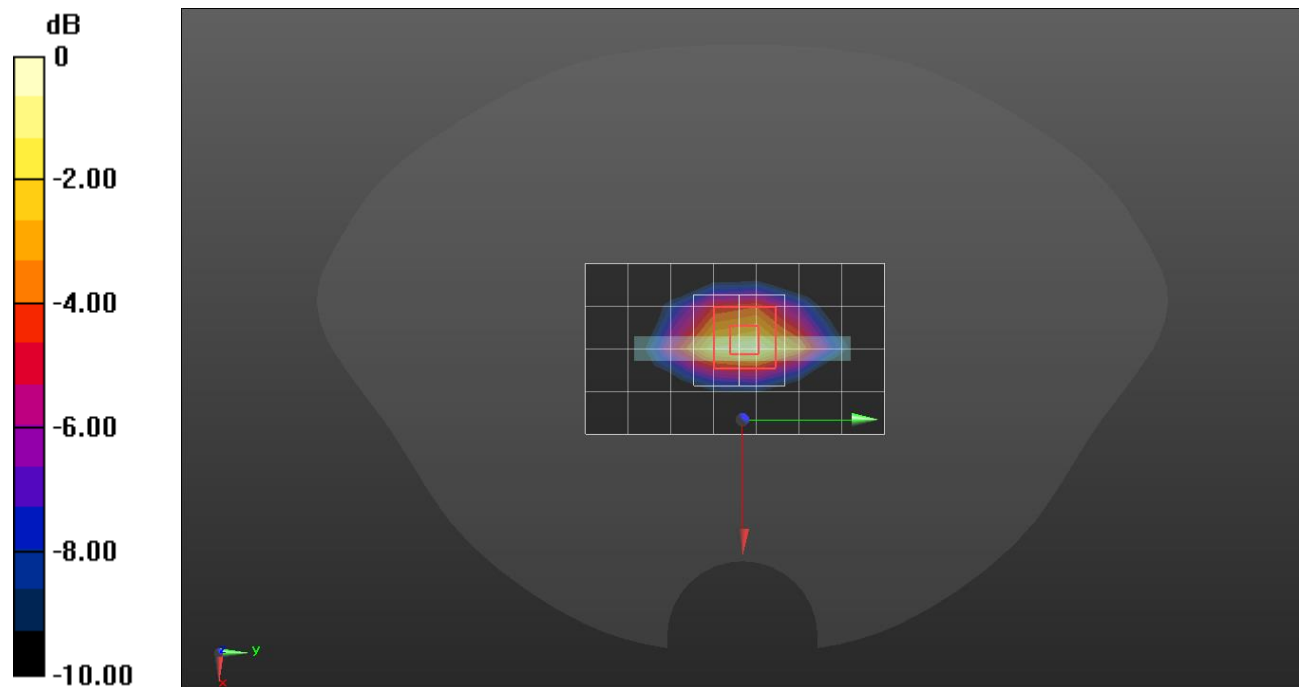

0 dB = 1.26 W/kg = 1.00 dBW/kg

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 39.511$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

LHS/Touch Rel.99 ch.9400/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.117 W/kg


LHS/Touch Rel.99 ch.9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.262 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

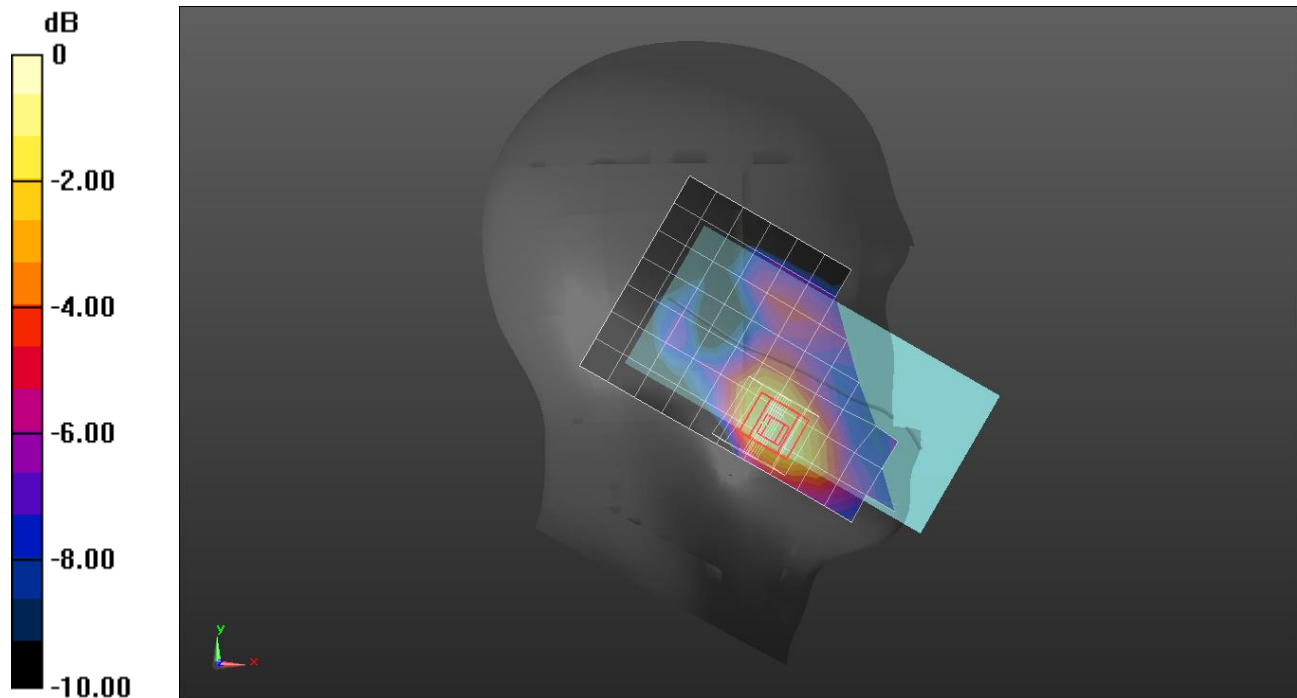

0 dB = 0.133 W/kg = -8.76 dBW/kg

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.922$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Rear/Rel.99 ch.9400/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.667 W/kg


Rear/Rel.99 ch.9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.56 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.610 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 0.770 W/kg

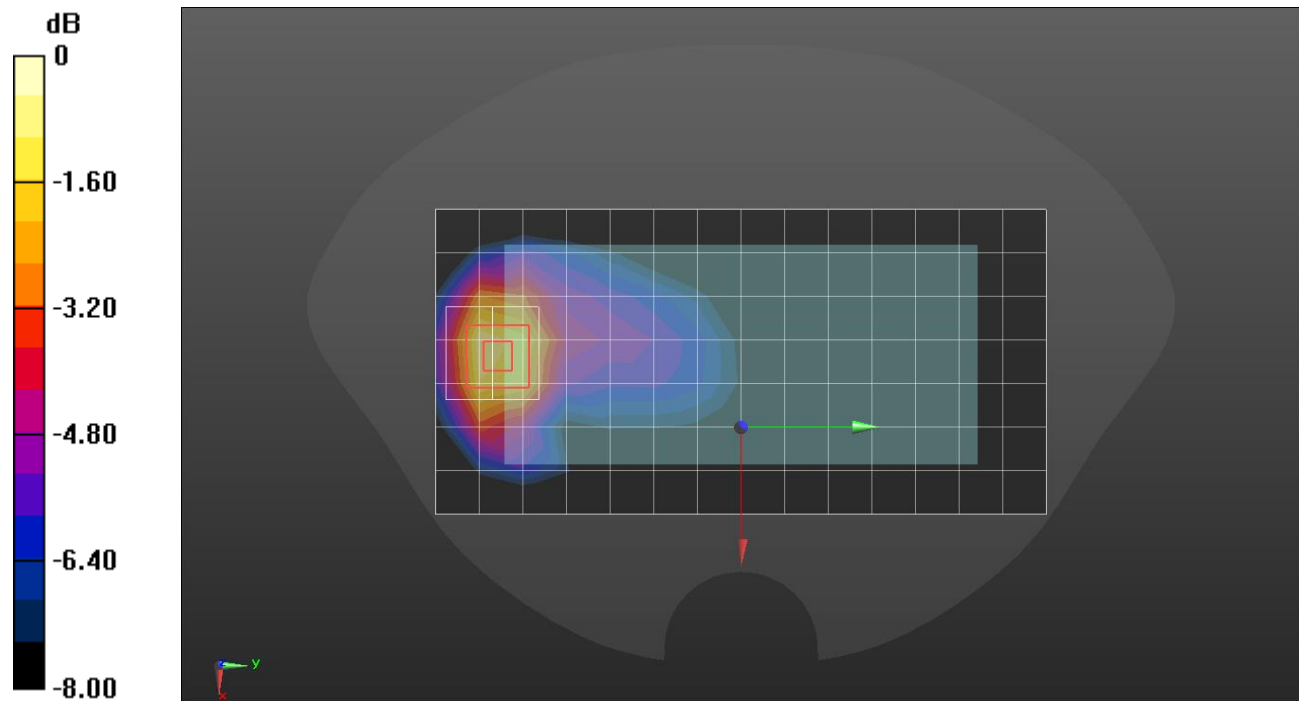

0 dB = 0.770 W/kg = -1.14 dBW/kg

W-CDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 39.511$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 3/Rel.99_ch 9400/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.19 W/kg


Edge 3/Rel.99_ch 9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.79 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.480 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

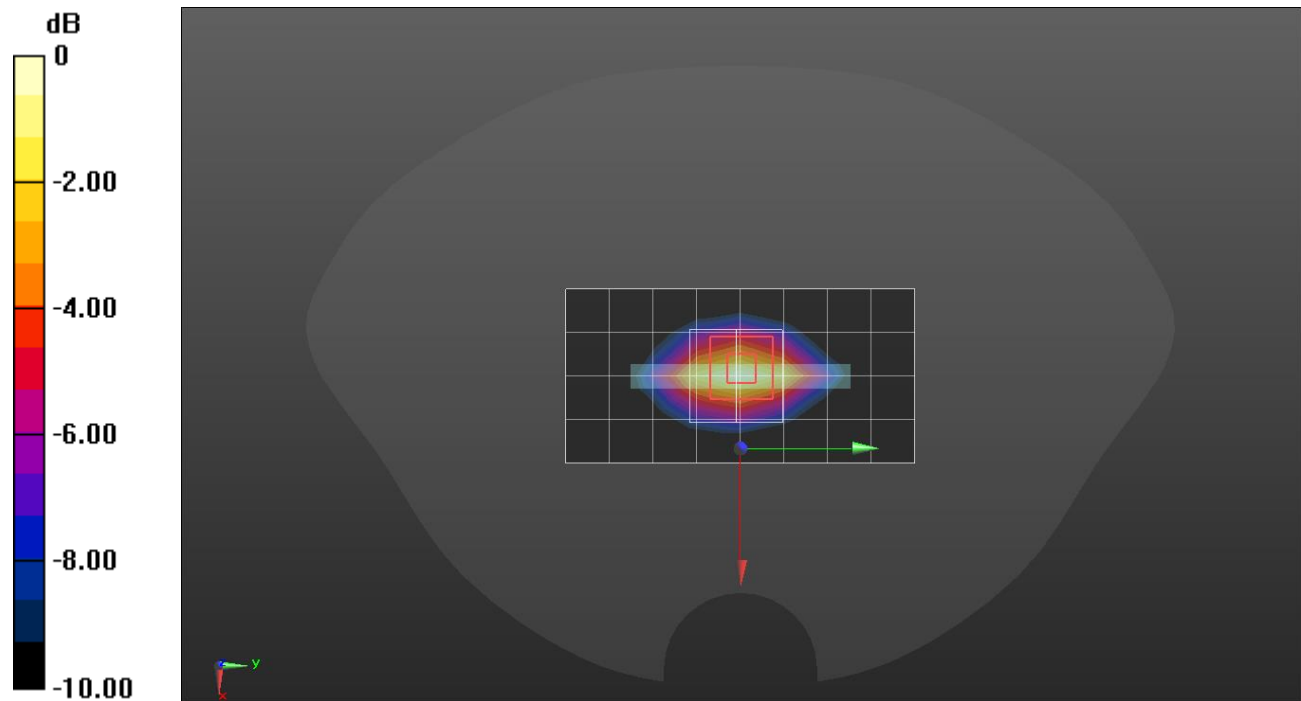

0 dB = 1.16 W/kg = 0.64 dBW/kg

W-CDMA Band II

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 40.868$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.91, 7.91, 7.91) @ 1907.6 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 3/Rel.99 ch.9538/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.80 W/kg


Edge 3/Rel.99 ch.9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 68.82 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 4.76 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 7.25 W/kg

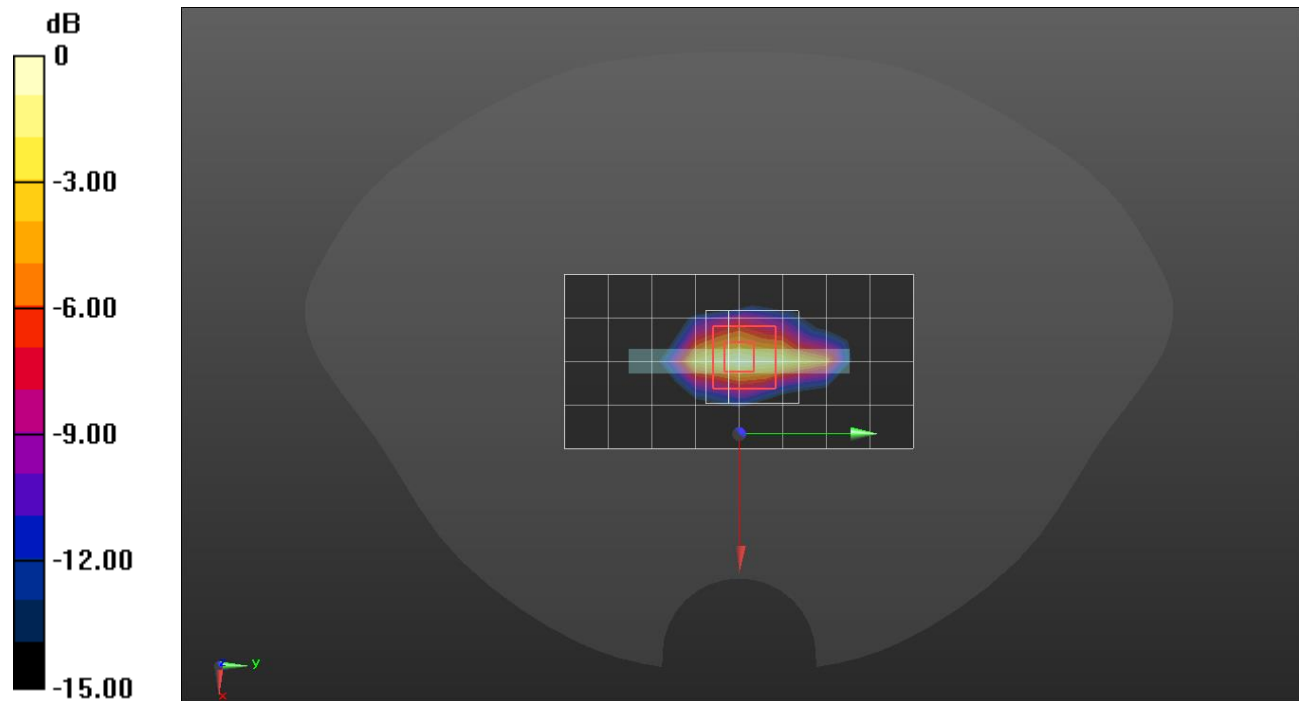

0 dB = 7.25 W/kg = 8.60 dBW/kg

W-CDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 39.892$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(8.11, 8.11, 8.11) @ 1732.6 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

LHS/Touch Rel.99 ch.1413/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.157 W/kg


LHS/Touch Rel.99 ch.1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.00 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

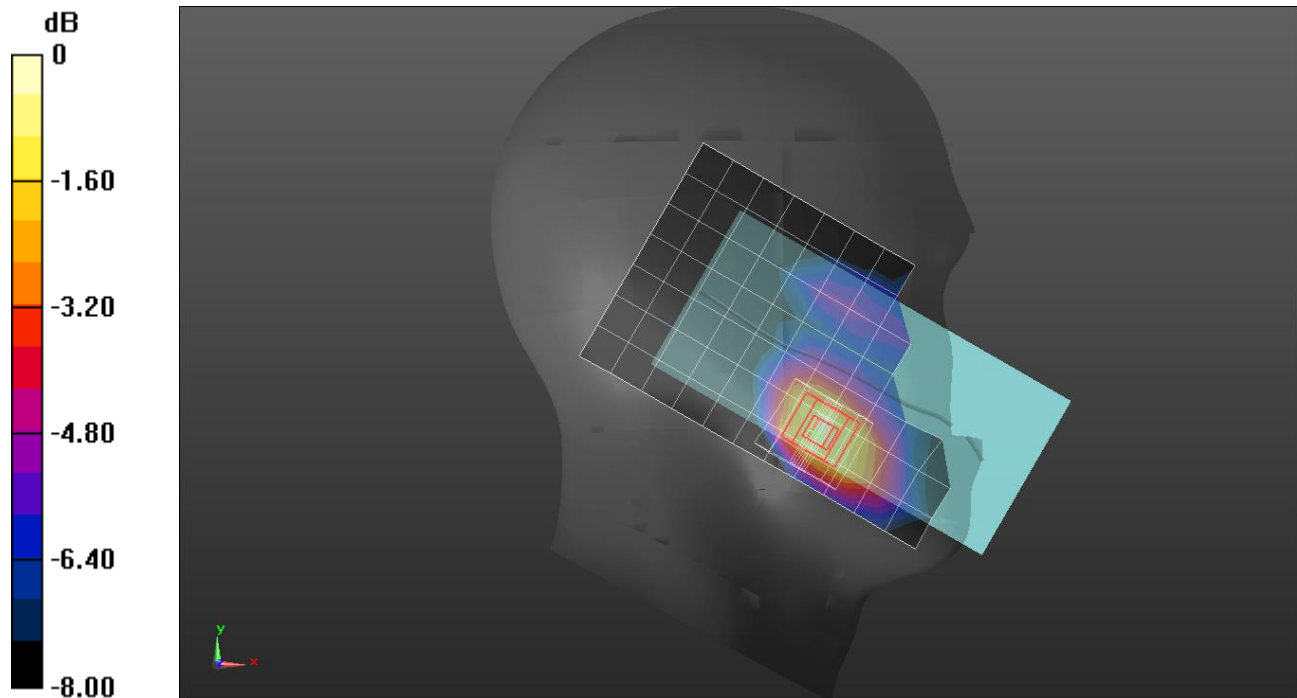

0 dB = 0.192 W/kg = -7.17 dBW/kg

W-CDMA Band IV

Frequency: 1712.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.274$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(8.72, 8.72, 8.72) @ 1712.4 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/Rel.99 ch.1312/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.745 W/kg


Rear/Rel.99 ch.1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.98 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.388 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

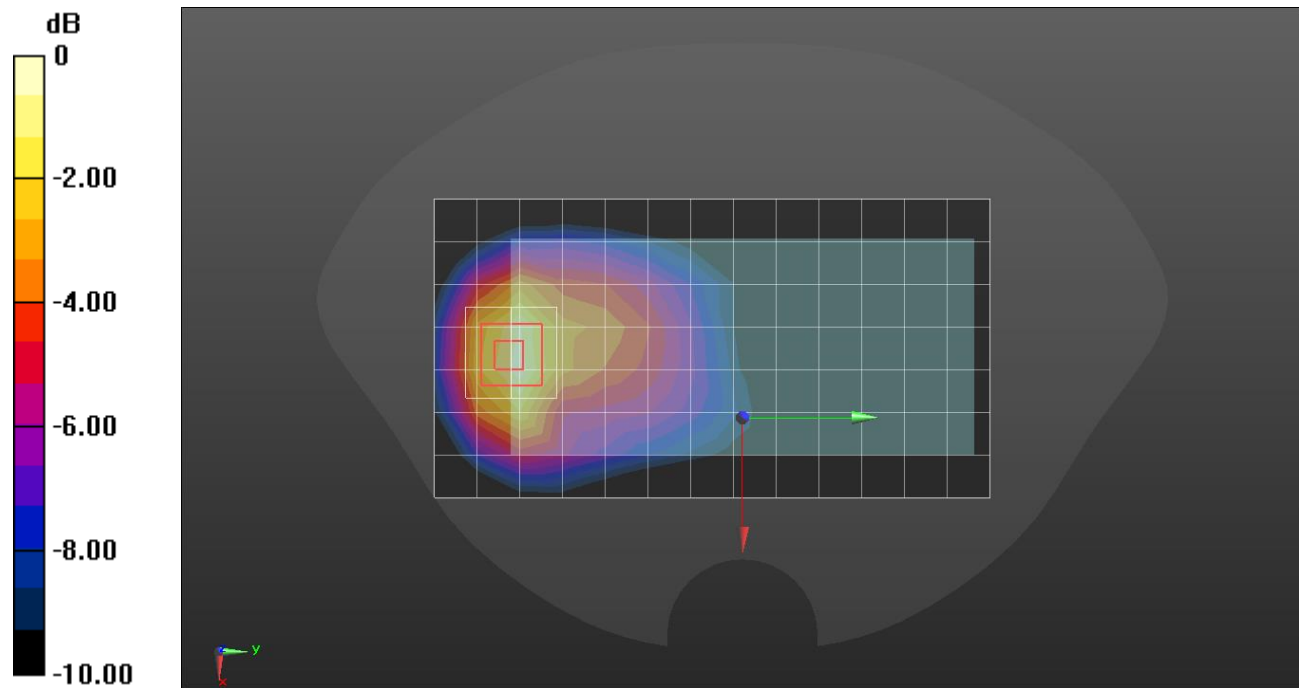

0 dB = 0.792 W/kg = -1.01 dBW/kg

W-CDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 39.892$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(8.11, 8.11, 8.11) @ 1732.6 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 3/Rel.99 ch.1413/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 W/kg


Edge 3/Rel.99 ch.1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.85 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

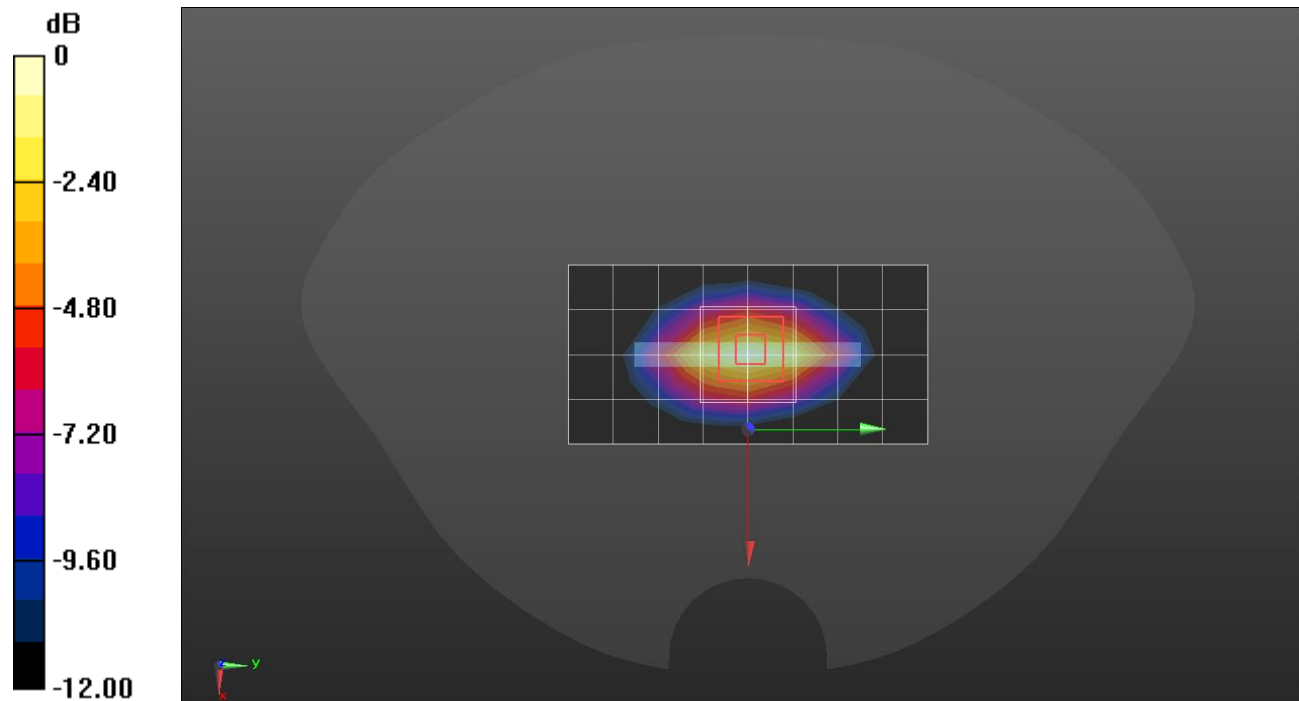

0 dB = 1.08 W/kg = 0.33 dBW/kg

W-CDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.329$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(8.31, 8.31, 8.31) @ 1732.6 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Edge 3/Rel.99 ch.1413/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.28 W/kg


Edge 3/Rel.99 ch.1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 65.19 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 8.18 W/kg

SAR(1 g) = 3.93 W/kg; SAR(10 g) = 1.77 W/kg

Maximum value of SAR (measured) = 5.63 W/kg

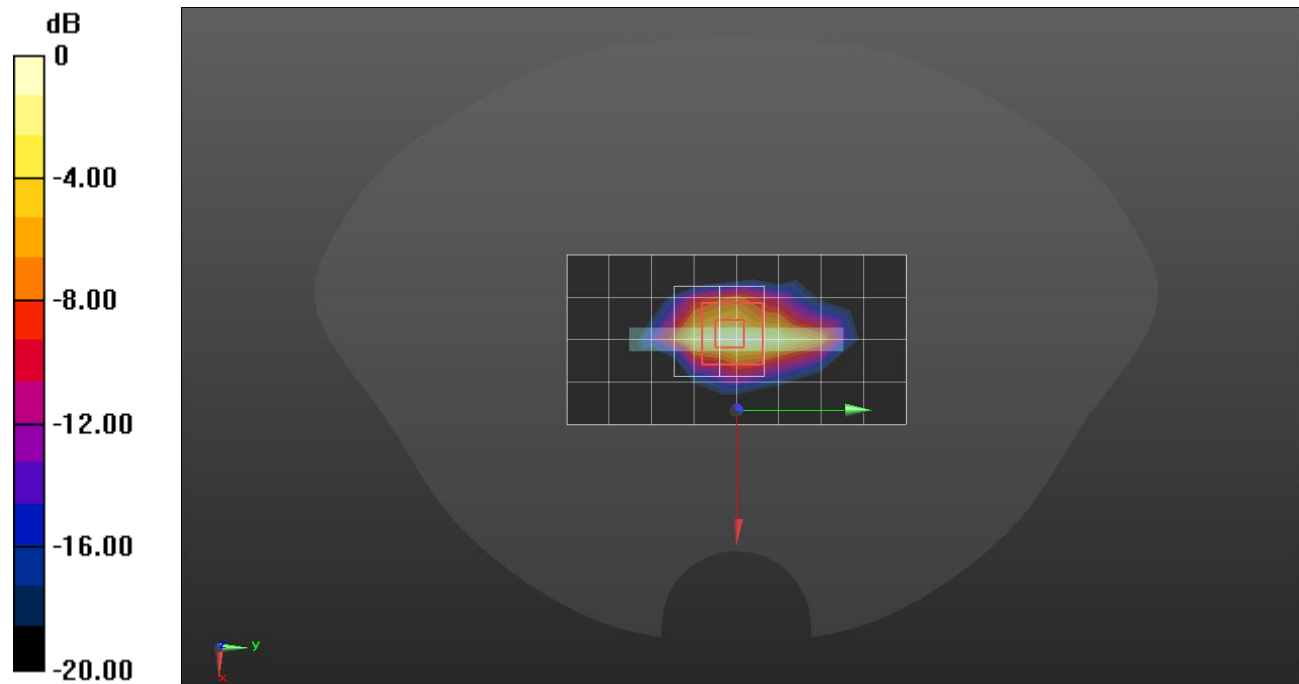

0 dB = 5.63 W/kg = 7.51 dBW/kg

W-CDMA Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 42.81$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 836.6 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

RHS/Touch Rel.99 ch.4183/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 W/kg


RHS/Touch Rel.99 ch.4183//Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.91 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.259 W/kg

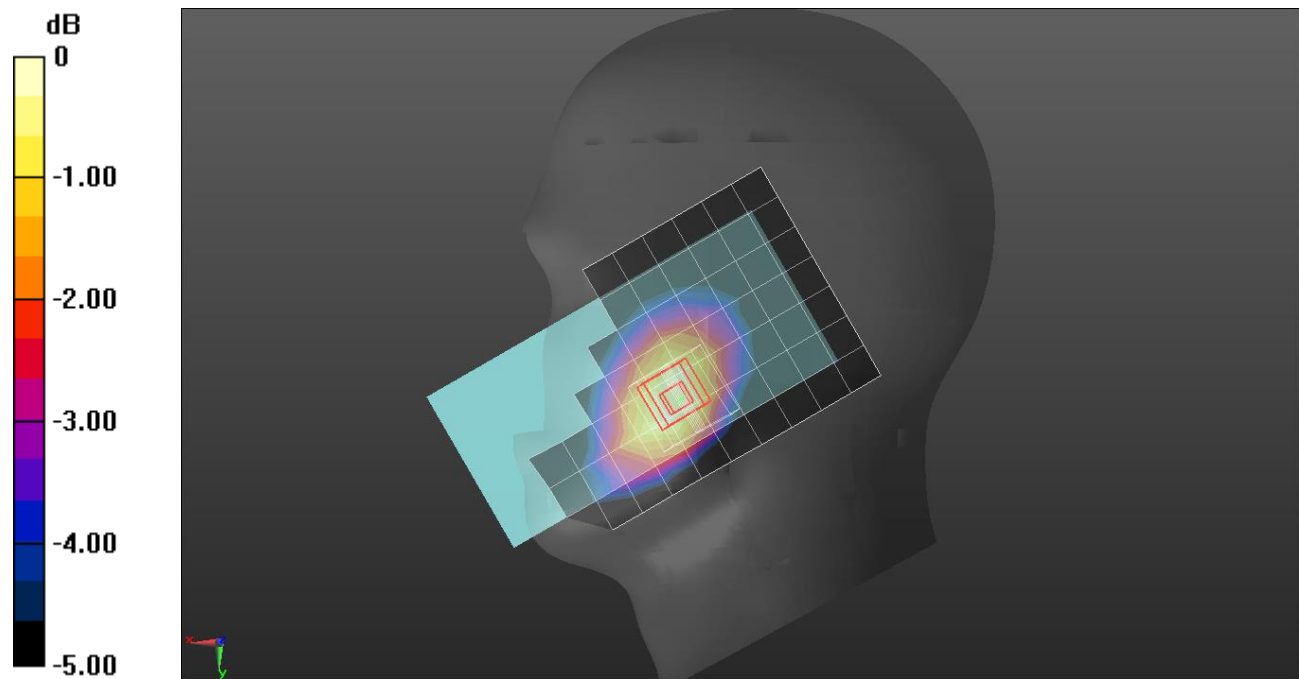

0 dB = 0.259 W/kg = -5.87 dBW/kg

W-CDMA Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 836.6 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/Rel.99 ch.4183/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.362 W/kg


Rear/Rel.99 ch.4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.19 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

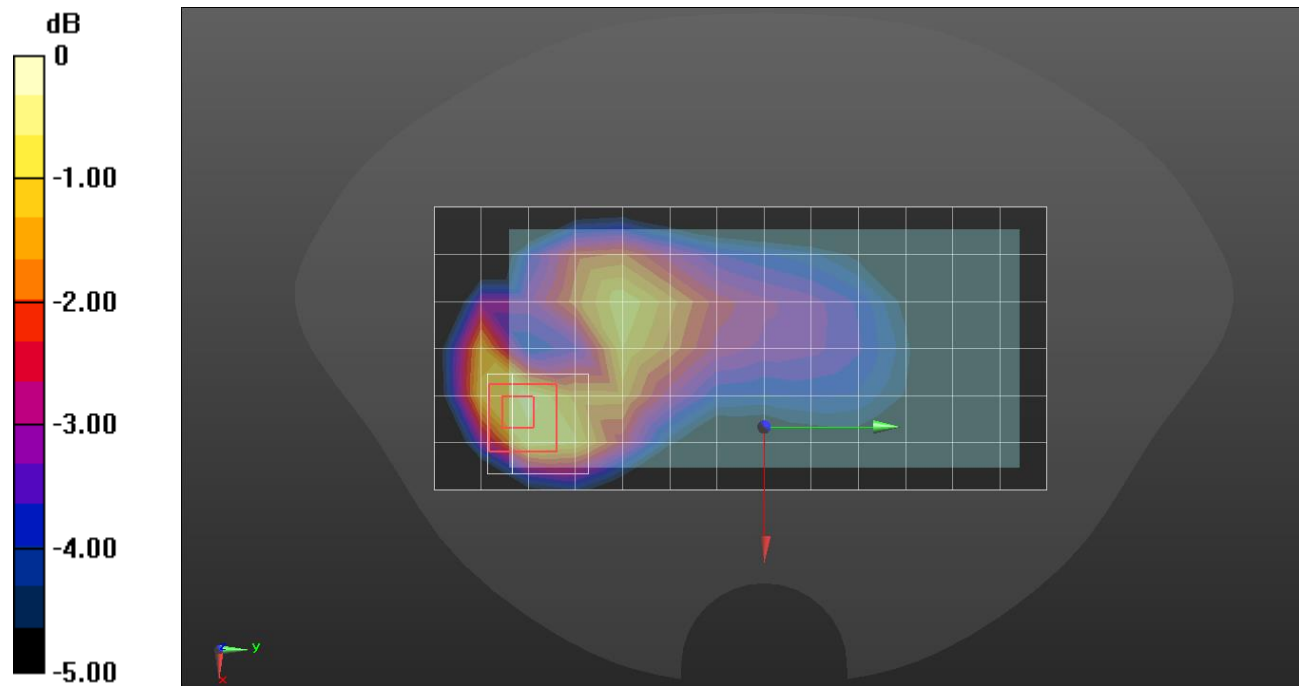

0 dB = 0.415 W/kg = -3.82 dBW/kg

W-CDMA Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.316$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 836.6 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/Rel.99 ch.4183/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.771 W/kg


Rear/Rel.99 ch.4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.57 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.389 W/kg

Maximum value of SAR (measured) = 0.903 W/kg

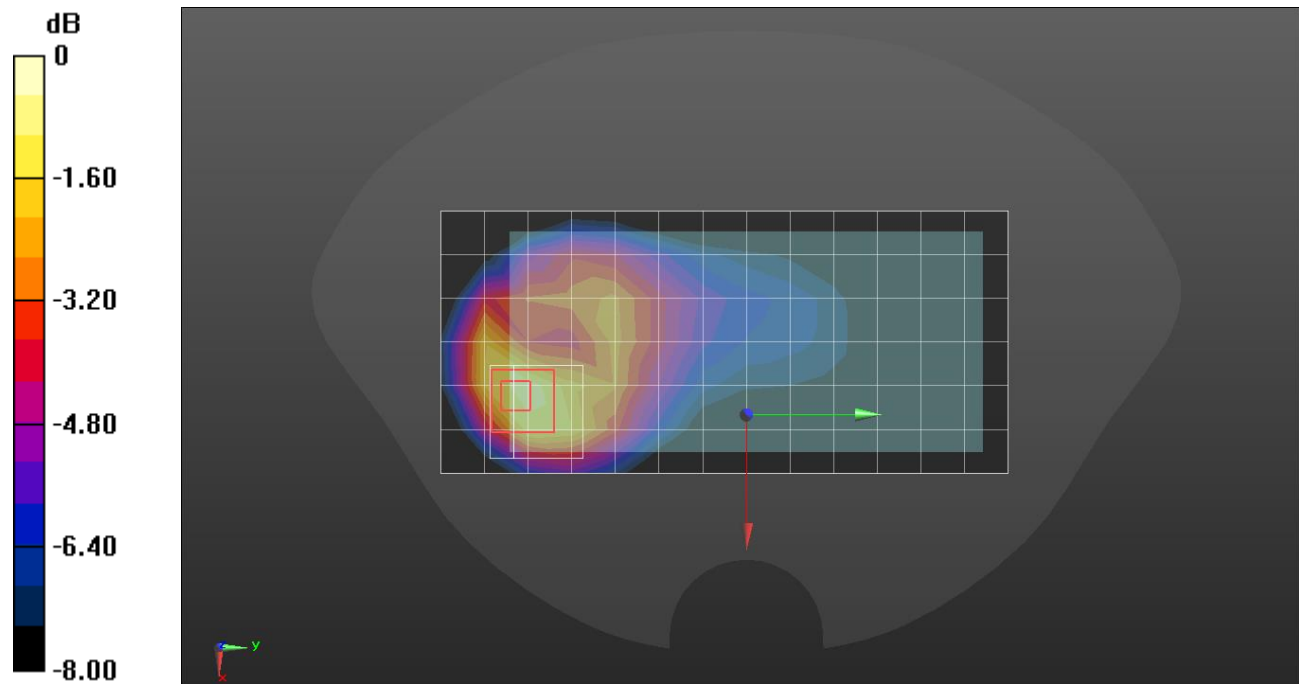

0 dB = 0.903 W/kg = -0.44 dBW/kg

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.426$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 836.52 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

RHS/Touch 1xEVDO Rev.A ch.384/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.166 W/kg


RHS/Touch 1xEVDO Rev.A ch.384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.80 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

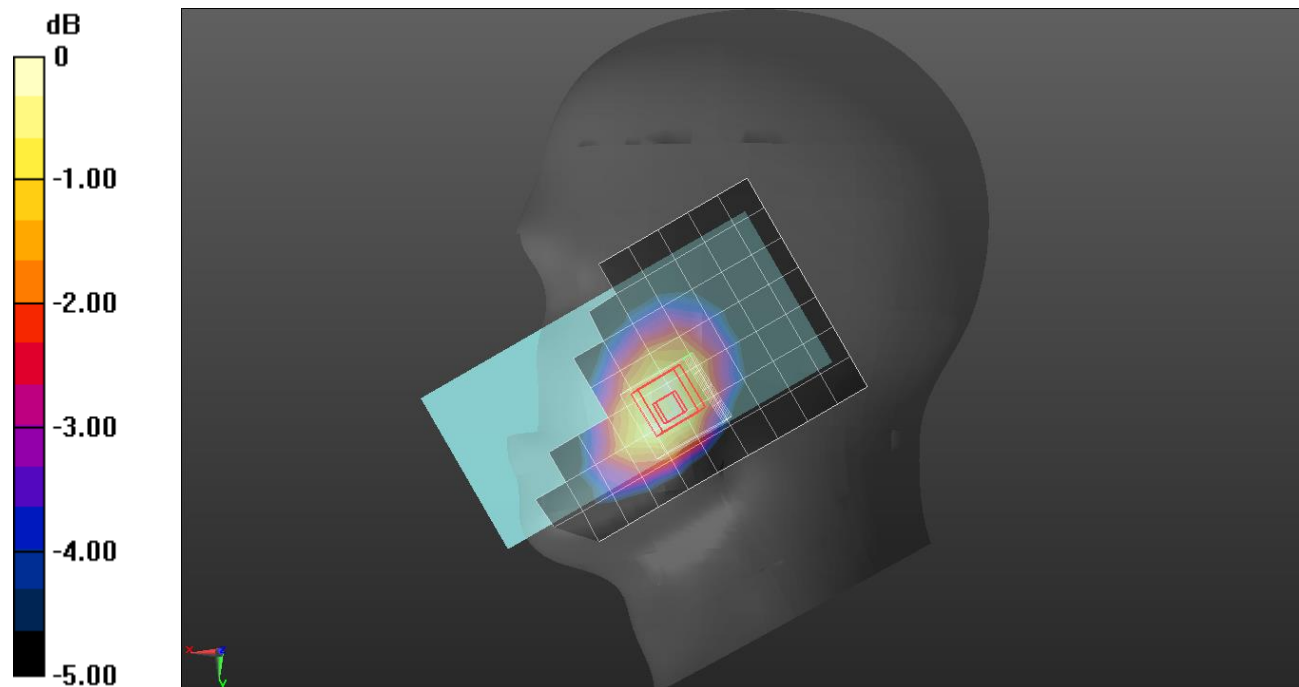

0 dB = 0.173 W/kg = -7.62 dBW/kg

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.426$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 836.52 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/1xRTT SO32 ch.384/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.296 W/kg


Rear/1xRTT SO32 ch.384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.06 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.294 W/kg

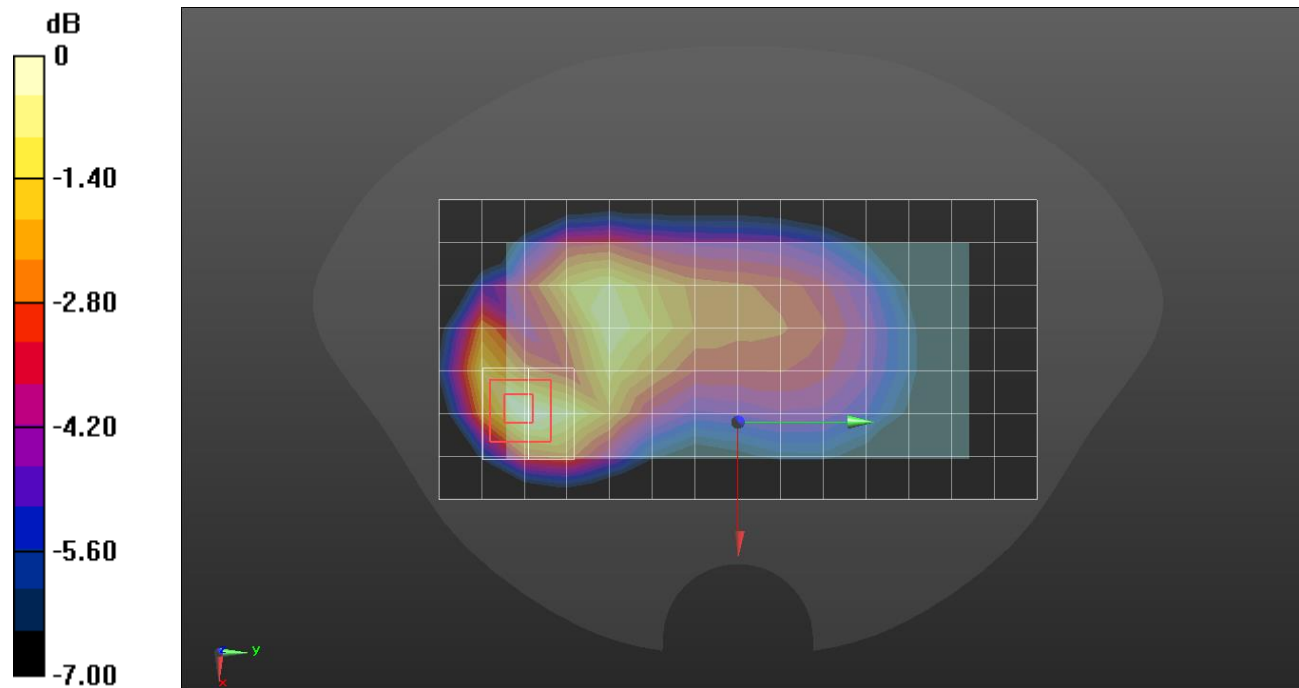

0 dB = 0.294 W/kg = -5.32 dBW/kg

CDMA BC0

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 42.356$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 836.52 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/ 1xEvDO Rev.0 ch.384/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.397 W/kg


Rear/ 1xEvDO Rev.0 ch.384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.37 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.397 W/kg

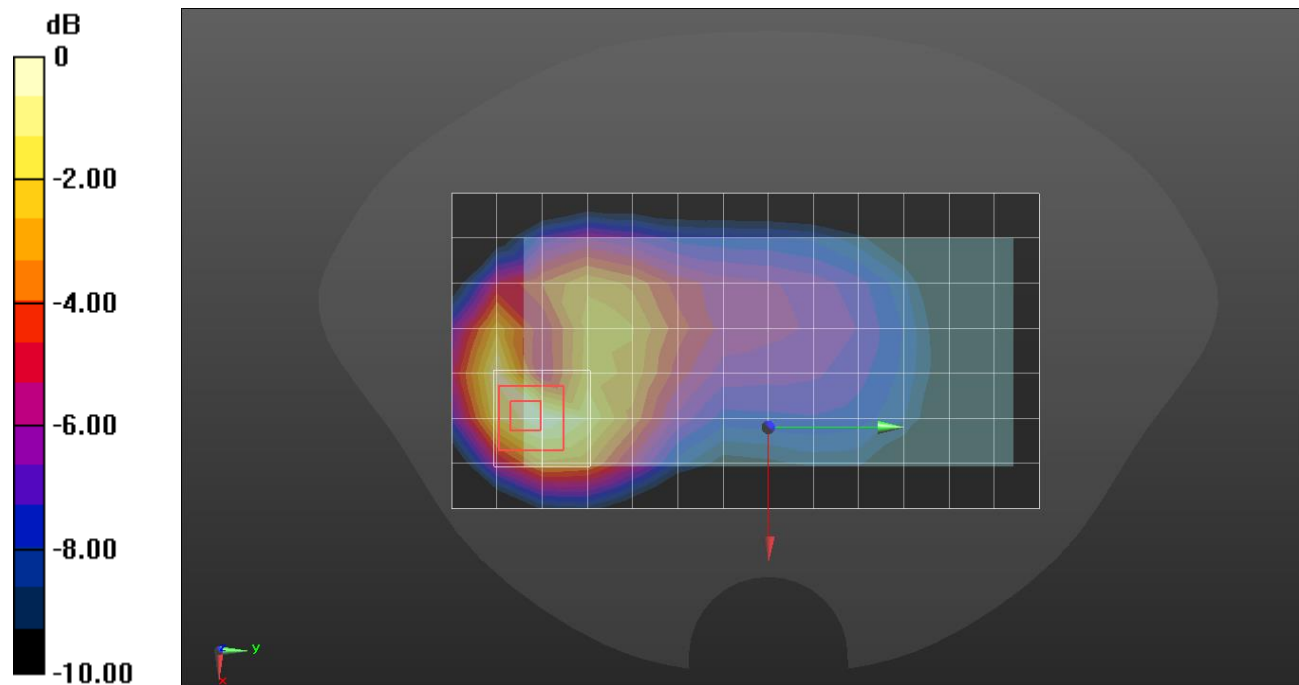

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.346$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(7.95, 7.95, 7.95) @ 1880 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

LHS/Touch 1xRTT RC3 SO55 ch.600/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.147 W/kg


LHS/Touch 1xRTT RC3 SO55 ch.600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.26 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

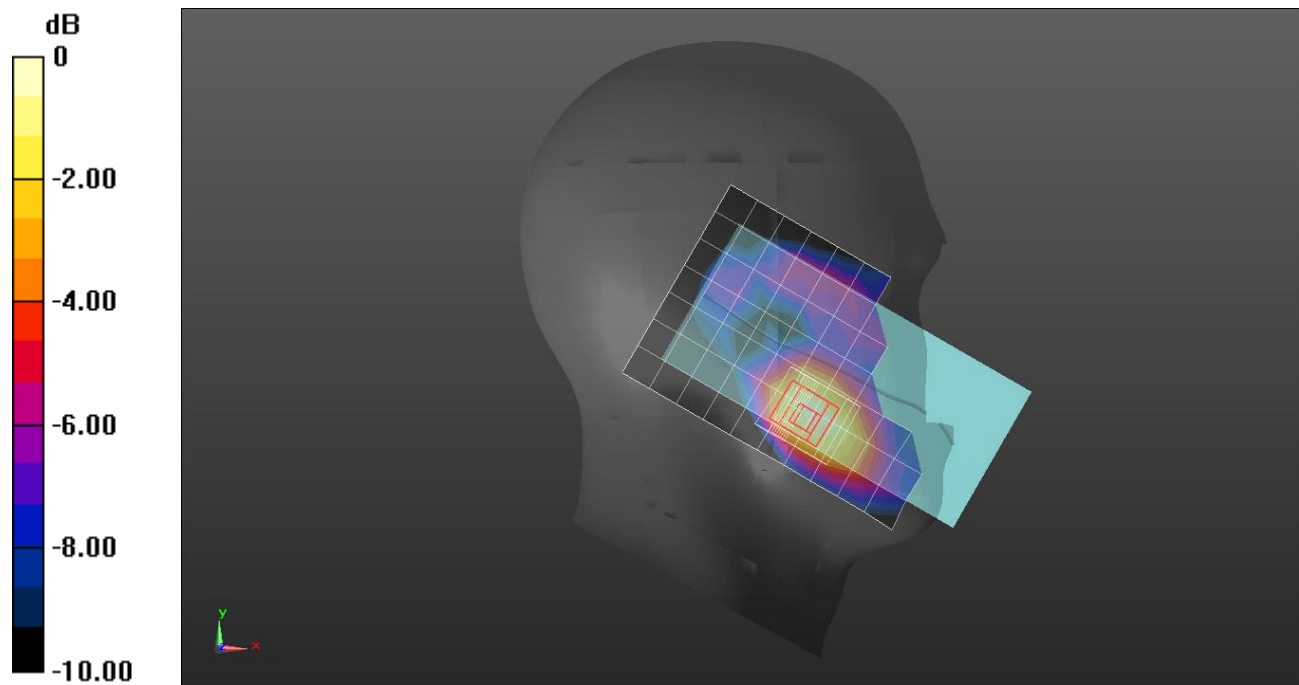

0 dB = 0.144 W/kg = -8.42 dBW/kg

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.346$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(7.95, 7.95, 7.95) @ 1880 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/1xRTT RC3 SO32 ch.600/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.697 W/kg


Rear/1xRTT RC3 SO32 ch.600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.52 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.940 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.347 W/kg

Maximum value of SAR (measured) = 0.742 W/kg

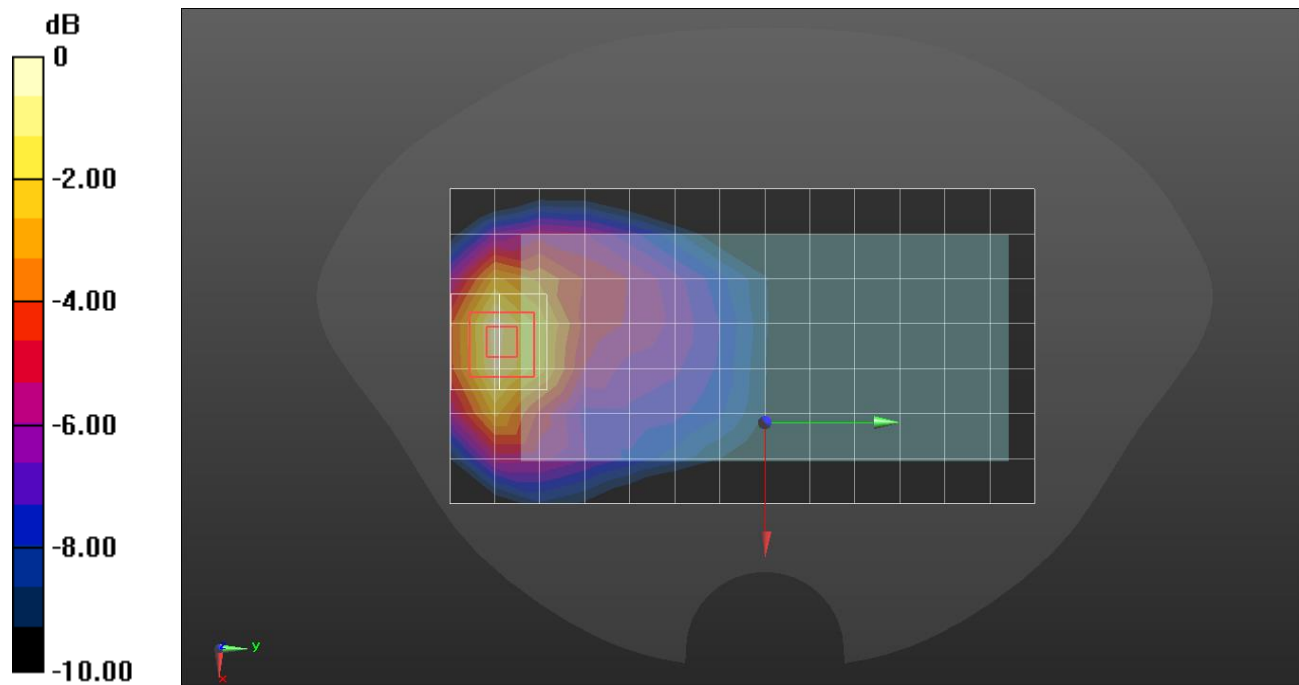

0 dB = 0.742 W/kg = -1.30 dBW/kg

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 39.236$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(7.95, 7.95, 7.95) @ 1880 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Edge 3/1xEvDO Rev.0 ch.600/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.21 W/kg


Edge 3/1xEvDO Rev.0 ch.600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.41 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.554 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

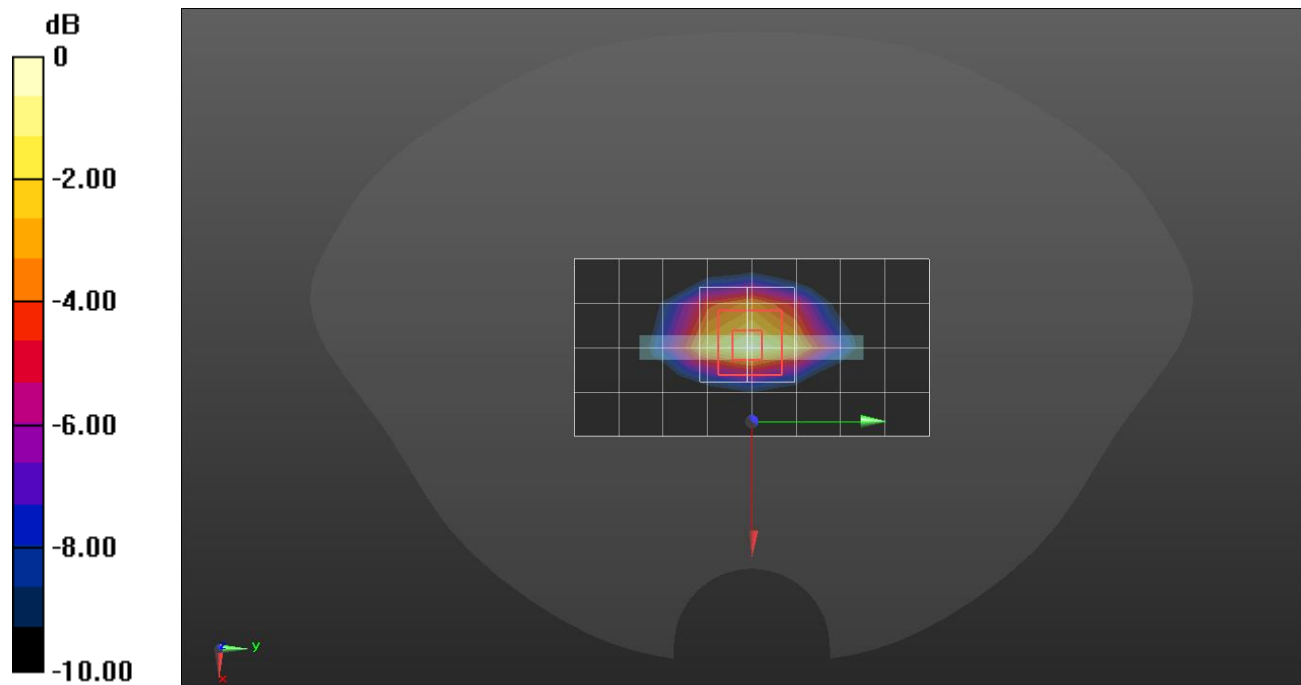

0 dB = 1.31 W/kg = 1.17 dBW/kg

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.346$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(7.95, 7.95, 7.95) @ 1880 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Edge 3/1xEvDO Rev.0 ch.600/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.14 W/kg


Edge 3/1xEvDO Rev.0 ch.600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.65 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 4.88 W/kg

SAR(1 g) = 2.82 W/kg; SAR(10 g) = 1.49 W/kg

Maximum value of SAR (measured) = 3.46 W/kg

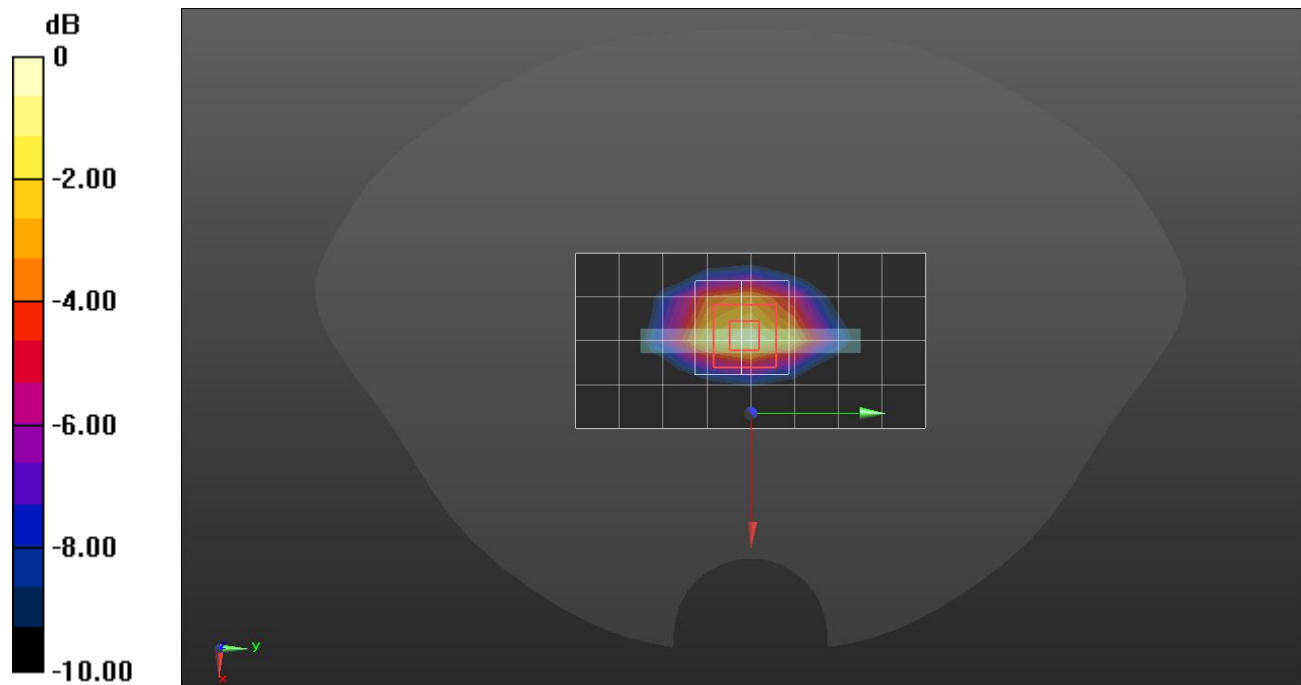

0 dB = 3.46 W/kg = 5.39 dBW/kg

CDMA BC10

Frequency: 820.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 820.5$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.565$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.64, 9.64, 9.64) @ 820.5 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

RHS/Touch 1xEVDO Rev.A Ch.580/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.277 W/kg


RHS/Touch 1xEVDO Rev.A Ch.580/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.43 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.296 W/kg

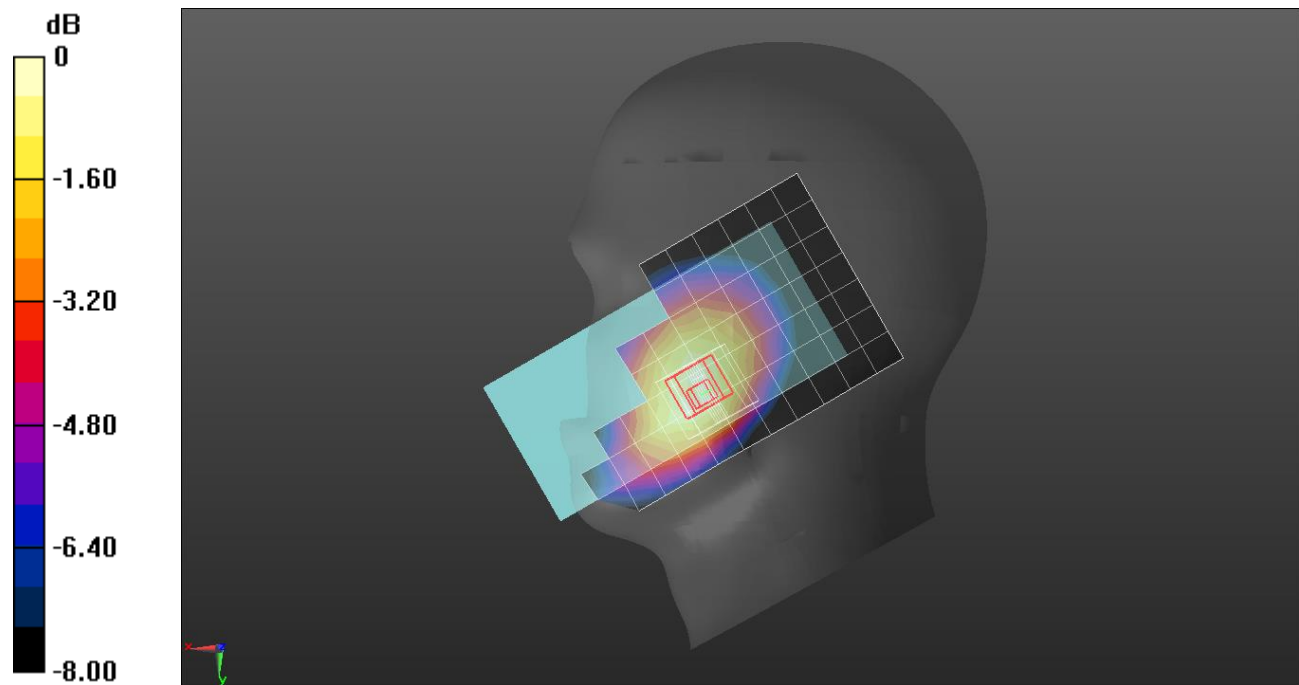

0 dB = 0.296 W/kg = -5.29 dBW/kg

CDMA BC10

Frequency: 820.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
 Medium parameters used (interpolated): $f = 820.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.044$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 820.5 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/1xRTT SO32 ch.580/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.548 W/kg


Rear/1xRTT SO32 ch.580/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.89 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.547 W/kg

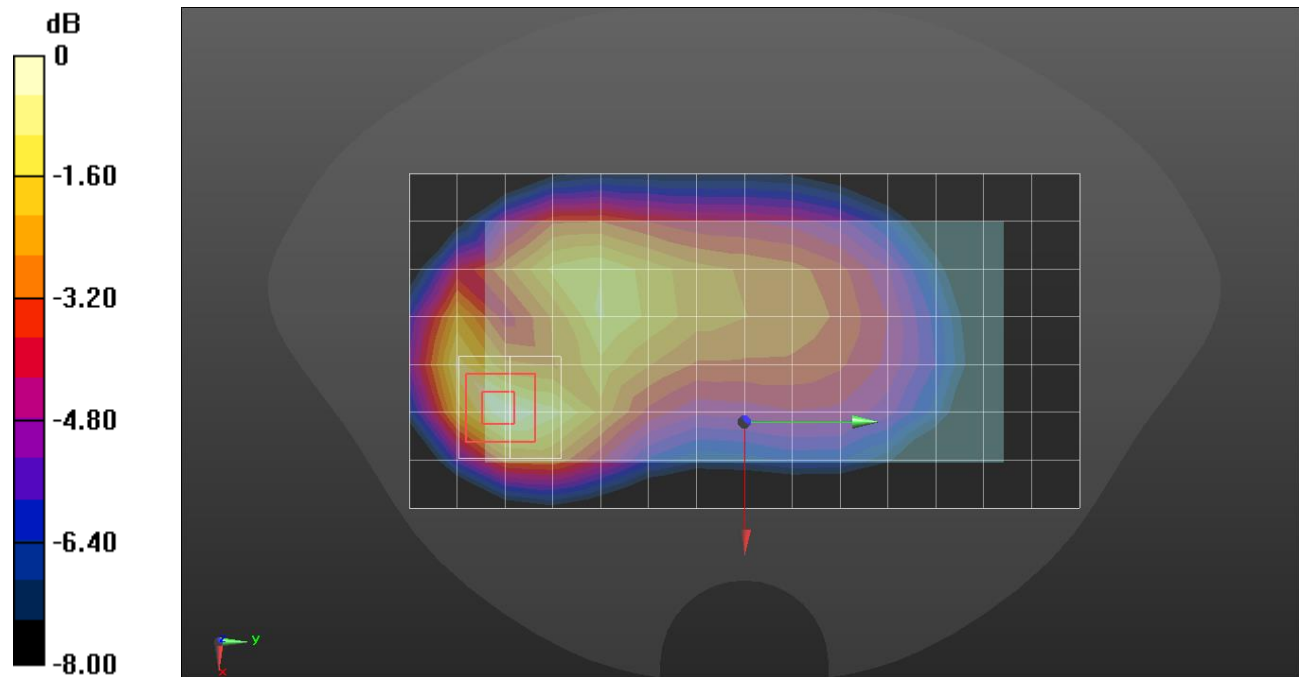

0 dB = 0.547 W/kg = -2.62 dBW/kg

CDMA BC10

Frequency: 820.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 820.5$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 41.132$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 820.5 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/1xEvDO Rev.0 ch.580/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.495 W/kg


Rear/1xEvDO Rev.0 ch.580/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.34 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.488 W/kg

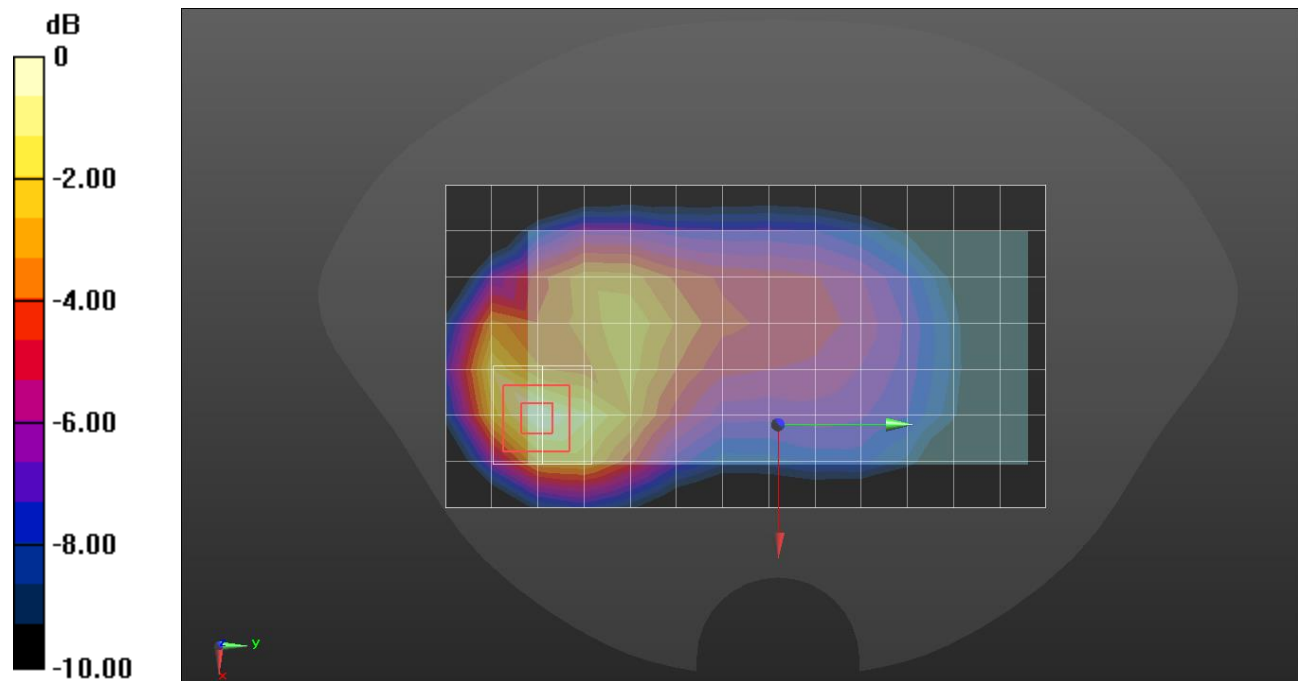

0 dB = 0.488 W/kg = -3.12 dBW/kg

LTE Band 7

Frequency: 2510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 39.664$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97) @ 2510 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

LHS/Touch QPSK RB 1/0 ch.20850/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0817 W/kg


LHS/Touch QPSK RB 1/0 ch.20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.165 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0948 W/kg

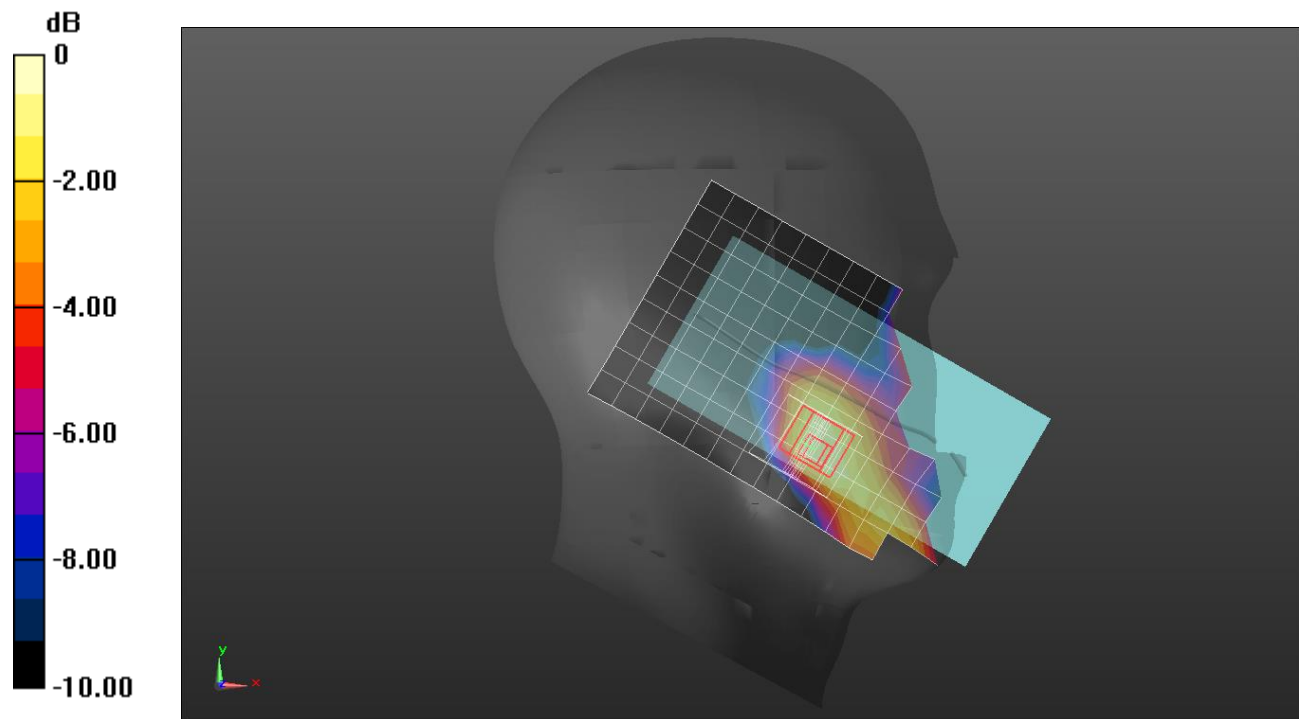

0 dB = 0.0948 W/kg = -10.23 dBW/kg

LTE Band 7

Frequency: 2510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 39.664$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97) @ 2510 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Rear/QPSK RB 1/0 ch.20850/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.579 W/kg


Rear/QPSK RB 1/0 ch.20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.78 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.854 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

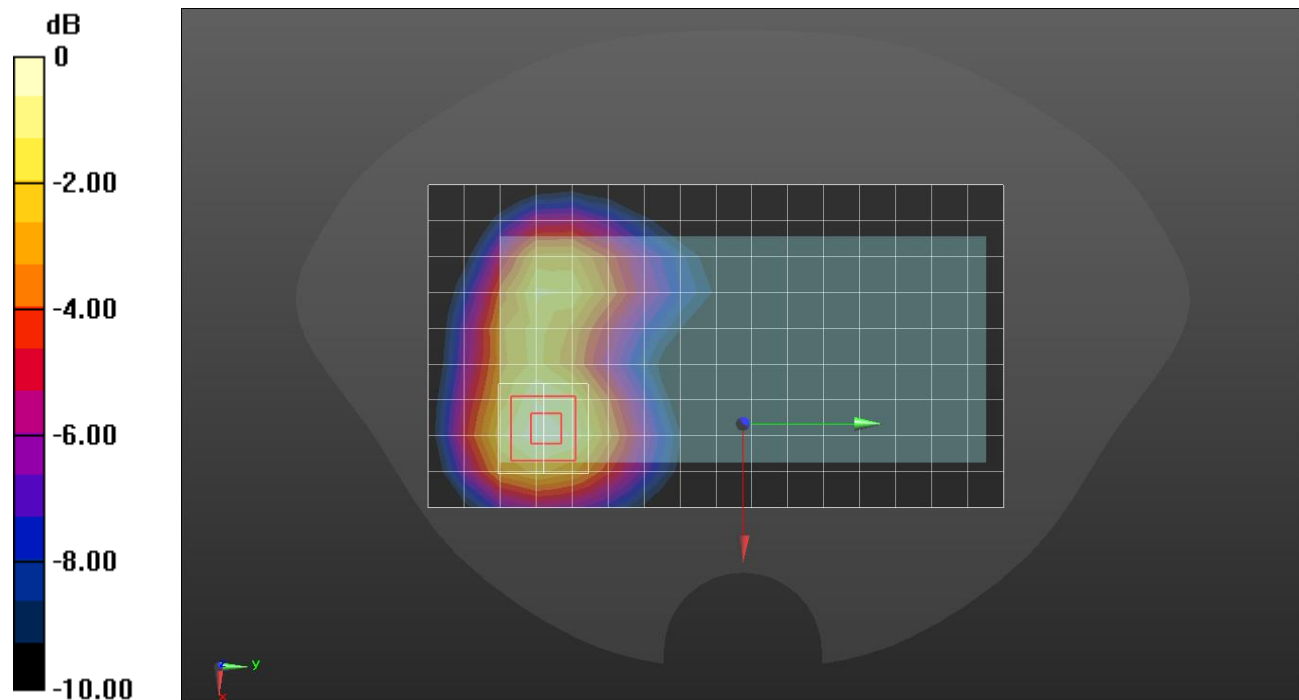

0 dB = 0.592 W/kg = -2.28 dBW/kg

LTE Band 7

Frequency: 2510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 39.664$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97) @ 2510 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 3/QPSK RB 50/24 ch.20850/Area Scan (10x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.455 W/kg


Edge 3/QPSK RB 50/24 ch.20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.76 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.514 W/kg

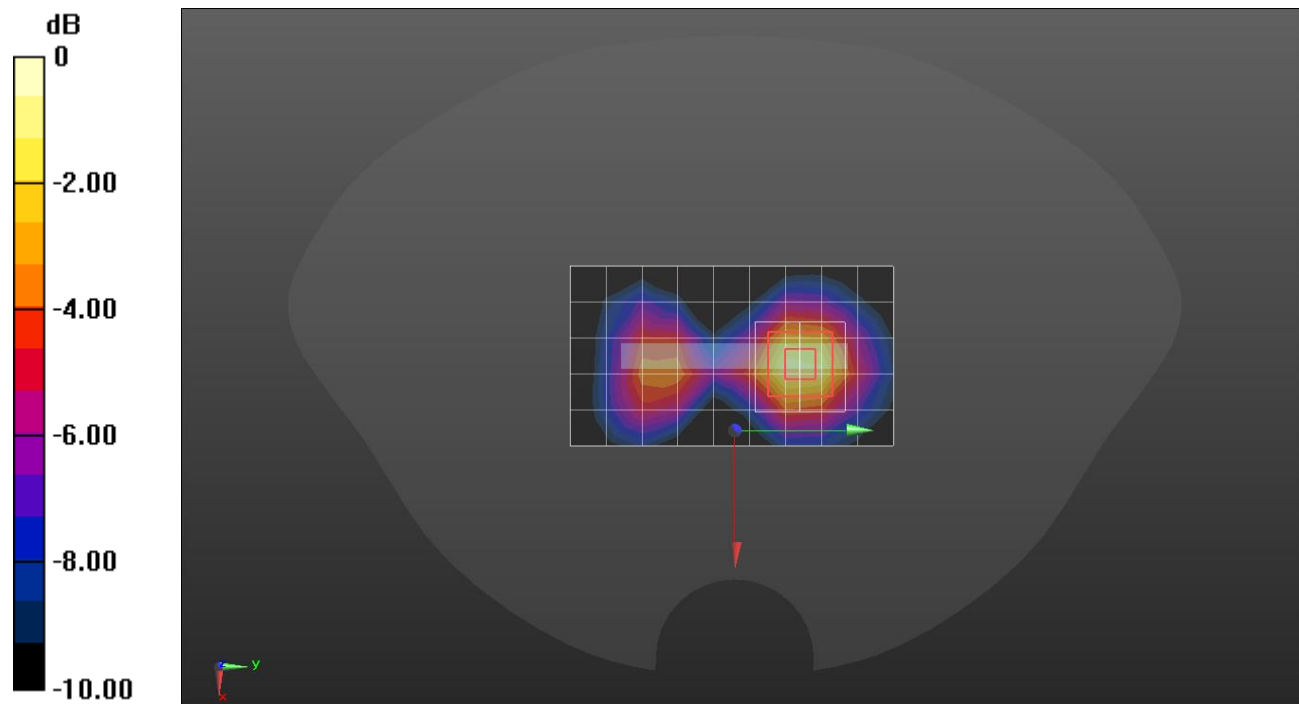

0 dB = 0.514 W/kg = -2.89 dBW/kg

LTE Band 12

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 707.5 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

RHS/Touch QPSK RB 1/49 ch.23095/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.176 W/kg


RHS/Touch QPSK RB 1/49 ch.23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.15 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.178 W/kg

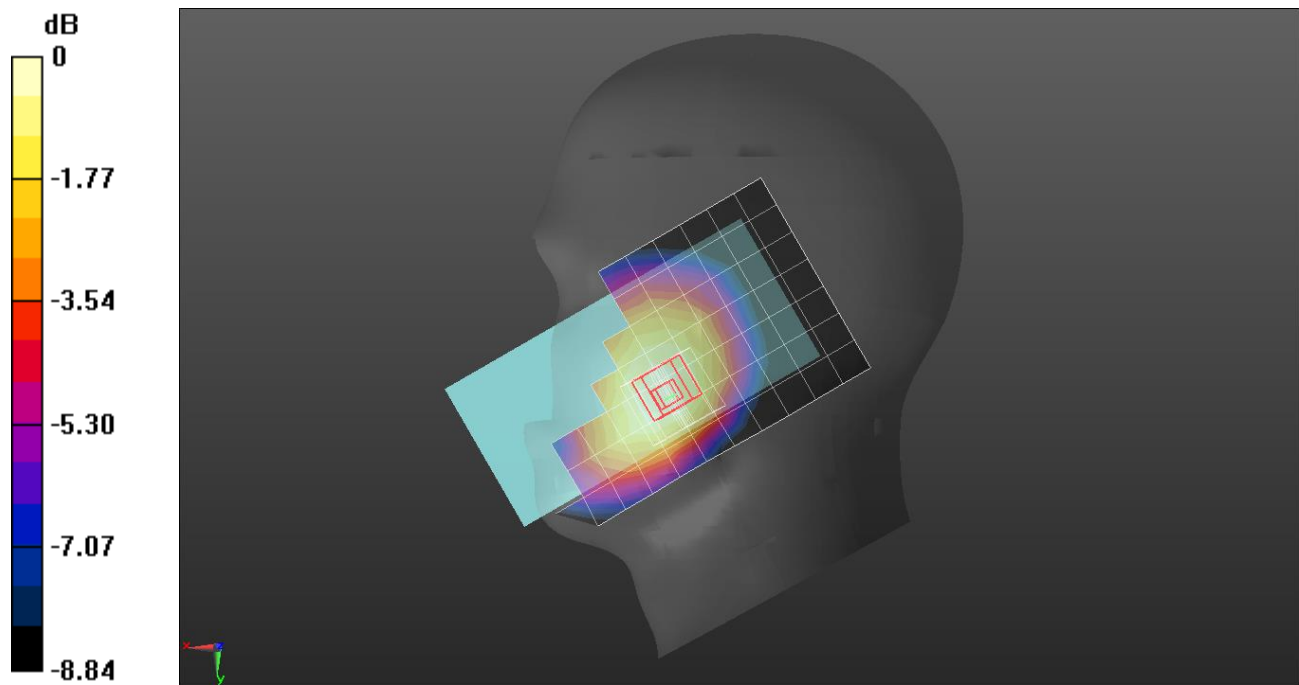

0 dB = 0.178 W/kg = -7.50 dBW/kg

LTE Band 12

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 707.5 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/QPSK RB 1/49 Ch.23095/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.228 W/kg


Rear/QPSK RB 1/49 Ch.23095/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.37 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.230 W/kg

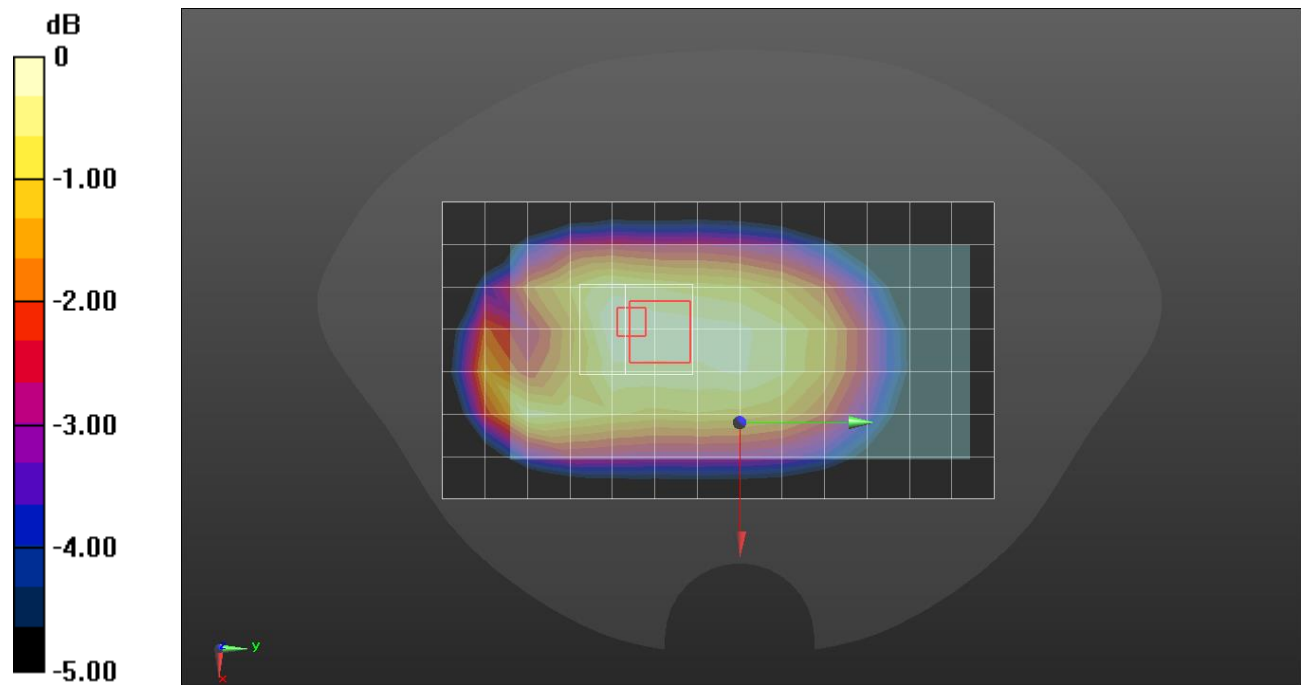

0 dB = 0.230 W/kg = -6.38 dBW/kg

LTE Band 12

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.603$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 707.5 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/QPSK RB 1/49 Ch.23095/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.401 W/kg


Rear/QPSK RB 1/49 Ch.23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.89 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.425 W/kg

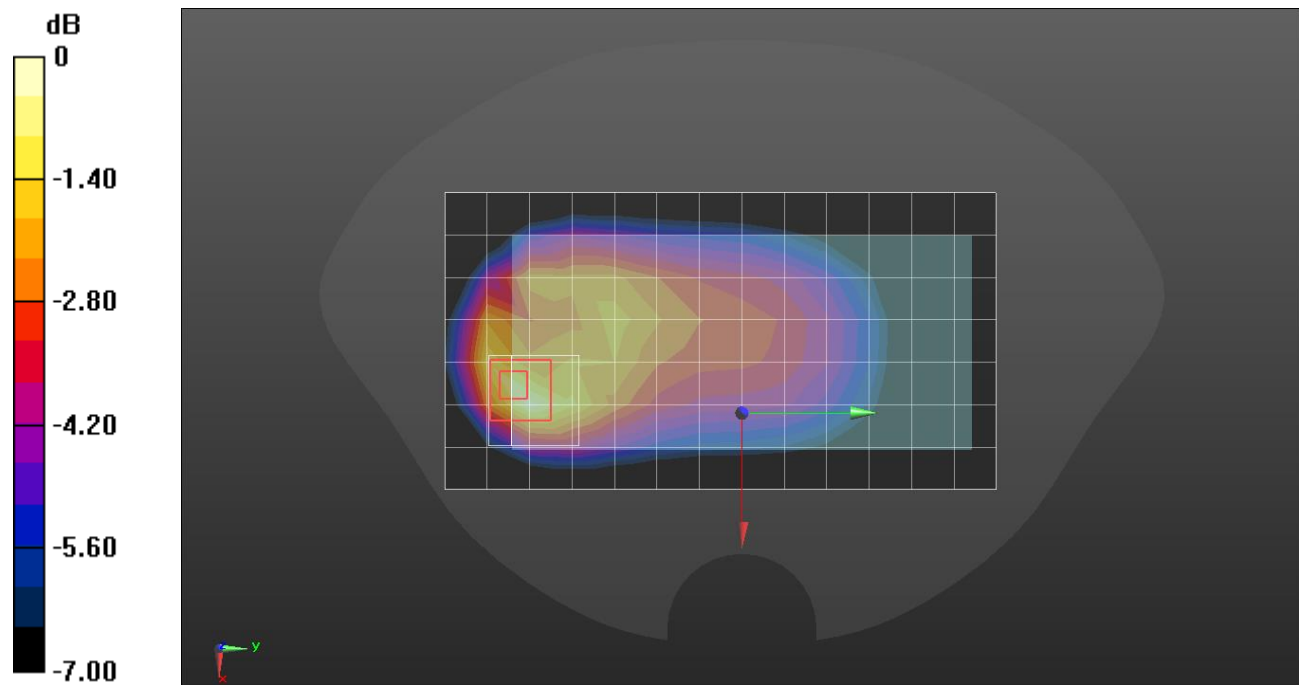

0 dB = 0.425 W/kg = -3.72 dBW/kg

LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.308$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 782 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

RHS/Touch QPSK RB 1/0 ch.23230/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.259 W/kg


RHS/Touch QPSK RB 1/0 ch.23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.54 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

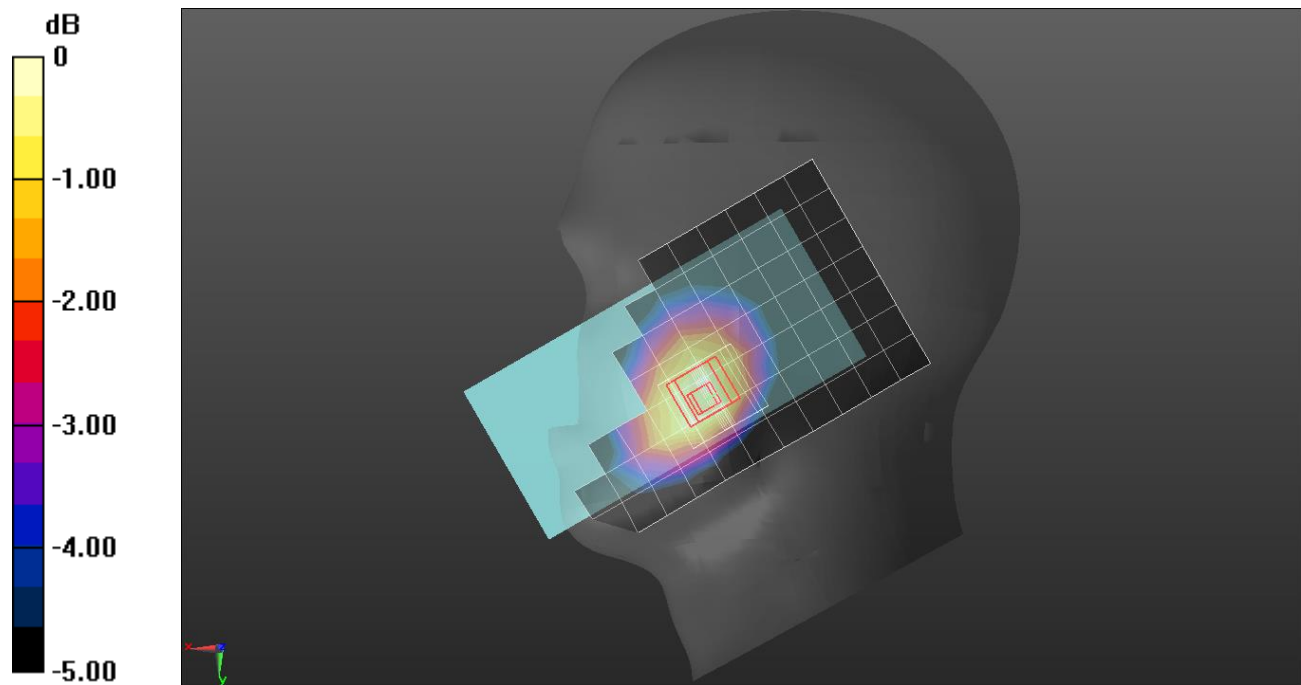

0 dB = 0.271 W/kg = -5.67 dBW/kg

LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.308$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 782 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Front/QPSK RB 1/0 Ch.23230/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.308 W/kg


Front/QPSK RB 1/0 Ch.23230/Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.64 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

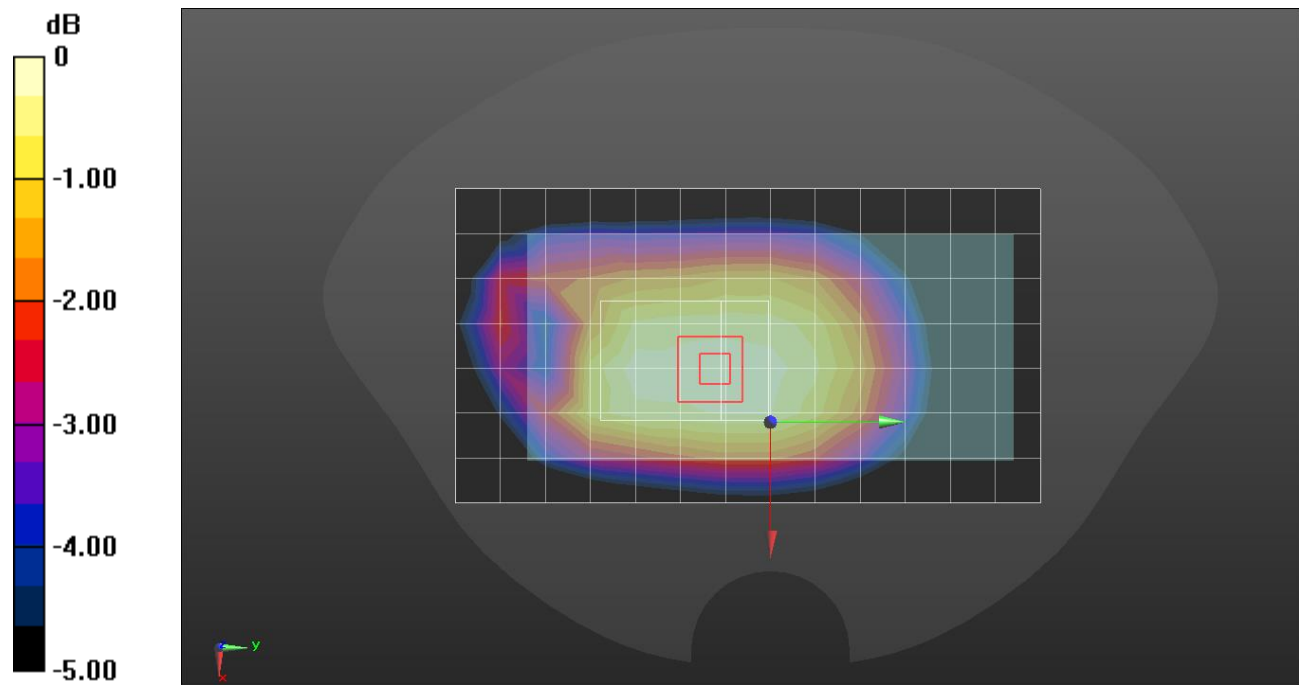

0 dB = 0.315 W/kg = -5.02 dBW/kg

LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.308$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 782 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/QPSK RB 1/0 Ch.23230/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.564 W/kg


Rear/QPSK RB 1/0 Ch.23230/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.46 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.671 W/kg

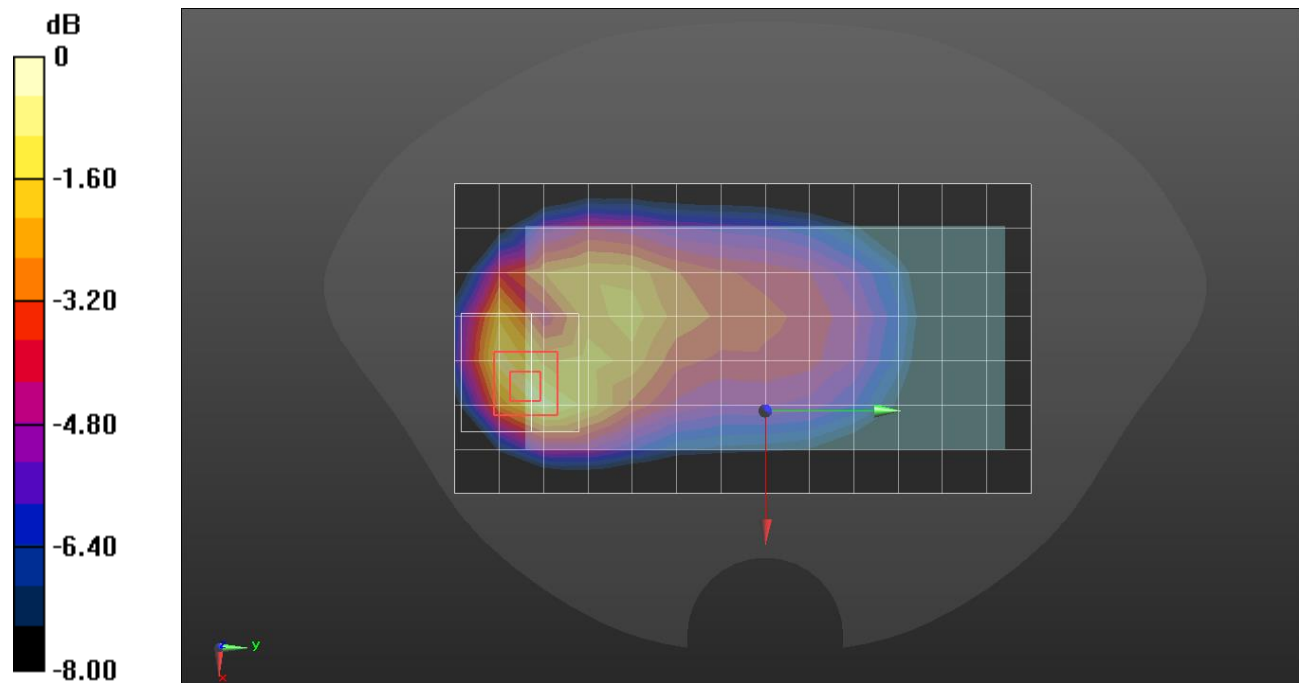

0 dB = 0.671 W/kg = -1.73 dBW/kg

LTE Band 14

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.758$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 793 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

RHS/Touch QPSK RB 1/0 ch.23330/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.226 W/kg


RHS/Touch QPSK RB 1/0 ch.23330/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.48 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.240 W/kg

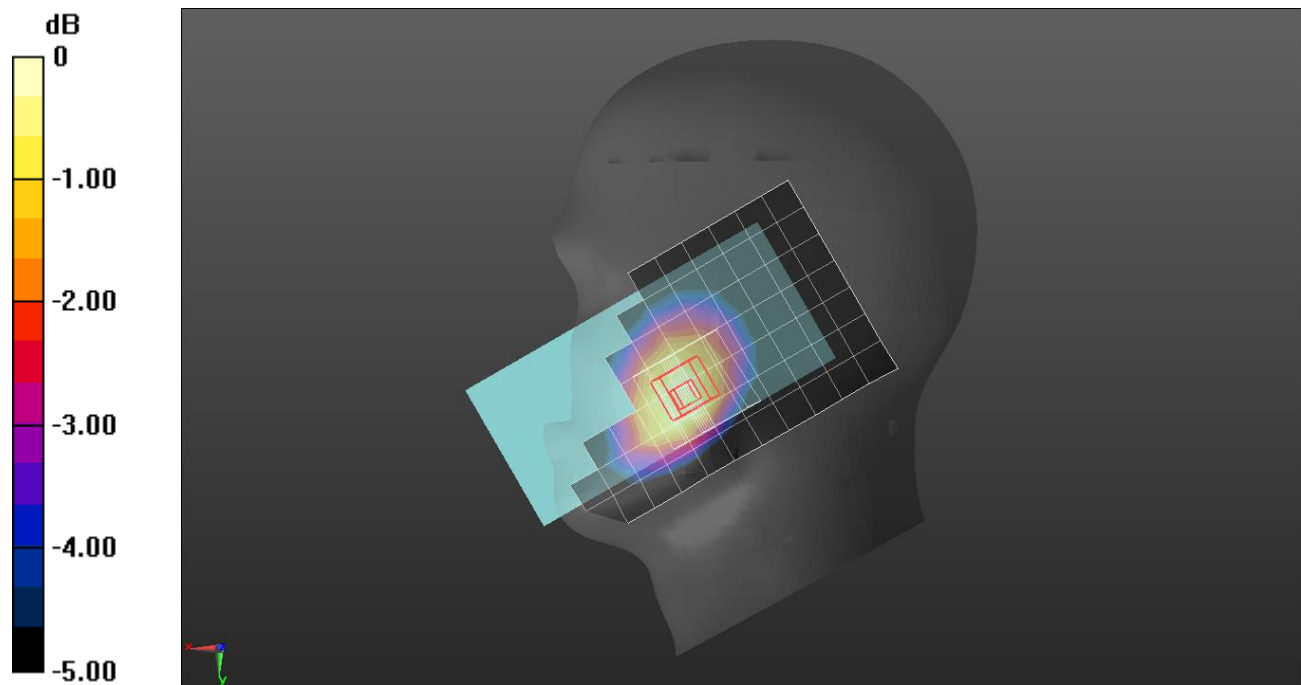

0 dB = 0.240 W/kg = -6.20 dBW/kg

LTE Band 14

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.319$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 793 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/QPSK RB 1/0 Ch.23330/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.323 W/kg


Rear/QPSK RB 1/0 Ch.23330/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.35 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.329 W/kg

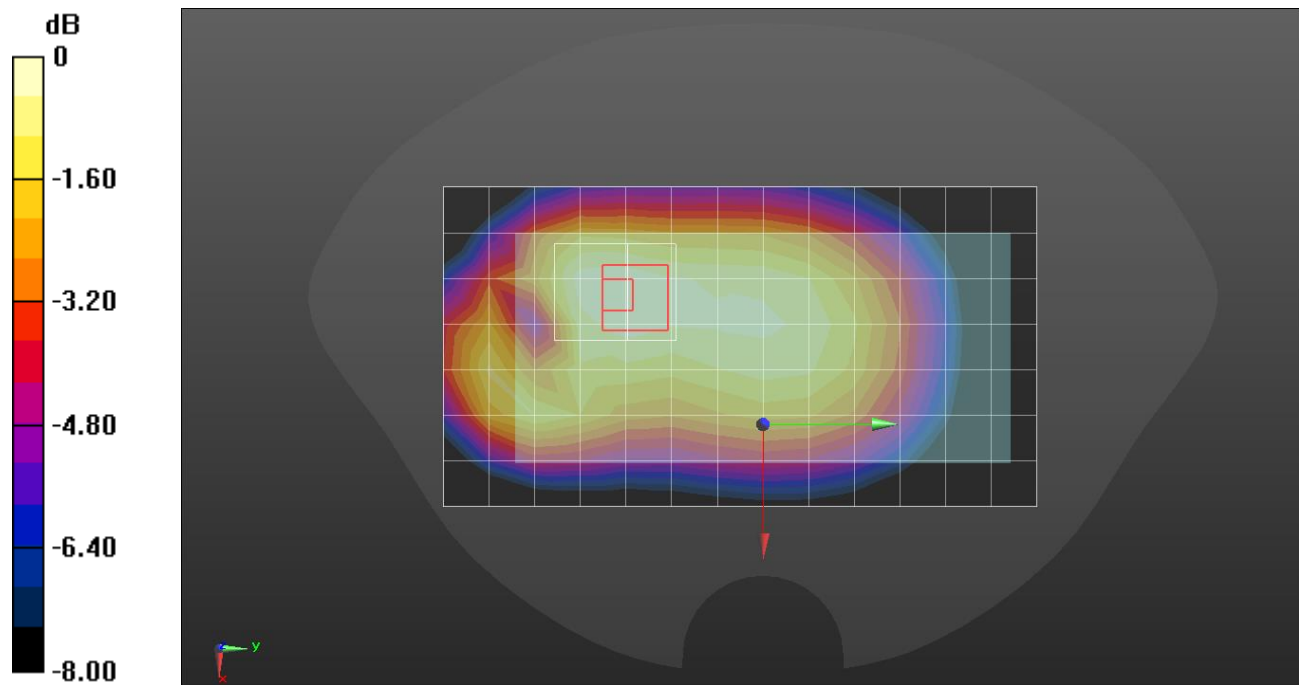

0 dB = 0.329 W/kg = -4.83 dBW/kg

LTE Band 14

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.319$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 793 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/QPSK RB 1/0 Ch.23330/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.638 W/kg


Rear/QPSK RB 1/0 Ch.23330/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.18 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.720 W/kg

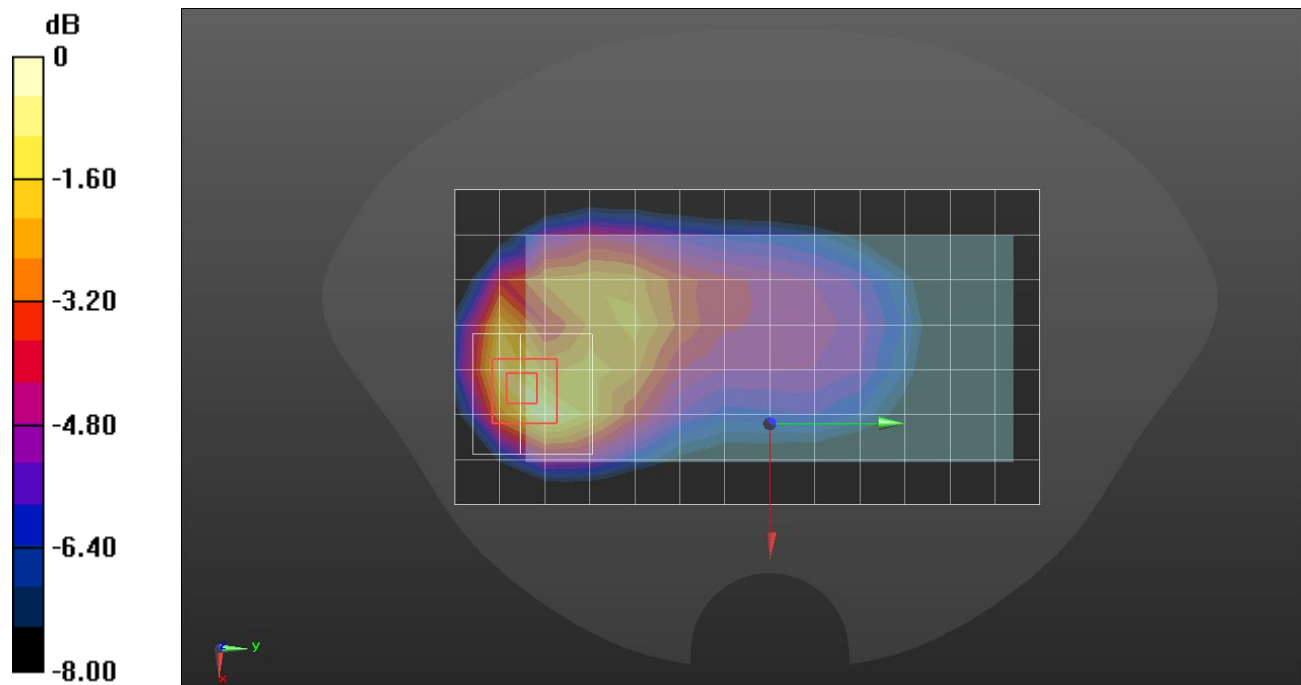

LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.445$ S/m; $\epsilon_r = 39.676$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.91, 7.91, 7.91) @ 1882.5 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

LHS/Touch QPSK 1/0 ch.26365/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.120 W/kg


LHS/Touch QPSK 1/0 ch.26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.593 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

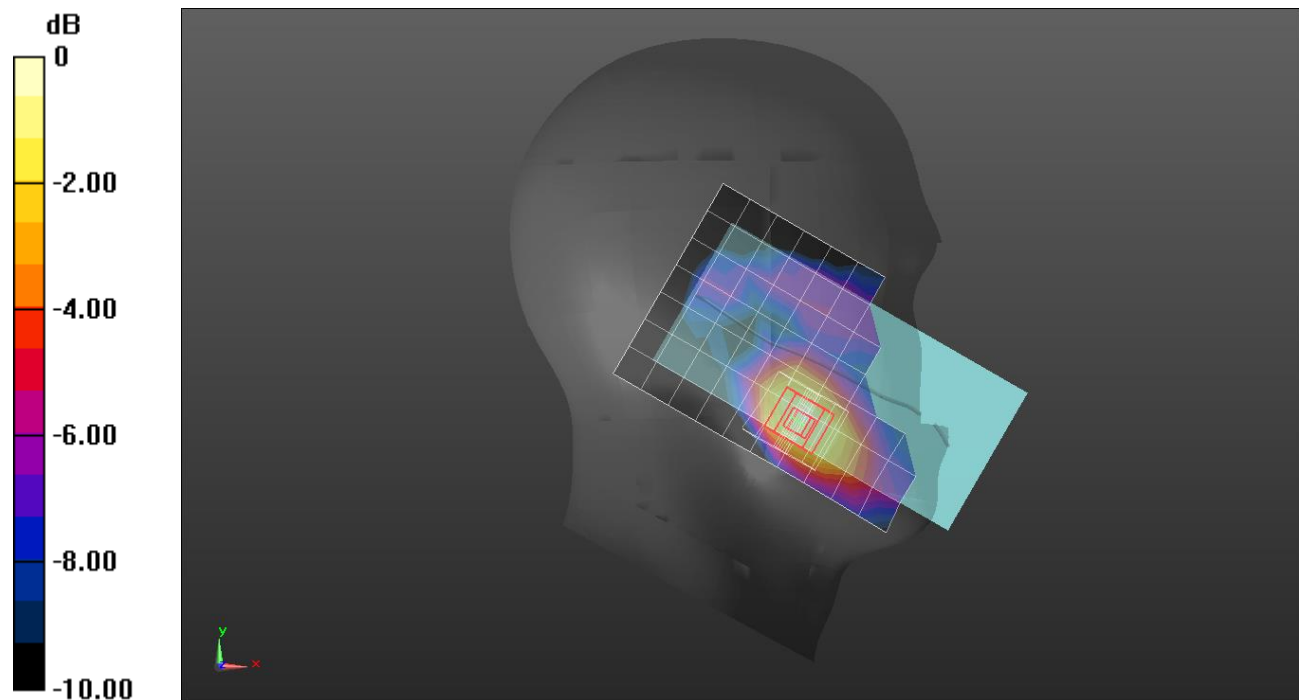

0 dB = 0.129 W/kg = -8.89 dBW/kg

LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.918$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.91, 7.91, 7.91) @ 1882.5 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Rear/QPSK RB 1/0 ch.26365/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.648 W/kg


Rear/QPSK RB 1/0 ch.26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.56 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 0.710 W/kg

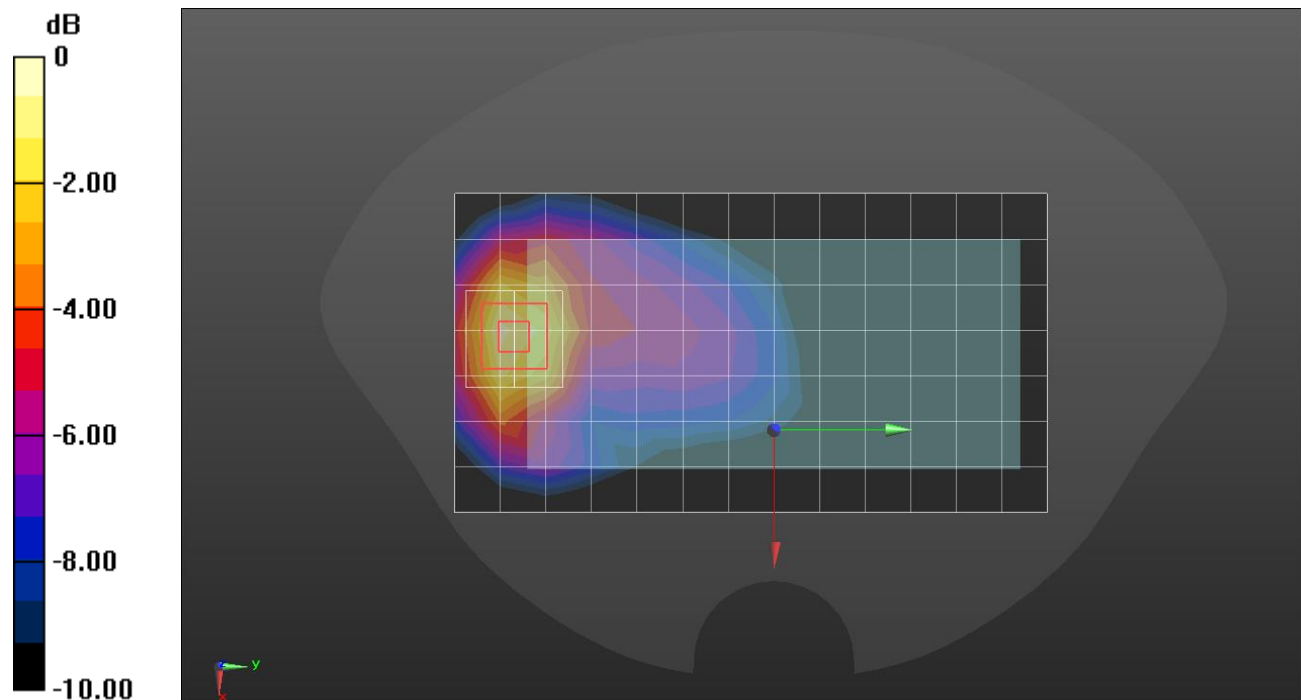

0 dB = 0.710 W/kg = -1.49 dBW/kg

LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.918$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.91, 7.91, 7.91) @ 1882.5 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 3/QPSK RB 1/0 ch.26365/Area Scan (9x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.20 W/kg


Edge 3/QPSK RB 1/0 ch.26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.73 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.483 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

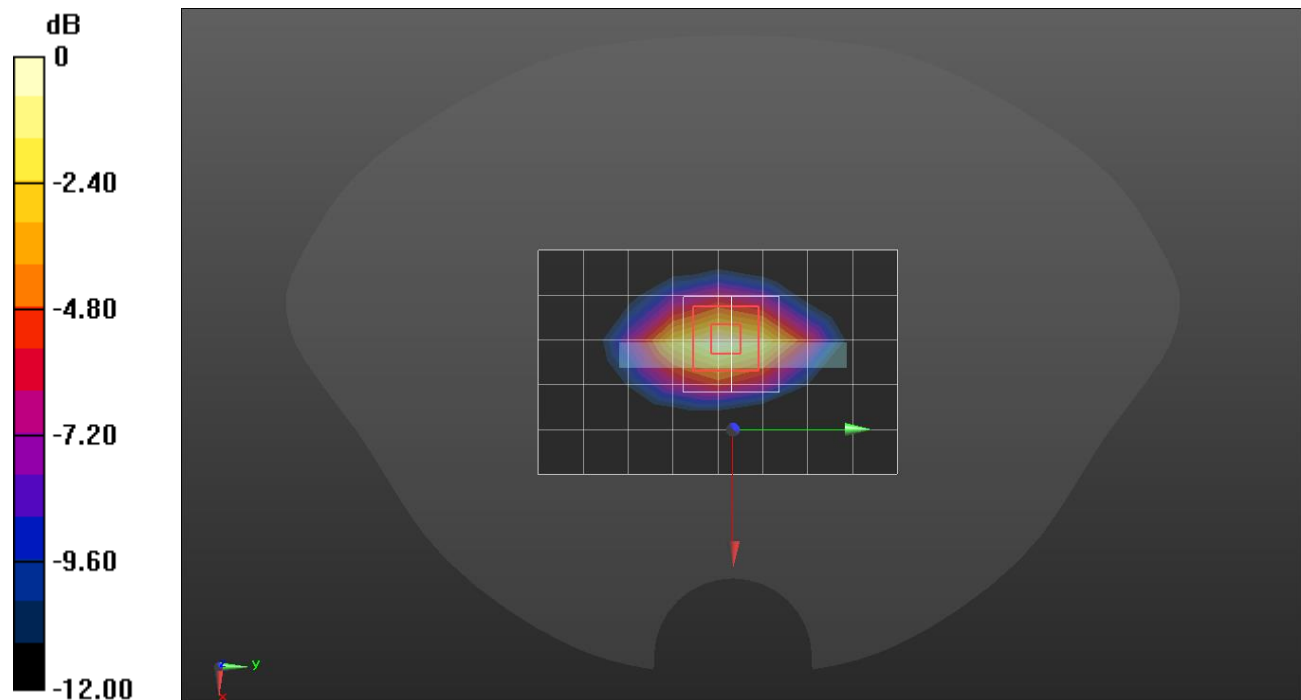

0 dB = 1.19 W/kg = 0.76 dBW/kg

LTE Band 25

Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 39.618$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.91, 7.91, 7.91) @ 1905 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 3/QPSK RB 1/0 ch.26590/Area Scan (9x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.87 W/kg


Edge 3/QPSK RB 1/0 ch.26590/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 67.71 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 10.0 W/kg

SAR(1 g) = 4.63 W/kg; SAR(10 g) = 2.03 W/kg

Maximum value of SAR (measured) = 6.58 W/kg

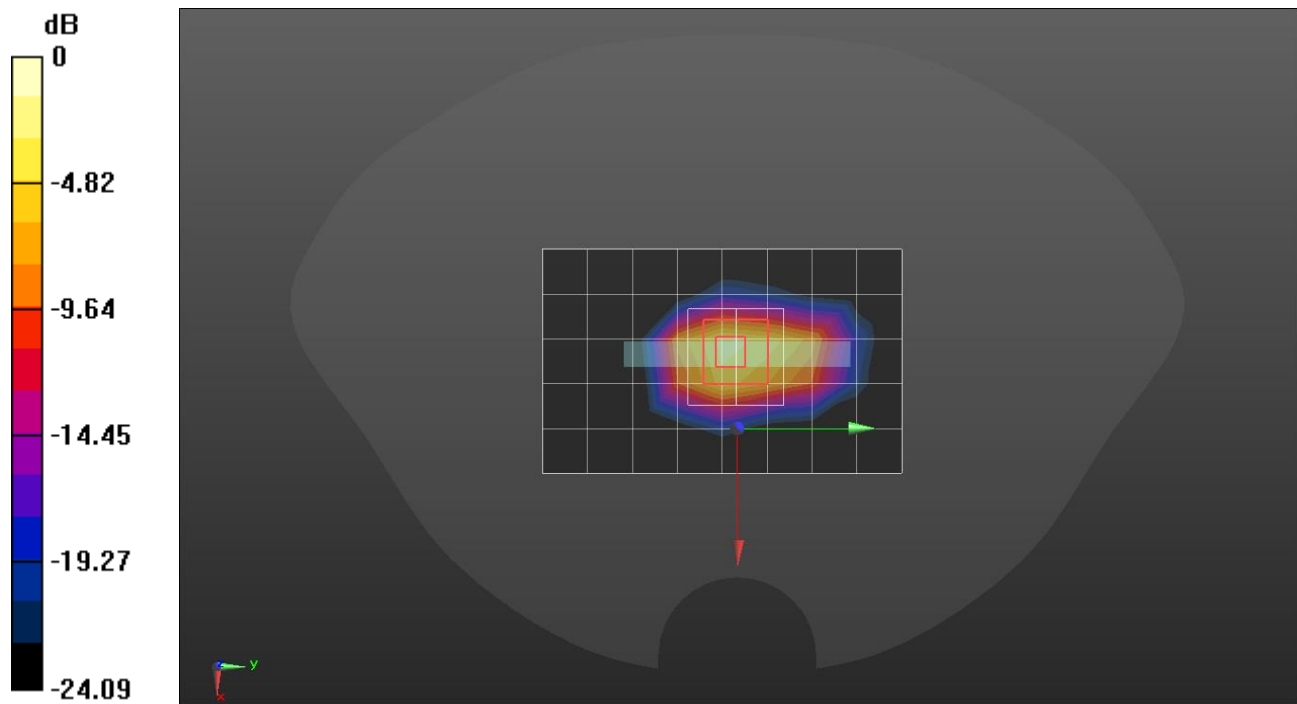

0 dB = 6.58 W/kg = 8.18 dBW/kg

LTE Band 26

Frequency: 831.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.868$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 831.5 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

RHS/Touch QPSK 1/0 ch.26865/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.295 W/kg


RHS/Touch QPSK 1/0 ch.26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.18 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.289 W/kg

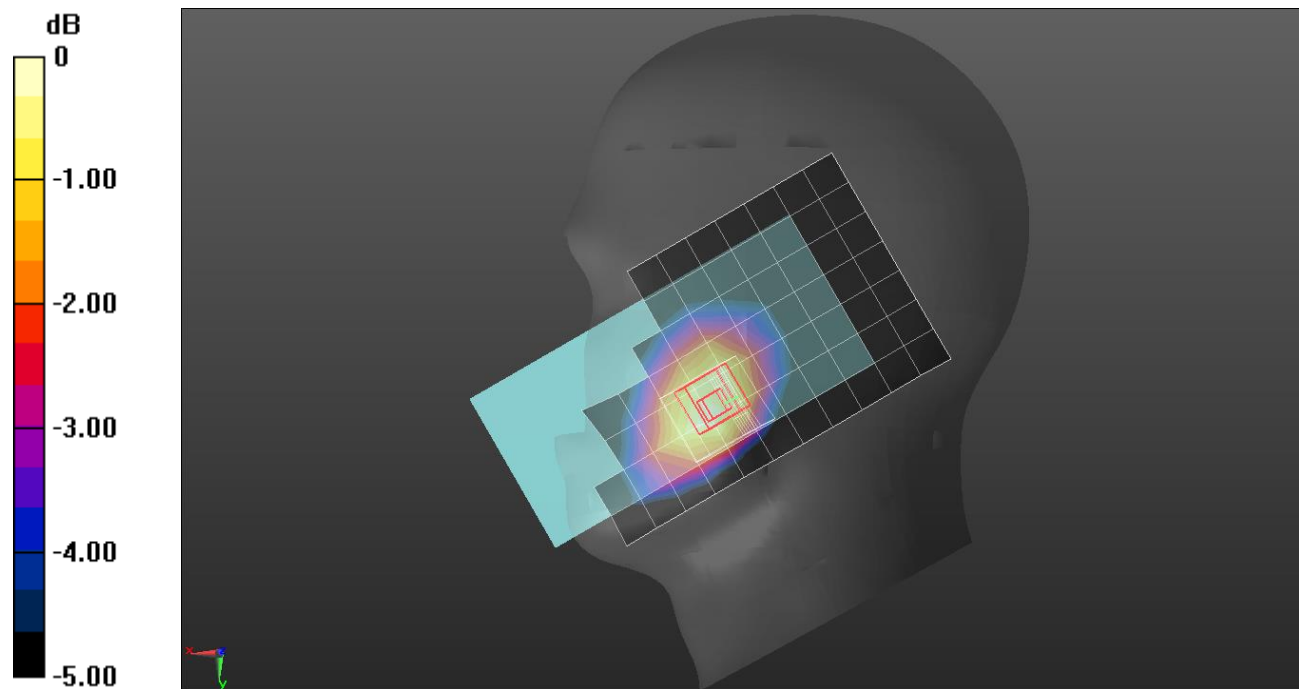

0 dB = 0.289 W/kg = -5.39 dBW/kg

LTE Band 26

Frequency: 831.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.373$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 831.5 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/QPSK RB 1/0 ch.26865/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.418 W/kg


Rear/QPSK RB 1/0 ch.26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.77 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

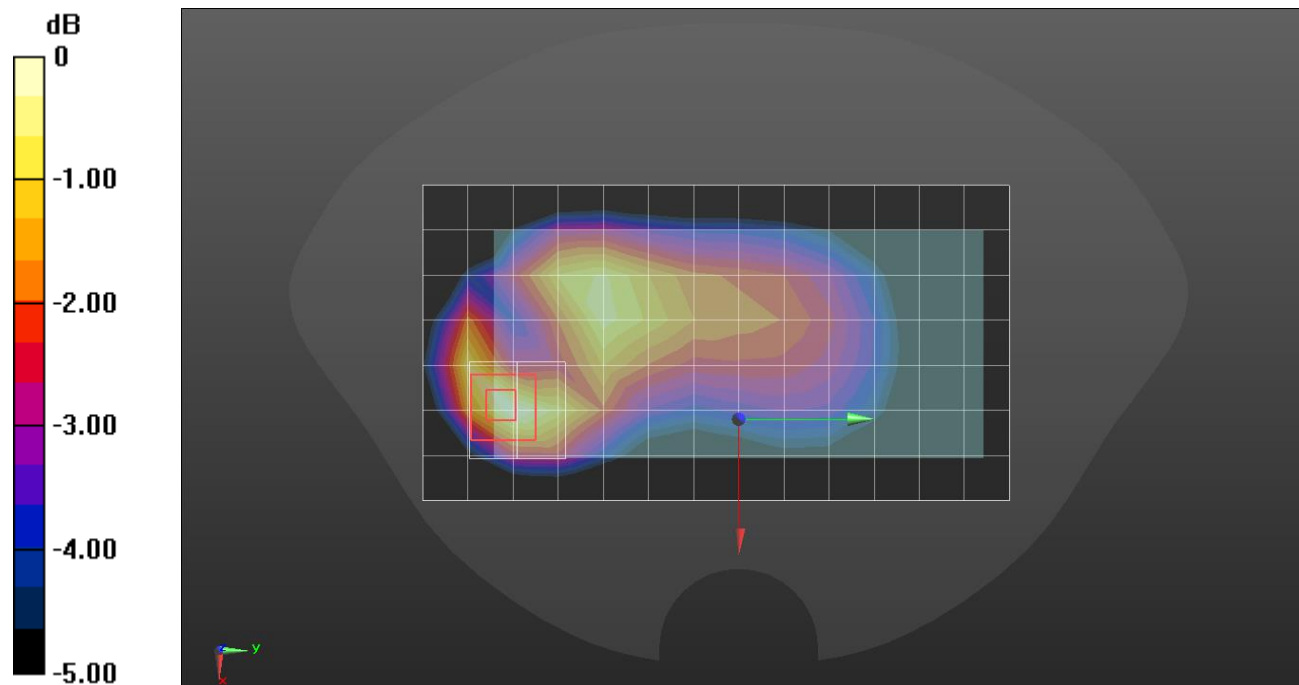

0 dB = 0.411 W/kg = -3.86 dBW/kg

LTE Band 26

Frequency: 831.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.373$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(10.3, 10.3, 10.3) @ 831.5 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/QPSK RB 1/0 ch.26865/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.796 W/kg


Rear/QPSK RB 1/0 ch.26865/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.04 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.361 W/kg

Maximum value of SAR (measured) = 0.823 W/kg

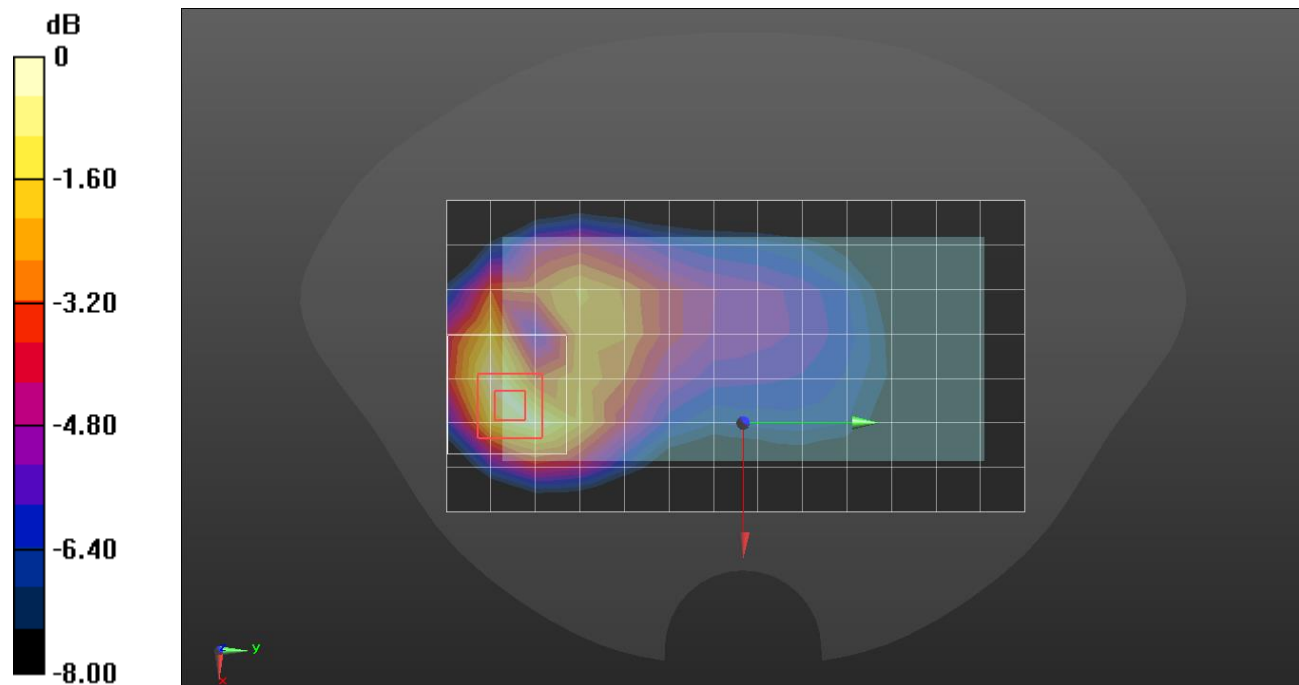

0 dB = 0.823 W/kg = -0.85 dBW/kg

LTE Band 30

Frequency: 2310 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.678$ S/m; $\epsilon_r = 39.557$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(7.96, 7.96, 7.96) @ 2310 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

RHS/Tilt QPSK RB 1/0 ch.27710/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0897 W/kg


RHS/Tilt QPSK RB 1/0 ch.27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.305 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0956 W/kg

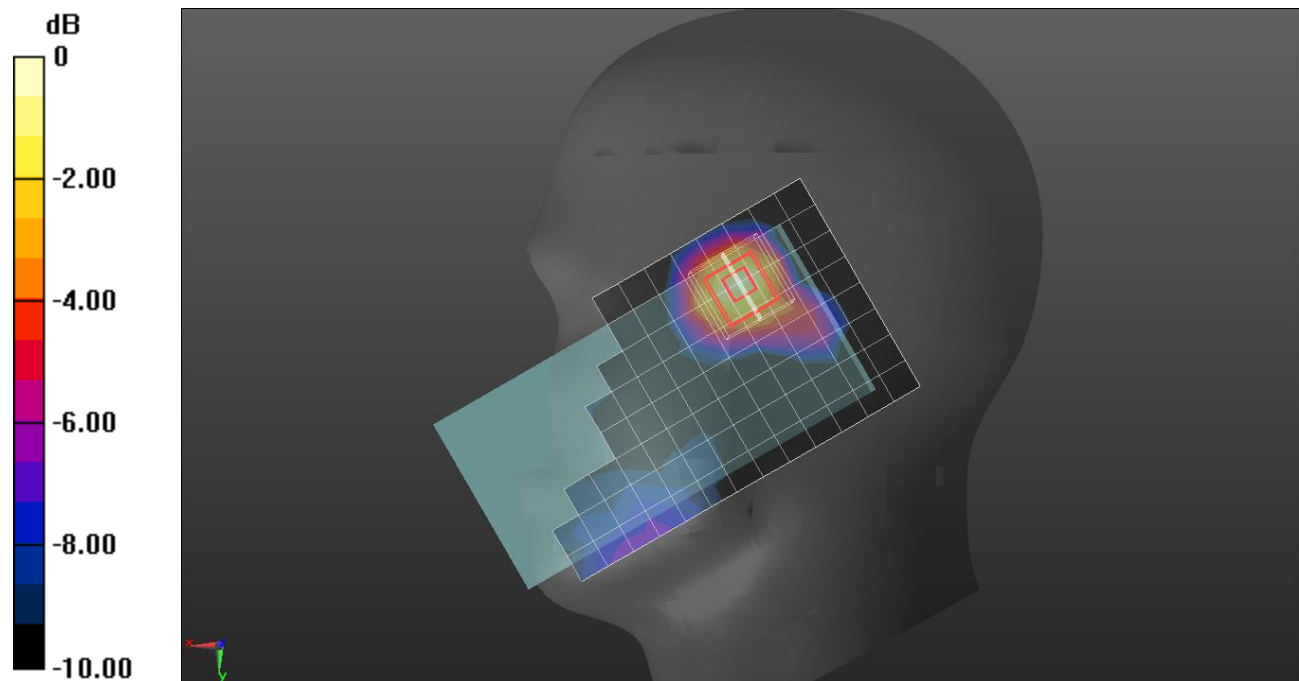

0 dB = 0.0956 W/kg = -10.20 dBW/kg

LTE Band 30

Frequency: 2310 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.678$ S/m; $\epsilon_r = 39.557$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(7.96, 7.96, 7.96) @ 2310 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Rear/QPSK RB 1/0 Ch.27710/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.546 W/kg


Rear/QPSK RB 1/0 Ch.27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.53 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.748 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.557 W/kg

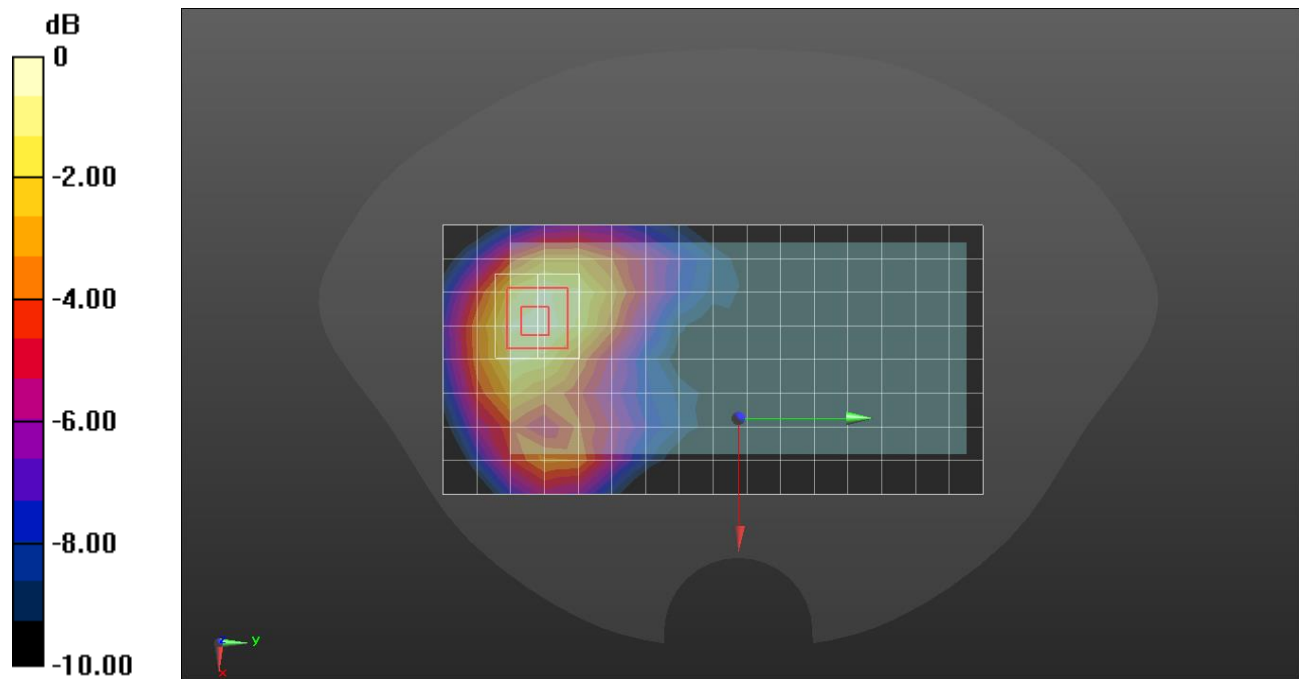

0 dB = 0.557 W/kg = -2.54 dBW/kg

LTE Band 30

Frequency: 2310 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.678$ S/m; $\epsilon_r = 39.557$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(7.96, 7.96, 7.96) @ 2310 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Edge 3/QPSK RB 25/0 ch.27710/Area Scan (11x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.419 W/kg


Edge 3/QPSK RB 25/0 ch.27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.85 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.468 W/kg

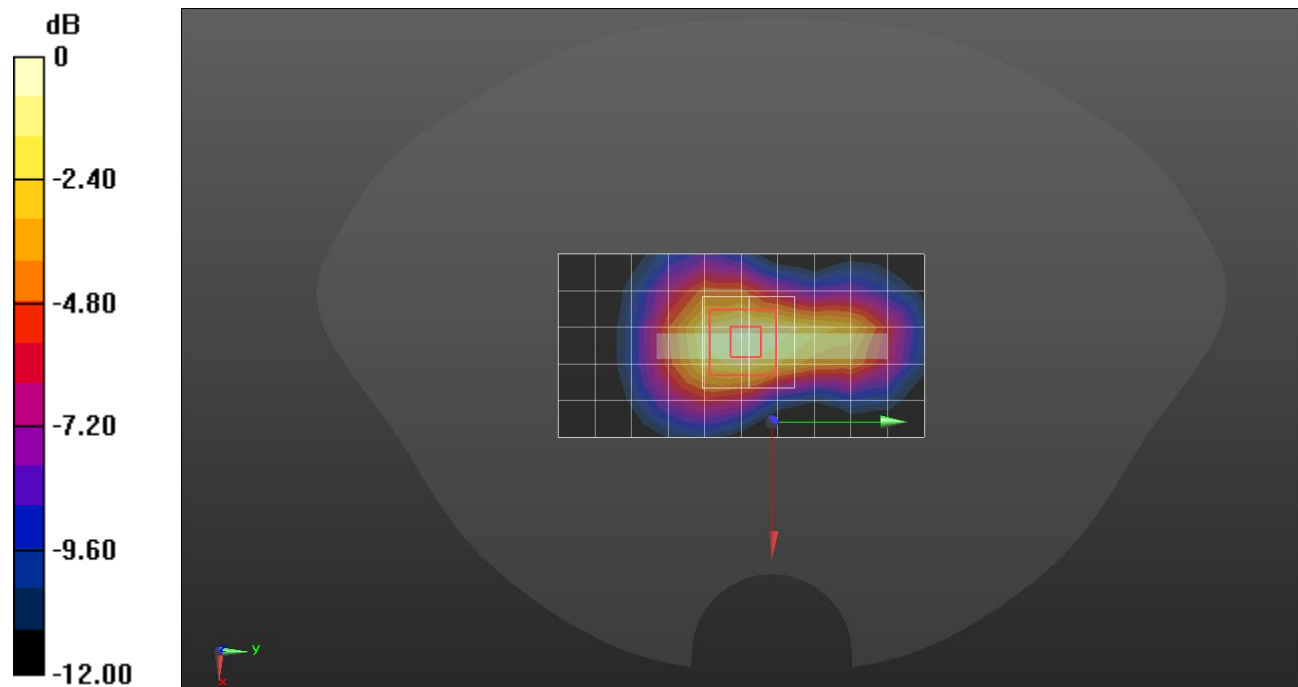

0 dB = 0.468 W/kg = -3.30 dBW/kg

LTE Band 30

Frequency: 2310 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.692$ S/m; $\epsilon_r = 38.872$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2019-07-18
- Probe: EX3DV4 - SN7376; ConvF(7.96, 7.96, 7.96) @ 2310 MHz; Calibrated: 2019-09-27
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1877

Edge 3/QPSK RB 1/0 ch.27710/Area Scan (11x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 2.85 W/kg


Edge 3/QPSK RB 1/0 ch.27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.59 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 8.37 W/kg

SAR(1 g) = 2.68 W/kg; SAR(10 g) = 0.938 W/kg

Maximum value of SAR (measured) = 4.58 W/kg

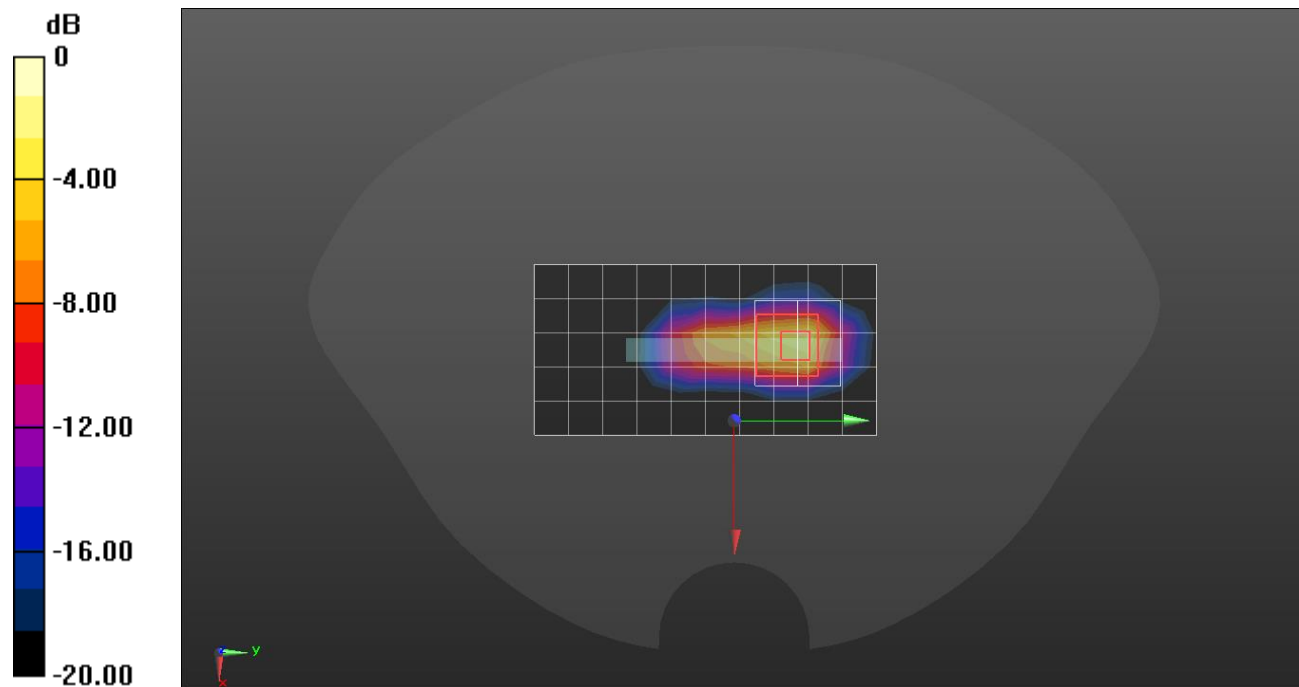

0 dB = 4.58 W/kg = 6.61 dBW/kg

LTE Band 41

Frequency: 2506 MHz; Duty Cycle: 1:1.59956; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 39.677$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97); Calibrated: 2019-09-23;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 3/QPSK RB 1/99 ch.39750/Area Scan (9x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.503 W/kg


Edge 3/QPSK RB 1/99 ch.39750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.81 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

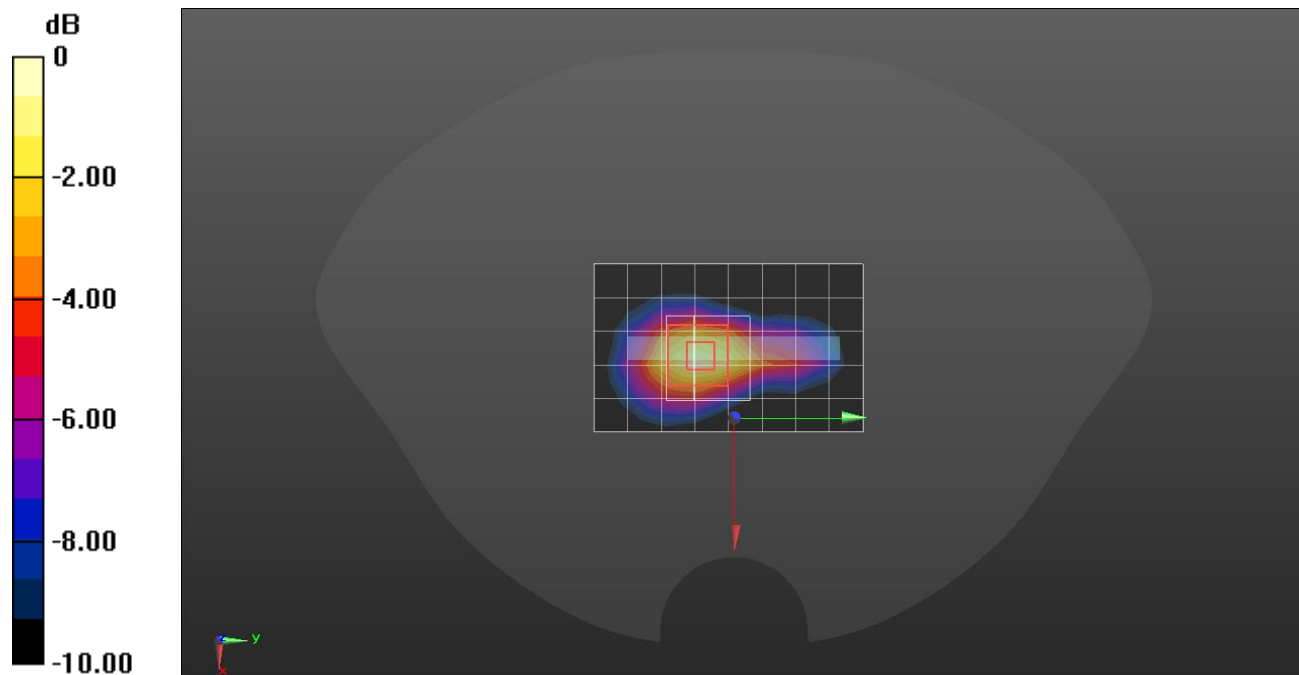

0 dB = 0.524 W/kg = -2.81 dBW/kg

LTE Band 41

Frequency: 2506 MHz; Duty Cycle: 1:2.30675; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.575$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97) @ 2506 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

LHS/Touch QPSK RB 1/99 ch.39750/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0611 W/kg


LHS/Touch QPSK RB 1/99 ch.39750/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.395 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0556 W/kg

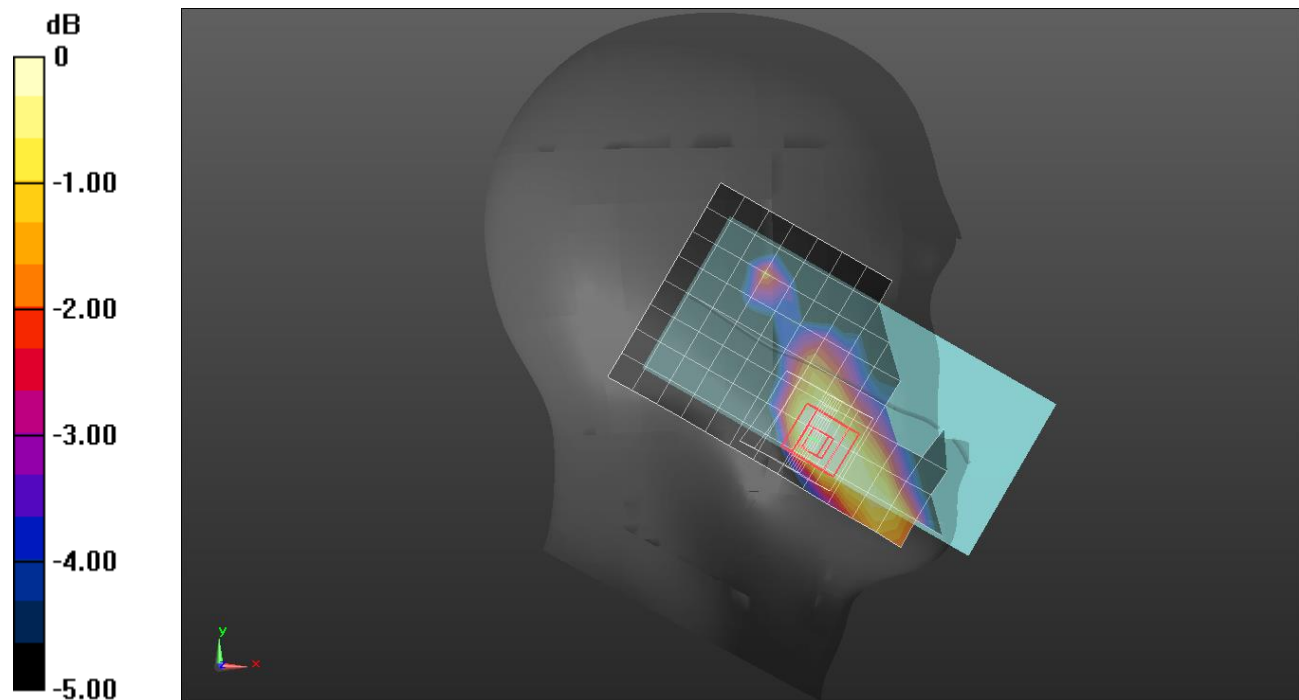

0 dB = 0.0556 W/kg = -12.55 dBW/kg

LTE Band 41

Frequency: 2506 MHz; Duty Cycle: 1:2.30675; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.575$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97) @ 2506 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Rear/QPSK RB 1/99 ch.39750/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.296 W/kg


Rear/QPSK RB 1/99 ch.39750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.71 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

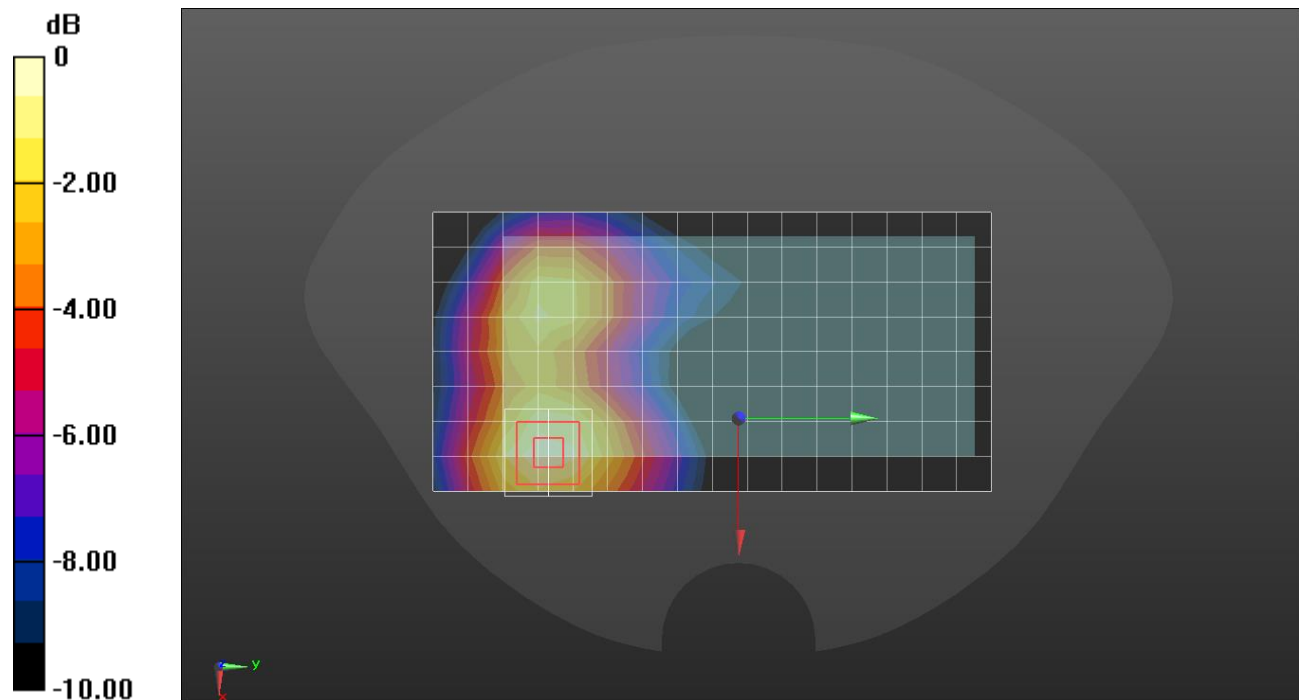

0 dB = 0.301 W/kg = -5.21 dBW/kg

LTE Band 66

Frequency: 1770 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 40.077$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(8.11, 8.11, 8.11) @ 1770 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

LHS/Touch QPSK RB 1/0 ch.132572/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.170 W/kg


LHS/Touch QPSK RB 1/0 ch.132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.28 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

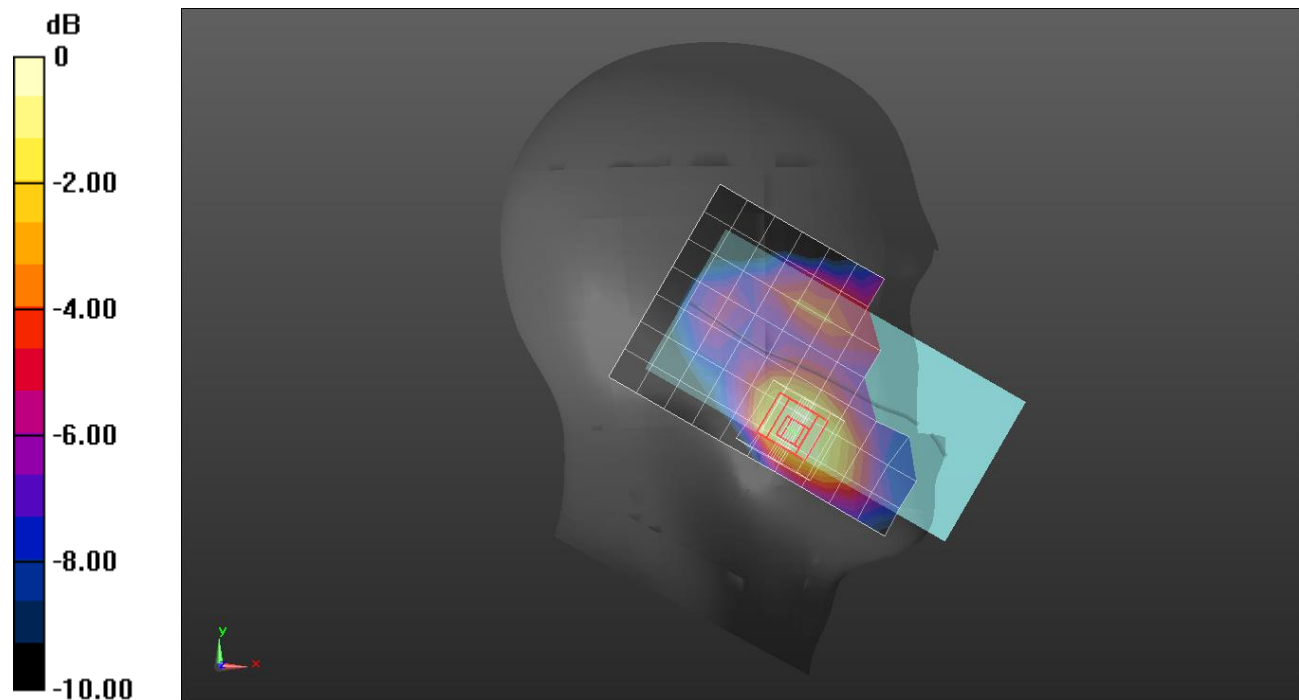

0 dB = 0.196 W/kg = -7.08 dBW/kg

LTE Band 66

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.855$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(8.31, 8.31, 8.31) @ 1745 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/QPSK RB 1/0 Ch.132322/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.900 W/kg


Rear/QPSK RB 1/0 Ch.132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.48 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

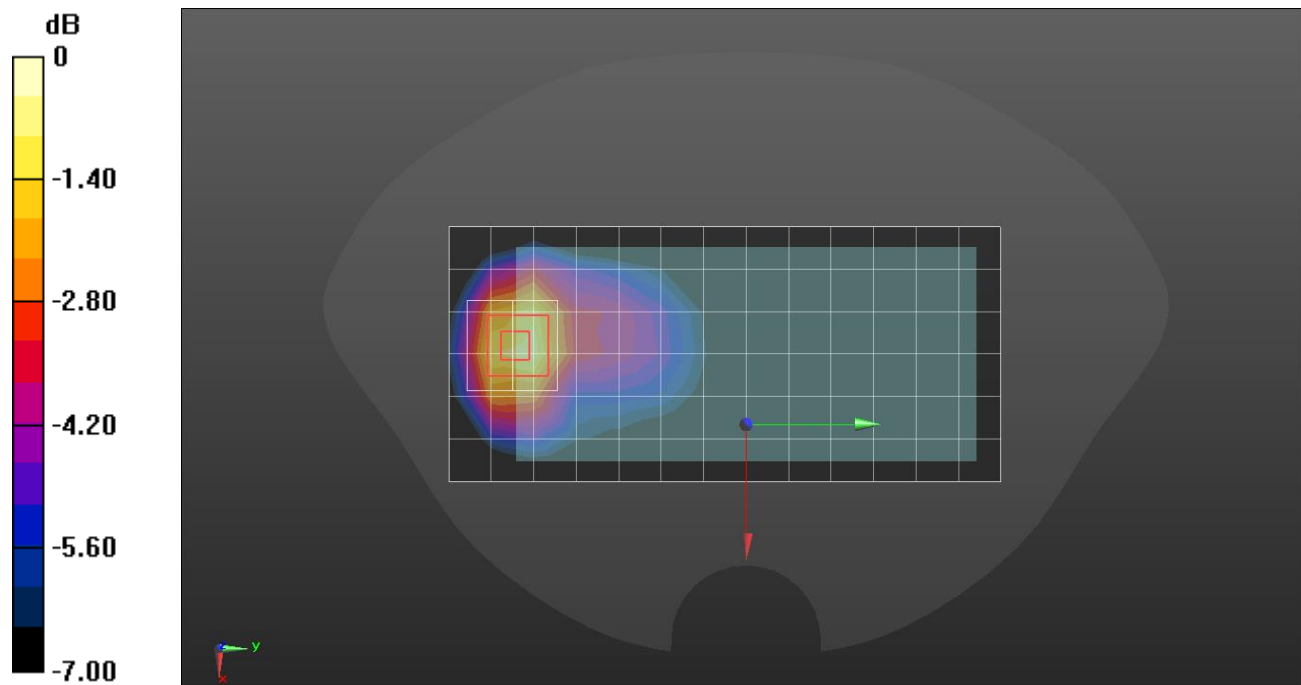

0 dB = 1.04 W/kg = 0.17 dBW/kg

LTE Band 66

Frequency: 1770 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 40.251$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(8.31, 8.31, 8.31) @ 1770 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Edge 3/QPSK RB 50/0 ch.132572/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.21 W/kg


Edge 3/QPSK RB 50/0 ch.132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.20 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.525 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

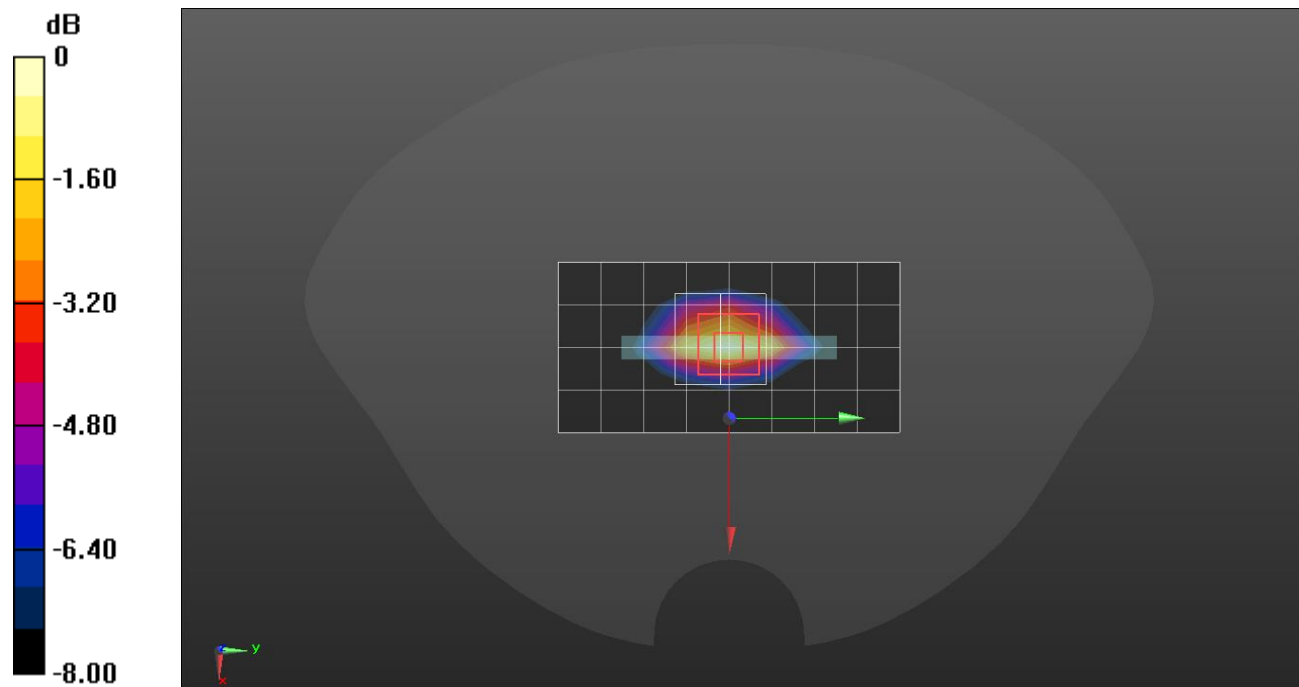

LTE Band 66

Frequency: 1770 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.745$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(8.31, 8.31, 8.31) @ 1770 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Edge3/QPSK RB 100/0 ch.132572/Area Scan (9x5x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.68 W/kg


Edge3/QPSK RB 100/0 ch.132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 65.14 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 9.93 W/kg

SAR(1 g) = 4.78 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 6.39 W/kg

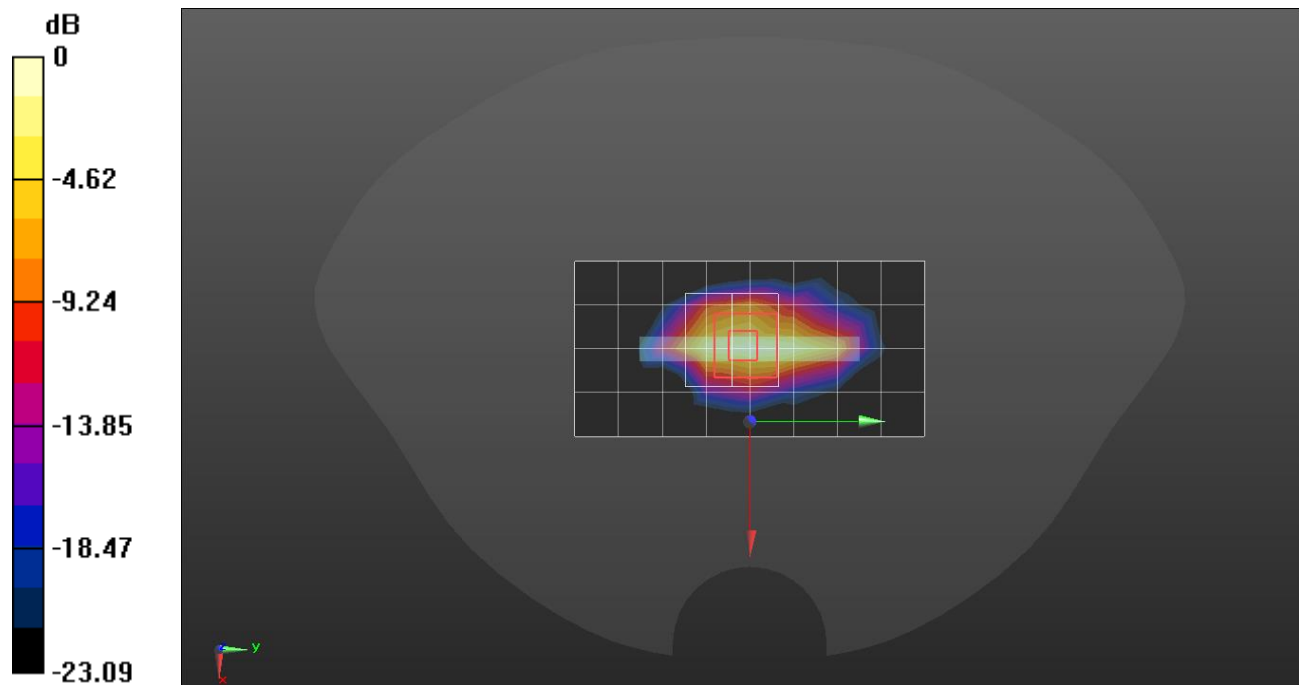

0 dB = 6.39 W/kg = 8.06 dBW/kg

LTE Band 71

Frequency: 680.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 680.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.203$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 680.5 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

RHS/Touch QPSK RB 1/49 ch.133297/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0796 W/kg


RHS/Touch QPSK RB 1/49 ch.133297/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.635 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0870 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0793 W/kg

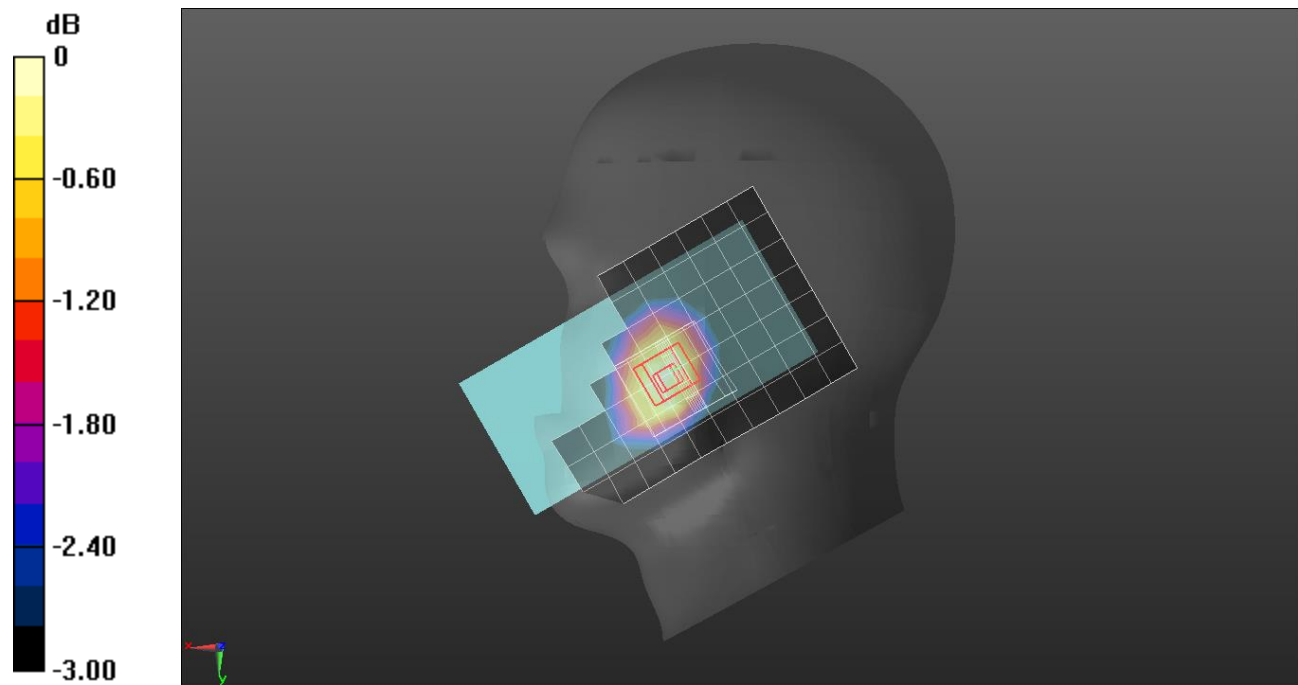

0 dB = 0.0793 W/kg = -11.01 dBW/kg

LTE Band 71

Frequency: 680.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 680.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.203$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 680.5 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/QPSK RB 1/49 Ch.133297/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.129 W/kg


Rear/QPSK RB 1/49 Ch.133297/Zoom Scan (8x12x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.88 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

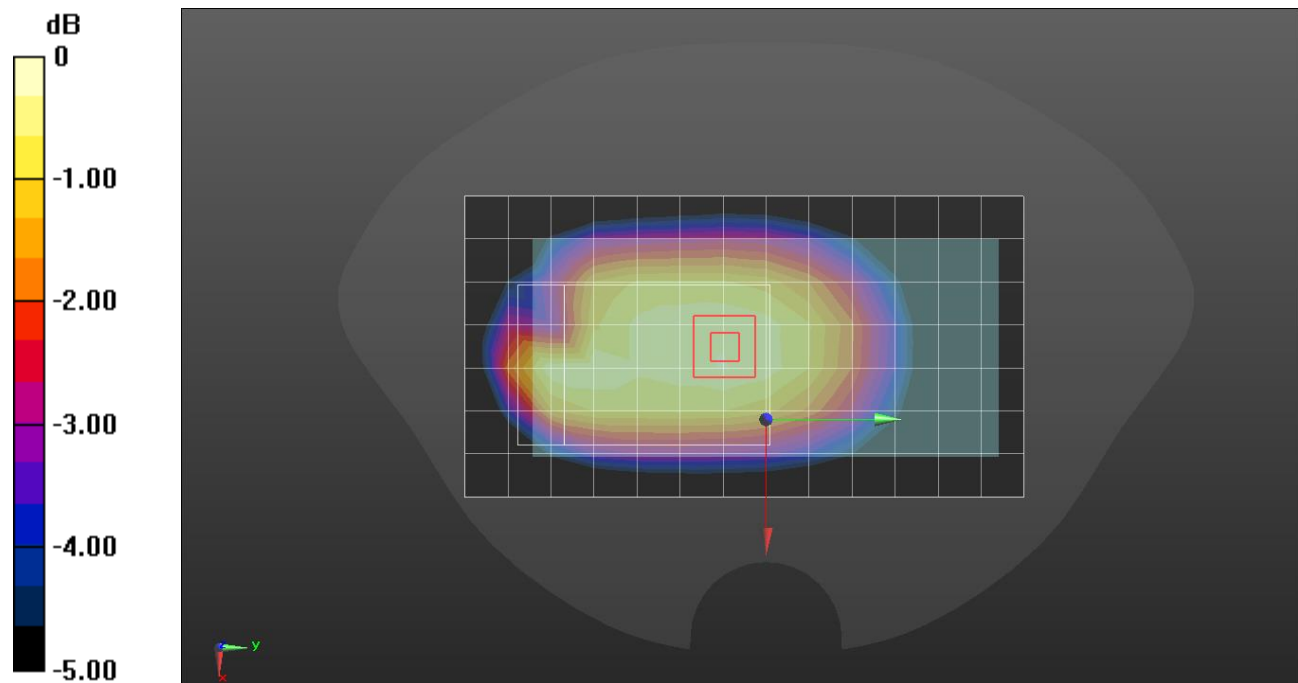

0 dB = 0.139 W/kg = -8.57 dBW/kg

LTE Band 71

Frequency: 680.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 680.5$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.203$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2019-09-20
- Probe: EX3DV4 - SN7314; ConvF(9.91, 9.91, 9.91) @ 680.5 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Type: QD 000 P40 CD; Serial: 1855

Rear/QPSK RB 1/49 Ch.133297/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.213 W/kg


Rear/QPSK RB 1/49 Ch.133297/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.97 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

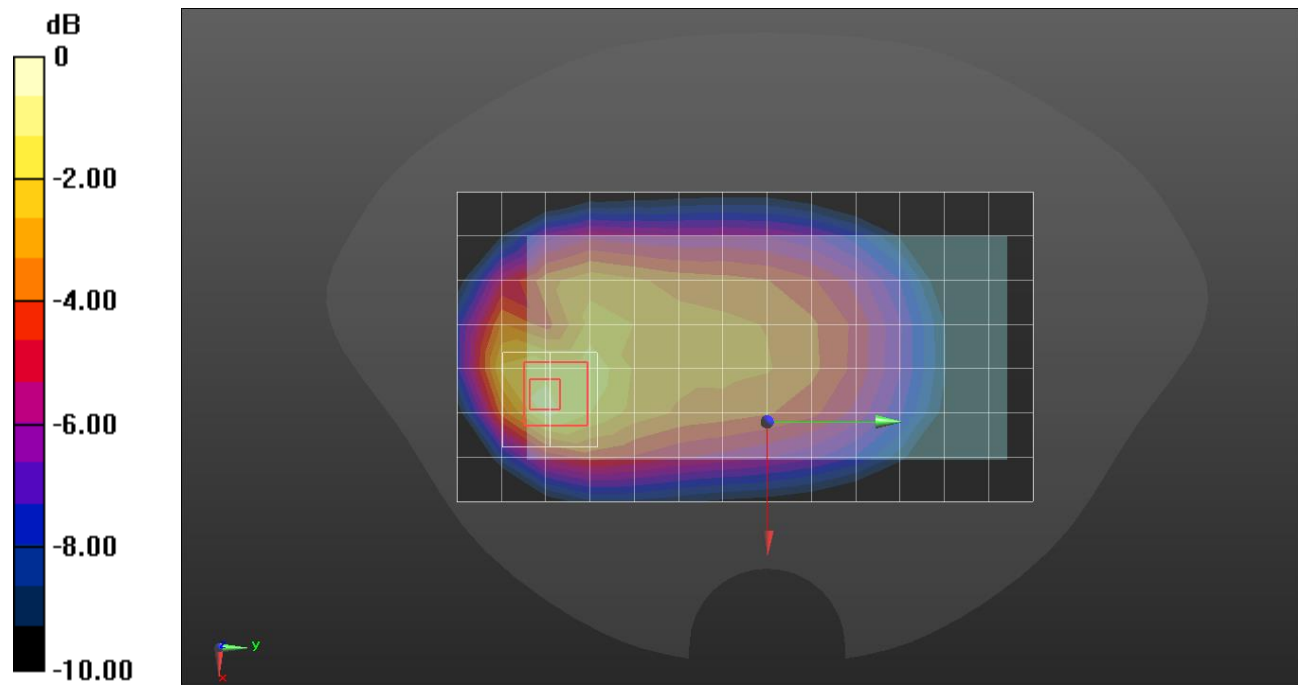

0 dB = 0.271 W/kg = -5.67 dBW/kg

Wi-Fi 2.4 GHz

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.076$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2437 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

RHS/Touch 802.11 b mode ch.6 SISO Ant 1/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.660 W/kg


RHS/Touch 802.11 b mode ch.6 SISO Ant 1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.85 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 0.851 W/kg

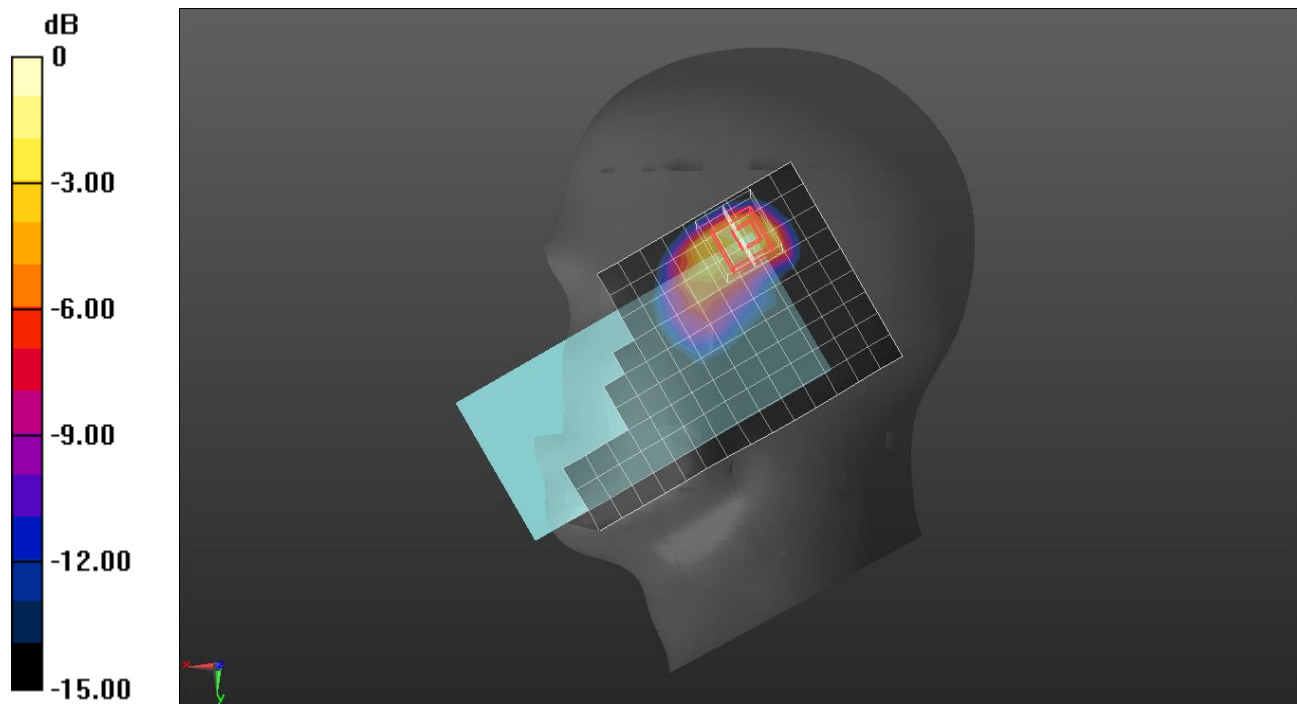

0 dB = 0.851 W/kg = -0.70 dBW/kg

Wi-Fi 2.4 GHz

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.027$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2462 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 4/802.11 b mode ch.11 SISO Ant.1/Area Scan (18x5x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.726 W/kg


Edge 4/802.11 b mode ch.11 SISO Ant.1/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.91 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.731 W/kg

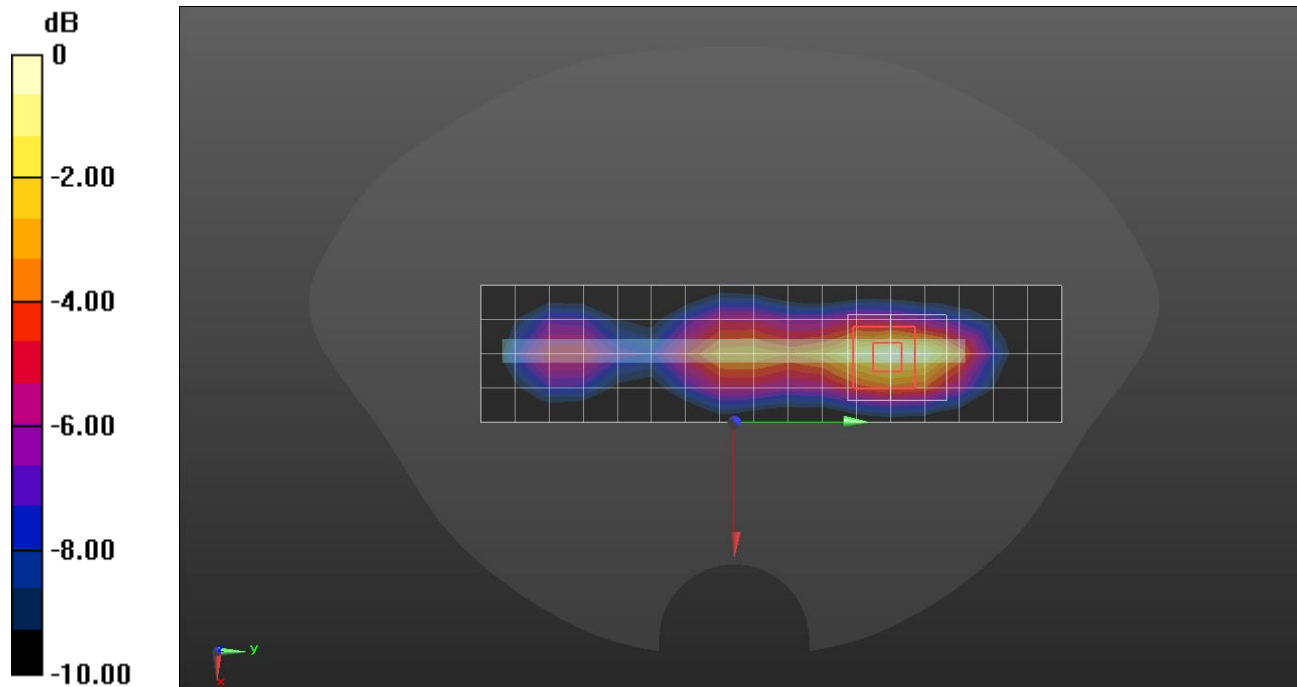

0 dB = 0.731 W/kg = -1.36 dBW/kg

Wi-Fi 2.4 GHz

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.027$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2462 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Rear/802.11 b mode ch.11 SISO Ant.2/Area Scan (17x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.142 W/kg


Rear/802.11 b mode ch.11 SISO Ant.2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.571 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

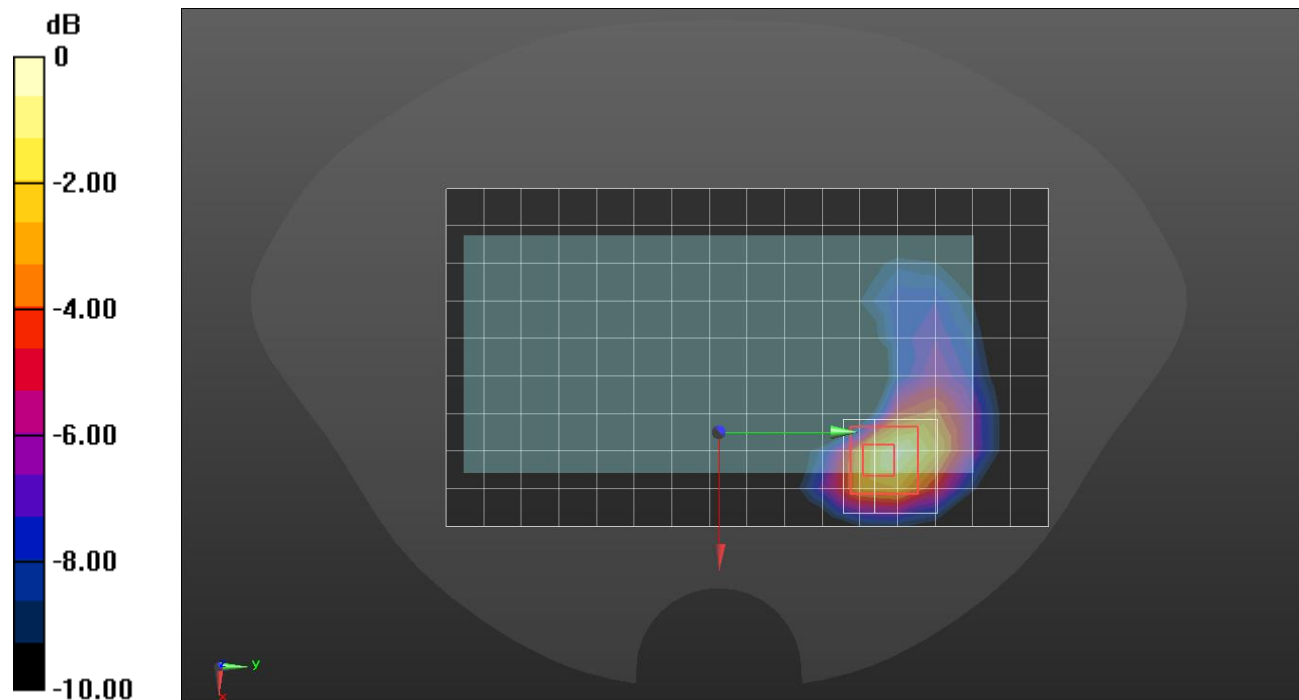

0 dB = 0.150 W/kg = -8.24 dBW/kg

Wi-Fi 2.4 GHz

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.794$ S/m; $\epsilon_r = 39.079$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2437 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Rear/802.11 g mode ch.6 MIMO/Area Scan (17x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.674 W/kg


Rear/802.11 g mode ch.6 MIMO/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.43 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.699 W/kg

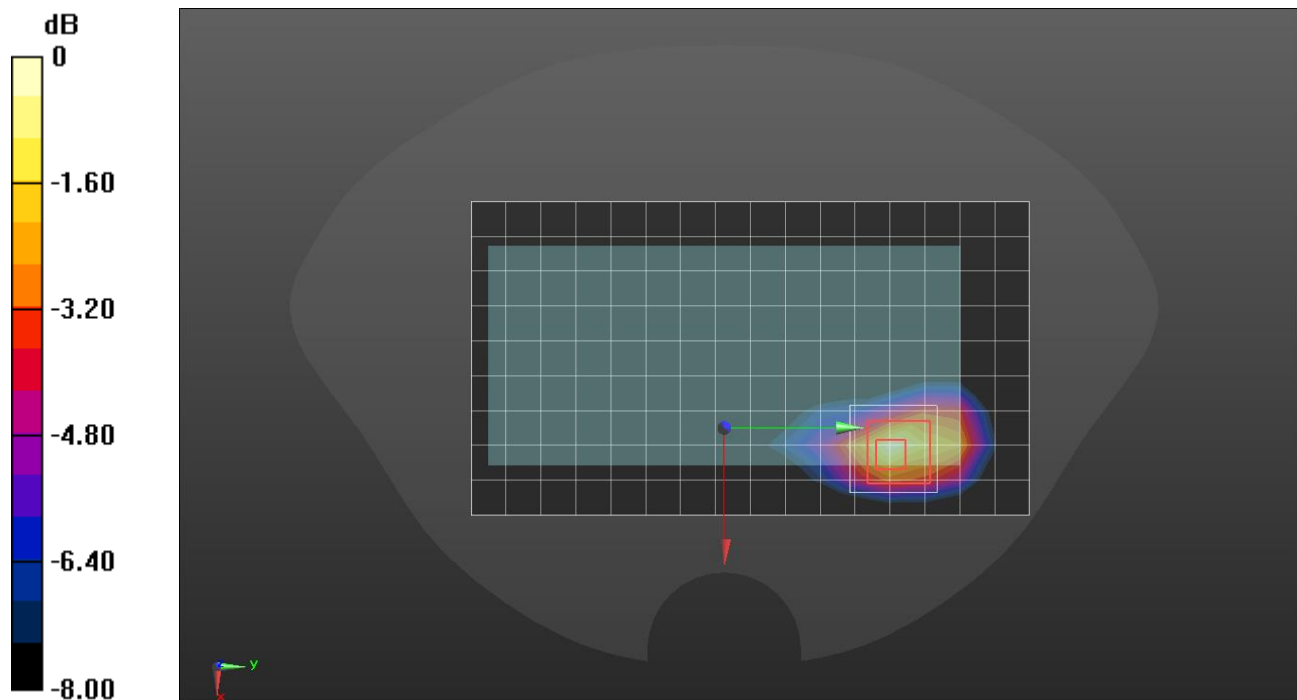

0 dB = 0.699 W/kg = -1.56 dBW/kg

Wi-Fi 5.3 GHz

Frequency: 5270 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.663$ S/m; $\epsilon_r = 36.467$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(5.24, 5.24, 5.24); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

LHS/Tilt 802.11 n mode ch.54 SISO Ant 1/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.409 W/kg


LHS/Tilt 802.11 n mode ch.54 SISO Ant 1/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.367 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.354 W/kg

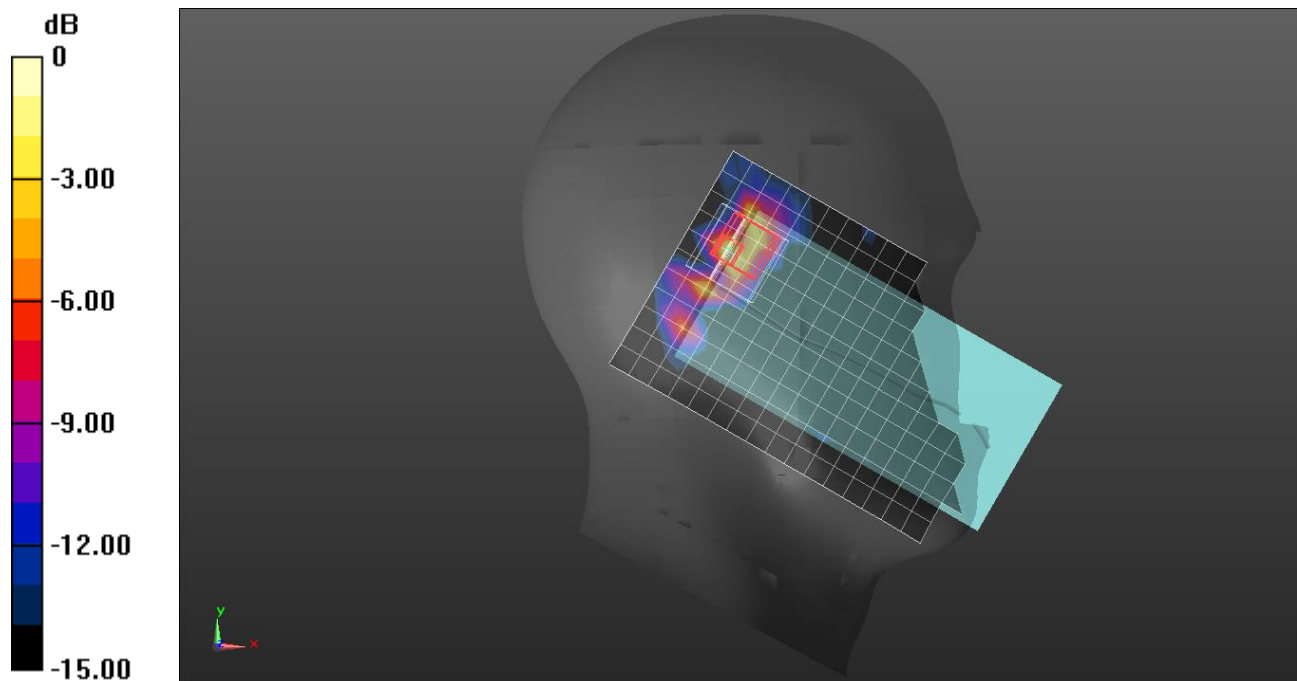

0 dB = 0.354 W/kg = -4.51 dBW/kg

Wi-Fi 5.3 GHz

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.748$ S/m; $\epsilon_r = 36.534$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(5.24, 5.24, 5.24); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

Rear/802.11 a mode ch.64 SISO Ant 2/Area Scan (20x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.118 W/kg


Rear/802.11 a mode ch.64 SISO Ant 2/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.904 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

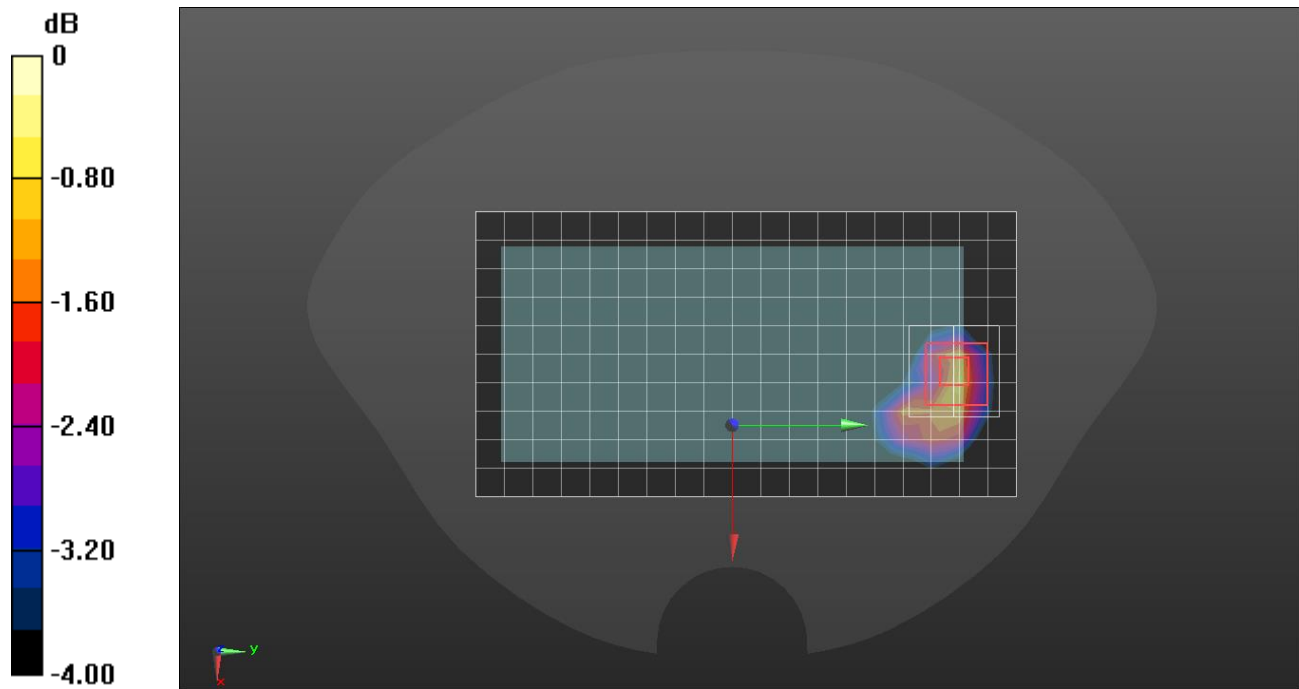

0 dB = 0.145 W/kg = -8.39 dBW/kg

Wi-Fi 5.3 GHz

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.748$ S/m; $\epsilon_r = 36.534$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(5.24, 5.24, 5.24) @ 5320 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

Rear/802.11 a mode ch.64 SISO Ant 2/Area Scan (20x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 6.55 W/kg


Rear/802.11 a mode ch 64 SISO Ant 2/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 33.46 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 15.0 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 0.719 W/kg

Maximum value of SAR (measured) = 7.67 W/kg

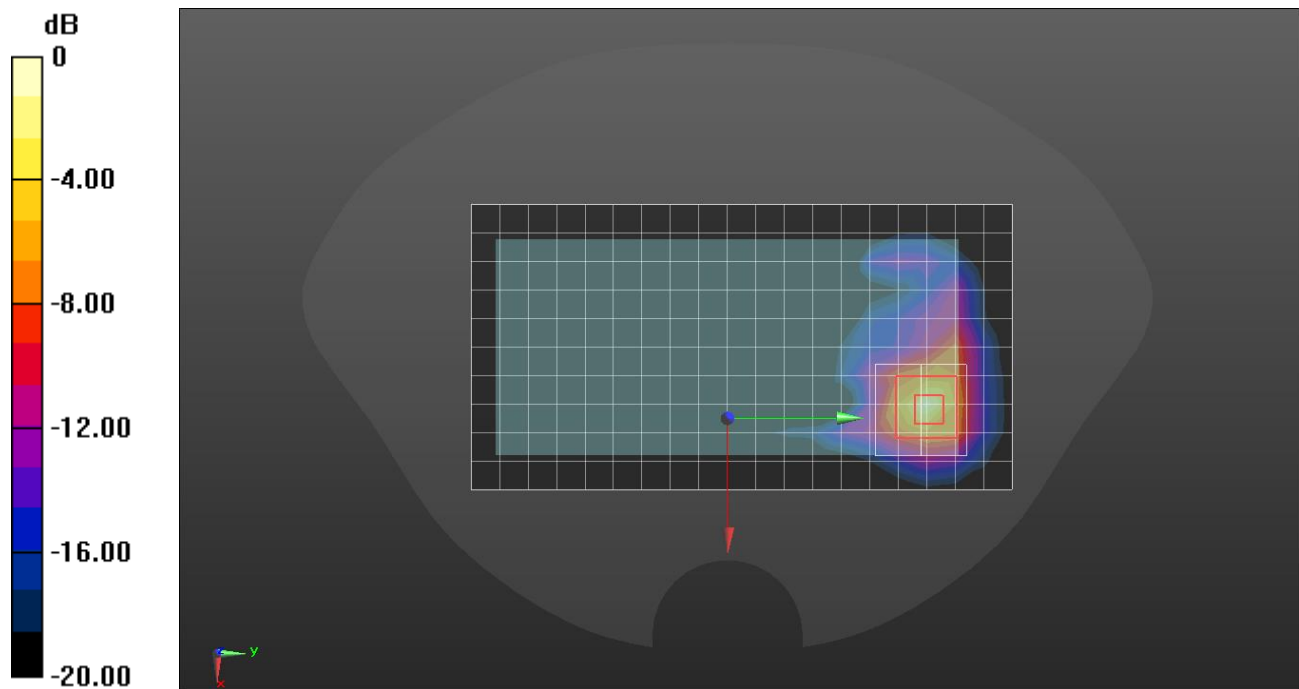

0 dB = 7.67 W/kg = 8.85 dBW/kg

Wi-Fi 5.6 GHz

Frequency: 5510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used: $f = 5510$ MHz; $\sigma = 4.921$ S/m; $\epsilon_r = 36.107$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(4.75, 4.75, 4.75); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

RHS/Tilt 802.11 n mode ch.102 SISO Ant 1/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.477 W/kg


RHS/Tilt 802.11 n mode ch.102 SISO Ant 1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.69 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.782 W/kg

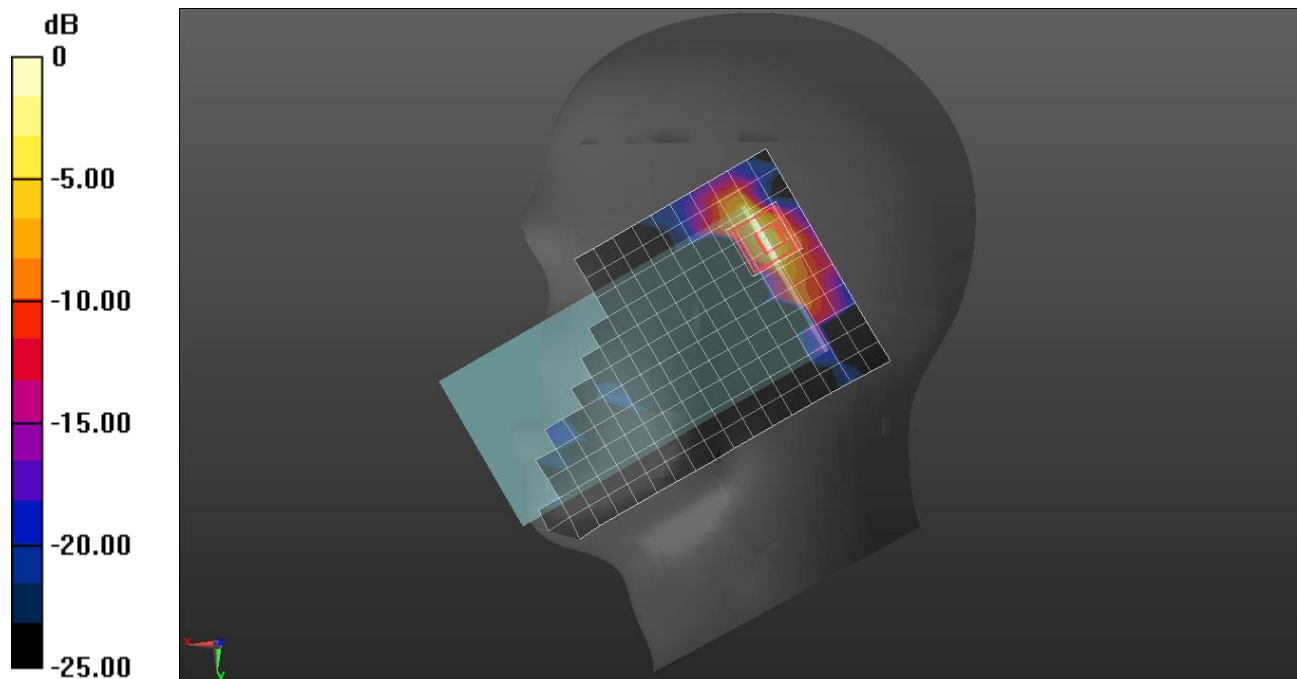

0 dB = 0.782 W/kg = -1.07 dBW/kg

Wi-Fi 5.5 GHz

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5620$ MHz; $\sigma = 5.048$ S/m; $\epsilon_r = 35.936$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(4.75, 4.75, 4.75) @ 5620 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

Rear/802.11 a mode ch.124 SISO Ant 2/Area Scan (20x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.503 W/kg


Rear/802.11 a mode ch.124 SISO Ant 2/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.07 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.540 W/kg

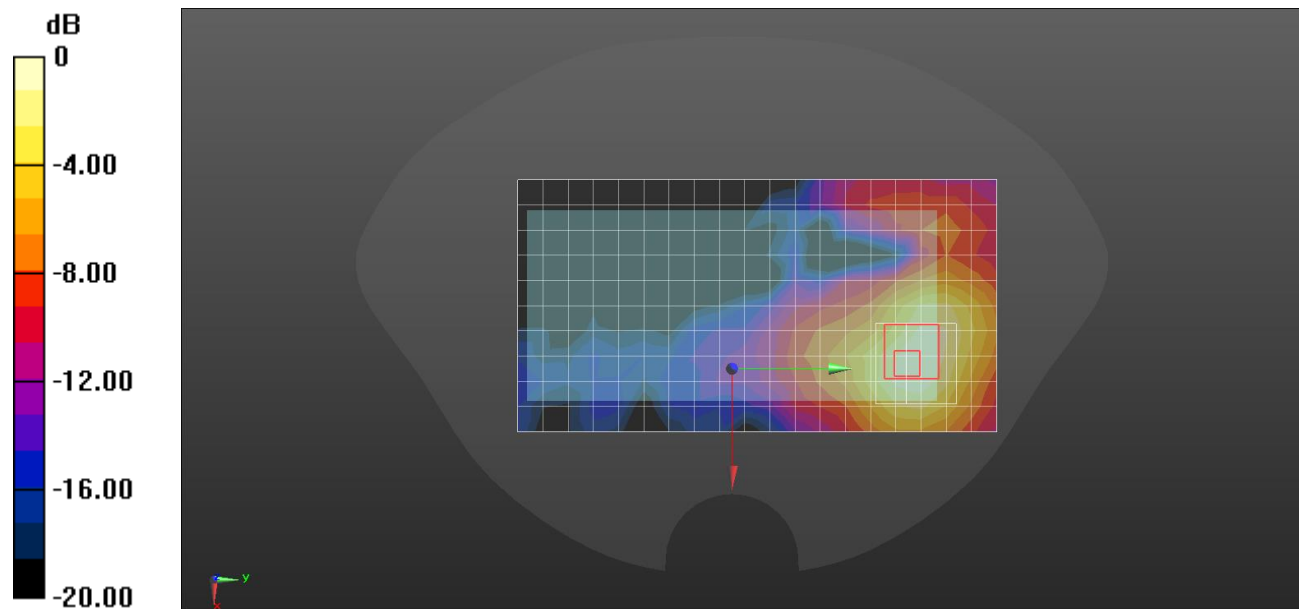

0 dB = 0.540 W/kg = -2.68 dBW/kg

Wi-Fi 5.5 GHz

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5620$ MHz; $\sigma = 5.048$ S/m; $\epsilon_r = 35.936$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(4.75, 4.75, 4.75) @ 5620 MHz; Calibrated: 2019-08-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

Rear/802.11 a mode ch.124 SISO Ant 2/Area Scan (20x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.89 W/kg


Rear/802.11 a mode ch.124 SISO Ant 2/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.34 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 4.09 W/kg; SAR(10 g) = 1.06 W/kg

Maximum value of SAR (measured) = 12.7 W/kg

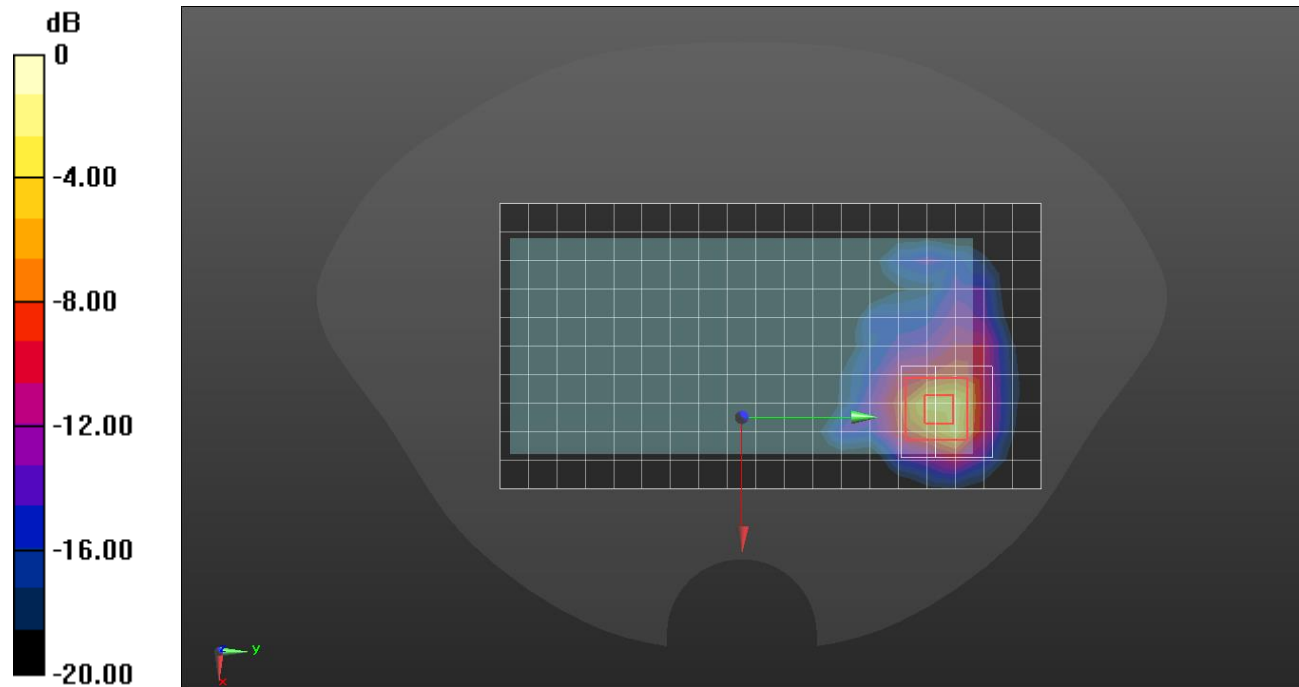

0 dB = 12.7 W/kg = 11.04 dBW/kg

Wi-Fi 5.8 GHz

Frequency: 5795 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 5.251$ S/m; $\epsilon_r = 35.679$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(4.95, 4.95, 4.95); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

RHS/Tilt 802.11 n mode ch.159 SISO Ant 1/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.577 W/kg


RHS/Tilt 802.11 n mode ch.159 SISO Ant 1/Zoom Scan (10x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.15 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.613 W/kg

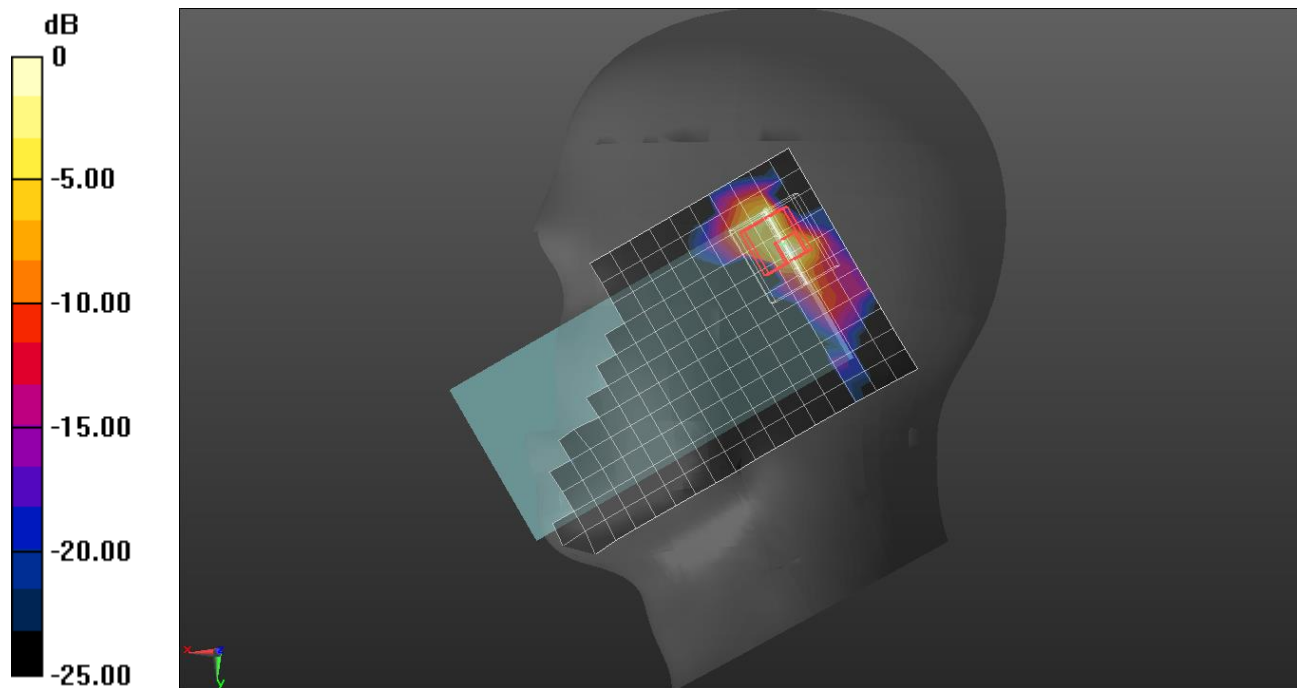

0 dB = 0.613 W/kg = -2.13 dBW/kg

Wi-Fi 5.8 GHz

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.281$ S/m; $\epsilon_r = 35.629$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(4.95, 4.95, 4.95); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

Rear/802.11 a mode ch.165 SISO Ant 2/Area Scan (21x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.552 W/kg


Rear/802.11 a mode ch.165 SISO Ant 2/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.82 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.600 W/kg

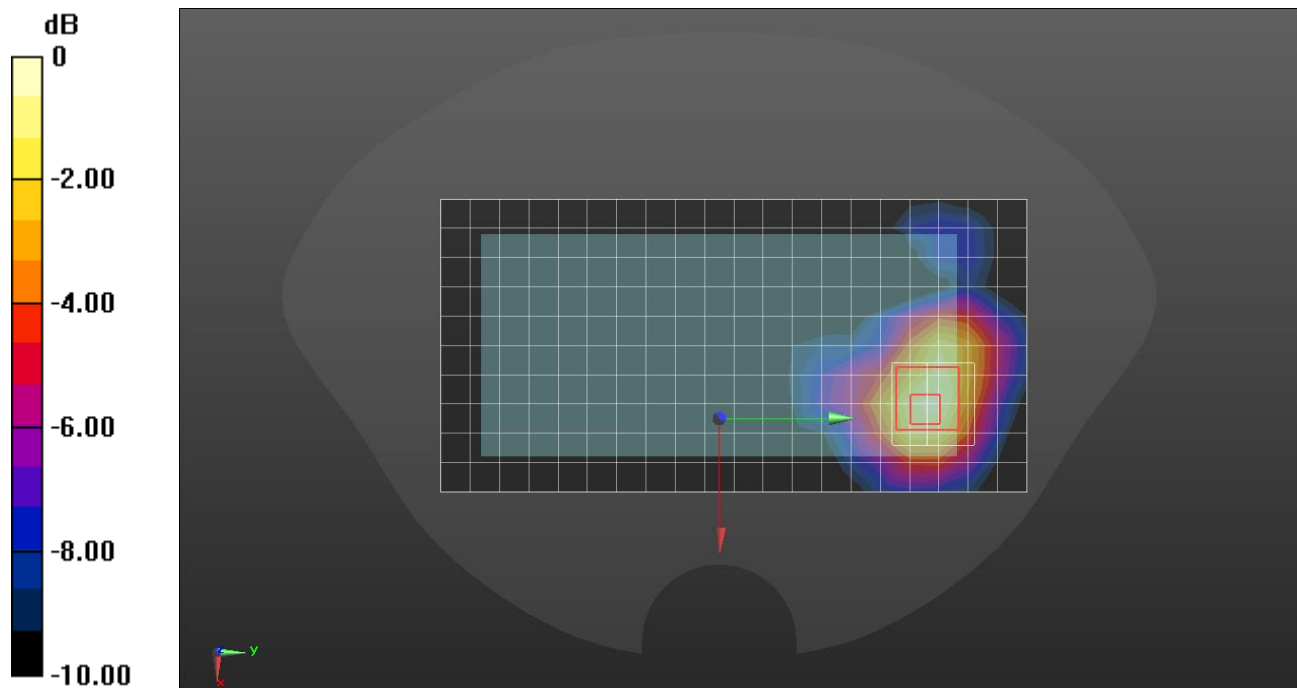

0 dB = 0.600 W/kg = -2.22 dBW/kg

Wi-Fi 5.8 GHz

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 35.749$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(4.95, 4.95, 4.95); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

Rear/802.11 a mode ch.149 SISO Ant 2/Area Scan (21x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.05 W/kg


Rear/802.11 a mode ch.149 SISO Ant 2/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.15 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

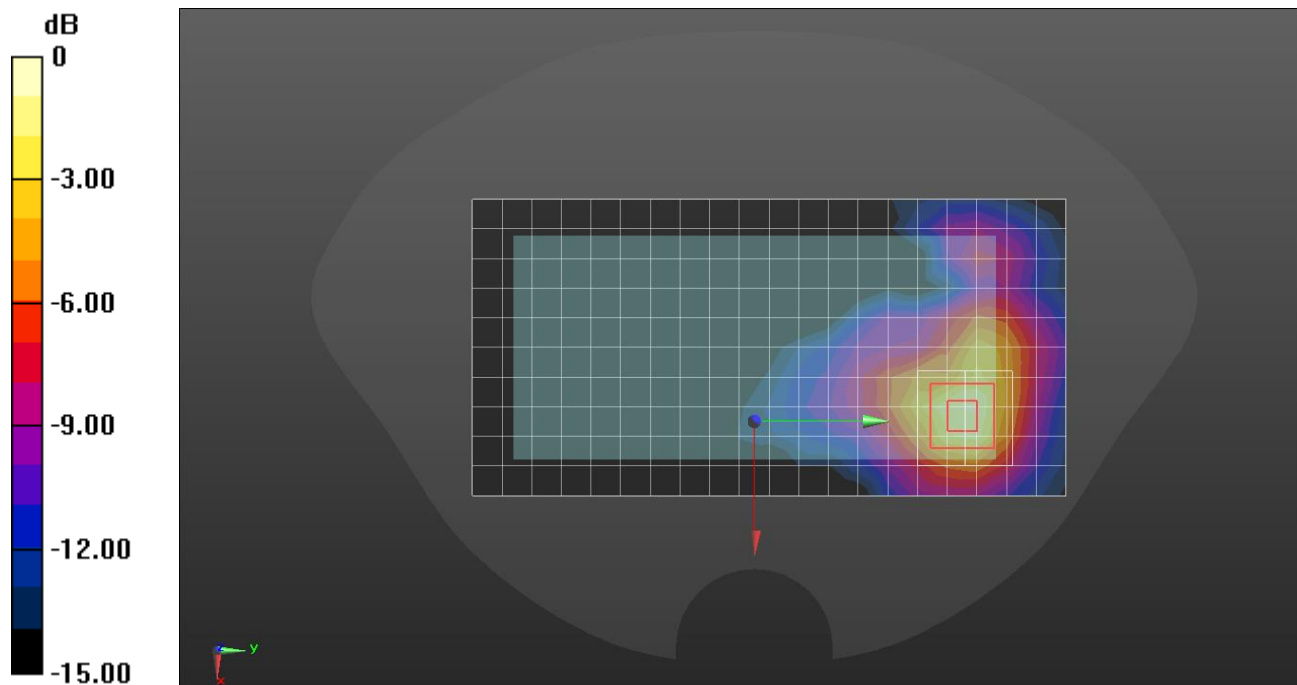

Wi-Fi 5.8 GHz

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 35.749$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1343; Calibrated: 2019-08-27
- Probe: EX3DV4 - SN3871; ConvF(4.95, 4.95, 4.95); Calibrated: 2019-08-29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1751

Rear/802.11 a mode ch.149 MIMO/Area Scan (21x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.14 W/kg


Rear/802.11 a mode ch.149 MIMO/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.99 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

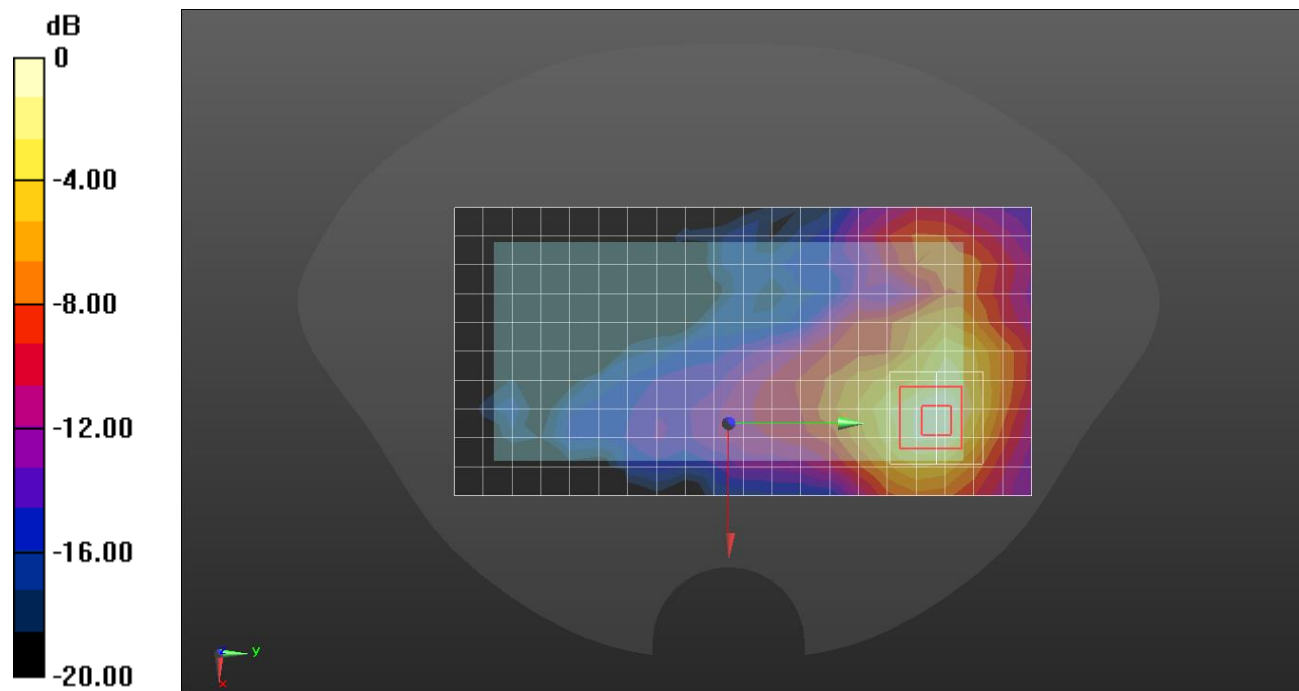

0 dB = 1.20 W/kg = 0.79 dBW/kg

Bluetooth

Frequency: 2441 MHz; Duty Cycle: 1:1.29033; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 39.072$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2441 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

RHS/Touch Bluetooth GFSK ch.39/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.141 W/kg


RHS/Touch Bluetooth GFSK ch.39/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.484 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.140 W/kg

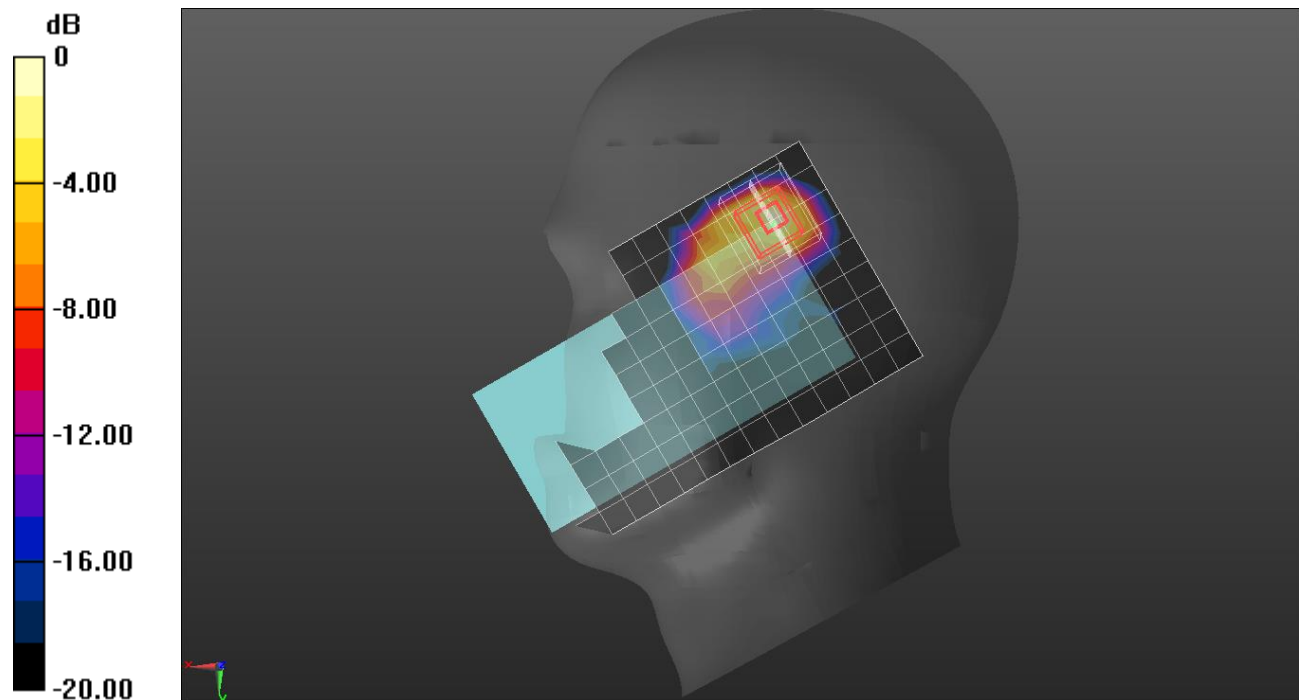

Bluetooth

Frequency: 2441 MHz; Duty Cycle: 1:1.29033; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 38.652$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2441 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Rear/Bluetooth GFSK ch.39/Area Scan (17x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.00813 W/kg


Rear/Bluetooth GFSK ch.39/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.425 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00727 W/kg; SAR(10 g) = 0.00292 W/kg

Maximum value of SAR (measured) = 0.0105 W/kg

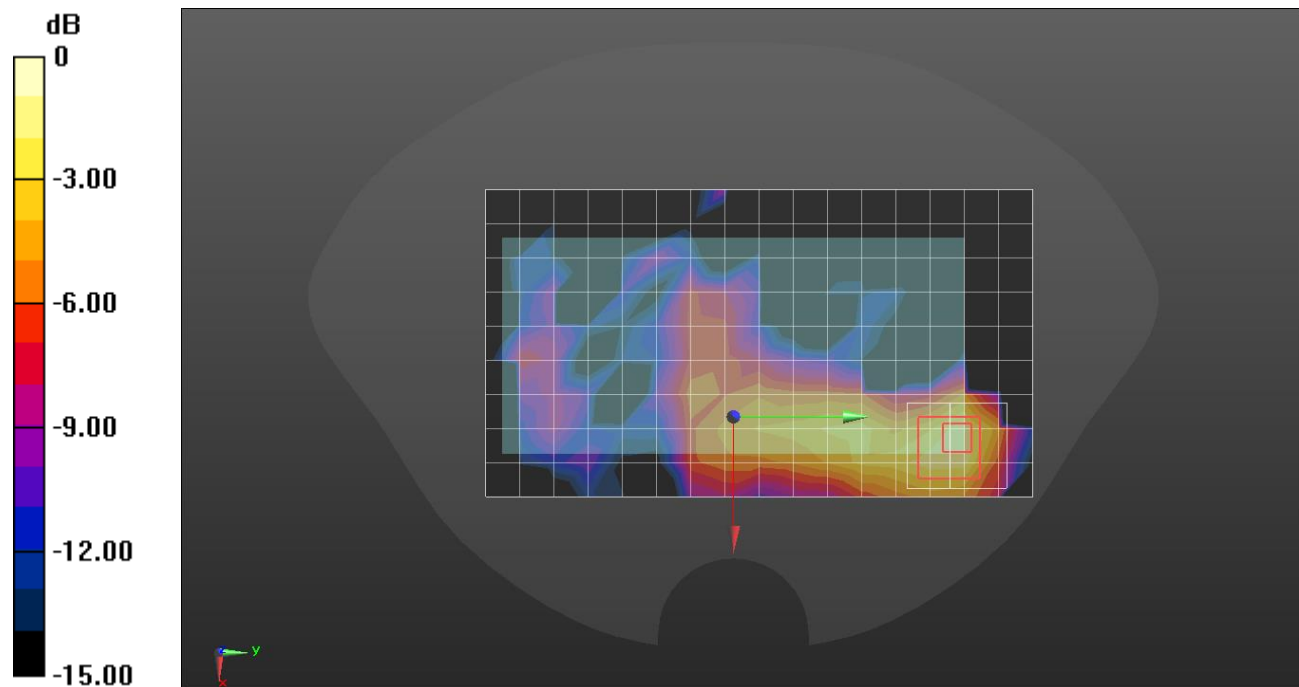

0 dB = 0.0105 W/kg = -19.79 dBW/kg

Bluetooth

Frequency: 2441 MHz; Duty Cycle: 1:1.29033; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 38.652$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2441 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 4/Bluetooth GFSK ch.39/Area Scan (17x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0241 W/kg


Edge 4/Bluetooth GFSK ch.39/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.038 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00943 W/kg

Maximum value of SAR (measured) = 0.0297 W/kg

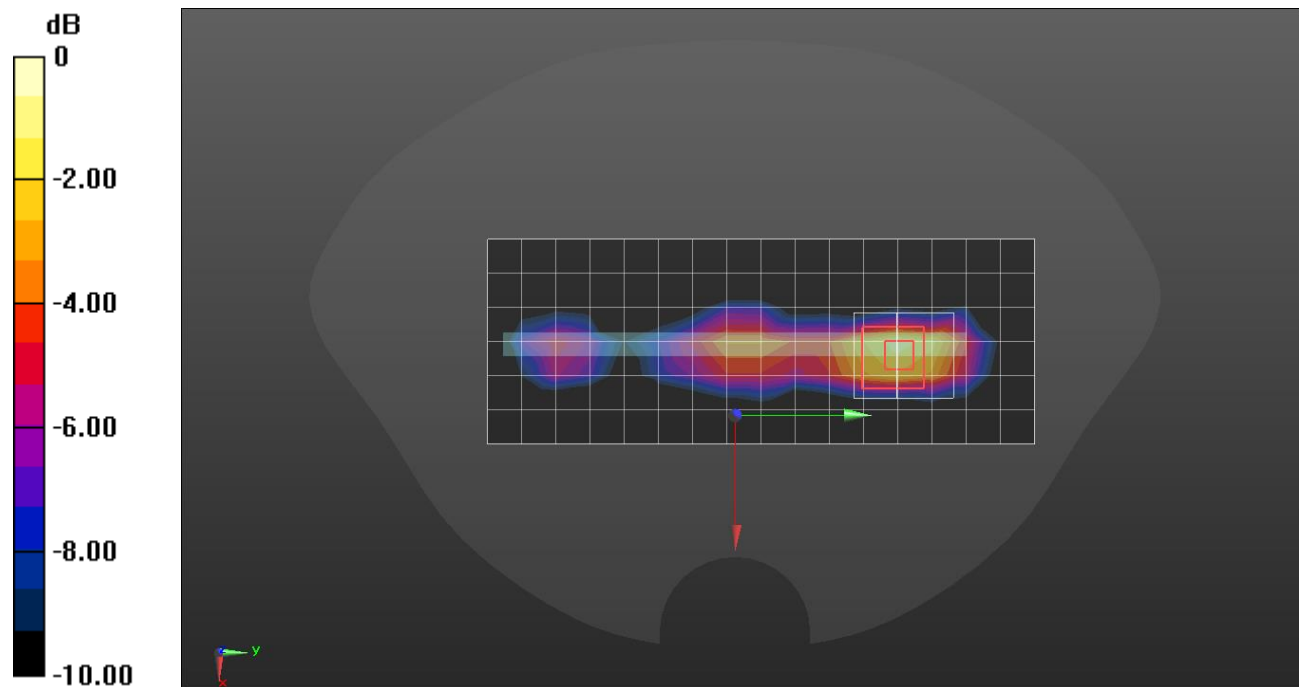

0 dB = 0.0297 W/kg = -15.27 dBW/kg

LTE Band 41

Frequency: 2506 MHz; Duty Cycle: 1:1.59956; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.575$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97) @ 2506 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

LHS/Touch QPSK RB PCC 1/99 SCC 1/0 ch.39750/Area Scan (10x17x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0532 W/kg

LHS/Touch QPSK RB PCC 1/99 SCC 1/0 ch.39750/Zoom Scan (7x7x7)/Cube 0: Measurement



grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.530 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0574 W/kg

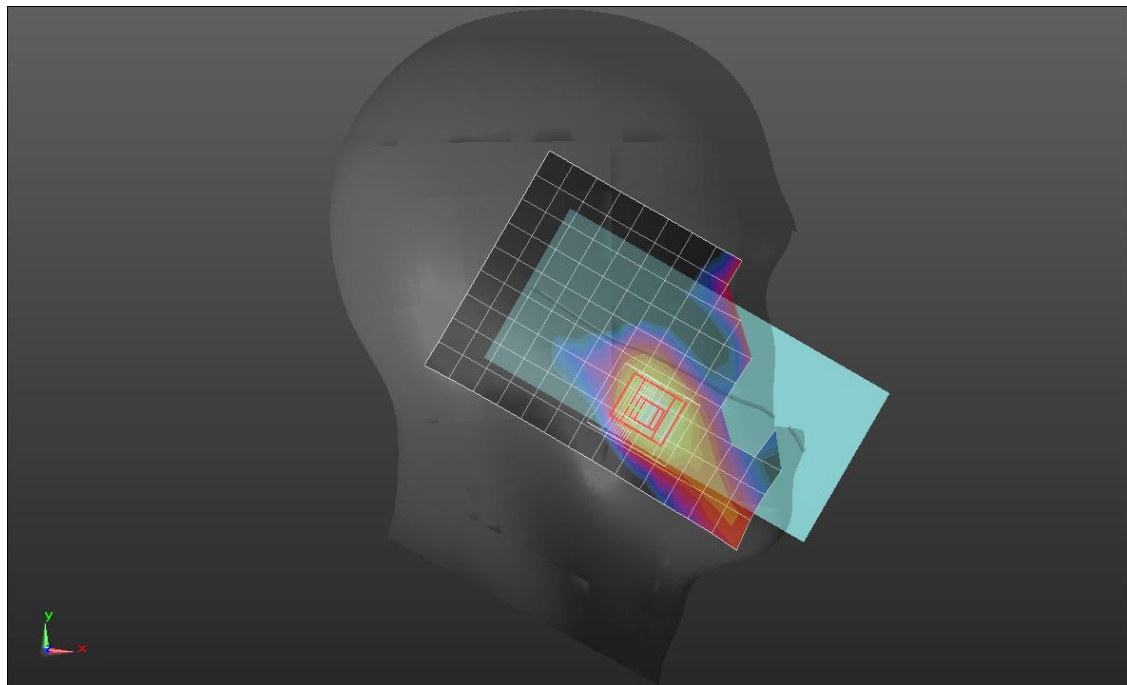

0 dB = 0.0574 W/kg = -12.41 dBW/kg

LTE Band 41

Frequency: 2506 MHz; Duty Cycle: 1:1.59956; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.575$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97) @ 2506 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Rear/QPSK RB PCC 1/99 SCC 1/0 ch.39750/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.310 W/kg


Rear/QPSK RB PCC 1/99 SCC 1/0 ch.39750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.32 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.337 W/kg

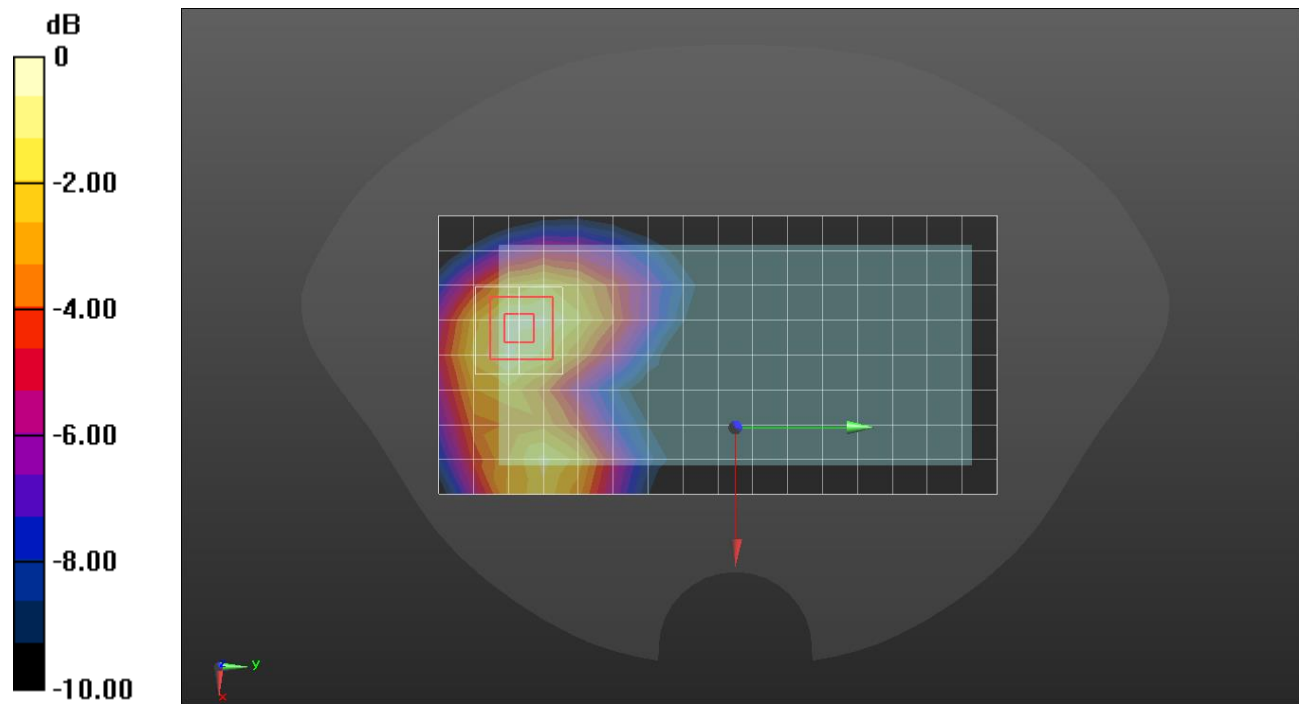

LTE Band 41

Frequency: 2506 MHz; Duty Cycle: 1:1.59956; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.575$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(6.97, 6.97, 6.97) @ 2506 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V8.0 (20deg probe tilt); Type: QD 000 P41 AA; Serial: 1989

Edge 3/QPSK RB PCC 1/99 SCC 1/0 ch.39750/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.560 W/kg

Edge 3/QPSK RB PCC 1/99 SCC 1/0 ch.39750/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.89 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.846 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.584 W/kg

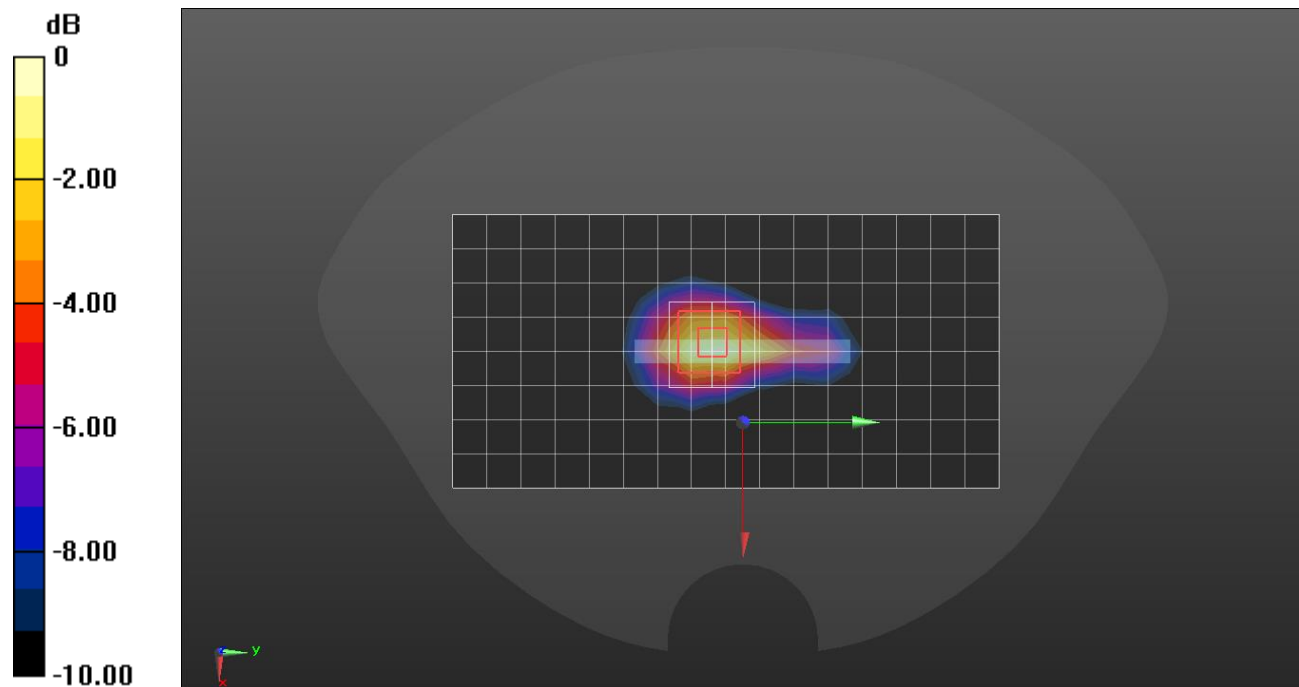

0 dB = 0.584 W/kg = -2.34 dBW/kg