

FCC Sub6 REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

August 27, 2020

Location:

HCT CO., LTD.,

Address:

129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2008-FC070

FCC ID: A3LSMG781U

APPLICANT: SAMSUNG Electronics Co., Ltd.

According to the Evaluation report, all of the data contained herein is reused from the reference
FCC ID : A3LSMG781V report.

Model(s): SM-G781U
Additional Model(s): SM-G781U1/DS, SM-G781W
EUT Type: Mobile Phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n71 (5)	665.5 - 695.5	4M49G7D	PI/2 BPSK	0.092	19.66
		4M51G7D	QPSK	0.088	19.44
		4M50W7D	16QAM	0.073	18.65
		4M49W7D	64QAM	0.055	17.37
		4M49W7D	256QAM	0.034	15.35
Sub6 n71 (10)	668.0 - 693.0	8M99G7D	PI/2 BPSK	0.084	19.23
		8M99G7D	QPSK	0.084	19.22
		8M99W7D	16QAM	0.072	18.55
		9M00W7D	64QAM	0.051	17.10
		8M99W7D	256QAM	0.032	15.08
Sub6 n71 (15)	670.5 - 690.5	13M5G7D	PI/2 BPSK	0.087	19.39
		13M5G7D	QPSK	0.086	19.34
		13M5W7D	16QAM	0.070	18.45
		13M5W7D	64QAM	0.052	17.12
		13M5W7D	256QAM	0.032	15.11
Sub6 n71 (20)	673.0 - 688.0	17M9G7D	PI/2 BPSK	0.094	19.71
		17M9G7D	QPSK	0.092	19.62
		18M0W7D	16QAM	0.076	18.82
		17M9W7D	64QAM	0.055	17.40
		17M9W7D	256QAM	0.035	15.42

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

Report No.: HCT-RF-2008-FC070

REVIEWED BY



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2008-FC070	August 27, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 OCCUPIED BANDWIDTH.	10
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	11
3.6 BAND EDGE	12
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
3.8 WORST CASE(RADIATED TEST)	14
3.9 WORST CASE(CONDUCTED TEST)	15
4. LIST OF TEST EQUIPMENT	16
5. MEASUREMENT UNCERTAINTY	18
6. SUMMARY OF TEST RESULTS	19
7. SAMPLE CALCULATION	20
8. TEST DATA	22
8.1 EFFECTIVE RADIATED POWER.....	22
8.2 RADIATED SPURIOUS EMISSIONS	26
8.3 OCCUPIED BANDWIDTH	30
8.4 CONDUCTED SPURIOUS EMISSIONS	31
8.5 BAND EDGE	31
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
9. TEST PLOTS.....	36
10. ANNEX A_ TEST SETUP PHOTO.....	101

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG781U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile Phone
Model(s):	SM-G781U
Additional Model(s):	SM-G781U1/DS, SM-G781W
SCS(kHz):	15
Bandwidth(MHz):	5, 10, 15, 20
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency:	665.5 MHz – 695.5 MHz (Sub6 n71(5 MHz)) 668.0 MHz – 693.0 MHz (Sub6 n71(10 MHz)) 670.5 MHz – 690.5 MHz (Sub6 n71(15 MHz)) 673.0 MHz – 688.0 MHz (Sub6 n71(20 MHz))
Date(s) of Tests:	July 06, 2020 ~ August 12, 2020

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, NFC, WPT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

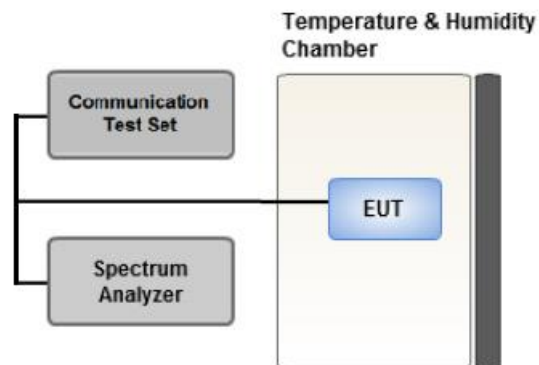

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

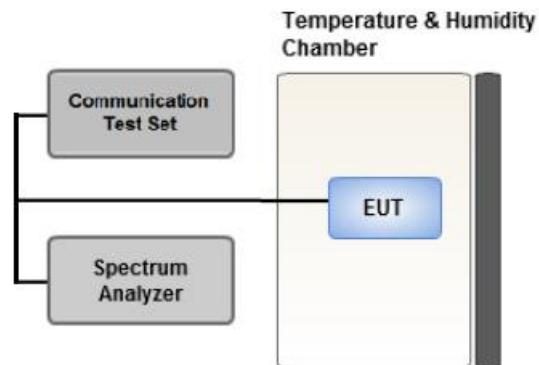

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.6 BAND EDGE

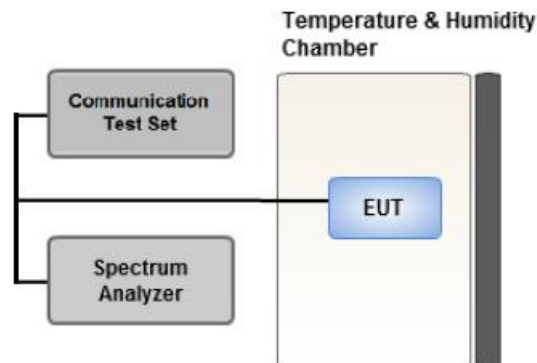

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

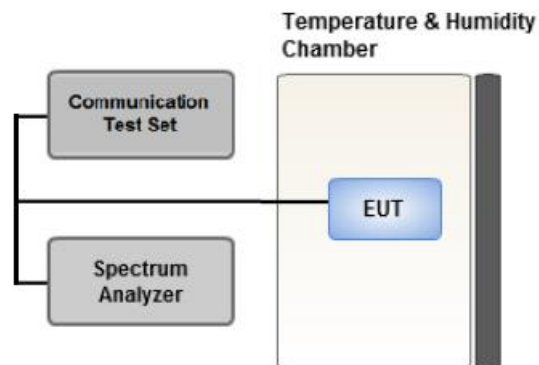

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.

- All modes of operation were investigated and the worst case configuration results are reported.

- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).

All EN-DC mode of operation were investigated and the worst case configuration results are reported.

(Worst case: 2A-n71A)

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

-SM-G781U & additional models were tested and the worst case results are reported.

(Worst case : SM-G781U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1	1	Y
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	1	1	Z

3.9 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.

(Worst case: PI/2 BPSK)

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

-SM-G781U & additional models were tested and the worst case results are reported.

(Worst case : SM-G781U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	5,10,15,20	Mid	Full RB	0
Band Edge	PI/2 BPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	51
		15	Low	1	0
			High	1	78
		20	Low	1	0
			High	1	105
		5,10,15,20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	5,10,15,20	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS/H.P.F	1	03/19/2020	Annual	03/19/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY4004427	09/27/2019	Annual	09/27/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93008124	03/18/2020	Annual	03/18/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/12/2019	Biennial	03/12/2021
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	E7515B / 5G Wireless Tester	MY58300756	01/07/2020	Annual	01/07/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
Mini-Circuits	ZC4PD-K1844+ / 4-Way Divider	942907	09/05/2019	Annual	09/05/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
665.5	Sub6 n71/ 5 MHz [15 kHz]	PI/2 BPSK	-29.13	29.82	-9.76	1.25	V	< 3.00	0.076	18.81
		QPSK	-29.32	29.63	-9.76	1.25	V		0.073	18.62
		16-QAM	-30.25	28.70	-9.76	1.25	V		0.059	17.69
		64-QAM	-31.61	27.34	-9.76	1.25	V		0.043	16.33
		256-QAM	-33.60	25.35	-9.76	1.25	V		0.027	14.34
680.5		PI/2 BPSK	-28.70	30.70	-9.78	1.26	V		0.092	19.66
		QPSK	-28.92	30.48	-9.78	1.26	V		0.088	19.44
		16-QAM	-29.71	29.69	-9.78	1.26	V		0.073	18.65
		64-QAM	-30.99	28.41	-9.78	1.26	V		0.055	17.37
		256-QAM	-33.01	26.39	-9.78	1.26	V		0.034	15.35
695.5		PI/2 BPSK	-29.79	29.43	-9.79	1.28	V		0.069	18.36
		QPSK	-30.03	29.19	-9.79	1.28	V		0.065	18.12
		16-QAM	-30.78	28.44	-9.79	1.28	V		0.055	17.37
		64-QAM	-32.14	27.08	-9.79	1.28	V		0.040	16.01
		256-QAM	-34.15	25.07	-9.79	1.28	V		0.025	14.00

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
668.0	Sub6 n71/ 10 MHz [15 kHz]	PI/2 BPSK	-29.53	29.54	-9.76	1.25	V	< 3.00	0.071	18.53
		QPSK	-29.56	29.51	-9.76	1.25	V		0.071	18.50
		16-QAM	-30.63	28.44	-9.76	1.25	V		0.055	17.43
		64-QAM	-31.72	27.35	-9.76	1.25	V		0.043	16.34
		256-QAM	-33.71	25.36	-9.76	1.25	V		0.027	14.35
680.5		PI/2 BPSK	-29.13	30.27	-9.78	1.26	V		0.084	19.23
		QPSK	-29.14	30.26	-9.78	1.26	V		0.084	19.22
		16-QAM	-29.81	29.59	-9.78	1.26	V		0.072	18.55
		64-QAM	-31.26	28.14	-9.78	1.26	V		0.051	17.10
		256-QAM	-33.28	26.12	-9.78	1.26	V		0.032	15.08
693.0		PI/2 BPSK	-29.76	29.41	-9.79	1.27	V		0.068	18.35
		QPSK	-29.79	29.38	-9.79	1.27	V		0.068	18.32
		16-QAM	-30.38	28.79	-9.79	1.27	V		0.059	17.73
		64-QAM	-31.95	27.22	-9.79	1.27	V		0.041	16.16
		256-QAM	-33.95	25.22	-9.79	1.27	V		0.026	14.16

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
670.5	Sub6 n71/ 15 MHz [15 kHz]	PI/2 BPSK	-28.81	30.38	-9.77	1.25	V	< 3.00	0.086	19.36
		QPSK	-28.83	30.36	-9.77	1.25	V		0.086	19.34
		16-QAM	-29.86	29.33	-9.77	1.25	V		0.068	18.31
		64-QAM	-31.20	27.99	-9.77	1.25	V		0.050	16.97
		256-QAM	-33.22	25.97	-9.77	1.25	V		0.031	14.95
680.5		PI/2 BPSK	-28.97	30.43	-9.78	1.26	V		0.087	19.39
		QPSK	-29.13	30.27	-9.78	1.26	V		0.084	19.23
		16-QAM	-29.91	29.49	-9.78	1.26	V		0.070	18.45
		64-QAM	-31.24	28.16	-9.78	1.26	V		0.052	17.12
		256-QAM	-33.25	26.15	-9.78	1.26	V		0.032	15.11
690.5		PI/2 BPSK	-28.99	30.25	-9.79	1.27	V		0.083	19.19
		QPSK	-29.16	30.08	-9.79	1.27	V		0.080	19.02
		16-QAM	-29.99	29.25	-9.79	1.27	V		0.066	18.19
		64-QAM	-31.30	27.94	-9.79	1.27	V		0.049	16.88
		256-QAM	-33.31	25.93	-9.79	1.27	V		0.031	14.87

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
673.0	Sub6 n71/ 20 MHz [15 kHz]	PI/2 BPSK	-28.83	30.41	-9.77	1.25	V	< 3.00	0.087	19.39
		QPSK	-28.91	30.33	-9.77	1.25	V		0.085	19.31
		16-QAM	-29.74	29.50	-9.77	1.25	V		0.070	18.48
		64-QAM	-31.29	27.95	-9.77	1.25	V		0.049	16.93
		256-QAM	-33.27	25.97	-9.77	1.25	V		0.031	14.95
680.5		PI/2 BPSK	-28.65	30.75	-9.78	1.26	V		0.094	19.71
		QPSK	-28.74	30.66	-9.78	1.26	V		0.092	19.62
		16-QAM	-29.54	29.86	-9.78	1.26	V		0.076	18.82
		64-QAM	-30.96	28.44	-9.78	1.26	V		0.055	17.40
		256-QAM	-32.94	26.46	-9.78	1.26	V		0.035	15.42
688.0		PI/2 BPSK	-28.81	30.49	-9.78	1.27	V		0.088	19.44
		QPSK	-28.84	30.46	-9.78	1.27	V		0.087	19.41
		16-QAM	-29.83	29.47	-9.78	1.27	V		0.070	18.42
		64-QAM	-31.15	28.15	-9.78	1.27	V		0.051	17.10
		256-QAM	-33.16	26.14	-9.78	1.27	V		0.032	15.09

8.2 RADIATED SPURIOUS EMISSIONS

- NR Band: N71
- LTE Band(Anchor): B2
- Bandwidth: 5 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
133100 (665.5)	1,331.00	-53.05	6.95	-61.06	1.79	H	-55.90	-13.00
	1,996.50	-50.76	10.39	-57.59	2.21	V	-49.41	-13.00
	2,662.00	-56.20	11.10	-58.48	2.59	H	-49.97	-13.00
136100 (680.5)	1,361.00	-53.03	7.23	-60.88	1.81	H	-55.46	-13.00
	2,041.50	-51.03	10.25	-56.55	2.23	V	-48.53	-13.00
	2,722.00	-56.39	11.05	-58.86	2.61	H	-50.42	-13.00
139100 (695.5)	1,391.00	-53.30	7.48	-62.13	1.84	H	-56.49	-13.00
	2,086.50	-50.85	9.95	-55.13	2.26	V	-47.44	-13.00
	2,782.00	-56.28	10.95	-57.87	2.62	H	-49.54	-13.00

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18650 (1855.0)	3,710.00	-52.47	12.43	-56.70	3.08	H	-47.35	-13.00
	5,565.00	-54.66	13.18	-52.76	3.83	H	-43.41	-13.00
	7,420.00	-58.14	11.15	-47.60	4.43	V	-40.88	-13.00

- NR Band: N71
- LTE Band(Anchor): B2
- Bandwidth: 10 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
133600 (668.0)	1,336.00	-53.06	6.99	-60.70	1.80	H	-55.51	-13.00
	2,004.00	-50.98	10.38	-57.55	2.22	V	-49.39	-13.00
	2,672.00	-56.23	11.10	-58.72	2.57	H	-50.19	-13.00
136100 (680.5)	1,361.00	-53.07	7.23	-60.92	1.81	H	-55.50	-13.00
	2,041.50	-51.13	10.25	-56.65	2.23	V	-48.63	-13.00
	2,722.00	-56.58	11.05	-59.05	2.61	H	-50.61	-13.00
138600 (693.0)	1,386.00	-53.19	7.42	-61.73	1.83	H	-56.14	-13.00
	2,079.00	-51.21	10.00	-55.78	2.26	V	-48.04	-13.00
	2,772.00	-56.42	10.95	-58.19	2.64	H	-49.88	-13.00

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18650 (1855.0)	3,710.00	-52.49	12.43	-56.72	3.08	H	-47.37	-13.00
	5,565.00	-54.56	13.18	-52.66	3.83	H	-43.31	-13.00
	7,420.00	-58.32	11.15	-47.78	4.43	H	-41.06	-13.00

- NR Band: N71
- LTE Band(Anchor): B2
- Bandwidth: 15 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
134100 (670.5)	1,341.00	-53.21	7.03	-60.50	1.80	H	-55.27	-13.00
	2,011.50	-51.02	10.35	-57.46	2.22	V	-49.33	-13.00
	2,682.00	-56.59	11.10	-58.60	2.57	H	-50.07	-13.00
136100 (680.5)	1,361.00	-53.02	7.23	-60.87	1.81	H	-55.45	-13.00
	2,041.50	-51.19	10.25	-56.71	2.23	V	-48.69	-13.00
	2,722.00	-56.21	11.05	-58.68	2.61	H	-50.24	-13.00
138100 (690.5)	1,381.00	-53.41	7.35	-61.66	1.82	V	-56.13	-13.00
	2,071.50	-50.80	10.00	-55.25	2.26	H	-47.51	-13.00
	2,762.00	-56.24	10.98	-58.22	2.66	H	-49.90	-13.00

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18650 (1855.0)	3,710.00	-52.28	12.43	-56.51	3.08	H	-47.16	-13.00
	5,565.00	-53.89	13.18	-51.99	3.83	H	-42.64	-13.00
	7,420.00	-58.17	11.15	-47.63	4.43	H	-40.91	-13.00

- NR Band: N71
- LTE Band(Anchor): B2
- Bandwidth: 20 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
134600 (673.0)	1,346.00	-53.15	7.07	-61.02	1.80	H	-55.75	-13.00
	2,019.00	-50.96	10.30	-56.86	2.23	V	-48.79	-13.00
	2,692.00	-56.52	11.10	-58.86	2.59	H	-50.35	-13.00
136100 (680.5)	1,361.00	-52.96	7.23	-60.81	1.81	H	-55.39	-13.00
	2,041.50	-50.73	10.25	-56.25	2.23	V	-48.23	-13.00
	2,722.00	-56.09	11.05	-58.56	2.61	V	-50.12	-13.00
137600 (688.0)	1,376.00	-53.41	7.35	-61.89	1.82	H	-56.36	-13.00
	2,064.00	-50.79	10.05	-55.61	2.25	V	-47.81	-13.00
	2,752.00	-56.57	11.00	-58.96	2.65	H	-50.61	-13.00

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18650 (1855.0)	3,710.00	-52.50	12.43	-56.73	3.08	H	-47.38	-13.00
	5,565.00	-53.96	13.18	-52.06	3.83	H	-42.71	-13.00
	7,420.00	-58.32	11.15	-47.78	4.43	H	-41.06	-13.00

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n71	5 MHz	680.5	BPSK	25	0	4.4877
			QPSK			4.5059
			16-QAM			4.4993
			64-QAM			4.4891
			256-QAM			4.4875
	10 MHz		BPSK	50		8.9857
			QPSK			8.9898
			16-QAM			8.9874
			64-QAM			8.9972
			256-QAM			8.9853
	15 MHz		BPSK	75		13.484
			QPSK			13.476
			16-QAM			13.520
			64-QAM			13.479
			256-QAM			13.515
	20 MHz		BPSK	100		17.886
			QPSK			17.897
			16-QAM			17.946
			64-QAM			17.880
			256-QAM			17.920

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 37 ~ 56.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n71	5	665.5	3.6965	30.278	-67.181	-36.903	-13.00
		680.5	3.7024	30.278	-67.379	-37.101	
		695.5	3.7000	30.278	-67.021	-36.743	
	10	668.0	3.7139	30.278	-67.297	-37.019	
		680.5	3.7114	30.278	-67.346	-37.068	
		693.0	3.6875	30.278	-67.477	-37.199	
	15	670.5	3.6825	30.278	-67.259	-36.981	
		680.5	3.6945	30.278	-67.345	-37.067	
		690.5	3.6965	30.278	-67.361	-37.083	
	20	673.0	3.7139	30.278	-67.375	-37.097	
		680.5	3.6930	30.278	-67.064	-36.786	
		688.0	3.7129	30.278	-67.296	-37.018	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 89 ~ 100.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	28.691
1 – 5	30.278
5 – 10	31.391
10 – 15	31.716
15 – 20	32.553
Above 20(26.5)	33.984

8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 57 ~ 88.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100%): 3.850 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
665.5	100%	+20(Ref)	665 500 005	0.0	0.000 000	0.000
	100%	-30	665 500 012	6.8	0.000 001	0.010
	100%	-20	665 500 013	8.0	0.000 001	0.012
	100%	-10	665 500 017	12.0	0.000 002	0.018
	100%	0	665 500 019	14.0	0.000 002	0.021
	100%	+10	665 500 019	13.9	0.000 002	0.021
	100%	+30	665 500 013	8.0	0.000 001	0.012
	100%	+40	665 500 017	11.9	0.000 002	0.018
	100%	+50	665 500 009	4.0	0.000 001	0.006
	Batt. Endpoint	+20	665 500 012	6.8	0.000 001	0.010
695.5	100%	+20(Ref)	695 500 015	0.0	0.000 000	0.000
	100%	-30	695 500 025	10.4	0.000 001	0.015
	100%	-20	695 500 025	10.7	0.000 002	0.015
	100%	-10	695 500 019	4.9	0.000 001	0.007
	100%	0	695 500 029	14.4	0.000 002	0.021
	100%	+10	695 500 019	4.6	0.000 001	0.007
	100%	+30	695 500 018	3.5	0.000 001	0.005
	100%	+40	695 500 028	13.4	0.000 002	0.019
	100%	+50	695 500 028	13.4	0.000 002	0.019
	Batt. Endpoint	+20	695 500 023	8.9	0.000 001	0.013

- ☐ BandWidth: 10 MHz
☐ Voltage(100%): 3.850 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
668.0	100%	+20(Ref)	668 000 007	0.0	0.000 000	0.000
	100%	-30	668 000 016	9.6	0.000 001	0.014
	100%	-20	668 000 022	15.0	0.000 002	0.022
	100%	-10	668 000 014	7.8	0.000 001	0.012
	100%	0	668 000 022	15.0	0.000 002	0.022
	100%	+10	668 000 017	10.6	0.000 002	0.016
	100%	+30	668 000 021	14.9	0.000 002	0.022
	100%	+40	668 000 018	11.4	0.000 002	0.017
	100%	+50	668 000 016	9.9	0.000 001	0.015
	Batt. Endpoint	+20	668 000 020	13.4	0.000 002	0.020
693.0	100%	+20(Ref)	693 000 005	0.0	0.000 000	0.000
	100%	-30	693 000 016	10.7	0.000 002	0.015
	100%	-20	693 000 018	12.4	0.000 002	0.018
	100%	-10	693 000 009	3.5	0.000 001	0.005
	100%	0	693 000 011	5.7	0.000 001	0.008
	100%	+10	693 000 010	5.0	0.000 001	0.007
	100%	+30	693 000 019	13.9	0.000 002	0.020
	100%	+40	693 000 015	9.5	0.000 001	0.014
	100%	+50	693 000 008	3.1	0.000 000	0.005
	Batt. Endpoint	+20	693 000 018	13.1	0.000 002	0.019

- ☐ BandWidth: 15 MHz
☐ Voltage(100%): 3.850 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
670.5	100%	+20(Ref)	670 500 011	0.0	0.000 000	0.000
	100%	-30	670 500 024	12.5	0.000 002	0.019
	100%	-20	670 500 017	6.0	0.000 001	0.009
	100%	-10	670 500 020	9.4	0.000 001	0.014
	100%	0	670 500 016	5.4	0.000 001	0.008
	100%	+10	670 500 023	11.7	0.000 002	0.017
	100%	+30	670 500 017	5.9	0.000 001	0.009
	100%	+40	670 500 016	4.8	0.000 001	0.007
	100%	+50	670 500 024	13.0	0.000 002	0.019
	Batt. Endpoint	+20	670 500 024	13.1	0.000 002	0.020
690.5	100%	+20(Ref)	690 500 005	0.0	0.000 000	0.000
	100%	-30	690 500 014	9.1	0.000 001	0.013
	100%	-20	690 500 013	7.6	0.000 001	0.011
	100%	-10	690 500 015	9.8	0.000 001	0.014
	100%	0	690 500 016	11.3	0.000 002	0.016
	100%	+10	690 500 015	10.2	0.000 001	0.015
	100%	+30	690 500 015	9.6	0.000 001	0.014
	100%	+40	690 500 012	7.2	0.000 001	0.010
	100%	+50	690 500 010	5.5	0.000 001	0.008
	Batt. Endpoint	+20	690 500 017	12.1	0.000 002	0.018

- ☐ BandWidth: 20 MHz
☐ Voltage(100%): 3.850 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
673.0	100%	+20(Ref)	673 000 011	0.0	0.000 000	0.000
	100%	-30	673 000 024	13.8	0.000 002	0.020
	100%	-20	673 000 018	7.5	0.000 001	0.011
	100%	-10	673 000 025	14.7	0.000 002	0.022
	100%	0	673 000 020	9.7	0.000 001	0.014
	100%	+10	673 000 016	5.9	0.000 001	0.009
	100%	+30	673 000 017	6.7	0.000 001	0.010
	100%	+40	673 000 022	11.7	0.000 002	0.017
	100%	+50	673 000 022	11.5	0.000 002	0.017
	Batt. Endpoint	+20	673 000 018	7.4	0.000 001	0.011
688.0	100%	+20(Ref)	688 000 014	0.0	0.000 000	0.000
	100%	-30	688 000 020	5.1	0.000 001	0.007
	100%	-20	688 000 026	11.5	0.000 002	0.017
	100%	-10	688 000 027	12.1	0.000 002	0.018
	100%	0	688 000 022	7.1	0.000 001	0.010
	100%	+10	688 000 023	9.0	0.000 001	0.013
	100%	+30	688 000 026	11.2	0.000 002	0.016
	100%	+40	688 000 019	4.3	0.000 001	0.006
	100%	+50	688 000 021	6.3	0.000 001	0.009
	Batt. Endpoint	+20	688 000 022	7.2	0.000 001	0.010

9. TEST PLOTS


Sub6 n71. Occupied Bandwidth Plot (5M BW Ch.136100 BPSK_RB6_0)

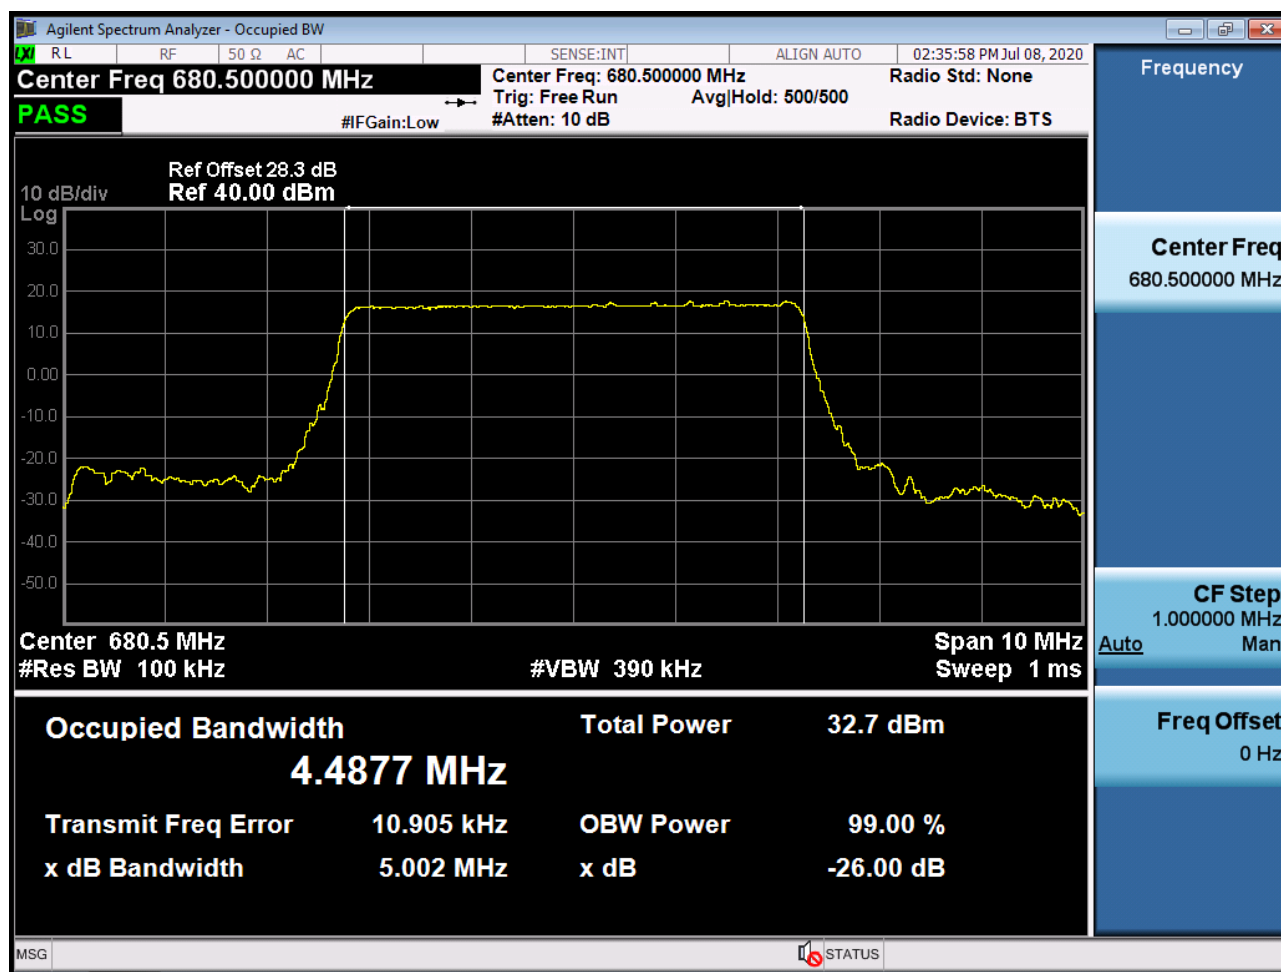


Sub6 n71. Occupied Bandwidth Plot (5M BW Ch.136100 QPSK_RB6_0)

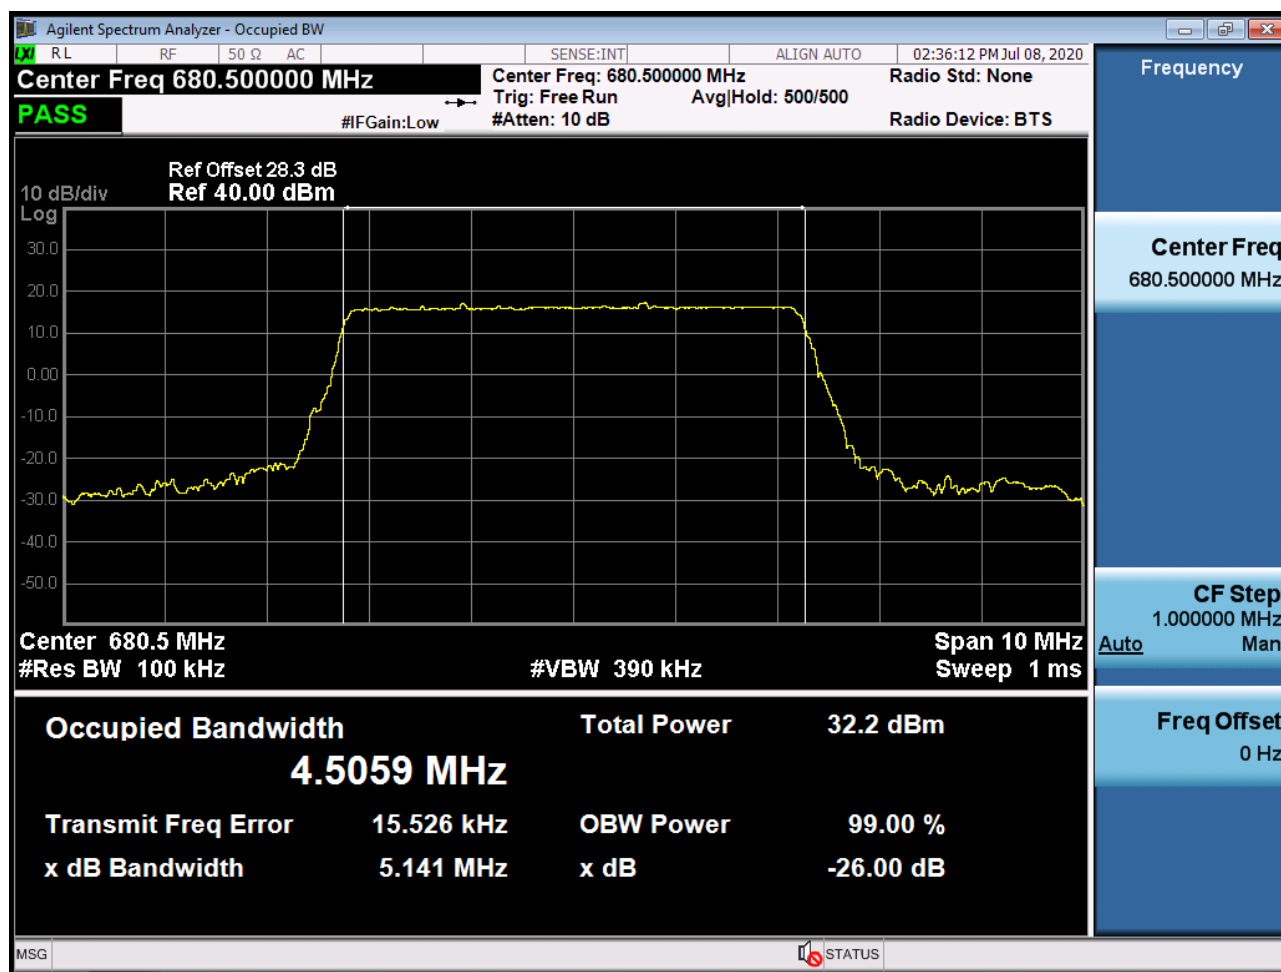


Sub6 n71. Occupied Bandwidth Plot (5M BW Ch.136100 16QAM_RB6_0)

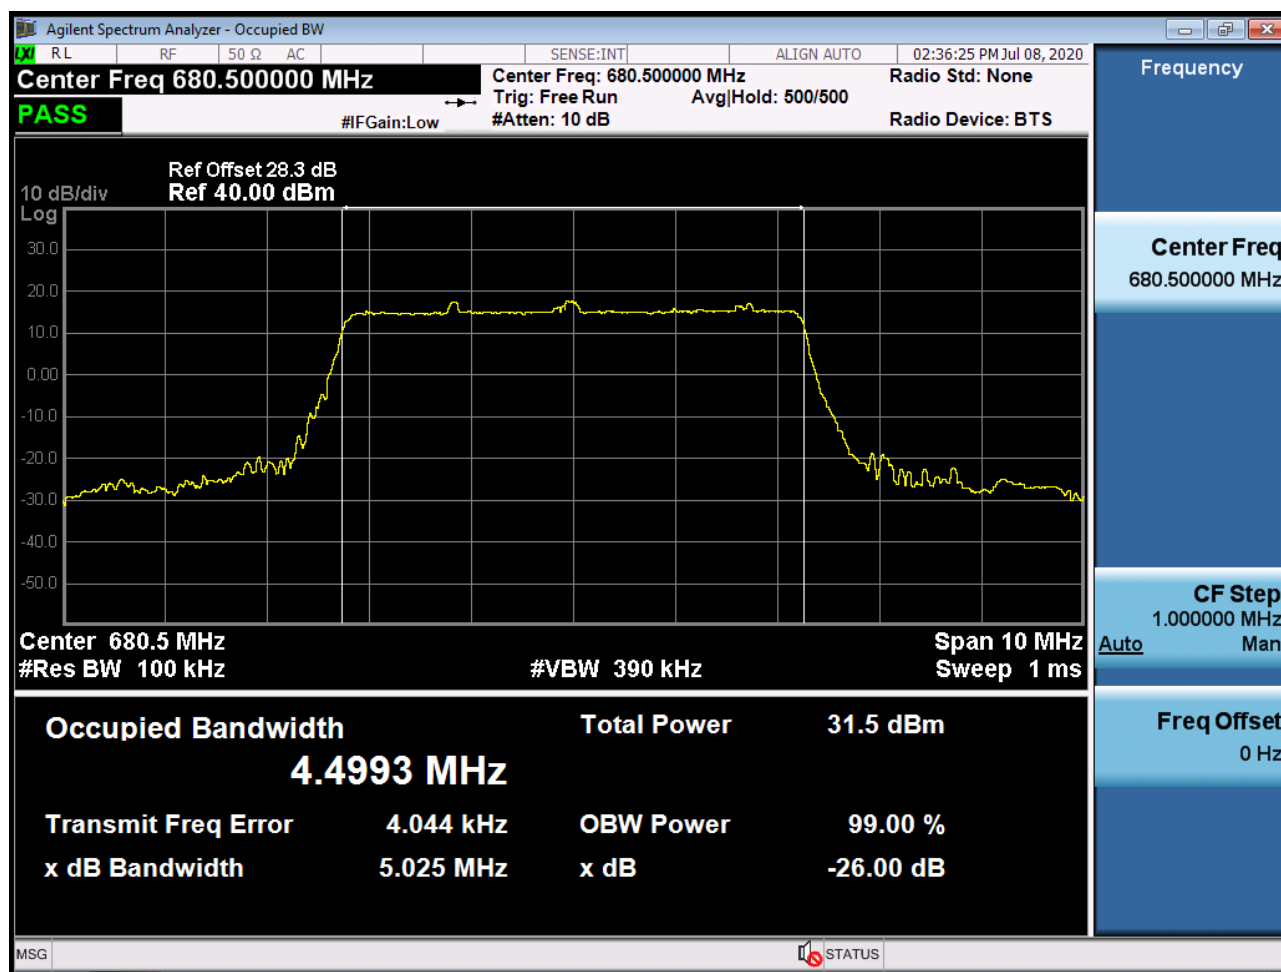


Sub6 n71. Occupied Bandwidth Plot (5M BW Ch.136100 64QAM_RB6_0)

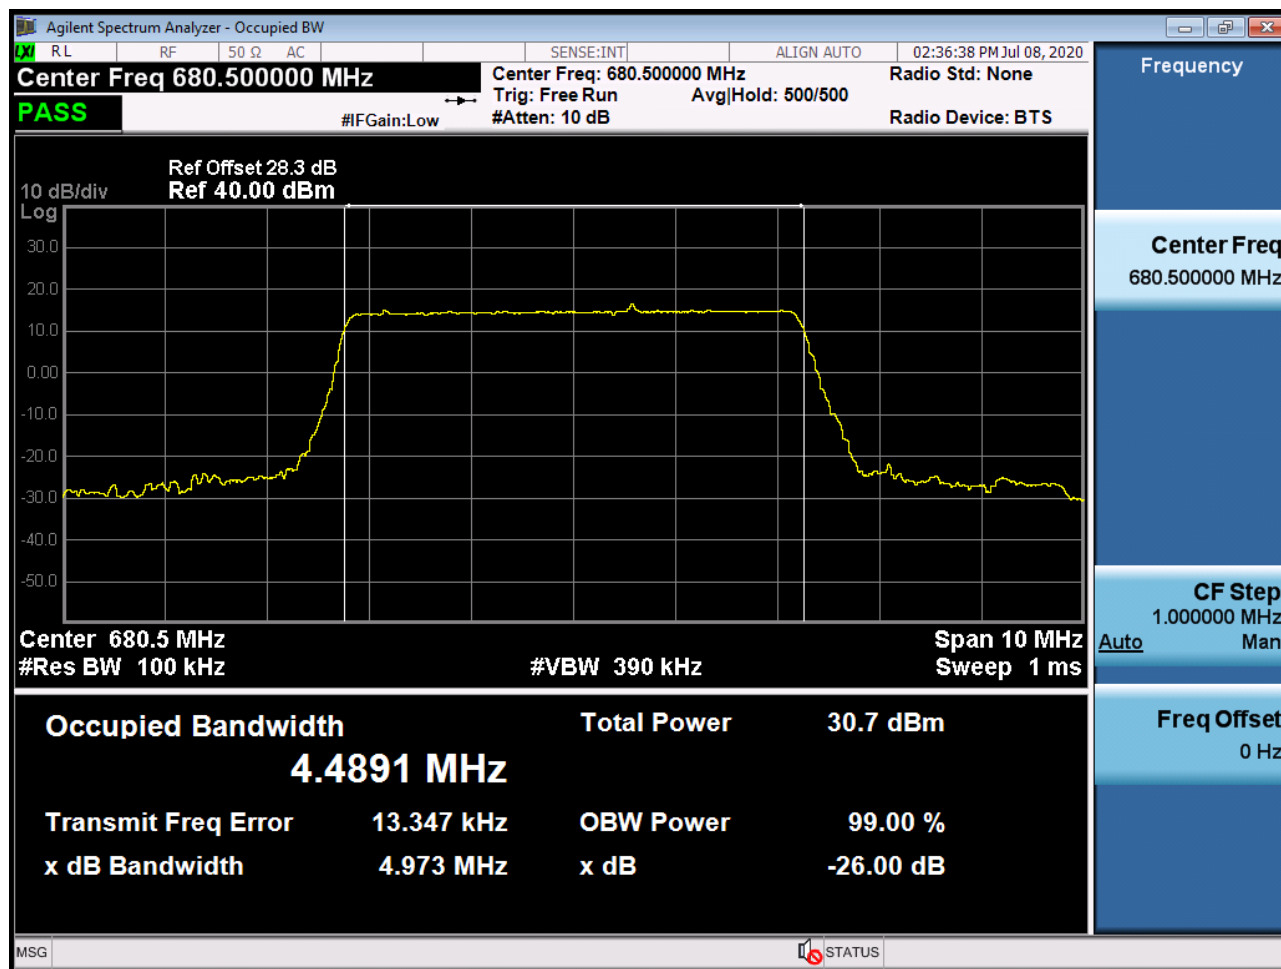


Sub6 n71. Occupied Bandwidth Plot (5M BW Ch.136100 256QAM_RB6_0)

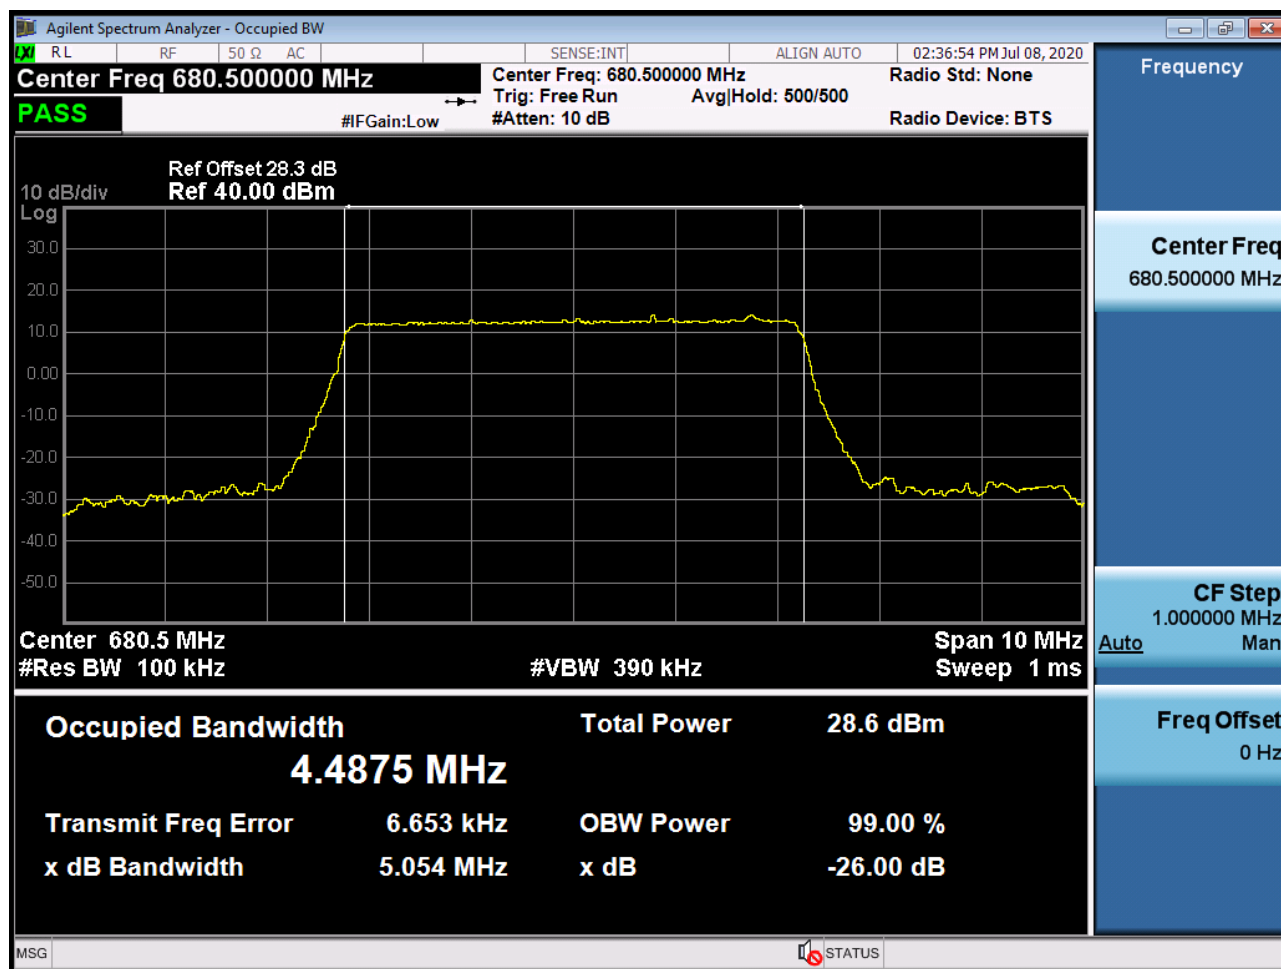


Sub6 n71. Occupied Bandwidth Plot (10M BW Ch.136100 BPSK_RB15_0)

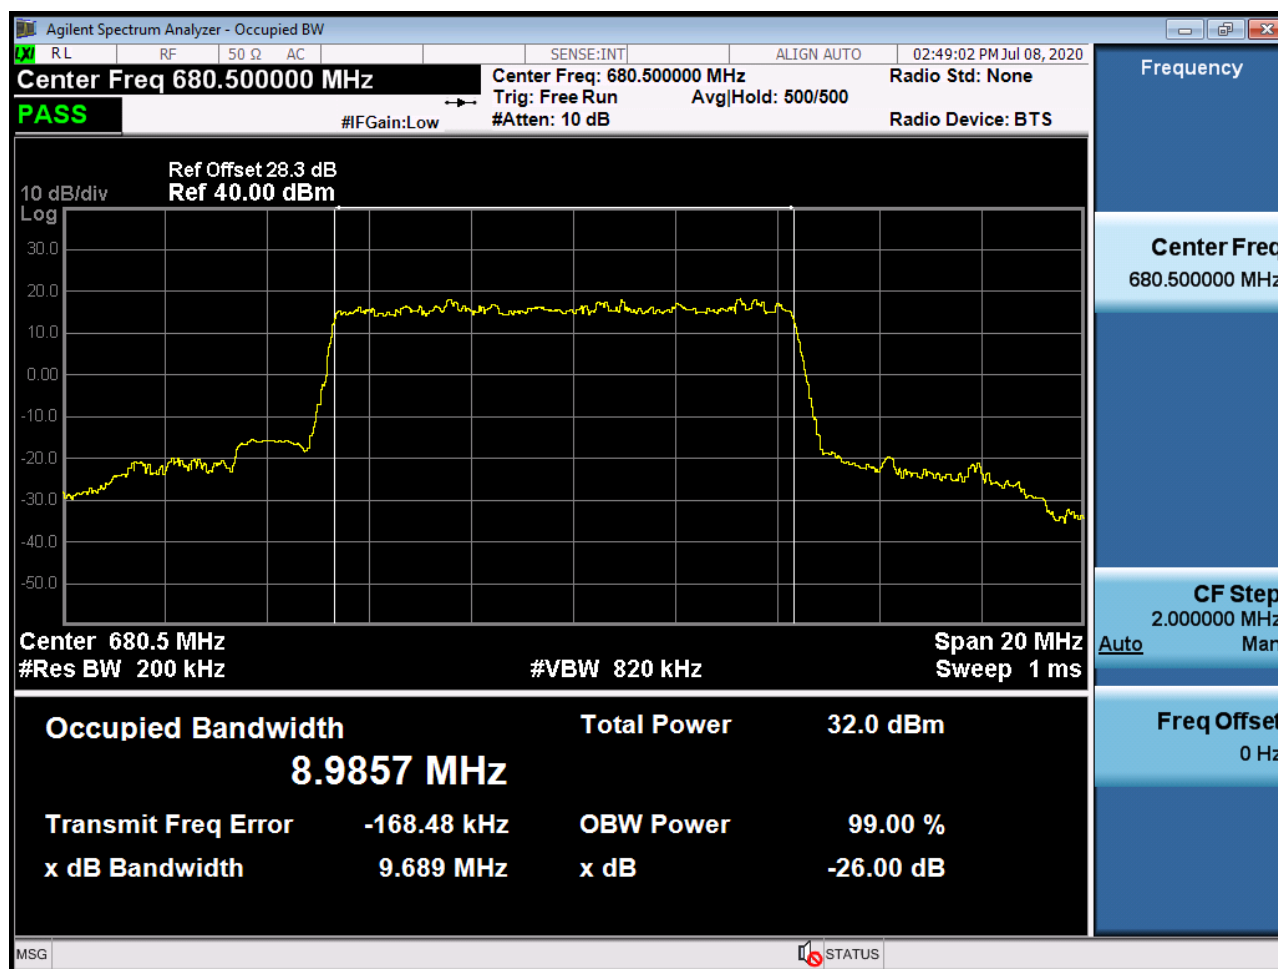


Sub6 n71. Occupied Bandwidth Plot (10M BW Ch.136100 QPSK_RB15_0)

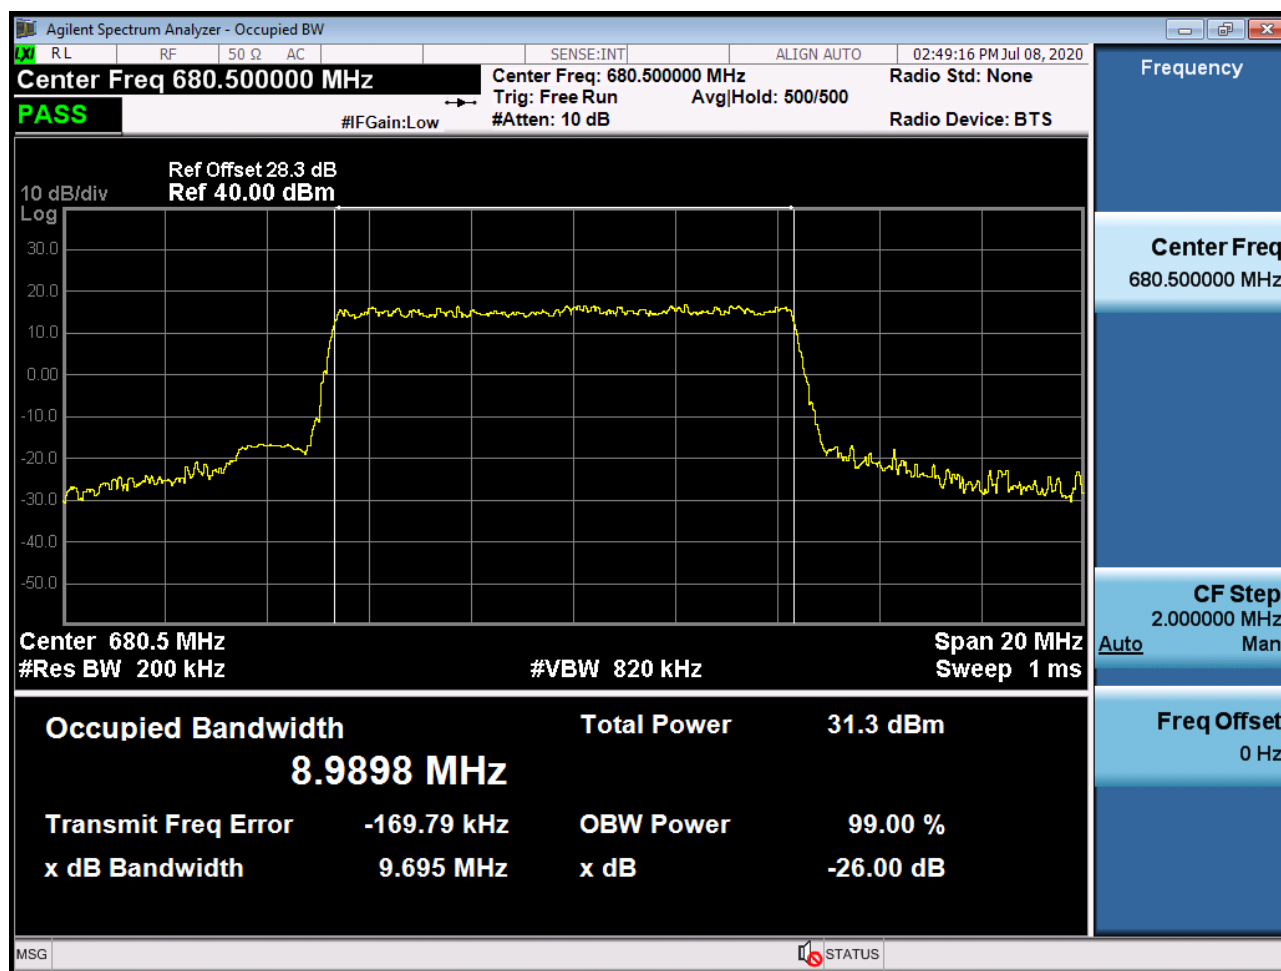


Sub6 n71. Occupied Bandwidth Plot (10M BW Ch.136100 16QAM_RB15_0)

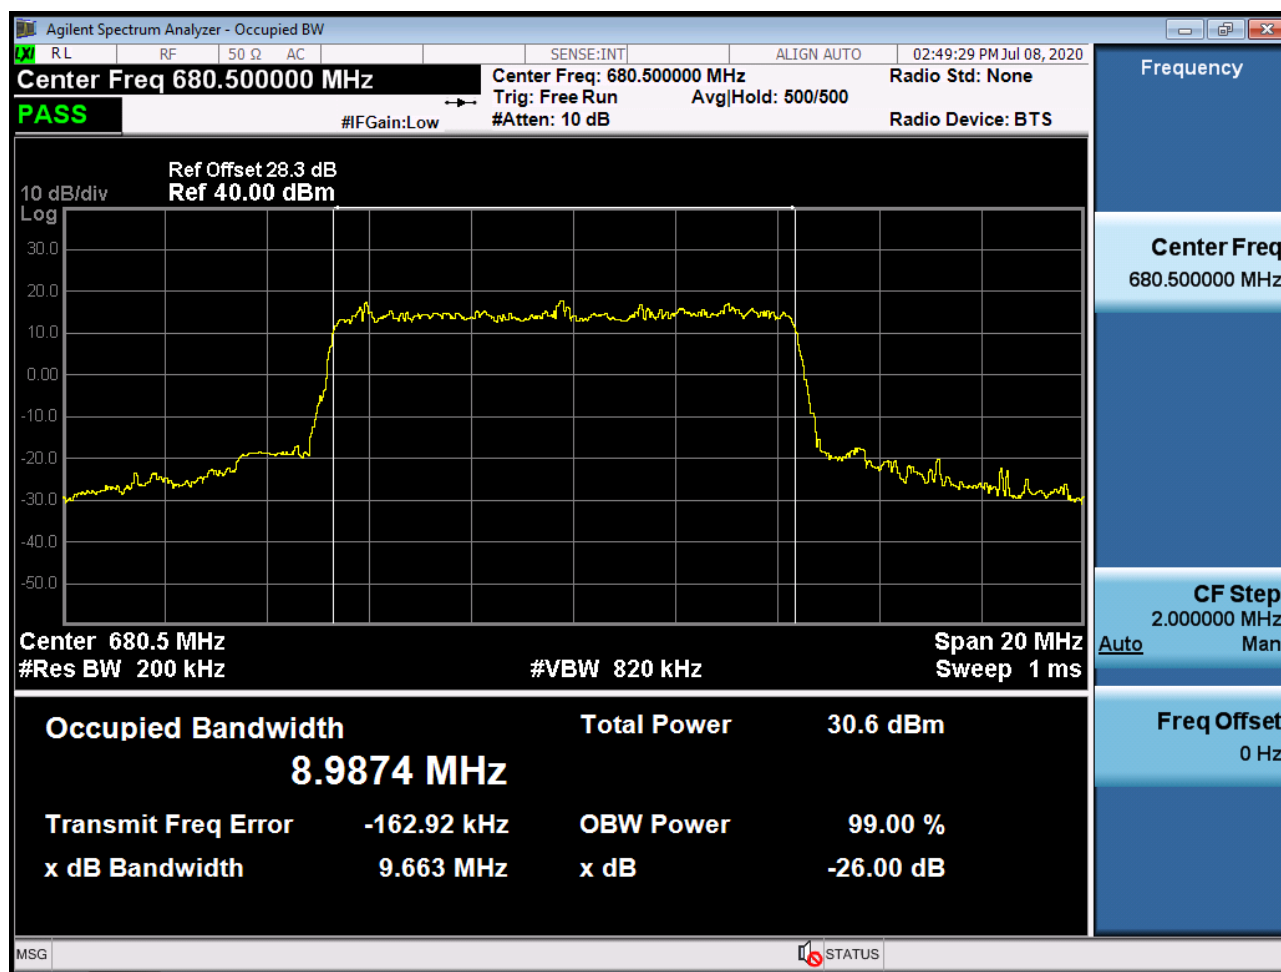


Sub6 n71. Occupied Bandwidth Plot (10M BW Ch.136100 64QAM_RB15_0)

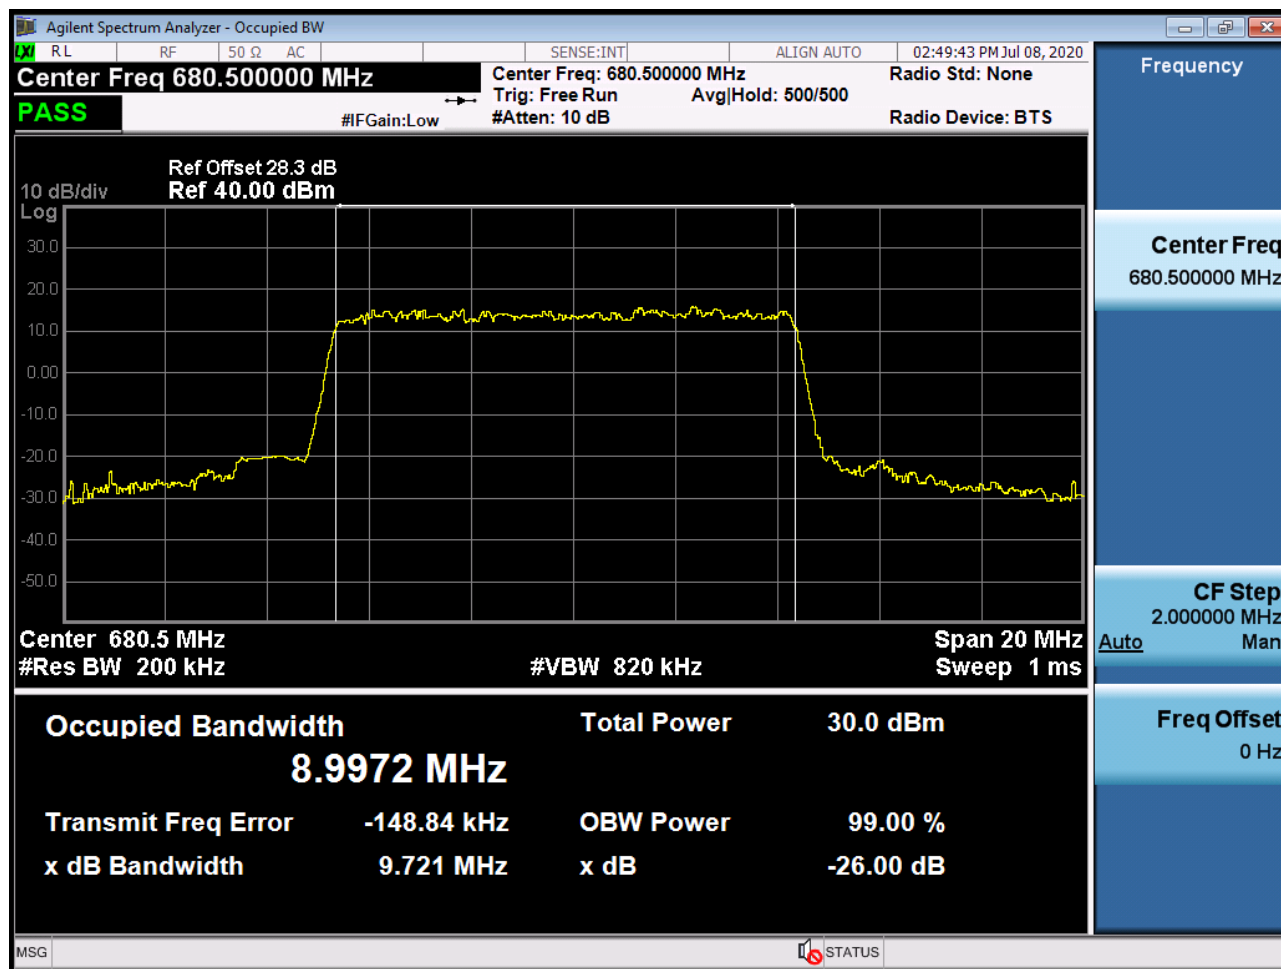


Sub6 n71. Occupied Bandwidth Plot (10M BW Ch.136100 256QAM_RB15_0)

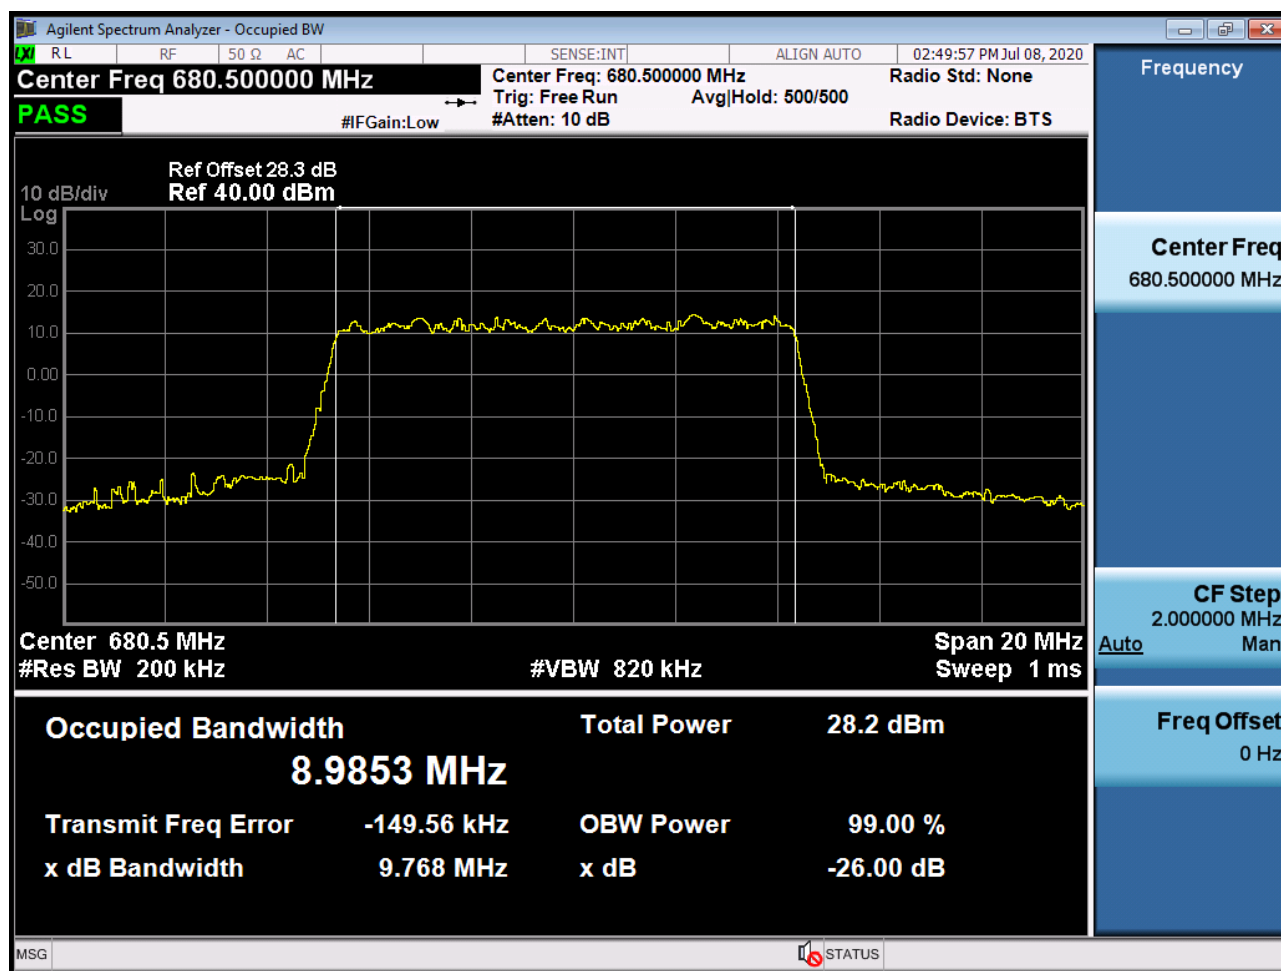


Sub6 n71. Occupied Bandwidth Plot (15M BW Ch.136100 BPSK_RB25_0)

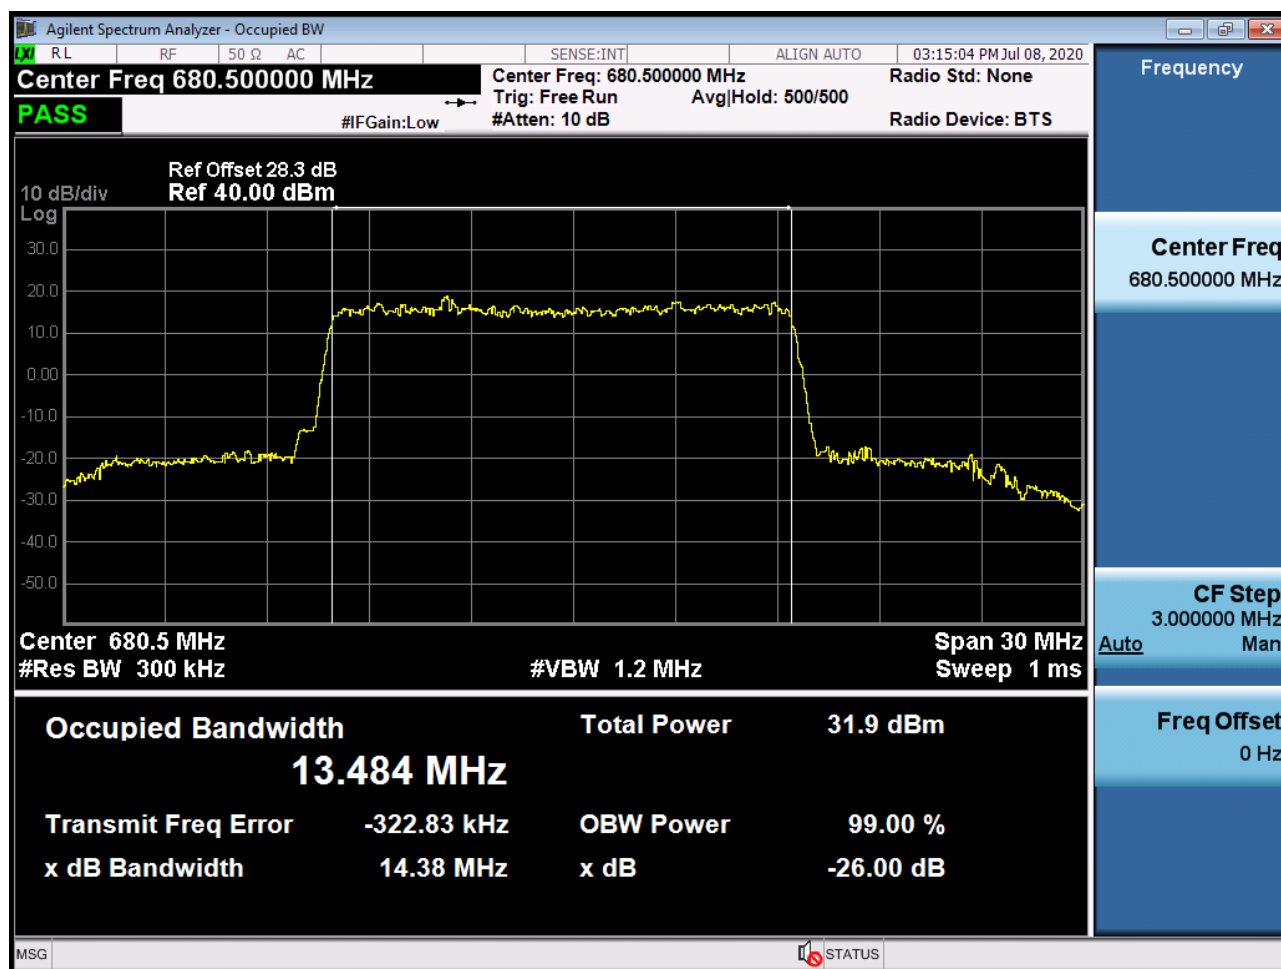


Sub6 n71. Occupied Bandwidth Plot (15M BW Ch.136100 QPSK_RB25_0)

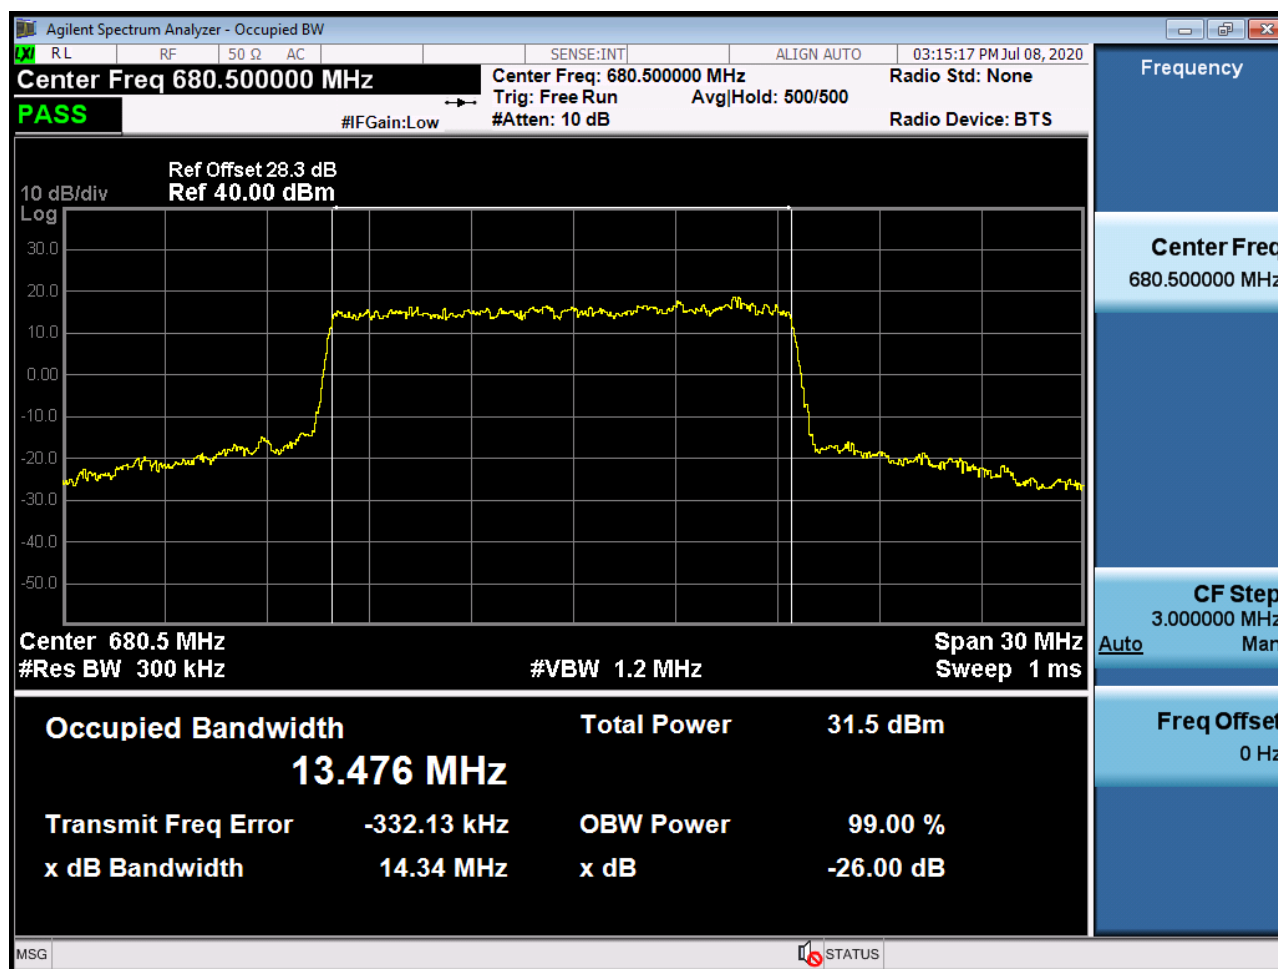


Sub6 n71. Occupied Bandwidth Plot (15M BW Ch.136100 16QAM_RB25_0)

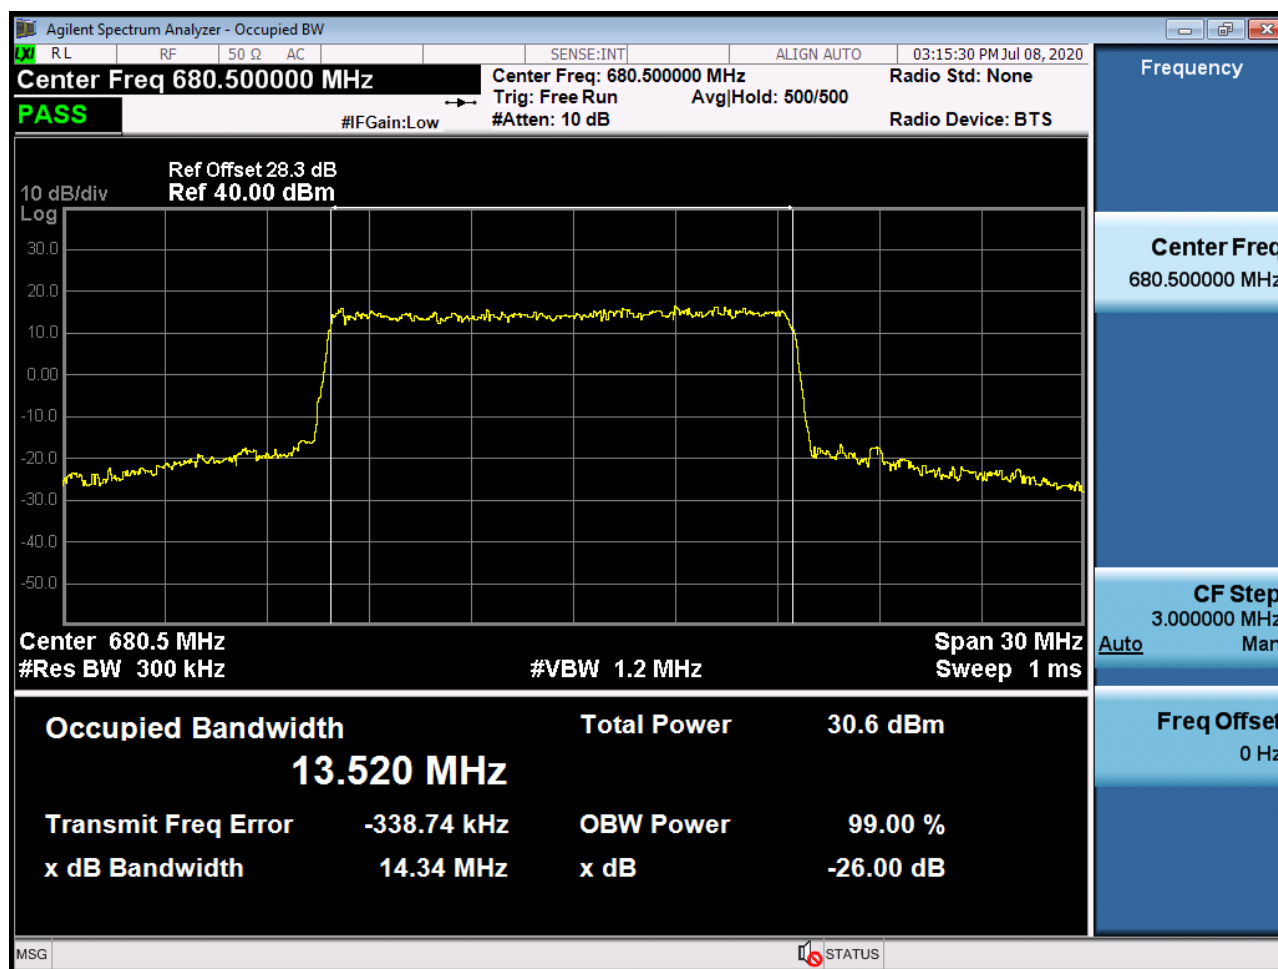


Sub6 n71. Occupied Bandwidth Plot (15M BW Ch.136100 64QAM_RB25_0)

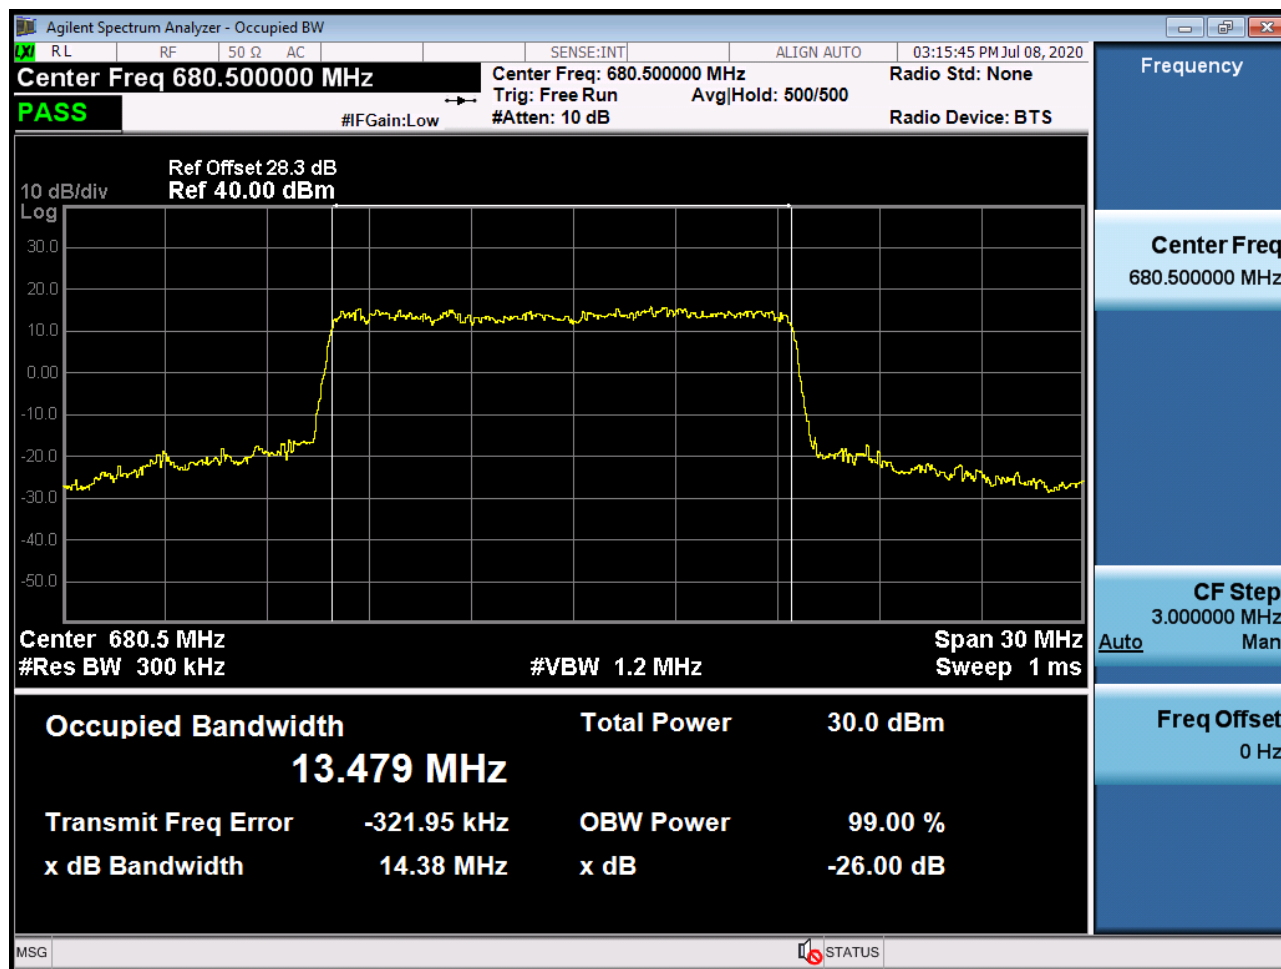


Sub6 n71. Occupied Bandwidth Plot (15M BW Ch.136100 256QAM_RB25_0)

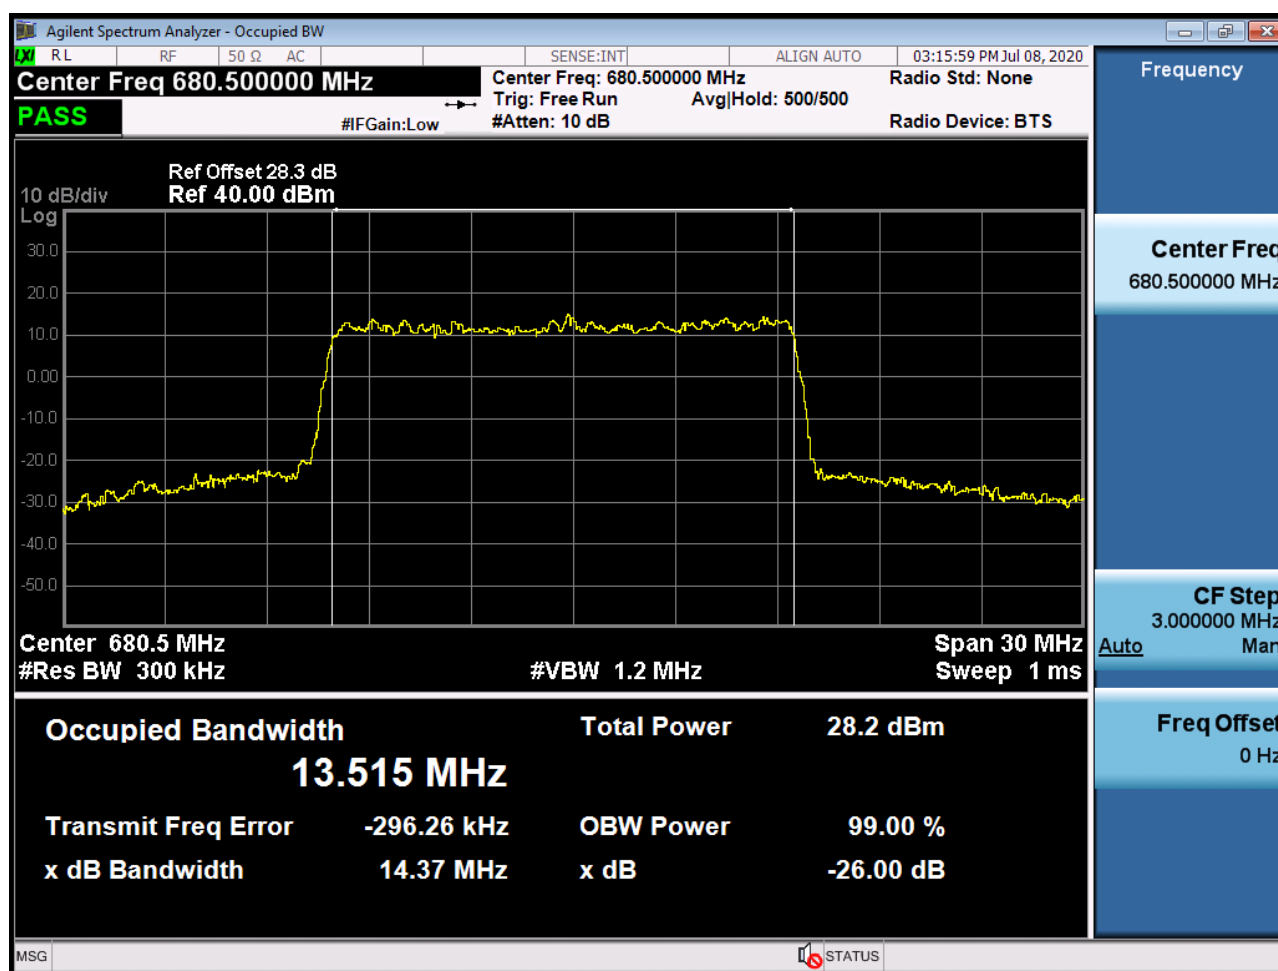


Sub6 n71. Occupied Bandwidth Plot (20M BW Ch.136100 BPSK_RB50_0)

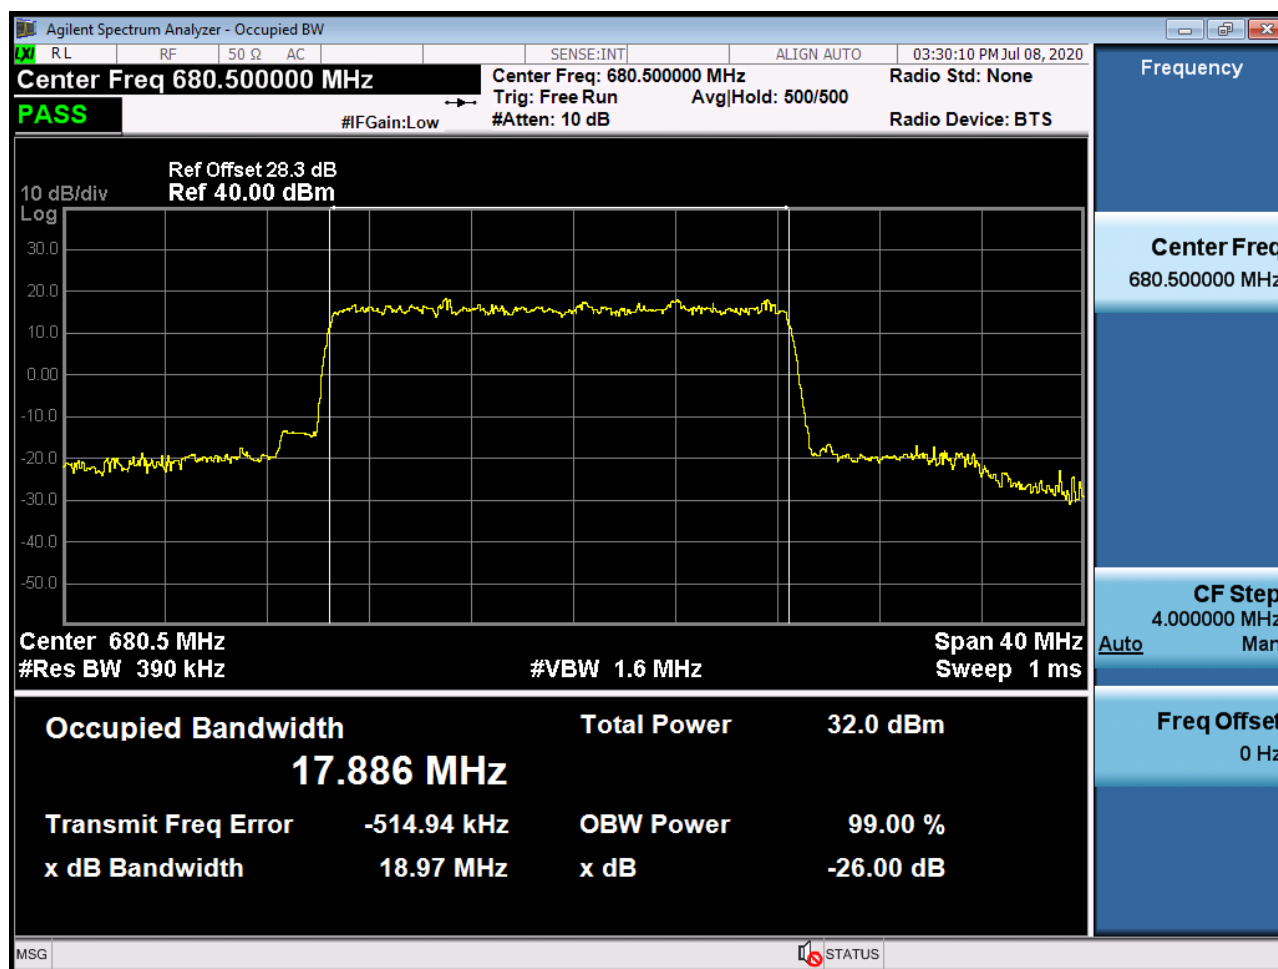


Sub6 n71. Occupied Bandwidth Plot (20M BW Ch.136100 QPSK_RB50_0)

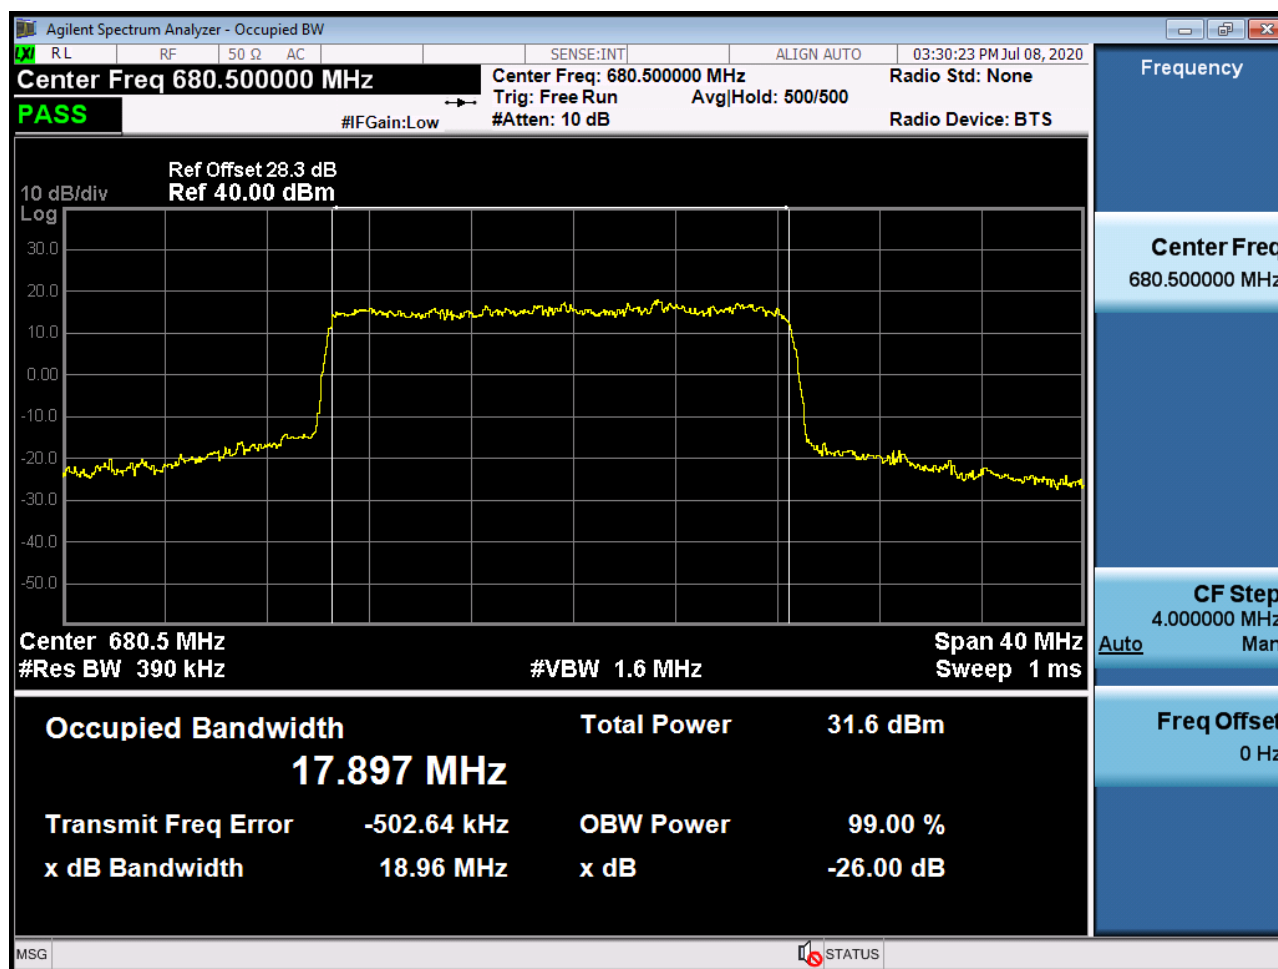


Sub6 n71. Occupied Bandwidth Plot (20M BW Ch.136100 16QAM_RB50_0)

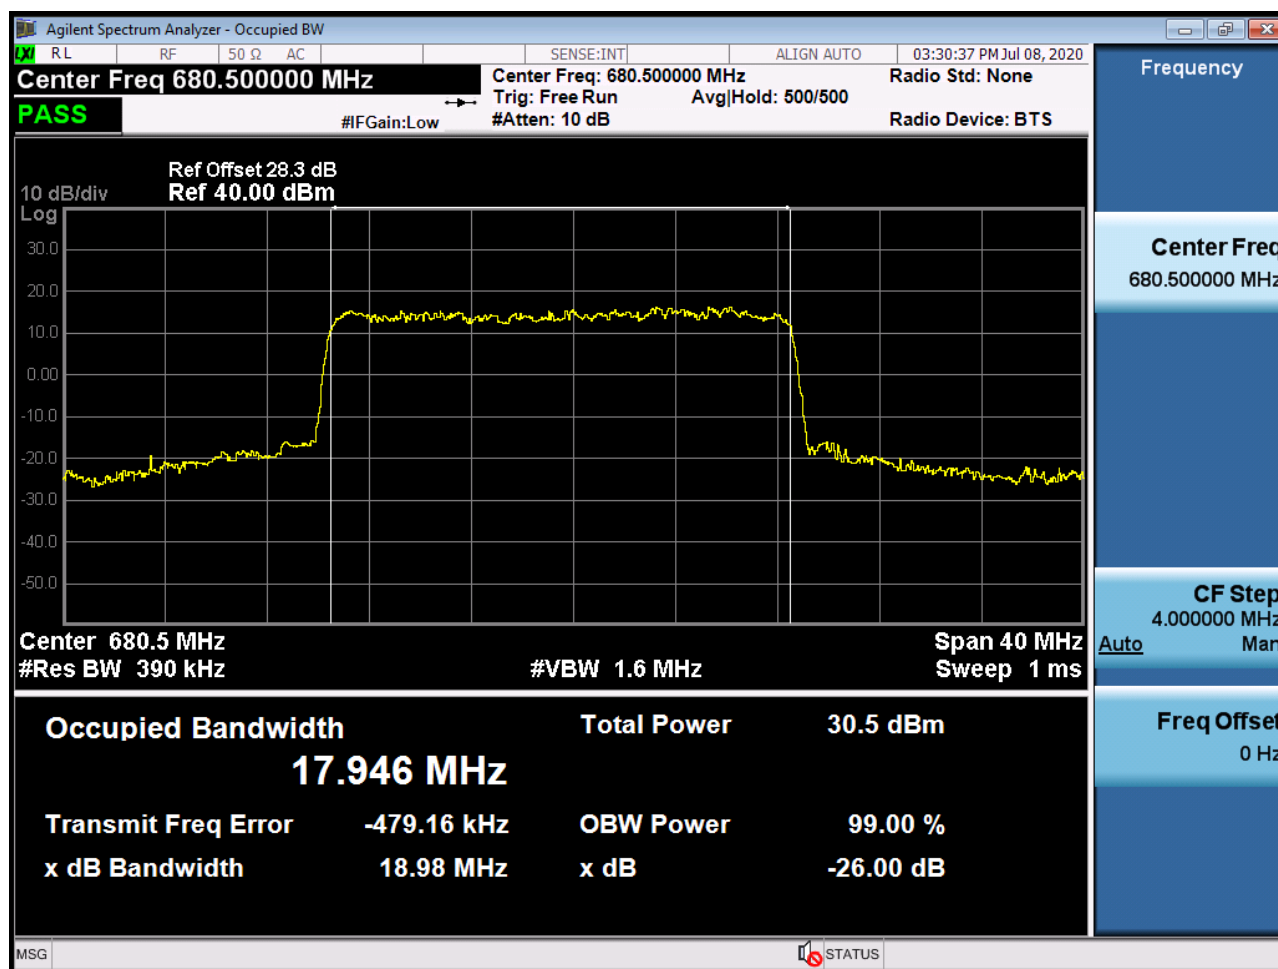

Sub6 n71. Occupied Bandwidth Plot (20M BW Ch.136100 64QAM_RB50_0)

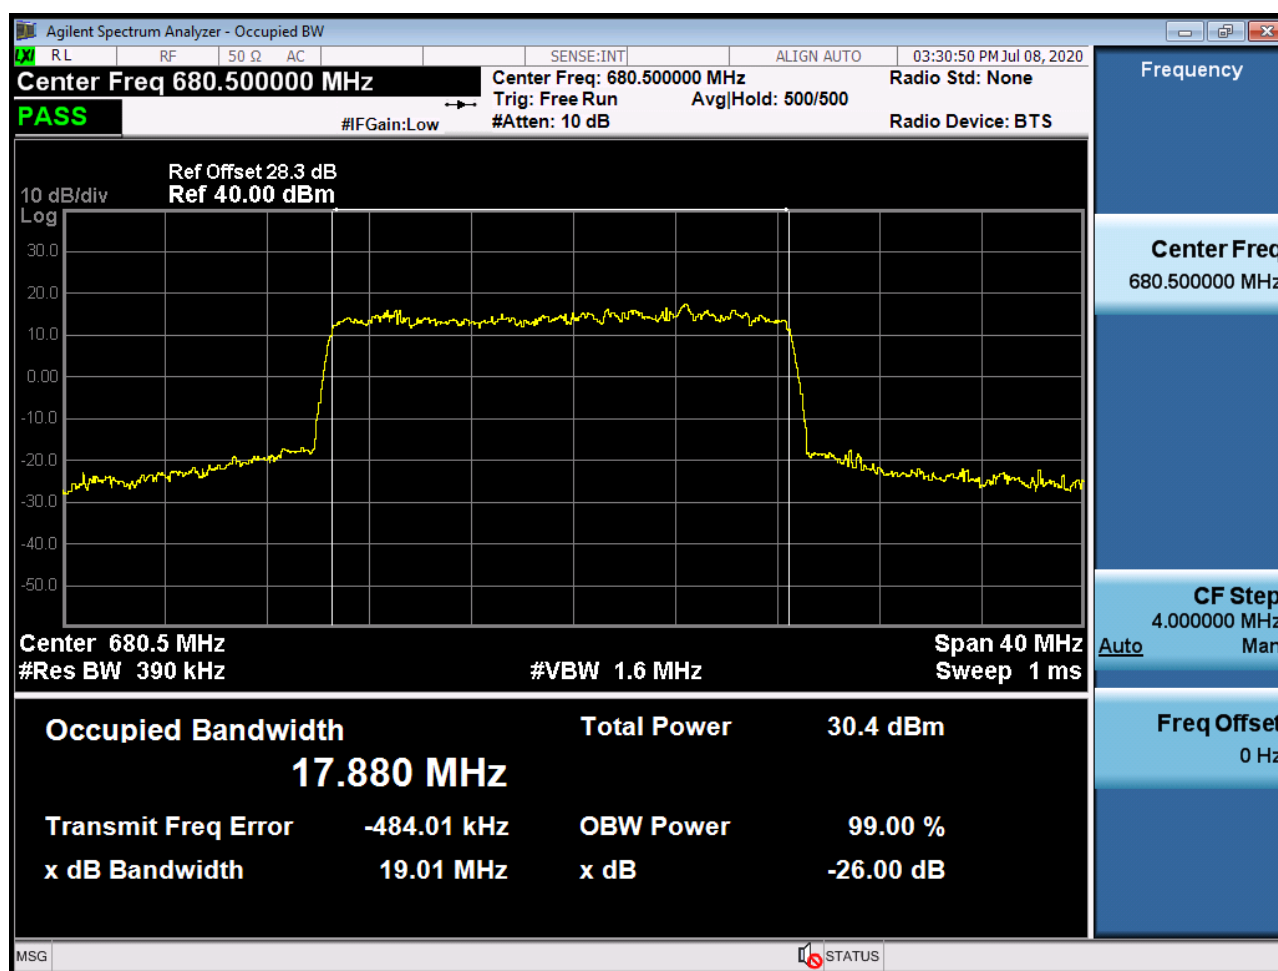

Sub6 n71. Occupied Bandwidth Plot (20M BW Ch.136100 256QAM_RB50_0)

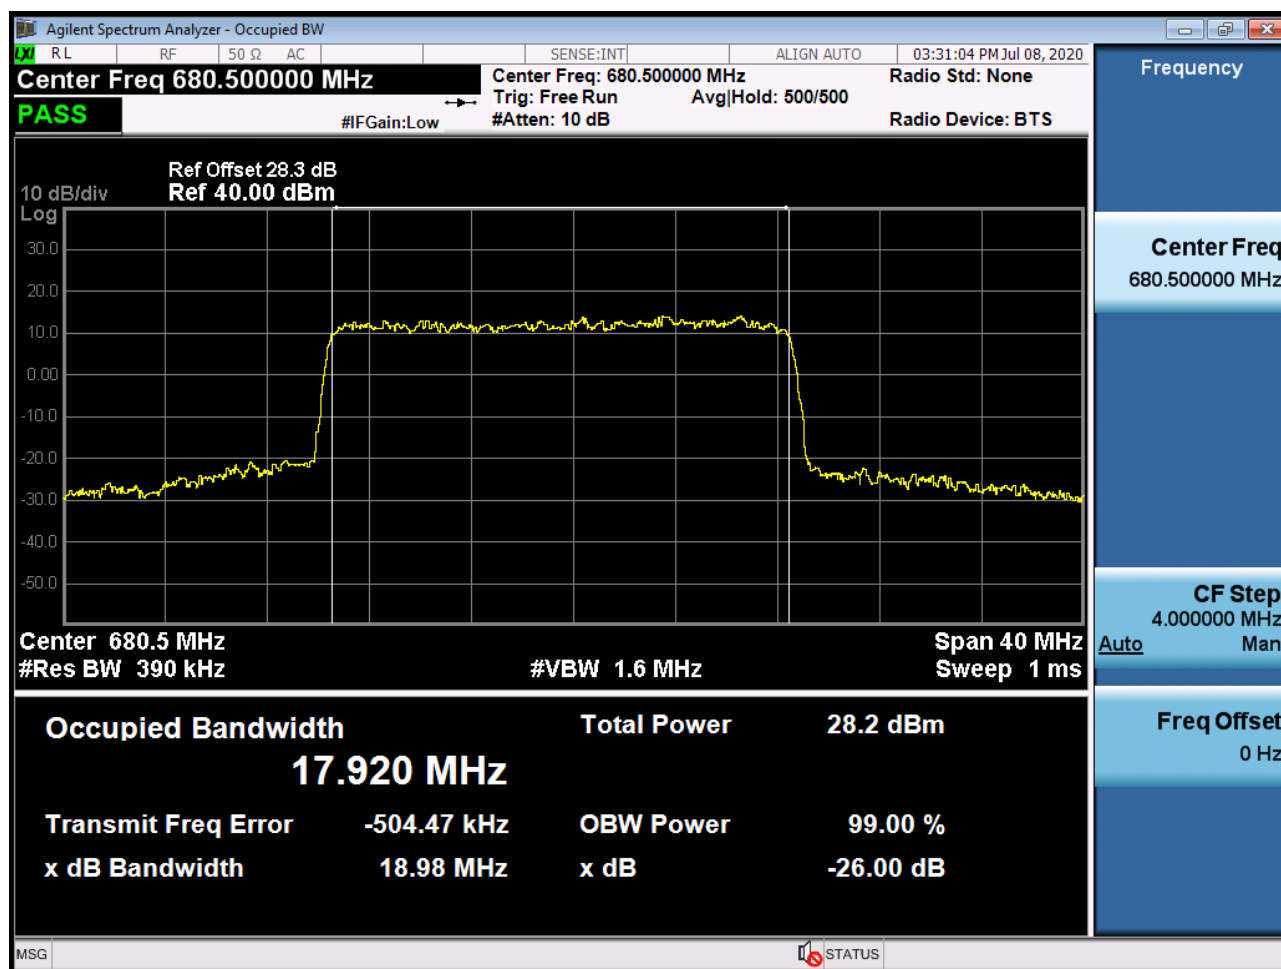

Sub6 n71. Lower Band Edge Plot (5M BW Ch.133100 BPSK_RB1_Offset 0)_1



Sub6 n71. Lower Band Edge Plot (5M BW Ch.133100 BPSK_RB1_Offset 0)_2



Sub6 n71. Lower Band Edge Plot (5M BW Ch.133100 BPSK_RB6_Offset 0)



Sub6 n71. Lower Extended Band Edge Plot (5M BW Ch.133100 BPSK_RB6_0)



Sub6 n71. Lower Band Edge Plot (10M BW Ch.133600 BPSK_RB1_Offset 0)_1



Sub6 n71. Lower Band Edge Plot (10M BW Ch.133600 BPSK_RB1_Offset 0)_2



Sub6 n71. Lower Band Edge Plot (10M BW Ch.133600 BPSK_RB15_Offset 0)



Sub6 n71. Lower Extended Band Edge Plot (10M BW Ch.133600 BPSK_RB15_0)



Sub6 n71. Lower Band Edge Plot (15M BW Ch.134100 BPSK_RB1_Offset 0)_1



Sub6 n71. Lower Band Edge Plot (15M BW Ch.134100 BPSK_RB1_Offset 0)_2



Sub6 n71. Lower Band Edge Plot (15M BW Ch.134100 BPSK_RB25_Offset 0)



Sub6 n71. Lower Extended Band Edge Plot (15M BW Ch.134100 BPSK_RB25_0)



Sub6 n71. Lower Band Edge Plot (20M BW Ch.134600 BPSK_RB1_Offset 0)_1



Sub6 n71. Lower Band Edge Plot (20M BW Ch.134600 BPSK_RB1_Offset 0)_2



Sub6 n71. Lower Band Edge Plot (20M BW Ch.134600 BPSK_RB50_Offset 0)



Sub6 n71. Lower Extended Band Edge Plot (20M BW Ch.134600 BPSK_RB50_0)



Sub6 n71. Upper Band Edge Plot (5M BW Ch.139100 BPSK_RB1_Offset 5)_1



Agilent Spectrum Analyzer - Swept SA

Center Freq 699.050000 MHz

Ref Offset 28.3 dB
Ref 28.30 dBm

10 dB/div
Log

Start 698.1000 MHz
#Res BW 100 kHz

Stop 700.0000 MHz
#Sweep 1.000 s (1001 pts)

#Avg Type: RMS

Trig: Free Run
#Atten: 10 dB

PNO: Wide
IFGain: Low

Mkr1 698.100 0 MHz
-19.257 dBm

13.50 dBm

Frequency

Auto Tune

Center Freq
699.050000 MHz

Start Freq
698.100000 MHz

Stop Freq
700.000000 MHz

CF Step
190.000 kHz

Auto Man

Freq Offset
0 Hz

Sub6 n71. Upper Band Edge Plot (5M BW Ch.139100 BPSK_RB6_Offset 0)



Agilent Spectrum Analyzer - Swept SA

Center Freq 704.000000 MHz

Trig: Free Run

#Avg Type: RMS

Ref Offset 28.3 dB

Ref 28.30 dBm

Mkr1 700.000 MHz

-38.021 dBm

Start 700.000 MHz

#Res BW 100 kHz

#VBW 300 kHz

Stop 708.000 MHz

#Sweep 1.000 s (1001 pts)

Sub6 n71. Upper Band Edge Plot (10M BW Ch.138600 BPSK_RB1_Offset 14)-1



Sub6 n71. Upper Band Edge Plot (10M BW Ch.138600 BPSK_RB1_Offset 14)-2



Sub6 n71. Upper Band Edge Plot (10M BW Ch.138600 BPSK_RB15_Offset 0)



Sub6 n71. Upper Extended Band Edge Plot (10M BW Ch.138600 BPSK_RB15_0)



Sub6 n71. Upper Band Edge Plot (15M BW Ch.138100 BPSK_RB1_Offset 24)_1



Sub6 n71. Upper Band Edge Plot (15M BW Ch.138100 BPSK_RB1_Offset 24)_2



Sub6 n71. Upper Band Edge Plot (15M BW Ch.138100 BPSK_RB25_Offset 0)



Sub6 n71. Upper Extended Band Edge Plot (15M BW Ch.138100 BPSK_RB25_0)



Sub6 n71. Upper Band Edge Plot (20M BW Ch.137600 BPSK_RB1_Offset 49)_1



Sub6 n71. Upper Band Edge Plot (20M BW Ch.137600 BPSK_RB1_Offset 49)_2




Sub6 n71. Upper Band Edge Plot (20M BW Ch.137600 BPSK_RB50_Offset 0)




Sub6 n71. Upper Extended Band Edge Plot (20M BW Ch.137600 BPSK_RB50_0)



Sub6 n71. Conducted Spurious Plot _ (133100ch_5MHz_BPSK_RB 1_0)

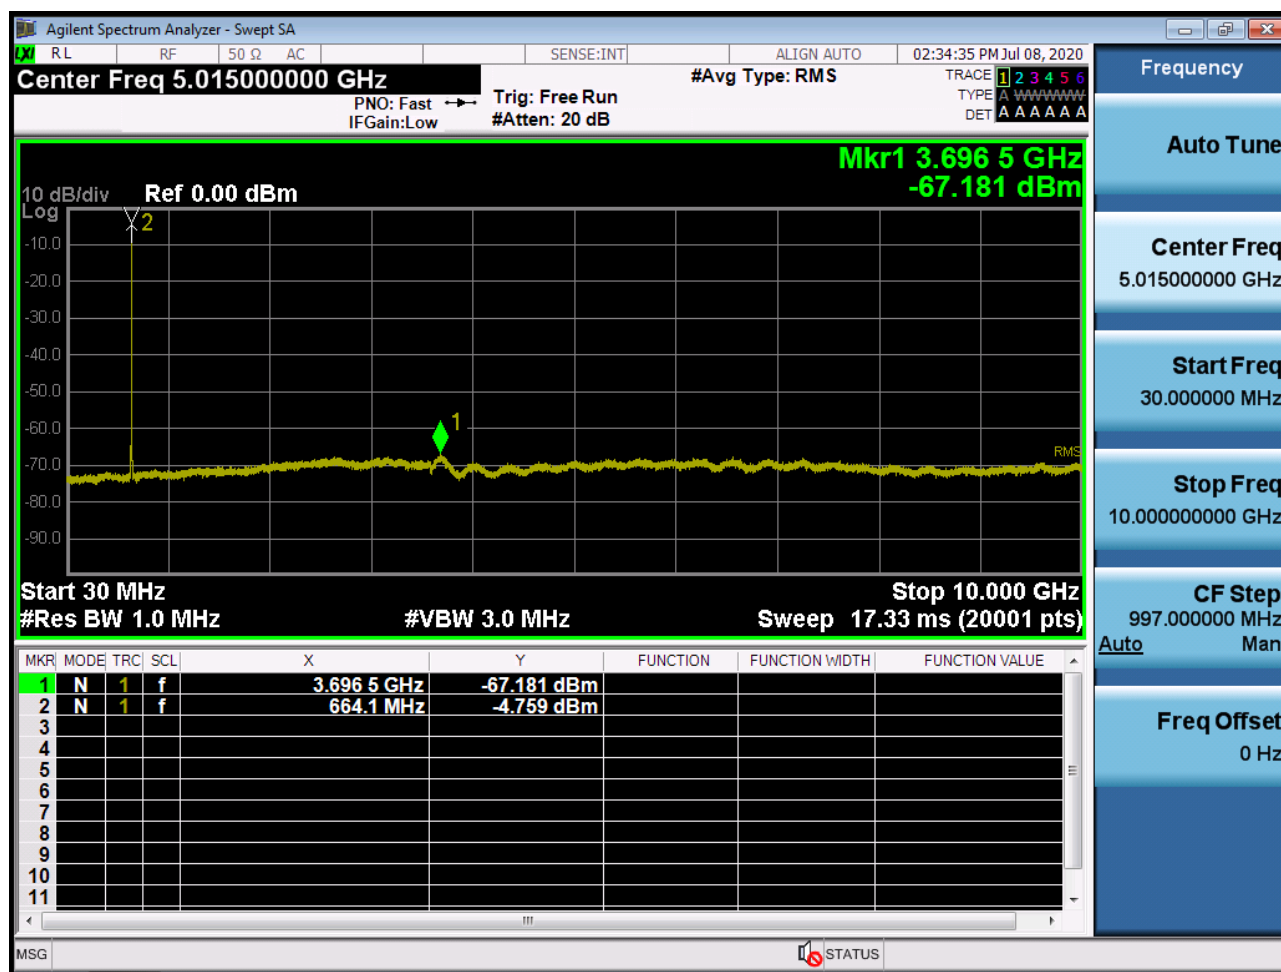

Sub6 n71. Conducted Spurious Plot _ (136100ch_5MHz_BPSK_RB 1_0)

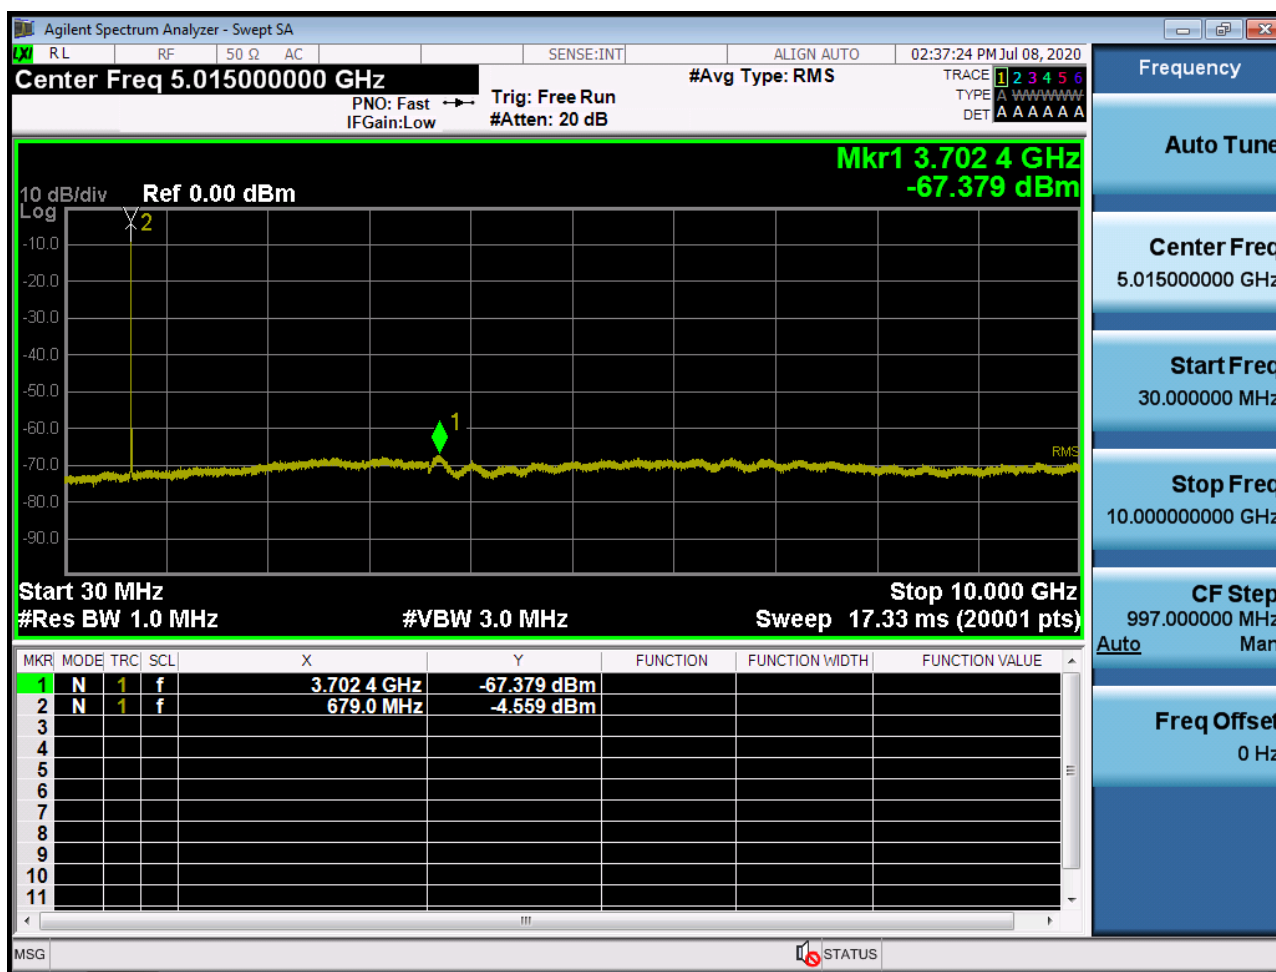

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 02:40:42 PM Jul 08, 2020

Center Freq 5.01500000 GHz #Avg Type: RMS

PNO: Fast IFGain:Low Trig: Free Run #Atten: 20 dB

TRACE 1 2 3 4 5 6
TYPE A
DET A A A A A A

10 dB/div Ref 0.00 dBm

Log

Mkr1 3.700 0 GHz
-67.021 dBm

Start 30 MHz
#Res BW 1.0 MHz

#VBW 3.0 MHz

Stop 10.000 GHz
Sweep 17.33 ms (20001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	3.700 0 GHz	-67.021 dBm			
2	N	1	f	694.0 MHz	-4.660 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq
5.01500000 GHz

Start Freq
30.000000 MHz

Stop Freq
10.00000000 GHz


CF Step
997.000000 MHz

Auto Man


Freq Offset
0 Hz

[illegible]


Sub6 n71. Conducted Spurious Plot _ (136100ch_10M Hz_BPSK_RB 1_0)

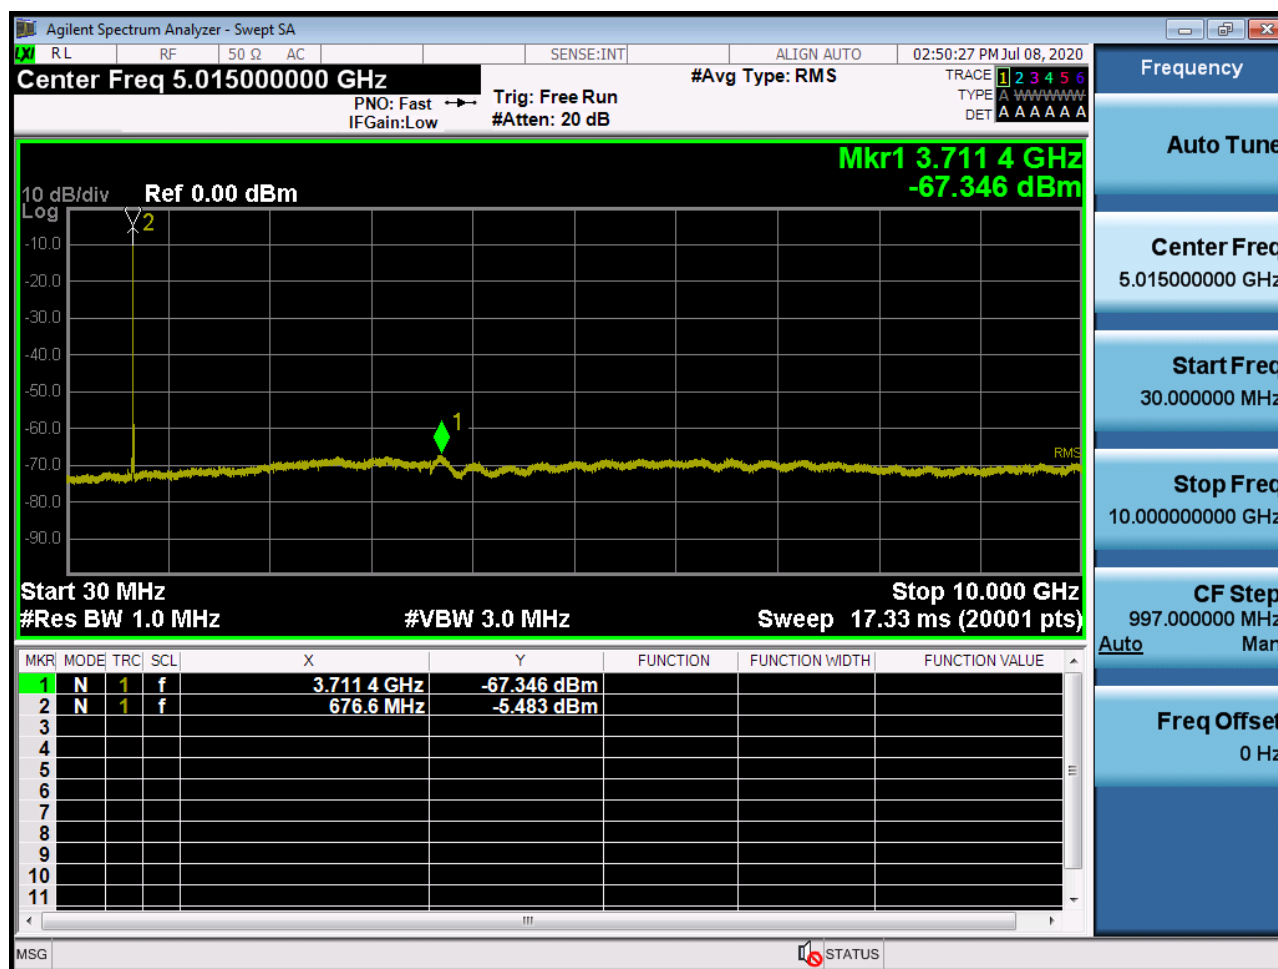


Sub6 n71. Conducted Spurious Plot _ (138600ch_10M Hz_BPSK_RB 1_0)

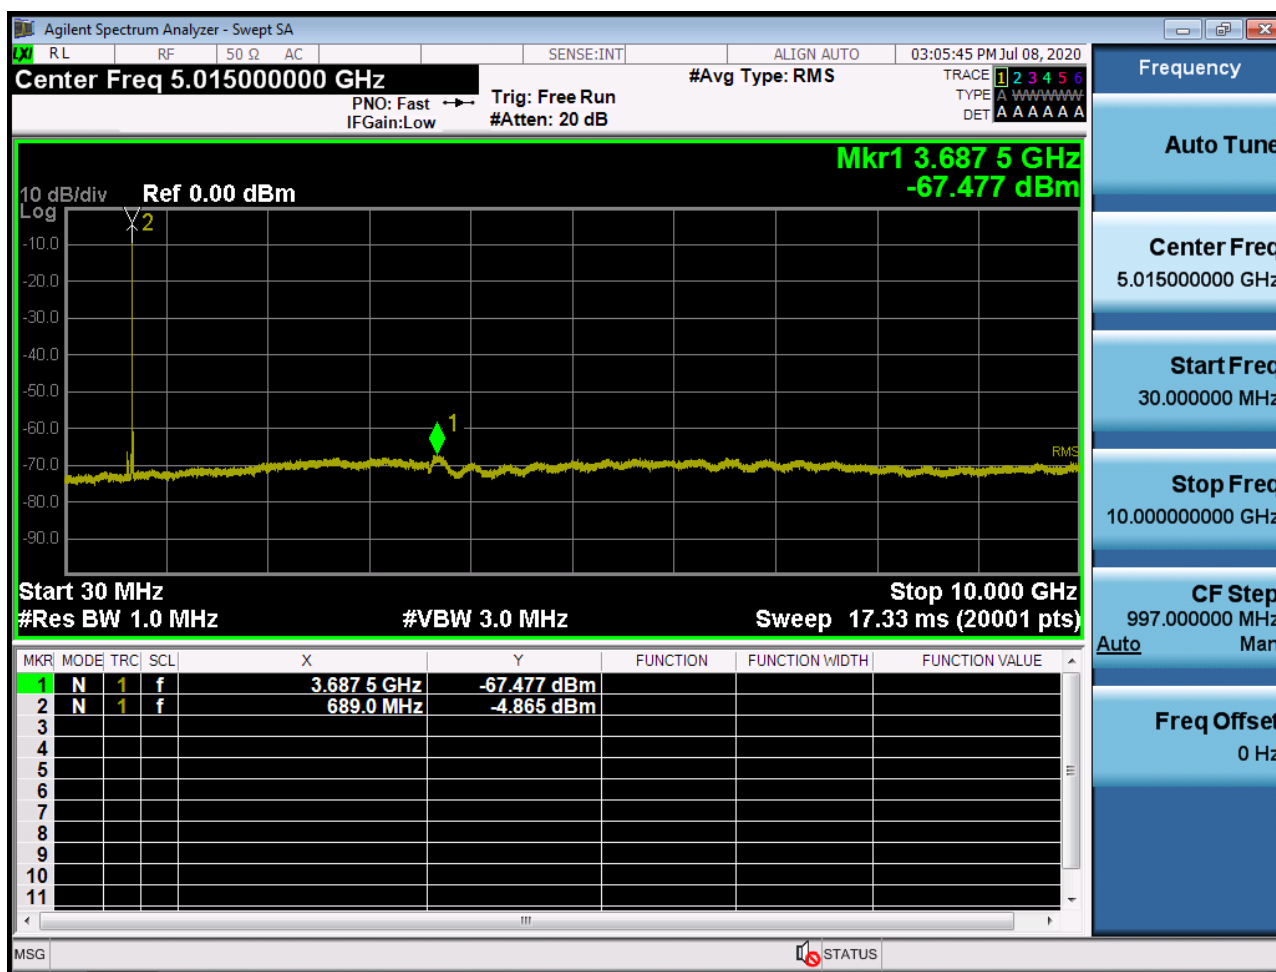


Sub6 n71. Conducted Spurious Plot _ (134100ch_15MHz_BPSK_RB 1_0)

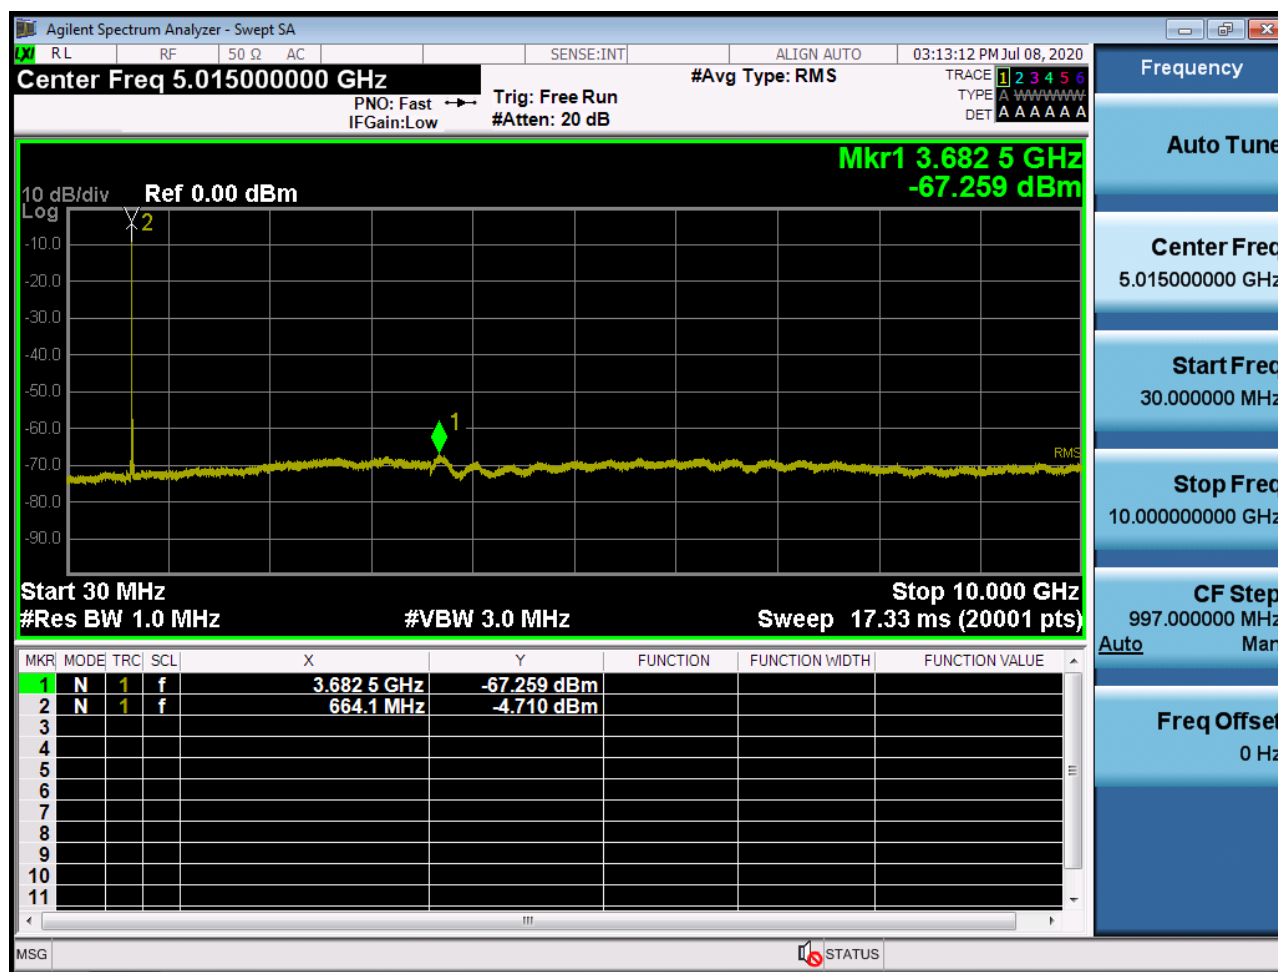


Sub6 n71. Conducted Spurious Plot _ (136100ch_15MHz_BPSK_RB 1_0)

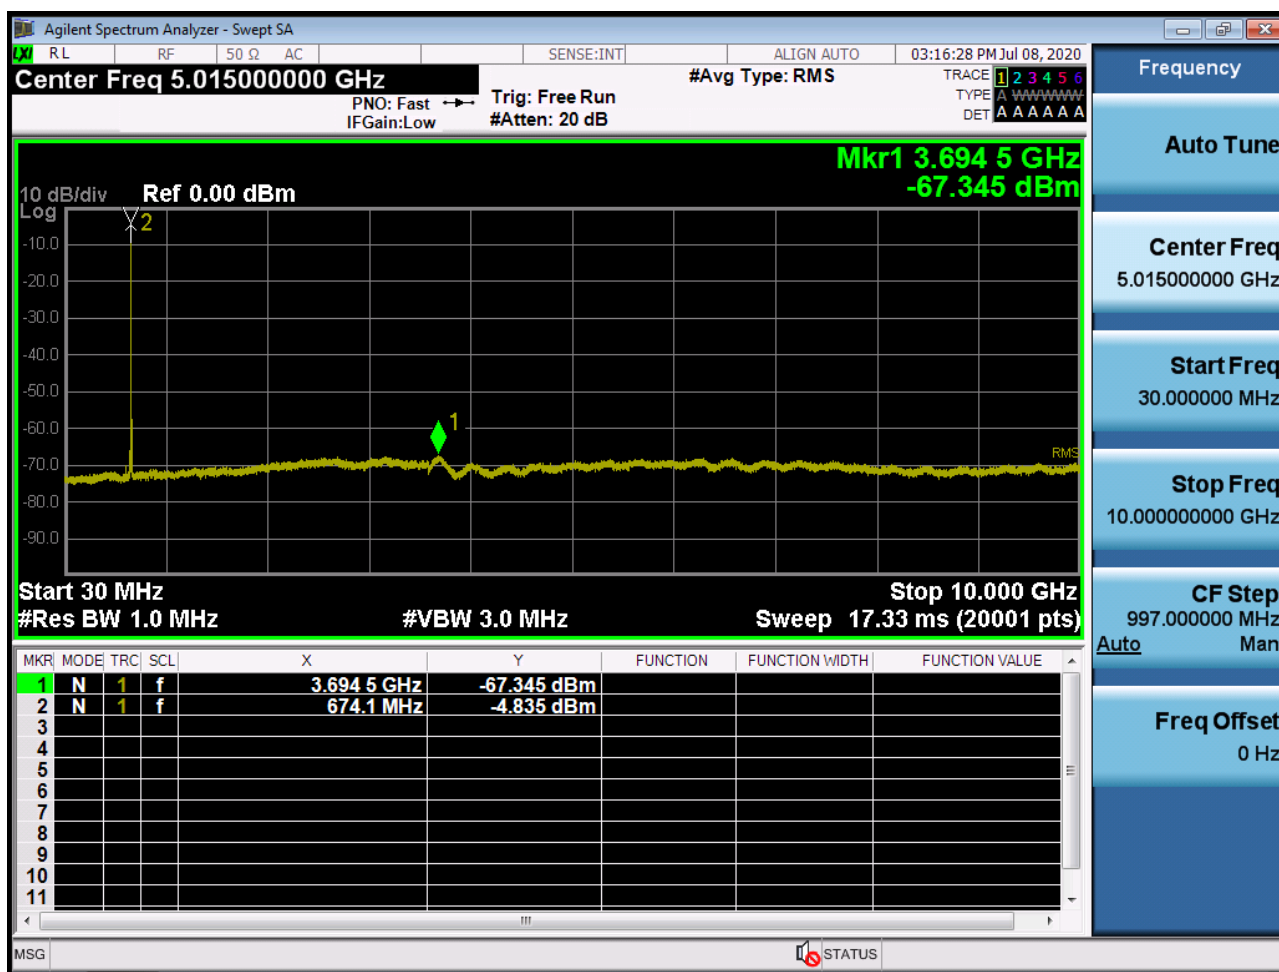


Sub6 n71. Conducted Spurious Plot _ (138100ch_15MHz_BPSK_RB 1_0)

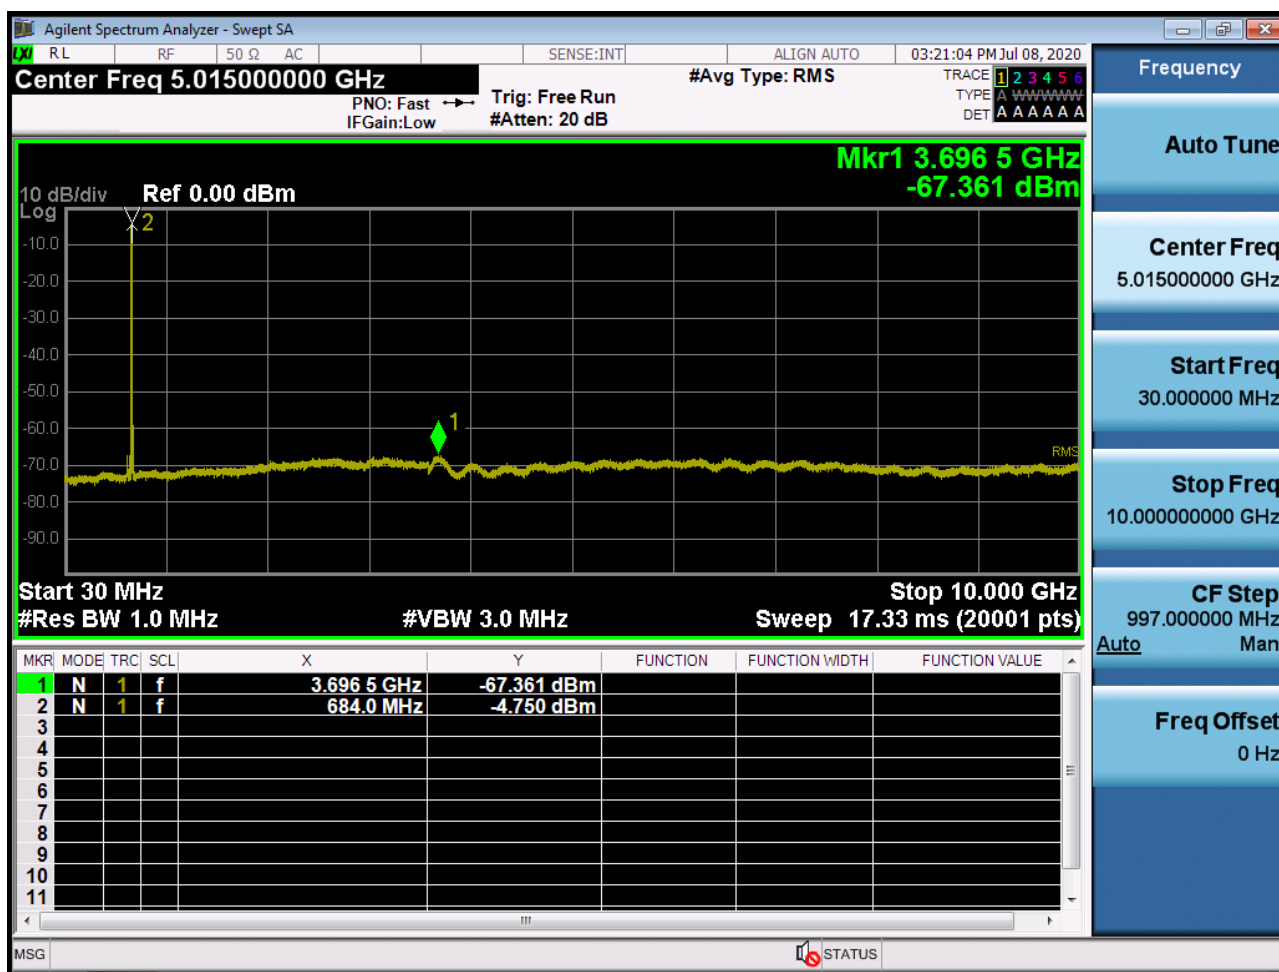


Sub6 n71. Conducted Spurious Plot _ (134600ch_20MHz_BPSK_RB 1_0)

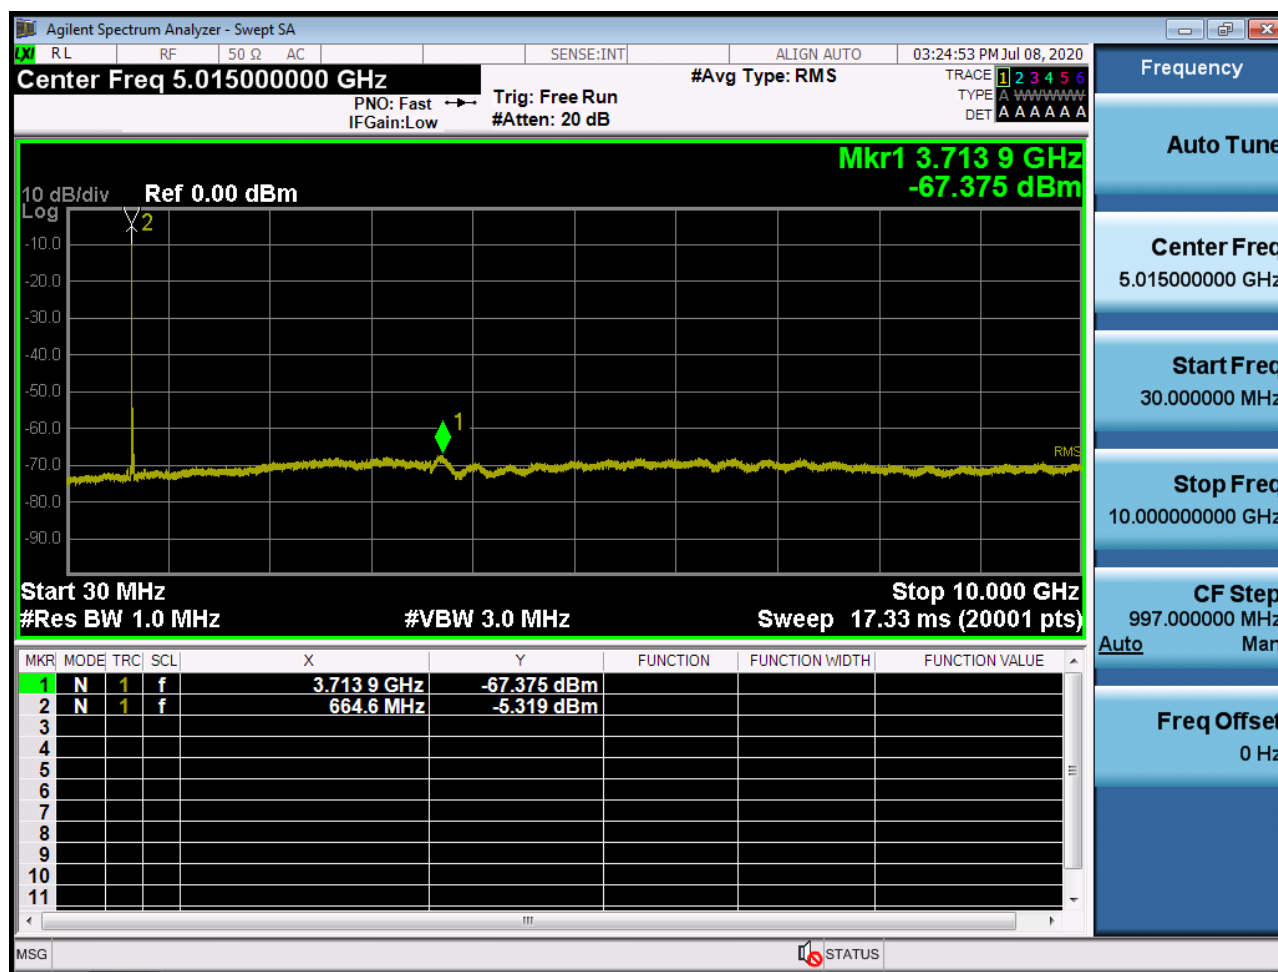

Sub6 n71. Conducted Spurious Plot _ (136100ch_20MHz_BPSK_RB 1_0)

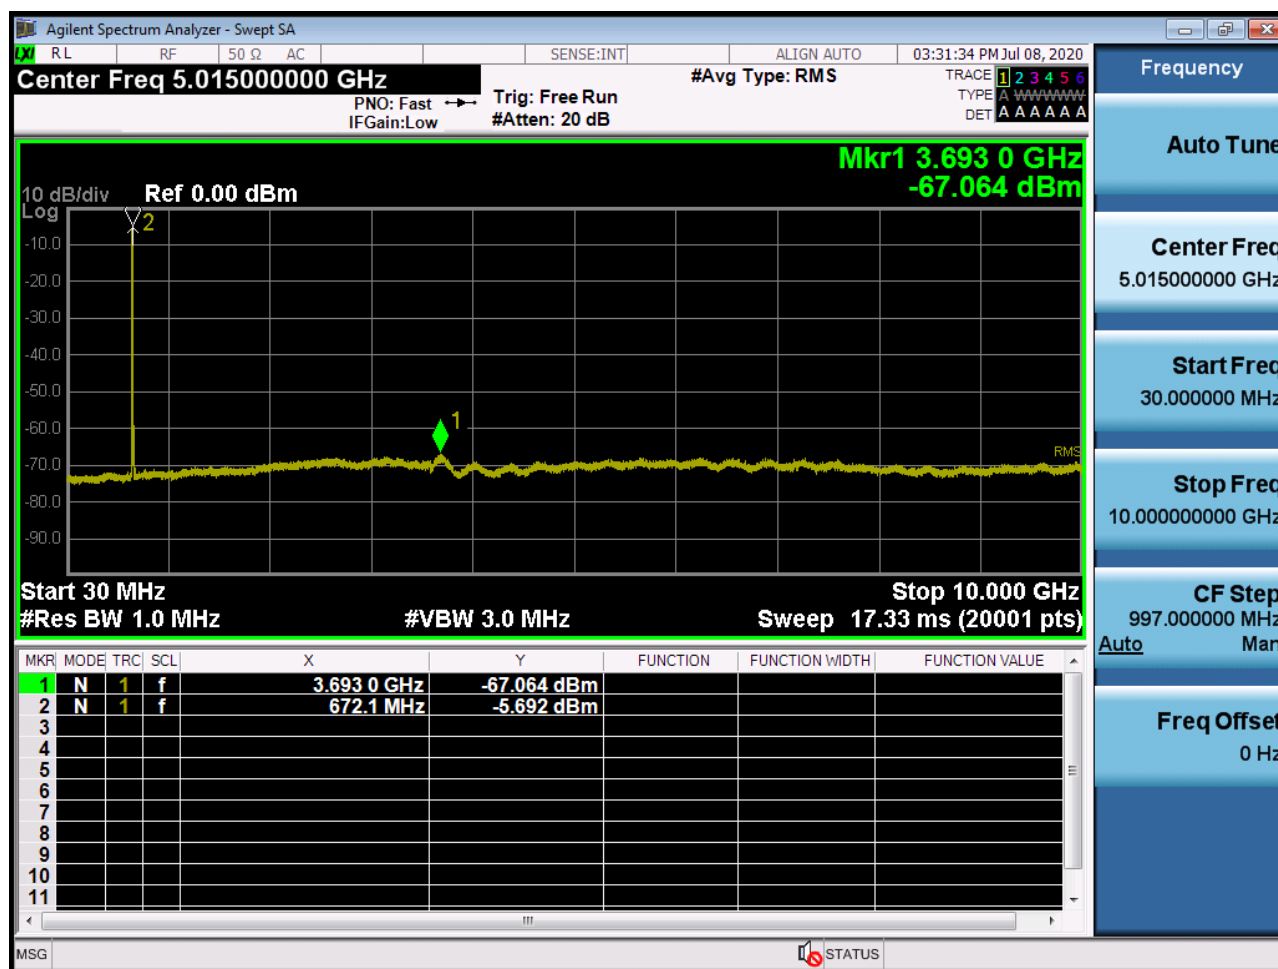

Sub6 n71. Conducted Spurious Plot _ (137600ch_20MHz_BPSK_RB 1_0)

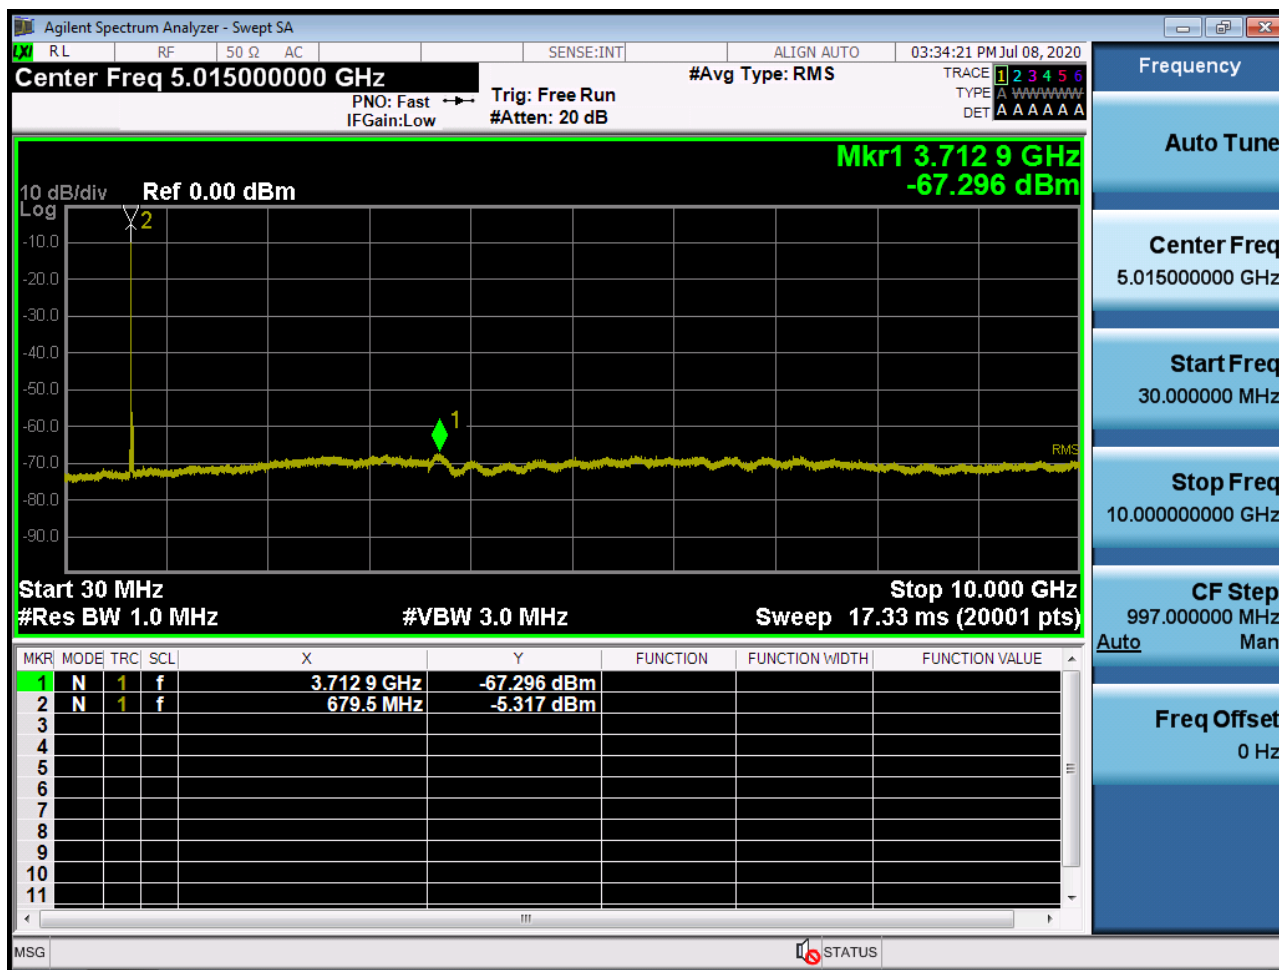

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2008-FC070-P