



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics, Co. Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:

06/10/15 - 07/02/15

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

OY1506101120.A3L

FCC ID:

A3LSMG928W8

APPLICANT:

SAMSUNG ELECTRONICS, CO. LTD.

DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-G928W8

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)	10 gm Extremity (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.21	0.34	0.58	
PCE	UMTS 850	826.40 - 846.60 MHz	0.19	0.39	0.66	
PCE	UMTS 1750	1712.4 - 1752.5 MHz	0.18	1.05	0.88	3.02
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.38	1.07	
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.13	0.65	1.00	2.68
PCE	LTE Band 12	699.7 - 715.3 MHz	0.14	0.32	0.62	
PCE	LTE Band 13	779.5 - 784.5 MHz	0.15	0.31	0.45	
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.20	0.41	0.59	
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.19	1.03	0.74	2.07
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	< 0.1	0.59	0.99	2.86
PCE	LTE Band 30	2307.5 - 2312.5 MHz	0.13	0.45	1.05	
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.43	0.23	0.26	
NII	U-NII-1	5180 - 5240 MHz				
NII	U-NII-2A	5260 - 5320 MHz	0.33	< 0.1		0.56
NII	U-NII-2C	5500 - 5720 MHz	0.49	< 0.1		0.42
NII	U-NII-3	5745 - 5825 MHz	0.43	< 0.1	0.10	
DSS/DTS	Bluetooth	2402 - 2480 MHz		< 0.1		< 0.1
Simultaneous SAR per KDB 690783 D01v01r03:			1.12	1.41	1.47	3.72

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: SARTICK@MMFAI.INFO.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 1 of 102

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	11
3	INTRODUCTION	12
4	DOSIMETRIC ASSESSMENT	13
5	DEFINITION OF REFERENCE POINTS	14
6	TEST CONFIGURATION POSITIONS FOR HANDSETS	15
7	RF EXPOSURE LIMITS	18
8	FCC MEASUREMENT PROCEDURES.....	19
9	RF CONDUCTED POWERS.....	25
10	SYSTEM VERIFICATION.....	67
11	SAR DATA SUMMARY	71
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	87
13	SAR MEASUREMENT VARIABILITY	96
14	EQUIPMENT LIST	97
15	MEASUREMENT UNCERTAINTIES	98
16	CONCLUSION.....	100
17	REFERENCES	101
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: SENSOR TRIGGERING DATA SUMMARY		

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 2 of 102

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.5 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 30	Voice/Data	2307.5 - 2312.5 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
U-NII-1	Data	5180 - 5240 MHz
U-NII-2A	Data	5260 - 5320 MHz
U-NII-2C	Data	5500 - 5720 MHz
U-NII-3	Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
ANT+	Data	2402 - 2480 MHz
MST	Data	1 - 8.3 kHz

1.2 Power Reduction for SAR

This device utilizes independent power reduction mechanisms for SAR compliance for the licensed transmitter and the WLAN transmitter. For the main transmitter, the device utilizes power reduction for some exposure and use conditions as outlined in Section 1.3. Additionally, this device uses an independent single-step fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528. The reduced powers for the power reduction mechanisms were confirmed via conducted power measurements at the RF port (See Section 9). Detailed descriptions of the mechanisms are included in the operational description.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 3 of 102

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

1.3.1 Maximum Main Band Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slot	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slot	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.5	33.5	31.5	30.5	28.5	27.5	25.5	24.0	22.5
	Nominal	33.0	33.0	31.0	30.0	28.0	27.0	25.0	23.5	22.0
GSM/GPRS/EDGE 1900	Maximum	31.5	31.5	29.0	27.0	25.5	26.5	24.5	23.0	22.0
	Nominal	31.0	31.0	28.5	26.5	25.0	26.0	24.0	22.5	21.5

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	24.8	24.8	23.5	24.0
	Nominal	24.3	24.3	23.0	23.5
UMTS Band 4 (1750 MHz)	Maximum	24.5	23.5	24.0	24.0
	Nominal	24.0	23.0	23.5	23.5
UMTS Band 2 (1900 MHz)	Maximum	24.2	23.9	23.2	23.5
	Nominal	23.7	23.4	22.7	23.0

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	24.8
	Nominal	24.3
LTE Band 17	Maximum	24.8
	Nominal	24.3
LTE Band 13	Maximum	24.0
	Nominal	23.5
LTE Band 5 (Cell)	Maximum	24.8
	Nominal	24.3
LTE Band 4 (AWS)	Maximum	24.5
	Nominal	24.0
LTE Band 2 (PCS)	Maximum	24.0
	Nominal	23.5
LTE Band 30	Maximum	23.1
	Nominal	22.6

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 4 of 102

1.3.2 Maximum DTS/DSS Power

SISO

Mode / Band		Modulated Average - Single Tx Chain (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	17.5
	Nominal	17.0
IEEE 802.11g (2.4 GHz)	Maximum	14.5
	Nominal	14.0
IEEE 802.11n (2.4 GHz)	Maximum	13.5
	Nominal	13.0
Bluetooth	Maximum	12.0
	Nominal	11.5
Bluetooth LE	Maximum	9.0
	Nominal	8.5

MIMO

Mode / Band		Modulated Average - MIMO (dBm)
		20 MHz Bandwidth
IEEE 802.11n (2.4 GHz)	Maximum	16.5
	Nominal	16.0

1.3.3 Maximum NII Power

SISO

Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	13.5		
	Nominal	13.0		
IEEE 802.11n (5 GHz)	Maximum	13.5	12.5	
	Nominal	13.0	12.0	
IEEE 802.11ac (5 GHz)	Maximum	12.5	12.5	11.5
	Nominal	12.0	12.0	11.0

MIMO

Mode / Band		Modulated Average - MIMO (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11n (5 GHz)	Maximum	16.5	15.5	
	Nominal	16.0	15.0	
IEEE 802.11ac (5 GHz)	Maximum	15.5	15.5	14.5
	Nominal	15.0	15.0	14.0

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 5 of 102	

1.3.4 Reduced Main Band Power – Power Reduction Active – Hotspot, Extremity

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	20.5	20.5	20.5	20.5
	Nominal	20.0	20.0	20.0	20.0
UMTS Band 2 (1900 MHz)	Maximum	21.5	21.5	21.0	21.5
	Nominal	21.0	21.0	20.5	21.0

Mode / Band		Modulated Average (dBm)
LTE Band 4 (AWS)	Maximum	20.5
	Nominal	20.0
LTE Band 2 (PCS)	Maximum	20.5
	Nominal	20.0

1.3.5 Reduced DTS Power – Power Reduction Active – Held to Ear

SISO

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	14.5
	Nominal	14.0
IEEE 802.11g (2.4 GHz)	Maximum	11.5
	Nominal	11.0
IEEE 802.11n (2.4 GHz)	Maximum	10.5
	Nominal	10.0

MIMO

Mode / Band		Modulated Average - MIMO (dBm)
		20 MHz Bandwidth
IEEE 802.11n (2.4 GHz)	Maximum	13.5
	Nominal	13.0

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 6 of 102

1.3.6 Reduced NII Power – Power Reduction Active – Held to Ear

SISO

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	10.5		
	Nominal	10.0		
IEEE 802.11n (5 GHz)	Maximum	10.5		
	Nominal	10.0		
IEEE 802.11ac (5 GHz)	Maximum	9.5	9.5	8.5
	Nominal	9.0	9.0	8.0

MIMO

Mode / Band		Modulated Average - MIMO (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11n (5 GHz)	Maximum	13.5	12.5	
	Nominal	13.0	12.0	
IEEE 802.11ac (5 GHz)	Maximum	12.5	12.5	11.5
	Nominal	12.0	12.0	11.0

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 30	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for Wireless Router SAR or Extremity SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02 guidance, page 2 and FCC KDB 648474 D04v01r02. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A and U-NII-2C WLAN operations are disabled.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 7 of 102

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

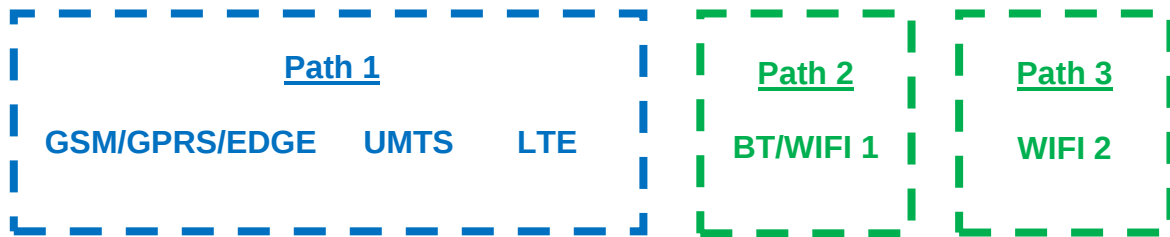


Figure 1-1
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Extremity	Notes
1	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	GSM voice + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes	
4	GSM voice + 2.4 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
5	GSM voice + 5 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
6	GSM voice + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz Wi-Fi Ant 2 + 5 GHz Wi-Fi Ant 1	Yes	Yes	N/A	Yes	
8	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
9	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
10	UMTS + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes	
11	UMTS + 2.4 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
12	UMTS + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
13	UMTS + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	Yes	Yes	
14	UMTS + 2.4 GHz Wi-Fi Ant 2 + 5 GHz Wi-Fi Ant 1	Yes	Yes	Yes	Yes	
15	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
16	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
17	LTE + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes	
18	LTE + 2.4 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
19	LTE + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
20	LTE + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	Yes	Yes	
21	LTE + 2.4 GHz Wi-Fi Ant 2 + 5 GHz Wi-Fi Ant 1	Yes	Yes	Yes	Yes	
22	GPRS/EDGE + 2.4 GHz Wi-Fi	N/A	N/A	Yes	Yes	
23	GPRS/EDGE + 5 GHz Wi-Fi	N/A	N/A	Yes	Yes	
24	GPRS/EDGE + 2.4 GHz Wi-Fi MIMO	N/A	N/A	Yes	Yes	
25	GPRS/EDGE + 5 GHz Wi-Fi MIMO	N/A	N/A	Yes	Yes	
26	GPRS/EDGE + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	N/A	N/A	Yes	Yes	
27	GPRS/EDGE + 2.4 GHz Wi-Fi Ant 2 + 5 GHz Wi-Fi Ant 1	N/A	N/A	Yes	Yes	
28	GSM voice + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 1	N/A	N/A	N/A	N/A	Not Supported by HW
29	GSM voice + 2.4 GHz Wi-Fi Ant 2 + 5 GHz Wi-Fi Ant 2	N/A	N/A	N/A	N/A	Not Supported by HW
30	UMTS + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 1	N/A	N/A	N/A	N/A	Not Supported by HW
31	UMTS + 2.4 GHz Wi-Fi Ant 2 + 5 GHz Wi-Fi Ant 2	N/A	N/A	N/A	N/A	Not Supported by HW
32	LTE + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 1	N/A	N/A	N/A	N/A	Not Supported by HW
33	LTE + 2.4 GHz Wi-Fi Ant 2 + 5 GHz Wi-Fi Ant 2	N/A	N/A	N/A	N/A	Not Supported by HW
34	GPRS/EDGE + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 1	N/A	N/A	N/A	N/A	Not Supported by HW
35	GPRS/EDGE + 2.4 GHz Wi-Fi Ant 2 + 5 GHz Wi-Fi Ant 2	N/A	N/A	N/A	N/A	Not Supported by HW

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 8 of 102

Notes:

1. All licensed modes share the same antenna path and cannot transmit simultaneously.
2. 2.4 GHz WLAN, 5 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
4. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
5. 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII-2A, and U-NII-2C were not evaluated for wireless router conditions.
6. This device supports 2x2 MIMO Tx for WLAN 802.11n/ac. Each WLAN antenna can transmit independently or together when operating with MIMO.
7. This device supports VoLTE.

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz DTS and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg for 1g SAR and less than 3.0 W/kg for 10g SAR, SAR is not required for U-NII-1 band according to FCC KDB 248227 D01v02r01.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) Band gap channels and TDWR channels are supported

Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1-g SAR > 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r03.

FCC ID: A3LSMG928W8	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset

This device supports both LTE Band 12 and LTE Band 17. Since the supported frequency span for LTE Band 17 falls completely within the supported frequency span for LTE Band 12, both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE Band 12.

This device supports inter-band LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r01, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

Per FCC KDB Publication 648474 D04v01r02, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1-g SAR > 1.2 W/kg. For some modes, Extremity SAR was additionally evaluated at maximum output power due to reduced power (See Section 6.7 for more information).

1.8 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01v03, D05v02r03, D05Av01, D06v02 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r01 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r03, D02v01r01 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r02 (Phablet Procedures)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number	Max Power Extremity Serial Number	Reduced Power Extremity Serial Number
GSM/GPRS/EDGE 850	95B11	95B11	95B11	-	-
UMTS 850	95BE8	95BE8	95BE8	-	-
UMTS 1750	95B11	95B11	95B11	95B11	95B11
GSM/GPRS/EDGE 1900	964E1	95B11	95B11	-	-
UMTS 1900	95BE8	95BDC	95BE6	95BDC	95BE6
LTE Band 12	95C05	95C05	95C05	-	-
LTE Band 13	95BD8	95BD8	95BD8	-	-
LTE Band 5 (Cell)	95C05	95C05	95C05	-	-
LTE Band 4 (AWS)	95C05	95C05	95BE6	95C05	95BE6
LTE Band 2 (PCS)	95C05	95C05	95BE6	95C05	95BE6
LTE Band 30	95C05	95C05	95C05	-	-
2.4 GHz WLAN	95BE4	95C04	95C04	-	-
U-NII-2A and U-NII-2C	95BE4	95BE4	-	95BE4	-
U-NII-3	95BE4	95BE4	95BE4	-	-
Bluetooth	-	95BE6	-	95BE6	-

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 10 of 102

2

LTE INFORMATION

LTE Information			
FCC ID:	A3LSMG928W8		
Form Factor	Portable Handset		
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)		
	LTE Band 17 (706.5 - 713.5 MHz)		
	LTE Band 13 (779.5 - 784.5 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
	LTE Band 30 (2307.5 - 2312.5 MHz)		
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 17: 5 MHz, 10 MHz		
	LTE Band 13: 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
LTE Band 30: 5 MHz, 10 MHz			
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)	784.5 (23255)
LTE Band 13: 10 MHz	782 (23230)	782 (23230)	782 (23230)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
LTE Band 30: 5 MHz	2307.5 (27685)	2310 (27710)	2312.5 (27735)
LTE Band 30: 10 MHz	2310 (27710)	2310 (27710)	2310 (27710)
UE Category	9		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations		
LTE Release 10 Additional Information	This device does not support full CA features on 3GPP Release 10. It supports a maximum of 3 carriers in the downlink. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WIFI Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.		

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 11 of 102

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 12 of 102

4

DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 13 of 102

5

DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

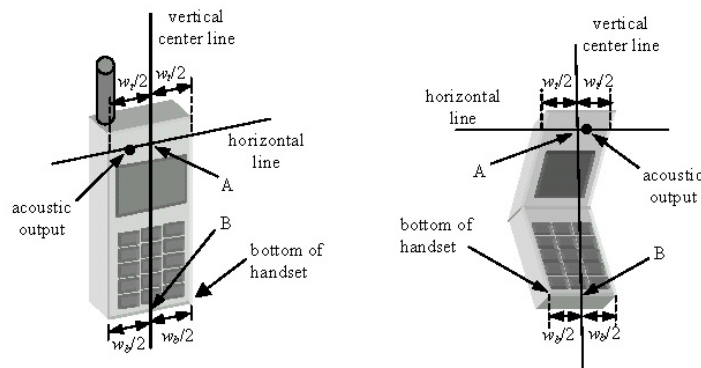


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 14 of 102

6 TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

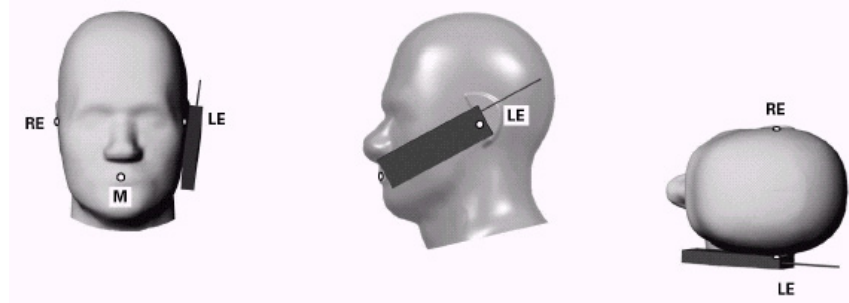


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 15 of 102

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04 v01r02 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1-g SAR > 1.2 W/kg.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

There is power reduction for some wireless modes and bands, as indicated in Section 1.3. The reduced powers were confirmed via conducted power measurements at the RF port (See Section 9). Detailed descriptions of the power reduction mechanism are included in the operational description

6.7 Additional Test Positions due to Proximity Conditions

This device uses a sensor to reduce output powers in extremity (hand-held) use conditions. When the sensor detects a user is touching the device on or near to the antenna, the device reduces the maximum allowed output power. However, the proximity sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

FCC KDB 616217 D04 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional exposure conditions. The smallest separation distance determined by the sensor triggering and sensor coverage for each applicable edge, minus 1 mm, was used as the test separation distance for SAR testing. Sensor triggering distance summary data is included in Appendix G.

The proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 17 of 102

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 18 of 102

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03 "3G SAR Measurement Procedures."

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 19 of 102

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.4.6 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HSDSCH Cell are required to perform the power measurement and for the results to be acceptable

8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r03 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 20 of 102

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r03:

- a. Per Section 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 4.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 4.2.1.
- c. Per Section 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 4.2.4 and 4.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 4.2.1 through 4.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.5.5 Downlink Carrier Aggregation

LTE Carrier Aggregation (CA) measurements are made in accordance to 3GPP TS 36.521-1 V10.4.0 (2012-12). The RRC connection is only handled by one cell, the Primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds the Secondary component carrier (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to release 8 specifications on the PCC. Additional output powers are measured using two carriers in the downlink for the release 8 configurations with the highest output power among all channels, RB configurations and bandwidths for each uplink band. Per FCC KDB Publication 941225 D05A v01r01, no SAR measurements are required when the average output power with downlink carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink carrier aggregation inactive.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 21 of 102

8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r01 for more details.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg for 1g SAR or > 3.0 W/kg for 10g SAR. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg for 1g SAR or > 3.0 W/kg for 10g SAR.

8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels.

8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g SAR and ≤ 1.0 W/kg for 10g SAR, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR or all test positions are measured.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 22 of 102

8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg for 1g SAR and > 2.0 W/kg for 10g SAR, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg for 1g SAR and > 3.0 W/kg for 10g SAR, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg for 1g SAR and > 3.0 W/kg for 10g SAR. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate and lowest order 802.11a/g/n/ac mode. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate, and lowest order 802.11a/g/n/ac mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 for 1g SAR and ≤ 2.0 W/kg for 10g SAR, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg for 1g SAR and ≤ 3.0 W/kg for 10g SAR or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6).

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 23 of 102

8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg for 1g SAR and ≤ 3.0 W/kg for 10g SAR, no additional SAR tests for the subsequent test configurations are required.

8.6.9 MIMO SAR considerations

Per KDB 248227 D01v02r01, the simultaneous SAR provisions in KDB Publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg for 1g SAR and < 4.0 W/kg for 10g SAR, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 24 of 102

9 RF CONDUCTED POWERS

9.1 GSM Conducted Powers

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.50	33.50	31.30	29.98	28.11	26.47	24.39	22.92	21.71
	190	33.49	33.31	31.16	29.89	28.08	26.82	24.69	23.26	22.02
	251	33.46	33.47	31.43	29.95	28.20	26.95	24.75	23.33	22.25
GSM 1900	512	29.75	29.64	27.01	25.94	23.79	25.40	23.57	22.16	21.22
	661	29.95	29.60	27.05	25.59	23.99	25.10	23.26	21.91	21.00
	810	30.12	29.97	27.47	25.81	24.25	25.66	23.58	22.41	21.18
		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.47	24.47	25.28	25.72	25.10	17.44	18.37	18.66	18.70
	190	24.46	24.28	25.14	25.63	25.07	17.79	18.67	19.00	19.01
	251	24.43	24.44	25.41	25.69	25.19	17.92	18.73	19.07	19.24
GSM 1900	512	20.72	20.61	20.99	21.68	20.78	16.37	17.55	17.90	18.21
	661	20.92	20.57	21.03	21.33	20.98	16.07	17.24	17.65	17.99
	810	21.09	20.94	21.45	21.55	21.24	16.63	17.56	18.15	18.17
GSM 850	Frame	23.97	23.97	24.98	25.74	24.99	17.97	18.98	19.24	18.99
GSM 1900	Avg. Targets:	21.97	21.97	22.48	22.24	21.99	16.97	17.98	18.24	18.49

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 12 (Max 4 Tx uplink slots)
EDGE Multislot class: 12 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 9-1
Power Measurement Setup

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 25 of 102

9.2 UMTS Conducted Powers

9.2.1 Maximum Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.91	23.96	24.00	23.59	23.44	23.31	23.35	23.24	23.46	-
99		12.2 kbps AMR	23.92	23.94	24.01	23.58	23.54	23.34	23.42	23.27	23.49	-
6	HSDPA	Subtest 1	23.59	23.70	23.52	23.50	23.38	23.27	22.94	23.09	23.12	0
6		Subtest 2	24.07	23.98	24.09	22.58	22.74	22.76	22.91	22.80	23.04	0
6		Subtest 3	22.87	22.76	22.89	21.56	21.70	21.71	22.17	22.18	22.04	0.5
6		Subtest 4	22.34	22.30	22.38	21.57	21.69	21.73	22.05	22.07	22.02	0.5
6	HSUPA	Subtest 1	22.76	22.77	22.79	23.49	23.33	23.23	22.43	22.36	22.48	0
6		Subtest 2	21.79	21.93	21.93	23.47	23.36	23.25	21.62	21.71	21.71	2
6		Subtest 3	21.98	21.99	22.07	23.44	23.39	23.26	21.83	21.30	21.49	1
6		Subtest 4	22.76	21.92	21.90	23.48	23.36	23.24	21.60	21.71	21.76	2
6		Subtest 5	22.77	22.79	22.76	23.50	23.41	23.29	22.40	22.35	22.32	0
8	DC-HSDPA	Subtest 1	23.88	23.91	23.79	23.83	23.89	23.67	23.08	23.21	23.07	0
8		Subtest 2	23.97	23.96	23.86	23.85	23.86	23.65	23.13	23.26	22.98	0
8		Subtest 3	22.97	22.96	22.83	22.94	23.18	22.34	22.94	23.06	22.91	0.5
8		Subtest 4	21.94	21.88	21.86	21.89	22.18	22.06	21.95	22.04	21.90	0.5

9.2.2 Reduced Conducted Powers – Reduced Power Active (Hotspot mode, Extremity)

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	20.13	19.98	19.89	21.15	20.83	20.97	-
99		12.2 kbps AMR	20.12	20.00	19.92	20.99	20.92	20.96	-
6	HSDPA	Subtest 1	20.05	19.95	19.86	21.03	20.99	21.11	0
6		Subtest 2	20.09	19.98	19.80	21.15	21.20	21.22	0
6		Subtest 3	20.14	19.96	19.81	21.10	21.06	21.20	0.5
6		Subtest 4	20.06	19.97	19.86	21.10	21.05	21.19	0.5
6	HSUPA	Subtest 1	19.97	19.95	19.84	20.09	20.08	20.27	0
6		Subtest 2	20.07	19.89	19.82	20.06	20.07	20.25	2
6		Subtest 3	20.05	19.91	19.79	20.09	20.15	20.26	1
6		Subtest 4	20.03	19.88	19.80	20.18	20.25	20.30	2
6		Subtest 5	20.11	19.98	19.91	20.13	20.27	20.31	0
8	DC-HSDPA	Subtest 1	20.41	20.42	20.18	20.69	20.67	20.54	0
8		Subtest 2	20.42	20.39	20.19	20.68	20.73	20.58	0
8		Subtest 3	20.45	20.41	20.17	20.64	20.72	20.56	0.5
8		Subtest 4	20.41	20.44	20.18	20.66	20.72	20.58	0.5

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.




Figure 9-2
Power Measurement Setup

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 26 of 102

9.3 LTE Conducted Powers

9.3.1 LTE Band 12

Table 9-1
LTE Band 12 Maximum Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	707.5	23095	10	QPSK	1	0	24.50	0	0
	707.5	23095	10	QPSK	1	25	24.00	0	0
	707.5	23095	10	QPSK	1	49	24.41	0	0
	707.5	23095	10	QPSK	25	0	23.14	0-1	1
	707.5	23095	10	QPSK	25	12	23.18	0-1	1
	707.5	23095	10	QPSK	25	25	23.09	0-1	1
	707.5	23095	10	QPSK	50	0	23.12	0-1	1
	707.5	23095	10	16QAM	1	0	23.44	0-1	1
	707.5	23095	10	16QAM	1	25	23.47	0-1	1
	707.5	23095	10	16QAM	1	49	23.42	0-1	1
	707.5	23095	10	16QAM	25	0	22.12	0-2	2
	707.5	23095	10	16QAM	25	12	22.00	0-2	2
	707.5	23095	10	16QAM	25	25	22.01	0-2	2
	707.5	23095	10	16QAM	50	0	22.14	0-2	2

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 27 of 102

Table 9-2
LTE Band 12 Maximum Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	701.5	23035	5	QPSK	1	0	24.58	0	0
	701.5	23035	5	QPSK	1	12	24.47	0	0
	701.5	23035	5	QPSK	1	24	24.62	0	0
	701.5	23035	5	QPSK	12	0	23.37	0-1	1
	701.5	23035	5	QPSK	12	6	23.28	0-1	1
	701.5	23035	5	QPSK	12	13	23.30	0-1	1
	701.5	23035	5	QPSK	25	0	23.33	0-1	1
	701.5	23035	5	16-QAM	1	0	23.48	0-1	1
	701.5	23035	5	16-QAM	1	12	23.39	0-1	1
	701.5	23035	5	16-QAM	1	24	23.41	0-1	1
	701.5	23035	5	16-QAM	12	0	22.37	0-2	2
	701.5	23035	5	16-QAM	12	6	22.23	0-2	2
Mid	701.5	23035	5	16-QAM	12	13	22.26	0-2	2
	701.5	23035	5	16-QAM	25	0	22.34	0-2	2
	707.5	23095	5	QPSK	1	0	24.54	0	0
	707.5	23095	5	QPSK	1	12	24.54	0	0
	707.5	23095	5	QPSK	1	24	24.59	0	0
	707.5	23095	5	QPSK	12	0	23.11	0-1	1
	707.5	23095	5	QPSK	12	6	23.24	0-1	1
	707.5	23095	5	QPSK	12	13	23.21	0-1	1
	707.5	23095	5	QPSK	25	0	23.09	0-1	1
	707.5	23095	5	16-QAM	1	0	23.54	0-1	1
	707.5	23095	5	16-QAM	1	12	23.53	0-1	1
	707.5	23095	5	16-QAM	1	24	23.54	0-1	1
High	707.5	23095	5	16-QAM	12	0	22.18	0-2	2
	707.5	23095	5	16-QAM	12	6	22.20	0-2	2
	707.5	23095	5	16-QAM	12	13	22.17	0-2	2
	707.5	23095	5	16-QAM	25	0	22.08	0-2	2
	713.5	23155	5	QPSK	1	0	24.69	0	0
	713.5	23155	5	QPSK	1	12	24.58	0	0
	713.5	23155	5	QPSK	1	24	24.71	0	0
	713.5	23155	5	QPSK	12	0	23.36	0-1	1
	713.5	23155	5	QPSK	12	6	23.26	0-1	1
	713.5	23155	5	QPSK	12	13	23.25	0-1	1
	713.5	23155	5	QPSK	25	0	23.34	0-1	1
	713.5	23155	5	16-QAM	1	0	23.44	0-1	1
	713.5	23155	5	16-QAM	1	12	23.37	0-1	1
	713.5	23155	5	16-QAM	1	24	23.41	0-1	1
	713.5	23155	5	16-QAM	12	0	22.32	0-2	2
	713.5	23155	5	16-QAM	12	6	22.19	0-2	2
	713.5	23155	5	16-QAM	12	13	22.16	0-2	2
	713.5	23155	5	16-QAM	25	0	22.37	0-2	2

Table 9-3
LTE Band 12 Maximum Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	700.5	23025	3	QPSK	1	0	24.66	0	0
	700.5	23025	3	QPSK	1	7	24.67	0	0
	700.5	23025	3	QPSK	1	14	24.66	0	0
	700.5	23025	3	QPSK	8	0	23.35	0-1	1
	700.5	23025	3	QPSK	8	4	23.22	0-1	1
	700.5	23025	3	QPSK	8	7	23.24	0-1	1
	700.5	23025	3	QPSK	15	0	23.33	0-1	1
	700.5	23025	3	16-QAM	1	0	23.71	0-1	1
	700.5	23025	3	16-QAM	1	7	23.60	0-1	1
	700.5	23025	3	16-QAM	1	14	23.62	0-1	1
	700.5	23025	3	16-QAM	8	0	22.31	0-2	2
	700.5	23025	3	16-QAM	8	4	22.26	0-2	2
Mid	700.5	23025	3	16-QAM	8	7	22.19	0-2	2
	700.5	23025	3	16-QAM	15	0	22.29	0-2	2
	707.5	23095	3	QPSK	1	0	24.69	0	0
	707.5	23095	3	QPSK	1	7	24.70	0	0
	707.5	23095	3	QPSK	1	14	24.70	0	0
	707.5	23095	3	QPSK	8	0	23.15	0-1	1
	707.5	23095	3	QPSK	8	4	23.19	0-1	1
	707.5	23095	3	QPSK	8	7	23.21	0-1	1
	707.5	23095	3	QPSK	15	0	23.17	0-1	1
	707.5	23095	3	16-QAM	1	0	23.71	0-1	1
	707.5	23095	3	16-QAM	1	7	23.66	0-1	1
	707.5	23095	3	16-QAM	1	14	23.64	0-1	1
High	707.5	23095	3	16-QAM	8	0	22.06	0-2	2
	707.5	23095	3	16-QAM	8	4	22.20	0-2	2
	707.5	23095	3	16-QAM	8	7	22.13	0-2	2
	707.5	23095	3	16-QAM	15	0	22.09	0-2	2
	714.5	23165	3	QPSK	1	0	24.65	0	0
	714.5	23165	3	QPSK	1	7	24.67	0	0
	714.5	23165	3	QPSK	1	14	24.68	0	0
	714.5	23165	3	QPSK	8	0	23.25	0-1	1
	714.5	23165	3	QPSK	8	4	23.24	0-1	1
	714.5	23165	3	QPSK	8	7	23.32	0-1	1
	714.5	23165	3	QPSK	15	0	23.29	0-1	1
	714.5	23165	3	16-QAM	1	0	23.66	0-1	1
	714.5	23165	3	16-QAM	1	7	23.57	0-1	1
	714.5	23165	3	16-QAM	1	14	23.72	0-1	1
	714.5	23165	3	16-QAM	8	0	22.16	0-2	2
	714.5	23165	3	16-QAM	8	4	22.14	0-2	2
	714.5	23165	3	16-QAM	8	7	22.20	0-2	2
	714.5	23165	3	16-QAM	15	0	22.21	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 29 of 102	

Table 9-4
LTE Band 12 Maximum Conducted Powers - 1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	699.7	23017	1.4	QPSK	1	0	24.80	0	0
	699.7	23017	1.4	QPSK	1	2	24.70	0	0
	699.7	23017	1.4	QPSK	1	5	24.75	0	0
	699.7	23017	1.4	QPSK	3	0	24.46	0	0
	699.7	23017	1.4	QPSK	3	2	24.40	0	0
	699.7	23017	1.4	QPSK	3	3	24.41	0	0
	699.7	23017	1.4	QPSK	6	0	23.28	0-1	1
	699.7	23017	1.4	16-QAM	1	0	23.49	0-1	1
	699.7	23017	1.4	16-QAM	1	2	23.41	0-1	1
	699.7	23017	1.4	16-QAM	1	5	23.47	0-1	1
	699.7	23017	1.4	16-QAM	3	0	23.16	0-1	1
	699.7	23017	1.4	16-QAM	3	2	23.15	0-1	1
	699.7	23017	1.4	16-QAM	3	3	23.14	0-1	1
	699.7	23017	1.4	16-QAM	6	0	22.35	0-2	2
Mid	707.5	23095	1.4	QPSK	1	0	24.53	0	0
	707.5	23095	1.4	QPSK	1	2	24.60	0	0
	707.5	23095	1.4	QPSK	1	5	24.61	0	0
	707.5	23095	1.4	QPSK	3	0	24.24	0	0
	707.5	23095	1.4	QPSK	3	2	24.33	0	0
	707.5	23095	1.4	QPSK	3	3	24.32	0	0
	707.5	23095	1.4	QPSK	6	0	23.13	0-1	1
	707.5	23095	1.4	16-QAM	1	0	23.77	0-1	1
	707.5	23095	1.4	16-QAM	1	2	23.72	0-1	1
	707.5	23095	1.4	16-QAM	1	5	23.78	0-1	1
	707.5	23095	1.4	16-QAM	3	0	23.25	0-1	1
	707.5	23095	1.4	16-QAM	3	2	23.36	0-1	1
	707.5	23095	1.4	16-QAM	3	3	23.34	0-1	1
	707.5	23095	1.4	16-QAM	6	0	22.16	0-2	2
High	715.3	23173	1.4	QPSK	1	0	24.59	0	0
	715.3	23173	1.4	QPSK	1	2	24.62	0	0
	715.3	23173	1.4	QPSK	1	5	24.67	0	0
	715.3	23173	1.4	QPSK	3	0	24.23	0	0
	715.3	23173	1.4	QPSK	3	2	24.38	0	0
	715.3	23173	1.4	QPSK	3	3	24.35	0	0
	715.3	23173	1.4	QPSK	6	0	23.30	0-1	1
	715.3	23173	1.4	16-QAM	1	0	23.64	0-1	1
	715.3	23173	1.4	16-QAM	1	2	23.63	0-1	1
	715.3	23173	1.4	16-QAM	1	5	23.77	0-1	1
	715.3	23173	1.4	16-QAM	3	0	23.31	0-1	1
	715.3	23173	1.4	16-QAM	3	2	23.29	0-1	1
	715.3	23173	1.4	16-QAM	3	3	23.28	0-1	1
	715.3	23173	1.4	16-QAM	6	0	22.22	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 30 of 102	

9.3.1

LTE Band 13

Table 9-5
LTE Band 13 Maximum Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	782.0	23230	10	QPSK	1	0	23.11	0	0
	782.0	23230	10	QPSK	1	25	23.28	0	0
	782.0	23230	10	QPSK	1	49	23.12	0	0
	782.0	23230	10	QPSK	25	0	22.07	0-1	1
	782.0	23230	10	QPSK	25	12	22.04	0-1	1
	782.0	23230	10	QPSK	25	25	22.00	0-1	1
	782.0	23230	10	QPSK	50	0	22.01	0-1	1
	782.0	23230	10	16QAM	1	0	22.12	0-1	1
	782.0	23230	10	16QAM	1	25	22.17	0-1	1
	782.0	23230	10	16QAM	1	49	22.10	0-1	1
	782.0	23230	10	16QAM	25	0	21.00	0-2	2
	782.0	23230	10	16QAM	25	12	21.02	0-2	2
	782.0	23230	10	16QAM	25	25	21.10	0-2	2
	782.0	23230	10	16QAM	50	0	21.09	0-2	2

Table 9-6
LTE Band 13 Maximum Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	782.0	23230	5	QPSK	1	0	23.15	0	0
	782.0	23230	5	QPSK	1	12	23.24	0	0
	782.0	23230	5	QPSK	1	24	23.14	0	0
	782.0	23230	5	QPSK	12	0	22.05	0-1	1
	782.0	23230	5	QPSK	12	6	22.01	0-1	1
	782.0	23230	5	QPSK	12	13	22.07	0-1	1
	782.0	23230	5	QPSK	25	0	22.03	0-1	1
	782.0	23230	5	16-QAM	1	0	22.09	0-1	1
	782.0	23230	5	16-QAM	1	12	22.04	0-1	1
	782.0	23230	5	16-QAM	1	24	22.06	0-1	1
	782.0	23230	5	16-QAM	12	0	21.04	0-2	2
	782.0	23230	5	16-QAM	12	6	21.07	0-2	2
	782.0	23230	5	16-QAM	12	13	21.00	0-2	2
	782.0	23230	5	16-QAM	25	0	21.02	0-2	2

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 31 of 102

9.3.2

LTE Band 5 (Cell)

Table 9-7
LTE Band 5 (Cell) Maximum Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	836.5	20525	10	QPSK	1	0	24.48	0	0
	836.5	20525	10	QPSK	1	25	24.38	0	0
	836.5	20525	10	QPSK	1	49	24.31	0	0
	836.5	20525	10	QPSK	25	0	22.98	0-1	1
	836.5	20525	10	QPSK	25	12	23.00	0-1	1
	836.5	20525	10	QPSK	25	25	22.88	0-1	1
	836.5	20525	10	QPSK	50	0	22.99	0-1	1
	836.5	20525	10	16QAM	1	0	23.49	0-1	1
	836.5	20525	10	16QAM	1	25	23.40	0-1	1
	836.5	20525	10	16QAM	1	49	23.24	0-1	1
	836.5	20525	10	16QAM	25	0	21.89	0-2	2
	836.5	20525	10	16QAM	25	12	21.92	0-2	2
	836.5	20525	10	16QAM	25	25	21.80	0-2	2
	836.5	20525	10	16QAM	50	0	22.03	0-2	2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 32 of 102

Table 9-8
LTE Band 5 (Cell) Maximum Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	826.5	20425	5	QPSK	1	0	24.45	0	0
	826.5	20425	5	QPSK	1	12	24.42	0	0
	826.5	20425	5	QPSK	1	24	24.38	0	0
	826.5	20425	5	QPSK	12	0	23.25	0-1	1
	826.5	20425	5	QPSK	12	6	23.16	0-1	1
	826.5	20425	5	QPSK	12	13	23.28	0-1	1
	826.5	20425	5	QPSK	25	0	23.10	0-1	1
	826.5	20425	5	16-QAM	1	0	23.60	0-1	1
	826.5	20425	5	16-QAM	1	12	23.62	0-1	1
	826.5	20425	5	16-QAM	1	24	23.46	0-1	1
	826.5	20425	5	16-QAM	12	0	22.18	0-2	2
	826.5	20425	5	16-QAM	12	6	22.08	0-2	2
	826.5	20425	5	16-QAM	12	13	22.11	0-2	2
	826.5	20425	5	16-QAM	25	0	22.00	0-2	2
Mid	836.5	20525	5	QPSK	1	0	24.36	0	0
	836.5	20525	5	QPSK	1	12	24.43	0	0
	836.5	20525	5	QPSK	1	24	24.46	0	0
	836.5	20525	5	QPSK	12	0	23.33	0-1	1
	836.5	20525	5	QPSK	12	6	23.19	0-1	1
	836.5	20525	5	QPSK	12	13	23.18	0-1	1
	836.5	20525	5	QPSK	25	0	23.05	0-1	1
	836.5	20525	5	16-QAM	1	0	23.72	0-1	1
	836.5	20525	5	16-QAM	1	12	23.70	0-1	1
	836.5	20525	5	16-QAM	1	24	23.58	0-1	1
	836.5	20525	5	16-QAM	12	0	22.27	0-2	2
	836.5	20525	5	16-QAM	12	6	22.18	0-2	2
	836.5	20525	5	16-QAM	12	13	22.17	0-2	2
	836.5	20525	5	16-QAM	25	0	21.99	0-2	2
High	846.5	20625	5	QPSK	1	0	24.44	0	0
	846.5	20625	5	QPSK	1	12	24.41	0	0
	846.5	20625	5	QPSK	1	24	24.40	0	0
	846.5	20625	5	QPSK	12	0	23.18	0-1	1
	846.5	20625	5	QPSK	12	6	23.12	0-1	1
	846.5	20625	5	QPSK	12	13	23.17	0-1	1
	846.5	20625	5	QPSK	25	0	23.02	0-1	1
	846.5	20625	5	16-QAM	1	0	23.45	0-1	1
	846.5	20625	5	16-QAM	1	12	23.61	0-1	1
	846.5	20625	5	16-QAM	1	24	23.42	0-1	1
	846.5	20625	5	16-QAM	12	0	22.15	0-2	2
	846.5	20625	5	16-QAM	12	6	22.16	0-2	2
	846.5	20625	5	16-QAM	12	13	22.15	0-2	2
	846.5	20625	5	16-QAM	25	0	22.06	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 33 of 102	

Table 9-9
LTE Band 5 (Cell) Maximum Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	825.5	20415	3	QPSK	1	0	24.34	0	0
	825.5	20415	3	QPSK	1	7	24.47	0	0
	825.5	20415	3	QPSK	1	14	24.55	0	0
	825.5	20415	3	QPSK	8	0	23.24	0-1	1
	825.5	20415	3	QPSK	8	4	23.17	0-1	1
	825.5	20415	3	QPSK	8	7	23.26	0-1	1
	825.5	20415	3	QPSK	15	0	23.08	0-1	1
	825.5	20415	3	16-QAM	1	0	23.66	0-1	1
	825.5	20415	3	16-QAM	1	7	23.37	0-1	1
	825.5	20415	3	16-QAM	1	14	23.67	0-1	1
	825.5	20415	3	16-QAM	8	0	22.06	0-2	2
	825.5	20415	3	16-QAM	8	4	22.10	0-2	2
	825.5	20415	3	16-QAM	8	7	22.12	0-2	2
	825.5	20415	3	16-QAM	15	0	22.01	0-2	2
Mid	836.5	20525	3	QPSK	1	0	24.51	0	0
	836.5	20525	3	QPSK	1	7	24.47	0	0
	836.5	20525	3	QPSK	1	14	24.44	0	0
	836.5	20525	3	QPSK	8	0	23.19	0-1	1
	836.5	20525	3	QPSK	8	4	23.18	0-1	1
	836.5	20525	3	QPSK	8	7	23.17	0-1	1
	836.5	20525	3	QPSK	15	0	23.04	0-1	1
	836.5	20525	3	16-QAM	1	0	23.68	0-1	1
	836.5	20525	3	16-QAM	1	7	23.51	0-1	1
	836.5	20525	3	16-QAM	1	14	23.35	0-1	1
	836.5	20525	3	16-QAM	8	0	22.09	0-2	2
	836.5	20525	3	16-QAM	8	4	22.03	0-2	2
	836.5	20525	3	16-QAM	8	7	22.18	0-2	2
	836.5	20525	3	16-QAM	15	0	22.11	0-2	2
High	847.5	20635	3	QPSK	1	0	24.43	0	0
	847.5	20635	3	QPSK	1	7	24.48	0	0
	847.5	20635	3	QPSK	1	14	24.39	0	0
	847.5	20635	3	QPSK	8	0	23.18	0-1	1
	847.5	20635	3	QPSK	8	4	23.10	0-1	1
	847.5	20635	3	QPSK	8	7	23.09	0-1	1
	847.5	20635	3	QPSK	15	0	23.02	0-1	1
	847.5	20635	3	16-QAM	1	0	23.28	0-1	1
	847.5	20635	3	16-QAM	1	7	23.50	0-1	1
	847.5	20635	3	16-QAM	1	14	23.31	0-1	1
	847.5	20635	3	16-QAM	8	0	21.92	0-2	2
	847.5	20635	3	16-QAM	8	4	21.87	0-2	2
	847.5	20635	3	16-QAM	8	7	22.01	0-2	2
	847.5	20635	3	16-QAM	15	0	22.00	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY150610120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 34 of 102	

Table 9-10
LTE Band 5 (Cell) Maximum Conducted Powers - 1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	824.7	20407	1.4	QPSK	1	0	24.53	0	0
	824.7	20407	1.4	QPSK	1	2	24.68	0	0
	824.7	20407	1.4	QPSK	1	5	24.50	0	0
	824.7	20407	1.4	QPSK	3	0	24.34	0	0
	824.7	20407	1.4	QPSK	3	2	24.34	0	0
	824.7	20407	1.4	QPSK	3	3	24.27	0	0
	824.7	20407	1.4	QPSK	6	0	23.16	0-1	1
	824.7	20407	1.4	16-QAM	1	0	23.65	0-1	1
	824.7	20407	1.4	16-QAM	1	2	23.47	0-1	1
	824.7	20407	1.4	16-QAM	1	5	23.55	0-1	1
	824.7	20407	1.4	16-QAM	3	0	23.24	0-1	1
	824.7	20407	1.4	16-QAM	3	2	23.10	0-1	1
	824.7	20407	1.4	16-QAM	3	3	23.20	0-1	1
Mid	836.5	20525	1.4	QPSK	1	0	24.44	0	0
	836.5	20525	1.4	QPSK	1	2	24.46	0	0
	836.5	20525	1.4	QPSK	1	5	24.42	0	0
	836.5	20525	1.4	QPSK	3	0	24.28	0	0
	836.5	20525	1.4	QPSK	3	2	24.23	0	0
	836.5	20525	1.4	QPSK	3	3	24.27	0	0
	836.5	20525	1.4	QPSK	6	0	23.04	0-1	1
	836.5	20525	1.4	16-QAM	1	0	23.35	0-1	1
	836.5	20525	1.4	16-QAM	1	2	23.20	0-1	1
	836.5	20525	1.4	16-QAM	1	5	23.41	0-1	1
	836.5	20525	1.4	16-QAM	3	0	23.30	0-1	1
	836.5	20525	1.4	16-QAM	3	2	23.03	0-1	1
	836.5	20525	1.4	16-QAM	3	3	23.17	0-1	1
	836.5	20525	1.4	16-QAM	6	0	22.14	0-2	2
High	848.3	20643	1.4	QPSK	1	0	24.41	0	0
	848.3	20643	1.4	QPSK	1	2	24.36	0	0
	848.3	20643	1.4	QPSK	1	5	24.48	0	0
	848.3	20643	1.4	QPSK	3	0	24.14	0	0
	848.3	20643	1.4	QPSK	3	2	24.10	0	0
	848.3	20643	1.4	QPSK	3	3	24.18	0	0
	848.3	20643	1.4	QPSK	6	0	23.01	0-1	1
	848.3	20643	1.4	16-QAM	1	0	23.68	0-1	1
	848.3	20643	1.4	16-QAM	1	2	23.59	0-1	1
	848.3	20643	1.4	16-QAM	1	5	23.57	0-1	1
	848.3	20643	1.4	16-QAM	3	0	23.22	0-1	1
	848.3	20643	1.4	16-QAM	3	2	23.13	0-1	1
	848.3	20643	1.4	16-QAM	3	3	23.02	0-1	1
	848.3	20643	1.4	16-QAM	6	0	22.02	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 35 of 102	

9.3.3

LTE Band 4 (AWS)

Table 9-11
LTE Band 4 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	23.73	0	0
	1732.5	20175	20	QPSK	1	50	23.80	0	0
	1732.5	20175	20	QPSK	1	99	23.76	0	0
	1732.5	20175	20	QPSK	50	0	22.52	0-1	1
	1732.5	20175	20	QPSK	50	25	22.55	0-1	1
	1732.5	20175	20	QPSK	50	50	22.44	0-1	1
	1732.5	20175	20	QPSK	100	0	22.47	0-1	1
	1732.5	20175	20	16QAM	1	0	22.95	0-1	1
	1732.5	20175	20	16QAM	1	50	22.91	0-1	1
	1732.5	20175	20	16QAM	1	99	22.85	0-1	1
	1732.5	20175	20	16QAM	50	0	21.26	0-2	2
	1732.5	20175	20	16QAM	50	25	21.30	0-2	2
	1732.5	20175	20	16QAM	50	50	21.29	0-2	2
	1732.5	20175	20	16QAM	100	0	21.23	0-2	2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 36 of 102

Table 9-12
LTE Band 4 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	23.85	0	0
	1717.5	20025	15	QPSK	1	36	23.85	0	0
	1717.5	20025	15	QPSK	1	74	23.89	0	0
	1717.5	20025	15	QPSK	36	0	22.40	0-1	1
	1717.5	20025	15	QPSK	36	18	22.41	0-1	1
	1717.5	20025	15	QPSK	36	37	22.42	0-1	1
	1717.5	20025	15	QPSK	75	0	22.40	0-1	1
	1717.5	20025	15	16QAM	1	0	22.59	0-1	1
	1717.5	20025	15	16QAM	1	36	22.91	0-1	1
	1717.5	20025	15	16QAM	1	74	22.56	0-1	1
	1717.5	20025	15	16QAM	36	0	21.23	0-2	2
	1717.5	20025	15	16QAM	36	18	21.31	0-2	2
	1717.5	20025	15	16QAM	36	37	21.28	0-2	2
	1717.5	20025	15	16QAM	75	0	21.27	0-2	2
Mid	1732.5	20175	15	QPSK	1	0	23.91	0	0
	1732.5	20175	15	QPSK	1	36	23.73	0	0
	1732.5	20175	15	QPSK	1	74	23.84	0	0
	1732.5	20175	15	QPSK	36	0	22.45	0-1	1
	1732.5	20175	15	QPSK	36	18	22.35	0-1	1
	1732.5	20175	15	QPSK	36	37	22.34	0-1	1
	1732.5	20175	15	QPSK	75	0	22.33	0-1	1
	1732.5	20175	15	16QAM	1	0	22.72	0-1	1
	1732.5	20175	15	16QAM	1	36	22.74	0-1	1
	1732.5	20175	15	16QAM	1	74	22.68	0-1	1
	1732.5	20175	15	16QAM	36	0	21.30	0-2	2
	1732.5	20175	15	16QAM	36	18	21.30	0-2	2
	1732.5	20175	15	16QAM	36	37	21.27	0-2	2
	1732.5	20175	15	16QAM	75	0	21.35	0-2	2
High	1747.5	20325	15	QPSK	1	0	23.72	0	0
	1747.5	20325	15	QPSK	1	36	23.74	0	0
	1747.5	20325	15	QPSK	1	74	23.76	0	0
	1747.5	20325	15	QPSK	36	0	22.63	0-1	1
	1747.5	20325	15	QPSK	36	18	22.59	0-1	1
	1747.5	20325	15	QPSK	36	37	22.69	0-1	1
	1747.5	20325	15	QPSK	75	0	22.64	0-1	1
	1747.5	20325	15	16QAM	1	0	23.09	0-1	1
	1747.5	20325	15	16QAM	1	36	23.12	0-1	1
	1747.5	20325	15	16QAM	1	74	23.32	0-1	1
	1747.5	20325	15	16QAM	36	0	21.57	0-2	2
	1747.5	20325	15	16QAM	36	18	21.50	0-2	2
	1747.5	20325	15	16QAM	36	37	21.57	0-2	2
	1747.5	20325	15	16QAM	75	0	21.60	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 37 of 102	

Table 9-13
LTE Band 4 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	23.87	0	0
	1715	20000	10	QPSK	1	25	23.88	0	0
	1715	20000	10	QPSK	1	49	23.80	0	0
	1715	20000	10	QPSK	25	0	22.47	0-1	1
	1715	20000	10	QPSK	25	12	22.50	0-1	1
	1715	20000	10	QPSK	25	25	22.40	0-1	1
	1715	20000	10	QPSK	50	0	22.45	0-1	1
	1715	20000	10	16QAM	1	0	22.97	0-1	1
	1715	20000	10	16QAM	1	25	22.86	0-1	1
	1715	20000	10	16QAM	1	49	22.96	0-1	1
	1715	20000	10	16QAM	25	0	21.40	0-2	2
	1715	20000	10	16QAM	25	12	21.16	0-2	2
	1715	20000	10	16QAM	25	25	21.22	0-2	2
	1715	20000	10	16QAM	50	0	21.37	0-2	2
Mid	1732.5	20175	10	QPSK	1	0	23.84	0	0
	1732.5	20175	10	QPSK	1	25	23.78	0	0
	1732.5	20175	10	QPSK	1	49	23.89	0	0
	1732.5	20175	10	QPSK	25	0	22.43	0-1	1
	1732.5	20175	10	QPSK	25	12	22.41	0-1	1
	1732.5	20175	10	QPSK	25	25	22.41	0-1	1
	1732.5	20175	10	QPSK	50	0	22.50	0-1	1
	1732.5	20175	10	16QAM	1	0	22.74	0-1	1
	1732.5	20175	10	16QAM	1	25	22.63	0-1	1
	1732.5	20175	10	16QAM	1	49	22.62	0-1	1
	1732.5	20175	10	16QAM	25	0	21.47	0-2	2
	1732.5	20175	10	16QAM	25	12	21.31	0-2	2
	1732.5	20175	10	16QAM	25	25	21.43	0-2	2
	1732.5	20175	10	16QAM	50	0	21.39	0-2	2
High	1750	20350	10	QPSK	1	0	24.13	0	0
	1750	20350	10	QPSK	1	25	24.12	0	0
	1750	20350	10	QPSK	1	49	23.94	0	0
	1750	20350	10	QPSK	25	0	22.62	0-1	1
	1750	20350	10	QPSK	25	12	22.59	0-1	1
	1750	20350	10	QPSK	25	25	22.61	0-1	1
	1750	20350	10	QPSK	50	0	22.67	0-1	1
	1750	20350	10	16QAM	1	0	22.82	0-1	1
	1750	20350	10	16QAM	1	25	23.02	0-1	1
	1750	20350	10	16QAM	1	49	23.03	0-1	1
	1750	20350	10	16QAM	25	0	21.41	0-2	2
	1750	20350	10	16QAM	25	12	21.45	0-2	2
	1750	20350	10	16QAM	25	25	21.52	0-2	2
	1750	20350	10	16QAM	50	0	21.51	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 38 of 102	

Table 9-14
LTE Band 4 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	23.71	0	0
	1712.5	19975	5	QPSK	1	12	23.70	0	0
	1712.5	19975	5	QPSK	1	24	23.83	0	0
	1712.5	19975	5	QPSK	12	0	22.29	0-1	1
	1712.5	19975	5	QPSK	12	6	22.28	0-1	1
	1712.5	19975	5	QPSK	12	13	22.20	0-1	1
	1712.5	19975	5	QPSK	25	0	22.00	0-1	1
	1712.5	19975	5	16-QAM	1	0	22.66	0-1	1
	1712.5	19975	5	16-QAM	1	12	22.71	0-1	1
	1712.5	19975	5	16-QAM	1	24	22.52	0-1	1
	1712.5	19975	5	16-QAM	12	0	21.28	0-2	2
	1712.5	19975	5	16-QAM	12	6	21.23	0-2	2
	1712.5	19975	5	16-QAM	12	13	21.32	0-2	2
	1712.5	19975	5	16-QAM	25	0	21.40	0-2	2
Mid	1732.5	20175	5	QPSK	1	0	23.79	0	0
	1732.5	20175	5	QPSK	1	12	23.69	0	0
	1732.5	20175	5	QPSK	1	24	23.67	0	0
	1732.5	20175	5	QPSK	12	0	22.90	0-1	1
	1732.5	20175	5	QPSK	12	6	22.87	0-1	1
	1732.5	20175	5	QPSK	12	13	22.89	0-1	1
	1732.5	20175	5	QPSK	25	0	22.86	0-1	1
	1732.5	20175	5	16-QAM	1	0	22.75	0-1	1
	1732.5	20175	5	16-QAM	1	12	22.64	0-1	1
	1732.5	20175	5	16-QAM	1	24	22.68	0-1	1
	1732.5	20175	5	16-QAM	12	0	21.94	0-2	2
	1732.5	20175	5	16-QAM	12	6	21.88	0-2	2
	1732.5	20175	5	16-QAM	12	13	21.83	0-2	2
	1732.5	20175	5	16-QAM	25	0	21.71	0-2	2
High	1752.5	20375	5	QPSK	1	0	23.92	0	0
	1752.5	20375	5	QPSK	1	12	23.84	0	0
	1752.5	20375	5	QPSK	1	24	23.87	0	0
	1752.5	20375	5	QPSK	12	0	22.48	0-1	1
	1752.5	20375	5	QPSK	12	6	22.44	0-1	1
	1752.5	20375	5	QPSK	12	13	22.47	0-1	1
	1752.5	20375	5	QPSK	25	0	22.42	0-1	1
	1752.5	20375	5	16-QAM	1	0	23.13	0-1	1
	1752.5	20375	5	16-QAM	1	12	22.98	0-1	1
	1752.5	20375	5	16-QAM	1	24	22.95	0-1	1
	1752.5	20375	5	16-QAM	12	0	21.32	0-2	2
	1752.5	20375	5	16-QAM	12	6	21.50	0-2	2
	1752.5	20375	5	16-QAM	12	13	21.37	0-2	2
	1752.5	20375	5	16-QAM	25	0	21.43	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 39 of 102	

Table 9-15
LTE Band 4 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1711.5	19965	3	QPSK	1	0	23.71	0	0
	1711.5	19965	3	QPSK	1	7	23.69	0	0
	1711.5	19965	3	QPSK	1	14	23.66	0	0
	1711.5	19965	3	QPSK	8	0	22.35	0-1	1
	1711.5	19965	3	QPSK	8	4	22.36	0-1	1
	1711.5	19965	3	QPSK	8	7	22.37	0-1	1
	1711.5	19965	3	QPSK	15	0	22.33	0-1	1
	1711.5	19965	3	16-QAM	1	0	23.03	0-1	1
	1711.5	19965	3	16-QAM	1	7	22.95	0-1	1
	1711.5	19965	3	16-QAM	1	14	22.94	0-1	1
	1711.5	19965	3	16-QAM	8	0	21.36	0-2	2
	1711.5	19965	3	16-QAM	8	4	21.36	0-2	2
	1711.5	19965	3	16-QAM	8	7	21.37	0-2	2
Mid	1732.5	20175	3	QPSK	1	0	23.66	0	0
	1732.5	20175	3	QPSK	1	7	23.67	0	0
	1732.5	20175	3	QPSK	1	14	23.71	0	0
	1732.5	20175	3	QPSK	8	0	22.31	0-1	1
	1732.5	20175	3	QPSK	8	4	22.30	0-1	1
	1732.5	20175	3	QPSK	8	7	22.30	0-1	1
	1732.5	20175	3	QPSK	15	0	22.31	0-1	1
	1732.5	20175	3	16-QAM	1	0	22.91	0-1	1
	1732.5	20175	3	16-QAM	1	7	22.80	0-1	1
	1732.5	20175	3	16-QAM	1	14	22.83	0-1	1
	1732.5	20175	3	16-QAM	8	0	21.30	0-2	2
	1732.5	20175	3	16-QAM	8	4	21.28	0-2	2
	1732.5	20175	3	16-QAM	8	7	21.27	0-2	2
	1732.5	20175	3	16-QAM	15	0	21.29	0-2	2
High	1753.5	20385	3	QPSK	1	0	23.85	0	0
	1753.5	20385	3	QPSK	1	7	23.86	0	0
	1753.5	20385	3	QPSK	1	14	23.79	0	0
	1753.5	20385	3	QPSK	8	0	22.50	0-1	1
	1753.5	20385	3	QPSK	8	4	22.49	0-1	1
	1753.5	20385	3	QPSK	8	7	22.49	0-1	1
	1753.5	20385	3	QPSK	15	0	22.47	0-1	1
	1753.5	20385	3	16-QAM	1	0	22.93	0-1	1
	1753.5	20385	3	16-QAM	1	7	22.94	0-1	1
	1753.5	20385	3	16-QAM	1	14	22.87	0-1	1
	1753.5	20385	3	16-QAM	8	0	21.41	0-2	2
	1753.5	20385	3	16-QAM	8	4	21.41	0-2	2
	1753.5	20385	3	16-QAM	8	7	21.42	0-2	2
	1753.5	20385	3	16-QAM	15	0	21.61	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 40 of 102

Table 9-16
LTE Band 4 (AWS) Maximum Conducted Powers - 1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1710.7	19957	1.4	QPSK	1	0	23.76	0	0
	1710.7	19957	1.4	QPSK	1	2	23.71	0	0
	1710.7	19957	1.4	QPSK	1	5	23.78	0	0
	1710.7	19957	1.4	QPSK	3	0	23.60	0	0
	1710.7	19957	1.4	QPSK	3	2	23.58	0	0
	1710.7	19957	1.4	QPSK	3	3	23.57	0	0
	1710.7	19957	1.4	QPSK	6	0	22.43	0-1	1
	1710.7	19957	1.4	16-QAM	1	0	22.76	0-1	1
	1710.7	19957	1.4	16-QAM	1	2	22.73	0-1	1
	1710.7	19957	1.4	16-QAM	1	5	22.79	0-1	1
	1710.7	19957	1.4	16-QAM	3	0	22.51	0-1	1
	1710.7	19957	1.4	16-QAM	3	2	22.36	0-1	1
	1710.7	19957	1.4	16-QAM	3	3	22.37	0-1	1
Mid	1710.7	19957	1.4	16-QAM	6	0	21.44	0-2	2
	1732.5	20175	1.4	QPSK	1	0	23.66	0	0
	1732.5	20175	1.4	QPSK	1	2	23.63	0	0
	1732.5	20175	1.4	QPSK	1	5	23.65	0	0
	1732.5	20175	1.4	QPSK	3	0	23.51	0	0
	1732.5	20175	1.4	QPSK	3	2	23.54	0	0
	1732.5	20175	1.4	QPSK	3	3	23.48	0	0
	1732.5	20175	1.4	QPSK	6	0	22.43	0-1	1
	1732.5	20175	1.4	16-QAM	1	0	22.62	0-1	1
	1732.5	20175	1.4	16-QAM	1	2	22.88	0-1	1
	1732.5	20175	1.4	16-QAM	1	5	23.11	0-1	1
	1732.5	20175	1.4	16-QAM	3	0	22.32	0-1	1
	1732.5	20175	1.4	16-QAM	3	2	22.29	0-1	1
	1732.5	20175	1.4	16-QAM	3	3	22.26	0-1	1
High	1732.5	20175	1.4	16-QAM	6	0	21.43	0-2	2
	1754.3	20393	1.4	QPSK	1	0	23.87	0	0
	1754.3	20393	1.4	QPSK	1	2	23.91	0	0
	1754.3	20393	1.4	QPSK	1	5	23.90	0	0
	1754.3	20393	1.4	QPSK	3	0	23.64	0	0
	1754.3	20393	1.4	QPSK	3	2	23.69	0	0
	1754.3	20393	1.4	QPSK	3	3	23.62	0	0
	1754.3	20393	1.4	QPSK	6	0	22.51	0-1	1
	1754.3	20393	1.4	16-QAM	1	0	23.03	0-1	1
	1754.3	20393	1.4	16-QAM	1	2	22.78	0-1	1
	1754.3	20393	1.4	16-QAM	1	5	22.96	0-1	1
	1754.3	20393	1.4	16-QAM	3	0	22.30	0-1	1
	1754.3	20393	1.4	16-QAM	3	2	22.41	0-1	1
	1754.3	20393	1.4	16-QAM	3	3	22.34	0-1	1
	1754.3	20393	1.4	16-QAM	6	0	21.50	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 41 of 102	

Table 9-17
LTE Band 4 Reduced Conducted Powers - 20 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	19.84	0	0
	1732.5	20175	20	QPSK	1	50	19.88	0	0
	1732.5	20175	20	QPSK	1	99	19.85	0	0
	1732.5	20175	20	QPSK	50	0	18.71	0-1	1
	1732.5	20175	20	QPSK	50	25	18.79	0-1	1
	1732.5	20175	20	QPSK	50	50	18.76	0-1	1
	1732.5	20175	20	QPSK	100	0	18.73	0-1	1
	1732.5	20175	20	16QAM	1	0	18.94	0-1	1
	1732.5	20175	20	16QAM	1	50	18.99	0-1	1
	1732.5	20175	20	16QAM	1	99	19.04	0-1	1
	1732.5	20175	20	16QAM	50	0	17.76	0-2	2
	1732.5	20175	20	16QAM	50	25	17.74	0-2	2
	1732.5	20175	20	16QAM	50	50	17.69	0-2	2
	1732.5	20175	20	16QAM	100	0	17.72	0-2	2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 42 of 102

Table 9-18
LTE Band 4 Reduced Conducted Powers - 15 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	20.18	0	0
	1717.5	20025	15	QPSK	1	36	20.08	0	0
	1717.5	20025	15	QPSK	1	74	20.05	0	0
	1717.5	20025	15	QPSK	36	0	18.83	0-1	1
	1717.5	20025	15	QPSK	36	18	18.83	0-1	1
	1717.5	20025	15	QPSK	36	37	18.85	0-1	1
	1717.5	20025	15	QPSK	75	0	18.80	0-1	1
	1717.5	20025	15	16QAM	1	0	18.98	0-1	1
	1717.5	20025	15	16QAM	1	36	19.06	0-1	1
	1717.5	20025	15	16QAM	1	74	19.34	0-1	1
	1717.5	20025	15	16QAM	36	0	17.80	0-2	2
	1717.5	20025	15	16QAM	36	18	17.70	0-2	2
	1717.5	20025	15	16QAM	36	37	17.78	0-2	2
Mid	1732.5	20175	15	QPSK	1	0	20.20	0	0
	1732.5	20175	15	QPSK	1	36	20.14	0	0
	1732.5	20175	15	QPSK	1	74	20.18	0	0
	1732.5	20175	15	QPSK	36	0	18.81	0-1	1
	1732.5	20175	15	QPSK	36	18	18.81	0-1	1
	1732.5	20175	15	QPSK	36	37	18.81	0-1	1
	1732.5	20175	15	QPSK	75	0	18.88	0-1	1
	1732.5	20175	15	16QAM	1	0	19.19	0-1	1
	1732.5	20175	15	16QAM	1	36	19.30	0-1	1
	1732.5	20175	15	16QAM	1	74	18.96	0-1	1
	1732.5	20175	15	16QAM	36	0	17.82	0-2	2
	1732.5	20175	15	16QAM	36	18	17.94	0-2	2
	1732.5	20175	15	16QAM	36	37	17.84	0-2	2
	1732.5	20175	15	16QAM	75	0	17.77	0-2	2
High	1747.5	20325	15	QPSK	1	0	20.22	0	0
	1747.5	20325	15	QPSK	1	36	20.12	0	0
	1747.5	20325	15	QPSK	1	74	20.24	0	0
	1747.5	20325	15	QPSK	36	0	18.88	0-1	1
	1747.5	20325	15	QPSK	36	18	18.88	0-1	1
	1747.5	20325	15	QPSK	36	37	18.85	0-1	1
	1747.5	20325	15	QPSK	75	0	18.94	0-1	1
	1747.5	20325	15	16QAM	1	0	19.15	0-1	1
	1747.5	20325	15	16QAM	1	36	19.19	0-1	1
	1747.5	20325	15	16QAM	1	74	19.01	0-1	1
	1747.5	20325	15	16QAM	36	0	17.86	0-2	2
	1747.5	20325	15	16QAM	36	18	17.88	0-2	2
	1747.5	20325	15	16QAM	36	37	17.89	0-2	2
	1747.5	20325	15	16QAM	75	0	17.88	0-2	2

Table 9-19
LTE Band 4 Reduced Conducted Powers - 10 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	20.24	0	0
	1715	20000	10	QPSK	1	25	20.17	0	0
	1715	20000	10	QPSK	1	49	20.22	0	0
	1715	20000	10	QPSK	25	0	18.93	0-1	1
	1715	20000	10	QPSK	25	12	18.91	0-1	1
	1715	20000	10	QPSK	25	25	18.90	0-1	1
	1715	20000	10	QPSK	50	0	18.86	0-1	1
	1715	20000	10	16QAM	1	0	19.25	0-1	1
	1715	20000	10	16QAM	1	25	19.20	0-1	1
	1715	20000	10	16QAM	1	49	19.22	0-1	1
	1715	20000	10	16QAM	25	0	17.83	0-2	2
	1715	20000	10	16QAM	25	12	17.90	0-2	2
	1715	20000	10	16QAM	25	25	17.79	0-2	2
	1715	20000	10	16QAM	50	0	17.73	0-2	2
Mid	1732.5	20175	10	QPSK	1	0	20.21	0	0
	1732.5	20175	10	QPSK	1	25	20.17	0	0
	1732.5	20175	10	QPSK	1	49	20.02	0	0
	1732.5	20175	10	QPSK	25	0	18.86	0-1	1
	1732.5	20175	10	QPSK	25	12	18.87	0-1	1
	1732.5	20175	10	QPSK	25	25	18.77	0-1	1
	1732.5	20175	10	QPSK	50	0	18.85	0-1	1
	1732.5	20175	10	16QAM	1	0	19.22	0-1	1
	1732.5	20175	10	16QAM	1	25	19.20	0-1	1
	1732.5	20175	10	16QAM	1	49	18.88	0-1	1
	1732.5	20175	10	16QAM	25	0	17.74	0-2	2
	1732.5	20175	10	16QAM	25	12	17.81	0-2	2
	1732.5	20175	10	16QAM	25	25	17.80	0-2	2
	1732.5	20175	10	16QAM	50	0	17.71	0-2	2
High	1750	20350	10	QPSK	1	0	20.19	0	0
	1750	20350	10	QPSK	1	25	20.19	0	0
	1750	20350	10	QPSK	1	49	20.26	0	0
	1750	20350	10	QPSK	25	0	18.84	0-1	1
	1750	20350	10	QPSK	25	12	18.87	0-1	1
	1750	20350	10	QPSK	25	25	18.84	0-1	1
	1750	20350	10	QPSK	50	0	18.93	0-1	1
	1750	20350	10	16QAM	1	0	19.09	0-1	1
	1750	20350	10	16QAM	1	25	19.25	0-1	1
	1750	20350	10	16QAM	1	49	19.27	0-1	1
	1750	20350	10	16QAM	25	0	17.79	0-2	2
	1750	20350	10	16QAM	25	12	17.88	0-2	2
	1750	20350	10	16QAM	25	25	17.83	0-2	2
	1750	20350	10	16QAM	50	0	17.95	0-2	2

Table 9-20
LTE Band 4 Reduced Conducted Powers - 5 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	19.98	0	0
	1712.5	19975	5	QPSK	1	12	19.91	0	0
	1712.5	19975	5	QPSK	1	24	19.86	0	0
	1712.5	19975	5	QPSK	12	0	18.73	0-1	1
	1712.5	19975	5	QPSK	12	6	18.67	0-1	1
	1712.5	19975	5	QPSK	12	13	18.66	0-1	1
	1712.5	19975	5	QPSK	25	0	18.63	0-1	1
	1712.5	19975	5	16-QAM	1	0	19.13	0-1	1
	1712.5	19975	5	16-QAM	1	12	19.06	0-1	1
	1712.5	19975	5	16-QAM	1	24	19.03	0-1	1
	1712.5	19975	5	16-QAM	12	0	17.63	0-2	2
	1712.5	19975	5	16-QAM	12	6	17.64	0-2	2
	1712.5	19975	5	16-QAM	12	13	17.62	0-2	2
Mid	1732.5	20175	5	QPSK	1	0	19.69	0	0
	1732.5	20175	5	QPSK	1	12	19.74	0	0
	1732.5	20175	5	QPSK	1	24	19.65	0	0
	1732.5	20175	5	QPSK	12	0	18.70	0-1	1
	1732.5	20175	5	QPSK	12	6	18.70	0-1	1
	1732.5	20175	5	QPSK	12	13	18.67	0-1	1
	1732.5	20175	5	QPSK	25	0	18.67	0-1	1
	1732.5	20175	5	16-QAM	1	0	18.82	0-1	1
	1732.5	20175	5	16-QAM	1	12	18.76	0-1	1
	1732.5	20175	5	16-QAM	1	24	18.78	0-1	1
	1732.5	20175	5	16-QAM	12	0	17.67	0-2	2
	1732.5	20175	5	16-QAM	12	6	17.73	0-2	2
	1732.5	20175	5	16-QAM	12	13	17.68	0-2	2
	1732.5	20175	5	16-QAM	25	0	17.67	0-2	2
High	1752.5	20375	5	QPSK	1	0	19.98	0	0
	1752.5	20375	5	QPSK	1	12	20.03	0	0
	1752.5	20375	5	QPSK	1	24	19.96	0	0
	1752.5	20375	5	QPSK	12	0	18.86	0-1	1
	1752.5	20375	5	QPSK	12	6	18.87	0-1	1
	1752.5	20375	5	QPSK	12	13	18.84	0-1	1
	1752.5	20375	5	QPSK	25	0	18.80	0-1	1
	1752.5	20375	5	16-QAM	1	0	19.12	0-1	1
	1752.5	20375	5	16-QAM	1	12	19.06	0-1	1
	1752.5	20375	5	16-QAM	1	24	19.12	0-1	1
	1752.5	20375	5	16-QAM	12	0	17.75	0-2	2
	1752.5	20375	5	16-QAM	12	6	17.67	0-2	2
	1752.5	20375	5	16-QAM	12	13	17.73	0-2	2
	1752.5	20375	5	16-QAM	25	0	17.72	0-2	2

Table 9-21
LTE Band 4 Reduced Conducted Powers - 3 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1711.5	19965	3	QPSK	1	0	20.11	0	0
	1711.5	19965	3	QPSK	1	7	20.00	0	0
	1711.5	19965	3	QPSK	1	14	19.97	0	0
	1711.5	19965	3	QPSK	8	0	18.69	0-1	1
	1711.5	19965	3	QPSK	8	4	18.70	0-1	1
	1711.5	19965	3	QPSK	8	7	18.72	0-1	1
	1711.5	19965	3	QPSK	15	0	18.68	0-1	1
	1711.5	19965	3	16-QAM	1	0	19.16	0-1	1
	1711.5	19965	3	16-QAM	1	7	19.13	0-1	1
	1711.5	19965	3	16-QAM	1	14	19.05	0-1	1
	1711.5	19965	3	16-QAM	8	0	17.74	0-2	2
	1711.5	19965	3	16-QAM	8	4	17.65	0-2	2
	1711.5	19965	3	16-QAM	8	7	17.71	0-2	2
Mid	1732.5	20175	3	QPSK	1	0	19.93	0	0
	1732.5	20175	3	QPSK	1	7	19.95	0	0
	1732.5	20175	3	QPSK	1	14	19.91	0	0
	1732.5	20175	3	QPSK	8	0	18.71	0-1	1
	1732.5	20175	3	QPSK	8	4	18.70	0-1	1
	1732.5	20175	3	QPSK	8	7	18.69	0-1	1
	1732.5	20175	3	QPSK	15	0	18.67	0-1	1
	1732.5	20175	3	16-QAM	1	0	18.99	0-1	1
	1732.5	20175	3	16-QAM	1	7	18.85	0-1	1
	1732.5	20175	3	16-QAM	1	14	18.80	0-1	1
	1732.5	20175	3	16-QAM	8	0	17.74	0-2	2
	1732.5	20175	3	16-QAM	8	4	17.73	0-2	2
	1732.5	20175	3	16-QAM	8	7	17.72	0-2	2
	1732.5	20175	3	16-QAM	15	0	17.62	0-2	2
High	1753.5	20385	3	QPSK	1	0	20.06	0	0
	1753.5	20385	3	QPSK	1	7	20.08	0	0
	1753.5	20385	3	QPSK	1	14	20.00	0	0
	1753.5	20385	3	QPSK	8	0	18.85	0-1	1
	1753.5	20385	3	QPSK	8	4	18.87	0-1	1
	1753.5	20385	3	QPSK	8	7	18.84	0-1	1
	1753.5	20385	3	QPSK	15	0	18.83	0-1	1
	1753.5	20385	3	16-QAM	1	0	19.13	0-1	1
	1753.5	20385	3	16-QAM	1	7	19.07	0-1	1
	1753.5	20385	3	16-QAM	1	14	19.30	0-1	1
	1753.5	20385	3	16-QAM	8	0	17.61	0-2	2
	1753.5	20385	3	16-QAM	8	4	17.63	0-2	2
	1753.5	20385	3	16-QAM	8	7	17.65	0-2	2
	1753.5	20385	3	16-QAM	15	0	17.68	0-2	2

Table 9-22
LTE Band 4 Reduced Conducted Powers – 1.4 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1710.7	19957	1.4	QPSK	1	0	20.27	0	0
	1710.7	19957	1.4	QPSK	1	2	20.20	0	0
	1710.7	19957	1.4	QPSK	1	5	20.21	0	0
	1710.7	19957	1.4	QPSK	3	0	19.95	0	0
	1710.7	19957	1.4	QPSK	3	2	19.98	0	0
	1710.7	19957	1.4	QPSK	3	3	19.93	0	0
	1710.7	19957	1.4	QPSK	6	0	18.84	0-1	1
	1710.7	19957	1.4	16-QAM	1	0	19.31	0-1	1
	1710.7	19957	1.4	16-QAM	1	2	19.25	0-1	1
	1710.7	19957	1.4	16-QAM	1	5	19.37	0-1	1
	1710.7	19957	1.4	16-QAM	3	0	18.74	0-1	1
	1710.7	19957	1.4	16-QAM	3	2	18.84	0-1	1
	1710.7	19957	1.4	16-QAM	3	3	18.69	0-1	1
Mid	1710.7	19957	1.4	16-QAM	6	0	17.89	0-2	2
	1732.5	20175	1.4	QPSK	1	0	19.92	0	0
	1732.5	20175	1.4	QPSK	1	2	20.11	0	0
	1732.5	20175	1.4	QPSK	1	5	19.98	0	0
	1732.5	20175	1.4	QPSK	3	0	19.85	0	0
	1732.5	20175	1.4	QPSK	3	2	19.79	0	0
	1732.5	20175	1.4	QPSK	3	3	19.87	0	0
	1732.5	20175	1.4	QPSK	6	0	18.82	0-1	1
	1732.5	20175	1.4	16-QAM	1	0	19.01	0-1	1
	1732.5	20175	1.4	16-QAM	1	2	19.18	0-1	1
	1732.5	20175	1.4	16-QAM	1	5	19.26	0-1	1
	1732.5	20175	1.4	16-QAM	3	0	18.79	0-1	1
	1732.5	20175	1.4	16-QAM	3	2	18.52	0-1	1
	1732.5	20175	1.4	16-QAM	3	3	18.67	0-1	1
High	1732.5	20175	1.4	16-QAM	6	0	17.76	0-2	2
	1754.3	20393	1.4	QPSK	1	0	19.91	0	0
	1754.3	20393	1.4	QPSK	1	2	19.92	0	0
	1754.3	20393	1.4	QPSK	1	5	19.85	0	0
	1754.3	20393	1.4	QPSK	3	0	19.84	0	0
	1754.3	20393	1.4	QPSK	3	2	19.81	0	0
	1754.3	20393	1.4	QPSK	3	3	19.76	0	0
	1754.3	20393	1.4	QPSK	6	0	18.77	0-1	1
	1754.3	20393	1.4	16-QAM	1	0	19.45	0-1	1
	1754.3	20393	1.4	16-QAM	1	2	19.41	0-1	1
	1754.3	20393	1.4	16-QAM	1	5	19.35	0-1	1
	1754.3	20393	1.4	16-QAM	3	0	18.76	0-1	1
	1754.3	20393	1.4	16-QAM	3	2	18.72	0-1	1
	1754.3	20393	1.4	16-QAM	3	3	18.77	0-1	1
	1754.3	20393	1.4	16-QAM	6	0	17.78	0-2	2

9.3.4

LTE Band 2 (PCS)

Table 9-23
LTE Band 2 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	23.61	0	0
	1860	18700	20	QPSK	1	50	23.72	0	0
	1860	18700	20	QPSK	1	99	23.64	0	0
	1860	18700	20	QPSK	50	0	22.32	0-1	1
	1860	18700	20	QPSK	50	25	22.43	0-1	1
	1860	18700	20	QPSK	50	50	22.38	0-1	1
	1860	18700	20	QPSK	100	0	22.27	0-1	1
	1860	18700	20	16QAM	1	0	22.50	0-1	1
	1860	18700	20	16QAM	1	50	22.58	0-1	1
	1860	18700	20	16QAM	1	99	22.48	0-1	1
	1860	18700	20	16QAM	50	0	21.28	0-2	2
	1860	18700	20	16QAM	50	25	21.30	0-2	2
	1860	18700	20	16QAM	50	50	21.21	0-2	2
	1860	18700	20	16QAM	100	0	21.31	0-2	2
Mid	1880.0	18900	20	QPSK	1	0	23.66	0	0
	1880.0	18900	20	QPSK	1	50	23.73	0	0
	1880.0	18900	20	QPSK	1	99	23.66	0	0
	1880.0	18900	20	QPSK	50	0	22.43	0-1	1
	1880.0	18900	20	QPSK	50	25	22.44	0-1	1
	1880.0	18900	20	QPSK	50	50	22.40	0-1	1
	1880.0	18900	20	QPSK	100	0	22.37	0-1	1
	1880.0	18900	20	16QAM	1	0	22.86	0-1	1
	1880.0	18900	20	16QAM	1	50	22.85	0-1	1
	1880.0	18900	20	16QAM	1	99	22.90	0-1	1
	1880.0	18900	20	16QAM	50	0	21.46	0-2	2
	1880.0	18900	20	16QAM	50	25	21.38	0-2	2
	1880.0	18900	20	16QAM	50	50	21.38	0-2	2
	1880.0	18900	20	16QAM	100	0	21.42	0-2	2
High	1900	19100	20	QPSK	1	0	23.93	0	0
	1900	19100	20	QPSK	1	50	23.70	0	0
	1900	19100	20	QPSK	1	99	23.68	0	0
	1900	19100	20	QPSK	50	0	22.78	0-1	1
	1900	19100	20	QPSK	50	25	22.70	0-1	1
	1900	19100	20	QPSK	50	50	22.65	0-1	1
	1900	19100	20	QPSK	100	0	22.70	0-1	1
	1900	19100	20	16QAM	1	0	22.94	0-1	1
	1900	19100	20	16QAM	1	50	22.83	0-1	1
	1900	19100	20	16QAM	1	99	22.81	0-1	1
	1900	19100	20	16QAM	50	0	21.49	0-2	2
	1900	19100	20	16QAM	50	25	21.43	0-2	2
	1900	19100	20	16QAM	50	50	21.37	0-2	2
	1900	19100	20	16QAM	100	0	21.48	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 48 of 102

Table 9-24
LTE Band 2 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	23.88	0	0
	1857.5	18675	15	QPSK	1	36	23.84	0	0
	1857.5	18675	15	QPSK	1	74	23.74	0	0
	1857.5	18675	15	QPSK	36	0	22.56	0-1	1
	1857.5	18675	15	QPSK	36	18	22.55	0-1	1
	1857.5	18675	15	QPSK	36	37	22.57	0-1	1
	1857.5	18675	15	QPSK	75	0	22.52	0-1	1
	1857.5	18675	15	16QAM	1	0	23.00	0-1	1
	1857.5	18675	15	16QAM	1	36	23.00	0-1	1
	1857.5	18675	15	16QAM	1	74	22.93	0-1	1
	1857.5	18675	15	16QAM	36	0	21.46	0-2	2
	1857.5	18675	15	16QAM	36	18	21.45	0-2	2
Mid	1857.5	18675	15	16QAM	36	37	21.53	0-2	2
	1857.5	18675	15	16QAM	75	0	21.53	0-2	2
	1880.0	18900	15	QPSK	1	0	23.87	0	0
	1880.0	18900	15	QPSK	1	36	23.92	0	0
	1880.0	18900	15	QPSK	1	74	23.91	0	0
	1880.0	18900	15	QPSK	36	0	22.52	0-1	1
	1880.0	18900	15	QPSK	36	18	22.54	0-1	1
	1880.0	18900	15	QPSK	36	37	22.56	0-1	1
	1880.0	18900	15	QPSK	75	0	22.48	0-1	1
	1880.0	18900	15	16QAM	1	0	22.89	0-1	1
	1880.0	18900	15	16QAM	1	36	22.91	0-1	1
	1880.0	18900	15	16QAM	1	74	22.87	0-1	1
High	1880.0	18900	15	16QAM	36	0	21.47	0-2	2
	1880.0	18900	15	16QAM	36	18	21.46	0-2	2
	1880.0	18900	15	16QAM	36	37	21.46	0-2	2
	1880.0	18900	15	16QAM	75	0	21.51	0-2	2
	1902.5	19125	15	QPSK	1	0	23.79	0	0
	1902.5	19125	15	QPSK	1	36	23.70	0	0
	1902.5	19125	15	QPSK	1	74	23.72	0	0
	1902.5	19125	15	QPSK	36	0	22.50	0-1	1
	1902.5	19125	15	QPSK	36	18	22.53	0-1	1
	1902.5	19125	15	QPSK	36	37	22.56	0-1	1
	1902.5	19125	15	QPSK	75	0	22.53	0-1	1
	1902.5	19125	15	16QAM	1	0	22.94	0-1	1
	1902.5	19125	15	16QAM	1	36	22.86	0-1	1
	1902.5	19125	15	16QAM	1	74	22.84	0-1	1
	1902.5	19125	15	16QAM	36	0	21.42	0-2	2
	1902.5	19125	15	16QAM	36	18	21.43	0-2	2
	1902.5	19125	15	16QAM	36	37	21.42	0-2	2
	1902.5	19125	15	16QAM	75	0	21.38	0-2	2

Table 9-25
LTE Band 2 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	23.91	0	0
	1855	18650	10	QPSK	1	25	23.90	0	0
	1855	18650	10	QPSK	1	49	23.89	0	0
	1855	18650	10	QPSK	25	0	22.45	0-1	1
	1855	18650	10	QPSK	25	12	22.54	0-1	1
	1855	18650	10	QPSK	25	25	22.52	0-1	1
	1855	18650	10	QPSK	50	0	22.49	0-1	1
	1855	18650	10	16QAM	1	0	22.61	0-1	1
	1855	18650	10	16QAM	1	25	22.64	0-1	1
	1855	18650	10	16QAM	1	49	22.62	0-1	1
	1855	18650	10	16QAM	25	0	21.46	0-2	2
	1855	18650	10	16QAM	25	12	21.57	0-2	2
Mid	1855	18650	10	16QAM	25	25	21.56	0-2	2
	1855	18650	10	16QAM	50	0	21.49	0-2	2
	1880.0	18900	10	QPSK	1	0	23.79	0	0
	1880.0	18900	10	QPSK	1	25	23.84	0	0
	1880.0	18900	10	QPSK	1	49	23.87	0	0
	1880.0	18900	10	QPSK	25	0	22.53	0-1	1
	1880.0	18900	10	QPSK	25	12	22.51	0-1	1
	1880.0	18900	10	QPSK	25	25	22.50	0-1	1
	1880.0	18900	10	QPSK	50	0	22.49	0-1	1
	1880.0	18900	10	16QAM	1	0	23.00	0-1	1
	1880.0	18900	10	16QAM	1	25	22.91	0-1	1
	1880.0	18900	10	16QAM	1	49	22.92	0-1	1
High	1880.0	18900	10	16QAM	25	0	21.41	0-2	2
	1880.0	18900	10	16QAM	25	12	21.52	0-2	2
	1880.0	18900	10	16QAM	25	25	21.47	0-2	2
	1880.0	18900	10	16QAM	50	0	21.54	0-2	2
	1905	19150	10	QPSK	1	0	23.92	0	0
	1905	19150	10	QPSK	1	25	23.90	0	0
	1905	19150	10	QPSK	1	49	23.83	0	0
	1905	19150	10	QPSK	25	0	22.52	0-1	1
	1905	19150	10	QPSK	25	12	22.57	0-1	1
	1905	19150	10	QPSK	25	25	22.56	0-1	1
	1905	19150	10	QPSK	50	0	22.57	0-1	1
	1905	19150	10	16QAM	1	0	22.81	0-1	1
	1905	19150	10	16QAM	1	25	22.83	0-1	1
	1905	19150	10	16QAM	1	49	22.76	0-1	1
	1905	19150	10	16QAM	25	0	21.45	0-2	2
	1905	19150	10	16QAM	25	12	21.56	0-2	2
	1905	19150	10	16QAM	25	25	21.57	0-2	2
	1905	19150	10	16QAM	50	0	21.50	0-2	2

Table 9-26
LTE Band 2 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	23.74	0	0
	1852.5	18625	5	QPSK	1	12	23.74	0	0
	1852.5	18625	5	QPSK	1	24	23.70	0	0
	1852.5	18625	5	QPSK	12	0	22.53	0-1	1
	1852.5	18625	5	QPSK	12	6	22.54	0-1	1
	1852.5	18625	5	QPSK	12	13	22.57	0-1	1
	1852.5	18625	5	QPSK	25	0	22.52	0-1	1
	1852.5	18625	5	16-QAM	1	0	22.93	0-1	1
	1852.5	18625	5	16-QAM	1	12	22.84	0-1	1
	1852.5	18625	5	16-QAM	1	24	22.93	0-1	1
	1852.5	18625	5	16-QAM	12	0	21.41	0-2	2
	1852.5	18625	5	16-QAM	12	6	21.39	0-2	2
Mid	1852.5	18625	5	16-QAM	12	13	21.44	0-2	2
	1852.5	18625	5	16-QAM	25	0	21.56	0-2	2
	1880.0	18900	5	QPSK	1	0	23.80	0	0
	1880.0	18900	5	QPSK	1	12	23.88	0	0
	1880.0	18900	5	QPSK	1	24	23.89	0	0
	1880.0	18900	5	QPSK	12	0	22.52	0-1	1
	1880.0	18900	5	QPSK	12	6	22.57	0-1	1
	1880.0	18900	5	QPSK	12	13	22.50	0-1	1
	1880.0	18900	5	QPSK	25	0	22.47	0-1	1
	1880.0	18900	5	16-QAM	1	0	23.00	0-1	1
	1880.0	18900	5	16-QAM	1	12	22.91	0-1	1
	1880.0	18900	5	16-QAM	1	24	22.98	0-1	1
High	1880.0	18900	5	16-QAM	12	0	21.54	0-2	2
	1880.0	18900	5	16-QAM	12	6	21.56	0-2	2
	1880.0	18900	5	16-QAM	12	13	21.62	0-2	2
	1880.0	18900	5	16-QAM	25	0	21.51	0-2	2
	1907.5	19175	5	QPSK	1	0	23.88	0	0
	1907.5	19175	5	QPSK	1	12	23.89	0	0
	1907.5	19175	5	QPSK	1	24	23.89	0	0
	1907.5	19175	5	QPSK	12	0	22.47	0-1	1
	1907.5	19175	5	QPSK	12	6	22.45	0-1	1
	1907.5	19175	5	QPSK	12	13	22.41	0-1	1
	1907.5	19175	5	QPSK	25	0	22.41	0-1	1
	1907.5	19175	5	16-QAM	1	0	22.78	0-1	1
	1907.5	19175	5	16-QAM	1	12	22.66	0-1	1
	1907.5	19175	5	16-QAM	1	24	22.76	0-1	1
	1907.5	19175	5	16-QAM	12	0	21.49	0-2	2
	1907.5	19175	5	16-QAM	12	6	21.43	0-2	2
	1907.5	19175	5	16-QAM	12	13	21.43	0-2	2
	1907.5	19175	5	16-QAM	25	0	21.47	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 51 of 102

Table 9-27
LTE Band 2 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1851.5	18615	3	QPSK	1	0	23.86	0	0
	1851.5	18615	3	QPSK	1	7	23.88	0	0
	1851.5	18615	3	QPSK	1	14	23.85	0	0
	1851.5	18615	3	QPSK	8	0	22.45	0-1	1
	1851.5	18615	3	QPSK	8	4	22.47	0-1	1
	1851.5	18615	3	QPSK	8	7	22.47	0-1	1
	1851.5	18615	3	QPSK	15	0	22.46	0-1	1
	1851.5	18615	3	16-QAM	1	0	22.99	0-1	1
	1851.5	18615	3	16-QAM	1	7	23.00	0-1	1
	1851.5	18615	3	16-QAM	1	14	22.96	0-1	1
	1851.5	18615	3	16-QAM	8	0	21.43	0-2	2
	1851.5	18615	3	16-QAM	8	4	21.52	0-2	2
	1851.5	18615	3	16-QAM	8	7	21.51	0-2	2
	1851.5	18615	3	16-QAM	15	0	21.47	0-2	2
Mid	1880.0	18900	3	QPSK	1	0	23.95	0	0
	1880.0	18900	3	QPSK	1	7	23.97	0	0
	1880.0	18900	3	QPSK	1	14	23.90	0	0
	1880.0	18900	3	QPSK	8	0	22.38	0-1	1
	1880.0	18900	3	QPSK	8	4	22.41	0-1	1
	1880.0	18900	3	QPSK	8	7	22.50	0-1	1
	1880.0	18900	3	QPSK	15	0	22.43	0-1	1
	1880.0	18900	3	16-QAM	1	0	22.79	0-1	1
	1880.0	18900	3	16-QAM	1	7	22.73	0-1	1
	1880.0	18900	3	16-QAM	1	14	22.72	0-1	1
	1880.0	18900	3	16-QAM	8	0	21.38	0-2	2
	1880.0	18900	3	16-QAM	8	4	21.39	0-2	2
	1880.0	18900	3	16-QAM	8	7	21.49	0-2	2
	1880.0	18900	3	16-QAM	15	0	21.39	0-2	2
High	1908.5	19185	3	QPSK	1	0	23.77	0	0
	1908.5	19185	3	QPSK	1	7	23.81	0	0
	1908.5	19185	3	QPSK	1	14	23.76	0	0
	1908.5	19185	3	QPSK	8	0	22.46	0-1	1
	1908.5	19185	3	QPSK	8	4	22.39	0-1	1
	1908.5	19185	3	QPSK	8	7	22.37	0-1	1
	1908.5	19185	3	QPSK	15	0	22.41	0-1	1
	1908.5	19185	3	16-QAM	1	0	22.91	0-1	1
	1908.5	19185	3	16-QAM	1	7	22.79	0-1	1
	1908.5	19185	3	16-QAM	1	14	22.92	0-1	1
	1908.5	19185	3	16-QAM	8	0	21.36	0-2	2
	1908.5	19185	3	16-QAM	8	4	21.24	0-2	2
	1908.5	19185	3	16-QAM	8	7	21.24	0-2	2
	1908.5	19185	3	16-QAM	15	0	21.40	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 52 of 102

Table 9-28
LTE Band 2 (PCS) Maximum Conducted Powers - 1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1850.7	18607	1.4	QPSK	1	0	23.93	0	0
	1850.7	18607	1.4	QPSK	1	2	23.99	0	0
	1850.7	18607	1.4	QPSK	1	5	23.96	0	0
	1850.7	18607	1.4	QPSK	3	0	23.54	0	0
	1850.7	18607	1.4	QPSK	3	2	23.64	0	0
	1850.7	18607	1.4	QPSK	3	3	23.66	0	0
	1850.7	18607	1.4	QPSK	6	0	22.57	0-1	1
	1850.7	18607	1.4	16-QAM	1	0	22.81	0-1	1
	1850.7	18607	1.4	16-QAM	1	2	22.74	0-1	1
	1850.7	18607	1.4	16-QAM	1	5	22.82	0-1	1
	1850.7	18607	1.4	16-QAM	3	0	22.57	0-1	1
	1850.7	18607	1.4	16-QAM	3	2	22.53	0-1	1
	1850.7	18607	1.4	16-QAM	3	3	22.50	0-1	1
Mid	1850.7	18607	1.4	16-QAM	6	0	21.54	0-2	2
	1880.0	18900	1.4	QPSK	1	0	23.87	0	0
	1880.0	18900	1.4	QPSK	1	2	23.89	0	0
	1880.0	18900	1.4	QPSK	1	5	23.96	0	0
	1880.0	18900	1.4	QPSK	3	0	23.61	0	0
	1880.0	18900	1.4	QPSK	3	2	23.61	0	0
	1880.0	18900	1.4	QPSK	3	3	23.59	0	0
	1880.0	18900	1.4	QPSK	6	0	22.49	0-1	1
	1880.0	18900	1.4	16-QAM	1	0	23.00	0-1	1
	1880.0	18900	1.4	16-QAM	1	2	22.96	0-1	1
	1880.0	18900	1.4	16-QAM	1	5	22.98	0-1	1
	1880.0	18900	1.4	16-QAM	3	0	22.61	0-1	1
	1880.0	18900	1.4	16-QAM	3	2	22.59	0-1	1
	1880.0	18900	1.4	16-QAM	3	3	22.53	0-1	1
High	1880.0	18900	1.4	16-QAM	6	0	21.38	0-2	2
	1909.3	19193	1.4	QPSK	1	0	23.76	0	0
	1909.3	19193	1.4	QPSK	1	2	23.72	0	0
	1909.3	19193	1.4	QPSK	1	5	23.80	0	0
	1909.3	19193	1.4	QPSK	3	0	23.57	0	0
	1909.3	19193	1.4	QPSK	3	2	23.51	0	0
	1909.3	19193	1.4	QPSK	3	3	23.51	0	0
	1909.3	19193	1.4	QPSK	6	0	22.49	0-1	1
	1909.3	19193	1.4	16-QAM	1	0	23.00	0-1	1
	1909.3	19193	1.4	16-QAM	1	2	22.90	0-1	1
	1909.3	19193	1.4	16-QAM	1	5	22.96	0-1	1
	1909.3	19193	1.4	16-QAM	3	0	22.57	0-1	1
	1909.3	19193	1.4	16-QAM	3	2	22.54	0-1	1
	1909.3	19193	1.4	16-QAM	3	3	22.58	0-1	1
	1909.3	19193	1.4	16-QAM	6	0	21.47	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 53 of 102	

Table 9-29
LTE Band 2 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	19.91	0	0
	1860	18700	20	QPSK	1	50	19.86	0	0
	1860	18700	20	QPSK	1	99	19.76	0	0
	1860	18700	20	QPSK	50	0	18.56	0-1	1
	1860	18700	20	QPSK	50	25	18.61	0-1	1
	1860	18700	20	QPSK	50	50	18.56	0-1	1
	1860	18700	20	QPSK	100	0	18.50	0-1	1
	1860	18700	20	16QAM	1	0	18.85	0-1	1
	1860	18700	20	16QAM	1	50	18.85	0-1	1
	1860	18700	20	16QAM	1	99	18.73	0-1	1
	1860	18700	20	16QAM	50	0	17.52	0-2	2
	1860	18700	20	16QAM	50	25	17.58	0-2	2
	1860	18700	20	16QAM	50	50	17.55	0-2	2
Mid	1880.0	18900	20	QPSK	1	0	19.95	0	0
	1880.0	18900	20	QPSK	1	50	19.90	0	0
	1880.0	18900	20	QPSK	1	99	19.85	0	0
	1880.0	18900	20	QPSK	50	0	18.54	0-1	1
	1880.0	18900	20	QPSK	50	25	18.62	0-1	1
	1880.0	18900	20	QPSK	50	50	18.60	0-1	1
	1880.0	18900	20	QPSK	100	0	18.50	0-1	1
	1880.0	18900	20	16QAM	1	0	18.87	0-1	1
	1880.0	18900	20	16QAM	1	50	18.89	0-1	1
	1880.0	18900	20	16QAM	1	99	18.84	0-1	1
	1880.0	18900	20	16QAM	50	0	17.66	0-2	2
	1880.0	18900	20	16QAM	50	25	17.62	0-2	2
	1880.0	18900	20	16QAM	50	50	17.55	0-2	2
	1880.0	18900	20	16QAM	100	0	17.59	0-2	2
High	1900	19100	20	QPSK	1	0	19.97	0	0
	1900	19100	20	QPSK	1	50	19.85	0	0
	1900	19100	20	QPSK	1	99	19.92	0	0
	1900	19100	20	QPSK	50	0	18.63	0-1	1
	1900	19100	20	QPSK	50	25	18.51	0-1	1
	1900	19100	20	QPSK	50	50	18.50	0-1	1
	1900	19100	20	QPSK	100	0	18.57	0-1	1
	1900	19100	20	16QAM	1	0	18.84	0-1	1
	1900	19100	20	16QAM	1	50	18.80	0-1	1
	1900	19100	20	16QAM	1	99	18.70	0-1	1
	1900	19100	20	16QAM	50	0	17.65	0-2	2
	1900	19100	20	16QAM	50	25	17.54	0-2	2
	1900	19100	20	16QAM	50	50	17.50	0-2	2
	1900	19100	20	16QAM	100	0	17.57	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 54 of 102

Table 9-30
LTE Band 2 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	20.30	0	0
	1857.5	18675	15	QPSK	1	36	20.18	0	0
	1857.5	18675	15	QPSK	1	74	20.27	0	0
	1857.5	18675	15	QPSK	36	0	18.99	0-1	1
	1857.5	18675	15	QPSK	36	18	18.95	0-1	1
	1857.5	18675	15	QPSK	36	37	18.93	0-1	1
	1857.5	18675	15	QPSK	75	0	18.94	0-1	1
	1857.5	18675	15	16QAM	1	0	19.34	0-1	1
	1857.5	18675	15	16QAM	1	36	19.32	0-1	1
	1857.5	18675	15	16QAM	1	74	19.31	0-1	1
	1857.5	18675	15	16QAM	36	0	17.94	0-2	2
	1857.5	18675	15	16QAM	36	18	17.89	0-2	2
Mid	1857.5	18675	15	16QAM	36	37	17.86	0-2	2
	1857.5	18675	15	16QAM	75	0	17.85	0-2	2
	1880.0	18900	15	QPSK	1	0	20.35	0	0
	1880.0	18900	15	QPSK	1	36	20.29	0	0
	1880.0	18900	15	QPSK	1	74	20.28	0	0
	1880.0	18900	15	QPSK	36	0	18.95	0-1	1
	1880.0	18900	15	QPSK	36	18	18.95	0-1	1
	1880.0	18900	15	QPSK	36	37	18.90	0-1	1
	1880.0	18900	15	QPSK	75	0	18.97	0-1	1
	1880.0	18900	15	16QAM	1	0	19.45	0-1	1
	1880.0	18900	15	16QAM	1	36	19.44	0-1	1
	1880.0	18900	15	16QAM	1	74	19.25	0-1	1
High	1880.0	18900	15	16QAM	36	0	18.00	0-2	2
	1880.0	18900	15	16QAM	36	18	17.95	0-2	2
	1880.0	18900	15	16QAM	36	37	17.97	0-2	2
	1880.0	18900	15	16QAM	75	0	17.98	0-2	2
	1902.5	19125	15	QPSK	1	0	20.32	0	0
	1902.5	19125	15	QPSK	1	36	20.25	0	0
	1902.5	19125	15	QPSK	1	74	20.32	0	0
	1902.5	19125	15	QPSK	36	0	19.02	0-1	1
	1902.5	19125	15	QPSK	36	18	18.97	0-1	1
	1902.5	19125	15	QPSK	36	37	18.93	0-1	1
	1902.5	19125	15	QPSK	75	0	18.95	0-1	1
	1902.5	19125	15	16QAM	1	0	19.31	0-1	1
	1902.5	19125	15	16QAM	1	36	19.36	0-1	1
	1902.5	19125	15	16QAM	1	74	19.26	0-1	1
	1902.5	19125	15	16QAM	36	0	17.92	0-2	2
	1902.5	19125	15	16QAM	36	18	17.98	0-2	2
	1902.5	19125	15	16QAM	36	37	17.95	0-2	2
	1902.5	19125	15	16QAM	75	0	17.96	0-2	2

Table 9-31
LTE Band 2 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	20.28	0	0
	1855	18650	10	QPSK	1	25	20.26	0	0
	1855	18650	10	QPSK	1	49	20.36	0	0
	1855	18650	10	QPSK	25	0	19.02	0-1	1
	1855	18650	10	QPSK	25	12	18.97	0-1	1
	1855	18650	10	QPSK	25	25	18.97	0-1	1
	1855	18650	10	QPSK	50	0	18.91	0-1	1
	1855	18650	10	16QAM	1	0	19.18	0-1	1
	1855	18650	10	16QAM	1	25	19.32	0-1	1
	1855	18650	10	16QAM	1	49	19.31	0-1	1
	1855	18650	10	16QAM	25	0	17.92	0-2	2
	1855	18650	10	16QAM	25	12	17.93	0-2	2
	1855	18650	10	16QAM	25	25	17.92	0-2	2
	1855	18650	10	16QAM	50	0	17.94	0-2	2
Mid	1880.0	18900	10	QPSK	1	0	20.24	0	0
	1880.0	18900	10	QPSK	1	25	20.29	0	0
	1880.0	18900	10	QPSK	1	49	20.18	0	0
	1880.0	18900	10	QPSK	25	0	19.03	0-1	1
	1880.0	18900	10	QPSK	25	12	18.98	0-1	1
	1880.0	18900	10	QPSK	25	25	18.93	0-1	1
	1880.0	18900	10	QPSK	50	0	18.96	0-1	1
	1880.0	18900	10	16QAM	1	0	19.45	0-1	1
	1880.0	18900	10	16QAM	1	25	19.44	0-1	1
	1880.0	18900	10	16QAM	1	49	19.25	0-1	1
	1880.0	18900	10	16QAM	25	0	18.00	0-2	2
	1880.0	18900	10	16QAM	25	12	18.07	0-2	2
	1880.0	18900	10	16QAM	25	25	17.96	0-2	2
	1880.0	18900	10	16QAM	50	0	17.93	0-2	2
High	1905	19150	10	QPSK	1	0	20.30	0	0
	1905	19150	10	QPSK	1	25	20.31	0	0
	1905	19150	10	QPSK	1	49	20.32	0	0
	1905	19150	10	QPSK	25	0	19.02	0-1	1
	1905	19150	10	QPSK	25	12	18.98	0-1	1
	1905	19150	10	QPSK	25	25	18.93	0-1	1
	1905	19150	10	QPSK	50	0	18.92	0-1	1
	1905	19150	10	16QAM	1	0	19.37	0-1	1
	1905	19150	10	16QAM	1	25	19.30	0-1	1
	1905	19150	10	16QAM	1	49	19.32	0-1	1
	1905	19150	10	16QAM	25	0	17.94	0-2	2
	1905	19150	10	16QAM	25	12	17.98	0-2	2
	1905	19150	10	16QAM	25	25	17.97	0-2	2
	1905	19150	10	16QAM	50	0	17.96	0-2	2

Table 9-32
LTE Band 2 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	20.22	0	0
	1852.5	18625	5	QPSK	1	12	20.13	0	0
	1852.5	18625	5	QPSK	1	24	20.22	0	0
	1852.5	18625	5	QPSK	12	0	19.01	0-1	1
	1852.5	18625	5	QPSK	12	6	19.00	0-1	1
	1852.5	18625	5	QPSK	12	13	18.96	0-1	1
	1852.5	18625	5	QPSK	25	0	19.02	0-1	1
	1852.5	18625	5	16-QAM	1	0	19.46	0-1	1
	1852.5	18625	5	16-QAM	1	12	19.13	0-1	1
	1852.5	18625	5	16-QAM	1	24	19.50	0-1	1
	1852.5	18625	5	16-QAM	12	0	17.95	0-2	2
	1852.5	18625	5	16-QAM	12	6	17.95	0-2	2
Mid	1852.5	18625	5	16-QAM	12	13	17.95	0-2	2
	1852.5	18625	5	16-QAM	25	0	17.99	0-2	2
	1880.0	18900	5	QPSK	1	0	20.21	0	0
	1880.0	18900	5	QPSK	1	12	20.28	0	0
	1880.0	18900	5	QPSK	1	24	20.08	0	0
	1880.0	18900	5	QPSK	12	0	19.01	0-1	1
	1880.0	18900	5	QPSK	12	6	18.92	0-1	1
	1880.0	18900	5	QPSK	12	13	18.98	0-1	1
	1880.0	18900	5	QPSK	25	0	19.01	0-1	1
	1880.0	18900	5	16-QAM	1	0	19.19	0-1	1
	1880.0	18900	5	16-QAM	1	12	19.22	0-1	1
	1880.0	18900	5	16-QAM	1	24	19.18	0-1	1
High	1880.0	18900	5	16-QAM	12	0	17.93	0-2	2
	1880.0	18900	5	16-QAM	12	6	17.96	0-2	2
	1880.0	18900	5	16-QAM	12	13	17.90	0-2	2
	1880.0	18900	5	16-QAM	25	0	18.02	0-2	2
	1907.5	19175	5	QPSK	1	0	20.23	0	0
	1907.5	19175	5	QPSK	1	12	20.16	0	0
	1907.5	19175	5	QPSK	1	24	20.11	0	0
	1907.5	19175	5	QPSK	12	0	18.99	0-1	1
	1907.5	19175	5	QPSK	12	6	18.95	0-1	1
	1907.5	19175	5	QPSK	12	13	18.98	0-1	1
	1907.5	19175	5	QPSK	25	0	18.95	0-1	1
	1907.5	19175	5	16-QAM	1	0	19.40	0-1	1
	1907.5	19175	5	16-QAM	1	12	19.27	0-1	1
	1907.5	19175	5	16-QAM	1	24	19.15	0-1	1
	1907.5	19175	5	16-QAM	12	0	17.90	0-2	2
	1907.5	19175	5	16-QAM	12	6	17.88	0-2	2
	1907.5	19175	5	16-QAM	12	13	17.89	0-2	2
	1907.5	19175	5	16-QAM	25	0	17.92	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 57 of 102

Table 9-33
LTE Band 2 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1851.5	18615	3	QPSK	1	0	20.42	0	0
	1851.5	18615	3	QPSK	1	7	20.33	0	0
	1851.5	18615	3	QPSK	1	14	20.45	0	0
	1851.5	18615	3	QPSK	8	0	19.10	0-1	1
	1851.5	18615	3	QPSK	8	4	19.01	0-1	1
	1851.5	18615	3	QPSK	8	7	18.98	0-1	1
	1851.5	18615	3	QPSK	15	0	19.00	0-1	1
	1851.5	18615	3	16-QAM	1	0	19.46	0-1	1
	1851.5	18615	3	16-QAM	1	7	19.32	0-1	1
	1851.5	18615	3	16-QAM	1	14	19.36	0-1	1
	1851.5	18615	3	16-QAM	8	0	17.95	0-2	2
	1851.5	18615	3	16-QAM	8	4	18.00	0-2	2
	1851.5	18615	3	16-QAM	8	7	17.95	0-2	2
Mid	1880.0	18900	3	16-QAM	15	0	17.87	0-2	2
	1880.0	18900	3	QPSK	1	0	20.33	0	0
	1880.0	18900	3	QPSK	1	7	20.30	0	0
	1880.0	18900	3	QPSK	1	14	20.37	0	0
	1880.0	18900	3	QPSK	8	0	18.92	0-1	1
	1880.0	18900	3	QPSK	8	4	18.92	0-1	1
	1880.0	18900	3	QPSK	8	7	18.94	0-1	1
	1880.0	18900	3	QPSK	15	0	19.01	0-1	1
	1880.0	18900	3	16-QAM	1	0	19.38	0-1	1
	1880.0	18900	3	16-QAM	1	7	19.33	0-1	1
	1880.0	18900	3	16-QAM	1	14	19.32	0-1	1
	1880.0	18900	3	16-QAM	8	0	18.05	0-2	2
	1880.0	18900	3	16-QAM	8	4	17.92	0-2	2
High	1880.0	18900	3	16-QAM	8	7	17.93	0-2	2
	1880.0	18900	3	16-QAM	15	0	17.99	0-2	2
	1908.5	19185	3	QPSK	1	0	20.32	0	0
	1908.5	19185	3	QPSK	1	7	20.25	0	0
	1908.5	19185	3	QPSK	1	14	20.38	0	0
	1908.5	19185	3	QPSK	8	0	18.94	0-1	1
	1908.5	19185	3	QPSK	8	4	18.89	0-1	1
	1908.5	19185	3	QPSK	8	7	18.94	0-1	1
	1908.5	19185	3	QPSK	15	0	18.97	0-1	1
	1908.5	19185	3	16-QAM	1	0	19.41	0-1	1
	1908.5	19185	3	16-QAM	1	7	19.45	0-1	1
	1908.5	19185	3	16-QAM	1	14	19.33	0-1	1
	1908.5	19185	3	16-QAM	8	0	17.96	0-2	2
	1908.5	19185	3	16-QAM	8	4	18.05	0-2	2
	1908.5	19185	3	16-QAM	8	7	17.85	0-2	2
	1908.5	19185	3	16-QAM	15	0	17.86	0-2	2

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 58 of 102

Table 9-34
LTE Band 2 (PCS) Reduced Conducted Powers – 1.4 MHz Bandwidth
(Reduced Power Active - Hotspot mode, Extremity)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1850.7	18607	1.4	QPSK	1	0	20.30	0	0
	1850.7	18607	1.4	QPSK	1	2	20.24	0	0
	1850.7	18607	1.4	QPSK	1	5	20.36	0	0
	1850.7	18607	1.4	QPSK	3	0	19.98	0	0
	1850.7	18607	1.4	QPSK	3	2	19.99	0	0
	1850.7	18607	1.4	QPSK	3	3	20.05	0	0
	1850.7	18607	1.4	QPSK	6	0	19.01	0-1	1
	1850.7	18607	1.4	16-QAM	1	0	19.36	0-1	1
	1850.7	18607	1.4	16-QAM	1	2	19.36	0-1	1
	1850.7	18607	1.4	16-QAM	1	5	19.40	0-1	1
	1850.7	18607	1.4	16-QAM	3	0	19.04	0-1	1
	1850.7	18607	1.4	16-QAM	3	2	19.00	0-1	1
	1850.7	18607	1.4	16-QAM	3	3	18.96	0-1	1
Mid	1850.7	18607	1.4	16-QAM	6	0	17.94	0-2	2
	1880.0	18900	1.4	QPSK	1	0	20.18	0	0
	1880.0	18900	1.4	QPSK	1	2	20.25	0	0
	1880.0	18900	1.4	QPSK	1	5	20.13	0	0
	1880.0	18900	1.4	QPSK	3	0	20.04	0	0
	1880.0	18900	1.4	QPSK	3	2	19.99	0	0
	1880.0	18900	1.4	QPSK	3	3	20.06	0	0
	1880.0	18900	1.4	QPSK	6	0	18.97	0-1	1
	1880.0	18900	1.4	16-QAM	1	0	19.41	0-1	1
	1880.0	18900	1.4	16-QAM	1	2	19.38	0-1	1
	1880.0	18900	1.4	16-QAM	1	5	19.24	0-1	1
	1880.0	18900	1.4	16-QAM	3	0	18.93	0-1	1
	1880.0	18900	1.4	16-QAM	3	2	18.89	0-1	1
	1880.0	18900	1.4	16-QAM	3	3	19.09	0-1	1
High	1880.0	18900	1.4	16-QAM	6	0	17.92	0-2	2
	1909.3	19193	1.4	QPSK	1	0	20.17	0	0
	1909.3	19193	1.4	QPSK	1	2	20.15	0	0
	1909.3	19193	1.4	QPSK	1	5	20.18	0	0
	1909.3	19193	1.4	QPSK	3	0	19.93	0	0
	1909.3	19193	1.4	QPSK	3	2	20.01	0	0
	1909.3	19193	1.4	QPSK	3	3	19.96	0	0
	1909.3	19193	1.4	QPSK	6	0	18.93	0-1	1
	1909.3	19193	1.4	16-QAM	1	0	19.41	0-1	1
	1909.3	19193	1.4	16-QAM	1	2	19.31	0-1	1
	1909.3	19193	1.4	16-QAM	1	5	19.36	0-1	1
	1909.3	19193	1.4	16-QAM	3	0	19.01	0-1	1
	1909.3	19193	1.4	16-QAM	3	2	18.94	0-1	1
	1909.3	19193	1.4	16-QAM	3	3	18.84	0-1	1
	1909.3	19193	1.4	16-QAM	6	0	17.98	0-2	2

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 59 of 102

9.3.5

LTE Band 30

Table 9-35
LTE Band 30 Maximum Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	2310.0	27710	10	QPSK	1	0	22.84	0	0
	2310.0	27710	10	QPSK	1	25	23.10	0	0
	2310.0	27710	10	QPSK	1	49	23.02	0	0
	2310.0	27710	10	QPSK	25	0	21.96	0-1	1
	2310.0	27710	10	QPSK	25	12	21.95	0-1	1
	2310.0	27710	10	QPSK	25	25	22.04	0-1	1
	2310.0	27710	10	QPSK	50	0	22.03	0-1	1
	2310.0	27710	10	16QAM	1	0	22.05	0-1	1
	2310.0	27710	10	16QAM	1	25	22.10	0-1	1
	2310.0	27710	10	16QAM	1	49	22.08	0-1	1
	2310.0	27710	10	16QAM	25	0	20.83	0-2	2
	2310.0	27710	10	16QAM	25	12	20.87	0-2	2
	2310.0	27710	10	16QAM	25	25	20.90	0-2	2
	2310.0	27710	10	16QAM	50	0	21.09	0-2	2

Table 9-36
LTE Band 30 Maximum Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	2310.0	27710	5	QPSK	1	0	22.82	0	0
	2310.0	27710	5	QPSK	1	12	22.73	0	0
	2310.0	27710	5	QPSK	1	24	22.70	0	0
	2310.0	27710	5	QPSK	12	0	21.84	0-1	1
	2310.0	27710	5	QPSK	12	6	21.73	0-1	1
	2310.0	27710	5	QPSK	12	13	21.76	0-1	1
	2310.0	27710	5	QPSK	25	0	21.78	0-1	1
	2310.0	27710	5	16-QAM	1	0	22.01	0-1	1
	2310.0	27710	5	16-QAM	1	12	21.95	0-1	1
	2310.0	27710	5	16-QAM	1	24	21.89	0-1	1
	2310.0	27710	5	16-QAM	12	0	20.87	0-2	2
	2310.0	27710	5	16-QAM	12	6	20.73	0-2	2
	2310.0	27710	5	16-QAM	12	13	20.68	0-2	2
	2310.0	27710	5	16-QAM	25	0	20.73	0-2	2

Note: LTE Band 30 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 60 of 102

9.3.6

LTE Carrier Aggregation Conducted Powers

Table 9-37
Two Component Carrier Maximum Conducted Powers

PCC						SCC				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Frequency [MHz]	PCC (UL) Channel	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Frequency [MHz]	SCC (DL) Channel	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
LTE B2	20	1900	19100	1	0	LTE B4	20	2132.5	2175	23.55	23.93
LTE B2	20	1900	19100	1	0	LTE B12	10	737.5	5095	23.63	23.93
LTE B2	20	1900	19100	1	0	LTE B17	10	740	5790	23.65	23.93
LTE B2	20	1900	19100	1	0	LTE B29	10	722.5	9715	23.58	23.93
LTE B2	20	1900	19100	1	0	LTE B30	10	2355	9820	23.61	23.93
LTE B4	10	1750	20350	1	0	LTE B2	20	1960	900	23.59	24.13
LTE B4	10	1750	20350	1	0	LTE B4	20	2132.5	2175	23.65	24.13
LTE B4	10	1750	20350	1	0	LTE B12	10	737.5	5095	23.59	24.13
LTE B4	10	1750	20350	1	0	LTE B17	10	740	5790	23.57	24.13
LTE B4	10	1750	20350	1	0	LTE B29	10	722.5	9715	23.52	24.13
LTE B4	10	1750	20350	1	0	LTE B30	10	2355	9820	23.54	24.13
LTE B12	5	713.5	23155	1	24	LTE B2	20	1960	900	23.37	24.71
LTE B30	10	2310	27710	1	25	LTE B2	20	1960	900	22.88	23.10
LTE B30	10	2310	27710	1	25	LTE B4	20	2132.5	2175	22.93	23.10
LTE B30	10	2310	27710	1	25	LTE B29	10	722.5	9715	22.84	23.10

Table 9-38
Three Component Carrier Maximum Conducted Powers

PCC						SCC				SCC				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Frequency [MHz]	PCC (UL) Channel	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Frequency [MHz]	SCC (DL) Channel	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Frequency [MHz]	SCC (DL) Channel	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
LTE B2	20	1900	19100	1	0	LTE B4	20	2132.5	2175	LTE B12	10	737.5	5095	23.48	23.93
LTE B2	20	1900	19100	1	0	LTE B4	20	2132.5	2175	LTE B29	10	722.5	9715	23.58	23.93
LTE B2	20	1900	19100	1	0	LTE B30	10	2355	9820	LTE B29	10	722.5	9715	23.94	23.93
LTE B4	10	1750	20350	1	0	LTE B2	20	1960	900	LTE B12	10	737.5	5095	23.50	24.13
LTE B4	10	1750	20350	1	0	LTE B2	20	1960	900	LTE B29	10	722.5	9715	23.44	24.13
LTE B4	10	1750	20350	1	0	LTE B4	20	2132.5	2175	LTE B29	10	722.5	9715	23.48	24.13
LTE B4	10	1750	20350	1	0	LTE B29	10	722.5	9715	LTE B30	10	2355	9820	23.60	24.13
LTE B30	10	2310	27710	1	25	LTE B2	20	1960	900	LTE B29	10	722.5	9715	22.56	23.10
LTE B30	10	2310	27710	1	25	LTE B4	20	2132.5	2175	LTE B29	10	722.5	9715	22.30	23.10

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 61 of 102

Table 9-39
Two Component Carrier Reduced Conducted Powers
(Reduced Power Active - Hotspot mode, Extremity)

PCC						SCC				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Frequency [MHz]	PCC (UL) Channel	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Frequency [MHz]	SCC (DL) Channel	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
LTE B2	10	1855	18650	1	49	LTE B4	20	2132.5	2175	19.92	20.36
LTE B2	10	1855	18650	1	49	LTE B12	10	737.5	5095	19.82	20.36
LTE B2	10	1855	18650	1	49	LTE B17	10	740	5790	19.94	20.36
LTE B2	10	1855	18650	1	49	LTE B29	10	722.5	9715	19.93	20.36
LTE B2	10	1855	18650	1	49	LTE B30	10	2355	9820	19.96	20.36
LTE B4	10	1750	20350	1	49	LTE B2	20	1960	900	19.86	20.26
LTE B4	10	1750	20350	1	49	LTE B4	20	2132.5	2175	19.93	20.26
LTE B4	10	1750	20350	1	49	LTE B12	10	737.5	5095	20.01	20.26
LTE B4	10	1750	20350	1	49	LTE B17	10	740	5790	19.95	20.26
LTE B4	10	1750	20350	1	49	LTE B29	10	722.5	9715	19.94	20.26
LTE B4	10	1750	20350	1	49	LTE B30	10	2355	9820	20.02	20.26

Table 9-40
Three Component Carrier Reduced Conducted Powers
(Reduced Power Active - Hotspot mode, Extremity)

PCC						SCC				SCC				Power	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Frequency [MHz]	PCC (UL) Channel	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Frequency [MHz]	SCC (DL) Channel	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Frequency [MHz]	SCC (DL) Channel	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
LTE B2	10	1855	18650	1	49	LTE B4	20	2132.5	2175	LTE B12	10	737.5	5095	19.71	20.36
LTE B2	10	1855	18650	1	49	LTE B4	20	2132.5	2175	LTE B29	10	722.5	9715	19.75	20.36
LTE B2	10	1855	18650	1	49	LTE B30	10	2355	9820	LTE B29	10	722.5	9715	19.68	20.36
LTE B4	10	1750	20350	1	49	LTE B2	20	1960	900	LTE B12	10	737.5	5095	19.76	20.26
LTE B4	10	1750	20350	1	49	LTE B2	20	1960	900	LTE B29	10	722.5	9715	19.72	20.26
LTE B4	10	1750	20350	1	49	LTE B4	20	2132.5	2175	LTE B29	10	722.5	9715	19.96	20.26
LTE B4	10	1750	20350	1	49	LTE B29	10	722.5	9715	LTE B30	10	2355	9820	19.77	20.26

Notes:

1. The device does not support all Rel. 10 Carrier Aggregation features due to modem chipset limitation.
2. The device only supports downlink Carrier Aggregation. Uplink Carrier Aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power (across all bandwidths, channels and RB Configurations) for each band.
3. The technical description includes all the possible carrier aggregation combinations.
4. All control and acknowledge data is sent on uplink channels that operate identical to release 8 specifications.
5. This device supports both LTE Band 12 and LTE Band 17. Since the supported frequency span for LTE Band 17 falls completely within the supported frequency span for LTE band 12, LTE Band 17 has same or lower target power as LTE Band 12, and both LTE bands share the same transmission path, LTE CA SAR combinations were only assessed for LTE Band 12 as PCC.
6. This device supports inter-band and intra-band LTE-CA.



Figure 9-3
Power Measurement Setup

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 62 of 102

9.4 WLAN Conducted Powers

Table 9-41
2.4 GHz WLAN Maximum Average RF Power

Antenna	Freq [MHz]	Channel	2.4 GHz Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11b	802.11g
Antenna 1	2412	1	16.50	14.26
	2437	6	17.35	14.00
	2462	11	17.33	13.98
Antenna 2	2412	1	17.40	13.98
	2437	6	17.48	14.27
	2462	11	16.64	14.34

Table 9-42
2.4 GHz WLAN Reduced Average RF Power –Reduced Power Active – Head

Antenna	Freq [MHz]	Channel	2.4 GHz Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11b	802.11g
Antenna 1	2412	1	14.04	11.27
	2437	6	13.71	10.63
	2462	11	14.12	11.03
Antenna 2	2412	1	13.84	10.57
	2437	6	14.48	11.36
	2462	11	13.86	10.75

Table 9-43
5 GHz WLAN (20 MHz) Maximum Average RF Power

Antenna	Freq [MHz]	Channel	5 GHz (20 MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11a	802.11n
Antenna 1	5180	36	12.80	12.57
	5200	40	12.81	12.55
	5220	44	12.85	12.57
	5240	48	12.86	12.51
	5260	52	13.45	12.52
	5280	56	13.40	12.50
	5300	60	13.42	13.07
	5320	64	13.25	13.03
	5500	100	13.45	13.34
	5600	120	12.88	12.91
	5620	124	12.76	12.80
	5720	144	13.38	13.06
	5745	149	13.30	13.32
	5785	157	13.40	13.32
	5825	165	13.32	13.25
Antenna 2	5180	36	12.92	12.57
	5200	40	12.88	12.51
	5220	44	12.95	12.52
	5240	48	12.90	12.55
	5260	52	13.00	12.56
	5280	56	12.98	12.56
	5300	60	12.90	12.65
	5320	64	13.11	12.60
	5500	100	12.70	12.65
	5600	120	12.56	12.37
	5620	124	12.47	12.34
	5720	144	12.55	12.62
	5745	149	12.70	12.40
	5785	157	12.72	12.44
	5825	165	12.65	12.45

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 64 of 102

Table 9-44
5 GHz WLAN (20 MHz) Reduced Average RF Power – Reduced Power Active - Head

Antenna	Freq [MHz]	Channel	5 GHz (20 MHz) Conducted Power [dBm]	
			IEEE Transmission Mode	
			802.11a	802.11n
Antenna 1	5180	36	9.56	9.52
	5200	40	9.42	9.41
	5220	44	9.35	9.29
	5240	48	9.49	9.31
	5260	52	9.67	9.41
	5280	56	9.74	9.55
	5300	60	9.61	9.41
	5320	64	9.44	9.35
	5500	100	9.91	9.85
	5600	120	9.74	9.67
	5620	124	9.61	9.55
	5720	144	9.55	9.41
	5745	149	9.91	9.75
	5785	157	10.01	9.89
	5825	165	9.90	9.65
Antenna 2	5180	36	9.59	9.39
	5200	40	9.57	9.31
	5220	44	9.51	9.29
	5240	48	9.44	9.37
	5260	52	9.47	9.45
	5280	56	9.43	9.39
	5300	60	9.48	9.25
	5320	64	9.45	9.42
	5500	100	9.53	9.47
	5600	120	9.48	9.47
	5620	124	9.39	9.32
	5720	144	9.52	9.42
	5745	149	9.67	9.50
	5785	157	9.86	9.74
	5825	165	9.58	9.55

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r01:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

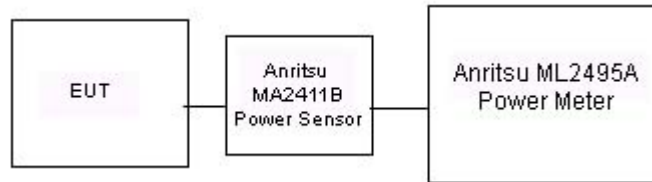


Figure 9-4
Power Measurement Setup

9.5 Bluetooth Conducted Powers

Table 9-45
Bluetooth RF Conducted Powers

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	10.86	12.200
2441	1.0	39	11.56	14.312
2480	1.0	78	10.09	10.200
2402	2.0	0	6.93	4.934
2441	2.0	39	7.41	5.503
2480	2.0	78	6.18	4.153
2402	3.0	0	7.00	5.008
2441	3.0	39	7.47	5.583
2480	3.0	78	6.24	4.212

Notes: The bolded data rate and channel above were tested for SAR.

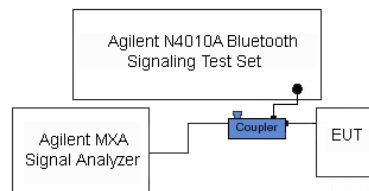


Figure 9-5
Power Measurement Setup

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 66 of 102

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/15/2015	750H	22.6	700	0.852	42.185	0.889	42.201	-4.16%	-0.04%
			710	0.863	42.069	0.890	42.149	-3.03%	-0.19%
			725	0.879	41.892	0.891	42.071	-1.35%	-0.43%
			740	0.896	41.721	0.893	41.994	0.34%	-0.65%
			755	0.912	41.551	0.894	41.916	2.01%	-0.87%
			770	0.925	41.367	0.895	41.838	3.35%	-1.13%
06/13/2015	835H	22.0	785	0.937	41.177	0.896	41.760	4.58%	-1.40%
			820	0.912	42.544	0.899	41.578	1.45%	2.32%
			835	0.924	42.336	0.900	41.500	2.67%	2.01%
06/26/2015	835H	22.0	850	0.939	42.163	0.916	41.500	2.51%	1.60%
			820	0.866	40.164	0.899	41.578	-3.67%	-3.40%
			835	0.880	39.963	0.900	41.500	-2.22%	-3.70%
06/22/2015	1750H	21.9	850	0.894	39.772	0.916	41.500	-2.40%	-4.16%
			1710	1.296	38.794	1.348	40.142	-3.86%	-3.36%
			1750	1.333	38.624	1.371	40.079	-2.77%	-3.63%
06/26/2015	1750H	22.1	1790	1.370	38.436	1.394	40.016	-1.72%	-3.95%
			1710	1.323	38.926	1.348	40.142	-1.85%	-3.03%
			1750	1.364	38.729	1.371	40.079	-0.51%	-3.37%
06/18/2015	1900H	21.4	1790	1.404	38.554	1.394	40.016	0.72%	-3.65%
			1850	1.343	40.472	1.400	40.000	-4.07%	1.18%
			1880	1.379	40.400	1.400	40.000	-1.50%	1.00%
06/25/2015	2300H	23.6	1910	1.412	40.262	1.400	40.000	0.86%	0.66%
			2300	1.732	39.129	1.670	39.500	3.71%	-0.94%
			2310	1.744	39.079	1.679	39.480	3.87%	-1.02%
06/17/2015	2400H	23.7	2320	1.757	39.030	1.687	39.460	4.15%	-1.09%
			2400	1.764	39.081	1.756	39.289	0.46%	-0.53%
			2450	1.825	38.879	1.800	39.200	1.39%	-0.82%
06/15/2015	5200H-5800H	21.6	2500	1.883	38.670	1.855	39.136	1.51%	-1.19%
			5280	4.710	34.444	4.737	35.894	-0.57%	-4.04%
			5300	4.720	34.391	4.758	35.871	-0.80%	-4.13%
			5500	4.950	34.051	4.963	35.643	-0.26%	-4.47%
			5785	5.264	33.603	5.255	35.317	0.17%	-4.85%
			5800	5.268	33.587	5.270	35.300	-0.04%	-4.85%

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 67 of 102

Table 10-2
Measured Body Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/18/2015	750B	22.3	700	0.925	55.732	0.959	55.726	-3.55%	0.01%
			710	0.934	55.652	0.960	55.687	-2.71%	-0.06%
			725	0.947	55.518	0.961	55.629	-1.46%	-0.20%
			740	0.960	55.370	0.963	55.570	-0.31%	-0.36%
			755	0.974	55.198	0.964	55.512	1.04%	-0.57%
			770	0.989	55.031	0.965	55.453	2.49%	-0.76%
06/13/2015	835B	21.7	785	1.003	54.887	0.966	55.395	3.83%	-0.92%
			820	0.986	54.091	0.969	55.258	1.75%	-2.11%
			835	1.000	53.915	0.970	55.200	3.09%	-2.33%
06/10/2015	1750B	23.0	850	1.015	53.746	0.988	55.154	2.73%	-2.55%
			1710	1.416	51.901	1.463	53.537	-3.21%	-3.06%
			1750	1.461	51.804	1.488	53.432	-1.81%	-3.05%
06/18/2015	1750B	21.8	1790	1.504	51.656	1.514	53.326	-0.66%	-3.13%
			1710	1.423	52.181	1.463	53.537	-2.73%	-2.53%
			1750	1.469	52.019	1.488	53.432	-1.28%	-2.64%
06/26/2015	1750B	21.1	1790	1.514	51.896	1.514	53.326	0.00%	-2.68%
			1710	1.452	52.527	1.463	53.537	-0.75%	-1.89%
			1750	1.499	52.362	1.488	53.432	0.74%	-2.00%
06/13/2015	1900B	22.4	1790	1.535	52.190	1.514	53.326	1.39%	-2.13%
			1850	1.504	52.540	1.520	53.300	-1.05%	-1.43%
			1880	1.540	52.457	1.520	53.300	1.32%	-1.58%
06/15/2015	1900B	22.5	1910	1.575	52.342	1.520	53.300	3.62%	-1.80%
			1850	1.504	52.574	1.520	53.300	-1.05%	-1.36%
			1880	1.537	52.506	1.520	53.300	1.12%	-1.49%
06/17/2015	1900B	23.2	1910	1.566	52.360	1.520	53.300	3.03%	-1.76%
			1850	1.508	51.336	1.520	53.300	-0.79%	-3.68%
			1880	1.539	51.185	1.520	53.300	1.25%	-3.97%
06/19/2015	1900B	23.0	1910	1.574	51.094	1.520	53.300	3.55%	-4.14%
			1850	1.502	51.326	1.520	53.300	-1.18%	-3.70%
			1880	1.535	51.190	1.520	53.300	0.99%	-3.96%
06/22/2015	1900B	23.3	1910	1.574	51.142	1.520	53.300	3.55%	-4.05%
			1850	1.510	52.982	1.520	53.300	-0.66%	-0.60%
			1880	1.544	52.888	1.520	53.300	1.58%	-0.77%
07/01/2015	1900B	22.7	1910	1.578	52.759	1.520	53.300	3.82%	-1.02%
			1850	1.507	52.721	1.520	53.300	-0.86%	-1.09%
			1880	1.541	52.602	1.520	53.300	1.38%	-1.31%
06/25/2015	2300B	23.1	1910	1.578	52.495	1.520	53.300	3.82%	-1.51%
			2300	1.785	51.956	1.809	52.900	-1.33%	-1.78%
			2310	1.798	51.911	1.816	52.887	-0.99%	-1.85%
06/20/2015	2450B	22.0	2320	1.812	51.867	1.826	52.873	-0.77%	-1.90%
			2400	1.958	51.583	1.902	52.767	2.94%	-2.24%
			2450	2.030	51.318	1.950	52.700	4.10%	-2.62%
07/02/2015	2450B	21.7	2500	2.096	51.154	2.021	52.636	3.71%	-2.82%
			2400	1.965	51.109	1.902	52.767	3.31%	-3.14%
			2450	2.035	50.882	1.950	52.700	4.36%	-3.45%
06/15/2015	5200B-5800B	21.8	2500	2.104	50.676	2.021	52.636	4.11%	-3.72%
			5260	5.253	48.754	5.369	48.933	-2.16%	-0.37%
			5300	5.298	48.672	5.416	48.879	-2.18%	-0.42%
			5320	5.327	48.627	5.439	48.851	-2.06%	-0.46%
			5500	5.561	48.347	5.650	48.607	-1.58%	-0.53%
			5785	5.944	47.950	5.982	48.220	-0.64%	-0.56%
			5800	5.960	47.927	6.000	48.200	-0.67%	-0.57%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 68 of 102

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-3
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
J	750	HEAD	06/15/2015	22.7	22.6	0.200	1003	3319	1.630	8.090	8.150	0.74%
J	835	HEAD	06/13/2015	22.3	22.0	0.200	4d132	3319	1.920	9.250	9.600	3.78%
K	835	HEAD	06/26/2015	22.5	22.2	0.200	4d132	3288	1.960	9.250	9.800	5.95%
J	1750	HEAD	06/22/2015	22.4	21.9	0.100	1051	3319	3.710	36.200	37.100	2.49%
H	1750	HEAD	06/26/2015	22.7	22.1	0.100	1051	3263	3.820	36.200	38.200	5.52%
G	1900	HEAD	06/18/2015	22.3	21.4	0.100	5d141	3318	4.190	39.900	41.900	5.01%
J	2300	HEAD	06/25/2015	22.3	23.6	0.100	1008	3319	5.170	49.900	51.700	3.61%
E	2450	HEAD	06/17/2015	23.0	22.2	0.100	719	3332	5.170	52.100	51.700	-0.77%
D	5300	HEAD	06/15/2015	23.1	21.6	0.050	1057	7357	4.440	84.700	88.800	4.84%
D	5500	HEAD	06/15/2015	22.5	21.6	0.050	1057	7357	4.280	84.300	85.600	1.54%
D	5800	HEAD	06/15/2015	22.7	21.6	0.050	1057	7357	4.200	81.100	84.000	3.58%
K	750	BODY	06/18/2015	22.7	22.3	0.200	1003	3288	1.750	8.460	8.750	3.43%
G	835	BODY	06/13/2015	22.4	21.7	0.200	4d133	3318	1.990	9.350	9.950	6.42%
J	1750	BODY	06/10/2015	22.4	23.0	0.100	1051	3319	3.800	37.100	38.000	2.43%
J	1750	BODY	06/18/2015	22.2	21.8	0.100	1051	3319	3.720	37.100	37.200	0.27%
J	1750	BODY	06/26/2015	20.1	20.9	0.100	1051	3319	4.010	37.100	40.100	8.09%
I	1900	BODY	06/15/2015	22.4	22.5	0.100	5d141	3213	4.060	40.000	40.600	1.50%
I	1900	BODY	06/17/2015	22.3	23.2	0.100	5d141	3213	4.060	40.000	40.600	1.50%
I	1900	BODY	06/19/2015	22.3	23.0	0.100	5d141	3213	4.110	40.000	41.100	2.75%
I	1900	BODY	06/22/2015	22.3	23.3	0.100	5d141	3213	3.820	40.000	38.200	-4.50%
I	1900	BODY	07/01/2015	21.1	21.3	0.100	5d149	3213	4.090	40.400	40.900	1.24%
J	2300	BODY	06/25/2015	22.3	23.1	0.100	1008	3319	5.220	48.100	52.200	8.52%
E	2450	BODY	06/20/2015	22.1	22.0	0.100	719	3332	5.300	51.800	53.000	2.32%
D	2450	BODY	07/02/2015	23.1	21.7	0.100	719	3209	5.660	51.800	56.600	9.27%
E	5300	BODY	06/15/2015	22.4	21.8	0.050	1057	3589	3.770	74.200	75.400	1.62%
E	5500	BODY	06/15/2015	22.3	21.6	0.050	1057	3589	3.810	79.200	76.200	-3.79%
E	5800	BODY	06/15/2015	22.5	21.7	0.050	1057	3589	3.390	75.100	67.800	-9.72%

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 69 of 102

Table 10-4
System Verification Results – 10g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
J	1750	BODY	06/18/2015	22.2	21.8	0.100	1051	3319	2.000	20.000	20.000	0.00%
J	1750	BODY	06/26/2015	20.1	20.9	0.100	1051	3319	2.130	20.000	21.300	6.50%
I	1900	BODY	06/13/2015	22.1	22.4	0.100	5d141	3213	2.140	21.200	21.400	0.94%
I	1900	BODY	06/17/2015	22.3	23.2	0.100	5d141	3213	2.100	21.200	21.000	-0.94%
D	2450	BODY	07/02/2015	23.1	21.7	0.100	719	3209	2.610	24.000	26.100	8.75%
E	5300	BODY	06/15/2015	22.4	21.8	0.050	1057	3589	1.060	20.900	21.200	1.44%
E	5500	BODY	06/15/2015	22.3	21.6	0.050	1057	3589	1.070	22.000	21.400	-2.73%

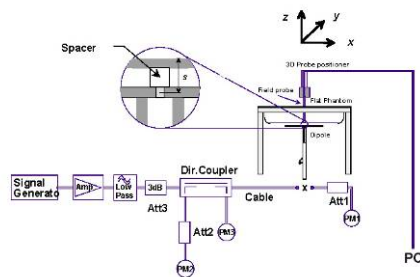


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 70 of 102	

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

Table 11-1
GSM 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.5	33.49	0.03	Right	Cheek	95B11	1:8.3	0.208	1.002	0.208	A1
836.60	190	GSM 850	GSM	33.5	33.49	0.18	Right	Tilt	95B11	1:8.3	0.091	1.002	0.091	
836.60	190	GSM 850	GSM	33.5	33.49	0.03	Left	Cheek	95B11	1:8.3	0.153	1.002	0.153	
836.60	190	GSM 850	GSM	33.5	33.49	-0.01	Left	Tilt	95B11	1:8.3	0.093	1.002	0.093	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-2
UMTS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	24.8	23.96	0.08	Right	Cheek	95BE8	1:1	0.154	1.213	0.187	A2
836.60	4183	UMTS 850	RMC	24.8	23.96	0.12	Right	Tilt	95BE8	1:1	0.066	1.213	0.080	
836.60	4183	UMTS 850	RMC	24.8	23.96	0.09	Left	Cheek	95BE8	1:1	0.092	1.213	0.112	
836.60	4183	UMTS 850	RMC	24.8	23.96	0.12	Left	Tilt	95BE8	1:1	0.060	1.213	0.073	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-3
UMTS 1750 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.5	23.44	0.05	Right	Cheek	95B11	1:1	0.121	1.276	0.154	
1732.40	1412	UMTS 1750	RMC	24.5	23.44	0.01	Right	Tilt	95B11	1:1	0.129	1.276	0.165	
1732.40	1412	UMTS 1750	RMC	24.5	23.44	0.02	Left	Cheek	95B11	1:1	0.138	1.276	0.176	A3
1732.40	1412	UMTS 1750	RMC	24.5	23.44	0.01	Left	Tilt	95B11	1:1	0.109	1.276	0.139	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 71 of 102

Table 11-4
GSM 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	31.5	29.95	0.17	Right	Cheek	964E1	1:8.3	0.035	1.429	0.050	
1880.00	661	GSM 1900	GSM	31.5	29.95	0.13	Right	Tilt	964E1	1:8.3	0.028	1.429	0.040	
1880.00	661	GSM 1900	GSM	31.5	29.95	-0.02	Left	Cheek	964E1	1:8.3	0.046	1.429	0.066	A4
1880.00	661	GSM 1900	GSM	31.5	29.95	0.19	Left	Tilt	964E1	1:8.3	0.033	1.429	0.047	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-5
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.2	23.24	0.11	Right	Cheek	95BE8	1:1	0.084	1.247	0.105	
1880.00	9400	UMTS 1900	RMC	24.2	23.24	0.15	Right	Tilt	95BE8	1:1	0.058	1.247	0.072	
1880.00	9400	UMTS 1900	RMC	24.2	23.24	0.17	Left	Cheek	95BE8	1:1	0.107	1.247	0.133	A5
1880.00	9400	UMTS 1900	RMC	24.2	23.24	0.05	Left	Tilt	95BE8	1:1	0.067	1.247	0.084	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-6
LTE Band 12 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	0.03	0	Right	Cheek	QPSK	1	0	95C05	1:1	0.128	1.072	0.137	A6
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	0.04	1	Right	Cheek	QPSK	25	12	95C05	1:1	0.093	1.153	0.107	
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	0.07	0	Right	Tilt	QPSK	1	0	95C05	1:1	0.044	1.072	0.047	
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	0.04	1	Right	Tilt	QPSK	25	12	95C05	1:1	0.029	1.153	0.033	
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	-0.13	0	Left	Cheek	QPSK	1	0	95C05	1:1	0.093	1.072	0.100	
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	-0.01	1	Left	Cheek	QPSK	25	12	95C05	1:1	0.069	1.153	0.080	
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	0.08	0	Left	Tilt	QPSK	1	0	95C05	1:1	0.063	1.072	0.068	
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	-0.05	1	Left	Tilt	QPSK	25	12	95C05	1:1	0.044	1.153	0.051	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-7
LTE Band 13 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.															(W/kg)		(W/kg)	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.11	0	Right	Cheek	QPSK	1	25	95BD8	1:1	0.129	1.180	0.152	A7
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.08	1	Right	Cheek	QPSK	25	0	95BD8	1:1	0.093	1.239	0.115	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.17	0	Right	Tilt	QPSK	1	25	95BD8	1:1	0.058	1.180	0.068	
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.00	1	Right	Tilt	QPSK	25	0	95BD8	1:1	0.045	1.239	0.056	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.13	0	Left	Cheek	QPSK	1	25	95BD8	1:1	0.108	1.180	0.127	
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.06	1	Left	Cheek	QPSK	25	0	95BD8	1:1	0.075	1.239	0.093	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.00	0	Left	Tilt	QPSK	1	25	95BD8	1:1	0.068	1.180	0.080	
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.05	1	Left	Tilt	QPSK	25	0	95BD8	1:1	0.043	1.239	0.053	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 72 of 102

Table 11-8
LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	0.08	0	Right	Cheek	QPSK	1	0	95C05	1:1	0.189	1.076	0.203	A8
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	0.03	1	Right	Cheek	QPSK	25	12	95C05	1:1	0.141	1.202	0.169	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	0.17	0	Right	Tilt	QPSK	1	0	95C05	1:1	0.088	1.076	0.095	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	0.12	1	Right	Tilt	QPSK	25	12	95C05	1:1	0.063	1.202	0.076	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	-0.12	0	Left	Cheek	QPSK	1	0	95C05	1:1	0.131	1.076	0.141	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	-0.01	1	Left	Cheek	QPSK	25	12	95C05	1:1	0.081	1.202	0.097	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	0.16	0	Left	Tilt	QPSK	1	0	95C05	1:1	0.082	1.076	0.088	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	0.17	1	Left	Tilt	QPSK	25	12	95C05	1:1	0.051	1.202	0.061	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak									Head										
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g)										
									averaged over 1 gram										

Table 11-9
LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	-0.19	0	Right	Cheek	QPSK	1	50	95C05	1:1	0.132	1.175	0.155	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	0.09	1	Right	Cheek	QPSK	50	25	95C05	1:1	0.101	1.245	0.126	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	-0.01	0	Right	Tilt	QPSK	1	50	95C05	1:1	0.137	1.175	0.161	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	-0.02	1	Right	Tilt	QPSK	50	25	95C05	1:1	0.096	1.245	0.120	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	-0.06	0	Left	Cheek	QPSK	1	50	95C05	1:1	0.158	1.175	0.186	A9
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	0.17	1	Left	Cheek	QPSK	50	25	95C05	1:1	0.121	1.245	0.151	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	0.07	0	Left	Tilt	QPSK	1	50	95C05	1:1	0.124	1.175	0.146	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	0.09	1	Left	Tilt	QPSK	50	25	95C05	1:1	0.089	1.245	0.111	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-10
LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	0.00	0	Right	Cheek	QPSK	1	0	95C05	1:1	0.068	1.016	0.069	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	0.09	1	Right	Cheek	QPSK	50	0	95C05	1:1	0.047	1.052	0.049	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	0.12	0	Right	Tilt	QPSK	1	0	95C05	1:1	0.044	1.016	0.045	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	0.19	1	Right	Tilt	QPSK	50	0	95C05	1:1	0.030	1.052	0.032	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	0.12	0	Left	Cheek	QPSK	1	0	95C05	1:1	0.089	1.016	0.090	A10
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	0.02	1	Left	Cheek	QPSK	50	0	95C05	1:1	0.064	1.052	0.067	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	0.18	0	Left	Tilt	QPSK	1	0	95C05	1:1	0.054	1.016	0.055	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	-0.17	1	Left	Tilt	QPSK	50	0	95C05	1:1	0.036	1.052	0.038	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 73 of 102

Table 11-11
LTE Band 30 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	-0.05	0	Right	Cheek	QPSK	1	25	95C05	1:1	0.091	1.000	0.091	
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	-0.07	1	Right	Cheek	QPSK	25	25	95C05	1:1	0.072	1.014	0.073	
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	-0.05	0	Right	Tilt	QPSK	1	25	95C05	1:1	0.087	1.000	0.087	
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	0.06	1	Right	Tilt	QPSK	25	25	95C05	1:1	0.065	1.014	0.066	
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	0.17	0	Left	Cheek	QPSK	1	25	95C05	1:1	0.131	1.000	0.131	A11
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	0.17	1	Left	Cheek	QPSK	25	25	95C05	1:1	0.099	1.014	0.100	
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	0.05	0	Left	Tilt	QPSK	1	25	95C05	1:1	0.058	1.000	0.058	
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	0.03	1	Left	Tilt	QPSK	25	25	95C05	1:1	0.046	1.014	0.047	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-12
DTS Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	14.5	14.12	0.14	Right	Cheek	1	95BE4	1	99.7	0.489	0.390	1.091	1.003	0.426	
2462	11	802.11b	DSSS	22	14.5	14.12	-0.04	Right	Tilt	1	95BE4	1	99.7	0.395	0.313	1.091	1.003	0.342	
2462	11	802.11b	DSSS	22	14.5	14.12	-	Left	Cheek	1	95BE4	1	99.7	0.289	-	1.091	1.003	-	
2462	11	802.11b	DSSS	22	14.5	14.12	-	Left	Tilt	1	95BE4	1	99.7	0.188	-	1.091	1.003	-	
2437	6	802.11b	DSSS	22	14.5	14.48	0.16	Right	Cheek	2	95BE4	1	99.7	0.458	0.419	1.005	1.003	0.422	A12
2437	6	802.11b	DSSS	22	14.5	14.48	0.07	Right	Tilt	2	95BE4	1	99.7	0.418	0.377	1.005	1.003	0.380	
2437	6	802.11b	DSSS	22	14.5	14.48	-	Left	Cheek	2	95BE4	1	99.7	0.218	-	1.005	1.003	-	
2437	6	802.11b	DSSS	22	14.5	14.48	-	Left	Tilt	2	95BE4	1	99.7	0.304	-	1.005	1.003	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-13
NII Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g) (W/kg)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	10.5	9.74	0.13	Right	Cheek	1	95BE4	6	98.6	0.288	0.124	1.191	1.014	0.150	
5280	56	802.11a	OFDM	20	10.5	9.74	-	Right	Tilt	1	95BE4	6	98.6	0.160	-	1.191	1.014	-	
5280	56	802.11a	OFDM	20	10.5	9.74	-	Left	Cheek	1	95BE4	6	98.6	0.049	-	1.191	1.014	-	
5280	56	802.11a	OFDM	20	10.5	9.74	-	Left	Tilt	1	95BE4	6	98.6	0.045	-	1.191	1.014	-	
5300	60	802.11a	OFDM	20	10.5	9.48	0.18	Right	Cheek	2	95BE4	6	99.4	0.483	0.255	1.265	1.006	0.325	
5300	60	802.11a	OFDM	20	10.5	9.48	-	Right	Tilt	2	95BE4	6	99.4	0.357	-	1.265	1.006	-	
5300	60	802.11a	OFDM	20	10.5	9.48	-	Left	Cheek	2	95BE4	6	99.4	0.036	-	1.265	1.006	-	
5300	60	802.11a	OFDM	20	10.5	9.48	-	Left	Tilt	2	95BE4	6	99.4	0.029	-	1.265	1.006	-	
5500	100	802.11a	OFDM	20	10.5	9.91	0.18	Right	Cheek	1	95BE4	6	98.6	0.088	0.022	1.146	1.014	0.025	
5500	100	802.11a	OFDM	20	10.5	9.91	-	Right	Tilt	1	95BE4	6	98.6	0.046	-	1.146	1.014	-	
5500	100	802.11a	OFDM	20	10.5	9.91	-	Left	Cheek	1	95BE4	6	98.6	0.014	-	1.146	1.014	-	
5500	100	802.11a	OFDM	20	10.5	9.91	-	Left	Tilt	1	95BE4	6	98.6	0.010	-	1.146	1.014	-	
5500	100	802.11a	OFDM	20	10.5	9.53	0.02	Right	Cheek	2	95BE4	6	99.4	0.609	0.311	1.250	1.006	0.391	
5500	100	802.11a	OFDM	20	10.5	9.53	0.18	Right	Tilt	2	95BE4	6	99.4	0.683	0.388	1.250	1.006	0.488	A13
5500	100	802.11a	OFDM	20	10.5	9.53	-	Left	Cheek	2	95BE4	6	99.4	0.488	-	1.250	1.006	-	
5500	100	802.11a	OFDM	20	10.5	9.53	-	Left	Tilt	2	95BE4	6	99.4	0.499	-	1.250	1.006	-	
5785	157	802.11a	OFDM	20	10.5	10.01	0.18	Right	Cheek	1	95BE4	6	98.6	0.043	0.012	1.119	1.014	0.013	
5785	157	802.11a	OFDM	20	10.5	10.01	-	Right	Tilt	1	95BE4	6	98.6	0.018	-	1.119	1.014	-	
5785	157	802.11a	OFDM	20	10.5	10.01	-	Left	Cheek	1	95BE4	6	98.6	0.008	-	1.119	1.014	-	
5785	157	802.11a	OFDM	20	10.5	10.01	-	Left	Tilt	1	95BE4	6	98.6	0.009	-	1.119	1.014	-	
5785	157	802.11a	OFDM	20	10.5	9.86	0.18	Right	Cheek	2	95BE4	6	99.4	0.931	0.371	1.159	1.006	0.433	
5785	157	802.11a	OFDM	20	10.5	9.86	0.16	Right	Tilt	2	95BE4	6	99.4	0.826	0.315	1.159	1.006	0.367	
5785	157	802.11a	OFDM	20	10.5	9.86	-	Left	Cheek	2	95BE4	6	99.4	0.472	-	1.159	1.006	-	
5785	157	802.11a	OFDM	20	10.5	9.86	-	Left	Tilt	2	95BE4	6	99.4	0.476	-	1.159	1.006	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Head										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 74 of 102

11.2 Standalone Body-Worn SAR Data

Table 11-14
GSM/UMTS Body-Worn SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.5	33.49	-0.01	15 mm	95B11	1	1:8.3	back	0.336	1.002	0.337	A14
836.60	4183	UMTS 850	RMC	24.8	23.96	-0.02	15 mm	95BE8	N/A	1:1	back	0.318	1.213	0.386	A16
1712.40	1312	UMTS 1750	RMC	24.5	23.59	-0.01	15 mm	95B11	N/A	1:1	back	0.837	1.233	1.032	A18
1732.40	1412	UMTS 1750	RMC	24.5	23.44	0.05	15 mm	95B11	N/A	1:1	back	0.826	1.276	1.054	
1752.50	1862	UMTS 1750	RMC	24.5	23.31	0.05	15 mm	95B11	N/A	1:1	back	0.752	1.315	0.989	
1880.00	661	GSM 1900	GSM	31.5	29.95	0.05	15 mm	95B11	1	1:8.3	back	0.263	1.429	0.376	A20
1880.00	9400	UMTS 1900	RMC	24.2	23.24	0.02	15 mm	95BDC	N/A	1:1	back	0.519	1.247	0.647	A22
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-15
LTE Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	-0.01	0	95C05	QPSK	1	0	15 mm	back	1:1	0.302	1.072	0.324	A24
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	-0.01	1	95C05	QPSK	25	12	15 mm	back	1:1	0.210	1.153	0.242	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.08	0	95BD8	QPSK	1	25	15 mm	back	1:1	0.264	1.180	0.312	A26
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	-0.04	1	95BD8	QPSK	25	0	15 mm	back	1:1	0.189	1.239	0.234	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	0.00	0	95C05	QPSK	1	0	15 mm	back	1:1	0.384	1.076	0.413	A28
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	0.02	1	95C05	QPSK	25	12	15 mm	back	1:1	0.257	1.202	0.309	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	-0.01	0	95C05	QPSK	1	50	15 mm	back	1:1	0.872	1.175	1.025	A30
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	0.03	1	95C05	QPSK	50	25	15 mm	back	1:1	0.680	1.245	0.847	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.47	0.02	1	95C05	QPSK	100	0	15 mm	back	1:1	0.668	1.268	0.847	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	0.00	0	95C05	QPSK	1	50	15 mm	back	1:1	0.821	1.175	0.965	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	-0.09	0	95C05	QPSK	1	0	15 mm	back	1:1	0.579	1.016	0.588	A32
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	-0.12	1	95C05	QPSK	50	0	15 mm	back	1:1	0.400	1.052	0.421	
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	0.05	0	95C05	QPSK	1	25	15 mm	back	1:1	0.449	1.000	0.449	A34
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	0.04	1	95C05	QPSK	25	25	15 mm	back	1:1	0.327	1.014	0.332	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak									Body 1.6 W/kg (mW/g) averaged over 1 gram										
Uncontrolled Exposure/General Population																			

Blue entry represents variability measurement.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 75 of 102

Table 11-16
DTS Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)			
2437	6	802.11b	DSSS	22	17.5	17.35	0.09	10 mm	1	95C04	1	back	99.7	0.145	0.122	1.035	1.003	0.126	
2437	6	802.11b	DSSS	22	17.5	17.48	0.01	10 mm	2	95C04	1	back	99.7	0.277	0.224	1.005	1.003	0.226	A36
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-17
NII Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	13.5	13.45	-0.12	10 mm	1	95BE4	6	back	98.6	0.028	0.016	1.012	1.014	0.016	
5320	64	802.11a	OFDM	20	13.5	13.11	0.18	10 mm	2	95BE4	6	back	99.4	0.062	0.032	1.094	1.006	0.035	
5500	100	802.11a	OFDM	20	13.5	13.45	0.10	10 mm	1	95BE4	6	back	98.6	0.014	0.002	1.012	1.014	0.002	
5500	100	802.11a	OFDM	20	13.5	12.70	0.14	10 mm	2	95BE4	6	back	99.4	0.067	0.030	1.202	1.006	0.036	
5785	157	802.11a	OFDM	20	13.5	13.40	0.00	10 mm	1	95BE4	6	back	98.6	0.013	0.003	1.023	1.014	0.003	
5785	157	802.11a	OFDM	20	13.5	12.72	0.12	10 mm	2	95BE4	6	back	99.4	0.062	0.035	1.197	1.006	0.042	A38
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 11-18
DSS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #
MHz	Ch.											(W/kg)			
2441	39	Bluetooth	FHSS	12.0	11.56	0.04	15 mm	95BE6	1	back	1:1	0.000	1.107	0.000	A40
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 76 of 102

11.3 Standalone Wireless Router SAR Data

Table 11-19
GPRS/UMTS Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	30.5	29.89	0.13	10 mm	95B11	3	1:2.76	back	0.505	1.151	0.581	A15
836.60	190	GSM 850	GPRS	30.5	29.89	-0.03	10 mm	95B11	3	1:2.76	front	0.458	1.151	0.527	
836.60	190	GSM 850	GPRS	30.5	29.89	-0.03	10 mm	95B11	3	1:2.76	bottom	0.211	1.151	0.243	
836.60	190	GSM 850	GPRS	30.5	29.89	0.16	10 mm	95B11	3	1:2.76	right	0.253	1.151	0.291	
836.60	190	GSM 850	GPRS	30.5	29.89	0.20	10 mm	95B11	3	1:2.76	left	0.045	1.151	0.052	
836.60	4183	UMTS 850	RMC	24.8	23.96	-0.05	10 mm	95BE8	N/A	1:1	back	0.540	1.213	0.655	A17
836.60	4183	UMTS 850	RMC	24.8	23.96	-0.01	10 mm	95BE8	N/A	1:1	front	0.485	1.213	0.588	
836.60	4183	UMTS 850	RMC	24.8	23.96	-0.07	10 mm	95BE8	N/A	1:1	bottom	0.266	1.213	0.323	
836.60	4183	UMTS 850	RMC	24.8	23.96	-0.01	10 mm	95BE8	N/A	1:1	right	0.277	1.213	0.336	
836.60	4183	UMTS 850	RMC	24.8	23.96	-0.08	10 mm	95BE8	N/A	1:1	left	0.039	1.213	0.047	
1712.40	1312	UMTS 1750	RMC	20.5	20.13	0.06	10 mm	95B11	N/A	1:1	back	0.711	1.089	0.774	
1732.40	1412	UMTS 1750	RMC	20.5	19.98	0.02	10 mm	95B11	N/A	1:1	back	0.784	1.127	0.884	A19
1752.50	1862	UMTS 1750	RMC	20.5	19.89	0.06	10 mm	95B11	N/A	1:1	back	0.637	1.151	0.733	
1732.40	1412	UMTS 1750	RMC	20.5	19.98	-0.12	10 mm	95B11	N/A	1:1	front	0.708	1.127	0.798	
1732.40	1412	UMTS 1750	RMC	20.5	19.98	-0.04	10 mm	95B11	N/A	1:1	bottom	0.707	1.127	0.797	
1732.40	1412	UMTS 1750	RMC	20.5	19.98	-0.01	10 mm	95B11	N/A	1:1	right	0.163	1.127	0.184	
1732.40	1412	UMTS 1750	RMC	20.5	19.98	-0.09	10 mm	95B11	N/A	1:1	left	0.025	1.127	0.028	
1850.20	512	GSM 1900	GPRS	27.0	25.94	-0.16	10 mm	95B11	3	1:2.76	back	0.792	1.276	1.011	A21
1880.00	661	GSM 1900	GPRS	27.0	25.59	0.13	10 mm	95B11	3	1:2.76	back	0.644	1.384	0.891	
1909.80	810	GSM 1900	GPRS	27.0	25.81	-0.02	10 mm	95B11	3	1:2.76	back	0.555	1.315	0.730	
1850.20	512	GSM 1900	GPRS	27.0	25.94	0.03	10 mm	95B11	3	1:2.76	front	0.767	1.276	0.979	
1880.00	661	GSM 1900	GPRS	27.0	25.59	-0.01	10 mm	95B11	3	1:2.76	front	0.776	1.384	1.074	
1909.80	810	GSM 1900	GPRS	27.0	25.81	-0.04	10 mm	95B11	3	1:2.76	front	0.660	1.315	0.868	
1880.00	661	GSM 1900	GPRS	27.0	25.59	0.11	10 mm	95B11	3	1:2.76	bottom	0.481	1.384	0.666	
1880.00	661	GSM 1900	GPRS	27.0	25.59	0.13	10 mm	95B11	3	1:2.76	right	0.099	1.384	0.137	
1880.00	661	GSM 1900	GPRS	27.0	25.59	0.13	10 mm	95B11	3	1:2.76	left	0.022	1.384	0.030	
1852.40	9262	UMTS 1900	RMC	21.5	21.15	0.09	10 mm	95BE6	N/A	1:1	back	0.803	1.084	0.870	
1880.00	9400	UMTS 1900	RMC	21.5	20.83	0.11	10 mm	95BE6	N/A	1:1	back	0.751	1.167	0.876	
1907.60	9538	UMTS 1900	RMC	21.5	20.97	0.12	10 mm	95BE6	N/A	1:1	back	0.621	1.130	0.702	
1852.40	9262	UMTS 1900	RMC	21.5	21.15	0.02	10 mm	95BE6	N/A	1:1	front	0.891	1.084	0.966	
1880.00	9400	UMTS 1900	RMC	21.5	20.83	0.01	10 mm	95BE6	N/A	1:1	front	0.722	1.167	0.843	
1907.60	9538	UMTS 1900	RMC	21.5	20.97	-0.01	10 mm	95BE6	N/A	1:1	front	0.626	1.130	0.707	
1852.40	9262	UMTS 1900	RMC	21.5	21.15	-0.03	10 mm	95BE6	N/A	1:1	bottom	0.912	1.084	0.989	A23
1880.00	9400	UMTS 1900	RMC	21.5	20.83	-0.05	10 mm	95BE6	N/A	1:1	bottom	0.855	1.167	0.998	
1907.60	9538	UMTS 1900	RMC	21.5	20.97	-0.06	10 mm	95BE6	N/A	1:1	bottom	0.616	1.130	0.696	
1880.00	9400	UMTS 1900	RMC	21.5	20.83	-0.09	10 mm	95BE6	N/A	1:1	right	0.134	1.167	0.156	
1880.00	9400	UMTS 1900	RMC	21.5	20.83	0.02	10 mm	95BE6	N/A	1:1	left	0.032	1.167	0.037	
1852.40	9262	UMTS 1900	RMC	21.5	21.15	-0.10	10 mm	95BE6	N/A	1:1	bottom	0.910	1.084	0.986	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Blue entry represents variability measurement.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 77 of 102

Table 11-20
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maxium Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	-0.06	0	95C05	QPSK	1	0	10 mm	back	1:1	0.467	1.072	0.501	
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	0.03	1	95C05	QPSK	25	12	10 mm	back	1:1	0.334	1.153	0.385	
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	-0.03	0	95C05	QPSK	1	0	10 mm	front	1:1	0.581	1.072	0.623	A25
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	-0.03	1	95C05	QPSK	25	12	10 mm	front	1:1	0.420	1.153	0.484	
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	0.09	0	95C05	QPSK	1	0	10 mm	bottom	1:1	0.240	1.072	0.257	
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	0.10	1	95C05	QPSK	25	12	10 mm	bottom	1:1	0.173	1.153	0.199	
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	-0.01	0	95C05	QPSK	1	0	10 mm	right	1:1	0.183	1.072	0.196	
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	-0.01	1	95C05	QPSK	25	12	10 mm	right	1:1	0.124	1.153	0.143	
707.50	23095	Mid	LTE Band 12	10	24.8	24.50	-0.15	0	95C05	QPSK	1	0	10 mm	left	1:1	0.085	1.072	0.091	
707.50	23095	Mid	LTE Band 12	10	23.8	23.18	-0.02	1	95C05	QPSK	25	12	10 mm	left	1:1	0.067	1.153	0.077	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-21
LTE Band 13 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.02	0	95BD8	QPSK	1	25	10 mm	back	1:1	0.377	1.180	0.445	A27
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.02	1	95BD8	QPSK	25	0	10 mm	back	1:1	0.272	1.239	0.337	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.02	0	95BD8	QPSK	1	25	10 mm	front	1:1	0.379	1.180	0.447	
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.00	1	95BD8	QPSK	25	0	10 mm	front	1:1	0.273	1.239	0.338	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.18	0	95BD8	QPSK	1	25	10 mm	bottom	1:1	0.213	1.180	0.251	
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.11	1	95BD8	QPSK	25	0	10 mm	bottom	1:1	0.154	1.239	0.191	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	0.01	0	95BD8	QPSK	1	25	10 mm	right	1:1	0.192	1.180	0.227	
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.11	1	95BD8	QPSK	25	0	10 mm	right	1:1	0.148	1.239	0.183	
782.00	23230	Mid	LTE Band 13	10	24.0	23.28	-0.16	0	95BD8	QPSK	1	25	10 mm	left	1:1	0.093	1.180	0.110	
782.00	23230	Mid	LTE Band 13	10	23.0	22.07	0.05	1	95BD8	QPSK	25	0	10 mm	left	1:1	0.080	1.239	0.099	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-22
LTE Band 5 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	-0.01	0	95C05	QPSK	1	0	10 mm	back	1:1	0.551	1.076	0.593	A29
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	0.05	1	95C05	QPSK	25	12	10 mm	back	1:1	0.383	1.202	0.460	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	0.00	0	95C05	QPSK	1	0	10 mm	front	1:1	0.516	1.076	0.555	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	0.03	1	95C05	QPSK	25	12	10 mm	front	1:1	0.358	1.202	0.430	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	-0.11	0	95C05	QPSK	1	0	10 mm	bottom	1:1	0.256	1.076	0.275	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	-0.03	1	95C05	QPSK	25	12	10 mm	bottom	1:1	0.184	1.202	0.221	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	-0.08	0	95C05	QPSK	1	0	10 mm	right	1:1	0.336	1.076	0.362	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	0.03	1	95C05	QPSK	25	12	10 mm	right	1:1	0.226	1.202	0.272	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.8	24.48	0.14	0	95C05	QPSK	1	0	10 mm	left	1:1	0.058	1.076	0.062	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.8	23.00	0.12	1	95C05	QPSK	25	12	10 mm	left	1:1	0.030	1.202	0.036	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 78 of 102

Table 11-23
LTE Band 4 (AWS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														[W/kg]		[W/kg]		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.88	-0.01	0	95BE6	QPSK	1	50	10 mm	back	1:1	0.496	1.153	0.572	A31
1732.50	20175	Mid	LTE Band 4 (AWS)	20	19.5	18.79	0.06	1	95BE6	QPSK	50	25	10 mm	back	1:1	0.400	1.178	0.471	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.88	-0.01	0	95BE6	QPSK	1	50	10 mm	front	1:1	0.644	1.153	0.743	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	19.5	18.79	0.01	1	95BE6	QPSK	50	25	10 mm	front	1:1	0.507	1.178	0.597	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.88	-0.07	0	95BE6	QPSK	1	50	10 mm	bottom	1:1	0.622	1.153	0.717	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	19.5	18.79	0.11	1	95BE6	QPSK	50	25	10 mm	bottom	1:1	0.616	1.178	0.726	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.88	0.10	0	95BE6	QPSK	1	50	10 mm	right	1:1	0.162	1.153	0.187	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	19.5	18.79	0.05	1	95BE6	QPSK	50	25	10 mm	right	1:1	0.130	1.178	0.153	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.88	0.02	0	95BE6	QPSK	1	50	10 mm	left	1:1	0.034	1.153	0.039	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	19.5	18.79	0.00	1	95BE6	QPSK	50	25	10 mm	left	1:1	0.027	1.178	0.032	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-24
LTE Band 2 (PCS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	20.5	19.97	-0.10	0	95BE6	QPSK	1	0	10 mm	back	1:1	0.530	1.130	0.599	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.63	-0.13	1	95BE6	QPSK	50	0	10 mm	back	1:1	0.368	1.222	0.450	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.5	19.91	0.12	0	95BE6	QPSK	1	0	10 mm	front	1:1	0.866	1.146	0.992	A33
1880.00	18900	Mid	LTE Band 2 (PCS)	20	20.5	19.95	0.12	0	95BE6	QPSK	1	0	10 mm	front	1:1	0.775	1.135	0.880	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.5	19.97	0.10	0	95BE6	QPSK	1	0	10 mm	front	1:1	0.723	1.130	0.817	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.63	0.13	1	95BE6	QPSK	50	0	10 mm	front	1:1	0.545	1.222	0.666	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.57	0.14	1	95BE6	QPSK	100	0	10 mm	front	1:1	0.458	1.239	0.567	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.5	19.97	0.04	0	95BE6	QPSK	1	0	10 mm	bottom	1:1	0.387	1.130	0.437	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.63	0.03	1	95BE6	QPSK	50	0	10 mm	bottom	1:1	0.260	1.222	0.318	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.5	19.97	-0.05	0	95BE6	QPSK	1	0	10 mm	right	1:1	0.139	1.130	0.157	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.63	-0.07	1	95BE6	QPSK	50	0	10 mm	right	1:1	0.099	1.222	0.121	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.5	19.97	0.06	0	95BE6	QPSK	1	0	10 mm	left	1:1	0.037	1.130	0.042	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.63	0.10	1	95BE6	QPSK	50	0	10 mm	left	1:1	0.025	1.222	0.031	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-25
LTE Band 30 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Num ber	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	0.02	0	95C05	QPSK	1	25	10 mm	back	1:1	0.843	1.000	0.843	
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	-0.17	1	95C05	QPSK	25	25	10 mm	back	1:1	0.607	1.014	0.615	
2310.00	27710	Mid	LTE Band 30	10	22.1	22.03	-0.10	1	95C05	QPSK	50	0	10 mm	back	1:1	0.633	1.016	0.643	
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	-0.06	0	95C05	QPSK	1	25	10 mm	front	1:1	0.637	1.000	0.637	
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	-0.02	1	95C05	QPSK	25	25	10 mm	front	1:1	0.471	1.014	0.478	
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	-0.02	0	95C05	QPSK	1	25	10 mm	bottom	1:1	1.050	1.000	1.050	A35
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	-0.04	1	95C05	QPSK	25	25	10 mm	bottom	1:1	0.773	1.014	0.784	
2310.00	27710	Mid	LTE Band 30	10	22.1	22.03	-0.06	1	95C05	QPSK	50	0	10 mm	bottom	1:1	0.793	1.016	0.806	
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	-0.04	0	95C05	QPSK	1	25	10 mm	left	1:1	0.319	1.000	0.319	
2310.00	27710	Mid	LTE Band 30	10	22.1	22.04	-0.05	1	95C05	QPSK	25	25	10 mm	left	1:1	0.236	1.014	0.239	
2310.00	27710	Mid	LTE Band 30	10	23.1	23.10	-0.11	0	95C05	QPSK	1	25	10 mm	bottom	1:1	1.050	1.000	1.050	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Blue entry represents variability measurement.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 79 of 102

Table 11-26
WLAN Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	17.5	17.35	-	10 mm	1	95C04	1	back	99.7	0.145	-	1.035	1.003	-	
2437	6	802.11b	DSSS	22	17.5	17.35	0.03	10 mm	1	95C04	1	front	99.7	0.153	0.135	1.035	1.003	0.140	
2437	6	802.11b	DSSS	22	17.5	17.35	-	10 mm	1	95C04	1	top	99.7	0.053	-	1.035	1.003	-	
2437	6	802.11b	DSSS	22	17.5	17.35	-	10 mm	1	95C04	1	left	99.7	0.064	-	1.035	1.003	-	
2437	6	802.11b	DSSS	22	17.5	17.48	-	10 mm	2	95C04	1	back	99.7	0.277	-	1.005	1.003	-	
2437	6	802.11b	DSSS	22	17.5	17.48	-	10 mm	2	95C04	1	front	99.7	0.179	-	1.005	1.003	-	
2437	6	802.11b	DSSS	22	17.5	17.48	-0.08	10 mm	2	95C04	1	top	99.7	0.300	0.253	1.005	1.003	0.255	A37
2437	6	802.11b	DSSS	22	17.5	17.48	-	10 mm	2	95C04	1	left	99.7	0.112	-	1.005	1.003	-	
5785	157	802.11a	OFDM	20	13.5	13.40	-	10 mm	1	95BE4	6	back	98.6	0.013	-	1.023	1.014	-	
5785	157	802.11a	OFDM	20	13.5	13.40	-0.17	10 mm	1	95BE4	6	front	98.6	0.016	0.004	1.023	1.014	0.004	
5785	157	802.11a	OFDM	20	13.5	13.40	-	10 mm	1	95BE4	6	top	98.6	0.013	-	1.023	1.014	-	
5785	157	802.11a	OFDM	20	13.5	13.40	-	10 mm	1	95BE4	6	left	98.6	0.013	-	1.023	1.014	-	
5785	157	802.11a	OFDM	20	13.5	12.72	-	10 mm	2	95BE4	6	back	99.4	0.082	-	1.197	1.006	-	
5785	157	802.11a	OFDM	20	13.5	12.72	0.12	10 mm	2	95BE4	6	front	99.4	0.203	0.085	1.197	1.006	0.103	A39
5785	157	802.11a	OFDM	20	13.5	12.72	-	10 mm	2	95BE4	6	top	99.4	0.180	-	1.197	1.006	-	
5785	157	802.11a	OFDM	20	13.5	12.72	-	10 mm	2	95BE4	6	left	99.4	0.028	-	1.197	1.006	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 80 of 102

11.4 Standalone Extremity SAR Data

Table 11-27
UMTS Extremity SAR Data

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Scaled SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1712.40	1312	UMTS 1750	RMC	24.5	23.59	0.07	4 mm	95B11	1:1	back	2.380	1.233	2.935	A41
1732.40	1412	UMTS 1750	RMC	24.5	23.44	-0.14	4 mm	95B11	1:1	back	2.320	1.276	2.960	
1752.50	1862	UMTS 1750	RMC	24.5	23.31	-0.13	4 mm	95B11	1:1	back	2.120	1.315	2.788	
1712.40	1312	UMTS 1750	RMC	24.5	23.59	0.06	4 mm	95B11	1:1	front	1.910	1.233	2.355	
1732.40	1412	UMTS 1750	RMC	24.5	23.44	0.03	4 mm	95B11	1:1	front	2.370	1.276	3.024	
1752.50	1862	UMTS 1750	RMC	24.5	23.31	0.07	4 mm	95B11	1:1	front	1.770	1.315	2.328	
1732.40	1412	UMTS 1750	RMC	24.5	23.44	-0.04	4 mm	95B11	1:1	bottom	1.420	1.276	1.812	
1732.40	1412	UMTS 1750	RMC	24.5	23.44	-0.03	0 mm	95B11	1:1	right	0.599	1.276	0.764	
1732.40	1412	UMTS 1750	RMC	24.5	23.44	-0.07	0 mm	95B11	1:1	left	0.184	1.276	0.235	
1712.40	1312	UMTS 1750	RMC	20.5	20.13	-0.14	0 mm	95B11	1:1	back	2.140	1.089	2.330	
1732.40	1412	UMTS 1750	RMC	20.5	19.98	-0.12	0 mm	95B11	1:1	back	2.060	1.127	2.322	
1752.50	1862	UMTS 1750	RMC	20.5	19.89	-0.11	0 mm	95B11	1:1	back	1.960	1.151	2.256	
1712.40	1312	UMTS 1750	RMC	20.5	20.13	0.20	0 mm	95B11	1:1	front	1.830	1.089	1.993	
1732.40	1412	UMTS 1750	RMC	20.5	19.98	0.16	0 mm	95B11	1:1	front	1.810	1.127	2.040	
1752.50	1862	UMTS 1750	RMC	20.5	19.89	0.18	0 mm	95B11	1:1	front	1.780	1.151	2.049	
1732.40	1412	UMTS 1750	RMC	20.5	19.98	-0.11	0 mm	95B11	1:1	bottom	0.818	1.127	0.922	
1712.40	1312	UMTS 1750	RMC	24.5	23.59	0.01	4 mm	95B11	1:1	back	2.320	1.233	2.861	
1852.40	9262	UMTS 1900	RMC	24.2	23.35	0.09	4 mm	95BDC	1:1	back	1.910	1.216	2.323	
1880.00	9400	UMTS 1900	RMC	24.2	23.24	0.07	4 mm	95BDC	1:1	back	1.780	1.247	2.220	
1907.60	9538	UMTS 1900	RMC	24.2	23.46	0.08	4 mm	95BDC	1:1	back	1.510	1.186	1.791	
1852.40	9262	UMTS 1900	RMC	24.2	23.35	-0.06	4 mm	95BDC	1:1	front	2.200	1.216	2.675	
1880.00	9400	UMTS 1900	RMC	24.2	23.24	-0.07	4 mm	95BDC	1:1	front	2.090	1.247	2.606	
1907.60	9538	UMTS 1900	RMC	24.2	23.46	-0.07	4 mm	95BDC	1:1	front	1.800	1.186	2.135	
1880.00	9400	UMTS 1900	RMC	24.2	23.24	0.06	4 mm	95BDC	1:1	bottom	1.550	1.247	1.933	
1880.00	9400	UMTS 1900	RMC	24.2	23.24	-0.11	0 mm	95BDC	1:1	right	0.426	1.247	0.531	
1880.00	9400	UMTS 1900	RMC	24.2	23.24	-0.02	0 mm	95BDC	1:1	left	0.094	1.247	0.117	
1852.40	9262	UMTS 1900	RMC	21.5	21.15	0.17	0 mm	95BE6	1:1	back	2.280	1.084	2.472	A42
1880.00	9400	UMTS 1900	RMC	21.5	20.83	0.19	0 mm	95BE6	1:1	back	2.110	1.167	2.462	
1907.60	9538	UMTS 1900	RMC	21.5	20.97	0.12	0 mm	95BE6	1:1	back	2.240	1.130	2.531	
1852.40	9262	UMTS 1900	RMC	21.5	21.15	0.04	0 mm	95BE6	1:1	front	2.020	1.084	2.190	
1880.00	9400	UMTS 1900	RMC	21.5	20.83	0.01	0 mm	95BE6	1:1	front	2.130	1.167	2.486	
1907.60	9538	UMTS 1900	RMC	21.5	20.97	0.18	0 mm	95BE6	1:1	front	2.040	1.130	2.305	
1880.00	9400	UMTS 1900	RMC	21.5	20.83	-0.20	0 mm	95BE6	1:1	bottom	1.710	1.167	1.996	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT														
Spatial Peak							Extremity							
Uncontrolled Exposure/General Population							4.0 W/kg (mW/g)							
							averaged over 10 grams							

Blue entry represents variability measurement.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 81 of 102

Table 11-28
LTE Extremity SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Scaled SAR (10g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	-0.02	0	95C05	QPSK	1	50	4 mm	back	1:1	1.760	1.175	2.068	A43
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	-0.13	1	95C05	QPSK	50	25	4 mm	back	1:1	1.350	1.245	1.681	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.47	-0.01	1	95C05	QPSK	100	0	4 mm	back	1:1	1.360	1.268	1.724	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	0.06	0	95C05	QPSK	1	50	4 mm	front	1:1	1.690	1.175	1.986	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	0.07	1	95C05	QPSK	50	25	4 mm	front	1:1	1.330	1.245	1.656	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	0.00	0	95C05	QPSK	1	50	4 mm	bottom	1:1	1.610	1.175	1.892	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	0.03	1	95C05	QPSK	50	25	4 mm	bottom	1:1	1.270	1.245	1.581	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	-0.15	0	95C05	QPSK	1	50	0 mm	right	1:1	0.445	1.175	0.523	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	0.08	1	95C05	QPSK	50	25	0 mm	right	1:1	0.365	1.245	0.454	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.80	-0.08	0	95C05	QPSK	1	50	0 mm	left	1:1	0.143	1.175	0.168	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.55	0.02	1	95C05	QPSK	50	25	0 mm	left	1:1	0.107	1.245	0.133	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.88	0.00	0	95BE6	QPSK	1	50	0 mm	back	1:1	1.730	1.153	1.995	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	19.5	18.79	-0.01	1	95BE6	QPSK	50	25	0 mm	back	1:1	1.190	1.178	1.402	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.88	0.06	0	95BE6	QPSK	1	50	0 mm	front	1:1	1.410	1.153	1.626	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	19.5	18.79	0.14	1	95BE6	QPSK	50	25	0 mm	front	1:1	1.120	1.178	1.319	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.88	-0.05	0	95BE6	QPSK	1	50	0 mm	bottom	1:1	1.600	1.153	1.845	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	19.5	18.79	-0.02	1	95BE6	QPSK	50	25	0 mm	bottom	1:1	1.260	1.178	1.484	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	-0.04	0	95C05	QPSK	1	0	4 mm	back	1:1	1.930	1.016	1.961	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	-0.09	1	95C05	QPSK	50	0	4 mm	back	1:1	1.380	1.052	1.452	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.0	23.72	0.04	0	95C05	QPSK	1	50	4 mm	front	1:1	2.680	1.067	2.860	A44
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.0	23.73	0.09	0	95C05	QPSK	1	50	4 mm	front	1:1	2.590	1.064	2.756	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	0.00	0	95C05	QPSK	1	0	4 mm	front	1:1	2.550	1.016	2.591	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	0.03	1	95C05	QPSK	50	0	4 mm	front	1:1	1.840	1.052	1.936	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.70	0.00	1	95C05	QPSK	100	0	4 mm	front	1:1	1.750	1.072	1.876	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	-0.12	0	95C05	QPSK	1	0	4 mm	bottom	1:1	1.010	1.016	1.026	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	-0.04	1	95C05	QPSK	50	0	4 mm	bottom	1:1	0.726	1.052	0.764	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	0.05	0	95C05	QPSK	1	0	0 mm	right	1:1	0.441	1.016	0.448	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	-0.07	1	95C05	QPSK	50	0	0 mm	right	1:1	0.336	1.052	0.353	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.93	0.04	0	95C05	QPSK	1	0	0 mm	left	1:1	0.078	1.016	0.079	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.0	22.78	0.02	1	95C05	QPSK	50	0	0 mm	left	1:1	0.054	1.052	0.057	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.5	19.91	-0.02	0	95BE6	QPSK	1	0	0 mm	back	1:1	1.740	1.146	1.994	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	20.5	19.95	-0.01	0	95BE6	QPSK	1	0	0 mm	back	1:1	1.830	1.135	2.077	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.5	19.97	-0.02	0	95BE6	QPSK	1	0	0 mm	back	1:1	1.910	1.130	2.158	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.63	0.04	1	95BE6	QPSK	50	0	0 mm	back	1:1	1.380	1.222	1.686	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.57	0.00	1	95BE6	QPSK	100	0	0 mm	back	1:1	1.360	1.239	1.685	
1860.00	18700	Low	LTE Band 2 (PCS)	20	20.5	19.91	0.00	0	95BE6	QPSK	1	0	0 mm	front	1:1	2.090	1.146	2.395	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	20.5	19.95	0.00	0	95BE6	QPSK	1	0	0 mm	front	1:1	2.110	1.135	2.395	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.5	19.97	0.01	0	95BE6	QPSK	1	0	0 mm	front	1:1	2.200	1.130	2.486	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.63	-0.08	1	95BE6	QPSK	50	0	0 mm	front	1:1	1.630	1.222	1.992	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.57	0.02	1	95BE6	QPSK	100	0	0 mm	front	1:1	1.620	1.239	2.007	
1900.00	19100	High	LTE Band 2 (PCS)	20	20.5	19.97	0.00	0	95BE6	QPSK	1	0	0 mm	bottom	1:1	1.490	1.130	1.684	
1900.00	19100	High	LTE Band 2 (PCS)	20	19.5	18.63	0.02	1	95BE6	QPSK	50	0	0 mm	bottom	1:1	1.100	1.222	1.344	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.0	23.72	0.03	0	95C05	QPSK	1	50	4 mm	front	1:1	2.550	1.067	2.721	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak								Extremity 4.0 W/kg (mW/g) averaged over 10 grams											
Uncontrolled Exposure/General Population																			

Blue entry represents variability measurement.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 82 of 102

Table 11-29
WLAN Extremity SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	13.5	13.45	-	0 mm	1	95BE4	6	back	98.6	1.009	-	1.012	1.014	-	
5260	52	802.11a	OFDM	20	13.5	13.45	-0.19	0 mm	1	95BE4	6	front	98.6	2.529	0.139	1.012	1.014	0.143	
5260	52	802.11a	OFDM	20	13.5	13.45	-	0 mm	1	95BE4	6	top	98.6	0.390	-	1.012	1.014	-	
5260	52	802.11a	OFDM	20	13.5	13.45	-	0 mm	1	95BE4	6	left	98.6	0.274	-	1.012	1.014	-	
5320	64	802.11a	OFDM	20	13.5	13.11	-	0 mm	2	95BE4	6	back	99.4	1.864	-	1.094	1.006	-	
5320	64	802.11a	OFDM	20	13.5	13.11	-0.10	0 mm	2	95BE4	6	front	99.4	2.706	0.505	1.094	1.006	0.555	A45
5320	64	802.11a	OFDM	20	13.5	13.11	-	0 mm	2	95BE4	6	top	99.4	1.052	-	1.094	1.006	-	
5320	64	802.11a	OFDM	20	13.5	13.11	-	0 mm	2	95BE4	6	left	99.4	0.128	-	1.094	1.006	-	
5500	100	802.11a	OFDM	20	13.5	13.45	-	0 mm	1	95BE4	6	back	98.6	0.483	-	1.012	1.014	-	
5500	100	802.11a	OFDM	20	13.5	13.45	0.11	0 mm	1	95BE4	6	front	98.6	0.700	0.028	1.012	1.014	0.028	
5500	100	802.11a	OFDM	20	13.5	13.45	-	0 mm	1	95BE4	6	top	98.6	0.047	-	1.012	1.014	-	
5500	100	802.11a	OFDM	20	13.5	13.45	-	0 mm	1	95BE4	6	left	98.6	0.102	-	1.012	1.014	-	
5500	100	802.11a	OFDM	20	13.5	12.70	-	0 mm	2	95BE4	6	back	99.4	2.463	-	1.202	1.006	-	
5500	100	802.11a	OFDM	20	13.5	12.70	-0.08	0 mm	2	95BE4	6	front	99.4	2.771	0.344	1.202	1.006	0.415	
5500	100	802.11a	OFDM	20	13.5	12.70	-	0 mm	2	95BE4	6	top	99.4	1.448	-	1.202	1.006	-	
5500	100	802.11a	OFDM	20	13.5	12.70	-	0 mm	2	95BE4	6	left	99.4	0.368	-	1.202	1.006	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Extremity											
Spatial Peak								4.0 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 10 grams											

Table 11-30
Bluetooth Extremity SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (10g)	Scaling Factor	Scaled SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2441	39	Bluetooth	FHSS	12.0	11.56	0.09	0 mm	95BE6	1	back	1:1	0.000	1.107	0.000	
2441	39	Bluetooth	FHSS	12.0	11.56	0.04	0 mm	95BE6	1	front	1:1	0.006	1.107	0.007	A46
2441	39	Bluetooth	FHSS	12.0	11.56	0.03	0 mm	95BE6	1	top	1:1	0.000	1.107	0.000	
2441	39	Bluetooth	FHSS	12.0	11.56	0.05	0 mm	95BE6	1	left	1:1	0.000	1.107	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Extremity								
Spatial Peak							4.0 W/kg (mW/g)								
Uncontrolled Exposure/General Population							averaged over 10 grams								

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 83 of 102

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance. A test separation distance of 10 mm for Body-worn SAR was used for 2.4 GHz and 5 GHz WLAN as it is more conservative.
7. Per FCC KDB Publication 648474 D04v01r02, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg for 1g SAR and 2.0 W/kg for 10g SAR. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.6 for more details).
10. Per FCC KDB Publication 648474 D04v01r02, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. When hotspot mode applies, extremity SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1-g SAR > 1.2 W/kg.
11. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous scenarios.
12. Additional SAR tests for extremity SAR were evaluated per KDB 616217 Section 6 (See Section 6.7 for more information).

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 84 of 102

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r03. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per KDB Publication 941225 D05Av01r01, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 85 of 102

WLAN/BT Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g SAR and ≤ 1.0 W/kg for 10g SAR, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r01 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r01 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g SAR and less than 3.0 W/kg for 10g SAR. See Section 8.6.6 for more information.
4. Per KDB Publication 248227 D01v02r01, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498. Please see Section 12 for complete analysis.
5. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g SAR and ≤ 3.0 W/kg for 10g SAR or all test channels were measured.
6. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
7. For SAR compliance, this device always uses power reduction when the device is in a held-to-ear RF exposure condition with 2.4 GHz and 5 GHz WLAN data modes. Therefore, WLAN head SAR was evaluated at reduced power levels.
8. The channel and data rate with the highest average output power were evaluated for Bluetooth body-worn and extremity SAR.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 86 of 102

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05r02 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

Note:

1. Since the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, MIMO SAR for 2.4 GHz and 5 GHz head, body-worn, hotspot and extremity exposure conditions was determined by the sum of 1g single transmission chain SAR values because the summation represents higher output power and yields more conservative result per KDB 248227 D01v02r01.
2. The highest reported SAR for each exposure condition is used for SAR summation purpose.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 87 of 102

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.208	0.426	0.422	0.634	0.630	1.056
	UMTS 850	0.187	0.426	0.422	0.613	0.609	1.035
	UMTS 1750	0.176	0.426	0.422	0.602	0.598	1.024
	GSM 1900	0.066	0.426	0.422	0.492	0.488	0.914
	UMTS 1900	0.133	0.426	0.422	0.559	0.555	0.981
	LTE Band 12	0.137	0.426	0.422	0.563	0.559	0.985
	LTE Band 13	0.152	0.426	0.422	0.578	0.574	1.000
	LTE Band 5 (Cell)	0.203	0.426	0.422	0.629	0.625	1.051
	LTE Band 4 (AWS)	0.186	0.426	0.422	0.612	0.608	1.034
	LTE Band 2 (PCS)	0.090	0.426	0.422	0.516	0.512	0.938
	LTE Band 30	0.131	0.426	0.422	0.557	0.553	0.979

Table 12-2
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.208	0.150	0.488	0.358	0.696	0.846
	UMTS 850	0.187	0.150	0.488	0.337	0.675	0.825
	UMTS 1750	0.176	0.150	0.488	0.326	0.664	0.814
	GSM 1900	0.066	0.150	0.488	0.216	0.554	0.704
	UMTS 1900	0.133	0.150	0.488	0.283	0.621	0.771
	LTE Band 12	0.137	0.150	0.488	0.287	0.625	0.775
	LTE Band 13	0.152	0.150	0.488	0.302	0.640	0.790
	LTE Band 5 (Cell)	0.203	0.150	0.488	0.353	0.691	0.841
	LTE Band 4 (AWS)	0.186	0.150	0.488	0.336	0.674	0.824
	LTE Band 2 (PCS)	0.090	0.150	0.488	0.240	0.578	0.728
	LTE Band 30	0.131	0.150	0.488	0.281	0.619	0.769

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 88 of 102

Table 12-3
Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	GSM 850	0.208	0.426	0.488	1.122
	UMTS 850	0.187	0.426	0.488	1.101
	UMTS 1750	0.176	0.426	0.488	1.090
	GSM 1900	0.066	0.426	0.488	0.980
	UMTS 1900	0.133	0.426	0.488	1.047
	LTE Band 12	0.137	0.426	0.488	1.051
	LTE Band 13	0.152	0.426	0.488	1.066
	LTE Band 5 (Cell)	0.203	0.426	0.488	1.117
	LTE Band 4 (AWS)	0.186	0.426	0.488	1.100
	LTE Band 2 (PCS)	0.090	0.426	0.488	1.004
	LTE Band 30	0.131	0.426	0.488	1.045

Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz Ant 2 and 5 GHz Ant 1 WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	GSM 850	0.208	0.422	0.150	0.780
	UMTS 850	0.187	0.422	0.150	0.759
	UMTS 1750	0.176	0.422	0.150	0.748
	GSM 1900	0.066	0.422	0.150	0.638
	UMTS 1900	0.133	0.422	0.150	0.705
	LTE Band 12	0.137	0.422	0.150	0.709
	LTE Band 13	0.152	0.422	0.150	0.724
	LTE Band 5 (Cell)	0.203	0.422	0.150	0.775
	LTE Band 4 (AWS)	0.186	0.422	0.150	0.758
	LTE Band 2 (PCS)	0.090	0.422	0.150	0.662
	LTE Band 30	0.131	0.422	0.150	0.703

12.4 Body-Worn Simultaneous Transmission Analysis

Note: For SAR summation for body-worn back side at 15mm, the SAR values at 10mm for some transmission modes were used since the 10mm test distance was more conservative. "<" denotes that the 10mm SAR values were used for summation purposes.

Table 12-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.337	< 0.126	< 0.226	<0.463	<0.563	<0.689
	UMTS 850	0.386	< 0.126	< 0.226	<0.512	<0.612	<0.738
	UMTS 1750	1.054	< 0.126	< 0.226	<1.18	<1.28	<1.406
	GSM 1900	0.376	< 0.126	< 0.226	<0.502	<0.602	<0.728
	UMTS 1900	0.647	< 0.126	< 0.226	<0.773	<0.873	<0.999
	LTE Band 12	0.324	< 0.126	< 0.226	<0.45	<0.55	<0.676
	LTE Band 13	0.312	< 0.126	< 0.226	<0.438	<0.538	<0.664
	LTE Band 5 (Cell)	0.413	< 0.126	< 0.226	<0.539	<0.639	<0.765
	LTE Band 4 (AWS)	1.025	< 0.126	< 0.226	<1.151	<1.251	<1.377
	LTE Band 2 (PCS)	0.588	< 0.126	< 0.226	<0.714	<0.814	<0.94
	LTE Band 30	0.449	< 0.126	< 0.226	<0.575	<0.675	<0.801

Table 12-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.337	< 0.016	< 0.042	<0.353	<0.379	<0.395
	UMTS 850	0.386	< 0.016	< 0.042	<0.402	<0.428	<0.444
	UMTS 1750	1.054	< 0.016	< 0.042	<1.07	<1.096	<1.112
	GSM 1900	0.376	< 0.016	< 0.042	<0.392	<0.418	<0.434
	UMTS 1900	0.647	< 0.016	< 0.042	<0.663	<0.689	<0.705
	LTE Band 12	0.324	< 0.016	< 0.042	<0.34	<0.366	<0.382
	LTE Band 13	0.312	< 0.016	< 0.042	<0.328	<0.354	<0.37
	LTE Band 5 (Cell)	0.413	< 0.016	< 0.042	<0.429	<0.455	<0.471
	LTE Band 4 (AWS)	1.025	< 0.016	< 0.042	<1.041	<1.067	<1.083
	LTE Band 2 (PCS)	0.588	< 0.016	< 0.042	<0.604	<0.63	<0.646
	LTE Band 30	0.449	< 0.016	< 0.042	<0.465	<0.491	<0.507

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 90 of 102

Table 12-7
Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN
(Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.337	< 0.126	< 0.042	<0.463	<0.379	<0.505
	UMTS 850	0.386	< 0.126	< 0.042	<0.512	<0.428	<0.554
	UMTS 1750	1.054	< 0.126	< 0.042	<1.18	<1.096	<1.222
	GSM 1900	0.376	< 0.126	< 0.042	<0.502	<0.418	<0.544
	UMTS 1900	0.647	< 0.126	< 0.042	<0.773	<0.689	<0.815
	LTE Band 12	0.324	< 0.126	< 0.042	<0.45	<0.366	<0.492
	LTE Band 13	0.312	< 0.126	< 0.042	<0.438	<0.354	<0.48
	LTE Band 5 (Cell)	0.413	< 0.126	< 0.042	<0.539	<0.455	<0.581
	LTE Band 4 (AWS)	1.025	< 0.126	< 0.042	<1.151	<1.067	<1.193
	LTE Band 2 (PCS)	0.588	< 0.126	< 0.042	<0.714	<0.63	<0.756
	LTE Band 30	0.449	< 0.126	< 0.042	<0.575	<0.491	<0.617

Table 12-8
Simultaneous Transmission Scenario with 2.4 GHz Ant 2 and 5 GHz Ant 1 WLAN
(Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.337	< 0.226	< 0.016	<0.563	<0.353	<0.579
	UMTS 850	0.386	< 0.226	< 0.016	<0.612	<0.402	<0.628
	UMTS 1750	1.054	< 0.226	< 0.016	<1.28	<1.07	<1.296
	GSM 1900	0.376	< 0.226	< 0.016	<0.602	<0.392	<0.618
	UMTS 1900	0.647	< 0.226	< 0.016	<0.873	<0.663	<0.889
	LTE Band 12	0.324	< 0.226	< 0.016	<0.55	<0.34	<0.566
	LTE Band 13	0.312	< 0.226	< 0.016	<0.538	<0.328	<0.554
	LTE Band 5 (Cell)	0.413	< 0.226	< 0.016	<0.639	<0.429	<0.655
	LTE Band 4 (AWS)	1.025	< 0.226	< 0.016	<1.251	<1.041	<1.267
	LTE Band 2 (PCS)	0.588	< 0.226	< 0.016	<0.814	<0.604	<0.83
	LTE Band 30	0.449	< 0.226	< 0.016	<0.675	<0.465	<0.691

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 91 of 102

Table 12-9
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.337	0.000	0.337
	UMTS 850	0.386	0.000	0.386
	UMTS 1750	1.054	0.000	1.054
	GSM 1900	0.376	0.000	0.376
	UMTS 1900	0.647	0.000	0.647
	LTE Band 12	0.324	0.000	0.324
	LTE Band 13	0.312	0.000	0.312
	LTE Band 5 (Cell)	0.413	0.000	0.413
	LTE Band 4 (AWS)	1.025	0.000	1.025
	LTE Band 2 (PCS)	0.588	0.000	0.588
	LTE Band 30	0.449	0.000	0.449

12.5 Hotspot SAR Simultaneous Transmission Analysis

Table 12-10
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.581	0.140	0.255	0.721	0.836	0.976
	UMTS 850	0.655	0.140	0.255	0.795	0.910	1.050
	UMTS 1750	0.884	0.140	0.255	1.024	1.139	1.279
	GPRS 1900	1.074	0.140	0.255	1.214	1.329	1.469
	UMTS 1900	0.998	0.140	0.255	1.138	1.253	1.393
	LTE Band 12	0.623	0.140	0.255	0.763	0.878	1.018
	LTE Band 13	0.447	0.140	0.255	0.587	0.702	0.842
	LTE Band 5 (Cell)	0.593	0.140	0.255	0.733	0.848	0.988
	LTE Band 4 (AWS)	0.743	0.140	0.255	0.883	0.998	1.138
	LTE Band 2 (PCS)	0.992	0.140	0.255	1.132	1.247	1.387
	LTE Band 30	1.050	0.140	0.255	1.190	1.305	1.445

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 92 of 102

Table 12-11
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.581	0.004	0.103	0.585	0.684	0.688
	UMTS 850	0.655	0.004	0.103	0.659	0.758	0.762
	UMTS 1750	0.884	0.004	0.103	0.888	0.987	0.991
	GPRS 1900	1.074	0.004	0.103	1.078	1.177	1.181
	UMTS 1900	0.998	0.004	0.103	1.002	1.101	1.105
	LTE Band 12	0.623	0.004	0.103	0.627	0.726	0.730
	LTE Band 13	0.447	0.004	0.103	0.451	0.550	0.554
	LTE Band 5 (Cell)	0.593	0.004	0.103	0.597	0.696	0.700
	LTE Band 4 (AWS)	0.743	0.004	0.103	0.747	0.846	0.850
	LTE Band 2 (PCS)	0.992	0.004	0.103	0.996	1.095	1.099
	LTE Band 30	1.050	0.004	0.103	1.054	1.153	1.157

Table 12-12
Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.581	0.140	0.103	0.824
	UMTS 850	0.655	0.140	0.103	0.898
	UMTS 1750	0.884	0.140	0.103	1.127
	GPRS 1900	1.074	0.140	0.103	1.317
	UMTS 1900	0.998	0.140	0.103	1.241
	LTE Band 12	0.623	0.140	0.103	0.866
	LTE Band 13	0.447	0.140	0.103	0.690
	LTE Band 5 (Cell)	0.593	0.140	0.103	0.836
	LTE Band 4 (AWS)	0.743	0.140	0.103	0.986
	LTE Band 2 (PCS)	0.992	0.140	0.103	1.235
	LTE Band 30	1.050	0.140	0.103	1.293

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset	Page 93 of 102	

Table 12-13
Simultaneous Transmission Scenario with 2.4 GHz Ant 2 and 5 GHz Ant 1 WLAN
(Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.581	0.255	0.004	0.840
	UMTS 850	0.655	0.255	0.004	0.914
	UMTS 1750	0.884	0.255	0.004	1.143
	GPRS 1900	1.074	0.255	0.004	1.333
	UMTS 1900	0.998	0.255	0.004	1.257
	LTE Band 12	0.623	0.255	0.004	0.882
	LTE Band 13	0.447	0.255	0.004	0.706
	LTE Band 5 (Cell)	0.593	0.255	0.004	0.852
	LTE Band 4 (AWS)	0.743	0.255	0.004	1.002
	LTE Band 2 (PCS)	0.992	0.255	0.004	1.251
	LTE Band 30	1.050	0.255	0.004	1.309

12.6 Extremity SAR Simultaneous Transmission Analysis

1. For SAR summations for extremity at 4 mm, Extremity WLAN/BT SAR values for 0.0 cm were used since the 0.0 cm test distance was more conservative. "<" denotes that the 0.0 cm Extremity WLAN/BT SAR values were used for summation purposes.
2. Additional SAR tests for extremity SAR were evaluated per KDB 616217 Section 6 (See Section 6.7 for more information)
3. Per FCC KDB Publication 648474 D04 Handset SAR v01r02, hand SAR tests were not required when wireless router mode does not apply and if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis was required to determine that SAR limit would not be exceed for all possible simultaneous scenarios, including those involving bands/modes not required to be evaluated for hand SAR.

Table 12-14
Simultaneous Transmission Scenario with 5 GHz WLAN (Extremity at 0.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Extremity SAR	UMTS 1750	2.330	0.143	0.555	2.473	2.885	3.028
	UMTS 1900	2.531	0.143	0.555	2.674	3.086	3.229
	LTE Band 4 (AWS)	1.995	0.143	0.555	2.138	2.550	2.693
	LTE Band 2 (PCS)	2.486	0.143	0.555	2.629	3.041	3.184

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset			Page 94 of 102

Table 12-15
Simultaneous Transmission Scenario with Bluetooth (Extremity at 0.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Extremity SAR	UMTS 1750	2.330	0.007	2.337
	UMTS 1900	2.531	0.007	2.538
	LTE Band 4 (AWS)	1.995	0.007	2.002
	LTE Band 2 (PCS)	2.486	0.007	2.493

Table 12-16
Simultaneous Transmission Scenario with 5 GHz WLAN (Extremity at 0.4 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Extremity SAR	UMTS 1750	3.024	<0.143	<0.555	<3.167	<3.579	<3.722
	UMTS 1900	2.675	<0.143	<0.555	<2.818	<3.23	<3.373
	LTE Band 4 (AWS)	2.068	<0.143	<0.555	<2.211	<2.623	<2.766
	LTE Band 2 (PCS)	2.860	<0.143	<0.555	<3.003	<3.415	<3.558

Table 12-17
Simultaneous Transmission Scenario with Bluetooth (Extremity at 0.4 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Extremity SAR	UMTS 1750	3.024	<0.007	<3.031
	UMTS 1900	2.675	<0.007	<2.682
	LTE Band 4 (AWS)	2.068	<0.007	<2.075
	LTE Band 2 (PCS)	2.860	<0.007	<2.867

12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 95 of 102

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) 10g Extremity SAR measurement variability analysis applies a factor of 2.5 to the procedures outlined above.

Table 13-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1852.40	9262	UMTS 1900	RMC	bottom	10 mm	0.912	0.910	1.00	N/A	N/A	N/A	N/A
1750	1732.50	20175	LTE Band 4 (AWS)	QPSK, 1 RB, 50 RB Offset	back	15 mm	0.872	0.821	1.06	N/A	N/A	N/A	N/A
2300	2310.00	27710	LTE Band 30	QPSK, 1 RB, 25 RB Offset	bottom	10 mm	1.050	1.050	1.00	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 13-2
Extremity SAR Measurement Variability Results

EXTREMITY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1860.00	18700	LTE Band 2 (PCS)	QPSK, 1 RB, 50 RB Offset	front	4 mm	2.680	2.550	1.05	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Extremity							
Spatial Peak						4.0 W/kg (mW/g)							
Uncontrolled Exposure/General Population						averaged over 10 grams							

13.2 Measurement Uncertainty

The measured 1g SAR was < 1.5 W/kg and 10g SAR was < 3.75 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 96 of 102

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/30/2014	Annual	10/30/2015	1833460
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/15/2015	Annual	3/15/2016	MY45470194
Agilent	8753E	(30kHz-6GHz) Network Analyzer	12/30/2014	Annual	12/30/2015	JP38020182
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	3/15/2015	Annual	3/15/2016	3629U00687
SPEAG	D750V3	750 MHz Dipole	1/16/2015	Annual	1/16/2016	1003
SPEAG	D835V2	835 MHz SAR Dipole	7/24/2014	Annual	7/24/2015	4d133
SPEAG	D835V2	835 MHz SAR Dipole	1/16/2015	Annual	1/16/2016	4d132
SPEAG	D1750V2	1750 MHz SAR Dipole	4/15/2015	Annual	4/15/2016	1051
SPEAG	D1900V2	1900 MHz SAR Dipole	7/23/2014	Annual	7/23/2015	5d149
SPEAG	D1900V2	1900 MHz SAR Dipole	4/14/2015	Annual	4/14/2016	5d141
SPEAG	D2300V2	2300 MHz SAR Dipole	1/27/2015	Annual	1/27/2016	1008
SPEAG	D2450V2	2450 MHz SAR Dipole	8/11/2014	Annual	8/11/2015	719
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/21/2015	Annual	1/21/2016	1057
SPEAG	ES30V3	SAR Probe	9/18/2014	Annual	9/18/2015	3332
SPEAG	ES30V3	SAR Probe	9/24/2014	Annual	9/24/2015	3288
SPEAG	ES30V3	SAR Probe	1/20/2015	Annual	1/20/2016	3213
SPEAG	EX30V4	SAR Probe	1/22/2015	Annual	1/22/2016	3589
SPEAG	ES30V3	SAR Probe	1/23/2015	Annual	1/23/2016	3318
SPEAG	ES30V3	SAR Probe	3/19/2015	Annual	3/19/2016	3319
SPEAG	EX30V4	SAR Probe	4/23/2015	Annual	4/23/2016	7357
SPEAG	ES30V3	SAR Probe	5/20/2015	Annual	5/20/2016	3263
SPEAG	ES30V3	SAR Probe	3/19/2015	Annual	3/19/2016	3209
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/17/2014	Annual	9/17/2015	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/14/2015	Annual	1/14/2016	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/20/2015	Annual	4/20/2016	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/13/2015	Annual	3/13/2016	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/13/2015	Annual	3/13/2016	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/18/2014	Annual	9/18/2015	1364
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/23/2014	Annual	10/23/2015	1408
Rohde & Schwarz	CMU200	Base Station Simulator	12/4/2014	Annual	12/4/2015	833855/0010
Rohde & Schwarz	CMU200	Base Station Simulator	3/23/2015	Annual	3/23/2016	836371/0079
SPEAG	DAK-3.5	Dielectric Assessment Kit	10/21/2014	Annual	10/21/2015	1091
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/12/2015	Annual	5/12/2016	1070
Mitutoyo	CD-6-CSX	Digital Caliper	5/8/2014	Biennial	5/8/2016	13264162
Mitutoyo	CD-6-CSX	Digital Caliper	5/8/2014	Biennial	5/8/2016	13264165
Fisher Scientific	15-077-960	Digital Thermometer	12/4/2013	Biennial	12/4/2015	130764551
Fisher Scientific	15-077-960	Digital Thermometer	12/4/2013	Biennial	12/4/2015	130764558
Agilent	E4438C	ESG Vector Signal Generator	3/12/2015	Annual	3/12/2016	MY45090700
Agilent	E4438C	ESG Vector Signal Generator	3/13/2015	Annual	3/13/2016	MY42082385
Control Company	4052	Long Stem Thermometer	9/27/2013	Biennial	9/27/2015	130567447
Fisher Scientific	S407993	Long Stem Thermometer	11/4/2013	Biennial	11/4/2015	130671826
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N5182A	MXG Vector Signal Generator	10/27/2014	Annual	10/27/2015	MY47420603
Agilent	N5182A	MXG Vector Signal Generator	3/16/2015	Annual	3/16/2016	MY47420800
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	7/15/2014	Annual	7/15/2015	1039
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	941001
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	1039008
Anritsu	MA2411B	Pulse Power Sensor	11/17/2014	Annual	11/17/2015	1126066
Anritsu	MA2411B	Pulse Power Sensor	3/13/2015	Annual	3/13/2016	1207470
Anritsu	MT8820C	Radio Communication Analyzer	8/28/2014	Annual	8/28/2015	6201240328
Anritsu	MT8820C	Radio Communication Analyzer	9/19/2014	Annual	9/19/2015	6201144418
Rohde & Schwarz	CMW500	Radio Communication Tester	5/28/2015	Annual	5/28/2016	102060
Rohde & Schwarz	CMW500	Radio Communication Tester	6/1/2015	Annual	6/1/2016	108843
Agilent	8753ES	S-Parameter Network Analyzer	1/20/2015	Annual	1/20/2016	US39170122
Agilent	8753ES	S-Parameter Network Analyzer	3/12/2015	Annual	3/12/2016	MY40000670
Seekonk	NC-100	Torque Wrench	3/18/2014	Biennial	3/18/2016	N/A
Seekonk	NC-100	Torque Wrench	3/18/2014	Biennial	3/18/2016	N/A
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Anritsu	MA24106A	USB Power Sensor	3/2/2015	Annual	3/2/2016	1344555
Anritsu	MA24106A	USB Power Sensor	3/2/2015	Annual	3/2/2016	1344556
VWR	36934-158	Wall-Mounted Thermometer	8/8/2013	Biennial	8/8/2015	130477877
VWR	36934-158	Wall-Mounted Thermometer	8/8/2013	Biennial	8/8/2015	130477866
Agilent	ES515C	Wireless Communications Test Set	2/23/2015	Biennial	2/23/2017	GB41450275
Agilent	ES515C	Wireless Communications Test Set	5/16/2015	Biennial	5/16/2017	GB43304447
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20dB Attenuator	CBT	N/A	CBT	N/A
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 97 of 102

15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.2	23.5

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 98 of 102

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 99 of 102

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMG928W8	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 100 of 102

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 101 of 102

- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D06
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01v02r01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMG928W8		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1506101120.A3L	Test Dates: 06/10/15 - 07/02/15	DUT Type: Portable Handset		Page 102 of 102

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.881 \text{ S/m}$; $\epsilon_r = 39.943$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-26-2015; Ambient Temp: 22.5°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3288; ConvF(6.51, 6.51, 6.51); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.57 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR (1 g) = 0.208 W/kg

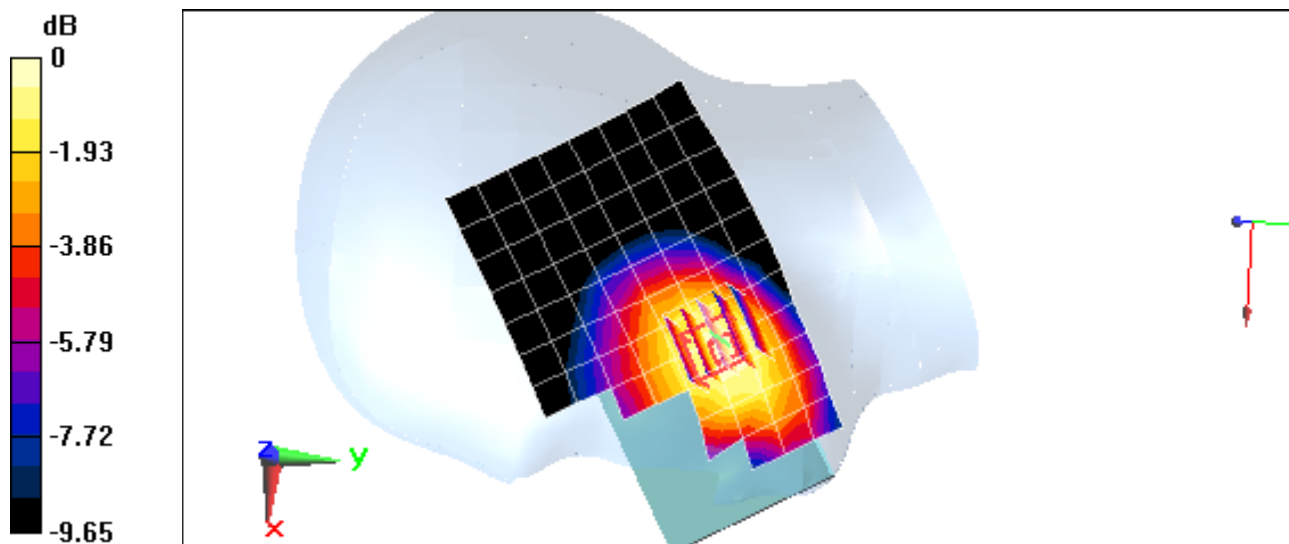

0 dB = 0.229 W/kg = -6.40 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE8

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 42.318$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-13-2015; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3319; ConvF(6.41, 6.41, 6.41); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.21 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR (1 g) = 0.154 W/kg

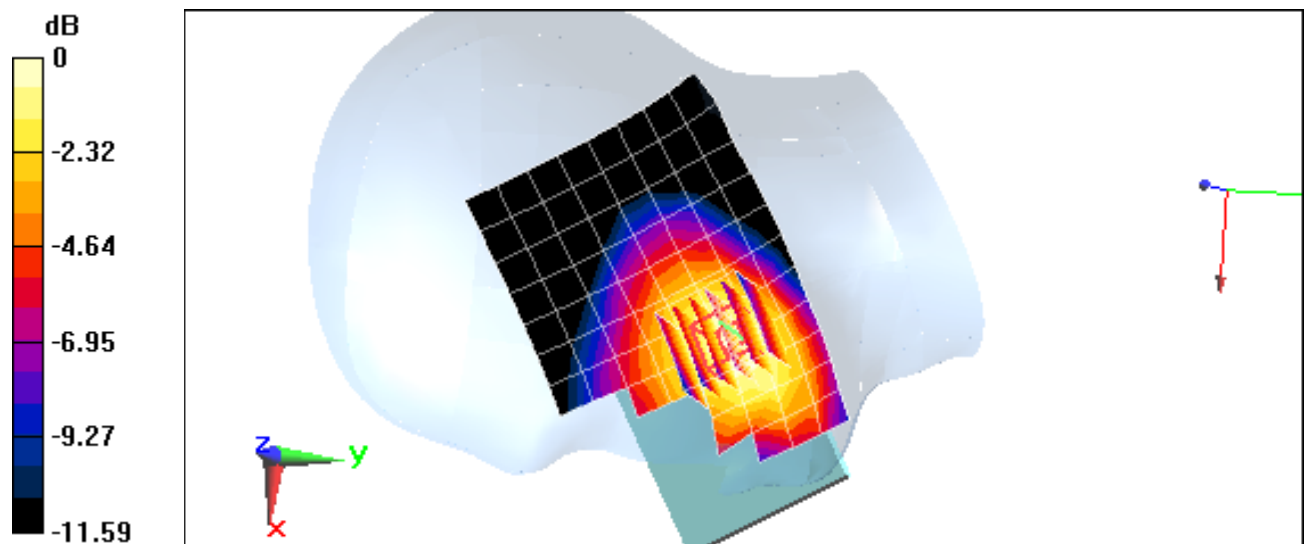

0 dB = 0.168 W/kg = -7.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.346 \text{ S/m}$; $\epsilon_r = 38.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-26-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3263; ConvF(5.27, 5.27, 5.27); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 10/23/2014

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.58 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR (1 g) = 0.138 W/kg

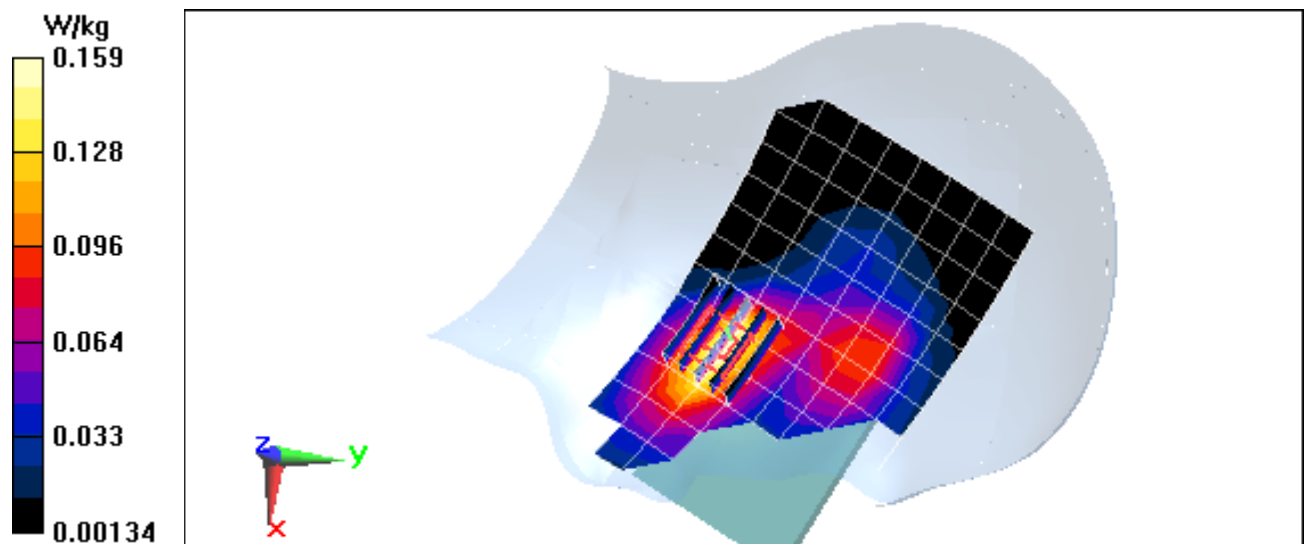

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 964E1

Communication System: UID 0, GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.379 \text{ S/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-18-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(5.05, 5.05, 5.05); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.114 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR (1 g) = 0.046 W/kg

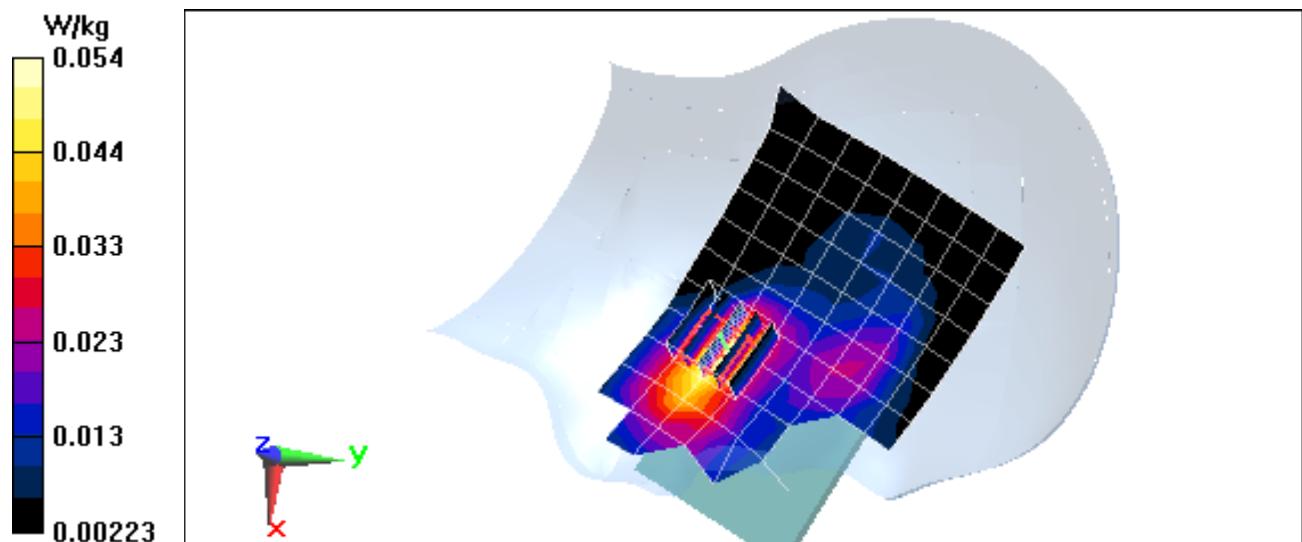

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE8

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.379 \text{ S/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-18-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(5.05, 5.05, 5.05); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.459 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR (1 g) = 0.107 W/kg

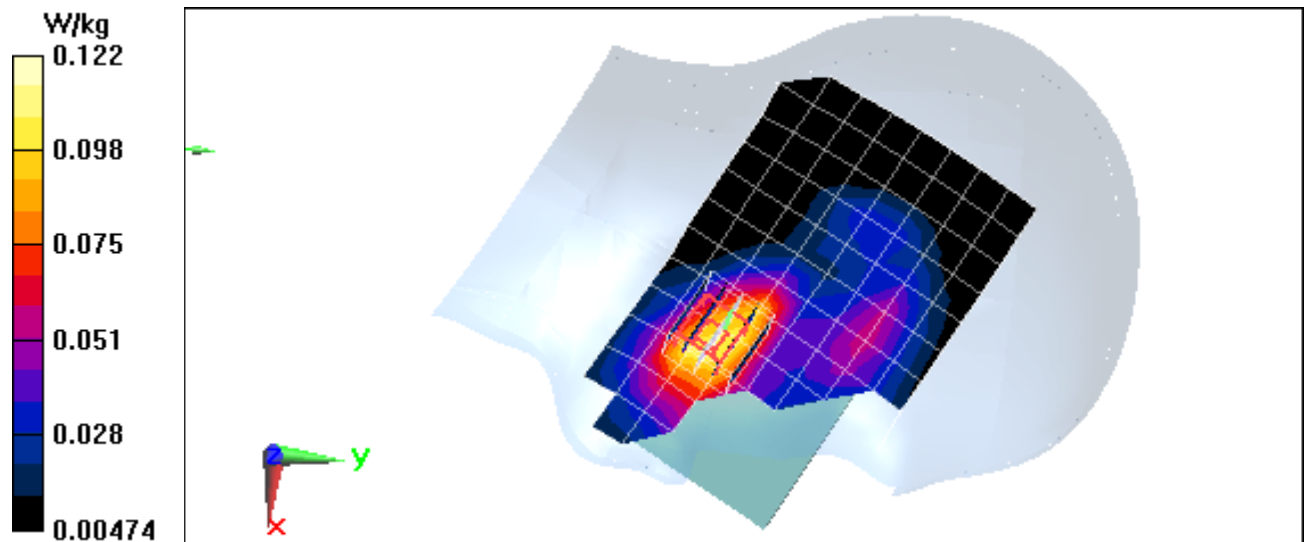

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.86 \text{ S/m}$; $\epsilon_r = 42.098$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-15-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3319; ConvF(6.69, 6.69, 6.69); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.05 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR (1 g) = 0.128 W/kg

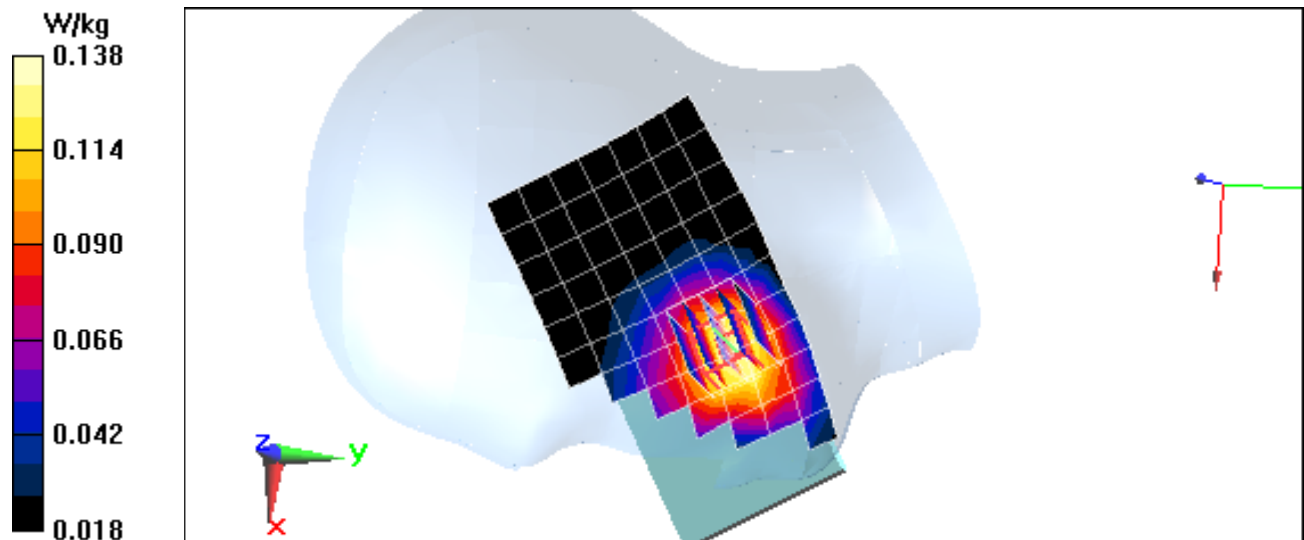

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BD8

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.935 \text{ S/m}$; $\epsilon_r = 41.215$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-15-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3319; ConvF(6.69, 6.69, 6.69); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.68 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR (1 g) = 0.129 W/kg

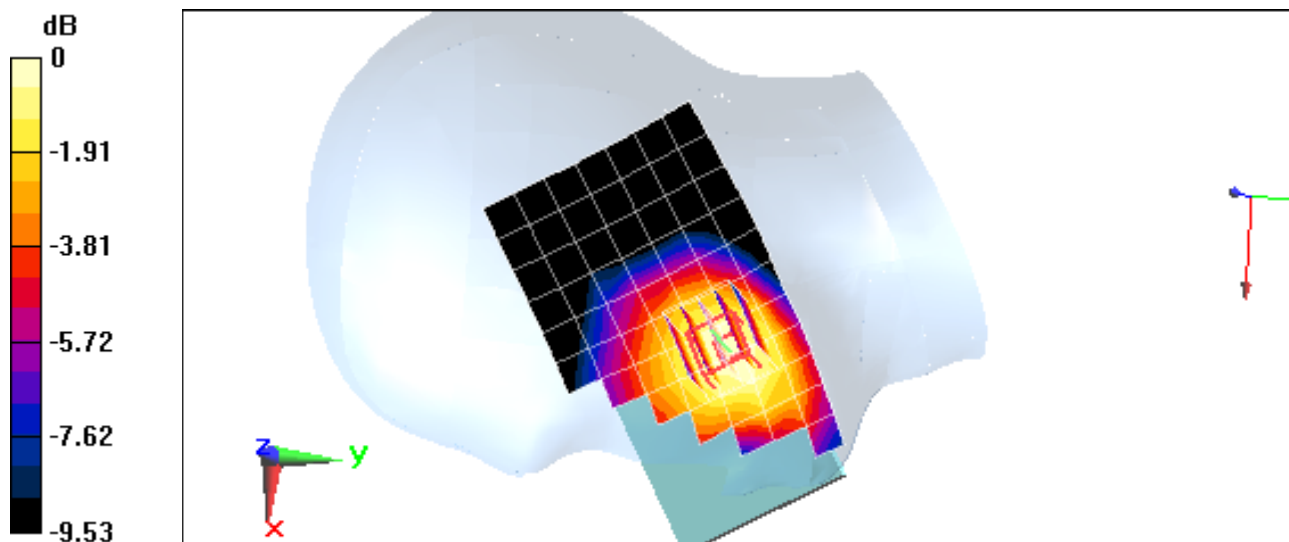

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.319$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-13-2015; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3319; ConvF(6.41, 6.41, 6.41); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.57 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR (1 g) = 0.189 W/kg

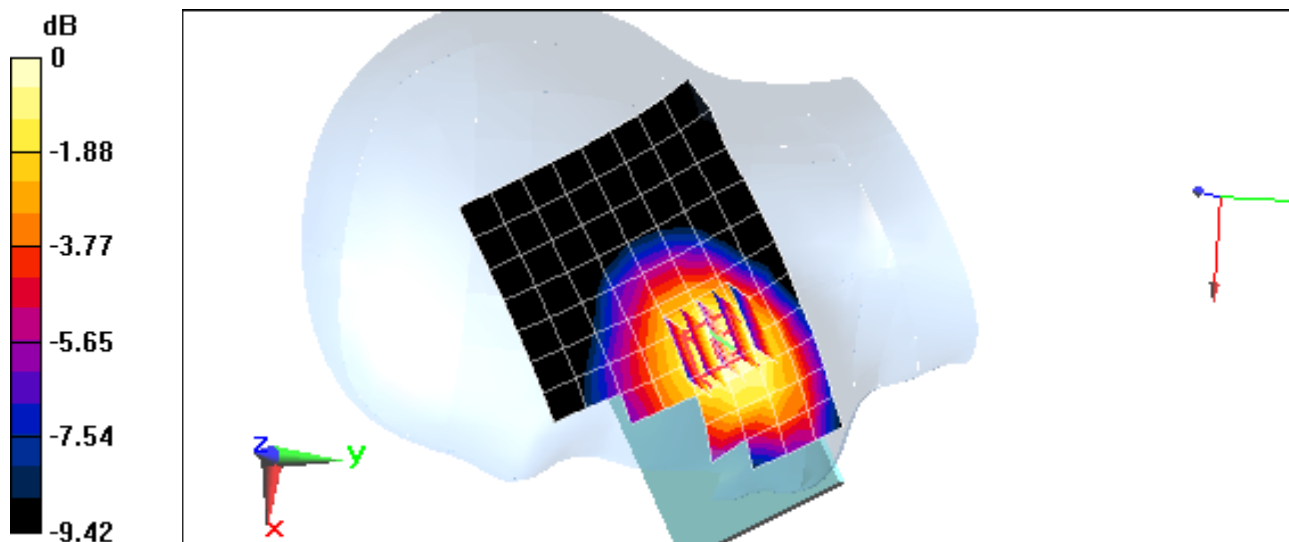

0 dB = 0.209 W/kg = -6.80 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE RF Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.317 \text{ S/m}$; $\epsilon_r = 38.698$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-22-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3319; ConvF(5.29, 5.29, 5.29); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.40 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR (1 g) = 0.158 W/kg

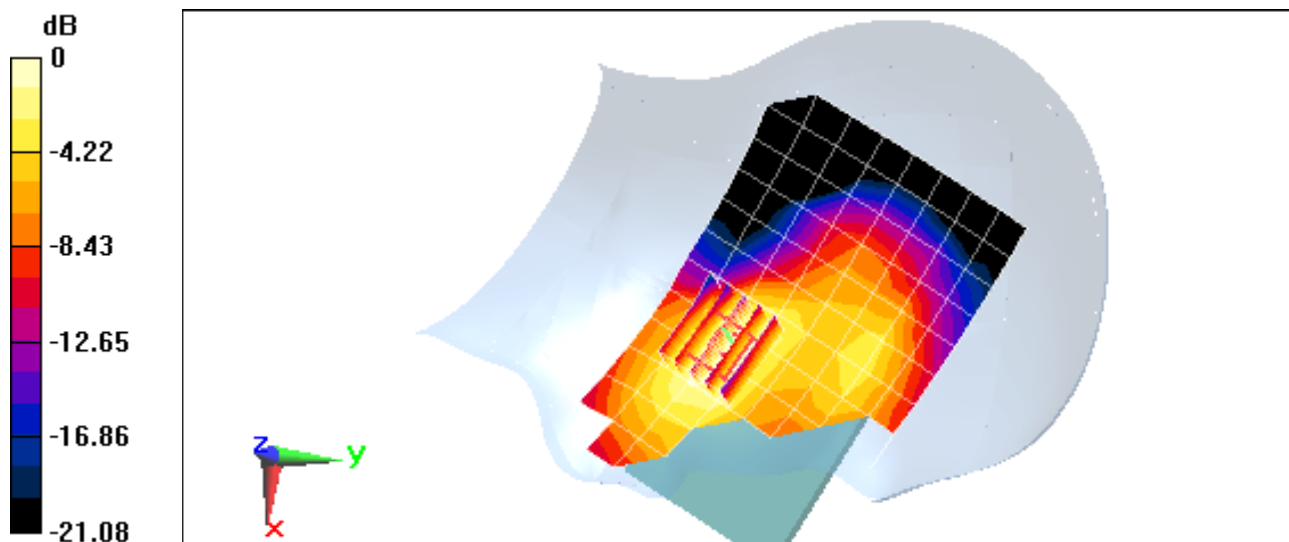

0 dB = 0.189 W/kg = -7.24 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.401 \text{ S/m}$; $\epsilon_r = 40.308$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-18-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(5.05, 5.05, 5.05); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Left Head, Cheek, High.ch, QPSK,
20 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.743 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR (1 g) = 0.089 W/kg

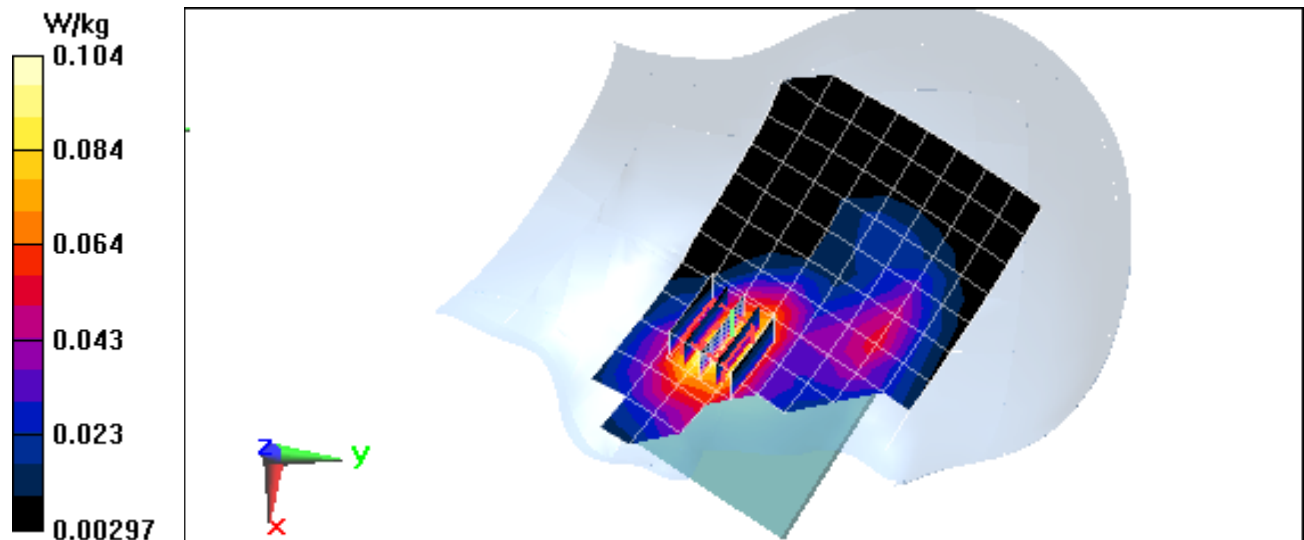

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Head Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.744 \text{ S/m}$; $\epsilon_r = 39.079$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-25-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.6°C

Probe: ES3DV3 - SN3319; ConvF(4.77, 4.77, 4.77); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 30, Left Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.994 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR (1 g) = 0.131 W/kg

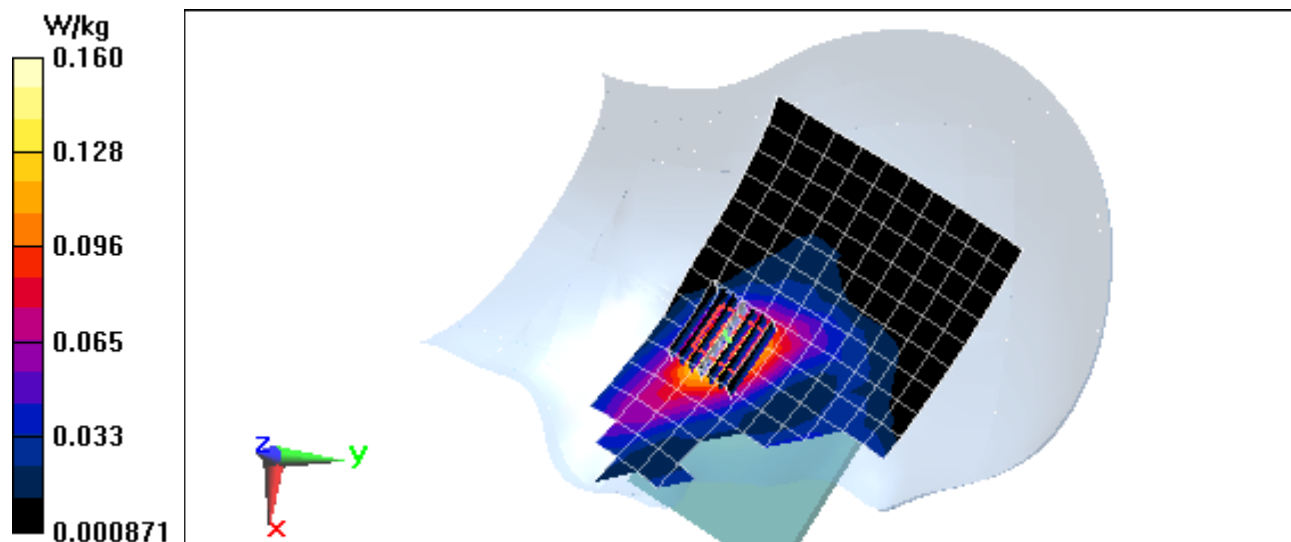

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE4

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.809 \text{ S/m}$; $\epsilon_r = 38.932$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-17-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3332; ConvF(4.49, 4.49, 4.49); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Right Head, Cheek, Ch 6, 1 Mbps, Antenna 2**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.32 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.971 W/kg

SAR (1 g) = 0.419 W/kg

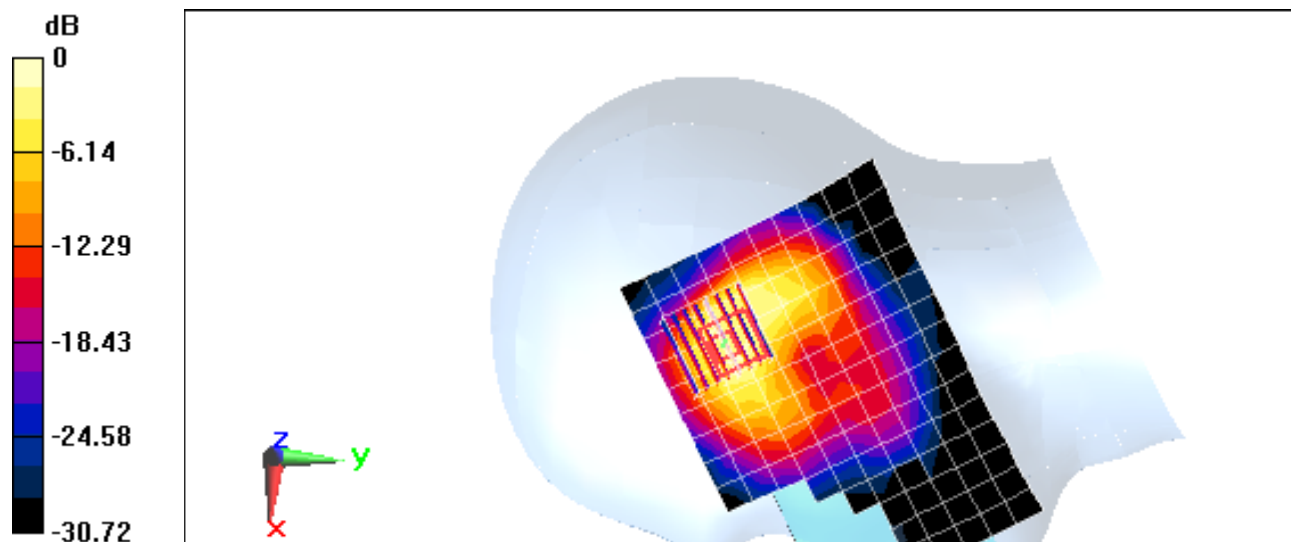

0 dB = 0.577 W/kg = -2.39 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE4

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 4.950 \text{ S/m}$; $\epsilon_r = 34.051$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-15-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7357; ConvF(4.7, 4.7, 4.7); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-2C, 20 MHz Bandwidth,
Right Head, Tilt, Ch 100, 6 Mbps, Antenna 2**


Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio =1.4

Reference Value = 9.642 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR (1 g) = 0.388 W/kg

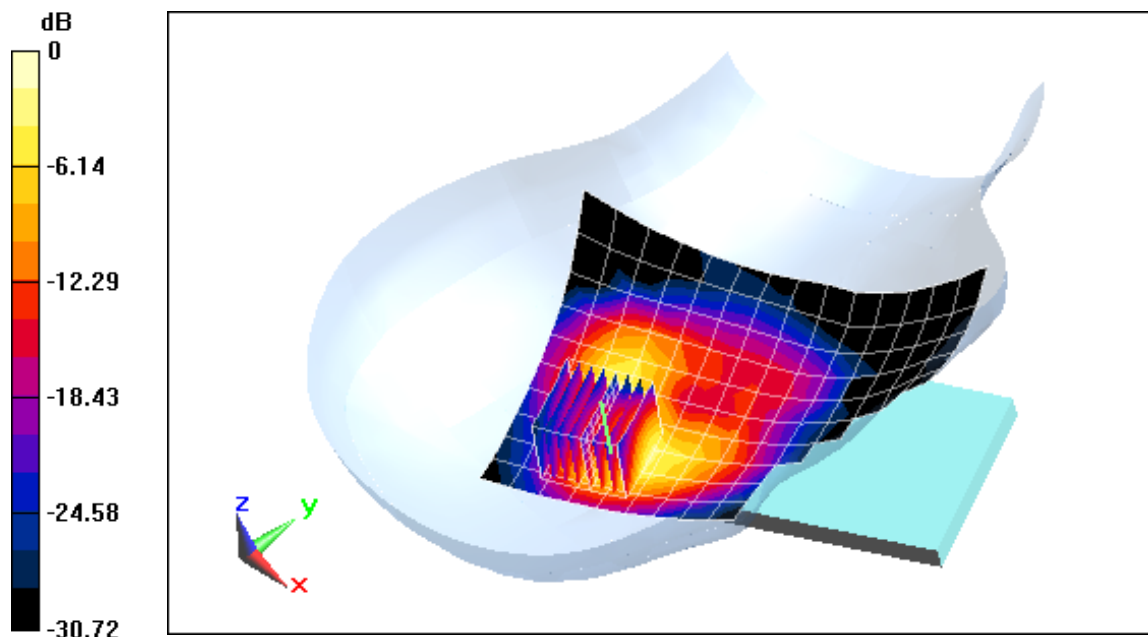

0 dB = 0.577 W/kg = -2.39 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.897$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-13-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.06 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR (1 g) = 0.336 W/kg

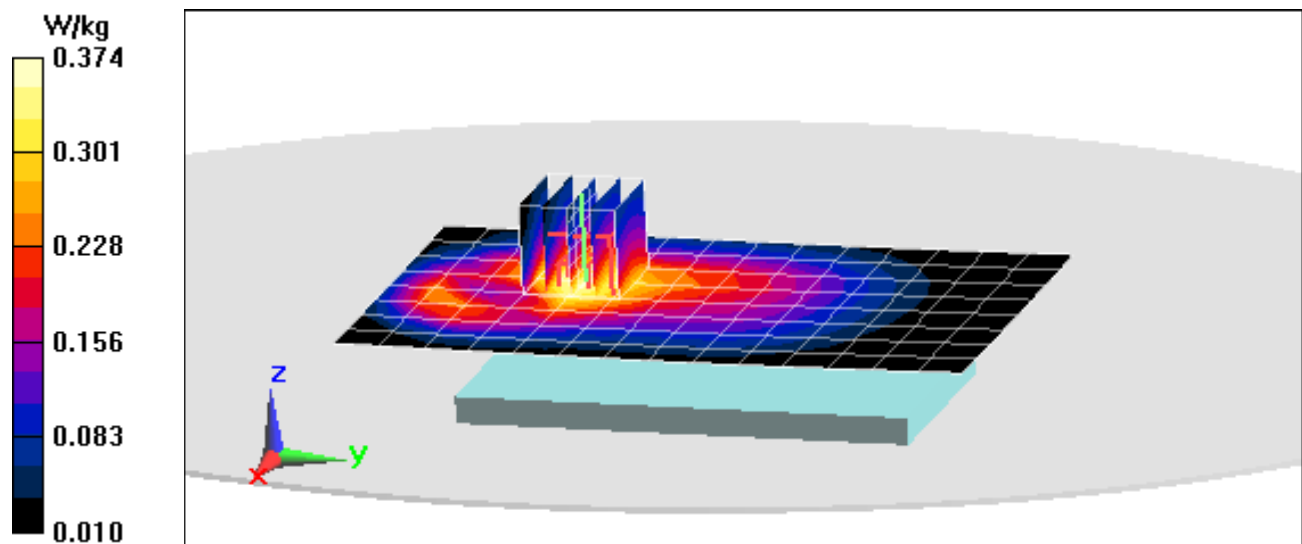

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.897$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-13-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.97 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.878 W/kg

SAR (1 g) = 0.505 W/kg

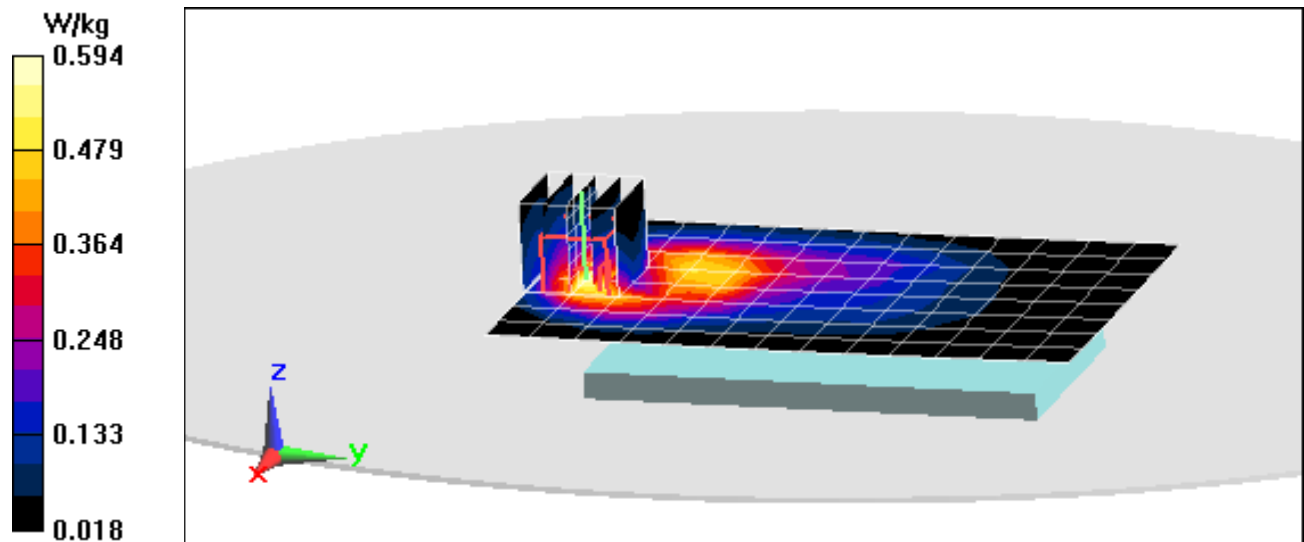

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE8

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.897$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-13-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.17 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR (1 g) = 0.318 W/kg

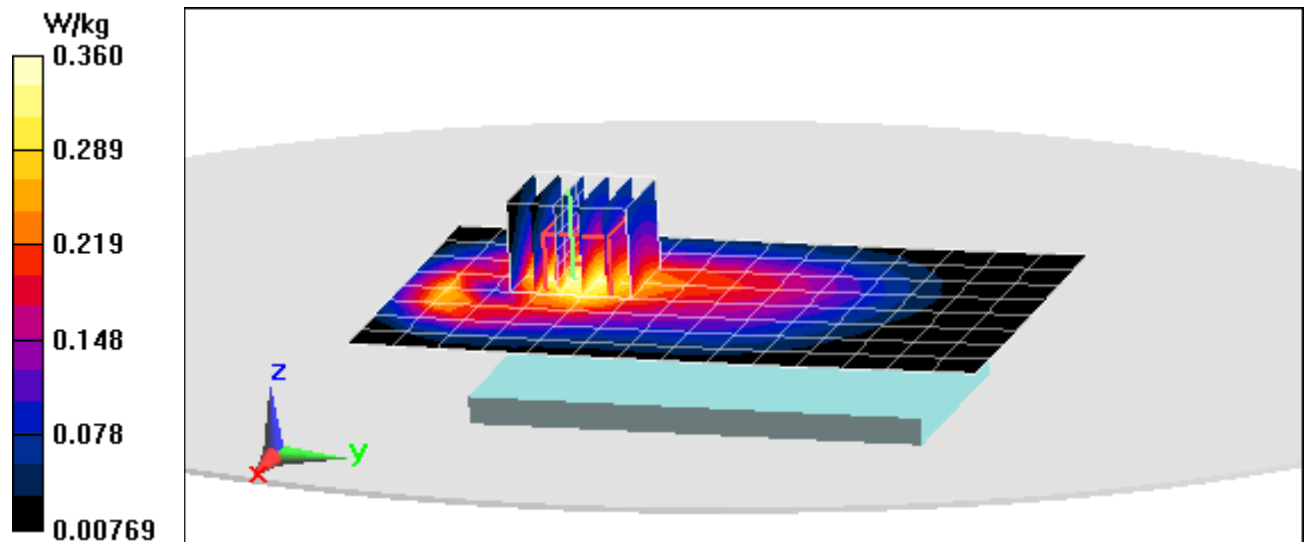

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE8

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.897$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-13-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.90 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.950 W/kg

SAR (1 g) = 0.540 W/kg

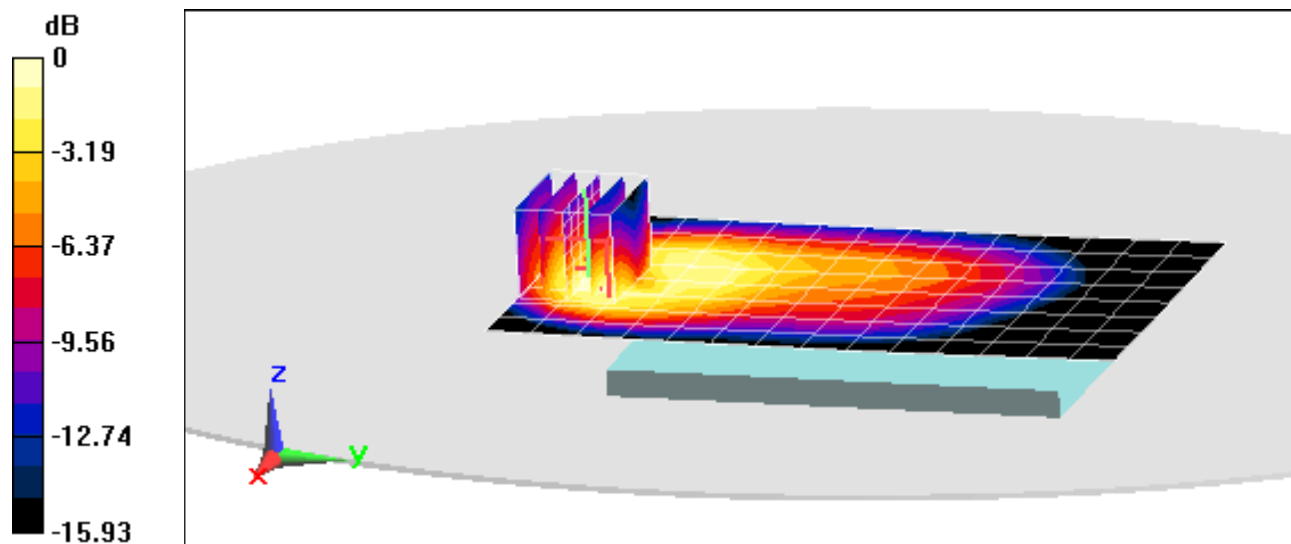

0 dB = 0.647 W/kg = -1.89 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.478 \text{ S/m}$; $\epsilon_r = 52.435$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-26-2015; Ambient Temp: 20.1°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3319; ConvF(4.83, 4.83, 4.83); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Body SAR, Back side, Mid.ch


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.21 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR (1 g) = 0.837 W/kg

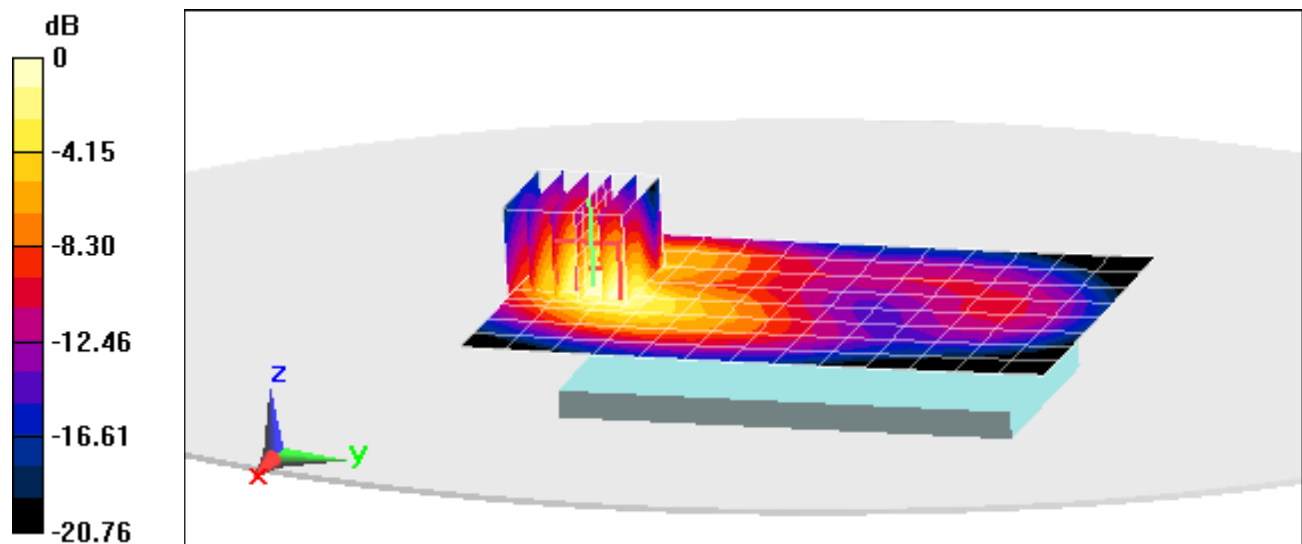

0 dB = 0.991 W/kg = -0.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.478 \text{ S/m}$; $\epsilon_r = 52.435$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2015; Ambient Temp: 20.1°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3319; ConvF(4.83, 4.83, 4.83); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Body SAR, Back side, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.19 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR (1 g) = 0.784 W/kg

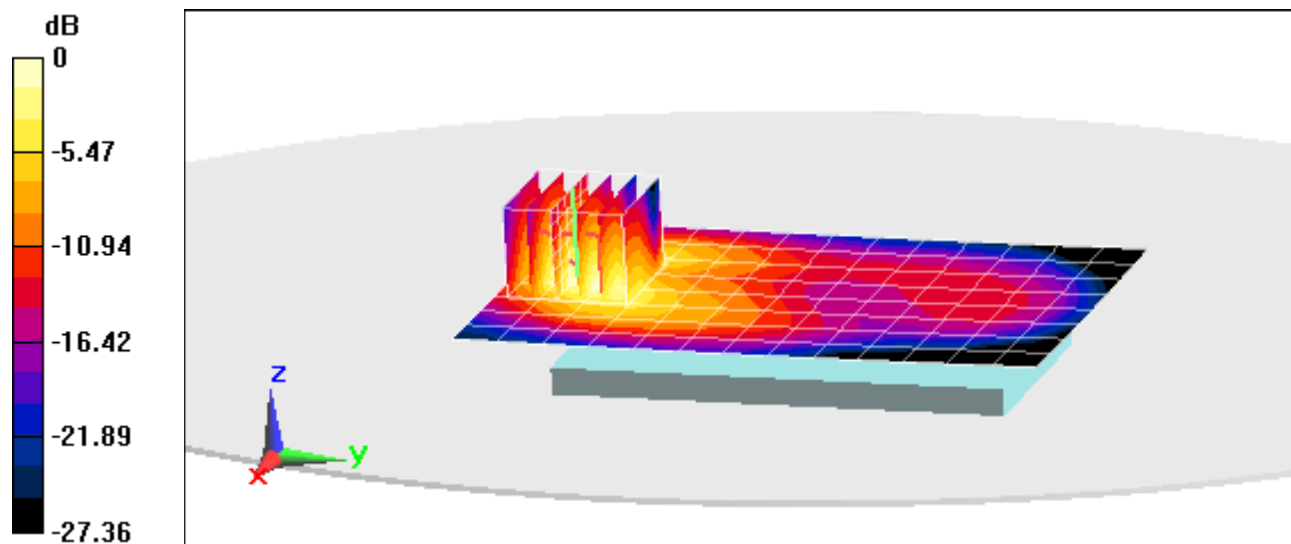

0 dB = 0.983 W/kg = -0.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-15-2015; Ambient Temp: 22.4°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.67 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR (1 g) = 0.263 W/kg

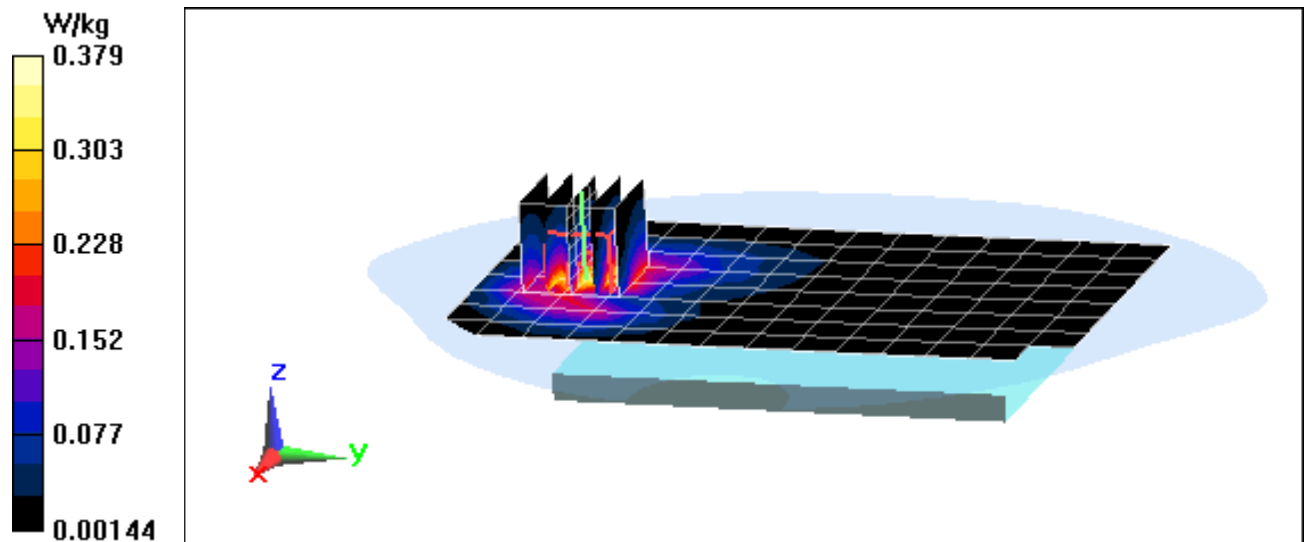

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1850.2 \text{ MHz}$; $\sigma = 1.507 \text{ S/m}$; $\epsilon_r = 52.72$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-01-2015; Ambient Temp: 21.1°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Back side, Low.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.83 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR (1 g) = 0.792 W/kg

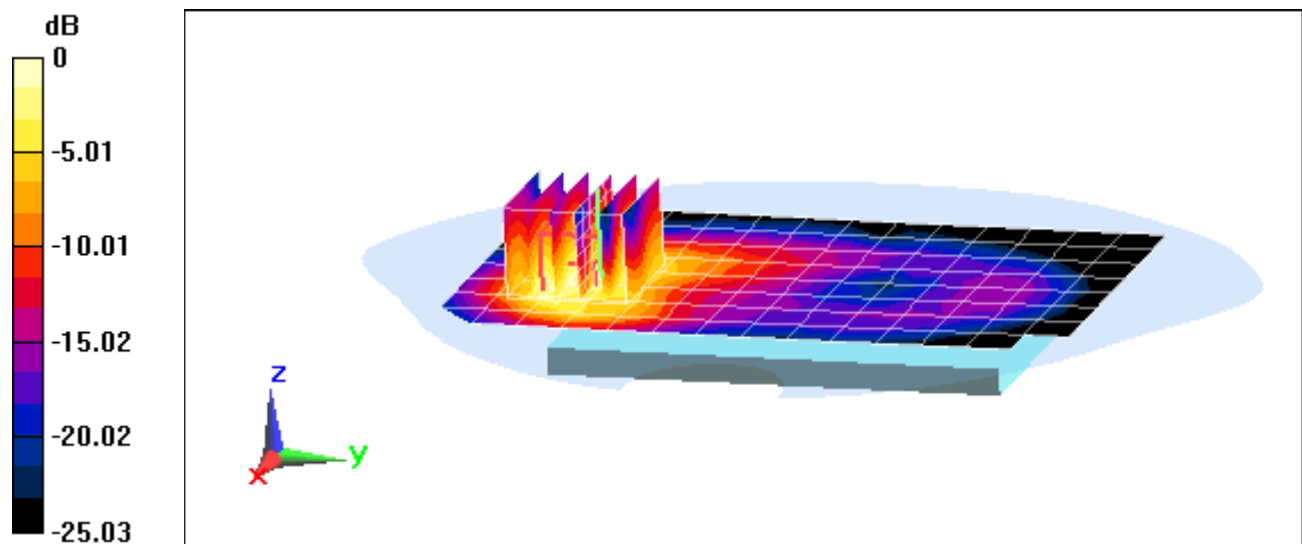

0 dB = 0.989 W/kg = -0.05 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BDC

Communication System: UID 0, UMTS; Frequency: 1880 MHz, Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1880 \text{ MHz}$; $\sigma = 1.539 \text{ S/m}$; $\epsilon_r = 51.185$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-17-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.16 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR (1 g) = 0.519 W/kg

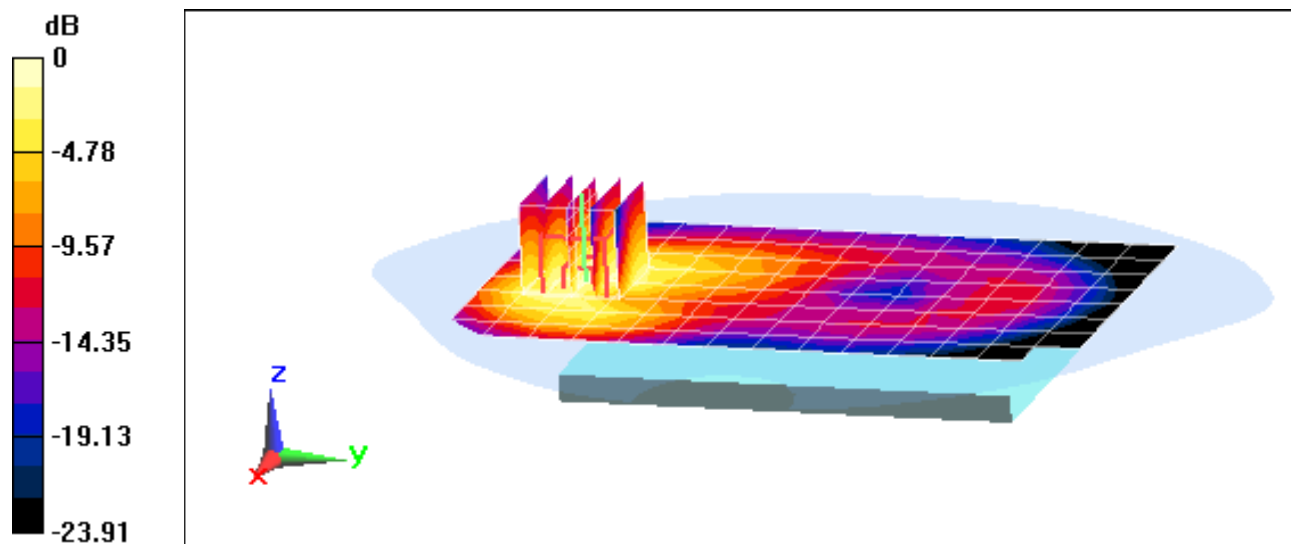

0 dB = 0.755 W/kg = -1.22 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE6

Communication System: UID 0, UMTS, Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1852.4 \text{ MHz}$; $\sigma = 1.513 \text{ S/m}$; $\epsilon_r = 52.974$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-22-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.3°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Bottom Edge, Low.ch


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.00 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR (1 g) = 0.912 W/kg

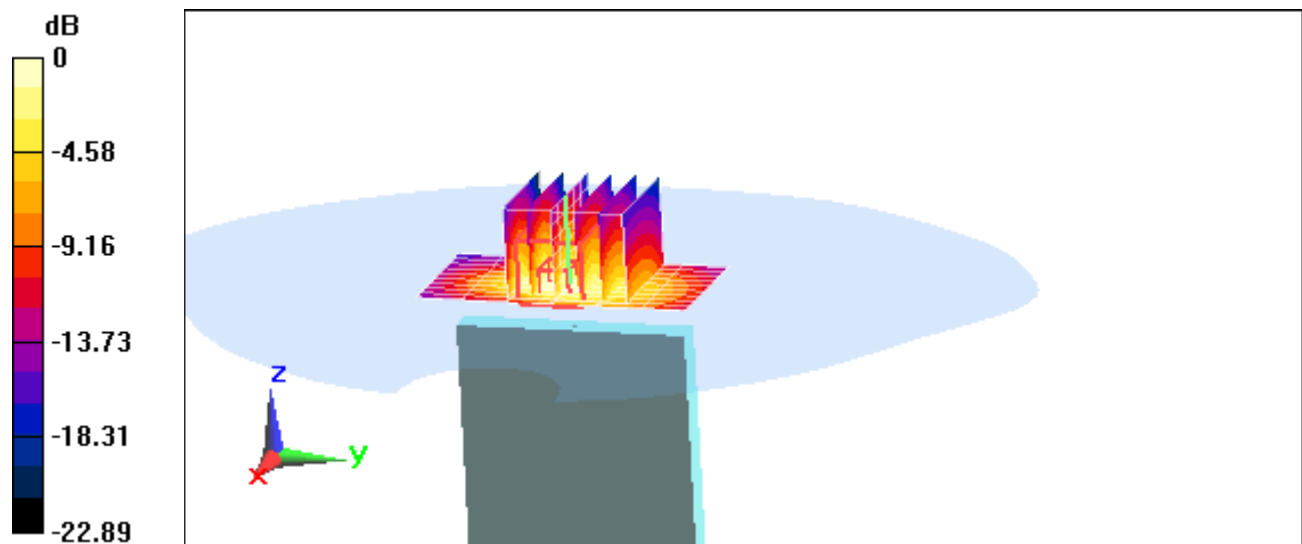

0 dB = 1.10 W/kg = 0.41 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.932 \text{ S/m}$; $\epsilon_r = 55.672$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-18-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3288; ConvF(6.38, 6.38, 6.38); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.63 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR (1 g) = 0.302 W/kg

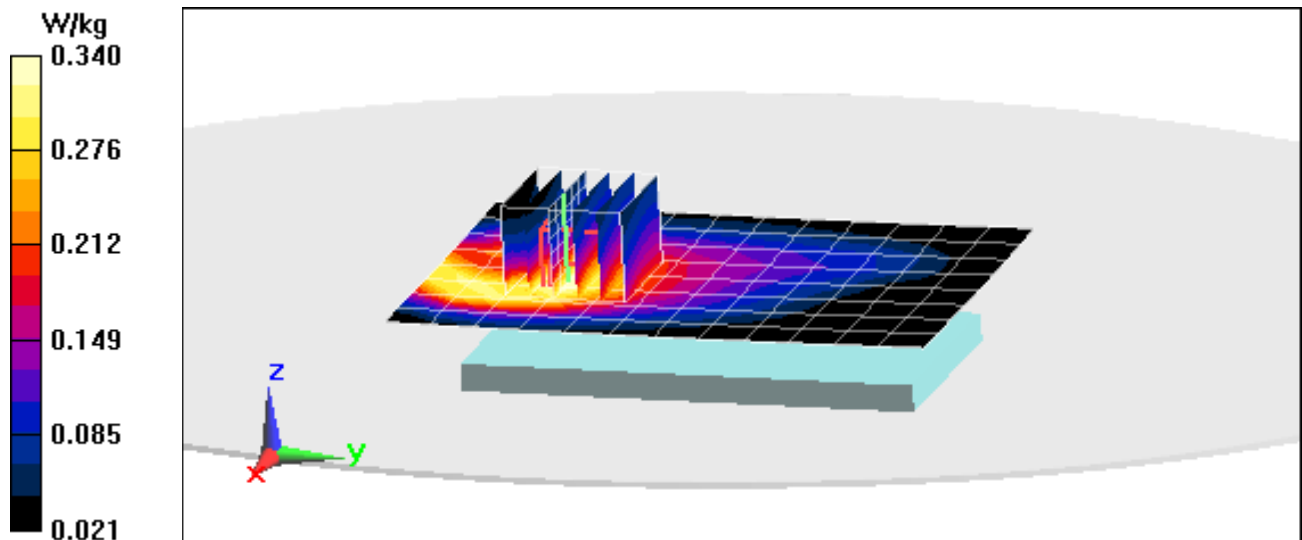

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.932 \text{ S/m}$; $\epsilon_r = 55.672$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3288; ConvF(6.38, 6.38, 6.38); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.39 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR (1 g) = 0.581 W/kg

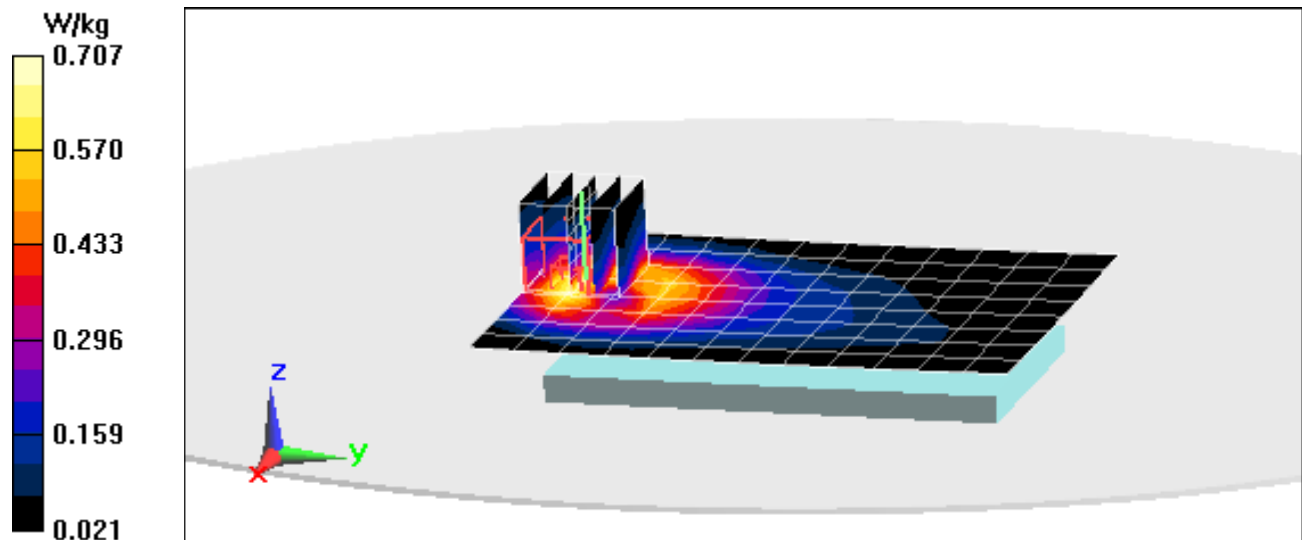

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BD8

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 740 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 54.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-18-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3288; ConvF(6.38, 6.38, 6.38); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.29 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR (1 g) = 0.264 W/kg

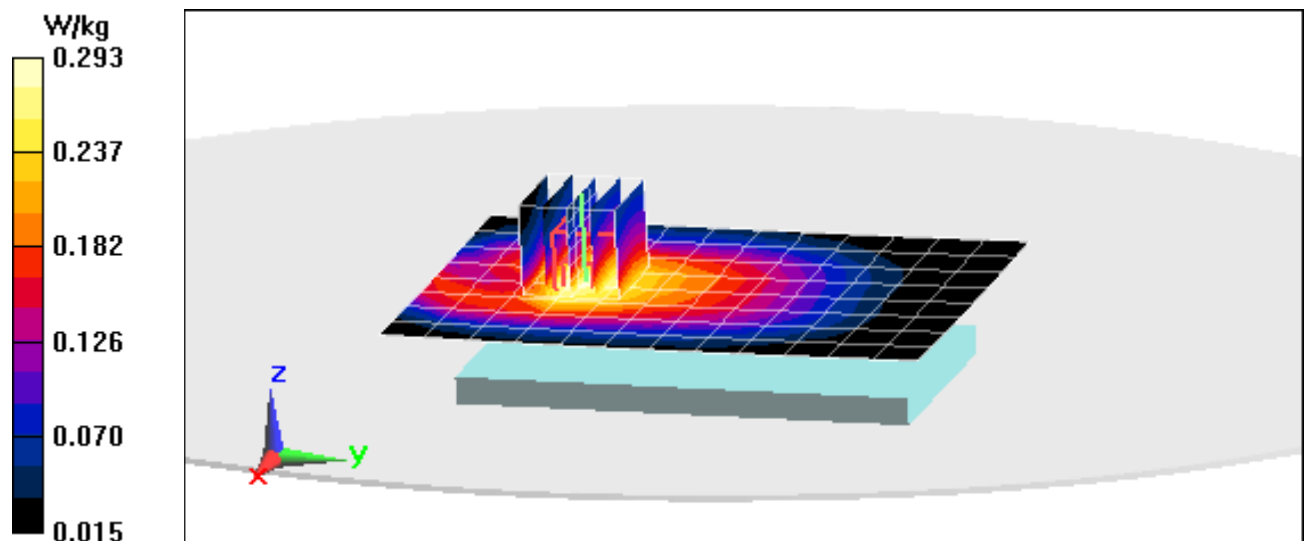

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BD8

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 740 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 54.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3288; ConvF(6.38, 6.38, 6.38); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Body SAR, Front side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.23 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.543 W/kg

SAR (1 g) = 0.379 W/kg

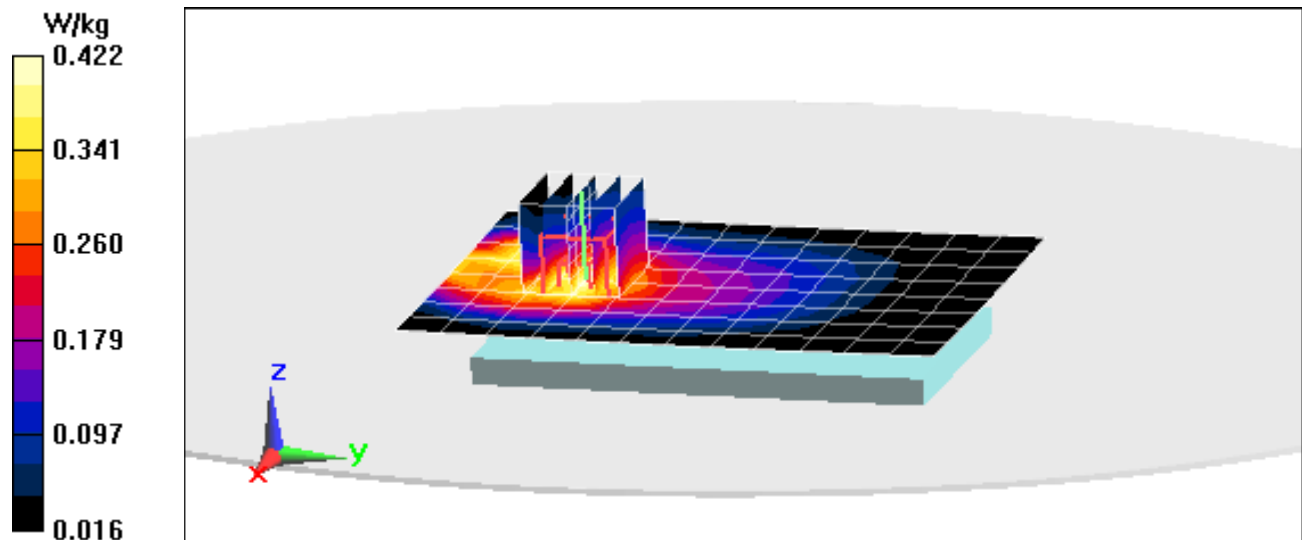

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.898$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-13-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.35 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR (1 g) = 0.384 W/kg

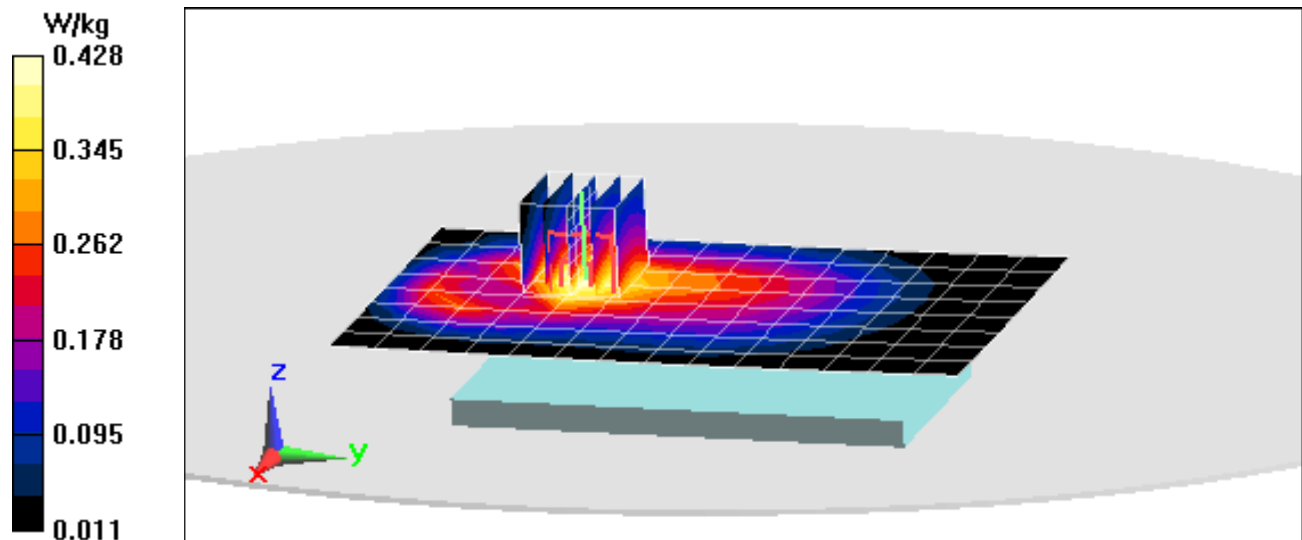

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.898$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-13-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.96 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.955 W/kg

SAR (1 g) = 0.551 W/kg

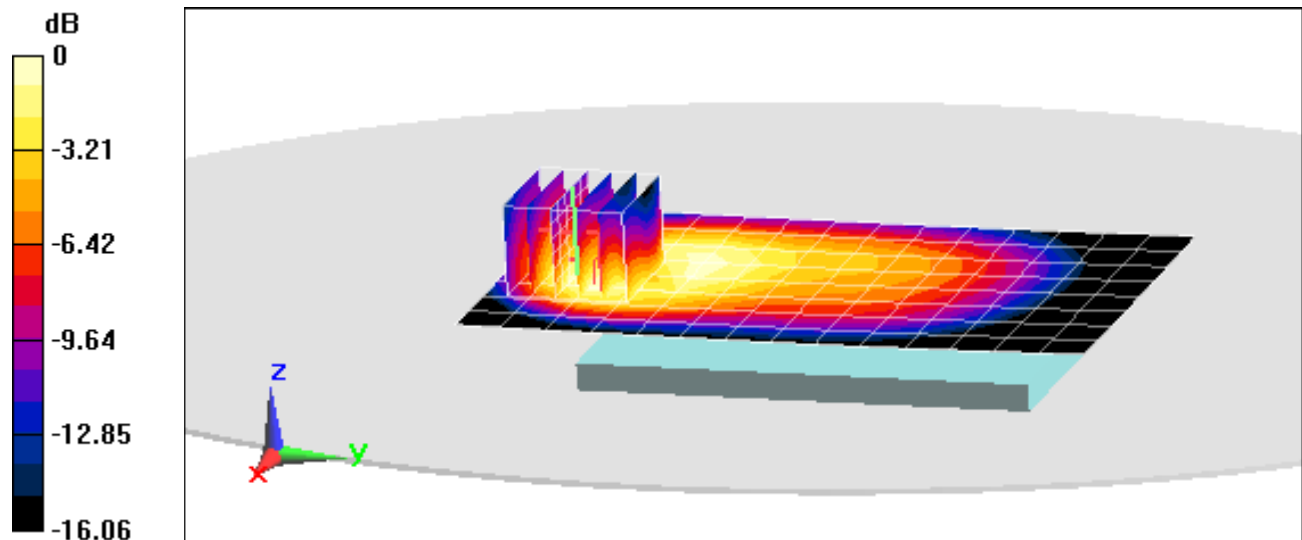

0 dB = 0.653 W/kg = -1.85 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 51.846$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-10-2015; Ambient Temp: 22.4°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3319; ConvF(4.83, 4.83, 4.83); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.47 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR (1 g) = 0.872 W/kg

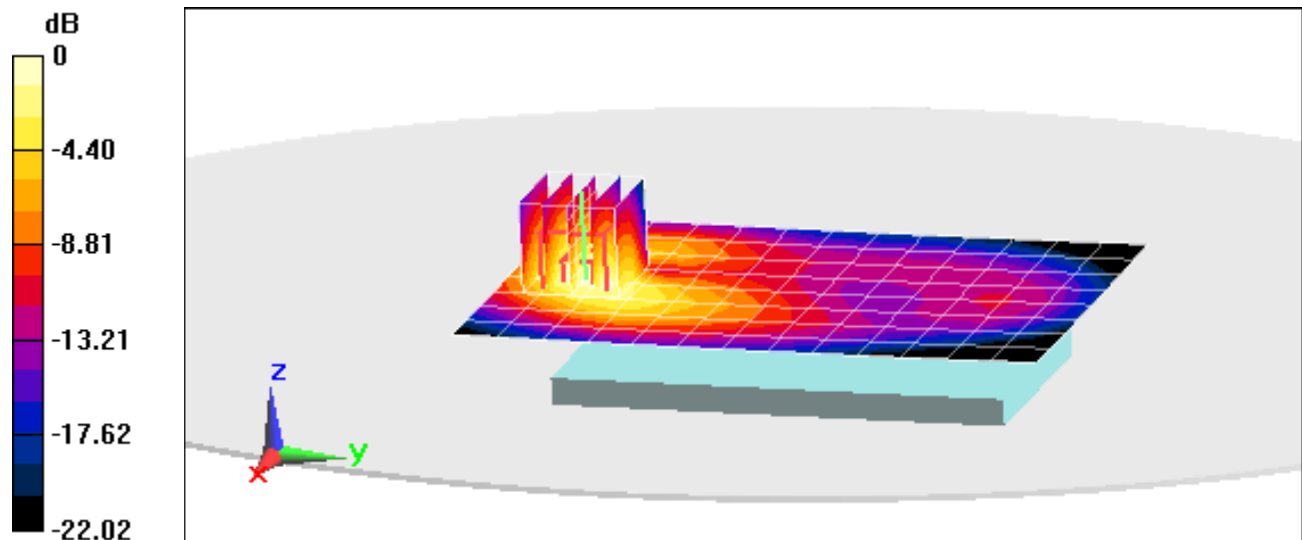

0 dB = 1.05 W/kg = 0.21 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE6

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.449 \text{ S/m}$; $\epsilon_r = 52.09$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2015; Ambient Temp: 22.2°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(4.83, 4.83, 4.83); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Front Side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.84 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR (1 g) = 0.644 W/kg

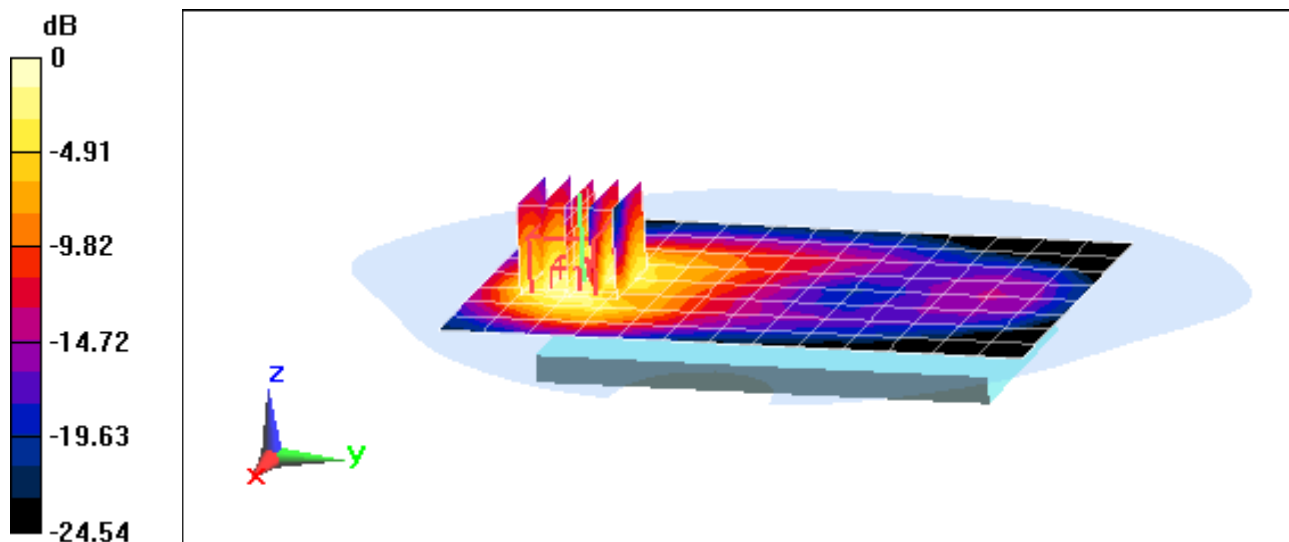

0 dB = 0.797 W/kg = -0.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.562 \text{ S/m}$; $\epsilon_r = 51.124$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-17-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.65 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR (1 g) = 0.579 W/kg

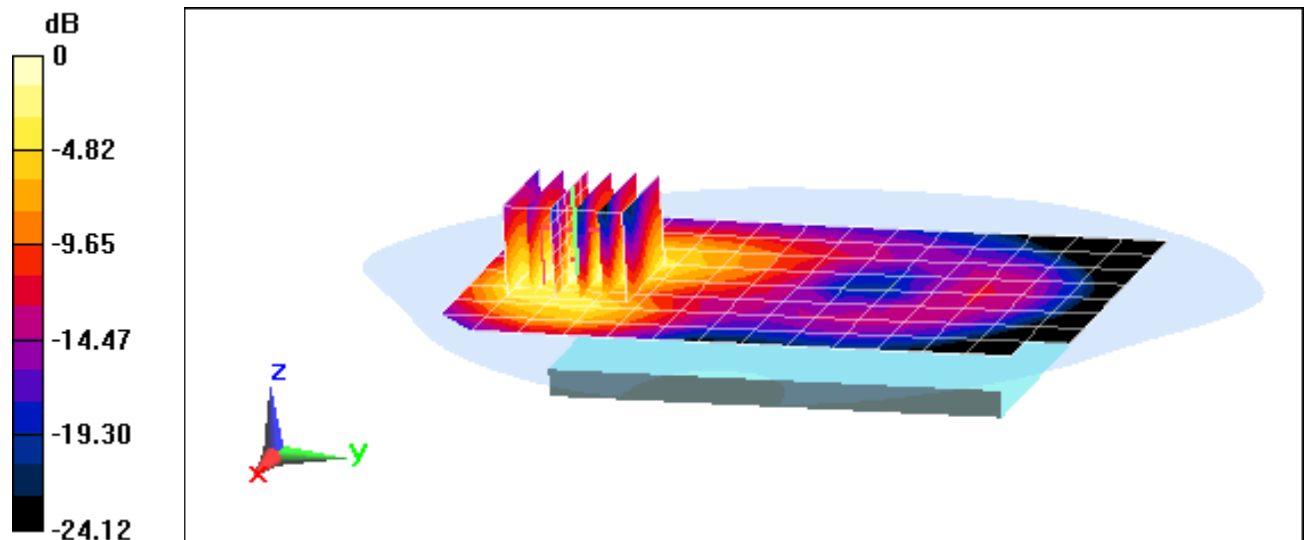

0 dB = 0.779 W/kg = -1.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE6

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

1860 MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 51.281$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-19-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Body SAR, Front side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.77 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR (1 g) = 0.866 W/kg

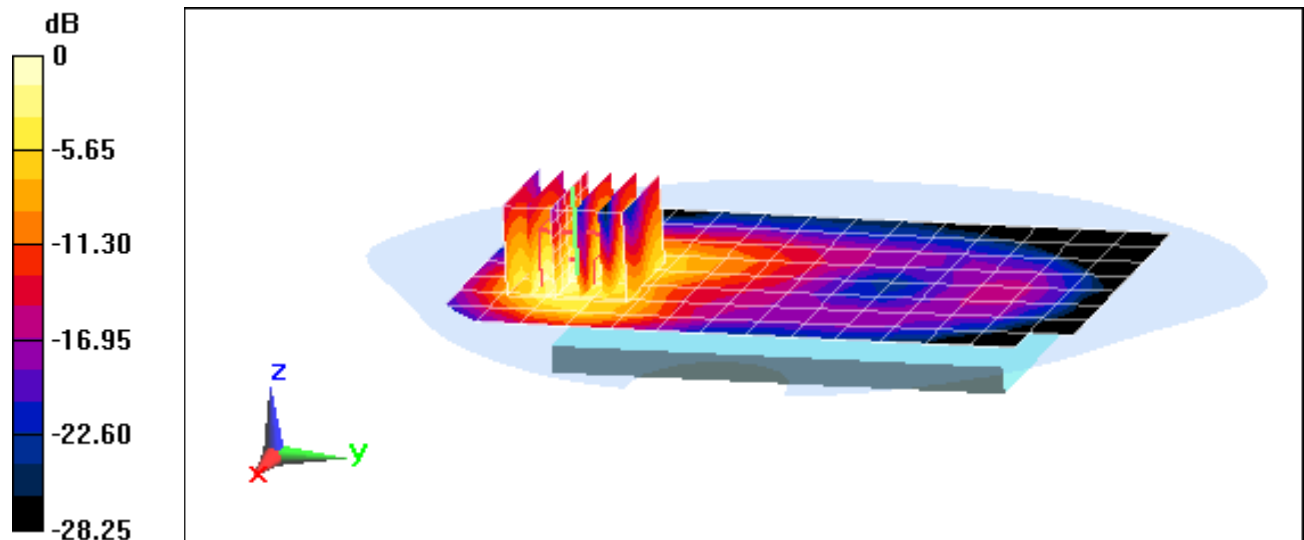

0 dB = 1.07 W/kg = 0.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Body Medium parameters used:

$f = 2310$ MHz; $\sigma = 1.798$ S/m; $\epsilon_r = 51.911$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-25-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3319; ConvF(4.24, 4.24, 4.24); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 30, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.71 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR (1 g) = 0.449 W/kg

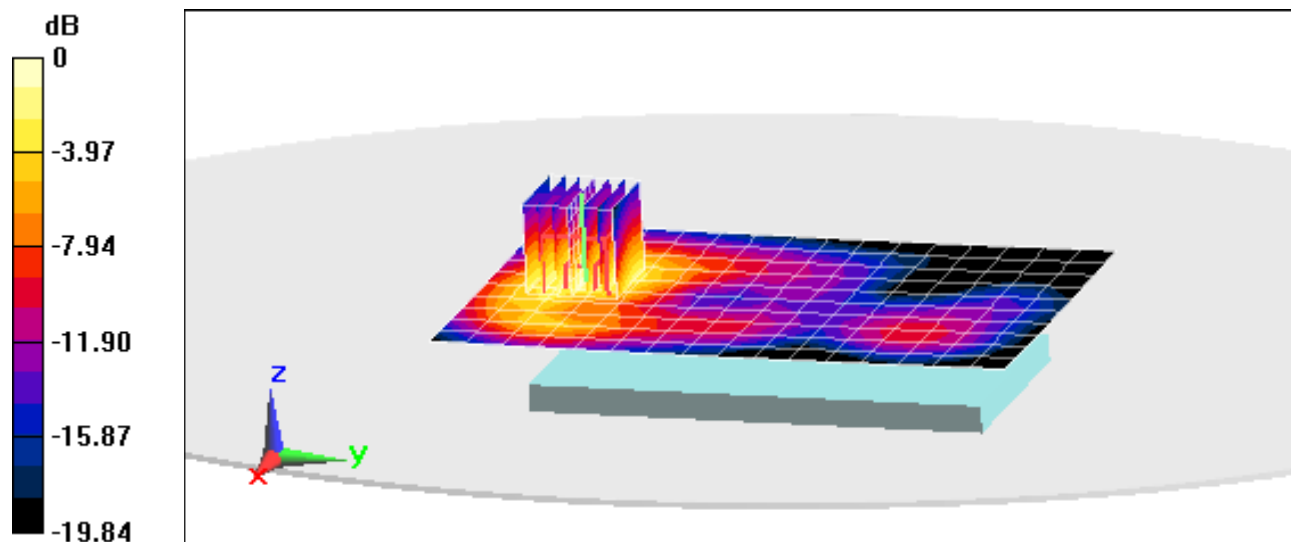

0 dB = 0.546 W/kg = -2.63 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: 2300 Body Medium parameters used:

$f = 2310 \text{ MHz}$; $\sigma = 1.798 \text{ S/m}$; $\epsilon_r = 51.911$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-25-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3319; ConvF(4.24, 4.24, 4.24); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 30, Body SAR, Bottom Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (11x9x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.69 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR (1 g) = 1.05 W/kg

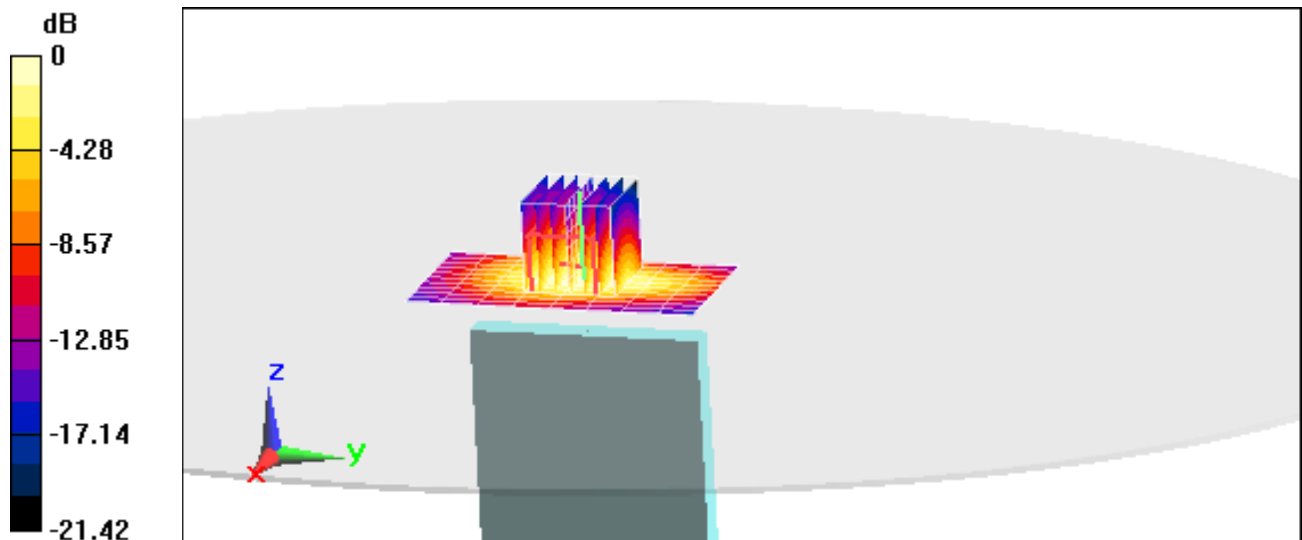

0 dB = 1.30 W/kg = 1.14 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C04

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.011 \text{ S/m}$; $\epsilon_r = 51.387$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-20-2015; Ambient Temp: 22.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3332; ConvF(4.31, 4.31, 4.31); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 06, 1 Mbps, Back Side, Antenna 2**


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.22 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR (1 g) = 0.224 W/kg

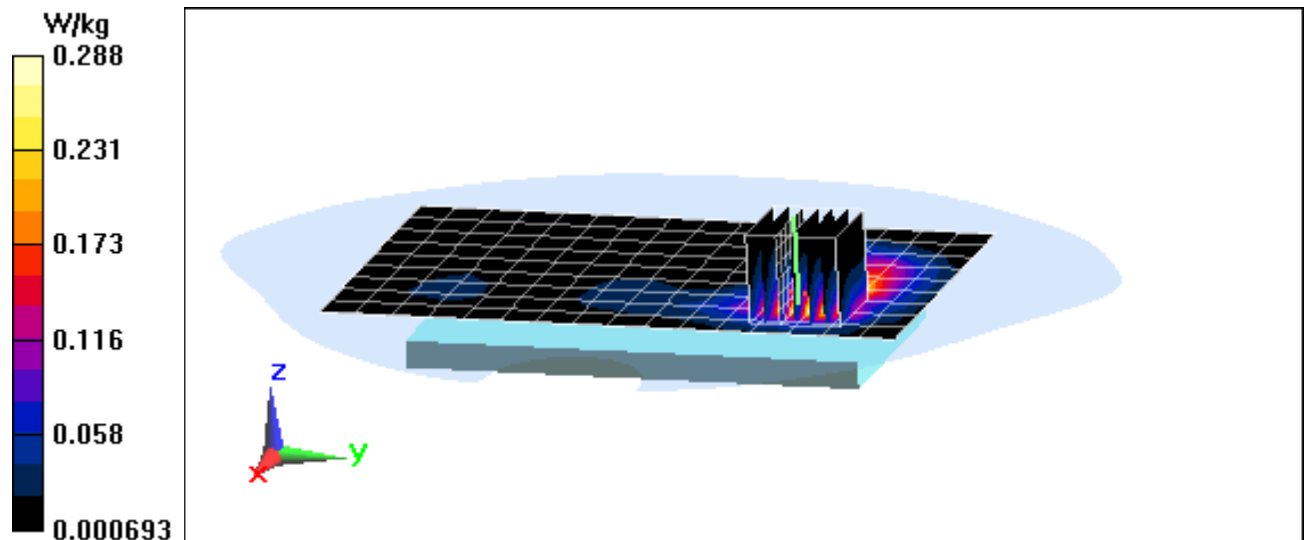

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C04

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.011 \text{ S/m}$; $\epsilon_r = 51.387$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-20-2015; Ambient Temp: 22.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3332; ConvF(4.31, 4.31, 4.31); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 06, 1 Mbps, Top Edge, Antenna 2**


Area Scan (10x9x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.68 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.484 W/kg

SAR (1 g) = 0.253 W/kg

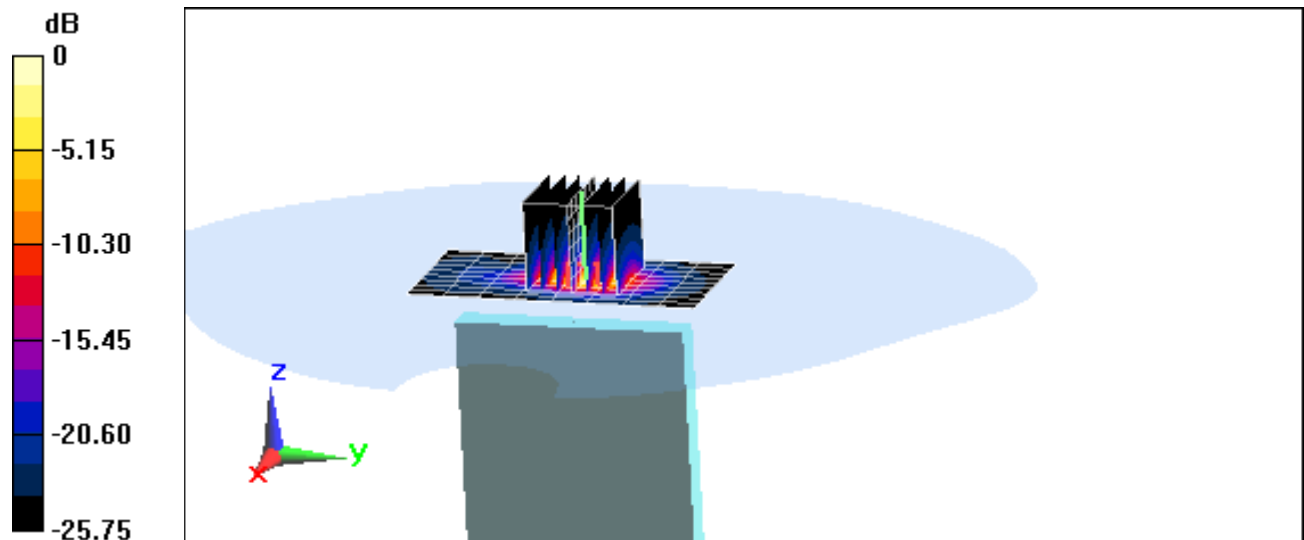

0 dB = 0.323 W/kg = -4.91 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE4

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5785 \text{ MHz}$; $\sigma = 5.944 \text{ S/m}$; $\epsilon_r = 47.95$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-15-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3589; ConvF(3.79, 3.79, 3.79); Calibrated: 1/22/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-3, 20 MHz Bandwidth,
Body SAR, Ch 157, 6 Mbps, Back Side, Antenna 2**


Area Scan (12x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio =1.4

Reference Value = 2.537 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR (1 g) = 0.035 W/kg

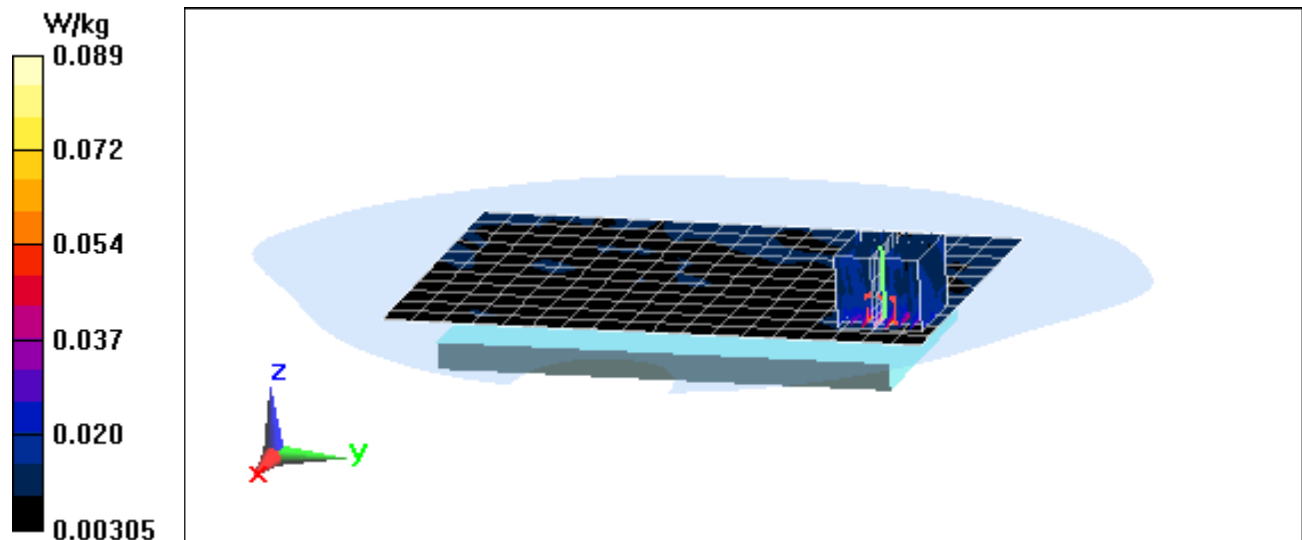

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE4

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5785 \text{ MHz}$; $\sigma = 5.944 \text{ S/m}$; $\epsilon_r = 47.95$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-15-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3589; ConvF(3.79, 3.79, 3.79); Calibrated: 1/22/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-3, 20 MHz Bandwidth,
Body SAR, Ch 157, 6 Mbps, Front Side, Antenna 2**


Area Scan (12x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio =1.4

Reference Value = 3.718 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR (1 g) = 0.085 W/kg

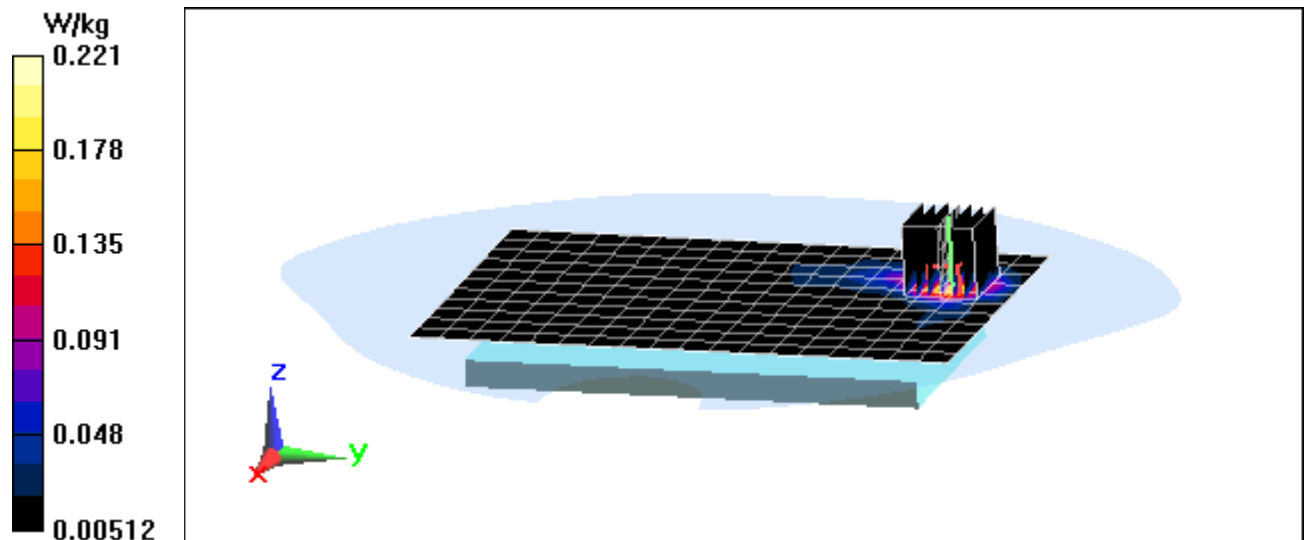

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE6

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2400 Body Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 2.022 \text{ S/m}$; $\epsilon_r = 50.923$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-02-2015; Ambient Temp: 23.1°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.12, 4.12, 4.12); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.6160 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.000227 W/kg

SAR (1 g) = 8.46e-007 W/kg

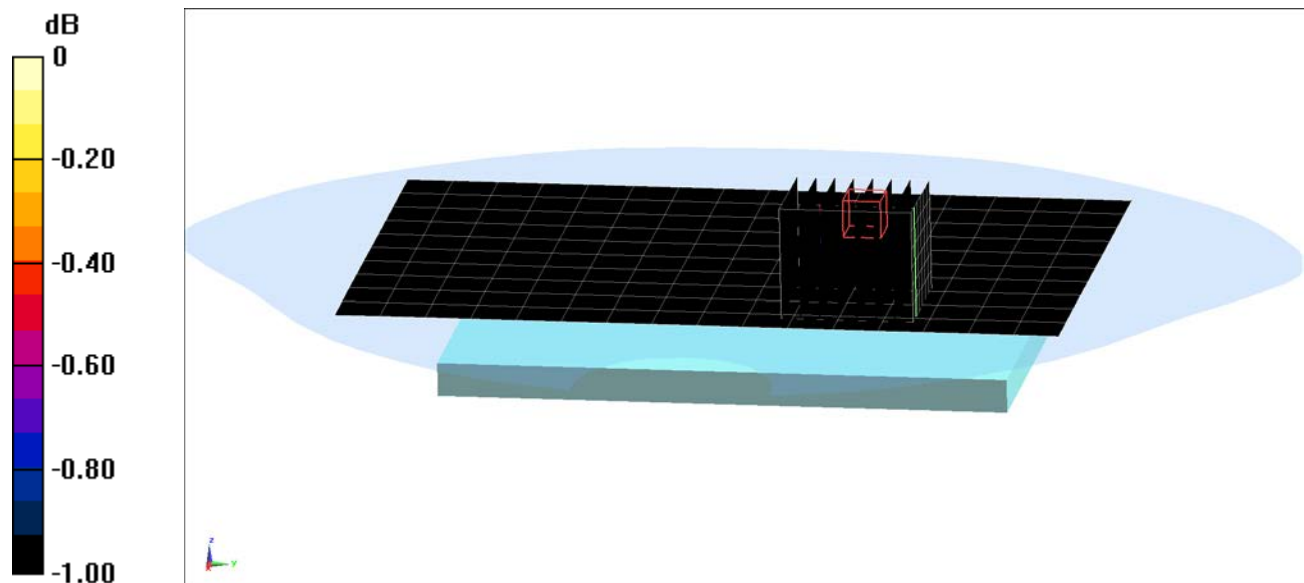

0 dB = 0.00159 W/kg = -27.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95B11

Communication System: UID 0, UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1712.4 \text{ MHz}$; $\sigma = 1.455 \text{ S/m}$; $\epsilon_r = 52.517$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.4 cm

Test Date: 06-26-2015; Ambient Temp: 20.1°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3319; ConvF(4.83, 4.83, 4.83); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Extremity SAR, Back side, Low.ch


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 63.63 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 9.35 W/kg

SAR (10 g) = 2.38 W/kg

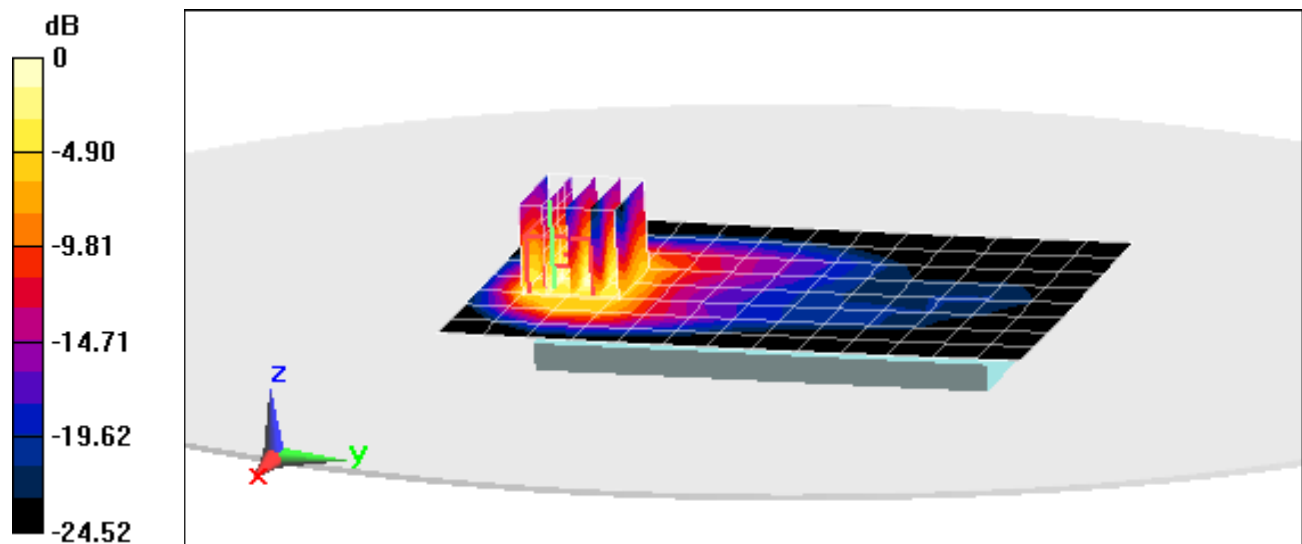

0 dB = 6.84 W/kg = 8.35 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE6

Communication System: UID 0, UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1852.4 \text{ MHz}$; $\sigma = 1.507 \text{ S/m}$; $\epsilon_r = 52.533$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-13-2015; Ambient Temp: 22.1°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Extremity SAR, Back side, Low.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.51 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR (10 g) = 2.28 W/kg

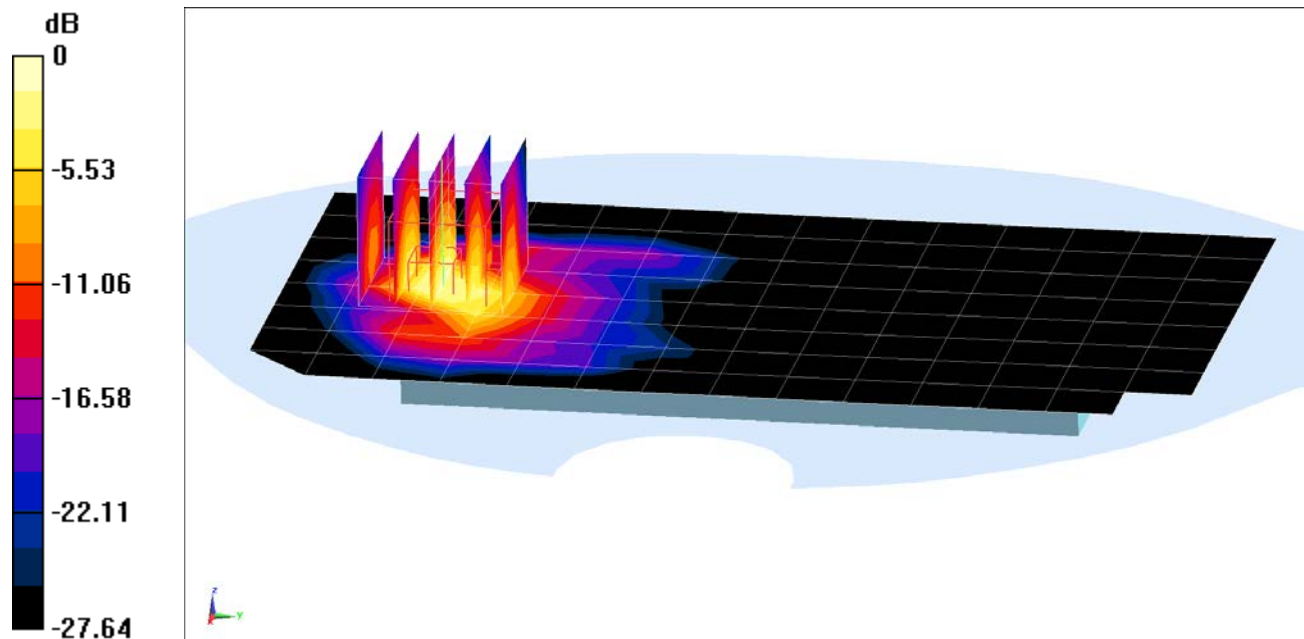

0 dB = 7.86 W/kg = 8.95 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.449$ S/m; $\epsilon_r = 52.09$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.4 cm

Test Date: 06-18-2015; Ambient Temp: 22.2°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(4.83, 4.83, 4.83); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Extremity SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.06 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 7.07 W/kg

SAR (10 g) = 1.76 W/kg

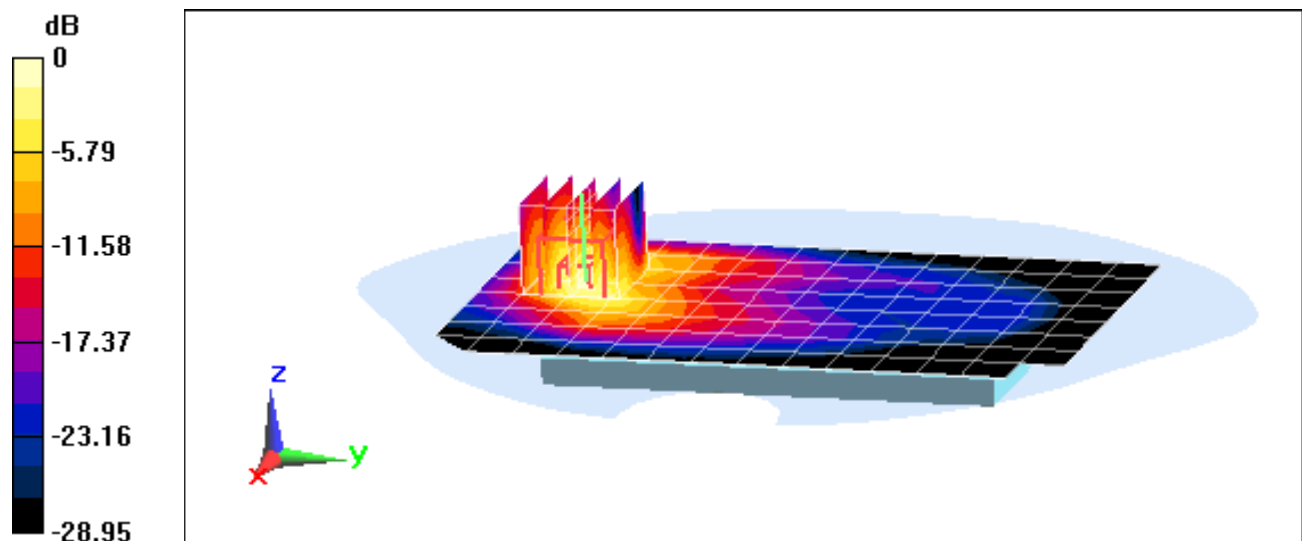

0 dB = 4.98 W/kg = 6.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95C05

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$; $\sigma = 1.518 \text{ S/m}$; $\epsilon_r = 51.286$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.4 cm

Test Date: 06-17-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Extremity SAR, Front side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.35 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 12.5 W/kg

SAR (10 g) = 2.68 W/kg

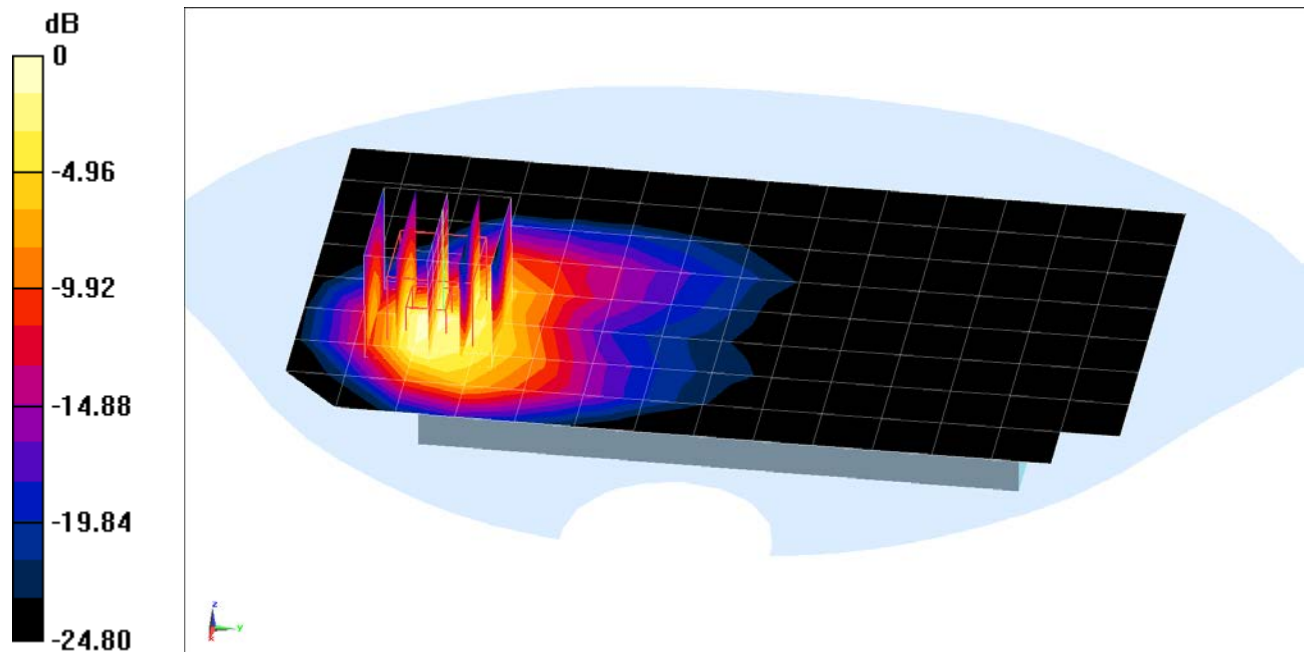

0 dB = 7.81 W/kg = 8.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE4

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5320 \text{ MHz}$; $\sigma = 5.327 \text{ S/m}$; $\epsilon_r = 48.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-15-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.79, 3.79, 3.79); Calibrated: 1/22/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, 5.3 GHz, 20 MHz Bandwidth,
Extremity SAR, Ch 64, 6 Mbps, Front Side, Antenna 2**


Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x12x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio=1.4

Reference Value = 16.60 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 6.12 W/kg

SAR (10 g) = 0.505 W/kg

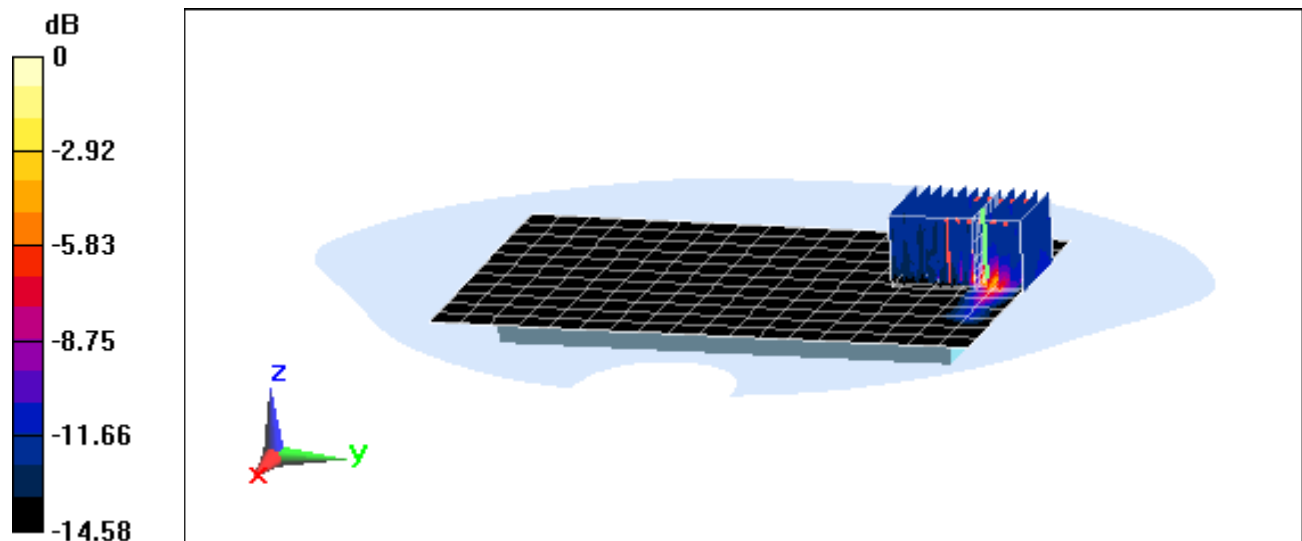

0 dB = 2.98 W/kg = 4.74 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG928W8; Type: Portable Handset; Serial: 95BE6

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2400 Body Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 2.022 \text{ S/m}$; $\epsilon_r = 50.923$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-02-2015; Ambient Temp: 23.1°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.12, 4.12, 4.12); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Bluetooth, Extremity SAR, Ch 39, 1 Mbps, Front Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (12x10x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.412 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR (10 g) = 0.006 W/kg

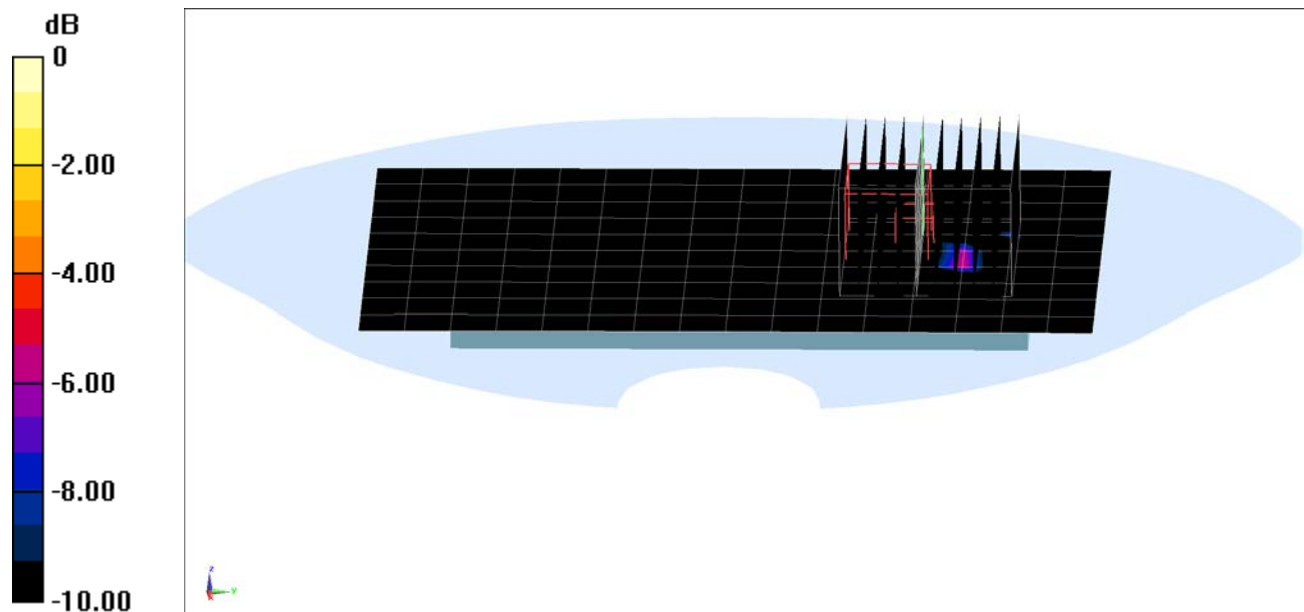

0 dB = 0.0944 W/kg = -10.25 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 41.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-15-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3319; ConvF(6.69, 6.69, 6.69); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 23 dBm (200 mW)

Peak SAR (extrapolated) = 2.37 W/kg

SAR (1 g) = 1.63 W/kg

Deviation (1 g) = 0.74%

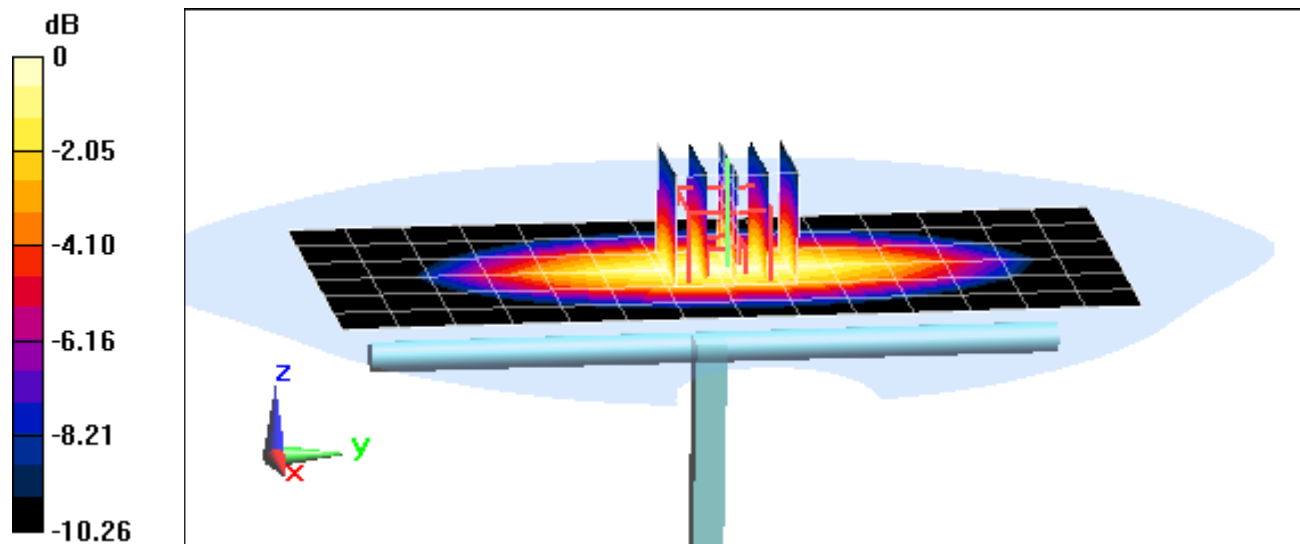

0 dB = 1.90 W/kg = 2.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 42.336$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-13-2015; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3319; ConvF(6.41, 6.41, 6.41); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 23 dBm (200 mW)

Peak SAR (extrapolated) = 2.77 W/kg

SAR (1 g) = 1.92 W/kg

Deviation (1 g) = 3.78%

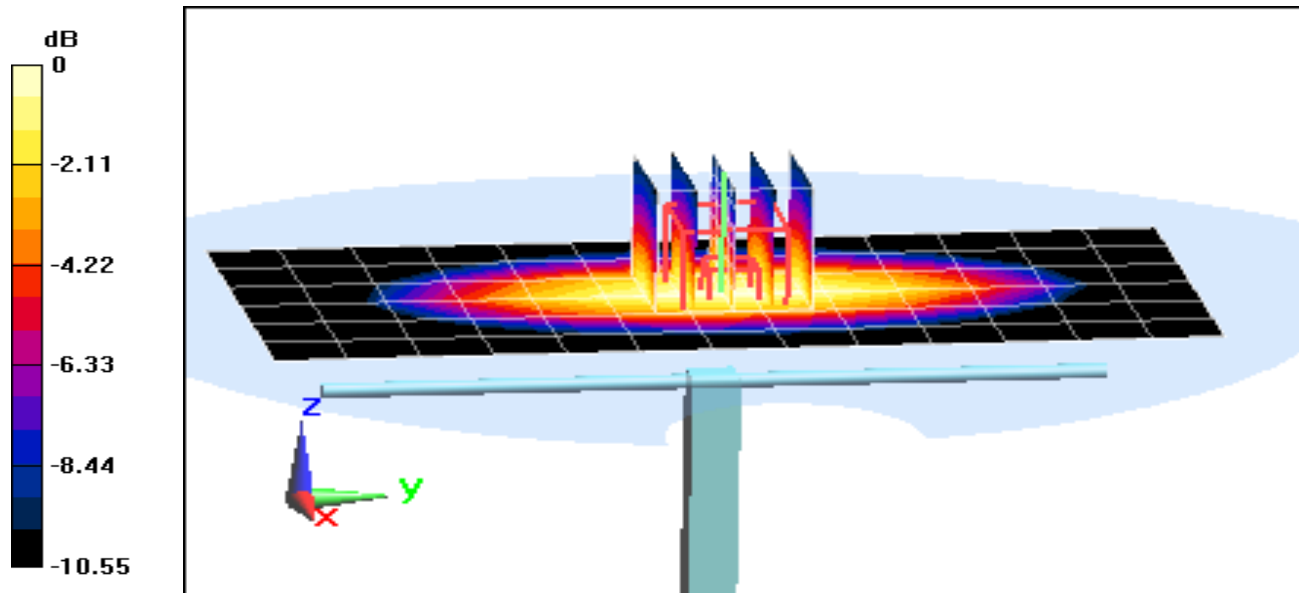

0 dB = 2.23 W/kg = 3.48 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 39.963$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-26-2015; Ambient Temp: 22.5°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3288; ConvF(6.51, 6.51, 6.51); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 23 dBm (200 mW)

Peak SAR (extrapolated) = 2.96 W/kg

SAR (1 g) = 1.96 W/kg

Deviation (1 g) = 5.95 %

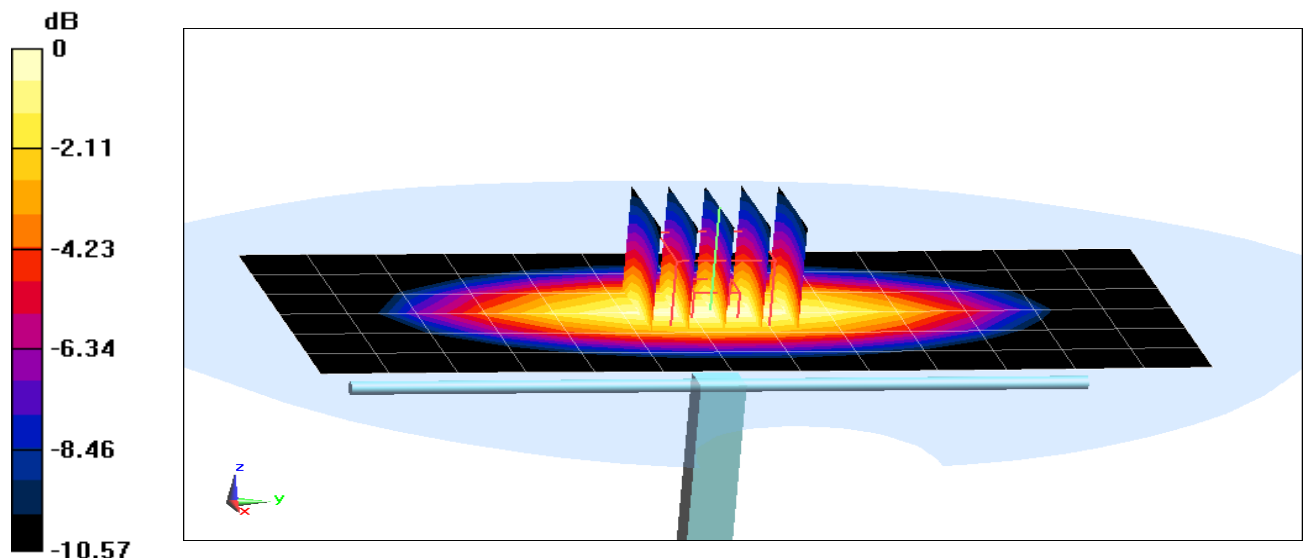

0 dB = 2.30 W/kg = 3.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.333$ S/m; $\epsilon_r = 38.624$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-22-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3319; ConvF(5.29, 5.29, 5.29); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.64 W/kg

SAR (1 g) = 3.71 W/kg

Deviation (1 g) = 2.49%

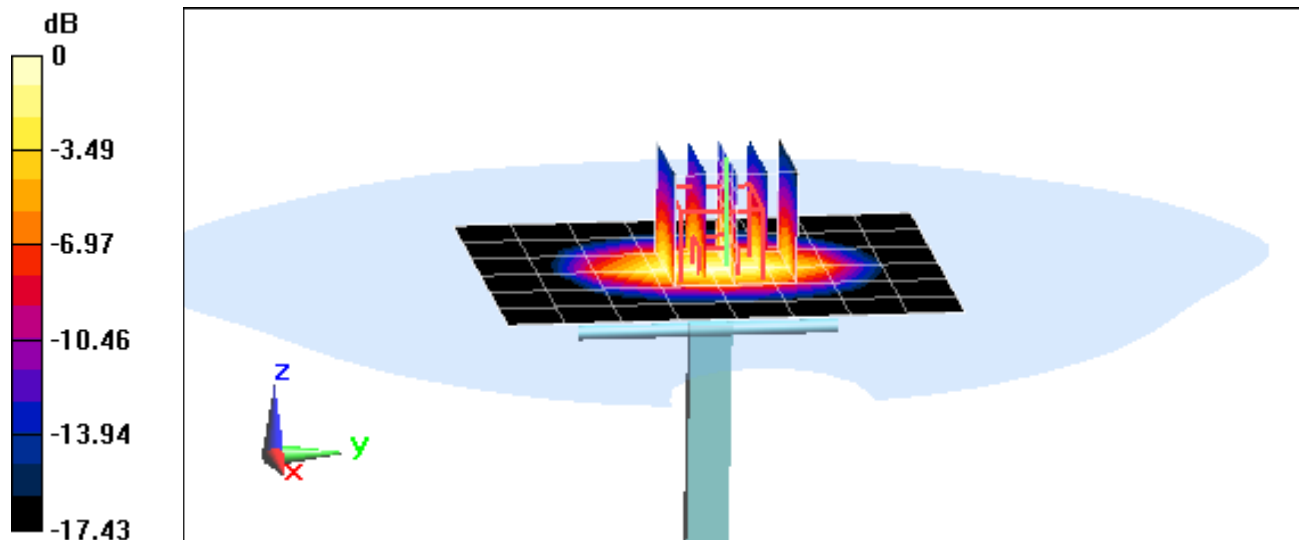

0 dB = 4.64 W/kg = 6.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.364 \text{ S/m}$; $\epsilon_r = 38.729$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3263; ConvF(5.27, 5.27, 5.27); Calibrated: 5/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 10/23/2014

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.89 W/kg

SAR (1 g) = 3.82 W/kg

Deviation (1 g) = 5.52 %

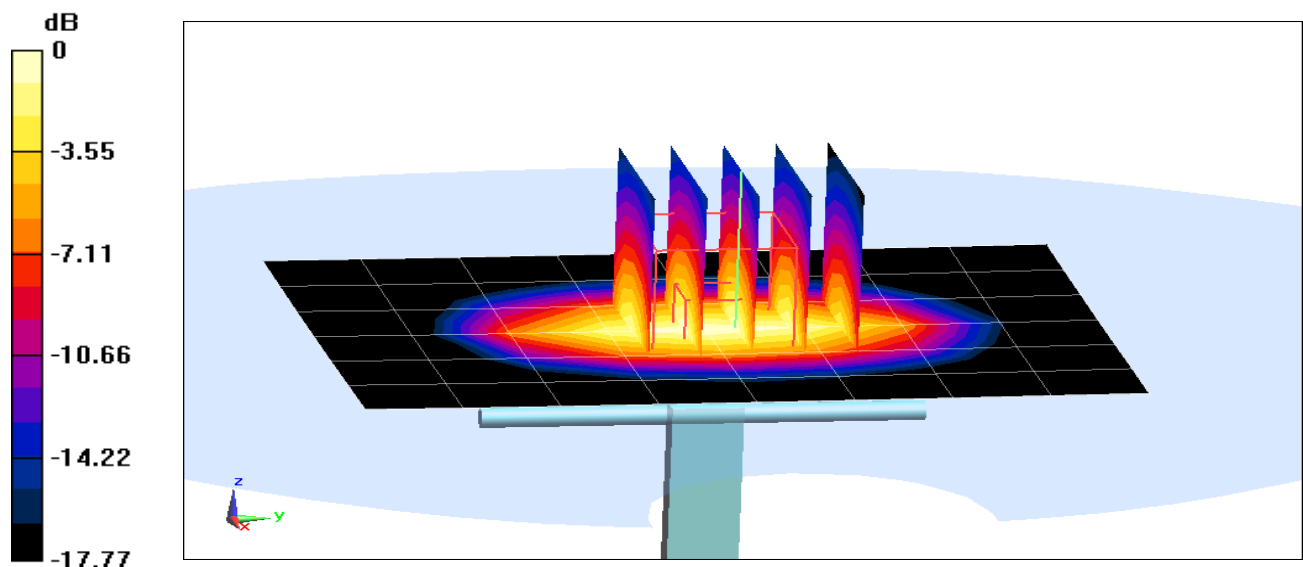

0 dB = 4.77 W/kg = 6.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d141

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.401 \text{ S/m}$; $\epsilon_r = 40.308$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3318; ConvF(5.05, 5.05, 5.05); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.60 W/kg

SAR (1 g) = 4.19 W/kg

Deviation (1 g) = 5.01%

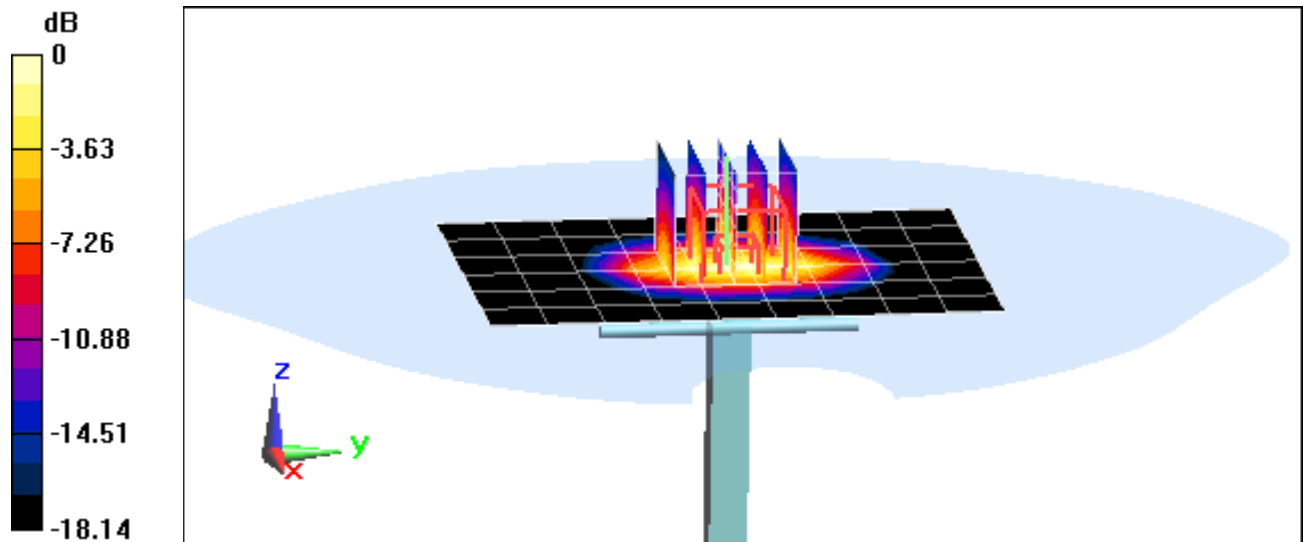

0 dB = 5.26 W/kg = 7.21 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2300 Head Medium parameters used:

$f = 2300 \text{ MHz}$; $\sigma = 1.732 \text{ S/m}$; $\epsilon_r = 39.129$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-25-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.6°C

Probe: ES3DV3 - SN3319; ConvF(4.77, 4.77, 4.77); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2300 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 10.5 W/kg

SAR (1 g) = 5.17 W/kg

Deviation (1 g) = 3.61%

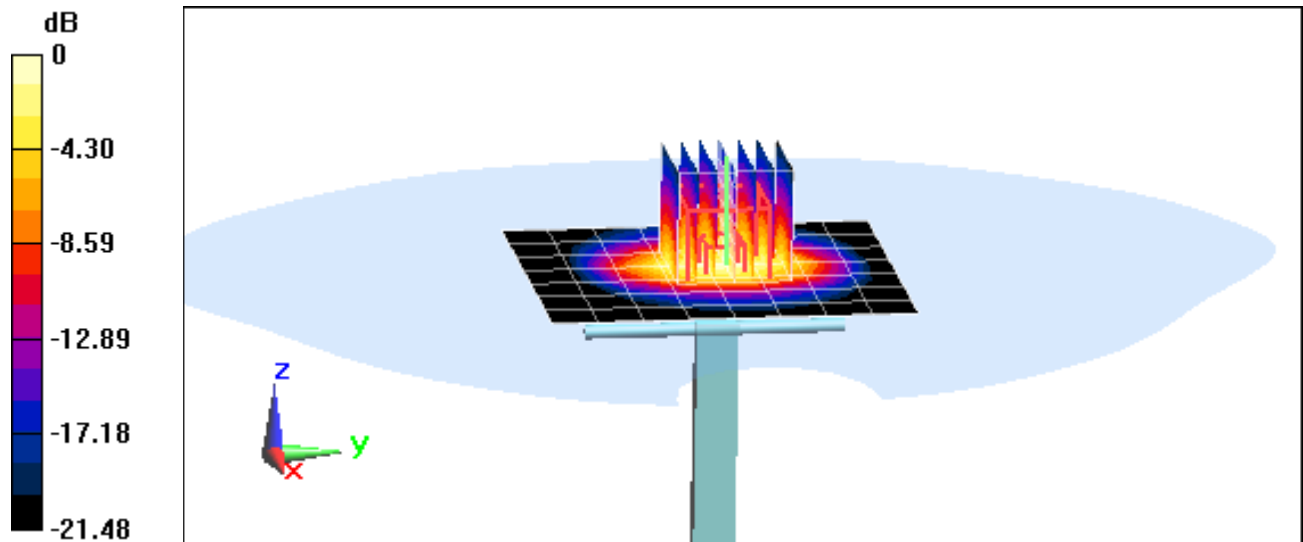

0 dB = 6.81 W/kg = 8.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.825 \text{ S/m}$; $\epsilon_r = 38.879$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-17-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3332; ConvF(4.49, 4.49, 4.49); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 11.0 W/kg

SAR (1 g) = 5.17 W/kg

Deviation (1 g) = -0.77%

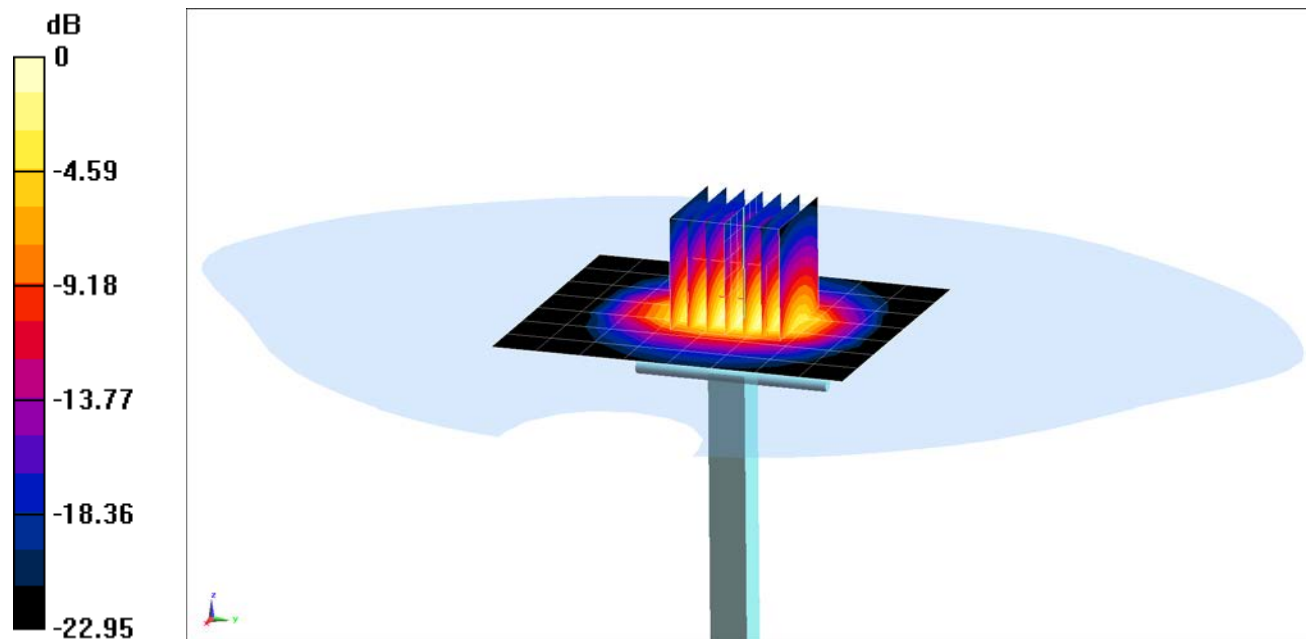

0 dB = 6.86 W/kg = 8.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 4.72 \text{ S/m}$; $\epsilon_r = 34.391$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-15-2015; Ambient Temp: 23.1°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7357; ConvF(4.93, 4.93, 4.93); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio = 1.4

Input Power = 17 dBm (50 mW)

Peak SAR (extrapolated) = 18.1 W/kg

SAR (1 g) = 4.44 W/kg

Deviation (1 g) = 4.84%

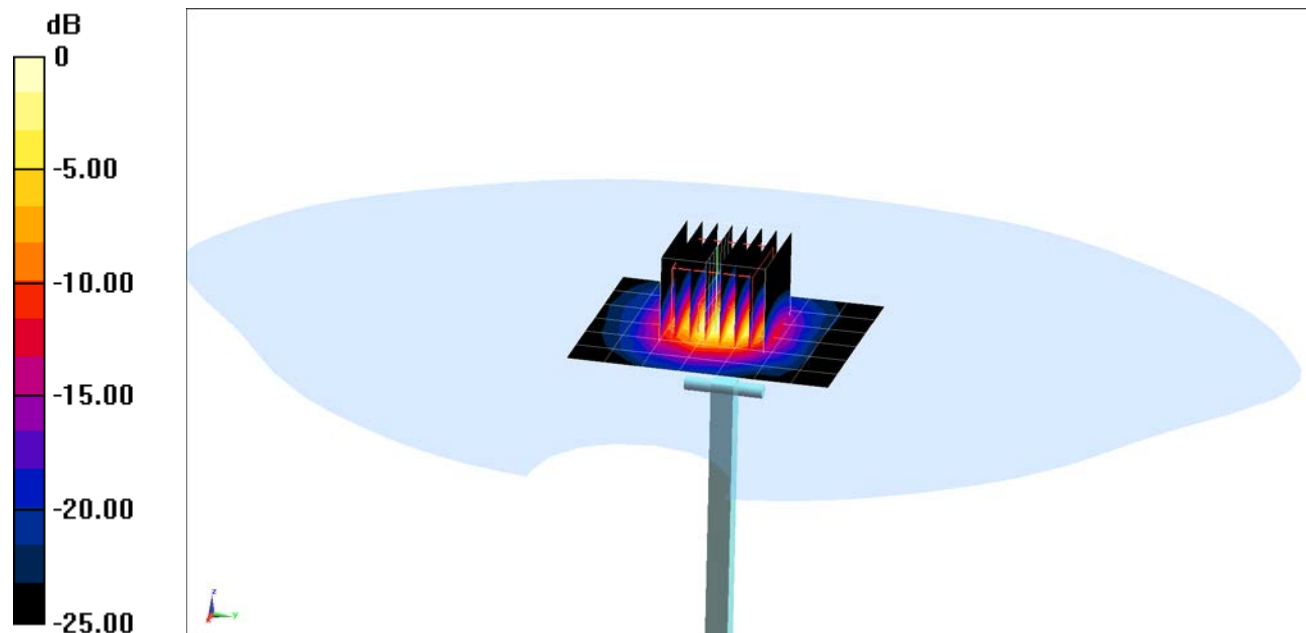

0 dB = 10.6 W/kg = 10.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 4.95 \text{ S/m}$; $\epsilon_r = 34.051$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-15-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7357; ConvF(4.7, 4.7, 4.7); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5500 MHz System Verification

Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio = 1.4

Input Power = 17 dBm (50 mW)

Peak SAR (extrapolated) = 18.2 W/kg

SAR (1 g) = 4.28 W/kg

Deviation (1 g) = 1.54%

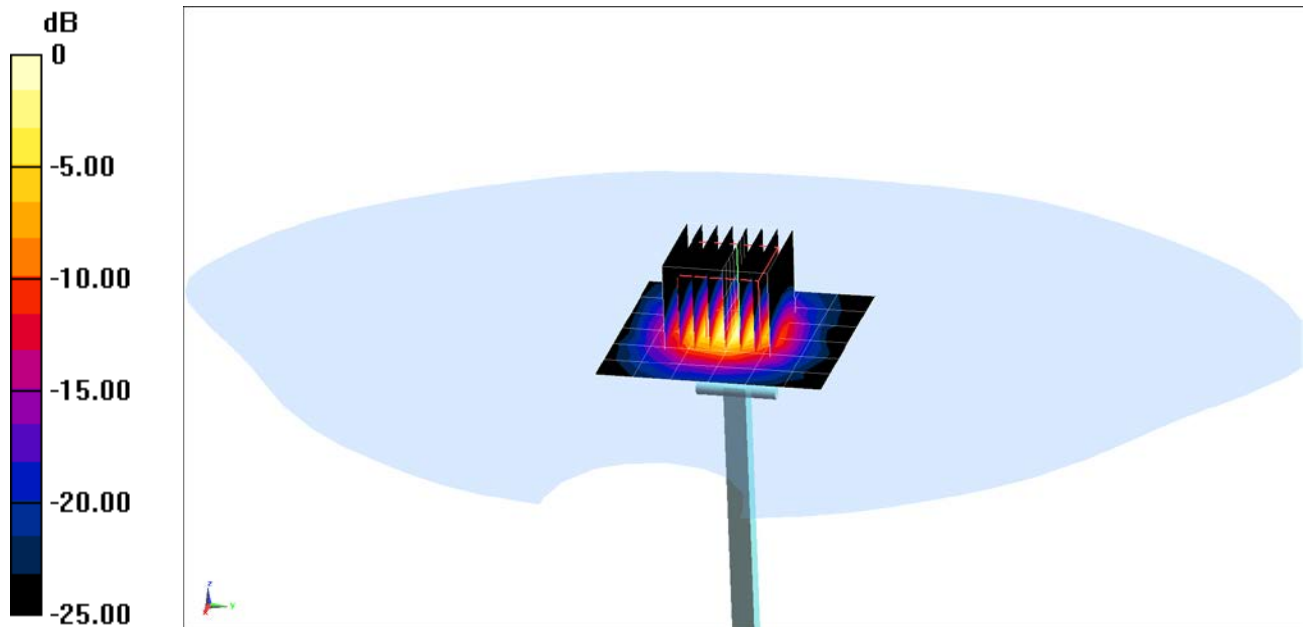

0 dB = 10.0 W/kg = 10.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 5.268 \text{ S/m}$; $\epsilon_r = 33.587$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-15-2015; Ambient Temp: 22.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7357; ConvF(4.41, 4.41, 4.41); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification

Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio = 1.4

Input Power = 17 dBm (50 mW)

Peak SAR (extrapolated) = 18.5 W/kg

SAR (1 g) = 4.20 W/kg

Deviation (1 g) = 3.58%

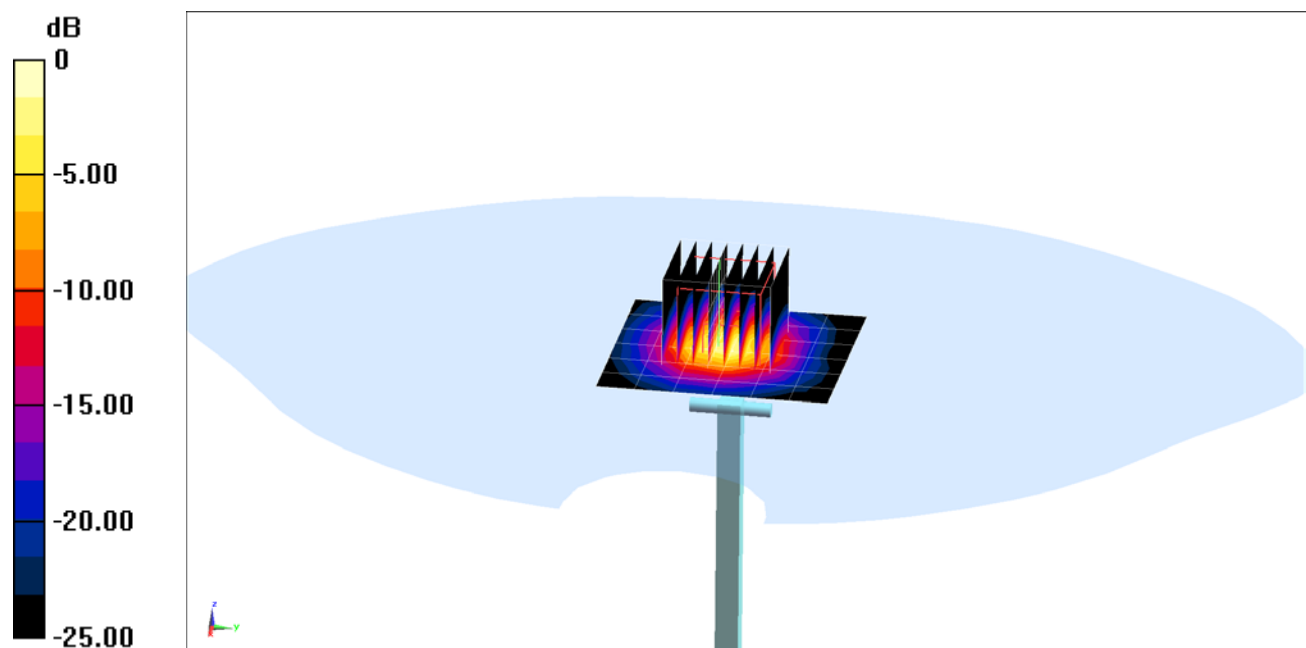

0 dB = 10.3 W/kg = 10.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.969 \text{ S/m}$; $\epsilon_r = 55.255$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-18-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3288; ConvF(6.38, 6.38, 6.38); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 23 dBm (200 mW)

Peak SAR (extrapolated) = 2.55 W/kg

SAR (1 g) = 1.75 W/kg

Deviation (1 g) = 3.43%

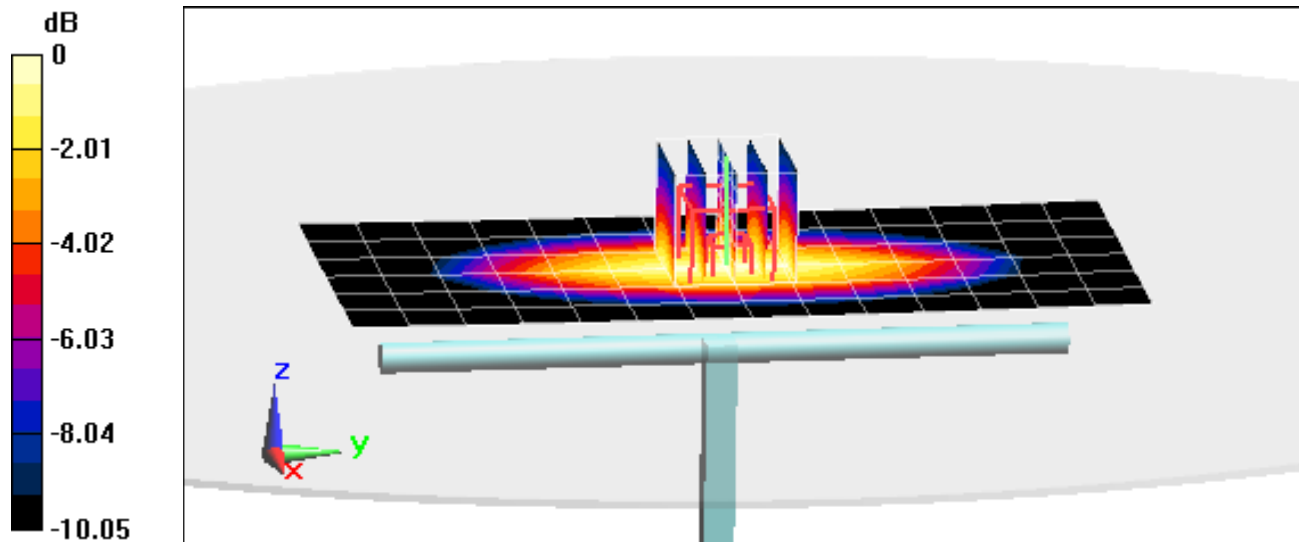

0 dB = 2.04 W/kg = 3.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 53.915$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-13-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 23 dBm (200 mW)

Peak SAR (extrapolated) = 2.95 W/kg

SAR (1 g) = 1.99 W/kg

Deviation (1 g) = 6.42%

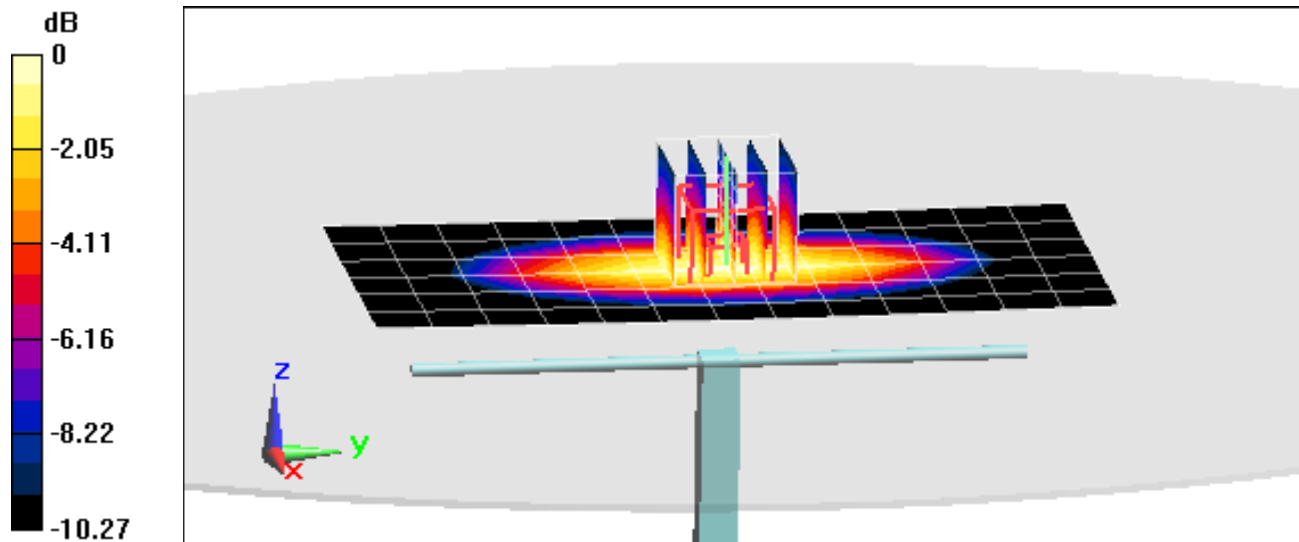

0 dB = 2.33 W/kg = 3.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.469 \text{ S/m}$; $\epsilon_r = 52.019$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2015; Ambient Temp: 22.2°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(4.83, 4.83, 4.83); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.43 W/kg

SAR (1 g) = 3.72 W/kg; SAR (10 g) = 2 W/kg

Deviation (1 g) = 0.27%; Deviation (10 g) = 0.00%

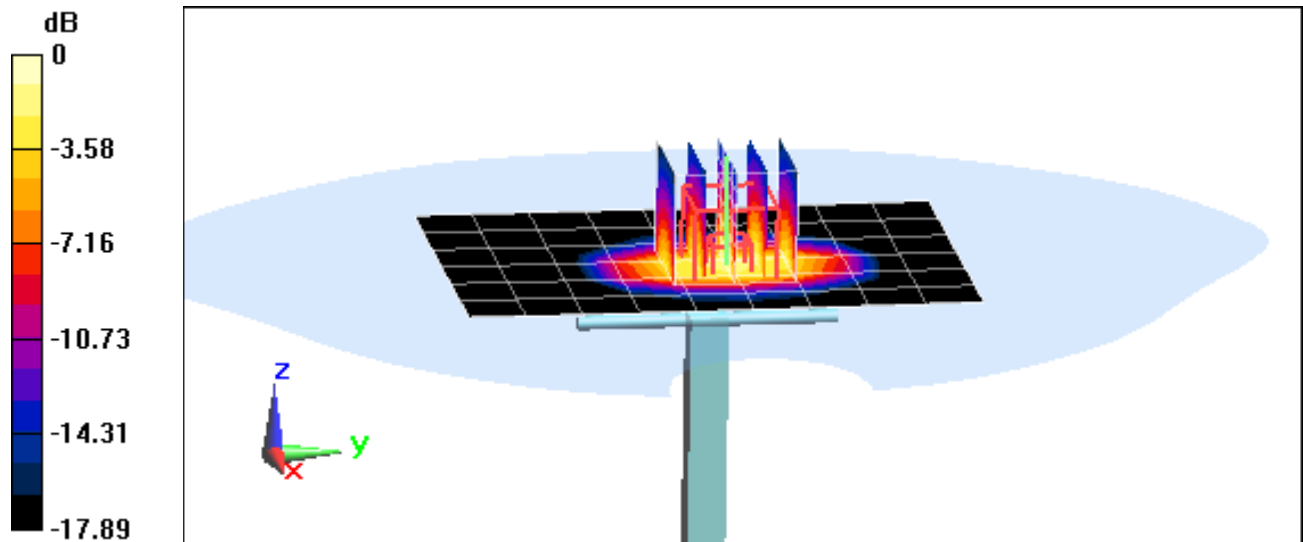

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.499 \text{ S/m}$; $\epsilon_r = 52.362$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-26-2015; Ambient Temp: 20.1°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3319; ConvF(4.83, 4.83, 4.83); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.96 W/kg

SAR (1 g) = 4.01 W/kg; SAR(10 g) = 2.13 W/kg

Deviation (1 g) = 8.09 %; Deviation (10 g) = 6.50 %

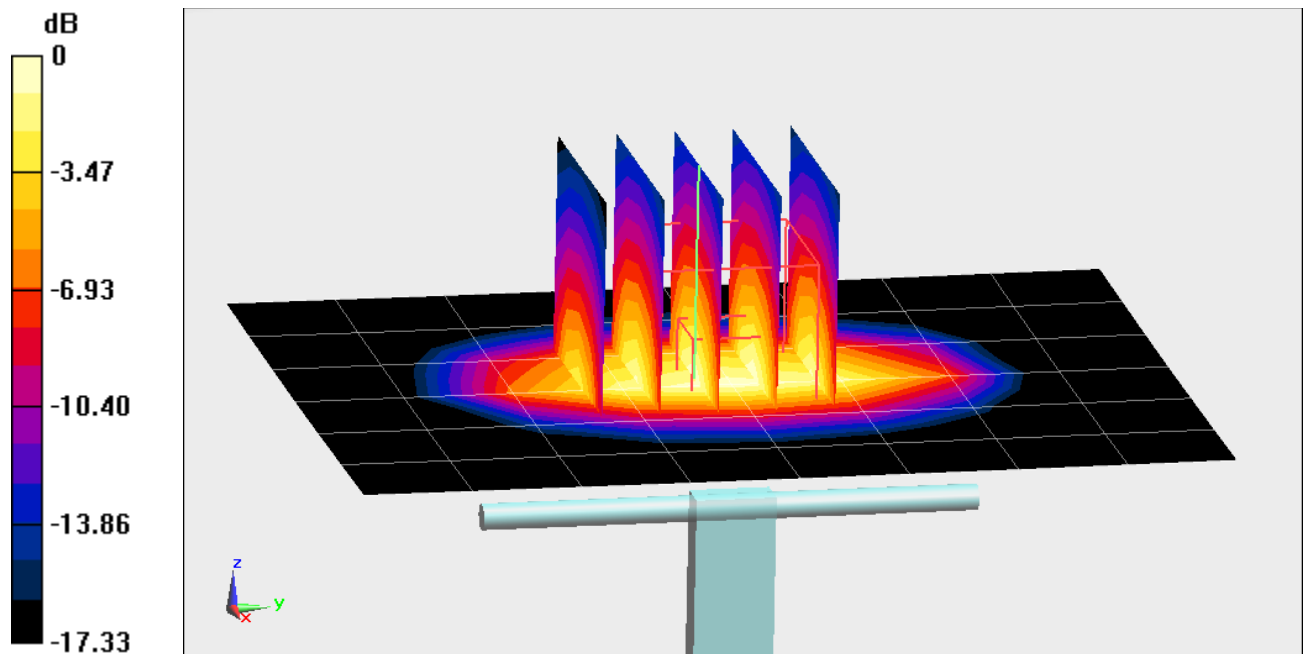

0 dB = 4.96 W/kg = 6.95 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d141

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.563 \text{ S/m}$; $\epsilon_r = 52.38$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-13-2015; Ambient Temp: 22.1°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.49 W/kg

SAR (10 g) = 2.14 W/kg

Deviation (10 g) = 0.94%

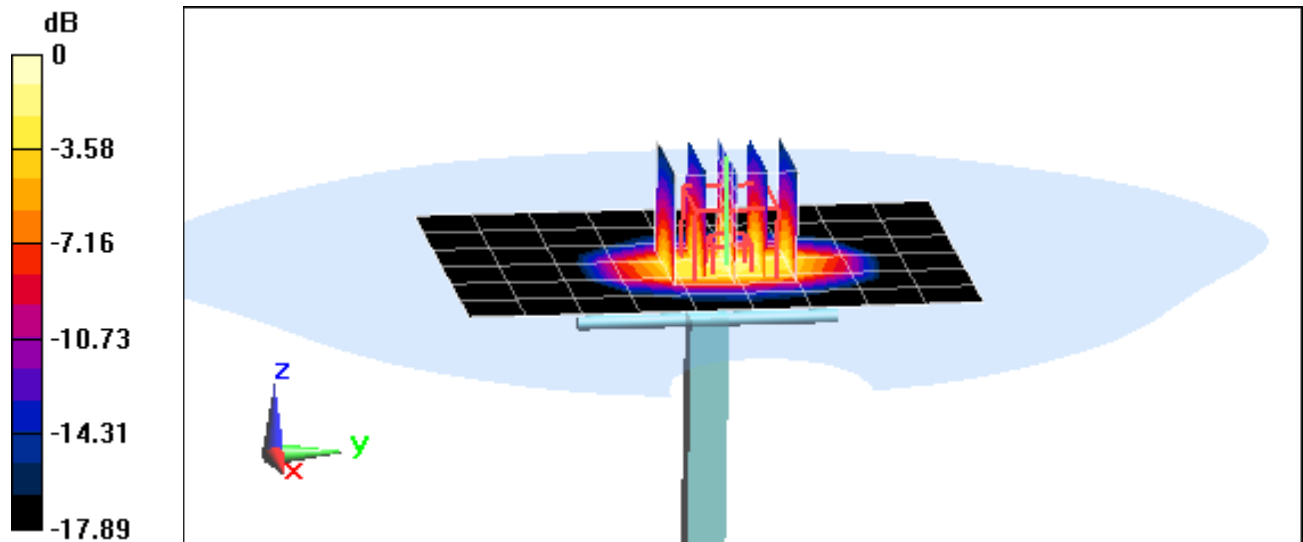

0 dB = 3.82 W/kg = 5.82 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d141

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.567 \text{ S/m}$; $\epsilon_r = 52.802$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-22-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.3°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM Front; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.94 W/kg

SAR (1 g) = 3.82 W/kg

Deviation (1 g) = -4.50%

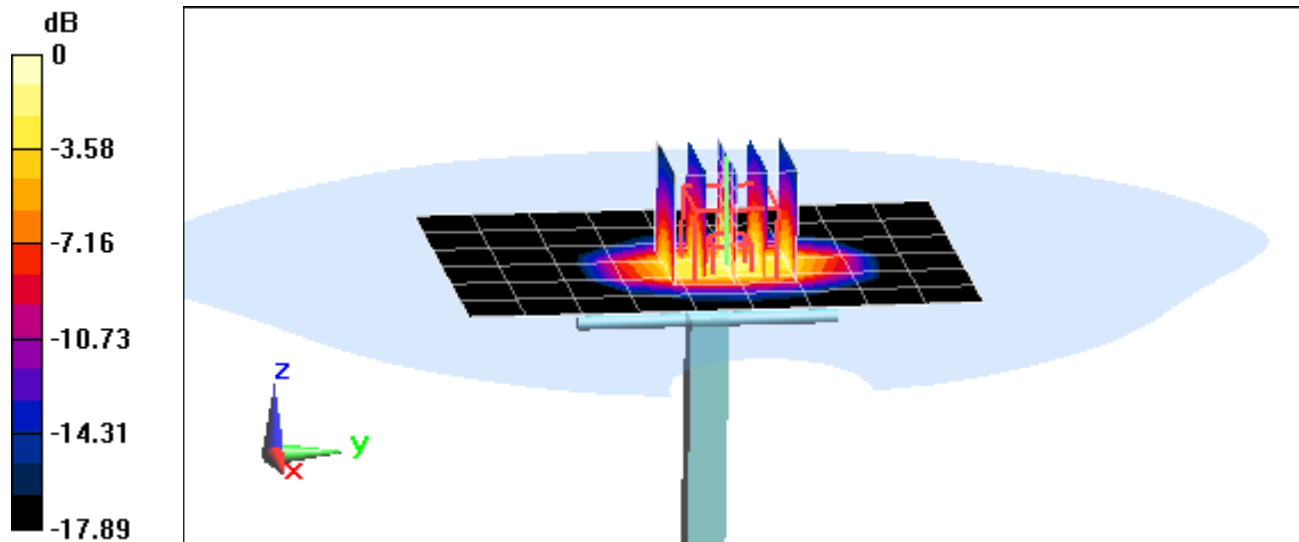

0 dB = 4.85 W/kg = 6.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.566 \text{ S/m}$; $\epsilon_r = 52.531$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-01-2015; Ambient Temp: 21.1°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72); Calibrated: 1/20/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/20/2015

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.48 W/kg

SAR (1 g) = 4.09 W/kg

Deviation (1 g) = 1.24%

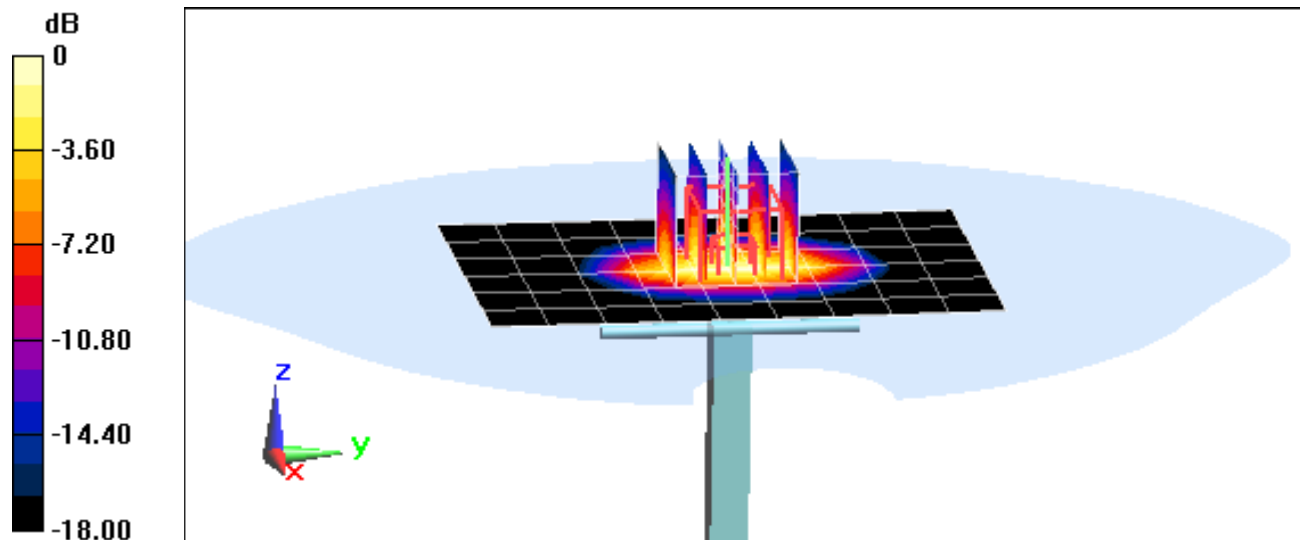

0 dB = 5.28 W/kg = 7.23 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: 2300 Body Medium parameters used:

$f = 2300 \text{ MHz}$; $\sigma = 1.785 \text{ S/m}$; $\epsilon_r = 51.956$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-25-2015; Ambient Temp: 22.3°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3319; ConvF(4.24, 4.24, 4.24); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/13/2015

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2300 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 10.2 W/kg

SAR (1 g) = 5.22 W/kg

Deviation (1 g) = 8.52%

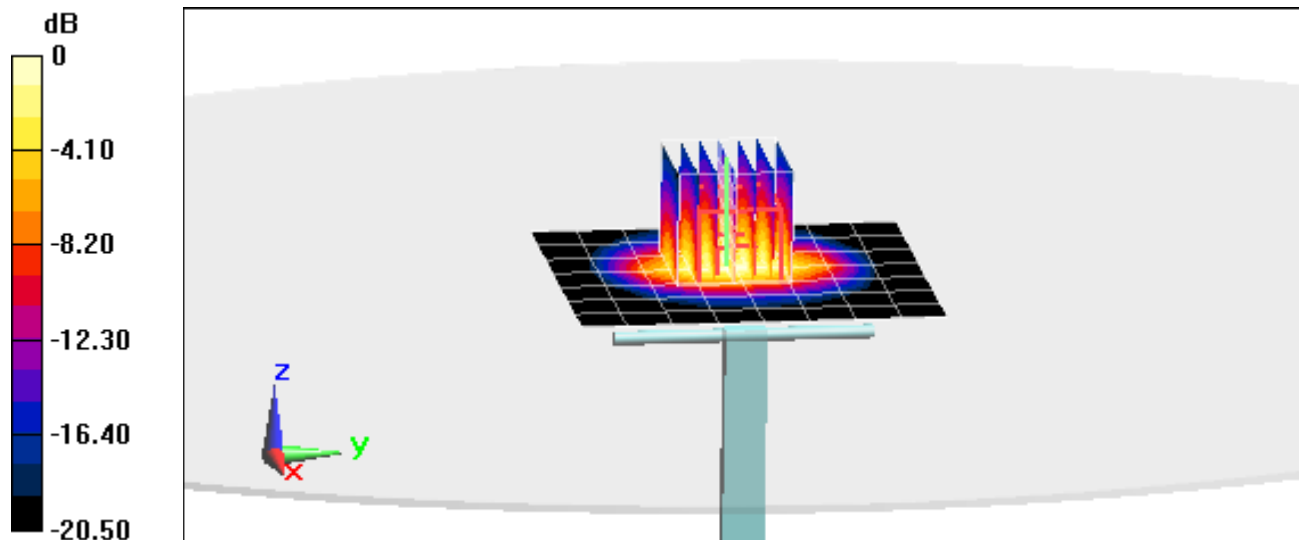

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 51.318$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-20-2015; Ambient Temp: 22.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3332; ConvF(4.31, 4.31, 4.31); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 11.0 W/kg

SAR (1 g) = 5.30 W/kg

Deviation (1 g) = 2.32%

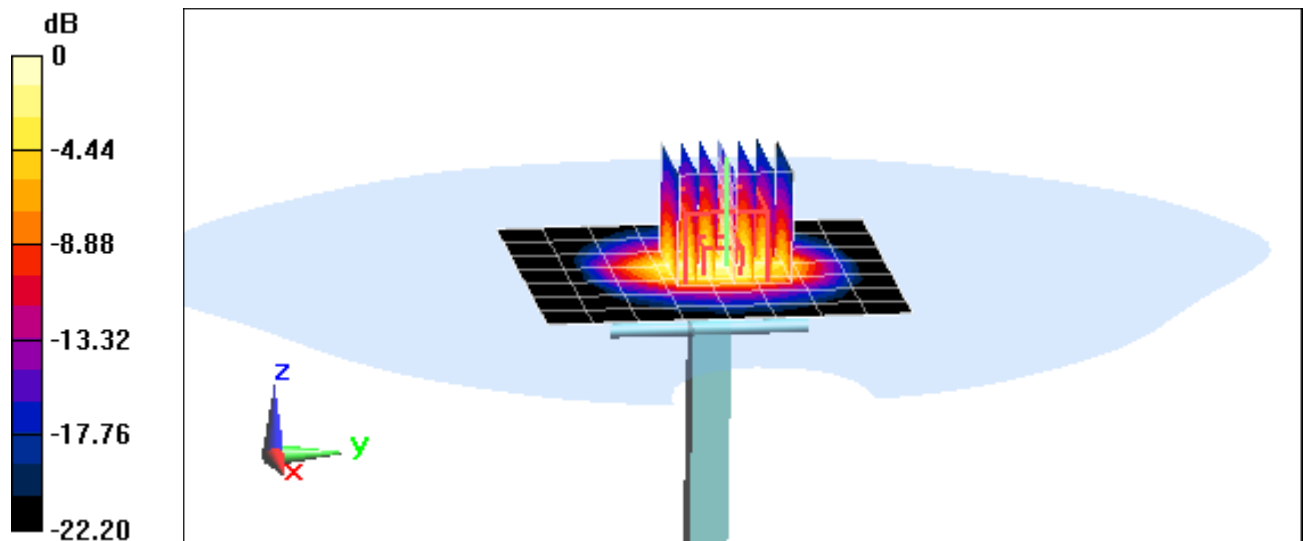

0 dB = 7.00 W/kg = 8.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.035 \text{ S/m}$; $\epsilon_r = 50.882$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-02-2015; Ambient Temp: 23.1°C; Tissue Temp: 21.7°C

Probe: ES3DV3 - SN3209; ConvF(4.12, 4.12, 4.12); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 12.0 W/kg

SAR (1 g) = 5.66 W/kg; SAR (10 g) = 2.61 W/kg

Deviation (1 g) = 9.27%; Deviation (10 g) = 8.75%

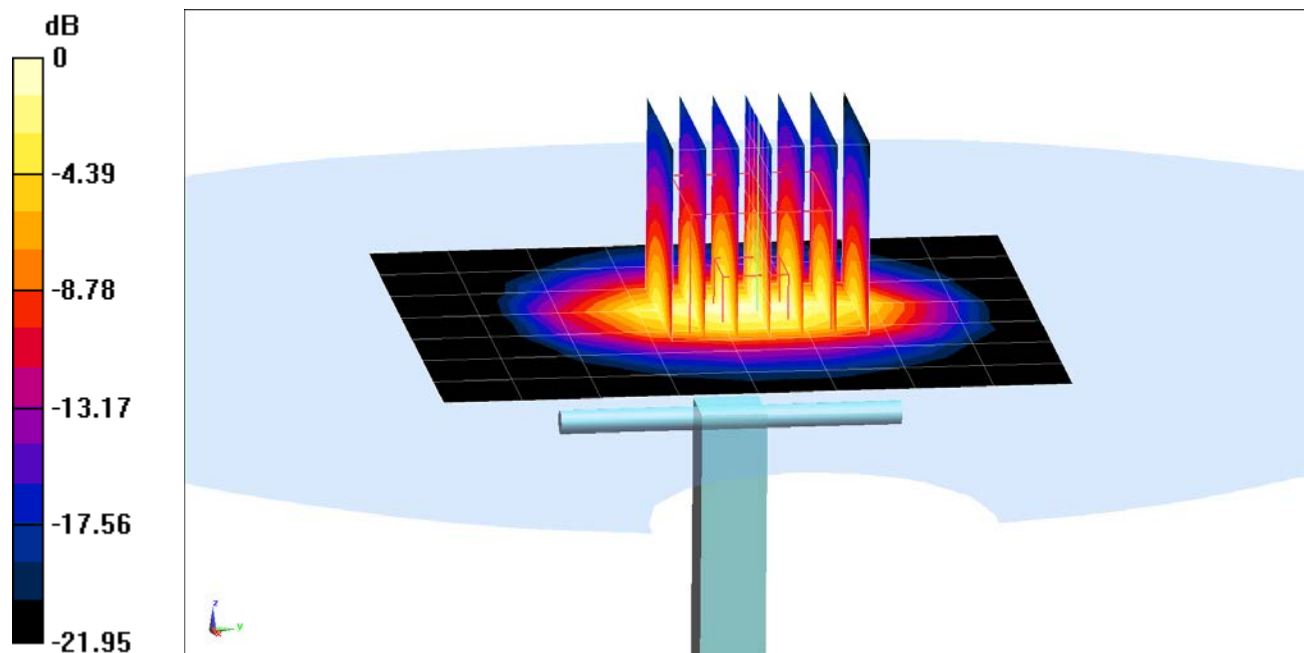

0 dB = 7.48 W/kg = 8.74 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.298 \text{ S/m}$; $\epsilon_r = 48.672$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-15-2015; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.79, 3.79, 3.79); Calibrated: 1/22/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio = 1.4

Input Power = 17 dBm (50 mW)

Peak SAR (extrapolated) = 15.5 W/kg

SAR (1 g) = 3.77 W/kg; SAR (10 g) = 1.06 W/kg

Deviation (1 g) = 1.62%; Deviation (10 g) = 1.44%

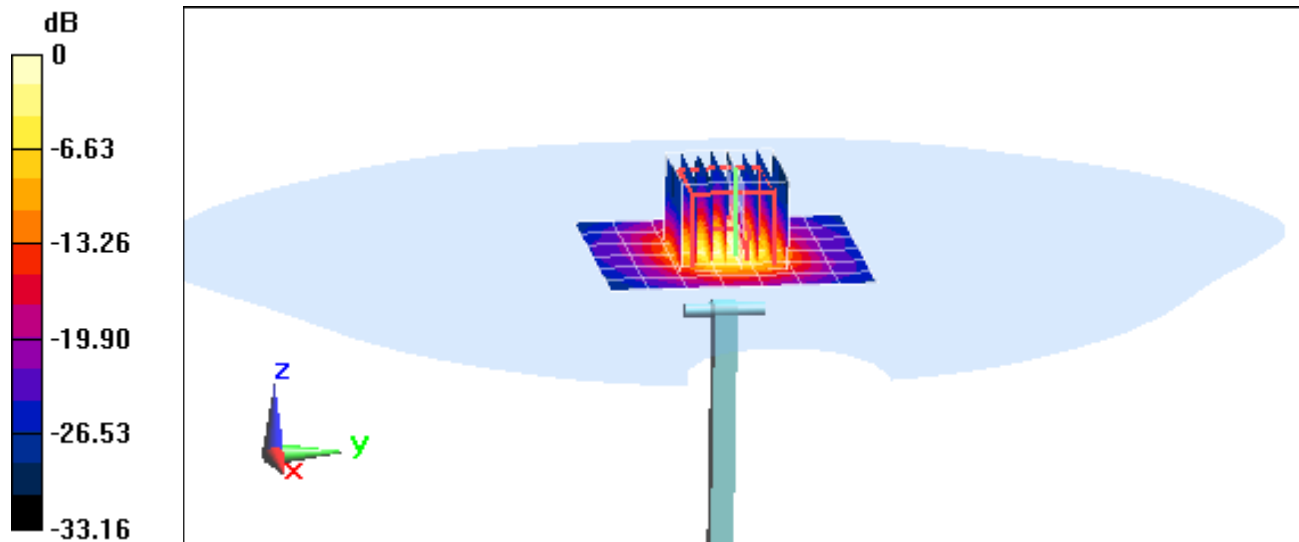

0 dB = 8.74 W/kg = 9.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.561 \text{ S/m}$; $\epsilon_r = 48.347$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-15-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3589; ConvF(3.65, 3.65, 3.65); Calibrated: 1/22/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5500 MHz System Verification

Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio = 1.4

Input Power = 17 dBm (50 mW)

Peak SAR (extrapolated) = 16.5 W/kg

SAR (1 g) = 3.81 W/kg; SAR (10 g) = 1.07 W/kg

Deviation (1 g) = -3.79%; Deviation (10 g) = -2.73%

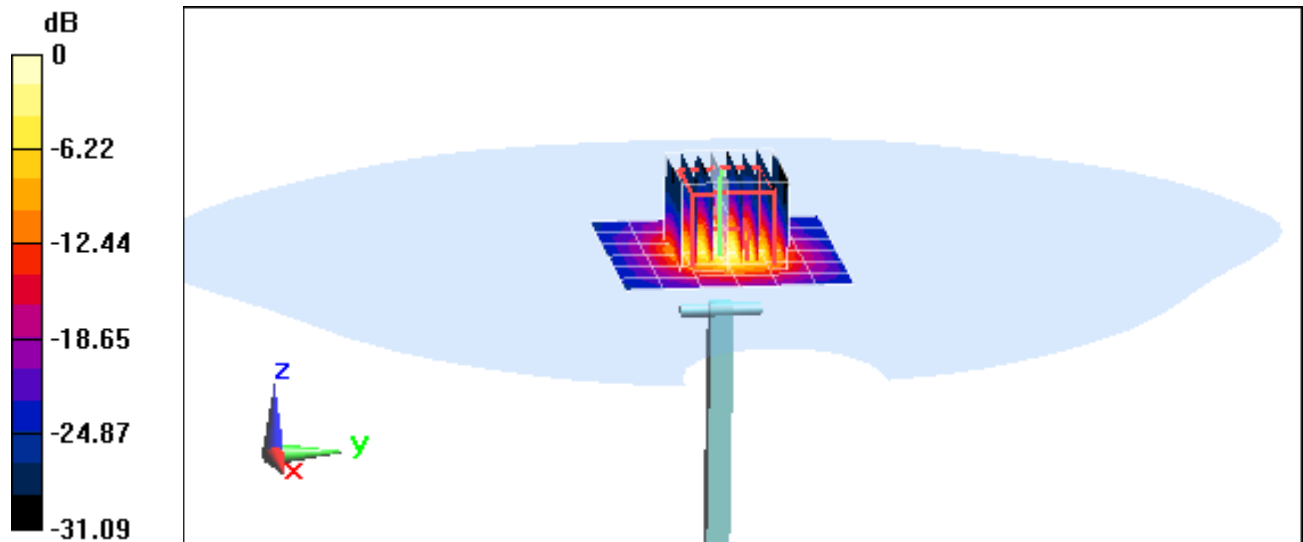

0 dB = 8.94 W/kg = 9.51 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 5.96 \text{ S/m}$; $\epsilon_r = 47.927$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-15-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3589; ConvF(3.79, 3.79, 3.79); Calibrated: 1/22/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio =1.4

Input Power = 17 dBm (50 mW)

Peak SAR (extrapolated) = 15.6 W/kg

SAR (1 g) = 3.39 W/kg

Deviation (1 g) = -9.72%

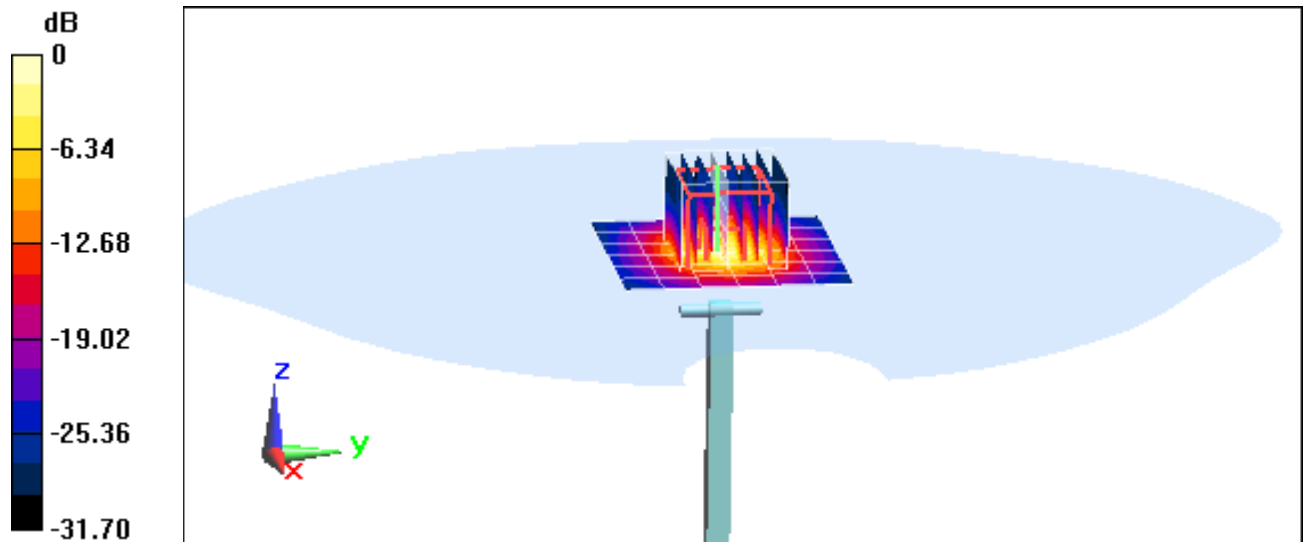

APPENDIX C: PROBE CALIBRATION



Accreditation No.: **SCS 0108**

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Certificate No: **D750V3-1003_Jan15**

Client **PC Test**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1003**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

CC
2/3/15

Calibration date: **January 16, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** Michael Weber **Function** Laboratory Technician

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: January 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.7 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.09 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.32 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	56.0 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.46 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.58 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.7 Ω - 1.4 j Ω
Return Loss	- 28.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.3 Ω - 3.8 j Ω
Return Loss	- 27.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.043 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 21, 2009

DASY5 Validation Report for Head TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.44, 6.44, 6.44); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.08 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 2.06 W/kg; SAR(10 g) = 1.35 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

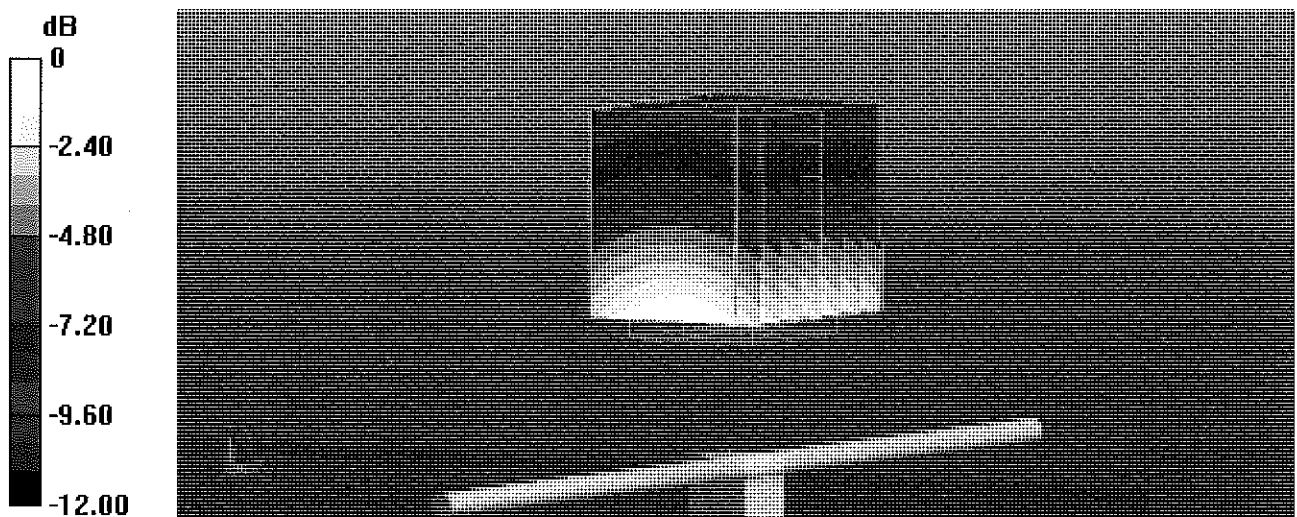


0 dB = 2.41 W/kg = 3.82 dBW/kg


Impedance Measurement Plot for Head TSL

16 Jan 2015 16:07:22
CH1 S11 1 U FS 1: 53.666 Ω -1.3730 Δ 154.55 pF 750.000 000 MHz

*
Del
CA

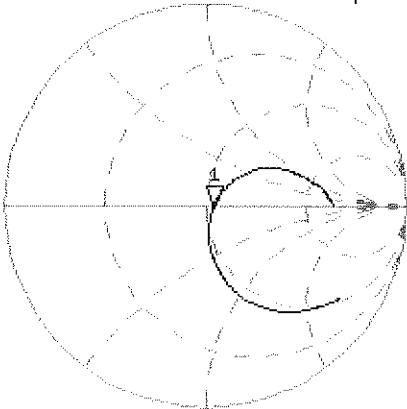

Avg
16
H1d

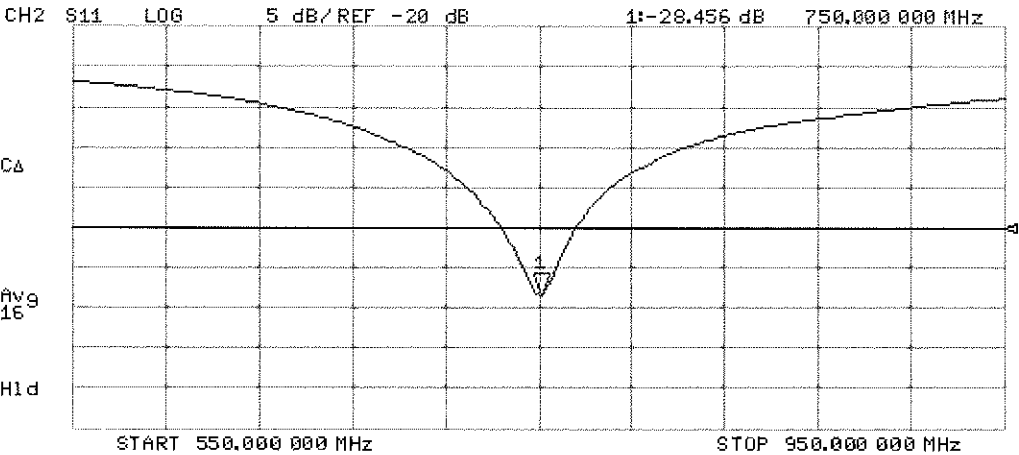

DASY5 Validation Report for Body TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.21, 6.21, 6.21); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.21 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.42 W/kg


Maximum value of SAR (measured) = 2.52 W/kg

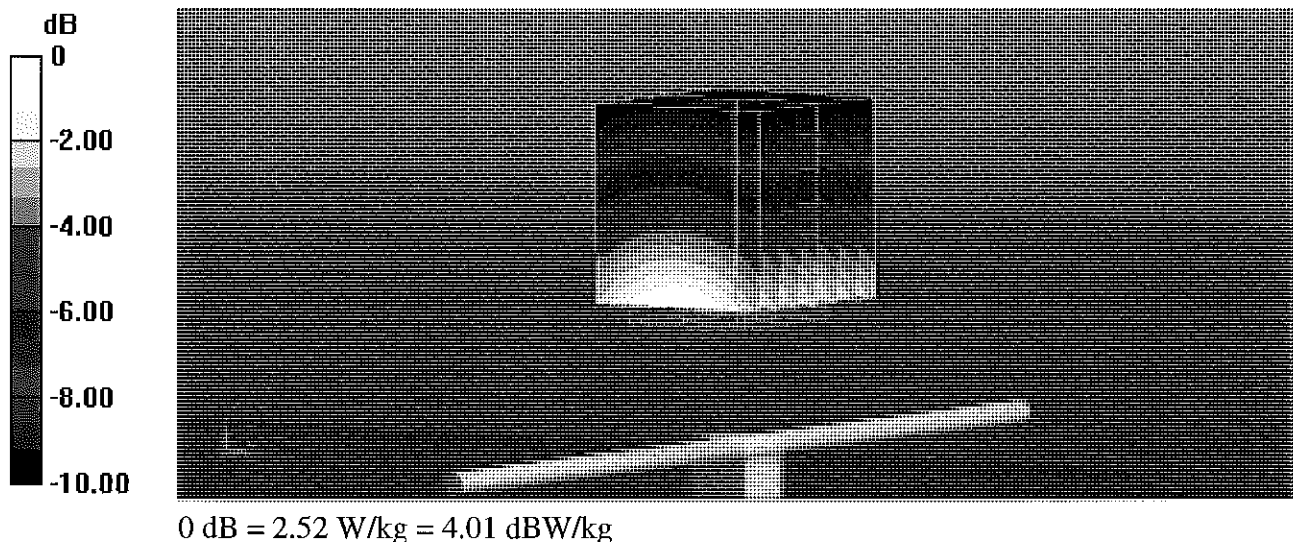

Impedance Measurement Plot for Body TSL

16 Jan 2015 13:37:35
[CH1] S11 1 U FS 1: 48.268 Ω -3.7676 Ω 56.324 pF 750.000 000 MHz

*
De1
CA

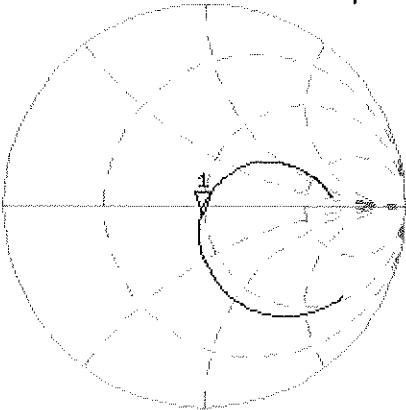


Avg
16
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.498 dB 750.000 000 MHz

CA

Avg
16
H1d

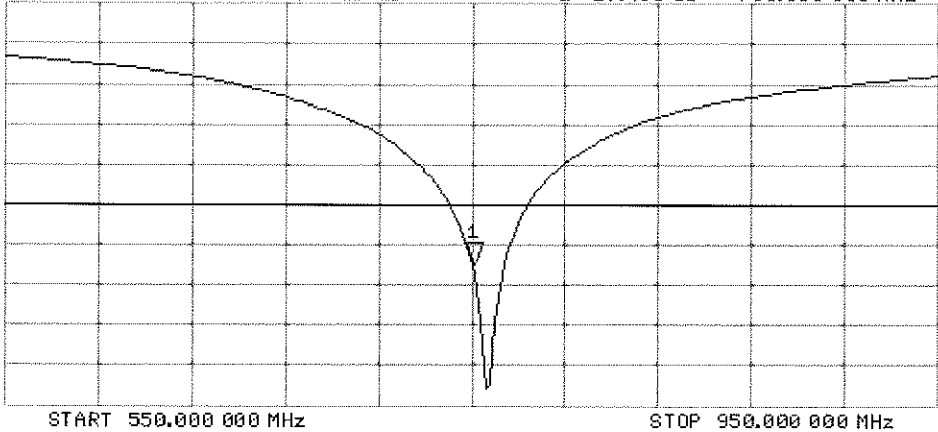



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132_Jan15**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d132**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

CC
 2/3/15

Calibration date: **January 16, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: January 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.5 $\pm$ 6 %	0.93 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.25 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.04 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.8 $\pm$ 6 %	1.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.35 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.14 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.53 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.98 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 Ω - 2.3 j Ω
Return Loss	- 30.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.5 Ω - 4.3 j Ω
Return Loss	- 25.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.385 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

DASY5 Validation Report for Head TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.2, 6.2, 6.2); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.27 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.51 W/kg


SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 2.77 W/kg

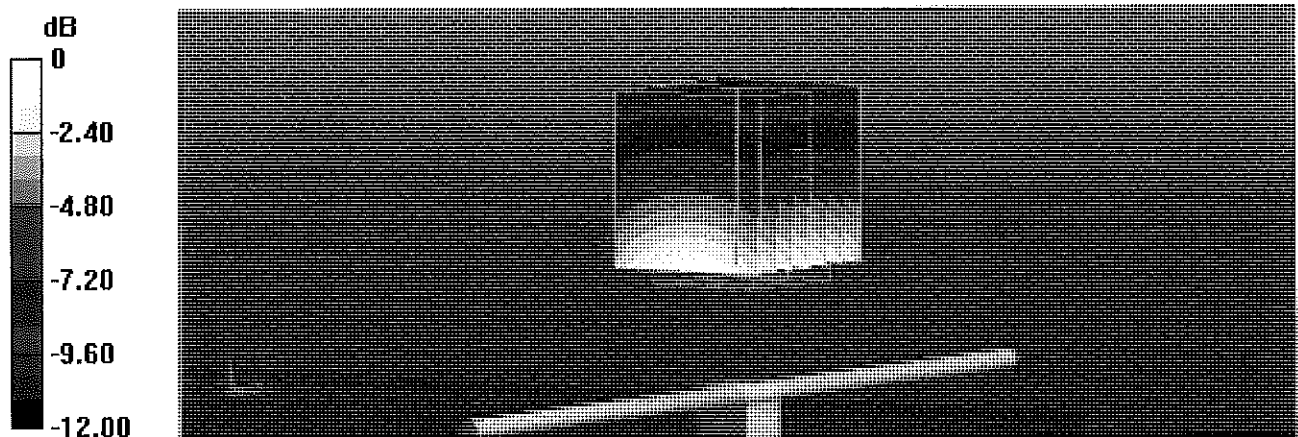

0 dB = 2.77 W/kg = 4.42 dBW/kg

Impedance Measurement Plot for Head TSL

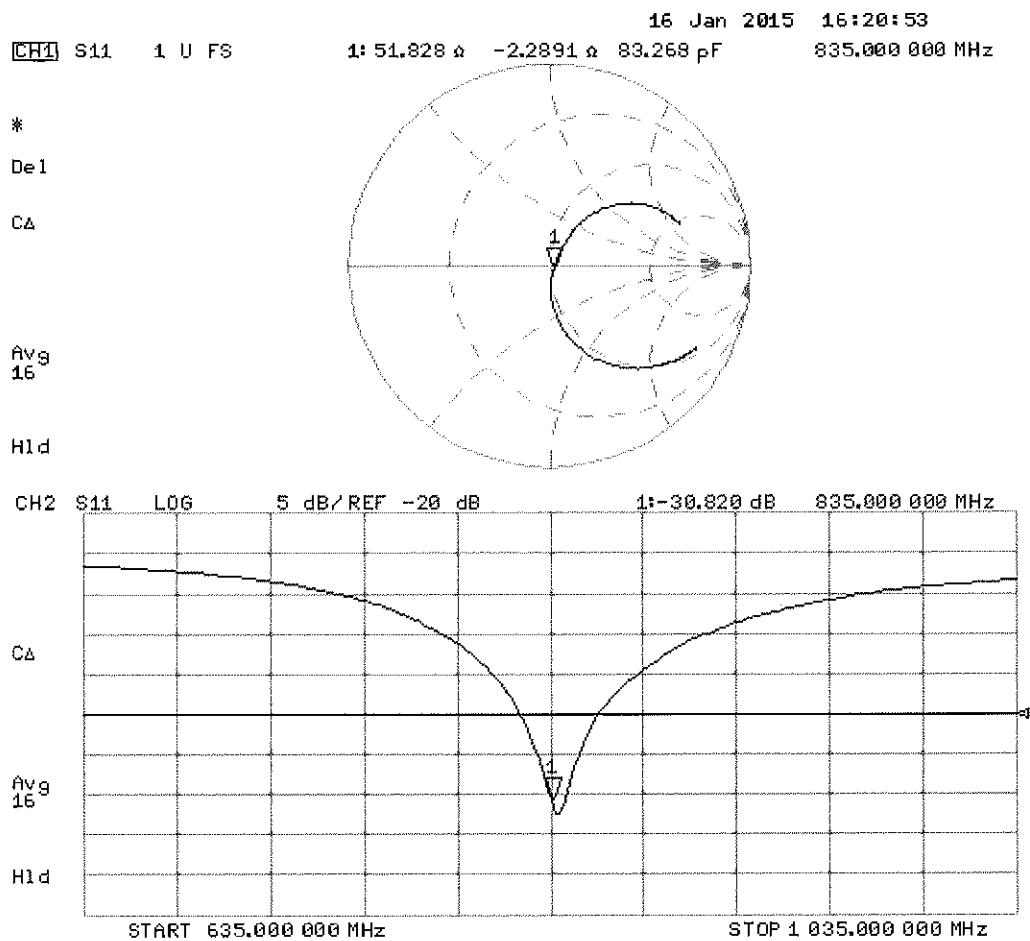

DASY5 Validation Report for Body TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 55.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.17, 6.17, 6.17); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.27 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.53 W/kg


Maximum value of SAR (measured) = 2.75 W/kg

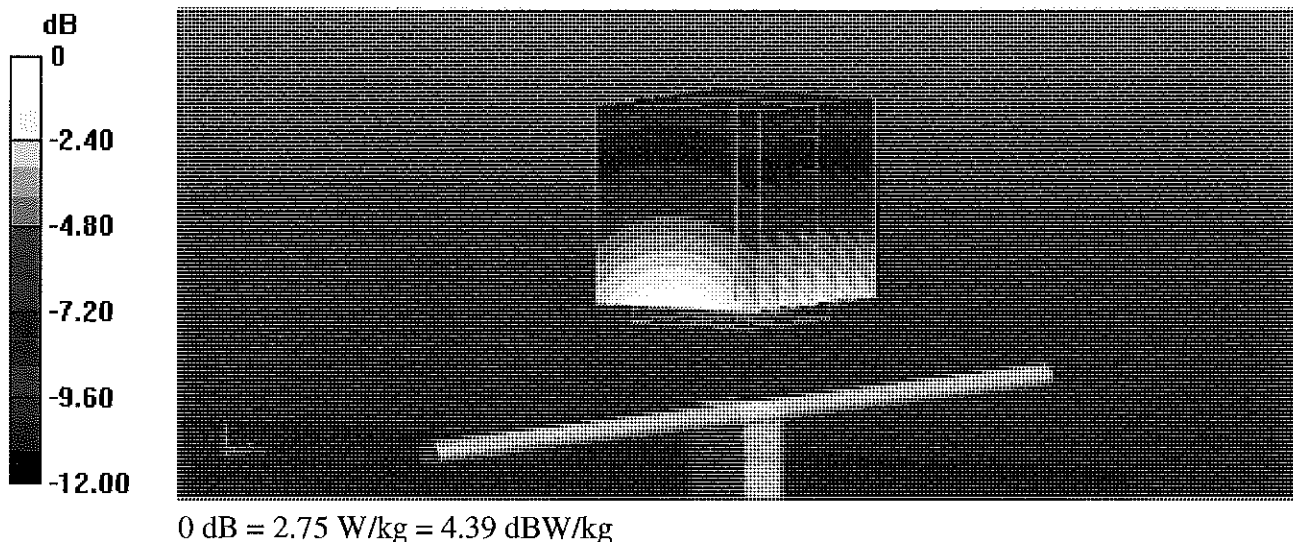

Impedance Measurement Plot for Body TSL

16 Jan 2015 13:51:19
 CH1 S11 1 U FS 1: 47.498 Ω -4.2520 Ω 44.828 pF 835.000 000 MHz

*
 Del
 CA

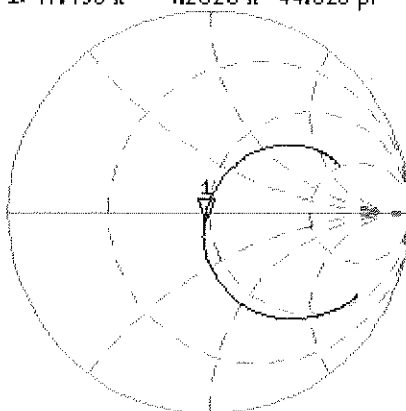


Avg
 16
 H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.931 dB 835.000 000 MHz

CA

Avg
 16

H1d

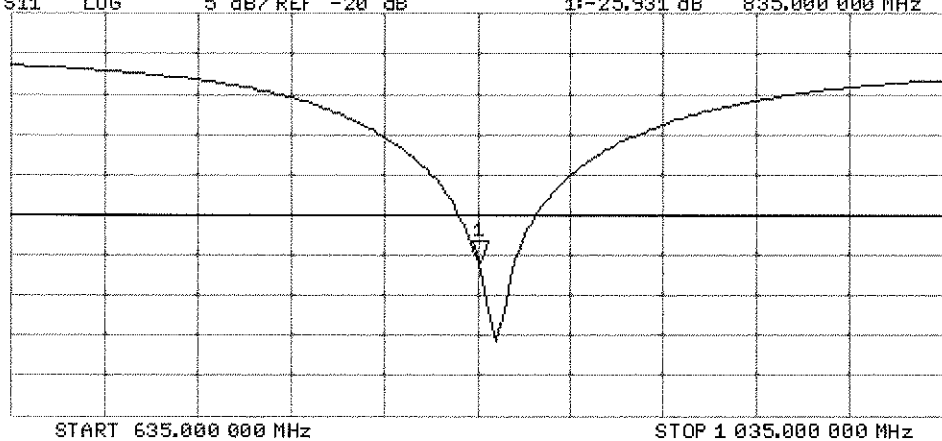



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1750V2-1051_Apr15**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1051**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

PM ✓
 4/29/15

Calibration date: **April 15, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: April 15, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.9 $\pm$ 6 %	1.35 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.04 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.80 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.2 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.5 $\pm$ 6 %	1.48 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.32 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.01 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.0 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.3 Ω - 0.2 j Ω
Return Loss	- 37.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.9 Ω + 0.3 j Ω
Return Loss	- 29.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.221 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 19, 2010

DASY5 Validation Report for Head TSL

Date: 15.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1051

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.2, 5.2, 5.2); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.99 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.04 W/kg; SAR(10 g) = 4.8 W/kg

Maximum value of SAR (measured) = 11.5 W/kg

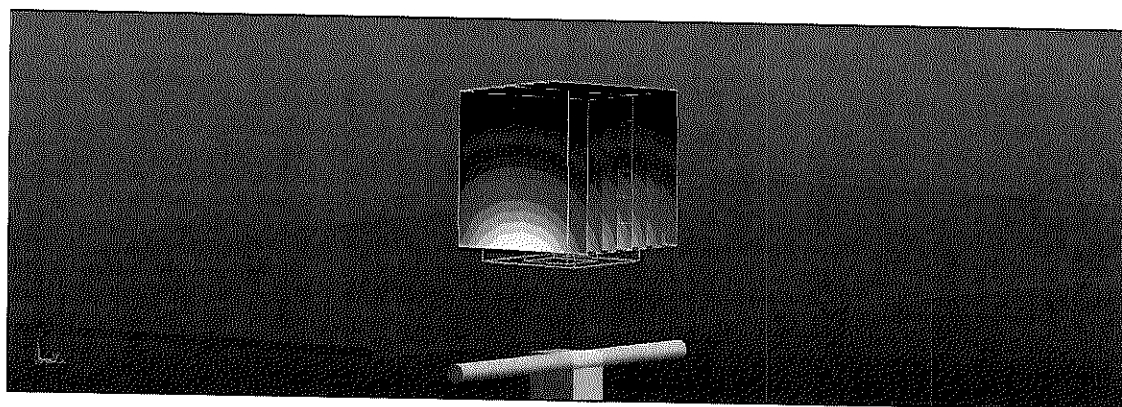

0 dB = 11.5 W/kg = 10.61 dBW/kg

Impedance Measurement Plot for Head TSL

CH1

S11

1 U FS

3: 51.330 Ω

-248.05 m Ω

366.65 pF

1 750.000 000 MHz

*


Del

C Δ

Avg

16

H1d

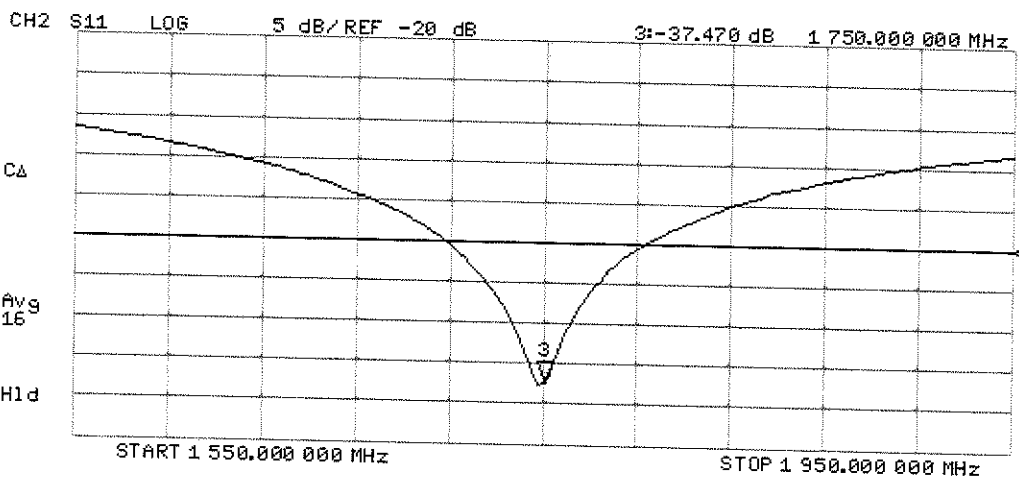

DASY5 Validation Report for Body TSL

Date: 15.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1051

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.88, 4.88, 4.88); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.87 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 9.32 W/kg; SAR(10 g) = 5.01 W/kg

Maximum value of SAR (measured) = 11.7 W/kg

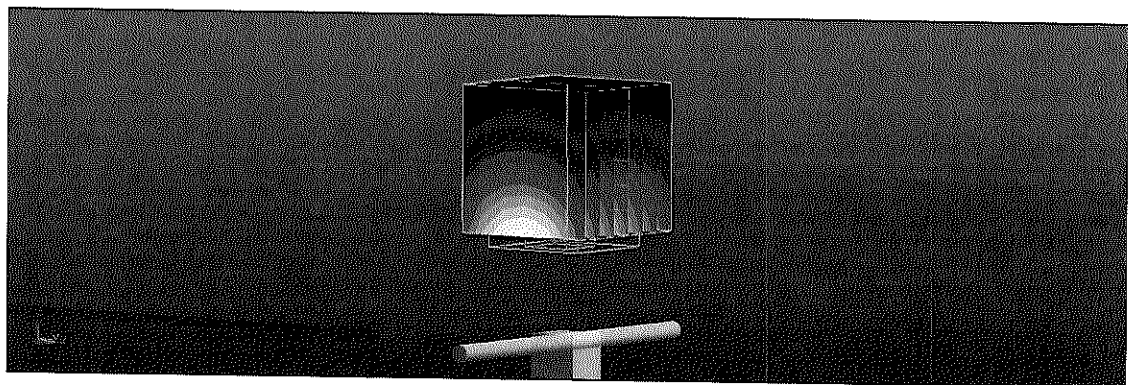


0 dB = 11.7 W/kg = 10.68 dBW/kg

Impedance Measurement Plot for Body TSL


15 Apr 2015 12:23:57
 [CH1] S11 1 U FS 3: 46.930 Ω 0.3242 Ω 29.486 pH 1 750.000 000 MHz

*
 Del
 Ca
 Avg
 16
 H1 d

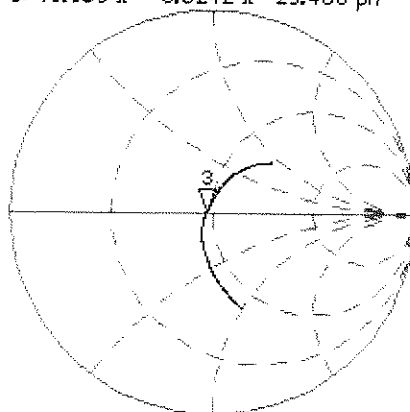

CH2 S11 LOG 5 dB/REF -20 dB 3:-29.939 dB 1 750.000 000 MHz

Ca
 Avg
 16
 H1 d

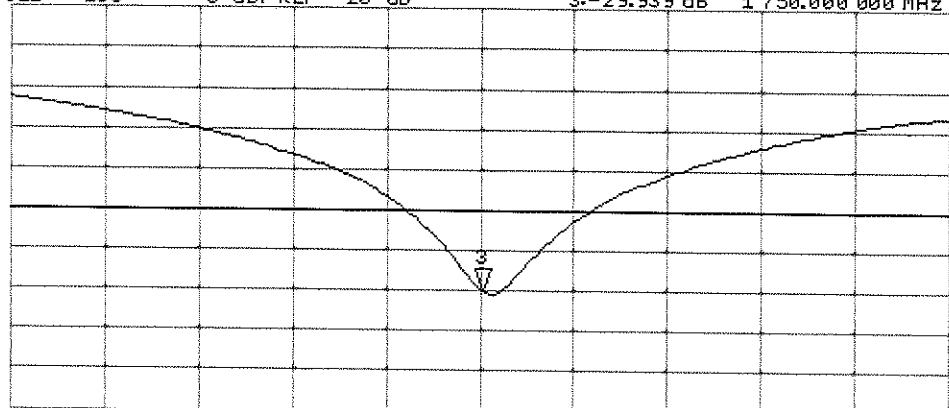

START 1 550.000 000 MHz

STOP 1 950.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1900V2-5d141_Apr15**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d141**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **April 14, 2015**

PN ✓
 4/29/15

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** Claudio Leubler **Function** Laboratory Technician

Signature

Approved by: **Name** Katja Pokovic **Function** Technical Manager

Issued: April 14, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.6 $\pm$ 6 %	1.37 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.93 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.9 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.9 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.8 $\pm$ 6 %	1.50 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.94 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.0 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.29 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.2 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.0 \Omega + 4.6 j\Omega$
Return Loss	- 25.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.2 \Omega + 5.6 j\Omega$
Return Loss	- 24.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.198 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 14.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d141

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5, 5, 5); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.18 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 9.93 W/kg; SAR(10 g) = 5.2 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

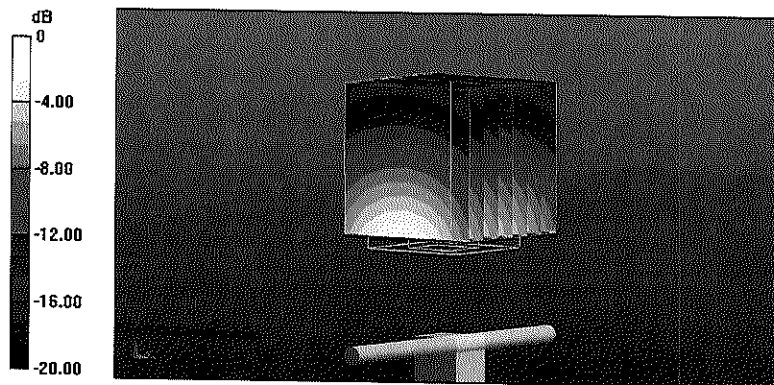


0 dB = 12.5 W/kg = 10.97 dBW/kg

Impedance Measurement Plot for Head TSL

14 Apr 2015 13:39:53
 [CH1] S11 1 U FS 1: 53.010 Ω 4.5664 Ω 382.51 pF 1 900.000 000 MHz

*
 De1
 CA

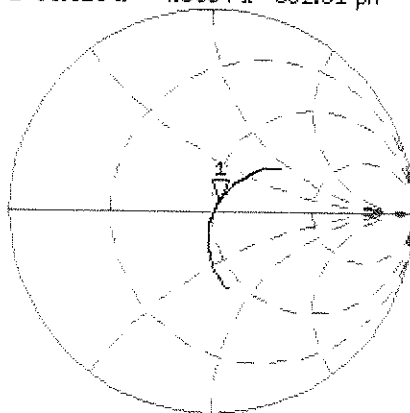

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.507 dB 1 900.000 000 MHz

CA

Avg
 16

H1d

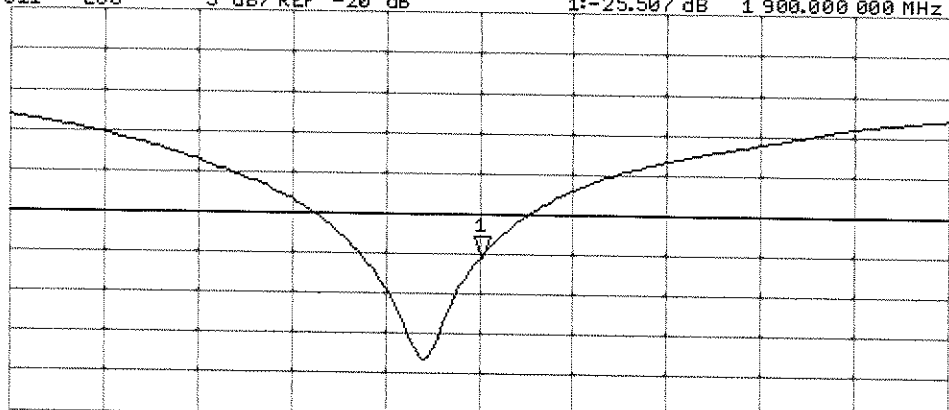

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 14.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d141

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.73 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.94 W/kg; SAR(10 g) = 5.29 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

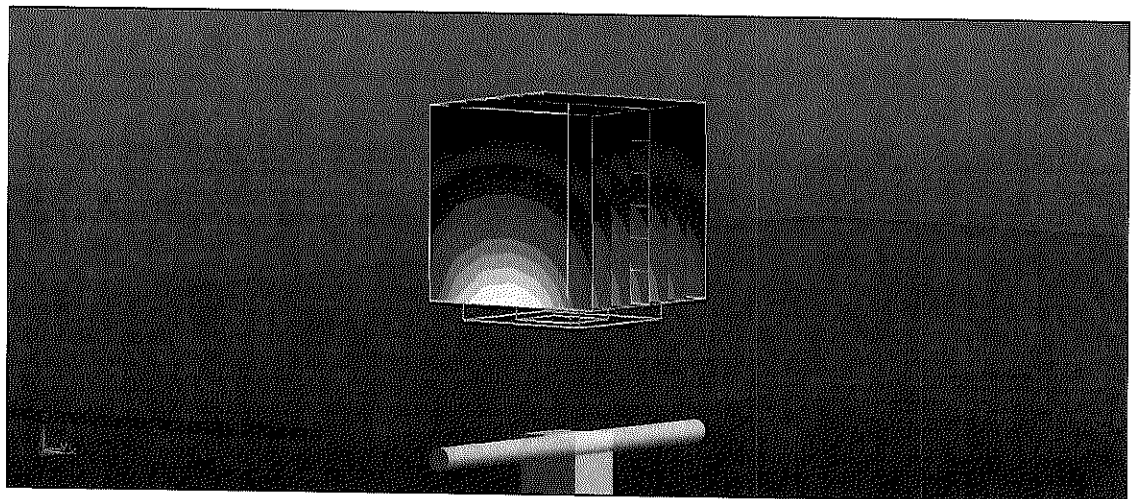


0 dB = 12.5 W/kg = 10.97 dBW/kg

Impedance Measurement Plot for Body TSL


14 Apr 2015 13:39:04
 CH1 S11 1 U FS 1: 48.211 Ω 5.5664 Ω 466.27 pF 1 900.000 000 MHz

*
 Del
 CA
 Avg
 16
 H1d

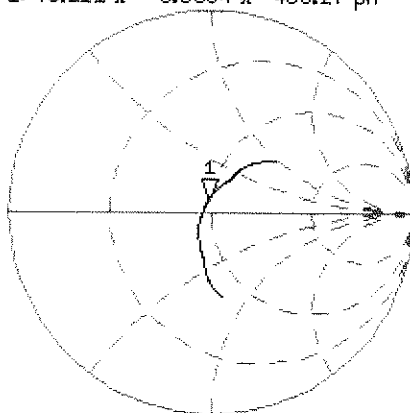

CH2 S11 LOG 5 dB/REF -20 dB 1:-24,520 dB 1 900.000 000 MHz

CA
 Avg
 16
 H1d

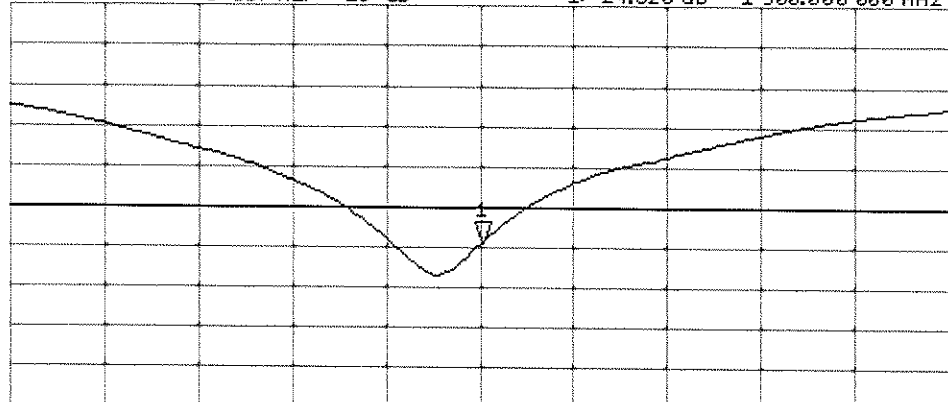

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2300V2-1008_Jan15**

CALIBRATION CERTIFICATE

Object **D2300V2 - SN:1008**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

CC
2/3/15

Calibration date: **January 27, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 27, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2300 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.5	1.67 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.9 $\pm$ 6 %	1.71 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.6 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	49.9 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.04 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.9	1.81 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.0 $\pm$ 6 %	1.85 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.2 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	48.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.81 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.0 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.8 Ω - 2.0 j Ω
Return Loss	- 32.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.8 Ω - 1.5 j Ω
Return Loss	- 26.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.169 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 30, 2007

DASY5 Validation Report for Head TSL

Date: 27.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.75, 4.75, 4.75); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Dipole Calibration for Head Tissue/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.6 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 24.1 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 6.04 W/kg

Maximum value of SAR (measured) = 16.3 W/kg

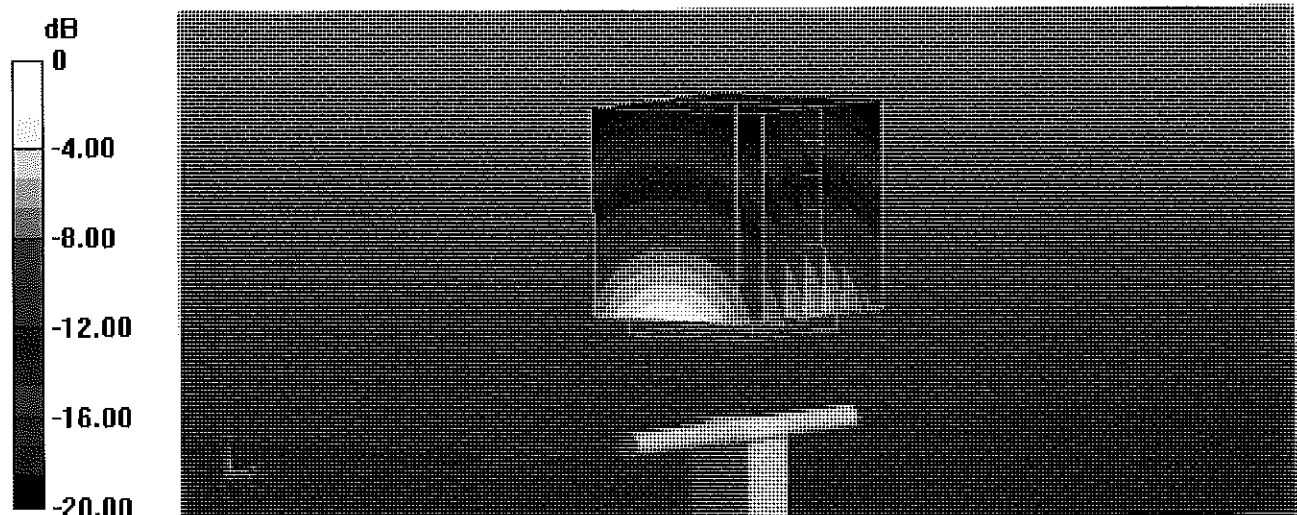


0 dB = 16.3 W/kg = 12.12 dBW/kg

Impedance Measurement Plot for Head TSL


26 Jan 2015 17:09:25
CH1 S11 1 U FS 2: 48.832 Ω -2.0469 Δ 33.807 pF 2 300.000 000 MHz

*
De1
CA
Avg
16
H1d

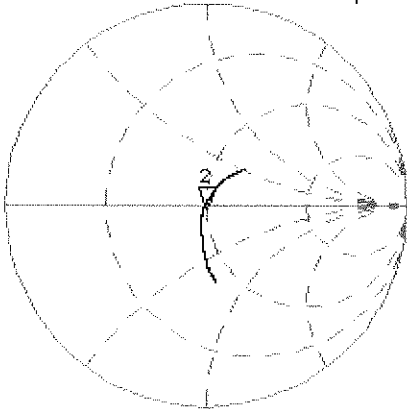

CH2 S11 LOG 5 dB/REF -20 dB 2:-32.452 dB 2 300.000 000 MHz

CA
Avg
16
H1d

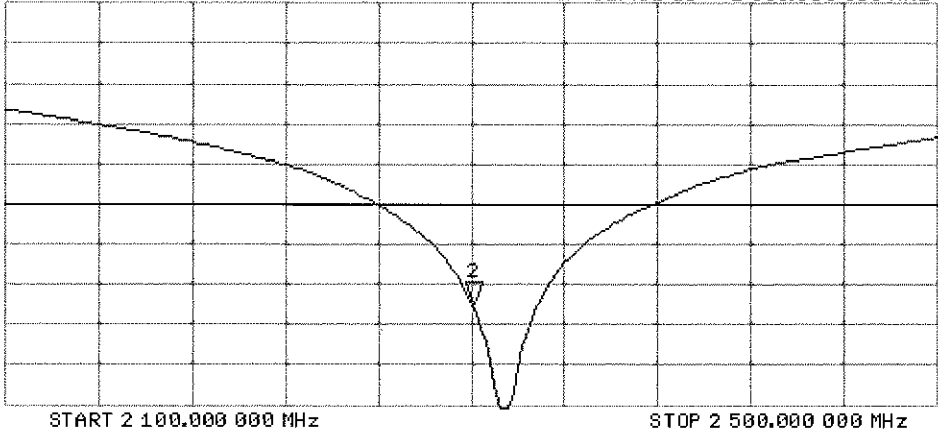

DASY5 Validation Report for Body TSL

Date: 27.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.44, 4.44, 4.44); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)



Dipole Calibration for Body Tissue/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.62 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 24.0 W/kg

SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.81 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

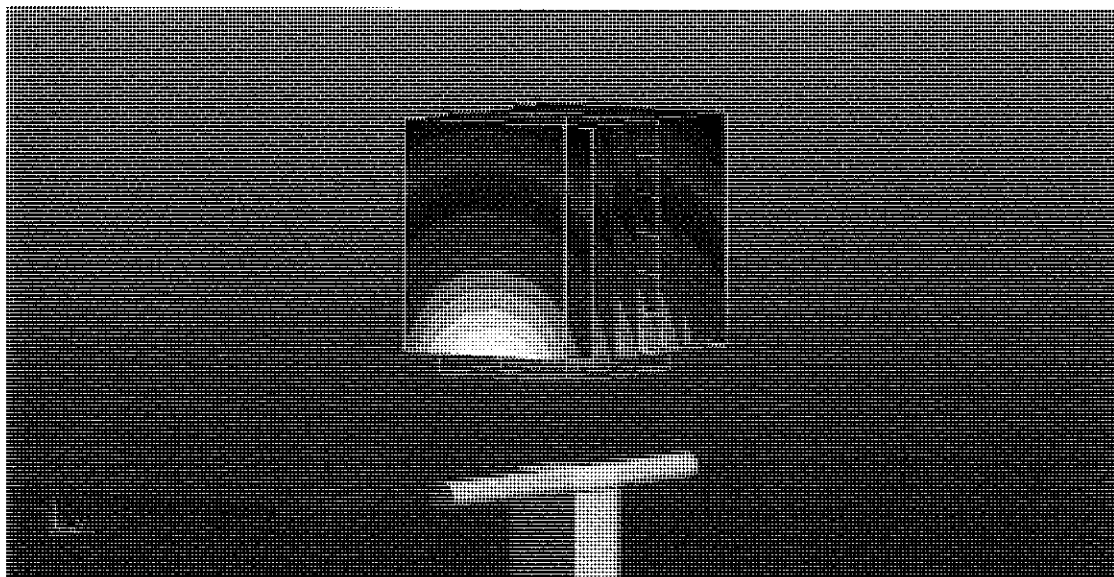


0 dB = 15.7 W/kg = 11.96 dBW/kg

Impedance Measurement Plot for Body TSL

26 Jan 2015 17:08:00
[CH1] S11 1 U FS 2: 45.758 Ω -1.4863 Ω 46.556 pF 2 300.000 000 MHz

*
Del
C Δ

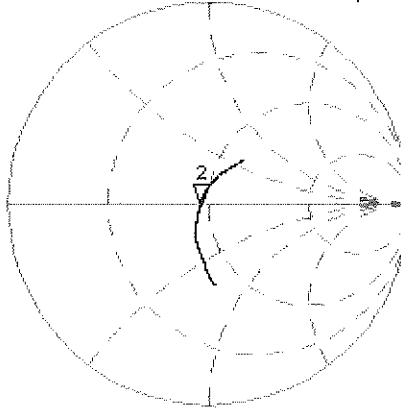

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 2:-26.571 dB 2 300.000 000 MHz

C Δ

Avg
16

H1d

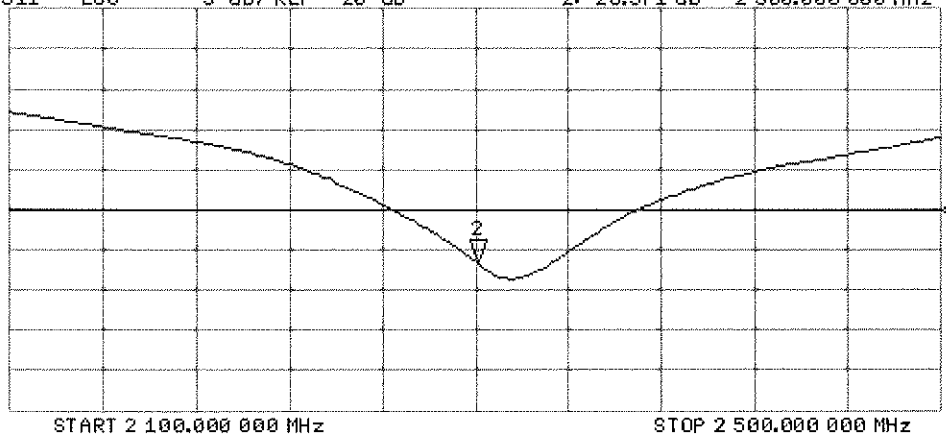



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2450V2-719_Aug14**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 719**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **August 11, 2014**

✓ KOK
9/8/14

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Signature

M. Weber

Approved by: **Katja Pokovic** Technical Manager

Katja Pokovic

Issued: August 12, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.0 $\pm$ 6 %	1.82 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.1 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.2 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	50.5 $\pm$ 6 %	2.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.0 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$54.9 \Omega + 3.0 j\Omega$
Return Loss	- 25.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$50.9 \Omega + 5.8 j\Omega$
Return Loss	- 24.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 10, 2002

DASY5 Validation Report for Head TSL

Date: 11.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.6 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.09 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

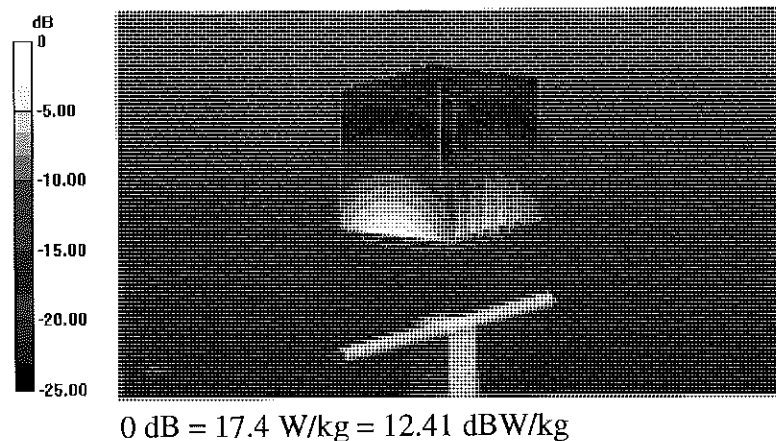

Impedance Measurement Plot for Head TSL

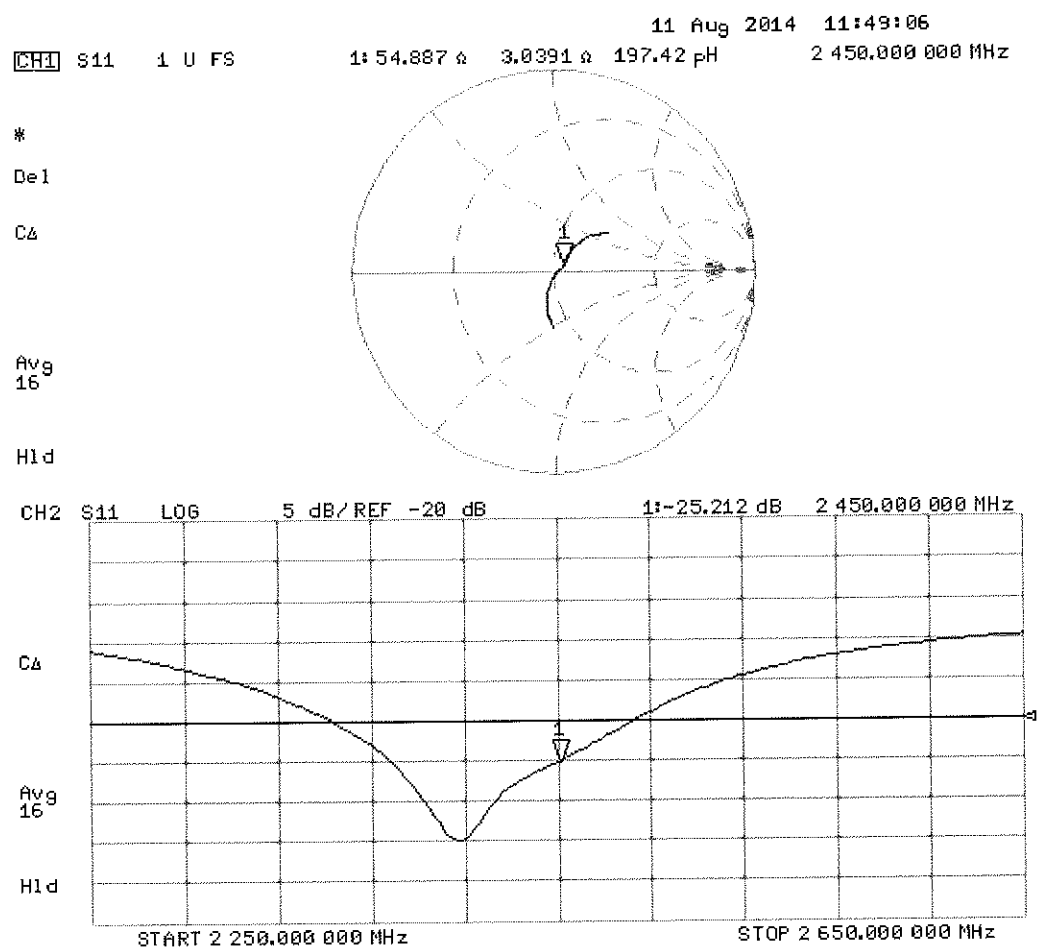

DASY5 Validation Report for Body TSL

Date: 11.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.08 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.1 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

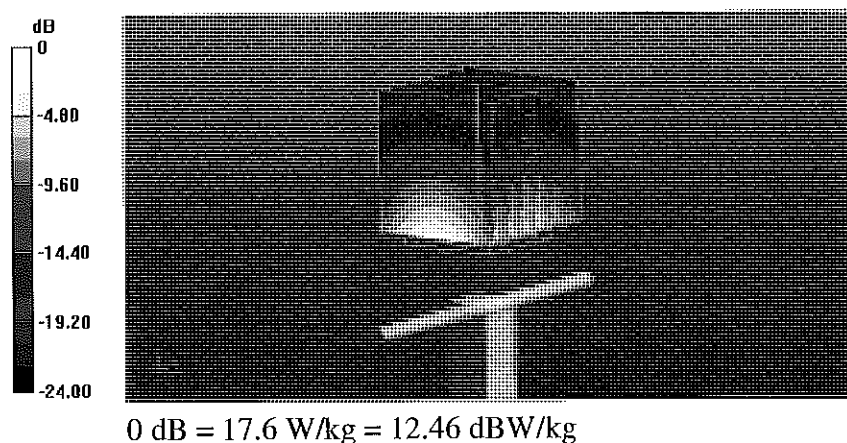

Impedance Measurement Plot for Body TSL

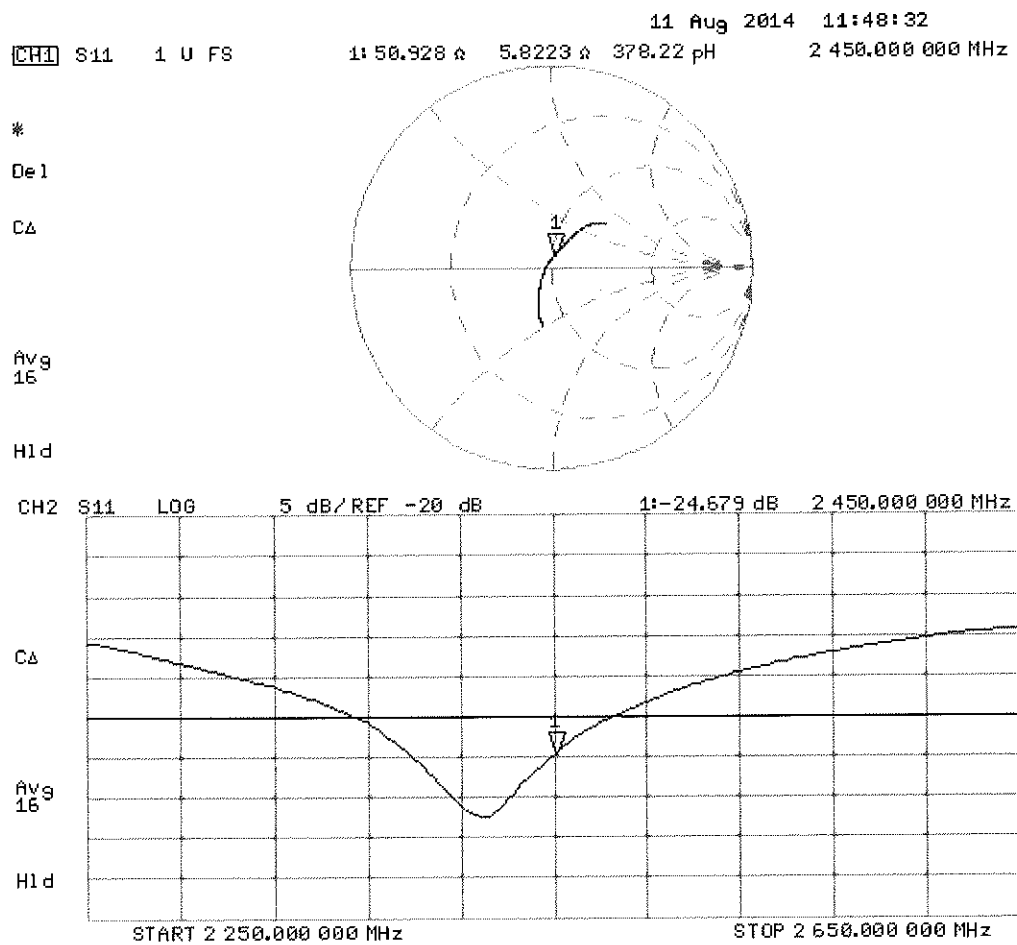



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1057_Jan15**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1057**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

CC
 2/3/15

Calibration date: **January 21, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe EX3DV4	SN: 3503	30-Dec-14 (No. EX3-3503_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** Michael Weber **Function** Laboratory Technician

Signature

Approved by: **Name** Katja Pokovic **Function** Technical Manager

Issued: January 22, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5300 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	36.3 $\pm$ 6 %	4.56 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.5 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.1 ± 6 %	4.66 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	84.7 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.1 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.9 ± 6 %	4.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.43 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	84.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.8 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.6 ± 6 %	4.97 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	5.18 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.4 ± 6 %	5.42 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.37 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	73.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.6 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.2 ± 6 %	5.55 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.9 ± 6 %	5.82 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.90 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.19 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.7 ± 6 %	5.96 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.4 ± 6 %	6.25 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.49 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.6 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	49.0 Ω - 9.4 j Ω
Return Loss	- 20.4 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	48.3 Ω - 4.2 j Ω
Return Loss	- 26.8 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	49.2 Ω - 5.0 j Ω
Return Loss	- 25.9 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	54.4 Ω - 4.8 j Ω
Return Loss	- 24.1 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	51.8 Ω - 2.6 j Ω
Return Loss	- 30.1 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	48.2 Ω - 8.4 j Ω
Return Loss	- 21.2 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	48.6 Ω - 3.6 j Ω
Return Loss	- 28.2 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	49.4 Ω - 4.1 j Ω
Return Loss	- 27.6 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	55.1 Ω - 4.0 j Ω
Return Loss	- 24.2 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	51.6 Ω - 1.6 j Ω
Return Loss	- 33.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

DASY5 Validation Report for Head TSL

Date: 21.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1057

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.56$ S/m; $\epsilon_r = 36.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.66$ S/m; $\epsilon_r = 36.1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.97$ S/m; $\epsilon_r = 35.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.51, 5.51, 5.51); Calibrated: 30.12.2014, ConvF(5.21, 5.21, 5.21); Calibrated: 30.12.2014, ConvF(5.12, 5.12, 5.12); Calibrated: 30.12.2014, ConvF(4.92, 4.92, 4.92); Calibrated: 30.12.2014, ConvF(4.9, 4.9, 4.9); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.51 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.30 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 32.1 W/kg

SAR(1 g) = 8.47 W/kg; SAR(10 g) = 2.41 W/kg

Maximum value of SAR (measured) = 20.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.33 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 33.5 W/kg

SAR(1 g) = 8.43 W/kg; SAR(10 g) = 2.38 W/kg

Maximum value of SAR (measured) = 20.6 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 64.47 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 33.5 W/kg
SAR(1 g) = 8.38 W/kg; SAR(10 g) = 2.37 W/kg
Maximum value of SAR (measured) = 20.2 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 62.34 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 33.8 W/kg
SAR(1 g) = 8.11 W/kg; SAR(10 g) = 2.29 W/kg
Maximum value of SAR (measured) = 19.8 W/kg

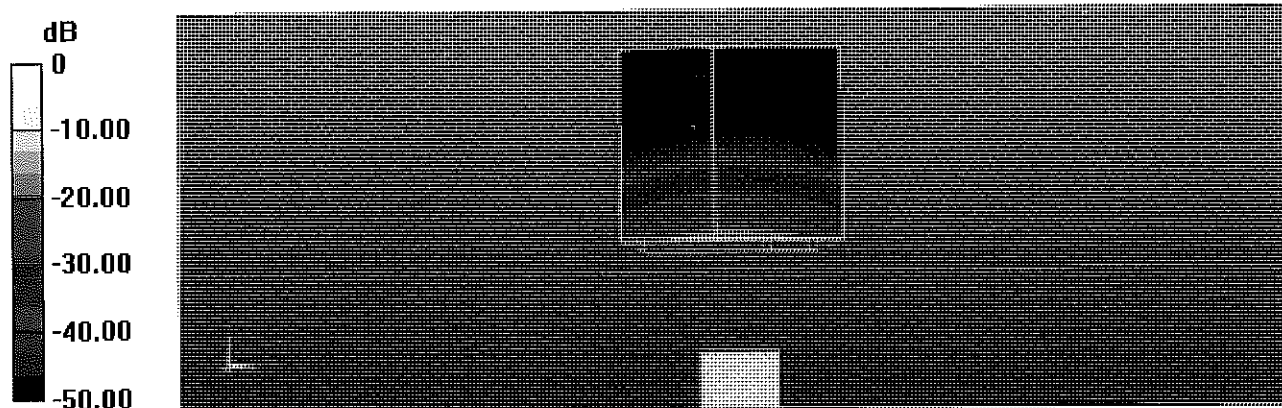

0 dB = 19.3 W/kg = 12.86 dBW/kg

Impedance Measurement Plot for Head TSL

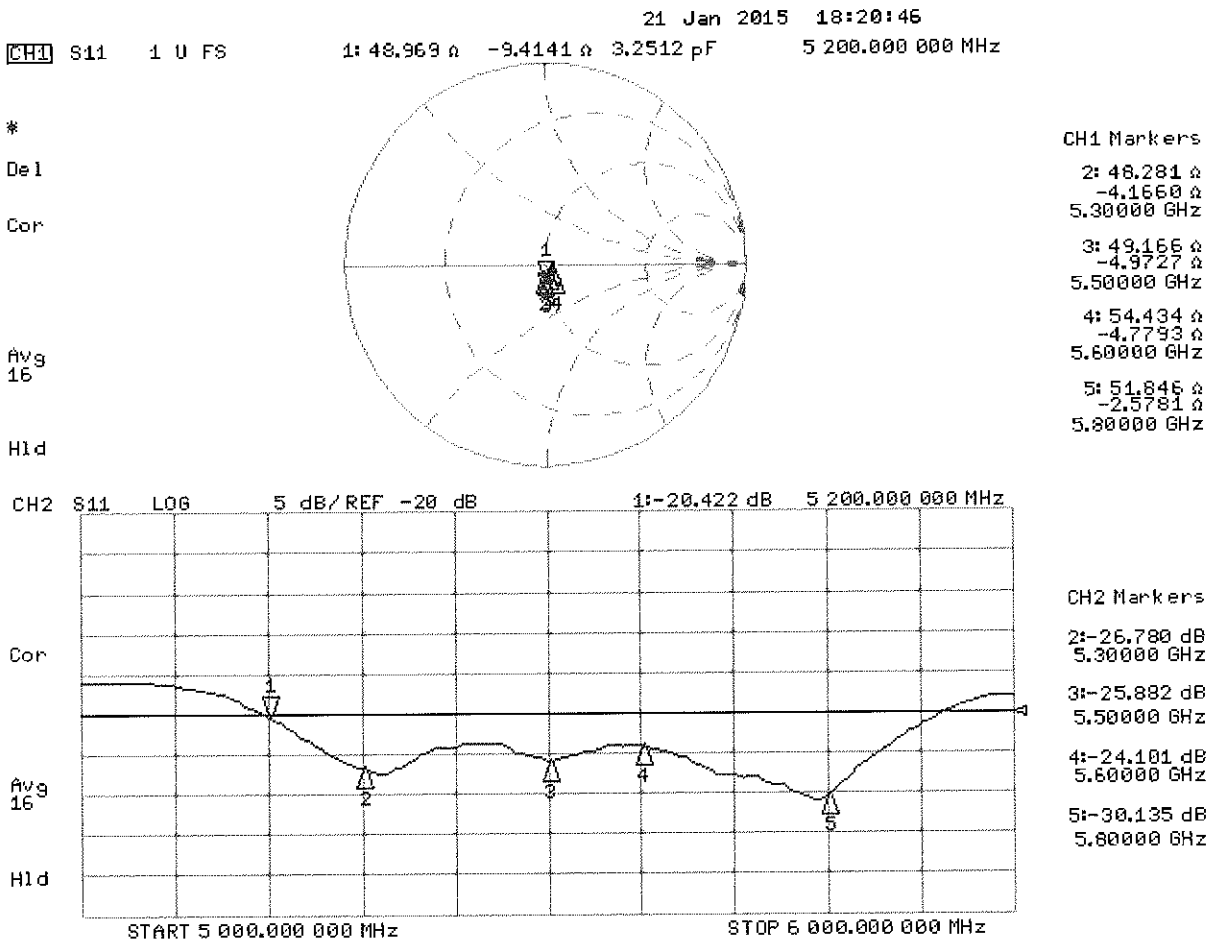

DASY5 Validation Report for Body TSL

Date: 20.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1057

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 49.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.55$ S/m; $\epsilon_r = 49.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.82$ S/m; $\epsilon_r = 48.9$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.96$ S/m; $\epsilon_r = 48.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.25$ S/m; $\epsilon_r = 48.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.95, 4.95, 4.95); Calibrated: 30.12.2014, ConvF(4.78, 4.78, 4.78); Calibrated: 30.12.2014, ConvF(4.45, 4.45, 4.45); Calibrated: 30.12.2014, ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2014, ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.76 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 7.37 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.35 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.04 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.19 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 57.74 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 34.1 W/kg

SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 19.1 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 55.86 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 34.7 W/kg

SAR(1 g) = 7.49 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

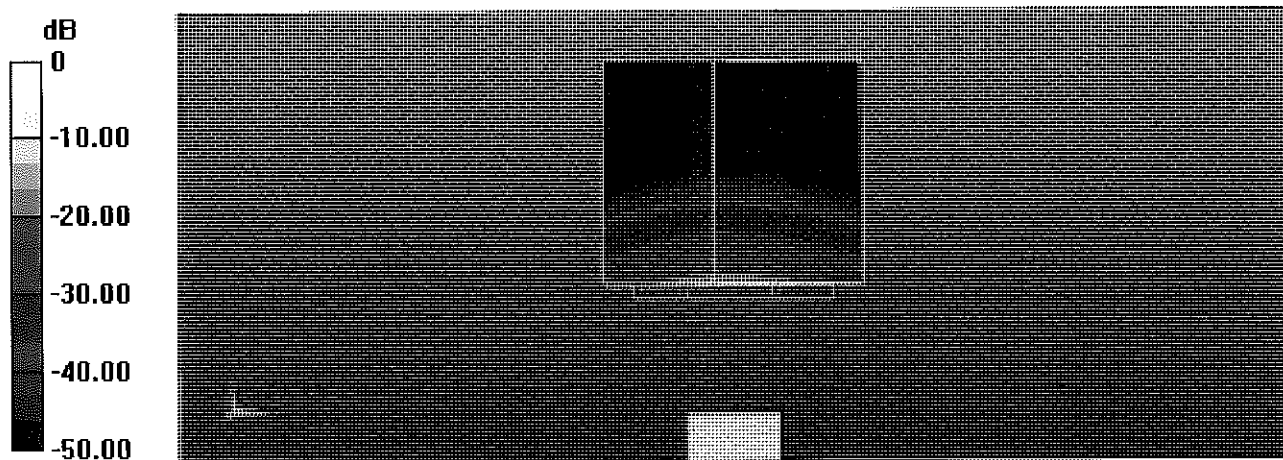

Impedance Measurement Plot for Body TSL

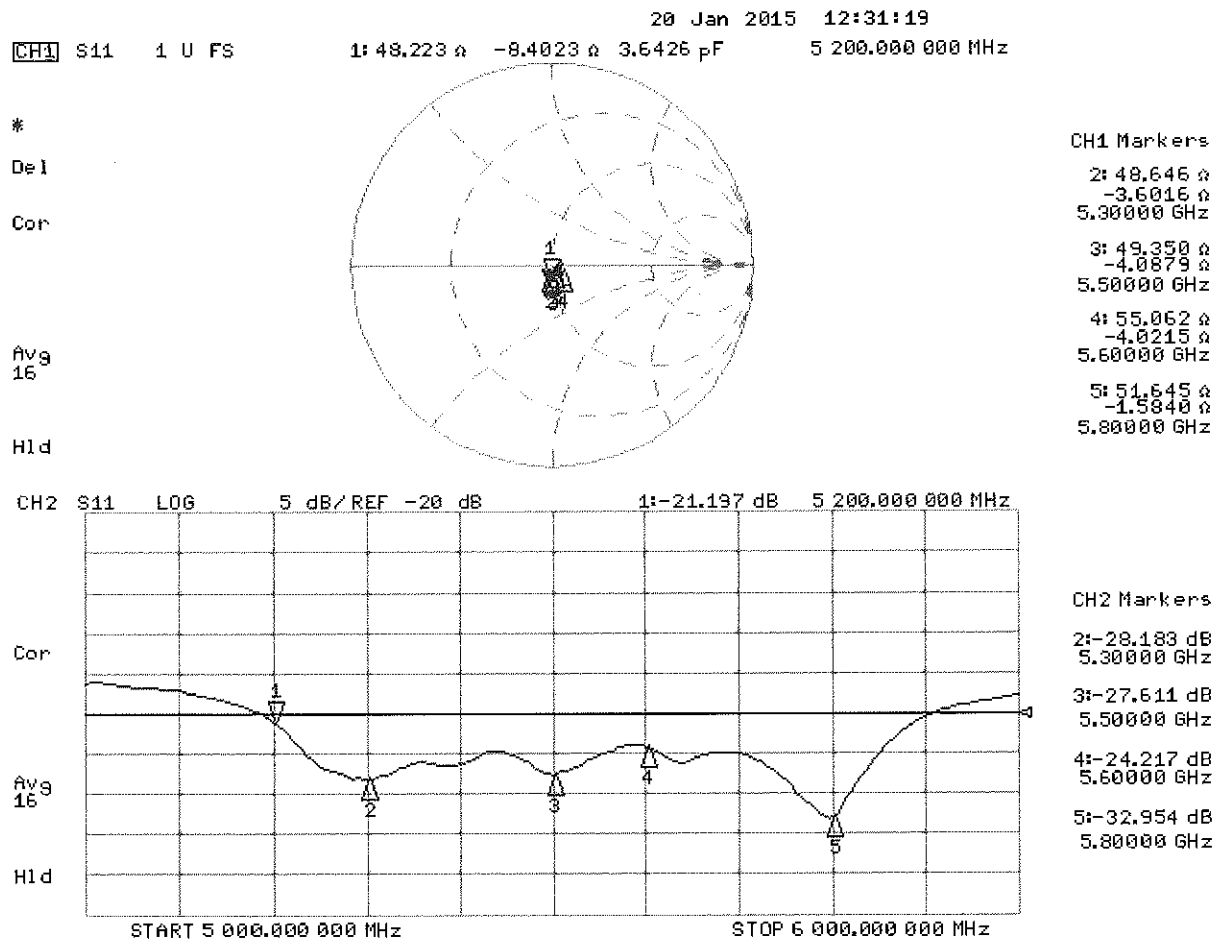



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d133_Jul14**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d133**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

CC
W/CM

Calibration date: **July 24, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8763E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Name** **Function** **Signature**
Jeton Kastrali **Laboratory Technician**

Approved by: **Name** **Technical Manager**
Katja Pokovic

Issued: July 24, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.1 $\pm$ 6 %	0.94 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.20 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.96 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.8 $\pm$ 6 %	1.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.44 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.35 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.15 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.6 Ω - 1.0 j Ω
Return Loss	- 34.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.8 Ω - 3.3 j Ω
Return Loss	- 27.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.395 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

DASY5 Validation Report for Head TSL

Date: 24.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d133

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/ $P_{\text{in}}=250 \text{ mW}$, $d=15\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.07 V/m ; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.38 W/kg ; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 2.79 W/kg

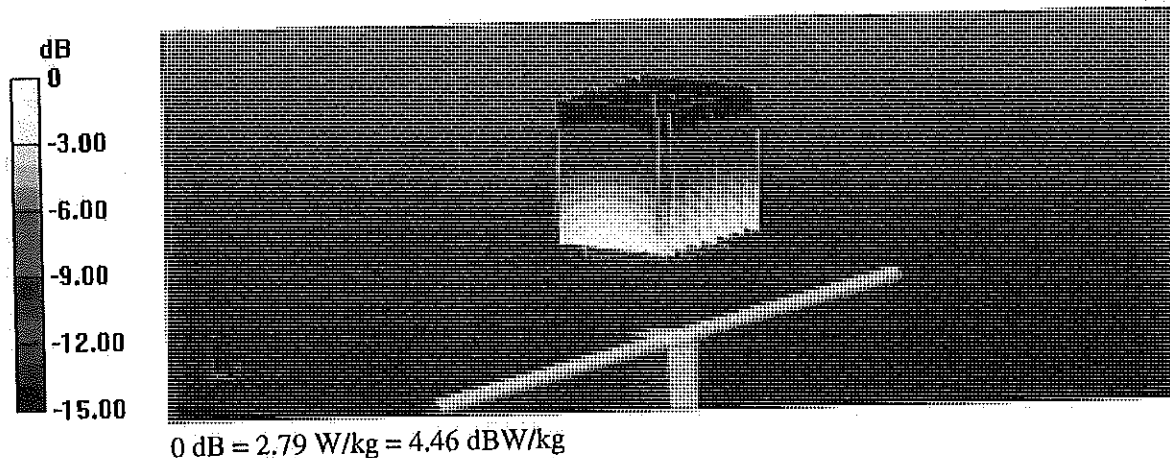

Impedance Measurement Plot for Head TSL

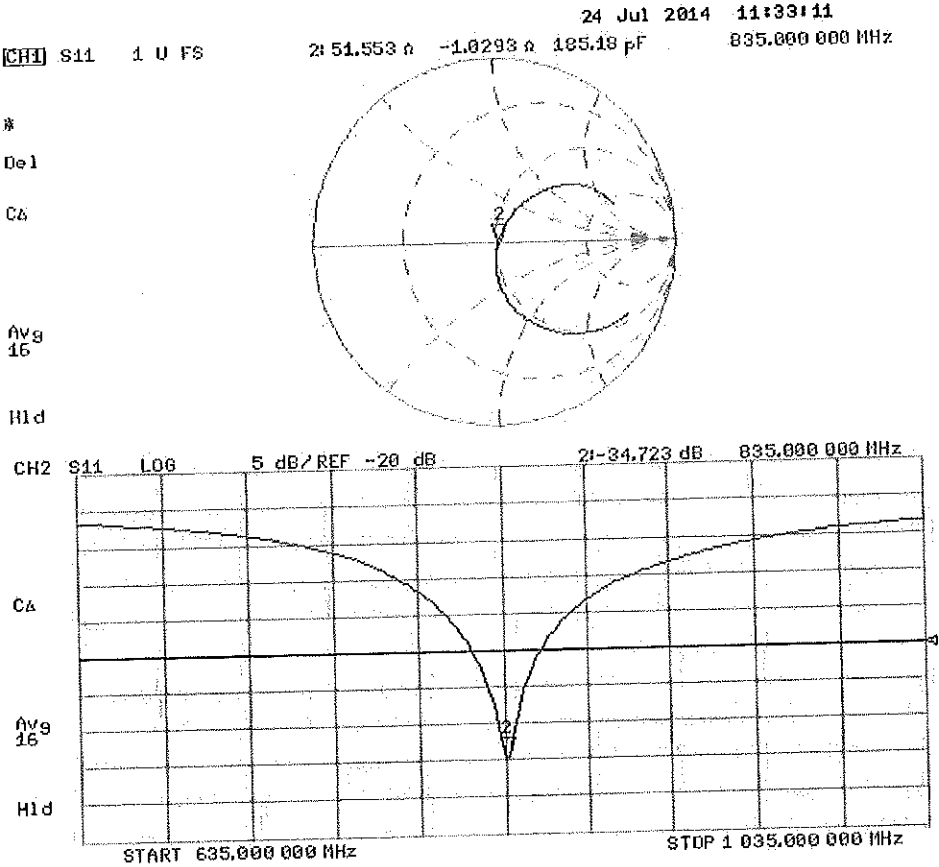

DASY5 Validation Report for Body TSL

Date: 17.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d133

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.61 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 2.84 W/kg

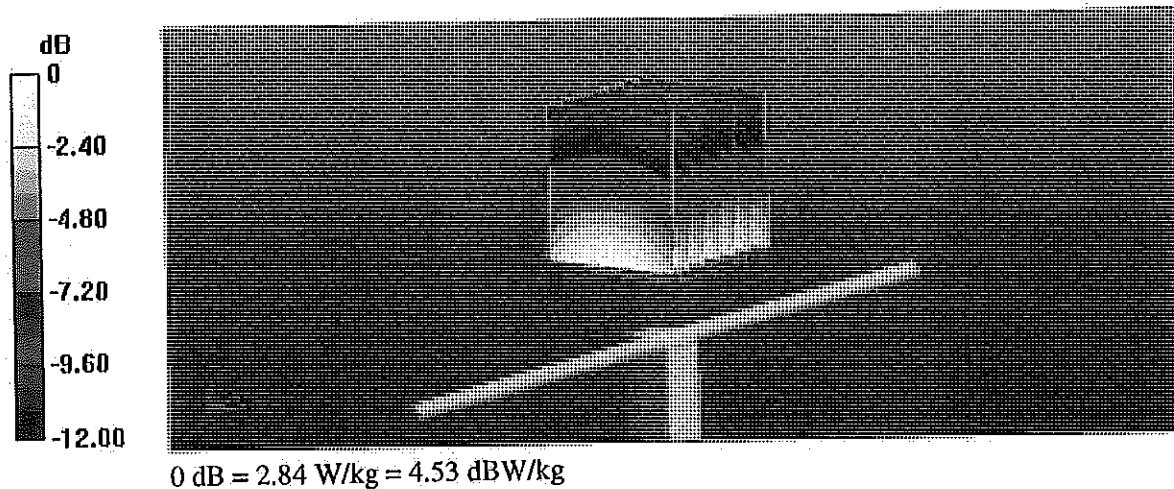

Impedance Measurement Plot for Body TSL

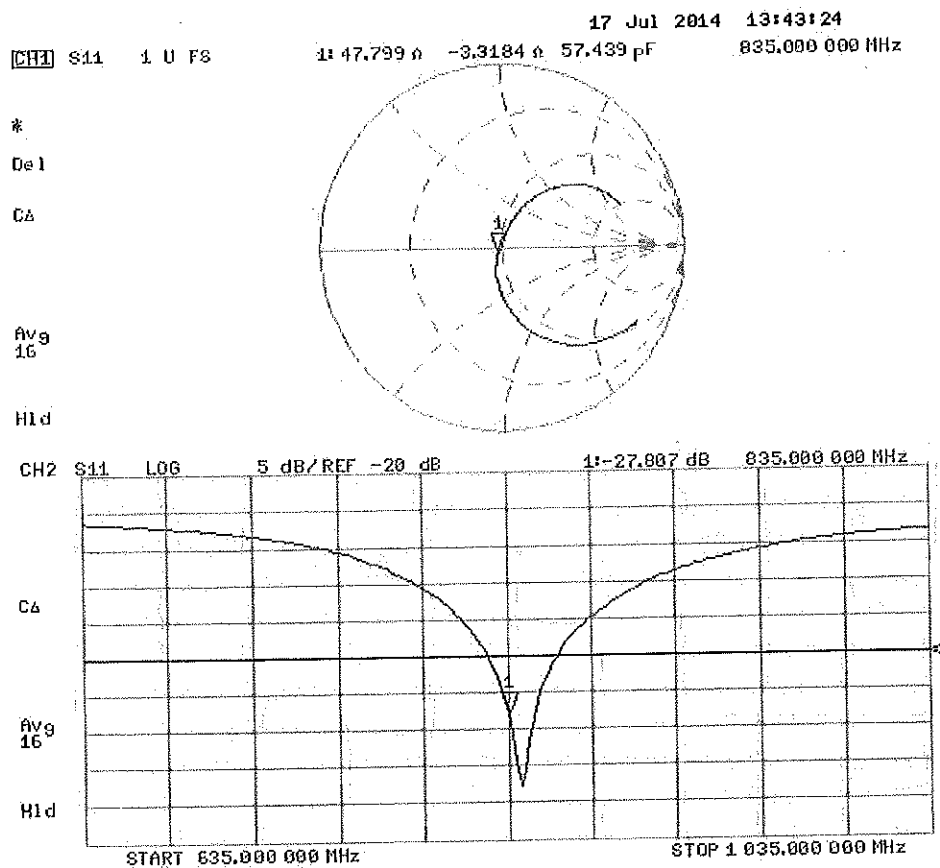



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1900V2-5d149_Jul14**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d149**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

CC
 11/5/14

Calibration date: **July 23, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	30-Apr-14 (No. DAE4-601_Apr14)	Apr-15
Secondary Standards	ID #	Check Date (In house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (In house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (In house check Oct-13)	In house check: Oct-14

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 23, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.5 $\pm$ 6 %	1.38 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.0 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.5 $\pm$ 6 %	1.51 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.33 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.3 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.6 \Omega + 5.5 j\Omega$
Return Loss	- 24.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.8 \Omega + 6.1 j\Omega$
Return Loss	- 24.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.197 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 23.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.38 \text{ S/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.06, 5.06, 5.06); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 100I
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, $d=10\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 98.92 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.24 W/kg

Maximum value of SAR (measured) = 12.8 W/kg

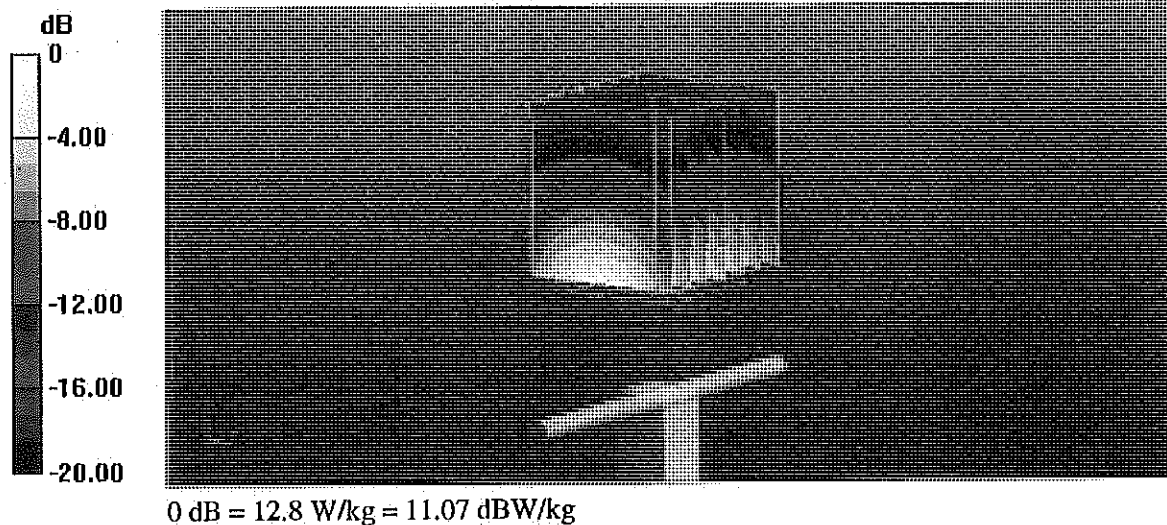

Impedance Measurement Plot for Head TSL

23 Jul 2014 10:46:05

CH1 S11 1 U FS

1: 52.600 Ω 5.4570 Ω 457.11 pH

1 900.000 000 MHz


#

De1

Cor

Avg
16

H1d

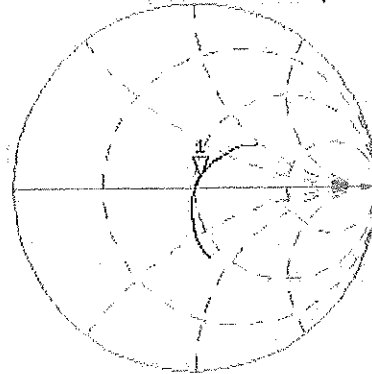


CH2 S11 LOG 5 dB/REF -20 dB 1: -24.600 dB 1 900.000 000 MHz

Cor

Avg
16

H1d

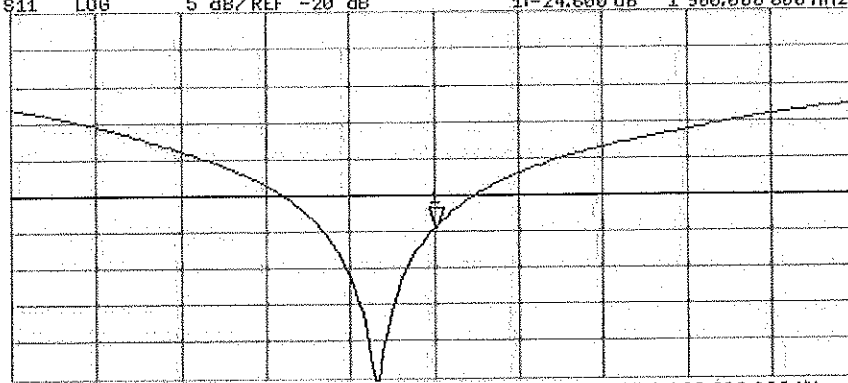

DASY5 Validation Report for Body TSL

Date: 23.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.83 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.33 W/kg


Maximum value of SAR (measured) = 12.8 W/kg

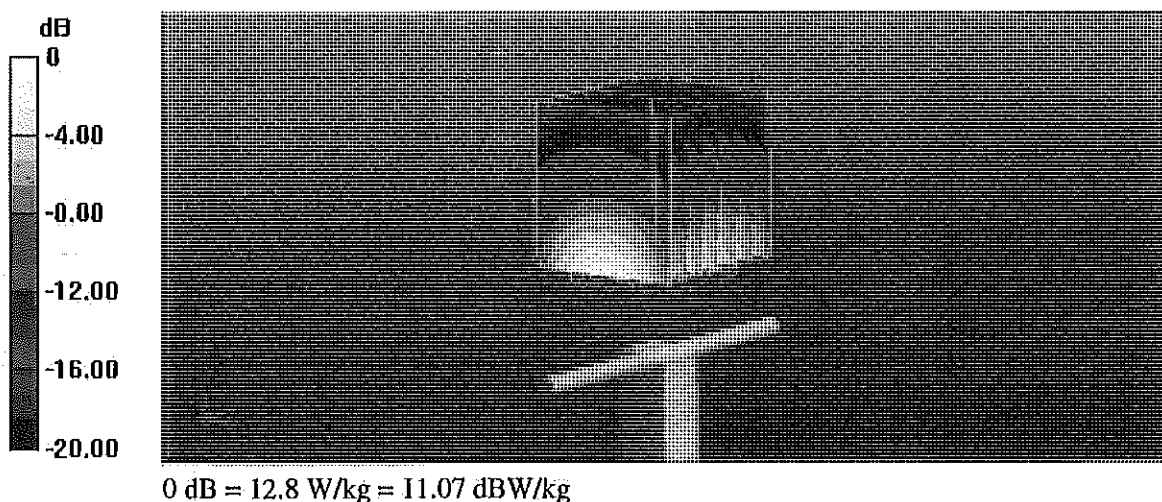

Impedance Measurement Plot for Body TSL

23 Jul 2014 10:45:45
 CH1 S11 1 U FS 1: 48.789 Ω 6.1426 Ω 514.54 pF 1 900.000 000 MHz

*
 Del
 Cor

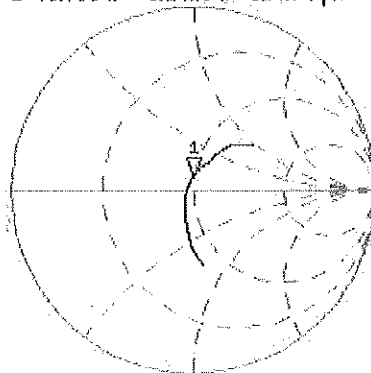

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.974 dB 1 900.000 000 MHz

Cor

Avg
 16

H1d

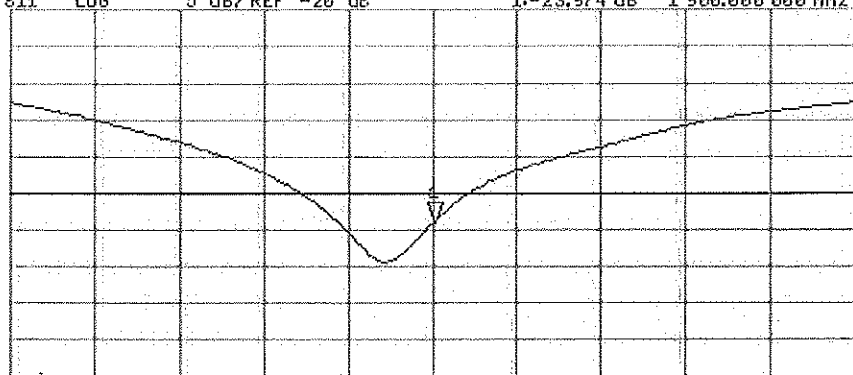

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz