

MEASUREMENT REPORT FCC PART 15.407 UNII

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea


Date of Testing:
4/29 - 8/12/2020
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2004140062-08.A3L

FCC ID:	A3LSMH204V
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type:	Certification
Model:	SM-H204V
EUT Type:	Indoor Customer Premises Equipment (CPE)
Frequency Range:	5180 – 5825MHz
Modulation Type:	OFDM
FCC Classification:	Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s):	Part 15 Subpart E (15.407)
Test Procedure(s):	ANSI C63.10-2013, KDB 789033 D02 v02r01, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 1 of 344	


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Antenna Description	7
2.4	Test Configuration	8
2.5	Software and Firmware	8
2.6	EMI Suppression Device(s)/Modifications	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	AC Line Conducted Emissions	9
3.3	Radiated Emissions	10
3.4	Environmental Conditions	10
4.0	ANTENNA REQUIREMENTS	11
5.0	MEASUREMENT UNCERTAINTY	12
6.0	TEST EQUIPMENT CALIBRATION DATA	13
7.0	TEST RESULTS	14
7.1	Summary	14
7.2	26dB Bandwidth Measurement – 802.11a	15
7.3	6dB Bandwidth Measurement – 802.11a/n/ac/ax	127
7.4	UNII Output Power Measurement – 802.11a	160
7.5	Maximum Power Spectral Density – 802.11a	166
7.6	Radiated Spurious Emission Measurements – Above 1GHz	314
7.6.1	MIMO Radiated Spurious Emission Measurements	317
7.6.2	Simultaneous Tx Radiated Spurious Emissions Measurements	325
7.6.3	MIMO Radiated Band Edge Measurements (20MHz BW)	327
7.6.4	MIMO Radiated Band Edge Measurements (40MHz BW)	329
7.6.5	MIMO Radiated Band Edge Measurements (80MHz BW)	331
7.7	Radiated Spurious Emissions Measurements – Below 1GHz	334
7.8	Line-Conducted Test Data	338
8.0	CONCLUSION	344

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 2 of 344	



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	MIMO	
			Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	683.912	28.35
2A		5260 - 5320	186.209	22.70
2C		5500 - 5720	151.705	21.81
3		5745 - 5825	731.139	28.64
1	40	5190 - 5230	660.693	28.20
2A		5270 - 5310	193.197	22.86
2C		5510 - 5710	168.655	22.27
3		5755 - 5795	657.658	28.18
1	80	5210	26.242	14.19
2A		5290	33.963	15.31
2C		5530 - 5690	161.436	22.08
3		5775	477.529	26.79
1	80+80	5210	20.370	13.09
2A		5290	19.275	12.85
2C		5530	14.997	11.76
		5610	14.158	11.51

EUT Overview

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 3 of 344	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 4 of 344

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Indoor Customer Premises Equipment (CPE) FCC ID: A3LSMH204V**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 18425, 16452, 17898, 23250

2.2 Device Capabilities

This device contains the following capabilities:

Multi-band LTE, 5G NR (n5, n66, n2, n261, n260), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (LE)

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	120	5600	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac / 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11n / 802.11ac / 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ac / 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 5 of 344

Band 1		Band 2A		Band 2C	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530
				138	5610

Table 2-4. 802.11ac / 802.11ax (80+80MHz BW) Frequency / Channel Operations

Notes:

- 5GHz NII operation is possible in 20MHz, and 40MHz, 80MHz and 80+80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
		MIMO/CDD
2.4GHz	b	90.01
	g	94.47
	n	95.93
	ac	95.25
	ax	95.60
5GHz	a	94.28
	n (HT20)	95.25
	ac (HT20)	95.42
	ax (HT20)	96.10
	n (HT40)	94.75
	ac (HT40)	94.57
	ax (HT40)	95.24
	ac (HT80)	95.24
	ax (HT80)	95.07
	ac (HT160)	94.42
	ax (HT160)	94.86

Table 2-5. Measured Duty Cycles

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 6 of 344	

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SDM		CDD	
5GHz	11a	✗	✗	✓	✓
	11n/ac/ax (20MHz)	✓	✓	✓	✓
	11n/ac/ax (40MHz)	✓	✓	✓	✓
	11ac/ax (80MHz)	✓	✓	✓	✓
	11ac/ax (80+80MHz)	✓	✓	✓	✓

Table 2-6. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz (WLAN & BT) and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report. The BTLE + 5GHz case is not considered as worst case since the BTLE power is lower than the 2.4GHz WLAN power.

Configuration 1: ANT1 and ANT2 transmitting in 2.4GHz mode and ANT3, ANT4, ANT5, ANT6 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1+2	3+4+5+6
Channel	6	100
Operating Frequency (MHz)	2437	5500
Data Rate (Mbps)	1Mbps	6Mbps
Mode	b	a

Table 2-7. Config-1 (ANT1+2 2.4GHz & ANT3+4+5+6 5GHz)

4. This device supports 80+80MHz channel bandwidth by concatenate two 80MHz channel bandwidths to achieve 160MHz bandwidth. For instance, channel 42

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	ANT3 Antenna Gain (dBi)	ANT4 Antenna Gain (dBi)	ANT5 Antenna Gain (dBi)	ANT6 Antenna Gain (dBi)	Directional Gain (dBi)
5.2	1.0	3.0	3.4	-0.7	4.7
5.3	2.1	3.2	2.6	-0.5	4.7
5.7	-2.7	1.5	3.5	3.1	5.4
5.8	-0.9	1.5	2.1	2.6	5.2

Table 2-8. Antenna Peak Gain

Per FCC 15.407(a)(ii), no reduction needed for both the maximum conducted output power and the maximum power spectral density when direction gain is less than 6 dBi.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 7 of 344	

2.4 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

2.5 Software and Firmware

The test was conducted with firmware version H204VVRE0ATG6 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMH204V	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 8 of 344

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 9 of 344

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 10 of 344	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 11 of 344	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMH204V	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 12 of 344

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL40-1	Conducted Cable Set (40GHz)	3/13/2020	Annual	3/13/2021	WL40-1
Anritsu	MA2411B	Pulse Power Sensor	12/4/2019	Annual	12/4/2020	846215
Anritsu	ML2495A	Power Meter	1/15/2020	Annual	1/15/2021	1328004
Anritsu	ML2496A	Power Meter	11/6/2019	Annual	11/6/2020	1405003
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/9/2020	Annual	1/9/2021	NMLC-2
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100037
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 13 of 344

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMH204V
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.6]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.6]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 0
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 14 of 344	

7.2 26dB Bandwidth Measurement – 802.11a

RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 15 of 344

© 2020 PCTEST

V 9.0 02/01/2019


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Antenna-3 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	20.42
	5200	40	a	6	34.84
	5240	48	a	6	27.57
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	20.24
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.27
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	21.07
	5180	36	ax (20MHz)	8/8.6 (MCS0)	20.59
	5200	40	ax (20MHz)	8/8.6 (MCS0)	20.80
	5240	48	ax (20MHz)	8/8.6 (MCS0)	20.70
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.08
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.47
	5190	38	ax (40MHz)	8/8.6 (MCS0)	40.16
	5230	46	ax (40MHz)	13.5/15 (MCS0)	40.72
	5210	42	ac (80MHz)	8/8.6 (MCS0)	81.70
Band 2A	5210	42	ax (80MHz)	8/8.6 (MCS0)	81.30
	5260	52	a	6	20.41
	5280	56	a	6	20.18
	5320	64	a	6	20.31
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	19.97
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	20.23
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	20.07
	5260	52	ax (20MHz)	8/8.6 (MCS0)	20.62
	5280	56	ax (20MHz)	8/8.6 (MCS0)	20.84
	5320	64	ax (20MHz)	8/8.6 (MCS0)	20.53
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.78
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.98
	5270	54	ax (40MHz)	8/8.6 (MCS0)	40.38
	5310	62	ax (40MHz)	8/8.6 (MCS0)	40.48
Band 2C	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	80.86
	5290	58	ax (80MHz)	8/8.6 (MCS0)	81.66
	5500	100	a	6	20.08
	5600	120	a	6	19.94
	5720	144	a	6	20.28
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	19.95
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	19.78
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	19.80
	5500	100	ax (20MHz)	8/8.6 (MCS0)	20.44
	5600	120	ax (20MHz)	8/8.6 (MCS0)	20.81
	5720	144	ax (20MHz)	8/8.6 (MCS0)	20.49
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.09
	5590	118	n (40MHz)	13.5/15 (MCS0)	38.90
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.57
	5510	102	ax (40MHz)	8/8.6 (MCS0)	40.39
	5590	118	ax (40MHz)	8/8.6 (MCS0)	40.59
	5710	142	ax (40MHz)	8/8.6 (MCS0)	39.88
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.49
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	80.77
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.31
	5530	106	ax (80MHz)	8/8.6 (MCS0)	81.13
	5610	122	ax (80MHz)	8/8.6 (MCS0)	94.56
	5690	138	ax (80MHz)	8/8.6 (MCS0)	82.65

Table 7-2. Conducted Bandwidth Measurements

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 16 of 344

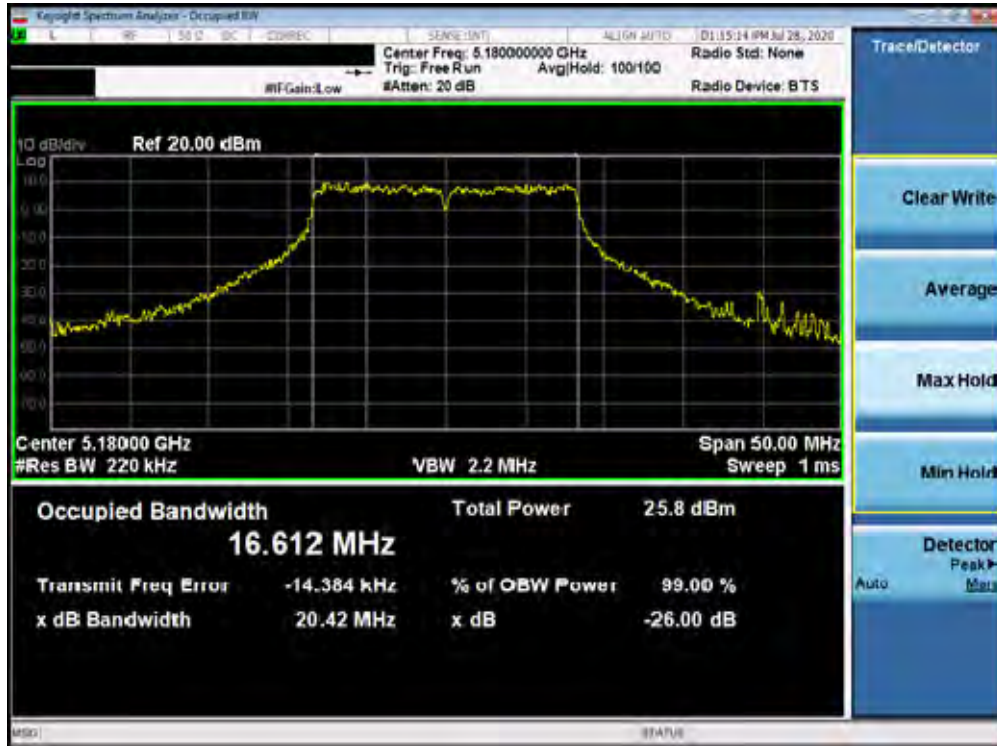


Plot 7-1. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 1) – Ch. 36)

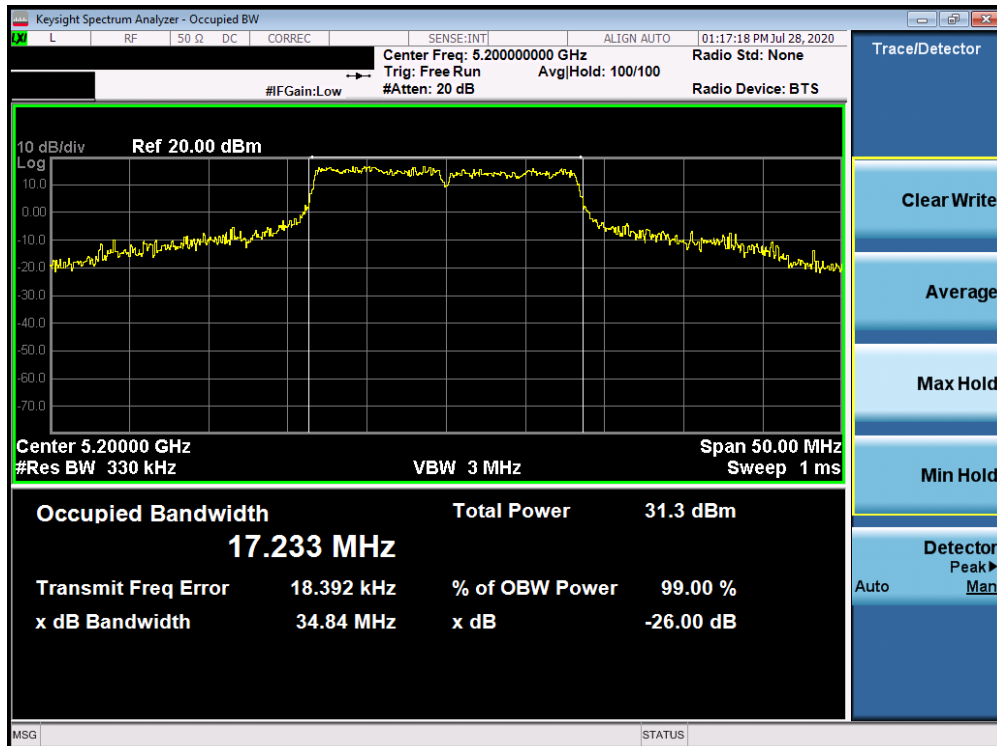


Plot 7-2. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 17 of 344

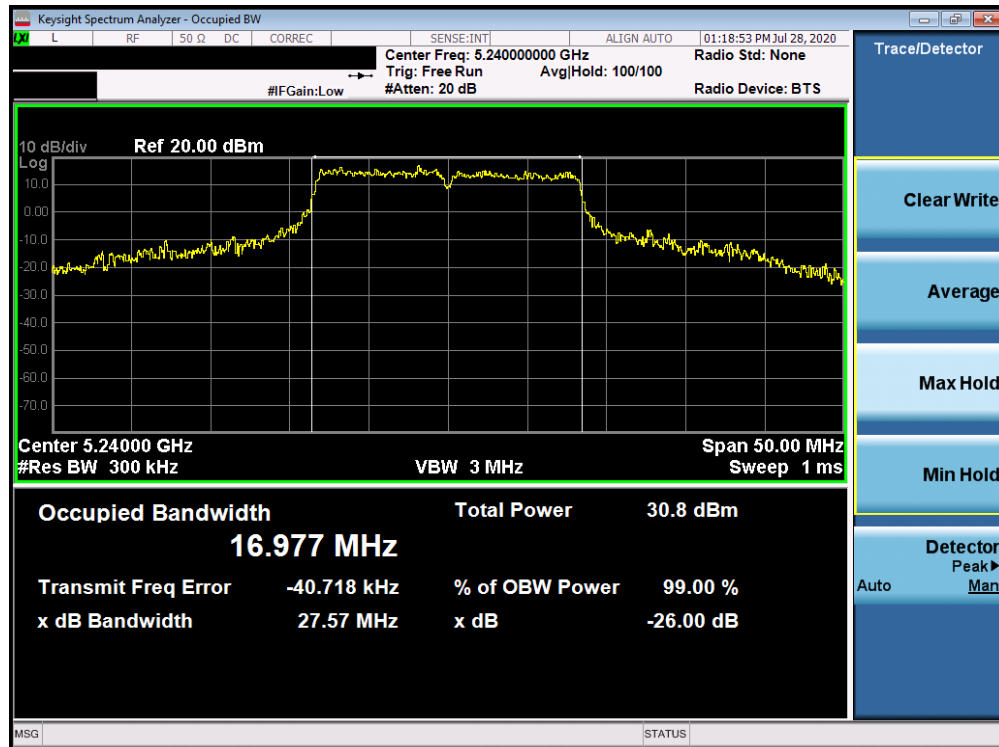


Plot 7-3. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 1) – Ch. 48)

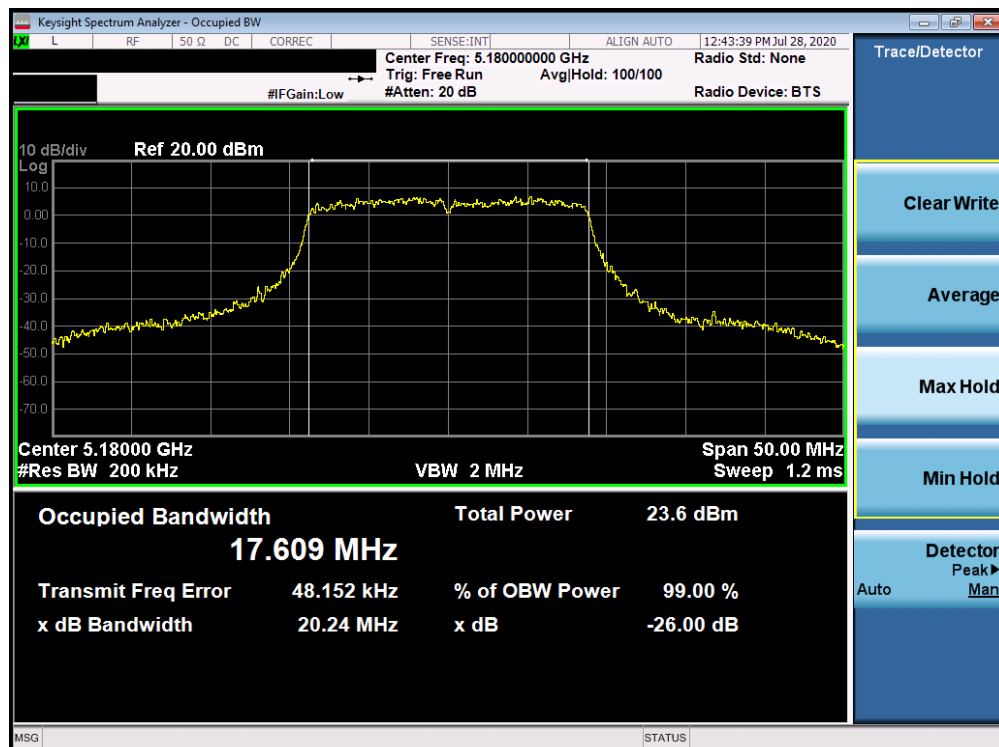


Plot 7-4. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 18 of 344

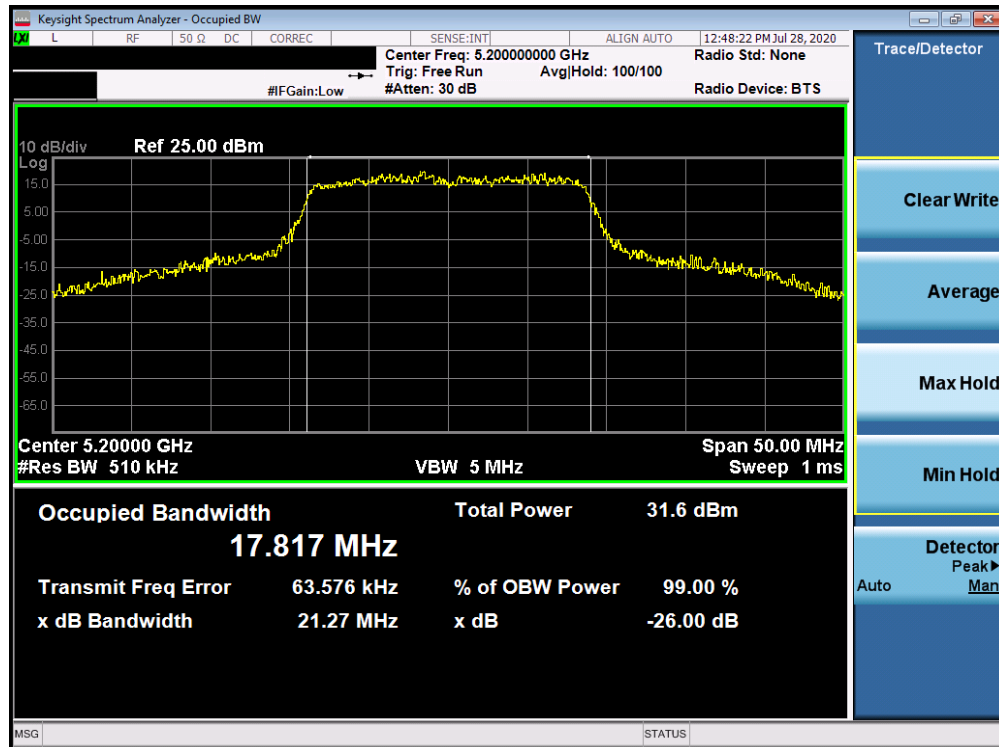


Plot 7-5. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

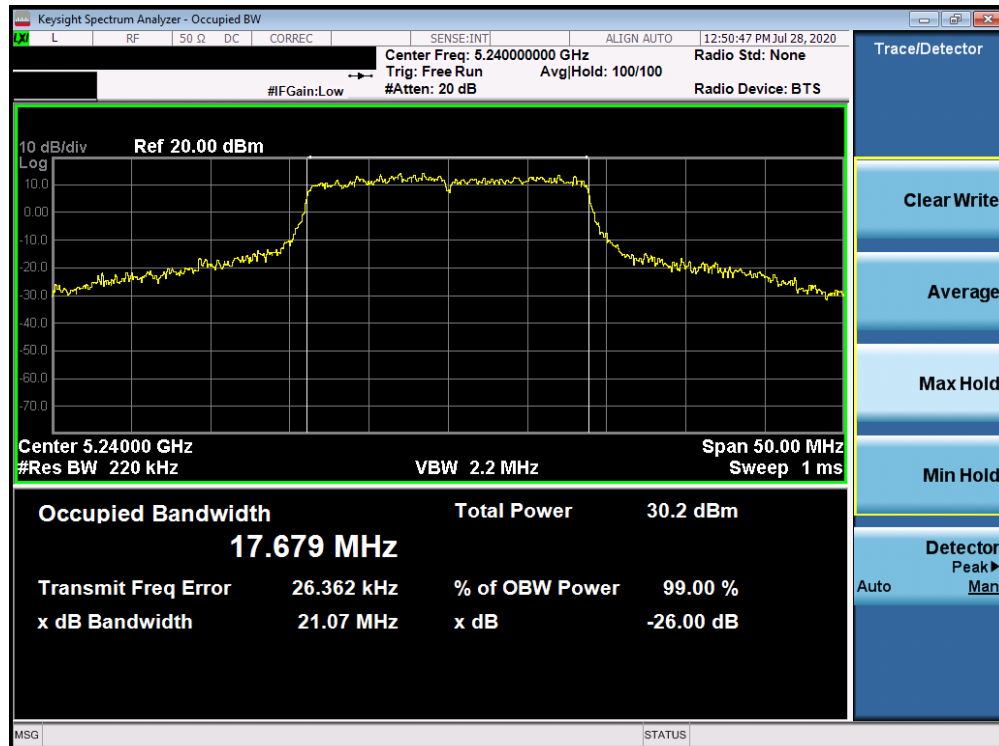


Plot 7-6. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 19 of 344

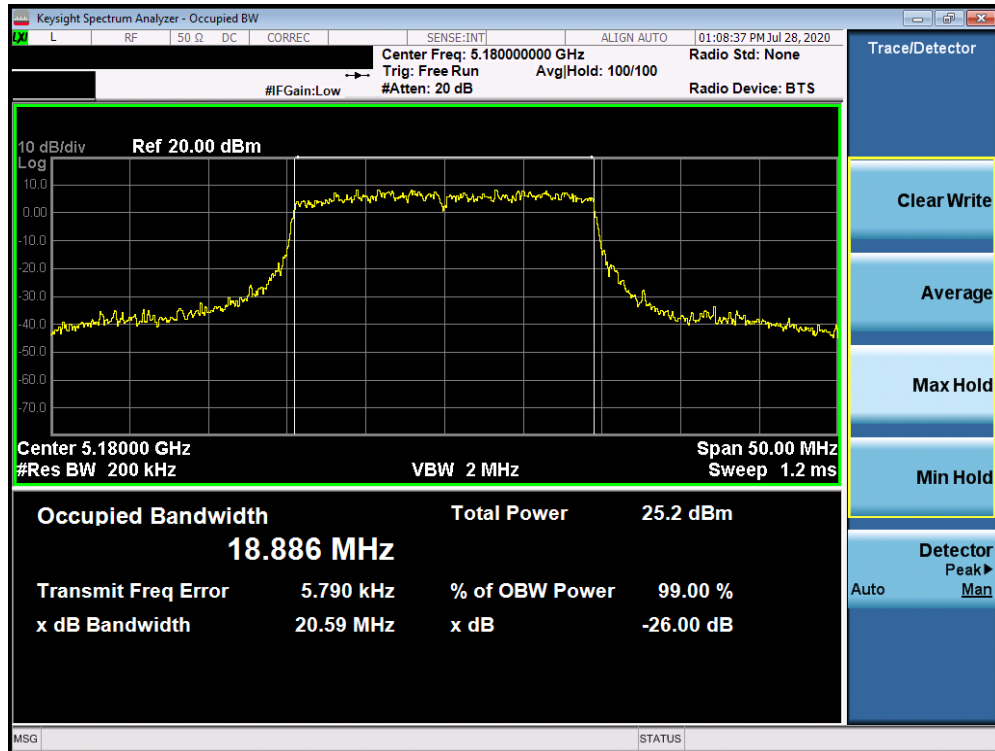


Plot 7-7. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 1) – Ch. 36)

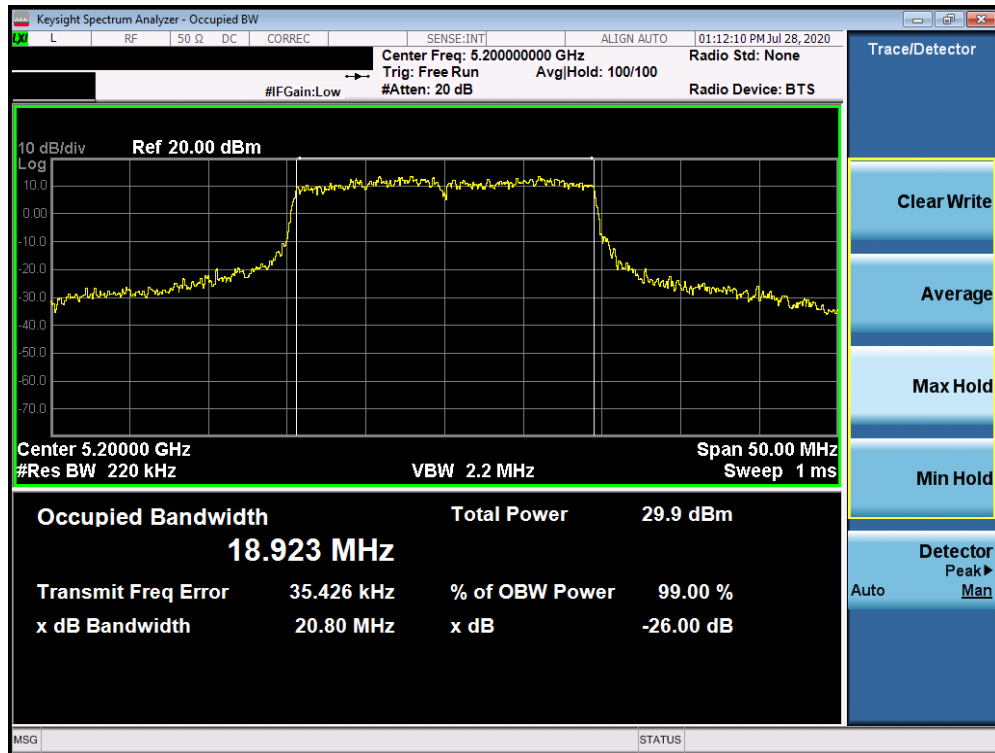


Plot 7-8. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 1) – Ch. 40)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 20 of 344

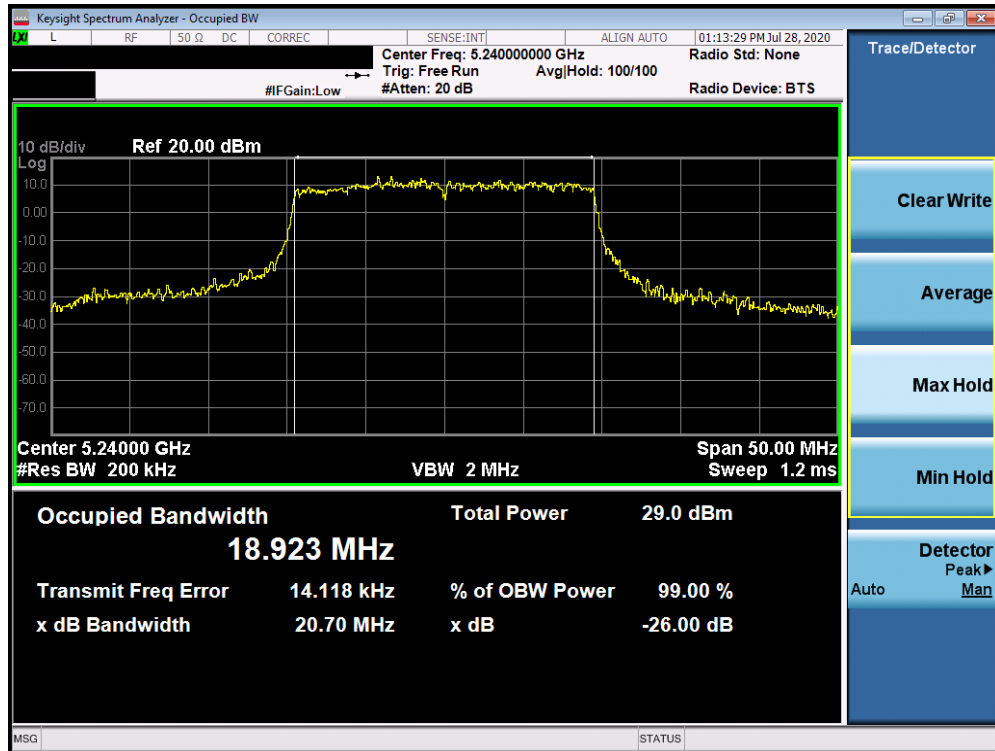


Plot 7-9. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 1) – Ch. 48)

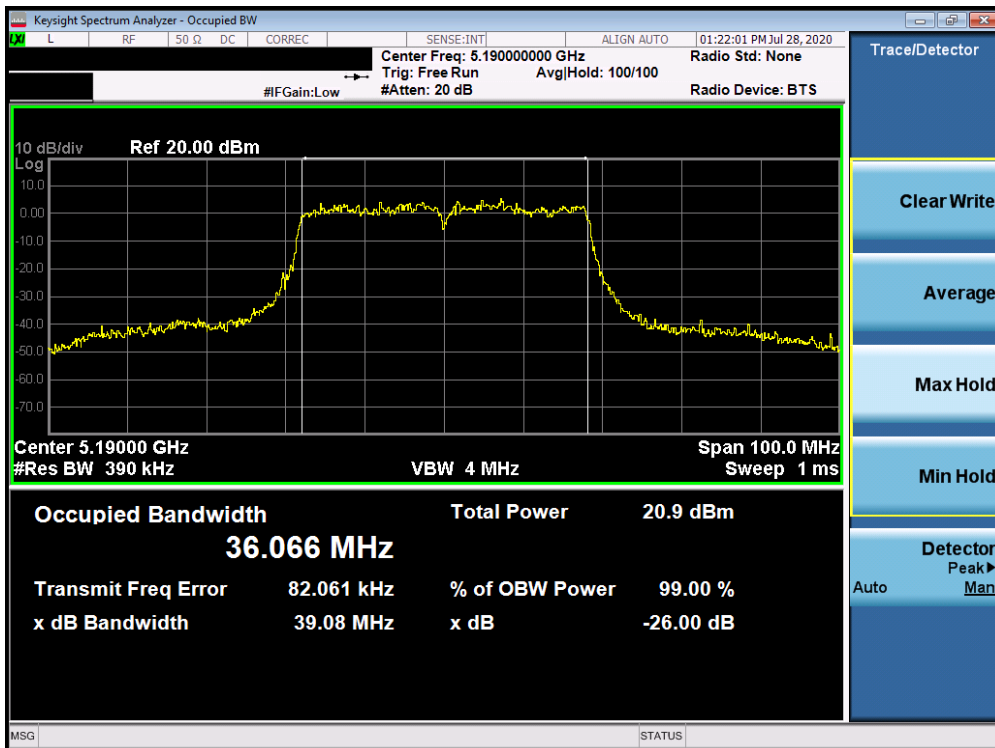


Plot 7-10. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 21 of 344

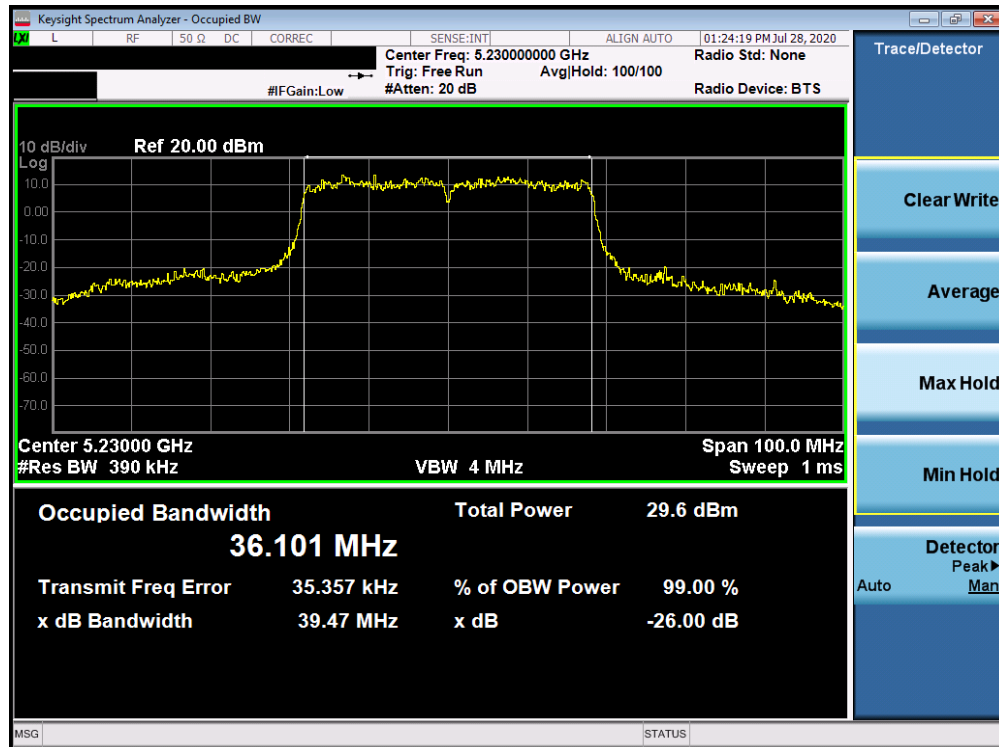


Plot 7-11. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

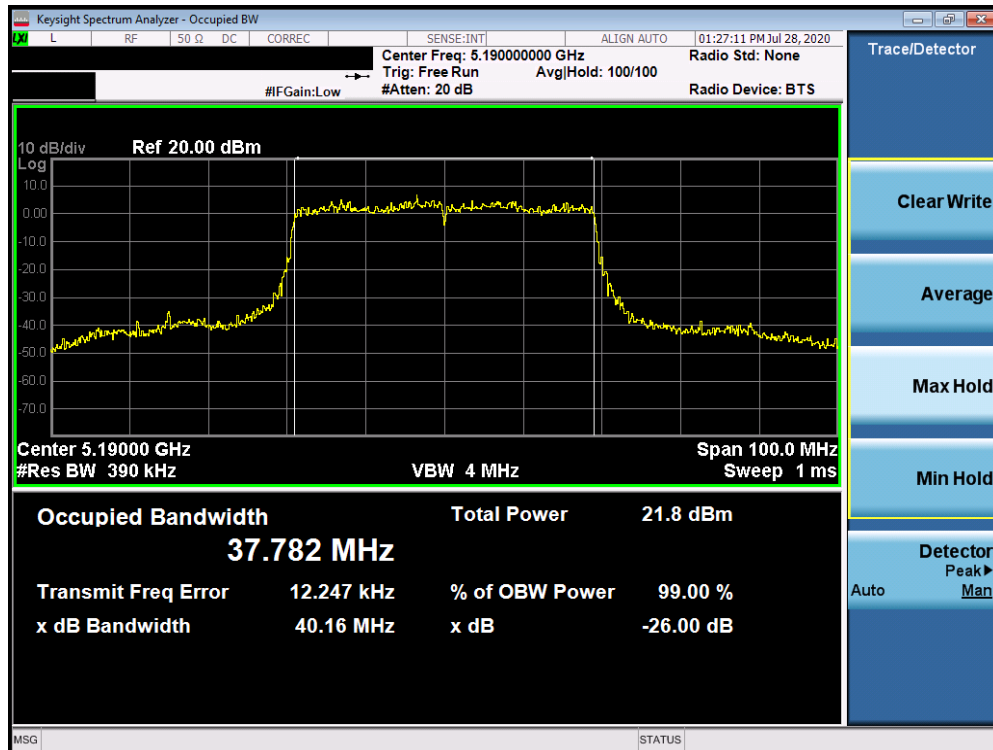


Plot 7-12. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11ax (UNII Band 1) – Ch. 38)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 22 of 344

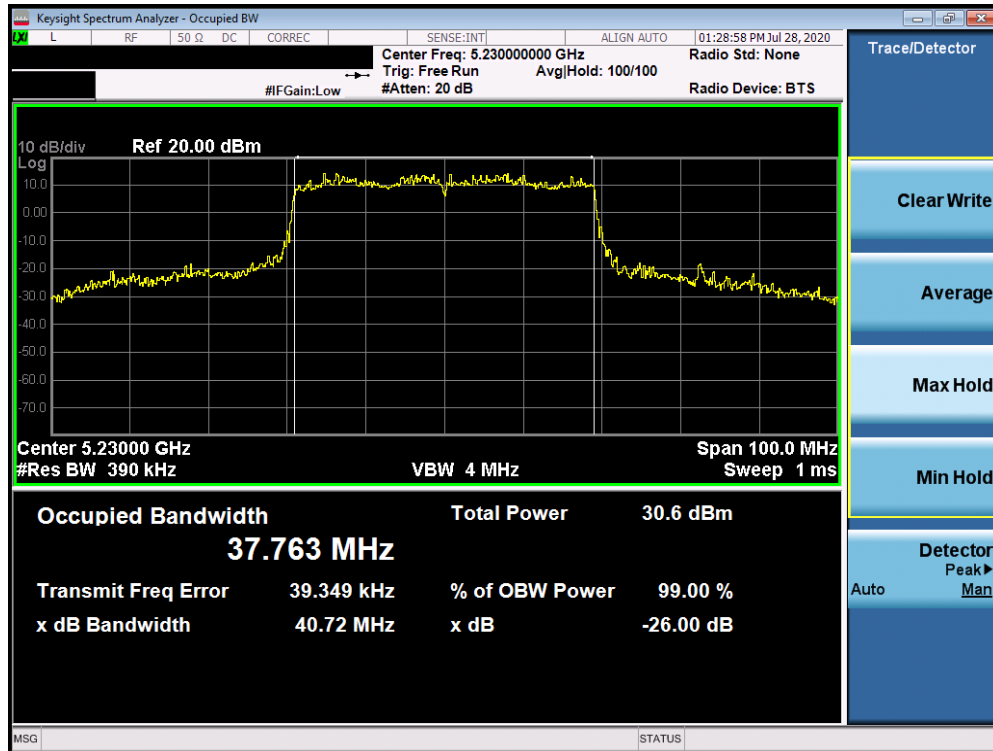


Plot 7-13. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11ax (UNII Band 1) – Ch. 46)

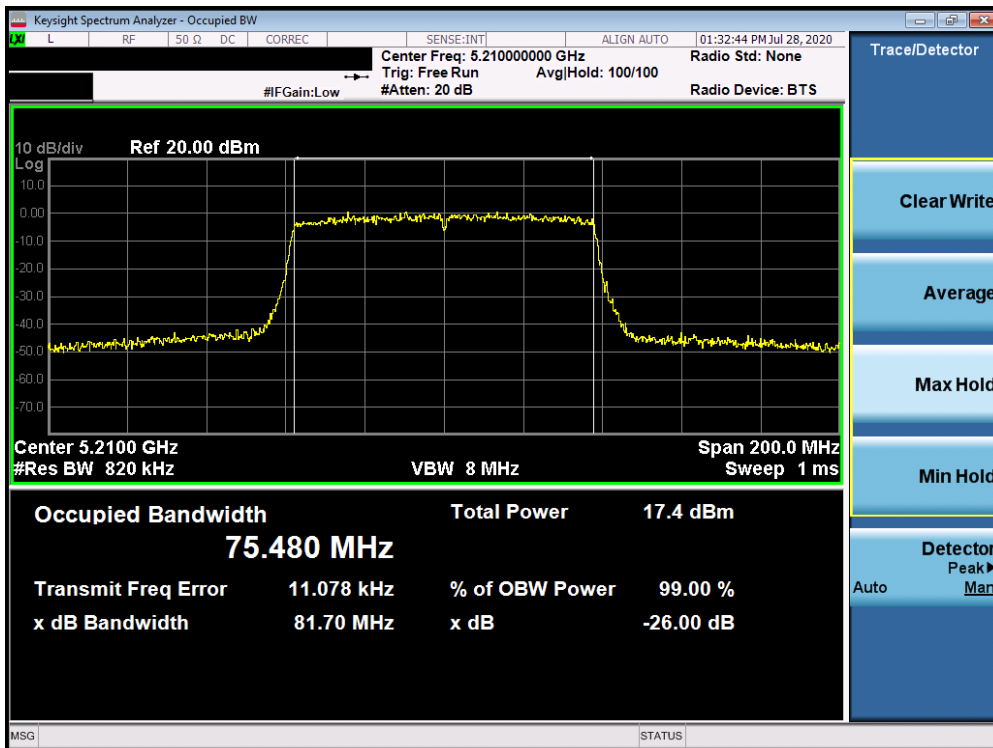


Plot 7-14. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMH204V	PCTEST Provided to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 23 of 344

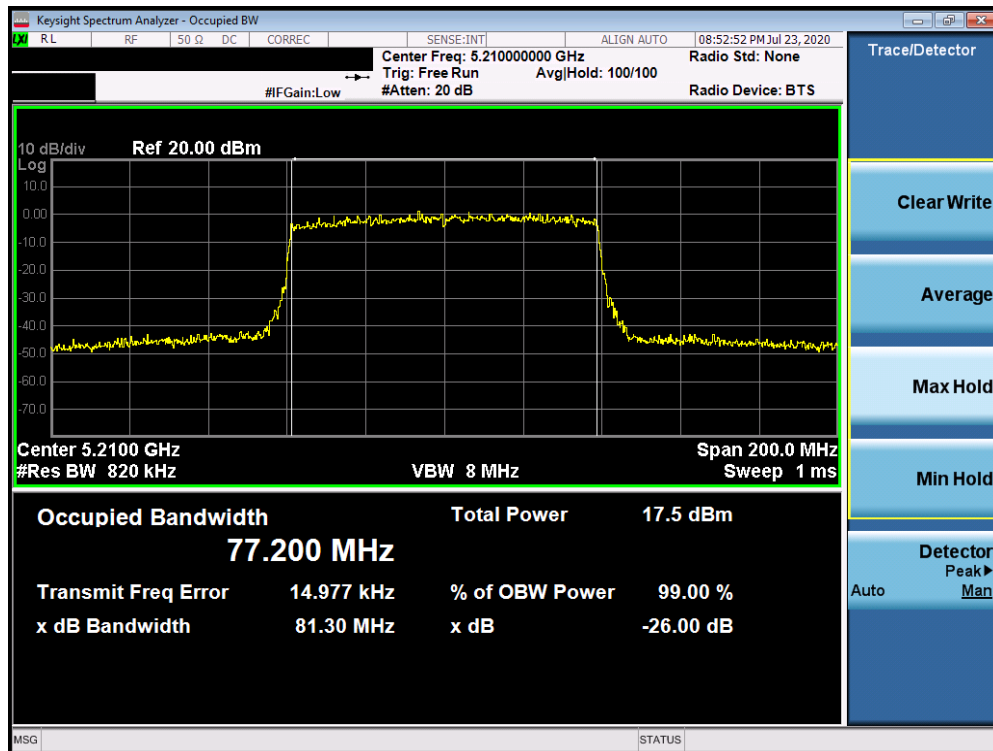


Plot 7-15. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ax (UNII Band 1) – Ch. 42)

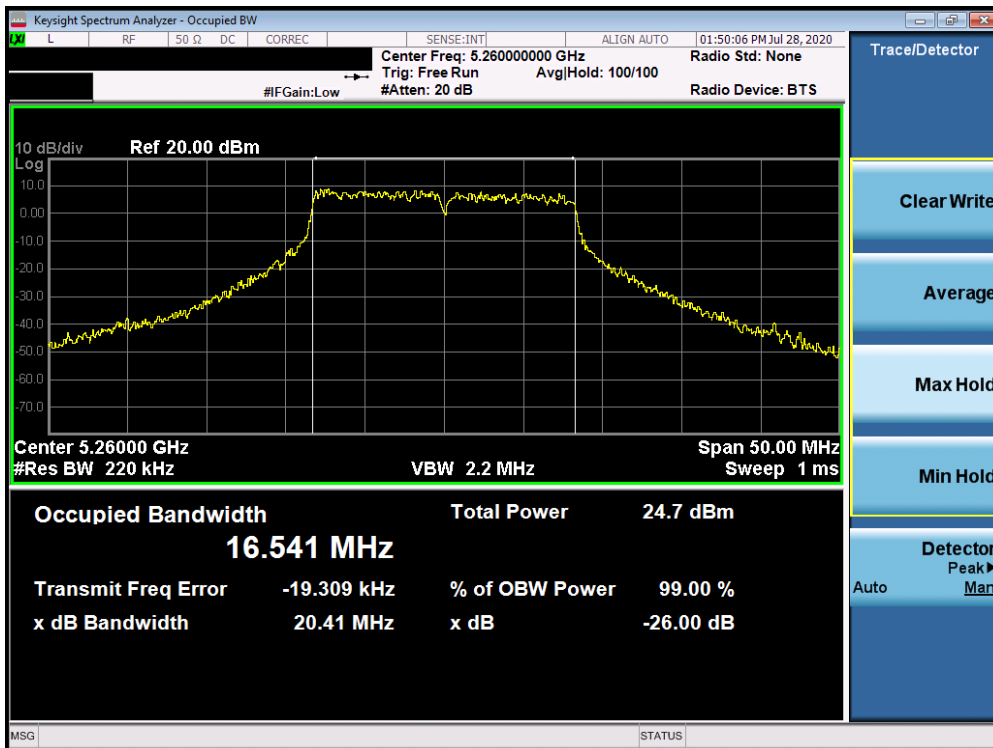


Plot 7-16. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMH204V	PCTEST Provided to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 24 of 344

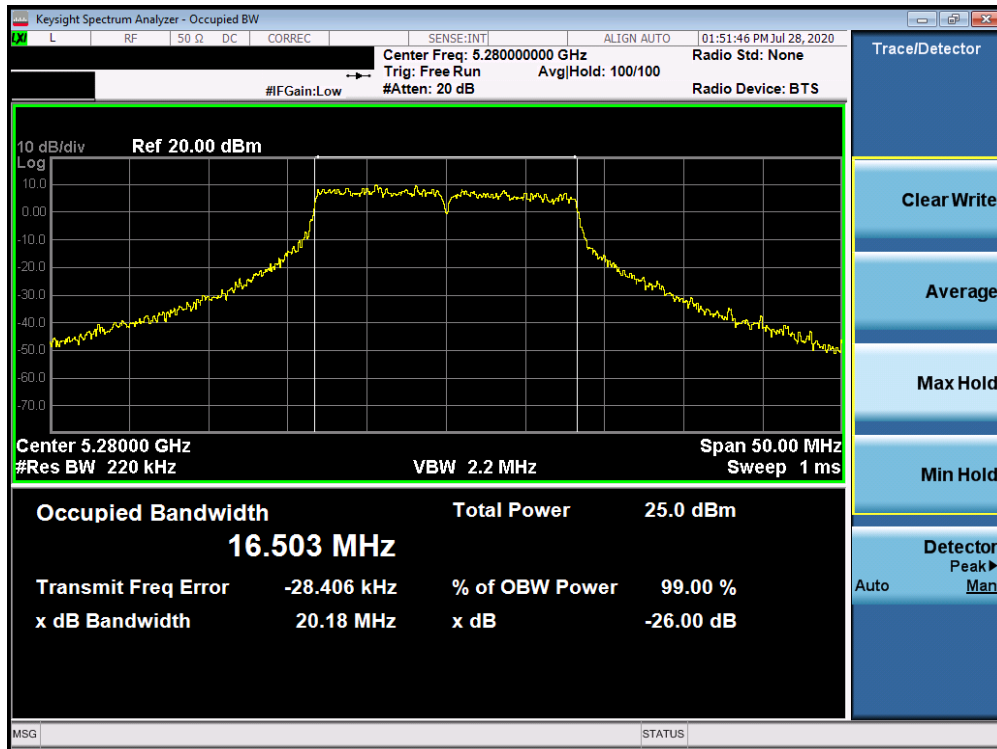


Plot 7-17. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 2A) – Ch. 56)

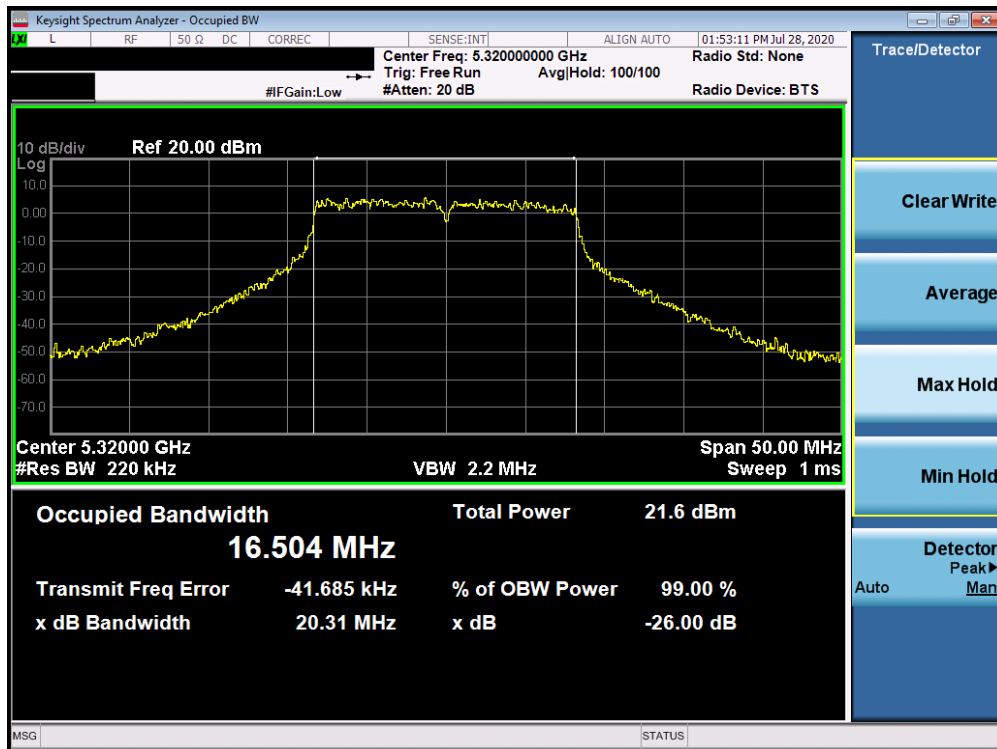


Plot 7-18. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 25 of 344

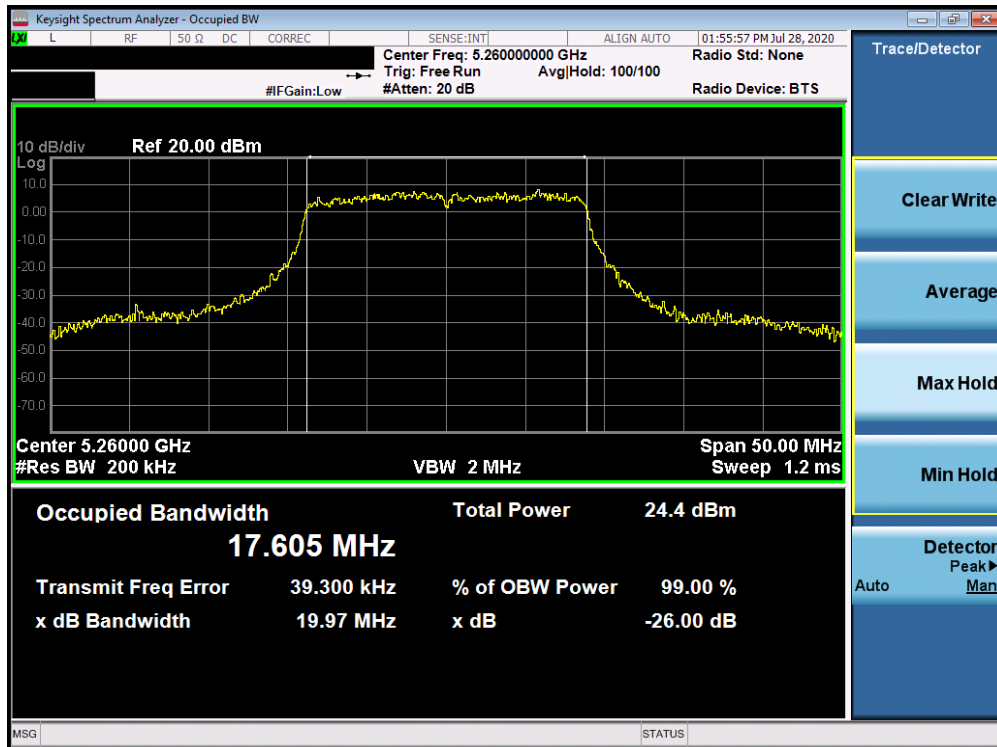


Plot 7-19. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

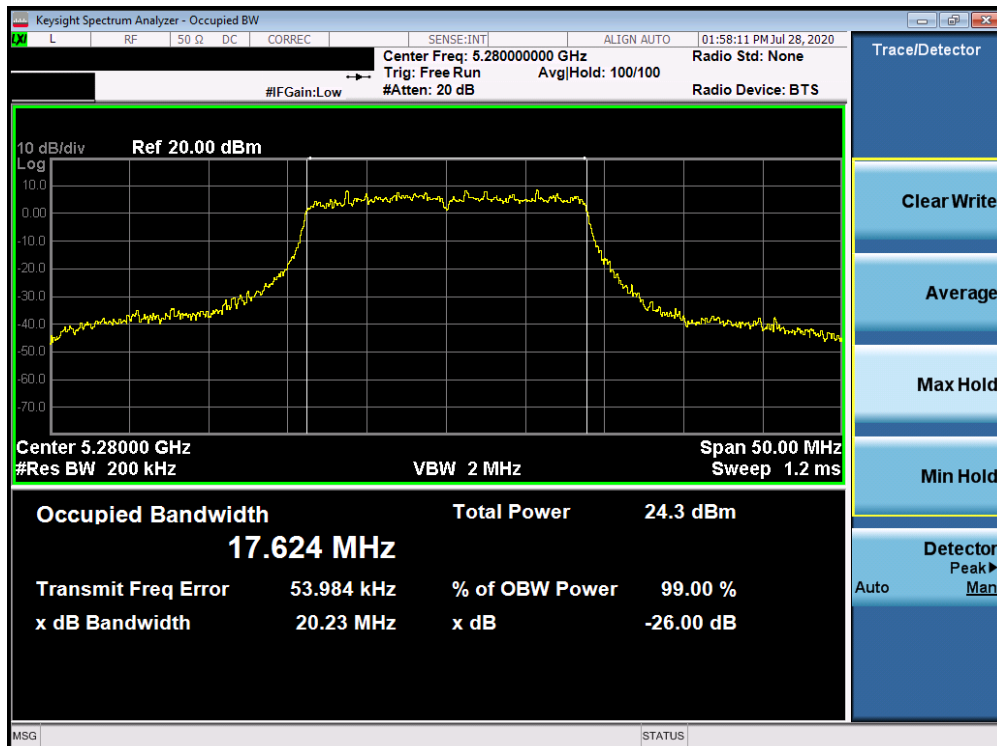


Plot 7-20. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 26 of 344

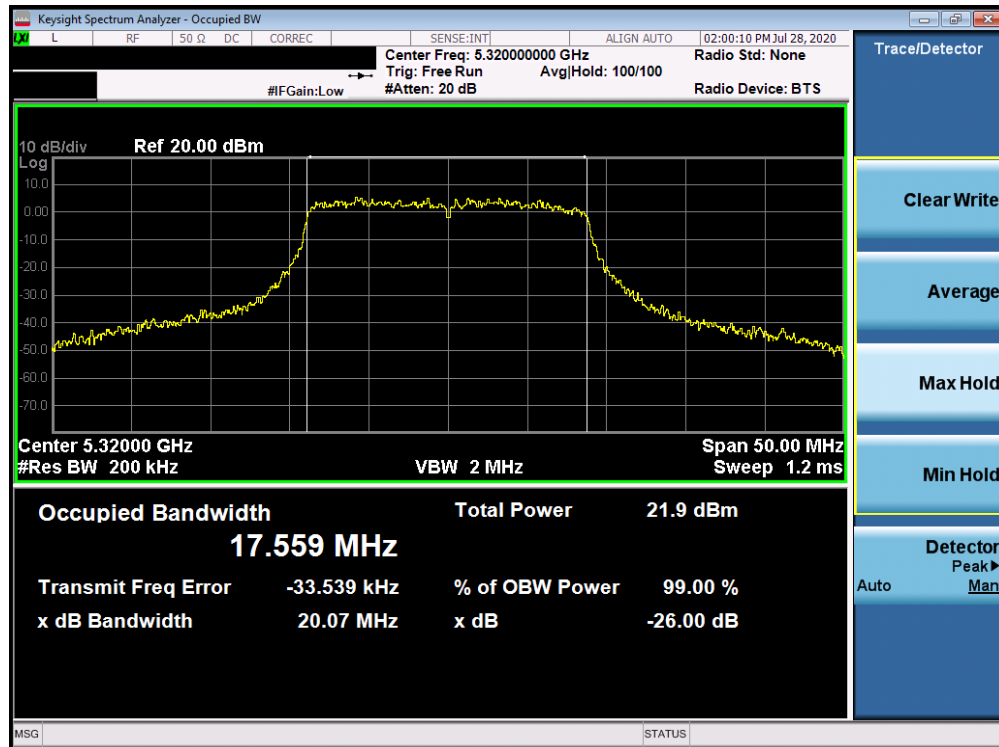


Plot 7-21. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

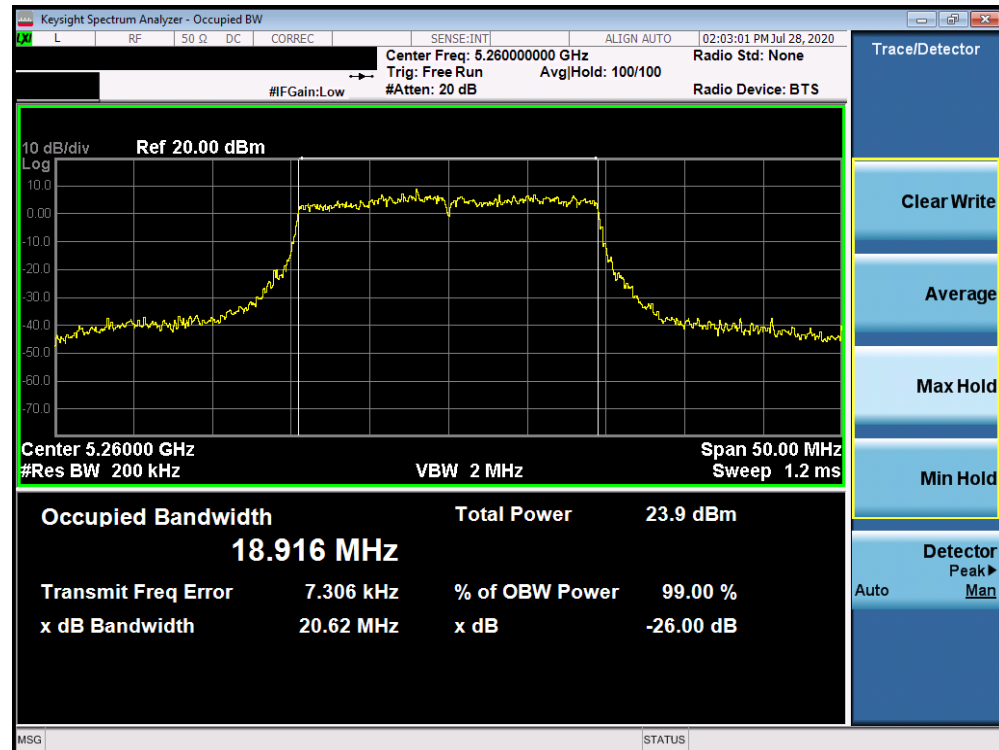


Plot 7-22. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 1) – Ch. 52)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 27 of 344

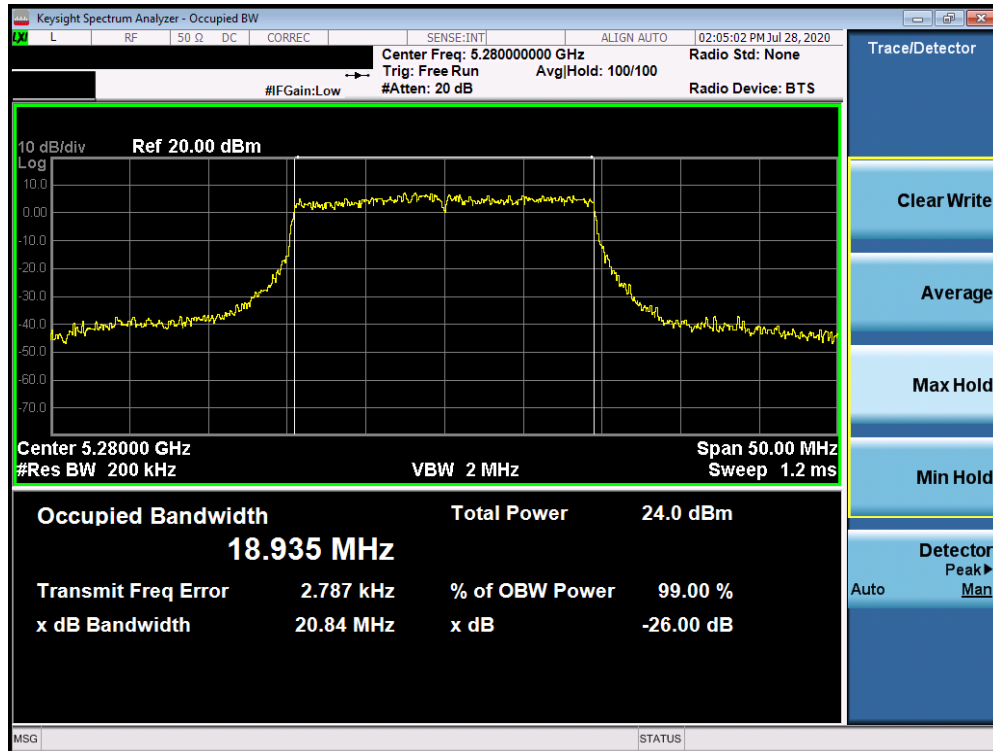


Plot 7-23. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 1) – Ch. 56)

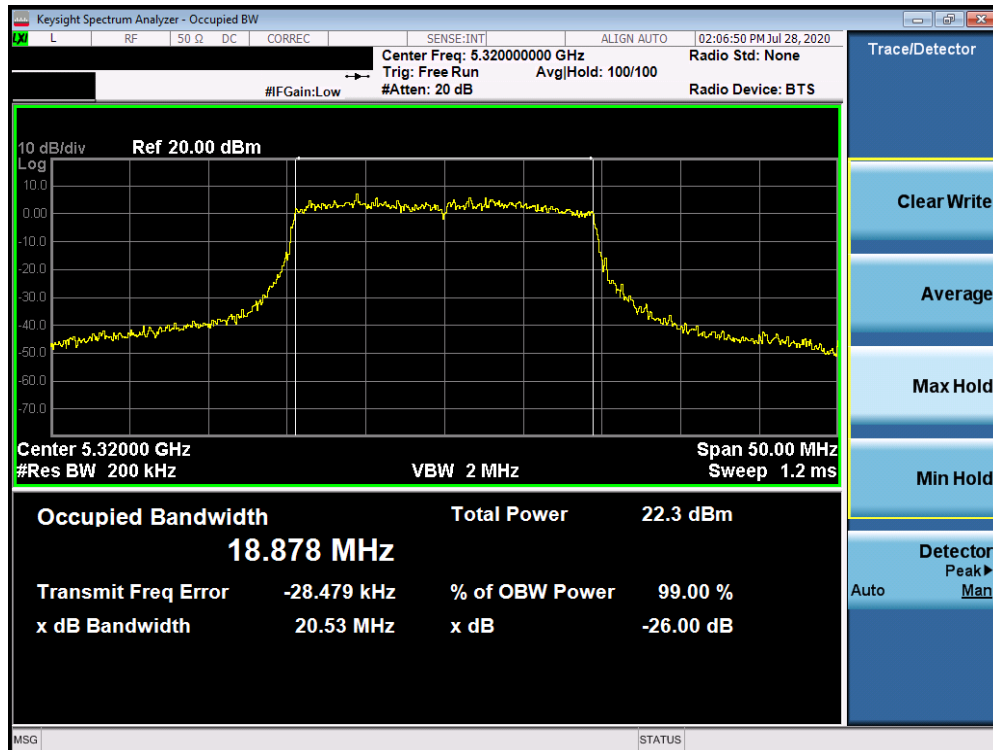


Plot 7-24. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 1) – Ch. 64)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 28 of 344

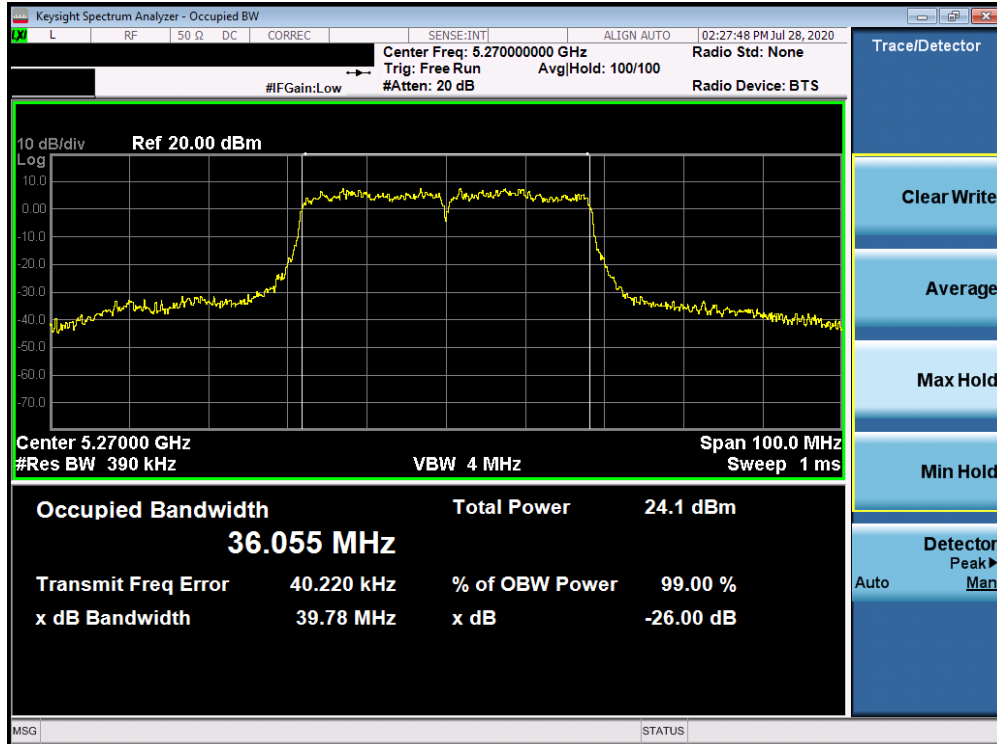


Plot 7-25. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

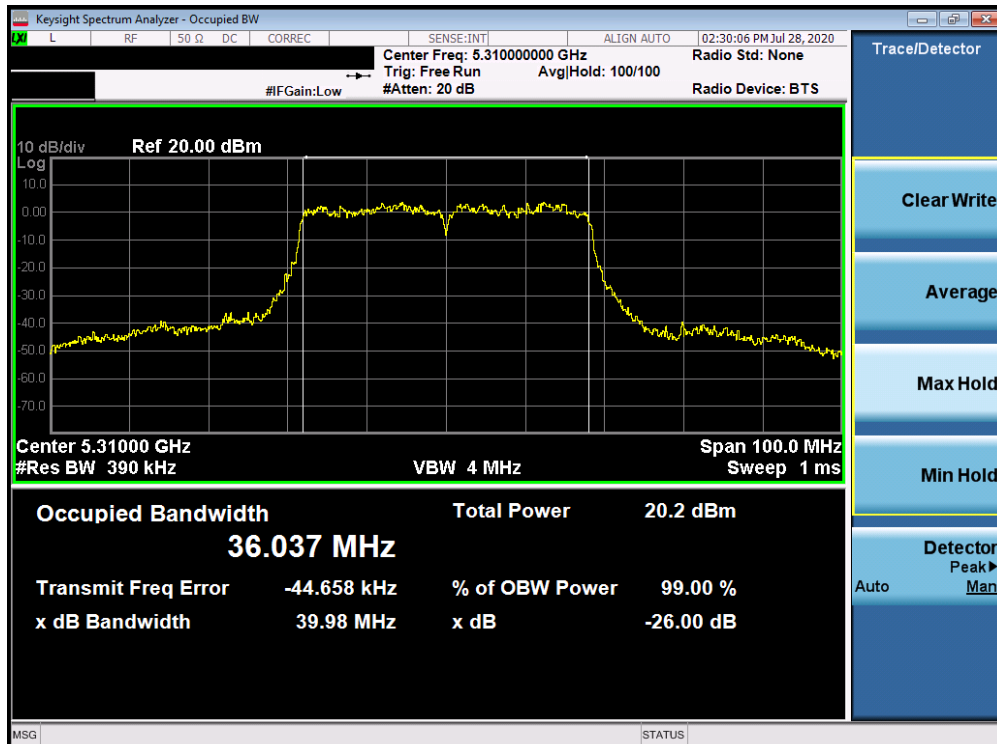


Plot 7-26. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 29 of 344

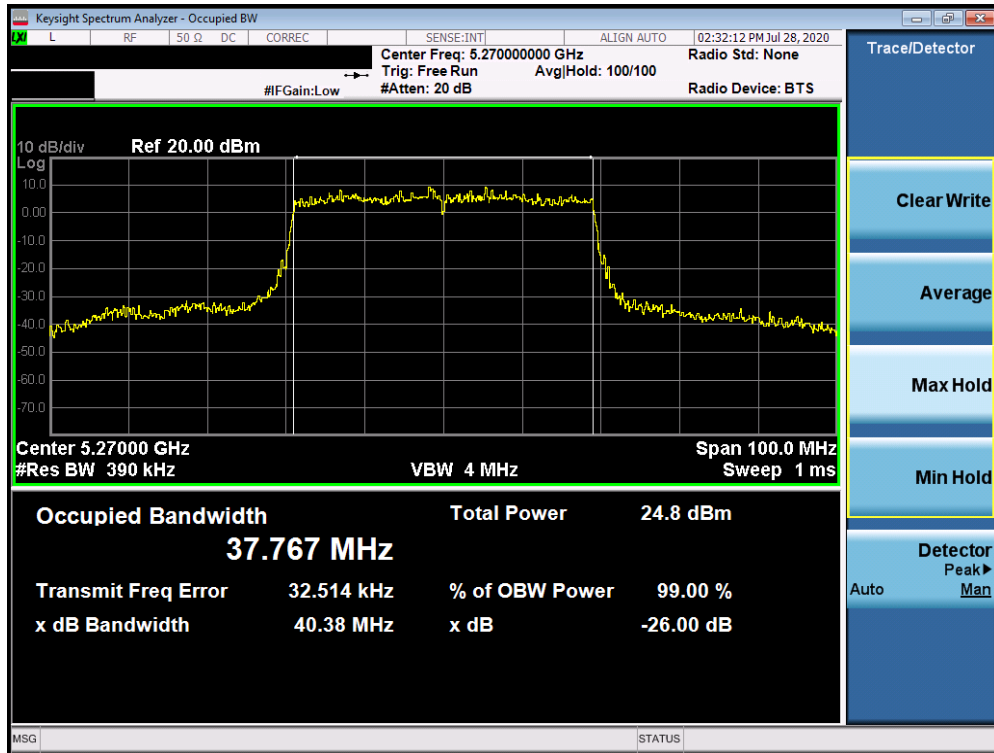


Plot 7-27. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 54)

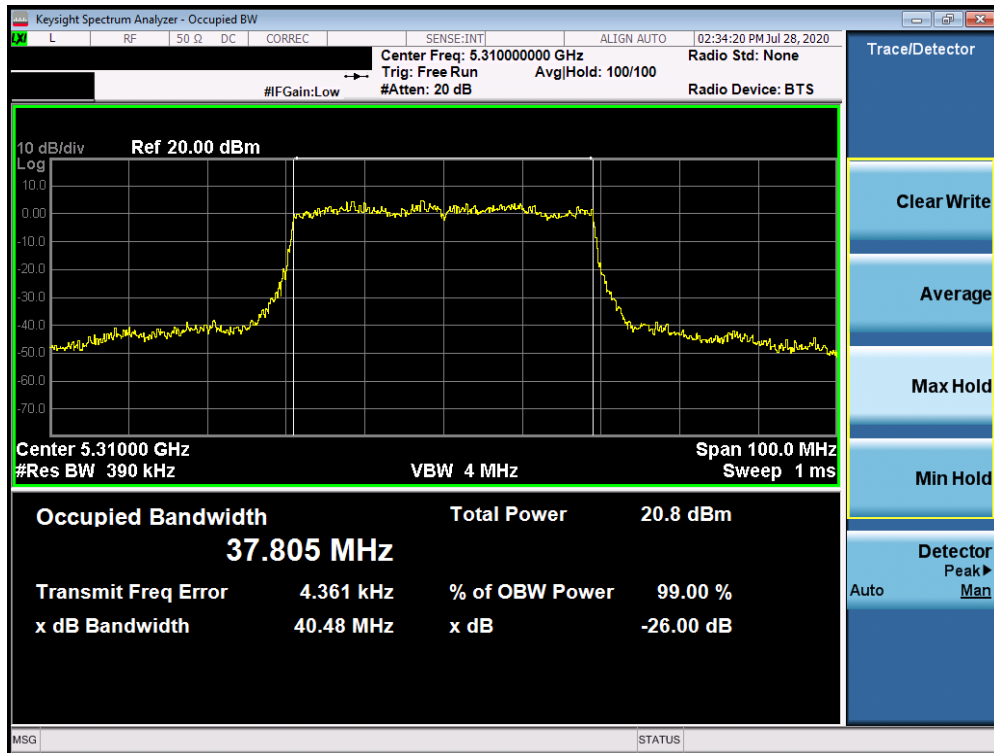


Plot 7-28. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11ax (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 30 of 344

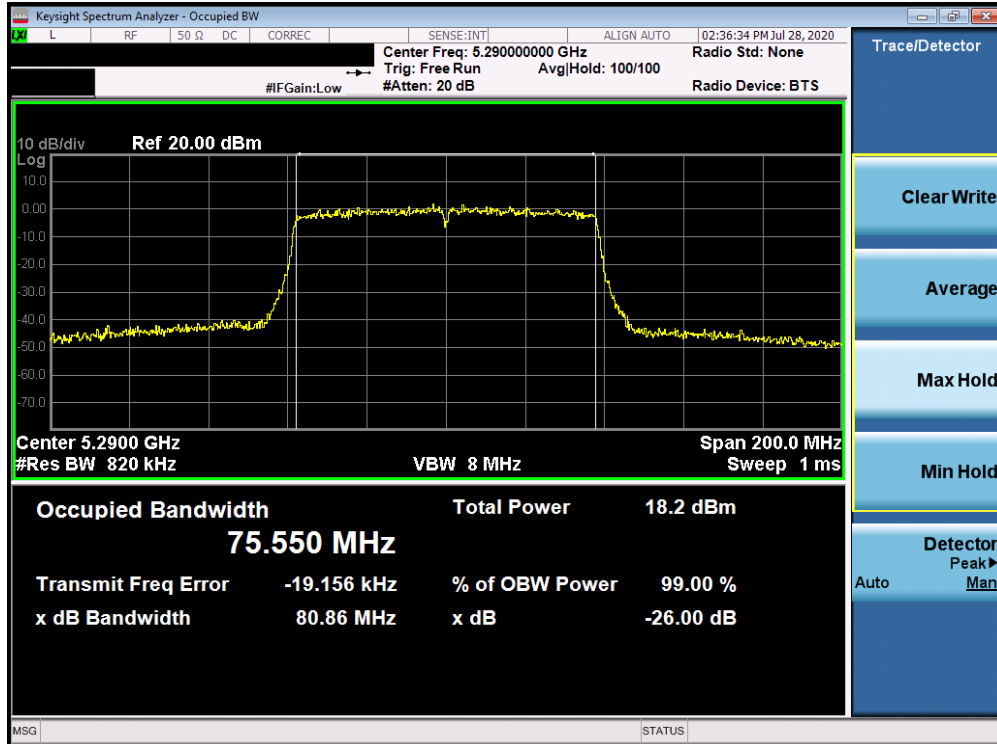


Plot 7-29. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

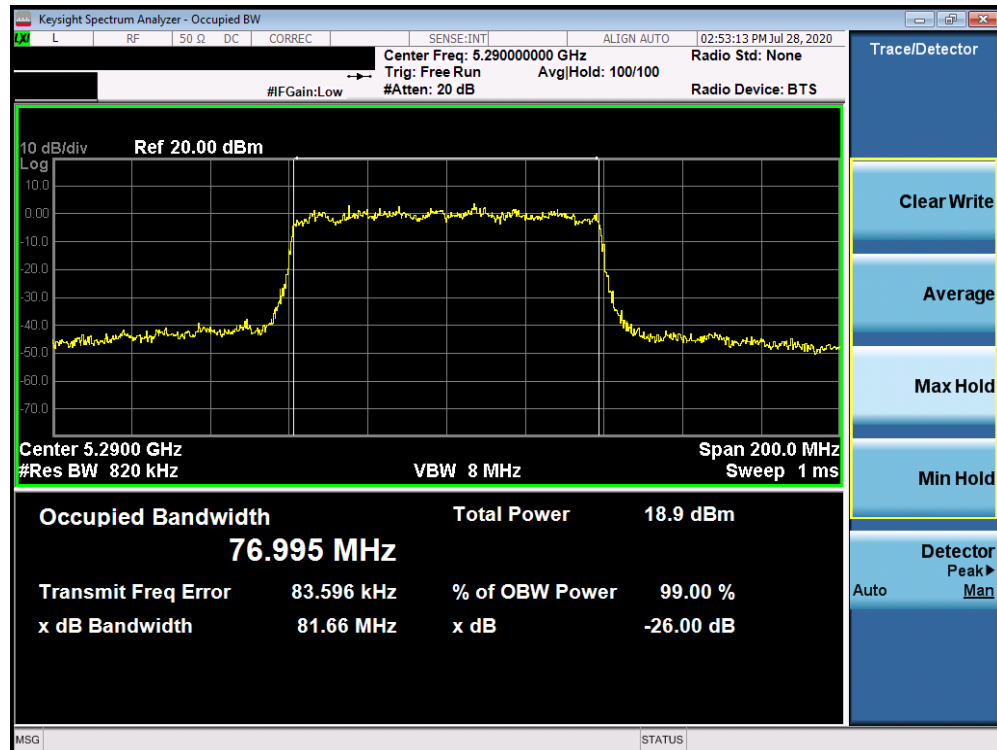


Plot 7-30. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 31 of 344

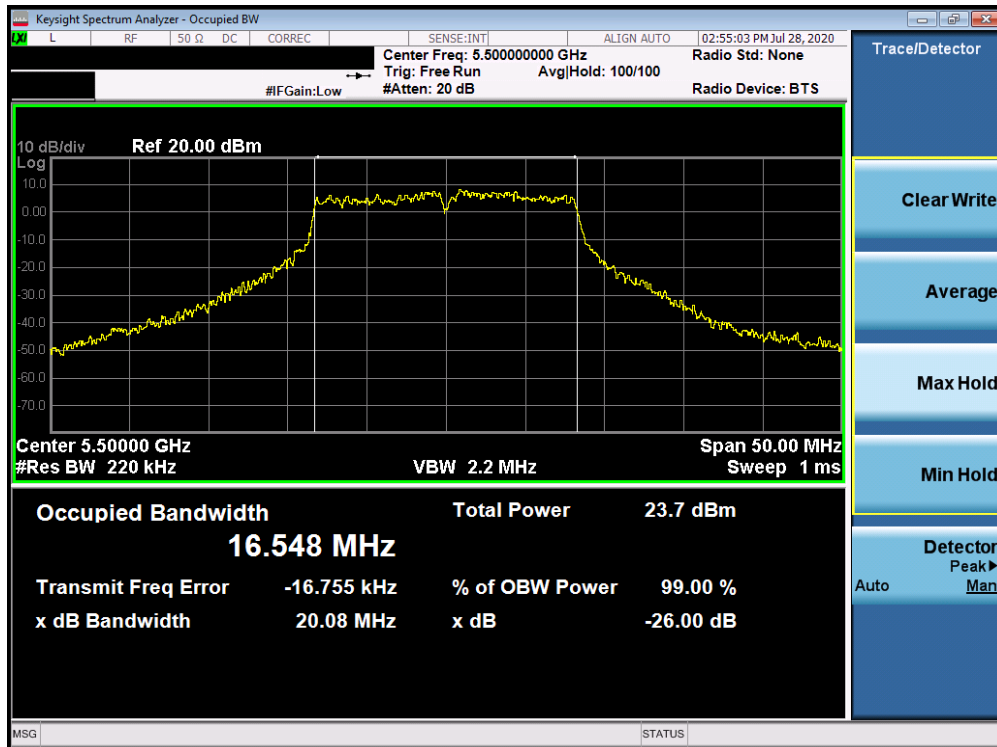


Plot 7-31. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 2C) – Ch. 100)

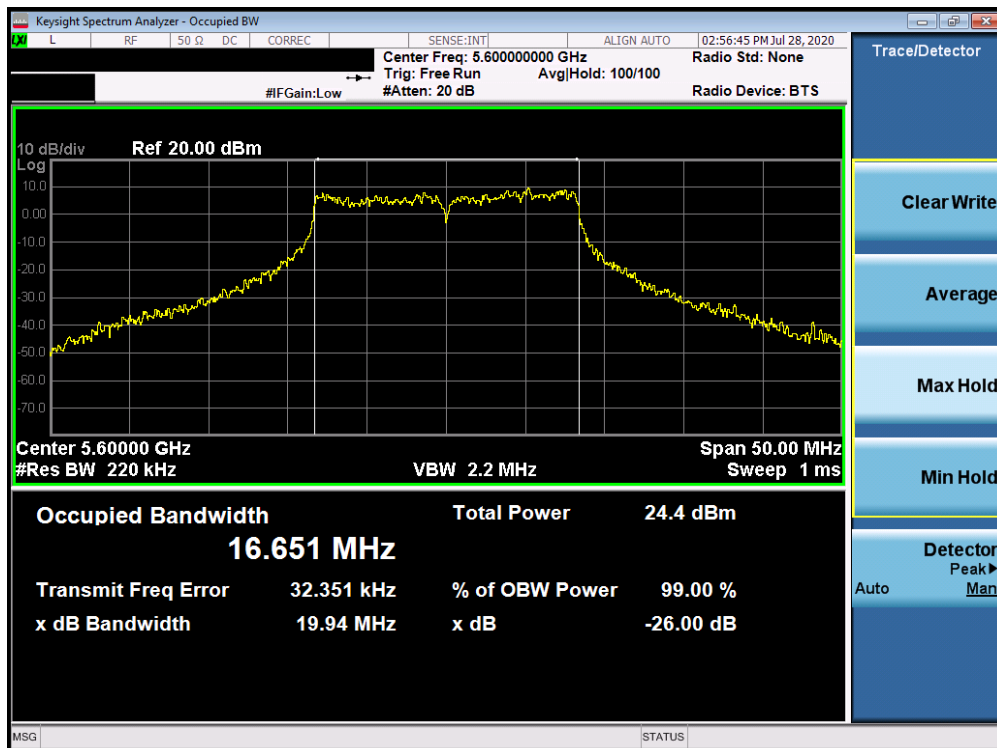


Plot 7-32. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 32 of 344

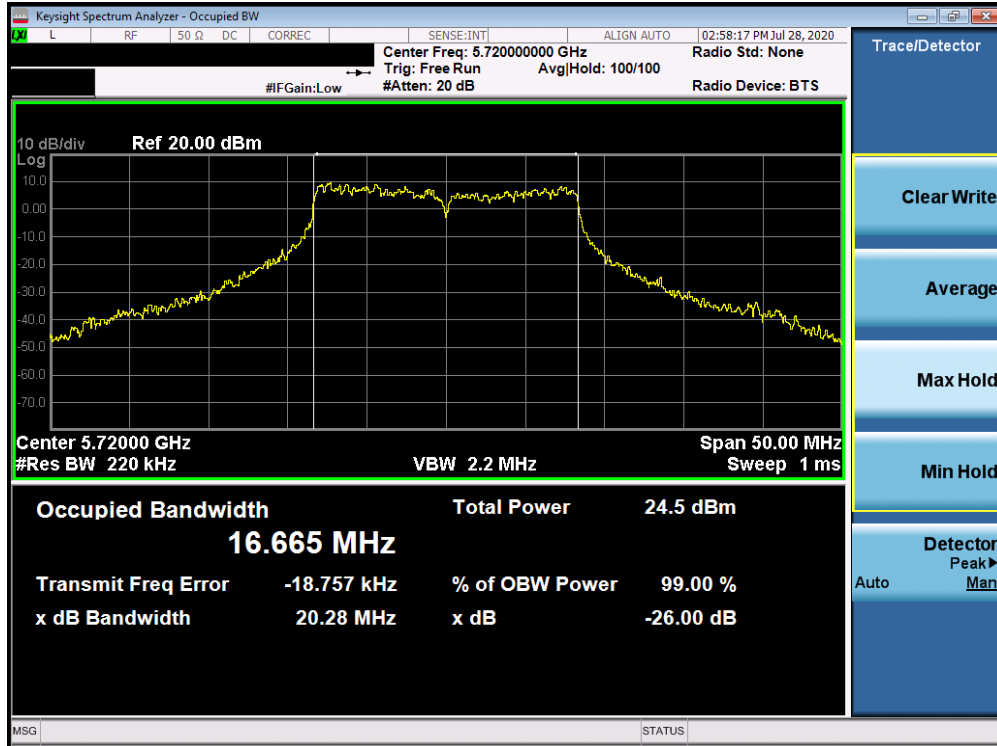


Plot 7-33. 26dB Bandwidth Plot ANT3 (802.11a (UNII Band 2C) – Ch. 144)

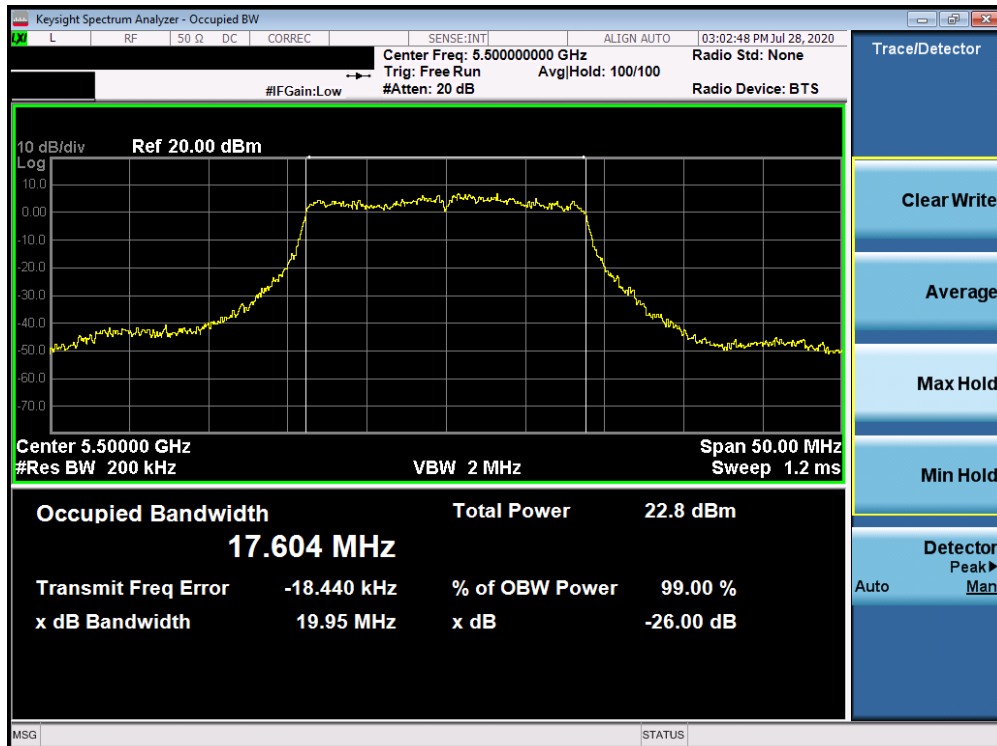


Plot 7-34. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 33 of 344

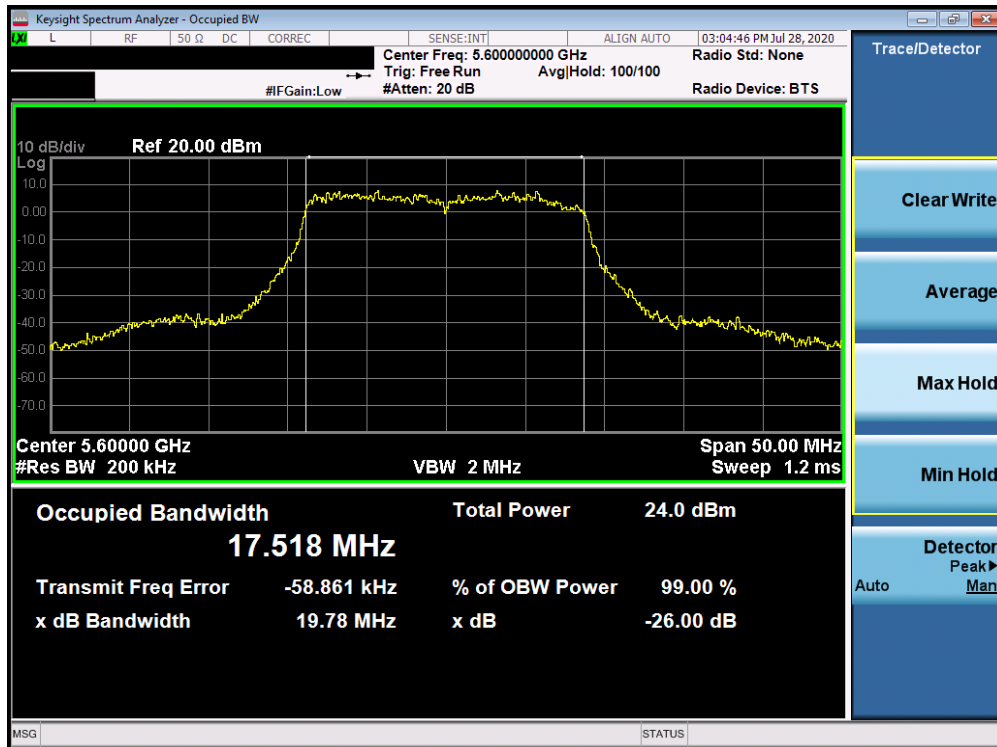


Plot 7-35. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

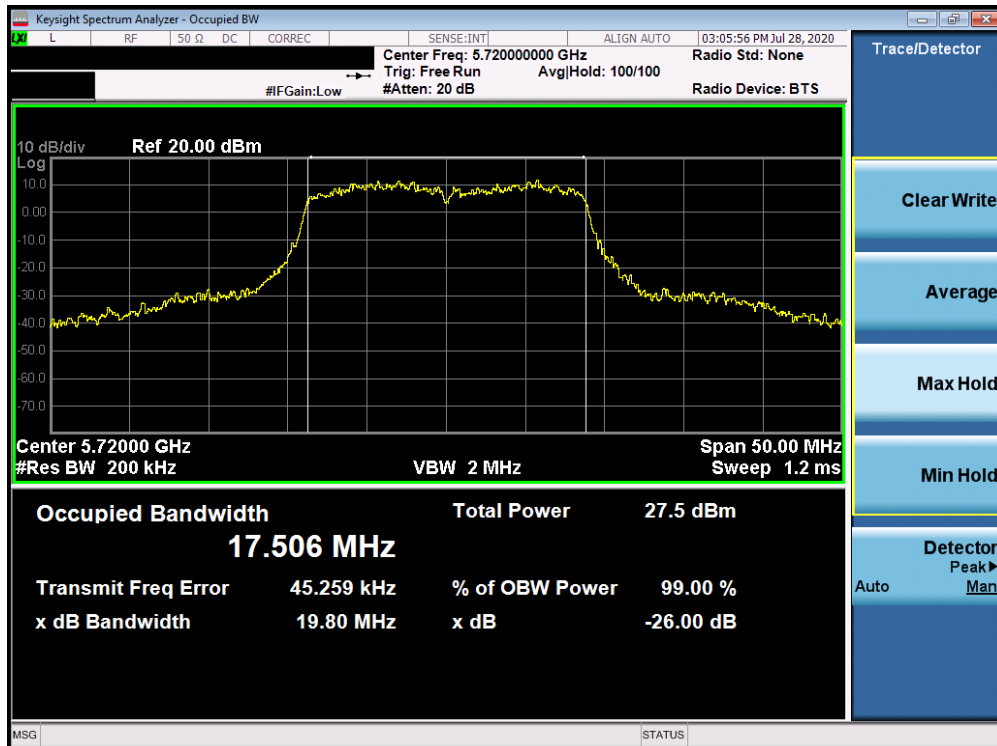

Plot 7-36. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 34 of 344

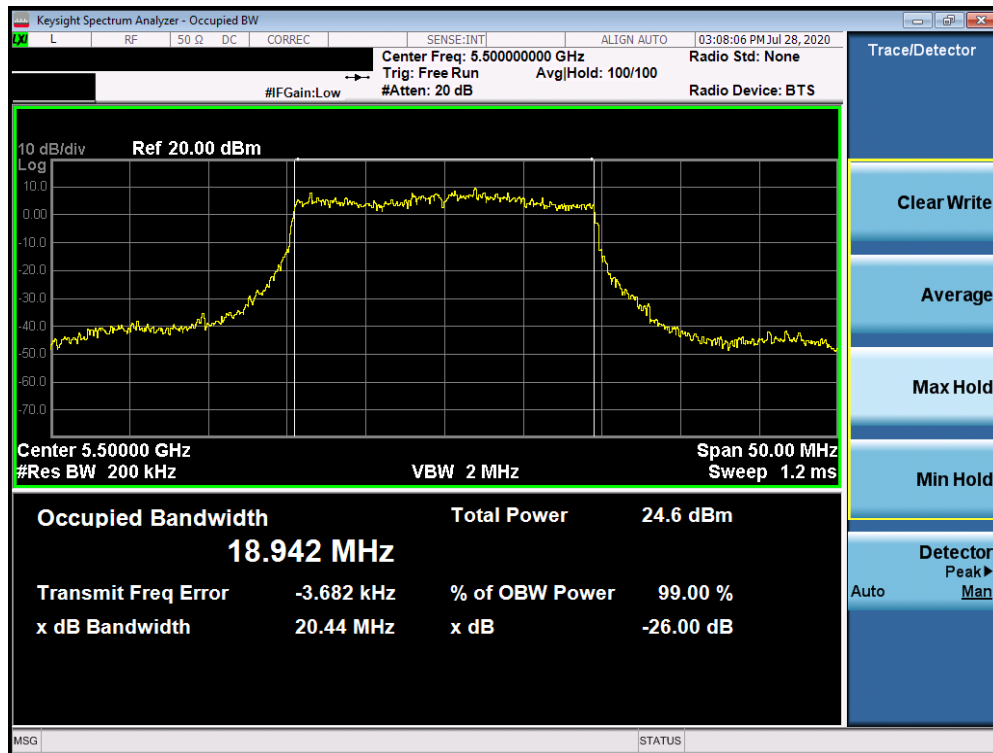


Plot 7-37. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 100)




Plot 7-38. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 35 of 344

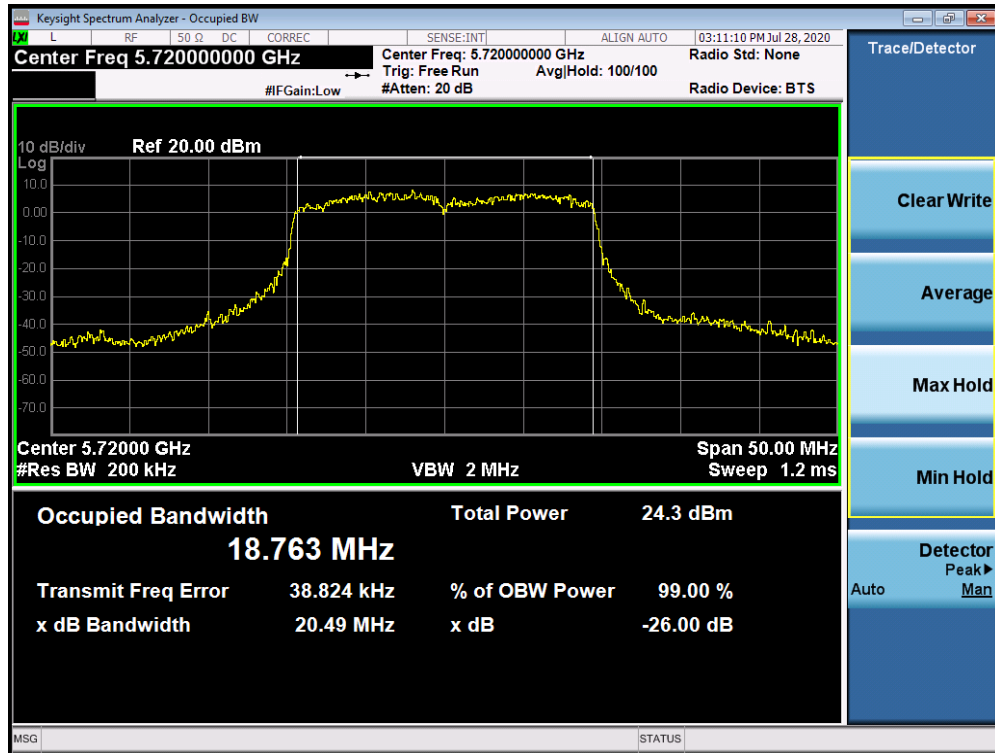


Plot 7-39. 26dB Bandwidth Plot ANT3 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 144)

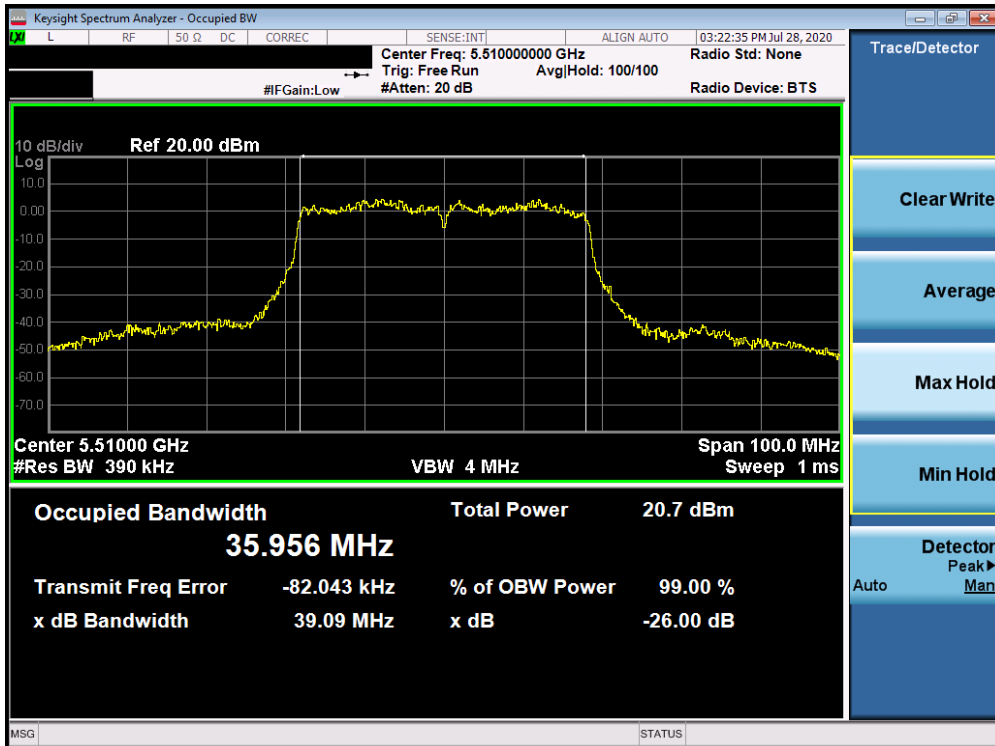


Plot 7-40. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 36 of 344

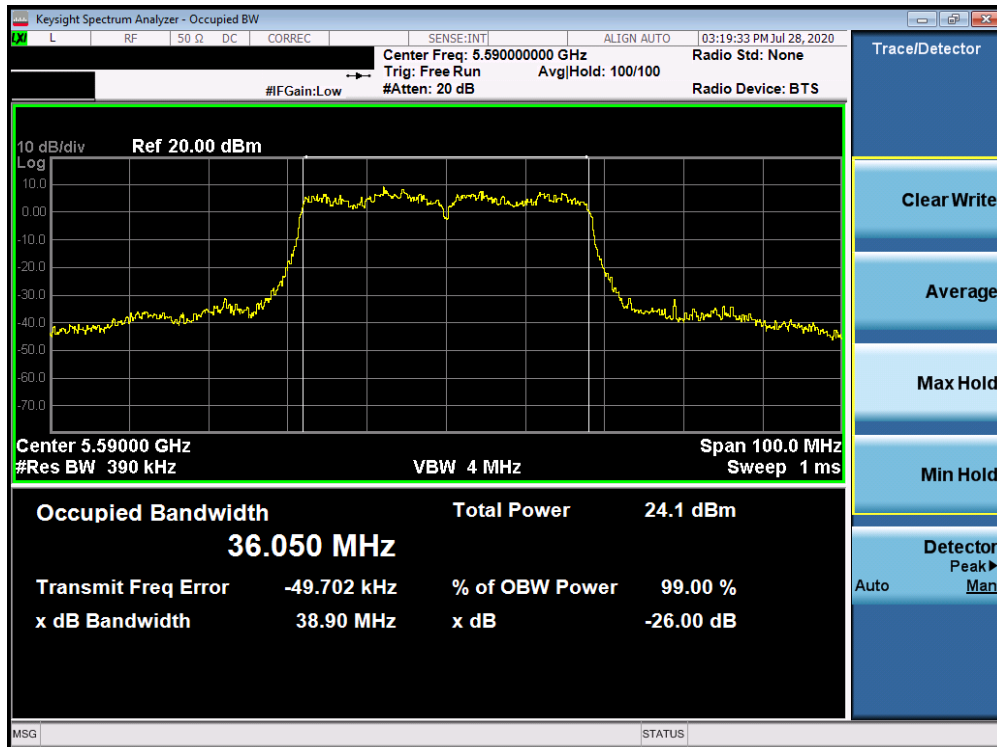


Plot 7-41. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

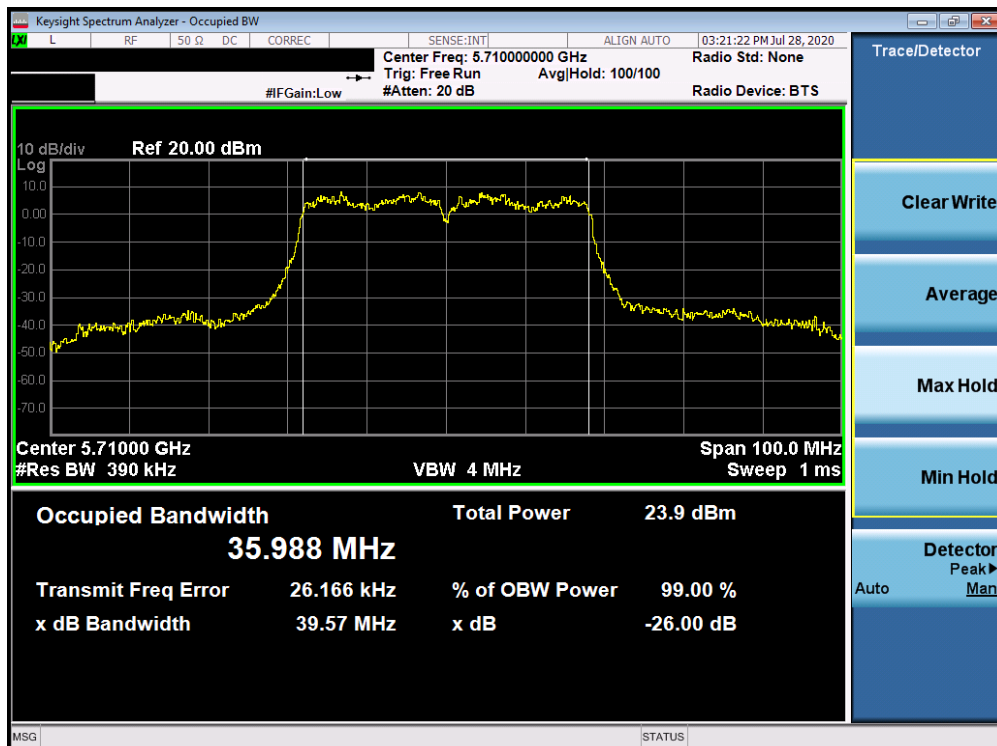


Plot 7-42. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 37 of 344

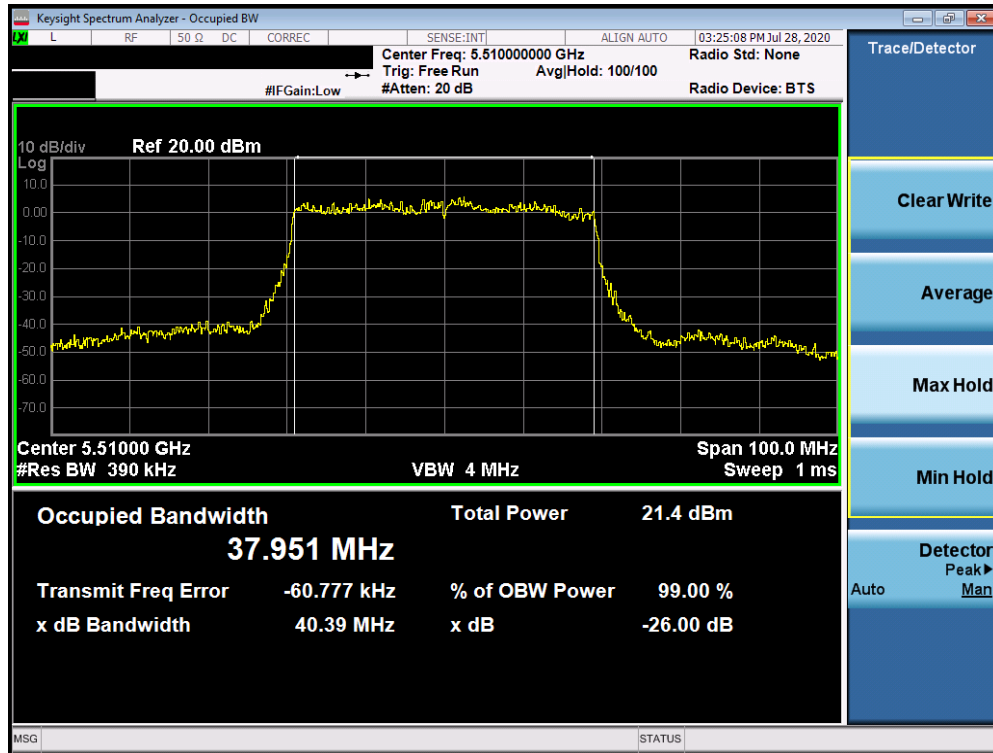


Plot 7-43. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 102)

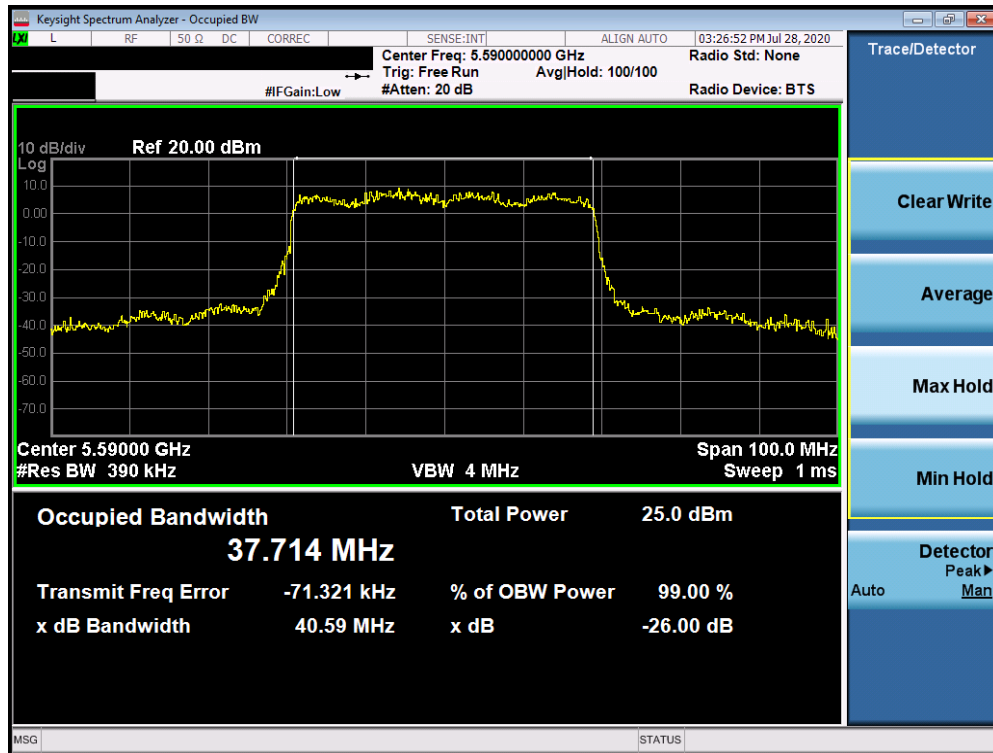


Plot 7-44. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 38 of 344

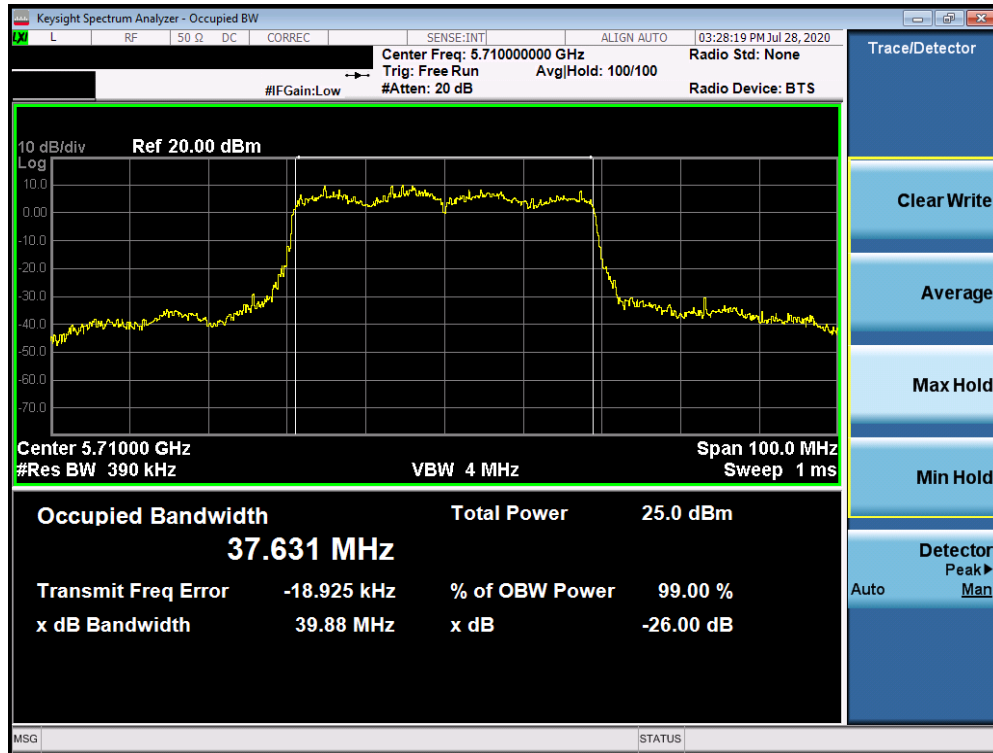


Plot 7-45. 26dB Bandwidth Plot ANT3 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 142)

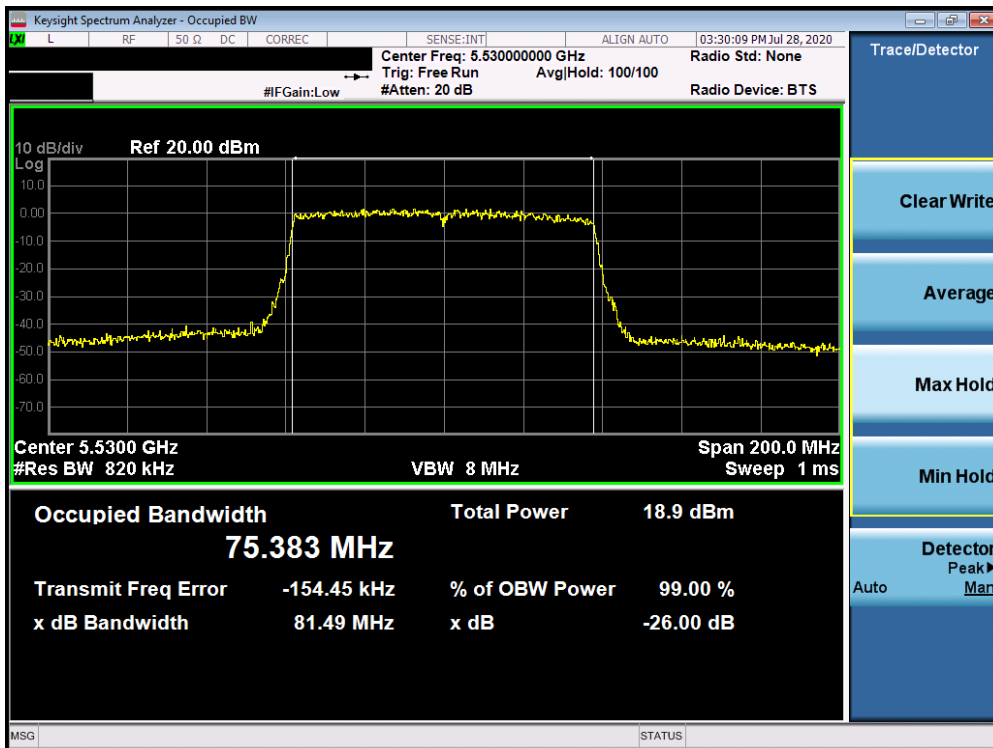


Plot 7-46. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 39 of 344

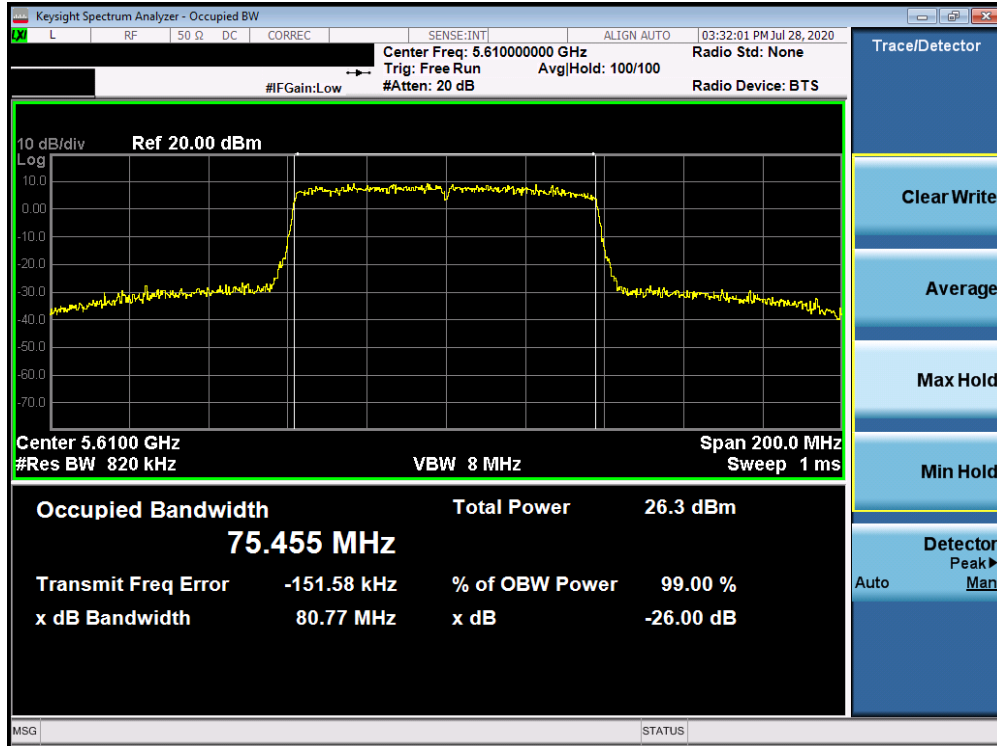


Plot 7-47. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

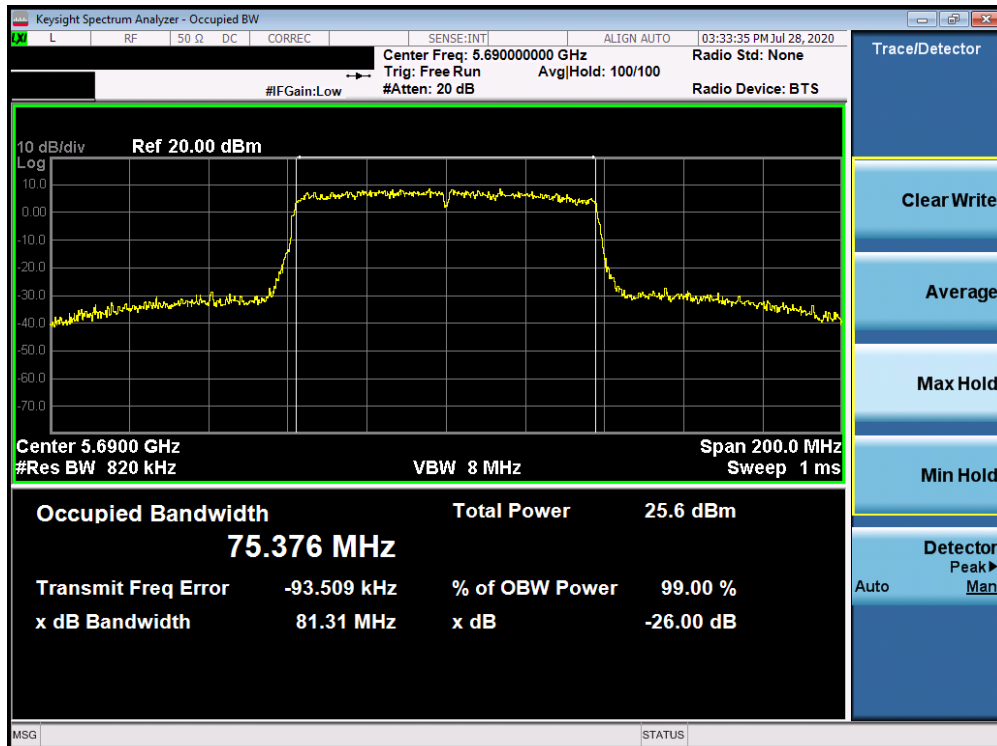


Plot 7-48. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 40 of 344

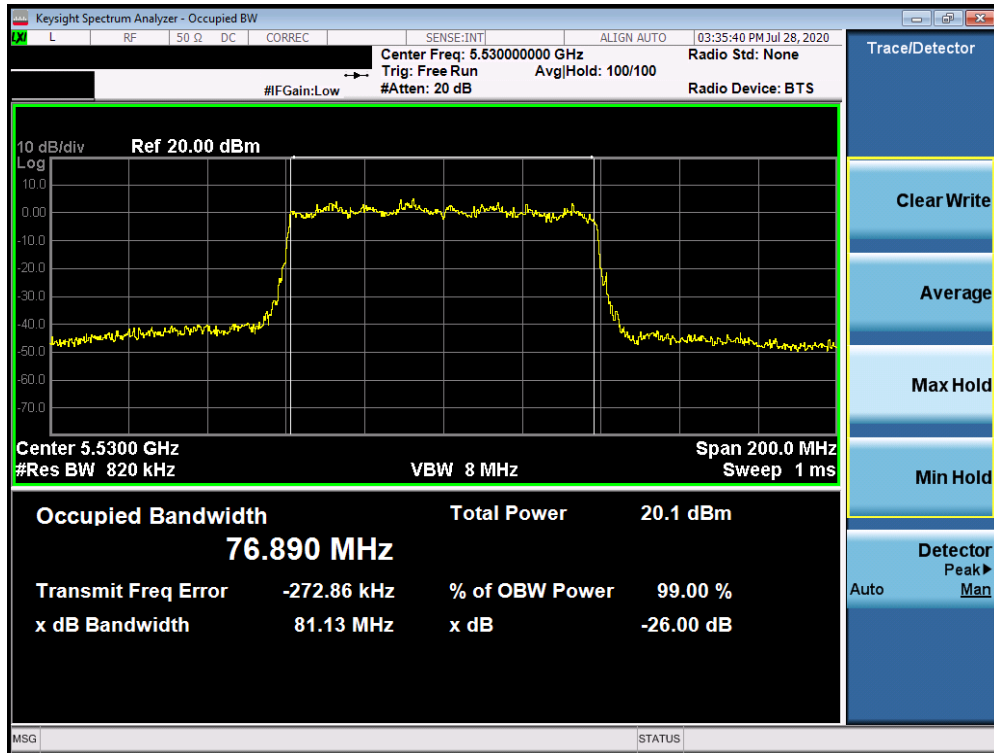


Plot 7-49. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 106)

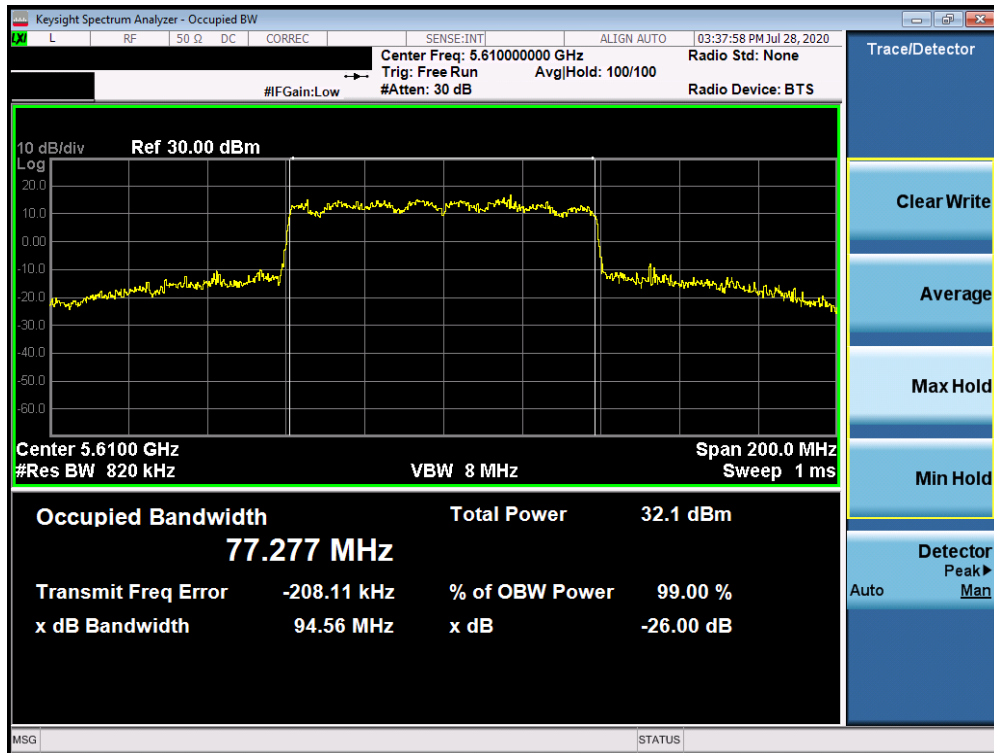

Plot 7-50. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 41 of 344

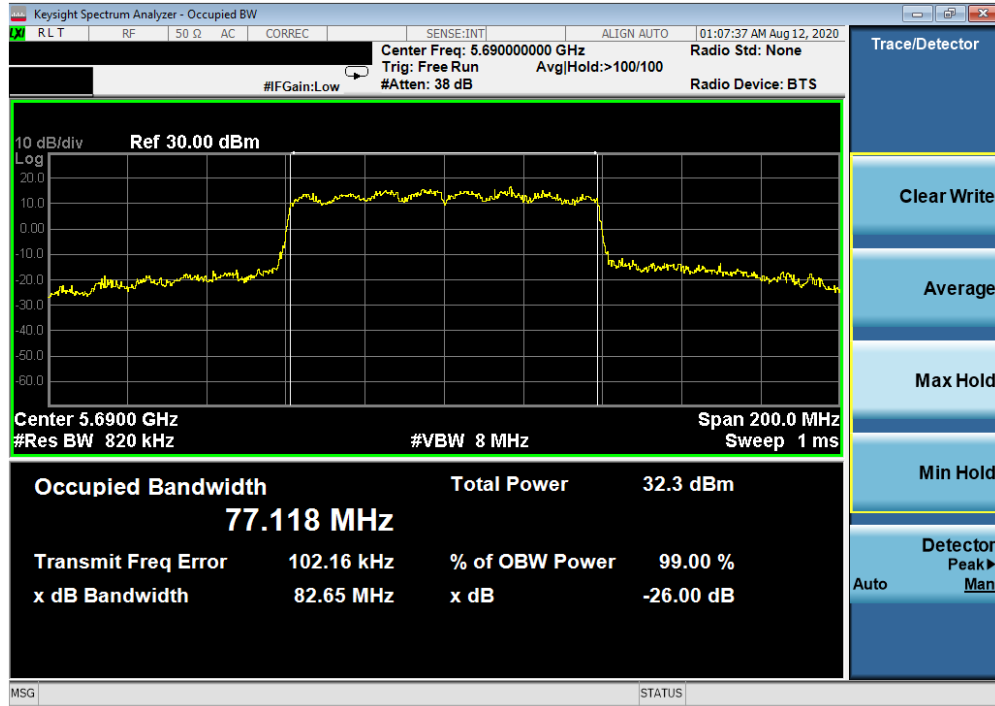

Plot 7-51. 26dB Bandwidth Plot ANT3 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 138)


FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 42 of 344

Antenna-4 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	19.53
	5200	40	a	6	20.23
	5240	48	a	6	19.75
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	20.50
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	20.80
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	20.63
	5180	36	ax (20MHz)	8/8.6 (MCS0)	20.94
	5200	40	ax (20MHz)	8/8.6 (MCS0)	21.18
	5240	48	ax (20MHz)	8/8.6 (MCS0)	20.99
	5190	38	n (40MHz)	13.5/15 (MCS0)	40.10
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.37
	5190	38	ax (40MHz)	8/8.6 (MCS0)	40.41
	5230	46	ax (40MHz)	13.5/15 (MCS0)	40.71
	5210	42	ac (80MHz)	8/8.6 (MCS0)	81.68
	5210	42	ax (80MHz)	8/8.6 (MCS0)	81.36
Band 2A	5260	52	a	6	20.11
	5280	56	a	6	20.78
	5320	64	a	6	21.13
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	20.79
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	19.76
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	24.75
	5260	52	ax (20MHz)	8/8.6 (MCS0)	20.77
	5280	56	ax (20MHz)	8/8.6 (MCS0)	21.13
	5320	64	ax (20MHz)	8/8.6 (MCS0)	21.22
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.72
	5310	62	n (40MHz)	13.5/15 (MCS0)	41.11
	5270	54	ax (40MHz)	8/8.6 (MCS0)	40.78
	5310	62	ax (40MHz)	8/8.6 (MCS0)	42.35
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.20
	5290	58	ax (80MHz)	8/8.6 (MCS0)	81.25
Band 2C	5500	100	a	6	39.10
	5600	120	a	6	37.69
	5720	144	a	6	36.55
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	40.20
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	39.59
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	39.03
	5500	100	ax (20MHz)	8/8.6 (MCS0)	38.39
	5600	120	ax (20MHz)	8/8.6 (MCS0)	42.01
	5720	144	ax (20MHz)	8/8.6 (MCS0)	36.88
	5510	102	n (40MHz)	13.5/15 (MCS0)	76.14
	5590	118	n (40MHz)	13.5/15 (MCS0)	77.51
	5710	142	n (40MHz)	13.5/15 (MCS0)	76.54
	5510	102	ax (40MHz)	8/8.6 (MCS0)	73.30
	5590	118	ax (40MHz)	8/8.6 (MCS0)	80.70
	5710	142	ax (40MHz)	8/8.6 (MCS0)	74.68
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	150.70
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	171.80
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	146.10
	5530	106	ax (80MHz)	8/8.6 (MCS0)	81.29
	5610	122	ax (80MHz)	8/8.6 (MCS0)	81.85
	5690	138	ax (80MHz)	8/8.6 (MCS0)	81.98

Table 7-3. Conducted Bandwidth Measurements

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 43 of 344

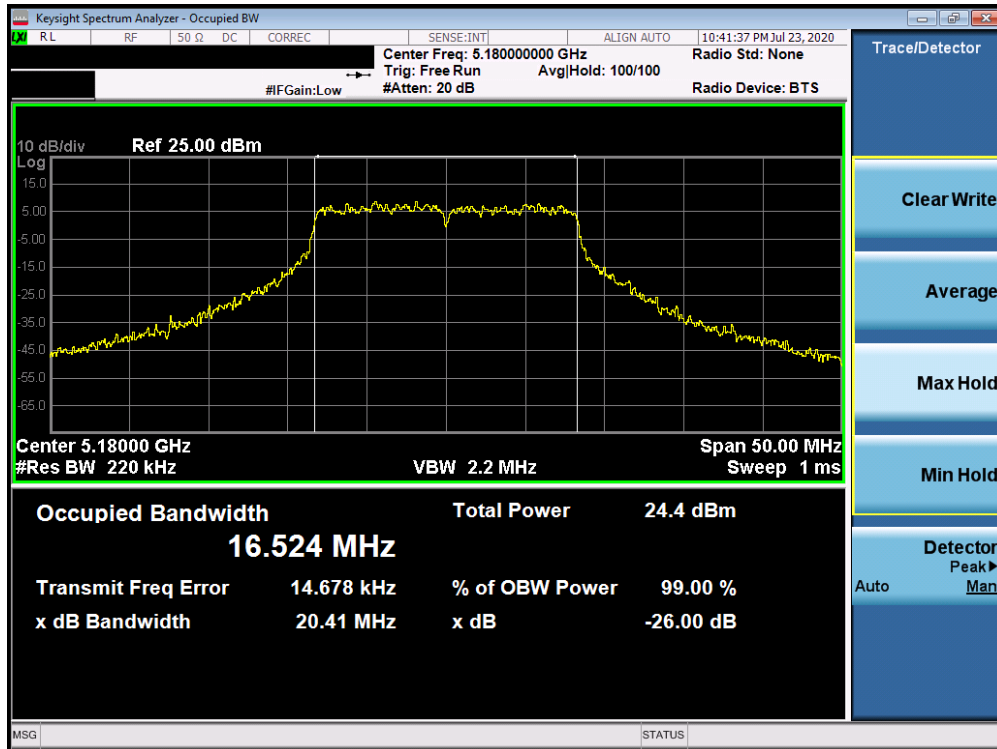


Plot 7-52. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 1) – Ch. 36)

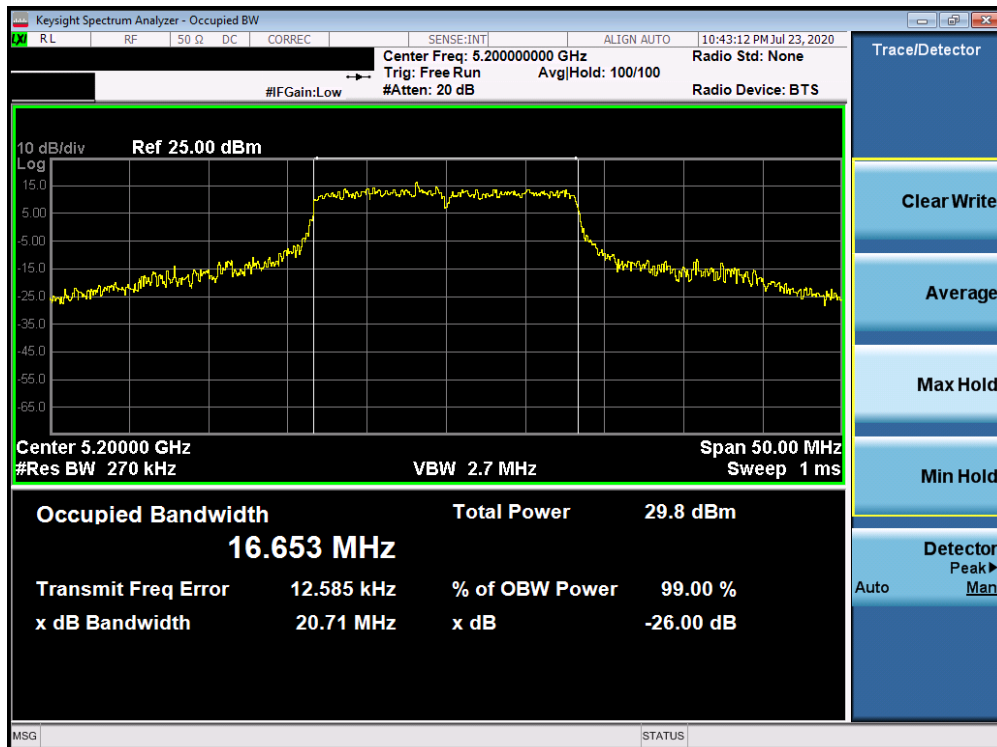


Plot 7-53. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMH204V	PCTEST Provided to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 44 of 344

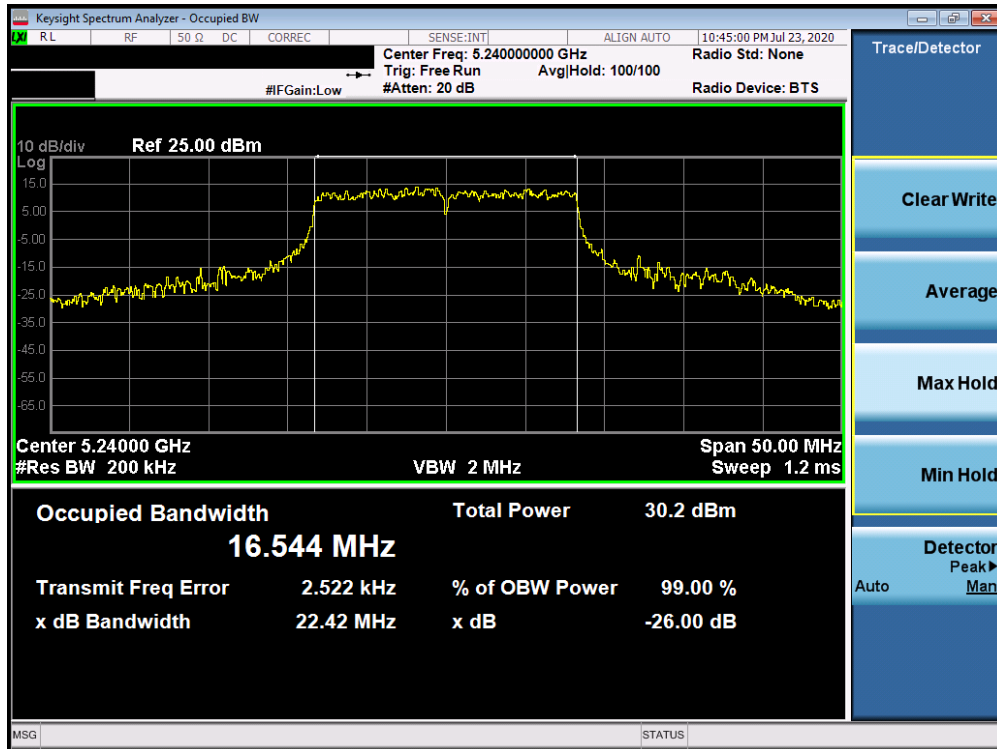


Plot 7-54. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 1) – Ch. 48)

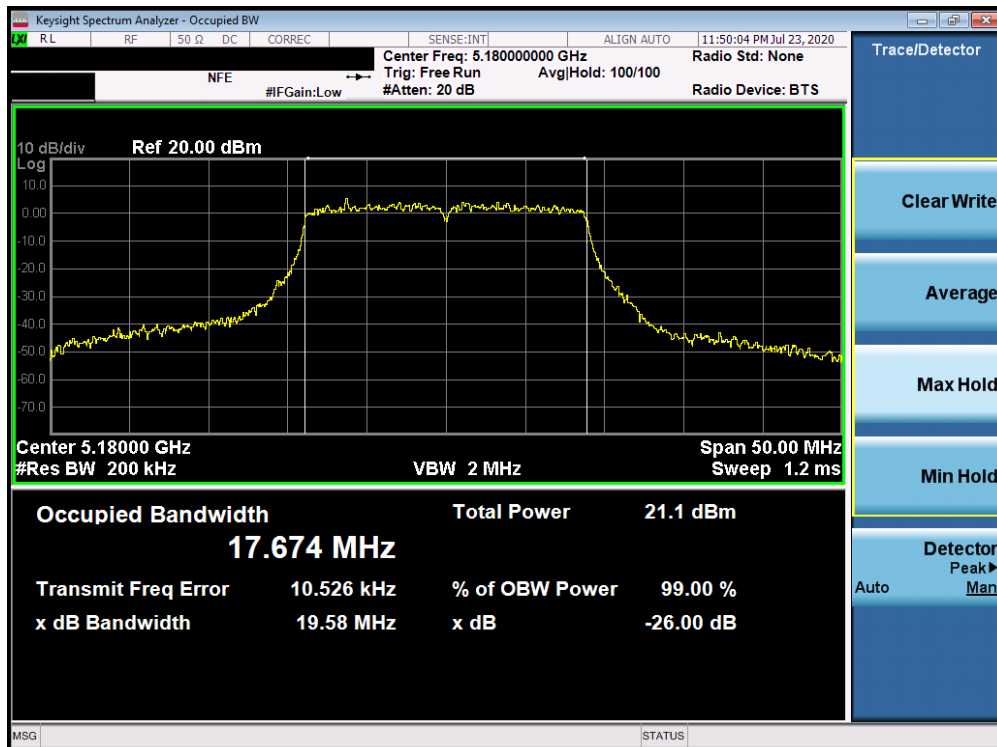


Plot 7-55. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 45 of 344

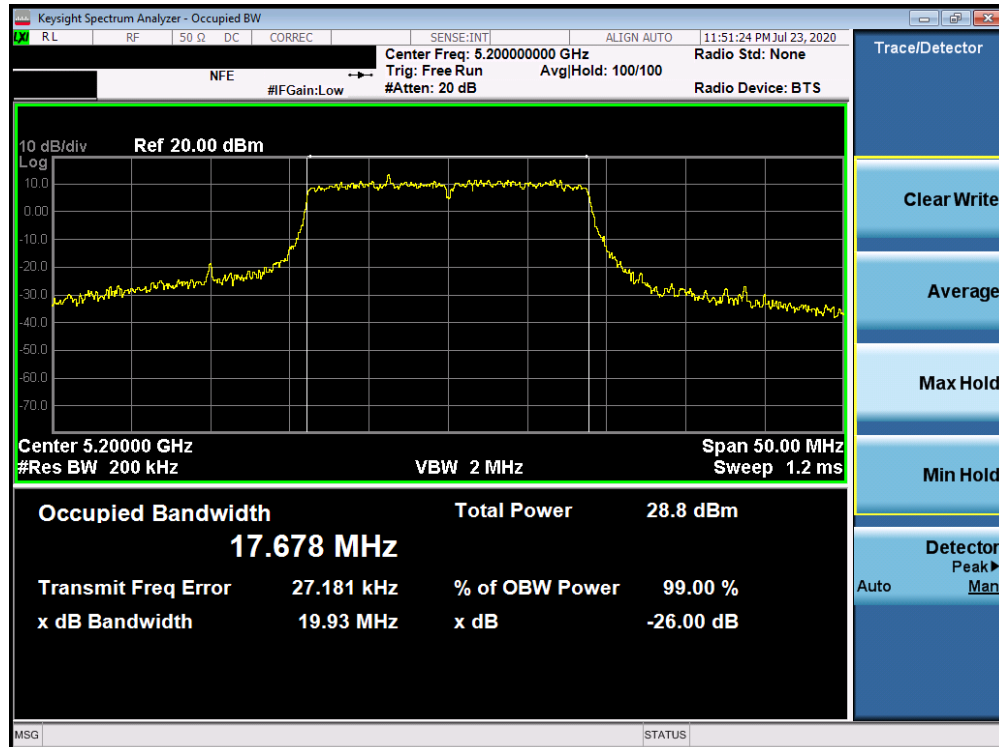


Plot 7-56. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

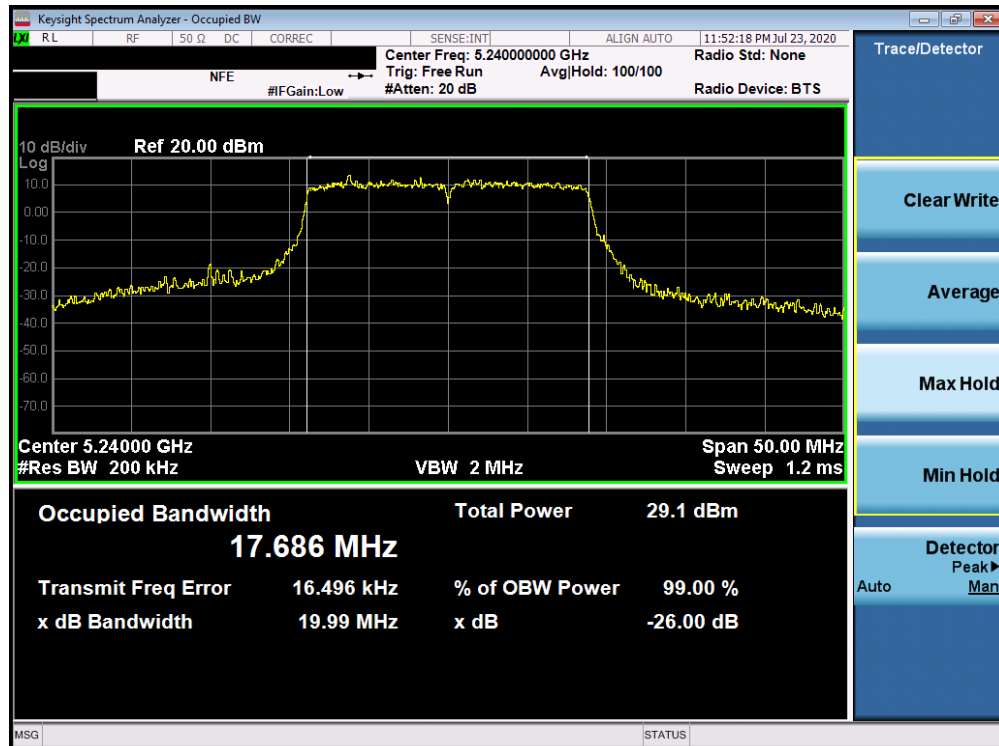


Plot 7-57. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 46 of 344

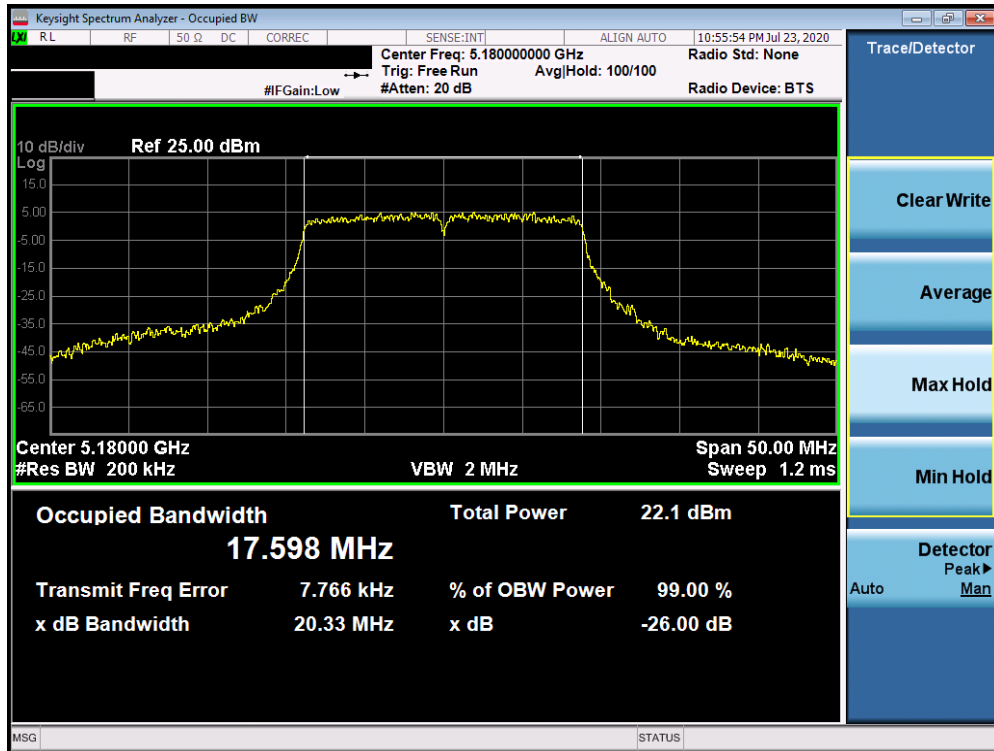


Plot 7-58. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 1) – Ch. 36)

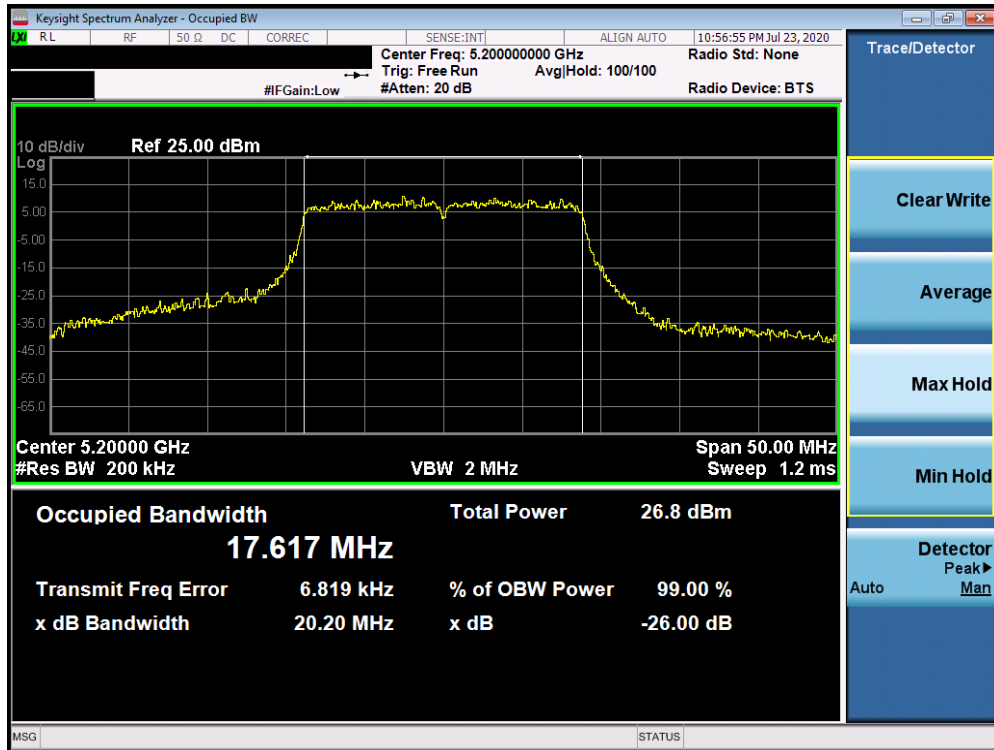


Plot 7-59. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 1) – Ch. 40)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 47 of 344

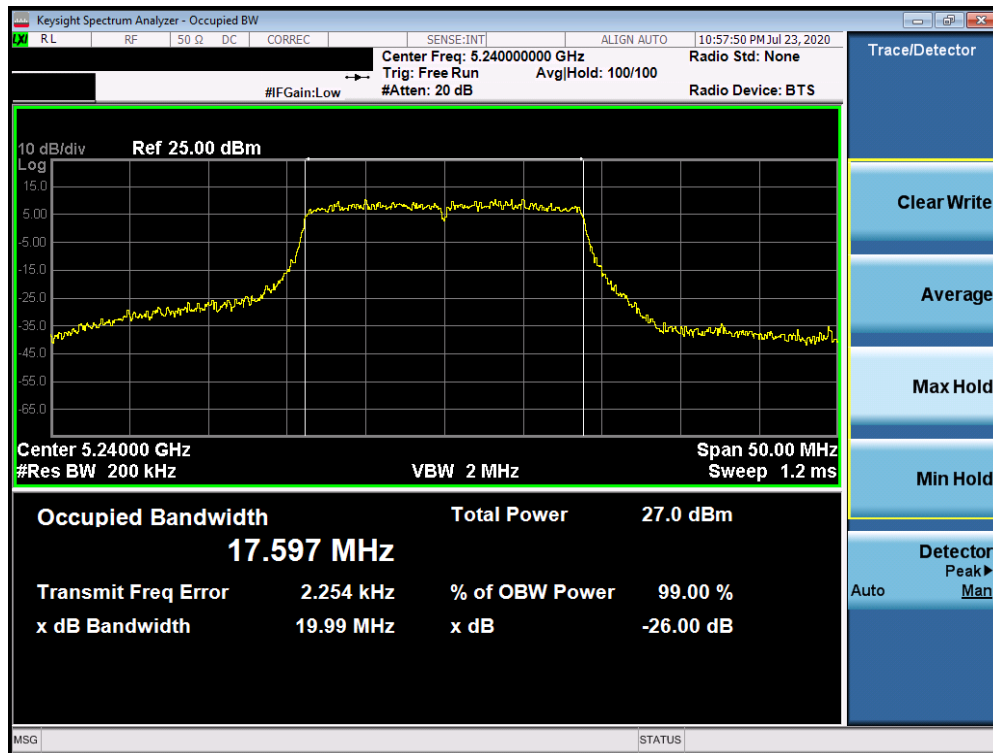


Plot 7-60. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 1) – Ch. 48)

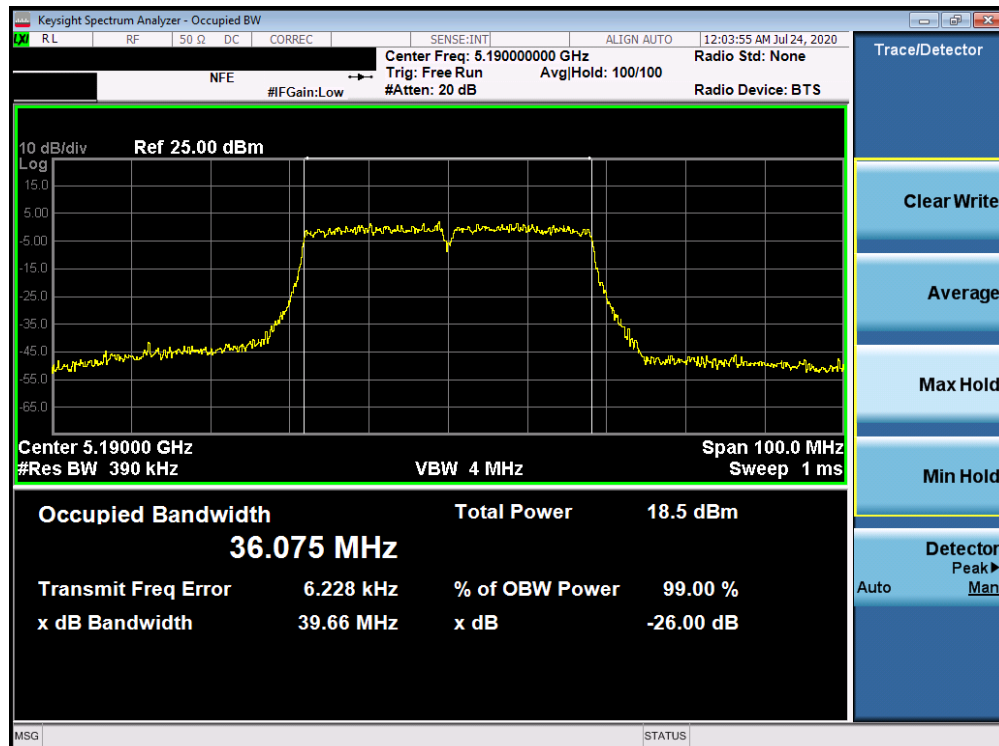


Plot 7-61. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 48 of 344

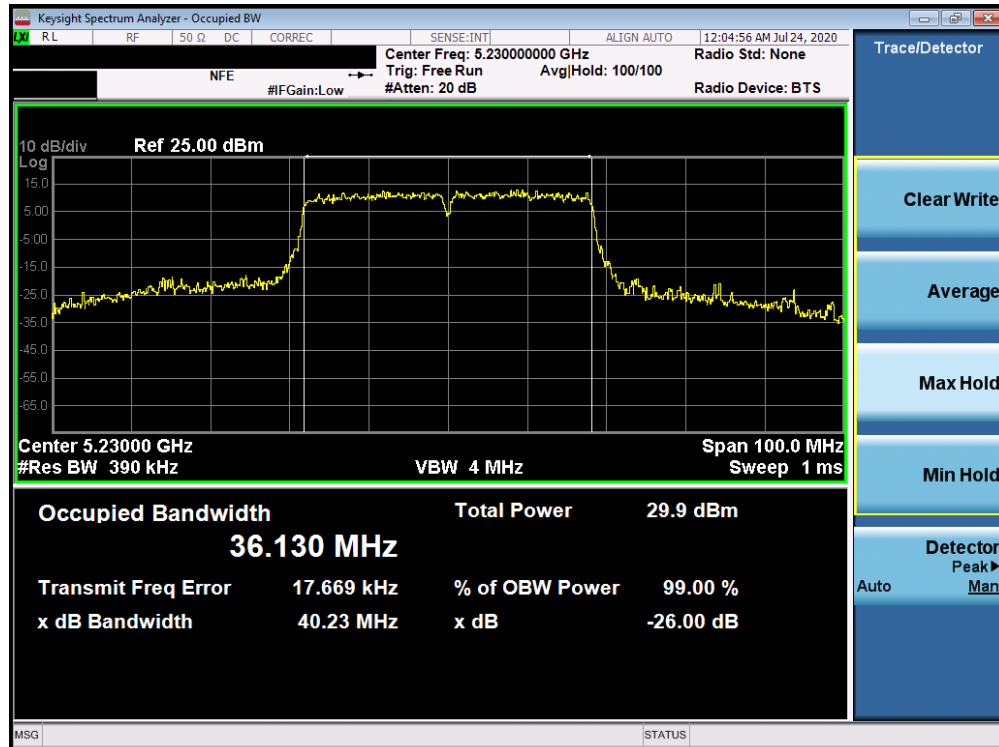


Plot 7-62. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

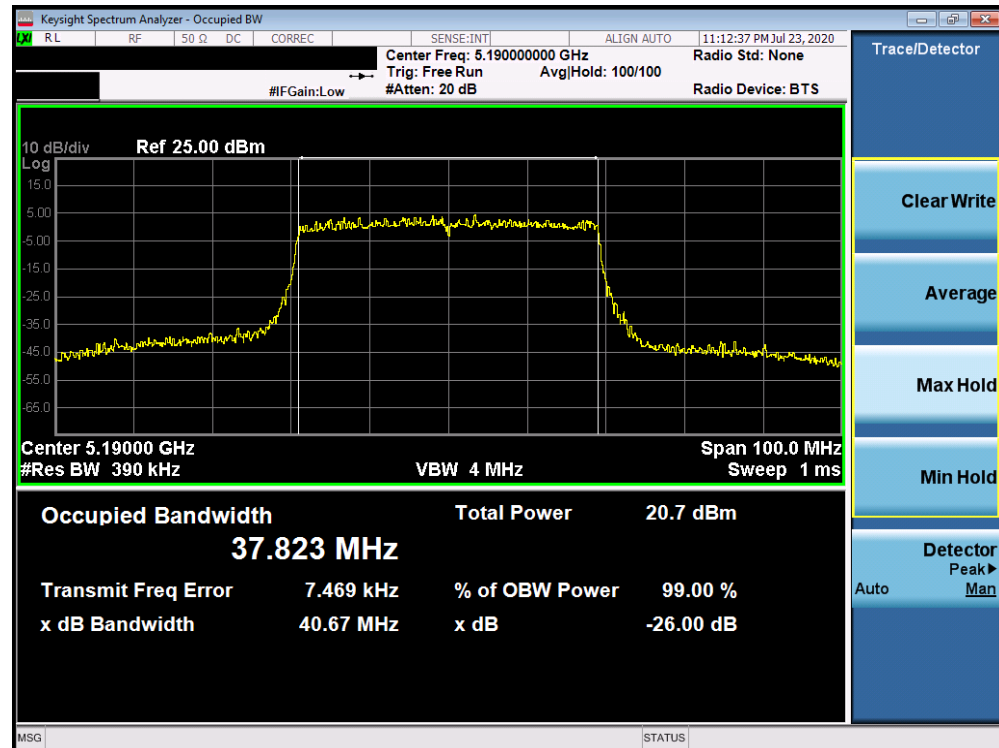


Plot 7-63. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11ax (UNII Band 1) – Ch. 38)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 49 of 344

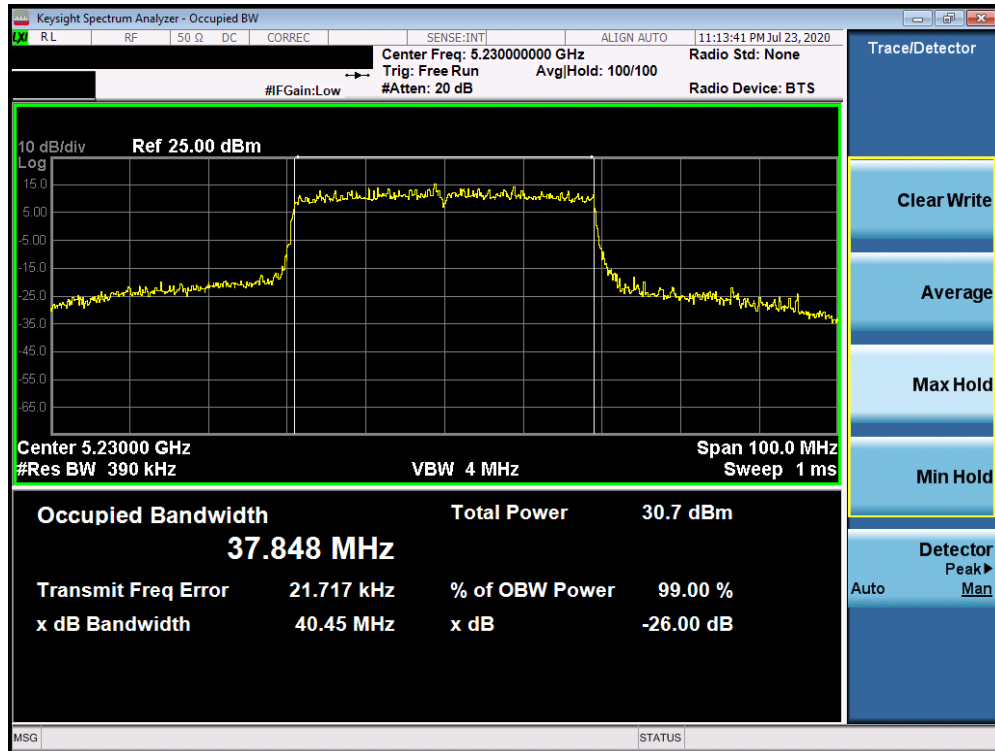


Plot 7-64. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11ax (UNII Band 1) – Ch. 46)

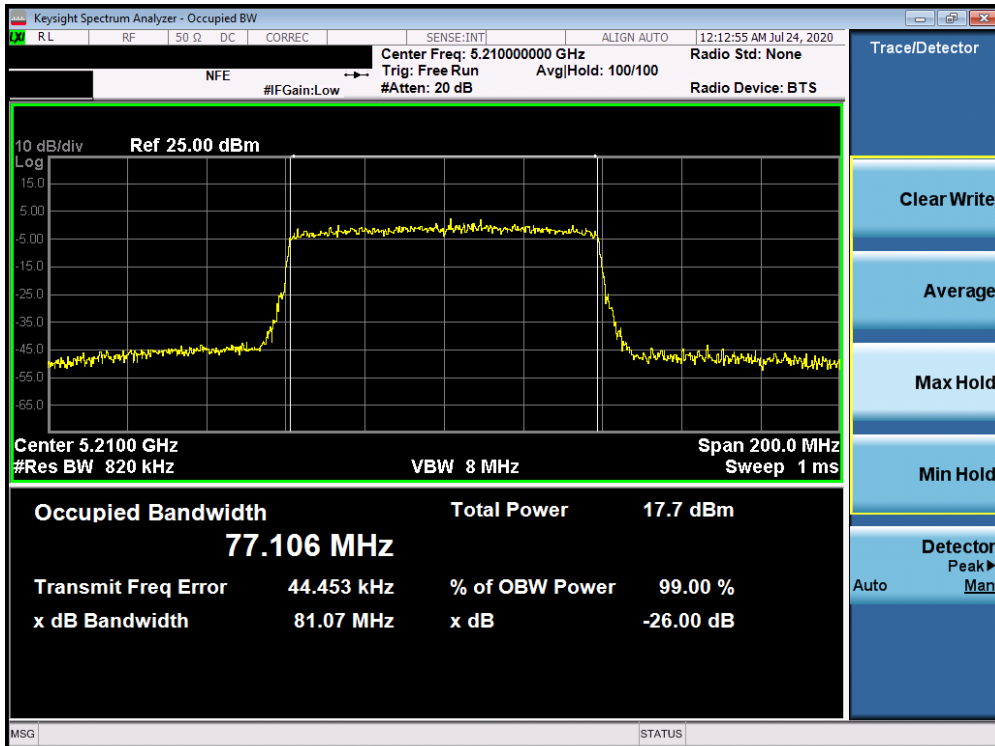


Plot 7-65. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 50 of 344

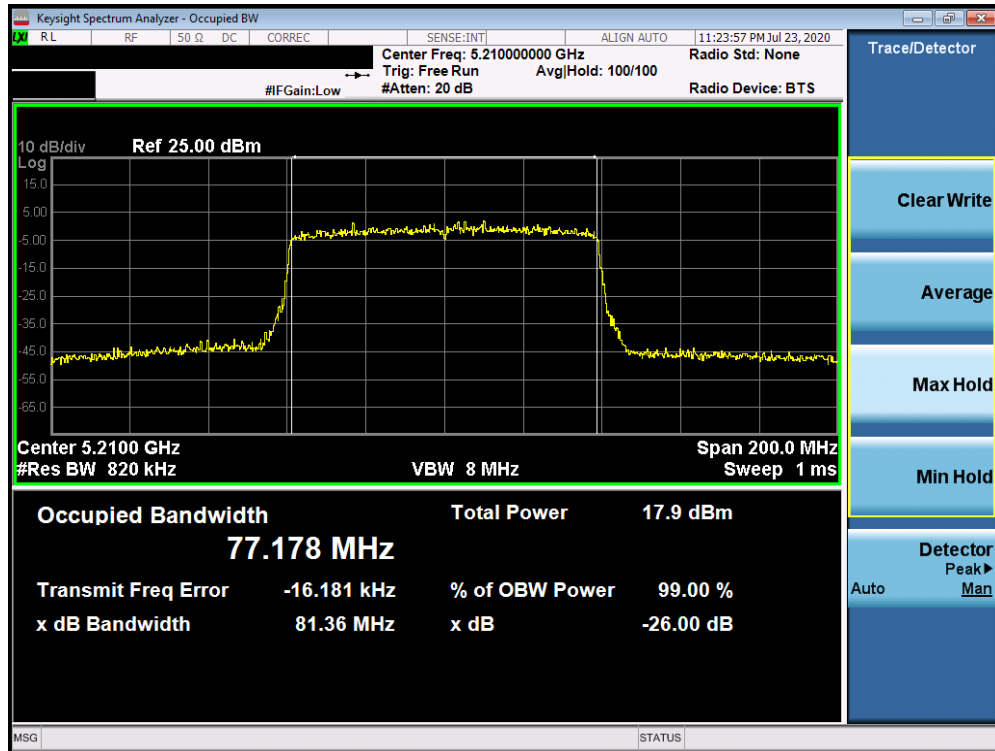


Plot 7-66. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ax (UNII Band 1) – Ch. 42)

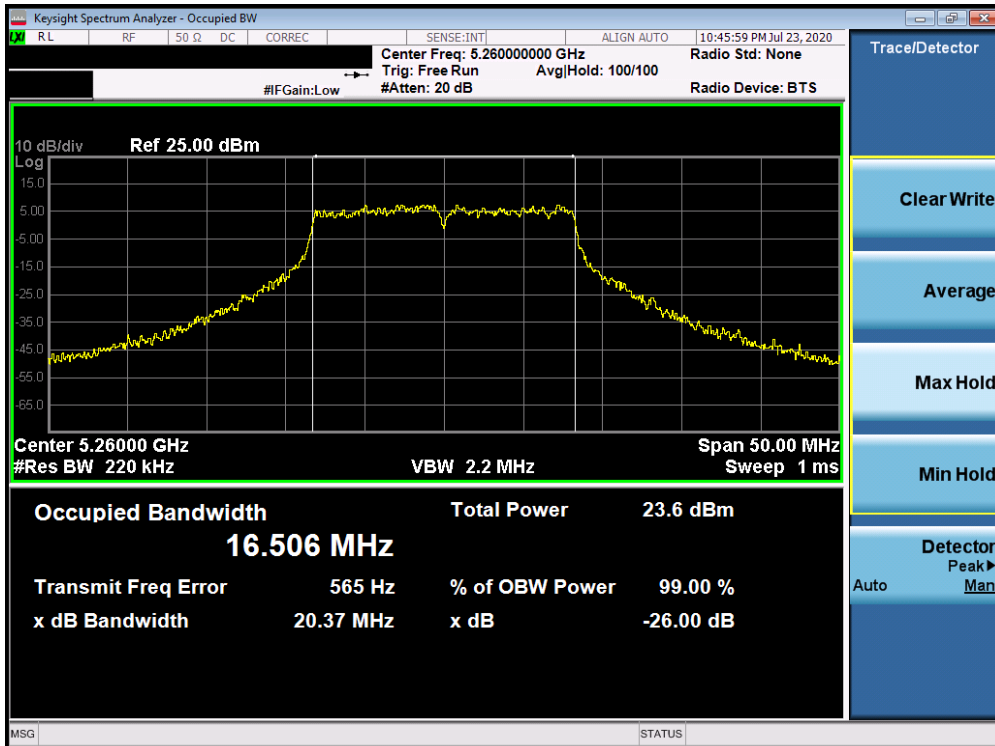


Plot 7-67. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 51 of 344

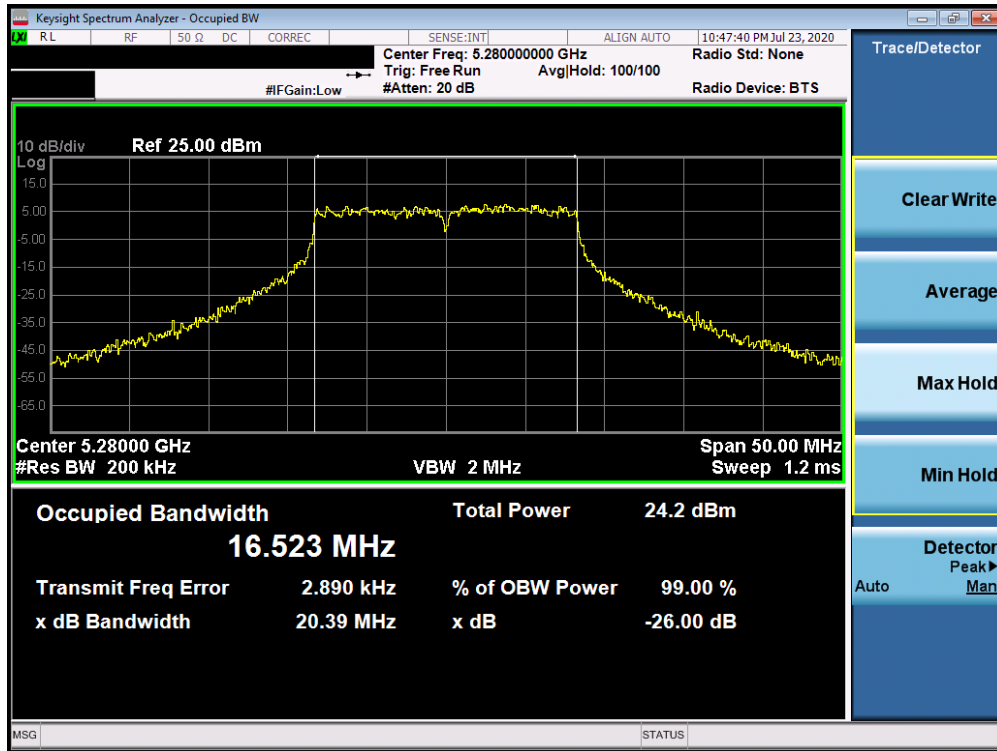


Plot 7-68. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 2A) – Ch. 56)

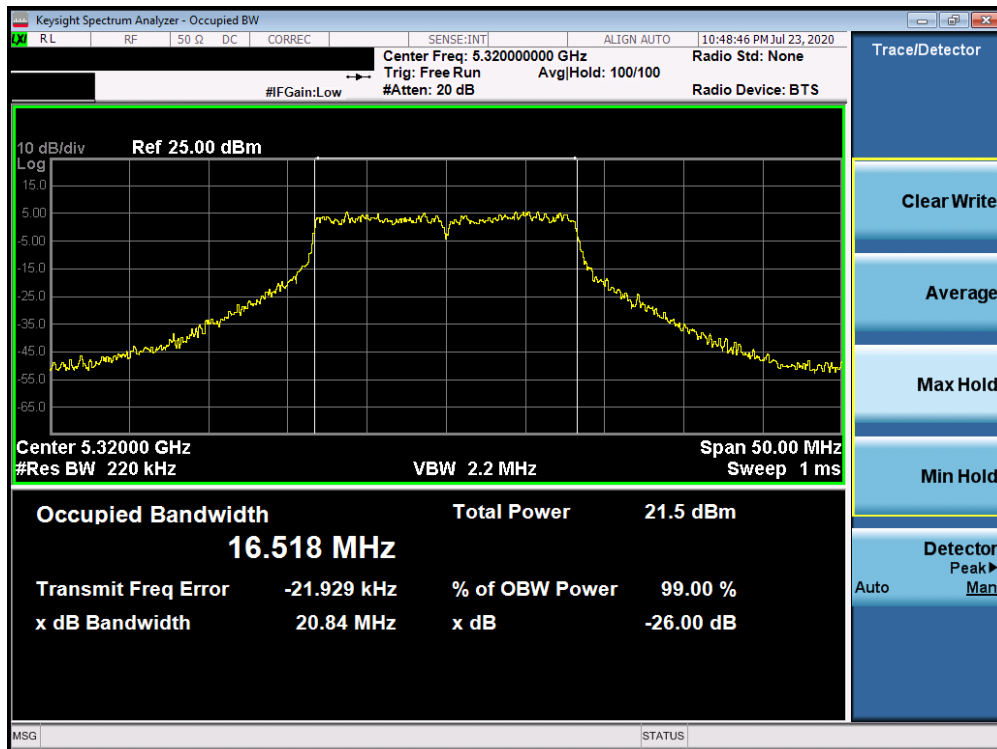


Plot 7-69. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 52 of 344

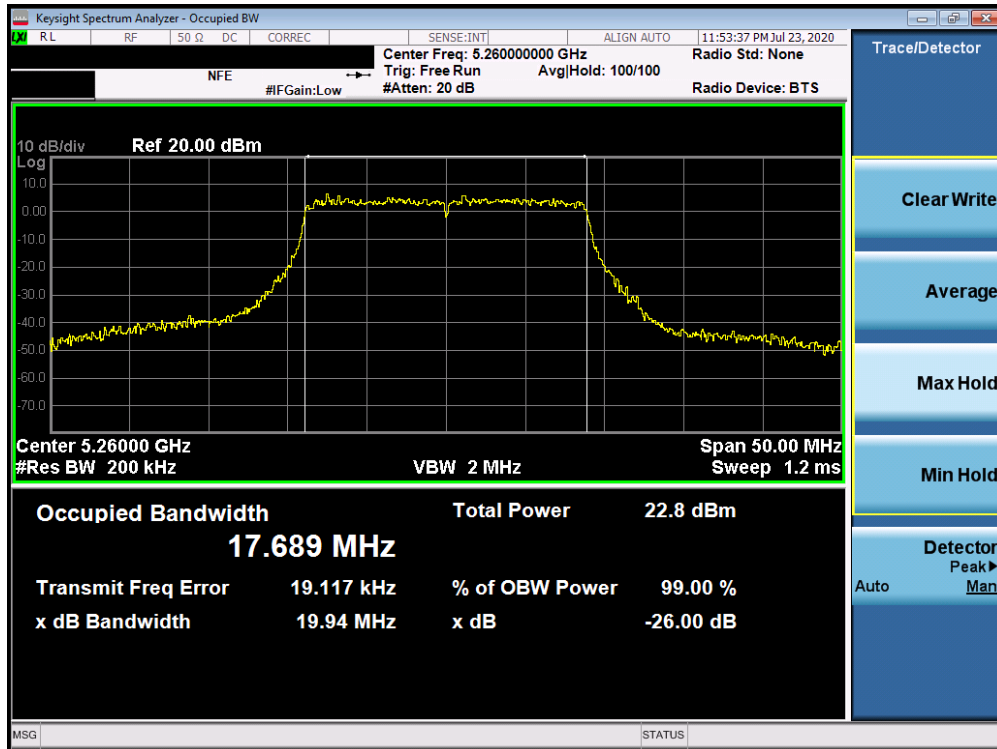


Plot 7-70. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

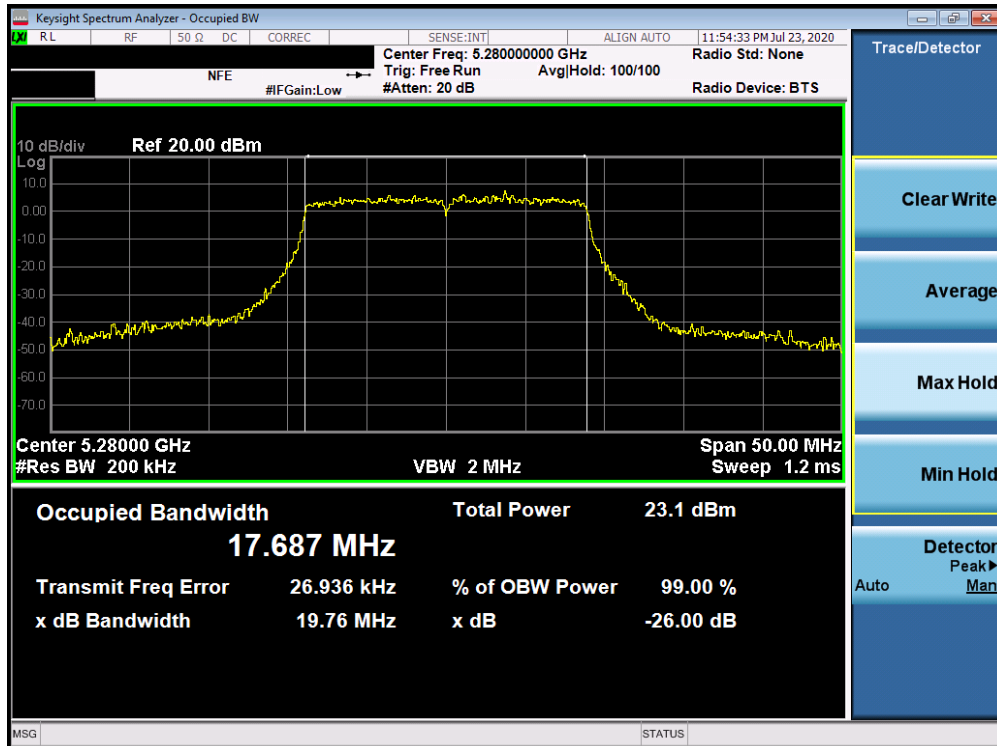


Plot 7-71. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 53 of 344

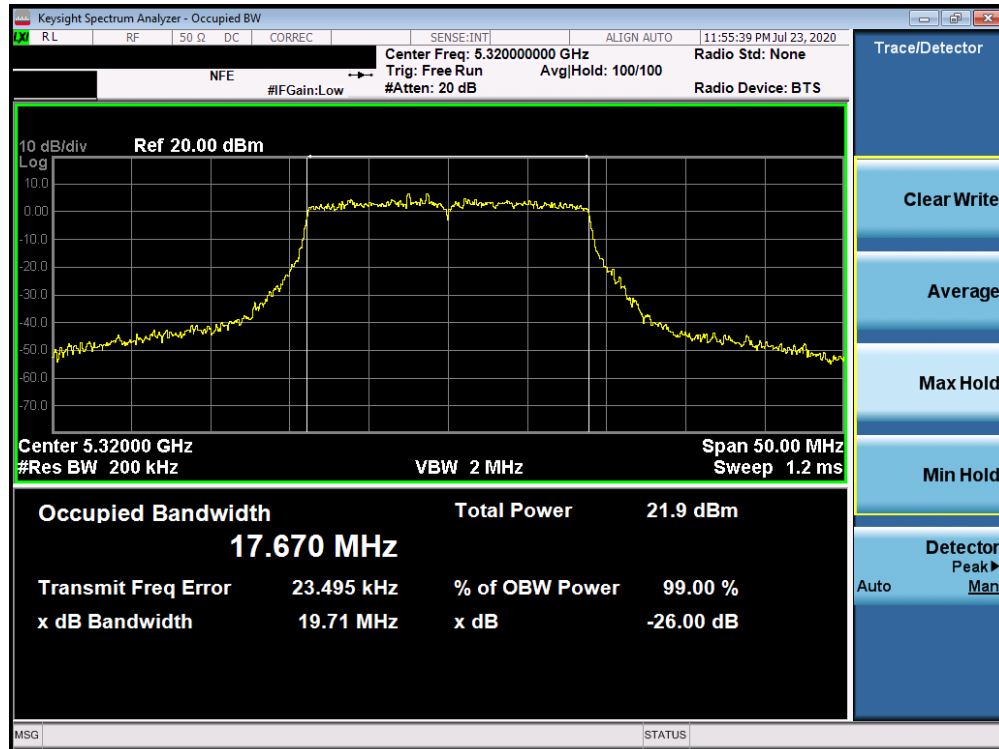


Plot 7-72. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

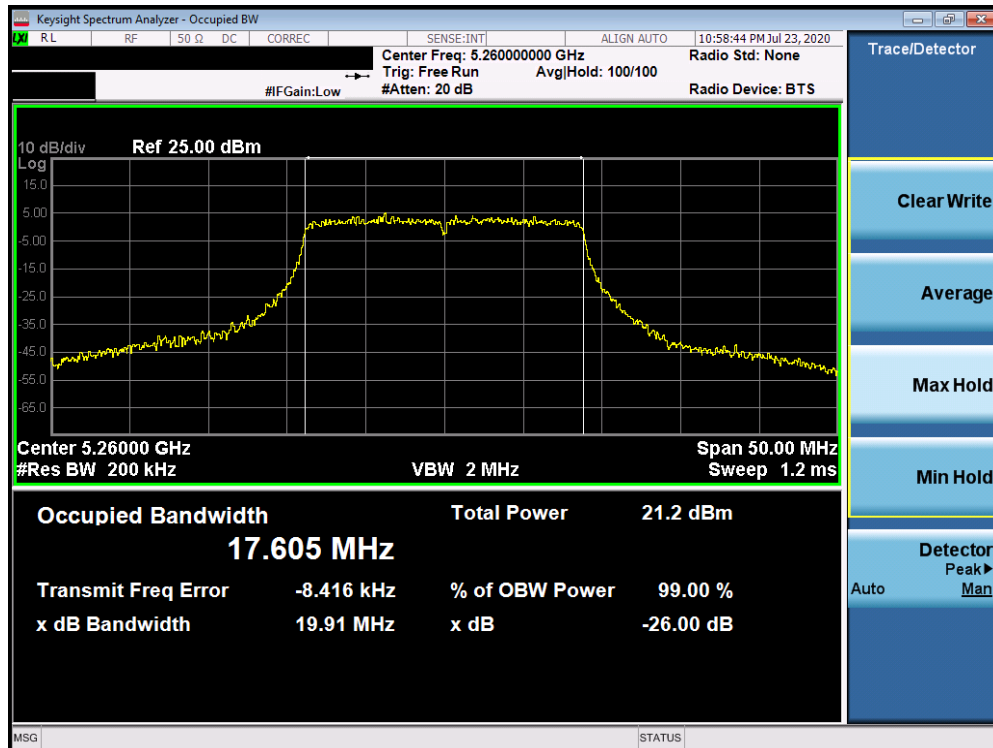


Plot 7-73. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08-A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 54 of 344

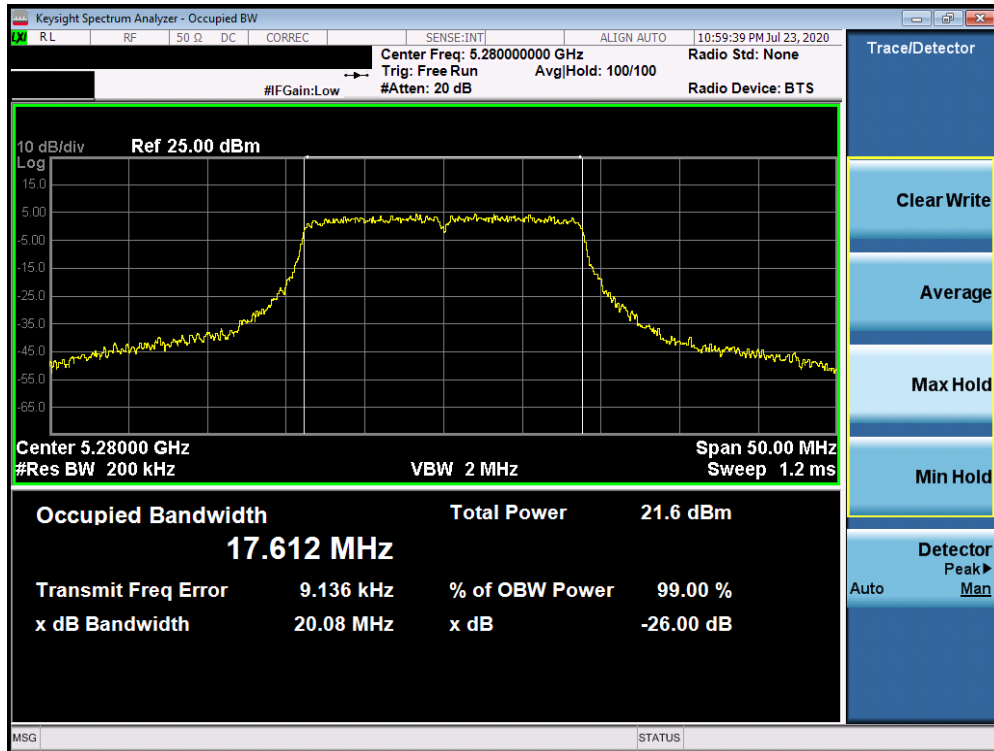


Plot 7-74. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 56)

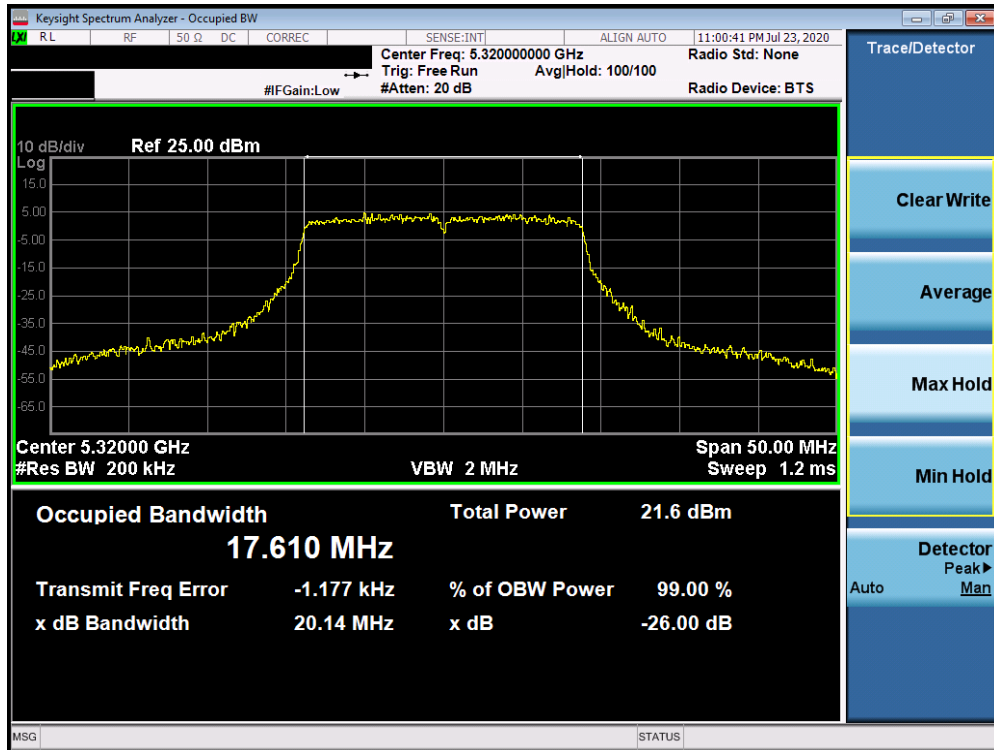


Plot 7-75. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 55 of 344

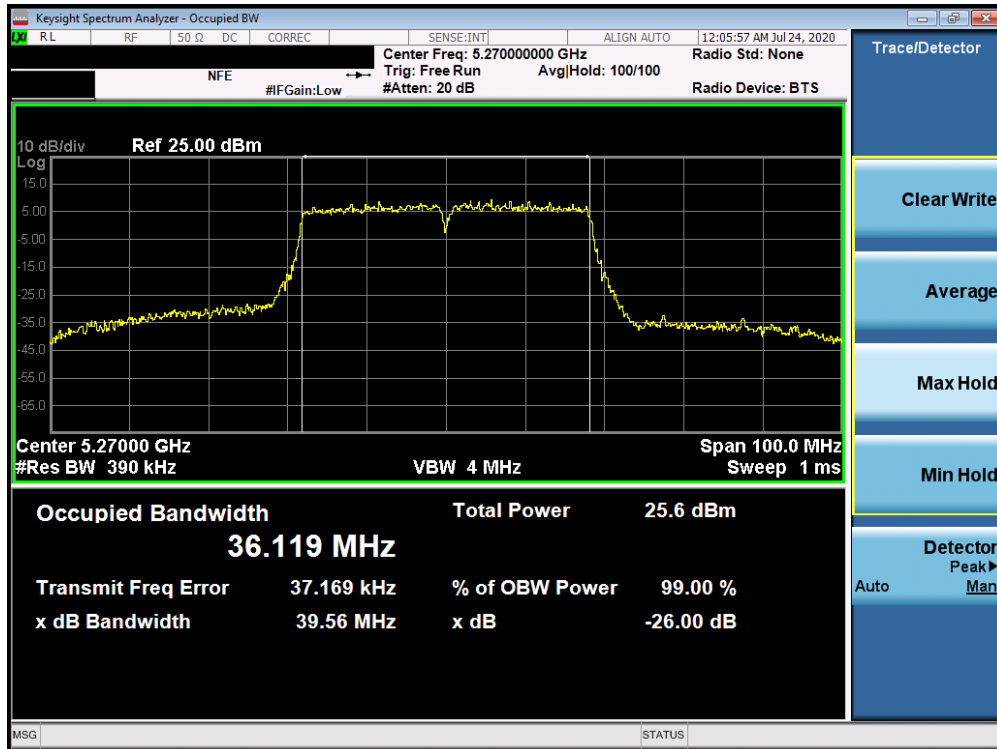


Plot 7-76. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

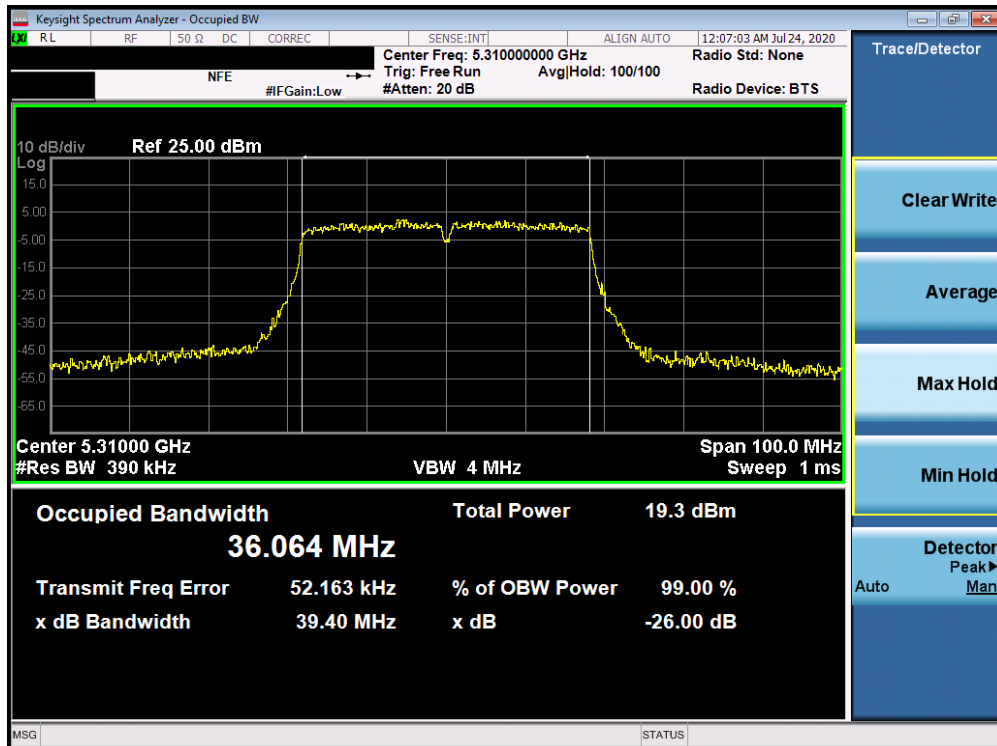


Plot 7-77. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 56 of 344

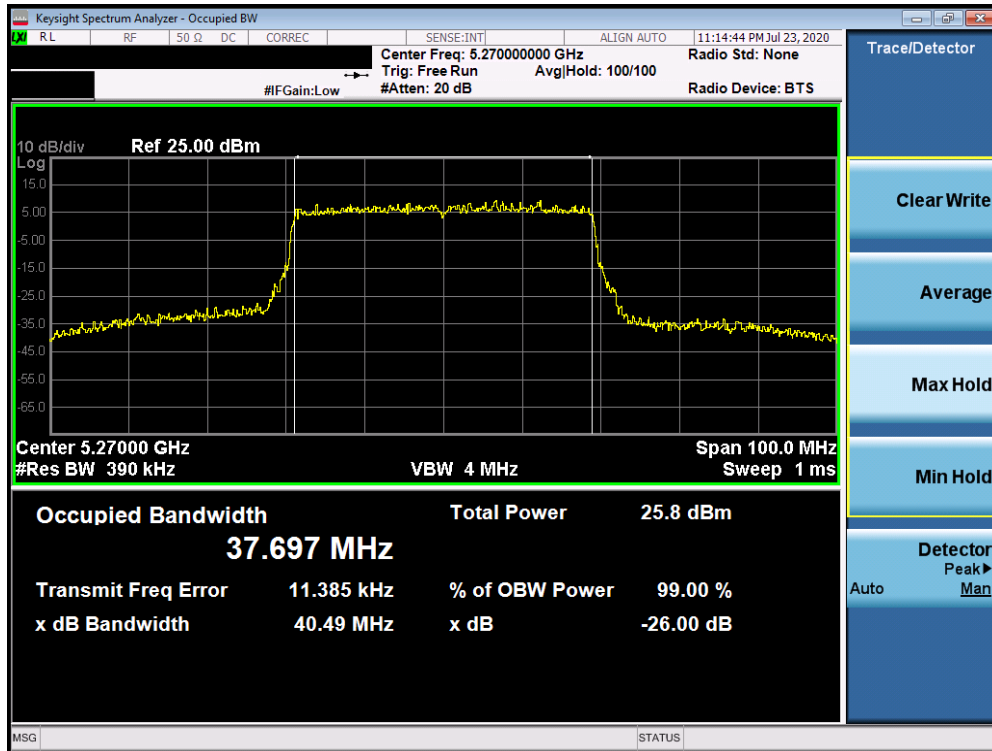


Plot 7-78. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11ax (UNII Band 2a) – Ch. 54)

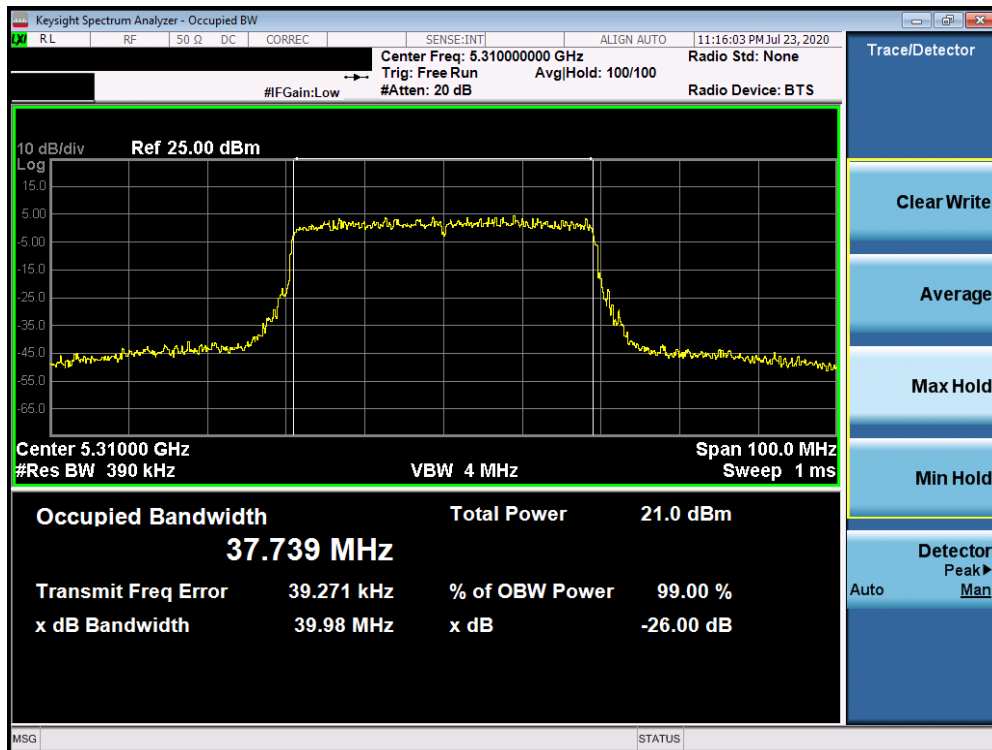


Plot 7-79. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11ax (UNII Band 2a) – Ch. 62)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 57 of 344

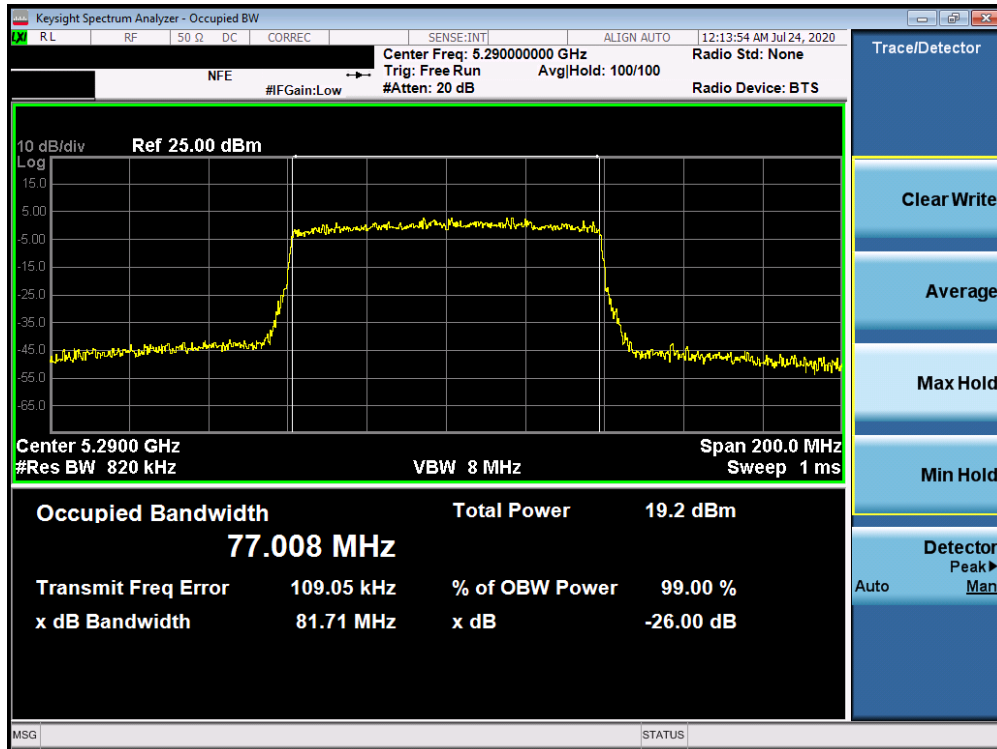


Plot 7-80. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

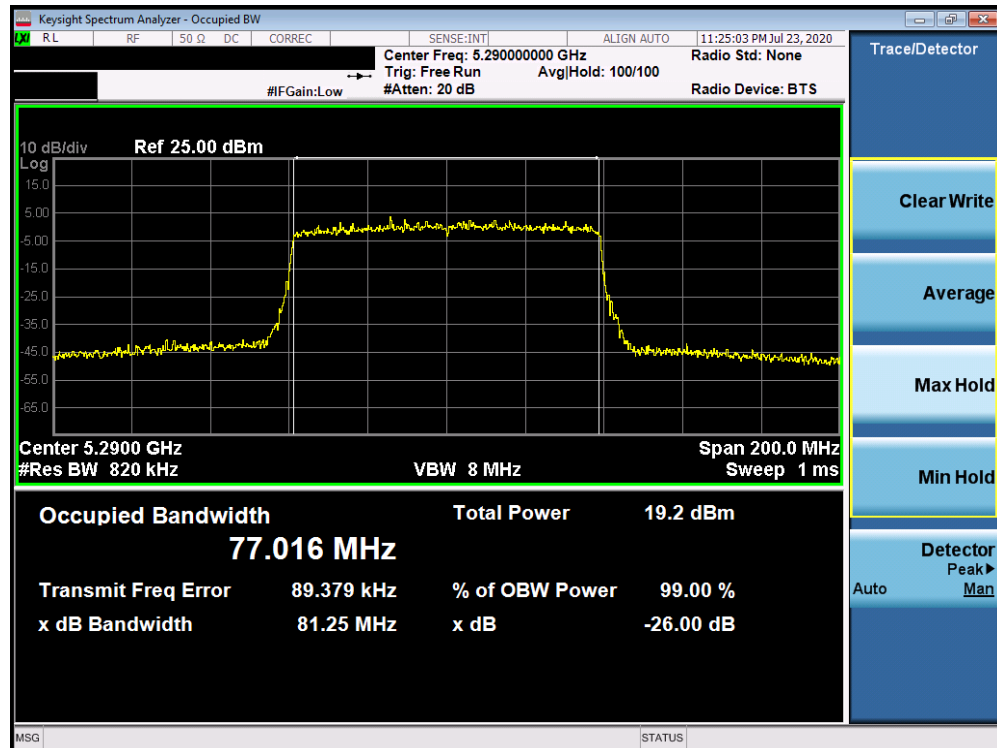


Plot 7-81. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 58 of 344

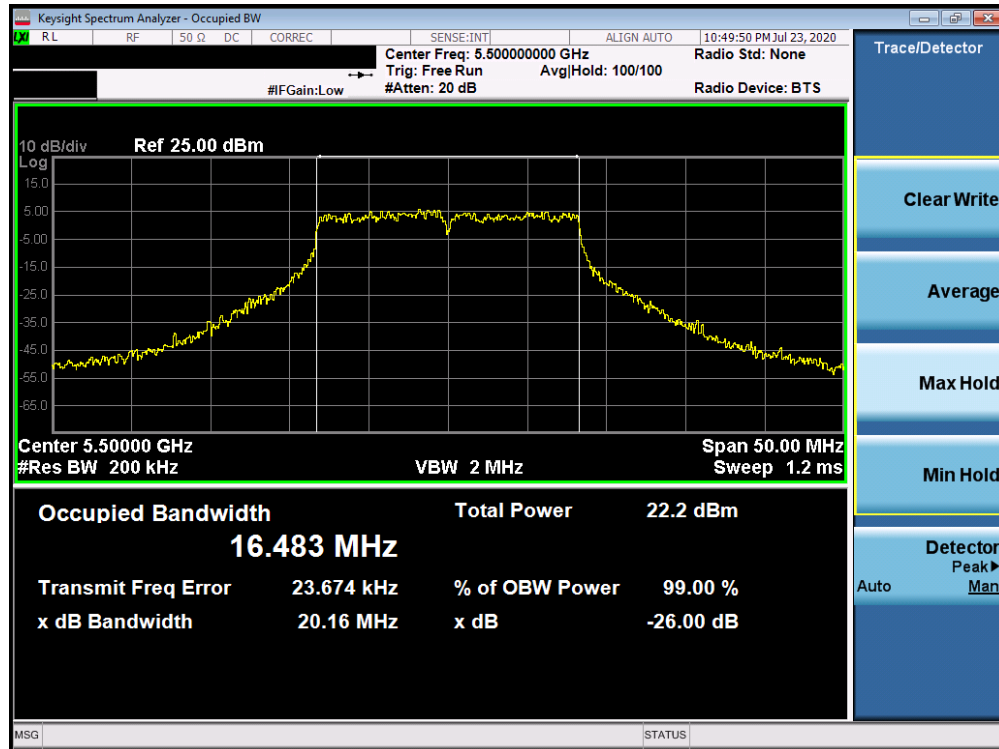


Plot 7-82. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 2C) – Ch. 100)

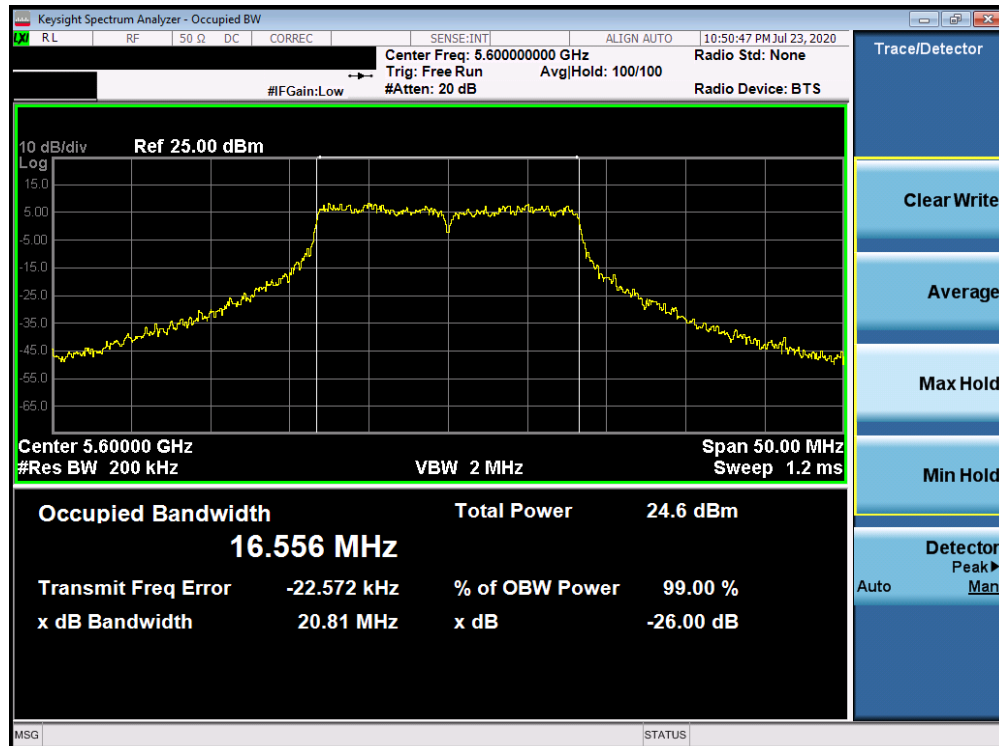


Plot 7-83. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 59 of 344

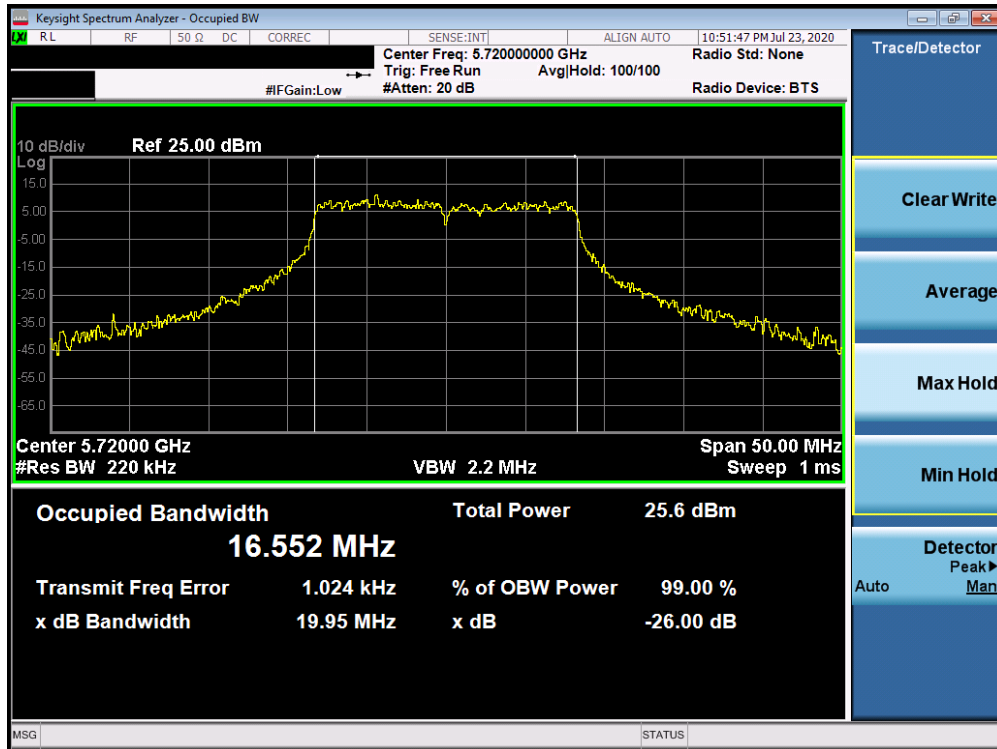


Plot 7-84. 26dB Bandwidth Plot ANT4 (802.11a (UNII Band 2C) – Ch. 144)

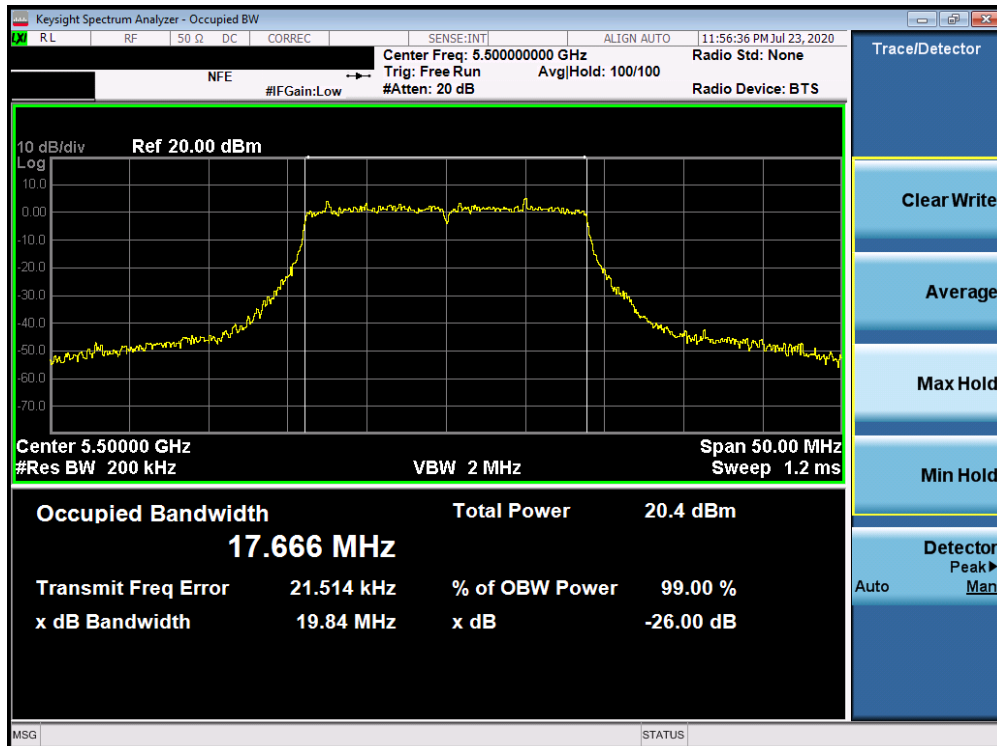


Plot 7-85. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 60 of 344

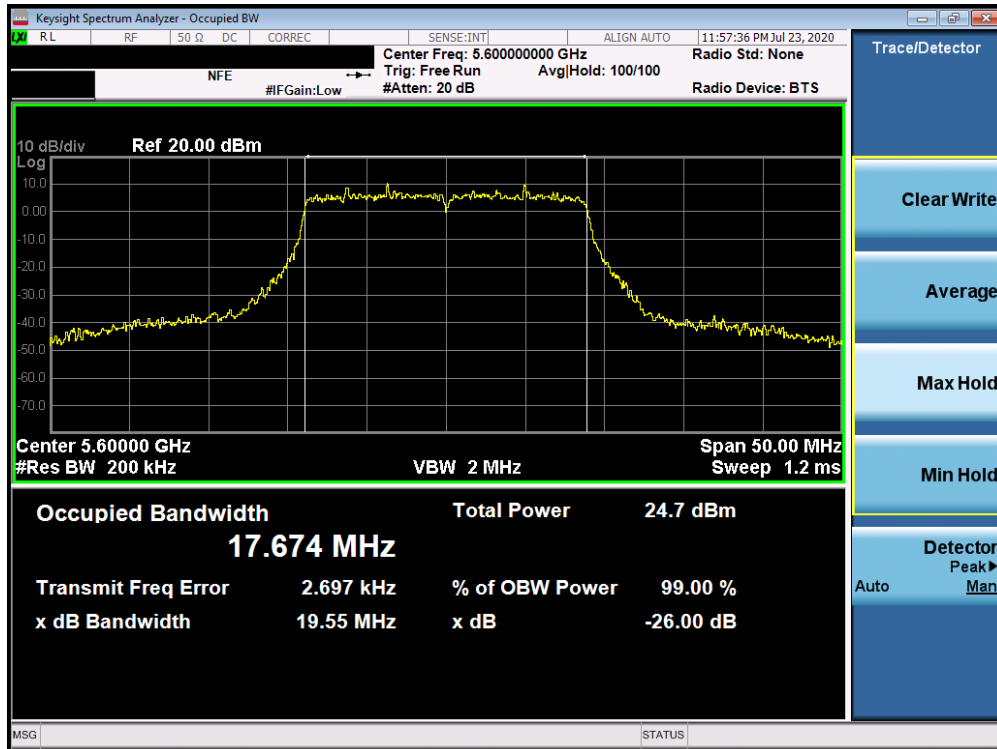


Plot 7-86. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

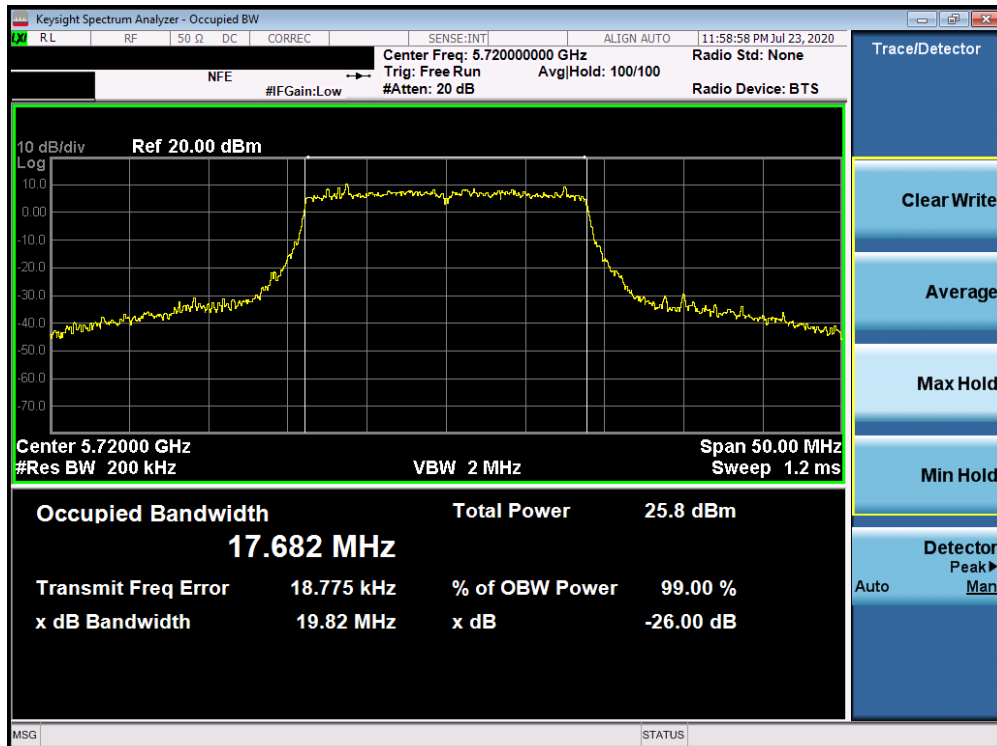


Plot 7-87. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 61 of 344

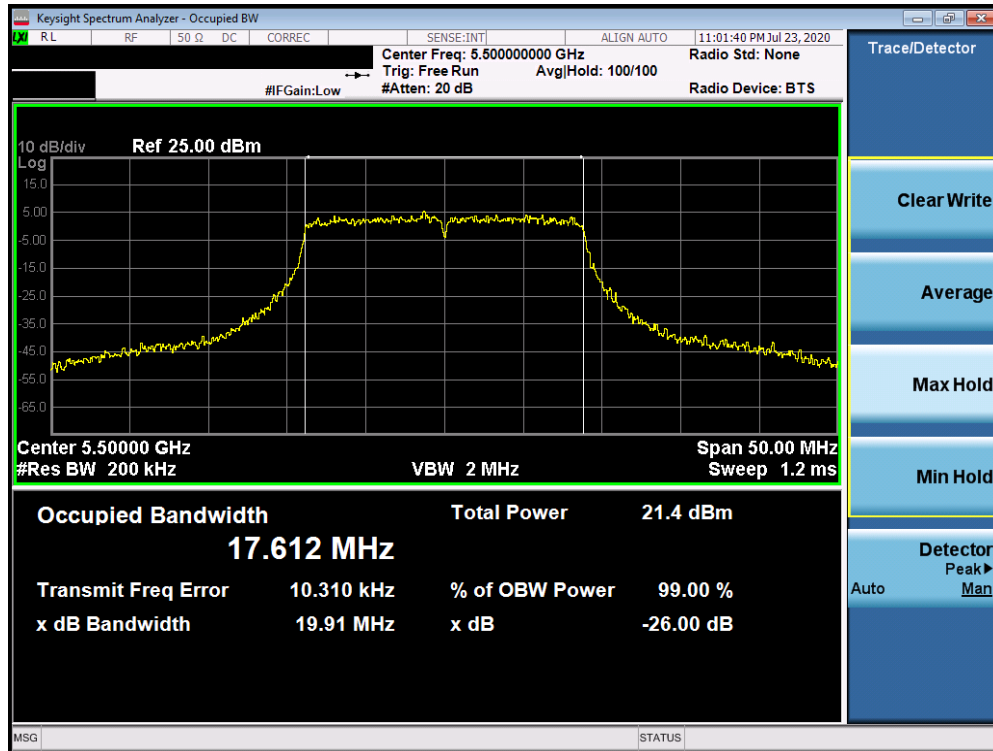


Plot 7-88. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 100)

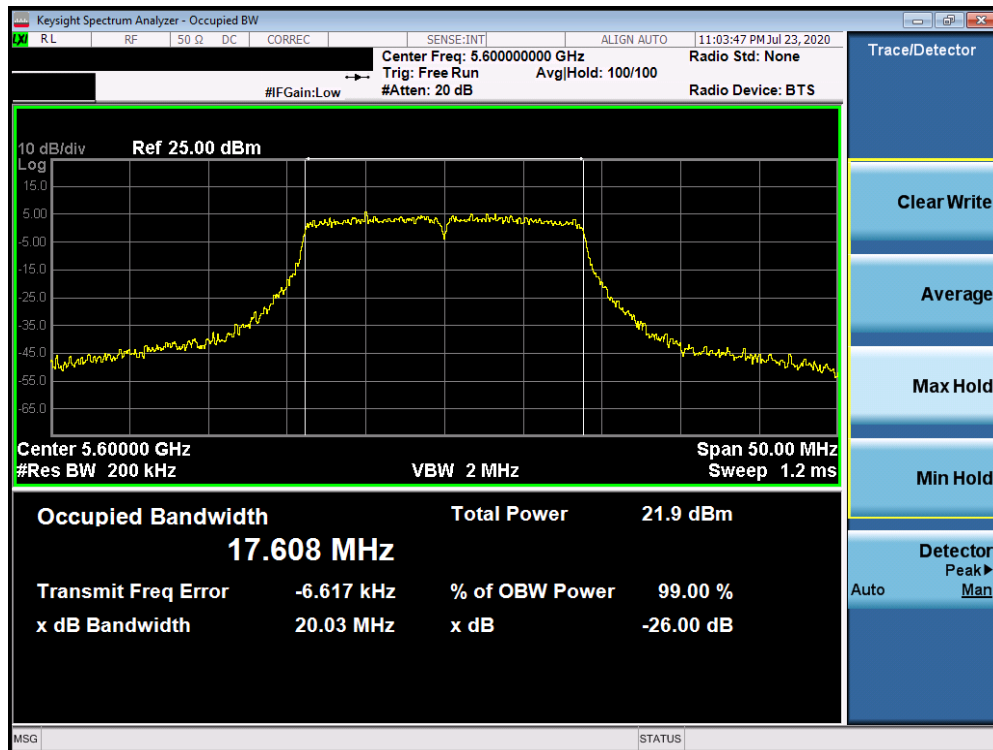


Plot 7-89. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 62 of 344

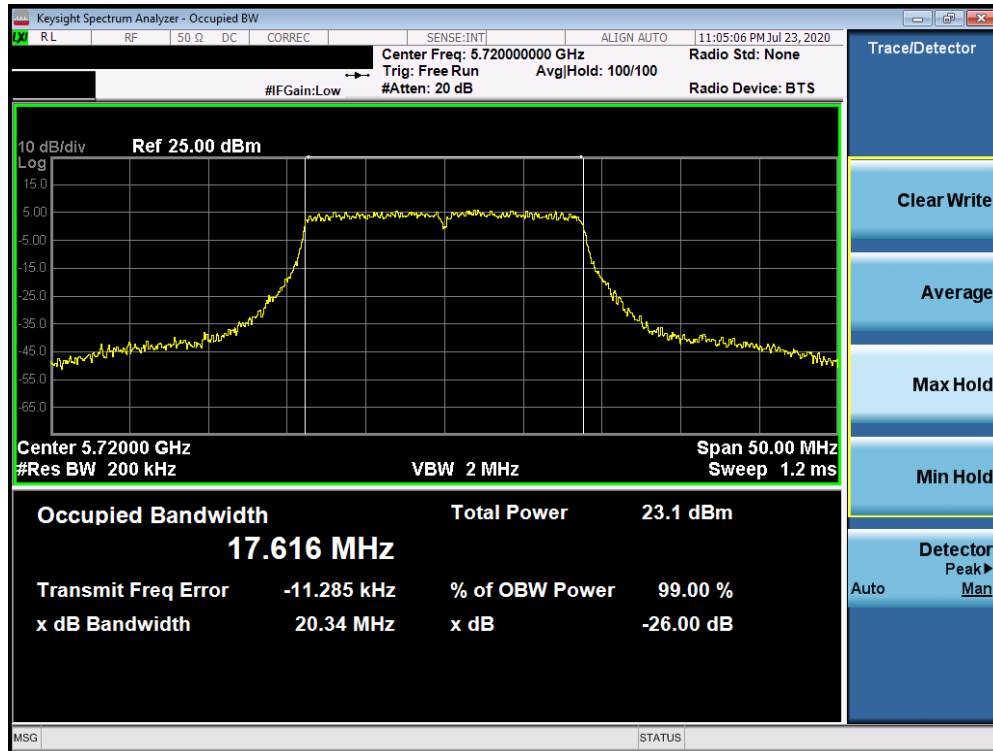


Plot 7-90. 26dB Bandwidth Plot ANT4 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 144)

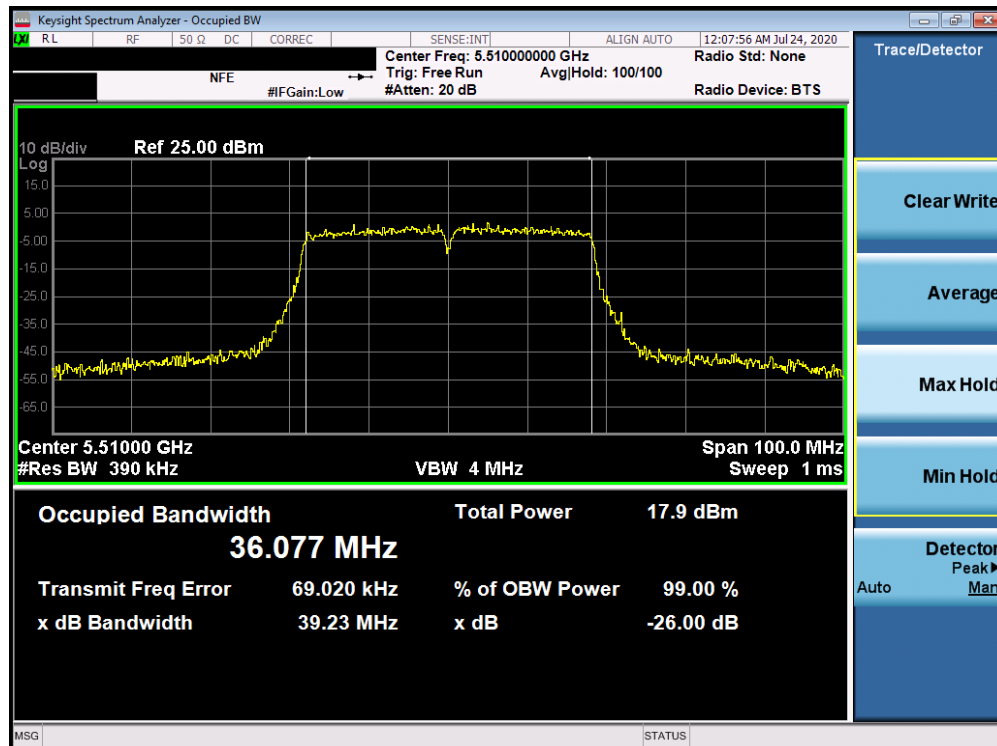


Plot 7-91. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 63 of 344

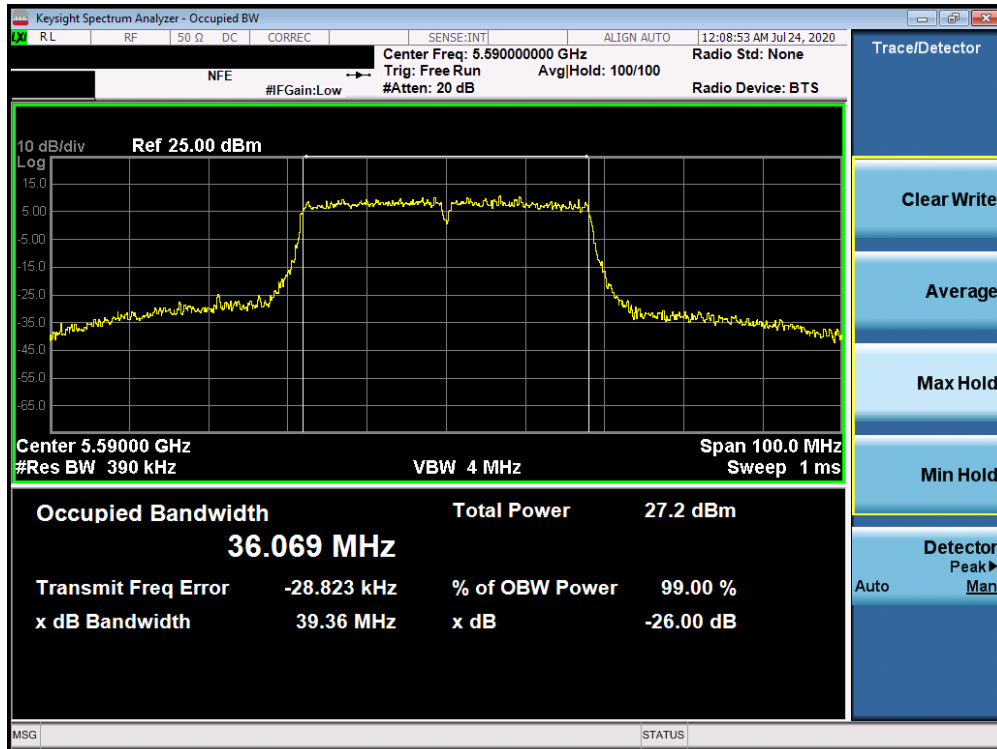


Plot 7-92. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

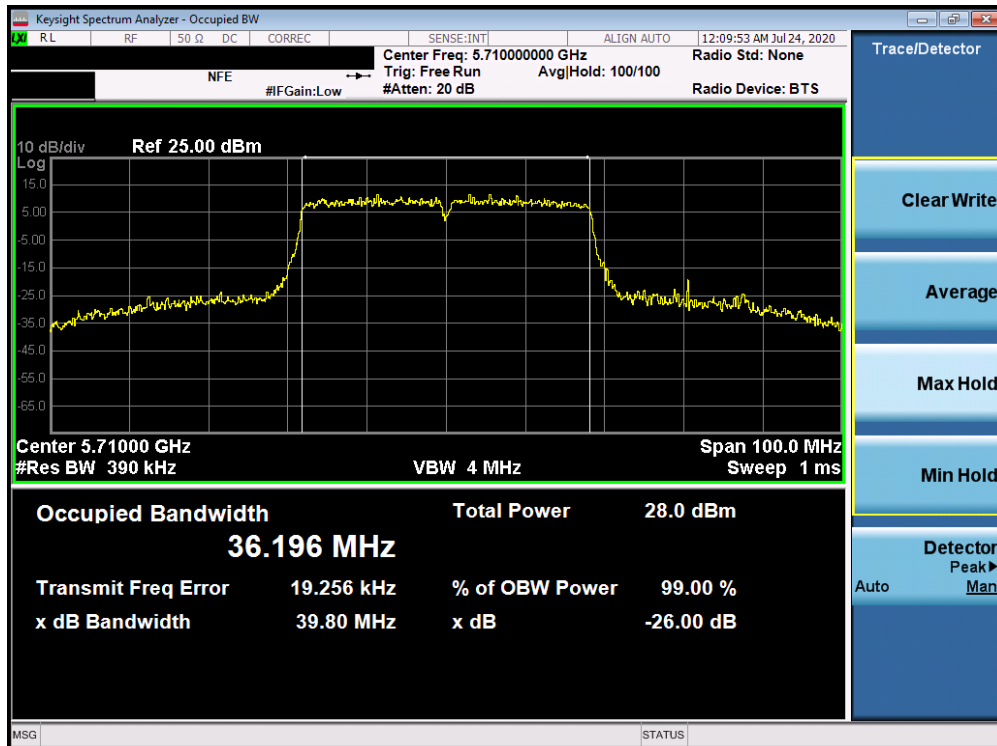


Plot 7-93. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 64 of 344

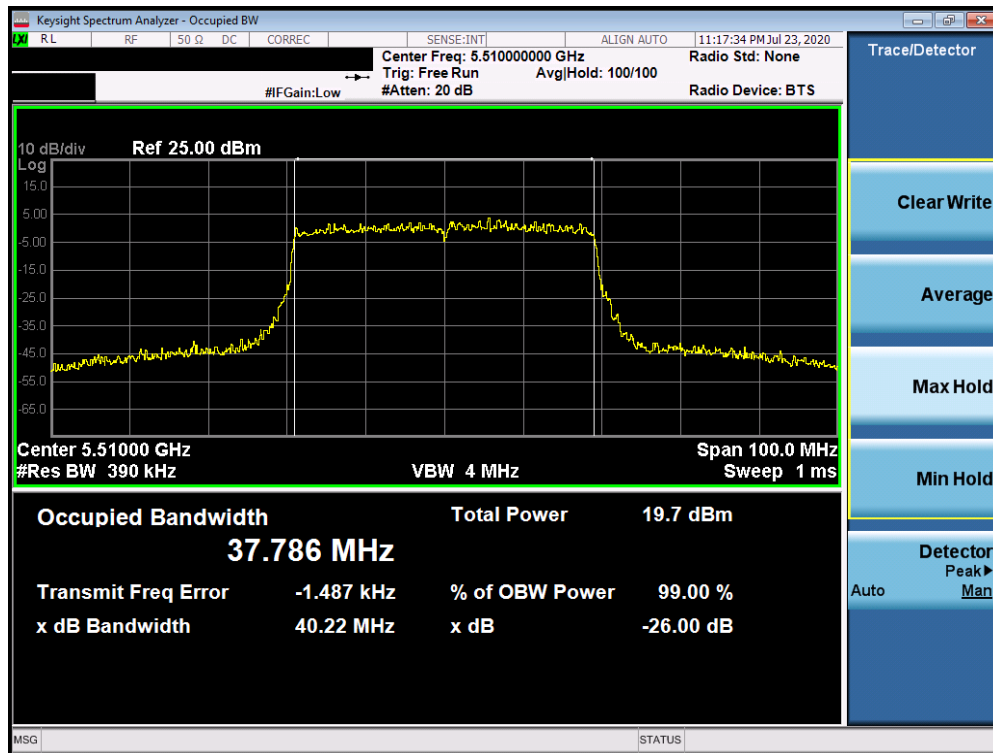


Plot 7-94. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 102)

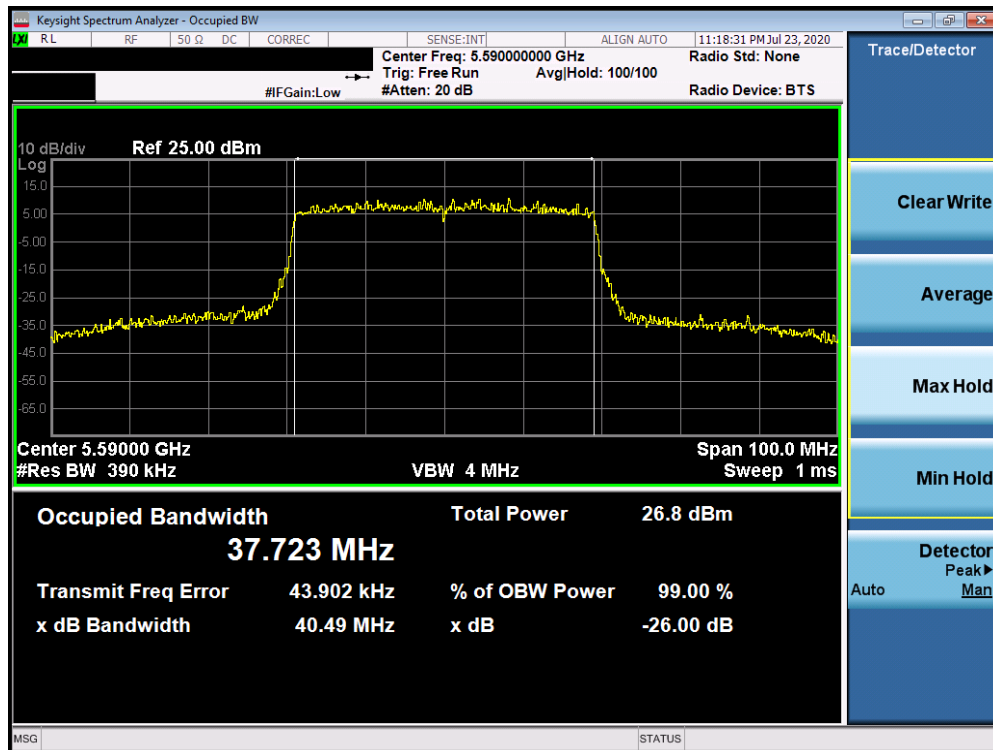


Plot 7-95. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 65 of 344

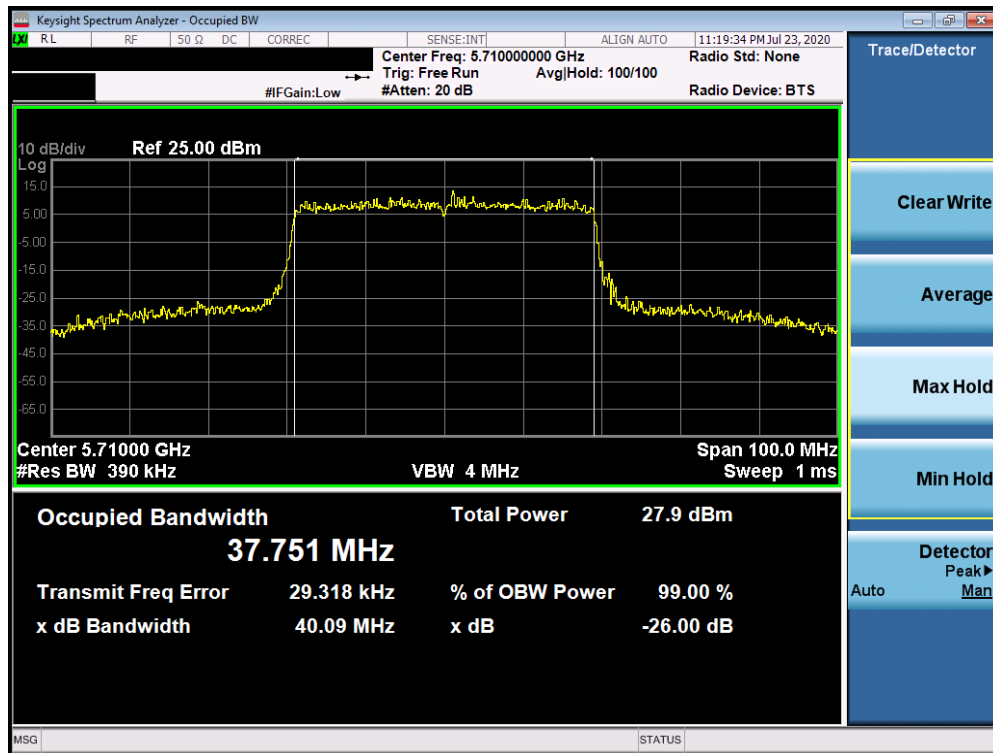


Plot 7-96. 26dB Bandwidth Plot ANT4 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 142)

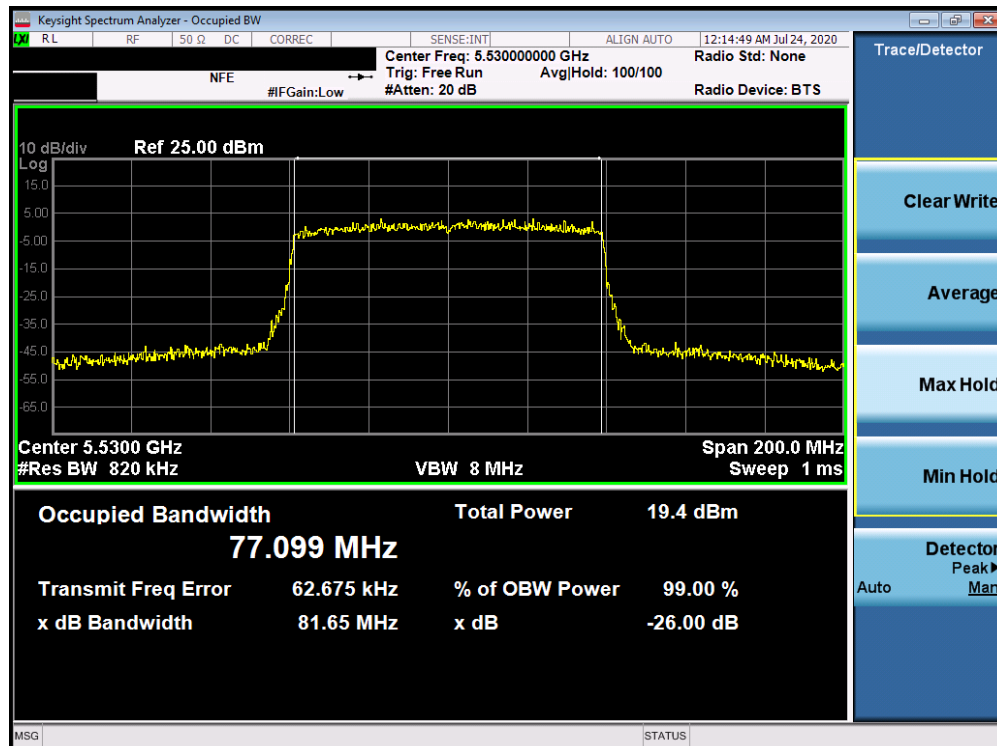


Plot 7-97. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 66 of 344

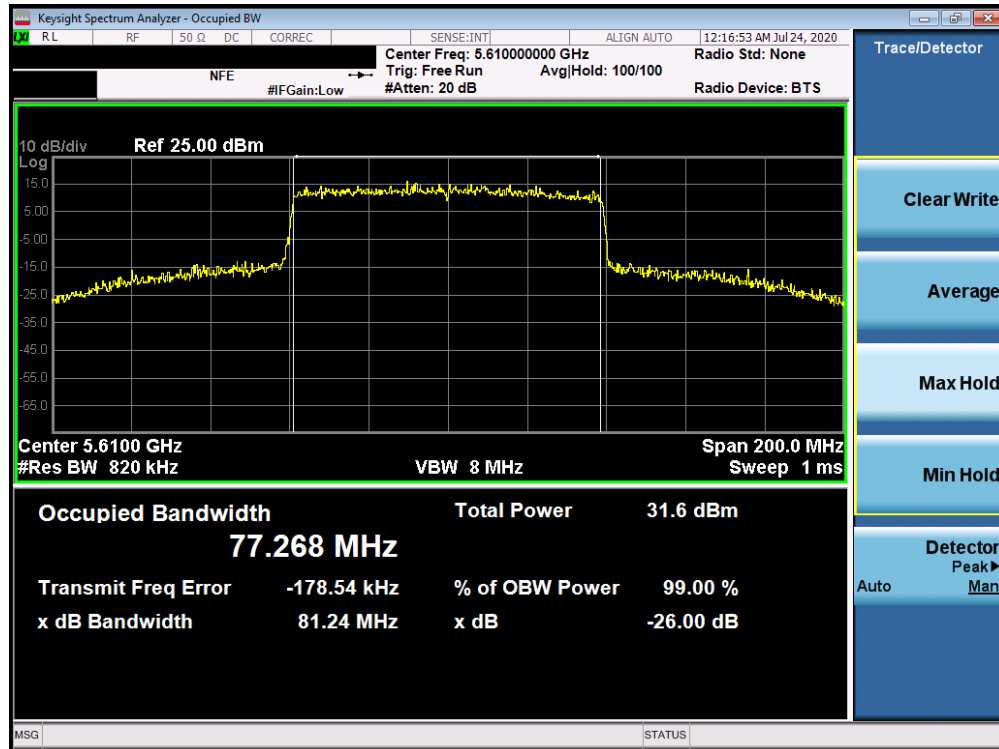


Plot 7-98. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

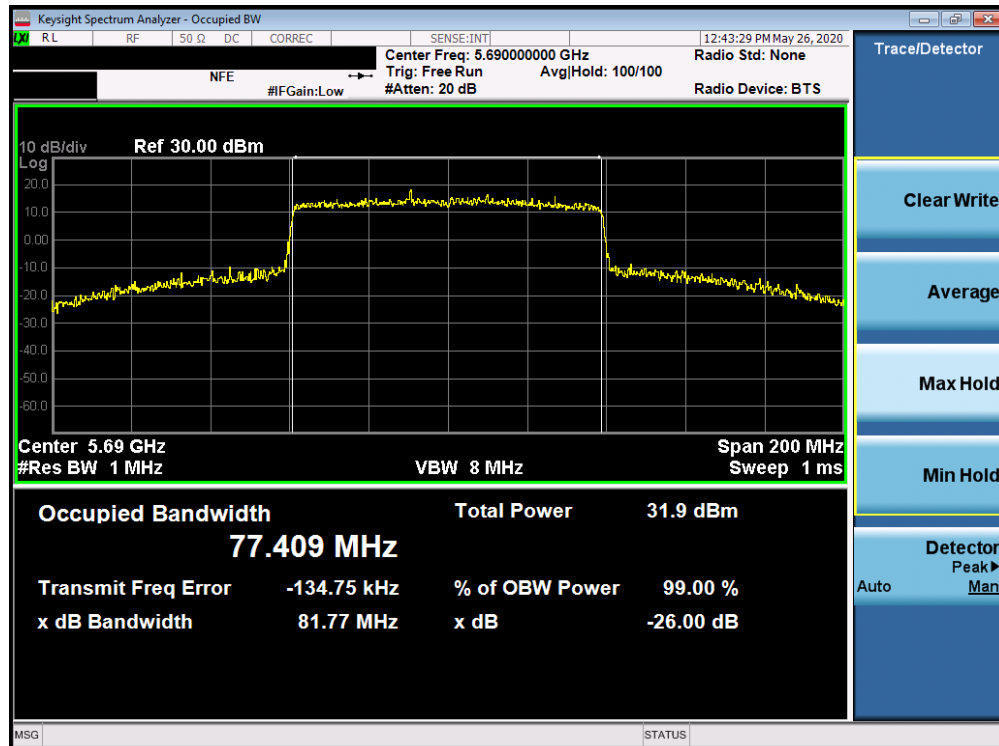

Plot 7-99. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 67 of 344

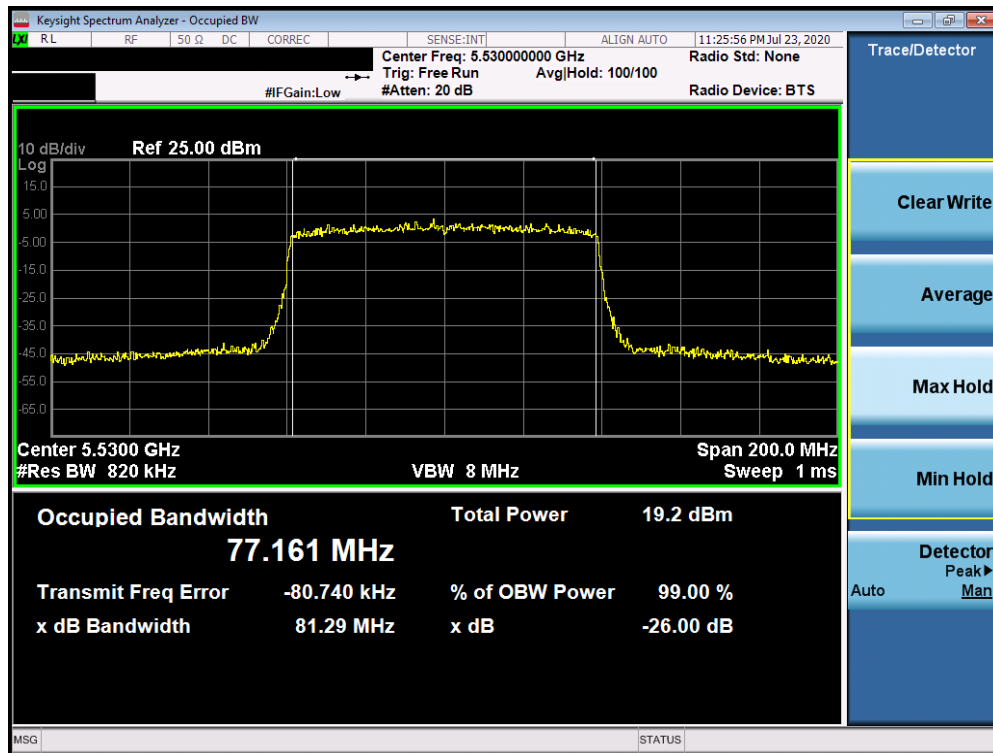


Plot 7-100. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 106)



Plot 7-101. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 68 of 344

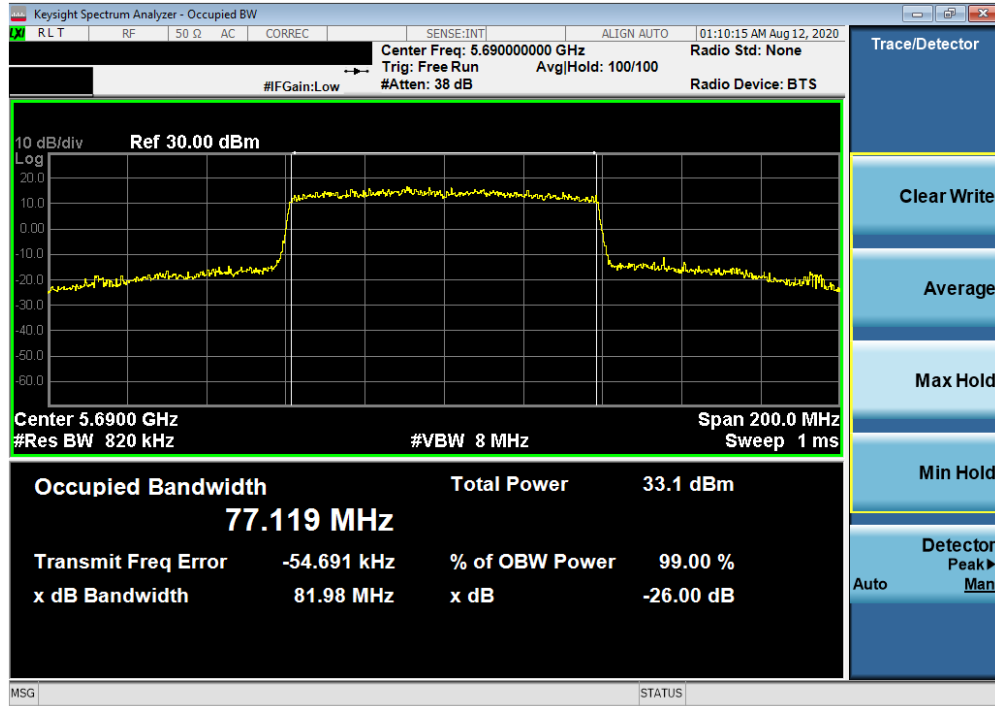

Plot 7-102. 26dB Bandwidth Plot ANT4 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 138)


FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 69 of 344

Antenna-5 26dB Bandwidth Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	a	6	20.24
	5200	40	a	6	33.84
	5240	48	a	6	26.33
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	19.59
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	20.95
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	20.04
	5180	36	ax (20MHz)	8/8.6 (MCS0)	20.69
	5200	40	ax (20MHz)	8/8.6 (MCS0)	20.59
	5240	48	ax (20MHz)	8/8.6 (MCS0)	20.91
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.31
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.93
	5190	38	ax (40MHz)	8/8.6 (MCS0)	40.75
	5230	46	ax (40MHz)	13.5/15 (MCS0)	40.15
	5210	42	ac (80MHz)	8/8.6 (MCS0)	80.30
	5210	42	ax (80MHz)	8/8.6 (MCS0)	81.38
Band 2A	5260	52	a	6	20.68
	5280	56	a	6	19.82
	5320	64	a	6	19.95
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	19.41
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	19.77
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	19.86
	5260	52	ax (20MHz)	8/8.6 (MCS0)	20.56
	5280	56	ax (20MHz)	8/8.6 (MCS0)	20.99
	5320	64	ax (20MHz)	8/8.6 (MCS0)	20.85
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.61
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.31
	5270	54	ax (40MHz)	8/8.6 (MCS0)	40.12
	5310	62	ax (40MHz)	8/8.6 (MCS0)	40.51
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	80.42
	5290	58	ax (80MHz)	8/8.6 (MCS0)	81.11
Band 2C	5500	100	a	6	20.46
	5600	120	a	6	20.31
	5720	144	a	6	20.36
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	19.44
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	19.50
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	19.88
	5500	100	ax (20MHz)	8/8.6 (MCS0)	20.77
	5600	120	ax (20MHz)	8/8.6 (MCS0)	20.36
	5720	144	ax (20MHz)	8/8.6 (MCS0)	20.47
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.10
	5590	118	n (40MHz)	13.5/15 (MCS0)	39.17
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.49
	5510	102	ax (40MHz)	8/8.6 (MCS0)	40.70
	5590	118	ax (40MHz)	8/8.6 (MCS0)	40.60
	5710	142	ax (40MHz)	8/8.6 (MCS0)	40.40
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	80.29
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	80.26
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	80.78
	5530	106	ax (80MHz)	8/8.6 (MCS0)	81.24
	5610	122	ax (80MHz)	8/8.6 (MCS0)	81.10
	5690	138	ax (80MHz)	8/8.6 (MCS0)	80.98

Table 7-4. Conducted Bandwidth Measurements

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 70 of 344

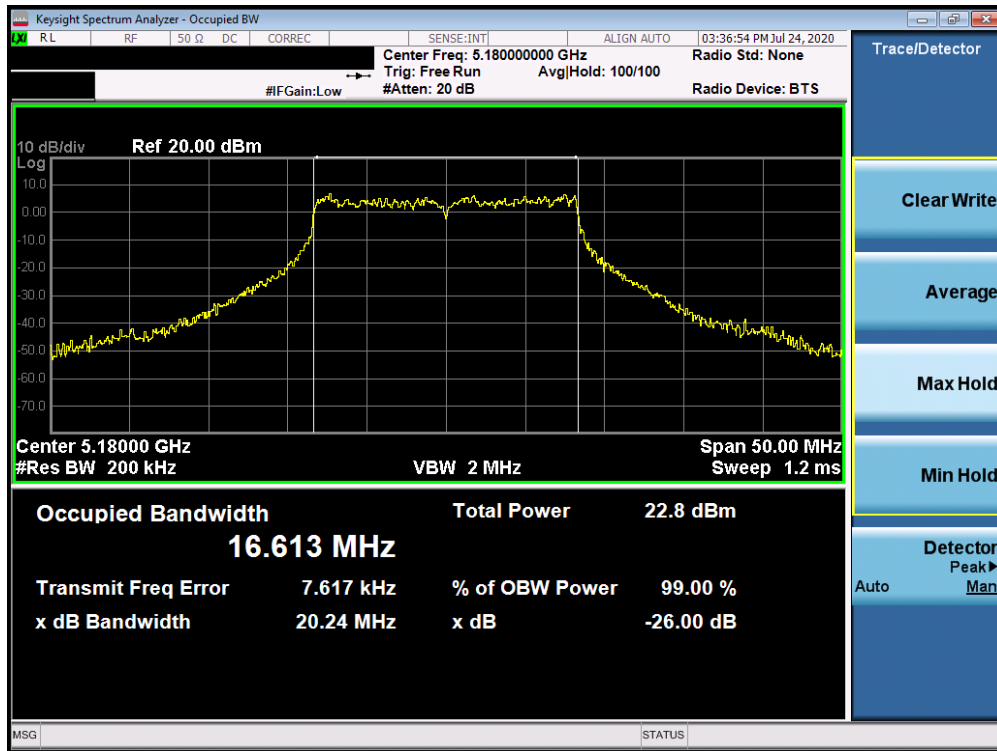


Plot 7-103. 26dB Bandwidth Plot ANT5 (802.11a (UNII Band 1) – Ch. 36)

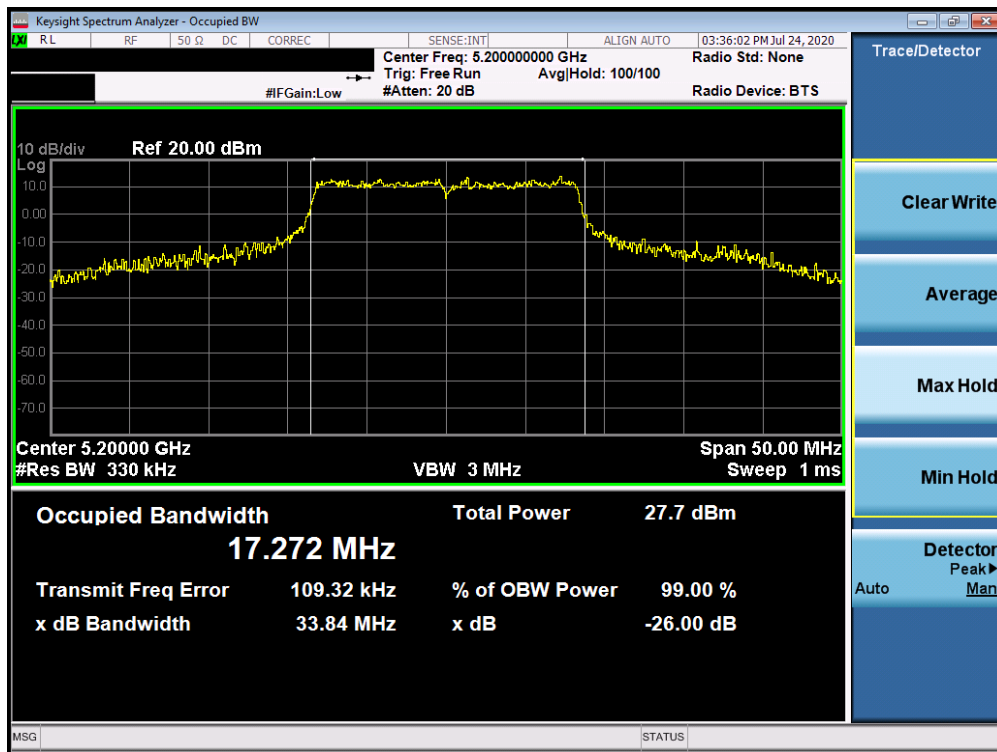


Plot 7-104. 26dB Bandwidth Plot ANT5 (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 71 of 344

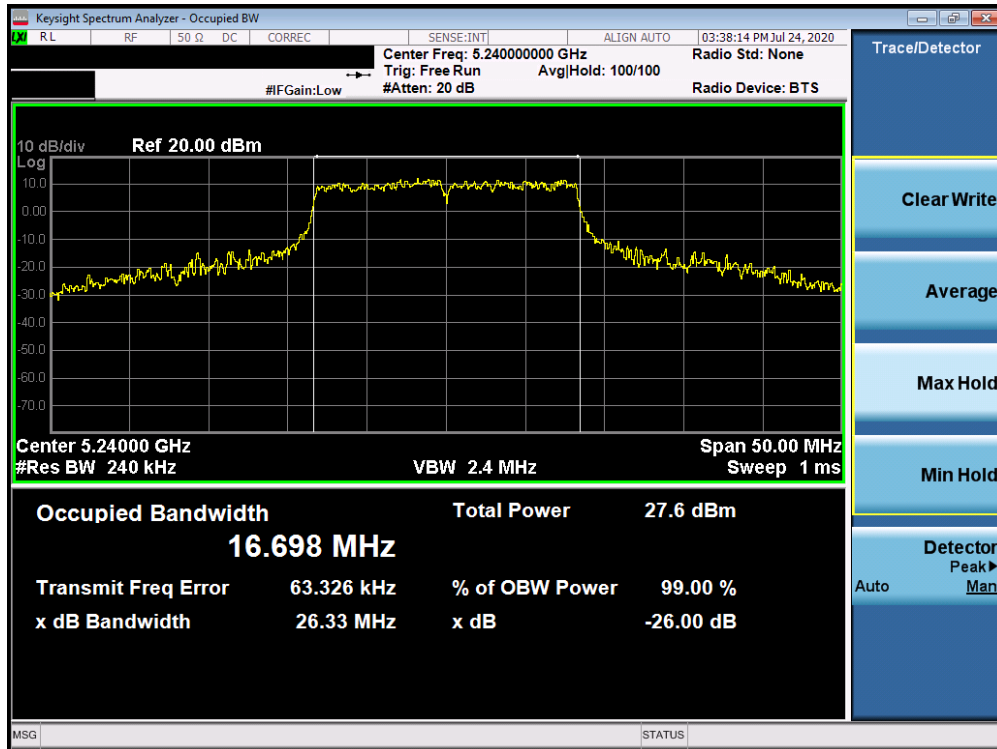


Plot 7-105. 26dB Bandwidth Plot ANT5 (802.11a (UNII Band 1) – Ch. 48)

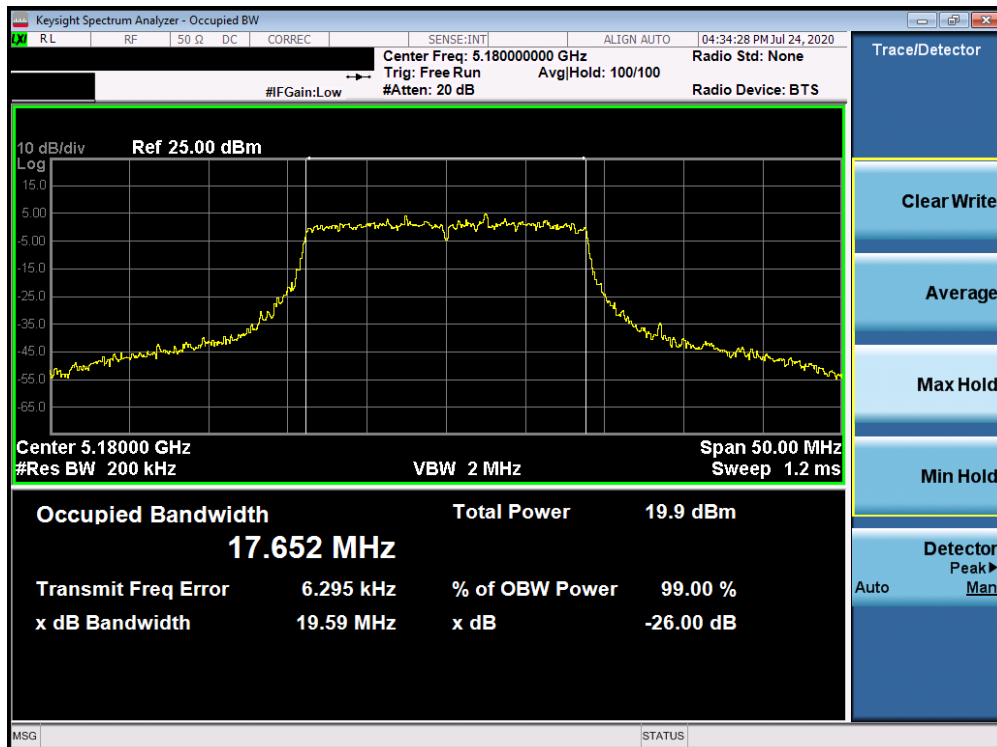


Plot 7-106. 26dB Bandwidth Plot ANT5 (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMH204V	PCTEST Provided to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 72 of 344

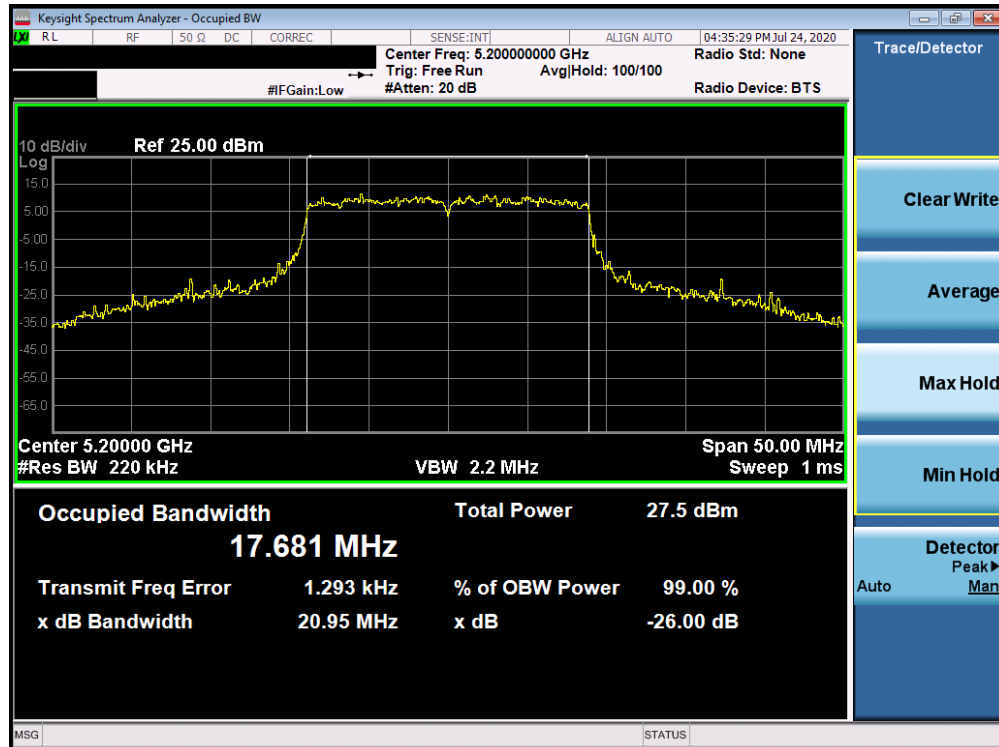

Plot 7-107. 26dB Bandwidth Plot ANT5 (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

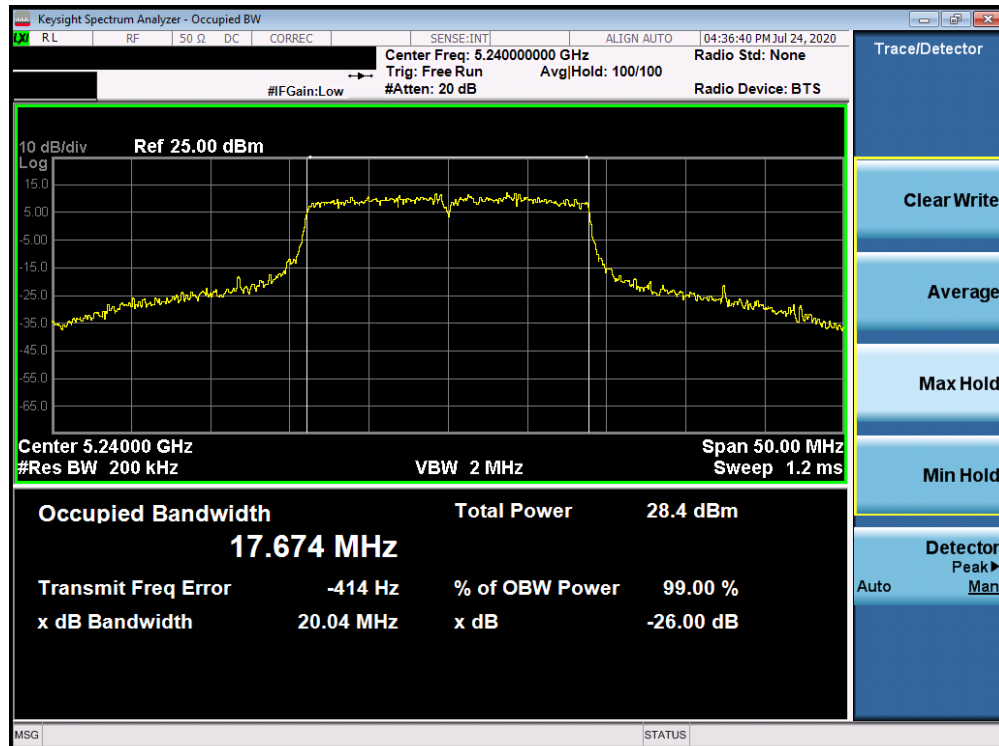

Plot 7-108. 26dB Bandwidth Plot ANT5 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 73 of 344