



MEASUREMENT REPORT

FCC Part 22 & 24

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:
6/7 - 6/24/2015
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1506101155.A3L

FCC ID:	A3LSMN920R4
APPLICANT:	SAMSUNG ELECTRONICS CO., LTD.

Application Type: Certification
Model(s): SM-N920R4
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2 §22(H) §24(E)
Test Procedure(s): ANSI/TIA-603-C-2004, KDB 971168 v02r02, KDB 648474 D03 v01r02
Test Device Serial No.: identical prototype [S/N: AC13E]

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
GPRS850	824.2 - 848.8	240KGXW	0.463	26.65
EDGE850	824.2 - 848.8	244KG7W	0.201	23.02
GPRS1900	1850.2 - 1909.8	239KGXW	0.442	26.45
EDGE1900	1850.2 - 1909.8	244KG7W	0.191	22.80
CDMA850	824.70 - 848.31	1M27F9W	0.058	17.63
CDMA1900	1851.25 - 1908.75	1M28F9W	0.109	20.37
WCDMA850	826.4 - 846.6	4M14F9W	0.057	17.54
WCDMA1900	1852.4 - 1907.6	4M15F9W	0.096	19.83

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 1 of 89	

TABLE OF CONTENTS


FCC PART 22 & 24 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES	5
2.3 TEST CONFIGURATION	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
3.0 DESCRIPTION OF TESTS	6
3.1 EVALUATION PROCEDURE	6
3.2 CELLULAR - BASE FREQUENCY BLOCKS	6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS	6
3.4 PCS - BASE FREQUENCY BLOCKS	6
3.5 PCS - MOBILE FREQUENCY BLOCKS	7
3.6 RADIATED MEASUREMENTS	7
4.0 TEST EQUIPMENT CALIBRATION DATA	8
5.0 SAMPLE CALCULATIONS	9
6.0 TEST RESULTS	10
6.1 SUMMARY	10
6.2 OCCUPIED BANDWIDTH	11
6.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	16
6.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL	44
6.5 PEAK-AVERAGE RATIO	56
6.6 RADIATED POWER (ERP/EIRP)	59
6.7 RADIATED SPURIOUS EMISSIONS MEASUREMENTS	63
6.8 FREQUENCY STABILITY / TEMPERATURE VARIATION	76
7.0 CONCLUSION	89

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 2 of 89



MEASUREMENT REPORT

FCC Part 22 & 24




§2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.
APPLICANT ADDRESS: 129, Samsung-ro, Maetan dong,
 Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA
FCC RULE PART(S): §2 §22(H) §24(E)
BASE MODEL: SM-N920R4
FCC ID: A3LSMN920R4
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODE: GSM / GPRS / EDGE / CDMA / WCDMA
FREQUENCY TOLERANCE: $\pm 0.00025\%$ (2.5 ppm)
Test Device Serial No.: AC13E ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: 6/7 - 6/24/2015
TEST REPORT S/N: 0Y1506101155.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025:2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 3 of 89	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

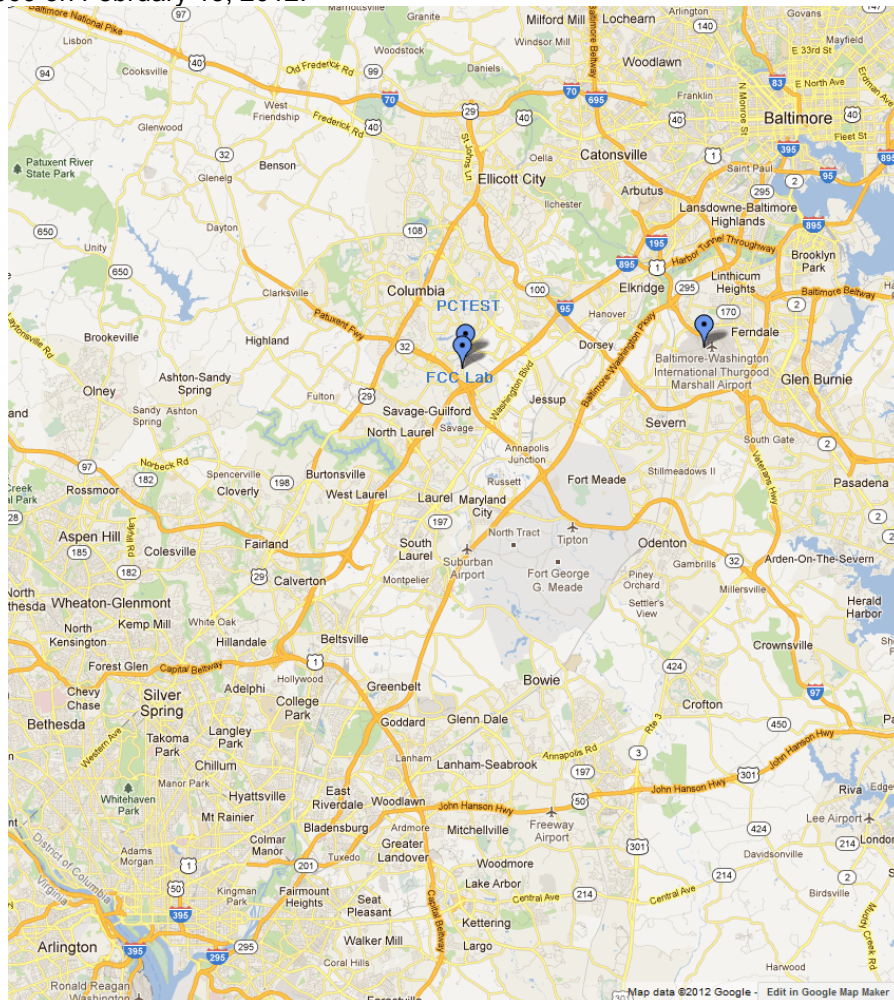


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 4 of 89

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN920R4**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A (BC0, BC1), 850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

Note: The circuitry for this device is electrically identical to a device bearing the FCC ID: A3LSMN920V. Thus, the data found within this report was taken from the A3LSMN920V.

2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSMN920R4 was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168 v02r02. See Section 6.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r02. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 5 of 89	

3.0 DESCRIPTION OF TESTS


3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 v02r02) were used in the measurement of the **Samsung Portable Handset FCC ID: A3LSMN920R4**.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

§22.905

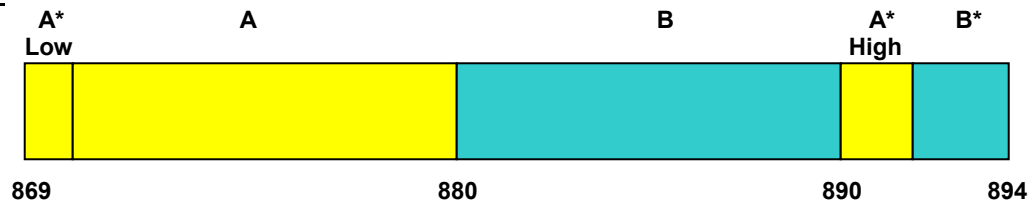

BLOCK 1: 869 – 880 MHz (A* Low + A)


BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

§22.905

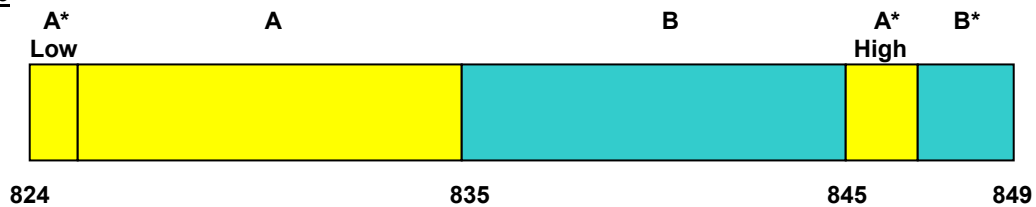

BLOCK 1: 824 – 835 MHz (A* Low + A)


BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

§24.229

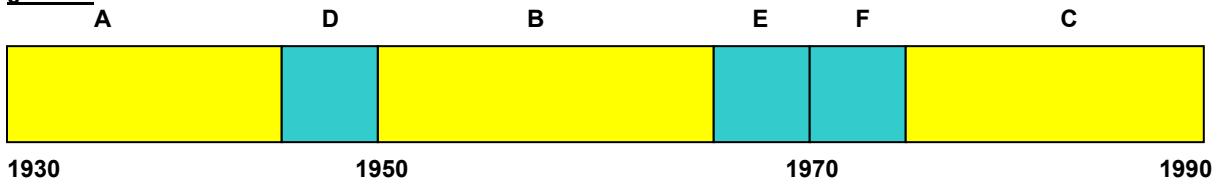

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)


BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 6 of 89

3.5 PCS - Mobile Frequency Blocks

§24.229

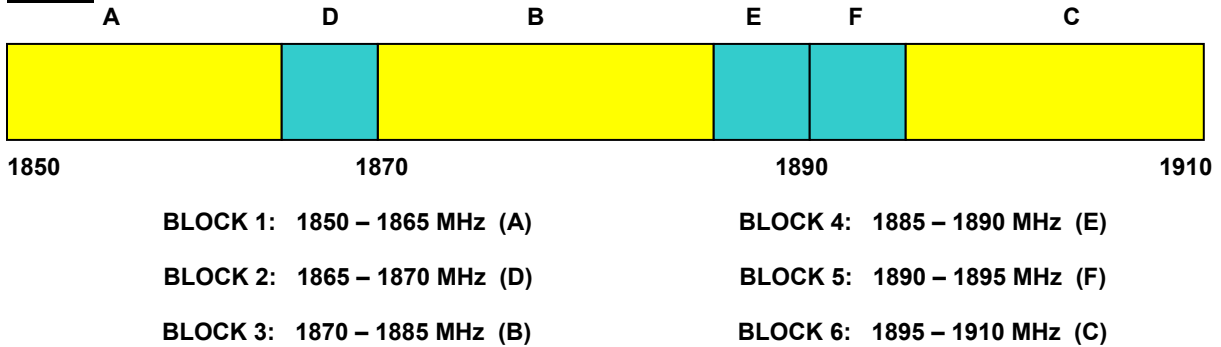

3.6 Radiated Measurements

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

Radiated power levels are investigated with the receive antenna vertically polarized while radiated spurious emissions levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-C-2004.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 7 of 89	

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx3	Licensed Transmitter Cable Set	6/12/2015	Annual	6/12/2016	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	10/24/2014	Annual	10/24/2015	N/A
Agilent	8447D	Broadband Amplifier	6/12/2015	Annual	6/12/2016	1937A03348
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	7/26/2013	Biennial	7/26/2015	121034
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Emco	6502	Active Loop Antenna (10k - 30 MHz)	6/24/2014	Biennial	6/24/2016	267
Espec	ESX-2CA	Environmental Chamber	3/17/2015	Annual	3/17/2016	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2014	Biennial	3/12/2016	128337
K & L	11SH10-3075/U18000	High Pass Filter	12/1/2014	Annual	12/1/2015	2
K & L	13SH10-1000/U1000	N Type High Pass Filter	12/1/2014	Annual	12/1/2015	1
Rhode & Schwarz	TS-PR18	Pre-Amplifier	3/5/2015	Annual	3/5/2016	101622
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836536/0005
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	3/12/2015	Annual	3/12/2016	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/21/2014	Annual	7/21/2015	100348
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2015	Annual	3/5/2016	100071
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/21/2013	Biennial	11/21/2015	9105-2404
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107

Table 4-1. Test Equipment

Notes:

1. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.
2. For equipment listed above that has a calibration date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 8 of 89	

5.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz
 G = Phase Modulation
 X = Cases not otherwise covered
 W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 W = Combination (Audio/Data)

CDMA Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 9 of 89

6.0 TEST RESULTS

6.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMN920R4
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM / GPRS / EDGE / CDMA / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
2.1051 22.917(a) 24.238(a)	Conducted Band Edge / Spurious Emissions	$> 43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 6.3, 6.4
24.232(d)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS	Section 6.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235	Frequency Stability	$< 2.5 \text{ ppm}$ (Part 22) Emission must remain in band (Part 24)		PASS	Section 6.8
22.913(a.2)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS	Section 6.6
24.232(c)	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS	Section 6.6
2.1053 22.917(a) 24.238(a)	Radiated Spurious Emissions	$> 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 6.7

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.2.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 10 of 89	

6.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 v02r02 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


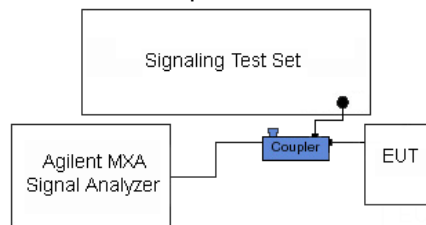


Figure 6-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 11 of 89	

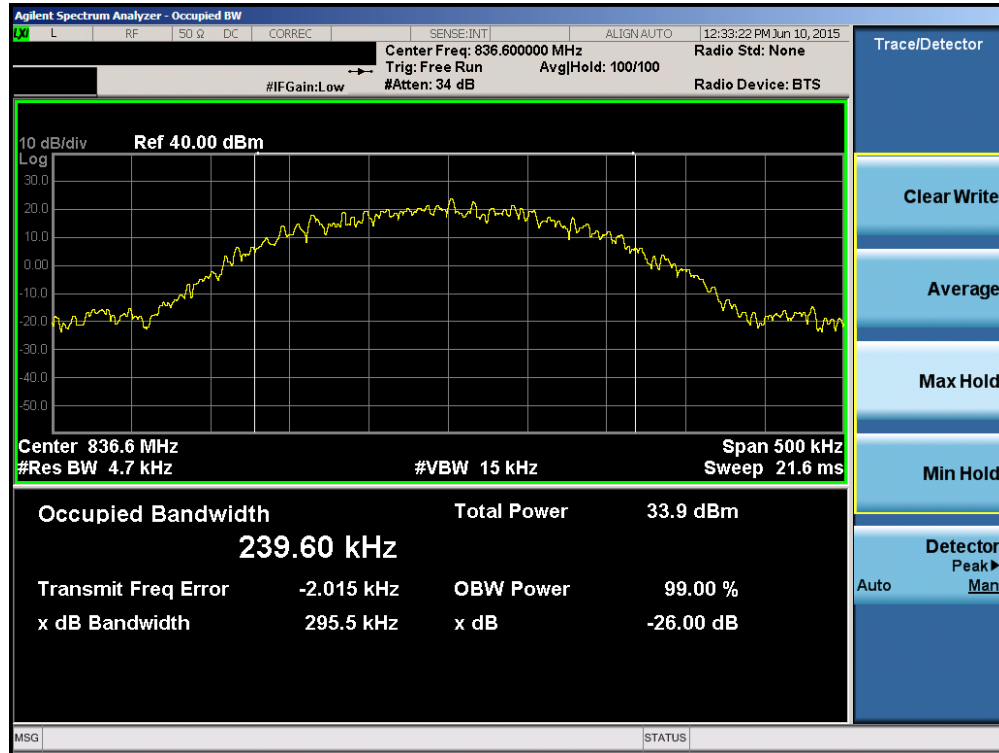


Plot 6-1. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)

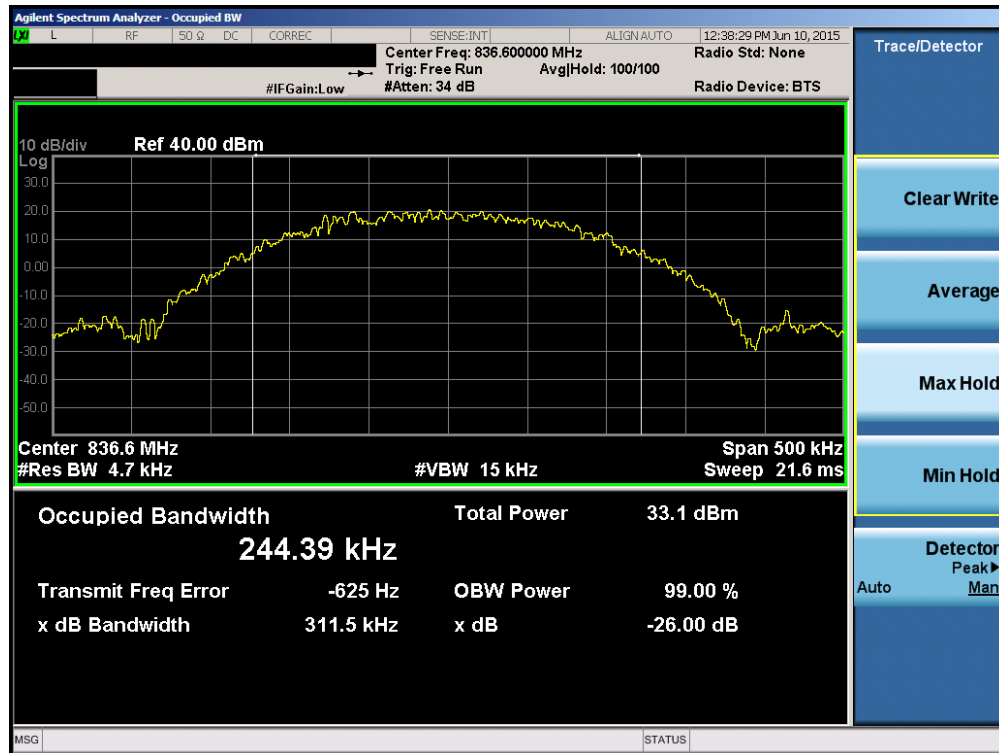


Plot 6-2. Occupied Bandwidth Plot (EDGE850 Mode – Ch. 190)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 12 of 89

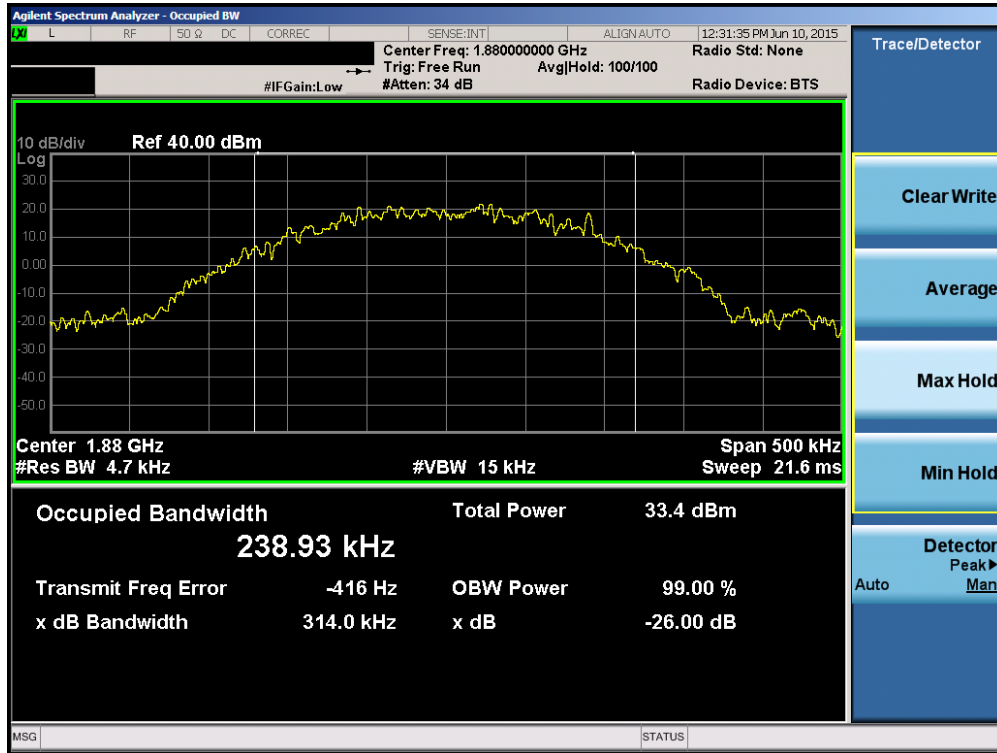


Plot 6-3. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

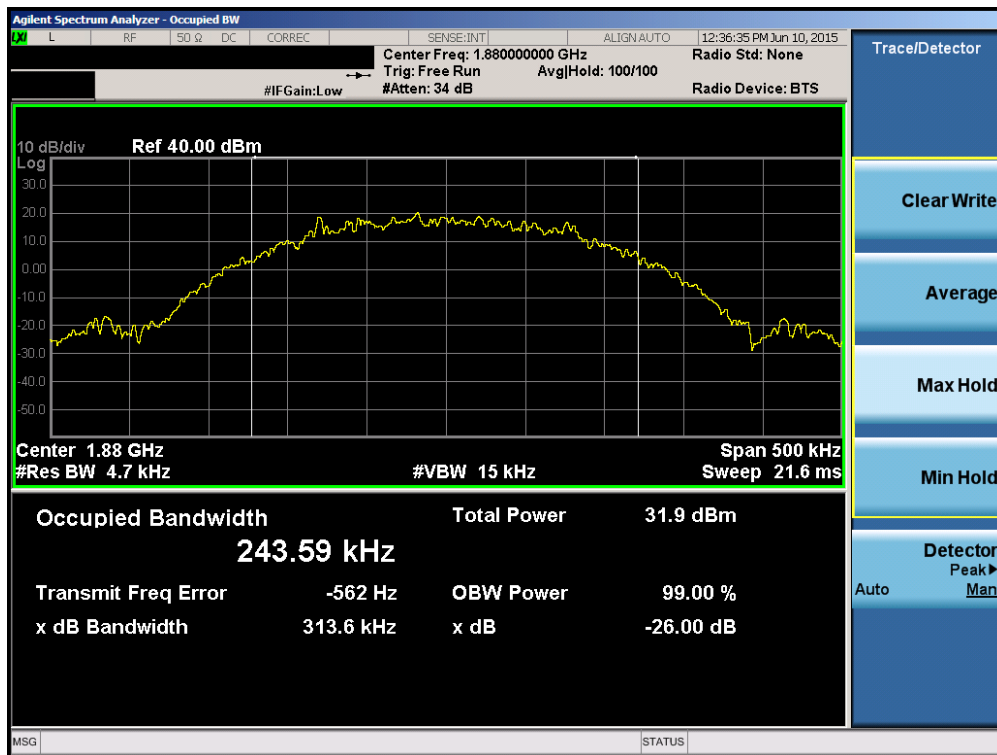


Plot 6-4. Occupied Bandwidth Plot (EDGE1900 Mode – Ch. 661)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 13 of 89

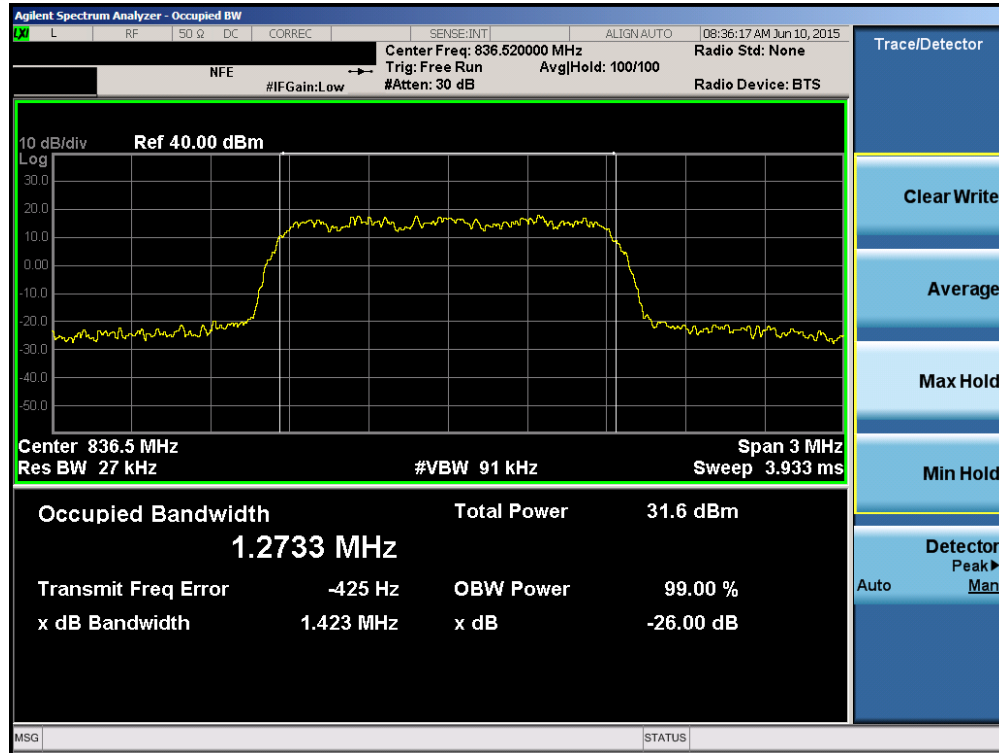


Plot 6-5. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

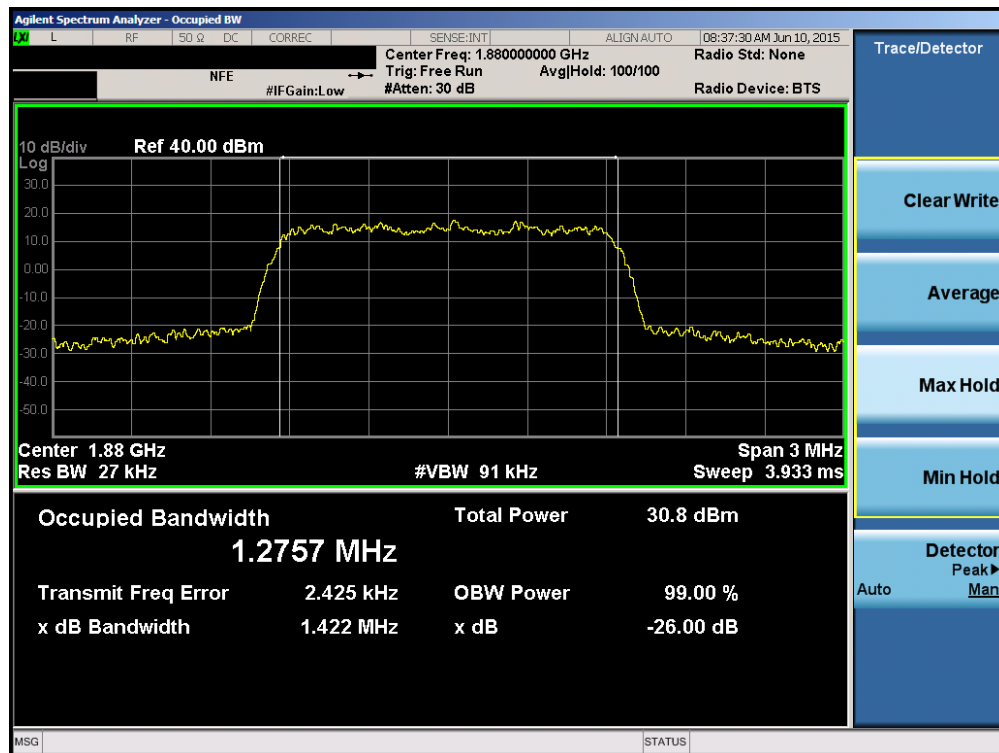


Plot 6-6. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 14 of 89

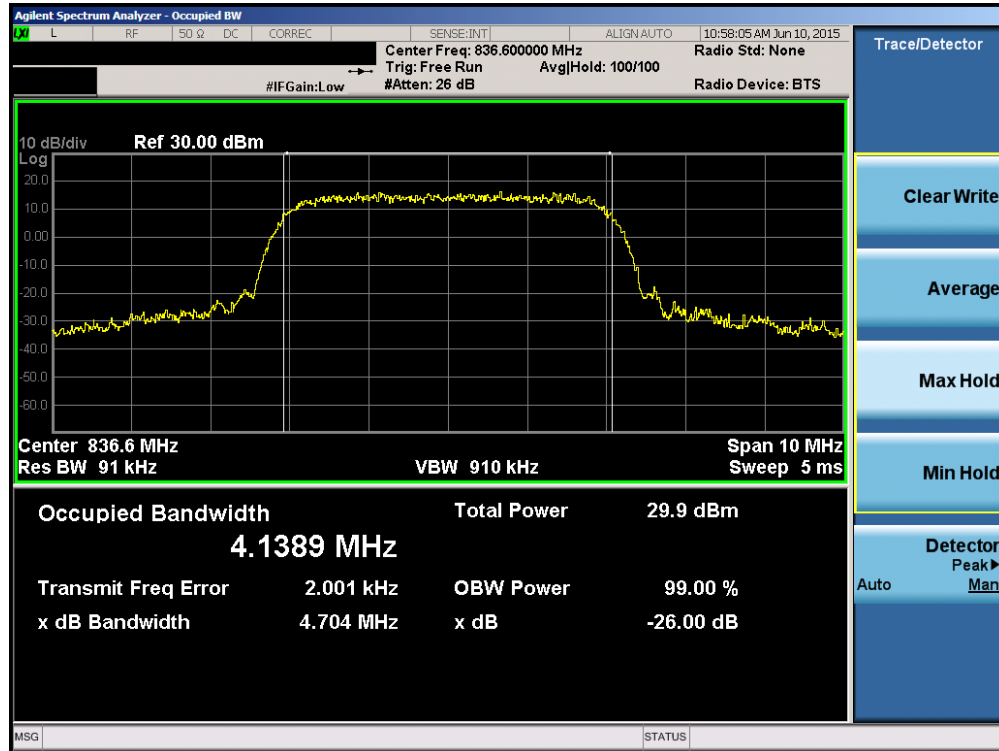

Plot 6-7. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

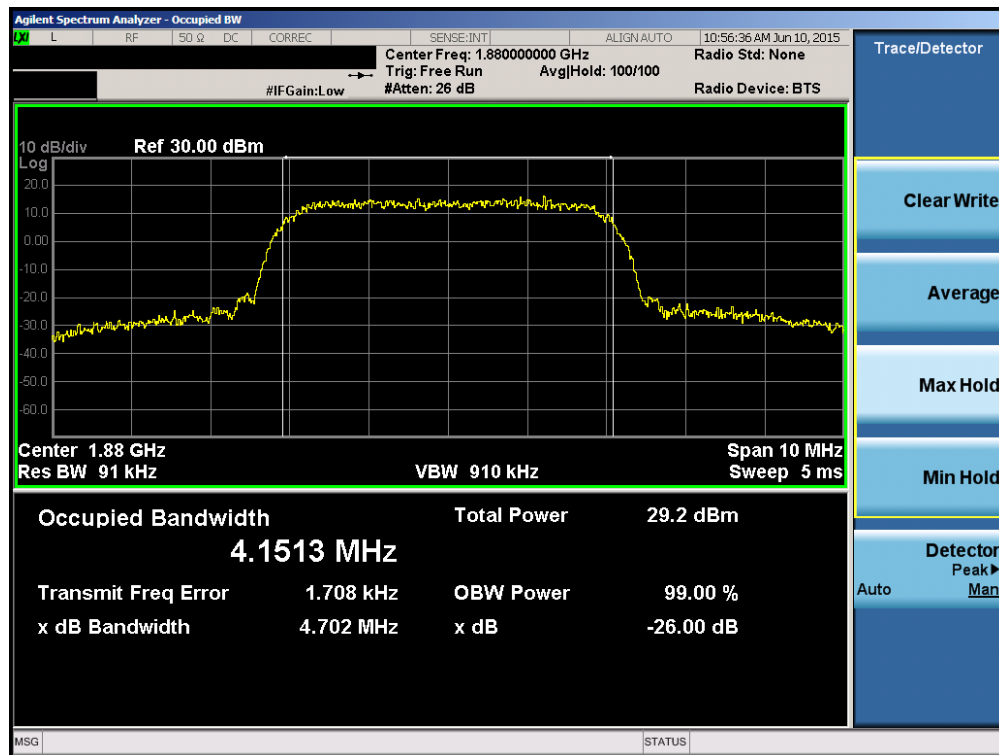

Plot 6-8. Occupied Bandwidth Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 15 of 89

6.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 v02r02 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


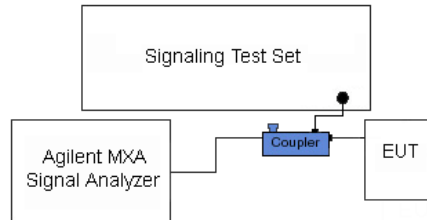


Figure 6-2. Test Instrument & Measurement Setup


Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 16 of 89

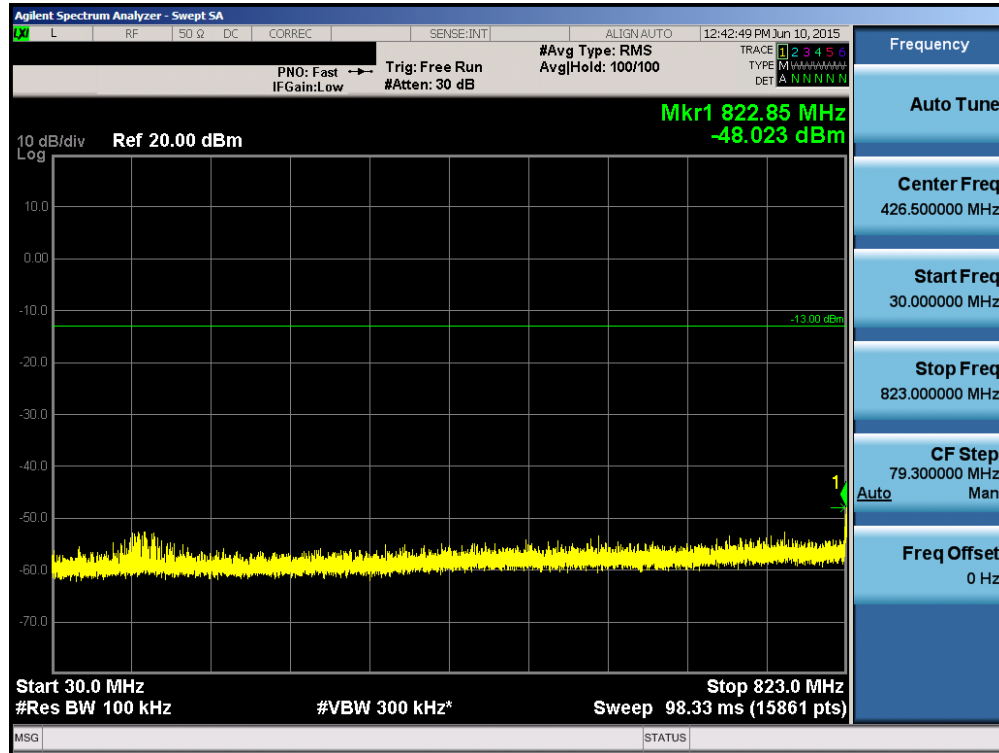


Plot 6-9. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

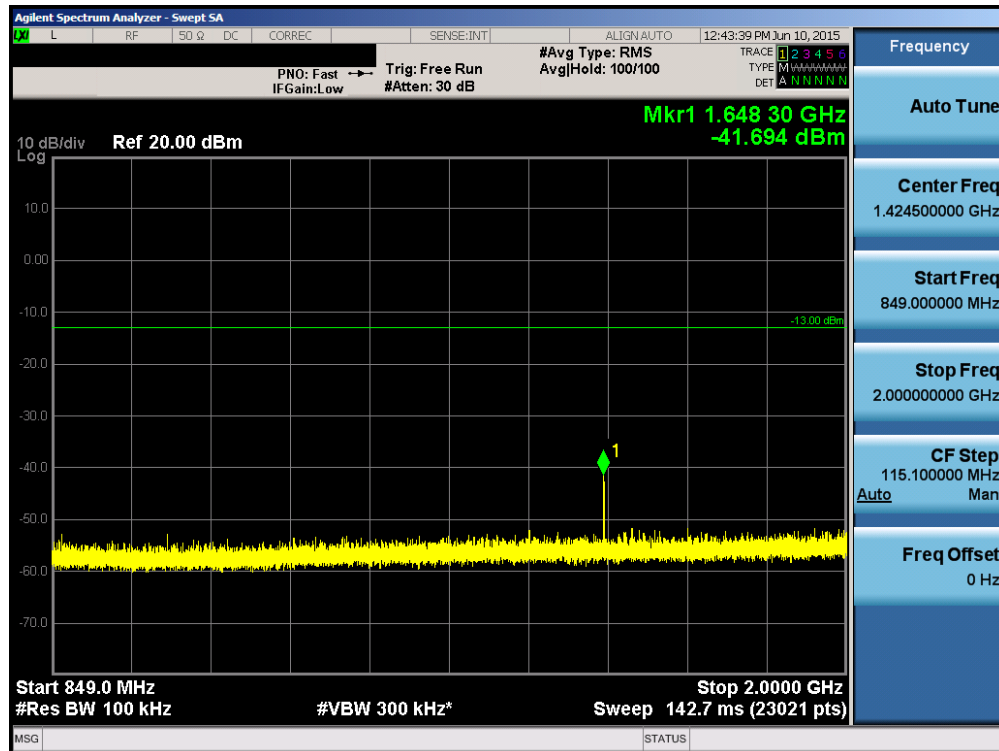


Plot 6-10. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 17 of 89

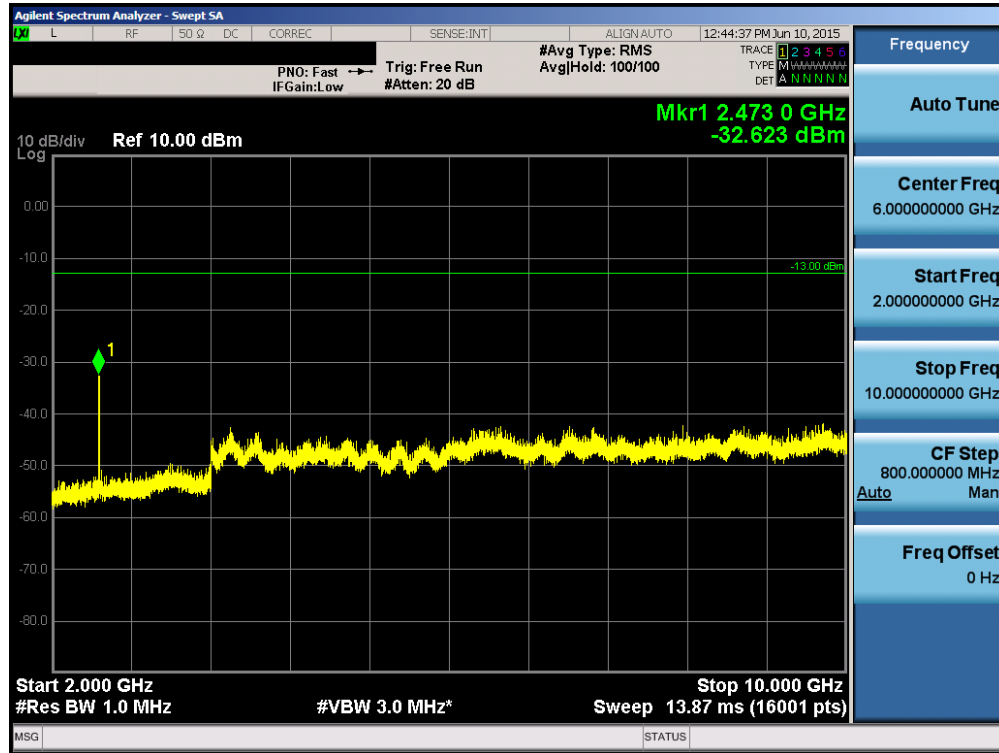


Plot 6-11. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

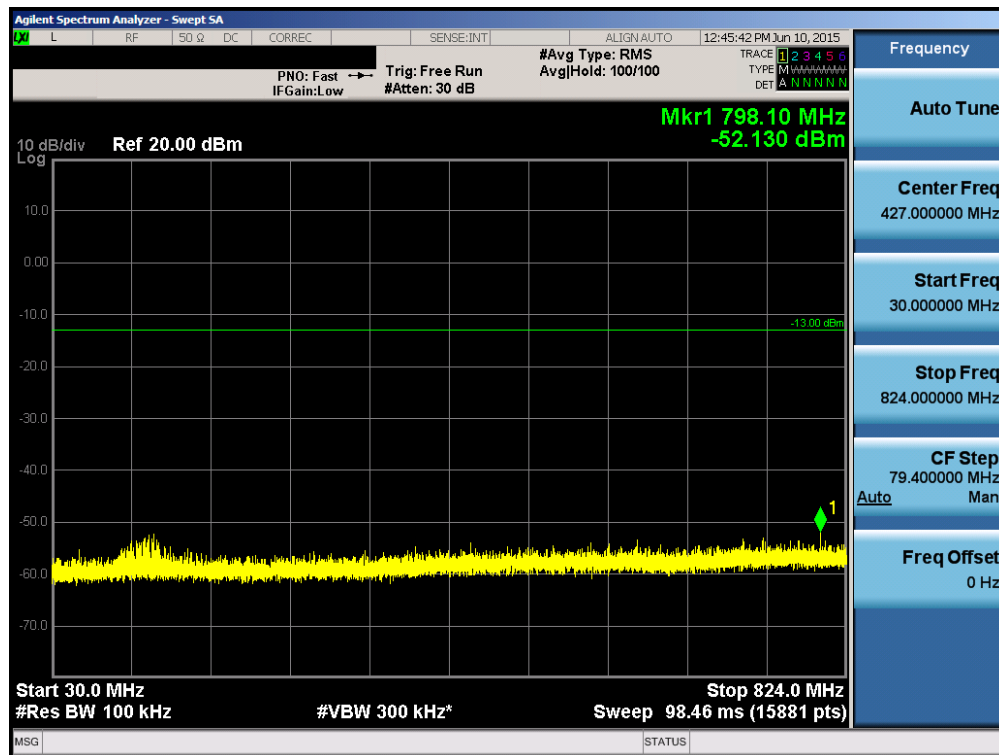


Plot 6-12. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 18 of 89

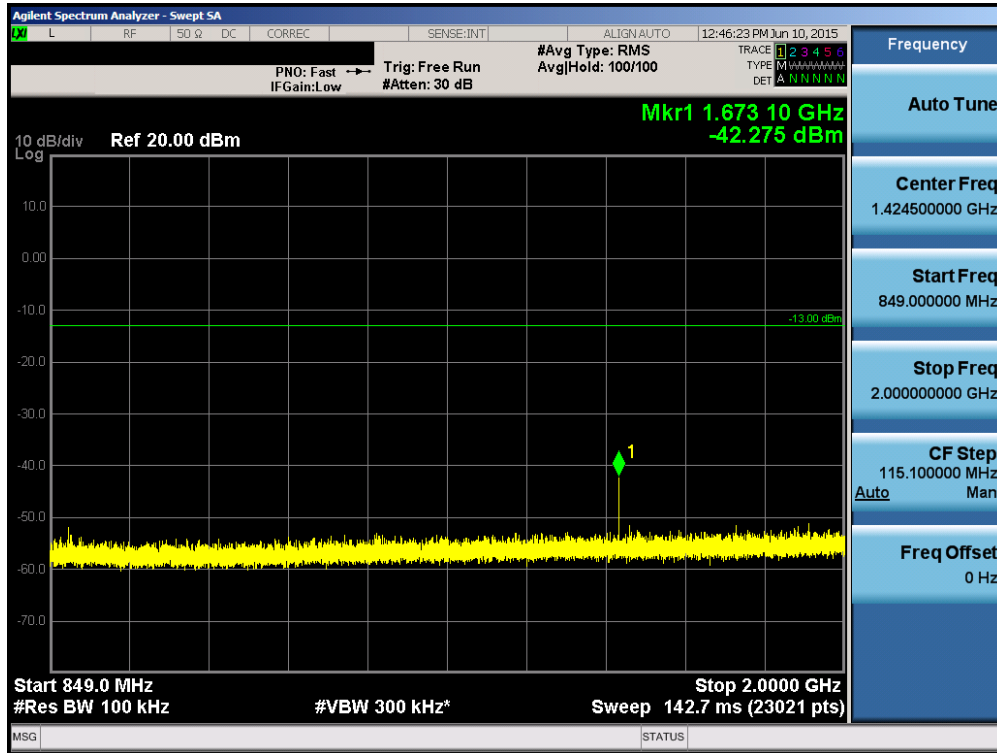


Plot 6-13. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

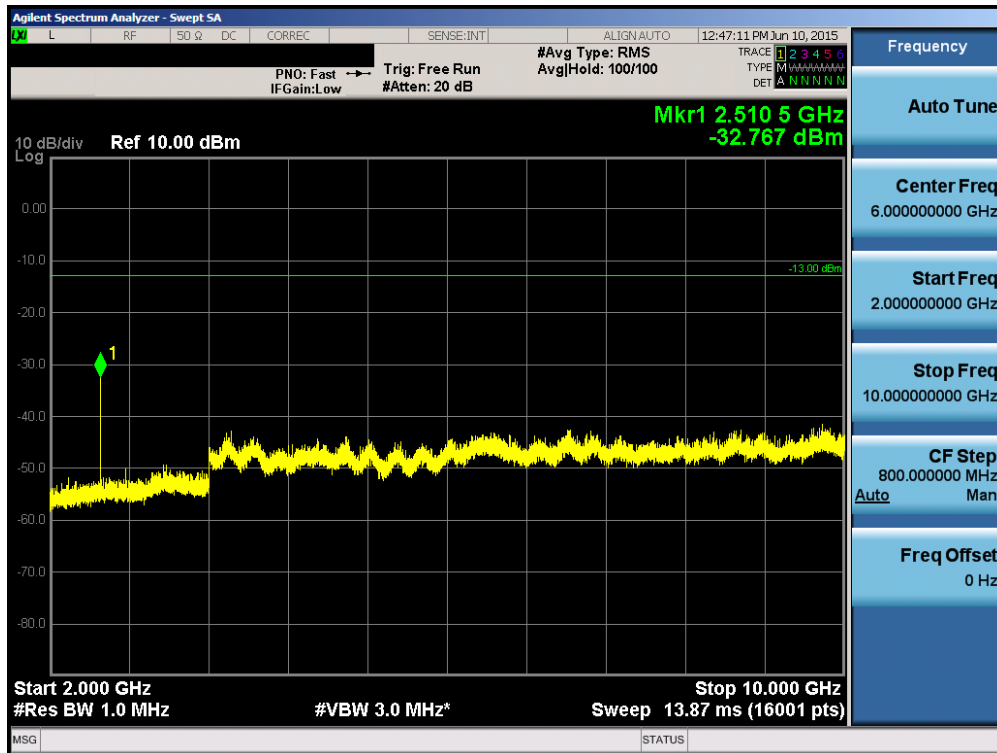


Plot 6-14. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 19 of 89

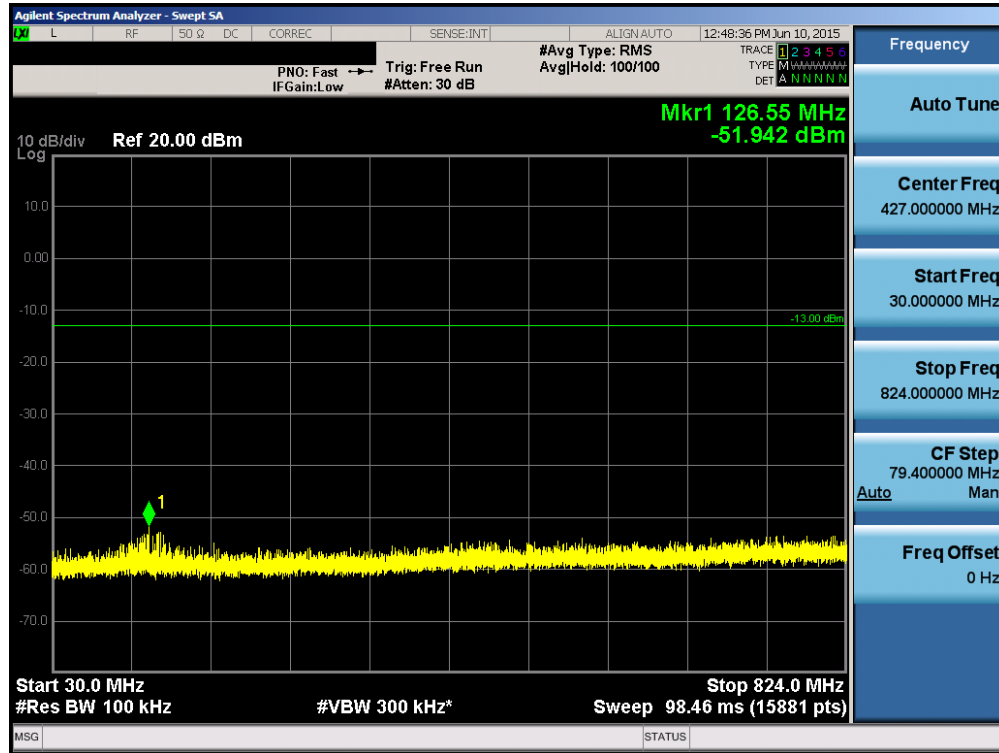


Plot 6-15. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

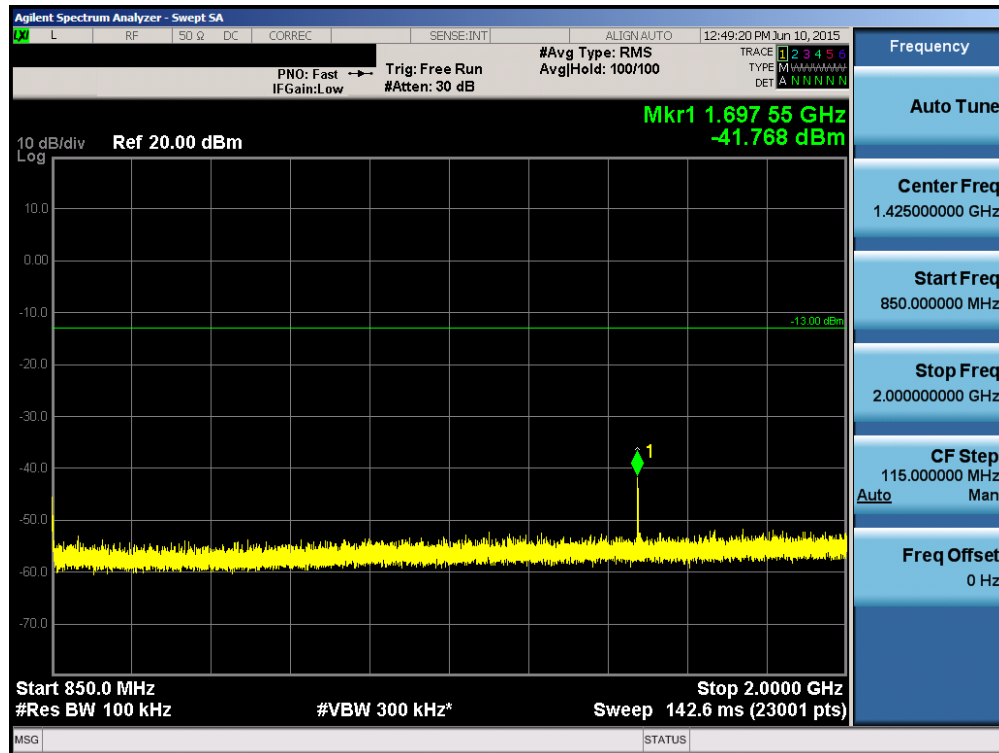


Plot 6-16. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 20 of 89

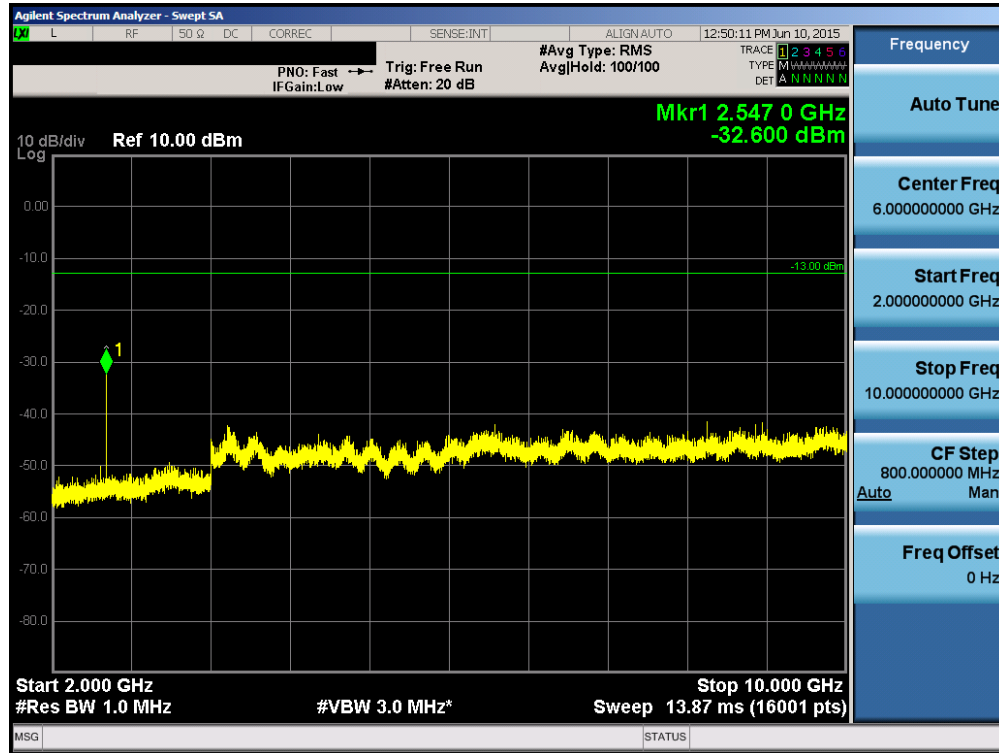


Plot 6-17. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

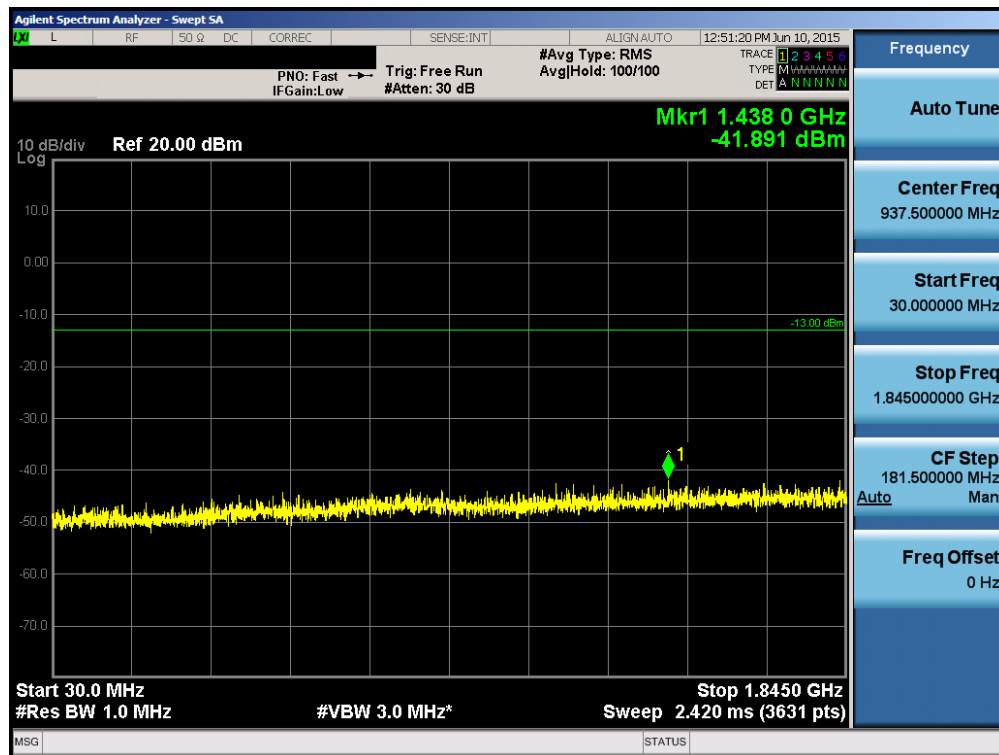


Plot 6-18. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 21 of 89

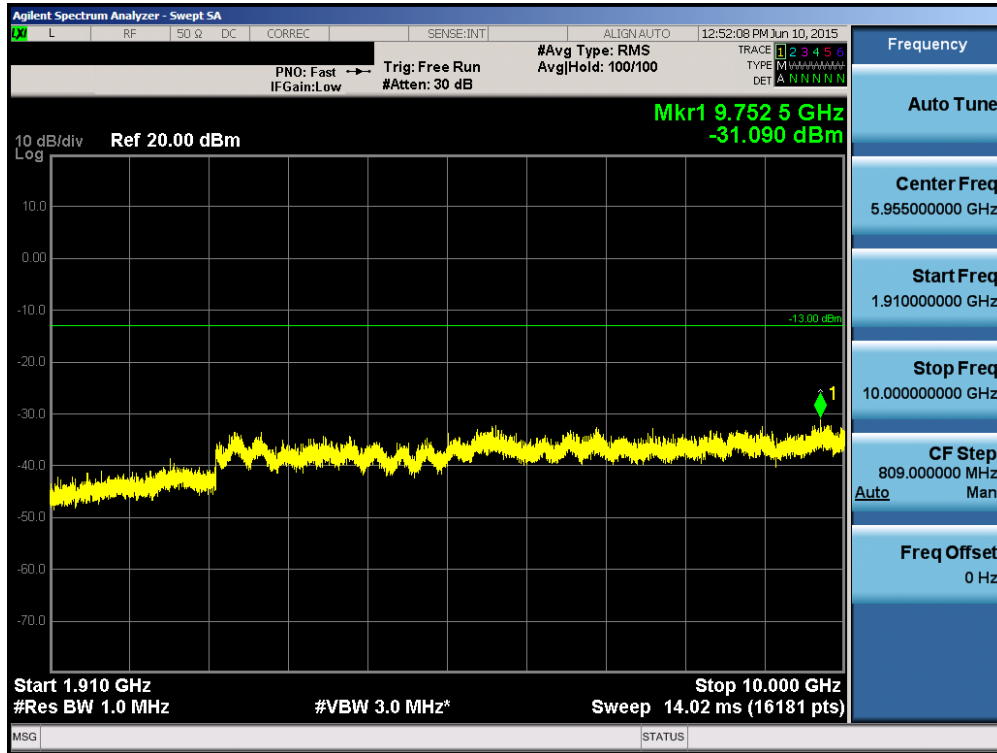


Plot 6-19. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

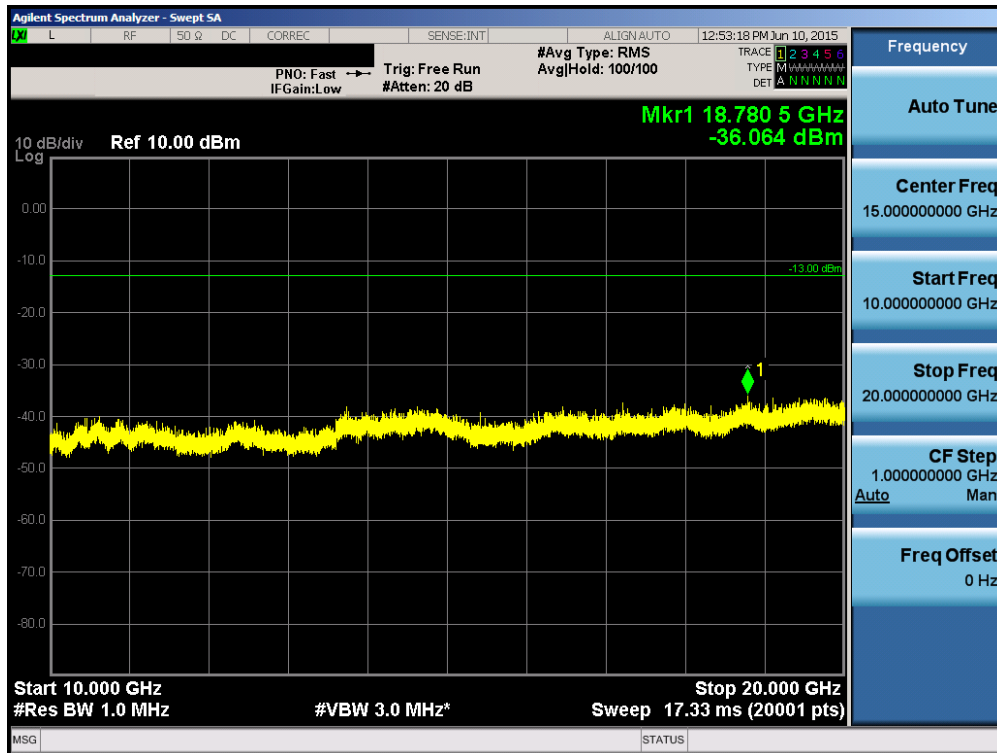


Plot 6-20. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 22 of 89

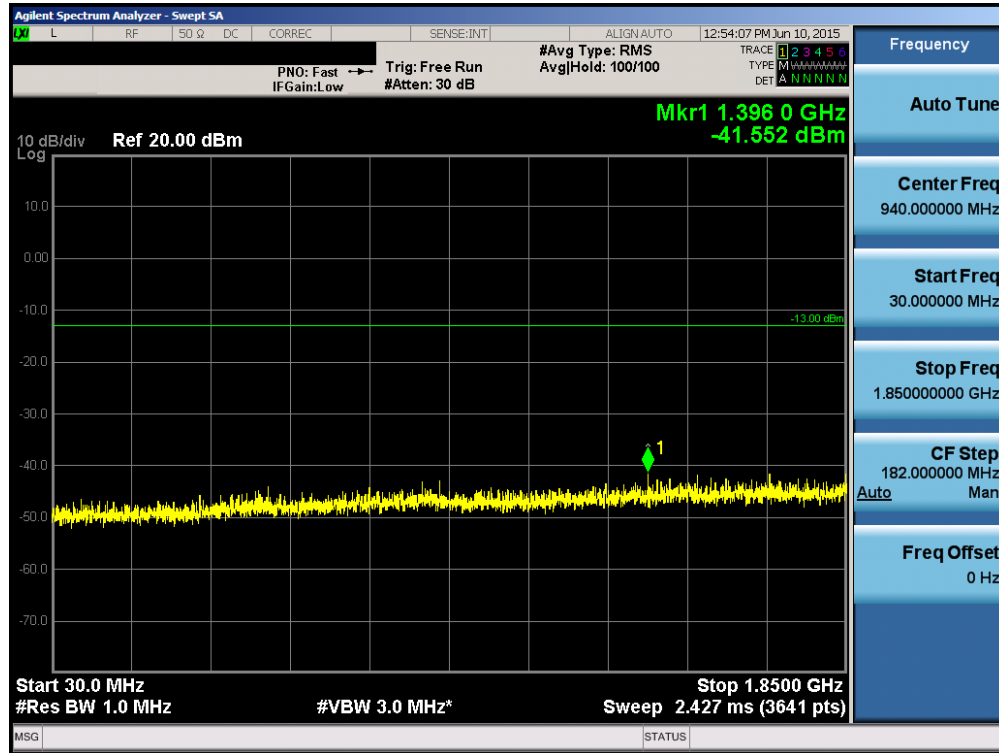


Plot 6-21. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

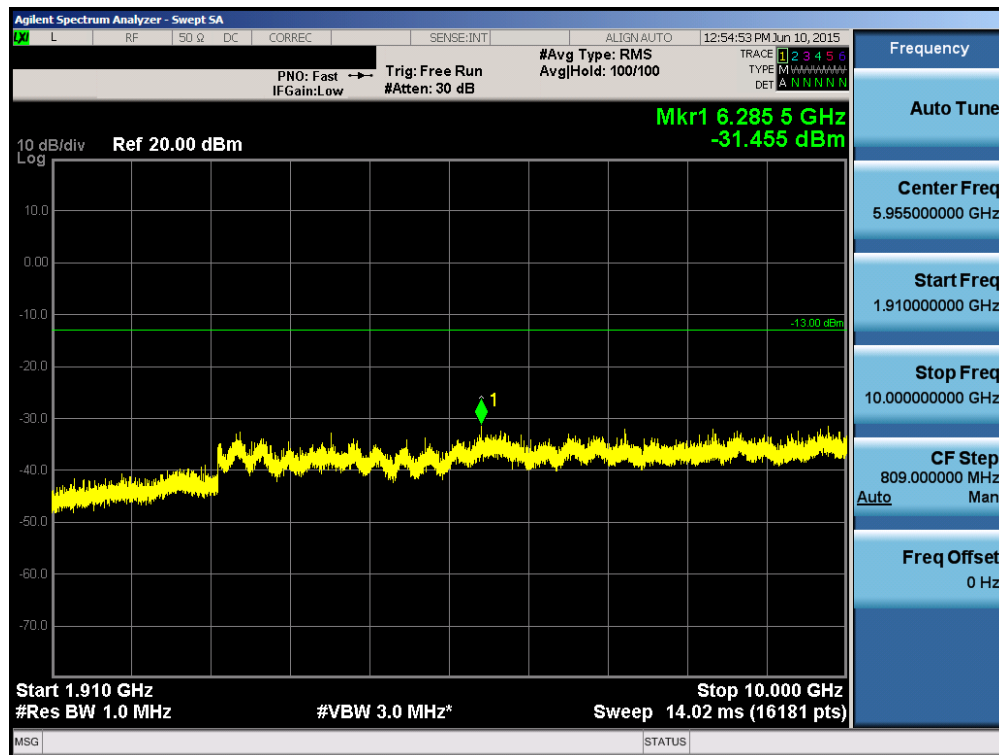


Plot 6-22. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 23 of 89

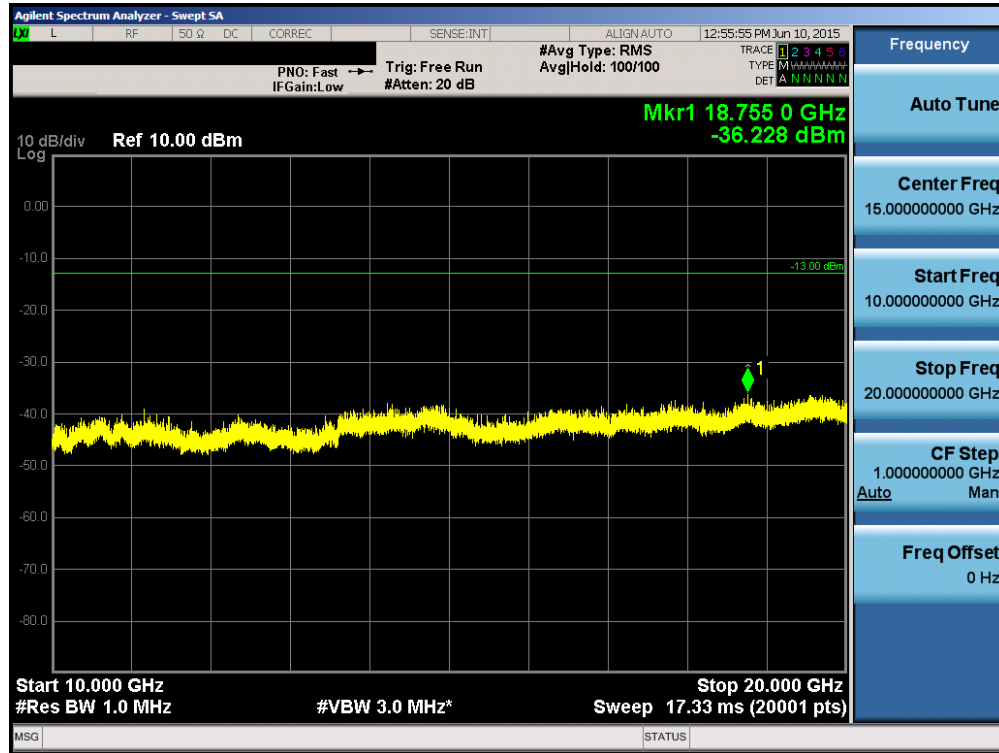


Plot 6-23. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

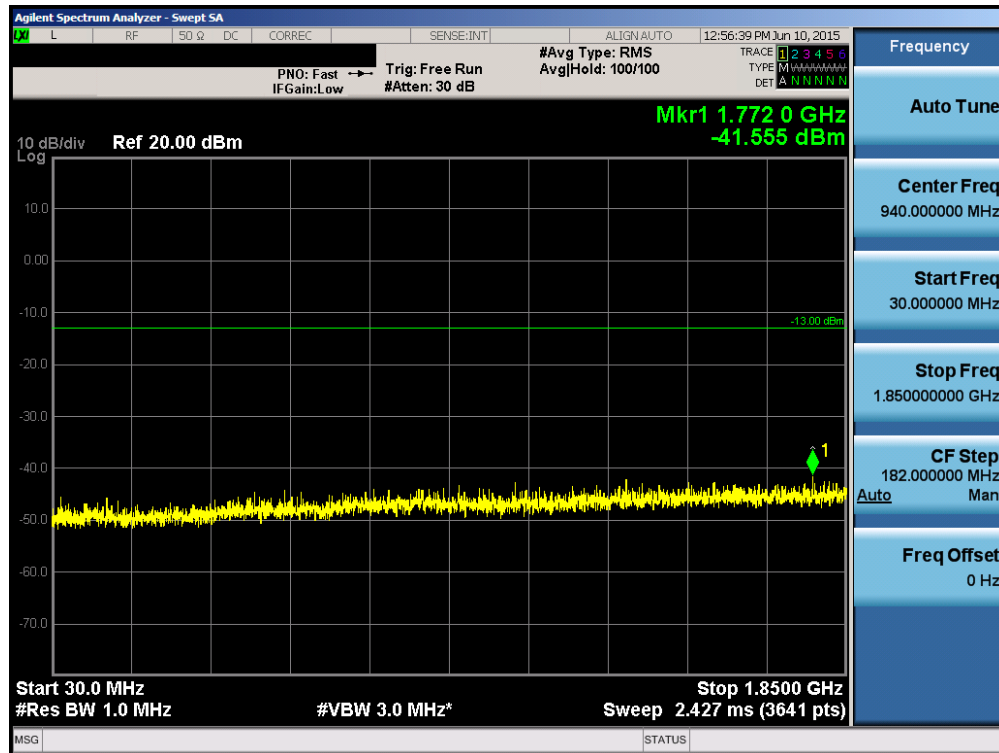


Plot 6-24. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 24 of 89

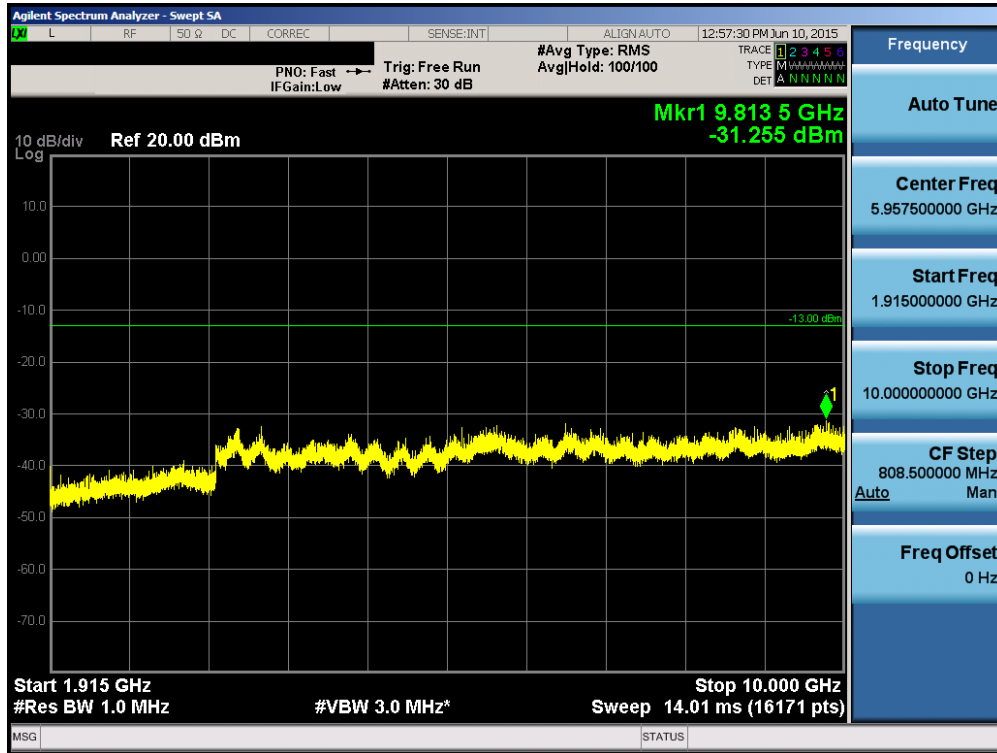


Plot 6-25. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

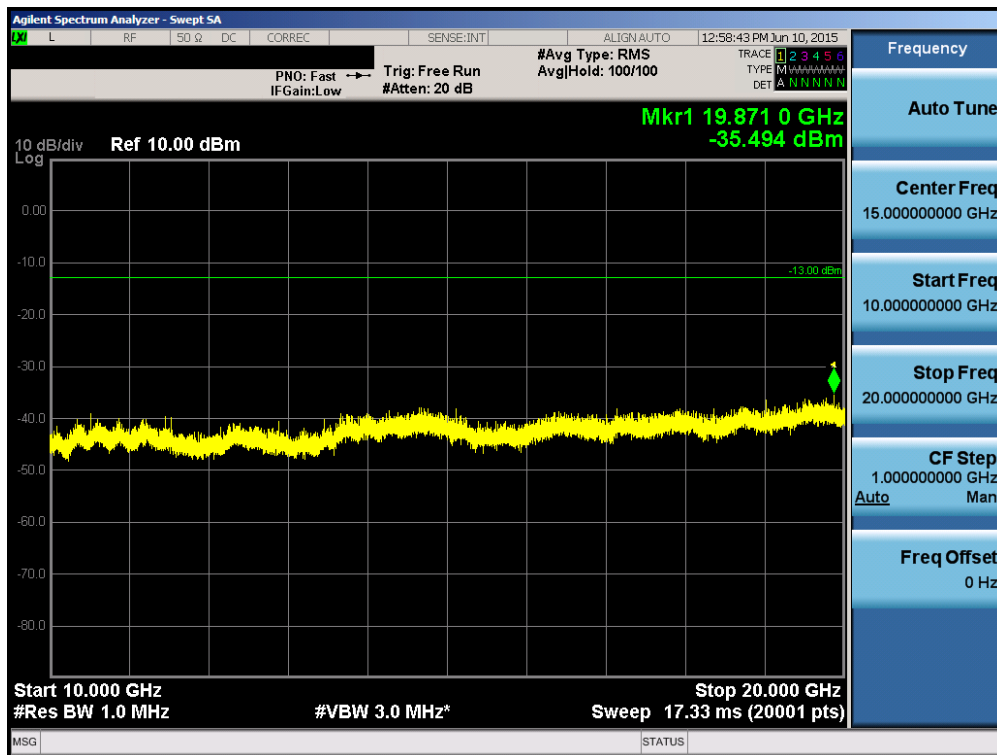


Plot 6-26. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 25 of 89

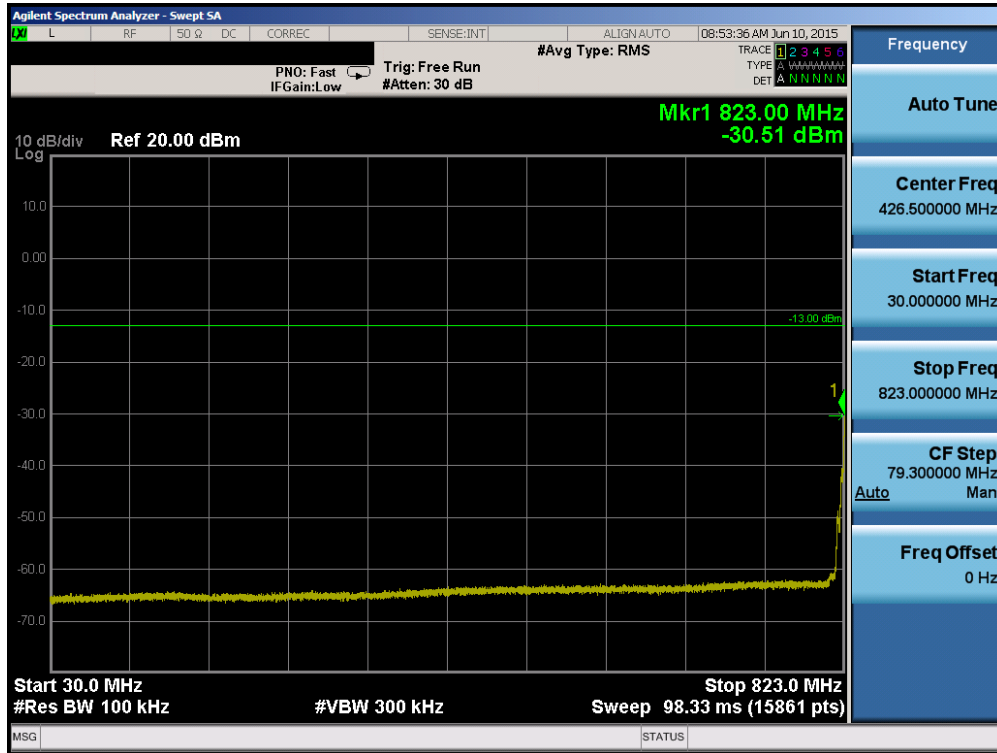


Plot 6-27. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

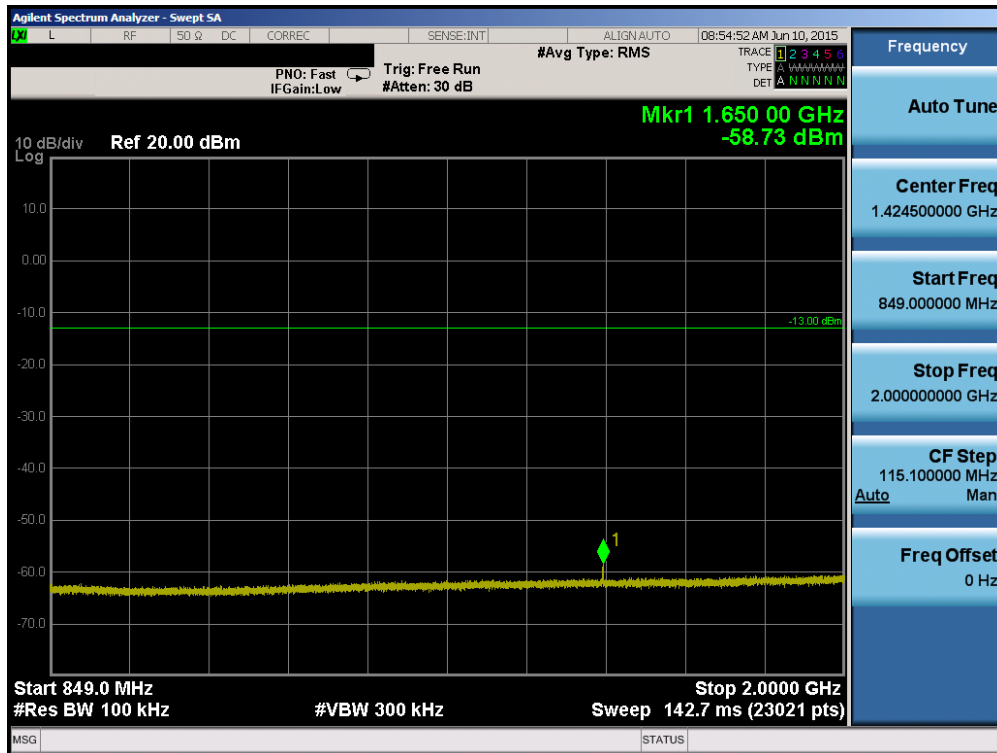


Plot 6-28. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 26 of 89

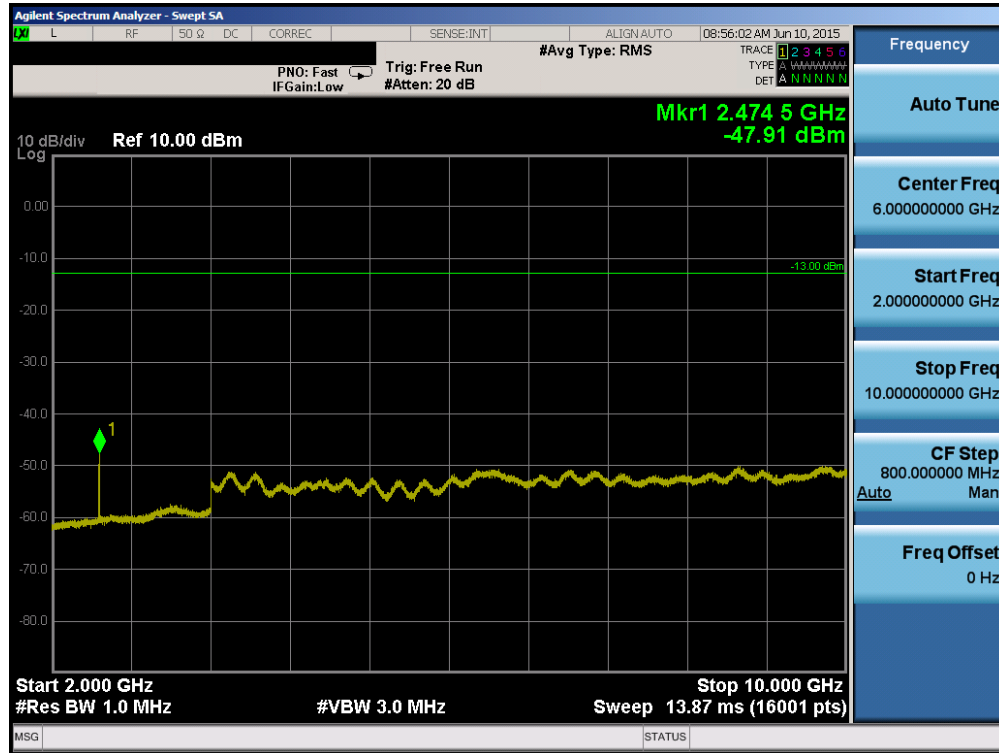


Plot 6-29. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

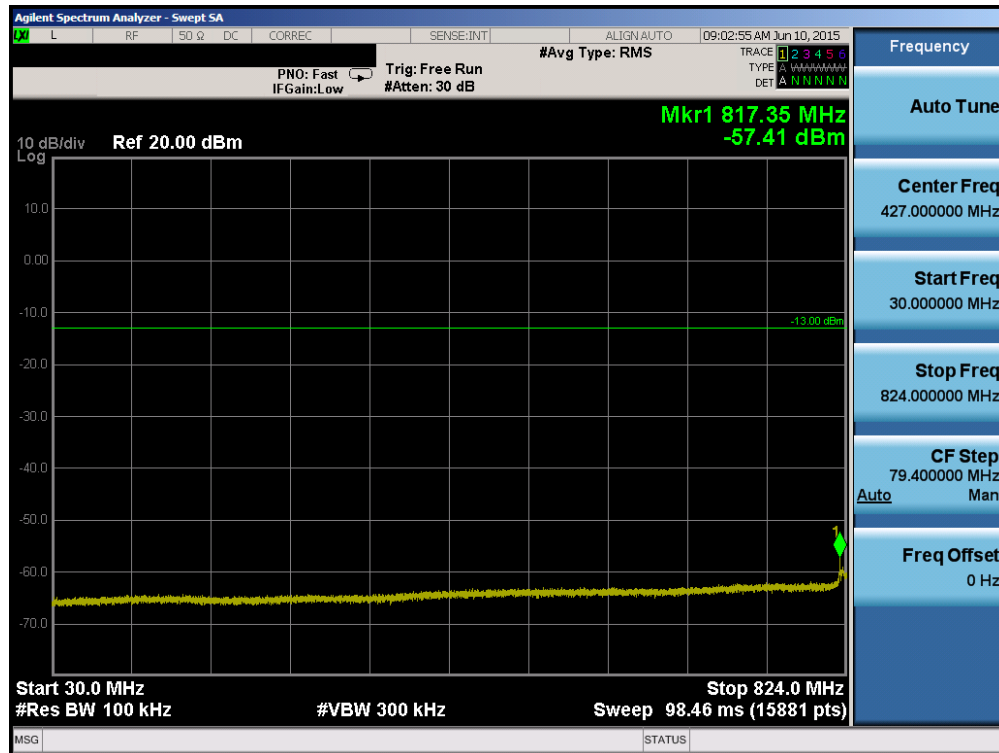


Plot 6-30. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 27 of 89

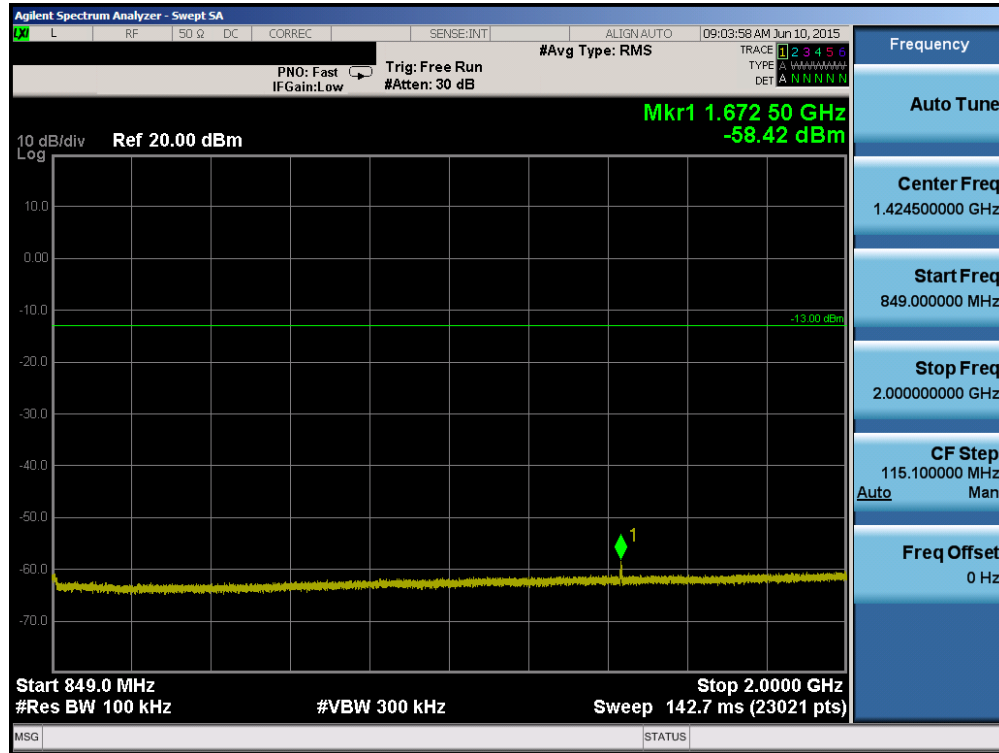


Plot 6-31. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

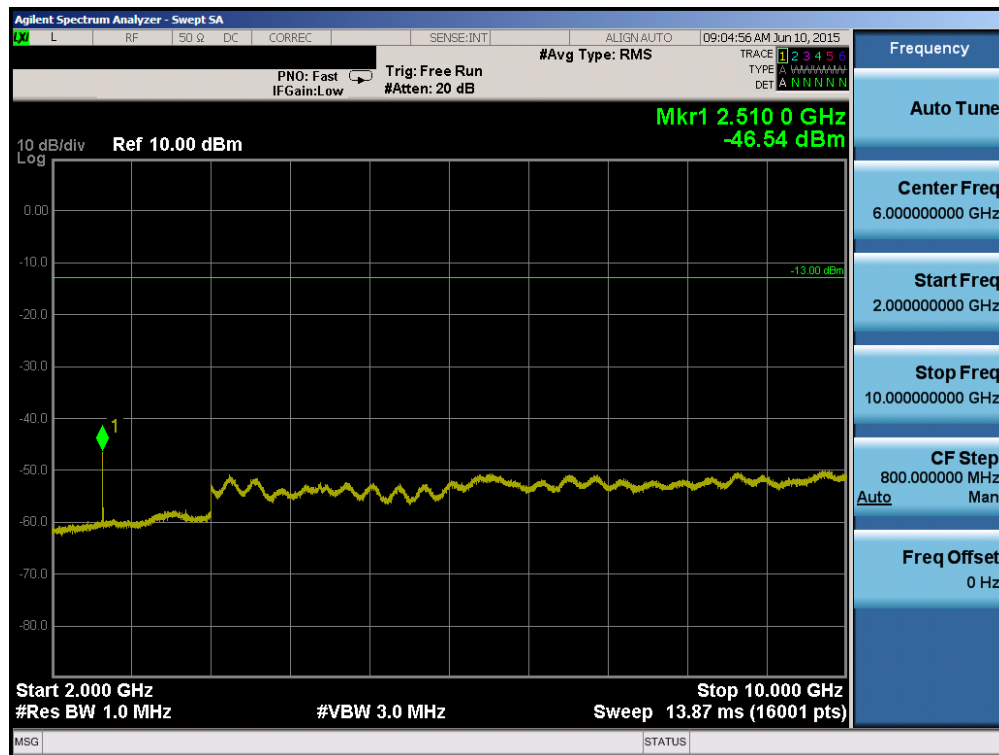


Plot 6-32. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 28 of 89

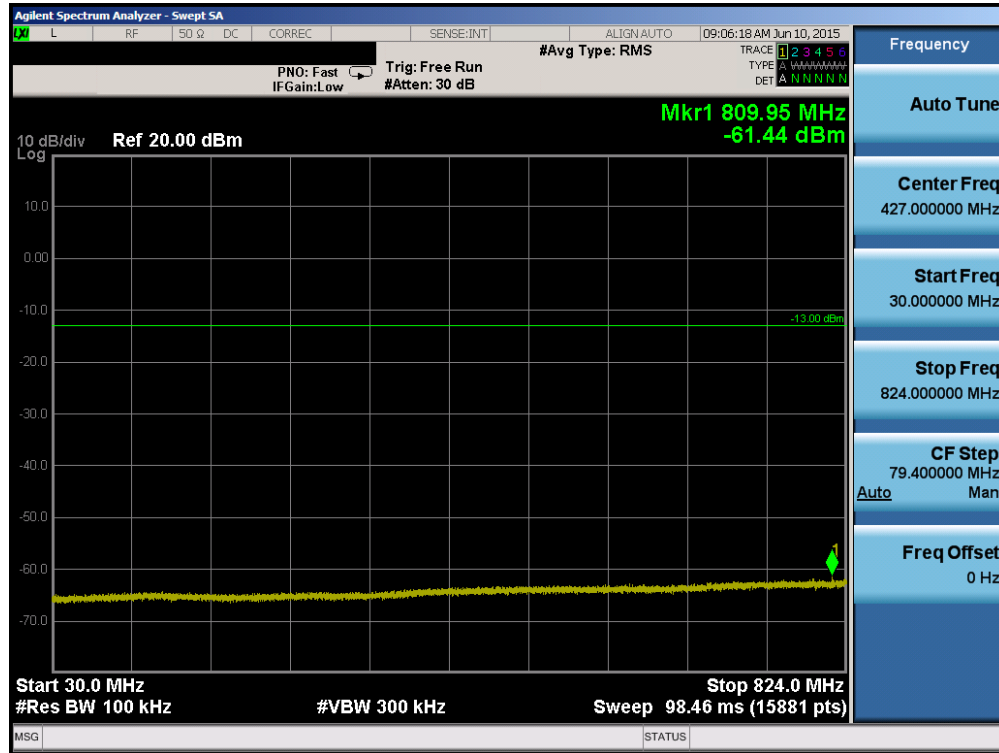


Plot 6-33. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

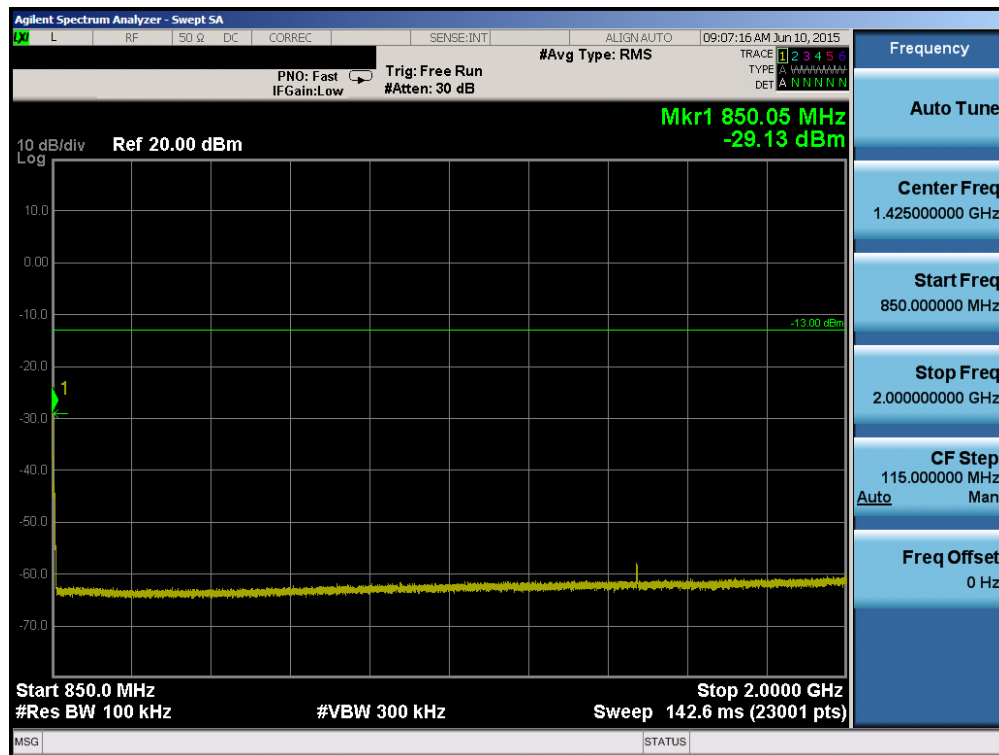


Plot 6-34. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 29 of 89

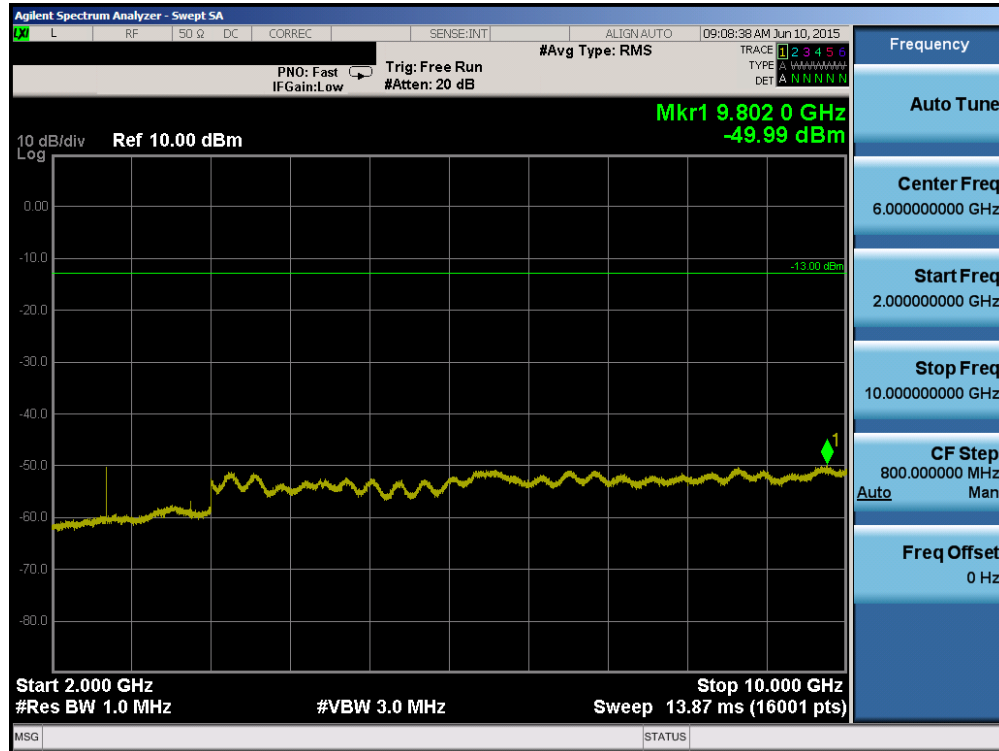


Plot 6-35. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

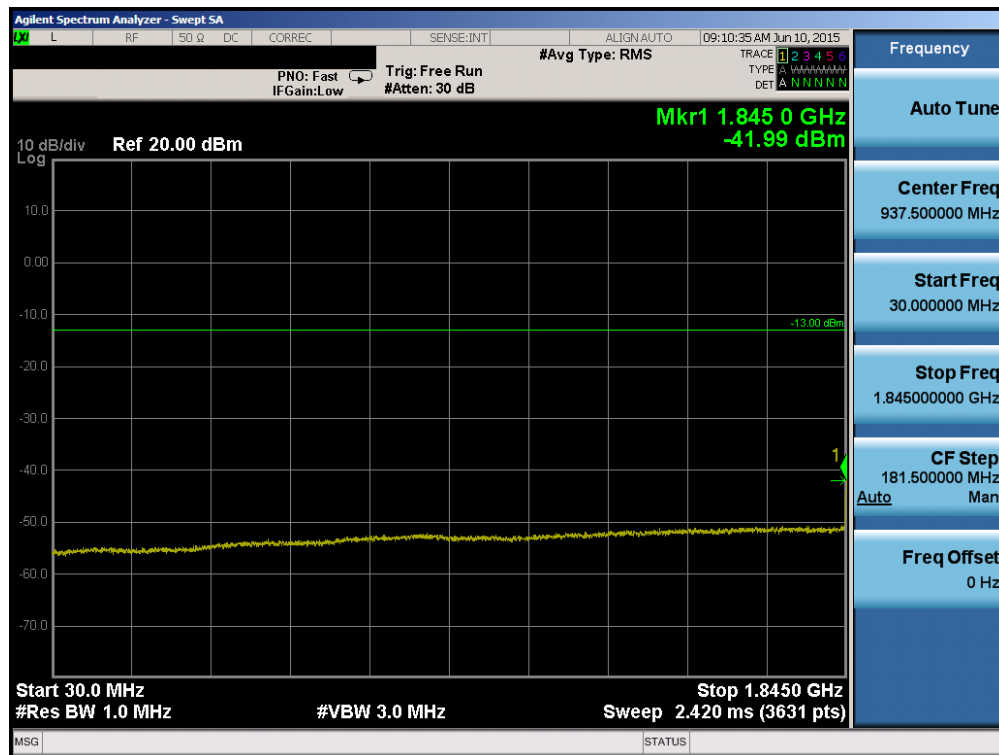


Plot 6-36. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 30 of 89

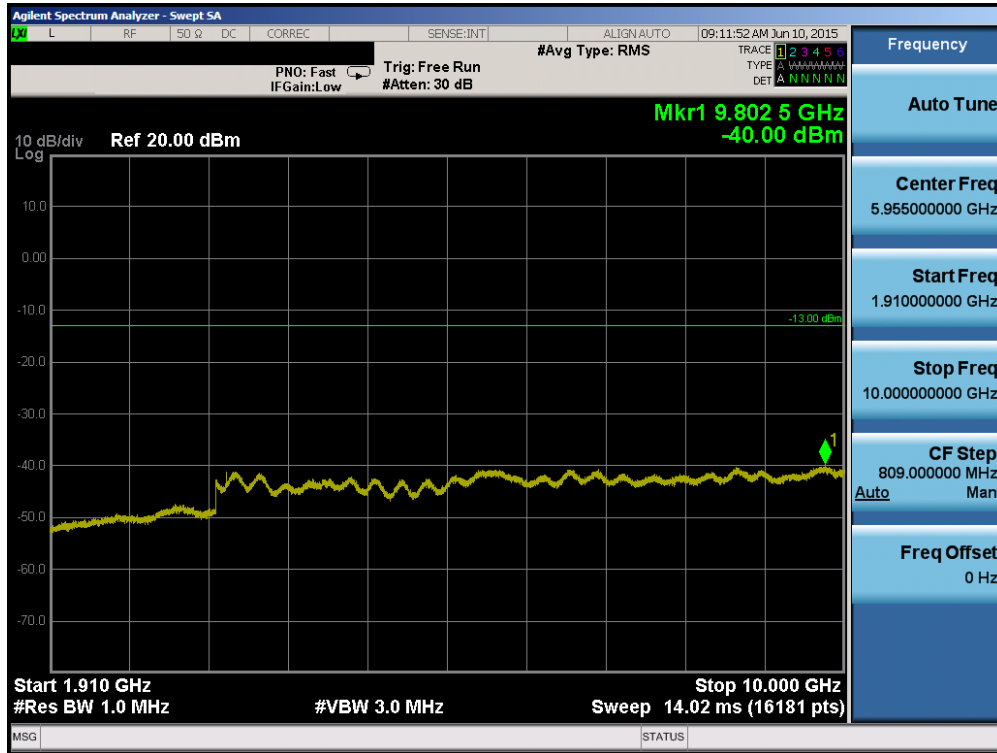


Plot 6-37. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

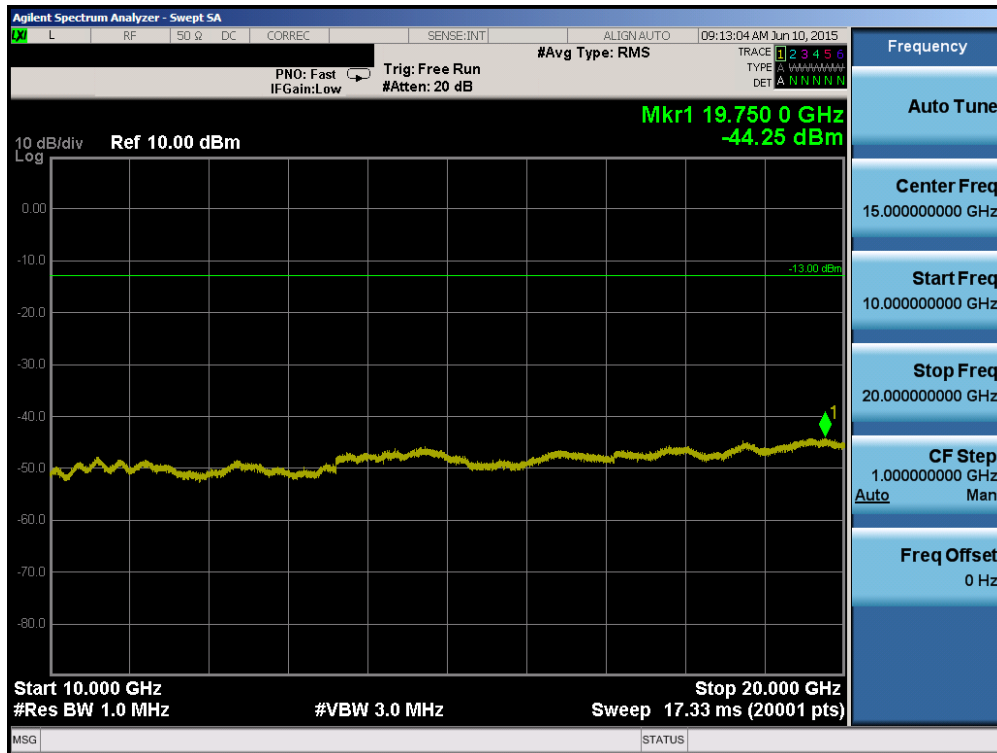


Plot 6-38. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 31 of 89

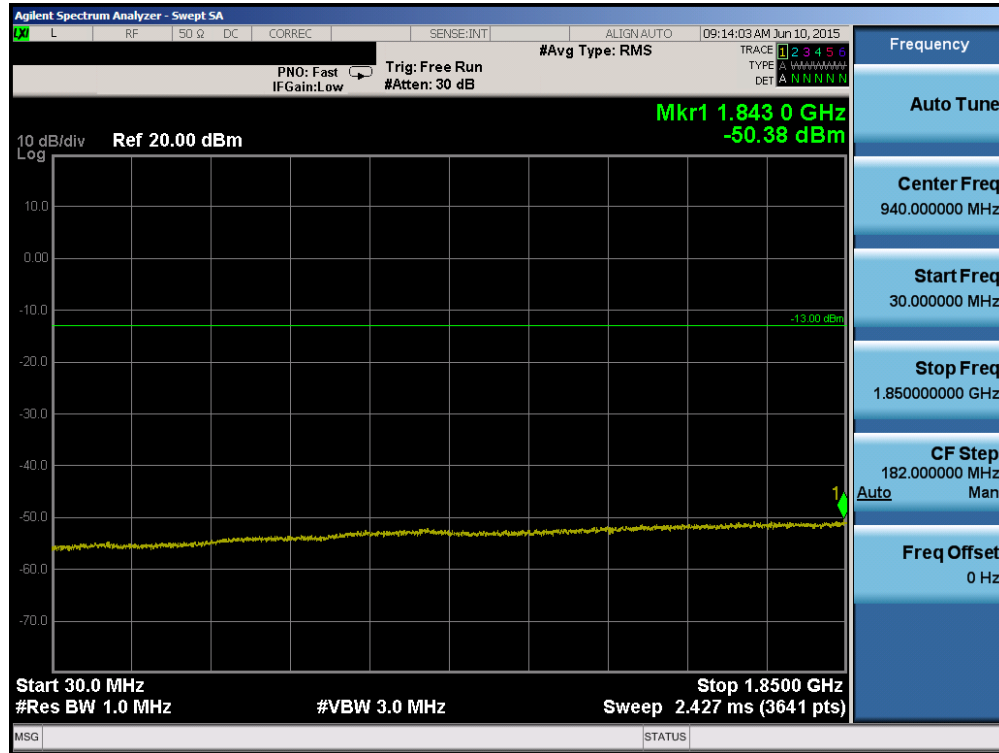


Plot 6-39. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

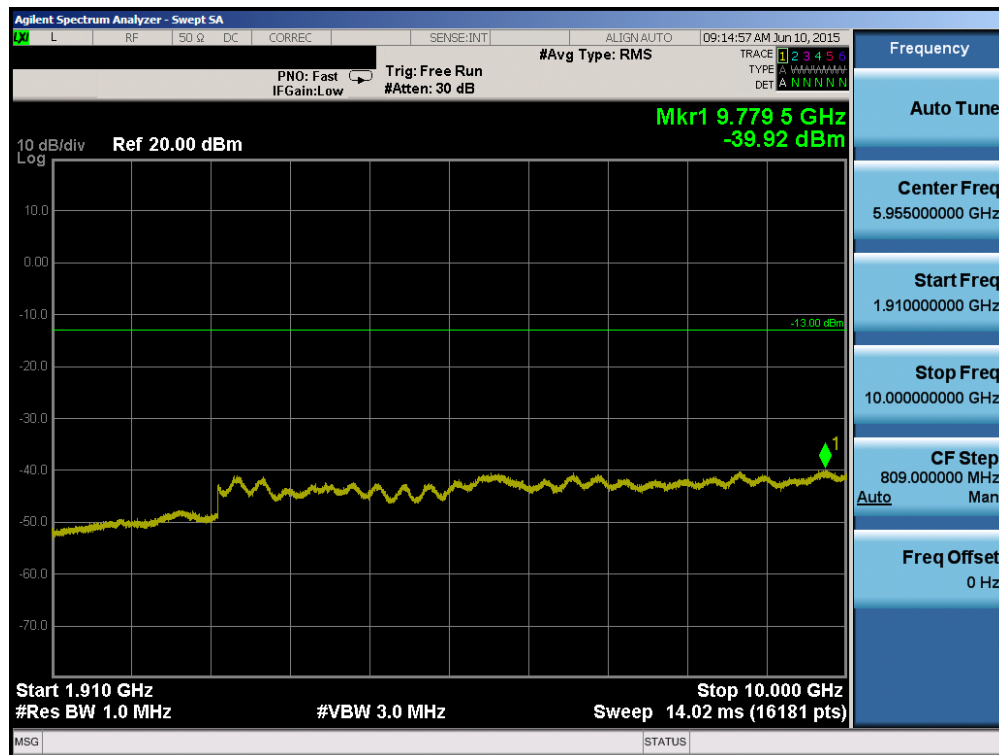


Plot 6-40. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 32 of 89

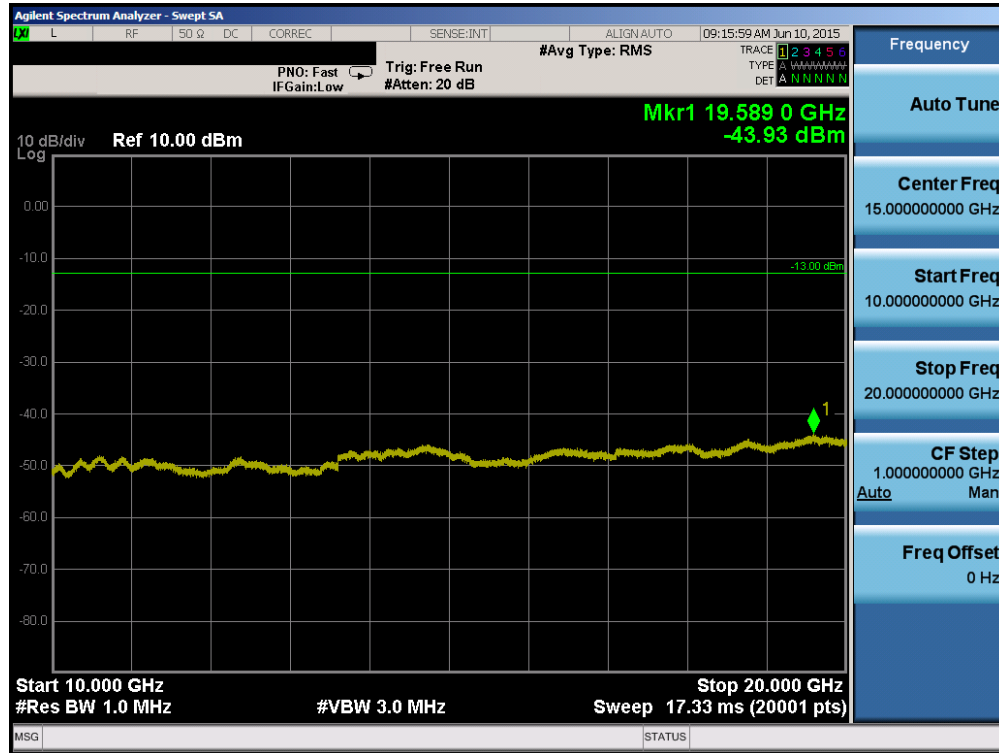


Plot 6-41. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

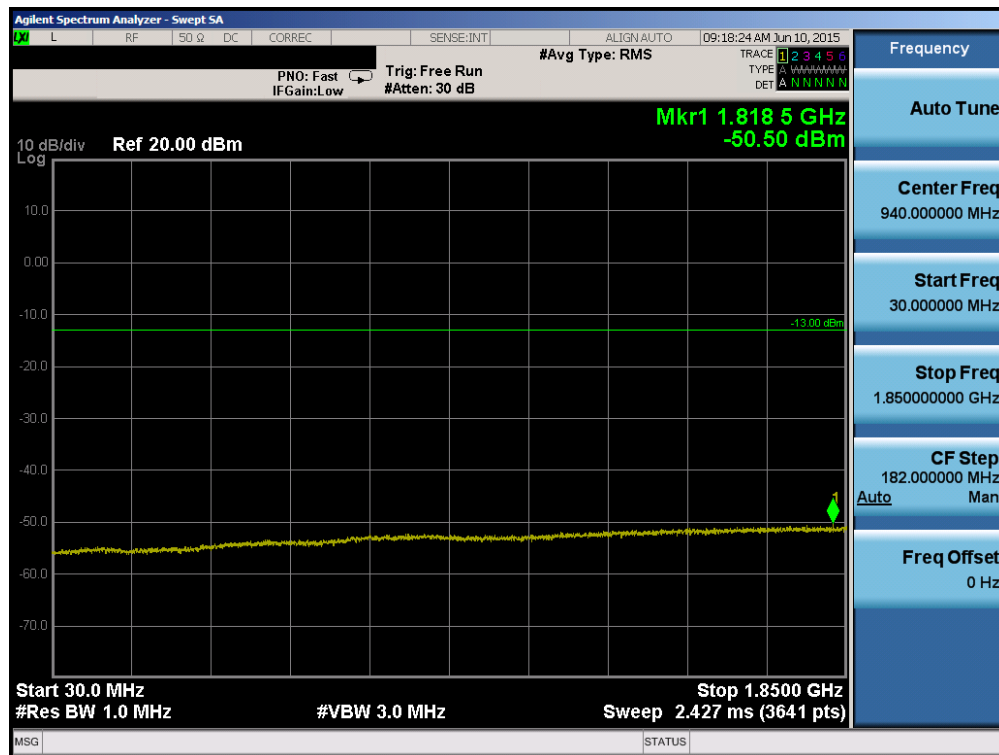


Plot 6-42. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 33 of 89

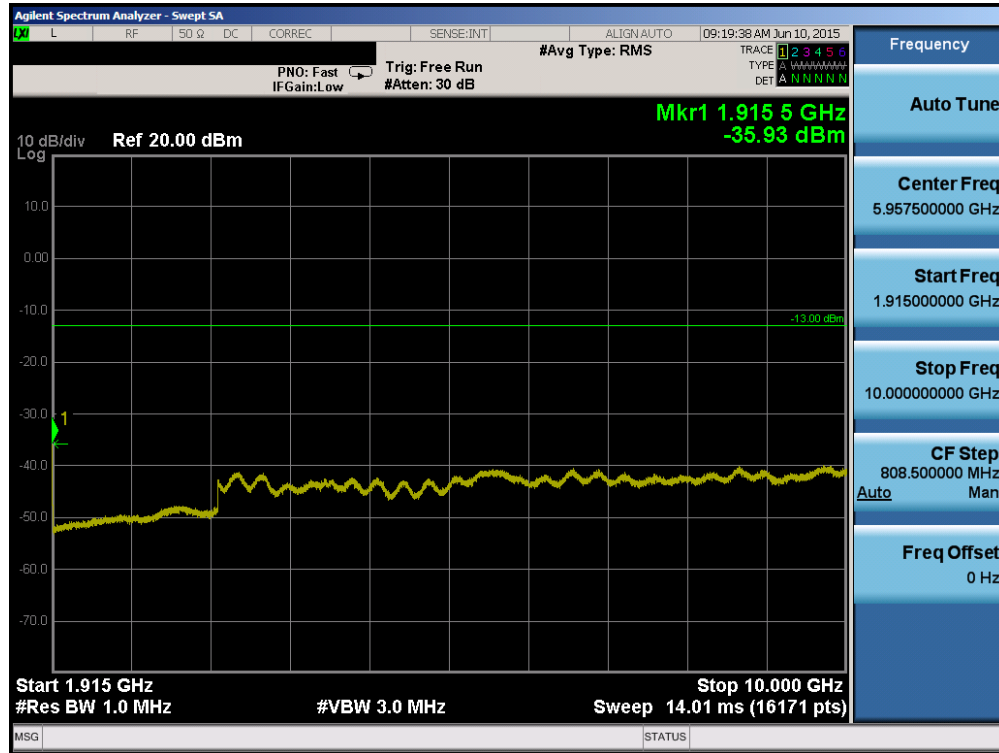


Plot 6-43. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

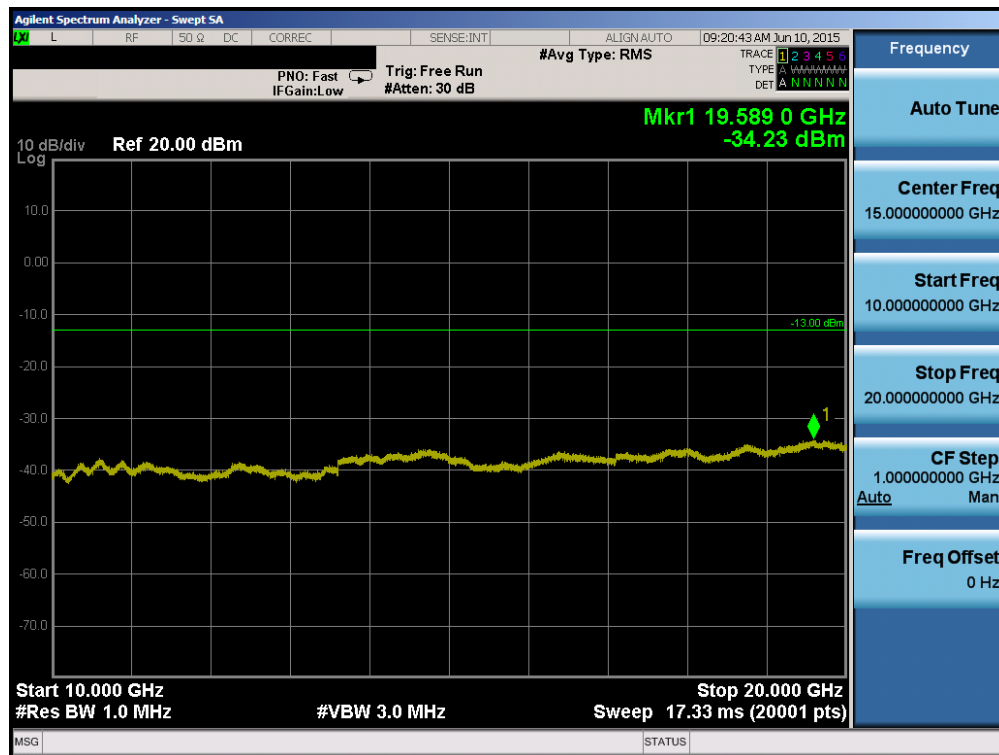


Plot 6-44. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 34 of 89

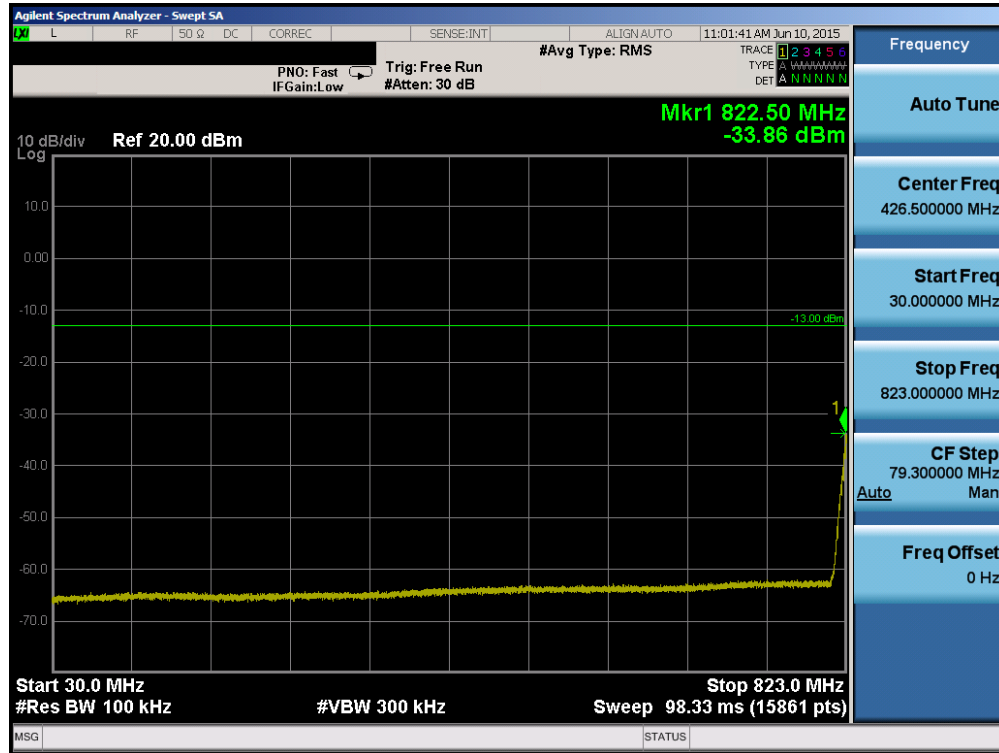


Plot 6-45. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

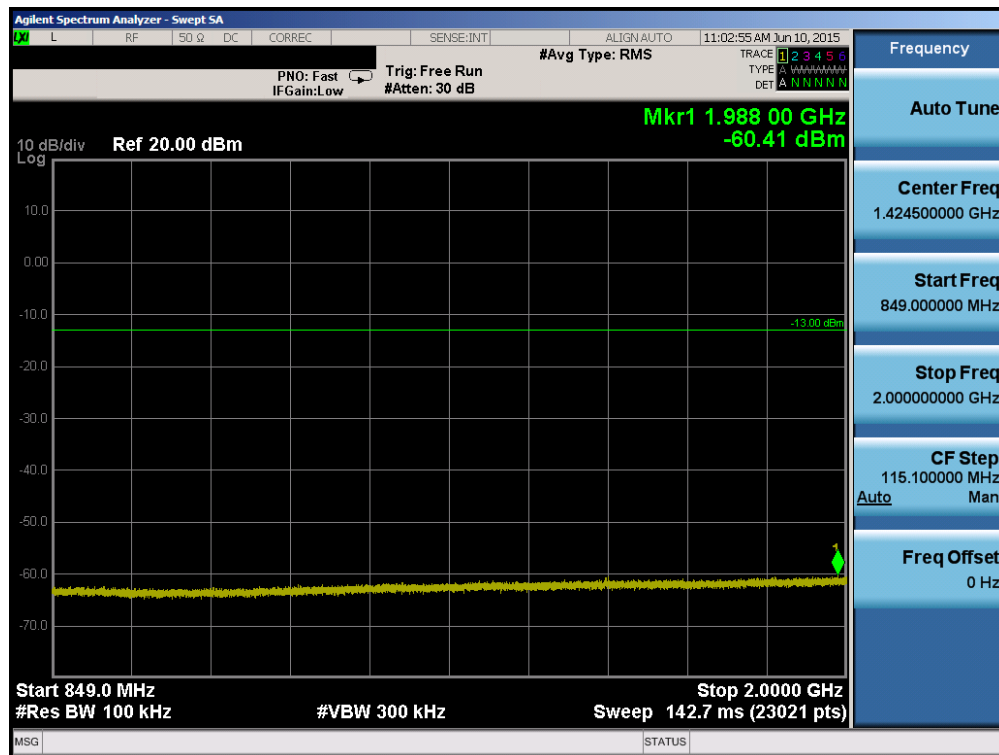


Plot 6-46. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 35 of 89

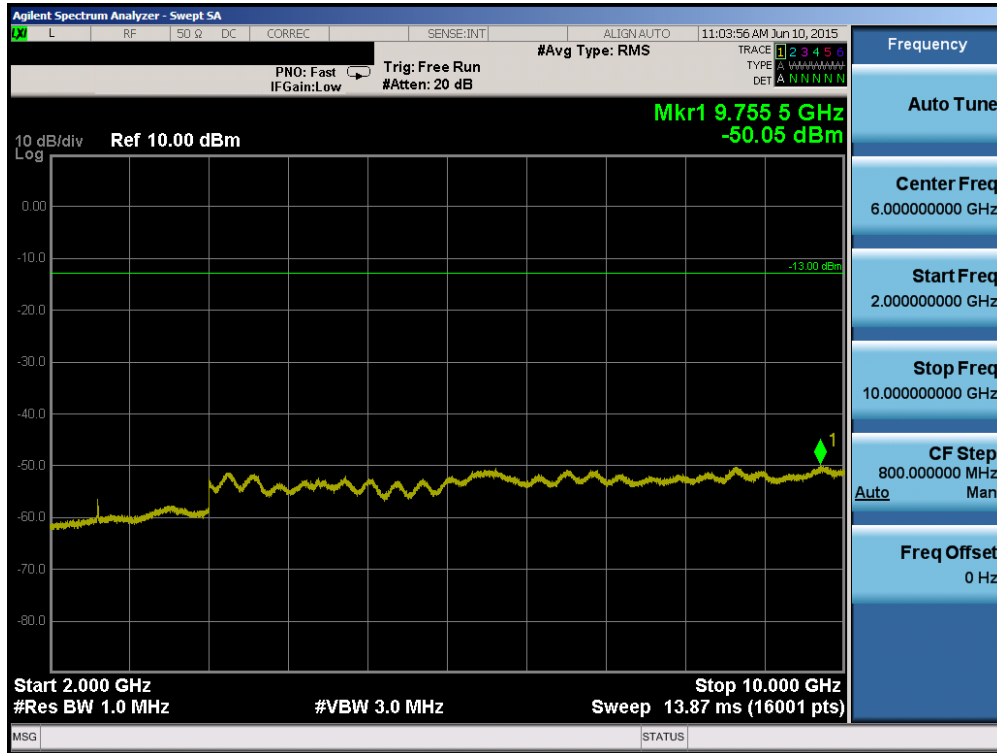


Plot 6-47. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

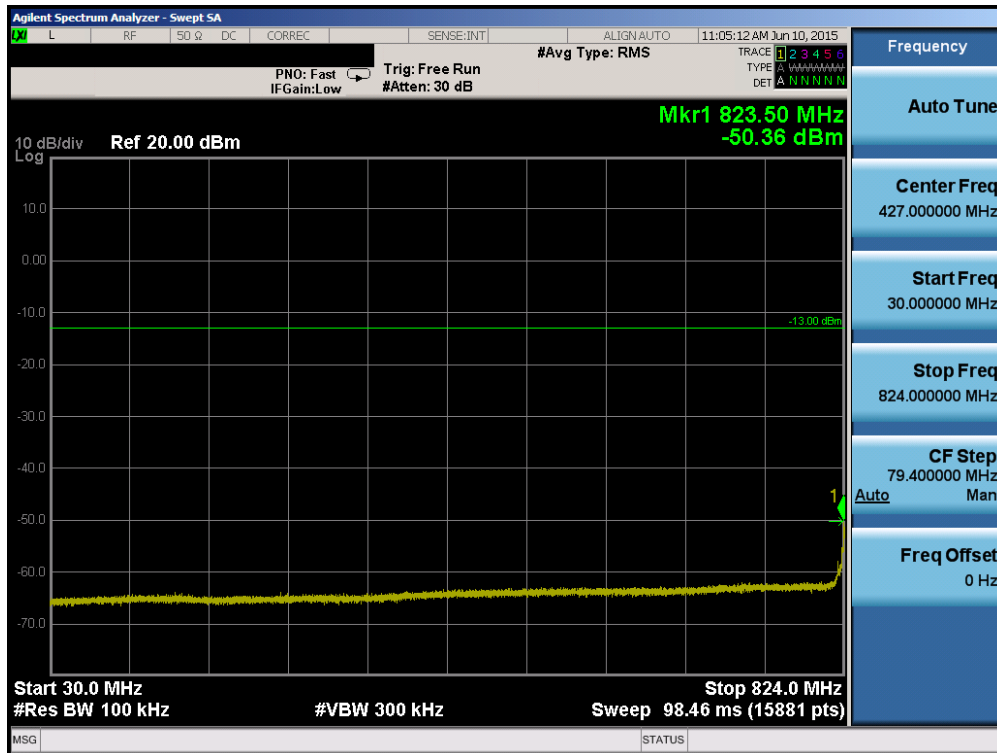


Plot 6-48. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 36 of 89

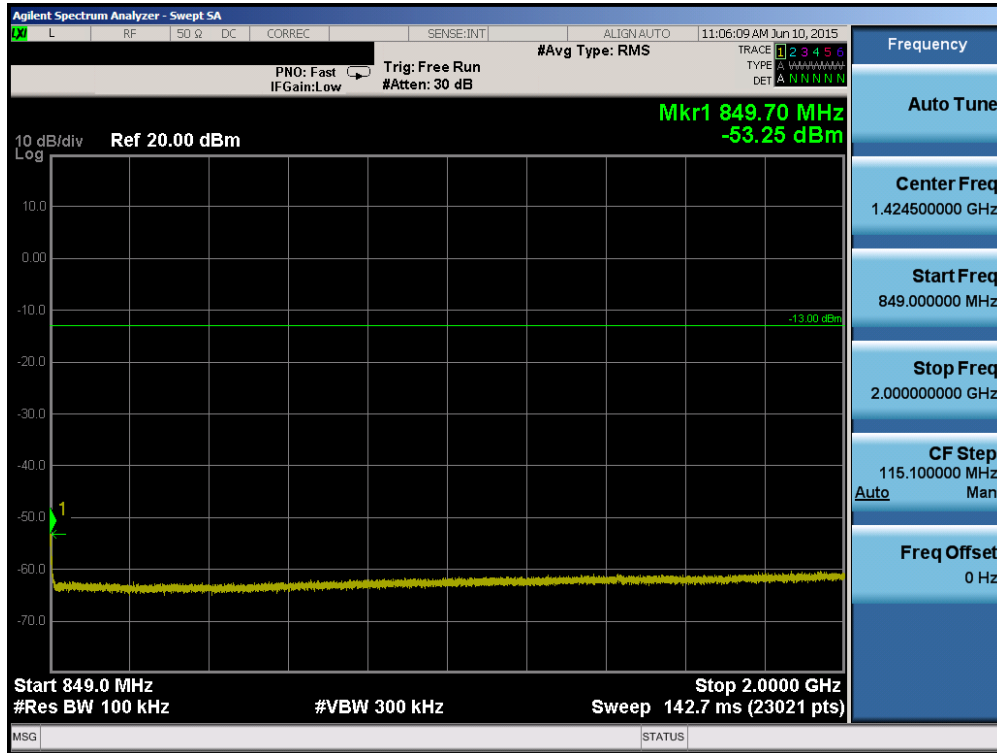


Plot 6-49. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

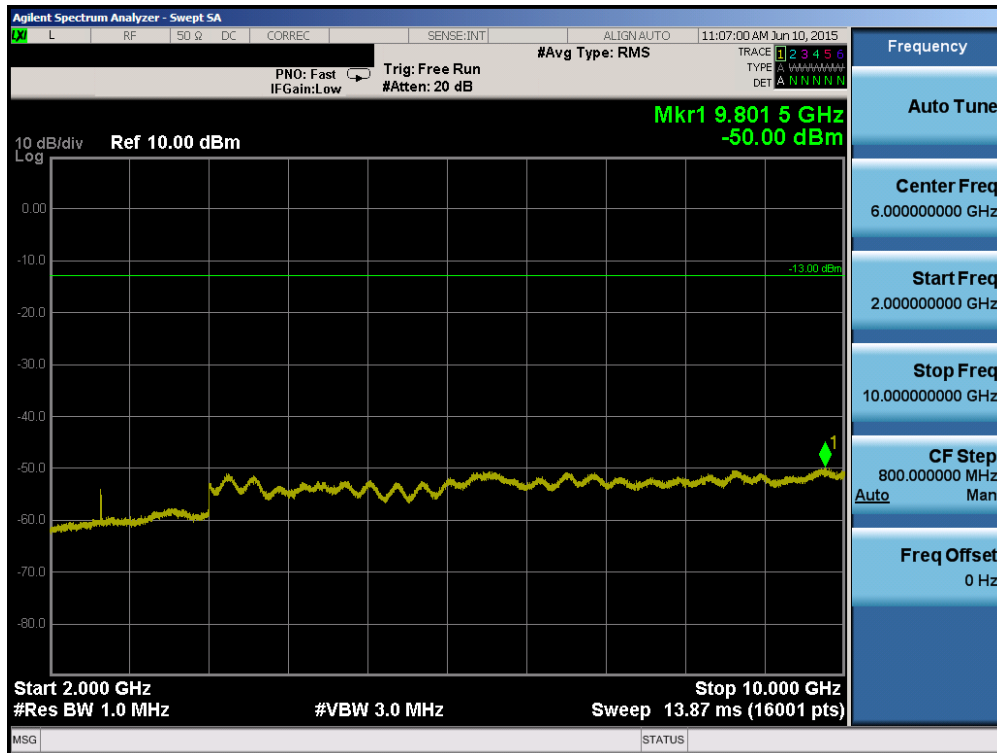


Plot 6-50. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 37 of 89

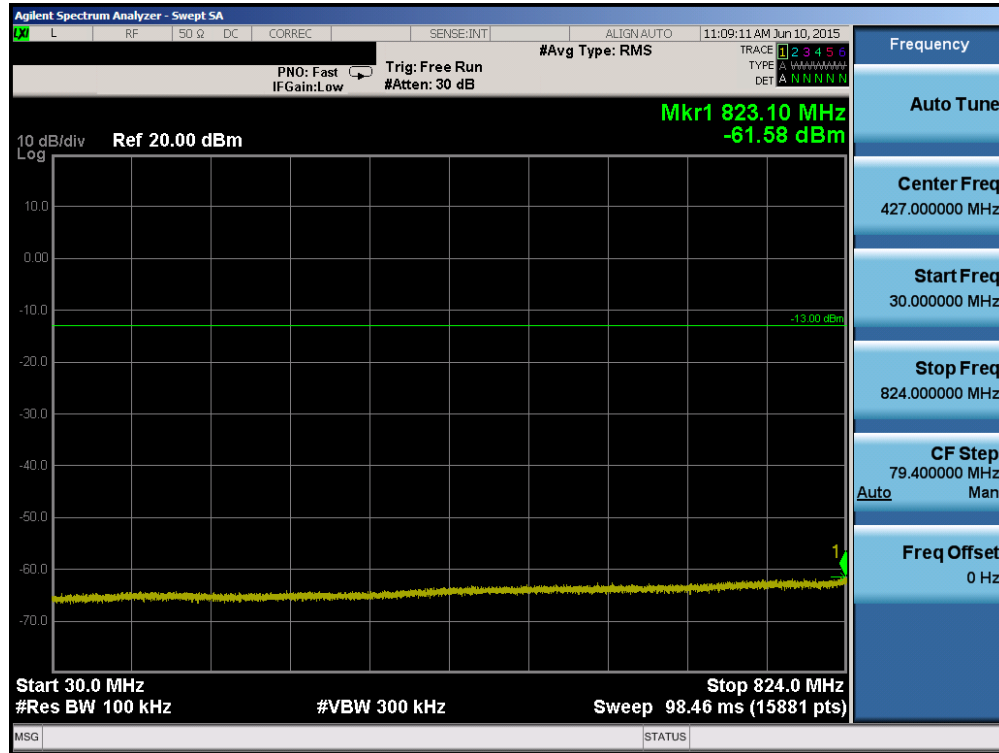


Plot 6-51. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

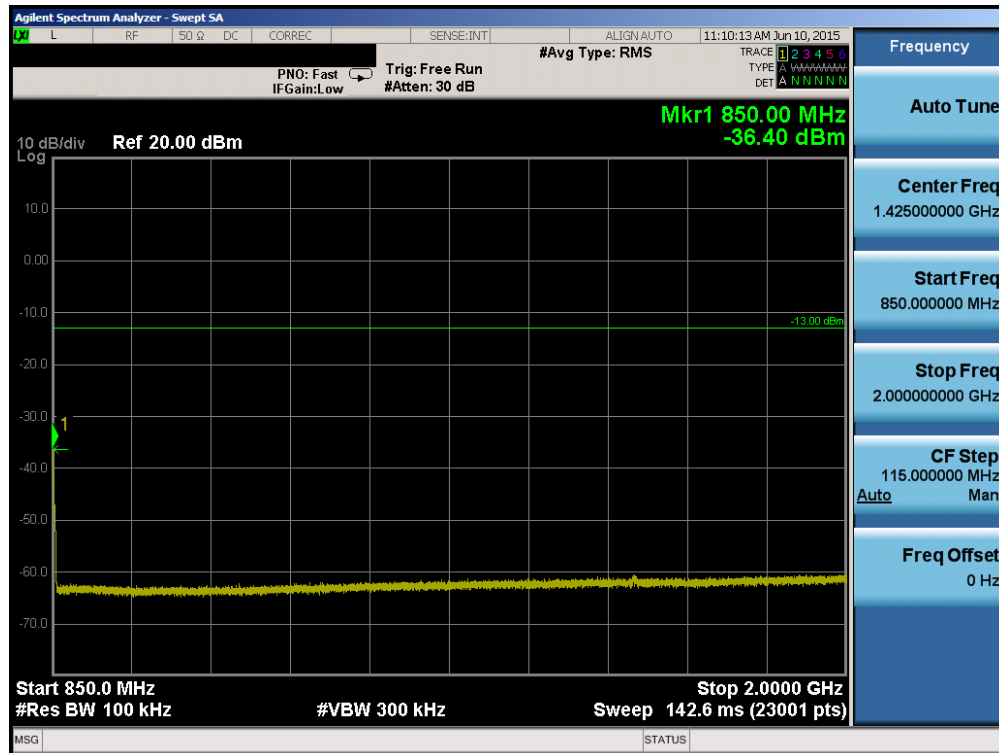


Plot 6-52. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 38 of 89

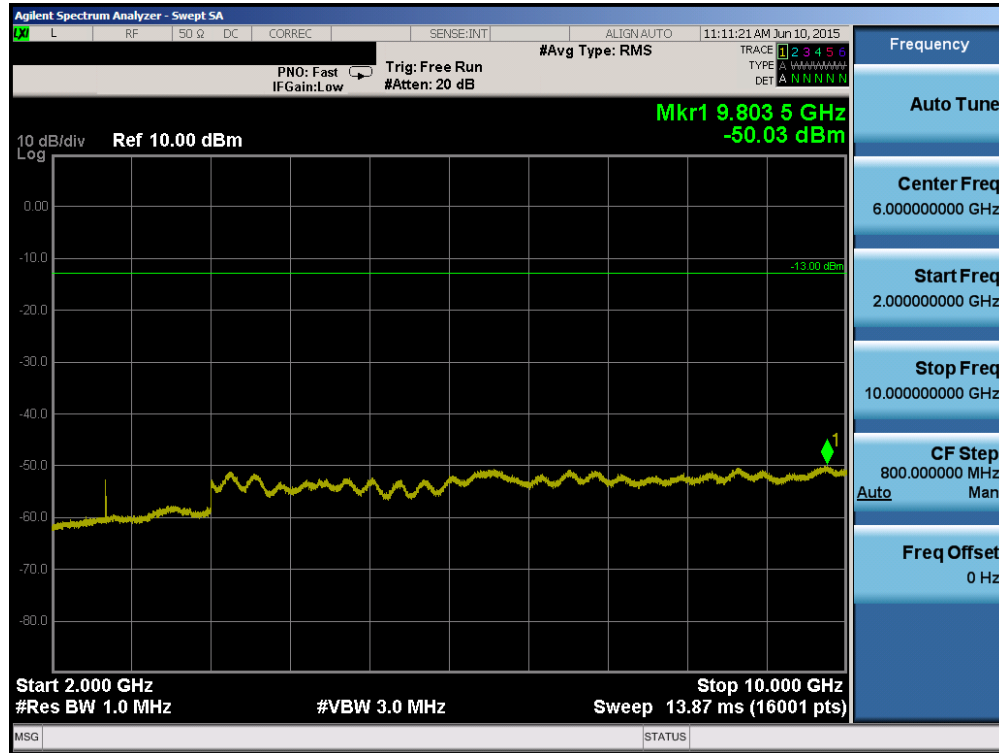


Plot 6-53. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

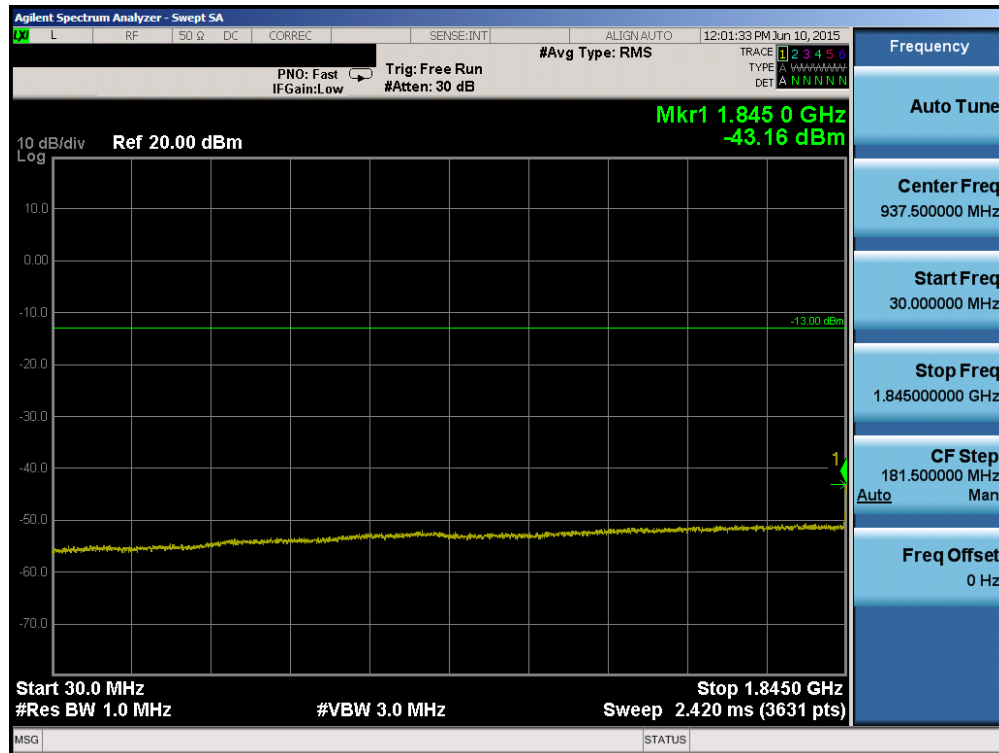


Plot 6-54. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 39 of 89

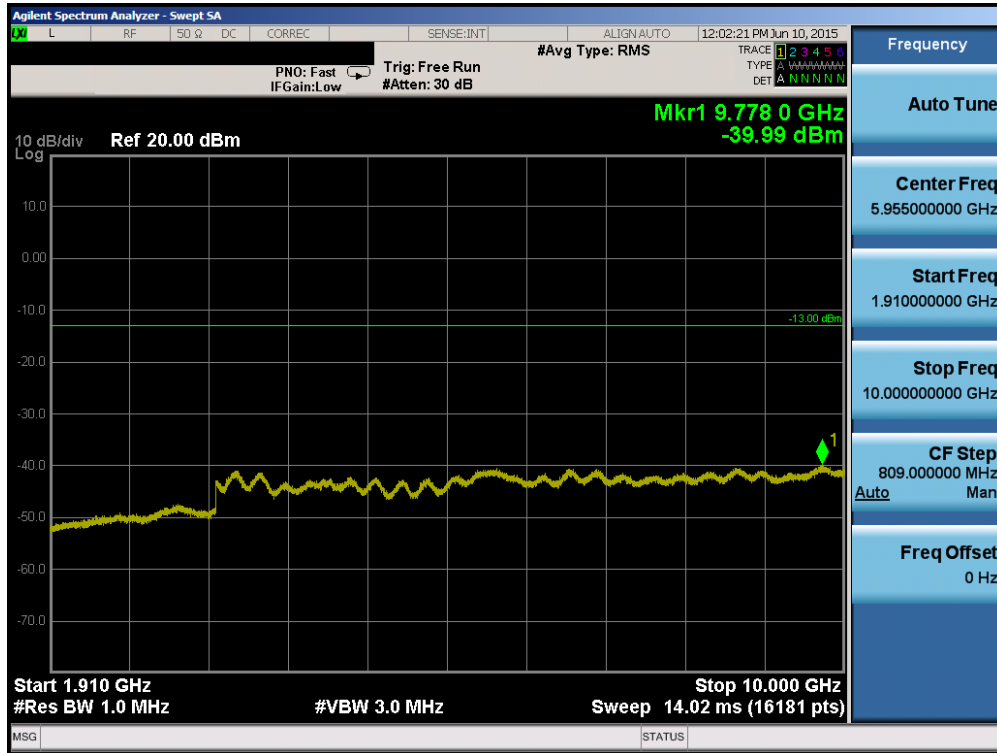


Plot 6-55. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

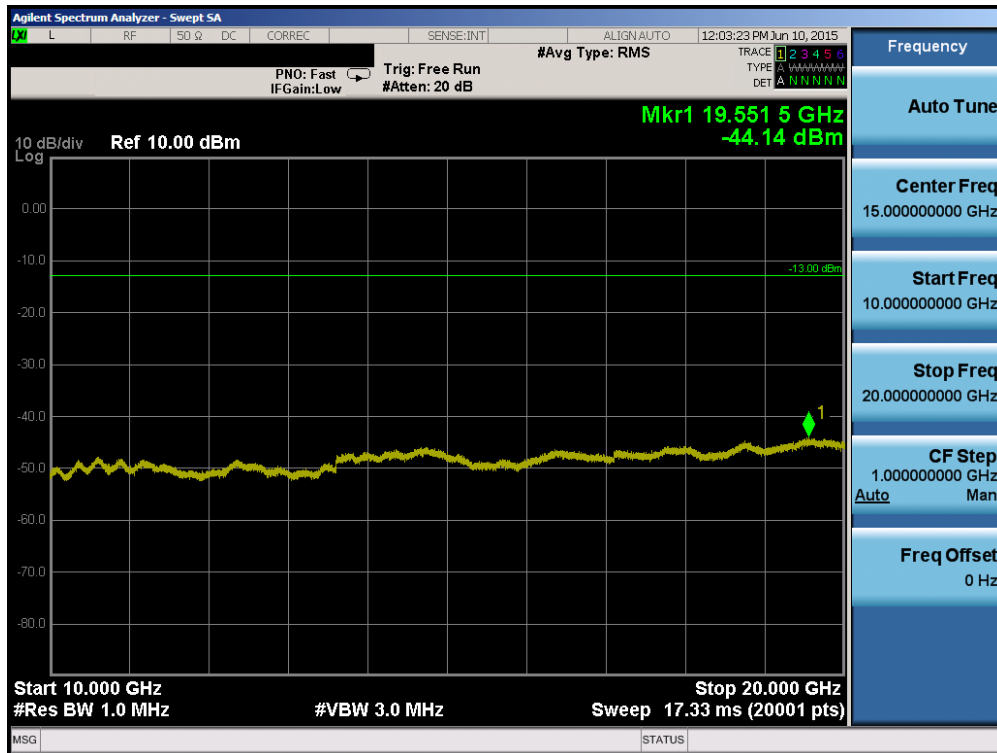


Plot 6-56. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 40 of 89

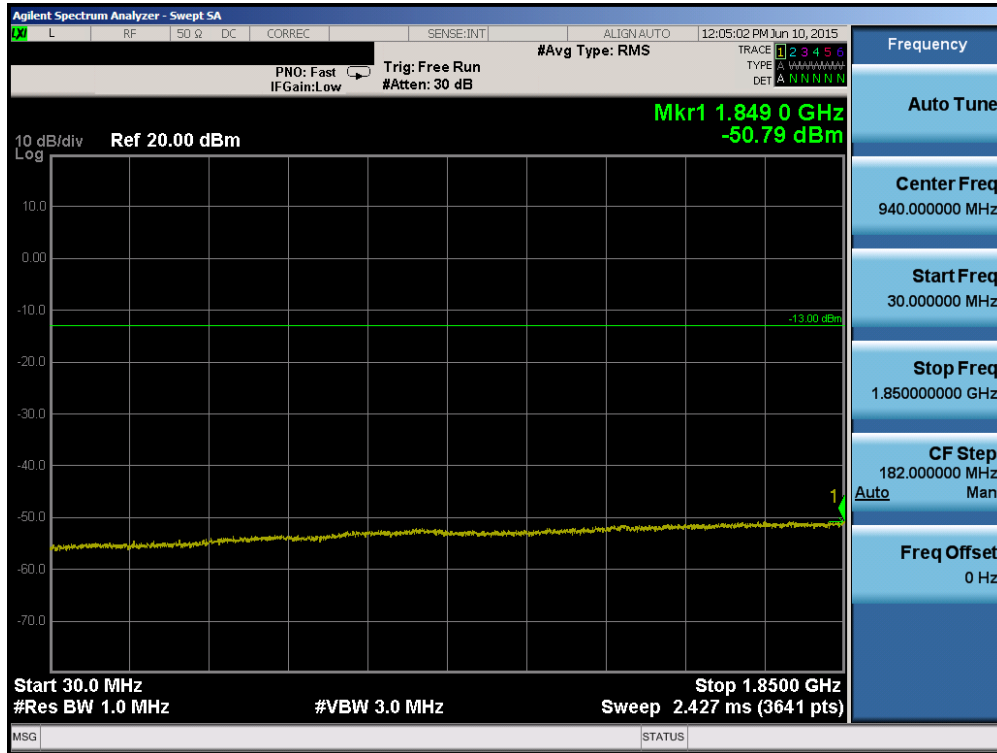


Plot 6-57. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

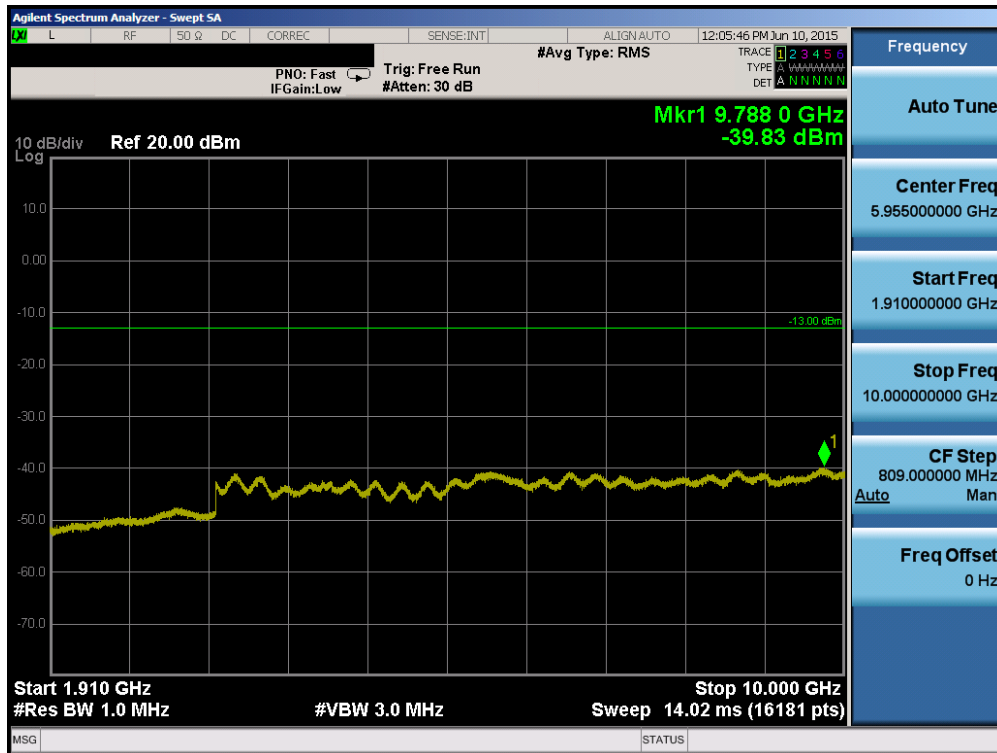


Plot 6-58. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 41 of 89

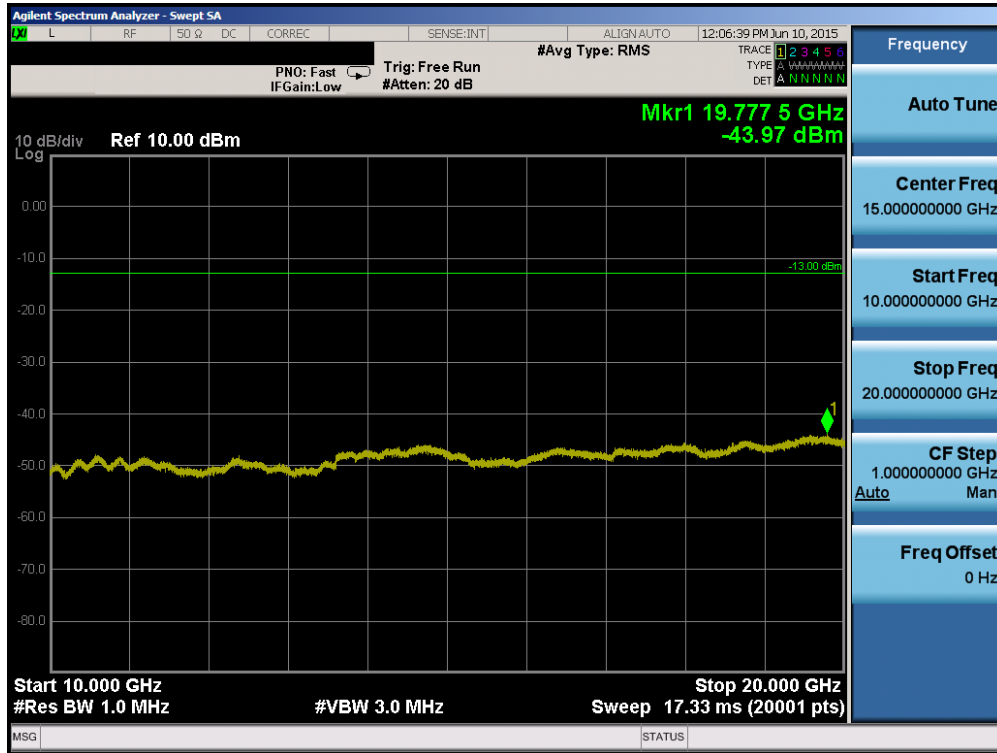


Plot 6-59. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

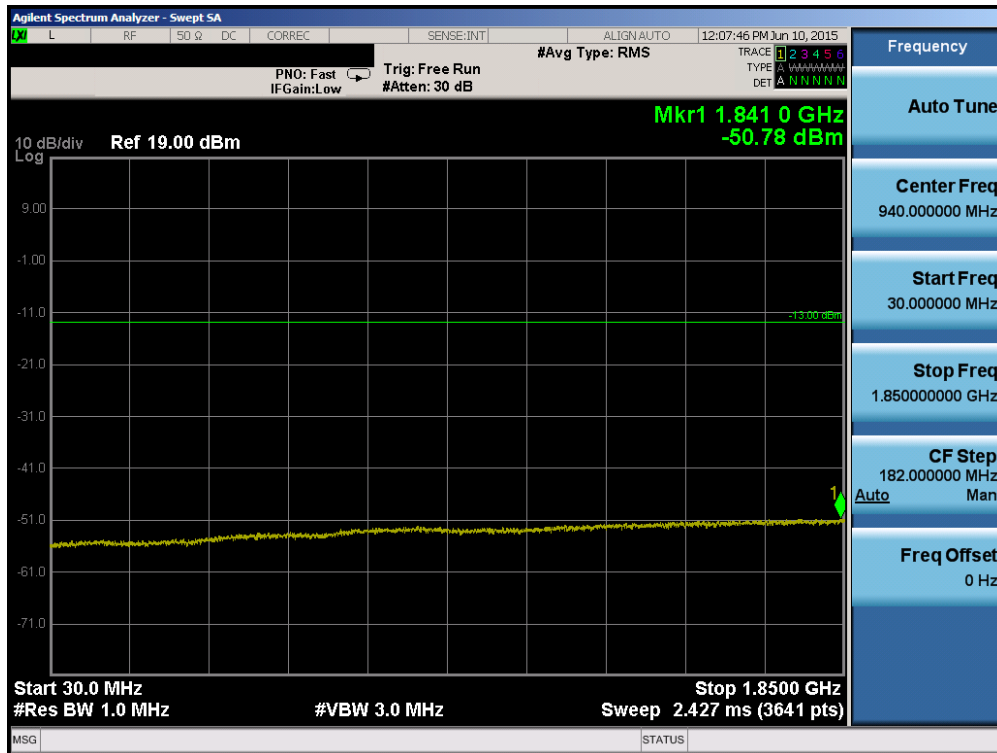


Plot 6-60. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 42 of 89

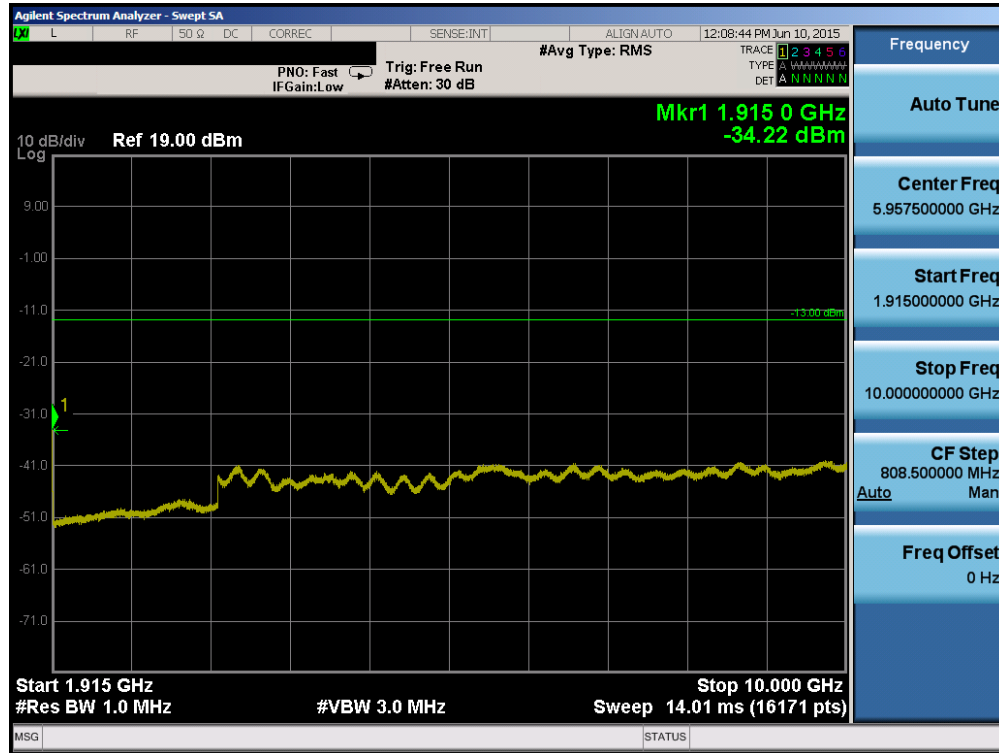

Plot 6-61. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

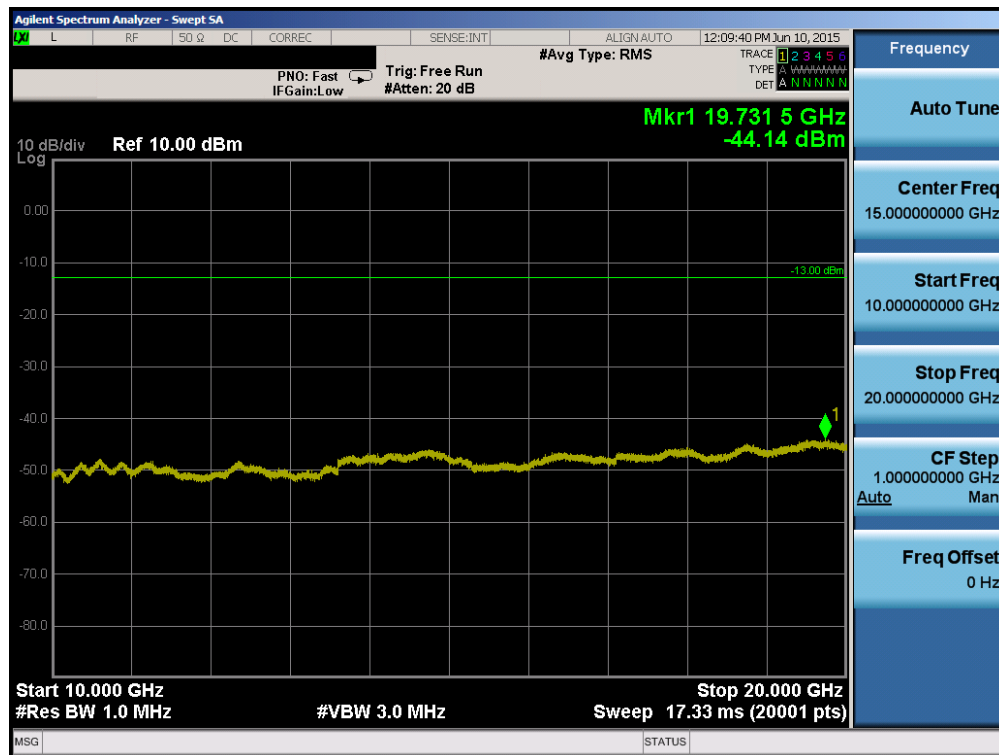

Plot 6-62. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 43 of 89

6.4 Band Edge Emissions at Antenna Terminal

§2.1051

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission bandwidth
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


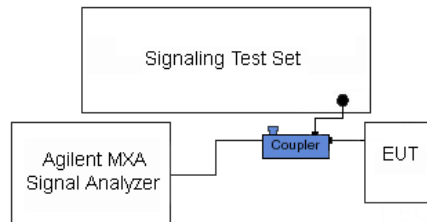


Figure 6-3. Test Instrument & Measurement Setup


Test Notes

Per in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power. For some 4MHz band edge plots, the emission is integrated over a 1MHz span starting 1MHz outside the band edge.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 44 of 89

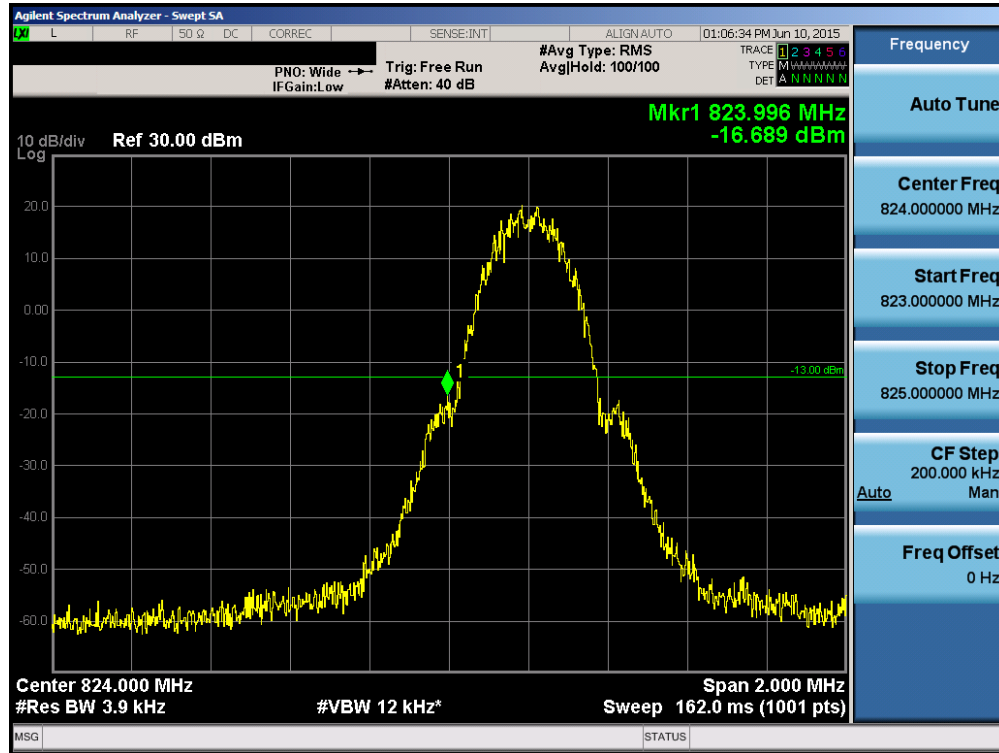


Plot 6-63. Band Edge Plot (Cellular GSM Mode – Ch. 128)

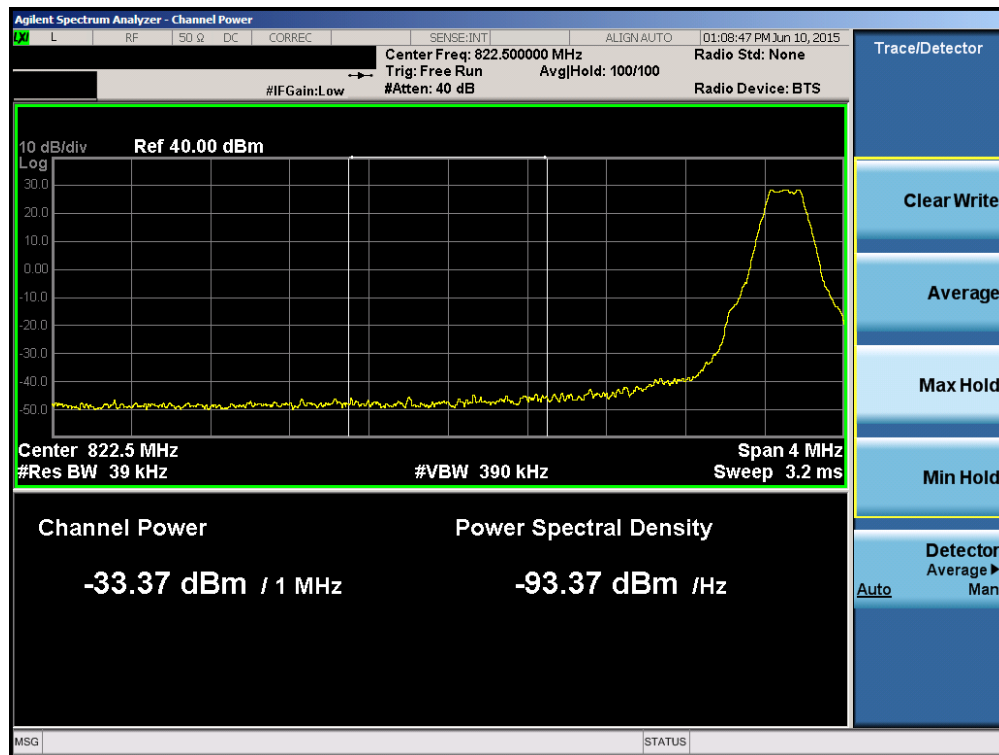


Plot 6-64. 4MHz Span Plot (Cellular GSM Mode – Ch. 128)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 45 of 89

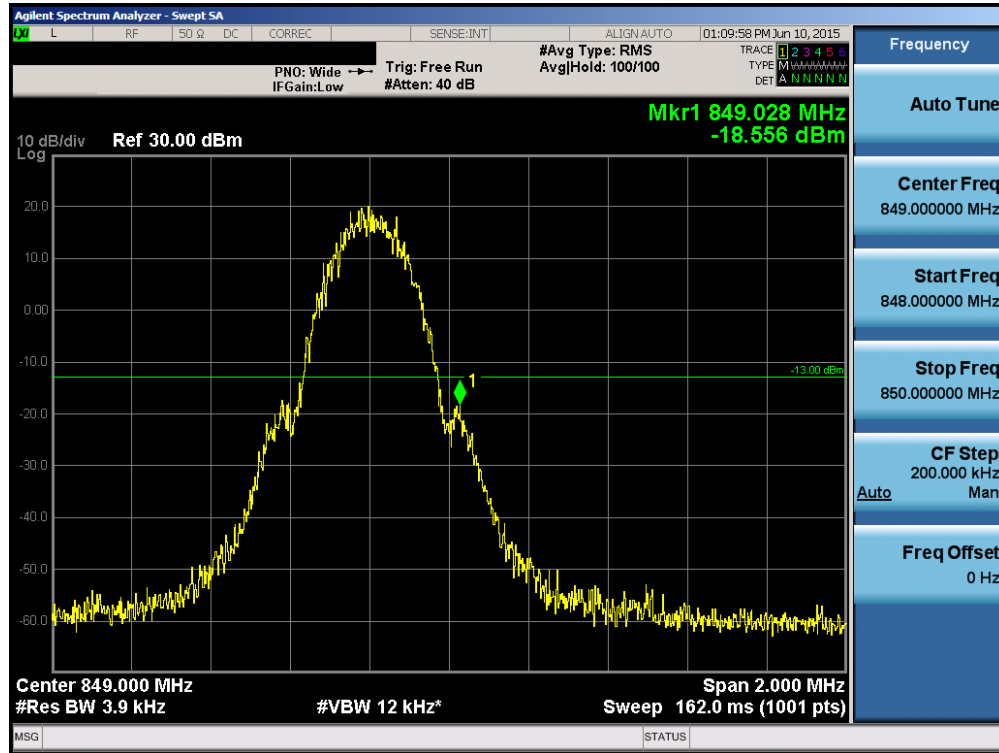


Plot 6-65. Band Edge Plot (Cellular GSM Mode – Ch. 251)

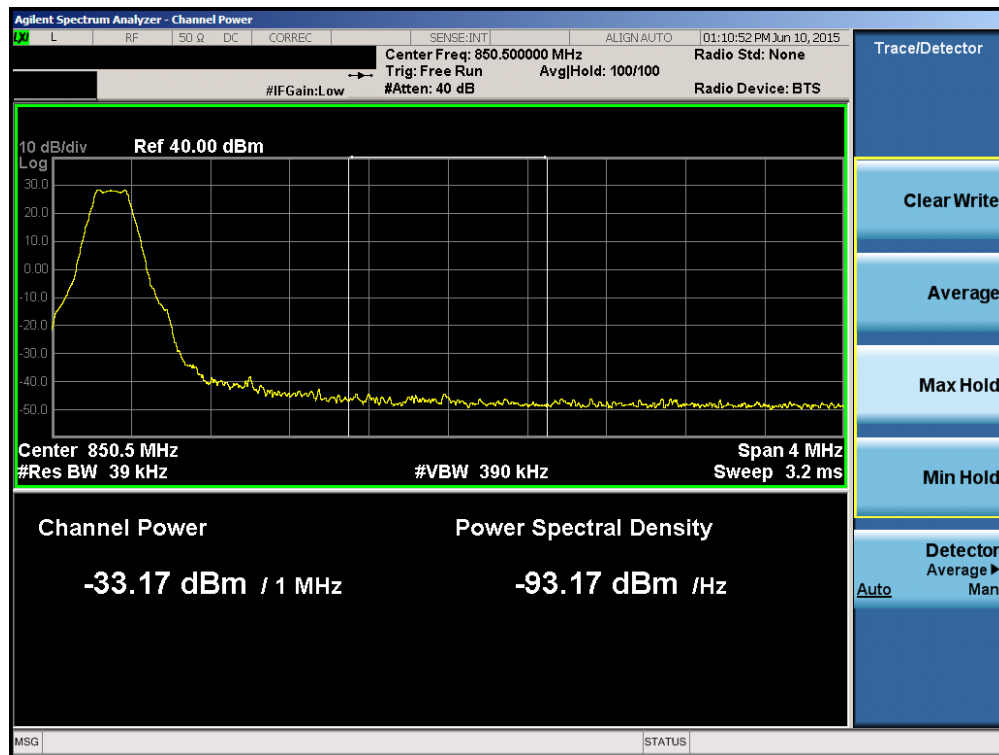


Plot 6-66. 4MHz Span Plot (Cellular GSM Mode – Ch. 251)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 46 of 89

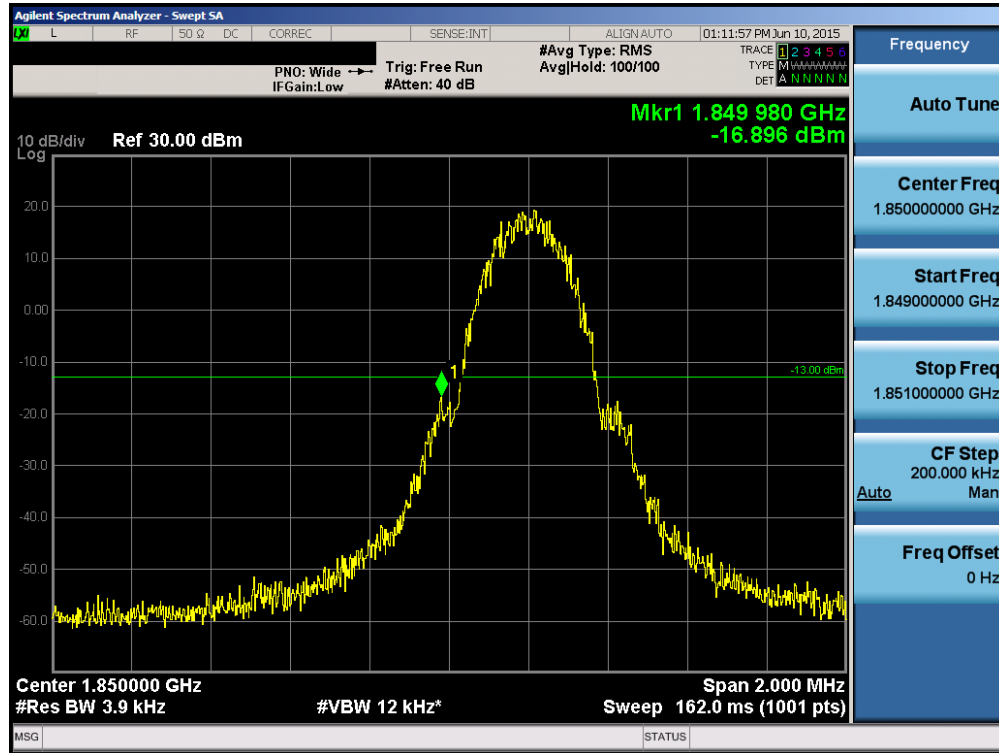


Plot 6-67. Band Edge Plot (PCS GSM Mode – Ch. 512)

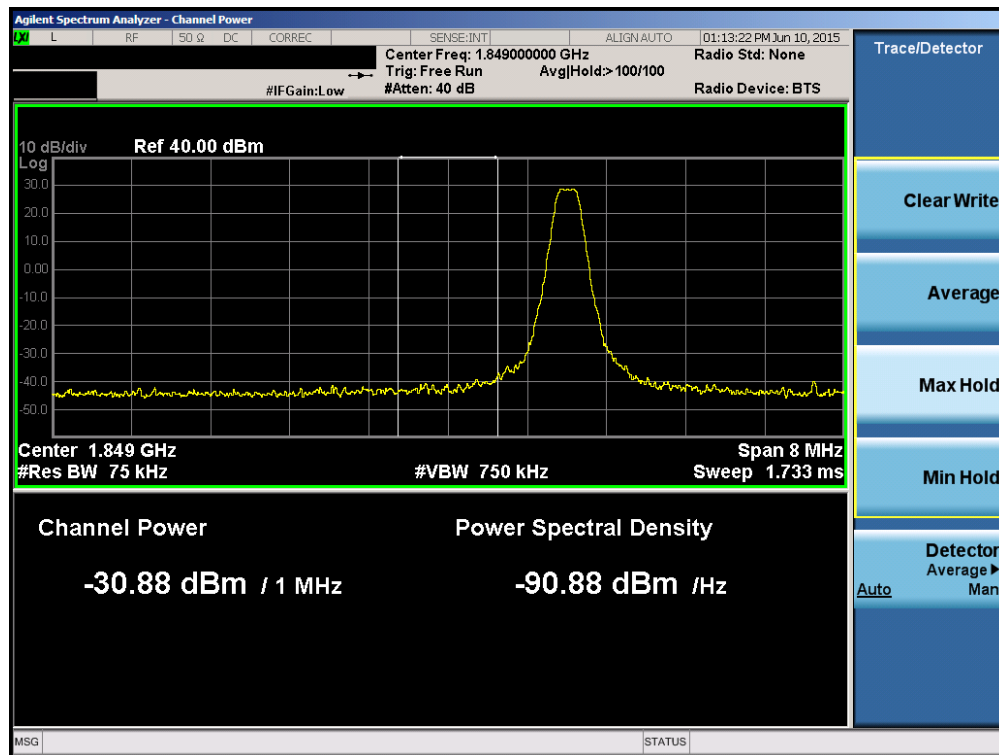


Plot 6-68. 4MHz Span Plot (PCS GSM Mode – Ch. 512)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 47 of 89

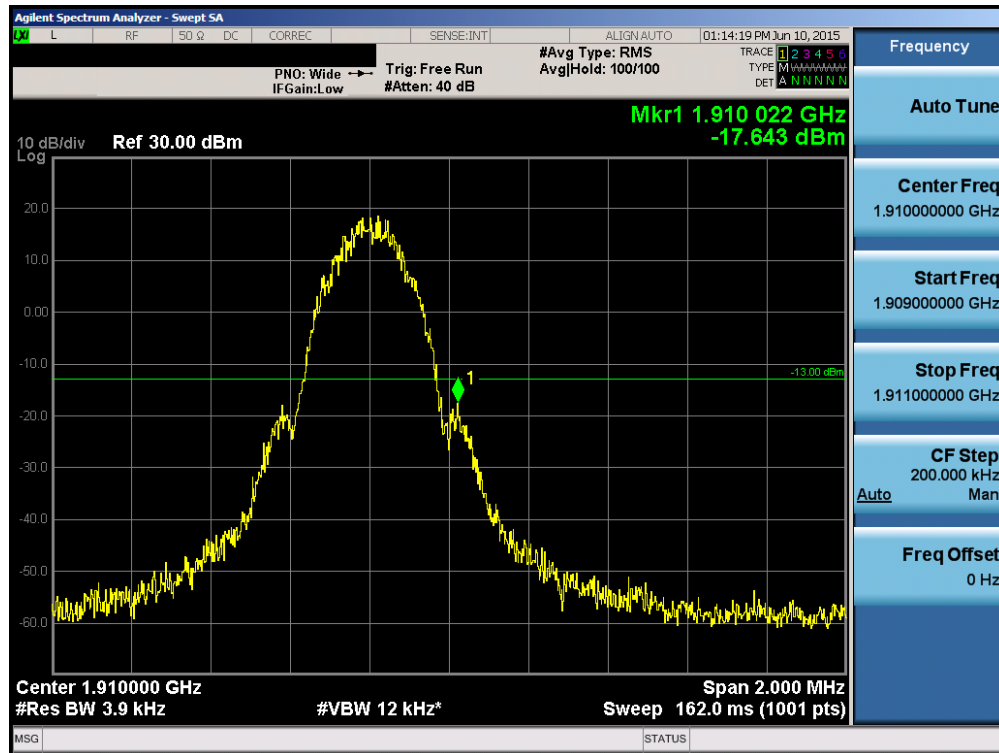


Plot 6-69. Band Edge Plot (PCS GSM Mode – Ch. 810)

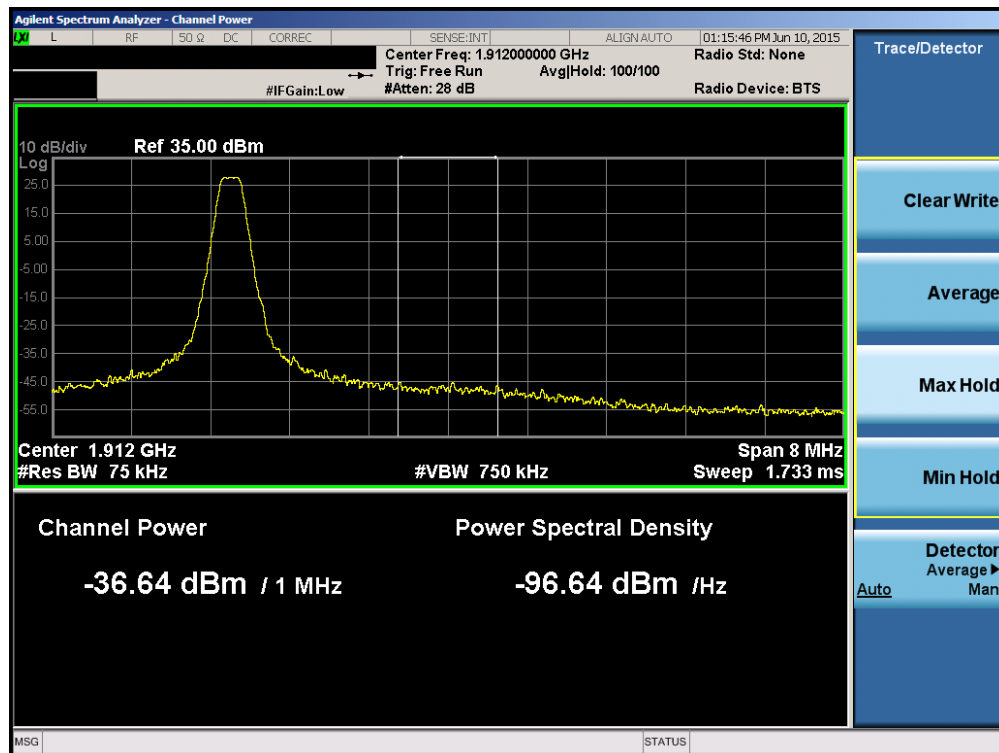


Plot 6-70. 4MHz Span Plot (PCS GSM Mode – Ch. 810)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 48 of 89

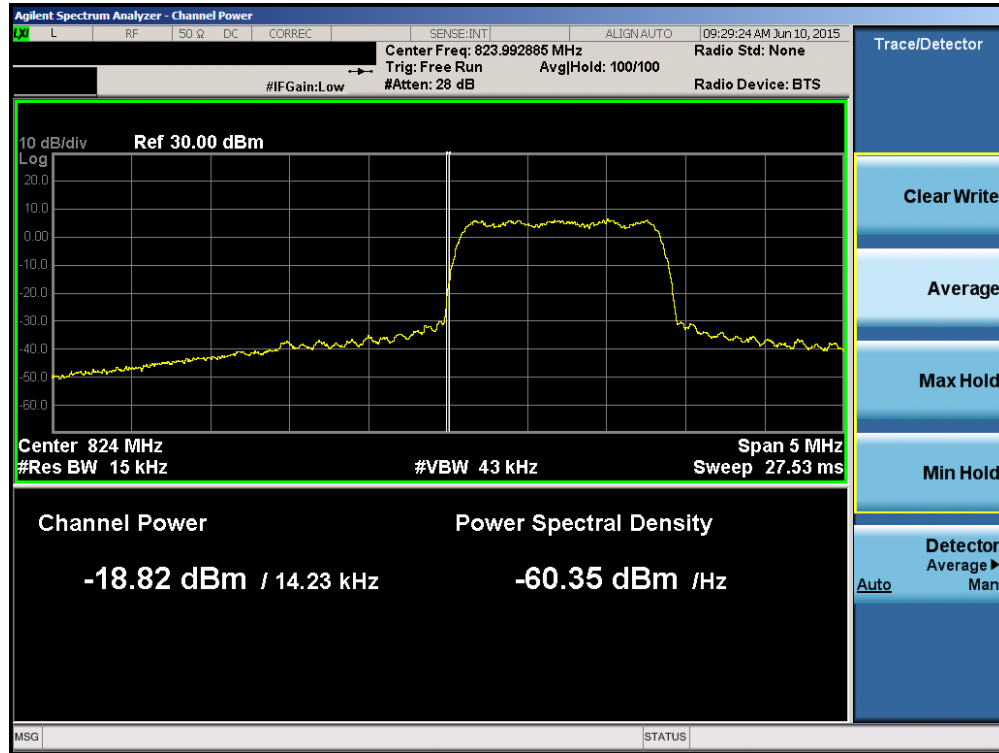


Plot 6-71. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)

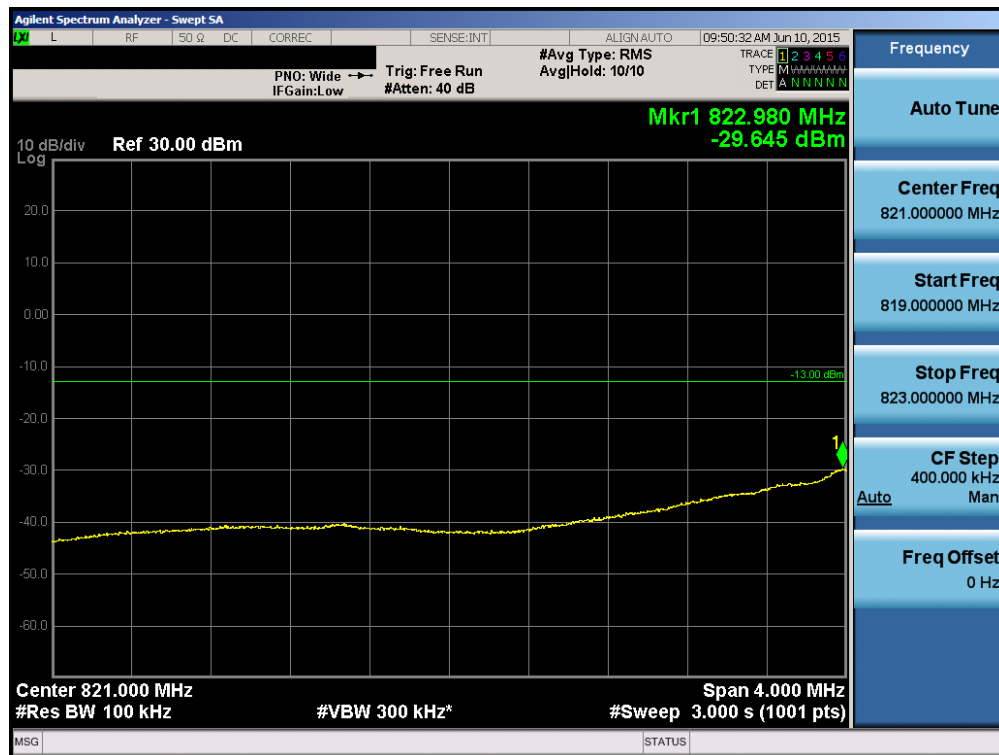

Plot 6-72. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 49 of 89

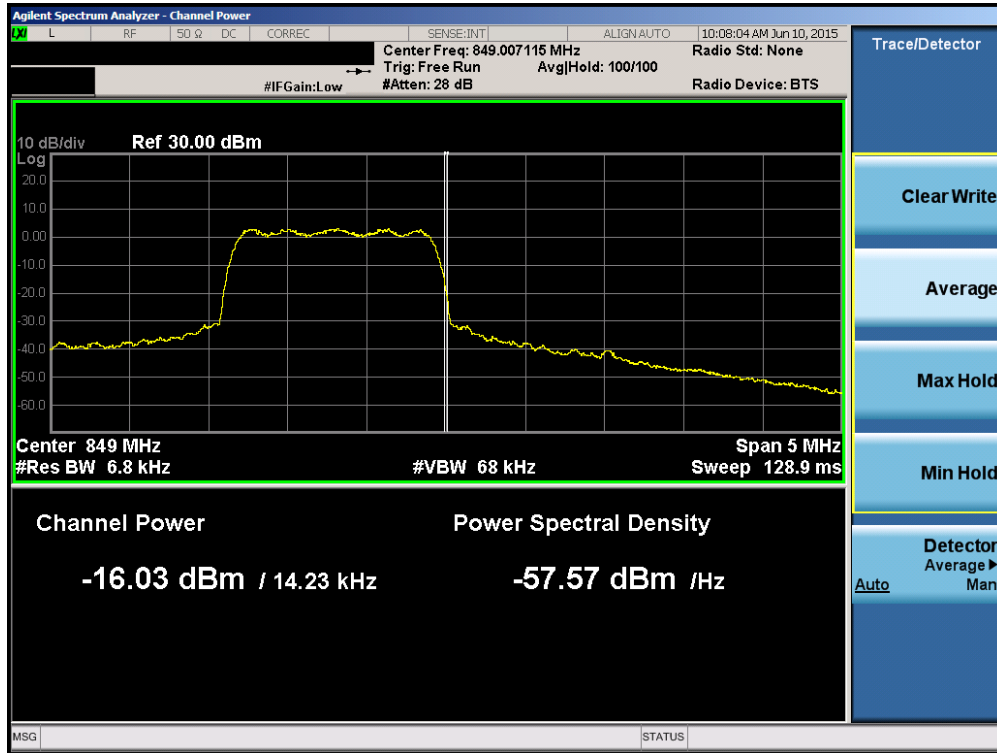


Plot 6-73. Band Edge Plot (Cellular CDMA Mode – Ch. 777)




Plot 6-74. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 50 of 89

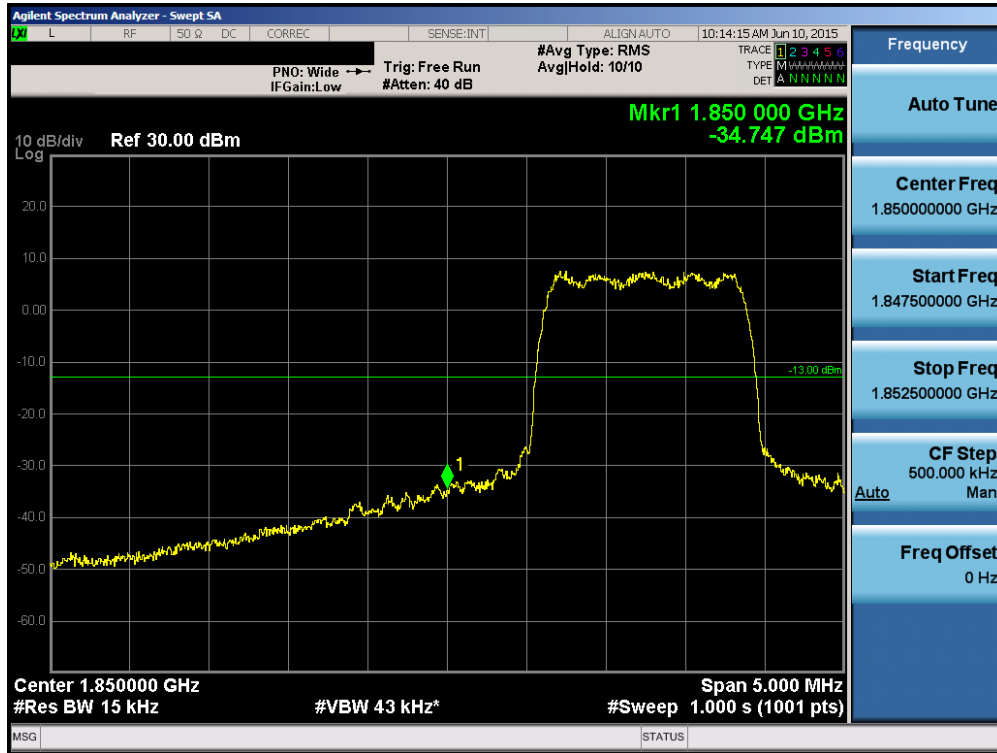


Plot 6-75. Band Edge Plot (PCS CDMA Mode – Ch. 25)

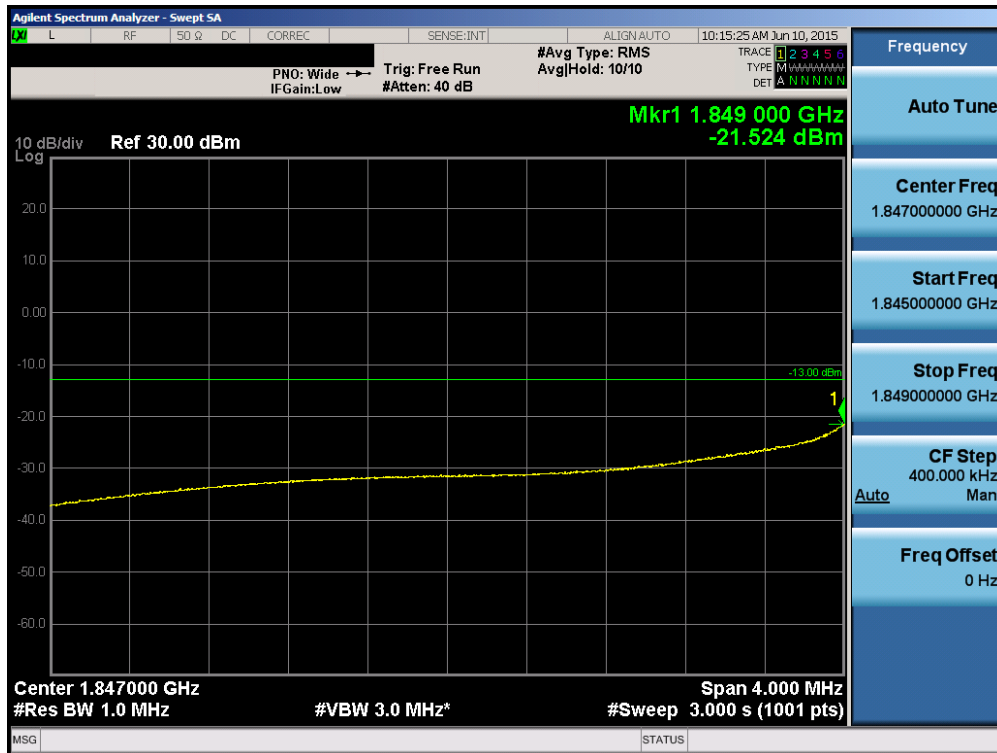

Plot 6-76. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 51 of 89

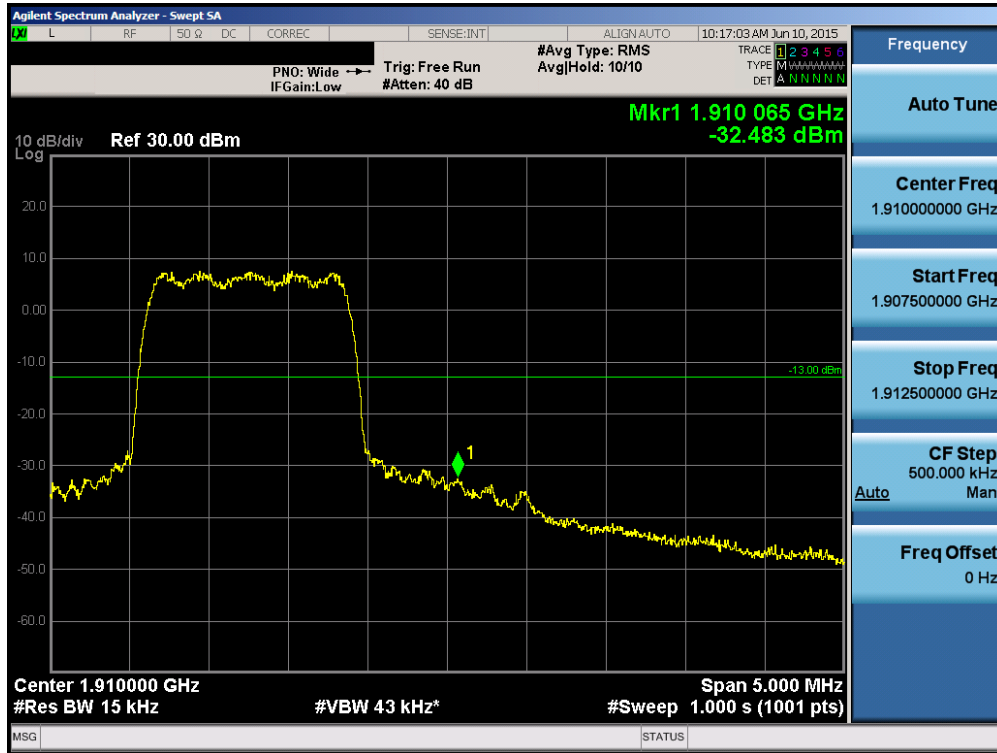


Plot 6-77. Band Edge Plot (PCS CDMA Mode – Ch. 1175)



Plot 6-78. 4MHz Span Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 52 of 89

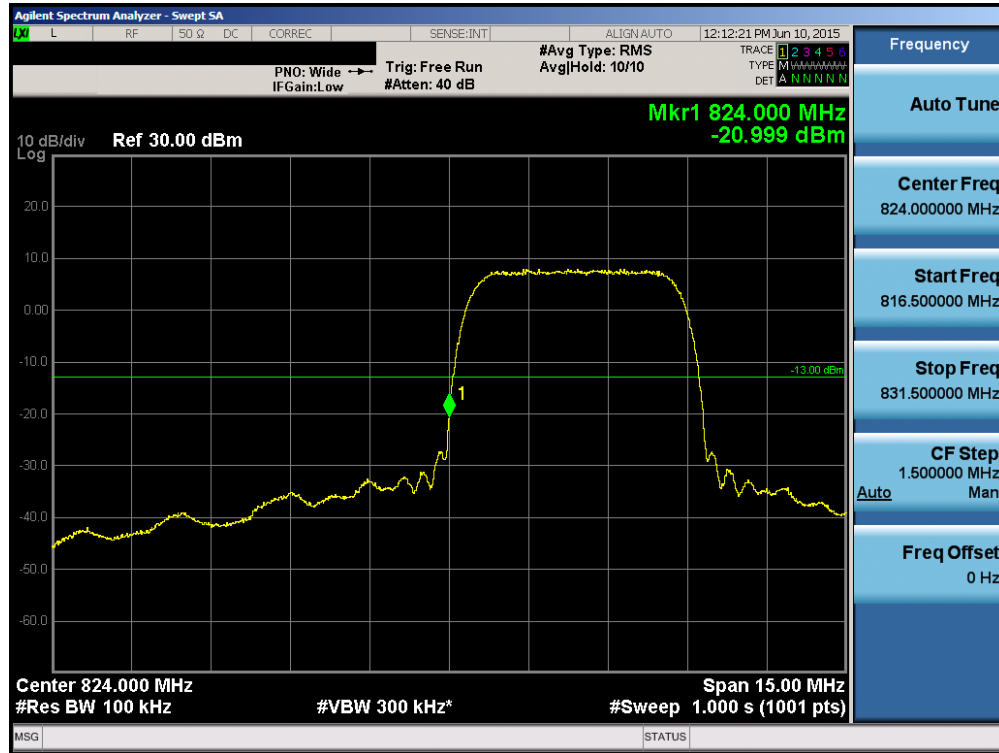


Plot 6-79. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)




Plot 6-80. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 53 of 89

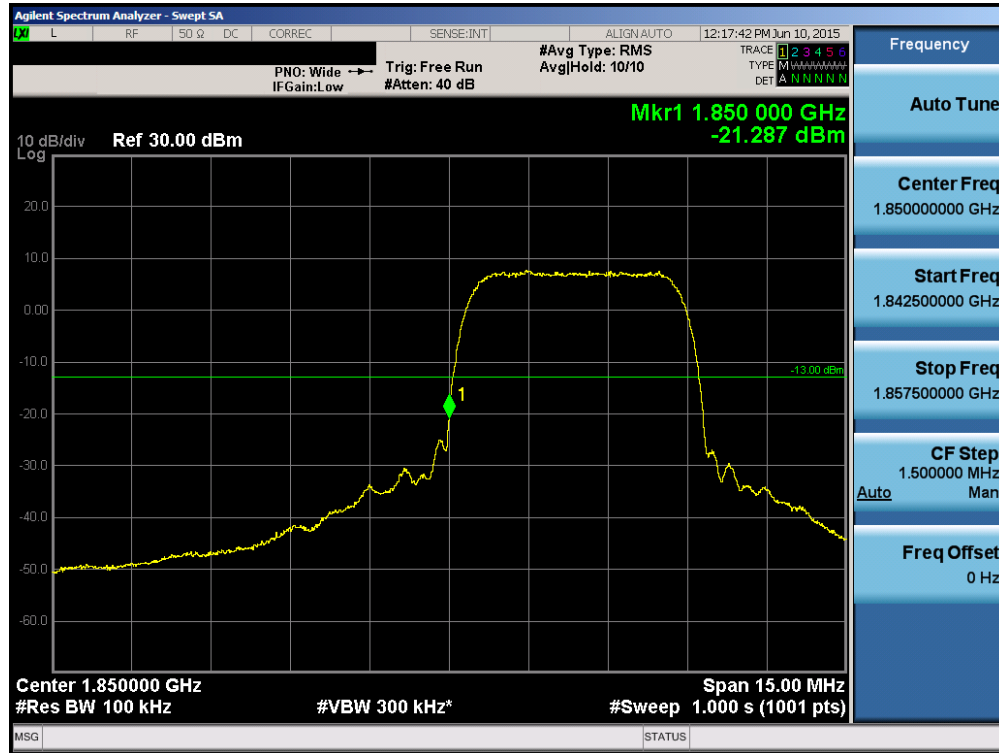


Plot 6-81. Band Edge Plot (PCS WCDMA Mode – Ch. 9262)

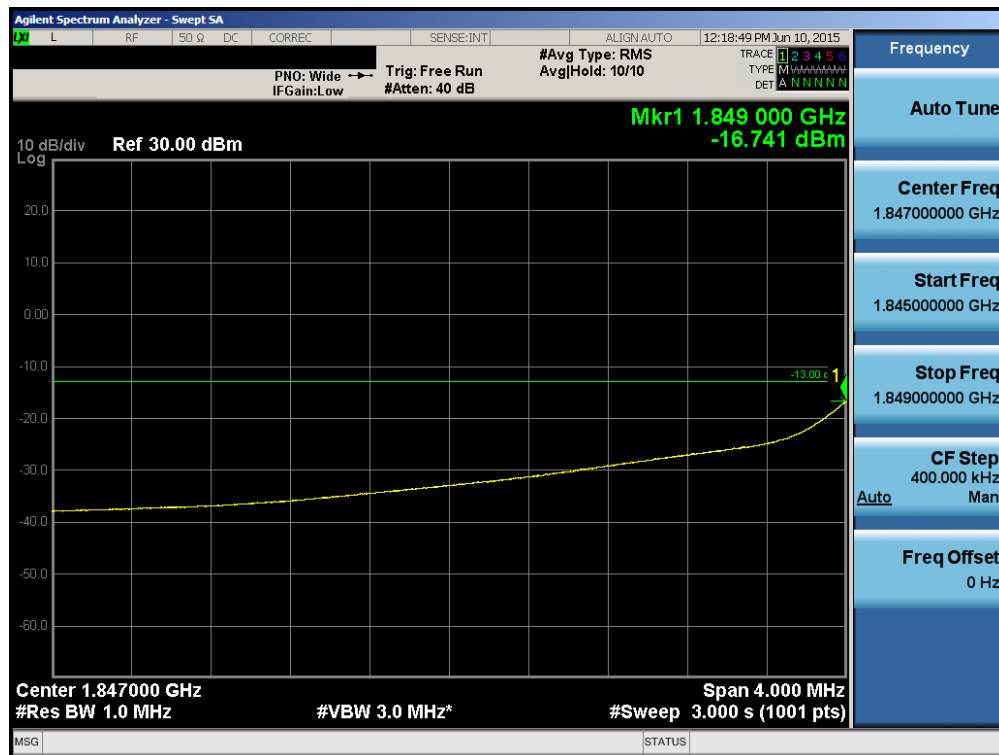


Plot 6-82. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 54 of 89

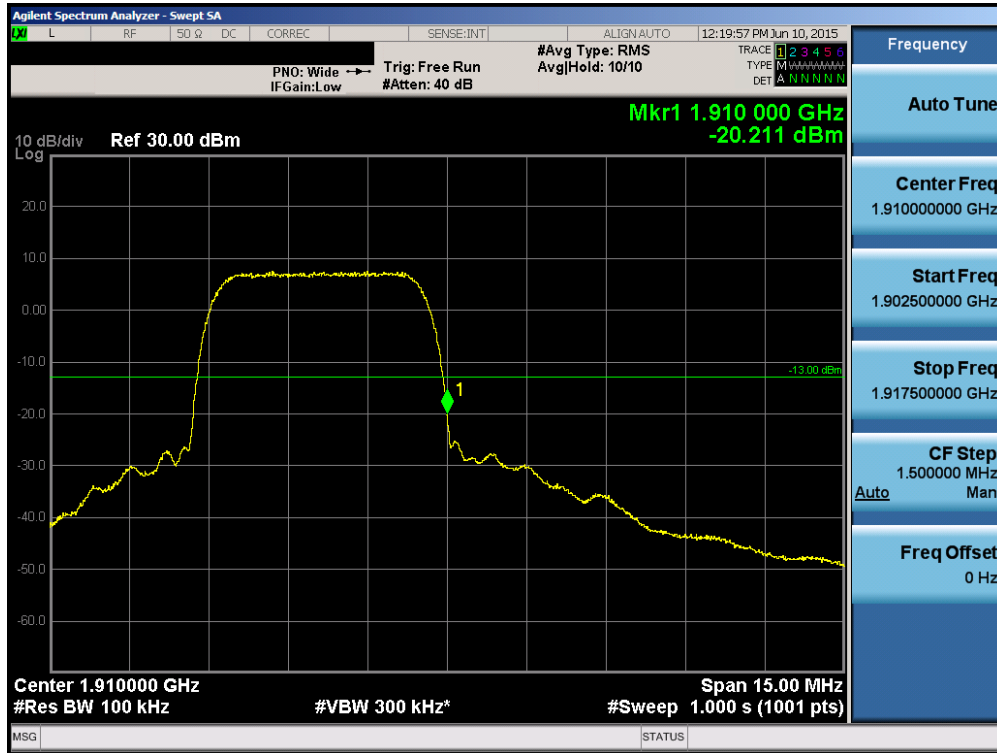

Plot 6-83. Band Edge Plot (PCS WCDMA Mode – Ch. 9538)

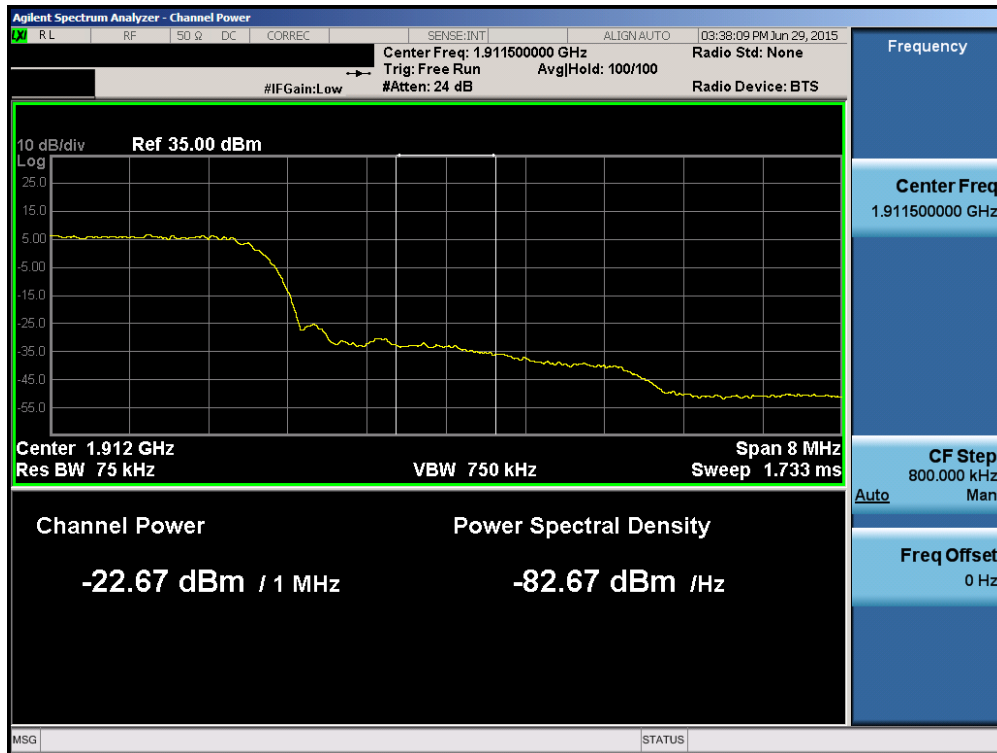

Plot 6-84. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 55 of 89

6.5 Peak-Average Ratio

§24.232(d)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 v02r02 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


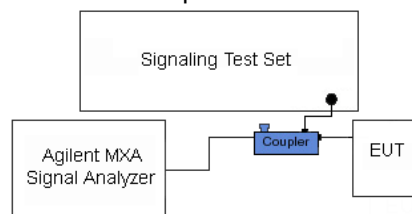


Figure 6-4. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 56 of 89

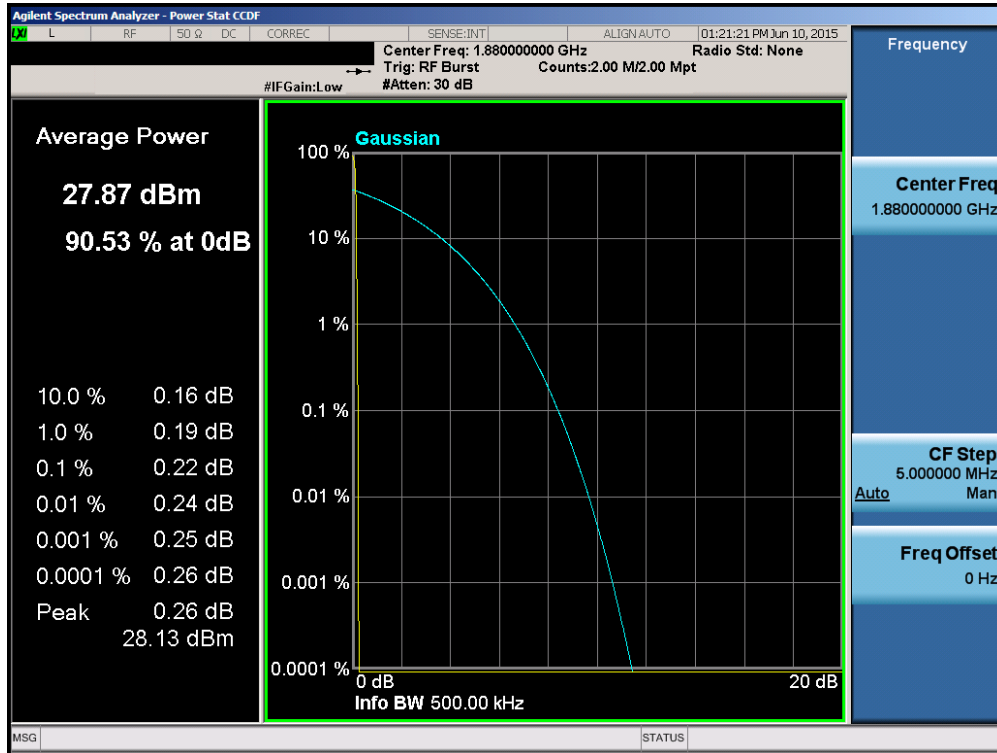


Plot 6-85. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)

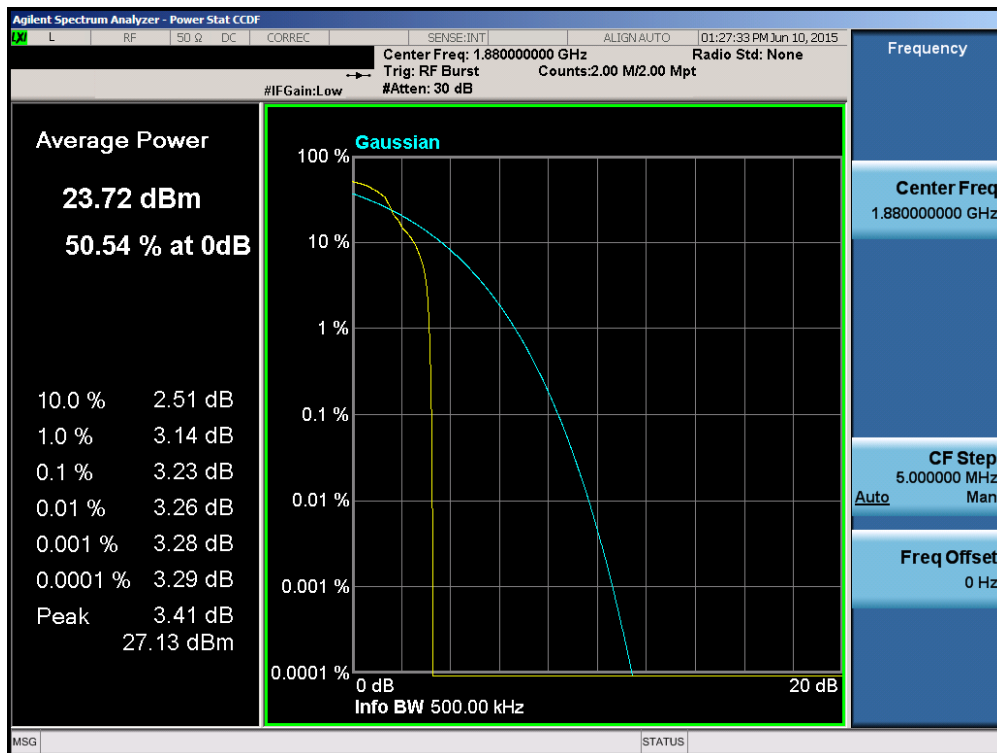


Plot 6-86. Peak-Average Ratio Plot (EDGE1900 Mode – Ch. 661)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 57 of 89

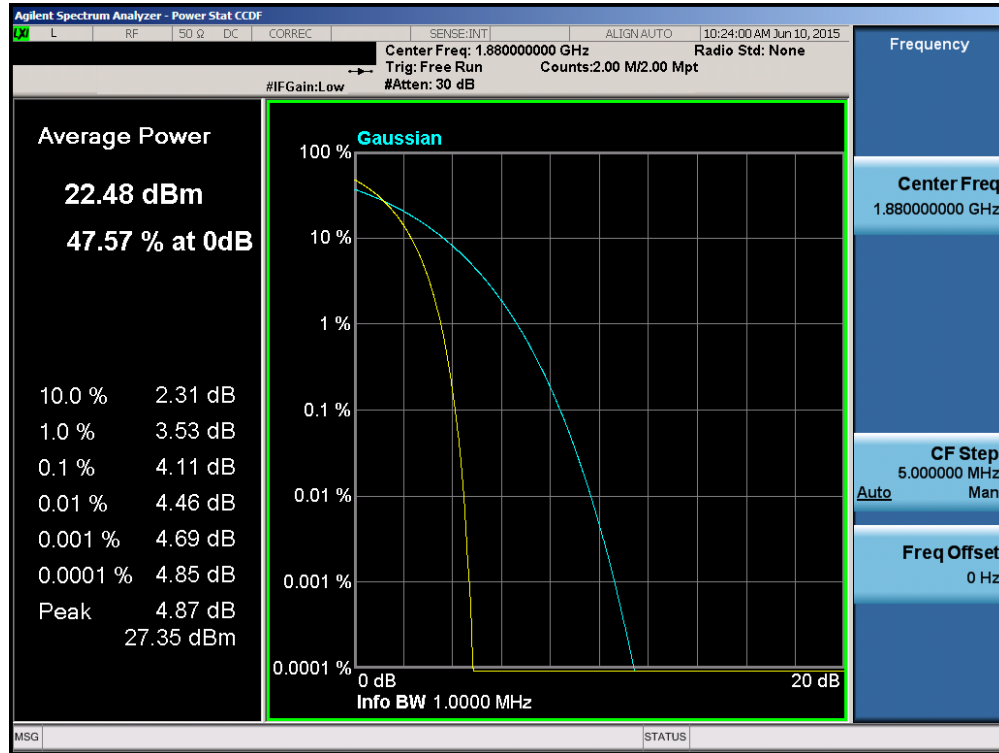

Plot 6-87. Peak-Average Ratio Plot (PCS CDMA Mode – Ch. 600)

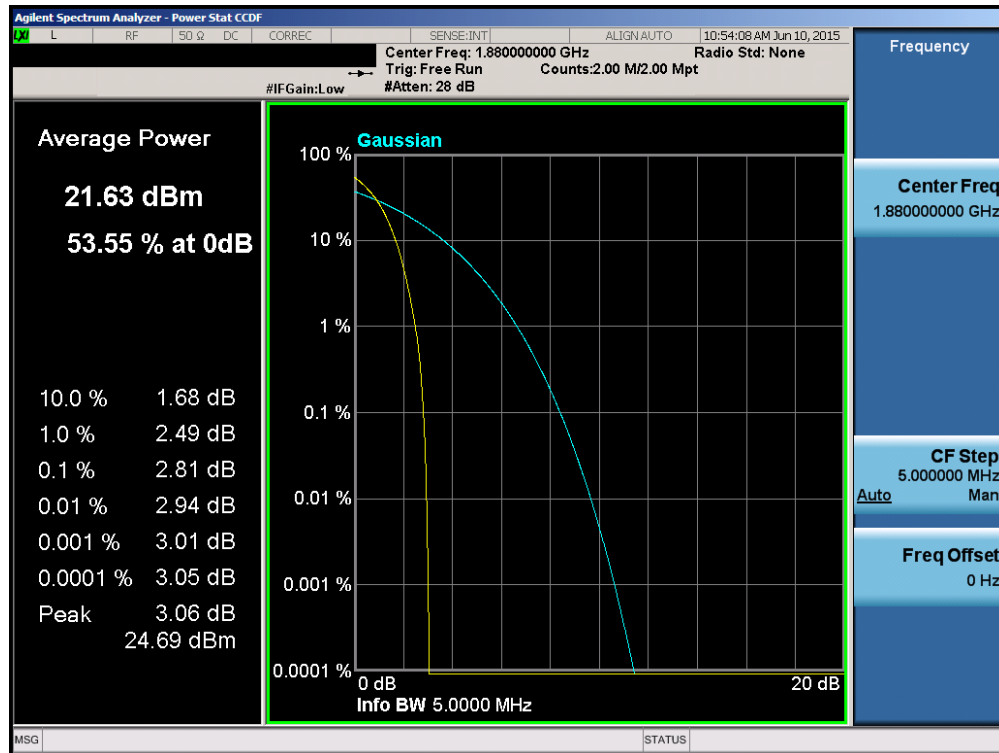

Plot 6-88. Peak-Average Ratio Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 58 of 89

6.6 Radiated Power (ERP/EIRP)

24.232(c)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 59 of 89

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

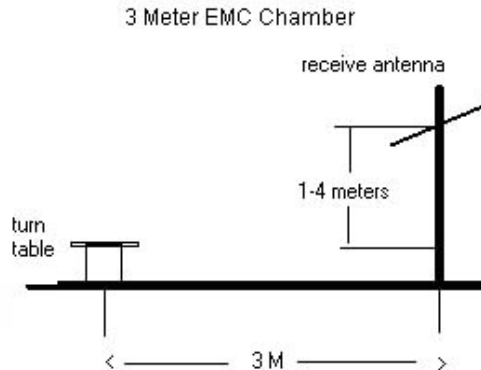


Figure 6-5. Test Instrument & Measurement Setup

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device employs CDMA technology. The EUT was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 60 of 89

Frequency [MHz]	Mode	Battery Cover	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GPRS850	Standard	23.54	2.98	V	26.52	0.448	38.45	-11.94
836.60	GPRS850	Standard	23.61	3.04	V	26.65	0.463	38.45	-11.80
848.80	GPRS850	Standard	23.54	3.11	V	26.65	0.462	38.45	-11.80
836.60	EDGE850	Standard	19.98	3.04	V	23.02	0.201	38.45	-15.43

Table 6-2. ERP (Cellular GSM)

Frequency [MHz]	Mode	Battery Cover	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.70	CDMA850	Standard	14.65	2.98	V	17.63	0.058	38.45	-20.82
836.52	CDMA850	Standard	14.41	3.04	V	17.45	0.056	38.45	-21.00
848.31	CDMA850	Standard	12.03	3.10	V	15.13	0.033	38.45	-23.32

Table 6-3. ERP (Cellular CDMA)

Frequency [MHz]	Mode	Battery Cover	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	Standard	13.89	2.99	V	16.88	0.049	38.45	-21.57
836.60	WCDMA850	Standard	14.50	3.04	V	17.54	0.057	38.45	-20.91
846.60	WCDMA850	Standard	13.88	3.10	V	16.98	0.050	38.45	-21.48

Table 6-4. ERP (Cellular WCDMA)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)						Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset					Page 61 of 89	

Frequency [MHz]	Mode	Battery Cover	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	Standard	20.26	6.19	V	26.45	0.442	33.01	-6.56
1880.00	GPRS1900	Standard	19.16	6.31	V	25.47	0.352	33.01	-7.54
1909.80	GPRS1900	Standard	18.78	6.50	V	25.28	0.337	33.01	-7.73
1850.20	EDGE1900	Standard	16.61	6.19	V	22.80	0.191	33.01	-10.21

Table 6-4. EIRP (PCS GSM)

Frequency [MHz]	Mode	Battery Cover	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	Standard	14.18	6.19	V	20.37	0.109	33.01	-12.64
1880.00	CDMA1900	Standard	13.98	6.31	V	20.29	0.107	33.01	-12.72
1908.75	CDMA1900	Standard	12.90	6.49	V	19.39	0.087	33.01	-13.62

Table 6-5. EIRP (PCS CDMA)

Frequency [MHz]	Mode	Battery Cover	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	Standard	13.63	6.20	V	19.83	0.096	33.01	-13.18
1880.00	WCDMA1900	Standard	12.95	6.31	V	19.26	0.084	33.01	-13.75
1907.60	WCDMA1900	Standard	13.34	6.47	V	19.81	0.096	33.01	-13.20

Table 6-4. EIRP (PCS WCDMA)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)						Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset					Page 62 of 89	

6.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 v02r02 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

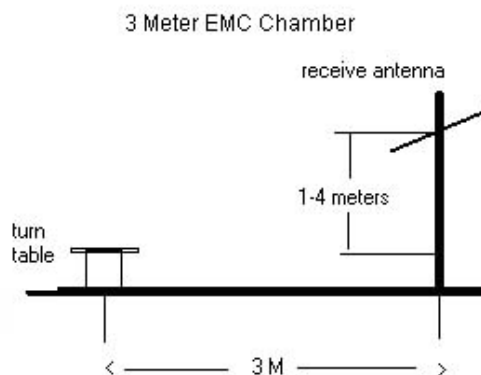


Figure 6-6. Test Instrument & Measurement Setup

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 63 of 89

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device employs CDMA technology. The EUT was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY: 824.20 MHz
 CHANNEL: 128
 MEASURED OUTPUT POWER: 26.52 dBm = 0.448 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.52 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1648.40	-58.53	6.59	-51.93	V	78.4
2472.60	-47.90	7.28	-40.61	V	67.1
3296.80	-62.20	7.37	-54.83	V	81.3

Table 6-6. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 64 of 89

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MEASURED OUTPUT POWER: 26.65 dBm = 0.463 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.65 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.20	-60.22	6.59	-53.63	V	80.3
2509.80	-51.32	7.34	-43.98	V	70.6
3346.40	-60.79	7.45	-53.34	V	80.0

Table 6-7. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MEASURED OUTPUT POWER: 26.65 dBm = 0.462 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.65 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1697.60	-57.94	6.58	-51.35	V	78.0
2546.40	-52.13	7.37	-44.76	V	71.4
3395.20	-62.52	7.53	-54.99	V	81.6

Table 6-8. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MEASURED OUTPUT POWER: 23.20 dBm = 0.209 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.20 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.20	-60.75	6.59	-54.16	V	80.8
2509.80	-58.01	7.34	-50.67	V	77.3
3346.40	-63.46	7.45	-56.01	V	82.7

Table 6-9. Radiated Spurious Data with WCP (Cellular GSM Mode – Ch. 190)

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 17.63 dBm = 0.058 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.63 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1649.40	-61.61	6.56	-55.06	H	72.7
2474.10	-56.32	7.30	-49.02	H	66.7
3298.80	-62.64	7.37	-55.28	H	72.9

Table 6-10. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384
 MEASURED OUTPUT POWER: 17.45 dBm = 0.056 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.45 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.04	-60.87	6.55	-54.31	H	71.8
2509.56	-61.86	7.34	-54.52	H	72.0
3346.08	-62.95	7.44	-55.51	H	73.0

Table 6-11. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777
 MEASURED OUTPUT POWER: 15.13 dBm = 0.033 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 28.13 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1696.62	-62.35	6.55	-55.81	H	70.9
2544.93	-59.41	7.36	-52.05	H	67.2
3393.24	-62.35	7.51	-54.84	H	70.0

Table 6-12. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013
 MEASURED OUTPUT POWER: 16.11 dBm = 0.041 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 29.11 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1649.40	-67.93	6.56	-61.38	H	76.5
2474.10	-62.89	7.30	-55.59	H	70.7
3298.80	-63.84	7.37	-56.48	H	71.6

Table 6-13. Radiated Spurious Data with WCP (Cellular CDMA Mode – Ch. 1013)

OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MEASURED OUTPUT POWER: 16.88 dBm = 0.049 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 29.88 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1652.80	-65.42	6.56	-58.86	H	75.7
2479.20	-59.08	7.30	-51.77	H	68.6
3305.60	-61.76	7.38	-54.38	H	71.3

Table 6-14. Radiated Spurious Data with WCP (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 4183
 MEASURED OUTPUT POWER: 17.54 dBm = 0.057 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.56 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1673.20	-66.15	6.55	-59.60	H	76.6
2509.80	-58.28	7.34	-50.94	H	67.9
3346.40	-62.57	7.44	-55.13	H	72.1

Table 6-15. Radiated Spurious Data with WCP (Cellular WCDMA Mode – Ch. 4183)

OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233
 MEASURED OUTPUT POWER: 16.98 dBm = 0.050 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 29.98 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
1693.20	-63.76	6.55	-57.21	H	74.2
2539.80	-58.66	7.36	-51.30	H	68.3
3386.40	-61.20	7.50	-53.70	H	70.7

Table 6-16. Radiated Spurious Data with WCP (Cellular WCDMA Mode – Ch. 4233)

OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MEASURED OUTPUT POWER: 26.45 dBm = 0.442 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.45 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3700.40	-58.65	9.46	-49.19	V	75.6
5550.60	-55.47	10.80	-44.67	V	71.1
7400.80	-53.00	10.67	-42.33	V	68.8
9251.00	-52.15	11.57	-40.57	V	67.0
11101.20	-52.63	12.80	-39.83	V	66.3

Table 6-17. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 25.47 dBm = 0.352 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.47 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3760.00	-58.81	9.29	-49.53	V	76.0
5640.00	-57.91	11.05	-46.86	V	73.3
7520.00	-55.00	10.97	-44.03	V	70.5
9400.00	-51.80	11.55	-40.25	V	66.7
11280.00	-51.09	12.72	-38.37	V	64.8

Table 6-18. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

OPERATING FREQUENCY: 1909.80 MHz
 CHANNEL: 810
 MEASURED OUTPUT POWER: 25.28 dBm = 0.337 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.28 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3819.60	-58.76	9.20	-49.56	V	76.0
5729.40	-58.02	11.30	-46.72	V	73.2
7639.20	-55.34	11.16	-44.17	V	70.6

Table 6-19. Radiated Spurious Data (PCS GSM Mode – Ch. 810)

OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MEASURED OUTPUT POWER: 21.21 dBm = 0.132 W
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.21 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3700.40	-60.99	9.46	-51.53	V	78.0
5550.60	-57.08	10.80	-46.28	V	72.7
7400.80	-54.37	10.67	-43.70	V	70.1
9251.00	-53.86	11.57	-42.28	V	68.7
11101.20	-53.44	12.80	-40.64	V	67.1

Table 6-20. Radiated Spurious Data with WCP (PCS GSM Mode – Ch. 512)

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 20.37 dBm = 0.109 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.37 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3702.50	-59.77	9.43	-50.34	H	70.7
5553.75	-54.33	10.79	-43.54	H	63.9
7405.00	-54.07	10.70	-43.37	H	63.7

Table 6-21. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 600
 MEASURED OUTPUT POWER: 20.29 dBm = 0.107 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.29 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3760.00	-59.96	9.28	-50.68	H	71.1
5640.00	-52.34	11.03	-41.31	H	61.7
7520.00	-54.15	10.97	-43.18	H	63.6

Table 6-22. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175
 MEASURED OUTPUT POWER: 19.39 dBm = 0.087 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.39 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3817.50	-59.46	9.19	-50.27	H	70.6
5726.25	-51.87	11.28	-40.59	H	61.0
7635.00	-55.99	11.17	-44.82	H	65.2

Table 6-23. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25
 MEASURED OUTPUT POWER: 16.72 dBm = 0.047 W
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 29.72 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3702.50	-60.56	9.43	-51.13	H	71.5
5553.75	-58.16	10.79	-47.37	H	67.7
7405.00	-54.64	10.70	-43.94	H	64.3

Table 6-24. Radiated Spurious Data with WCP (PCS CDMA Mode – Ch. 25)

OPERATING FREQUENCY: 1852.40 MHz
 CHANNEL: 9262
 MEASURED OUTPUT POWER: 19.83 dBm = 0.096 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.83 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3704.80	-60.04	9.43	-50.62	H	70.4
5557.20	-58.75	10.80	-47.95	H	67.8
7409.60	-54.08	10.71	-43.37	H	63.2

Table 6-25. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 9400
 MEASURED OUTPUT POWER: 19.26 dBm = 0.084 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 32.26 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3760.00	-60.09	9.28	-50.81	H	70.6
5640.00	-57.77	11.03	-46.74	H	66.6

Table 6-26. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 74 of 89

OPERATING FREQUENCY: 1907.60 MHz
 CHANNEL: 9538
 MEASURED OUTPUT POWER: 19.81 dBm = 0.096 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.81 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3815.20	-59.11	9.19	-49.92	H	69.7
5722.80	-59.53	11.27	-48.25	H	68.1

Table 6-27. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

OPERATING FREQUENCY: 1852.40 MHz
 CHANNEL: 9262
 MEASURED OUTPUT POWER: 21.58 dBm = 0.158 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 34.99 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	[dBc]
3704.80	-60.93	9.43	-51.51	H	71.3
5557.20	-58.99	10.80	-48.19	H	68.0
7409.60	-54.47	10.71	-43.76	H	63.6

Table 6-28. Radiated Spurious Data with WCP (PCS WCDMA Mode – Ch. 9262)

6.8 Frequency Stability / Temperature Variation

\$2.1055 \$22.355 \$24.235

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-C-2004

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 76 of 89	

Frequency Stability / Temperature Variation

§2.1055 §22.355

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 190

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,600,206	206	0.0000246
100 %		- 30	836,599,827	-173	-0.0000207
100 %		- 20	836,600,374	374	0.0000447
100 %		- 10	836,600,160	160	0.0000191
100 %		0	836,600,001	1	0.0000001
100 %		+ 10	836,600,287	287	0.0000343
100 %		+ 20	836,599,831	-169	-0.0000202
100 %		+ 30	836,599,828	-172	-0.0000206
100 %		+ 40	836,600,002	2	0.0000002
100 %		+ 50	836,599,772	-228	-0.0000273
BATT. ENDPOINT	3.45	+ 20	836,599,900	-100	-0.0000120

Table 6-29. Frequency Stability Data (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSMN920R4	 FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 77 of 89

Frequency Stability / Temperature Variation

§2.1055 §22.355

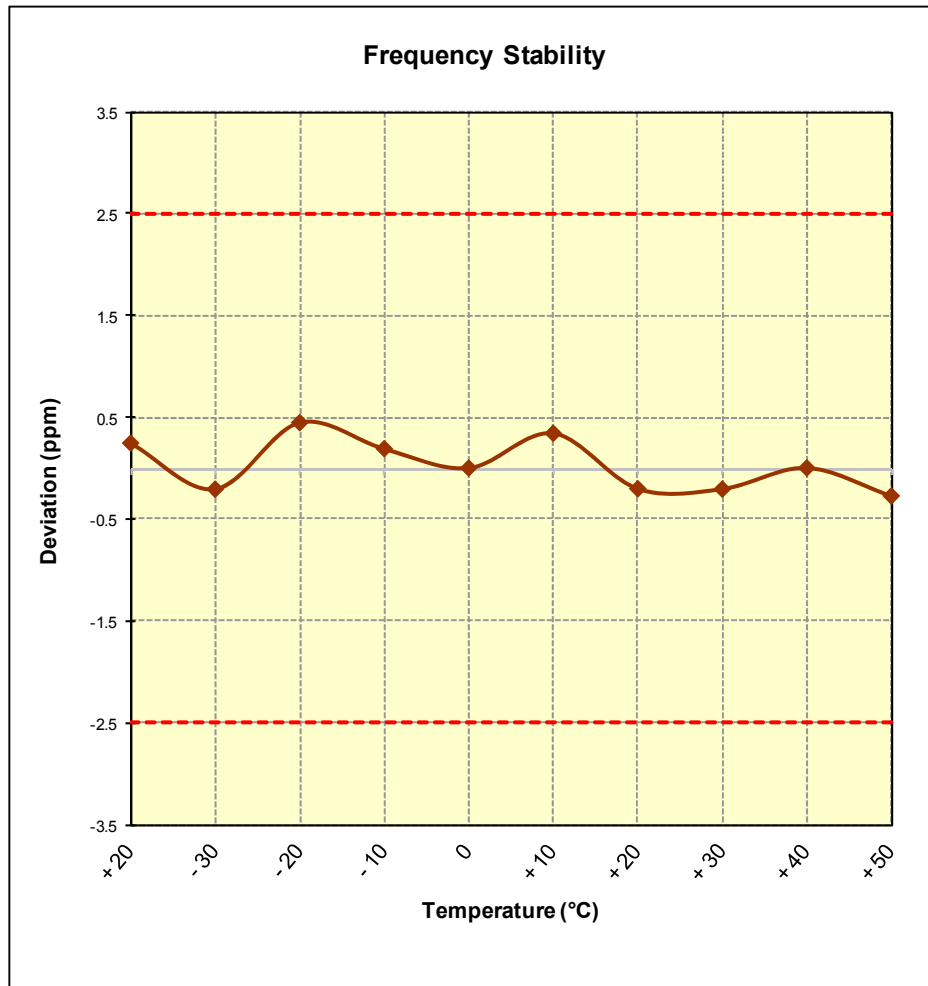


Figure 6-7. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset			Page 78 of 89

Frequency Stability / Temperature Variation

§2.1055 §22.355

OPERATING FREQUENCY: 836,520,000 Hz
 CHANNEL: 384
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,520,038	38	0.0000045
100 %		- 30	836,519,746	-254	-0.0000304
100 %		- 20	836,520,119	119	0.0000142
100 %		- 10	836,520,009	9	0.0000011
100 %		0	836,520,033	33	0.0000039
100 %		+ 10	836,519,725	-275	-0.0000329
100 %		+ 20	836,520,035	35	0.0000042
100 %		+ 30	836,520,005	5	0.0000006
100 %		+ 40	836,519,822	-178	-0.0000213
100 %		+ 50	836,520,051	51	0.0000061
BATT. ENDPOINT	3.45	+ 20	836,520,223	223	0.0000267

Table 6-30. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 79 of 89

Frequency Stability / Temperature Variation

§2.1055 §22.355

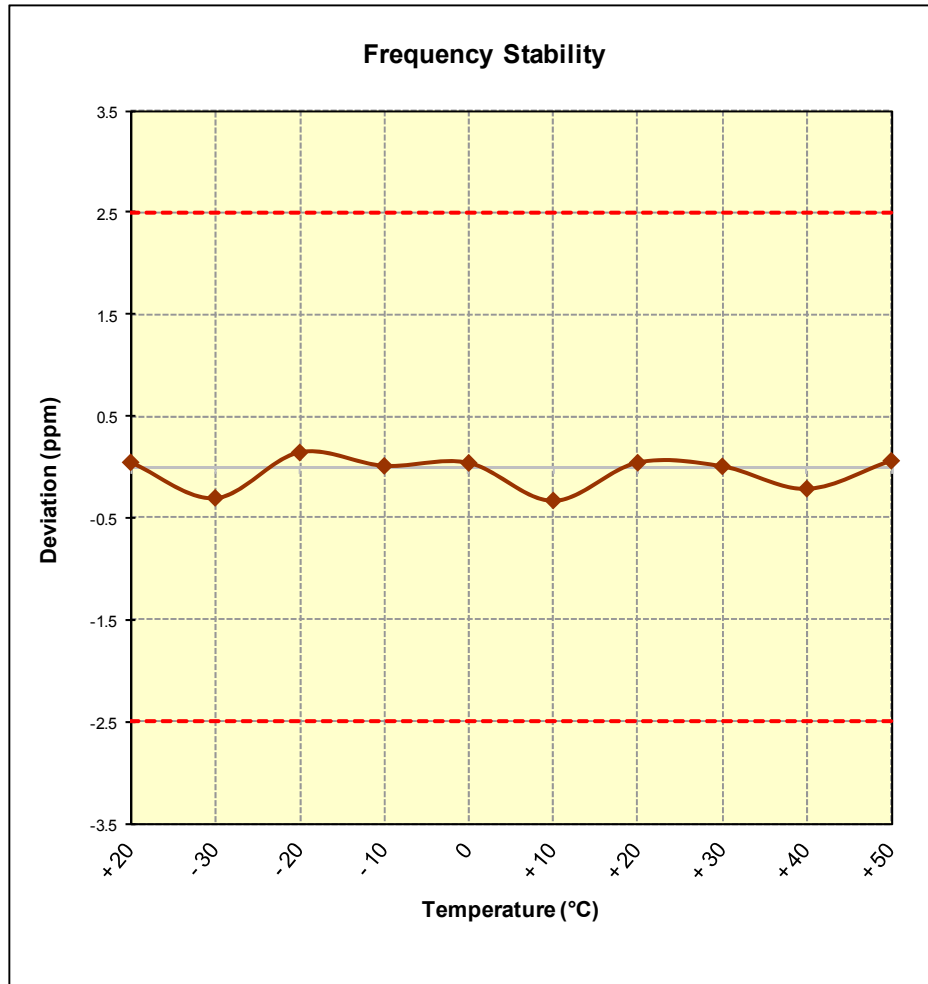


Figure 6-8. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 80 of 89

Frequency Stability / Temperature Variation

§2.1055 §22.355

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 4183

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,599,747	-253	-0.0000302
100 %		- 30	836,599,754	-246	-0.0000294
100 %		- 20	836,600,100	100	0.0000120
100 %		- 10	836,600,158	158	0.0000189
100 %		0	836,600,147	147	0.0000176
100 %		+ 10	836,600,120	120	0.0000143
100 %		+ 20	836,600,361	361	0.0000432
100 %		+ 30	836,599,793	-207	-0.0000247
100 %		+ 40	836,599,982	-18	-0.0000022
100 %		+ 50	836,599,862	-138	-0.0000165
BATT. ENDPOINT	3.45	+ 20	836,600,131	131	0.0000157

Table 6-31. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 81 of 89	

Frequency Stability / Temperature Variation

§2.1055 §22.355

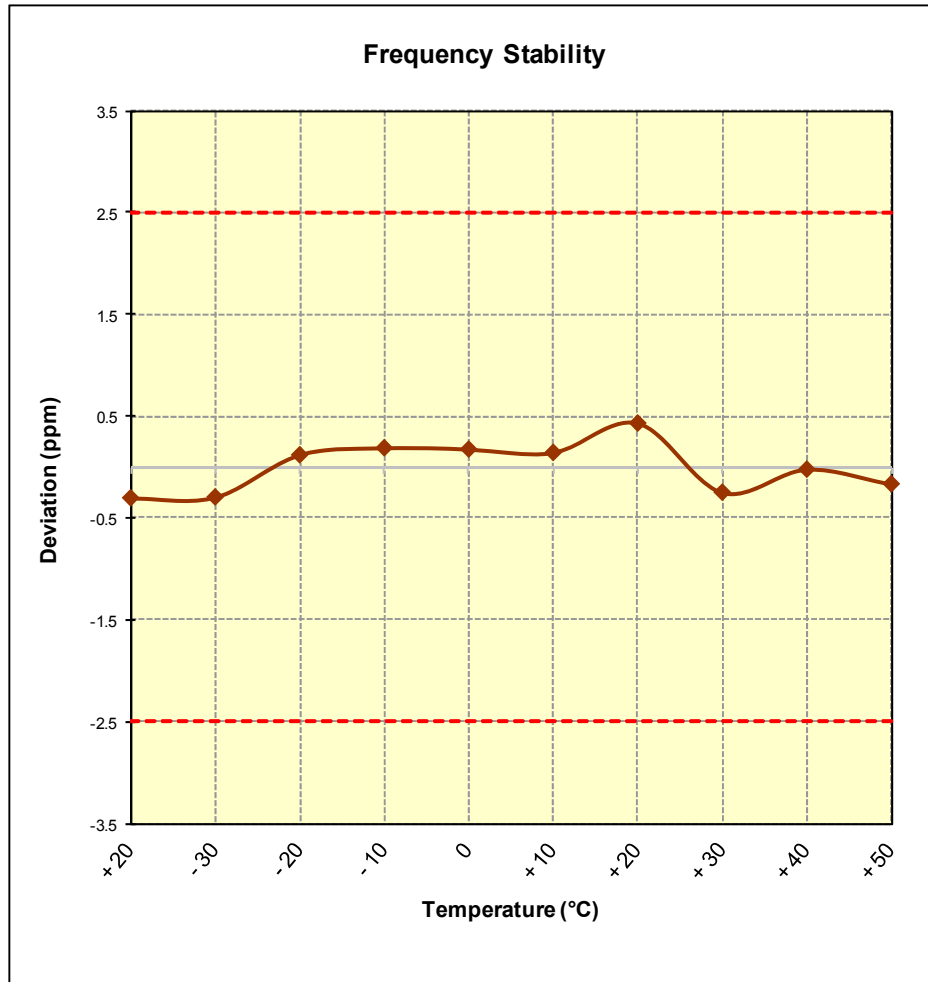


Figure 6-9. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset			Page 82 of 89

Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,879,999,896	-104	-0.0000055
100 %		- 30	1,880,000,459	459	0.0000244
100 %		- 20	1,879,999,939	-61	-0.0000032
100 %		- 10	1,880,000,003	3	0.0000002
100 %		0	1,879,999,935	-65	-0.0000035
100 %		+ 10	1,879,999,947	-53	-0.0000028
100 %		+ 20	1,879,999,760	-240	-0.0000128
100 %		+ 30	1,880,000,034	34	0.0000018
100 %		+ 40	1,880,000,337	337	0.0000179
100 %		+ 50	1,879,999,947	-53	-0.0000028
BATT. ENDPOINT	3.45	+ 20	1,880,000,049	49	0.0000026

Table 6-32. Frequency Stability Data (PCS GSM Mode – Ch. 661)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 83 of 89

Frequency Stability / Temperature Variation

§2.1055 §24.235

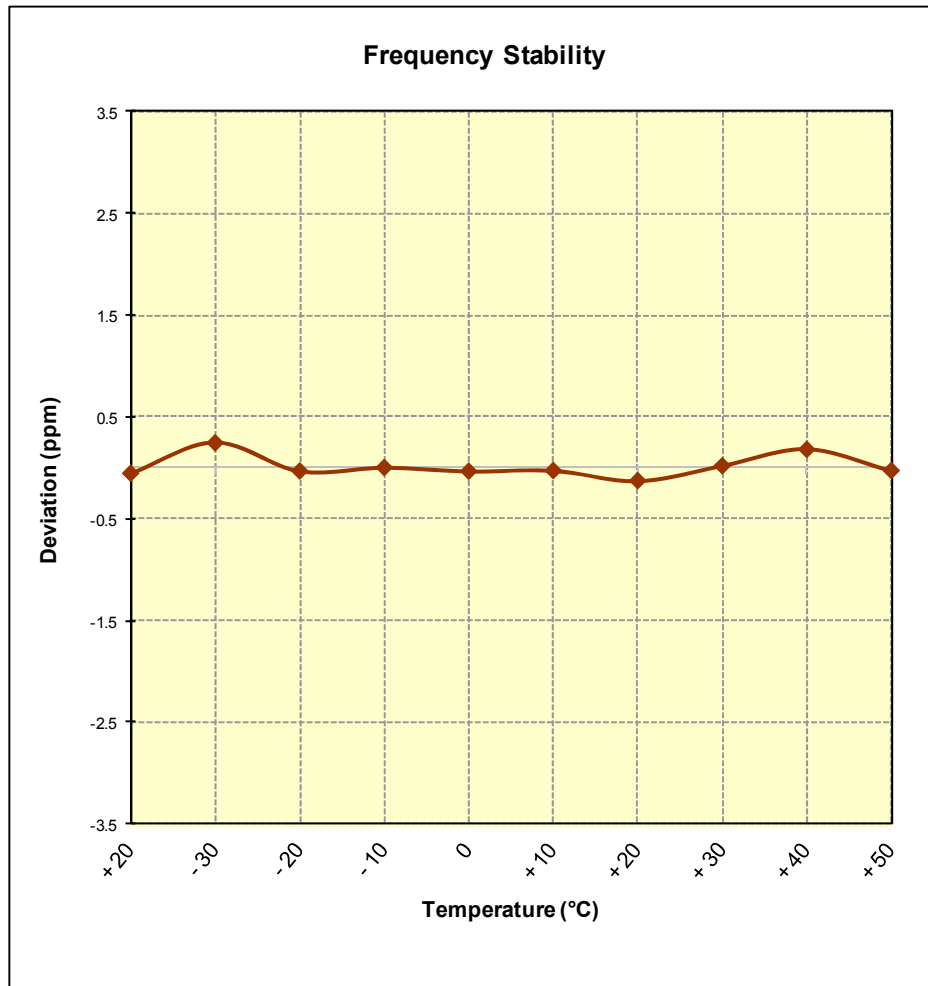


Figure 6-10. Frequency Stability Graph (PCS GSM Mode – Ch. 661)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 84 of 89

Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 600
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,880,000,172	172	0.0000091
100 %		- 30	1,879,999,792	-208	-0.0000111
100 %		- 20	1,879,999,949	-51	-0.0000027
100 %		- 10	1,879,999,746	-254	-0.0000135
100 %		0	1,880,000,024	24	0.0000013
100 %		+ 10	1,880,000,136	136	0.0000072
100 %		+ 20	1,880,000,181	181	0.0000096
100 %		+ 30	1,879,999,808	-192	-0.0000102
100 %		+ 40	1,879,999,814	-186	-0.0000099
100 %		+ 50	1,880,000,317	317	0.0000169
BATT. ENDPOINT	3.45	+ 20	1,880,000,113	113	0.0000060

Table 6-33. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset	Page 85 of 89	

Frequency Stability / Temperature Variation

§2.1055 §24.235

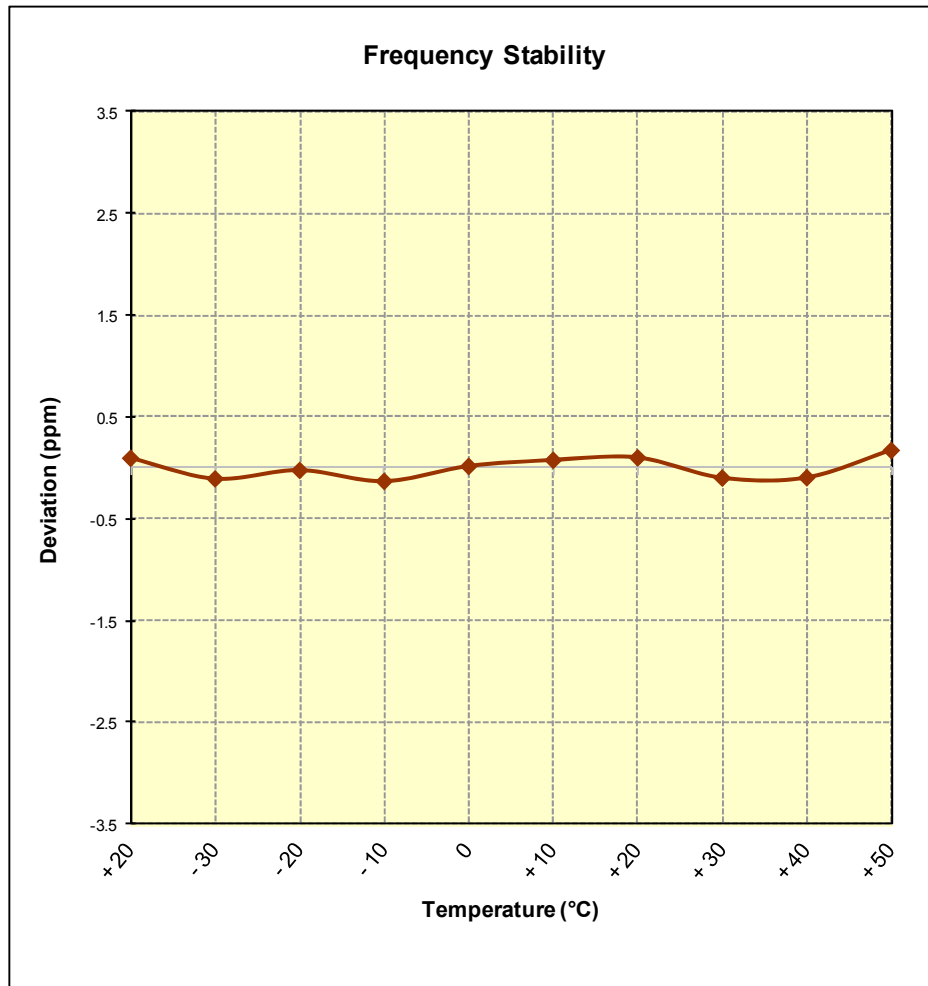


Figure 6-11. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 86 of 89

Frequency Stability / Temperature Variation

§2.1055 §24.235

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 9400
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,879,999,737	-263	-0.0000140
100 %		- 30	1,880,000,048	48	0.0000026
100 %		- 20	1,879,999,857	-143	-0.0000076
100 %		- 10	1,879,999,800	-200	-0.0000106
100 %		0	1,880,000,316	316	0.0000168
100 %		+ 10	1,879,999,816	-184	-0.0000098
100 %		+ 20	1,880,000,329	329	0.0000175
100 %		+ 30	1,879,999,673	-327	-0.0000174
100 %		+ 40	1,879,999,822	-178	-0.0000095
100 %		+ 50	1,879,999,864	-136	-0.0000072
BATT. ENDPOINT	3.45	+ 20	1,880,000,436	436	0.0000232

Table 6-34. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 87 of 89

Frequency Stability / Temperature Variation

§2.1055 §24.235

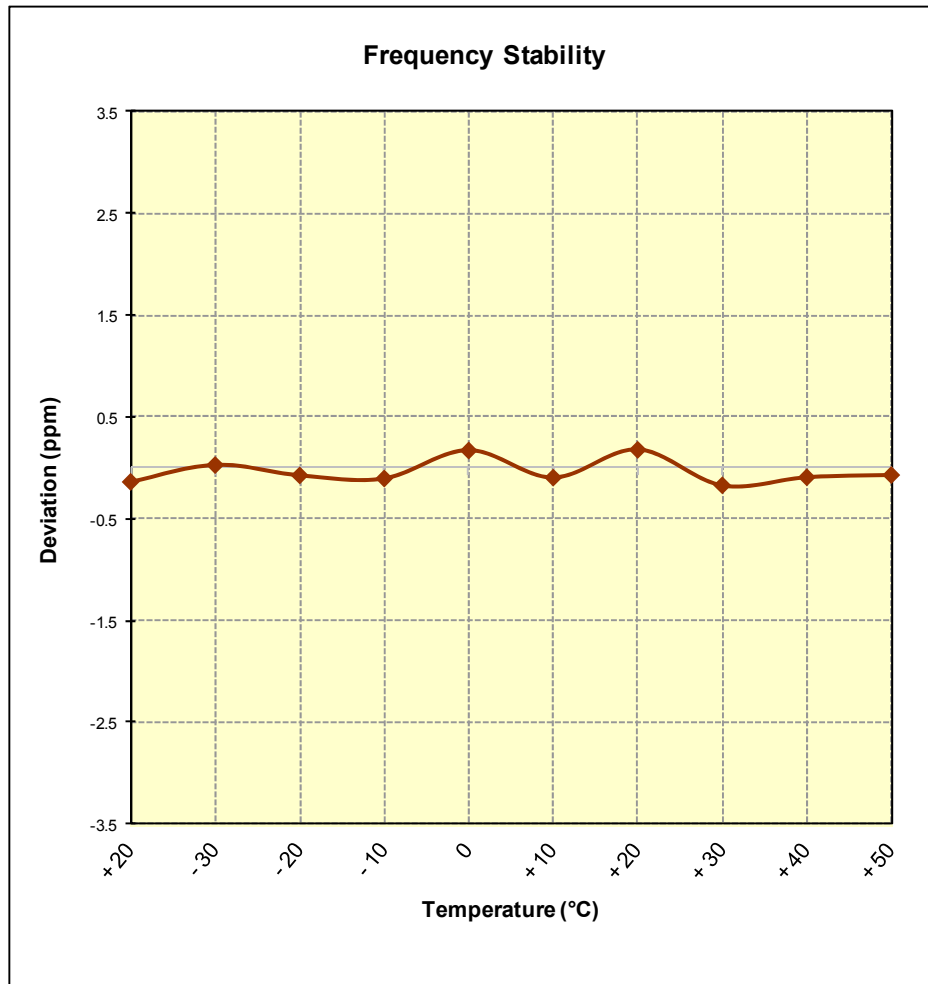


Figure 6-12. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: A3LSMN920R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 88 of 89

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN920R4** complies with all the requirements of Parts 22 & 24 of the FCC rules.

FCC ID: A3LSMN920R4		FCC Pt. 22 & 24 GSM / GPRS / EDGE / CDMA / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1506101155.A3L	Test Dates: 6/7 - 6/24/2015	EUT Type: Portable Handset		Page 89 of 89