



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics, Co. Ltd.
129, Samsung-ro Maetan Dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:

12/02/13 – 01/20/14

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1312182448.A3L

FCC ID:

A3LSMP905M

APPLICANT:

SAMSUNG ELECTRONICS, CO. LTD.

DUT Type:

Portable Tablet

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-P905M

Equipment Class	Band & Mode	Tx Frequency	Measured Conducted Power [dBm]	SAR
				1 gm Body (W/kg)
PCB	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	28.24	0.50
PCB	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	24.49	0.19
PCB	UMTS 850	826.40 - 846.60 MHz	22.35	0.44
PCB	UMTS 1900	1852.4 - 1907.6 MHz	22.28	0.24
PCB	LTE Band 17	706.5 - 713.5 MHz	23.00	0.20
PCB	LTE Band 5 (Cell)	824.7 - 848.3 MHz	22.16	0.27
PCB	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	22.90	0.38
PCB	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	23.40	0.47
DTS	2.4 GHz WLAN	2412 - 2462 MHz	13.66	1.10
DTS	5.8 GHz WLAN	5745 - 5825 MHz	10.05	1.06
NII	5.2 GHz WLAN	5180 - 5240 MHz	10.23	0.68
NII	5.3 GHz WLAN	5260 - 5320 MHz	10.25	0.97
NII	5.5 GHz WLAN	5500 - 5700 MHz	10.29	0.76
DSS/DTS	Bluetooth	2402 - 2480 MHz	7.97	N/A
Simultaneous SAR per KDB 690783 D01v01r02:				1.60

Note: Powers in the above table represent output powers for the SAR test configurations and may not represent the highest output powers for all configurations for each mode.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 1 of 97	

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	10
3	INTRODUCTION	11
4	DOSIMETRIC ASSESSMENT	12
5	SAR TESTING PROCEDURES	13
6	RF EXPOSURE LIMITS	14
7	FCC MEASUREMENT PROCEDURES.....	15
8	RF CONDUCTED POWERS.....	20
9	SYSTEM VERIFICATION.....	66
10	SAR DATA SUMMARY	68
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	76
12	SAR MEASUREMENT VARIABILITY	91
13	EQUIPMENT LIST	92
14	MEASUREMENT UNCERTAINTIES	93
15	CONCLUSION.....	95
16	REFERENCES	96
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: SAR SENSOR TRIGGERING DATA		

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 2 of 97	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 17	Data	706.5 - 713.5 MHz
LTE Band 5 (Cell)	Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Data	1850.7 - 1909.3 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
5.8 GHz WLAN	Data	5745 - 5825 MHz
5.2 GHz WLAN	Data	5180 - 5240 MHz
5.3 GHz WLAN	Data	5260 - 5320 MHz
5.5 GHz WLAN	Data	5500 - 5700 MHz
Bluetooth	Data	2402 - 2480 MHz
ANT+	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses a proximity sensor for SAR compliance. The capacitive proximity sensor is activated when used in close proximity to the user's body. The capacitive proximity sensor triggers power reduction for voice and data modes and is only applicable for tablet operations.

Since the device is a full tablet size, the Body SAR was evaluated per FCC KDB Publication 616217 D04v01 for full sized tablets.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 3 of 97

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

Maximum Power: capacitive sensor not active:

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.5	33.5	31.5	29.7	28.5	27.0	25.5	23.7	22.7
	Nominal	33.0	33.0	31.0	29.2	28.0	26.5	25.0	23.2	22.2
GSM/GPRS/EDGE 1900	Maximum	30.0	30.0	28.0	26.0	25.0	26.0	25.0	23.2	22.0
	Nominal	29.5	29.5	27.5	25.5	24.5	25.5	24.5	22.7	21.5
Mode / Band		Modulated Average (dBm)								
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA					
UMTS Band 5 (850 MHz)	Maximum	23.0	22.0	22.0	22.0					
	Nominal	22.5	21.5	21.5	21.5					
UMTS Band 2 (1900 MHz)	Maximum	23.0	22.0	22.0	22.0					
	Nominal	22.5	21.5	21.5	21.5					
Mode / Band		Modulated Average (dBm)								
LTE Band 17	Maximum	23.0								
	Nominal	22.5								
LTE Band 5 (Cell)	Maximum	22.5								
	Nominal	22.0								
LTE Band 4 (AWS)	Maximum	23.0								
	Nominal	22.5								
LTE Band 2 (PCS)	Maximum	23.5								
	Nominal	23.0								
Mode / Band		Modulated Average (dBm)								
IEEE 802.11b (2.4 GHz)	Maximum	14.5								
	Nominal	14.0								
IEEE 802.11g (2.4 GHz)	Maximum	12.5								
	Nominal	12.0								
IEEE 802.11n (2.4 GHz)	Maximum	10.5								
	Nominal	10.0								
IEEE 802.11a (5 GHz)	Maximum	10.5								
	Nominal	10.0								
IEEE 802.11n (5 GHz) (20 MHz BW)	Maximum	10.5								
	Nominal	10.0								
IEEE 802.11n (5 GHz) (40 MHz BW)	Maximum	10.5								
	Nominal	10.0								
IEEE 802.11ac (5 GHz)	Maximum	10.5								
	Nominal	10.0								
Bluetooth	Maximum	8.0								
	Nominal	7.5								
Bluetooth LE	Maximum	5.5								
	Nominal	5.0								


FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 4 of 97	

With power backoff, capacitive proximity sensor activated:

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX	1 TX	2 TX	3 TX	4 TX	1 TX	2 TX	3 TX	4 TX
GSM/GPRS/EDGE 850	Maximum	26.0	26.0	24.5	23.0	21.5	20.0	18.5	16.7	15.7
	Nominal	25.5	25.5	24.0	22.5	21.0	19.5	18.0	16.2	15.2
GSM/GPRS/EDGE 1900	Maximum	21.0	21.0	19.0	17.0	16.0	17.0	16.0	14.2	13.0
	Nominal	20.5	20.5	18.5	16.5	15.5	16.5	15.5	13.7	12.5
Mode / Band		Modulated Average (dBm)								
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA					
UMTS Band 5 (850 MHz)	Maximum	19.0	19.0	19.0	19.0					
	Nominal	18.5	18.5	18.5	18.5					
UMTS Band 2 (1900 MHz)	Maximum	13.0	13.0	13.0	13.0					
	Nominal	12.5	12.5	12.5	12.5					
Mode / Band		Modulated Average (dBm)								
LTE Band 17	Maximum	15.5								
	Nominal	15.0								
LTE Band 5 (Cell)	Maximum	16.0								
	Nominal	15.5								
LTE Band 4 (AWS)	Maximum	15.0								
	Nominal	14.5								
LTE Band 2 (PCS)	Maximum	15.0								
	Nominal	14.5								

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 5 of 97	

1.4 DUT Antenna Locations

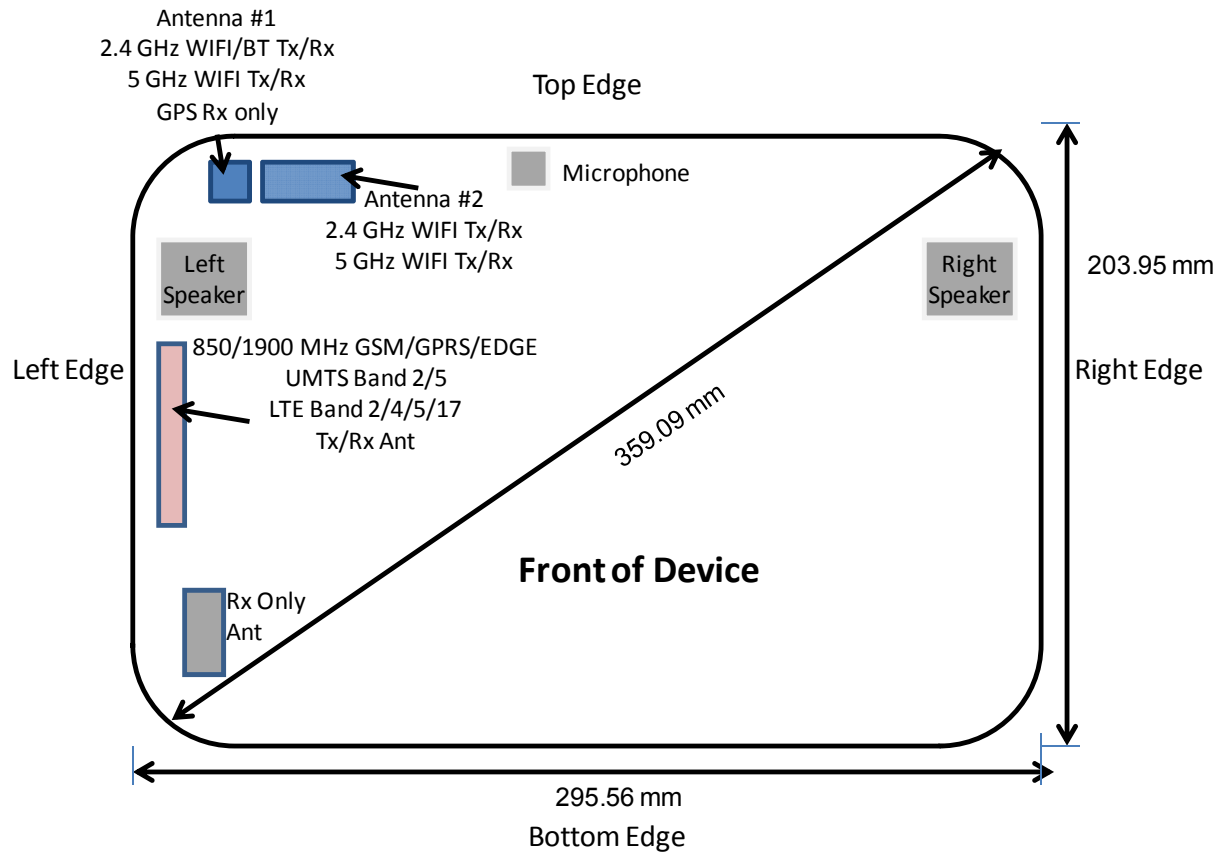

Note: Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.

Figure 1-1
DUT Antenna Locations

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 6 of 97

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in

Figure 1-2 and are color-coded to indicate communication modes which share the same path. This device supports MIMO Tx for WLAN 802.11n/ac. Each WLAN antenna can transmit independently or together when operating with MIMO.



Figure 1-2
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-1
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	UMTS + 2.4 GHz WI-FI	Yes
2	UMTS + 5 GHz WI-FI	Yes
3	UMTS + 2.4 GHz Bluetooth	Yes
4	LTE + 2.4 GHz WI-FI	Yes
5	LTE + 5 GHz WI-FI	Yes
6	LTE + 2.4 GHz Bluetooth	Yes
7	GSM/GPRS/EDGE + 2.4 GHz WI-FI	Yes
8	GSM/GPRS/EDGE + 5 GHz WI-FI	Yes
9	GSM/GPRS/EDGE + 2.4 GHz Bluetooth	Yes

Note:

1. Bluetooth and 2.4 GHz and 5 GHz share the same antenna path and cannot transmit simultaneously.
2. GSM, UMTS, and LTE share the same antenna path and cannot transmit simultaneously.
3. Per KDB 616217 D04 4.3, when voice mode is limited to speaker mode or headset operations only, additional SAR testing for tablet voice use is not required. Therefore, voice standalone and simultaneous combinations are not evaluated for body configurations. Corresponding data modes are used with Bluetooth when applicable.
4. This device supports WIFI direct. There is no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 7 of 97

1.6 SAR Test Exclusions Applied

(A) WIFI/BT

Per FCC KDB 447498 D01 v05, the SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth SAR was not required; $[(6/5) * \sqrt{2.441}] = 1.9 < 3.0$.

This device supports 20 MHz and 40 MHz Bandwidths for IEEE 802.11n for 5 GHz WIFI only. IEEE 802.11n was not evaluated for SAR since the average output power of 20 MHz and 40 MHz bandwidths was not more than 0.25 dB higher than the average output power of IEEE 802.11a.

IEEE 802.11b is not supported for WIFI antenna #2

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) No new 5 GHz channels

(B) Licensed Transmitter(s)

GSM/GPRS DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v02.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02.

When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.

1.7 Guidance Applied

- FCC KDB Publication 941225 D01-D06 (2G/3G/4G)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05 (General SAR Guidance)
- FCC KDB Publication 865664 D01-D02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01 (Tablet SAR Consideration)
- April 2013 TCB Workshop Notes (IEEE 802.11ac)

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 8 of 97

1.8 Device Serial Numbers

Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

Mode/Band	Body Reduced Power Serial Number	Body Maximum Power Serial Number
GSM/GPRS/EDGE 850	000032/1	000029/7
GSM/GPRS/EDGE 1900	000032/1	000029/7
UMTS 850	000032/1	000029/7
UMTS 1900	000032/1	000029/7
LTE Band 17	000030/5	00987/62
LTE Band 5 (Cell)	000032/1	000029/7
LTE Band 4 (AWS)	000032/1	000029/7
LTE Band 2 (PCS)	000032/1	000029/7
2.4 GHz WLAN	-	2611-2
5 GHz WLAN	-	2611-1

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 9 of 97

2

LTE INFORMATION

LTE Information			
FCC ID	A3LSMP905M		
Form Factor	Portable Tablet		
Frequency Range of each LTE transmission band	LTE Band 17 (706.5 - 713.5 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
Channel Bandwidths	LTE Band 17: 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
UE Category	3		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 10 of 97	

3

INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [24]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 11 of 97

4

DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 12 of 97

5.1 SAR Testing for Tablet per KDB Publication 616217 D04v01

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v05 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

5.2 Additional Test Positions due to Proximity Sensor Considerations

This device uses a proximity sensor to reduce voice and data powers in tablet-device use conditions.

While the device is touching the user on the antenna, the capacitive proximity sensor activates and reduces the maximum output power allowed. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

FCC KDB 616217 D04 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional exposure conditions. Since the capacitive proximity sensor activation distance for the back side of the device is 14 mm, a conservative distance of 13 mm was tested for SAR on the back side at maximum power. Since the capacitive proximity sensor activation distance for the left edge of the device is 14 mm, a conservative distance of 13 mm was tested for SAR on the left edge at maximum power. Sensor triggering distance summary data is included in Appendix G. The capacitive proximity sensor does not trigger power reduction from the front of the device.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antenna.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 13 of 97

6

RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 14 of 97

7 FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

7.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

7.3 SAR Measurement Conditions for UMTS

7.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

7.3.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 15 of 97

7.3.3 Procedures Used to Establish RF Signal for SAR HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. Body exposure conditions are typically applicable to these devices, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with UMTS and requires an active DPCCH. The default test configuration is to measure SAR in UMTS without HSDPA, with an established radio link between the DUT and a communication test set with 12.2 kbps RMC mode configured in Test Loop Mode 1; and tested with HSDPA with FRC and a 12.2 kbps RMC using the highest SAR configuration in UMTS. SAR is selectively confirmed for other physical channel configurations according to output power, exposure conditions and device operating capabilities. Maximum output power is verified according to 3GPP TS 23.121 (Release 5) and SAR must be measured according to these maximum output conditions.

Sub-Test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{HS} = \beta_{HS}/\beta_c = 30/15 \Leftrightarrow \beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{HS} = 30/15$) with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ ($A_{HS} = 24/15$) with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.							

Figure 7-1
Table C.10.1.4 of TS 234.121-1

7.3.4 SAR Measurement Conditions for HSUPA Data Devices

SAR for body exposure configurations are measured according to the 'Body SAR Measurements' procedures in the 'WCDMA Handsets' section of the KDB 941225 D01 FCC 3G document. In addition, Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher of that measured without HSPA in 12.2 kbps RMC mode or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and EDCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of the FCC 3G document.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 16 of 97	

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{15} = \beta_{15}/\beta_c = 30/15 \Leftrightarrow \beta_{15} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{15}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

7.3.5 SAR Measurement Conditions for DC-HSDPA

SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion. DC-HSDPA uplink maximum output power measurements using the four Rel. 5 HSDPA subtests in Table C.10.1.4 of TS 234.121-1 is required.

When the maximum average output power of each RF channel with DC-HSDPA active is $\leq 1/4$ dB higher than that measured using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit, SAR evaluation for DC-HSDPA is not required.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 17 of 97

7.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

7.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

7.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

7.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r01:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 18 of 97

7.5 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n/ac transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

7.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

7.5.2 Frequency Channel Configurations [27]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n/ac modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these “required channels” were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was 0.25 dB or higher than the 802.11a mode. 802.11ac SAR was evaluated for highest 802.11a configuration in each 5 GHz band and each exposure condition. 802.11ac modes were additionally evaluated for SAR if the output power for the respective mode was more than 0.25 dB higher than powers of 802.11a modes.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg or if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

7.5.3 MIMO SAR Considerations

Per KDB 248227, SAR for MIMO was measured with both transmitting simultaneously and was evaluated independently of SISO operation. For 2.4 GHz MIMO, 802.11n was evaluated. For 5 GHz MIMO, 802.11ac was evaluated since the maximum allowed output power was the same for both 802.11n/a.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 19 of 97

8 RF CONDUCTED POWERS

8.1 GSM Conducted Powers

Table 8-1
Maximum GSM/GPRS/EDGE Average RF Conducted Powers
Representing Capacitive Sensor Not Active

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.32	33.25	31.15	29.10	28.28	26.27	25.13	23.10	22.01
	190	33.28	33.24	31.50	29.27	28.24	26.01	24.93	23.08	22.15
	251	33.25	33.21	31.44	29.31	28.23	26.20	25.04	23.15	22.18
GSM 1900	512	29.92	29.99	26.89	25.42	24.44	25.14	25.00	22.90	21.91
	661	29.94	29.97	26.85	25.57	24.49	25.01	24.92	22.83	21.92
	810	30.00	29.99	27.03	25.47	24.37	25.07	24.98	22.87	21.89
GSM 850	Targets:	33.0	33.0	31.0	29.2	28.0	26.5	25.0	23.2	22.2
GSM 1900		29.5	29.5	27.5	25.5	24.5	25.5	24.5	22.7	21.5

		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.29	24.22	25.13	24.84	25.27	17.24	19.11	18.84	19.00
	190	24.25	24.21	25.48	25.01	25.23	16.98	18.91	18.82	19.14
	251	24.22	24.18	25.42	25.05	25.22	17.17	19.02	18.89	19.17
GSM 1900	512	20.89	20.96	20.87	21.16	21.43	16.11	18.98	18.64	18.90
	661	20.91	20.94	20.83	21.31	21.48	15.98	18.90	18.57	18.91
	810	20.97	20.96	21.01	21.21	21.36	16.04	18.96	18.61	18.88
GSM 850	Frame Avg.Targets:	23.97	23.97	24.98	24.94	24.99	17.47	18.98	18.94	19.19
GSM 1900		20.47	20.47	21.48	21.24	21.49	16.47	18.48	18.44	18.49

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 20 of 97

Table 8-2
Reduced GSM/GPRS/EDGE Average RF Conducted Powers
Representing Capacitive Sensor Active

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	25.42	25.38	23.81	21.82	20.54	19.35	17.67	15.81	14.75
	190	25.46	25.43	23.78	21.94	20.57	19.42	17.76	15.90	14.72
	251	25.51	25.48	24.05	21.92	20.72	19.66	17.86	15.94	14.94
GSM 1900	512	20.63	20.69	18.67	16.73	15.66	16.78	15.66	13.85	12.67
	661	20.58	20.65	18.72	16.58	15.56	16.66	15.69	13.77	12.79
	810	20.57	20.62	18.59	16.64	15.58	16.55	15.60	13.76	12.55
GSM 850	Targets:	25.5	25.5	24.0	22.5	21.0	19.5	18.0	16.2	15.2
GSM 1900		20.5	20.5	18.5	16.5	15.5	16.5	15.5	13.7	12.5

		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	16.39	16.35	17.79	17.56	17.53	10.32	11.65	11.55	11.74
	190	16.43	16.40	17.76	17.68	17.56	10.39	11.74	11.64	11.71
	251	16.48	16.45	18.03	17.66	17.71	10.63	11.84	11.68	11.93
GSM 1900	512	11.60	11.66	12.65	12.47	12.65	7.75	9.64	9.59	9.66
	661	11.55	11.62	12.70	12.32	12.55	7.63	9.67	9.51	9.78
	810	11.54	11.59	12.57	12.38	12.57	7.52	9.58	9.50	9.54
GSM 850	Frame Avg.Targets:	16.47	16.47	17.98	18.24	17.99	10.47	11.98	11.94	12.19
GSM 1900		11.47	11.47	12.48	12.24	12.49	7.47	9.48	9.44	9.49

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- Justification for reduced test configurations per KDB Publication 941225 D03v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 21 of 97	

3. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
4. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

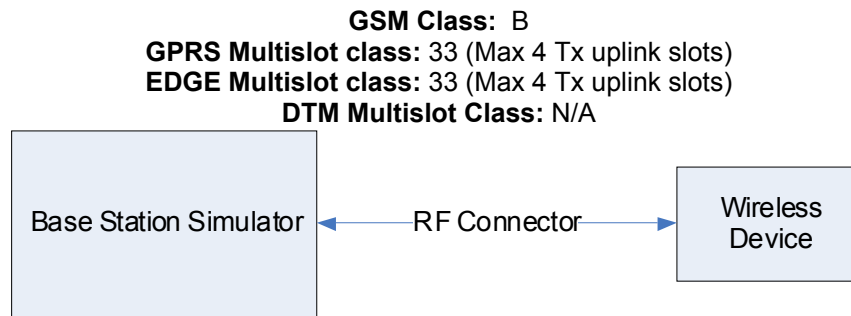


Figure 8-1
Power Measurement Setup

8.2 UMTS Conducted Power

Table 8-3
Maximum UMTS Average RF Conducted Powers
Representing Capacitive Sensor Not Active

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.36	22.35	22.25	22.21	22.28	22.45	-
99		12.2 kbps AMR	22.31	22.22	22.23	21.79	21.84	22.01	-
6	HSDPA	Subtest 1	21.33	21.19	21.21	20.81	20.87	20.96	0
6		Subtest 2	21.24	21.17	21.12	20.73	20.72	20.92	0
6		Subtest 3	20.62	20.69	20.62	20.45	20.43	20.62	0.5
6		Subtest 4	20.63	20.58	20.68	20.34	20.20	20.40	0.5
6	HSUPA	Subtest 1	21.01	21.04	21.08	20.15	20.10	20.42	0
6		Subtest 2	20.13	20.05	20.01	19.46	19.52	19.32	2
6		Subtest 3	19.78	19.90	19.97	19.66	19.41	19.52	1
6		Subtest 4	20.50	20.53	20.55	20.13	20.02	20.27	2
6		Subtest 5	21.07	20.92	21.05	20.21	20.38	20.57	0
8	DC-HSDPA	Subtest 1	21.62	21.45	21.58	21.87	21.74	21.85	0
8		Subtest 2	21.61	21.48	21.55	21.79	21.67	21.85	0
8		Subtest 3	21.05	21.00	21.09	21.21	21.14	21.34	0.5
8		Subtest 4	21.12	20.95	21.06	21.32	21.20	21.31	0.5

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 22 of 97

Table 8-4
Reduced UMTS Average RF Conducted Powers
Representing Capacitive Sensor Active

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	18.35	18.30	18.27	12.78	12.94	12.68	-
99		12.2 kbps AMR	18.22	18.27	18.29	12.74	12.97	12.73	-
6	HSDPA	Subtest 1	17.32	17.20	17.28	11.88	12.06	11.84	0
6		Subtest 2	17.25	17.31	17.15	11.86	12.01	11.69	0
6		Subtest 3	16.80	16.75	16.79	11.39	11.45	11.22	0.5
6		Subtest 4	16.86	16.82	16.76	11.33	11.47	11.24	0.5
6	HSUPA	Subtest 1	17.05	17.25	17.06	11.31	11.35	11.19	0
6		Subtest 2	16.04	16.02	15.98	10.93	10.99	10.85	2
6		Subtest 3	16.06	16.21	16.17	10.73	10.91	10.53	1
6		Subtest 4	16.53	16.28	16.77	11.24	11.15	10.76	2
6		Subtest 5	17.01	17.06	17.00	11.08	11.10	11.01	0
8	DC-HSDPA	Subtest 1	18.48	18.41	18.40	12.57	12.76	12.40	0
8		Subtest 2	18.55	18.31	18.50	12.52	12.64	12.41	0
8		Subtest 3	18.06	17.87	17.92	12.06	12.26	11.89	0.5
8		Subtest 4	18.04	17.86	17.97	12.06	12.25	12.02	0.5

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- Measured maximum output powers for DC-HSDPA were not greater than 1/4 dB higher than the WCDMA 12.2 kbps RMC maximum output, as a result, SAR evaluation is not required for DC-HSDPA

It is expected by the manufacturer that MPR for some HSUPA subtests may be up to 1 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.

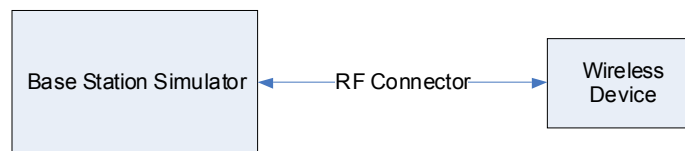


Figure 8-2
Power Measurement Setup

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 23 of 97	

8.3 LTE Conducted Powers

8.3.1 LTE Band 17

Table 8-5
Maximum LTE Band 17 Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	710.0	23790	10	QPSK	1	0	22.96	0	0
	710.0	23790	10	QPSK	1	25	22.87	0	0
	710.0	23790	10	QPSK	1	49	23.00	0	0
	710.0	23790	10	QPSK	25	0	21.99	1	0-1
	710.0	23790	10	QPSK	25	12	21.68	1	0-1
	710.0	23790	10	QPSK	25	25	22.00	1	0-1
	710.0	23790	10	QPSK	50	0	21.97	1	0-1
	710.0	23790	10	16QAM	1	0	21.88	1	0-1
	710.0	23790	10	16QAM	1	25	21.95	1	0-1
	710.0	23790	10	16QAM	1	49	21.60	1	0-1
	710.0	23790	10	16QAM	25	0	20.91	2	0-2
	710.0	23790	10	16QAM	25	12	20.79	2	0-2
	710.0	23790	10	16QAM	25	25	20.98	2	0-2
	710.0	23790	10	16QAM	50	0	20.95	2	0-2

Table 8-6
Reduced LTE Band 17 Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	710.0	23790	10	QPSK	1	0	14.82	0	0
	710.0	23790	10	QPSK	1	25	14.99	0	0
	710.0	23790	10	QPSK	1	49	15.06	0	0
	710.0	23790	10	QPSK	25	0	15.03	0	0-1
	710.0	23790	10	QPSK	25	12	15.05	0	0-1
	710.0	23790	10	QPSK	25	25	15.10	0	0-1
	710.0	23790	10	QPSK	50	0	15.04	0	0-1
	710.0	23790	10	16QAM	1	0	15.10	0	0-1
	710.0	23790	10	16QAM	1	25	15.30	0	0-1
	710.0	23790	10	16QAM	1	49	15.32	0	0-1
	710.0	23790	10	16QAM	25	0	15.07	0	0-2
	710.0	23790	10	16QAM	25	12	14.93	0	0-2
	710.0	23790	10	16QAM	25	25	15.11	0	0-2
	710.0	23790	10	16QAM	50	0	14.97	0	0-2

Note: LTE Band17 at 10 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 24 of 97

Table 8-7
Maximum LTE Band 17 Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	710.0	23790	5	QPSK	1	0	22.76	0	0
	710.0	23790	5	QPSK	1	12	22.84	0	0
	710.0	23790	5	QPSK	1	24	22.93	0	0
	710.0	23790	5	QPSK	12	0	21.81	1	0-1
	710.0	23790	5	QPSK	12	6	21.76	1	0-1
	710.0	23790	5	QPSK	12	13	21.69	1	0-1
	710.0	23790	5	QPSK	25	0	21.95	1	0-1
	710.0	23790	5	16-QAM	1	0	21.63	1	0-1
	710.0	23790	5	16-QAM	1	12	21.75	1	0-1
	710.0	23790	5	16-QAM	1	24	21.79	1	0-1
	710.0	23790	5	16-QAM	12	0	20.76	2	0-2
	710.0	23790	5	16-QAM	12	6	20.71	2	0-2
	710.0	23790	5	16-QAM	12	13	20.74	2	0-2
	710.0	23790	5	16-QAM	25	0	20.73	2	0-2

Table 8-8
Reduced LTE Band 17 Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	710.0	23790	5	QPSK	1	0	14.97	0	0
	710.0	23790	5	QPSK	1	12	14.93	0	0
	710.0	23790	5	QPSK	1	24	15.03	0	0
	710.0	23790	5	QPSK	12	0	14.92	0	0-1
	710.0	23790	5	QPSK	12	6	15.09	0	0-1
	710.0	23790	5	QPSK	12	13	15.03	0	0-1
	710.0	23790	5	QPSK	25	0	15.05	0	0-1
	710.0	23790	5	16-QAM	1	0	14.67	0	0-1
	710.0	23790	5	16-QAM	1	12	14.81	0	0-1
	710.0	23790	5	16-QAM	1	24	14.79	0	0-1
	710.0	23790	5	16-QAM	12	0	15.08	0	0-2
	710.0	23790	5	16-QAM	12	6	15.26	0	0-2
	710.0	23790	5	16-QAM	12	13	15.27	0	0-2
	710.0	23790	5	16-QAM	25	0	15.04	0	0-2

Note: LTE Band17 at 5 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 25 of 97

8.3.2 LTE Band 5 (Cell)

Table 8-9
Maximum LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	836.5	20525	10	QPSK	1	0	22.16	0	0
	836.5	20525	10	QPSK	1	25	22.01	0	0
	836.5	20525	10	QPSK	1	49	22.02	0	0
	836.5	20525	10	QPSK	25	0	21.01	1	0-1
	836.5	20525	10	QPSK	25	12	21.01	1	0-1
	836.5	20525	10	QPSK	25	25	21.04	1	0-1
	836.5	20525	10	QPSK	50	0	20.85	1	0-1
	836.5	20525	10	16QAM	1	0	21.06	1	0-1
	836.5	20525	10	16QAM	1	25	21.05	1	0-1
	836.5	20525	10	16QAM	1	49	20.99	1	0-1
	836.5	20525	10	16QAM	25	0	19.92	2	0-2
	836.5	20525	10	16QAM	25	12	19.87	2	0-2
	836.5	20525	10	16QAM	25	25	19.86	2	0-2
	836.5	20525	10	16QAM	50	0	19.85	2	0-2

Note: LTE Band 5 at 10 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

Table 8-10
Reduced LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	836.5	20525	10	QPSK	1	0	15.13	0	0
	836.5	20525	10	QPSK	1	25	15.14	0	0
	836.5	20525	10	QPSK	1	49	15.10	0	0
	836.5	20525	10	QPSK	25	0	15.25	0	0-1
	836.5	20525	10	QPSK	25	12	15.22	0	0-1
	836.5	20525	10	QPSK	25	25	15.32	0	0-1
	836.5	20525	10	QPSK	50	0	15.10	0	0-1
	836.5	20525	10	16QAM	1	0	15.31	0	0-1
	836.5	20525	10	16QAM	1	25	15.40	0	0-1
	836.5	20525	10	16QAM	1	49	15.52	0	0-1
	836.5	20525	10	16QAM	25	0	15.18	0	0-2
	836.5	20525	10	16QAM	25	12	15.17	0	0-2
	836.5	20525	10	16QAM	25	25	15.11	0	0-2
	836.5	20525	10	16QAM	50	0	15.19	0	0-2

Note: LTE Band 5 at 10 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 26 of 97

Table 8-11
Maximum LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	826.5	20425	5	QPSK	1	0	22.18	0	0
	826.5	20425	5	QPSK	1	12	22.20	0	0
	826.5	20425	5	QPSK	1	24	22.17	0	0
	826.5	20425	5	QPSK	12	0	21.18	1	0-1
	826.5	20425	5	QPSK	12	6	21.13	1	0-1
	826.5	20425	5	QPSK	12	13	21.09	1	0-1
	826.5	20425	5	QPSK	25	0	21.07	1	0-1
	826.5	20425	5	16-QAM	1	0	21.17	1	0-1
	826.5	20425	5	16-QAM	1	12	21.13	1	0-1
	826.5	20425	5	16-QAM	1	24	21.18	1	0-1
	826.5	20425	5	16-QAM	12	0	20.16	2	0-2
	826.5	20425	5	16-QAM	12	6	20.27	2	0-2
	826.5	20425	5	16-QAM	12	13	20.17	2	0-2
	826.5	20425	5	16-QAM	25	0	20.13	2	0-2
Mid	836.5	20525	5	QPSK	1	0	22.12	0	0
	836.5	20525	5	QPSK	1	12	22.02	0	0
	836.5	20525	5	QPSK	1	24	22.09	0	0
	836.5	20525	5	QPSK	12	0	20.96	1	0-1
	836.5	20525	5	QPSK	12	6	21.06	1	0-1
	836.5	20525	5	QPSK	12	13	20.98	1	0-1
	836.5	20525	5	QPSK	25	0	20.86	1	0-1
	836.5	20525	5	16-QAM	1	0	20.95	1	0-1
	836.5	20525	5	16-QAM	1	12	20.85	1	0-1
	836.5	20525	5	16-QAM	1	24	21.08	1	0-1
	836.5	20525	5	16-QAM	12	0	20.06	2	0-2
	836.5	20525	5	16-QAM	12	6	20.14	2	0-2
	836.5	20525	5	16-QAM	12	13	20.05	2	0-2
	836.5	20525	5	16-QAM	25	0	19.87	2	0-2
High	846.5	20625	5	QPSK	1	0	22.02	0	0
	846.5	20625	5	QPSK	1	12	22.03	0	0
	846.5	20625	5	QPSK	1	24	22.14	0	0
	846.5	20625	5	QPSK	12	0	21.00	1	0-1
	846.5	20625	5	QPSK	12	6	21.01	1	0-1
	846.5	20625	5	QPSK	12	13	21.06	1	0-1
	846.5	20625	5	QPSK	25	0	20.97	1	0-1
	846.5	20625	5	16-QAM	1	0	20.96	1	0-1
	846.5	20625	5	16-QAM	1	12	20.92	1	0-1
	846.5	20625	5	16-QAM	1	24	21.03	1	0-1
	846.5	20625	5	16-QAM	12	0	19.97	2	0-2
	846.5	20625	5	16-QAM	12	6	20.06	2	0-2
	846.5	20625	5	16-QAM	12	13	20.11	2	0-2
	846.5	20625	5	16-QAM	25	0	19.89	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 27 of 97	

Table 8-12
Reduced LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	826.5	20425	5	QPSK	1	0	15.09	0	0
	826.5	20425	5	QPSK	1	12	15.16	0	0
	826.5	20425	5	QPSK	1	24	15.17	0	0
	826.5	20425	5	QPSK	12	0	15.03	0	0-1
	826.5	20425	5	QPSK	12	6	15.14	0	0-1
	826.5	20425	5	QPSK	12	13	15.17	0	0-1
	826.5	20425	5	QPSK	25	0	15.13	0	0-1
	826.5	20425	5	16-QAM	1	0	15.02	0	0-1
	826.5	20425	5	16-QAM	1	12	15.06	0	0-1
	826.5	20425	5	16-QAM	1	24	15.01	0	0-1
	826.5	20425	5	16-QAM	12	0	15.08	0	0-2
	826.5	20425	5	16-QAM	12	6	15.10	0	0-2
	826.5	20425	5	16-QAM	12	13	15.18	0	0-2
	826.5	20425	5	16-QAM	25	0	15.02	0	0-2
Mid	836.5	20525	5	QPSK	1	0	15.23	0	0
	836.5	20525	5	QPSK	1	12	15.16	0	0
	836.5	20525	5	QPSK	1	24	15.34	0	0
	836.5	20525	5	QPSK	12	0	15.21	0	0-1
	836.5	20525	5	QPSK	12	6	15.35	0	0-1
	836.5	20525	5	QPSK	12	13	15.31	0	0-1
	836.5	20525	5	QPSK	25	0	15.20	0	0-1
	836.5	20525	5	16-QAM	1	0	15.00	0	0-1
	836.5	20525	5	16-QAM	1	12	15.02	0	0-1
	836.5	20525	5	16-QAM	1	24	15.14	0	0-1
	836.5	20525	5	16-QAM	12	0	15.34	0	0-2
	836.5	20525	5	16-QAM	12	6	15.35	0	0-2
	836.5	20525	5	16-QAM	12	13	15.39	0	0-2
	836.5	20525	5	16-QAM	25	0	15.19	0	0-2
High	846.5	20625	5	QPSK	1	0	15.42	0	0
	846.5	20625	5	QPSK	1	12	15.40	0	0
	846.5	20625	5	QPSK	1	24	15.21	0	0
	846.5	20625	5	QPSK	12	0	15.31	0	0-1
	846.5	20625	5	QPSK	12	6	15.34	0	0-1
	846.5	20625	5	QPSK	12	13	15.30	0	0-1
	846.5	20625	5	QPSK	25	0	15.33	0	0-1
	846.5	20625	5	16-QAM	1	0	15.26	0	0-1
	846.5	20625	5	16-QAM	1	12	15.26	0	0-1
	846.5	20625	5	16-QAM	1	24	15.22	0	0-1
	846.5	20625	5	16-QAM	12	0	15.20	0	0-2
	846.5	20625	5	16-QAM	12	6	15.31	0	0-2
	846.5	20625	5	16-QAM	12	13	15.18	0	0-2
	846.5	20625	5	16-QAM	25	0	15.16	0	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 28 of 97	

Table 8-13
Maximum LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	825.5	20415	3	QPSK	1	0	22.16	0	0
	825.5	20415	3	QPSK	1	7	22.11	0	0
	825.5	20415	3	QPSK	1	14	22.20	0	0
	825.5	20415	3	QPSK	8	0	21.19	1	0-1
	825.5	20415	3	QPSK	8	4	21.16	1	0-1
	825.5	20415	3	QPSK	8	7	21.15	1	0-1
	825.5	20415	3	QPSK	15	0	21.13	1	0-1
	825.5	20415	3	16-QAM	1	0	21.03	1	0-1
	825.5	20415	3	16-QAM	1	7	21.04	1	0-1
	825.5	20415	3	16-QAM	1	14	21.14	1	0-1
	825.5	20415	3	16-QAM	8	0	20.12	2	0-2
	825.5	20415	3	16-QAM	8	4	20.12	2	0-2
	825.5	20415	3	16-QAM	8	7	20.13	2	0-2
	825.5	20415	3	16-QAM	15	0	20.11	2	0-2
Mid	836.5	20525	3	QPSK	1	0	22.08	0	0
	836.5	20525	3	QPSK	1	7	21.98	0	0
	836.5	20525	3	QPSK	1	14	22.02	0	0
	836.5	20525	3	QPSK	8	0	21.05	1	0-1
	836.5	20525	3	QPSK	8	4	20.95	1	0-1
	836.5	20525	3	QPSK	8	7	21.04	1	0-1
	836.5	20525	3	QPSK	15	0	20.93	1	0-1
	836.5	20525	3	16-QAM	1	0	21.09	1	0-1
	836.5	20525	3	16-QAM	1	7	21.03	1	0-1
	836.5	20525	3	16-QAM	1	14	20.95	1	0-1
	836.5	20525	3	16-QAM	8	0	20.03	2	0-2
	836.5	20525	3	16-QAM	8	4	19.87	2	0-2
	836.5	20525	3	16-QAM	8	7	19.91	2	0-2
	836.5	20525	3	16-QAM	15	0	19.90	2	0-2
High	847.5	20635	3	QPSK	1	0	21.96	0	0
	847.5	20635	3	QPSK	1	7	22.07	0	0
	847.5	20635	3	QPSK	1	14	22.18	0	0
	847.5	20635	3	QPSK	8	0	21.00	1	0-1
	847.5	20635	3	QPSK	8	4	21.07	1	0-1
	847.5	20635	3	QPSK	8	7	21.06	1	0-1
	847.5	20635	3	QPSK	15	0	21.03	1	0-1
	847.5	20635	3	16-QAM	1	0	20.89	1	0-1
	847.5	20635	3	16-QAM	1	7	21.04	1	0-1
	847.5	20635	3	16-QAM	1	14	21.09	1	0-1
	847.5	20635	3	16-QAM	8	0	19.97	2	0-2
	847.5	20635	3	16-QAM	8	4	19.97	2	0-2
	847.5	20635	3	16-QAM	8	7	19.99	2	0-2
	847.5	20635	3	16-QAM	15	0	20.08	2	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 29 of 97	

Table 8-14
Reduced LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	825.5	20415	3	QPSK	1	0	15.13	0	0
	825.5	20415	3	QPSK	1	7	15.03	0	0
	825.5	20415	3	QPSK	1	14	15.15	0	0
	825.5	20415	3	QPSK	8	0	15.02	0	0-1
	825.5	20415	3	QPSK	8	4	15.00	0	0-1
	825.5	20415	3	QPSK	8	7	15.04	0	0-1
	825.5	20415	3	QPSK	15	0	15.12	0	0-1
	825.5	20415	3	16-QAM	1	0	15.01	0	0-1
	825.5	20415	3	16-QAM	1	7	15.02	0	0-1
	825.5	20415	3	16-QAM	1	14	15.01	0	0-1
	825.5	20415	3	16-QAM	8	0	15.00	0	0-2
	825.5	20415	3	16-QAM	8	4	15.15	0	0-2
	825.5	20415	3	16-QAM	8	7	15.10	0	0-2
Mid	825.5	20415	3	16-QAM	15	0	15.17	0	0-2
	836.5	20525	3	QPSK	1	0	15.21	0	0
	836.5	20525	3	QPSK	1	7	15.11	0	0
	836.5	20525	3	QPSK	1	14	15.10	0	0
	836.5	20525	3	QPSK	8	0	15.21	0	0-1
	836.5	20525	3	QPSK	8	4	15.27	0	0-1
	836.5	20525	3	QPSK	8	7	15.25	0	0-1
	836.5	20525	3	QPSK	15	0	15.16	0	0-1
	836.5	20525	3	16-QAM	1	0	15.37	0	0-1
	836.5	20525	3	16-QAM	1	7	15.36	0	0-1
	836.5	20525	3	16-QAM	1	14	15.34	0	0-1
	836.5	20525	3	16-QAM	8	0	15.16	0	0-2
	836.5	20525	3	16-QAM	8	4	15.05	0	0-2
	836.5	20525	3	16-QAM	8	7	15.15	0	0-2
High	836.5	20525	3	16-QAM	15	0	15.24	0	0-2
	847.5	20635	3	QPSK	1	0	15.30	0	0
	847.5	20635	3	QPSK	1	7	15.34	0	0
	847.5	20635	3	QPSK	1	14	15.21	0	0
	847.5	20635	3	QPSK	8	0	15.36	0	0-1
	847.5	20635	3	QPSK	8	4	15.26	0	0-1
	847.5	20635	3	QPSK	8	7	15.18	0	0-1
	847.5	20635	3	QPSK	15	0	15.20	0	0-1
	847.5	20635	3	16-QAM	1	0	15.12	0	0-1
	847.5	20635	3	16-QAM	1	7	15.07	0	0-1
	847.5	20635	3	16-QAM	1	14	15.13	0	0-1
	847.5	20635	3	16-QAM	8	0	15.12	0	0-2
	847.5	20635	3	16-QAM	8	4	15.07	0	0-2
	847.5	20635	3	16-QAM	8	7	15.08	0	0-2
	847.5	20635	3	16-QAM	15	0	15.19	0	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 30 of 97	

Table 8-15
Maximum LTE Band 5 (Cell) Conducted Powers - 1.4 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	824.7	20407	1.4	QPSK	1	0	22.21	0	0
	824.7	20407	1.4	QPSK	1	2	22.12	0	0
	824.7	20407	1.4	QPSK	1	5	22.20	0	0
	824.7	20407	1.4	QPSK	3	0	22.14	0	0
	824.7	20407	1.4	QPSK	3	2	22.11	0	0
	824.7	20407	1.4	QPSK	3	3	22.15	0	0
	824.7	20407	1.4	QPSK	6	0	21.16	1	0-1
	824.7	20407	1.4	16-QAM	1	0	21.14	1	0-1
	824.7	20407	1.4	16-QAM	1	2	21.08	1	0-1
	824.7	20407	1.4	16-QAM	1	5	21.11	1	0-1
	824.7	20407	1.4	16-QAM	3	0	21.12	1	0-1
	824.7	20407	1.4	16-QAM	3	2	21.04	1	0-1
	824.7	20407	1.4	16-QAM	3	3	21.18	1	0-1
	824.7	20407	1.4	16-QAM	6	0	20.08	2	0-2
Mid	836.5	20525	1.4	QPSK	1	0	21.93	0	0
	836.5	20525	1.4	QPSK	1	2	21.96	0	0
	836.5	20525	1.4	QPSK	1	5	21.99	0	0
	836.5	20525	1.4	QPSK	3	0	22.00	0	0
	836.5	20525	1.4	QPSK	3	2	21.99	0	0
	836.5	20525	1.4	QPSK	3	3	22.03	0	0
	836.5	20525	1.4	QPSK	6	0	21.00	1	0-1
	836.5	20525	1.4	16-QAM	1	0	20.99	1	0-1
	836.5	20525	1.4	16-QAM	1	2	20.85	1	0-1
	836.5	20525	1.4	16-QAM	1	5	20.88	1	0-1
	836.5	20525	1.4	16-QAM	3	0	20.94	1	0-1
	836.5	20525	1.4	16-QAM	3	2	20.97	1	0-1
	836.5	20525	1.4	16-QAM	3	3	20.99	1	0-1
	836.5	20525	1.4	16-QAM	6	0	19.90	2	0-2
High	848.3	20643	1.4	QPSK	1	0	22.05	0	0
	848.3	20643	1.4	QPSK	1	2	22.10	0	0
	848.3	20643	1.4	QPSK	1	5	22.14	0	0
	848.3	20643	1.4	QPSK	3	0	22.03	0	0
	848.3	20643	1.4	QPSK	3	2	22.09	0	0
	848.3	20643	1.4	QPSK	3	3	22.03	0	0
	848.3	20643	1.4	QPSK	6	0	21.10	1	0-1
	848.3	20643	1.4	16-QAM	1	0	21.14	1	0-1
	848.3	20643	1.4	16-QAM	1	2	21.06	1	0-1
	848.3	20643	1.4	16-QAM	1	5	21.08	1	0-1
	848.3	20643	1.4	16-QAM	3	0	21.05	1	0-1
	848.3	20643	1.4	16-QAM	3	2	21.07	1	0-1
	848.3	20643	1.4	16-QAM	3	3	21.03	1	0-1
	848.3	20643	1.4	16-QAM	6	0	20.00	2	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 31 of 97

Table 8-16
Reduced LTE Band 5 (Cell) Conducted Powers - 1.4 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	824.7	20407	1.4	QPSK	1	0	15.13	0	0
	824.7	20407	1.4	QPSK	1	2	15.10	0	0
	824.7	20407	1.4	QPSK	1	5	15.19	0	0
	824.7	20407	1.4	QPSK	3	0	15.08	0	0
	824.7	20407	1.4	QPSK	3	2	15.16	0	0
	824.7	20407	1.4	QPSK	3	3	15.07	0	0
	824.7	20407	1.4	QPSK	6	0	15.11	0	0-1
	824.7	20407	1.4	16-QAM	1	0	15.09	0	0-1
	824.7	20407	1.4	16-QAM	1	2	15.07	0	0-1
	824.7	20407	1.4	16-QAM	1	5	15.24	0	0-1
	824.7	20407	1.4	16-QAM	3	0	15.09	0	0-1
	824.7	20407	1.4	16-QAM	3	2	15.06	0	0-1
	824.7	20407	1.4	16-QAM	3	3	15.00	0	0-1
	824.7	20407	1.4	16-QAM	6	0	15.03	0	0-2
Mid	836.5	20525	1.4	QPSK	1	0	15.33	0	0
	836.5	20525	1.4	QPSK	1	2	15.28	0	0
	836.5	20525	1.4	QPSK	1	5	15.31	0	0
	836.5	20525	1.4	QPSK	3	0	15.24	0	0
	836.5	20525	1.4	QPSK	3	2	15.23	0	0
	836.5	20525	1.4	QPSK	3	3	15.22	0	0
	836.5	20525	1.4	QPSK	6	0	15.23	0	0-1
	836.5	20525	1.4	16-QAM	1	0	15.07	0	0-1
	836.5	20525	1.4	16-QAM	1	2	15.05	0	0-1
	836.5	20525	1.4	16-QAM	1	5	15.12	0	0-1
	836.5	20525	1.4	16-QAM	3	0	15.25	0	0-1
	836.5	20525	1.4	16-QAM	3	2	15.31	0	0-1
	836.5	20525	1.4	16-QAM	3	3	15.29	0	0-1
	836.5	20525	1.4	16-QAM	6	0	15.19	0	0-2
High	848.3	20643	1.4	QPSK	1	0	15.21	0	0
	848.3	20643	1.4	QPSK	1	2	15.18	0	0
	848.3	20643	1.4	QPSK	1	5	15.23	0	0
	848.3	20643	1.4	QPSK	3	0	15.20	0	0
	848.3	20643	1.4	QPSK	3	2	15.31	0	0
	848.3	20643	1.4	QPSK	3	3	15.28	0	0
	848.3	20643	1.4	QPSK	6	0	15.23	0	0-1
	848.3	20643	1.4	16-QAM	1	0	15.14	0	0-1
	848.3	20643	1.4	16-QAM	1	2	15.04	0	0-1
	848.3	20643	1.4	16-QAM	1	5	15.11	0	0-1
	848.3	20643	1.4	16-QAM	3	0	15.24	0	0-1
	848.3	20643	1.4	16-QAM	3	2	15.21	0	0-1
	848.3	20643	1.4	16-QAM	3	3	15.18	0	0-1
	848.3	20643	1.4	16-QAM	6	0	15.13	0	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 32 of 97

8.3.3

LTE Band 4 (AWS)

Table 8-17
Maximum LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	1732.5	20175	20	QPSK	1	0	22.86	0	0
	1732.5	20175	20	QPSK	1	50	22.90	0	0
	1732.5	20175	20	QPSK	1	99	22.71	0	0
	1732.5	20175	20	QPSK	50	0	21.82	1	0-1
	1732.5	20175	20	QPSK	50	25	21.83	1	0-1
	1732.5	20175	20	QPSK	50	50	21.75	1	0-1
	1732.5	20175	20	QPSK	100	0	21.78	1	0-1
	1732.5	20175	20	16QAM	1	0	21.79	1	0-1
	1732.5	20175	20	16QAM	1	50	21.80	1	0-1
	1732.5	20175	20	16QAM	1	99	21.74	1	0-1
	1732.5	20175	20	16QAM	50	0	20.75	2	0-2
	1732.5	20175	20	16QAM	50	25	20.70	2	0-2
	1732.5	20175	20	16QAM	50	50	20.69	2	0-2
	1732.5	20175	20	16QAM	100	0	20.67	2	0-2

Note: LTE Band 4 at 20 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

Table 8-18
Reduced LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	1732.5	20175	20	QPSK	1	0	14.55	0	0
	1732.5	20175	20	QPSK	1	50	14.66	0	0
	1732.5	20175	20	QPSK	1	99	14.47	0	0
	1732.5	20175	20	QPSK	50	0	14.58	0	0-1
	1732.5	20175	20	QPSK	50	25	14.52	0	0-1
	1732.5	20175	20	QPSK	50	50	14.46	0	0-1
	1732.5	20175	20	QPSK	100	0	14.55	0	0-1
	1732.5	20175	20	16QAM	1	0	14.71	0	0-1
	1732.5	20175	20	16QAM	1	50	14.65	0	0-1
	1732.5	20175	20	16QAM	1	99	14.46	0	0-1
	1732.5	20175	20	16QAM	50	0	14.47	0	0-2
	1732.5	20175	20	16QAM	50	25	14.57	0	0-2
	1732.5	20175	20	16QAM	50	50	14.52	0	0-2
	1732.5	20175	20	16QAM	100	0	14.63	0	0-2

Note: LTE Band 4 at 20 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 33 of 97

Table 8-19
Maximum LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1717.5	20025	15	QPSK	1	0	22.93	0	0
	1717.5	20025	15	QPSK	1	36	22.88	0	0
	1717.5	20025	15	QPSK	1	74	22.93	0	0
	1717.5	20025	15	QPSK	36	0	21.77	1	0-1
	1717.5	20025	15	QPSK	36	18	21.78	1	0-1
	1717.5	20025	15	QPSK	36	37	21.64	1	0-1
	1717.5	20025	15	QPSK	75	0	21.68	1	0-1
	1717.5	20025	15	16QAM	1	0	21.96	1	0-1
	1717.5	20025	15	16QAM	1	36	21.90	1	0-1
	1717.5	20025	15	16QAM	1	74	21.77	1	0-1
	1717.5	20025	15	16QAM	36	0	20.71	2	0-2
	1717.5	20025	15	16QAM	36	18	20.72	2	0-2
Mid	1717.5	20025	15	16QAM	36	37	20.76	2	0-2
	1717.5	20025	15	16QAM	75	0	20.65	2	0-2
	1732.5	20175	15	QPSK	1	0	22.87	0	0
	1732.5	20175	15	QPSK	1	36	22.92	0	0
	1732.5	20175	15	QPSK	1	74	22.87	0	0
	1732.5	20175	15	QPSK	36	0	21.78	1	0-1
	1732.5	20175	15	QPSK	36	18	21.85	1	0-1
	1732.5	20175	15	QPSK	36	37	21.89	1	0-1
	1732.5	20175	15	QPSK	75	0	21.77	1	0-1
	1732.5	20175	15	16QAM	1	0	21.88	1	0-1
	1732.5	20175	15	16QAM	1	36	21.84	1	0-1
	1732.5	20175	15	16QAM	1	74	21.72	1	0-1
High	1732.5	20175	15	16QAM	36	0	20.79	2	0-2
	1732.5	20175	15	16QAM	36	18	20.62	2	0-2
	1732.5	20175	15	16QAM	36	37	20.74	2	0-2
	1732.5	20175	15	16QAM	75	0	20.68	2	0-2
	1747.5	20325	15	QPSK	1	0	22.96	0	0
	1747.5	20325	15	QPSK	1	36	22.90	0	0
	1747.5	20325	15	QPSK	1	74	22.79	0	0
	1747.5	20325	15	QPSK	36	0	21.67	1	0-1
	1747.5	20325	15	QPSK	36	18	21.78	1	0-1
	1747.5	20325	15	QPSK	36	37	21.70	1	0-1
	1747.5	20325	15	QPSK	75	0	21.76	1	0-1
	1747.5	20325	15	16QAM	1	0	21.98	1	0-1
	1747.5	20325	15	16QAM	1	36	21.76	1	0-1
	1747.5	20325	15	16QAM	1	74	21.62	1	0-1
	1747.5	20325	15	16QAM	36	0	20.80	2	0-2
	1747.5	20325	15	16QAM	36	18	20.79	2	0-2
	1747.5	20325	15	16QAM	36	37	20.73	2	0-2
	1747.5	20325	15	16QAM	75	0	20.85	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 34 of 97	

Table 8-20
Reduced LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1717.5	20025	15	QPSK	1	0	14.41	0	0
	1717.5	20025	15	QPSK	1	36	14.54	0	0
	1717.5	20025	15	QPSK	1	74	14.54	0	0
	1717.5	20025	15	QPSK	36	0	14.34	0	0-1
	1717.5	20025	15	QPSK	36	18	14.46	0	0-1
	1717.5	20025	15	QPSK	36	37	14.44	0	0-1
	1717.5	20025	15	QPSK	75	0	14.47	0	0-1
	1717.5	20025	15	16QAM	1	0	14.38	0	0-1
	1717.5	20025	15	16QAM	1	36	14.41	0	0-1
	1717.5	20025	15	16QAM	1	74	14.47	0	0-1
	1717.5	20025	15	16QAM	36	0	14.35	0	0-2
	1717.5	20025	15	16QAM	36	18	14.46	0	0-2
Mid	1717.5	20025	15	16QAM	36	37	14.47	0	0-2
	1717.5	20025	15	16QAM	75	0	14.37	0	0-2
	1732.5	20175	15	QPSK	1	0	14.58	0	0
	1732.5	20175	15	QPSK	1	36	14.57	0	0
	1732.5	20175	15	QPSK	1	74	14.47	0	0
	1732.5	20175	15	QPSK	36	0	14.55	0	0-1
	1732.5	20175	15	QPSK	36	18	14.63	0	0-1
	1732.5	20175	15	QPSK	36	37	14.62	0	0-1
	1732.5	20175	15	QPSK	75	0	14.55	0	0-1
	1732.5	20175	15	16QAM	1	0	14.53	0	0-1
	1732.5	20175	15	16QAM	1	36	14.52	0	0-1
	1732.5	20175	15	16QAM	1	74	14.47	0	0-1
High	1732.5	20175	15	16QAM	36	0	14.59	0	0-2
	1732.5	20175	15	16QAM	36	18	14.41	0	0-2
	1732.5	20175	15	16QAM	36	37	14.59	0	0-2
	1732.5	20175	15	16QAM	75	0	14.51	0	0-2
	1747.5	20325	15	QPSK	1	0	14.64	0	0
	1747.5	20325	15	QPSK	1	36	14.58	0	0
	1747.5	20325	15	QPSK	1	74	14.38	0	0
	1747.5	20325	15	QPSK	36	0	14.57	0	0-1
	1747.5	20325	15	QPSK	36	18	14.59	0	0-1
	1747.5	20325	15	QPSK	36	37	14.46	0	0-1
	1747.5	20325	15	QPSK	75	0	14.54	0	0-1
	1747.5	20325	15	16QAM	1	0	14.75	0	0-1
	1747.5	20325	15	16QAM	1	36	14.48	0	0-1
	1747.5	20325	15	16QAM	1	74	14.42	0	0-1
	1747.5	20325	15	16QAM	36	0	14.67	0	0-2
	1747.5	20325	15	16QAM	36	18	14.58	0	0-2
	1747.5	20325	15	16QAM	36	37	14.46	0	0-2
	1747.5	20325	15	16QAM	75	0	14.55	0	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 35 of 97	

Table 8-21
Maximum LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1715	20000	10	QPSK	1	0	22.83	0	0
	1715	20000	10	QPSK	1	25	22.79	0	0
	1715	20000	10	QPSK	1	49	22.81	0	0
	1715	20000	10	QPSK	25	0	21.78	1	0-1
	1715	20000	10	QPSK	25	12	21.77	1	0-1
	1715	20000	10	QPSK	25	25	21.75	1	0-1
	1715	20000	10	QPSK	50	0	21.67	1	0-1
	1715	20000	10	16QAM	1	0	21.86	1	0-1
	1715	20000	10	16QAM	1	25	21.79	1	0-1
	1715	20000	10	16QAM	1	49	21.80	1	0-1
	1715	20000	10	16QAM	25	0	20.75	2	0-2
	1715	20000	10	16QAM	25	12	20.66	2	0-2
	1715	20000	10	16QAM	25	25	20.81	2	0-2
Mid	1732.5	20175	10	QPSK	1	0	23.00	0	0
	1732.5	20175	10	QPSK	1	25	22.93	0	0
	1732.5	20175	10	QPSK	1	49	22.79	0	0
	1732.5	20175	10	QPSK	25	0	22.00	1	0-1
	1732.5	20175	10	QPSK	25	12	21.97	1	0-1
	1732.5	20175	10	QPSK	25	25	21.96	1	0-1
	1732.5	20175	10	QPSK	50	0	21.94	1	0-1
	1732.5	20175	10	16QAM	1	0	21.97	1	0-1
	1732.5	20175	10	16QAM	1	25	21.93	1	0-1
	1732.5	20175	10	16QAM	1	49	21.92	1	0-1
	1732.5	20175	10	16QAM	25	0	20.97	2	0-2
	1732.5	20175	10	16QAM	25	12	20.85	2	0-2
	1732.5	20175	10	16QAM	25	25	20.82	2	0-2
	1732.5	20175	10	16QAM	50	0	20.70	2	0-2
High	1750	20350	10	QPSK	1	0	22.91	0	0
	1750	20350	10	QPSK	1	25	22.79	0	0
	1750	20350	10	QPSK	1	49	22.77	0	0
	1750	20350	10	QPSK	25	0	21.76	1	0-1
	1750	20350	10	QPSK	25	12	21.71	1	0-1
	1750	20350	10	QPSK	25	25	21.79	1	0-1
	1750	20350	10	QPSK	50	0	21.69	1	0-1
	1750	20350	10	16QAM	1	0	21.93	1	0-1
	1750	20350	10	16QAM	1	25	21.77	1	0-1
	1750	20350	10	16QAM	1	49	21.78	1	0-1
	1750	20350	10	16QAM	25	0	20.79	2	0-2
	1750	20350	10	16QAM	25	12	20.70	2	0-2
	1750	20350	10	16QAM	25	25	20.74	2	0-2
	1750	20350	10	16QAM	50	0	20.63	2	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 36 of 97	

Table 8-22
Reduced LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1715	20000	10	QPSK	1	0	14.42	0	0
	1715	20000	10	QPSK	1	25	14.44	0	0
	1715	20000	10	QPSK	1	49	14.48	0	0
	1715	20000	10	QPSK	25	0	14.38	0	0-1
	1715	20000	10	QPSK	25	12	14.34	0	0-1
	1715	20000	10	QPSK	25	25	14.43	0	0-1
	1715	20000	10	QPSK	50	0	14.48	0	0-1
	1715	20000	10	16QAM	1	0	14.31	0	0-1
	1715	20000	10	16QAM	1	25	14.42	0	0-1
	1715	20000	10	16QAM	1	49	14.45	0	0-1
	1715	20000	10	16QAM	25	0	14.36	0	0-2
	1715	20000	10	16QAM	25	12	14.47	0	0-2
	1715	20000	10	16QAM	25	25	14.51	0	0-2
Mid	1732.5	20175	10	QPSK	1	0	14.56	0	0
	1732.5	20175	10	QPSK	1	25	14.65	0	0
	1732.5	20175	10	QPSK	1	49	14.38	0	0
	1732.5	20175	10	QPSK	25	0	14.47	0	0-1
	1732.5	20175	10	QPSK	25	12	14.54	0	0-1
	1732.5	20175	10	QPSK	25	25	14.63	0	0-1
	1732.5	20175	10	QPSK	50	0	14.54	0	0-1
	1732.5	20175	10	16QAM	1	0	14.65	0	0-1
	1732.5	20175	10	16QAM	1	25	14.67	0	0-1
	1732.5	20175	10	16QAM	1	49	14.60	0	0-1
	1732.5	20175	10	16QAM	25	0	14.54	0	0-2
	1732.5	20175	10	16QAM	25	12	14.46	0	0-2
	1732.5	20175	10	16QAM	25	25	14.54	0	0-2
	1732.5	20175	10	16QAM	50	0	14.52	0	0-2
High	1750	20350	10	QPSK	1	0	14.61	0	0
	1750	20350	10	QPSK	1	25	14.48	0	0
	1750	20350	10	QPSK	1	49	14.42	0	0
	1750	20350	10	QPSK	25	0	14.53	0	0-1
	1750	20350	10	QPSK	25	12	14.37	0	0-1
	1750	20350	10	QPSK	25	25	14.34	0	0-1
	1750	20350	10	QPSK	50	0	14.41	0	0-1
	1750	20350	10	16QAM	1	0	14.55	0	0-1
	1750	20350	10	16QAM	1	25	14.47	0	0-1
	1750	20350	10	16QAM	1	49	14.38	0	0-1
	1750	20350	10	16QAM	25	0	14.47	0	0-2
	1750	20350	10	16QAM	25	12	14.44	0	0-2
	1750	20350	10	16QAM	25	25	14.37	0	0-2
	1750	20350	10	16QAM	50	0	14.38	0	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 37 of 97	

Table 8-23
Maximum LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1712.5	19975	5	QPSK	1	0	22.82	0	0
	1712.5	19975	5	QPSK	1	12	22.81	0	0
	1712.5	19975	5	QPSK	1	24	22.80	0	0
	1712.5	19975	5	QPSK	12	0	21.72	1	0-1
	1712.5	19975	5	QPSK	12	6	21.78	1	0-1
	1712.5	19975	5	QPSK	12	13	21.83	1	0-1
	1712.5	19975	5	QPSK	25	0	21.74	1	0-1
	1712.5	19975	5	16-QAM	1	0	21.85	1	0-1
	1712.5	19975	5	16-QAM	1	12	21.90	1	0-1
	1712.5	19975	5	16-QAM	1	24	21.77	1	0-1
	1712.5	19975	5	16-QAM	12	0	20.73	2	0-2
	1712.5	19975	5	16-QAM	12	6	20.80	2	0-2
Mid	1712.5	19975	5	16-QAM	12	13	20.79	2	0-2
	1712.5	19975	5	16-QAM	25	0	20.71	2	0-2
	1732.5	20175	5	QPSK	1	0	22.89	0	0
	1732.5	20175	5	QPSK	1	12	22.91	0	0
	1732.5	20175	5	QPSK	1	24	22.79	0	0
	1732.5	20175	5	QPSK	12	0	21.96	1	0-1
	1732.5	20175	5	QPSK	12	6	21.97	1	0-1
	1732.5	20175	5	QPSK	12	13	21.91	1	0-1
	1732.5	20175	5	QPSK	25	0	21.83	1	0-1
	1732.5	20175	5	16-QAM	1	0	21.94	1	0-1
	1732.5	20175	5	16-QAM	1	12	21.79	1	0-1
	1732.5	20175	5	16-QAM	1	24	21.81	1	0-1
High	1732.5	20175	5	16-QAM	12	0	20.96	2	0-2
	1732.5	20175	5	16-QAM	12	6	20.95	2	0-2
	1732.5	20175	5	16-QAM	12	13	20.91	2	0-2
	1732.5	20175	5	16-QAM	25	0	20.79	2	0-2
	1752.5	20375	5	QPSK	1	0	22.68	0	0
	1752.5	20375	5	QPSK	1	12	22.78	0	0
	1752.5	20375	5	QPSK	1	24	22.81	0	0
	1752.5	20375	5	QPSK	12	0	21.88	1	0-1
	1752.5	20375	5	QPSK	12	6	21.82	1	0-1
	1752.5	20375	5	QPSK	12	13	21.83	1	0-1
	1752.5	20375	5	QPSK	25	0	21.81	1	0-1
	1752.5	20375	5	16-QAM	1	0	21.88	1	0-1
	1752.5	20375	5	16-QAM	1	12	21.79	1	0-1
	1752.5	20375	5	16-QAM	1	24	21.73	1	0-1
	1752.5	20375	5	16-QAM	12	0	20.88	2	0-2
	1752.5	20375	5	16-QAM	12	6	20.81	2	0-2
	1752.5	20375	5	16-QAM	12	13	20.84	2	0-2
	1752.5	20375	5	16-QAM	25	0	20.79	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 38 of 97	

Table 8-24
Reduced LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1712.5	19975	5	QPSK	1	0	14.38	0	0
	1712.5	19975	5	QPSK	1	12	14.28	0	0
	1712.5	19975	5	QPSK	1	24	14.45	0	0
	1712.5	19975	5	QPSK	12	0	14.36	0	0-1
	1712.5	19975	5	QPSK	12	6	14.32	0	0-1
	1712.5	19975	5	QPSK	12	13	14.45	0	0-1
	1712.5	19975	5	QPSK	25	0	14.32	0	0-1
	1712.5	19975	5	16-QAM	1	0	14.43	0	0-1
	1712.5	19975	5	16-QAM	1	12	14.34	0	0-1
	1712.5	19975	5	16-QAM	1	24	14.43	0	0-1
	1712.5	19975	5	16-QAM	12	0	14.43	0	0-2
	1712.5	19975	5	16-QAM	12	6	14.36	0	0-2
Mid	1712.5	19975	5	16-QAM	12	13	14.37	0	0-2
	1712.5	19975	5	16-QAM	25	0	14.31	0	0-2
	1732.5	20175	5	QPSK	1	0	14.57	0	0
	1732.5	20175	5	QPSK	1	12	14.53	0	0
	1732.5	20175	5	QPSK	1	24	14.68	0	0
	1732.5	20175	5	QPSK	12	0	14.58	0	0-1
	1732.5	20175	5	QPSK	12	6	14.63	0	0-1
	1732.5	20175	5	QPSK	12	13	14.55	0	0-1
	1732.5	20175	5	QPSK	25	0	14.67	0	0-1
	1732.5	20175	5	16-QAM	1	0	14.65	0	0-1
	1732.5	20175	5	16-QAM	1	12	14.62	0	0-1
	1732.5	20175	5	16-QAM	1	24	14.60	0	0-1
High	1732.5	20175	5	16-QAM	12	0	14.73	0	0-2
	1732.5	20175	5	16-QAM	12	6	14.54	0	0-2
	1732.5	20175	5	16-QAM	12	13	14.77	0	0-2
	1732.5	20175	5	16-QAM	25	0	14.46	0	0-2
	1752.5	20375	5	QPSK	1	0	14.49	0	0
	1752.5	20375	5	QPSK	1	12	14.36	0	0
	1752.5	20375	5	QPSK	1	24	14.45	0	0
	1752.5	20375	5	QPSK	12	0	14.37	0	0-1
	1752.5	20375	5	QPSK	12	6	14.46	0	0-1
	1752.5	20375	5	QPSK	12	13	14.44	0	0-1
	1752.5	20375	5	QPSK	25	0	14.35	0	0-1
	1752.5	20375	5	16-QAM	1	0	14.37	0	0-1
	1752.5	20375	5	16-QAM	1	12	14.41	0	0-1
	1752.5	20375	5	16-QAM	1	24	14.52	0	0-1
	1752.5	20375	5	16-QAM	12	0	14.51	0	0-2
	1752.5	20375	5	16-QAM	12	6	14.39	0	0-2
	1752.5	20375	5	16-QAM	12	13	14.57	0	0-2
	1752.5	20375	5	16-QAM	25	0	14.36	0	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 39 of 97	

Table 8-25
Maximum LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1711.5	19965	3	QPSK	1	0	22.82	0	0
	1711.5	19965	3	QPSK	1	7	22.74	0	0
	1711.5	19965	3	QPSK	1	14	22.78	0	0
	1711.5	19965	3	QPSK	8	0	21.79	1	0-1
	1711.5	19965	3	QPSK	8	4	21.75	1	0-1
	1711.5	19965	3	QPSK	8	7	21.78	1	0-1
	1711.5	19965	3	QPSK	15	0	21.72	1	0-1
	1711.5	19965	3	16-QAM	1	0	21.82	1	0-1
	1711.5	19965	3	16-QAM	1	7	21.60	1	0-1
	1711.5	19965	3	16-QAM	1	14	21.65	1	0-1
	1711.5	19965	3	16-QAM	8	0	20.73	2	0-2
	1711.5	19965	3	16-QAM	8	4	20.65	2	0-2
Mid	1711.5	19965	3	16-QAM	8	7	20.64	2	0-2
	1711.5	19965	3	16-QAM	15	0	20.73	2	0-2
	1732.5	20175	3	QPSK	1	0	22.89	0	0
	1732.5	20175	3	QPSK	1	7	22.97	0	0
	1732.5	20175	3	QPSK	1	14	22.87	0	0
	1732.5	20175	3	QPSK	8	0	21.91	1	0-1
	1732.5	20175	3	QPSK	8	4	21.98	1	0-1
	1732.5	20175	3	QPSK	8	7	21.95	1	0-1
	1732.5	20175	3	QPSK	15	0	21.94	1	0-1
	1732.5	20175	3	16-QAM	1	0	21.84	1	0-1
	1732.5	20175	3	16-QAM	1	7	21.78	1	0-1
	1732.5	20175	3	16-QAM	1	14	21.92	1	0-1
High	1732.5	20175	3	16-QAM	8	0	20.66	2	0-2
	1732.5	20175	3	16-QAM	8	4	20.75	2	0-2
	1732.5	20175	3	16-QAM	8	7	20.72	2	0-2
	1732.5	20175	3	16-QAM	15	0	20.78	2	0-2
	1753.5	20385	3	QPSK	1	0	22.54	0	0
	1753.5	20385	3	QPSK	1	7	22.81	0	0
	1753.5	20385	3	QPSK	1	14	22.86	0	0
	1753.5	20385	3	QPSK	8	0	21.86	1	0-1
	1753.5	20385	3	QPSK	8	4	21.83	1	0-1
	1753.5	20385	3	QPSK	8	7	21.79	1	0-1
	1753.5	20385	3	QPSK	15	0	21.85	1	0-1
	1753.5	20385	3	16-QAM	1	0	21.66	1	0-1
	1753.5	20385	3	16-QAM	1	7	21.75	1	0-1
	1753.5	20385	3	16-QAM	1	14	21.63	1	0-1
	1753.5	20385	3	16-QAM	8	0	20.78	2	0-2
	1753.5	20385	3	16-QAM	8	4	20.62	2	0-2
	1753.5	20385	3	16-QAM	8	7	20.71	2	0-2
	1753.5	20385	3	16-QAM	15	0	20.82	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 40 of 97	

Table 8-26
Reduced LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1711.5	19965	3	QPSK	1	0	14.42	0	0
	1711.5	19965	3	QPSK	1	7	14.28	0	0
	1711.5	19965	3	QPSK	1	14	14.36	0	0
	1711.5	19965	3	QPSK	8	0	14.39	0	0-1
	1711.5	19965	3	QPSK	8	4	14.27	0	0-1
	1711.5	19965	3	QPSK	8	7	14.31	0	0-1
	1711.5	19965	3	QPSK	15	0	14.24	0	0-1
	1711.5	19965	3	16-QAM	1	0	14.34	0	0-1
	1711.5	19965	3	16-QAM	1	7	14.30	0	0-1
	1711.5	19965	3	16-QAM	1	14	14.32	0	0-1
	1711.5	19965	3	16-QAM	8	0	14.23	0	0-2
	1711.5	19965	3	16-QAM	8	4	14.20	0	0-2
Mid	1711.5	19965	3	16-QAM	8	7	14.25	0	0-2
	1711.5	19965	3	16-QAM	15	0	14.34	0	0-2
	1732.5	20175	3	QPSK	1	0	14.53	0	0
	1732.5	20175	3	QPSK	1	7	14.64	0	0
	1732.5	20175	3	QPSK	1	14	14.55	0	0
	1732.5	20175	3	QPSK	8	0	14.65	0	0-1
	1732.5	20175	3	QPSK	8	4	14.62	0	0-1
	1732.5	20175	3	QPSK	8	7	14.58	0	0-1
	1732.5	20175	3	QPSK	15	0	14.56	0	0-1
	1732.5	20175	3	16-QAM	1	0	14.54	0	0-1
	1732.5	20175	3	16-QAM	1	7	14.61	0	0-1
	1732.5	20175	3	16-QAM	1	14	14.76	0	0-1
High	1732.5	20175	3	16-QAM	8	0	14.58	0	0-2
	1732.5	20175	3	16-QAM	8	4	14.52	0	0-2
	1732.5	20175	3	16-QAM	8	7	14.65	0	0-2
	1732.5	20175	3	16-QAM	15	0	14.60	0	0-2
	1753.5	20385	3	QPSK	1	0	14.38	0	0
	1753.5	20385	3	QPSK	1	7	14.42	0	0
	1753.5	20385	3	QPSK	1	14	14.43	0	0
	1753.5	20385	3	QPSK	8	0	14.46	0	0-1
	1753.5	20385	3	QPSK	8	4	14.37	0	0-1
	1753.5	20385	3	QPSK	8	7	14.45	0	0-1
	1753.5	20385	3	QPSK	15	0	14.39	0	0-1
	1753.5	20385	3	16-QAM	1	0	14.35	0	0-1
	1753.5	20385	3	16-QAM	1	7	14.41	0	0-1
	1753.5	20385	3	16-QAM	1	14	14.39	0	0-1
	1753.5	20385	3	16-QAM	8	0	14.37	0	0-2
	1753.5	20385	3	16-QAM	8	4	14.45	0	0-2
	1753.5	20385	3	16-QAM	8	7	14.36	0	0-2
	1753.5	20385	3	16-QAM	15	0	14.44	0	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 41 of 97	

Table 8-27
Maximum LTE Band 4 (AWS) Conducted Powers - 1.4 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1710.7	19957	1.4	QPSK	1	0	22.79	0	0
	1710.7	19957	1.4	QPSK	1	2	22.76	0	0
	1710.7	19957	1.4	QPSK	1	5	22.88	0	0
	1710.7	19957	1.4	QPSK	3	0	22.82	0	0
	1710.7	19957	1.4	QPSK	3	2	22.78	0	0
	1710.7	19957	1.4	QPSK	3	3	22.80	0	0
	1710.7	19957	1.4	QPSK	6	0	21.87	1	0-1
	1710.7	19957	1.4	16-QAM	1	0	21.72	1	0-1
	1710.7	19957	1.4	16-QAM	1	2	21.81	1	0-1
	1710.7	19957	1.4	16-QAM	1	5	21.83	1	0-1
	1710.7	19957	1.4	16-QAM	3	0	21.79	1	0-1
	1710.7	19957	1.4	16-QAM	3	2	21.83	1	0-1
	1710.7	19957	1.4	16-QAM	3	3	21.86	1	0-1
Mid	1710.7	19957	1.4	16-QAM	6	0	20.71	2	0-2
	1732.5	20175	1.4	QPSK	1	0	23.00	0	0
	1732.5	20175	1.4	QPSK	1	2	22.93	0	0
	1732.5	20175	1.4	QPSK	1	5	22.98	0	0
	1732.5	20175	1.4	QPSK	3	0	22.80	0	0
	1732.5	20175	1.4	QPSK	3	2	22.91	0	0
	1732.5	20175	1.4	QPSK	3	3	22.83	0	0
	1732.5	20175	1.4	QPSK	6	0	22.00	1	0-1
	1732.5	20175	1.4	16-QAM	1	0	21.88	1	0-1
	1732.5	20175	1.4	16-QAM	1	2	21.93	1	0-1
	1732.5	20175	1.4	16-QAM	1	5	21.89	1	0-1
	1732.5	20175	1.4	16-QAM	3	0	21.88	1	0-1
	1732.5	20175	1.4	16-QAM	3	2	21.86	1	0-1
High	1732.5	20175	1.4	16-QAM	3	3	21.95	1	0-1
	1732.5	20175	1.4	16-QAM	6	0	20.98	2	0-2
	1754.3	20393	1.4	QPSK	1	0	22.83	0	0
	1754.3	20393	1.4	QPSK	1	2	22.82	0	0
	1754.3	20393	1.4	QPSK	1	5	22.78	0	0
	1754.3	20393	1.4	QPSK	3	0	22.76	0	0
	1754.3	20393	1.4	QPSK	3	2	22.75	0	0
	1754.3	20393	1.4	QPSK	3	3	22.80	0	0
	1754.3	20393	1.4	QPSK	6	0	21.83	1	0-1
	1754.3	20393	1.4	16-QAM	1	0	21.73	1	0-1
	1754.3	20393	1.4	16-QAM	1	2	21.68	1	0-1
	1754.3	20393	1.4	16-QAM	1	5	21.73	1	0-1
	1754.3	20393	1.4	16-QAM	3	0	21.66	1	0-1
	1754.3	20393	1.4	16-QAM	3	2	21.72	1	0-1
	1754.3	20393	1.4	16-QAM	3	3	21.85	1	0-1
	1754.3	20393	1.4	16-QAM	6	0	20.70	2	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 42 of 97

Table 8-28
Reduced LTE Band 4 (AWS) Conducted Powers - 1.4 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1710.7	19957	1.4	QPSK	1	0	14.29	0	0
	1710.7	19957	1.4	QPSK	1	2	14.21	0	0
	1710.7	19957	1.4	QPSK	1	5	14.29	0	0
	1710.7	19957	1.4	QPSK	3	0	14.31	0	0
	1710.7	19957	1.4	QPSK	3	2	14.43	0	0
	1710.7	19957	1.4	QPSK	3	3	14.35	0	0
	1710.7	19957	1.4	QPSK	6	0	14.41	0	0-1
	1710.7	19957	1.4	16-QAM	1	0	14.08	0	0-1
	1710.7	19957	1.4	16-QAM	1	2	14.23	0	0-1
	1710.7	19957	1.4	16-QAM	1	5	14.16	0	0-1
	1710.7	19957	1.4	16-QAM	3	0	14.45	0	0-1
	1710.7	19957	1.4	16-QAM	3	2	14.46	0	0-1
	1710.7	19957	1.4	16-QAM	3	3	14.44	0	0-1
Mid	1710.7	19957	1.4	16-QAM	6	0	14.37	0	0-2
	1732.5	20175	1.4	QPSK	1	0	14.72	0	0
	1732.5	20175	1.4	QPSK	1	2	14.55	0	0
	1732.5	20175	1.4	QPSK	1	5	14.76	0	0
	1732.5	20175	1.4	QPSK	3	0	14.56	0	0
	1732.5	20175	1.4	QPSK	3	2	14.64	0	0
	1732.5	20175	1.4	QPSK	3	3	14.58	0	0
	1732.5	20175	1.4	QPSK	6	0	14.62	0	0-1
	1732.5	20175	1.4	16-QAM	1	0	14.64	0	0-1
	1732.5	20175	1.4	16-QAM	1	2	14.82	0	0-1
	1732.5	20175	1.4	16-QAM	1	5	14.66	0	0-1
	1732.5	20175	1.4	16-QAM	3	0	14.61	0	0-1
	1732.5	20175	1.4	16-QAM	3	2	14.49	0	0-1
High	1732.5	20175	1.4	16-QAM	3	3	14.55	0	0-1
	1732.5	20175	1.4	16-QAM	6	0	14.52	0	0-2
	1754.3	20393	1.4	QPSK	1	0	14.53	0	0
	1754.3	20393	1.4	QPSK	1	2	14.45	0	0
	1754.3	20393	1.4	QPSK	1	5	14.53	0	0
	1754.3	20393	1.4	QPSK	3	0	14.44	0	0
	1754.3	20393	1.4	QPSK	3	2	14.45	0	0
	1754.3	20393	1.4	QPSK	3	3	14.38	0	0
	1754.3	20393	1.4	QPSK	6	0	14.52	0	0-1
	1754.3	20393	1.4	16-QAM	1	0	14.64	0	0-1
	1754.3	20393	1.4	16-QAM	1	2	14.57	0	0-1
	1754.3	20393	1.4	16-QAM	1	5	14.65	0	0-1
	1754.3	20393	1.4	16-QAM	3	0	14.42	0	0-1
	1754.3	20393	1.4	16-QAM	3	2	14.37	0	0-1
	1754.3	20393	1.4	16-QAM	3	3	14.39	0	0-1
	1754.3	20393	1.4	16-QAM	6	0	14.40	0	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 43 of 97	

8.3.4

LTE Band 2 (PCS)

Table 8-29
Maximum LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1860	18700	20	QPSK	1	0	23.29	0	0
	1860	18700	20	QPSK	1	50	23.40	0	0
	1860	18700	20	QPSK	1	99	23.33	0	0
	1860	18700	20	QPSK	50	0	22.16	1	0-1
	1860	18700	20	QPSK	50	25	22.21	1	0-1
	1860	18700	20	QPSK	50	50	22.15	1	0-1
	1860	18700	20	QPSK	100	0	22.20	1	0-1
	1860	18700	20	16QAM	1	0	22.03	1	0-1
	1860	18700	20	16QAM	1	50	22.14	1	0-1
	1860	18700	20	16QAM	1	99	22.02	1	0-1
	1860	18700	20	16QAM	50	0	21.14	2	0-2
	1860	18700	20	16QAM	50	25	21.27	2	0-2
	1860	18700	20	16QAM	50	50	21.18	2	0-2
	1860	18700	20	16QAM	100	0	21.23	2	0-2
Mid	1880.0	18900	20	QPSK	1	0	23.26	0	0
	1880.0	18900	20	QPSK	1	50	23.10	0	0
	1880.0	18900	20	QPSK	1	99	23.12	0	0
	1880.0	18900	20	QPSK	50	0	22.05	1	0-1
	1880.0	18900	20	QPSK	50	25	22.03	1	0-1
	1880.0	18900	20	QPSK	50	50	22.07	1	0-1
	1880.0	18900	20	QPSK	100	0	22.01	1	0-1
	1880.0	18900	20	16QAM	1	0	22.21	1	0-1
	1880.0	18900	20	16QAM	1	50	22.15	1	0-1
	1880.0	18900	20	16QAM	1	99	22.08	1	0-1
	1880.0	18900	20	16QAM	50	0	20.99	2	0-2
	1880.0	18900	20	16QAM	50	25	20.95	2	0-2
	1880.0	18900	20	16QAM	50	50	21.03	2	0-2
	1880.0	18900	20	16QAM	100	0	21.06	2	0-2
High	1900	19100	20	QPSK	1	0	23.12	0	0
	1900	19100	20	QPSK	1	50	23.11	0	0
	1900	19100	20	QPSK	1	99	23.32	0	0
	1900	19100	20	QPSK	50	0	21.94	1	0-1
	1900	19100	20	QPSK	50	25	21.91	1	0-1
	1900	19100	20	QPSK	50	50	21.96	1	0-1
	1900	19100	20	QPSK	100	0	21.95	1	0-1
	1900	19100	20	16QAM	1	0	22.14	1	0-1
	1900	19100	20	16QAM	1	50	22.01	1	0-1
	1900	19100	20	16QAM	1	99	22.03	1	0-1
	1900	19100	20	16QAM	50	0	21.00	2	0-2
	1900	19100	20	16QAM	50	25	20.98	2	0-2
	1900	19100	20	16QAM	50	50	20.97	2	0-2
	1900	19100	20	16QAM	100	0	20.93	2	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 44 of 97

Table 8-30
Reduced LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1860	18700	20	QPSK	1	0	14.84	0	0
	1860	18700	20	QPSK	1	50	14.95	0	0
	1860	18700	20	QPSK	1	99	14.80	0	0
	1860	18700	20	QPSK	50	0	14.92	0	0-1
	1860	18700	20	QPSK	50	25	14.88	0	0-1
	1860	18700	20	QPSK	50	50	14.90	0	0-1
	1860	18700	20	QPSK	100	0	14.89	0	0-1
	1860	18700	20	16QAM	1	0	14.75	0	0-1
	1860	18700	20	16QAM	1	50	14.89	0	0-1
	1860	18700	20	16QAM	1	99	14.74	0	0-1
	1860	18700	20	16QAM	50	0	14.90	0	0-2
	1860	18700	20	16QAM	50	25	14.82	0	0-2
	1860	18700	20	16QAM	50	50	14.92	0	0-2
Mid	1860	18700	20	16QAM	100	0	14.94	0	0-2
	1880.0	18900	20	QPSK	1	0	14.94	0	0
	1880.0	18900	20	QPSK	1	50	14.77	0	0
	1880.0	18900	20	QPSK	1	99	14.61	0	0
	1880.0	18900	20	QPSK	50	0	14.81	0	0-1
	1880.0	18900	20	QPSK	50	25	14.65	0	0-1
	1880.0	18900	20	QPSK	50	50	14.61	0	0-1
	1880.0	18900	20	QPSK	100	0	14.71	0	0-1
	1880.0	18900	20	16QAM	1	0	14.84	0	0-1
	1880.0	18900	20	16QAM	1	50	14.79	0	0-1
	1880.0	18900	20	16QAM	1	99	14.59	0	0-1
	1880.0	18900	20	16QAM	50	0	14.81	0	0-2
	1880.0	18900	20	16QAM	50	25	14.74	0	0-2
	1880.0	18900	20	16QAM	50	50	14.59	0	0-2
High	1880.0	18900	20	16QAM	100	0	14.73	0	0-2
	1900	19100	20	QPSK	1	0	14.65	0	0
	1900	19100	20	QPSK	1	50	14.53	0	0
	1900	19100	20	QPSK	1	99	14.58	0	0
	1900	19100	20	QPSK	50	0	14.62	0	0-1
	1900	19100	20	QPSK	50	25	14.54	0	0-1
	1900	19100	20	QPSK	50	50	14.55	0	0-1
	1900	19100	20	QPSK	100	0	14.43	0	0-1
	1900	19100	20	16QAM	1	0	14.72	0	0-1
	1900	19100	20	16QAM	1	50	14.57	0	0-1
	1900	19100	20	16QAM	1	99	14.81	0	0-1
	1900	19100	20	16QAM	50	0	14.52	0	0-2
	1900	19100	20	16QAM	50	25	14.59	0	0-2
	1900	19100	20	16QAM	50	50	14.42	0	0-2
	1900	19100	20	16QAM	100	0	14.56	0	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 45 of 97	

Table 8-31
Maximum LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1857.5	18675	15	QPSK	1	0	23.28	0	0
	1857.5	18675	15	QPSK	1	36	23.39	0	0
	1857.5	18675	15	QPSK	1	74	23.45	0	0
	1857.5	18675	15	QPSK	36	0	22.18	1	0-1
	1857.5	18675	15	QPSK	36	18	22.27	1	0-1
	1857.5	18675	15	QPSK	36	37	22.22	1	0-1
	1857.5	18675	15	QPSK	75	0	22.23	1	0-1
	1857.5	18675	15	16QAM	1	0	22.35	1	0-1
	1857.5	18675	15	16QAM	1	36	22.31	1	0-1
	1857.5	18675	15	16QAM	1	74	22.29	1	0-1
	1857.5	18675	15	16QAM	36	0	21.21	2	0-2
	1857.5	18675	15	16QAM	36	18	21.24	2	0-2
	1857.5	18675	15	16QAM	36	37	21.23	2	0-2
Mid	1857.5	18675	15	16QAM	75	0	21.24	2	0-2
	1880.0	18900	15	QPSK	1	0	23.11	0	0
	1880.0	18900	15	QPSK	1	36	23.16	0	0
	1880.0	18900	15	QPSK	1	74	23.17	0	0
	1880.0	18900	15	QPSK	36	0	22.15	1	0-1
	1880.0	18900	15	QPSK	36	18	22.10	1	0-1
	1880.0	18900	15	QPSK	36	37	22.06	1	0-1
	1880.0	18900	15	QPSK	75	0	21.97	1	0-1
	1880.0	18900	15	16QAM	1	0	22.17	1	0-1
	1880.0	18900	15	16QAM	1	36	22.08	1	0-1
	1880.0	18900	15	16QAM	1	74	22.06	1	0-1
	1880.0	18900	15	16QAM	36	0	21.11	2	0-2
	1880.0	18900	15	16QAM	36	18	21.02	2	0-2
	1880.0	18900	15	16QAM	36	37	21.06	2	0-2
High	1880.0	18900	15	16QAM	75	0	21.04	2	0-2
	1902.5	19125	15	QPSK	1	0	23.15	0	0
	1902.5	19125	15	QPSK	1	36	23.09	0	0
	1902.5	19125	15	QPSK	1	74	23.28	0	0
	1902.5	19125	15	QPSK	36	0	22.07	1	0-1
	1902.5	19125	15	QPSK	36	18	21.97	1	0-1
	1902.5	19125	15	QPSK	36	37	22.06	1	0-1
	1902.5	19125	15	QPSK	75	0	21.96	1	0-1
	1902.5	19125	15	16QAM	1	0	22.21	1	0-1
	1902.5	19125	15	16QAM	1	36	22.02	1	0-1
	1902.5	19125	15	16QAM	1	74	22.25	1	0-1
	1902.5	19125	15	16QAM	36	0	21.00	2	0-2
	1902.5	19125	15	16QAM	36	18	21.04	2	0-2
	1902.5	19125	15	16QAM	36	37	21.09	2	0-2
	1902.5	19125	15	16QAM	75	0	21.06	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 46 of 97	

Table 8-32
Reduced LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1857.5	18675	15	QPSK	1	0	14.88	0	0
	1857.5	18675	15	QPSK	1	36	14.99	0	0
	1857.5	18675	15	QPSK	1	74	14.94	0	0
	1857.5	18675	15	QPSK	36	0	14.83	0	0-1
	1857.5	18675	15	QPSK	36	18	14.89	0	0-1
	1857.5	18675	15	QPSK	36	37	14.86	0	0-1
	1857.5	18675	15	QPSK	75	0	14.97	0	0-1
	1857.5	18675	15	16QAM	1	0	14.77	0	0-1
	1857.5	18675	15	16QAM	1	36	14.78	0	0-1
	1857.5	18675	15	16QAM	1	74	14.96	0	0-1
	1857.5	18675	15	16QAM	36	0	14.73	0	0-2
	1857.5	18675	15	16QAM	36	18	14.85	0	0-2
	1857.5	18675	15	16QAM	36	37	14.85	0	0-2
	1857.5	18675	15	16QAM	75	0	14.92	0	0-2
Mid	1880.0	18900	15	QPSK	1	0	14.91	0	0
	1880.0	18900	15	QPSK	1	36	14.69	0	0
	1880.0	18900	15	QPSK	1	74	14.72	0	0
	1880.0	18900	15	QPSK	36	0	14.88	0	0-1
	1880.0	18900	15	QPSK	36	18	14.75	0	0-1
	1880.0	18900	15	QPSK	36	37	14.61	0	0-1
	1880.0	18900	15	QPSK	75	0	14.76	0	0-1
	1880.0	18900	15	16QAM	1	0	14.83	0	0-1
	1880.0	18900	15	16QAM	1	36	14.67	0	0-1
	1880.0	18900	15	16QAM	1	74	14.58	0	0-1
	1880.0	18900	15	16QAM	36	0	14.69	0	0-2
	1880.0	18900	15	16QAM	36	18	14.74	0	0-2
	1880.0	18900	15	16QAM	36	37	14.66	0	0-2
	1880.0	18900	15	16QAM	75	0	14.67	0	0-2
High	1902.5	19125	15	QPSK	1	0	14.68	0	0
	1902.5	19125	15	QPSK	1	36	14.53	0	0
	1902.5	19125	15	QPSK	1	74	14.69	0	0
	1902.5	19125	15	QPSK	36	0	14.58	0	0-1
	1902.5	19125	15	QPSK	36	18	14.55	0	0-1
	1902.5	19125	15	QPSK	36	37	14.54	0	0-1
	1902.5	19125	15	QPSK	75	0	14.62	0	0-1
	1902.5	19125	15	16QAM	1	0	14.66	0	0-1
	1902.5	19125	15	16QAM	1	36	14.55	0	0-1
	1902.5	19125	15	16QAM	1	74	14.67	0	0-1
	1902.5	19125	15	16QAM	36	0	14.54	0	0-2
	1902.5	19125	15	16QAM	36	18	14.49	0	0-2
	1902.5	19125	15	16QAM	36	37	14.53	0	0-2
	1902.5	19125	15	16QAM	75	0	14.60	0	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 47 of 97	

Table 8-33
Maximum LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1855	18650	10	QPSK	1	0	23.31	0	0
	1855	18650	10	QPSK	1	25	23.37	0	0
	1855	18650	10	QPSK	1	49	23.45	0	0
	1855	18650	10	QPSK	25	0	22.19	1	0-1
	1855	18650	10	QPSK	25	12	22.22	1	0-1
	1855	18650	10	QPSK	25	25	22.27	1	0-1
	1855	18650	10	QPSK	50	0	22.16	1	0-1
	1855	18650	10	16QAM	1	0	22.15	1	0-1
	1855	18650	10	16QAM	1	25	22.32	1	0-1
	1855	18650	10	16QAM	1	49	22.36	1	0-1
	1855	18650	10	16QAM	25	0	21.21	2	0-2
	1855	18650	10	16QAM	25	12	21.17	2	0-2
	1855	18650	10	16QAM	25	25	21.27	2	0-2
Mid	1855	18650	10	16QAM	50	0	21.15	2	0-2
	1880.0	18900	10	QPSK	1	0	23.22	0	0
	1880.0	18900	10	QPSK	1	25	23.07	0	0
	1880.0	18900	10	QPSK	1	49	23.21	0	0
	1880.0	18900	10	QPSK	25	0	22.17	1	0-1
	1880.0	18900	10	QPSK	25	12	22.07	1	0-1
	1880.0	18900	10	QPSK	25	25	22.12	1	0-1
	1880.0	18900	10	QPSK	50	0	22.06	1	0-1
	1880.0	18900	10	16QAM	1	0	22.12	1	0-1
	1880.0	18900	10	16QAM	1	25	22.07	1	0-1
	1880.0	18900	10	16QAM	1	49	22.26	1	0-1
	1880.0	18900	10	16QAM	25	0	21.13	2	0-2
	1880.0	18900	10	16QAM	25	12	21.08	2	0-2
	1880.0	18900	10	16QAM	25	25	20.98	2	0-2
High	1880.0	18900	10	16QAM	50	0	20.97	2	0-2
	1905	19150	10	QPSK	1	0	23.01	0	0
	1905	19150	10	QPSK	1	25	23.06	0	0
	1905	19150	10	QPSK	1	49	23.28	0	0
	1905	19150	10	QPSK	25	0	22.04	1	0-1
	1905	19150	10	QPSK	25	12	22.06	1	0-1
	1905	19150	10	QPSK	25	25	22.03	1	0-1
	1905	19150	10	QPSK	50	0	21.97	1	0-1
	1905	19150	10	16QAM	1	0	22.06	1	0-1
	1905	19150	10	16QAM	1	25	22.07	1	0-1
	1905	19150	10	16QAM	1	49	22.12	1	0-1
	1905	19150	10	16QAM	25	0	21.06	2	0-2
	1905	19150	10	16QAM	25	12	21.06	2	0-2
	1905	19150	10	16QAM	25	25	21.02	2	0-2
	1905	19150	10	16QAM	50	0	21.03	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 48 of 97	

Table 8-34
Reduced LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1855	18650	10	QPSK	1	0	14.72	0	0
	1855	18650	10	QPSK	1	25	14.78	0	0
	1855	18650	10	QPSK	1	49	14.89	0	0
	1855	18650	10	QPSK	25	0	14.79	0	0-1
	1855	18650	10	QPSK	25	12	14.88	0	0-1
	1855	18650	10	QPSK	25	25	14.85	0	0-1
	1855	18650	10	QPSK	50	0	14.81	0	0-1
	1855	18650	10	16QAM	1	0	14.76	0	0-1
	1855	18650	10	16QAM	1	25	14.87	0	0-1
	1855	18650	10	16QAM	1	49	14.91	0	0-1
	1855	18650	10	16QAM	25	0	14.74	0	0-2
	1855	18650	10	16QAM	25	12	14.71	0	0-2
	1855	18650	10	16QAM	25	25	14.89	0	0-2
Mid	1855	18650	10	16QAM	50	0	14.80	0	0-2
	1880.0	18900	10	QPSK	1	0	14.72	0	0
	1880.0	18900	10	QPSK	1	25	14.67	0	0
	1880.0	18900	10	QPSK	1	49	14.76	0	0
	1880.0	18900	10	QPSK	25	0	14.83	0	0-1
	1880.0	18900	10	QPSK	25	12	14.63	0	0-1
	1880.0	18900	10	QPSK	25	25	14.68	0	0-1
	1880.0	18900	10	QPSK	50	0	14.60	0	0-1
	1880.0	18900	10	16QAM	1	0	14.79	0	0-1
	1880.0	18900	10	16QAM	1	25	14.66	0	0-1
	1880.0	18900	10	16QAM	1	49	14.74	0	0-1
	1880.0	18900	10	16QAM	25	0	14.83	0	0-2
	1880.0	18900	10	16QAM	25	12	14.73	0	0-2
	1880.0	18900	10	16QAM	25	25	14.79	0	0-2
High	1880.0	18900	10	16QAM	50	0	14.79	0	0-2
	1905	19150	10	QPSK	1	0	14.62	0	0
	1905	19150	10	QPSK	1	25	14.57	0	0
	1905	19150	10	QPSK	1	49	14.64	0	0
	1905	19150	10	QPSK	25	0	14.57	0	0-1
	1905	19150	10	QPSK	25	12	14.50	0	0-1
	1905	19150	10	QPSK	25	25	14.51	0	0-1
	1905	19150	10	QPSK	50	0	14.52	0	0-1
	1905	19150	10	16QAM	1	0	14.68	0	0-1
	1905	19150	10	16QAM	1	25	14.54	0	0-1
	1905	19150	10	16QAM	1	49	14.77	0	0-1
	1905	19150	10	16QAM	25	0	14.55	0	0-2
	1905	19150	10	16QAM	25	12	14.54	0	0-2
	1905	19150	10	16QAM	25	25	14.50	0	0-2
	1905	19150	10	16QAM	50	0	14.49	0	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 49 of 97	

Table 8-35
Maximum LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1852.5	18625	5	QPSK	1	0	23.11	0	0
	1852.5	18625	5	QPSK	1	12	23.15	0	0
	1852.5	18625	5	QPSK	1	24	23.38	0	0
	1852.5	18625	5	QPSK	12	0	22.23	1	0-1
	1852.5	18625	5	QPSK	12	6	22.22	1	0-1
	1852.5	18625	5	QPSK	12	13	22.20	1	0-1
	1852.5	18625	5	QPSK	25	0	22.20	1	0-1
	1852.5	18625	5	16-QAM	1	0	22.15	1	0-1
	1852.5	18625	5	16-QAM	1	12	22.12	1	0-1
	1852.5	18625	5	16-QAM	1	24	22.26	1	0-1
	1852.5	18625	5	16-QAM	12	0	21.27	2	0-2
	1852.5	18625	5	16-QAM	12	6	21.31	2	0-2
	1852.5	18625	5	16-QAM	12	13	21.29	2	0-2
	1852.5	18625	5	16-QAM	25	0	21.25	2	0-2
Mid	1880.0	18900	5	QPSK	1	0	23.11	0	0
	1880.0	18900	5	QPSK	1	12	23.15	0	0
	1880.0	18900	5	QPSK	1	24	23.25	0	0
	1880.0	18900	5	QPSK	12	0	22.18	1	0-1
	1880.0	18900	5	QPSK	12	6	22.17	1	0-1
	1880.0	18900	5	QPSK	12	13	22.10	1	0-1
	1880.0	18900	5	QPSK	25	0	22.08	1	0-1
	1880.0	18900	5	16-QAM	1	0	22.11	1	0-1
	1880.0	18900	5	16-QAM	1	12	22.05	1	0-1
	1880.0	18900	5	16-QAM	1	24	22.23	1	0-1
	1880.0	18900	5	16-QAM	12	0	21.22	2	0-2
	1880.0	18900	5	16-QAM	12	6	21.17	2	0-2
	1880.0	18900	5	16-QAM	12	13	21.12	2	0-2
	1880.0	18900	5	16-QAM	25	0	21.04	2	0-2
High	1907.5	19175	5	QPSK	1	0	23.13	0	0
	1907.5	19175	5	QPSK	1	12	23.09	0	0
	1907.5	19175	5	QPSK	1	24	23.29	0	0
	1907.5	19175	5	QPSK	12	0	22.08	1	0-1
	1907.5	19175	5	QPSK	12	6	22.04	1	0-1
	1907.5	19175	5	QPSK	12	13	22.15	1	0-1
	1907.5	19175	5	QPSK	25	0	22.04	1	0-1
	1907.5	19175	5	16-QAM	1	0	22.17	1	0-1
	1907.5	19175	5	16-QAM	1	12	22.09	1	0-1
	1907.5	19175	5	16-QAM	1	24	22.19	1	0-1
	1907.5	19175	5	16-QAM	12	0	21.13	2	0-2
	1907.5	19175	5	16-QAM	12	6	21.15	2	0-2
	1907.5	19175	5	16-QAM	12	13	21.18	2	0-2
	1907.5	19175	5	16-QAM	25	0	21.00	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 50 of 97	

Table 8-36
Reduced LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1852.5	18625	5	QPSK	1	0	14.73	0	0
	1852.5	18625	5	QPSK	1	12	14.70	0	0
	1852.5	18625	5	QPSK	1	24	14.87	0	0
	1852.5	18625	5	QPSK	12	0	14.74	0	0-1
	1852.5	18625	5	QPSK	12	6	14.75	0	0-1
	1852.5	18625	5	QPSK	12	13	14.87	0	0-1
	1852.5	18625	5	QPSK	25	0	14.81	0	0-1
	1852.5	18625	5	16-QAM	1	0	14.72	0	0-1
	1852.5	18625	5	16-QAM	1	12	14.82	0	0-1
	1852.5	18625	5	16-QAM	1	24	14.94	0	0-1
	1852.5	18625	5	16-QAM	12	0	14.80	0	0-2
	1852.5	18625	5	16-QAM	12	6	14.83	0	0-2
	1852.5	18625	5	16-QAM	12	13	14.92	0	0-2
	1852.5	18625	5	16-QAM	25	0	14.85	0	0-2
Mid	1880.0	18900	5	QPSK	1	0	14.76	0	0
	1880.0	18900	5	QPSK	1	12	14.69	0	0
	1880.0	18900	5	QPSK	1	24	14.70	0	0
	1880.0	18900	5	QPSK	12	0	14.74	0	0-1
	1880.0	18900	5	QPSK	12	6	14.74	0	0-1
	1880.0	18900	5	QPSK	12	13	14.66	0	0-1
	1880.0	18900	5	QPSK	25	0	14.68	0	0-1
	1880.0	18900	5	16-QAM	1	0	14.74	0	0-1
	1880.0	18900	5	16-QAM	1	12	14.75	0	0-1
	1880.0	18900	5	16-QAM	1	24	14.65	0	0-1
	1880.0	18900	5	16-QAM	12	0	14.84	0	0-2
	1880.0	18900	5	16-QAM	12	6	14.70	0	0-2
	1880.0	18900	5	16-QAM	12	13	14.56	0	0-2
	1880.0	18900	5	16-QAM	25	0	14.69	0	0-2
High	1907.5	19175	5	QPSK	1	0	14.46	0	0
	1907.5	19175	5	QPSK	1	12	14.53	0	0
	1907.5	19175	5	QPSK	1	24	14.61	0	0
	1907.5	19175	5	QPSK	12	0	14.64	0	0-1
	1907.5	19175	5	QPSK	12	6	14.43	0	0-1
	1907.5	19175	5	QPSK	12	13	14.56	0	0-1
	1907.5	19175	5	QPSK	25	0	14.49	0	0-1
	1907.5	19175	5	16-QAM	1	0	14.53	0	0-1
	1907.5	19175	5	16-QAM	1	12	14.59	0	0-1
	1907.5	19175	5	16-QAM	1	24	14.65	0	0-1
	1907.5	19175	5	16-QAM	12	0	14.52	0	0-2
	1907.5	19175	5	16-QAM	12	6	14.60	0	0-2
	1907.5	19175	5	16-QAM	12	13	14.76	0	0-2
	1907.5	19175	5	16-QAM	25	0	14.54	0	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 51 of 97	

Table 8-37
Maximum LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1851.5	18615	3	QPSK	1	0	23.12	0	0
	1851.5	18615	3	QPSK	1	7	23.13	0	0
	1851.5	18615	3	QPSK	1	14	23.26	0	0
	1851.5	18615	3	QPSK	8	0	22.25	1	0-1
	1851.5	18615	3	QPSK	8	4	22.24	1	0-1
	1851.5	18615	3	QPSK	8	7	22.18	1	0-1
	1851.5	18615	3	QPSK	15	0	22.22	1	0-1
	1851.5	18615	3	16-QAM	1	0	22.16	1	0-1
	1851.5	18615	3	16-QAM	1	7	22.23	1	0-1
	1851.5	18615	3	16-QAM	1	14	22.15	1	0-1
	1851.5	18615	3	16-QAM	8	0	21.17	2	0-2
	1851.5	18615	3	16-QAM	8	4	21.23	2	0-2
	1851.5	18615	3	16-QAM	8	7	21.17	2	0-2
	1851.5	18615	3	16-QAM	15	0	21.20	2	0-2
Mid	1880.0	18900	3	QPSK	1	0	23.20	0	0
	1880.0	18900	3	QPSK	1	7	23.16	0	0
	1880.0	18900	3	QPSK	1	14	23.25	0	0
	1880.0	18900	3	QPSK	8	0	22.17	1	0-1
	1880.0	18900	3	QPSK	8	4	22.13	1	0-1
	1880.0	18900	3	QPSK	8	7	22.15	1	0-1
	1880.0	18900	3	QPSK	15	0	22.15	1	0-1
	1880.0	18900	3	16-QAM	1	0	22.19	1	0-1
	1880.0	18900	3	16-QAM	1	7	22.13	1	0-1
	1880.0	18900	3	16-QAM	1	14	22.23	1	0-1
	1880.0	18900	3	16-QAM	8	0	21.08	2	0-2
	1880.0	18900	3	16-QAM	8	4	21.06	2	0-2
	1880.0	18900	3	16-QAM	8	7	21.02	2	0-2
	1880.0	18900	3	16-QAM	15	0	21.10	2	0-2
High	1908.5	19185	3	QPSK	1	0	23.05	0	0
	1908.5	19185	3	QPSK	1	7	23.16	0	0
	1908.5	19185	3	QPSK	1	14	23.31	0	0
	1908.5	19185	3	QPSK	8	0	22.14	1	0-1
	1908.5	19185	3	QPSK	8	4	22.20	1	0-1
	1908.5	19185	3	QPSK	8	7	22.25	1	0-1
	1908.5	19185	3	QPSK	15	0	22.08	1	0-1
	1908.5	19185	3	16-QAM	1	0	22.03	1	0-1
	1908.5	19185	3	16-QAM	1	7	22.13	1	0-1
	1908.5	19185	3	16-QAM	1	14	22.12	1	0-1
	1908.5	19185	3	16-QAM	8	0	21.04	2	0-2
	1908.5	19185	3	16-QAM	8	4	21.11	2	0-2
	1908.5	19185	3	16-QAM	8	7	21.20	2	0-2
	1908.5	19185	3	16-QAM	15	0	21.14	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 52 of 97	

Table 8-38
Reduced LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1851.5	18615	3	QPSK	1	0	14.73	0	0
	1851.5	18615	3	QPSK	1	7	14.74	0	0
	1851.5	18615	3	QPSK	1	14	14.67	0	0
	1851.5	18615	3	QPSK	8	0	14.70	0	0-1
	1851.5	18615	3	QPSK	8	4	14.77	0	0-1
	1851.5	18615	3	QPSK	8	7	14.62	0	0-1
	1851.5	18615	3	QPSK	15	0	14.72	0	0-1
	1851.5	18615	3	16-QAM	1	0	14.91	0	0-1
	1851.5	18615	3	16-QAM	1	7	14.87	0	0-1
	1851.5	18615	3	16-QAM	1	14	14.77	0	0-1
	1851.5	18615	3	16-QAM	8	0	14.64	0	0-2
	1851.5	18615	3	16-QAM	8	4	14.68	0	0-2
	1851.5	18615	3	16-QAM	8	7	14.85	0	0-2
	1851.5	18615	3	16-QAM	15	0	14.79	0	0-2
Mid	1880.0	18900	3	QPSK	1	0	14.78	0	0
	1880.0	18900	3	QPSK	1	7	14.58	0	0
	1880.0	18900	3	QPSK	1	14	14.75	0	0
	1880.0	18900	3	QPSK	8	0	14.73	0	0-1
	1880.0	18900	3	QPSK	8	4	14.74	0	0-1
	1880.0	18900	3	QPSK	8	7	14.68	0	0-1
	1880.0	18900	3	QPSK	15	0	14.76	0	0-1
	1880.0	18900	3	16-QAM	1	0	14.84	0	0-1
	1880.0	18900	3	16-QAM	1	7	14.69	0	0-1
	1880.0	18900	3	16-QAM	1	14	14.55	0	0-1
	1880.0	18900	3	16-QAM	8	0	14.73	0	0-2
	1880.0	18900	3	16-QAM	8	4	14.62	0	0-2
	1880.0	18900	3	16-QAM	8	7	14.75	0	0-2
	1880.0	18900	3	16-QAM	15	0	14.69	0	0-2
High	1908.5	19185	3	QPSK	1	0	14.55	0	0
	1908.5	19185	3	QPSK	1	7	14.59	0	0
	1908.5	19185	3	QPSK	1	14	14.82	0	0
	1908.5	19185	3	QPSK	8	0	14.51	0	0-1
	1908.5	19185	3	QPSK	8	4	14.58	0	0-1
	1908.5	19185	3	QPSK	8	7	14.62	0	0-1
	1908.5	19185	3	QPSK	15	0	14.54	0	0-1
	1908.5	19185	3	16-QAM	1	0	14.49	0	0-1
	1908.5	19185	3	16-QAM	1	7	14.61	0	0-1
	1908.5	19185	3	16-QAM	1	14	14.71	0	0-1
	1908.5	19185	3	16-QAM	8	0	14.52	0	0-2
	1908.5	19185	3	16-QAM	8	4	14.46	0	0-2
	1908.5	19185	3	16-QAM	8	7	14.56	0	0-2
	1908.5	19185	3	16-QAM	15	0	14.61	0	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 53 of 97	

Table 8-39
Maximum LTE Band 2 (PCS) Conducted Powers - 1.4 MHz Bandwidth
Representing Capacitive Sensor Not Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1850.7	18607	1.4	QPSK	1	0	23.27	0	0
	1850.7	18607	1.4	QPSK	1	2	23.25	0	0
	1850.7	18607	1.4	QPSK	1	5	23.24	0	0
	1850.7	18607	1.4	QPSK	3	0	23.19	0	0
	1850.7	18607	1.4	QPSK	3	2	23.19	0	0
	1850.7	18607	1.4	QPSK	3	3	23.18	0	0
	1850.7	18607	1.4	QPSK	6	0	22.25	1	0-1
	1850.7	18607	1.4	16-QAM	1	0	22.09	1	0-1
	1850.7	18607	1.4	16-QAM	1	2	22.23	1	0-1
	1850.7	18607	1.4	16-QAM	1	5	22.07	1	0-1
	1850.7	18607	1.4	16-QAM	3	0	22.22	1	0-1
	1850.7	18607	1.4	16-QAM	3	2	22.18	1	0-1
	1850.7	18607	1.4	16-QAM	3	3	22.20	1	0-1
	1850.7	18607	1.4	16-QAM	6	0	21.21	2	0-2
Mid	1880.0	18900	1.4	QPSK	1	0	23.14	0	0
	1880.0	18900	1.4	QPSK	1	2	23.05	0	0
	1880.0	18900	1.4	QPSK	1	5	23.06	0	0
	1880.0	18900	1.4	QPSK	3	0	23.12	0	0
	1880.0	18900	1.4	QPSK	3	2	23.17	0	0
	1880.0	18900	1.4	QPSK	3	3	23.07	0	0
	1880.0	18900	1.4	QPSK	6	0	22.16	1	0-1
	1880.0	18900	1.4	16-QAM	1	0	22.11	1	0-1
	1880.0	18900	1.4	16-QAM	1	2	22.12	1	0-1
	1880.0	18900	1.4	16-QAM	1	5	22.06	1	0-1
	1880.0	18900	1.4	16-QAM	3	0	22.14	1	0-1
	1880.0	18900	1.4	16-QAM	3	2	22.13	1	0-1
	1880.0	18900	1.4	16-QAM	3	3	22.10	1	0-1
	1880.0	18900	1.4	16-QAM	6	0	21.12	2	0-2
High	1909.3	19193	1.4	QPSK	1	0	23.21	0	0
	1909.3	19193	1.4	QPSK	1	2	23.26	0	0
	1909.3	19193	1.4	QPSK	1	5	23.26	0	0
	1909.3	19193	1.4	QPSK	3	0	23.17	0	0
	1909.3	19193	1.4	QPSK	3	2	23.19	0	0
	1909.3	19193	1.4	QPSK	3	3	23.18	0	0
	1909.3	19193	1.4	QPSK	6	0	22.25	1	0-1
	1909.3	19193	1.4	16-QAM	1	0	22.04	1	0-1
	1909.3	19193	1.4	16-QAM	1	2	22.10	1	0-1
	1909.3	19193	1.4	16-QAM	1	5	22.06	1	0-1
	1909.3	19193	1.4	16-QAM	3	0	22.12	1	0-1
	1909.3	19193	1.4	16-QAM	3	2	22.15	1	0-1
	1909.3	19193	1.4	16-QAM	3	3	22.18	1	0-1
	1909.3	19193	1.4	16-QAM	6	0	21.20	2	0-2

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 54 of 97	

Table 8-40
Reduced LTE Band 2 (PCS) Conducted Powers - 1.4 MHz Bandwidth
Representing Capacitive Sensor Active

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1850.7	18607	1.4	QPSK	1	0	14.88	0	0
	1850.7	18607	1.4	QPSK	1	2	14.91	0	0
	1850.7	18607	1.4	QPSK	1	5	14.77	0	0
	1850.7	18607	1.4	QPSK	3	0	14.72	0	0
	1850.7	18607	1.4	QPSK	3	2	14.89	0	0
	1850.7	18607	1.4	QPSK	3	3	14.69	0	0
	1850.7	18607	1.4	QPSK	6	0	14.74	0	0-1
	1850.7	18607	1.4	16-QAM	1	0	14.82	0	0-1
	1850.7	18607	1.4	16-QAM	1	2	14.83	0	0-1
	1850.7	18607	1.4	16-QAM	1	5	14.78	0	0-1
	1850.7	18607	1.4	16-QAM	3	0	14.78	0	0-1
	1850.7	18607	1.4	16-QAM	3	2	14.76	0	0-1
	1850.7	18607	1.4	16-QAM	3	3	14.83	0	0-1
	1850.7	18607	1.4	16-QAM	6	0	14.80	0	0-2
Mid	1880.0	18900	1.4	QPSK	1	0	14.65	0	0
	1880.0	18900	1.4	QPSK	1	2	14.74	0	0
	1880.0	18900	1.4	QPSK	1	5	14.70	0	0
	1880.0	18900	1.4	QPSK	3	0	14.68	0	0
	1880.0	18900	1.4	QPSK	3	2	14.71	0	0
	1880.0	18900	1.4	QPSK	3	3	14.69	0	0
	1880.0	18900	1.4	QPSK	6	0	14.84	0	0-1
	1880.0	18900	1.4	16-QAM	1	0	14.92	0	0-1
	1880.0	18900	1.4	16-QAM	1	2	14.73	0	0-1
	1880.0	18900	1.4	16-QAM	1	5	14.75	0	0-1
	1880.0	18900	1.4	16-QAM	3	0	14.79	0	0-1
	1880.0	18900	1.4	16-QAM	3	2	14.69	0	0-1
	1880.0	18900	1.4	16-QAM	3	3	14.64	0	0-1
	1880.0	18900	1.4	16-QAM	6	0	14.63	0	0-2
High	1909.3	19193	1.4	QPSK	1	0	14.73	0	0
	1909.3	19193	1.4	QPSK	1	2	14.65	0	0
	1909.3	19193	1.4	QPSK	1	5	14.70	0	0
	1909.3	19193	1.4	QPSK	3	0	14.75	0	0
	1909.3	19193	1.4	QPSK	3	2	14.69	0	0
	1909.3	19193	1.4	QPSK	3	3	14.99	0	0
	1909.3	19193	1.4	QPSK	6	0	14.70	0	0-1
	1909.3	19193	1.4	16-QAM	1	0	14.66	0	0-1
	1909.3	19193	1.4	16-QAM	1	2	14.65	0	0-1
	1909.3	19193	1.4	16-QAM	1	5	14.71	0	0-1
	1909.3	19193	1.4	16-QAM	3	0	14.62	0	0-1
	1909.3	19193	1.4	16-QAM	3	2	14.61	0	0-1
	1909.3	19193	1.4	16-QAM	3	3	14.79	0	0-1
	1909.3	19193	1.4	16-QAM	6	0	14.71	0	0-2

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 55 of 97	

8.4 Antenna 1 WLAN Conducted Powers

Table 8-41
IEEE 802.11b Average RF Power Antenna 1

Mode	Freq [MHz]	Channel	802.11b Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1	13.66	13.82	13.75	13.64
802.11b	2437	6	13.24	13.40	13.29	13.20
802.11b	2462	11	13.44	13.62	13.51	13.47

Table 8-42
IEEE 802.11g Average RF Power Antenna 1

Mode	Freq [MHz]	Channel	802.11g Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	12.40	12.41	12.40	12.21	12.09	11.92	12.23	11.64
802.11g	2437	6	12.41	12.46	12.38	12.21	12.03	11.85	12.26	11.64
802.11g	2462	11	12.46	12.49	12.41	12.28	12.13	11.93	12.26	11.72

Table 8-43
IEEE 802.11n Average RF Power Antenna 1

Mode	Freq [MHz]	Channel	802.11n (2.4GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	9.47	9.37	9.53	9.25	9.38	9.24	9.19	9.34
802.11n	2437	6	9.52	9.46	9.60	9.25	9.41	9.23	9.19	9.41
802.11n	2462	11	9.55	9.48	9.65	9.35	9.43	9.26	9.36	9.46

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 56 of 97

Table 8-44
IEEE 802.11a Average RF Power Antenna 1

Mode	Freq [MHz]	Channel	802.11a Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11a	5180	36*	10.23	10.10	10.16	10.18	10.22	9.87	9.89	9.99
802.11a	5200	40	10.17	10.08	10.09	10.16	10.20	9.82	9.87	9.94
802.11a	5220	44	10.16	10.07	10.16	10.18	10.16	9.74	9.81	9.96
802.11a	5240	48*	10.10	10.04	9.96	10.06	10.10	9.78	9.79	9.85
802.11a	5260	52*	10.19	10.05	10.16	10.14	10.22	9.80	9.88	10.02
802.11a	5280	56	10.15	10.01	10.08	10.06	10.19	9.85	9.79	9.98
802.11a	5300	60	10.20	10.10	10.13	10.18	10.18	9.79	9.82	10.00
802.11a	5320	64*	10.18	10.06	10.19	10.13	10.27	9.79	9.84	10.03
802.11a	5500	100	10.27	10.29	10.25	10.22	10.15	10.02	9.97	10.17
802.11a	5520	104*	10.20	10.24	10.20	10.18	10.09	9.99	9.90	10.15
802.11a	5540	108	10.25	10.17	10.21	10.20	10.06	10.00	10.01	10.17
802.11a	5560	112	10.29	10.39	10.29	10.23	10.17	10.00	9.96	10.18
802.11a	5580	116*	10.22	10.28	10.17	10.08	10.14	9.96	9.88	10.16
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	9.98	10.04	9.92	9.95	9.86	9.64	9.67	9.86
802.11a	5680	136*	9.97	9.96	9.95	9.90	9.85	9.64	9.70	9.89
802.11a	5700	140	9.93	9.97	9.91	9.85	9.79	9.65	9.65	9.79
802.11a	5745	149*	9.87	9.87	9.85	9.89	9.74	9.69	9.58	9.83
802.11a	5765	153	9.71	9.75	9.69	9.76	9.55	9.50	9.42	9.60
802.11a	5785	157*	9.72	9.69	9.68	9.72	9.59	9.53	9.39	9.65
802.11a	5805	161*	9.45	9.47	9.38	9.51	9.33	9.35	9.09	9.40
802.11a	5825	165	9.30	9.31	9.35	9.31	9.19	9.14	9.01	9.32

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

(*) – indicates default channels per KDB Publication 248227 D01v01r02. When the adjacent channels are higher in power then the default channels, these “required channels” are considered for SAR testing instead of the default channels.

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 57 of 97	

Table 8-45
IEEE 802.11n Average RF Power – 20 MHz Bandwidth Antenna 1

Mode	Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	5180	36	9.98	9.87	9.89	9.91	9.97	9.59	9.70	9.74
802.11n	5200	40	10.13	10.00	10.04	10.14	10.06	9.70	9.85	9.89
802.11n	5220	44	9.91	9.81	9.84	9.91	9.91	9.51	9.63	9.65
802.11n	5240	48	10.10	10.02	9.94	10.02	10.09	9.76	9.75	9.91
802.11n	5260	52	10.10	9.99	10.06	10.03	10.11	9.69	9.82	9.92
802.11n	5280	56	10.09	9.93	10.07	10.11	10.16	9.68	9.87	9.94
802.11n	5300	60	10.13	10.00	10.10	10.04	10.12	9.72	9.89	9.96
802.11n	5320	64	10.10	10.04	10.11	9.99	10.17	9.67	9.78	9.85
802.11n	5500	100	10.31	10.35	10.24	10.22	10.25	10.09	10.00	10.19
802.11n	5520	104	10.20	10.21	10.13	10.12	10.08	10.01	9.91	10.03
802.11n	5540	108	10.27	10.32	10.19	10.25	10.21	10.14	9.93	10.15
802.11n	5560	112	10.24	10.31	10.13	10.14	10.15	9.94	9.99	10.16
802.11n	5580	116	10.18	10.22	10.12	10.10	10.07	10.01	9.84	10.05
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	9.99	10.05	9.97	9.82	9.95	9.79	9.69	9.83
802.11n	5680	136	9.78	9.81	9.71	9.73	9.68	9.60	9.53	9.64
802.11n	5700	140	9.90	9.95	9.82	9.84	9.83	9.73	9.57	9.76
802.11n	5745	149	9.66	9.65	9.63	9.64	9.51	9.45	9.39	9.56
802.11n	5765	153	9.56	9.62	9.47	9.48	9.49	9.36	9.24	9.45
802.11n	5785	157	9.50	9.41	9.49	9.44	9.35	9.31	9.18	9.48
802.11n	5805	161	9.32	9.31	9.27	9.27	9.19	9.20	9.11	9.25
802.11n	5825	165	9.31	9.36	9.25	9.28	9.14	9.15	9.06	9.23

Table 8-46
IEEE 802.11n Average RF Power – 40 MHz Bandwidth Antenna 1


Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13.5	27	40.5	54	81	108	121.5	135
802.11n	5190	38	10.36	10.40	10.38	10.45	10.35	10.38	10.37	10.14
802.11n	5230	46	10.15	10.25	10.20	10.31	10.11	10.13	10.20	9.92
802.11n	5270	54	10.26	10.19	10.18	10.19	10.16	10.20	10.20	9.96
802.11n	5310	62	10.05	9.95	9.95	9.95	9.95	10.00	9.96	9.76
802.11n	5510	102	10.05	9.98	9.89	10.03	9.93	9.99	10.06	9.76
802.11n	5550	110	10.02	9.95	9.94	10.04	9.93	10.01	10.00	9.75
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	10.00	9.97	9.86	9.90	9.97	9.87	10.03	9.65
802.11n	5755	151	9.27	9.18	9.15	9.17	9.10	9.14	9.08	9.17
802.11n	5795	159	9.12	9.13	9.06	9.01	8.96	8.99	8.90	9.06

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 58 of 97	

Table 8-47
IEEE 802.11ac Average RF Power – 80 MHz Bandwidth Antenna 1

Mode	Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
			Data Rate [Mbps]									
			29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5210	42	9.92	9.88	9.94	9.95	10.02	9.96	10.06	10.01	9.91	9.89
802.11ac	5290	58	9.97	9.93	9.99	10.00	10.07	10.01	10.11	10.06	9.96	9.94
802.11ac	5530	106	9.92	9.88	9.94	9.95	10.02	9.96	10.06	10.01	9.91	9.89
802.11ac	5775	155	9.88	9.84	9.90	9.91	9.98	9.92	10.02	9.97	9.87	9.85

Power Measurements for signals < 50 MHz Bandwidth

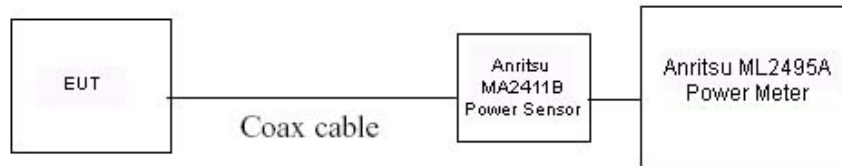

Power Measurements for signals > 50 MHz Bandwidth

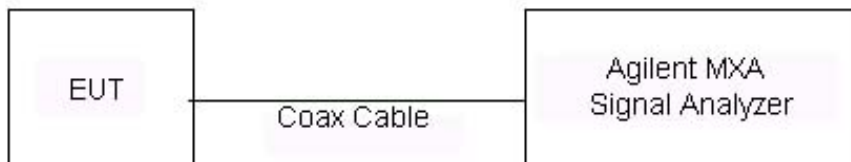


Figure 8-3
Power Measurement Setup

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- Full SAR tests for all IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 59 of 97	

8.5 Antenna 2 WLAN Conducted Powers

Table 8-48
IEEE 802.11g Average RF Power Antenna 2

Mode	Freq [MHz]	Channel	802.11g Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	11.64	11.42	11.53	11.50	11.48	11.17	11.34	11.23
802.11g	2437	6	11.93	11.79	11.90	11.82	11.87	11.46	11.75	11.62
802.11g	2462	11	11.62	11.41	11.54	11.45	11.44	11.17	11.27	11.25

Table 8-49
IEEE 802.11n Average RF Power Antenna 2

Mode	Freq [MHz]	Channel	802.11n (2.4GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	9.72	9.68	9.65	9.79	9.77	9.72	9.80	9.74
802.11n	2437	6	10.33	10.32	10.34	10.43	10.29	10.36	10.48	10.28
802.11n	2462	11	10.26	10.18	10.12	10.31	10.26	10.24	10.36	10.28

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 60 of 97

Table 8-50
IEEE 802.11a Average RF Power Antenna 2

Mode	Freq [MHz]	Channel	802.11a Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11a	5180	36*	9.83	9.71	9.87	9.51	9.54	9.62	9.82	9.67
802.11a	5200	40	9.90	9.87	9.95	9.56	9.63	9.70	9.88	9.69
802.11a	5220	44	9.80	9.66	9.87	9.52	9.47	9.61	9.83	9.63
802.11a	5240	48*	10.03	9.92	10.13	9.74	9.67	9.79	9.97	9.84
802.11a	5260	52*	10.20	10.04	10.15	9.92	9.97	10.02	10.20	10.08
802.11a	5280	56	10.25	10.06	10.25	10.01	10.06	10.04	10.16	10.06
802.11a	5300	60	10.22	10.09	10.19	9.96	9.92	9.96	10.23	10.11
802.11a	5320	64*	10.23	10.03	10.18	9.98	10.01	10.02	10.18	10.11
802.11a	5500	100	9.64	9.48	9.59	9.37	9.32	9.46	9.58	9.48
802.11a	5520	104*	9.50	9.36	9.53	9.20	9.20	9.33	9.44	9.36
802.11a	5540	108	9.45	9.26	9.40	9.22	9.13	9.31	9.34	9.26
802.11a	5560	112	9.44	9.33	9.46	9.20	9.09	9.24	9.42	9.30
802.11a	5580	116*	9.55	9.42	9.53	9.33	9.17	9.37	9.43	9.43
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	10.28	10.10	10.15	10.01	9.89	10.03	10.24	10.09
802.11a	5680	136*	10.22	10.07	10.12	9.92	9.79	10.09	10.15	10.14
802.11a	5700	140	9.86	9.67	9.78	9.50	9.46	9.66	9.77	9.67
802.11a	5745	149*	9.72	9.60	9.64	9.52	9.74	9.57	9.78	9.60
802.11a	5765	153	9.68	9.49	9.57	9.55	9.66	9.51	9.73	9.65
802.11a	5785	157*	10.05	9.95	10.05	9.86	9.99	9.89	10.13	9.99
802.11a	5805	161*	9.95	9.78	9.89	9.70	10.01	9.76	10.11	9.83
802.11a	5825	165	9.68	9.56	9.57	9.49	9.69	9.51	9.78	9.61

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

(*) – indicates default channels per KDB Publication 248227 D01v01r02. When the adjacent channels are higher in power then the default channels, these “required channels” are considered for SAR testing instead of the default channels.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 61 of 97	

Table 8-51
IEEE 802.11n Average RF Power – 20 MHz Bandwidth Antenna 2

Mode	Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	5180	36	9.56	9.39	9.66	9.26	9.23	9.32	9.54	9.42
802.11n	5200	40	9.58	9.40	9.67	9.35	9.21	9.31	9.54	9.40
802.11n	5220	44	9.74	9.54	9.85	9.38	9.47	9.47	9.75	9.56
802.11n	5240	48	9.64	9.47	9.78	9.34	9.32	9.40	9.64	9.47
802.11n	5260	52	9.99	9.82	10.00	9.66	9.78	9.83	9.94	9.83
802.11n	5280	56	10.10	9.99	10.09	9.81	9.84	9.95	10.12	9.89
802.11n	5300	60	10.20	10.05	10.20	9.94	10.03	10.01	10.20	10.04
802.11n	5320	64	10.26	10.10	10.24	9.94	9.97	10.11	10.14	10.12
802.11n	5500	100	9.48	9.26	9.44	9.22	9.14	9.26	9.43	9.27
802.11n	5520	104	9.35	9.20	9.24	9.18	9.03	9.13	9.27	9.14
802.11n	5540	108	9.23	8.99	9.22	9.03	8.87	9.00	9.13	9.07
802.11n	5560	112	9.30	9.06	9.29	9.01	8.94	9.12	9.17	9.16
802.11n	5580	116	9.26	9.13	9.23	8.93	8.95	9.02	9.22	9.00
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	10.08	9.81	10.01	9.79	9.77	9.80	10.03	9.82
802.11n	5680	136	10.10	9.86	10.07	9.82	9.76	9.90	10.10	9.80
802.11n	5700	140	9.79	9.63	9.73	9.59	9.41	9.54	9.72	9.62
802.11n	5745	149	9.63	9.61	9.62	9.59	9.49	9.68	9.55	9.72
802.11n	5765	153	9.42	9.45	9.50	9.37	9.35	9.52	9.34	9.51
802.11n	5785	157	10.00	10.01	10.02	9.96	9.87	10.08	9.86	10.13
802.11n	5805	161	9.67	9.68	9.63	9.68	9.48	9.76	9.60	9.80
802.11n	5825	165	9.53	9.45	9.52	9.50	9.41	9.63	9.42	9.58

Table 8-52
IEEE 802.11n Average RF Power – 40 MHz Bandwidth Antenna 2

Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13.5	27	40.5	54	81	108	121.5	135
802.11n	5190	38	10.06	9.99	9.88	9.95	10.02	9.75	9.78	9.84
802.11n	5230	46	10.17	10.10	9.97	10.04	10.09	9.88	9.90	9.98
802.11n	5270	54	10.40	10.35	10.22	10.33	10.41	10.08	10.07	10.24
802.11n	5310	62	10.38	10.32	10.19	10.34	10.36	10.08	10.05	10.20
802.11n	5510	102	9.80	9.75	9.62	9.73	9.81	9.48	9.47	9.64
802.11n	5550	110	9.67	9.63	9.55	9.62	9.67	9.36	9.29	9.48
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	10.32	10.36	10.16	10.24	10.39	10.00	9.97	10.15
802.11n	5755	151	9.77	9.85	9.79	9.70	9.74	9.67	9.93	9.73
802.11n	5795	159	9.31	9.42	9.30	9.23	9.28	9.19	9.39	9.24

FCC ID: A3LSMP905M



SAR EVALUATION REPORT



Reviewed by:
Quality Manager

Document S/N:
0Y1312182448.A3L


Test Dates:
12/02/13 - 01/20/14

DUT Type:
Portable Tablet

Page 62 of 97

Table 8-53
IEEE 802.11ac Average RF Power – 80 MHz Bandwidth Antenna 2

Mode	Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
			Data Rate [Mbps]									
			29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5210	42	9.55	9.48	9.51	9.44	9.45	9.41	9.42	9.50	9.46	9.50
802.11ac	5290	58	9.96	9.82	9.94	9.85	9.87	9.82	9.85	9.86	9.83	9.89
802.11ac	5530	106	9.32	9.26	9.31	9.22	9.29	9.24	9.21	9.28	9.20	9.25
802.11ac	5775	155	10.21	10.13	10.19	10.09	10.12	10.07	10.06	10.10	10.01	10.09



Power Measurements for signals > 50 MHz Bandwidth




Figure 8-4
Power Measurement Setup

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11g were selected for SAR evaluation. IEEE 802.11b is not supported for WIFI antenna #2. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11g mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- Full SAR tests for all IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 63 of 97	

8.6 MIMO WLAN Conducted Powers

Table 8-54
IEEE 802.11n Average RF Power MIMO

Mode	Freq [MHz]	Channel	802.11n (2.4GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13	26	39	52	78	104	117	130
802.11n	2412	1	9.07	9.09	9.17	9.17	9.01	9.00	8.94	8.91
802.11n	2437	6	9.84	9.85	9.97	9.94	9.77	9.73	9.70	9.68
802.11n	2462	11	9.67	9.75	9.78	9.73	9.57	9.58	9.54	9.53

Table 8-55
IEEE 802.11n Average RF Power – 20 MHz Bandwidth MIMO

Mode	Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13	26	39	52	78	104	117	130
802.11n	5180	36	9.73	9.59	9.81	9.37	9.39	9.46	9.75	9.59
802.11n	5200	40	9.80	9.65	9.84	9.51	9.46	9.56	9.77	9.66
802.11n	5220	44	9.68	9.57	9.80	9.33	9.32	9.39	9.66	9.55
802.11n	5240	48	9.84	9.65	9.86	9.48	9.51	9.54	9.88	9.73
802.11n	5260	52	9.79	9.57	9.78	9.54	9.62	9.70	9.76	9.59
802.11n	5280	56	9.74	9.51	9.73	9.49	9.64	9.65	9.71	9.52
802.11n	5300	60	9.47	9.29	9.47	9.25	9.34	9.44	9.49	9.31
802.11n	5320	64	9.56	9.33	9.56	9.26	9.43	9.45	9.57	9.41
802.11n	5500	100	10.24	10.04	10.24	9.96	9.82	10.09	10.19	10.07
802.11n	5520	104	10.22	10.02	10.27	9.96	9.80	10.10	10.16	10.04
802.11n	5540	108	10.09	9.89	10.08	9.78	9.63	9.93	10.07	9.92
802.11n	5560	112	10.15	10.00	10.19	9.90	9.75	9.95	10.10	9.99
802.11n	5580	116	10.21	10.03	10.19	10.00	9.78	10.11	10.13	10.03
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	10.07	9.93	10.11	9.78	9.65	9.93	10.03	9.93
802.11n	5680	136	10.12	9.99	10.12	9.82	9.69	9.99	10.08	9.98
802.11n	5700	140	10.13	9.92	10.14	9.85	9.70	9.95	10.10	9.95
802.11n	5745	149	9.50	9.44	9.51	9.50	9.28	9.50	9.48	9.64
802.11n	5765	153	9.34	9.29	9.38	9.33	9.15	9.32	9.34	9.52
802.11n	5785	157	9.28	9.27	9.27	9.32	9.05	9.28	9.24	9.36
802.11n	5805	161	9.42	9.39	9.49	9.43	9.24	9.39	9.41	9.55
802.11n	5825	165	9.10	9.04	9.13	9.06	8.92	9.18	9.11	9.23

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 64 of 97

Table 8-56
IEEE 802.11n Average RF Power – 40 MHz Bandwidth MIMO

Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			27	54	81	108	162	216	243	270
802.11n	5190	38	9.83	9.72	9.61	9.74	9.77	9.50	9.54	9.60
802.11n	5230	46	9.78	9.67	9.56	9.64	9.75	9.46	9.46	9.52
802.11n	5270	54	9.70	9.70	9.52	9.66	9.73	9.35	9.41	9.54
802.11n	5310	62	9.73	9.75	9.55	9.72	9.74	9.39	9.43	9.56
802.11n	5510	102	10.22	10.19	10.02	10.19	10.27	9.91	9.81	10.03
802.11n	5550	110	10.24	10.23	10.06	10.14	10.26	9.90	9.85	10.01
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	10.18	10.17	9.94	10.21	10.20	9.83	9.74	10.02
802.11n	5755	151	9.20	9.23	9.19	9.08	9.18	9.04	9.34	9.14
802.11n	5795	159	9.15	9.19	9.15	9.04	9.11	8.96	9.28	9.07

Table 8-57
IEEE 802.11ac Average RF Power – 80 MHz Bandwidth MIMO

Mode	Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
			Data Rate [Mbps]									
			58.5	117	175.5	234	351	468	526.5	585	702	780
802.11ac	5210	42	9.58	9.55	9.65	9.52	9.57	9.55	9.65	9.64	9.58	9.60
802.11ac	5290	58	9.62	9.30	9.47	9.37	9.48	9.41	9.49	9.36	9.38	9.48
802.11ac	5530	106	10.10	9.97	10.12	10.03	10.16	10.11	10.19	10.10	10.03	10.03
802.11ac	5775	155	9.48	9.44	9.47	9.51	9.48	9.43	9.54	9.43	9.41	9.39

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11n were selected for SAR evaluation.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11ac were selected for SAR evaluation.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 65 of 97

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
01/20/2014	750B	21.0	710	0.924	54.526	0.960	55.687	-3.75%	-2.08%
			725	0.933	54.322	0.961	55.629	-2.91%	-2.35%
			740	0.948	54.214	0.963	55.570	-1.56%	-2.44%
			755	0.967	54.070	0.964	55.512	0.31%	-2.60%
01/03/2014	835B	20.5	820	0.981	53.678	0.969	55.258	1.24%	-2.86%
			835	0.997	53.516	0.970	55.200	2.78%	-3.05%
			850	1.014	53.348	0.988	55.154	2.63%	-3.27%
01/03/2014	1750B	21.8	1710	1.431	51.969	1.463	53.537	-2.19%	-2.93%
			1750	1.474	51.770	1.488	53.432	-0.94%	-3.11%
			1790	1.528	51.674	1.514	53.326	0.92%	-3.10%
12/30/2013	1900B	22.6	1850	1.504	52.228	1.520	53.300	-1.05%	-2.01%
			1880	1.536	52.130	1.520	53.300	1.05%	-2.20%
			1910	1.568	52.012	1.520	53.300	3.16%	-2.42%
12/02/2013	2450B	22.4	2401	1.969	51.263	1.903	52.765	3.47%	-2.85%
			2450	2.036	51.063	1.950	52.700	4.41%	-3.11%
			2499	2.111	50.908	2.019	52.638	4.56%	-3.29%
12/09/2013	5200B-5800B	23.1	5180	5.294	47.186	5.276	49.041	0.34%	-3.78%
			5200	5.308	47.157	5.299	49.014	0.17%	-3.79%
			5220	5.336	47.123	5.323	48.987	0.24%	-3.81%
			5240	5.359	47.072	5.346	48.960	0.24%	-3.86%
			5260	5.395	46.995	5.369	48.933	0.48%	-3.96%
			5280	5.446	46.966	5.393	48.906	0.98%	-3.97%
			5300	5.457	46.887	5.416	48.879	0.76%	-4.08%
			5320	5.494	46.885	5.439	48.851	1.01%	-4.02%
			5500	5.757	46.563	5.650	48.607	1.89%	-4.21%
			5520	5.786	46.551	5.673	48.580	1.99%	-4.18%
			5540	5.814	46.521	5.696	48.553	2.07%	-4.19%
			5560	5.844	46.519	5.720	48.526	2.17%	-4.14%
			5580	5.880	46.485	5.743	48.499	2.39%	-4.15%
			5600	5.901	46.459	5.766	48.471	2.34%	-4.15%
			5660	5.975	46.396	5.837	48.390	2.36%	-4.12%
			5745	6.067	46.335	5.936	48.275	2.21%	-4.02%
			5765	6.083	46.289	5.959	48.248	2.08%	-4.06%
			5785	6.094	46.276	5.982	48.220	1.87%	-4.03%
			5800	6.125	46.249	6.000	48.200	2.08%	-4.05%
			5805	6.110	46.260	6.006	48.193	1.73%	-4.01%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per IEEE 1528 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 66 of 97

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-2
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
G	750	BODY	01/20/2014	23.8	22.1	0.100	1046	3209	0.897	8.770	8.970	2.28%
K	835	BODY	01/03/2014	22.5	20.5	0.100	4d119	3333	1.030	9.540	10.300	7.97%
E	1750	BODY	01/03/2014	23.0	21.8	0.100	1051	3914	3.550	37.800	35.500	-6.08%
I	1900	BODY	12/30/2013	23.4	21.8	0.100	5d148	3319	4.040	40.800	40.400	-0.98%
D	2450	BODY	12/02/2013	22.2	22.4	0.100	797	3022	5.000	49.600	50.000	0.81%
A	5200	BODY	12/09/2013	23.5	22.6	0.100	1057	3589	7.240	75.500	72.400	-4.11%
A	5300	BODY	12/09/2013	23.7	22.6	0.100	1057	3589	7.860	75.300	78.600	4.38%
A	5500	BODY	12/09/2013	23.6	22.6	0.100	1057	3589	7.770	80.800	77.700	-3.84%
A	5600	BODY	12/09/2013	23.4	22.6	0.100	1057	3589	8.110	80.300	81.100	1.00%
A	5800	BODY	12/09/2013	23.6	22.7	0.100	1057	3589	7.610	75.100	76.100	1.33%

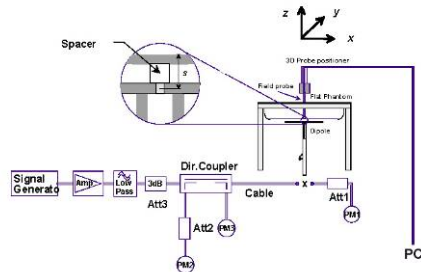


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 67 of 97

10 SAR DATA SUMMARY

10.1 Standalone Body SAR Data

Table 10-1
GPRS/UMTS Maximum Power Body SAR
Representing Capacitive Sensor Not Active

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	28.5	28.24	0.01	13 mm	000029/7	4	1:2.076	back	0.367	1.062	0.390	
836.60	190	GSM 850	GPRS	28.5	28.24	-0.12	13 mm	000029/7	4	1:2.076	left	0.232	1.062	0.246	
1880.00	661	GSM 1900	GPRS	25.0	24.49	0.01	13 mm	000029/7	4	1:2.076	back	0.041	1.125	0.046	
1880.00	661	GSM 1900	GPRS	25.0	24.49	-0.03	13 mm	000029/7	4	1:2.076	left	0.032	1.125	0.036	
836.60	4183	UMTS 850	RMC	23.0	22.35	0.01	13 mm	000029/7	N/A	1:1	back	0.154	1.161	0.179	
836.60	4183	UMTS 850	RMC	23.0	22.35	-0.05	13 mm	000029/7	N/A	1:1	left	0.112	1.161	0.130	
1880.00	9400	UMTS 1900	RMC	23.0	22.28	-0.03	13 mm	000029/7	N/A	1:1	back	0.073	1.180	0.086	
1880.00	9400	UMTS 1900	RMC	23.0	22.28	-0.02	13 mm	000029/7	N/A	1:1	left	0.045	1.180	0.053	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 10-2
GPRS/UMTS Reduced Power Body SAR
Representing Capacitive Sensor Active

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	21.5	20.57	0.04	0 mm	000032/1	4	1:2.076	back	0.404	1.239	0.501	A1
836.60	190	GSM 850	GPRS	21.5	20.57	0.08	0 mm	000032/1	4	1:2.076	left	0.381	1.239	0.472	
1880.00	661	GSM 1900	GPRS	16.0	15.56	0.06	0 mm	000032/1	4	1:2.076	back	0.175	1.107	0.194	A2
1880.00	661	GSM 1900	GPRS	16.0	15.56	-0.04	0 mm	000032/1	4	1:2.076	left	0.122	1.107	0.135	
836.60	4183	UMTS 850	RMC	19.0	18.30	-0.02	0 mm	000032/1	N/A	1:1	back	0.363	1.175	0.427	
836.60	4183	UMTS 850	RMC	19.0	18.30	-0.04	0 mm	000032/1	N/A	1:1	left	0.373	1.175	0.438	A3
1880.00	9400	UMTS 1900	RMC	13.0	12.94	-0.09	0 mm	000032/1	N/A	1:1	back	0.233	1.014	0.236	A4
1880.00	9400	UMTS 1900	RMC	13.0	12.94	-0.04	0 mm	000032/1	N/A	1:1	left	0.138	1.014	0.140	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 68 of 97

Table 10-3
LTE Body Maximum Power SAR
Representing Capacitive Sensor Not Active

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
710.00	23790	Mid	LTE Band 17	10	23.0	23.00	-0.02	0	00987/62	QPSK	1	49	13 mm	back	1:1	0.204	1.000	0.204	A5
710.00	23790	Mid	LTE Band 17	10	22.0	22.00	-0.06	1	00987/62	QPSK	25	25	13 mm	back	1:1	0.164	1.000	0.164	
710.00	23790	Mid	LTE Band 17	10	23.0	23.00	0.00	0	00987/62	QPSK	1	49	13 mm	left	1:1	0.133	1.000	0.131	
710.00	23790	Mid	LTE Band 17	10	22.0	22.00	0.01	1	00987/62	QPSK	25	25	13 mm	left	1:1	0.105	1.000	0.104	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.5	22.16	0.00	0	000029/7	QPSK	1	0	13 mm	back	1:1	0.149	1.081	0.161	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.5	21.04	0.02	1	000029/7	QPSK	25	25	13 mm	back	1:1	0.118	1.112	0.131	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.5	22.16	0.05	0	000029/7	QPSK	1	0	13 mm	left	1:1	0.100	1.081	0.108	
836.50	20525	Mid	LTE Band 5 (Cell)	10	21.5	21.04	0.03	1	000029/7	QPSK	25	25	13 mm	left	1:1	0.086	1.112	0.096	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.0	22.90	0.06	0	000029/7	QPSK	1	50	13 mm	back	1:1	0.124	1.023	0.127	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.0	21.83	-0.03	1	000029/7	QPSK	50	25	13 mm	back	1:1	0.096	1.040	0.100	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.0	22.90	-0.16	0	000029/7	QPSK	1	50	13 mm	left	1:1	0.058	1.023	0.059	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.0	21.83	0.04	1	000029/7	QPSK	50	25	13 mm	left	1:1	0.046	1.040	0.048	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	-0.01	0	000029/7	QPSK	1	50	13 mm	back	1:1	0.166	1.023	0.170	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.5	22.21	0.03	1	000029/7	QPSK	50	25	13 mm	back	1:1	0.129	1.069	0.138	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.40	0.01	0	000029/7	QPSK	1	50	13 mm	left	1:1	0.071	1.023	0.073	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.5	22.21	0.13	1	000029/7	QPSK	50	25	13 mm	left	1:1	0.054	1.069	0.058	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 69 of 97

Table 10-4
LTE Reduced Power Body SAR
Representing Capacitive Sensor Active

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducte d Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
710.00	23790	Mid	LTE Band 17	10	15.5	15.06	0.02	0	000030/5	QPSK	1	49	0 mm	back	1:1	0.072	1.107	0.080	
710.00	23790	Mid	LTE Band 17	10	15.5	15.10	0.02	0	000030/5	QPSK	25	25	0 mm	back	1:1	0.101	1.096	0.111	
710.00	23790	Mid	LTE Band 17	10	15.5	15.06	-0.05	0	000030/5	QPSK	1	49	0 mm	left	1:1	0.078	1.107	0.086	
710.00	23790	Mid	LTE Band 17	10	15.5	15.10	0.00	0	000030/5	QPSK	25	25	0 mm	left	1:1	0.107	1.096	0.117	
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	15.14	0.00	0	000032/1	QPSK	1	25	0 mm	back	1:1	0.223	1.219	0.272	
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	15.32	0.04	0	000032/1	QPSK	25	25	0 mm	back	1:1	0.229	1.169	0.268	A6
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	15.14	0.04	0	000032/1	QPSK	1	25	0 mm	left	1:1	0.194	1.219	0.236	
836.50	20525	Mid	LTE Band 5 (Cell)	10	16.0	15.32	-0.01	0	000032/1	QPSK	25	25	0 mm	left	1:1	0.196	1.169	0.229	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.66	0.01	0	000032/1	QPSK	1	50	0 mm	back	1:1	0.353	1.081	0.382	A7
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.58	-0.11	0	000032/1	QPSK	50	0	0 mm	back	1:1	0.343	1.102	0.378	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.66	-0.05	0	000032/1	QPSK	1	50	0 mm	left	1:1	0.140	1.081	0.151	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	15.0	14.58	0.01	0	000032/1	QPSK	50	0	0 mm	left	1:1	0.129	1.102	0.142	
1860.00	18700	Low	LTE Band 2 (PCS)	20	15.0	14.95	0.06	0	000032/1	QPSK	1	50	0 mm	back	1:1	0.461	1.012	0.467	A8
1860.00	18700	Low	LTE Band 2 (PCS)	20	15.0	14.92	0.03	0	000032/1	QPSK	50	0	0 mm	back	1:1	0.440	1.019	0.448	
1860.00	18700	Low	LTE Band 2 (PCS)	20	15.0	14.95	-0.06	0	000032/1	QPSK	1	50	0 mm	left	1:1	0.297	1.012	0.301	
1860.00	18700	Low	LTE Band 2 (PCS)	20	15.0	14.92	-0.01	0	000032/1	QPSK	50	0	0 mm	left	1:1	0.286	1.019	0.291	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 70 of 97

Table 10-5
WLAN Body SAR Antenna 1

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2412	1	IEEE 802.11b	DSSS	14.5	13.66	0.03	0 mm	2611-2	1	back	1:1	0.742	1.213	0.900	
2437	6	IEEE 802.11b	DSSS	14.5	13.24	0.08	0 mm	2611-2	1	back	1:1	0.796	1.337	1.064	
2462	11	IEEE 802.11b	DSSS	14.5	13.44	0.03	0 mm	2611-2	1	back	1:1	0.665	1.276	0.849	
2412	1	IEEE 802.11b	DSSS	14.5	13.66	0.06	0 mm	2611-2	1	top	1:1	0.561	1.213	0.680	
2412	1	IEEE 802.11b	DSSS	14.5	13.66	-0.15	0 mm	2611-2	1	left	1:1	0.001	1.213	0.001	
5745	149	IEEE 802.11a	OFDM	10.5	9.87	0.14	0 mm	2611-1	6	back	1:1	0.326	1.156	0.377	
5785	157	IEEE 802.11a	OFDM	10.5	9.72	-0.08	0 mm	2611-1	6	back	1:1	0.314	1.197	0.376	
5805	161	IEEE 802.11a	OFDM	10.5	9.45	0.17	0 mm	2611-1	6	back	1:1	0.292	1.274	0.372	
5775	155	IEEE 802.11ac	OFDM	10.5	9.88	0.16	0 mm	2611-1	29.3	back	1:1	0.308	1.153	0.355	
5745	149	IEEE 802.11a	OFDM	10.5	9.87	0.16	0 mm	2611-1	6	top	1:1	0.057	1.156	0.066	
5745	149	IEEE 802.11a	OFDM	10.5	9.87	-0.19	0 mm	2611-1	6	left	1:1	0.001	1.156	0.001	
5180	36	IEEE 802.11a	OFDM	10.5	10.23	-0.13	0 mm	2611-1	6	back	1:1	0.589	1.064	0.627	
5220	44	IEEE 802.11a	OFDM	10.5	10.16	0.04	0 mm	2611-1	6	back	1:1	0.624	1.081	0.675	
5210	42	IEEE 802.11ac	OFDM	10.5	9.92	-0.17	0 mm	2611-1	29.3	back	1:1	0.548	1.143	0.626	
5180	36	IEEE 802.11a	OFDM	10.5	10.23	-0.16	0 mm	2611-1	6	top	1:1	0.074	1.064	0.079	
5180	36	IEEE 802.11a	OFDM	10.5	10.23	-0.11	0 mm	2611-1	6	left	1:1	0.021	1.064	0.022	
5260	52	IEEE 802.11a	OFDM	10.5	10.19	0.04	0 mm	2611-1	6	back	1:1	0.871	1.074	0.935	
5300	60	IEEE 802.11a	OFDM	10.5	10.20	-0.02	0 mm	2611-1	6	back	1:1	0.695	1.072	0.745	
5290	58	IEEE 802.11ac	OFDM	10.5	9.97	-0.17	0 mm	2611-1	29.3	back	1:1	0.862	1.130	0.974	
5300	60	IEEE 802.11a	OFDM	10.5	10.20	0.13	0 mm	2611-1	6	top	1:1	0.104	1.072	0.111	
5300	60	IEEE 802.11a	OFDM	10.5	10.20	0.12	0 mm	2611-1	6	left	1:1	0.028	1.072	0.030	
5500	100	IEEE 802.11a	OFDM	10.5	10.27	-0.13	0 mm	2611-1	6	back	1:1	0.439	1.054	0.463	
5560	112	IEEE 802.11a	OFDM	10.5	10.29	-0.13	0 mm	2611-1	6	back	1:1	0.438	1.050	0.460	
5660	132	IEEE 802.11a	OFDM	10.5	9.98	-0.13	0 mm	2611-1	6	back	1:1	0.677	1.127	0.763	
5530	106	IEEE 802.11ac	OFDM	10.5	9.92	-0.13	0 mm	2611-1	29.3	back	1:1	0.436	1.143	0.498	
5560	112	IEEE 802.11a	OFDM	10.5	10.29	0.13	0 mm	2611-1	6	top	1:1	0.073	1.050	0.077	
5560	112	IEEE 802.11a	OFDM	10.5	10.29	0.15	0 mm	2611-1	6	left	1:1	0.004	1.050	0.004	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 71 of 97

Table 10-6
WLAN Body SAR Antenna 2

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2412	1	IEEE 802.11g	OFDM	12.5	11.64	-0.12	0 mm	2611-2	6	back	1:1	0.895	1.219	1.091	
2437	6	IEEE 802.11g	OFDM	12.5	11.93	0.15	0 mm	2611-2	6	back	1:1	0.960	1.140	1.094	A9
2462	11	IEEE 802.11g	OFDM	12.5	11.62	0.15	0 mm	2611-2	6	back	1:1	0.896	1.225	1.098	
2437	6	IEEE 802.11g	OFDM	12.5	11.93	0.02	0 mm	2611-2	6	top	1:1	0.172	1.140	0.196	
2437	6	IEEE 802.11g	OFDM	12.5	11.93	0.13	0 mm	2611-2	6	left	1:1	0.095	1.140	0.108	
2437	6	IEEE 802.11g	OFDM	12.5	11.93	-0.03	0 mm	2611-2	6	back	1:1	0.902	1.140	1.028	
5745	149	IEEE 802.11a	OFDM	10.5	9.72	-0.14	0 mm	2611-1	6	back	1:1	0.778	1.197	0.931	
5785	157	IEEE 802.11a	OFDM	10.5	10.05	-0.13	0 mm	2611-1	6	back	1:1	0.789	1.109	0.875	
5805	161	IEEE 802.11a	OFDM	10.5	9.95	-0.14	0 mm	2611-1	6	back	1:1	0.937	1.135	1.063	A10
5775	155	IEEE 802.11ac	OFDM	10.5	10.21	-0.13	0 mm	2611-1	29.3	back	1:1	0.916	1.069	0.979	
5785	157	IEEE 802.11a	OFDM	10.5	10.05	-0.20	0 mm	2611-1	6	top	1:1	0.307	1.109	0.340	
5785	157	IEEE 802.11a	OFDM	10.5	10.05	-0.16	0 mm	2611-1	6	left	1:1	0.000	1.109	0.000	
5805	161	IEEE 802.11a	OFDM	10.5	9.95	0.20	0 mm	2611-1	6	back	1:1	0.853	1.135	0.968	
5200	40	IEEE 802.11a	OFDM	10.5	9.90	-0.13	0 mm	2611-1	6	back	1:1	0.323	1.148	0.371	
5240	48	IEEE 802.11a	OFDM	10.5	10.03	-0.19	0 mm	2611-1	6	back	1:1	0.256	1.114	0.285	
5210	42	IEEE 802.11ac	OFDM	10.5	9.55	0.13	0 mm	2611-1	29.3	back	1:1	0.258	1.245	0.321	
5240	48	IEEE 802.11a	OFDM	10.5	10.03	0.18	0 mm	2611-1	6	top	1:1	0.026	1.114	0.029	
5240	48	IEEE 802.11a	OFDM	10.5	10.03	0.13	0 mm	2611-1	6	left	1:1	0.006	1.114	0.007	
5280	56	IEEE 802.11a	OFDM	10.5	10.25	-0.18	0 mm	2611-1	6	back	1:1	0.292	1.059	0.309	
5320	64	IEEE 802.11a	OFDM	10.5	10.23	-0.13	0 mm	2611-1	6	back	1:1	0.367	1.064	0.390	
5290	58	IEEE 802.11ac	OFDM	10.5	9.96	0.12	0 mm	2611-1	29.3	back	1:1	0.308	1.132	0.349	
5280	56	IEEE 802.11a	OFDM	10.5	10.25	0.18	0 mm	2611-1	6	top	1:1	0.025	1.059	0.026	
5280	56	IEEE 802.11a	OFDM	10.5	10.25	-0.14	0 mm	2611-1	6	left	1:1	0.006	1.059	0.006	
5500	100	IEEE 802.11a	OFDM	10.5	9.64	-0.13	0 mm	2611-1	6	back	1:1	0.333	1.219	0.406	
5580	116	IEEE 802.11a	OFDM	10.5	9.55	-0.13	0 mm	2611-1	6	back	1:1	0.258	1.245	0.321	
5660	132	IEEE 802.11a	OFDM	10.5	10.28	-0.13	0 mm	2611-1	6	back	1:1	0.326	1.052	0.343	
5530	106	IEEE 802.11ac	OFDM	10.5	9.32	-0.12	0 mm	2611-1	29.3	back	1:1	0.269	1.312	0.353	
5660	132	IEEE 802.11a	OFDM	10.5	10.28	-0.18	0 mm	2611-1	6	top	1:1	0.124	1.052	0.130	
5660	132	IEEE 802.11a	OFDM	10.5	10.28	0.18	0 mm	2611-1	6	left	1:1	0.000	1.052	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entries indicate variability measurements.

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 72 of 97	

Table 10-7
WLAN Body SAR MIMO

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2437	6	IEEE 802.11n	OFDM	10.5	9.84	0.09	0 mm	2611-2	13	back	1:1	0.320	1.164	0.372	
2437	6	IEEE 802.11n	OFDM	10.5	9.84	0.10	0 mm	2611-2	13	top	1:1	0.273	1.164	0.318	
2437	6	IEEE 802.11n	OFDM	10.5	9.84	-0.13	0 mm	2611-2	13	left	1:1	0.001	1.164	0.001	
5775	155	IEEE 802.11ac	OFDM	10.5	9.48	0.13	0 mm	2611-1	58.5	back	1:1	0.826	1.265	1.045	
5775	155	IEEE 802.11ac	OFDM	10.5	9.48	0.13	0 mm	2611-1	58.5	top	1:1	0.354	1.265	0.448	
5775	155	IEEE 802.11ac	OFDM	10.5	9.48	-0.16	0 mm	2611-1	58.5	left	1:1	0.000	1.265	0.000	
5210	42	IEEE 802.11ac	OFDM	10.5	9.58	0.13	0 mm	2611-1	58.5	back	1:1	0.769	1.236	0.950	
5210	42	IEEE 802.11ac	OFDM	10.5	9.58	-0.20	0 mm	2611-1	58.5	top	1:1	0.268	1.236	0.331	
5210	42	IEEE 802.11ac	OFDM	10.5	9.58	0.16	0 mm	2611-1	58.5	left	1:1	0.029	1.236	0.036	
5290	58	IEEE 802.11ac	OFDM	10.5	9.62	0.13	0 mm	2611-1	58.5	back	1:1	0.895	1.225	1.096	
5290	58	IEEE 802.11ac	OFDM	10.5	9.62	0.11	0 mm	2611-1	58.5	top	1:1	0.080	1.225	0.098	
5290	58	IEEE 802.11ac	OFDM	10.5	9.62	-0.14	0 mm	2611-1	58.5	left	1:1	0.036	1.225	0.044	
5290	58	IEEE 802.11ac	OFDM	10.5	9.62	-0.14	0 mm	2611-1	58.5	back	1:1	0.818	1.225	1.002	
5530	106	IEEE 802.11ac	OFDM	10.5	10.10	0.17	0 mm	2611-1	58.5	back	1:1	0.987	1.096	1.082	A8
5530	106	IEEE 802.11ac	OFDM	10.5	10.10	0.21	0 mm	2611-1	58.5	top	1:1	0.082	1.096	0.090	
5530	106	IEEE 802.11ac	OFDM	10.5	10.10	-0.15	0 mm	2611-1	58.5	left	1:1	0.009	1.096	0.010	
5530	106	IEEE 802.11ac	OFDM	10.5	10.10	-0.13	0 mm	2611-1	58.5	back	1:1	0.892	1.096	0.978	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body								
Spatial Peak							1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population							averaged over 1 gram								

Note: Blue entries indicate variability measurements.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 73 of 97

10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB 616217 and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
7. Per FCC KDB 616217 D04 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v05 was applied to determine SAR test exclusion for adjacent edge configurations. Left edge SAR tests were required for the main antenna. Top and left edge SAR tests were required for the WLAN/BT antennas.

GSM Test Notes:

1. Justification for reduced test configurations per KDB Publication 941225 D03v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
2. Per FCC KDB Publication 447498 D01v05, when the reported (scaled) SAR measured at the middle channel > 0.8 W/kg then testing at the other channels is required for such test configuration(s). Since the maximum output power variation across the required test channels is < ½ dB, the middle channel was the default channel used for SAR evaluation.

UMTS Notes:

1. UMTS mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, when the reported (scaled) SAR measured at the middle channel > 0.8 W/kg then testing at the other channels is required for such test configuration(s). When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r01. Implementation of the general test procedures can be found in Section 7.4.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 74 of 97

3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

WLAN Notes:

1. Justification for reduced test configurations for SISO WIFI antenna #1 channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for SISO WIFI antenna #2 channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11g. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11g mode.
3. Justification for reduced test configurations for SISO WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz bandwidths) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
4. Per KDB 248227, SAR for MIMO was measured with both transmitting simultaneously and was evaluated independently of SISO operation. For 2.4 GHz MIMO, 802.11n was evaluated. For 5 GHz MIMO, 802.11ac was evaluated since the maximum allowed output power was the same for 802.11n.
5. Per April 2013 TCB Workshop notes, full SAR tests for SISO IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition
6. WIFI transmission was verified using an uncalibrated spectrum analyzer.
7. When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is >1.6 W/kg or the reported 1g averaged SAR is >0.8 W/kg, SAR testing on other default channels was required.
8. There is no proximity sensor power reduction mechanism applied for WIFI/BT modes.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 75 of 97

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to handsets with built-in unlicensed transmitters such as 802.11a/b/g/n/ac and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 11-1
Estimated SAR

Mode	Configuration	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
		[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	Touching*	2441	8.00	5	0.250
Bluetooth	Left Edge	2441	8.00	31.27	0.040
Bluetooth	Top Edge	2441	8.00	6	0.208

Note:

1. For configurations excluded per 447498 D01v05, an estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR exclusion since the test separation distance was >50 mm.
2. (*) – Per FCC KDB Publication 447498, when the test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 76 of 97

11.3 Body SAR Simultaneous Transmission Analysis

Table 11-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body at 0 mm) Antenna 1

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.501	1.064	1.565	Body SAR	Back	0.194	1.064	1.258
	Top	0.400	0.680	1.080		Top	0.400	0.680	1.080
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.472	0.001	0.473		Left	0.135	0.001	0.136
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.427	1.064	1.491	Body SAR	Back	0.236	1.064	1.300
	Top	0.400	0.680	1.080		Top	0.400	0.680	1.080
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.438	0.001	0.439		Left	0.140	0.001	0.141
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.111	1.064	1.175	Body SAR	Back	0.272	1.064	1.336
	Top	0.400	0.680	1.080		Top	0.400	0.680	1.080
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.117	0.001	0.118		Left	0.236	0.001	0.237
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.382	1.064	1.446	Body SAR	Back	0.467	1.064	1.531
	Top	0.400	0.680	1.080		Top	0.400	0.680	1.080
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.151	0.001	0.152		Left	0.301	0.001	0.302

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 77 of 97

Table 11-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Body SAR at 0 mm) Antenna 1

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.501	0.974	1.475	Body SAR	Back	0.194	0.974	1.168
	Top	0.400	0.111	0.511		Top	0.400	0.111	0.511
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.472	0.030	0.502		Left	0.135	0.030	0.165
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.427	0.974	1.401	Body SAR	Back	0.236	0.974	1.210
	Top	0.400	0.111	0.511		Top	0.400	0.111	0.511
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.438	0.030	0.468		Left	0.140	0.030	0.170
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.111	0.974	1.085	Body SAR	Back	0.272	0.974	1.246
	Top	0.400	0.111	0.511		Top	0.400	0.111	0.511
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.117	0.030	0.147		Left	0.236	0.030	0.266
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.382	0.974	1.356	Body SAR	Back	0.467	0.974	1.441
	Top	0.400	0.111	0.511		Top	0.400	0.111	0.511
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.151	0.030	0.181		Left	0.301	0.030	0.331

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 78 of 97	

Table 11-4
Simultaneous Transmission Scenario with Bluetooth (Body SAR at 0 mm) Antenna 1

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.501	0.250	0.751	Body SAR	Back	0.194	0.250	0.444
	Top	0.400	0.208	0.608		Top	0.400	0.208	0.608
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.472	0.040	0.512		Left	0.135	0.040	0.175
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.427	0.250	0.677	Body SAR	Back	0.236	0.250	0.486
	Top	0.400	0.208	0.608		Top	0.400	0.208	0.608
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.438	0.040	0.478		Left	0.140	0.040	0.180
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.111	0.250	0.361	Body SAR	Back	0.272	0.250	0.522
	Top	0.400	0.208	0.608		Top	0.400	0.208	0.608
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.117	0.040	0.157		Left	0.236	0.040	0.276
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.382	0.250	0.632	Body SAR	Back	0.467	0.250	0.717
	Top	0.400	0.208	0.608		Top	0.400	0.208	0.608
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.151	0.040	0.191		Left	0.301	0.040	0.341

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 79 of 97	

Table 11-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Back at 13 mm) Antenna 1

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.390	<1.064	<1.454
Back Side	GSM 1900	0.046	<1.064	<1.110
Back Side	UMTS 850	0.179	<1.064	<1.243
Back Side	UMTS 1900	0.086	<1.064	<1.150
Back Side	LTE Band 17	0.204	<1.064	<1.268
Back Side	LTE Band 5 (Cell)	0.161	<1.064	<1.225
Back Side	LTE Band 4 (AWS)	0.127	<1.064	<1.191
Back Side	LTE Band 2 (PCS)	0.170	<1.064	<1.234

Table 11-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Back at 13 mm) Antenna 1

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.390	<0.974	<1.364
Back Side	GSM 1900	0.046	<0.974	<1.020
Back Side	UMTS 850	0.179	<0.974	<1.153
Back Side	UMTS 1900	0.086	<0.974	<1.060
Back Side	LTE Band 17	0.204	<0.974	<1.178
Back Side	LTE Band 5 (Cell)	0.161	<0.974	<1.135
Back Side	LTE Band 4 (AWS)	0.127	<0.974	<1.101
Back Side	LTE Band 2 (PCS)	0.170	<0.974	<1.144

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 80 of 97	

Table 11-7
Simultaneous Transmission Scenario with Bluetooth (Back at 13 mm) Antenna 1

Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.390	<0.250	<0.640
Back Side	GSM 1900	0.046	<0.250	<0.296
Back Side	UMTS 850	0.179	<0.250	<0.429
Back Side	UMTS 1900	0.086	<0.250	<0.336
Back Side	LTE Band 17	0.204	<0.250	<0.454
Back Side	LTE Band 5 (Cell)	0.161	<0.250	<0.411
Back Side	LTE Band 4 (AWS)	0.127	<0.250	<0.377
Back Side	LTE Band 2 (PCS)	0.170	<0.250	<0.420

Table 11-8
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Left at 13 mm) Antenna 1

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Left Edge	GSM 850	0.246	<0.001	<0.247
Left Edge	GSM 1900	0.036	<0.001	<0.037
Left Edge	UMTS 850	0.130	<0.001	<0.131
Left Edge	UMTS 1900	0.053	<0.001	<0.054
Left Edge	LTE Band 17	0.133	<0.001	<0.134
Left Edge	LTE Band 5 (Cell)	0.108	<0.001	<0.109
Left Edge	LTE Band 4 (AWS)	0.059	<0.001	<0.060
Left Edge	LTE Band 2 (PCS)	0.073	<0.001	<0.074

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 81 of 97	

Table 11-9
Simultaneous Transmission Scenario with 5 GHz WLAN (Left at 13 mm) Antenna 1

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Left Edge	GSM 850	0.246	<0.030	<0.276
Left Edge	GSM 1900	0.036	<0.030	<0.066
Left Edge	UMTS 850	0.130	<0.030	<0.160
Left Edge	UMTS 1900	0.053	<0.030	<0.083
Left Edge	LTE Band 17	0.133	<0.030	<0.163
Left Edge	LTE Band 5 (Cell)	0.108	<0.030	<0.138
Left Edge	LTE Band 4 (AWS)	0.059	<0.030	<0.089
Left Edge	LTE Band 2 (PCS)	0.073	<0.030	<0.103

Table 11-10
Simultaneous Transmission Scenario with Bluetooth (Left at 13 mm) Antenna 1

Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Left Edge	GSM 850	0.246	<0.040	<0.286
Left Edge	GSM 1900	0.036	<0.040	<0.076
Left Edge	UMTS 850	0.130	<0.040	<0.170
Left Edge	UMTS 1900	0.053	<0.040	<0.093
Left Edge	LTE Band 17	0.133	<0.040	<0.173
Left Edge	LTE Band 5 (Cell)	0.108	<0.040	<0.148
Left Edge	LTE Band 4 (AWS)	0.059	<0.040	<0.099
Left Edge	LTE Band 2 (PCS)	0.073	<0.040	<0.113

FCC ID: A3LSMP905M		SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 82 of 97

Table 11-11
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body at 0 mm) Antenna 2

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.501	1.098	1.599	Body SAR	Back	0.194	1.098	1.292
	Top	0.400	0.196	0.596		Top	0.400	0.196	0.596
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.472	0.108	0.580		Left	0.135	0.108	0.243
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.427	1.098	1.525	Body SAR	Back	0.236	1.098	1.334
	Top	0.400	0.196	0.596		Top	0.400	0.196	0.596
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.438	0.108	0.546		Left	0.140	0.108	0.248
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.111	1.098	1.209	Body SAR	Back	0.272	1.098	1.370
	Top	0.400	0.196	0.596		Top	0.400	0.196	0.596
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.117	0.108	0.225		Left	0.236	0.108	0.344
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.382	1.098	1.480	Body SAR	Back	0.467	1.098	1.565
	Top	0.400	0.196	0.596		Top	0.400	0.196	0.596
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.151	0.108	0.259		Left	0.301	0.108	0.409

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 83 of 97	

Table 11-12
Simultaneous Transmission Scenario with 5 GHz WLAN (Body SAR at 0 mm) Antenna 2

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.501	1.063	1.564	Body SAR	Back	0.194	1.063	1.257
	Top	0.400	0.340	0.740		Top	0.400	0.340	0.740
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.472	0.007	0.479		Left	0.135	0.007	0.142
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.427	1.063	1.490	Body SAR	Back	0.236	1.063	1.299
	Top	0.400	0.340	0.740		Top	0.400	0.340	0.740
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.438	0.007	0.445		Left	0.140	0.007	0.147
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.111	1.063	1.174	Body SAR	Back	0.272	1.063	1.335
	Top	0.400	0.340	0.740		Top	0.400	0.340	0.740
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.117	0.007	0.124		Left	0.236	0.007	0.243
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.382	1.063	1.445	Body SAR	Back	0.467	1.063	1.530
	Top	0.400	0.340	0.740		Top	0.400	0.340	0.740
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.151	0.007	0.158		Left	0.301	0.007	0.308

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 84 of 97	

Table 11-13
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Back at 13 mm) Antenna 2

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.390	<1.098	<1.488
Back Side	GSM 1900	0.046	<1.098	<1.144
Back Side	UMTS 850	0.179	<1.098	<1.277
Back Side	UMTS 1900	0.086	<1.098	<1.184
Back Side	LTE Band 17	0.204	<1.098	<1.302
Back Side	LTE Band 5 (Cell)	0.161	<1.098	<1.259
Back Side	LTE Band 4 (AWS)	0.127	<1.098	<1.225
Back Side	LTE Band 2 (PCS)	0.170	<1.098	<1.268

Table 11-14
Simultaneous Transmission Scenario with 5 GHz WLAN (Back at 13 mm) Antenna 2

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.390	<1.063	<1.453
Back Side	GSM 1900	0.046	<1.063	<1.109
Back Side	UMTS 850	0.179	<1.063	<1.242
Back Side	UMTS 1900	0.086	<1.063	<1.149
Back Side	LTE Band 17	0.204	<1.063	<1.267
Back Side	LTE Band 5 (Cell)	0.161	<1.063	<1.224
Back Side	LTE Band 4 (AWS)	0.127	<1.063	<1.190
Back Side	LTE Band 2 (PCS)	0.170	<1.063	<1.233

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 85 of 97	

Table 11-15
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Left at 13 mm) Antenna 2

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Left Edge	GSM 850	0.246	<0.108	<0.354
Left Edge	GSM 1900	0.036	<0.108	<0.144
Left Edge	UMTS 850	0.130	<0.108	<0.238
Left Edge	UMTS 1900	0.053	<0.108	<0.161
Left Edge	LTE Band 17	0.133	<0.108	<0.241
Left Edge	LTE Band 5 (Cell)	0.108	<0.108	<0.216
Left Edge	LTE Band 4 (AWS)	0.059	<0.108	<0.167
Left Edge	LTE Band 2 (PCS)	0.073	<0.108	<0.181

Table 11-16
Simultaneous Transmission Scenario with 5 GHz WLAN (Left at 13 mm) Antenna 2

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Left Edge	GSM 850	0.246	<0.007	<0.253
Left Edge	GSM 1900	0.036	<0.007	<0.043
Left Edge	UMTS 850	0.130	<0.007	<0.137
Left Edge	UMTS 1900	0.053	<0.007	<0.060
Left Edge	LTE Band 17	0.133	<0.007	<0.140
Left Edge	LTE Band 5 (Cell)	0.108	<0.007	<0.115
Left Edge	LTE Band 4 (AWS)	0.059	<0.007	<0.066
Left Edge	LTE Band 2 (PCS)	0.073	<0.007	<0.080

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 86 of 97	

Table 11-17
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body at 0 mm) MIMO

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.501	0.372	0.873	Body SAR	Back	0.194	0.372	0.566
	Top	0.400	0.318	0.718		Top	0.400	0.318	0.718
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.472	0.001	0.473		Left	0.135	0.001	0.136
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.427	0.372	0.799	Body SAR	Back	0.236	0.372	0.608
	Top	0.400	0.318	0.718		Top	0.400	0.318	0.718
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.438	0.001	0.439		Left	0.140	0.001	0.141
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.111	0.372	0.483	Body SAR	Back	0.272	0.372	0.644
	Top	0.400	0.318	0.718		Top	0.400	0.318	0.718
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.117	0.001	0.118		Left	0.236	0.001	0.237
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.382	0.372	0.754	Body SAR	Back	0.467	0.372	0.839
	Top	0.400	0.318	0.718		Top	0.400	0.318	0.718
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.151	0.001	0.152		Left	0.301	0.001	0.302

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 87 of 97	

Table 11-18
Simultaneous Transmission Scenario with 5 GHz WLAN (Body SAR at 0 mm) MIMO

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.501	1.096	1.597	Body SAR	Back	0.194	1.096	1.290
	Top	0.400	0.448	0.848		Top	0.400	0.448	0.848
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.472	0.044	0.516		Left	0.135	0.044	0.179
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.427	1.096	1.523	Body SAR	Back	0.236	1.096	1.332
	Top	0.400	0.448	0.848		Top	0.400	0.448	0.848
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.438	0.044	0.482		Left	0.140	0.044	0.184
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.111	1.096	1.207	Body SAR	Back	0.272	1.096	1.368
	Top	0.400	0.448	0.848		Top	0.400	0.448	0.848
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.117	0.044	0.161		Left	0.236	0.044	0.280
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.382	1.096	1.478	Body SAR	Back	0.467	1.096	1.563
	Top	0.400	0.448	0.848		Top	0.400	0.448	0.848
	Bottom	0.400	0.400	0.800		Bottom	0.400	0.400	0.800
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.151	0.044	0.195		Left	0.301	0.044	0.345

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 88 of 97	

Table 11-19
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Back at 13 mm) MIMO

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.390	<0.372	<0.762
Back Side	GSM 1900	0.046	<0.372	<0.418
Back Side	UMTS 850	0.179	<0.372	<0.551
Back Side	UMTS 1900	0.086	<0.372	<0.458
Back Side	LTE Band 17	0.204	<0.372	<0.576
Back Side	LTE Band 5 (Cell)	0.161	<0.372	<0.533
Back Side	LTE Band 4 (AWS)	0.127	<0.372	<0.499
Back Side	LTE Band 2 (PCS)	0.170	<0.372	<0.542

Table 11-20
Simultaneous Transmission Scenario with 5 GHz WLAN (Back at 13 mm) MIMO

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.390	<1.096	<1.486
Back Side	GSM 1900	0.046	<1.096	<1.142
Back Side	UMTS 850	0.179	<1.096	<1.275
Back Side	UMTS 1900	0.086	<1.096	<1.182
Back Side	LTE Band 17	0.204	<1.096	<1.300
Back Side	LTE Band 5 (Cell)	0.161	<1.096	<1.257
Back Side	LTE Band 4 (AWS)	0.127	<1.096	<1.223
Back Side	LTE Band 2 (PCS)	0.170	<1.096	<1.266

Table 11-21
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Left at 13 mm) MIMO

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Left Edge	GSM 850	0.246	<0.001	<0.247
Left Edge	GSM 1900	0.036	<0.001	<0.037
Left Edge	UMTS 850	0.130	<0.001	<0.131
Left Edge	UMTS 1900	0.053	<0.001	<0.054
Left Edge	LTE Band 17	0.133	<0.001	<0.134
Left Edge	LTE Band 5 (Cell)	0.108	<0.001	<0.109
Left Edge	LTE Band 4 (AWS)	0.059	<0.001	<0.060
Left Edge	LTE Band 2 (PCS)	0.073	<0.001	<0.074

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 89 of 97	

Table 11-22
Simultaneous Transmission Scenario with 5 GHz WLAN (Left at 13 mm) MIMO

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Left Edge	GSM 850	0.246	<0.044	<0.29
Left Edge	GSM 1900	0.036	<0.044	<0.08
Left Edge	UMTS 850	0.130	<0.044	<0.174
Left Edge	UMTS 1900	0.053	<0.044	<0.097
Left Edge	LTE Band 17	0.133	<0.044	<0.177
Left Edge	LTE Band 5 (Cell)	0.108	<0.044	<0.152
Left Edge	LTE Band 4 (AWS)	0.059	<0.044	<0.103
Left Edge	LTE Band 2 (PCS)	0.073	<0.044	<0.117

Note:

1. For configurations excluded per 447498 D01v05, an estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR exclusion when the test separation distance was >50 mm.
2. For SAR summations for body back at 13 mm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
3. For SAR summations for body left at 13 mm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
4. For SAR summation for body back at 13 mm estimated Bluetooth SAR values for 0.0 cm were used since the 0.0 cm test distance for Bluetooth was more conservative. "<" denotes that the 0.0 cm estimated Bluetooth SAR values were used for summation purposes.
5. The worst case 5 GHz WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has WIFI Direct / WIFI Display capability. Therefore, the summations above represent the absolute worst cases for simultaneous transmission with 5 GHz WLAN.

11.4 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet	Page 90 of 97

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The variability measurement procedures were applied using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 12-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS															
Band	FREQUENCY		Antenna	Mode	Service	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)			
2450	2437.00	6	Antenna 2	IEEE 802.11g	OFDM	6	back	0 mm	0.960	0.902	1.06	N/A	N/A	N/A	N/A
5300	5290.00	58	MIMO	IEEE 802.11ac	OFDM	58.6	back	0 mm	0.895	0.818	1.09	N/A	N/A	N/A	N/A
5500	5530.00	106	MIMO	IEEE 802.11ac	OFDM	58.6	back	0 mm	0.987	0.892	1.11	N/A	N/A	N/A	N/A
5800	5805.00	161	Antenna 2	IEEE 802.11a	OFDM	6	back	0 mm	0.937	0.853	1.10	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body							
Spatial Peak								1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population								averaged over 1 grams							

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 91 of 97

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/16/2013	Annual	4/16/2014	MY45470194
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/16/2013	Annual	4/16/2014	JP38020182
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	4/17/2013	Annual	4/17/2014	3629U00687
Agilent	85070C	Dielectric Probe Kit	2/14/2013	Annual	2/14/2014	MY44300633
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Agilent	N5182A	MXG Vector Signal Generator	10/28/2013	Annual	10/28/2014	US46240505
Agilent	8753ES	S-Parameter Network Analyzer	10/29/2013	Annual	10/29/2014	US39170122
Agilent	85047A	S-Parameter Test Set	N/A	N/A	N/A	2904A00579
Amplifier Research	551G4	5W, 800MHz-4.2GHz	CBT	N/A	CBT	21910
Anritsu	ML2438A	Power Meter	2/14/2013	Annual	2/14/2014	1190013
Anritsu	ML2438A	Power Meter	2/14/2013	Annual	2/14/2014	98150041
Anritsu	ML2495A	Power Meter	10/31/2013	Annual	10/31/2014	1039008
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5318
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5821
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	2400
Anritsu	MA2481A	Power Sensor	10/30/2013	Annual	10/30/2014	5605
Anritsu	MA2411B	Pulse Power Sensor	11/14/2013	Annual	11/14/2014	1126066
Anritsu	MT8820C	Radio Communication Analyzer	6/28/2013	Annual	6/28/2014	6201240328
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bi-directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bi-directional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/3/2013	Annual	5/3/2014	836371/0079
Rohde & Schwarz	CMU200	Base Station Simulator	9/23/2013	Annual	9/23/2014	109892
Rohde & Schwarz	NRVD	Dual Channel Power Meter	10/12/2012	Biennial	10/12/2014	101695
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	2/8/2013	Annual	2/8/2014	101699
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	6/6/2013	Annual	6/6/2014	111427
Rohde & Schwarz	NRV-Z32	Peak Power Sensor	10/12/2012	Biennial	10/12/2014	836019/013
Rohde & Schwarz	SMIQQ3B	Signal Generator	4/17/2013	Annual	4/17/2014	DE27259
Rohde & Schwarz	SME06	Signal Generator	10/30/2013	Annual	10/30/2014	832026
Rohde & Schwarz	NRVS	Single Channel Power Meter	10/31/2013	Annual	10/31/2014	835360/0079
Seekonk	NC-100	Torque Wrench (8" lb)	11/29/2011	Triennial	11/29/2014	21053
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
SPEAG	D1750V2	1750 MHz SAR Dipole	4/30/2013	Annual	4/30/2014	1051
SPEAG	D1900V2	1900 MHz SAR Dipole	2/6/2013	Annual	2/6/2014	50148
SPEAG	D2450V2	2450 MHz SAR Dipole	1/8/2013	Annual	1/8/2014	797
SPEAG	D5GHZV2	5 GHz SAR Dipole	1/11/2013	Annual	1/11/2014	1057
SPEAG	D750V3	750 MHz Dipole	2/13/2013	Annual	2/13/2014	1046
SPEAG	D835V2	835 MHz SAR Dipole	4/25/2013	Annual	4/25/2014	40119
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/19/2013	Annual	11/19/2014	1408
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/17/2013	Annual	1/17/2014	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/22/2013	Annual	4/22/2014	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/21/2013	Annual	8/21/2014	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2013	Annual	3/8/2014	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/19/2013	Annual	11/19/2014	1333
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/14/2013	Annual	5/14/2014	1070
SPEAG	DAK-3.5	Dielectric Assessment Kit	11/13/2013	Annual	11/13/2014	1091
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/18/2013	Annual	8/18/2014	1008
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/18/2013	Annual	8/18/2014	1009
SPEAG	EX3DV4	SAR Probe	1/17/2013	Annual	1/17/2014	3589
SPEAG	ES3DV3	SAR Probe	4/29/2013	Annual	4/29/2014	3319
SPEAG	ES3DV2	SAR Probe	8/22/2013	Annual	8/22/2014	3022
SPEAG	ES3DV3	SAR Probe	3/15/2013	Annual	3/15/2014	3209
SPEAG	EX3DV4	SAR Probe	10/23/2013	Annual	10/23/2014	3914
SPEAG	ES3DV3	SAR Probe	11/22/2013	Annual	11/22/2014	3333
Tektronix	RSA6114A	Real Time Spectrum Analyzer	4/17/2013	Annual	4/17/2014	8010177
VWR	36934-158	Digital Thermometer	8/8/2013	Annual	8/8/2014	130477877
VWR	36934-158	Digital Thermometer	8/8/2013	Annual	8/8/2014	130258636
VWR	23226-658	Long Stem Thermometer	3/30/2012	Biennial	3/30/2014	122179874
VWR	23226-658	Long Stem Thermometer	5/16/2012	Biennial	5/16/2014	122295544

Note:

- CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
- All calibrated equipments were used during their calibration period.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 92 of 97

14 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.2	23.5

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 93 of 97

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _f 1gm	c _g 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 94 of 97

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 95 of 97

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 96 of 97

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [29] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [30] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [31] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [32] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [33] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1312182448.A3L	Test Dates: 12/02/13 - 01/20/14	DUT Type: Portable Tablet		Page 97 of 97

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 000032/1

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.999 \text{ S/m}$; $\epsilon_r = 53.498$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-03-2014; Ambient Temp: 22.5°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3333; ConvF(6.07, 6.07, 6.07); Calibrated: 11/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 4 Tx Slots


Area Scan (13x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.824 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.404 W/kg

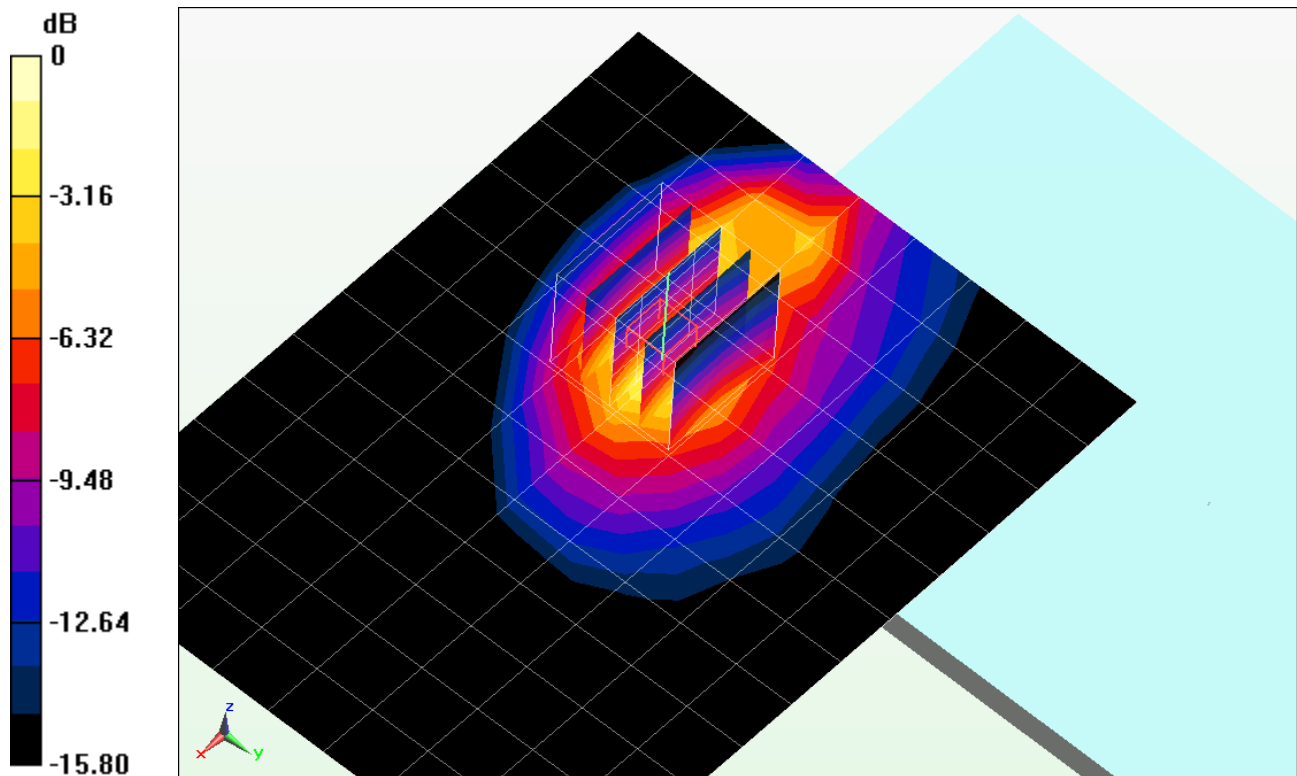

0 dB = 0.460 W/kg = -3.37 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 000032/1

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body; Medium parameters used:

$$f = 1880 \text{ MHz}; \sigma = 1.536 \text{ S/m}; \epsilon_r = 52.13; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-30-2013; Ambient Temp: 23.4°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 4 Tx Slots


Area Scan (12x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.803 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.175 W/kg

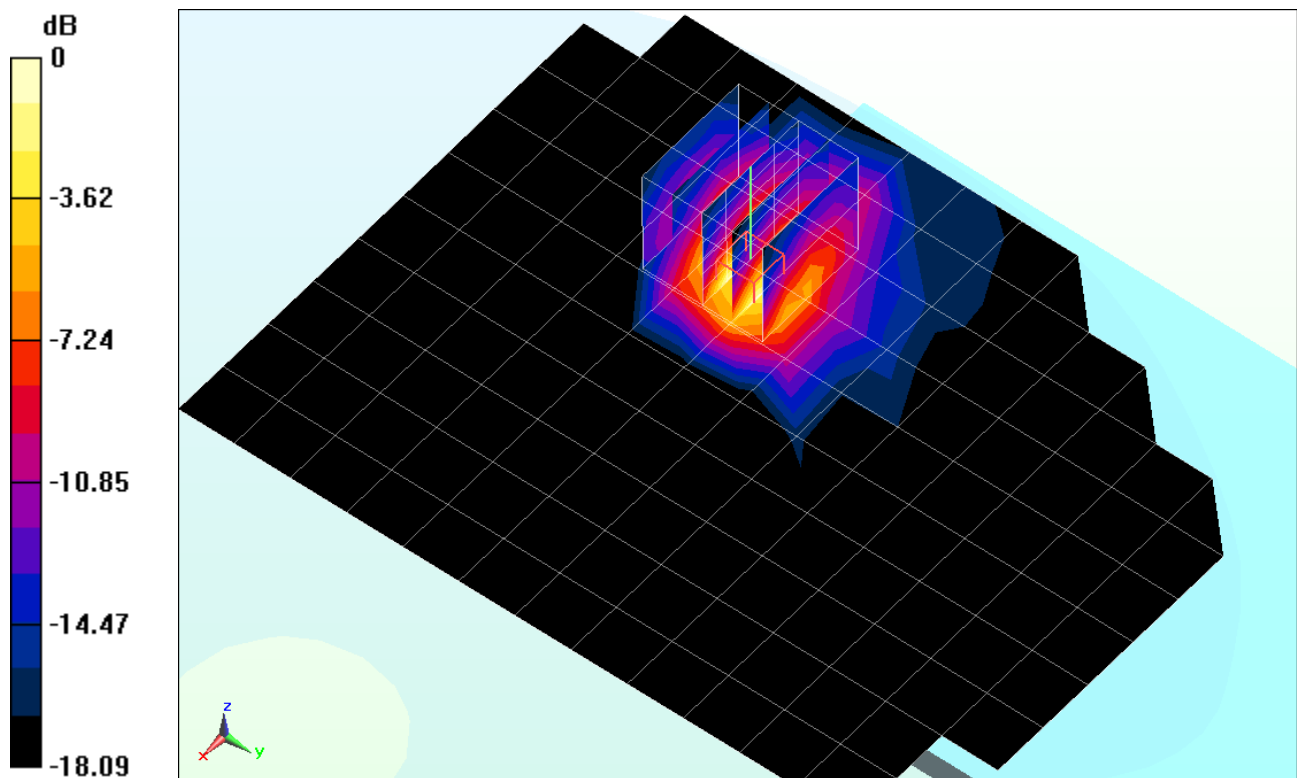

0 dB = 0.190 W/kg = -7.21 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 000032/1

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.999 \text{ S/m}$; $\epsilon_r = 53.498$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-03-2014; Ambient Temp: 22.5°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3333; ConvF(6.07, 6.07, 6.07); Calibrated: 11/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 850, Body SAR, Left Edge, Mid.ch


Area Scan (10x12x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.382 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.373 W/kg

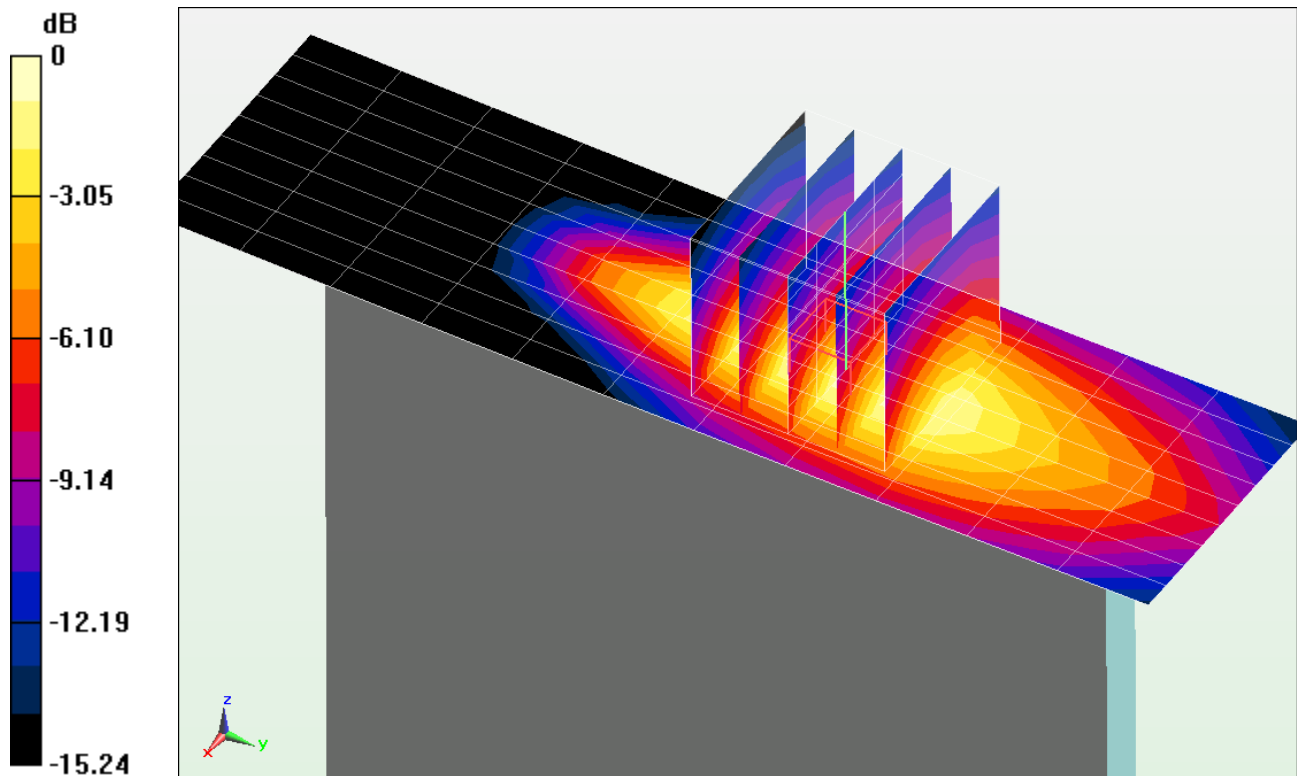

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 000032/1

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.536 \text{ S/m}$; $\epsilon_r = 52.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-30-2013; Ambient Temp: 23.4°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (12x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.980 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.233 W/kg

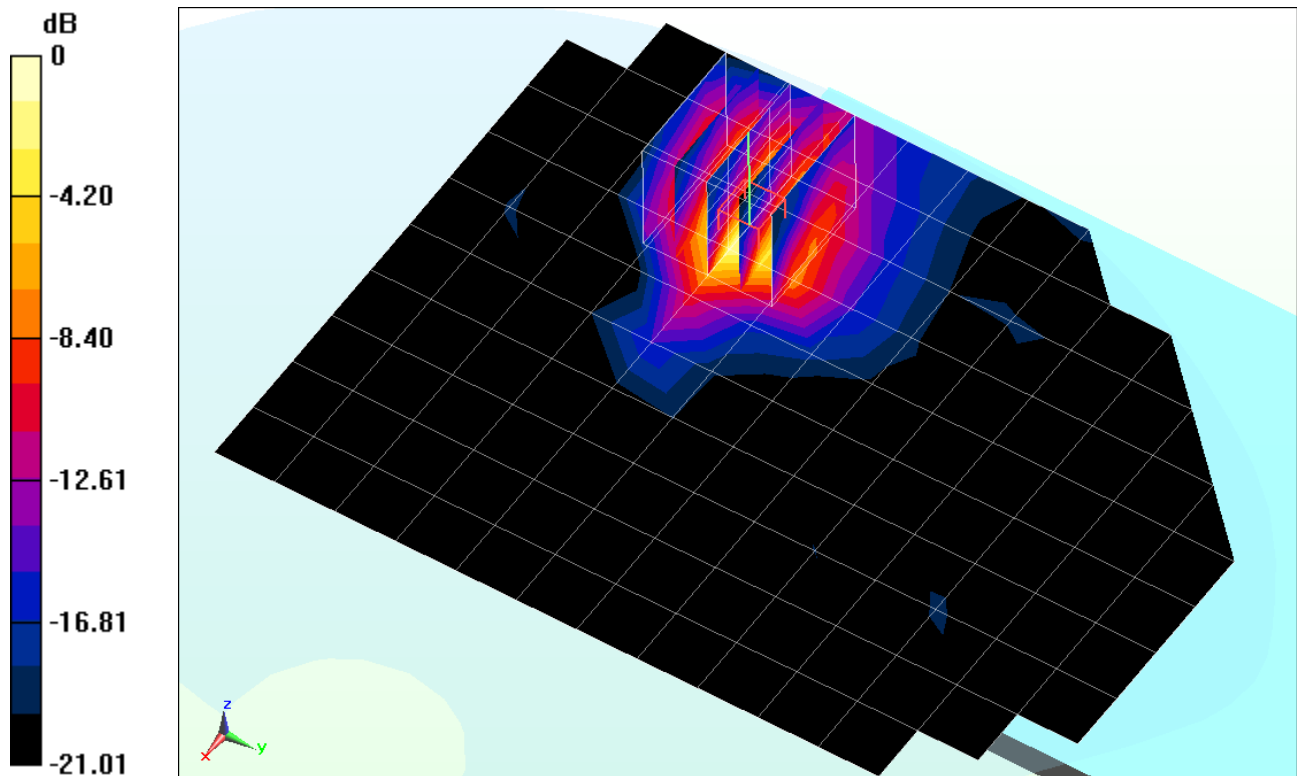

0 dB = 0.279 W/kg = -5.54 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 00987/62

Communication System: UID 0, LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 740 Body; Medium parameters used:

$f = 710 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 54.526$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.3 cm

Test Date: 01-20-2014; Ambient Temp: 23.8°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.38, 6.38, 6.38); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 17, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (11x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.901 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.204 W/kg

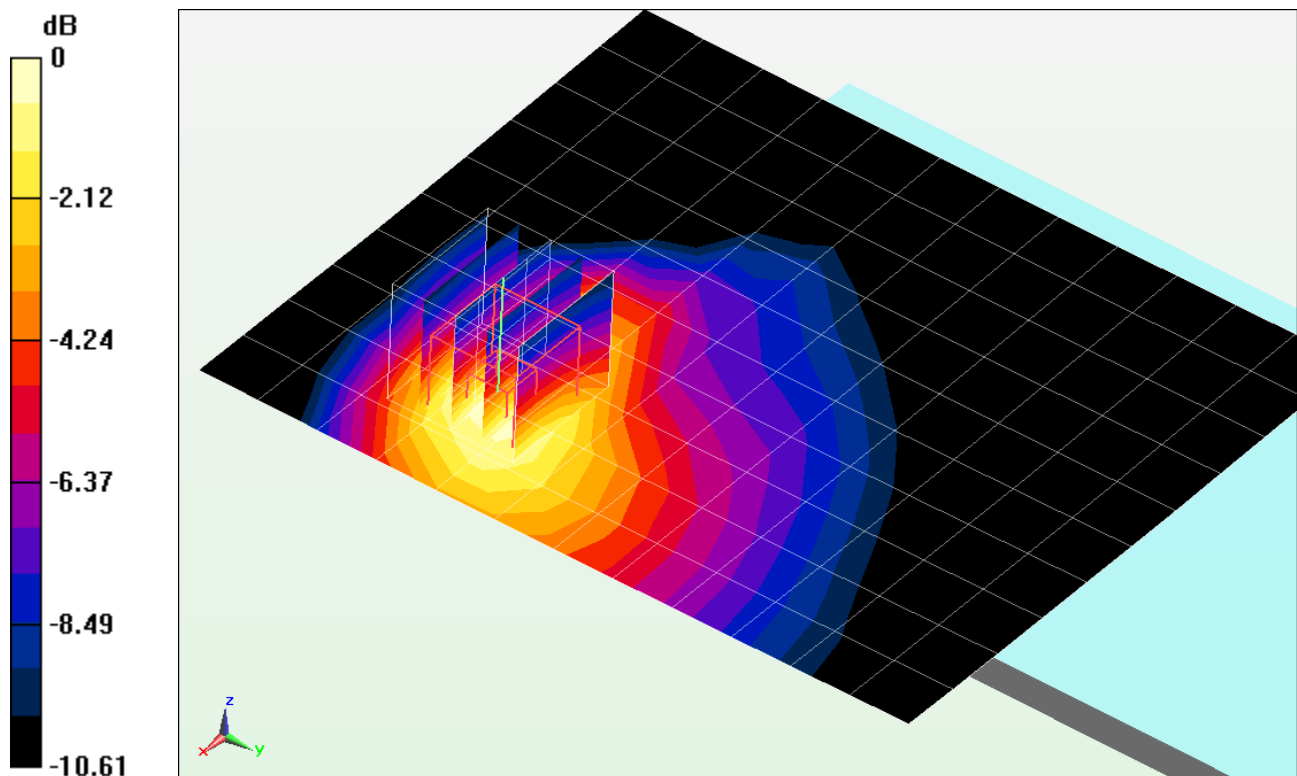

0 dB = 0.219 W/kg = -6.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 000032/1

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.999 \text{ S/m}$; $\epsilon_r = 53.499$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-03-2014; Ambient Temp: 22.5°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3333; ConvF(6.07, 6.07, 6.07); Calibrated: 11/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 25 RB, 25 RB Offset**


Area Scan (12x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.542 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.229 W/kg

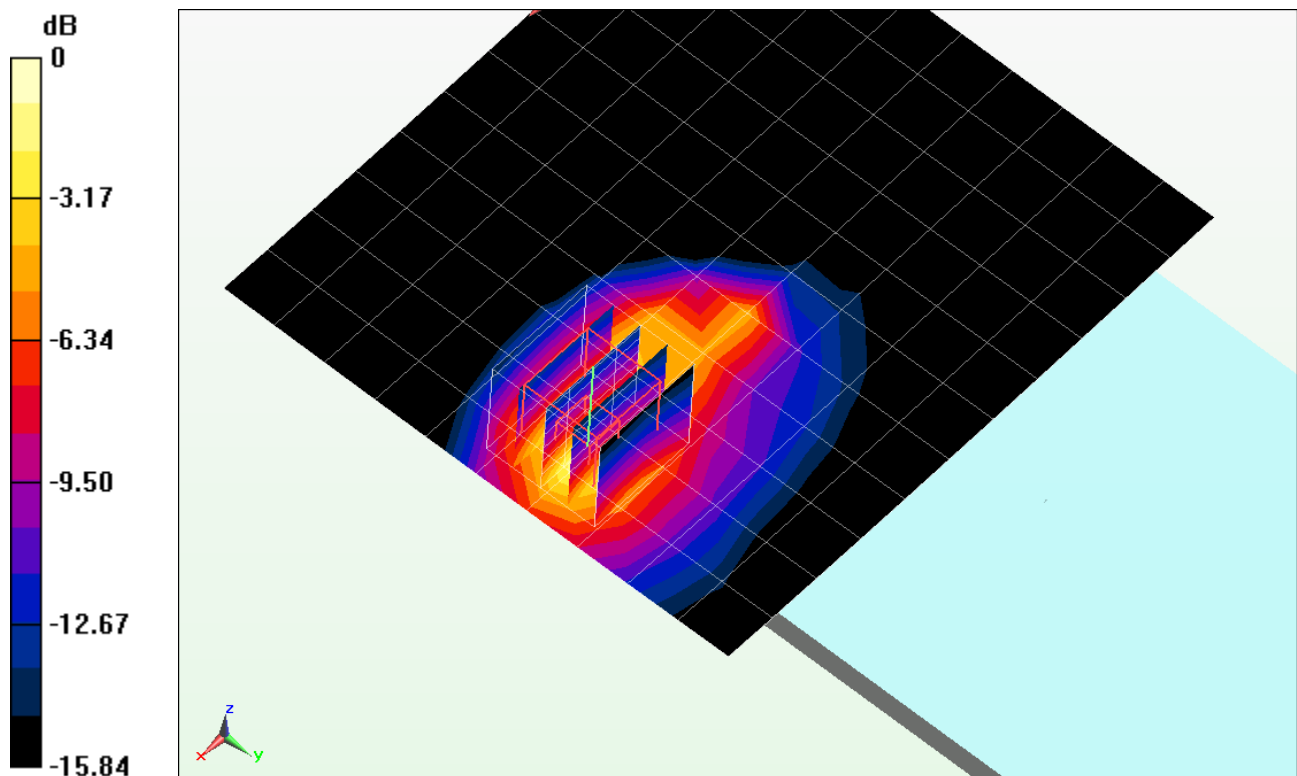

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 000032/1

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.455 \text{ S/m}$; $\epsilon_r = 51.857$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 01-03-2014; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3914; ConvF(7.89, 7.89, 7.89); Calibrated: 10/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (12x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.115 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.806 W/kg

SAR(1 g) = 0.353 W/kg

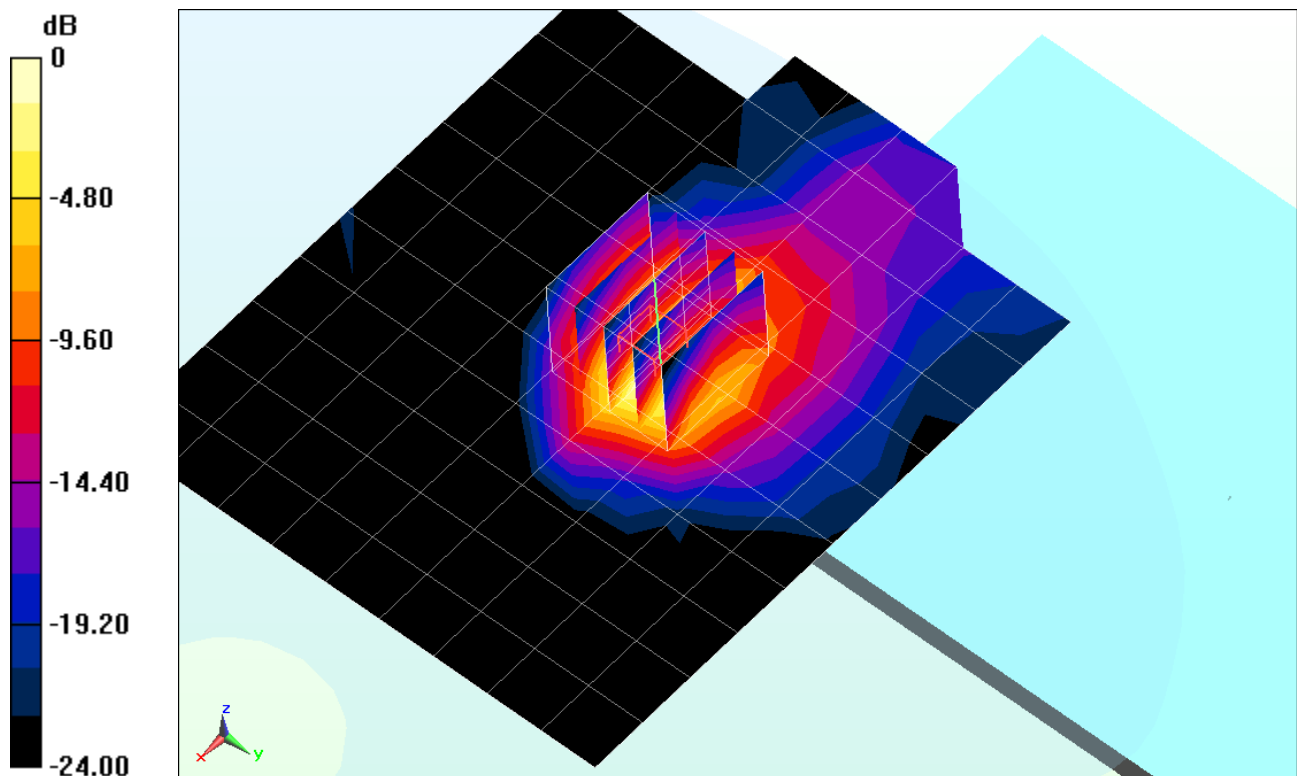

0 dB = 0.373 W/kg = -4.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 000032/1

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$; $\sigma = 1.515 \text{ S/m}$; $\epsilon_r = 52.195$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-30-2013; Ambient Temp: 23.4°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (12x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.840 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.461 W/kg

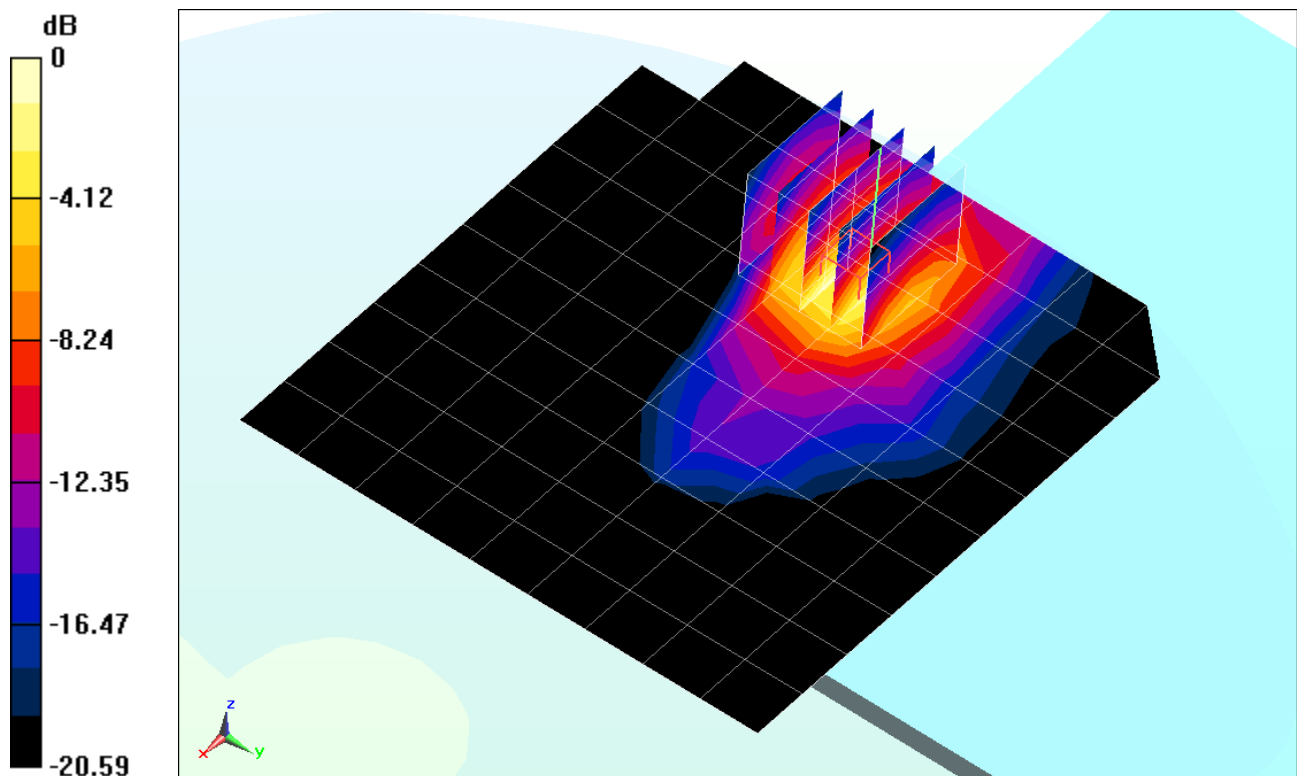

0 dB = 1.00 W/kg = 0.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 2611-2

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$$f = 2437 \text{ MHz}; \sigma = 2.018 \text{ S/m}; \epsilon_r = 51.116; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-02-2013; Ambient Temp: 22.2°C; Tissue Temp: 22.4°C

Probe: ES3DV2 - SN3022; ConvF(4.01, 4.01, 4.01); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11g, Body SAR, Antenna 2, Ch 06, 6 Mbps, Back Side


Area Scan (13x13x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.222 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.960 W/kg

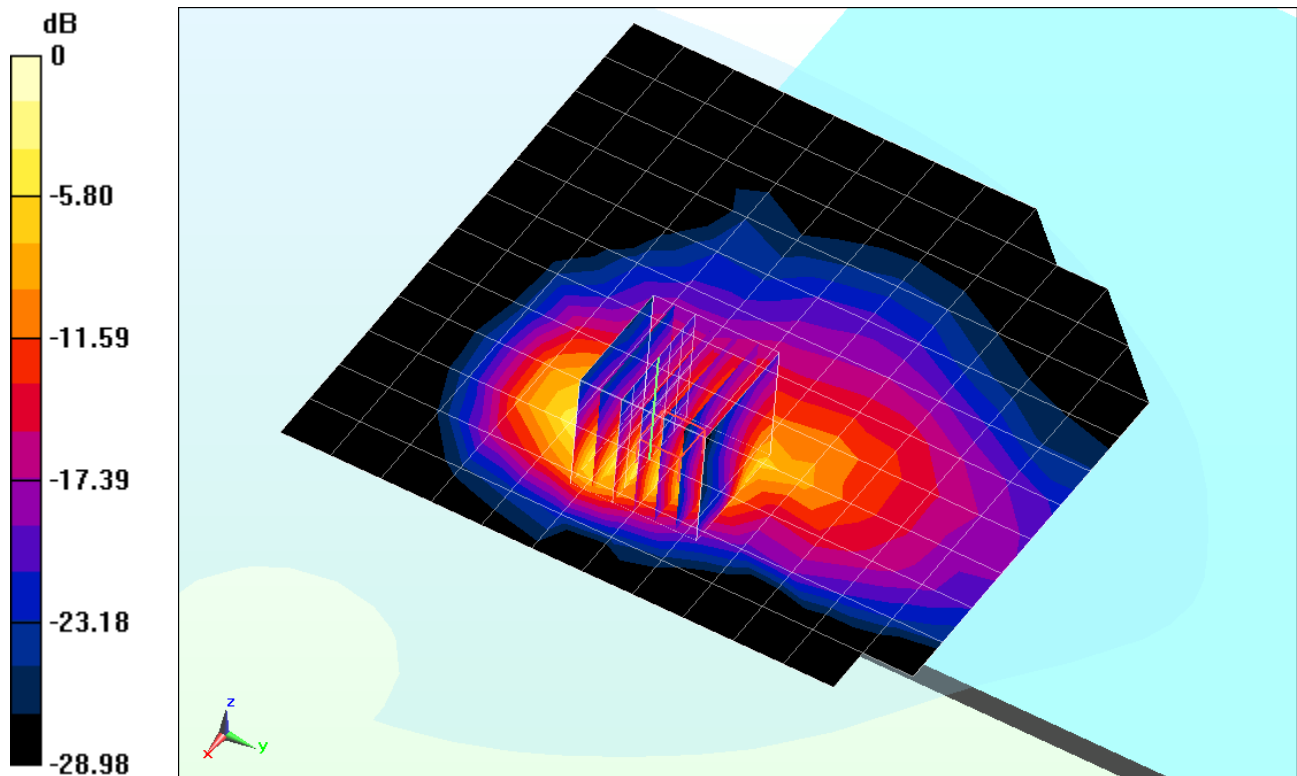

0 dB = 1.35 W/kg = 1.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 2611-1

Communication System: UID 0, IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5805 \text{ MHz}$; $\sigma = 6.11 \text{ S/m}$; $\epsilon_r = 46.26$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-09-2013; Ambient Temp: 23.6°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.8 GHz, Antenna 2, Body SAR, Ch 161, 6 Mbps, Back Side


Area Scan (9x15x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 5.891 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 0.937 W/kg

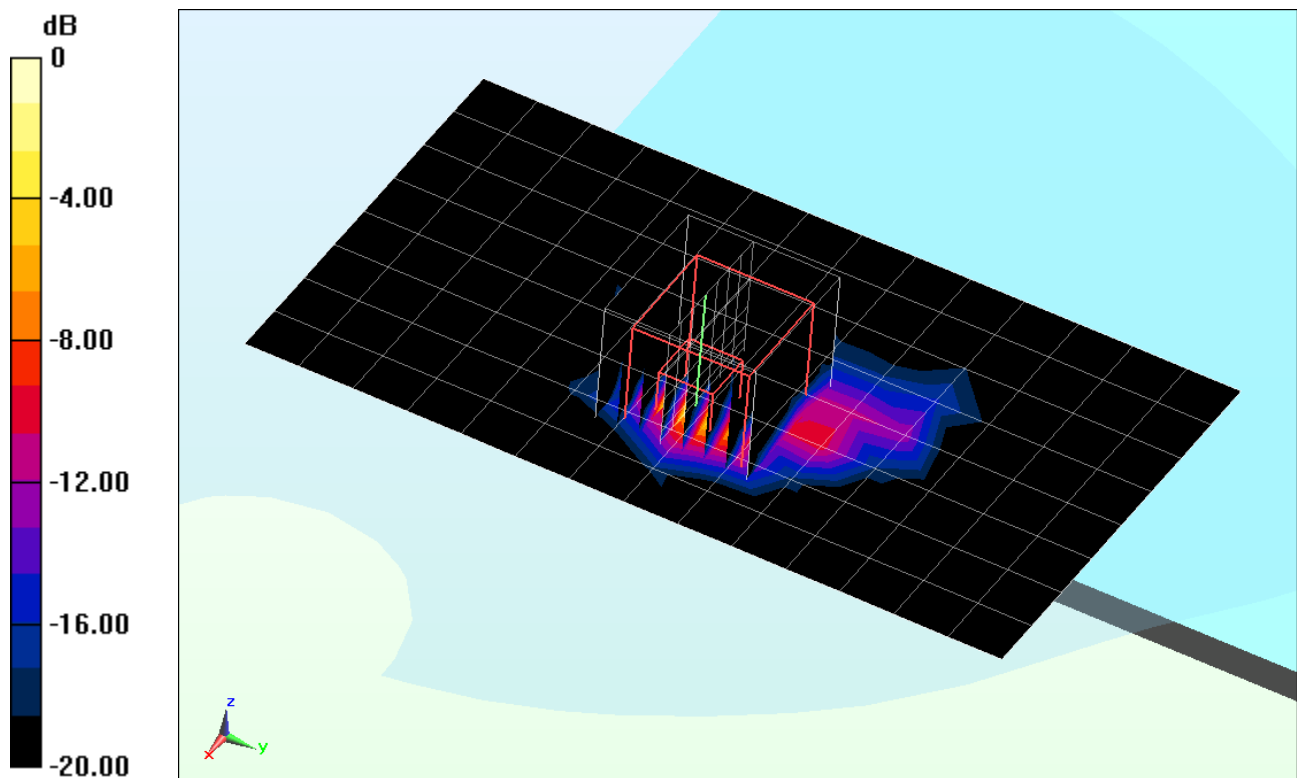

0 dB = 2.31 W/kg = 3.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMP905M; Type: Portable Tablet; Serial: 2611-1

Communication System: UID 0, IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5530 MHz; Duty Cycle: 1:1
Medium: 5 GHz Body; Medium parameters used (interpolated):

$$f = 5530 \text{ MHz}; \sigma = 5.8 \text{ S/m}; \epsilon_r = 46.536; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 12-09-2013; Ambient Temp: 23.6°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3589; ConvF(3.52, 3.52, 3.52); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11ac, 5.5 GHz, MIMO, Body SAR, Ch 106, 58.5 Mbps, Back Side


Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 8.806 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 14.2 W/kg

SAR(1 g) = 0.987 W/kg

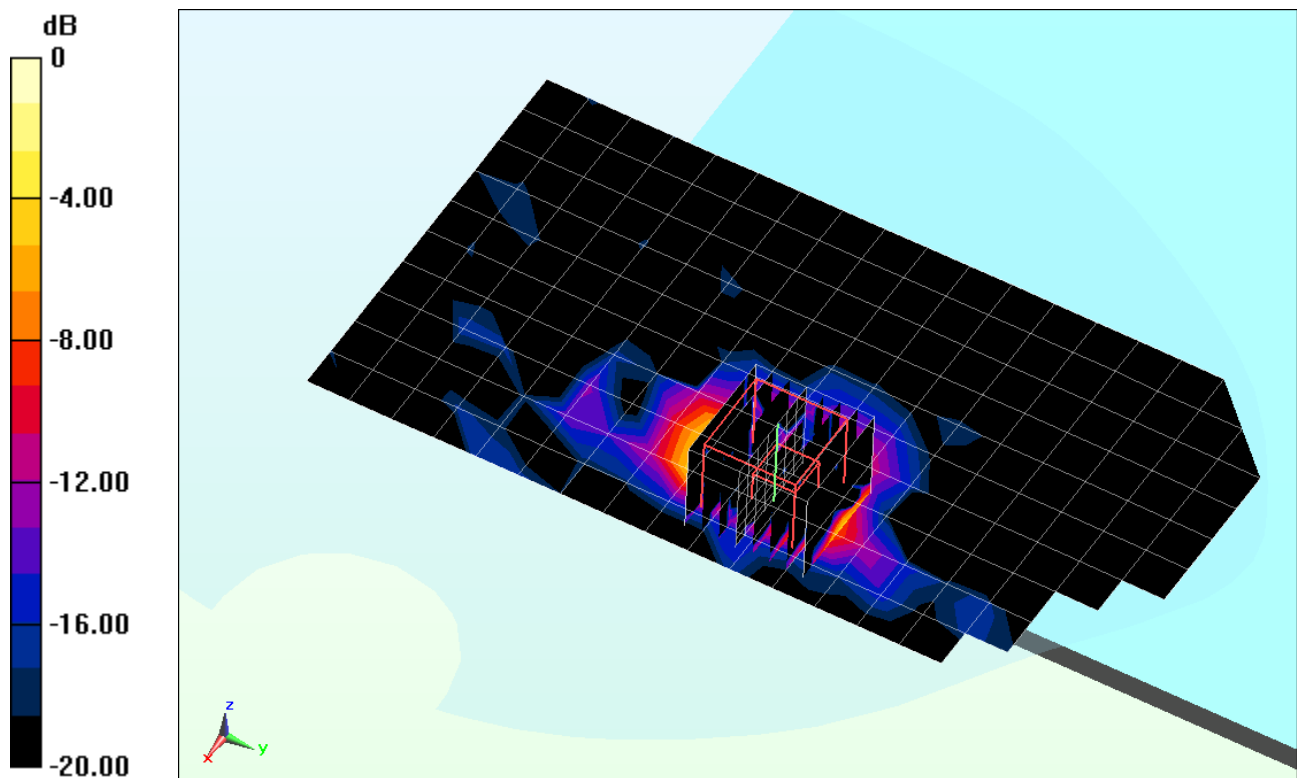

0 dB = 1.07 W/kg = 0.29 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1046

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 740 Body; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 54.118$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-20-2014; Ambient Temp: 23.8°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.38, 6.38, 6.38); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.897 W/kg

Deviation = 2.28%

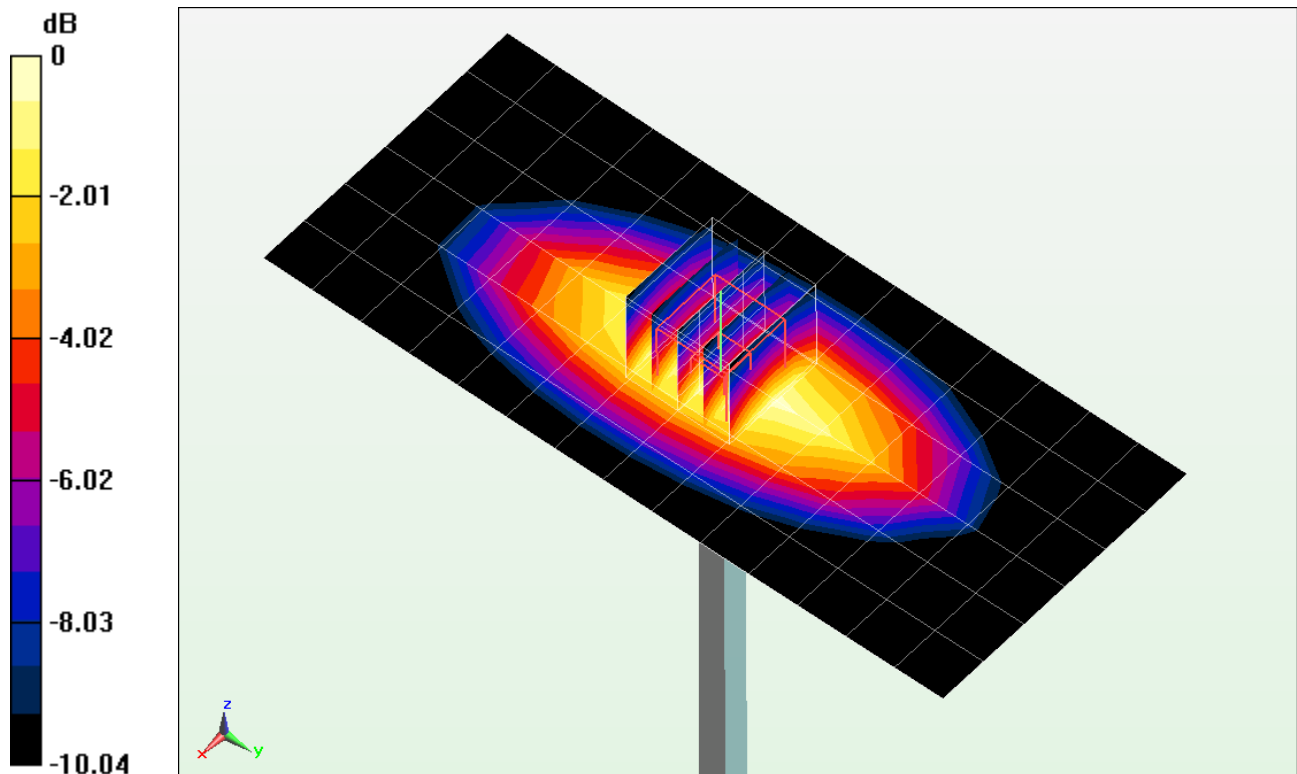

0 dB = 0.967 W/kg = -0.15 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 53.516$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-03-2014; Ambient Temp: 22.5°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3333; ConvF(6.07, 6.07, 6.07); Calibrated: 11/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.03 W/kg

Deviation = 7.97%

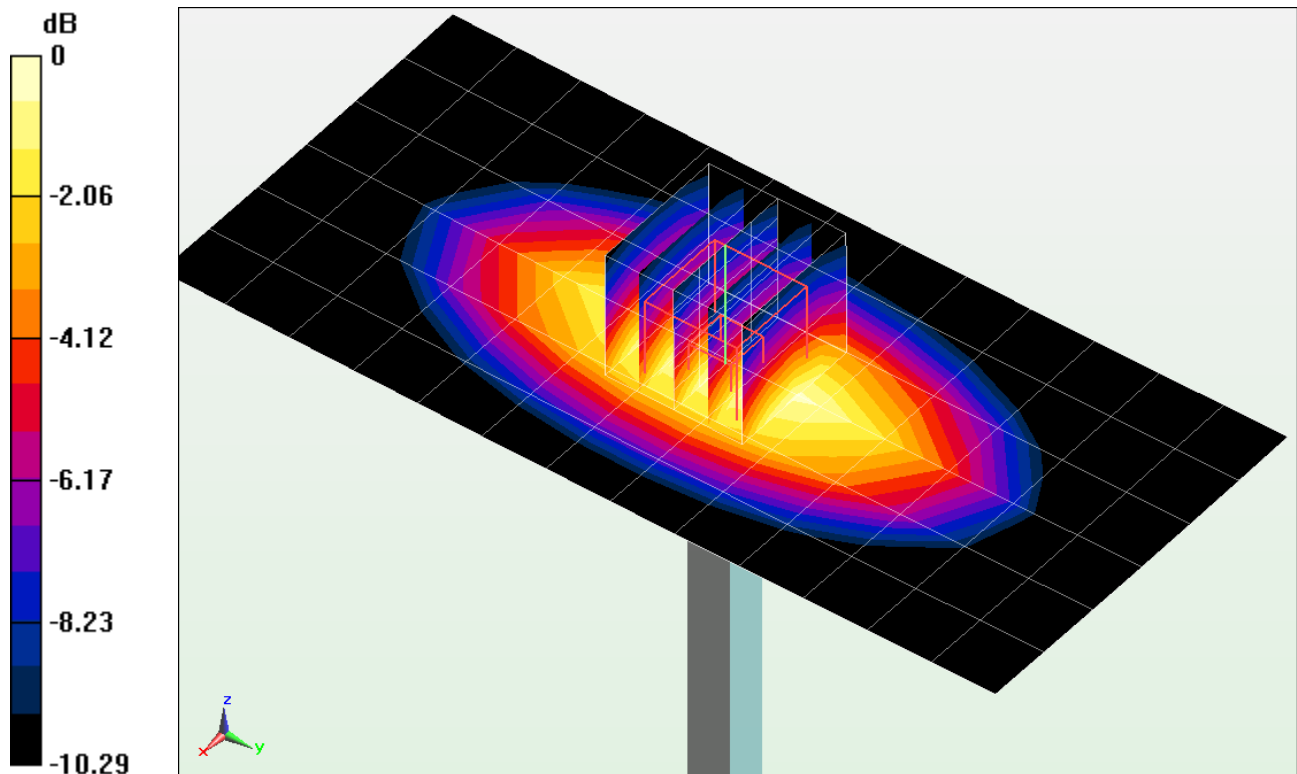

0 dB = 1.11 W/kg = 0.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.474 \text{ S/m}$; $\epsilon_r = 51.77$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-03-2014; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3914; ConvF(7.89, 7.89, 7.89); Calibrated: 10/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 6.34 W/kg

SAR(1 g) = 3.55 W/kg

Deviation = -6.08%

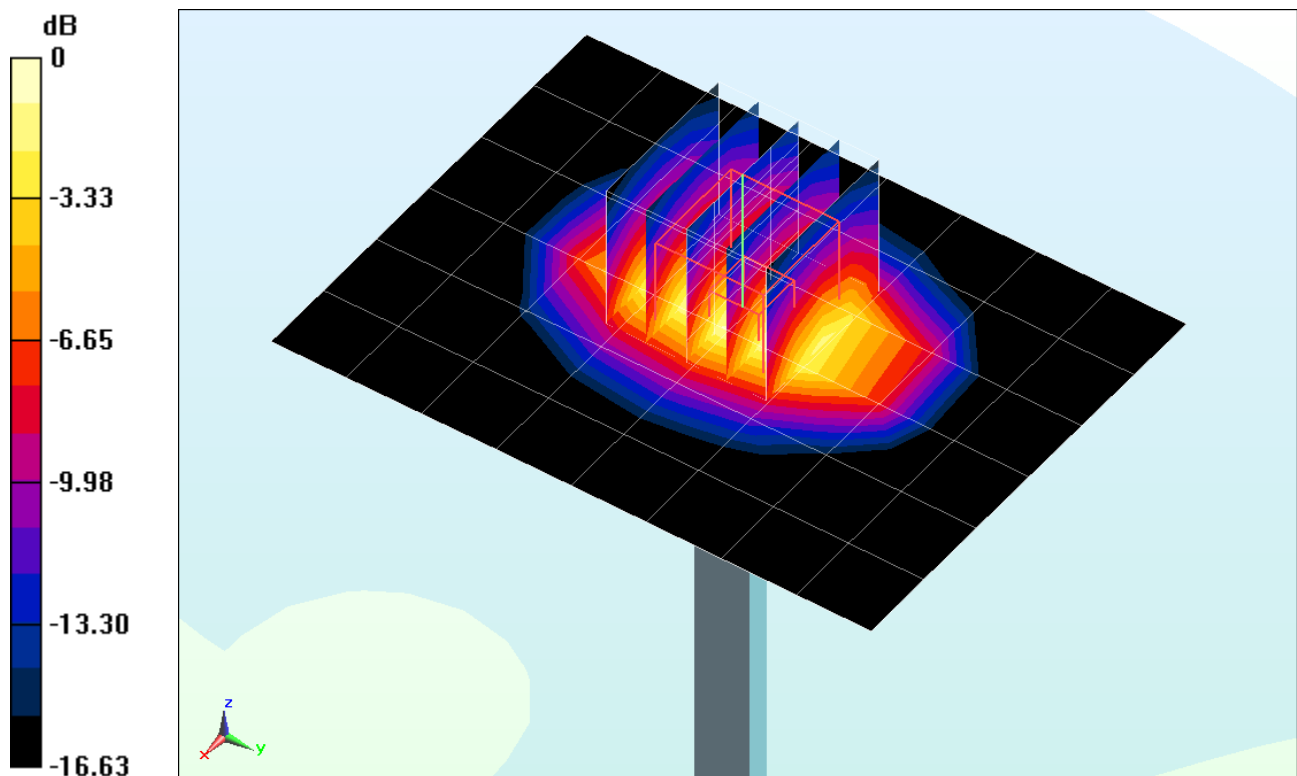

0 dB = 3.97 W/kg = 5.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.557 \text{ S/m}$; $\epsilon_r = 52.051$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-30-2013; Ambient Temp: 23.4°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3319; ConvF(4.85, 4.85, 4.85); Calibrated: 4/29/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/22/2013

Phantom: SAM front; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.36 W/kg

SAR(1 g) = 4.04 W/kg

Deviation = -0.98%

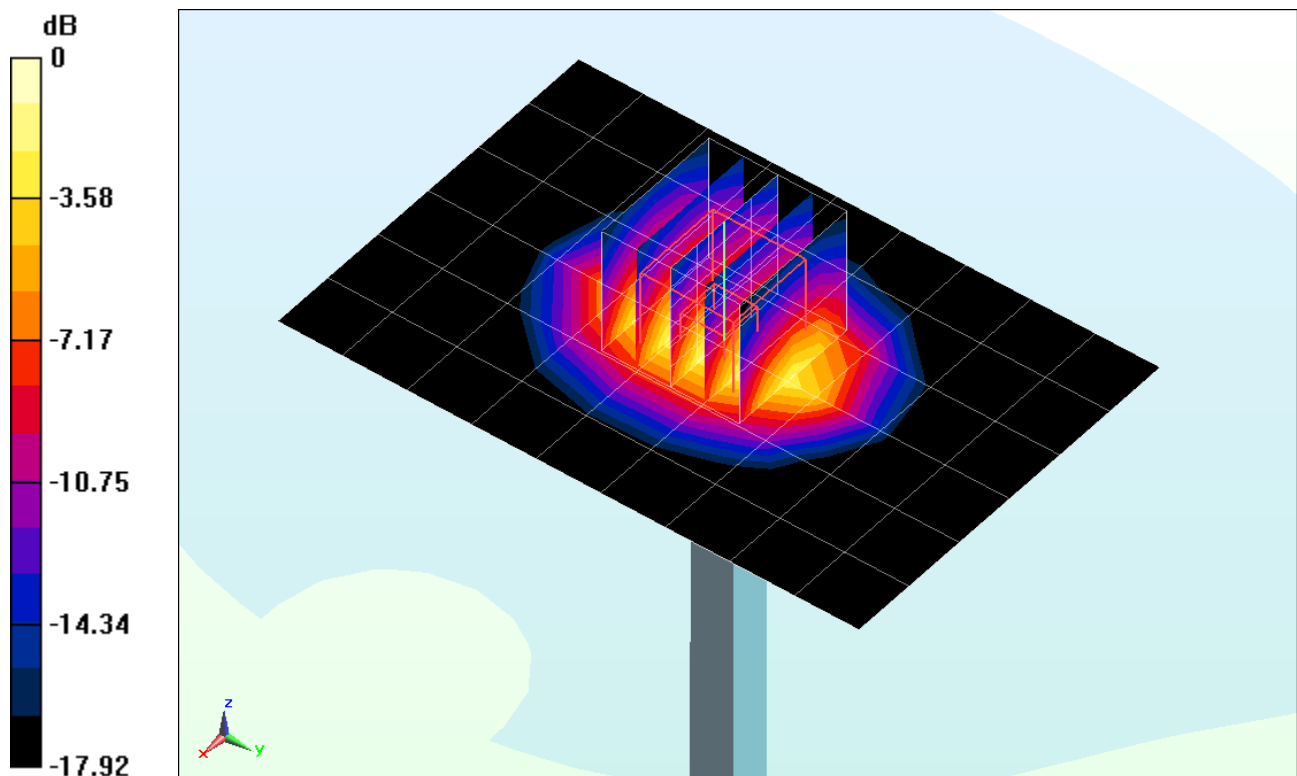

0 dB = 4.56 W/kg = 6.59 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.036 \text{ S/m}$; $\epsilon_r = 51.063$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-02-2013; Ambient Temp: 22.2°C; Tissue Temp: 22.4°C

Probe: ES3DV2 - SN3022; ConvF(4.01, 4.01, 4.01); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5 W/kg

Deviation = 0.81%

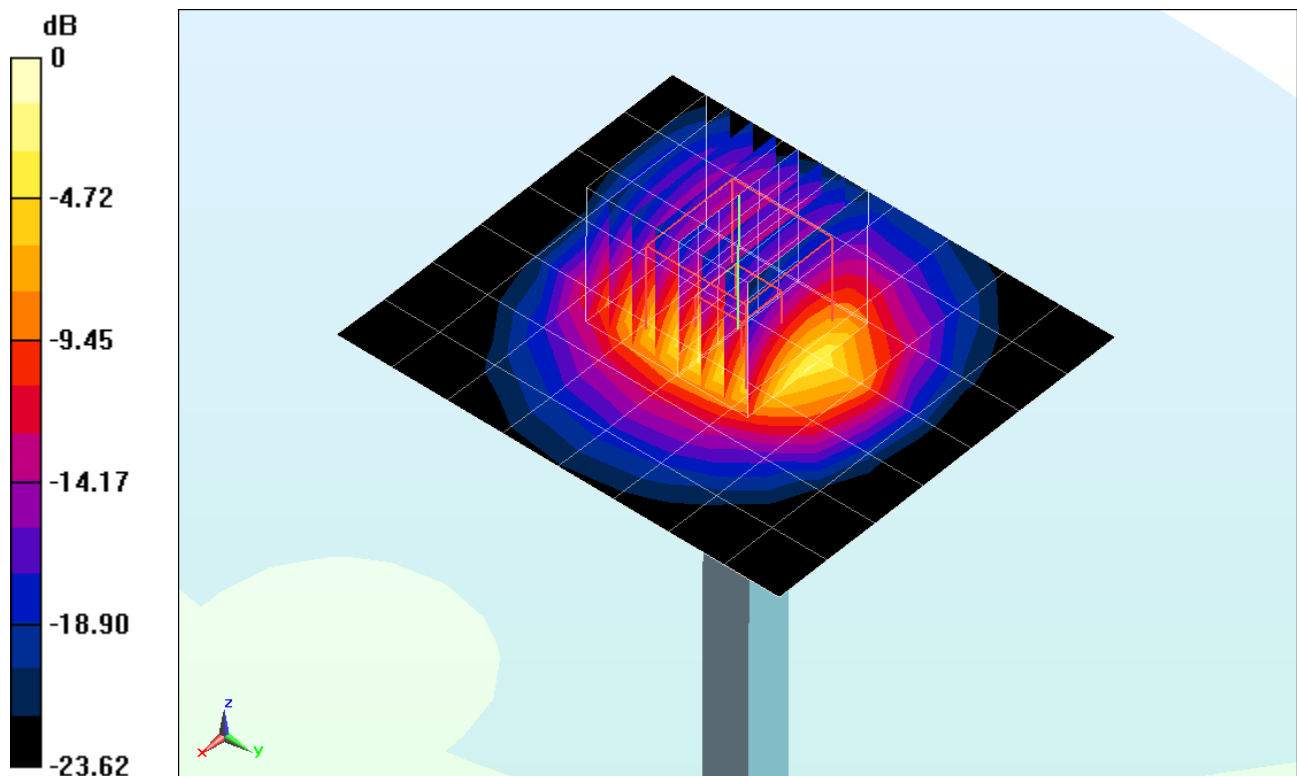

0 dB = 6.57 W/kg = 8.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 5.308 \text{ S/m}$; $\epsilon_r = 47.157$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-09-2013; Ambient Temp: 23.5°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3589; ConvF(3.99, 3.99, 3.99); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5200MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 7.24 W/kg

Deviation = -4.11%

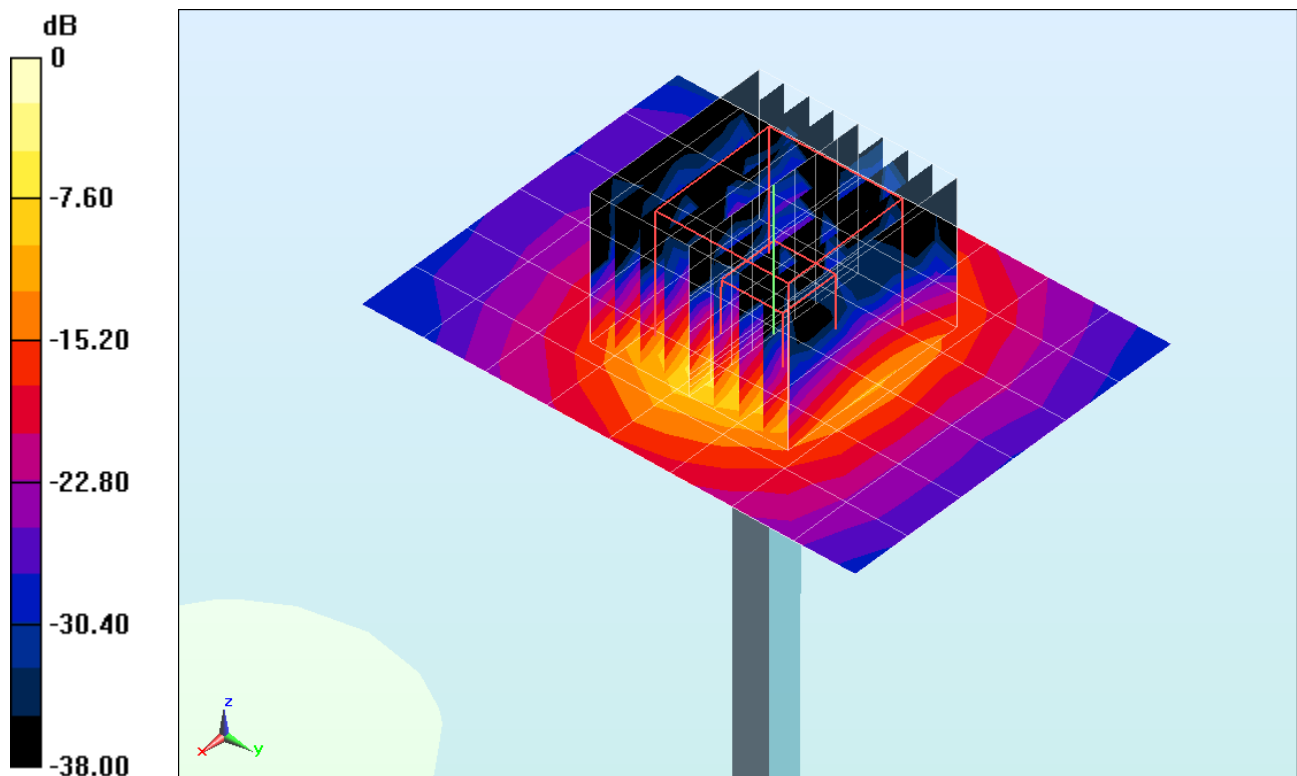

0 dB = 18.0 W/kg = 12.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.457 \text{ S/m}$; $\epsilon_r = 46.887$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-09-2013; Ambient Temp: 23.7°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5300MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 7.86 W/kg

Deviation = 4.38%

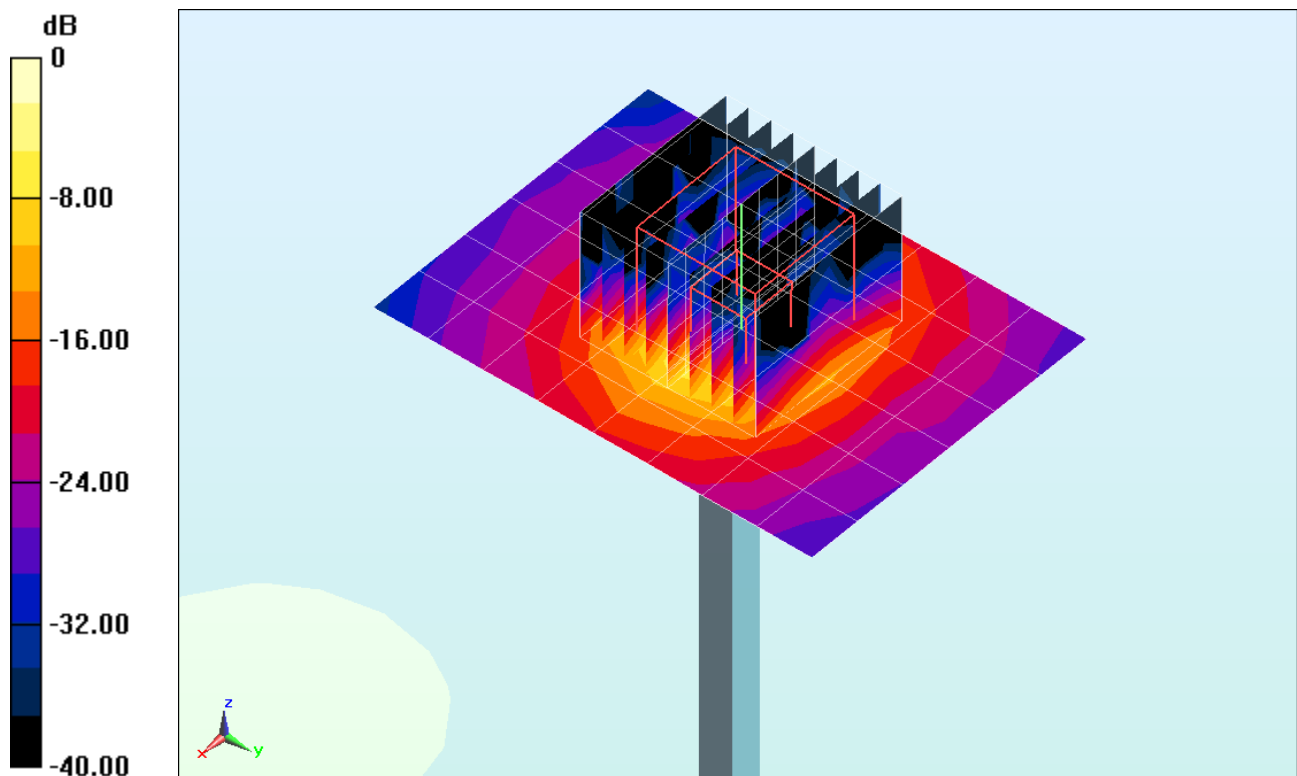

0 dB = 20.7 W/kg = 13.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.757 \text{ S/m}$; $\epsilon_r = 46.563$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-09-2013; Ambient Temp: 23.6°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3589; ConvF(3.52, 3.52, 3.52); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5500MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 7.77 W/kg

Deviation = -3.84%

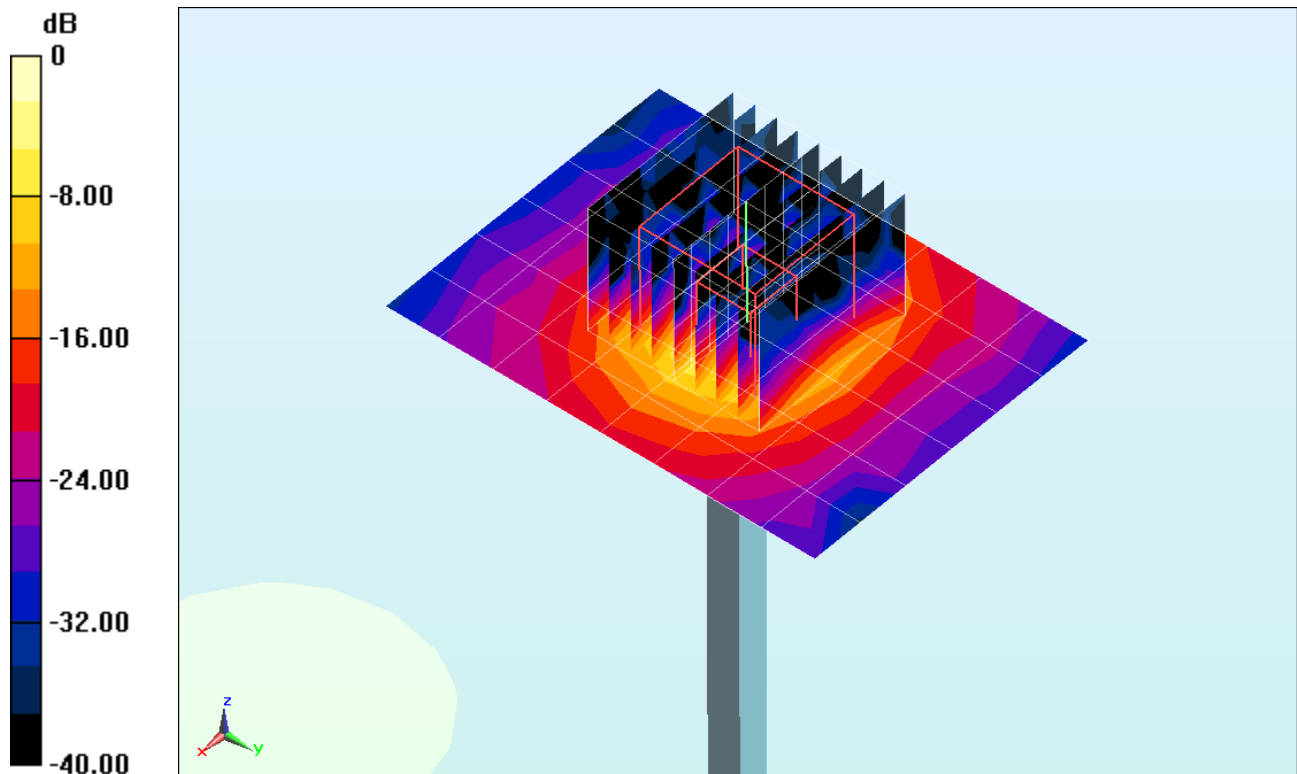

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.901 \text{ S/m}$; $\epsilon_r = 46.459$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-09-2013; Ambient Temp: 23.4°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3589; ConvF(3.32, 3.32, 3.32); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5600MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 32.9 W/kg

SAR(1 g) = 8.11 W/kg

Deviation = 1.00%

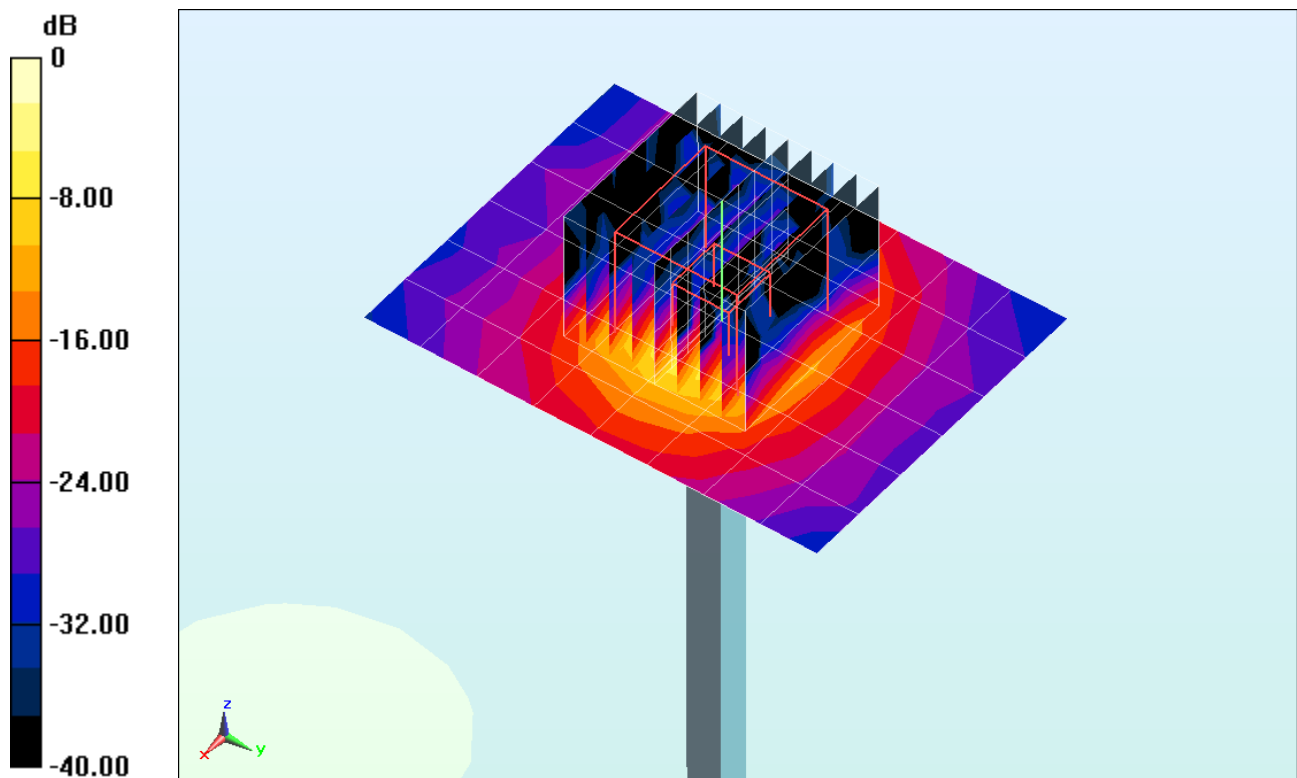

0 dB = 20.7 W/kg = 13.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.125 \text{ S/m}$; $\epsilon_r = 46.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-09-2013; Ambient Temp: 23.6°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5800MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 7.61 W/kg

Deviation = 1.33%

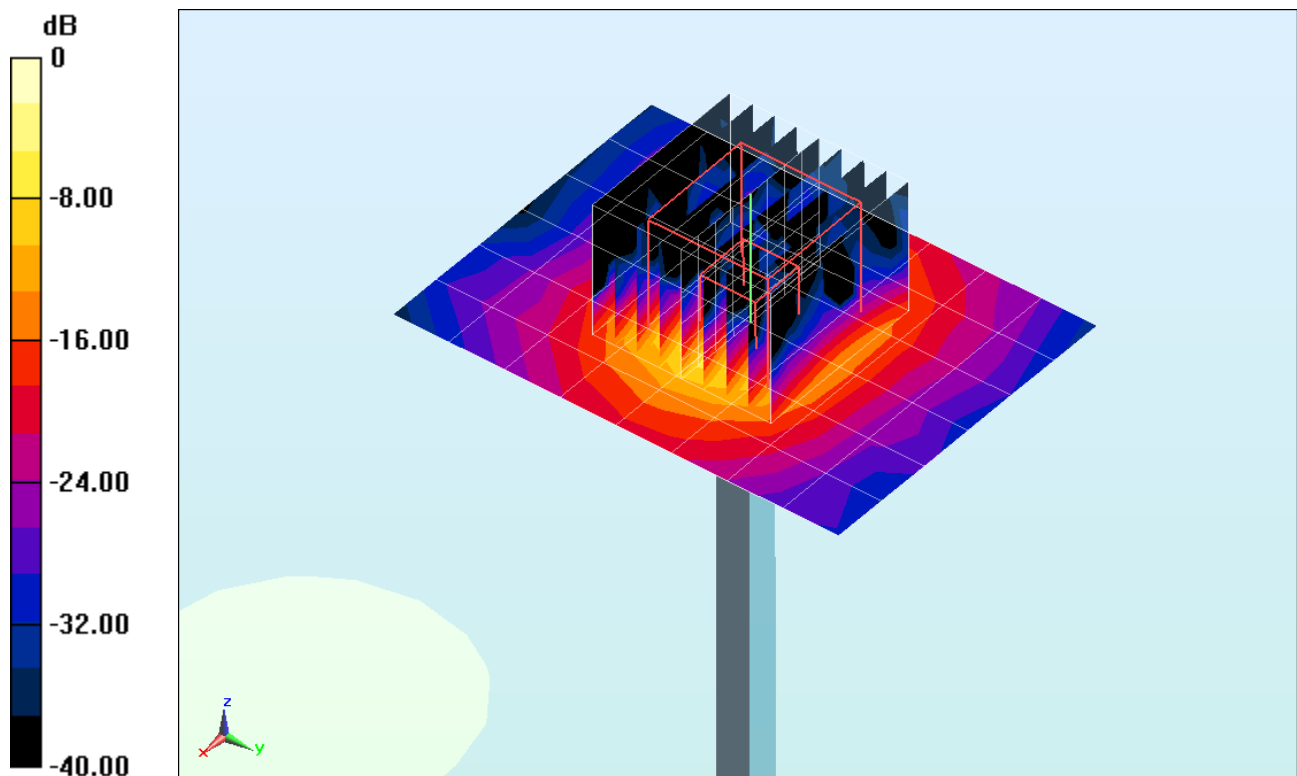

0 dB = 20.5 W/kg = 13.12 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D750V3-1046_Feb13**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1046**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **February 13, 2013**

✓
KOK
2/21/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 13, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.50 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.55 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.77 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.49 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.84 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$56.3 \Omega + 1.4 j\Omega$
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$52.0 \Omega - 1.1 j\Omega$
Return Loss	- 32.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.038 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 02, 2011

DASY5 Validation Report for Head TSL

Date: 13.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1046

Communication System: CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.28, 6.28, 6.28); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.942 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.41 W/kg


Maximum value of SAR (measured) = 2.55 W/kg

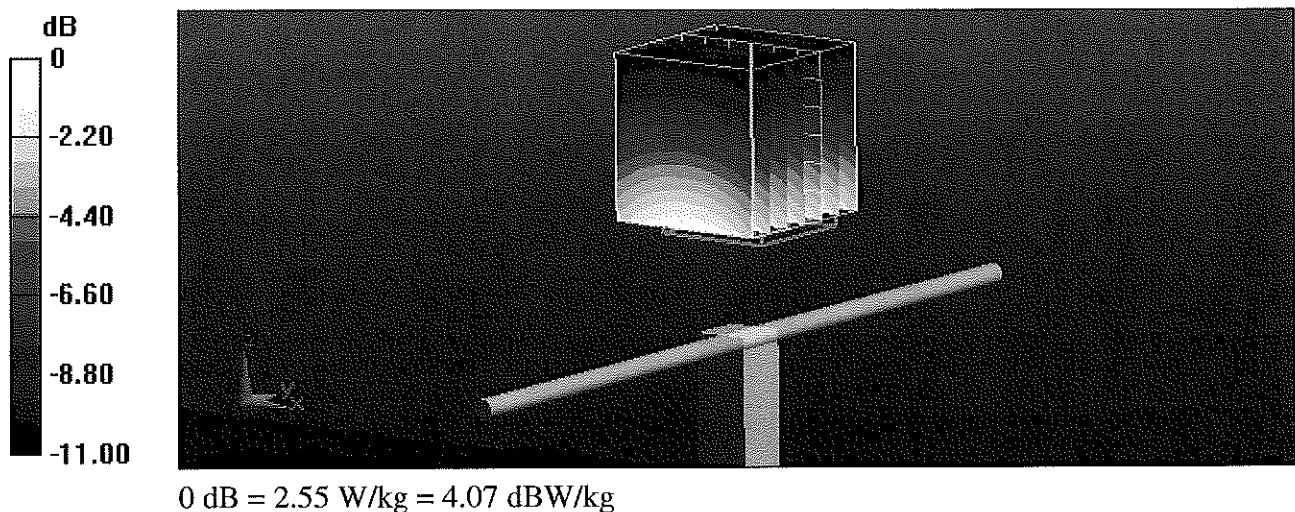

Impedance Measurement Plot for Head TSL


13 Feb 2013 16:15:52
 CH1 S11 1 U FS 1: 56.305 Ω 1.4043 Ω 298.00 pF 750.000 000 MHz

*
 Del
 Cor
 Avg
 16
 H1d

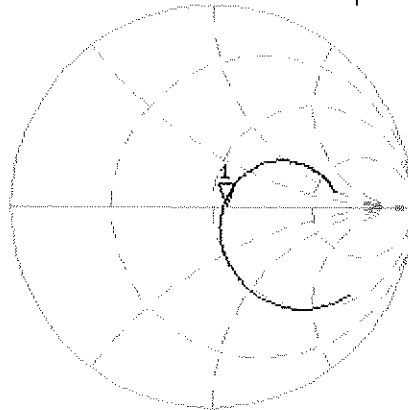

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.327 dB 750.000 000 MHz

Cor
 Avg
 16
 H1d

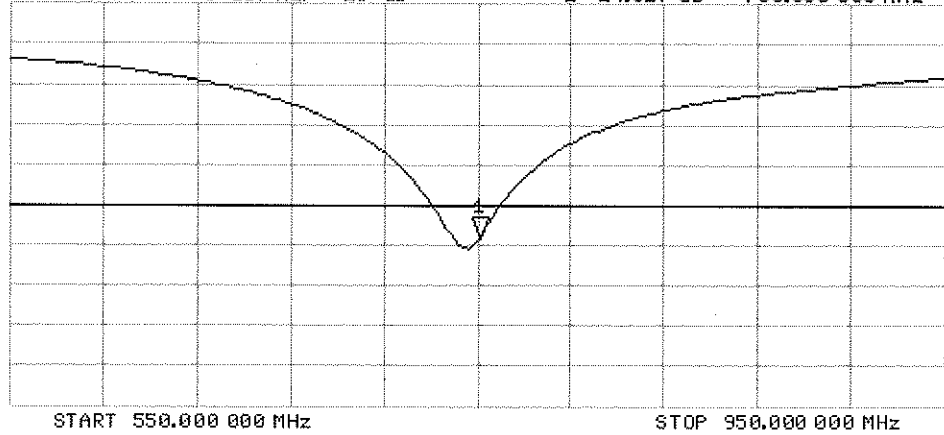

DASY5 Validation Report for Body TSL

Date: 13.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1046

Communication System: CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.11, 6.11, 6.11); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.942 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.49 W/kg

Maximum value of SAR (measured) = 2.61 W/kg

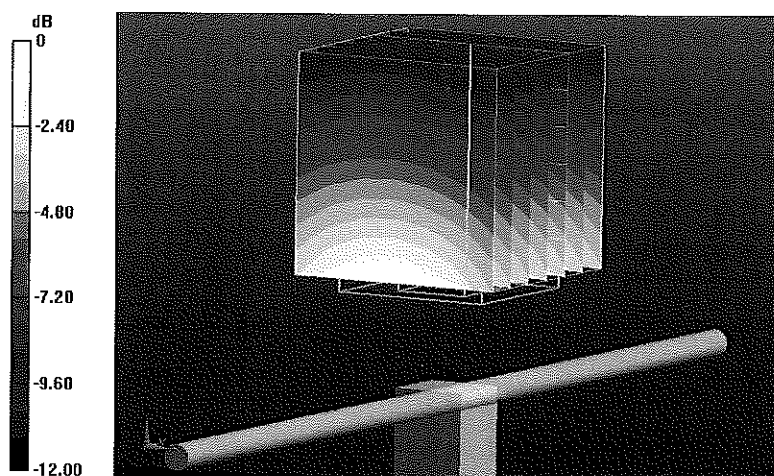


0 dB = 2.61 W/kg = 4.17 dBW/kg

Impedance Measurement Plot for Body TSL

13 Feb 2013 10:40:44
 [CH1] S11 1 U FS 1: 52.045 Ω -1.0898 Ω 194.71 pF 750.000 000 MHz

*
 Del
 CA

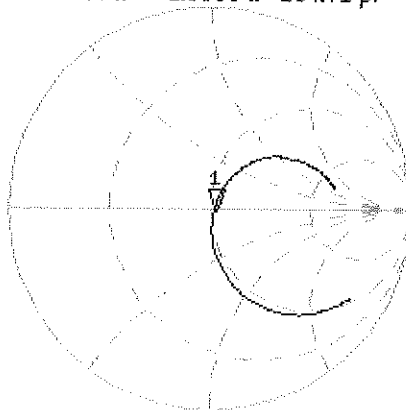

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -32.864 dB 750.000 000 MHz

CA

Avg
 16

H1d

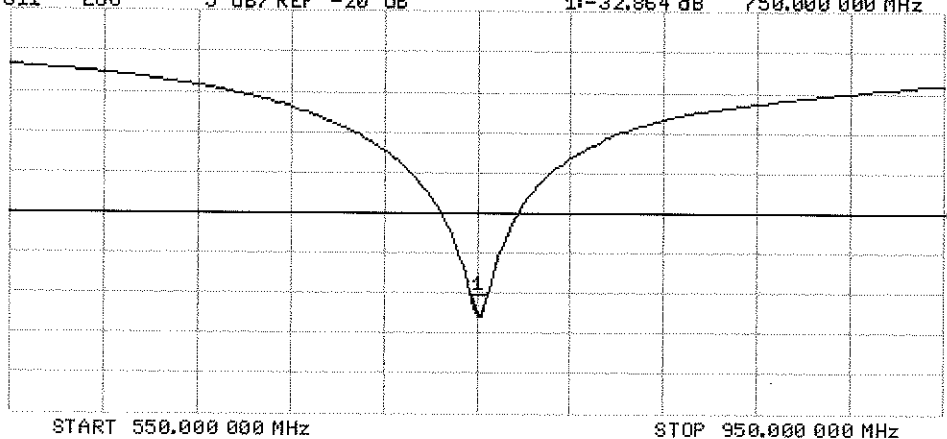



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d119_Apr13**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d119**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **April 25, 2013**

✓
KOK
5/8/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 909	11-Sep-12 (No. DAE4-909_Sep12)	Sep-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Claudio Leubler** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Issued: April 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.8 $\pm$ 6 %	0.94 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.51 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.68 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.30 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.0 $\pm$ 6 %	1.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.54 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.31 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.1 Ω - 4.7 j Ω
Return Loss	- 26.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.8 Ω - 6.3 j Ω
Return Loss	- 22.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.385 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 29, 2010

DASY5 Validation Report for Head TSL

Date: 25.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d119

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.05, 6.05, 6.05); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.387 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

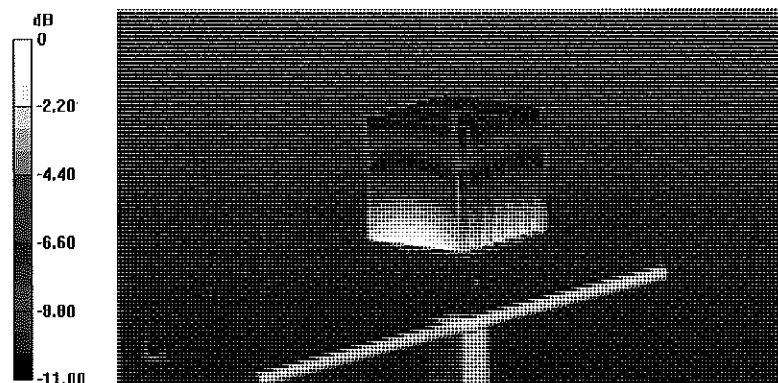

0 dB = 2.93 W/kg = 4.67 dBW/kg

Impedance Measurement Plot for Head TSL

25 Apr 2013 09:11:06
CH1 S11 1 U FS 1: 50.061 Ω -4.6621 Ω 40.884 pF 835.000 000 MHz


*

Del

CA

Avg
16

H1 d

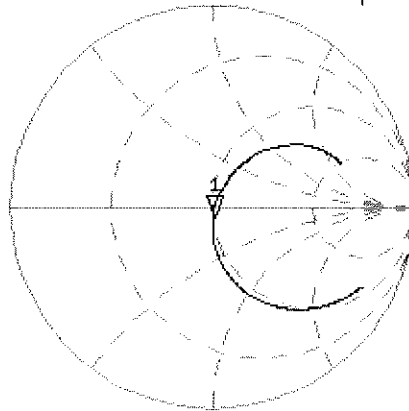


CH2 S11 LOG 5 dB/REF -20 dB 1:-26.641 dB 835.000 000 MHz

CA

Avg
16

H1 d

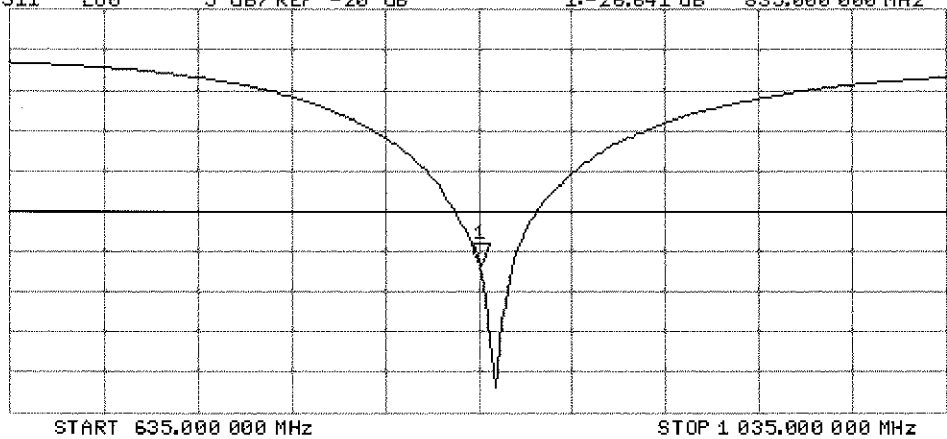

DASY5 Validation Report for Body TSL

Date: 24.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d119

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.178 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.68 W/kg


SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 2.89 W/kg

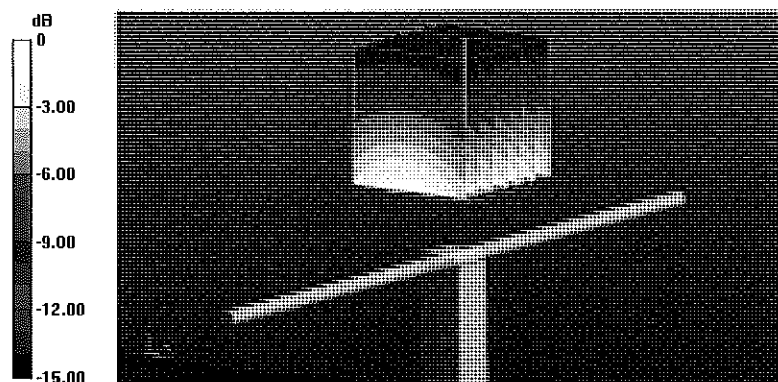

0 dB = 2.89 W/kg = 4.61 dBW/kg

Impedance Measurement Plot for Body TSL

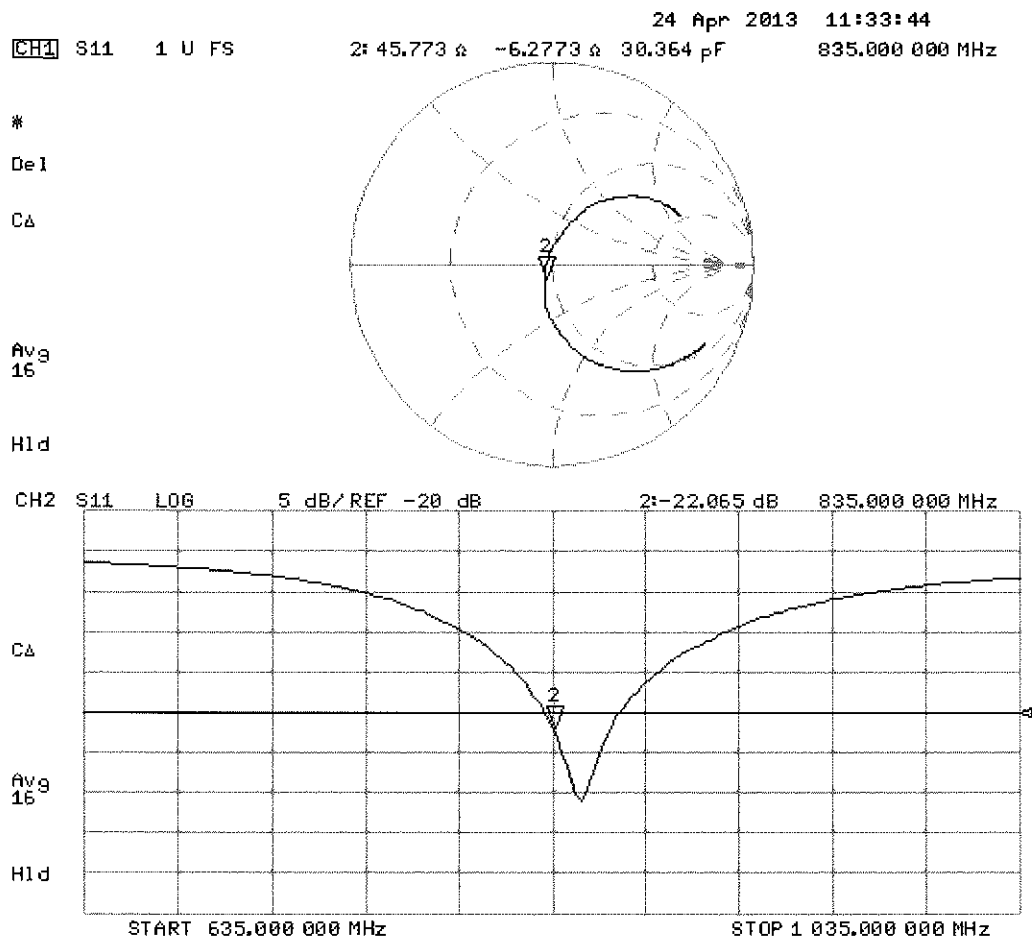



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1750V2-1051_Apr13**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN: 1051**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **April 30, 2013**

✓
KOK
5/8/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Claudio Leubler** Name: **Claudio Leubler** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Technical Manager

Issued: April 30, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.1 $\pm$ 6 %	1.33 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.83 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.5 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.8 $\pm$ 6 %	1.50 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.55 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.9 \Omega + 0.3 j\Omega$
Return Loss	- 40.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.0 \Omega + 0.4 j\Omega$
Return Loss	- 30.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.222 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 19, 2010

DASY5 Validation Report for Head TSL

Date: 30.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1051

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.18, 5.18, 5.18); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (8x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.104 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 9.01 W/kg; SAR(10 g) = 4.83 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

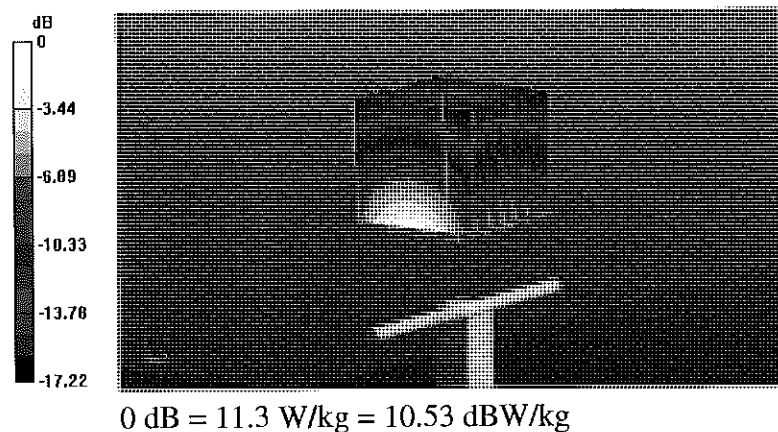


Impedance Measurement Plot for Head TSL

30 Apr 2013 12:59:57
 [CH1] S11 1 U FS 1: 50.889 Ω 0.2813 Ω 25.578 μH 1 750.000 000 MHz

*
 Del
 C Δ

Avs
 4

H1d

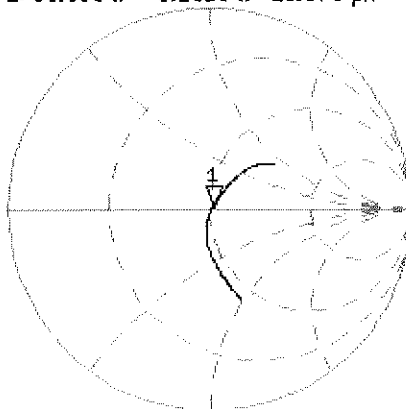


CH2 S11 LOG 5 dB/REF -20 dB 1:-40.692 dB 1 750.000 000 MHz

C Δ

Avs
 4

H1d

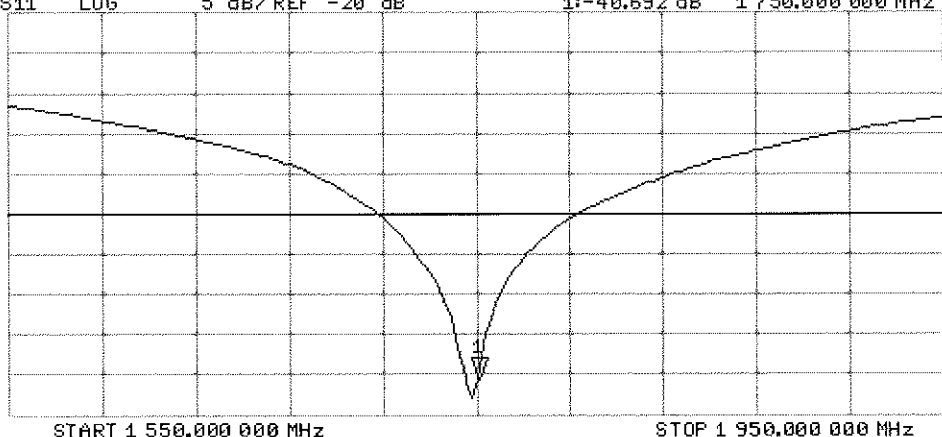

DASY5 Validation Report for Body TSL

Date: 30.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1051

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.83, 4.83, 4.83); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.473 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.55 W/kg; SAR(10 g) = 5.13 W/kg

Maximum value of SAR (measured) = 12.0 W/kg

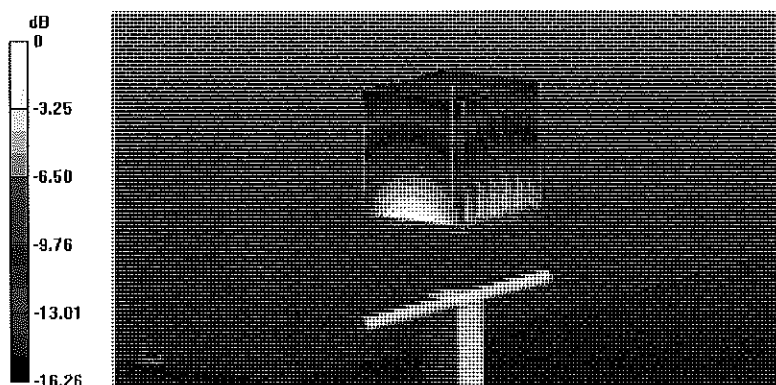


0 dB = 12.0 W/kg = 10.79 dBW/kg

Impedance Measurement Plot for Body TSL


30 Apr 2013 12:59:14
 [CH1] S11 1 U FS 1: 46.998 Ω 0.4160 Ω 37.835 pF 1 750.000 000 MHz

*
 De1
 CA
 Avg
 16
 H1d

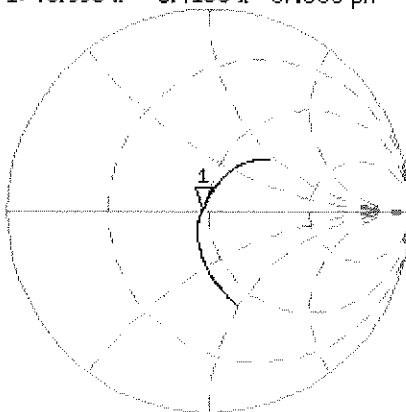

CH2 S11 LOG 5 dB/REF -20 dB 1:-30.102 dB 1 750.000 000 MHz

CA
 Avg
 16
 H1d

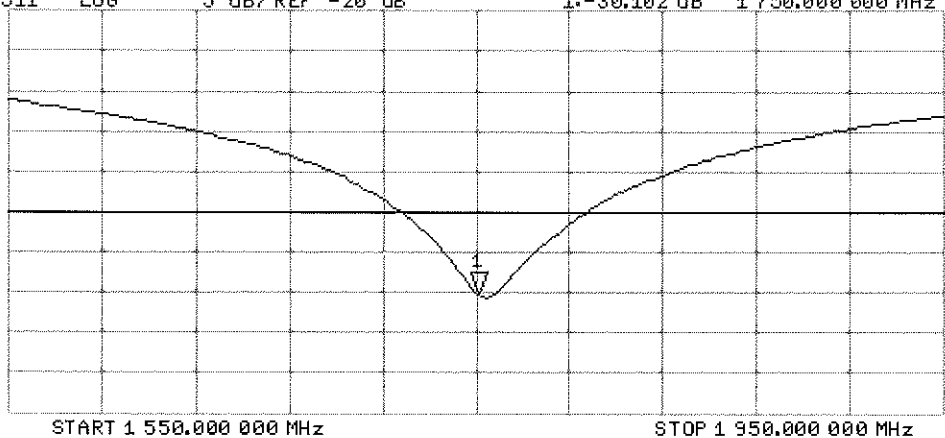



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1900V2-5d148_Feb13**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d148**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **February 06, 2013**

✓
KOK
2/21/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Leif Klysner** Name: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Technical Manager

Signature

Issued: February 6, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.4 $\pm$ 6 %	1.38 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.87 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.9 $\pm$ 6 %	1.53 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.7 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.1 Ω + 5.9 j Ω
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.3 Ω + 6.3 j Ω
Return Loss	- 23.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 06.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d148

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.98, 4.98, 4.98); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.534 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.18 W/kg


Maximum value of SAR (measured) = 12.1 W/kg

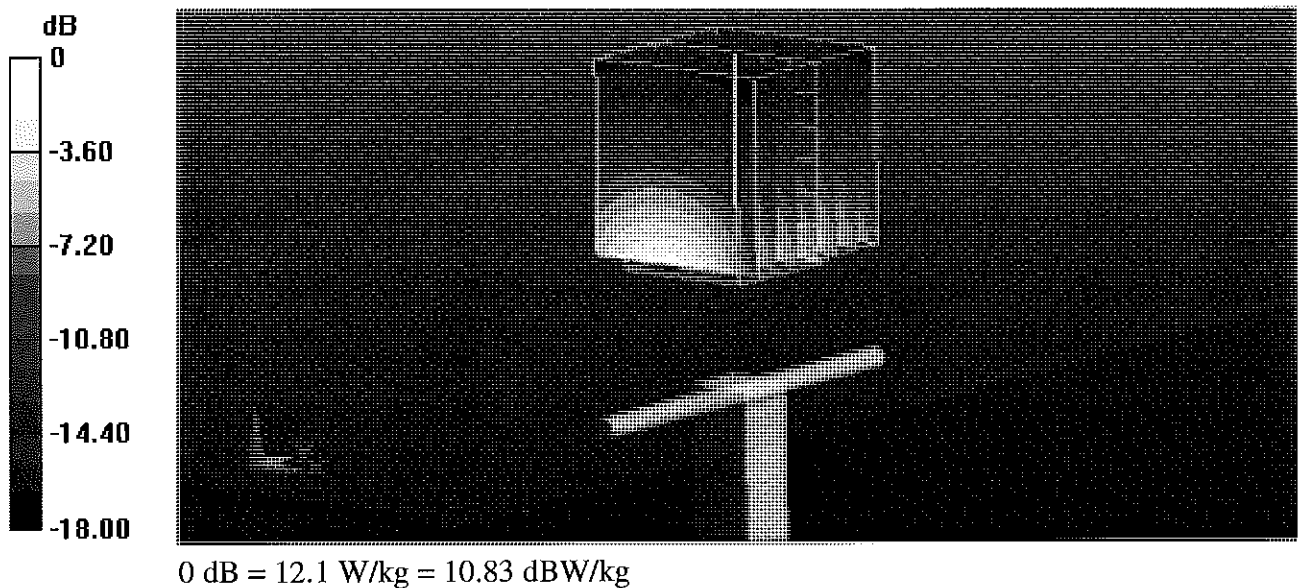

Impedance Measurement Plot for Head TSL


6 Feb 2013 09:25:10
 CH1 S11 1 U FS 1: 52.125 $\angle$ 5.8711 $\angle$ 491.80 μ H 1 900.000 000 MHz

*
 Del
 CA
 Avg
 16
 H1d

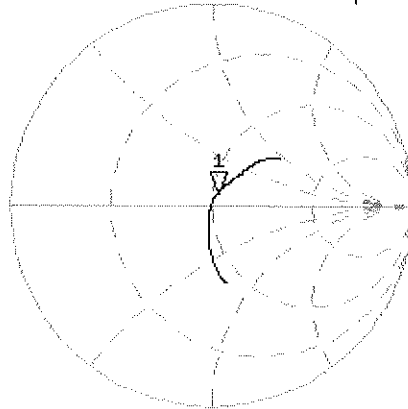

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.287 dB 1 900.000 000 MHz

CA
 Avg
 16
 H1d

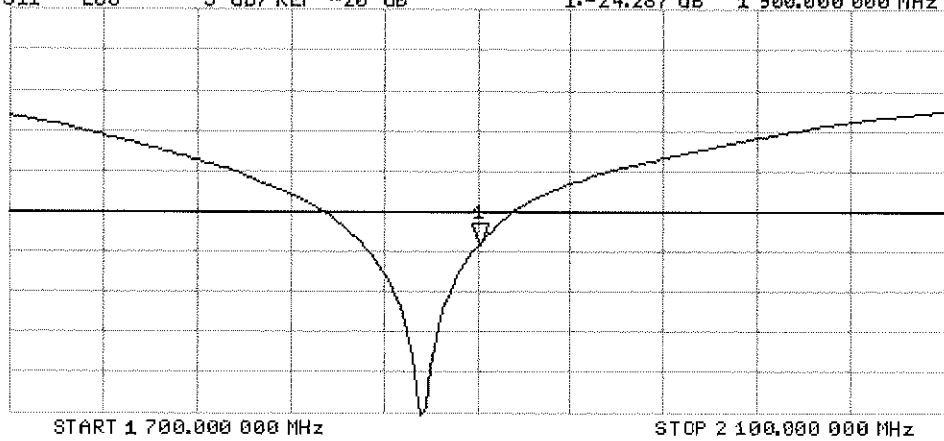

DASY5 Validation Report for Body TSL

Date: 06.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d148

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.6, 4.6, 4.6); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.534 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.9 W/kg


SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.45 W/kg

Maximum value of SAR (measured) = 13.1 W/kg

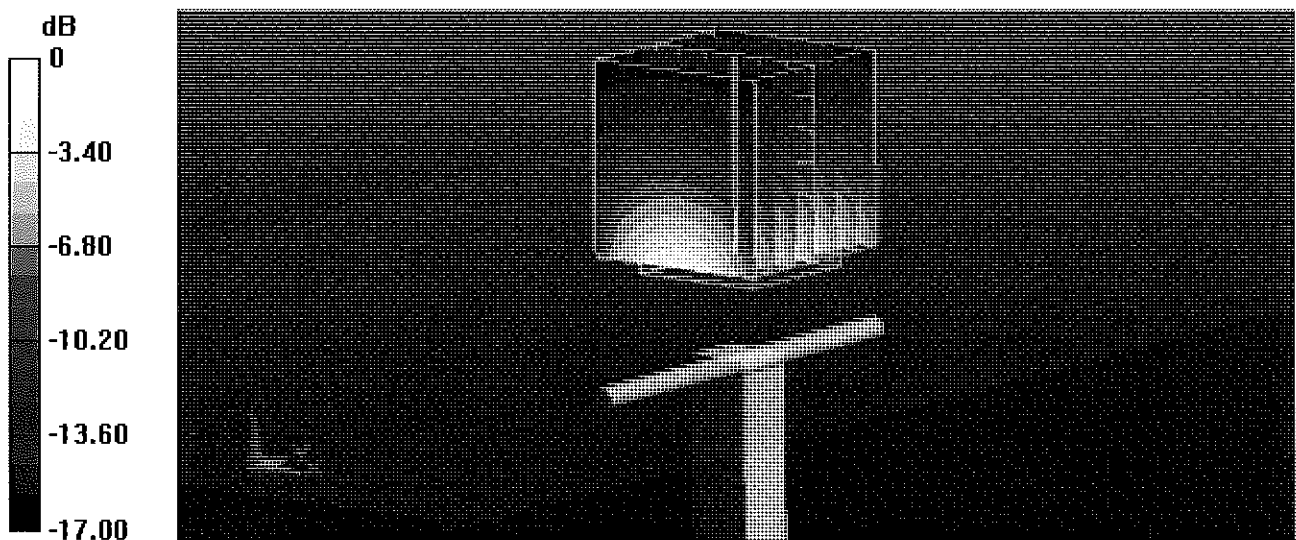

0 dB = 13.1 W/kg = 11.17 dBW/kg

Impedance Measurement Plot for Body TSL

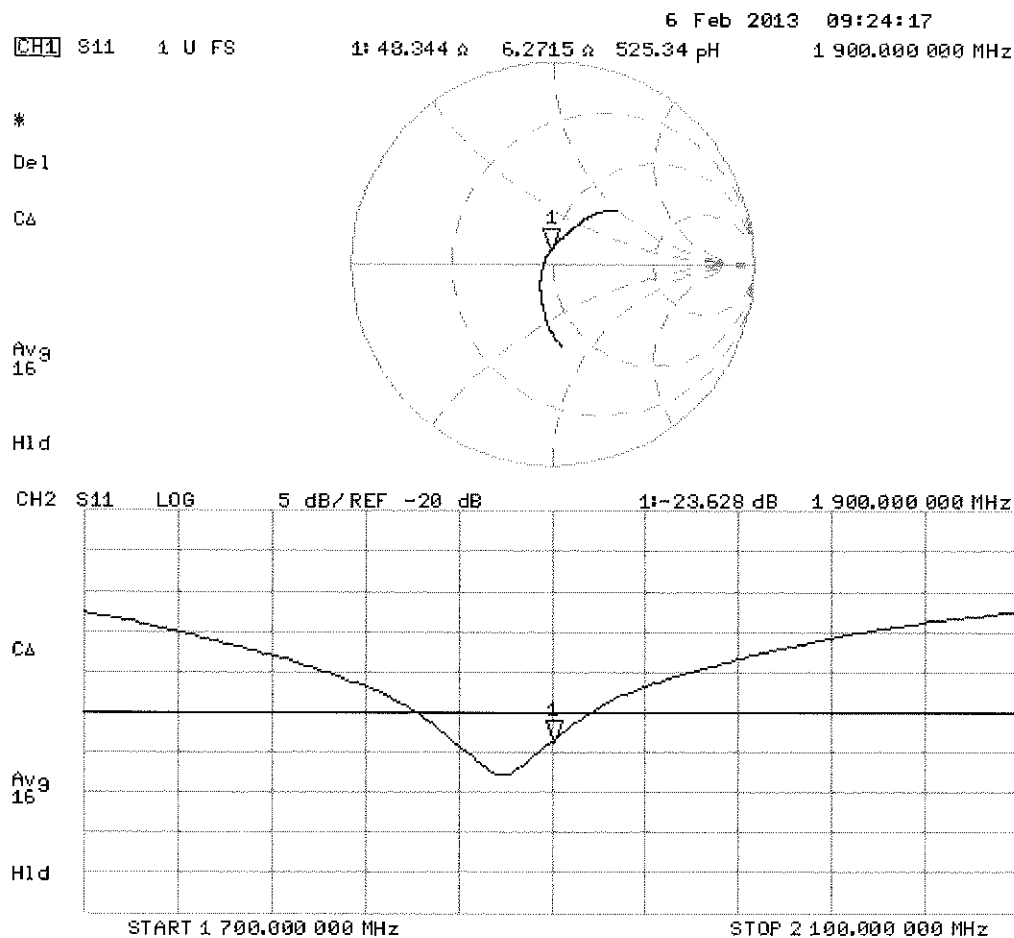



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D2450V2-797_Jan13**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 797**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 08, 2013**

✓
KOK
1/28/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Israe El-Naouq	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 8, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.85 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	50.5 $\pm$ 6 %	2.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.7 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.6 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.88 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.2 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.3 \Omega + 3.1 j\Omega$
Return Loss	- 27.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.1 \Omega + 4.9 j\Omega$
Return Loss	- 26.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 24, 2006

DASY5 Validation Report for Head TSL

Date: 08.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.154 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 27.8 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.2 W/kg

Maximum value of SAR (measured) = 17.0 W/kg

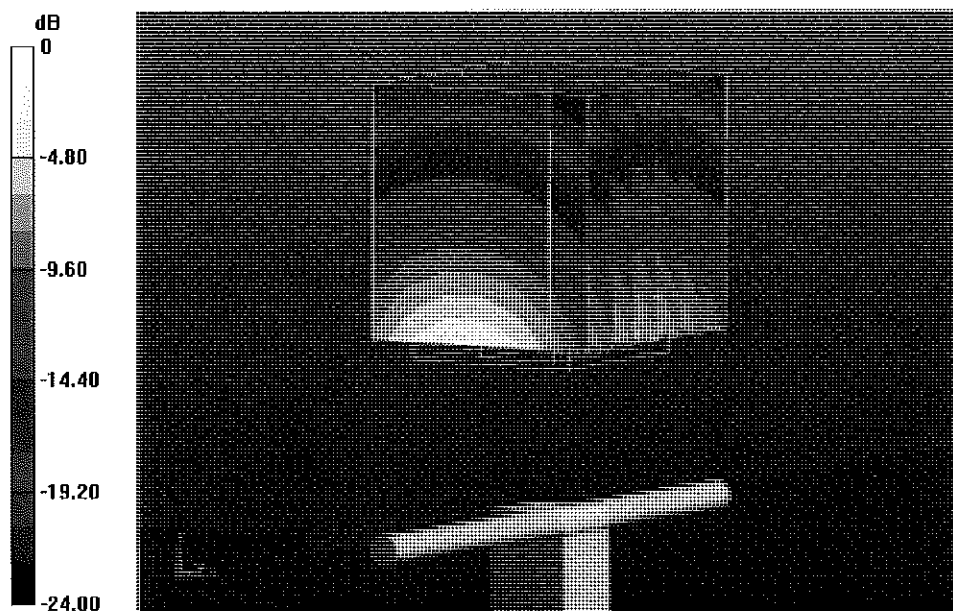


0 dB = 17.0 W/kg = 12.30 dBW/kg

Impedance Measurement Plot for Head TSL


8 Jan 2013 12:37:14
CH1 S11 1 U FS 1: 53.346 $\angle$ 3.0762 $\angle$ 199.83 pH 2 450.000 000 MHz

*
De1
Cor
Avg
16
H1d

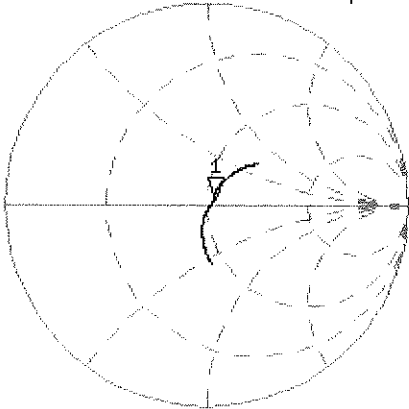

CH2 S11 LOG 5 dB/REF -20 dB 1: -27.136 dB 2 450.000 000 MHz

Cor
Avg
16
H1d

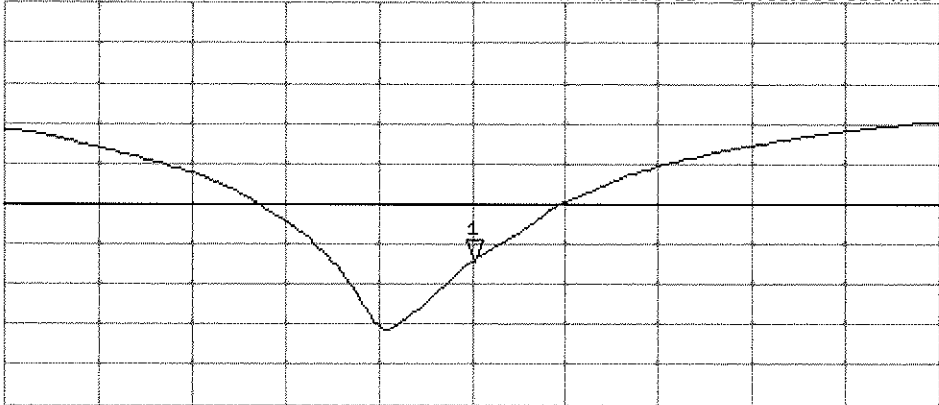

DASY5 Validation Report for Body TSL

Date: 08.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.935 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.7 W/kg


SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.88 W/kg

Maximum value of SAR (measured) = 16.7 W/kg

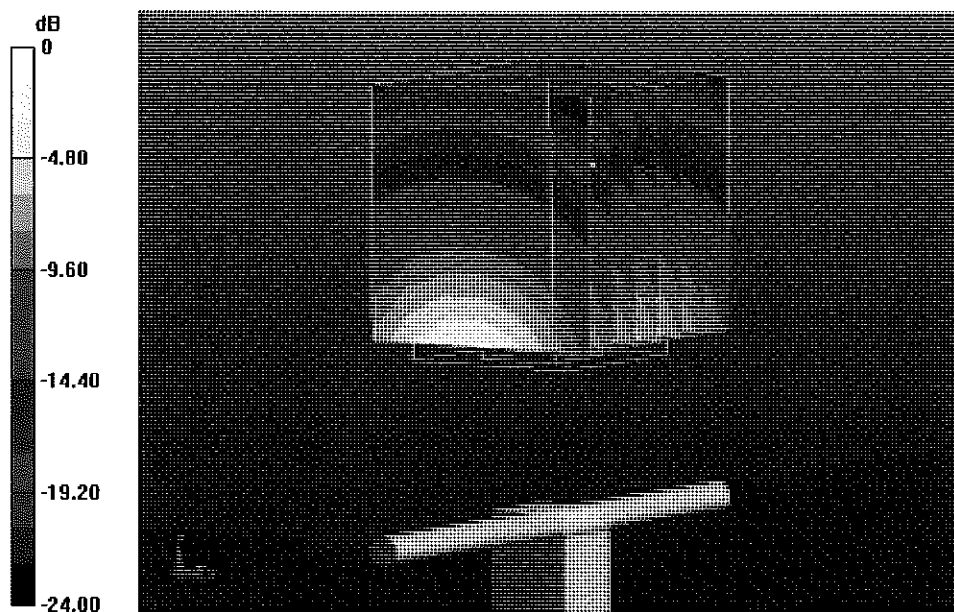

0 dB = 16.7 W/kg = 12.23 dBW/kg

Impedance Measurement Plot for Body TSL

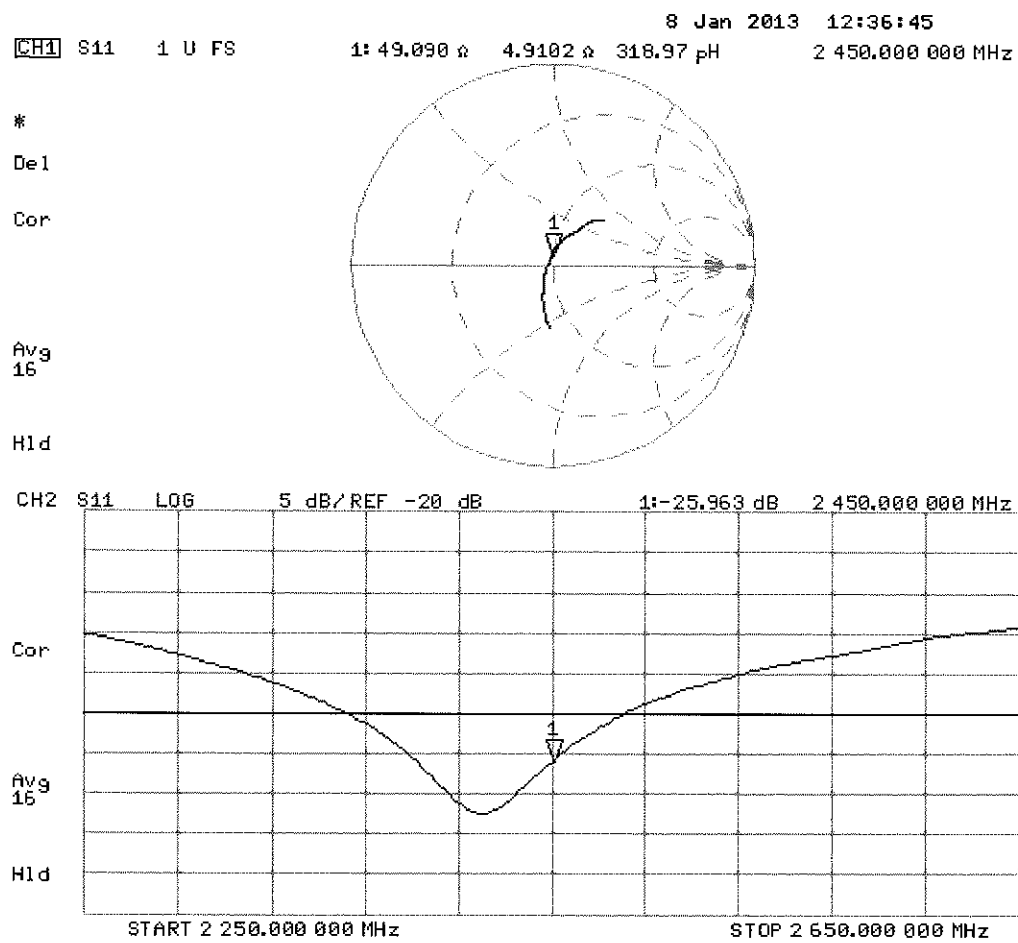



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D5GHzV2-1057_Jan13**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1057**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **January 11, 2013**

✓
KOK
1/29/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Israe El-Naouq** Name: **Israe El-Naouq** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature
Israe El-Naouq
Katja Pokovic

Issued: January 11, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5300 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.6 $\pm$ 6 %	4.50 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.66 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	75.9 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.4 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	4.60 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.9 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	4.79 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.5 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.1 ± 6 %	4.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.8 ± 6 %	5.09 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.69 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.42 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.61 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.55 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	5.81 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	5.94 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.0 ± 6 %	6.21 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg ± 19.5 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.5 Ω - 9.8 j Ω
Return Loss	- 20.3 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	48.5 Ω - 4.5 j Ω
Return Loss	- 26.4 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	50.6 Ω - 5.8 j Ω
Return Loss	- 24.8 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	53.9 Ω - 3.8 j Ω
Return Loss	- 25.6 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	52.5 Ω - 4.4 j Ω
Return Loss	- 26.1 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.3 Ω - 7.9 j Ω
Return Loss	- 22.0 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	48.7 Ω - 3.2 j Ω
Return Loss	- 29.2 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	51.2 Ω - 4.8 j Ω
Return Loss	- 26.2 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	53.6 Ω - 2.1 j Ω
Return Loss	- 27.9 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	53.3 Ω - 2.9 j Ω
Return Loss	- 27.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

DASY5 Validation Report for Head TSL

Date: 11.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.5$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.6$ S/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.79$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 33.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.671 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 29.4 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.473 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.735 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.848 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 33.5 W/kg
SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.3 W/kg
Maximum value of SAR (measured) = 20.2 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 60.467 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 33.3 W/kg
SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.17 W/kg
Maximum value of SAR (measured) = 19.4 W/kg

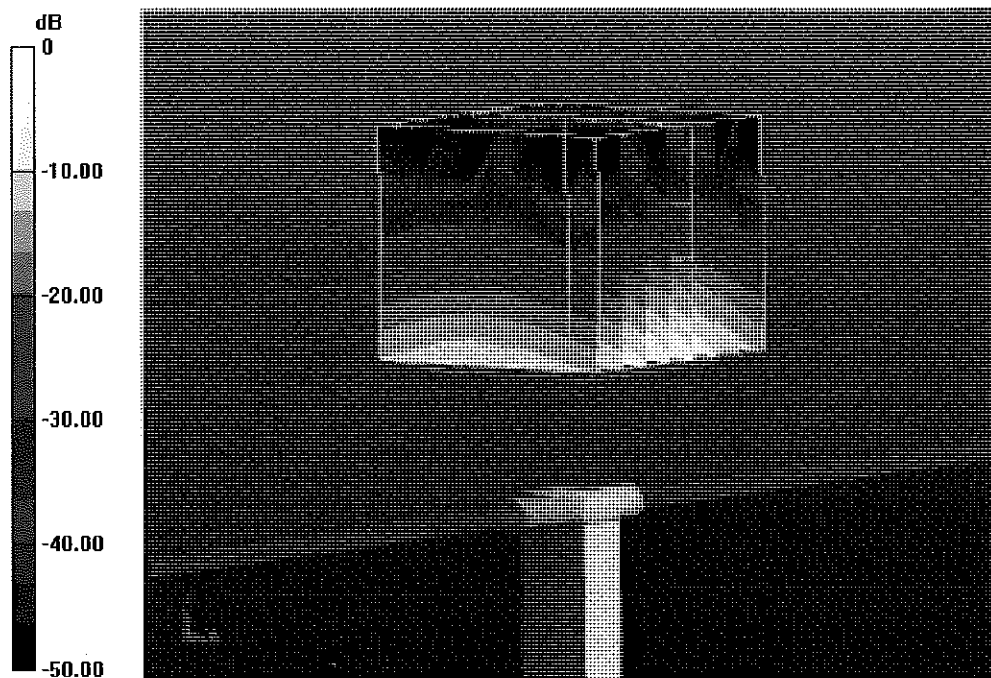

0 dB = 19.4 W/kg = 12.88 dBW/kg


Impedance Measurement Plot for Head TSL

11 Jan 2013 09:26:56
 [CH1] S11 1 U FS 1: 50.543 Ω -9.7754 Ω 3.1310 pF 5 200.000 000 MHz

*
 Del
 CA

Avg
 16

H1 d

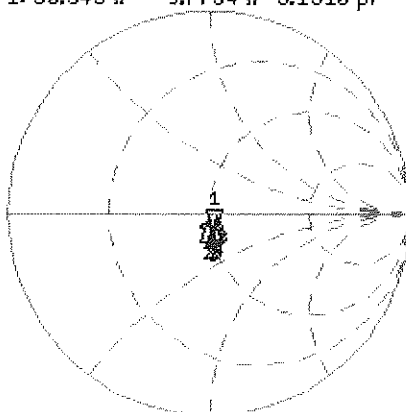

CH1 Markers


2: 48.508 Ω
 -4.4805 Ω
 5.30000 GHz
 3: 50.617 Ω
 -5.7559 Ω
 5.50000 GHz
 4: 53.891 Ω
 -3.8418 Ω
 5.60000 GHz
 5: 52.500 Ω
 -4.4160 Ω
 5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -20.273 dB 5 200.000 000 MHz

CA

Avg
 16

H1 d

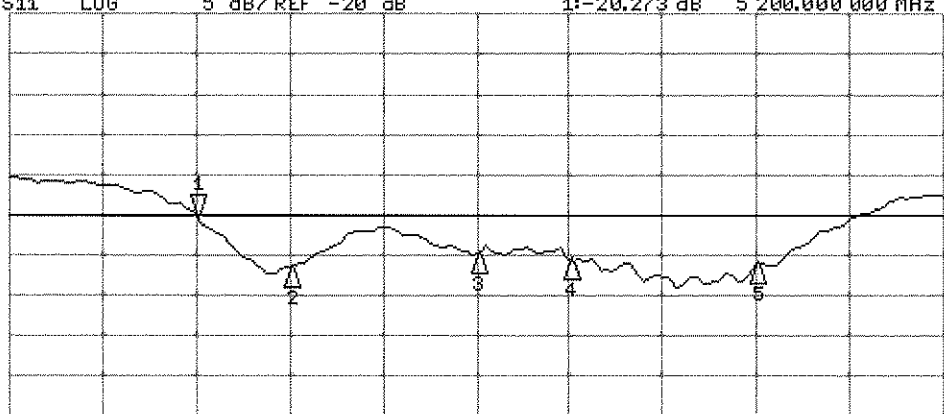

CH2 Markers

2: -26.396 dB
 5.30000 GHz
 3: -24.818 dB
 5.50000 GHz
 4: -25.573 dB
 5.60000 GHz
 5: -26.115 dB
 5.80000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 10.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.55$ S/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.81$ S/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.94$ S/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.21$ S/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.074 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 7.61 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.924 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 30.9 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.561 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 35.3 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.26 W/kg


Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.884 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 36.3 W/kg
SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.25 W/kg
Maximum value of SAR (measured) = 20.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 55.753 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 35.6 W/kg
SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.09 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

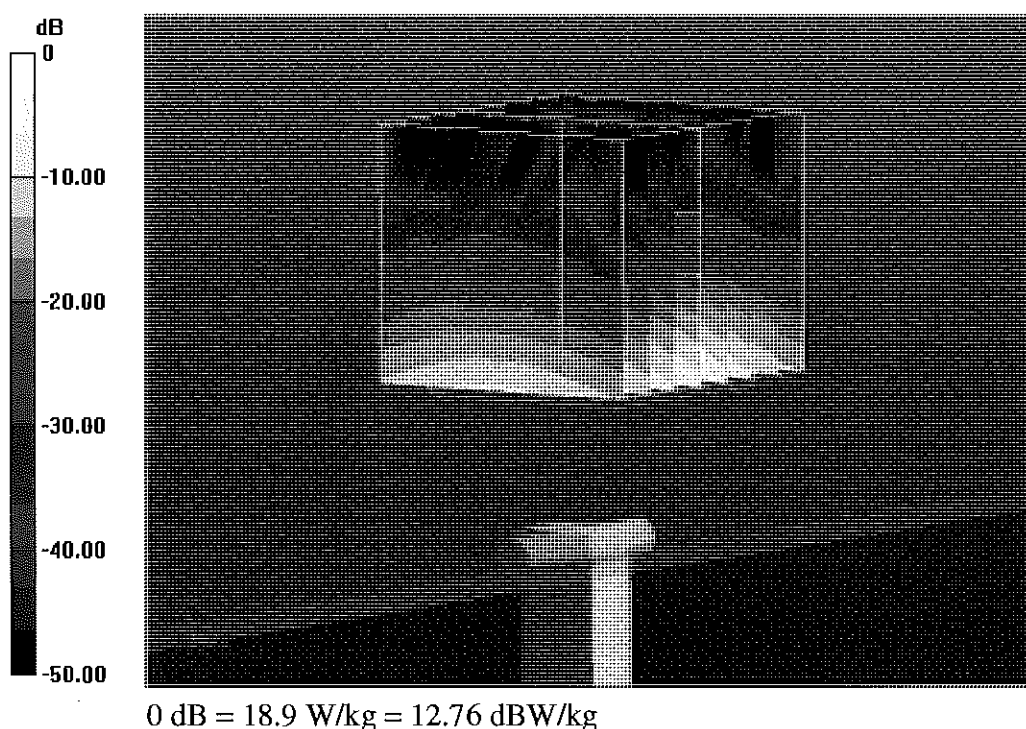

Impedance Measurement Plot for Body TSL

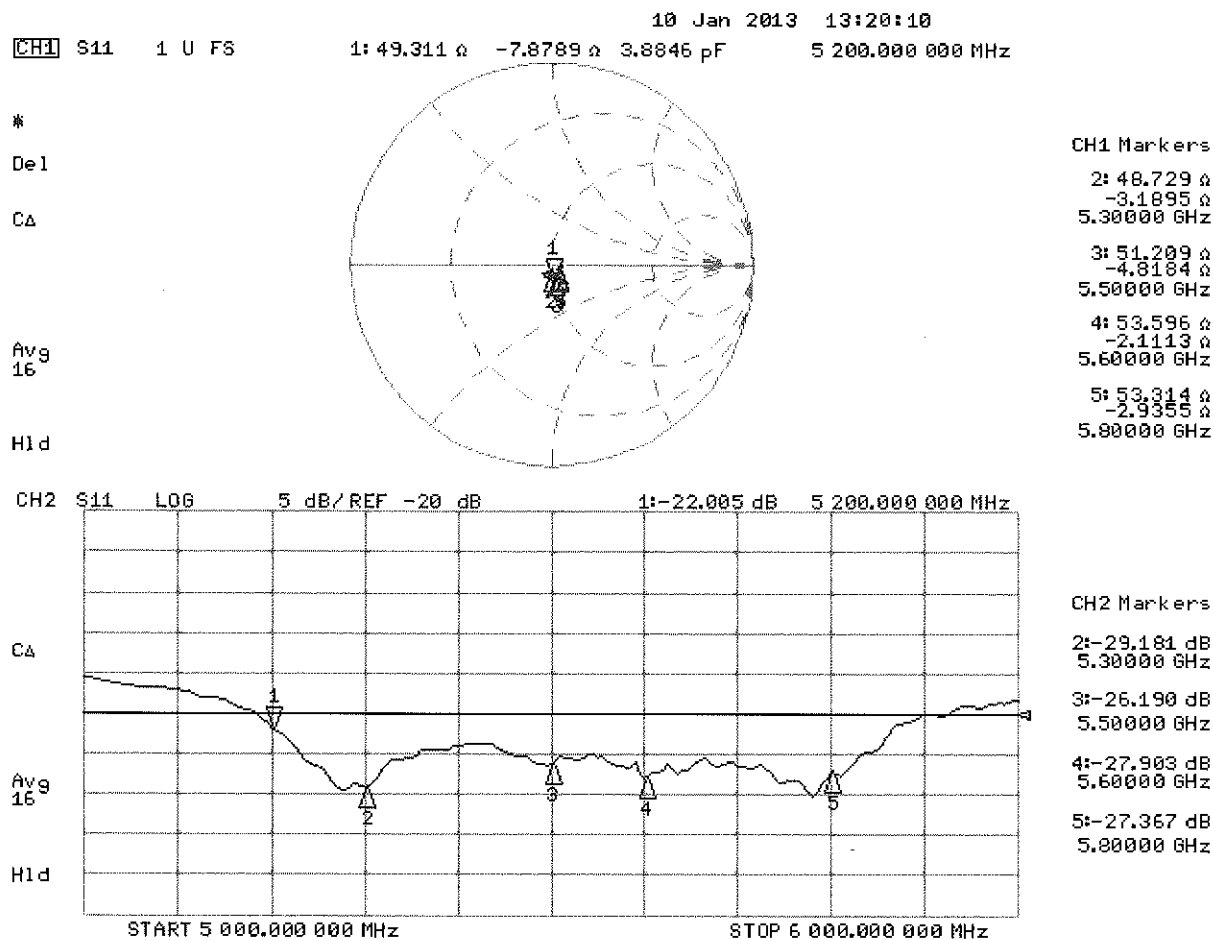



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **ES3-3209_Mar13**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3209**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **March 15, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

✓ KOK
3/24/13

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Israe El-Naouq	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: March 15, 2013
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ES3DV3

SN:3209

Manufactured: October 14, 2008
Calibrated: March 15, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.35	1.33	1.14	$\pm 10.1 \%$
DCP (mV) ^B	99.2	97.8	98.3	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	163.6	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		170.3	
		Z	0.0	0.0	1.0		158.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.74	6.74	6.74	0.76	1.18	± 12.0 %
835	41.5	0.90	6.46	6.46	6.46	0.31	1.81	± 12.0 %
1750	40.1	1.37	5.39	5.39	5.39	0.80	1.21	± 12.0 %
1900	40.0	1.40	5.21	5.21	5.21	0.78	1.26	± 12.0 %
2450	39.2	1.80	4.57	4.57	4.57	0.65	1.43	± 12.0 %
2600	39.0	1.96	4.43	4.43	4.43	0.75	1.36	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.38	6.38	6.38	0.80	1.16	± 12.0 %
835	55.2	0.97	6.28	6.28	6.28	0.52	1.45	± 12.0 %
1750	53.4	1.49	5.03	5.03	5.03	0.58	1.45	± 12.0 %
1900	53.3	1.52	4.77	4.77	4.77	0.70	1.36	± 12.0 %
2450	52.7	1.95	4.34	4.34	4.34	0.80	1.15	± 12.0 %
2600	52.5	2.16	4.11	4.11	4.11	0.80	1.00	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

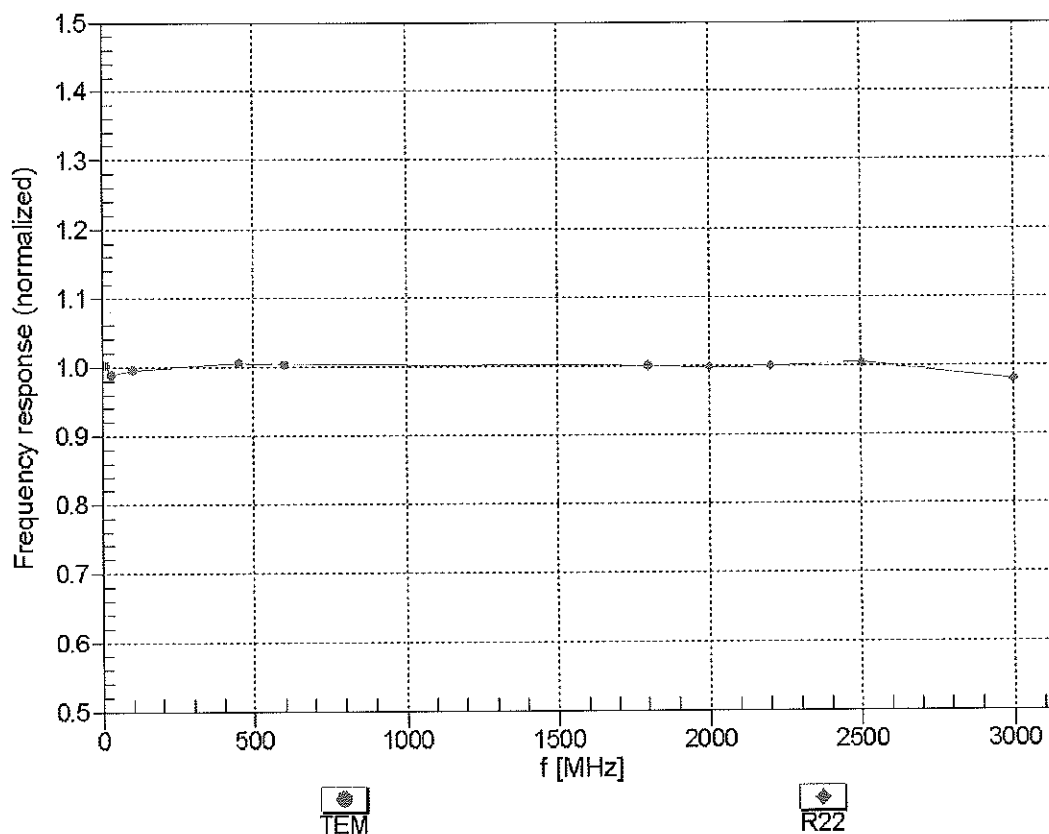



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


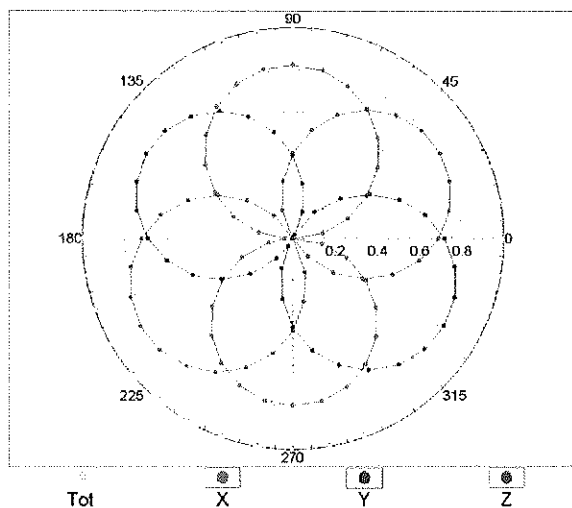


f=1800 MHz,R22

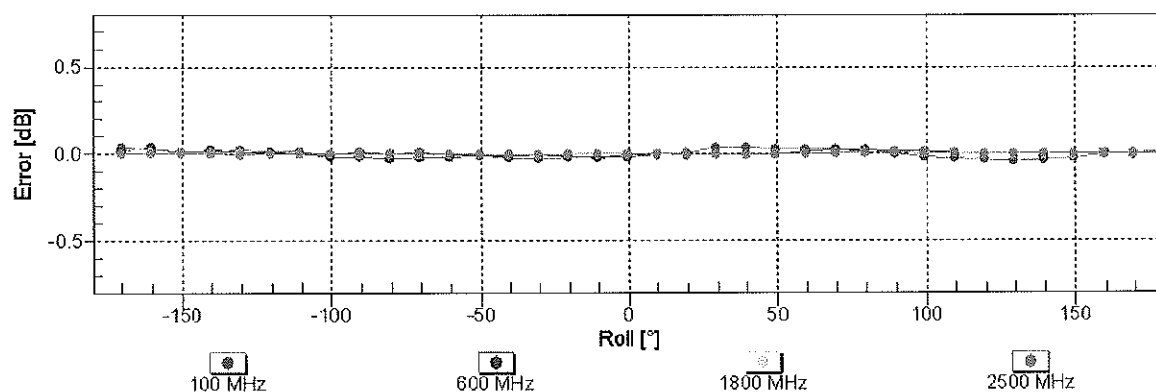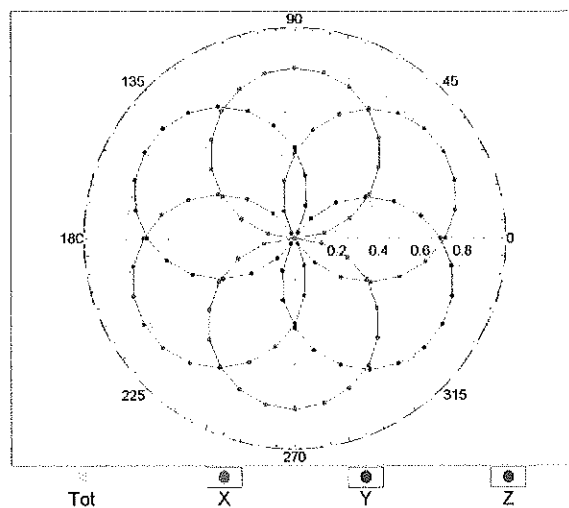


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

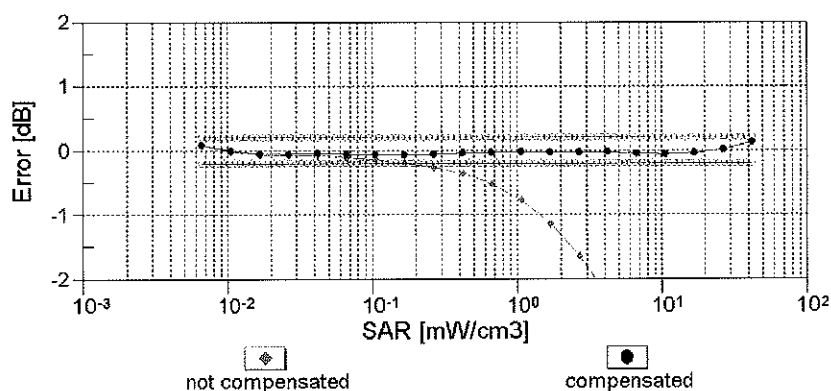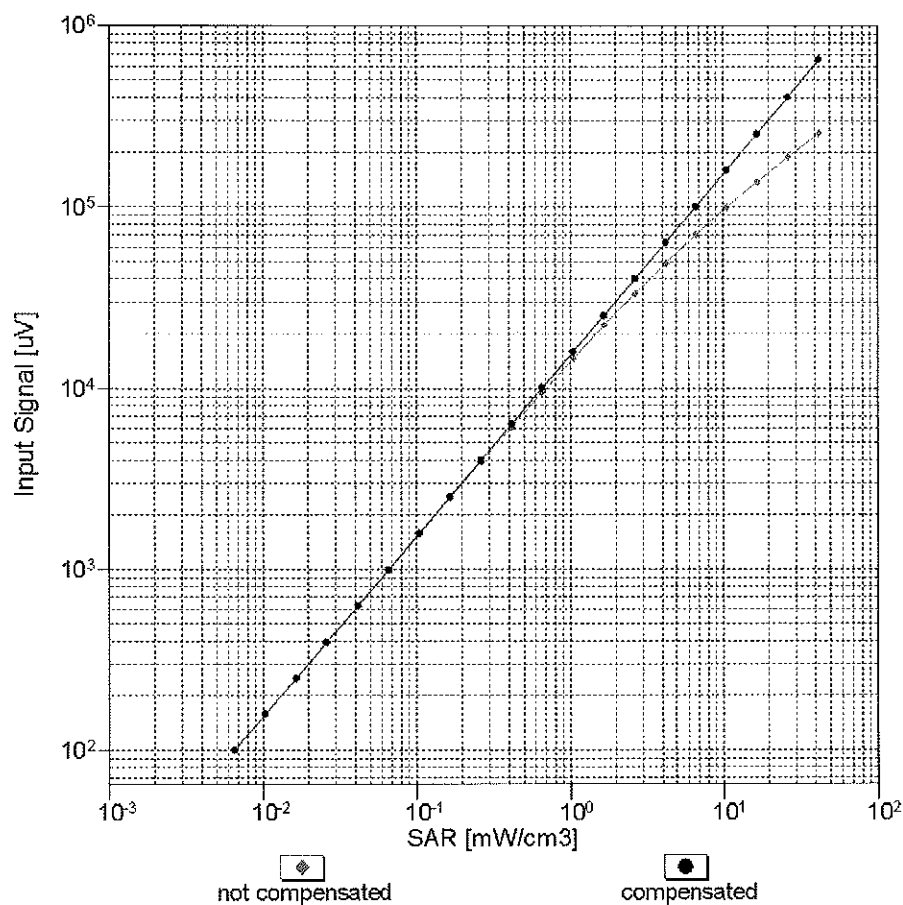



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

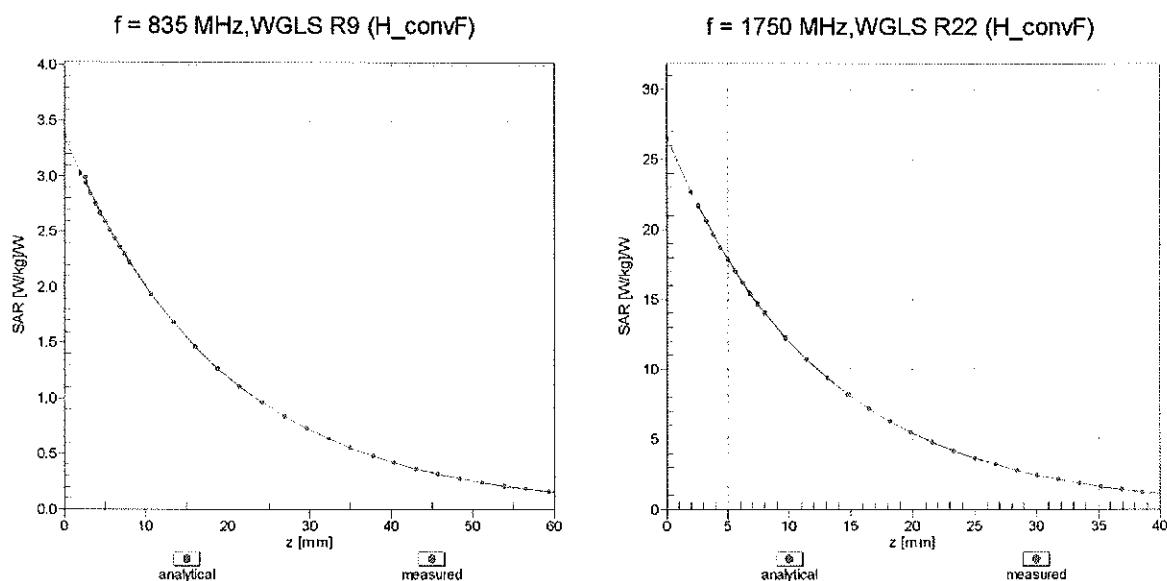

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

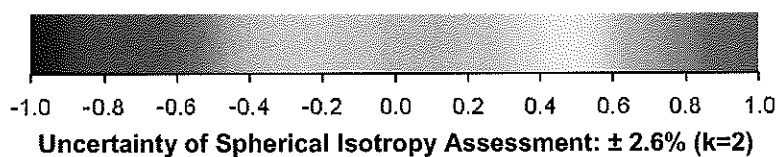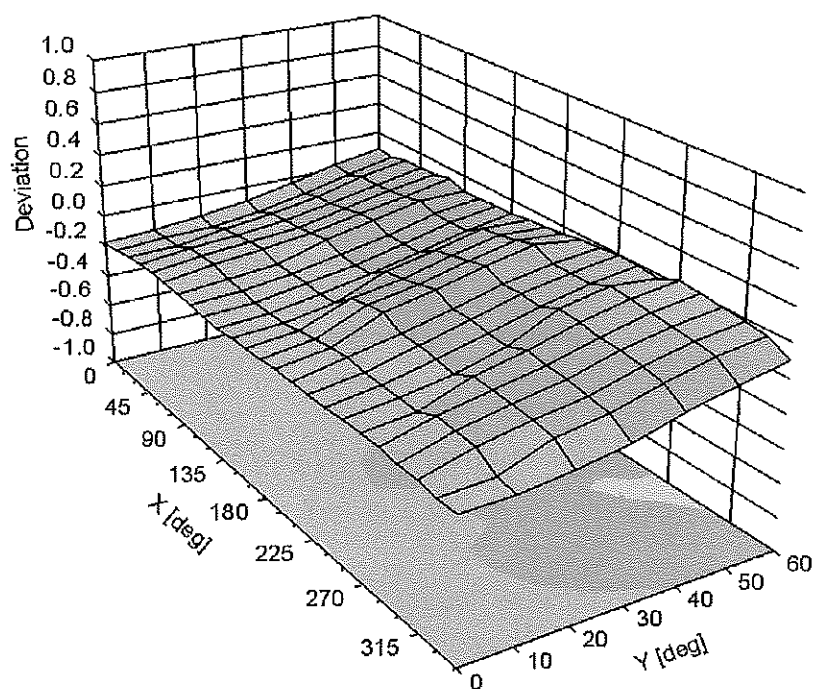

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-40.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3333_Nov13**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3333**

Calibration procedure(s) **QA CAL-01 v5, QA CAL-23 v5, QA CAL-25 v5
 Calibration procedure for dosimetric E-field probes**

Calibration date: **November 22, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	4-Sep-13 (No. DAE4-660_Sep13)	Sep-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: November 25, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below **ConvF**).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of **ConvF**.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe ES3DV3

SN:3333

Manufactured: January 24, 2012
Calibrated: November 22, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.08	0.90	0.88	$\pm 10.1 \%$
DCP (mV) ^B	104.9	103.3	101.7	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	140.9	$\pm 2.2 \%$
		Y	0.0	0.0	1.0		132.0	
		Z	0.0	0.0	1.0		170.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	6.56	6.56	6.56	0.44	1.54	± 12.0 %
850	41.5	0.92	6.30	6.30	6.30	0.46	1.48	± 12.0 %
1750	40.1	1.37	5.23	5.23	5.23	0.77	1.17	± 12.0 %
1900	40.0	1.40	5.05	5.05	5.05	0.80	1.19	± 12.0 %
2450	39.2	1.80	4.42	4.42	4.42	0.74	1.31	± 12.0 %
2600	39.0	1.96	4.28	4.28	4.28	0.80	1.30	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	6.11	6.11	6.11	0.33	1.90	± 12.0 %
850	55.2	0.99	6.07	6.07	6.07	0.80	1.19	± 12.0 %
1750	53.4	1.49	4.95	4.95	4.95	0.80	1.26	± 12.0 %
1900	53.3	1.52	4.71	4.71	4.71	0.49	1.54	± 12.0 %
2450	52.7	1.95	4.22	4.22	4.22	0.80	0.95	± 12.0 %
2600	52.5	2.16	4.16	4.16	4.16	0.80	1.07	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

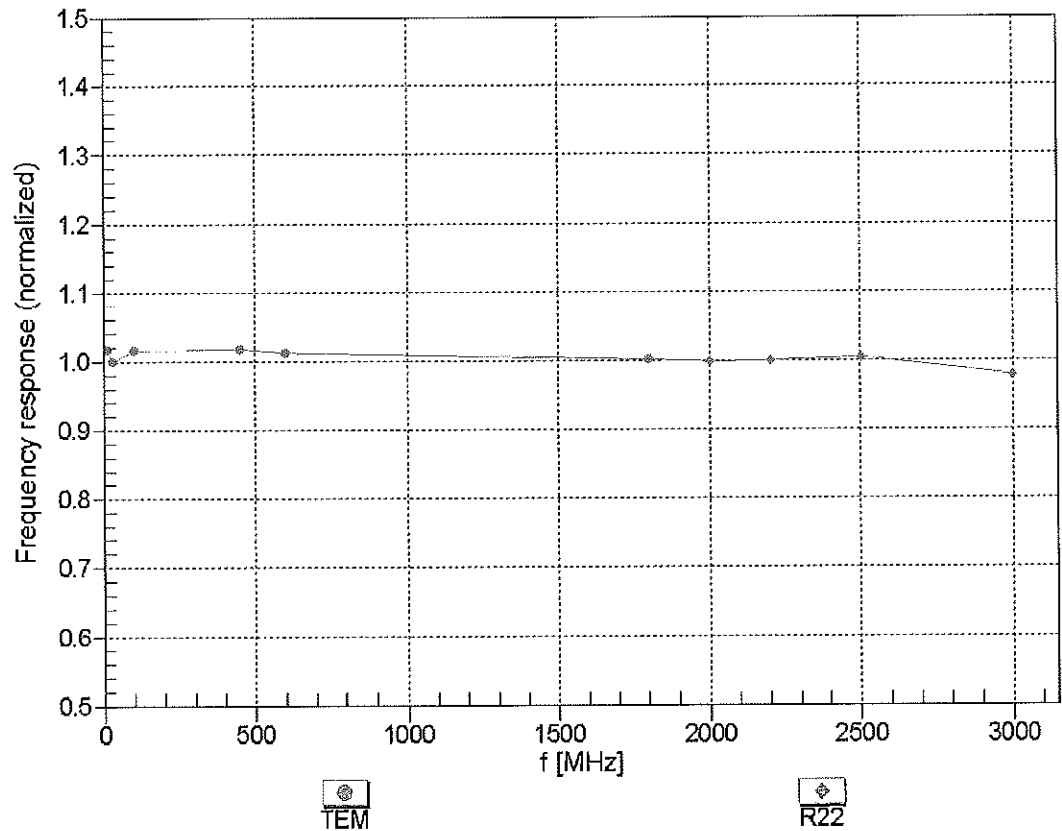



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


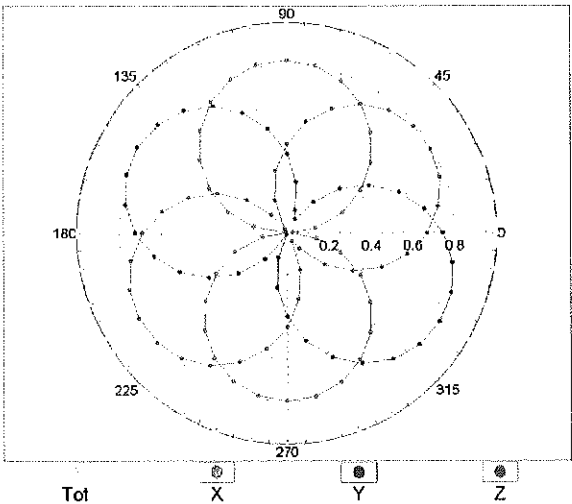


f=1800 MHz,R22

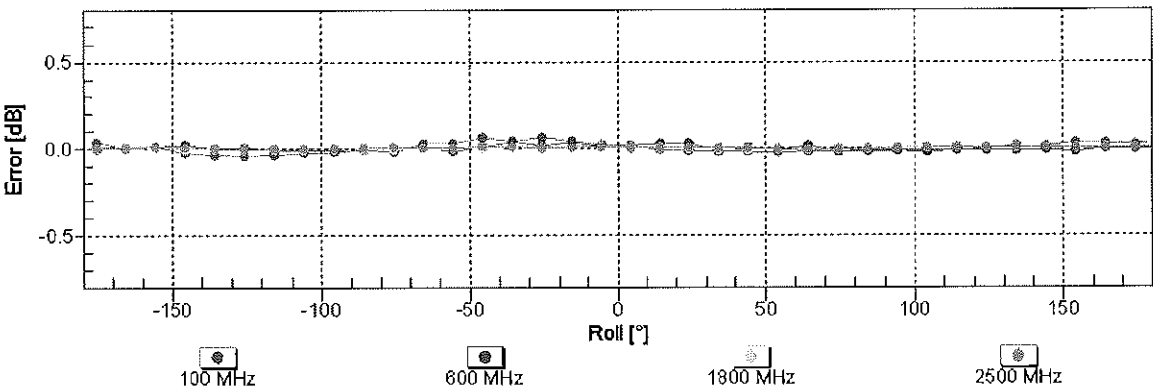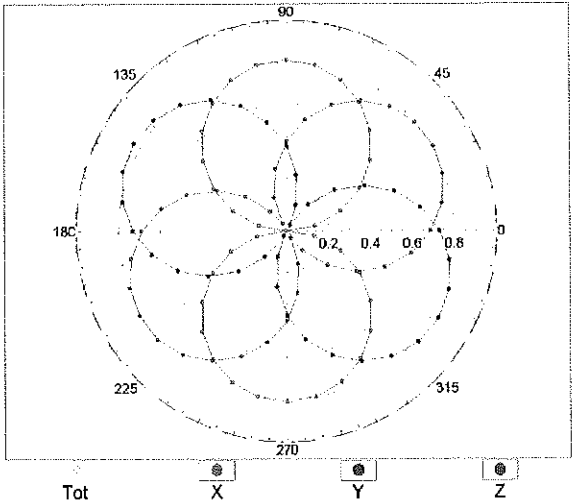


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head})
(TEM cell , f = 900 MHz)

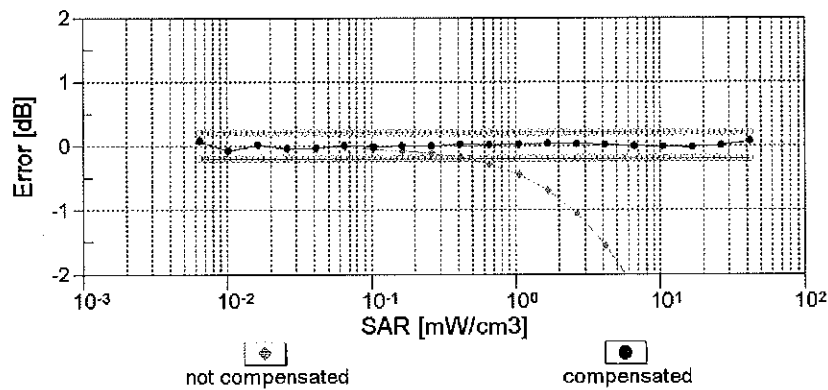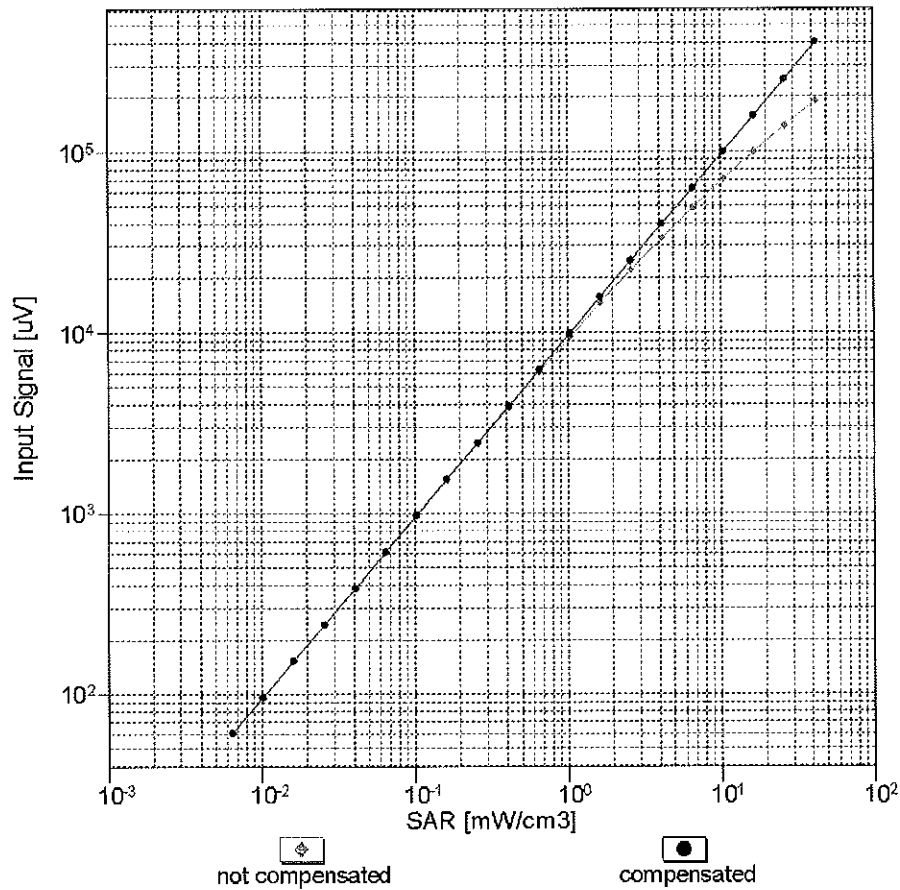



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

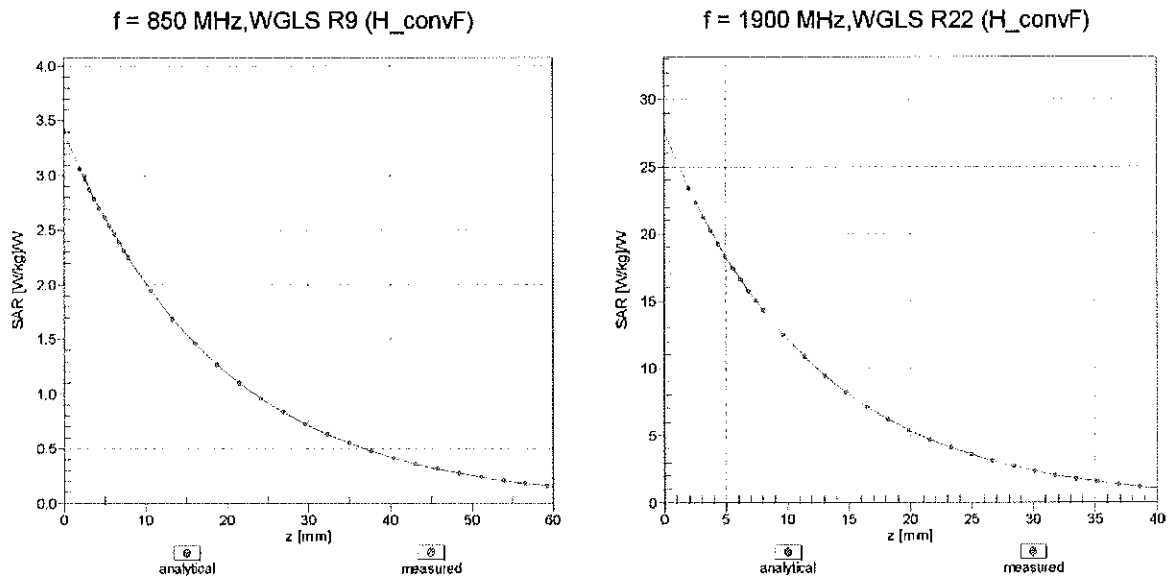

Deviation from Isotropy in Liquid

Error (ϕ , θ), $f = 900 \text{ MHz}$

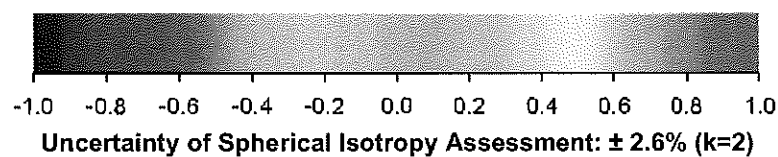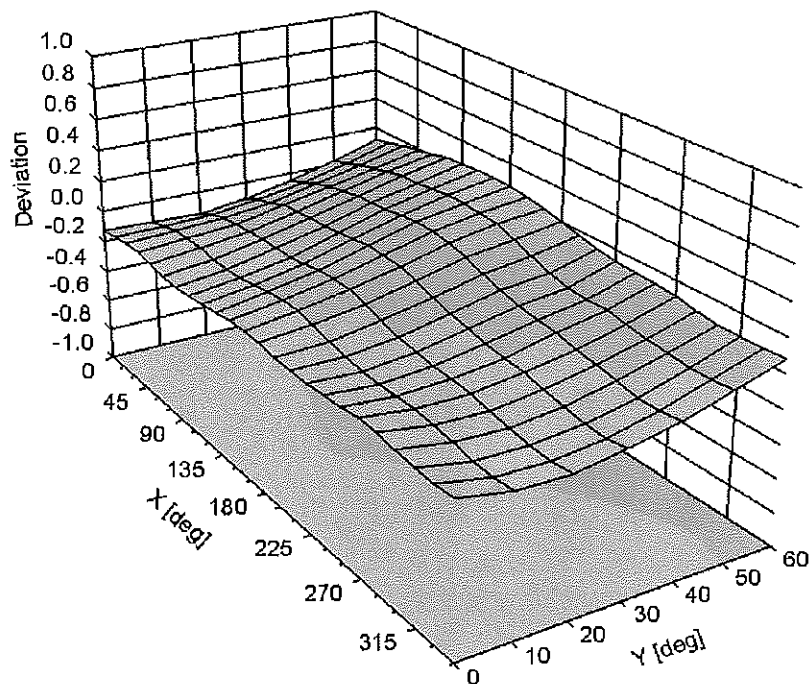

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-35.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **EX3-3914_Oct13**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3914**

Calibration procedure(s) **QA CAL-01 v3, QA CAL-14 v4, QA CAL-23 v5, QA CAL-25 v6**
 Calibration procedure for dosimetric E-field probes

Calibration date: **October 23, 2013**

VCC
 11/20/2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	4-Sep-13 (No. DAE4-660_Sep13)	Sep-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: October 25, 2013			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

PCT # 81072



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3914

Manufactured: December 18, 2012
Calibrated: October 23, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.47	0.49	0.51	$\pm 10.1 \%$
DCP (mV) ^B	99.2	98.9	98.2	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	158.3	$\pm 3.0 \%$
		Y	0.0	0.0	1.0		154.6	
		Z	0.0	0.0	1.0		170.8	
10010-CAA	SAR Validation (Square, 100ms, 10ms)	X	0.71	53.3	6.1	10.00	48.4	$\pm 2.5 \%$
		Y	2.43	67.0	13.8		39.9	
		Z	4.18	68.7	13.8		45.7	
10011-CAA	UMTS-FDD (WCDMA)	X	3.05	64.4	16.5	2.91	122.4	$\pm 0.5 \%$
		Y	3.31	66.5	18.2		123.5	
		Z	3.34	66.3	17.8		136.6	
10012-CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	2.49	64.8	16.1	1.87	120.6	$\pm 0.5 \%$
		Y	2.94	68.6	18.7		123.6	
		Z	2.63	65.9	17.0		135.4	
10021-DAA	GSM-FDD (TDMA, GMSK)	X	1.52	61.5	10.9	9.39	83.6	$\pm 1.2 \%$
		Y	2.22	67.4	15.0		116.0	
		Z	2.47	66.8	14.7		95.9	
10023-DAA	GPRS-FDD (TDMA, GMSK, TN 0)	X	1.73	63.3	11.9	9.57	81.5	$\pm 1.7 \%$
		Y	2.11	66.2	14.2		111.8	
		Z	2.76	69.0	16.0		93.6	
10024-DAA	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	1.34	62.1	9.4	6.56	121.0	$\pm 1.2 \%$
		Y	4.24	78.6	17.9		130.0	
		Z	2.91	70.7	14.9		141.4	
10027-DAA	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	1.25	63.5	9.7	4.80	143.5	$\pm 1.4 \%$
		Y	1.59	66.9	12.2		149.7	
		Z	2.98	71.5	14.0		123.3	
10028-DAA	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	0.51	58.3	7.4	3.55	113.4	$\pm 1.2 \%$
		Y	25.43	100.0	22.6		121.3	
		Z	38.67	97.5	20.6		133.3	
10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	0.28	58.6	5.3	1.16	134.7	$\pm 0.9 \%$
		Y	65.75	99.6	18.6		141.3	
		Z	0.20	55.6	4.1		112.1	
10039-CAA	CDMA2000 (1xRTT, RC1)	X	4.33	64.6	17.4	4.57	113.8	$\pm 0.7 \%$
		Y	4.55	66.0	18.6		120.8	
		Z	4.85	66.2	18.4		135.9	
10062-CAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	9.83	67.6	20.7	8.68	109.0	$\pm 2.5 \%$
		Y	10.06	68.4	21.5		118.2	
		Z	10.66	69.2	21.7		134.0	

10081-CAA	CDMA2000 (1xRTT, RC3)	X	3.59	63.9	16.9	3.97	113.6	±0.7 %
		Y	3.84	65.6	18.2		119.6	
		Z	3.95	65.4	17.8		134.5	
10098-CAA	UMTS-FDD (HSUPA, Subtest 2)	X	4.41	65.2	17.3	3.98	126.0	±0.7 %
		Y	4.73	66.9	18.6		132.5	
		Z	4.51	65.5	17.7		105.6	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.26	66.2	18.6	5.67	130.5	±1.2 %
		Y	6.61	67.7	19.8		139.3	
		Z	6.21	66.0	18.7		107.7	
10108-CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.13	65.8	18.6	5.80	126.3	±1.2 %
		Y	6.40	67.1	19.6		135.6	
		Z	6.10	65.5	18.5		107.4	
10110-CAB	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	5.78	65.3	18.3	5.75	123.1	±1.2 %
		Y	5.97	66.3	19.2		131.5	
		Z	5.86	65.3	18.4		104.9	
10114-CAA	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	9.92	67.7	20.3	8.10	115.7	±2.5 %
		Y	10.25	68.7	21.2		126.8	
		Z	10.71	69.4	21.3		146.0	
10117-CAA	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	9.95	67.8	20.3	8.07	116.6	±2.5 %
		Y	10.26	68.7	21.1		128.3	
		Z	10.70	69.4	21.3		146.9	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	7.19	67.3	21.5	9.28	145.0	±2.2 %
		Y	7.40	68.3	22.4		110.8	
		Z	7.79	68.4	22.0		128.0	
10154-CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	5.79	65.3	18.3	5.75	124.2	±1.2 %
		Y	6.03	66.5	19.4		131.9	
		Z	6.29	66.9	19.3		149.7	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.23	65.9	18.6	5.82	128.3	±1.2 %
		Y	6.51	67.2	19.7		136.9	
		Z	6.24	65.7	18.6		107.3	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.83	66.0	18.9	5.73	147.5	±1.2 %
		Y	4.72	65.8	19.2		113.8	
		Z	5.03	66.1	19.1		129.7	
10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.83	69.2	22.8	9.21	149.9	±1.9 %
		Y	5.81	69.4	23.4		120.3	
		Z	6.38	70.0	23.2		137.2	
10175-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.86	66.1	18.9	5.72	149.8	±1.2 %
		Y	4.72	65.8	19.2		113.3	
		Z	5.09	66.4	19.1		126.0	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.83	66.0	18.9	5.72	146.3	±1.2 %
		Y	4.69	65.6	19.1		112.2	
		Z	5.02	66.1	19.0		125.1	
10193-CAA	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	9.51	67.4	20.2	8.09	108.6	±2.5 %
		Y	9.72	68.1	20.9		118.2	
		Z	10.30	68.9	21.1		135.0	

10196-CAA	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	9.52	67.4	20.2	8.10	111.6	±2.5 %
		Y	9.79	68.3	21.1		121.3	
		Z	10.30	68.9	21.2		139.2	
10219-CAA	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	9.47	67.4	20.2	8.03	111.8	±2.2 %
		Y	9.67	68.3	21.0		120.0	
		Z	10.20	68.9	21.1		138.0	
10222-CAA	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	9.96	67.9	20.4	8.06	118.4	±2.5 %
		Y	10.25	68.8	21.2		128.2	
		Z	10.65	69.3	21.3		144.5	
10225-CAA	UMTS-FDD (HSPA+)	X	6.96	66.7	18.9	5.97	140.0	±1.4 %
		Y	7.23	67.9	20.0		148.9	
		Z	7.03	66.4	18.9		115.6	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	5.51	67.5	21.8	9.21	114.2	±1.9 %
		Y	5.82	69.4	23.4		123.0	
		Z	6.49	70.6	23.6		140.2	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.83	67.1	21.4	9.24	136.6	±1.9 %
		Y	7.30	69.4	23.2		147.3	
		Z	7.36	68.1	22.0		117.5	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	7.26	67.5	21.6	9.30	142.7	±1.9 %
		Y	7.44	68.4	22.4		110.5	
		Z	7.84	68.7	22.2		122.6	
10274-CAA	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	5.86	66.2	18.2	4.87	135.4	±0.9 %
		Y	6.12	67.5	19.2		142.3	
		Z	5.91	65.9	18.2		107.6	
10275-CAA	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	4.17	64.8	17.3	3.96	115.6	±0.7 %
		Y	4.42	66.4	18.5		124.6	
		Z	4.47	66.0	18.0		132.6	
10291-AAA	CDMA2000, RC3, SO55, Full Rate	X	3.36	64.7	17.1	3.46	109.4	±0.5 %
		Y	3.55	66.2	18.3		118.2	
		Z	3.60	65.6	17.7		120.9	
10292-AAA	CDMA2000, RC3, SO32, Full Rate	X	3.34	64.9	17.2	3.39	110.1	±0.5 %
		Y	3.57	66.7	18.5		121.0	
		Z	3.54	65.6	17.7		123.9	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.14	65.8	18.6	5.81	125.1	±1.2 %
		Y	6.44	67.2	19.7		135.7	
		Z	6.52	67.0	19.3		142.2	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.76	66.6	19.1	6.06	131.8	±1.4 %
		Y	7.03	67.8	20.0		142.5	
		Z	7.15	67.7	19.7		148.6	
10315-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	2.42	64.6	16.1	1.71	116.8	±0.5 %
		Y	3.00	69.3	19.0		126.9	
		Z	2.61	66.3	17.2		128.2	
10317-AAA	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	9.71	67.6	20.5	8.36	111.7	±2.5 %
		Y	9.99	68.6	21.4		122.2	
		Z	10.38	68.9	21.3		129.5	

10400-AAA	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	9.83	67.8	20.6	8.37	112.9	±2.5 %
		Y	10.09	68.7	21.4		123.9	
		Z	10.48	68.9	21.3		130.5	
10402-AAA	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	10.61	68.3	20.7	8.53	121.1	±2.5 %
		Y	11.25	70.0	21.9		135.4	
		Z	11.15	69.4	21.4		137.4	
10403-AAA	CDMA2000 (1xEV-DO, Rev. 0)	X	4.51	67.4	17.8	3.76	119.2	±0.5 %
		Y	4.91	69.5	19.3		128.3	
		Z	4.84	67.5	18.1		135.4	
10404-AAA	CDMA2000 (1xEV-DO, Rev. A)	X	4.51	67.7	18.0	3.77	117.4	±0.5 %
		Y	4.92	69.8	19.5		125.4	
		Z	4.71	67.3	18.0		131.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 8 and 9).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	9.70	9.70	9.70	0.34	1.01	± 12.0 %
835	41.5	0.90	9.34	9.34	9.34	0.67	0.67	± 12.0 %
1750	40.1	1.37	7.99	7.99	7.99	0.79	0.56	± 12.0 %
1900	40.0	1.40	7.69	7.69	7.69	0.80	0.58	± 12.0 %
2450	39.2	1.80	6.95	6.95	6.95	0.41	0.77	± 12.0 %
2600	39.0	1.96	6.79	6.79	6.79	0.40	0.82	± 12.0 %
5200	36.0	4.66	4.99	4.99	4.99	0.30	1.80	± 13.1 %
5300	35.9	4.76	4.82	4.82	4.82	0.30	1.80	± 13.1 %
5500	35.6	4.96	4.55	4.55	4.55	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.37	4.37	4.37	0.35	1.80	± 13.1 %
5800	35.3	5.27	4.52	4.52	4.52	0.35	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	9.39	9.39	9.39	0.63	0.74	± 12.0 %
835	55.2	0.97	9.31	9.31	9.31	0.56	0.76	± 12.0 %
1750	53.4	1.49	7.89	7.89	7.89	0.32	1.03	± 12.0 %
1900	53.3	1.52	7.51	7.51	7.51	0.51	0.76	± 12.0 %
2450	52.7	1.95	7.02	7.02	7.02	0.80	0.50	± 12.0 %
2600	52.5	2.16	6.81	6.81	6.81	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.52	4.52	4.52	0.35	1.90	± 13.1 %
5300	48.9	5.42	4.32	4.32	4.32	0.35	1.90	± 13.1 %
5500	48.6	5.65	4.07	4.07	4.07	0.35	1.90	± 13.1 %
5600	48.5	5.77	3.97	3.97	3.97	0.35	1.90	± 13.1 %
5800	48.2	6.00	4.14	4.14	4.14	0.40	1.90	± 13.1 %


^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell: ifi110 EXX, Waveguide: R22)

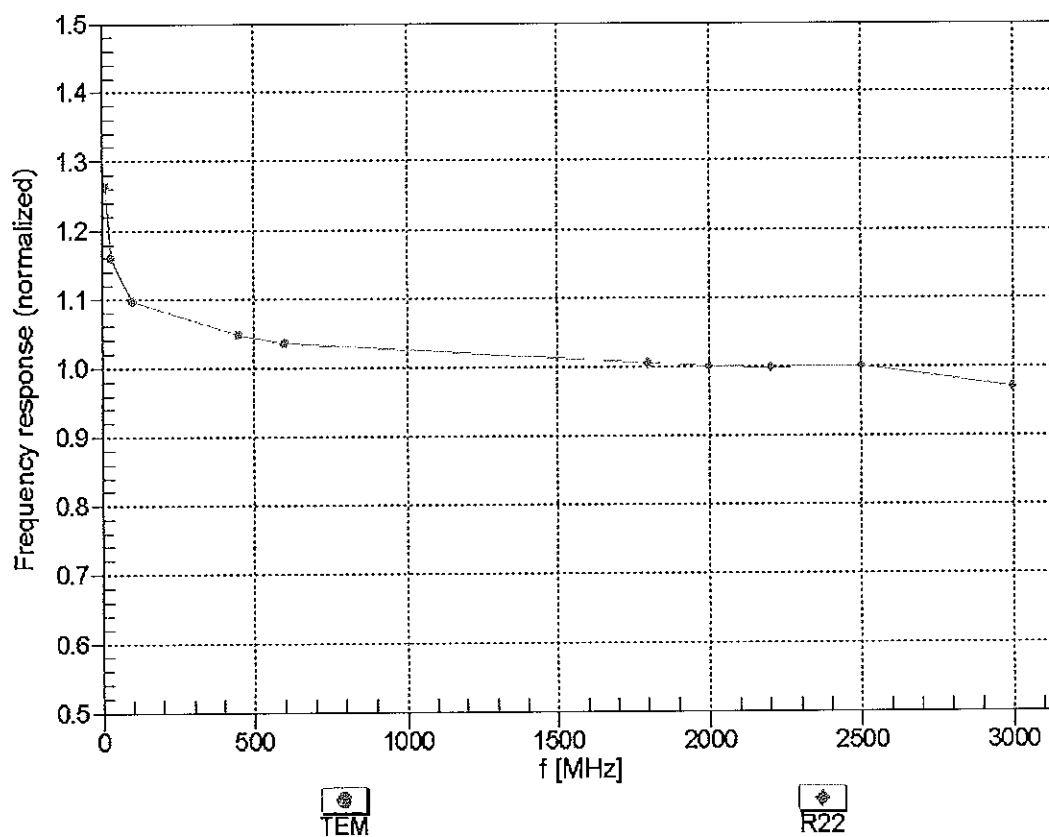



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


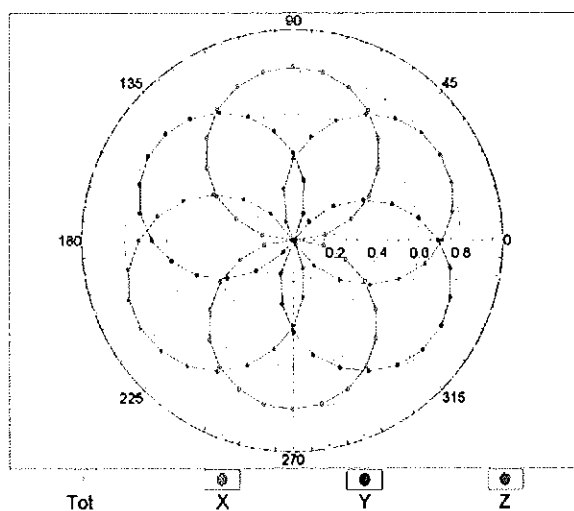


f=1800 MHz,R22

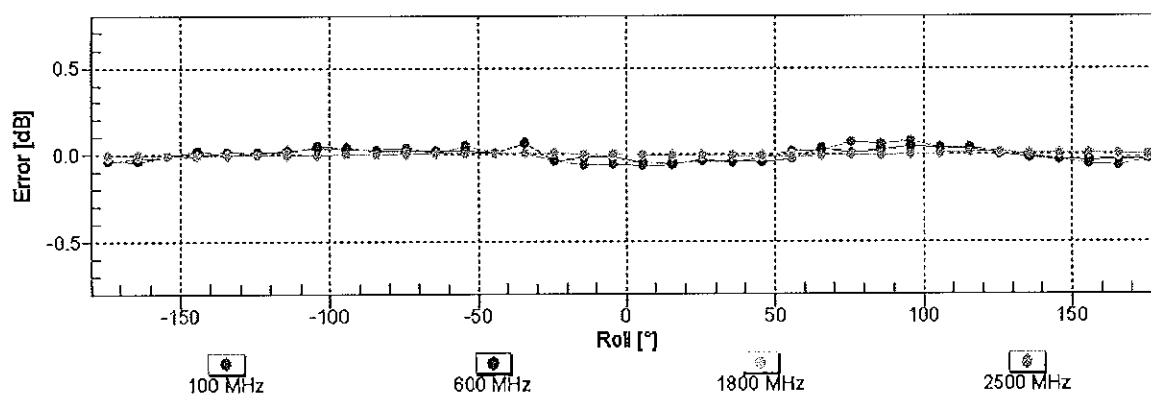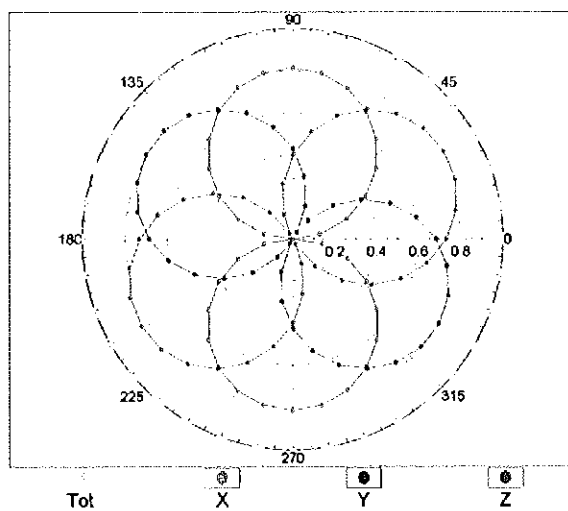


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

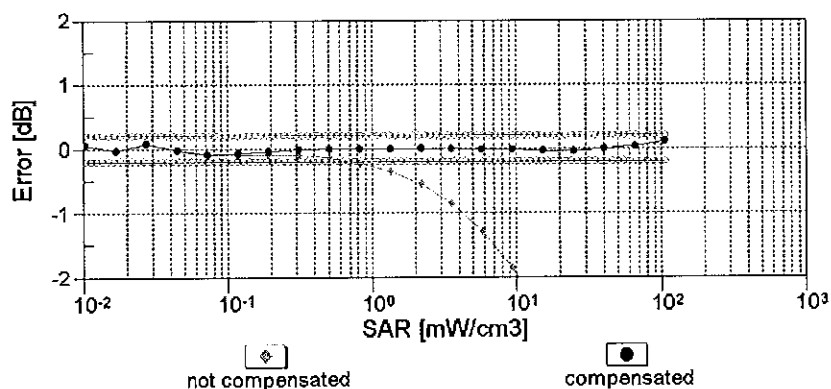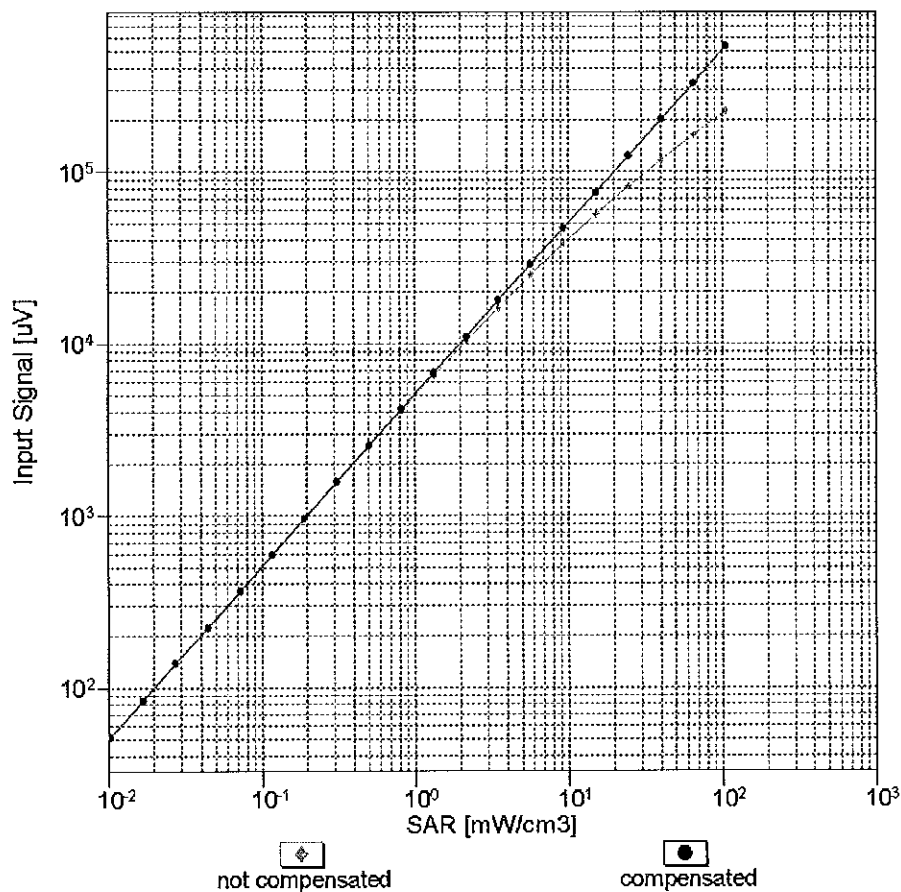



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

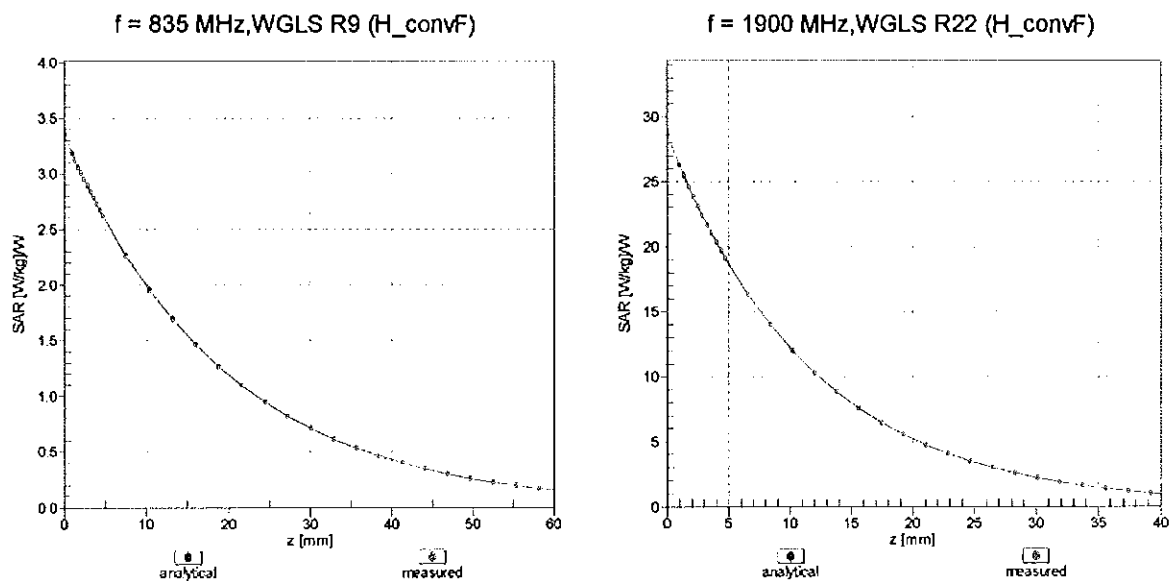

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

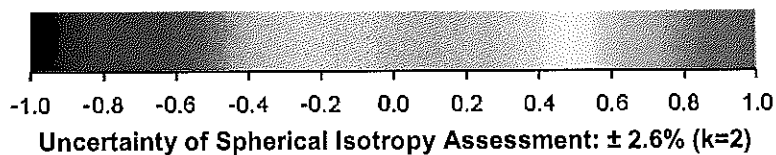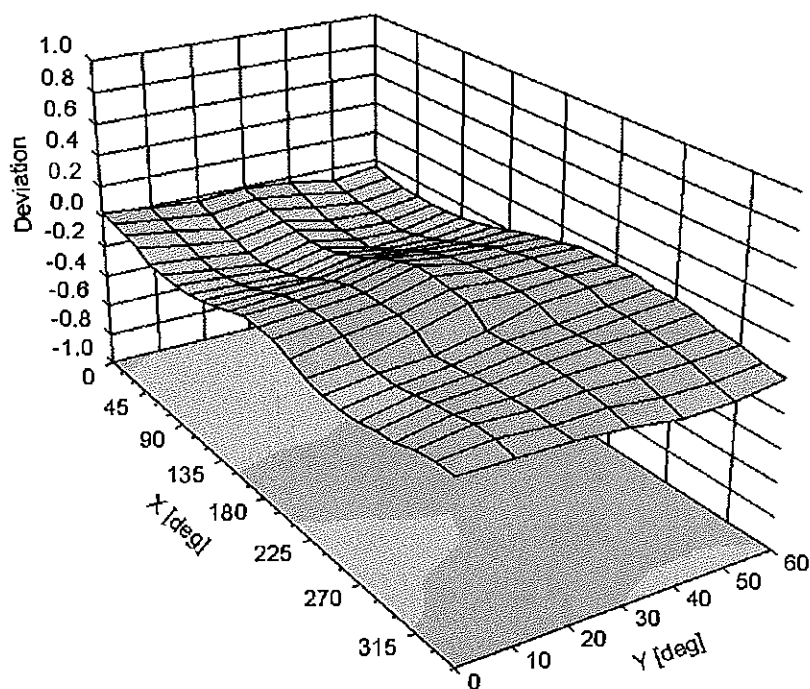

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-24.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **ES3-3319_Apr13**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3319**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 29, 2013**

VCC
6/14/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Dimce Iliev	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Technical Manager	
Issued: April 29, 2013			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ES3DV3

SN:3319

Manufactured: January 10, 2012
Calibrated: April 29, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3319

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.12	1.20	1.22	± 10.1 %
DCP (mV) ^B	100.7	102.6	102.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	152.0	±3.8 %
		Y	0.0	0.0	1.0		159.0	
		Z	0.0	0.0	1.0		149.8	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3319

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.49	6.49	6.49	0.28	1.97	± 12.0 %
850	41.5	0.92	6.23	6.23	6.23	0.42	1.57	± 12.0 %
1900	40.0	1.40	5.22	5.22	5.22	0.80	1.24	± 12.0 %
2450	39.2	1.80	4.57	4.57	4.57	0.80	1.32	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3319


Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.30	6.30	6.30	0.45	1.53	± 12.0 %
850	55.2	0.99	6.15	6.15	6.15	0.42	1.65	± 12.0 %
1900	53.3	1.52	4.85	4.85	4.85	0.63	1.49	± 12.0 %
2450	52.7	1.95	4.32	4.32	4.32	0.69	1.20	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

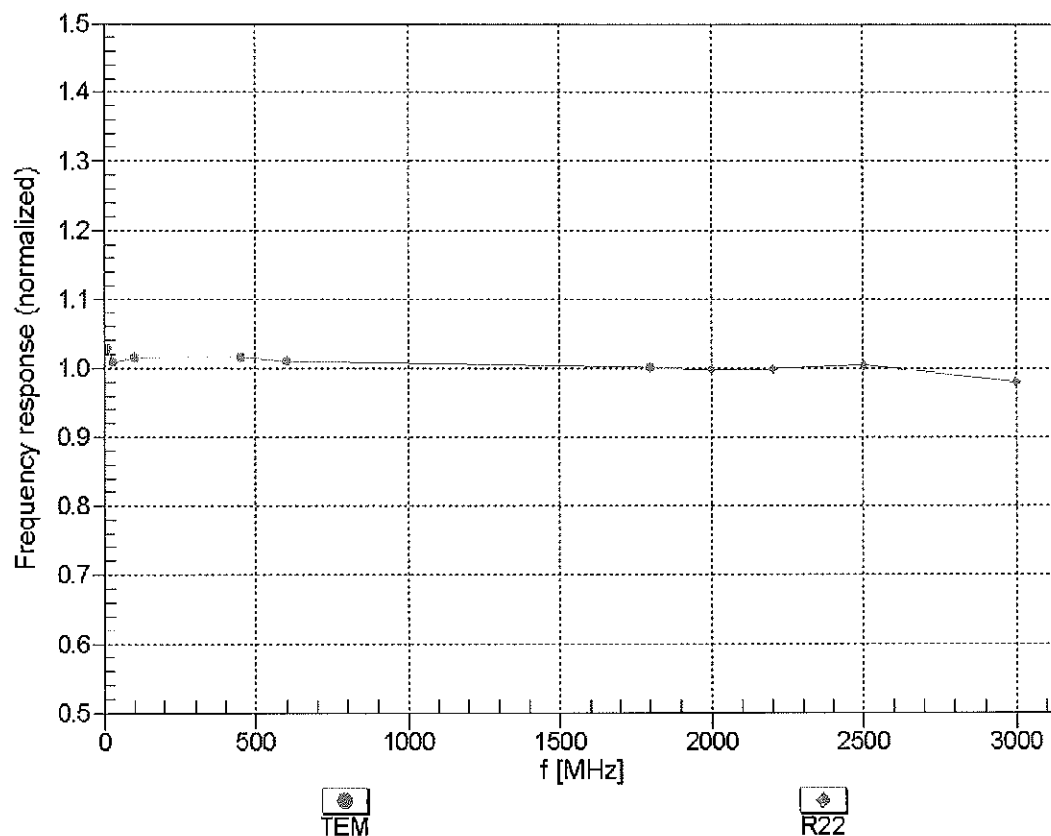



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$



f=600 MHz,TEM

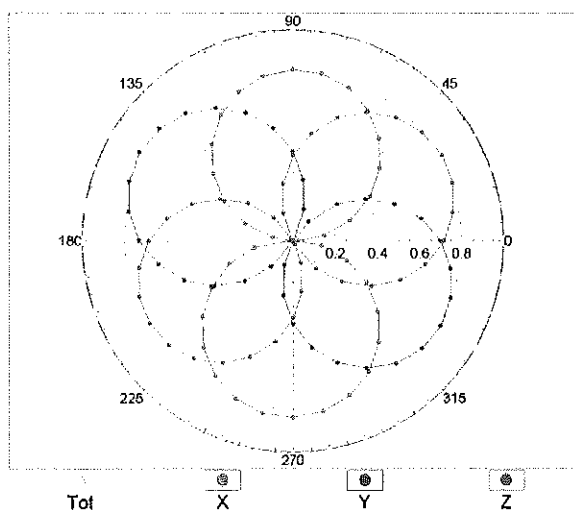

f=1800 MHz,R22

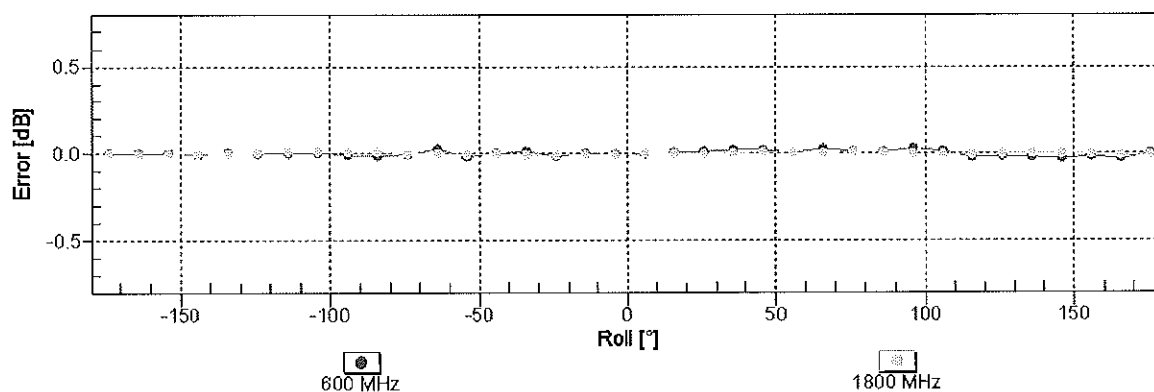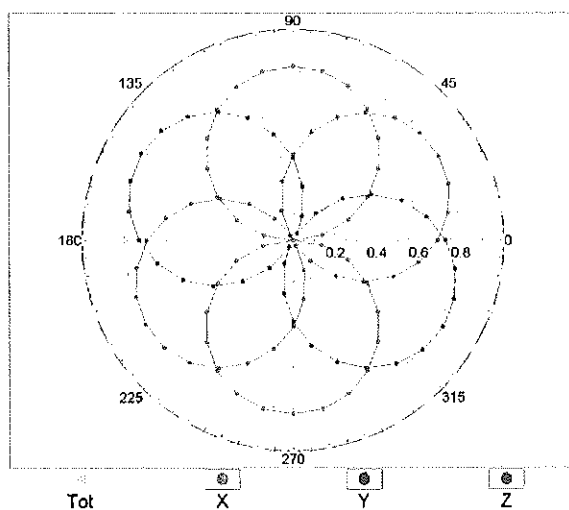
**Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)**

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

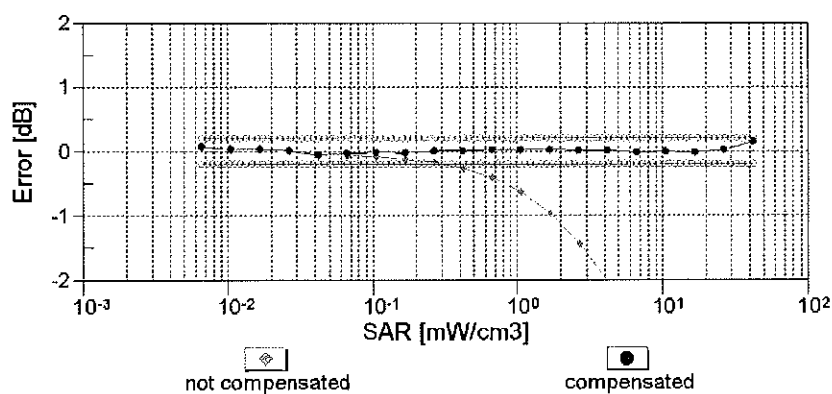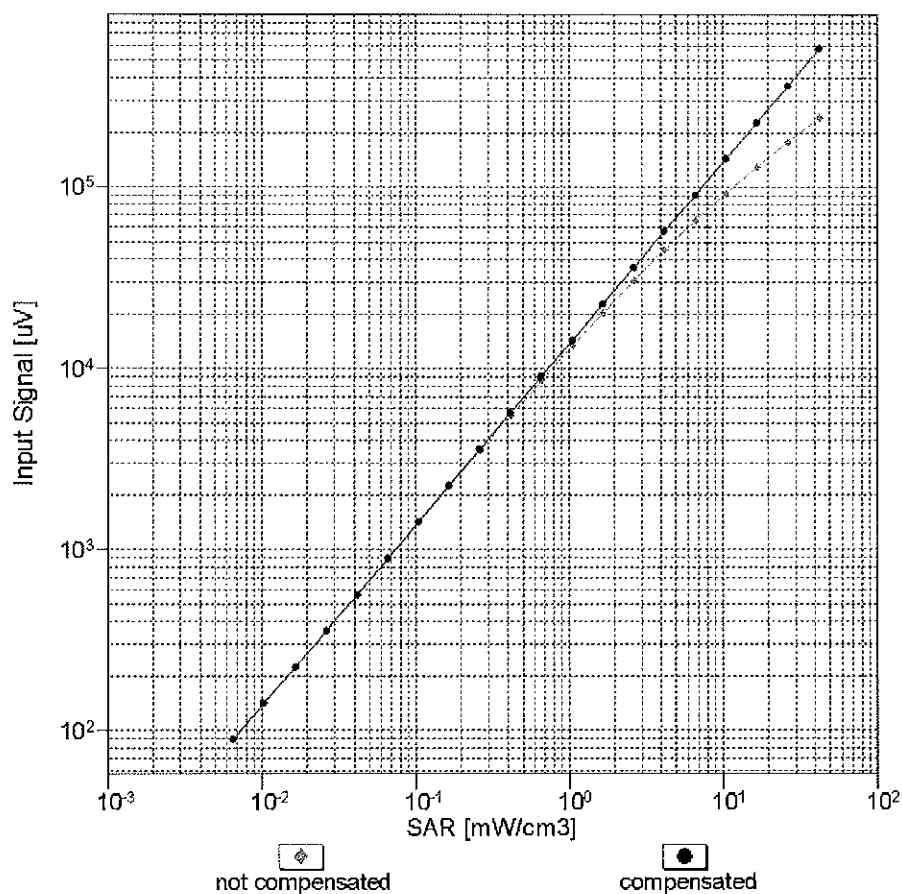



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

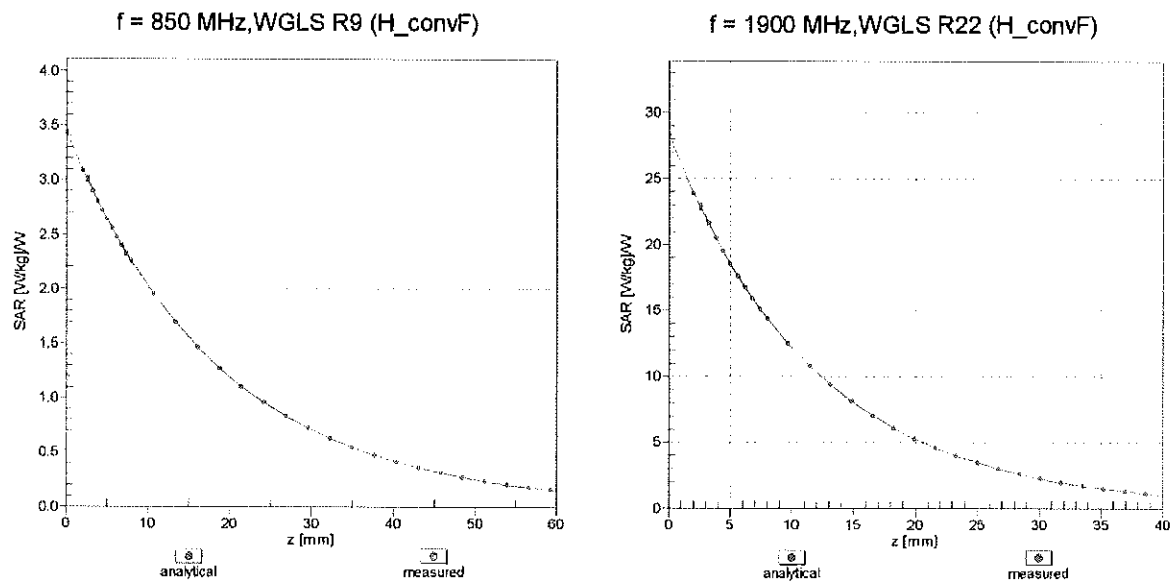

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

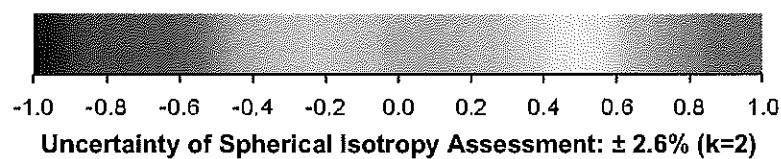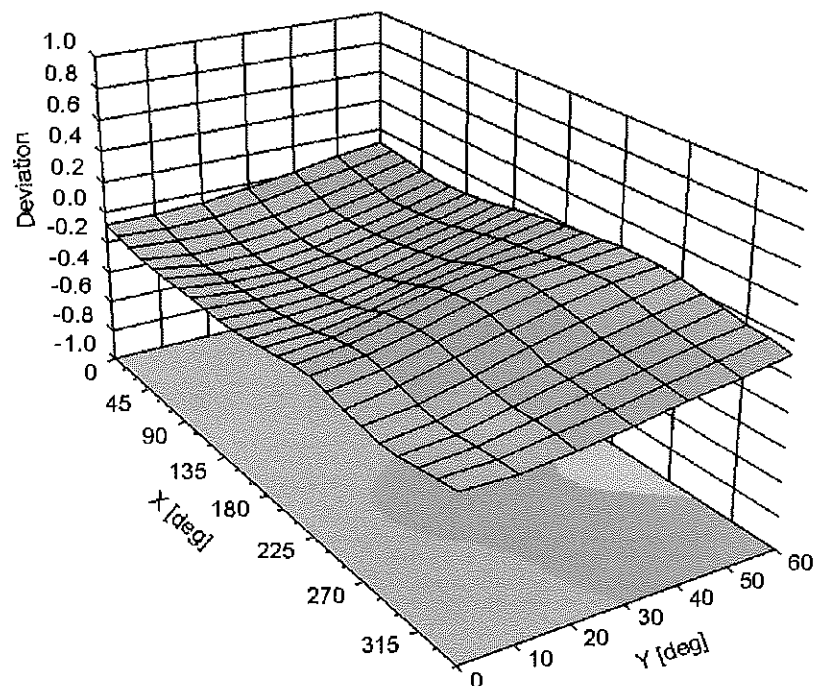

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3319

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-104.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

Additional Conversion Factors

for Dosimetric E-Field Probe

Type:

ES3DV3

Serial Number:

3319

Place of Assessment:

Zurich

Date of Assessment:


June 19, 2013

Probe Calibration Date:

April 29, 2013

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. The evaluation is coupled with measured conversion factors (probe calibration date indicated above). The uncertainty of the numerical assessment is based on the extrapolation from measured value at 835 MHz or at 1900 MHz.

Assessed by:



✓
KOK
6/25/13

Dosimetric E-Field Probe ES3DV3 SN:3319

Conversion factor ($\pm$ standard deviation)

1750 $\pm$ 50 MHz *ConvF* 5.59 $\pm$ 7 %

$\epsilon_r = 40.1 \pm 5\%$
 $\sigma = 1.37 \pm 5\%$ mho/m
(head tissue)

1750 $\pm$ 50 MHz *ConvF* 5.22 $\pm$ 7 %

$\epsilon_r = 53.4 \pm 5\%$
 $\sigma = 1.49 \pm 5\%$ mho/m
(body tissue)

Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also DASY Manual.



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3022_Aug13**

CALIBRATION CERTIFICATE

Object **ES3DV2 - SN:3022**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 22, 2013**

UTC
9/13/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: August 23, 2013			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ES3DV2

SN:3022

Manufactured: April 15, 2003
Calibrated: August 22, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.00	1.04	0.99	± 10.1 %
DCP (mV) ^B	100.7	97.4	99.7	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	178.6	±3.0 %
		Y	0.0	0.0	1.0		141.9	
		Z	0.0	0.0	1.0		134.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.21	6.21	6.21	0.19	2.37	± 12.0 %
835	41.5	0.90	6.09	6.09	6.09	0.30	1.70	± 12.0 %
1750	40.1	1.37	5.19	5.19	5.19	0.65	1.23	± 12.0 %
1900	40.0	1.40	5.03	5.03	5.03	0.51	1.43	± 12.0 %
2450	39.2	1.80	4.36	4.36	4.36	0.51	1.51	± 12.0 %
2600	39.0	1.96	4.16	4.16	4.16	0.74	1.29	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	5.92	5.92	5.92	0.24	1.99	± 12.0 %
835	55.2	0.97	5.91	5.91	5.91	0.29	1.85	± 12.0 %
1750	53.4	1.49	4.75	4.75	4.75	0.52	1.52	± 12.0 %
1900	53.3	1.52	4.49	4.49	4.49	0.49	1.56	± 12.0 %
2450	52.7	1.95	4.01	4.01	4.01	0.70	1.02	± 12.0 %
2600	52.5	2.16	3.85	3.85	3.85	0.58	0.90	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

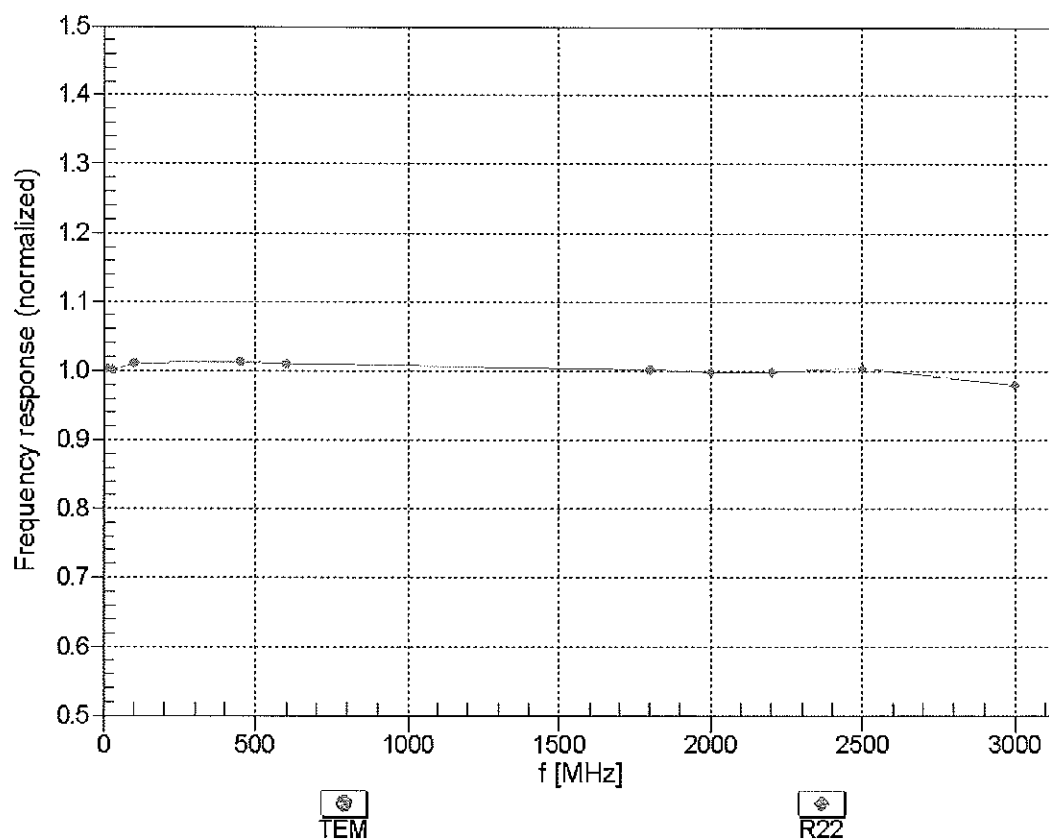



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM

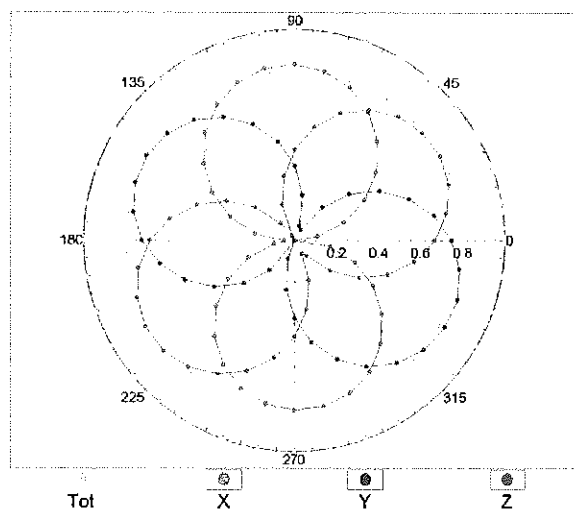


f=1800 MHz,R22

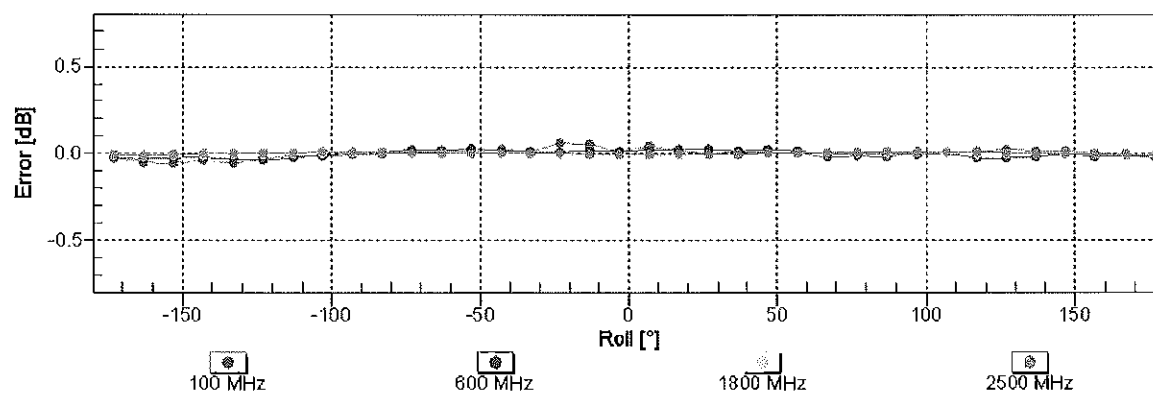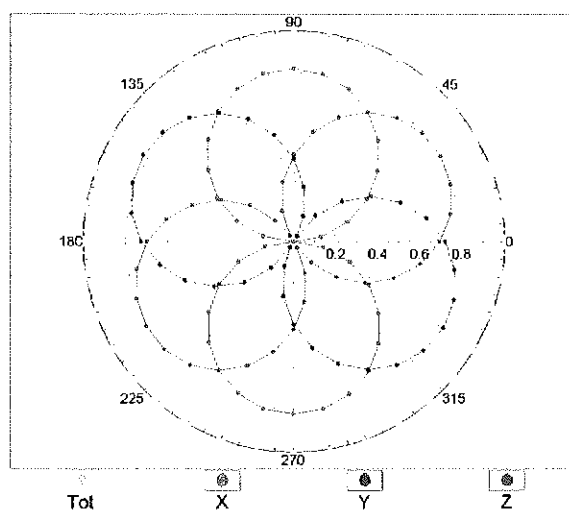


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

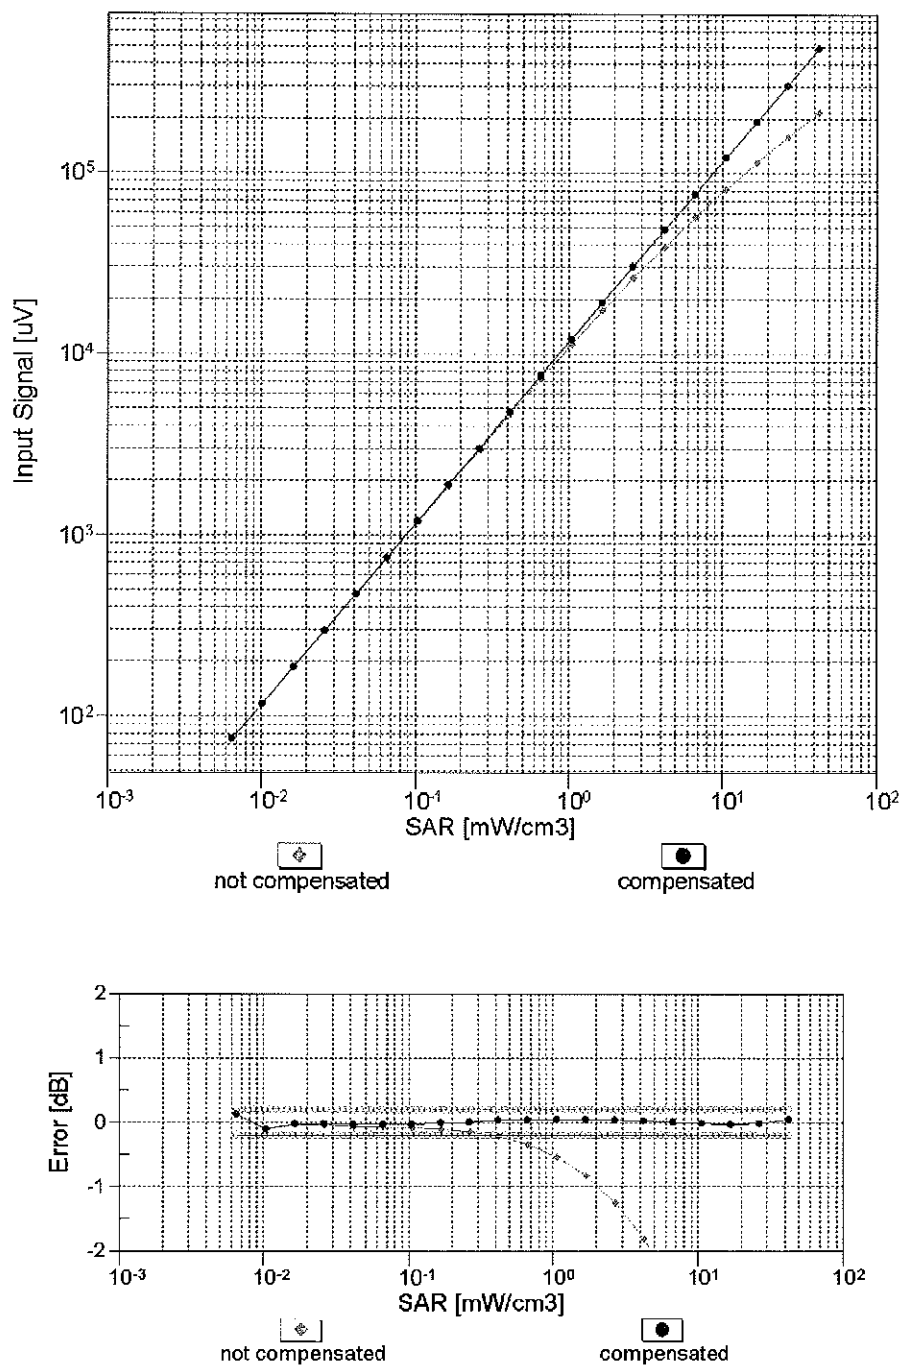



Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

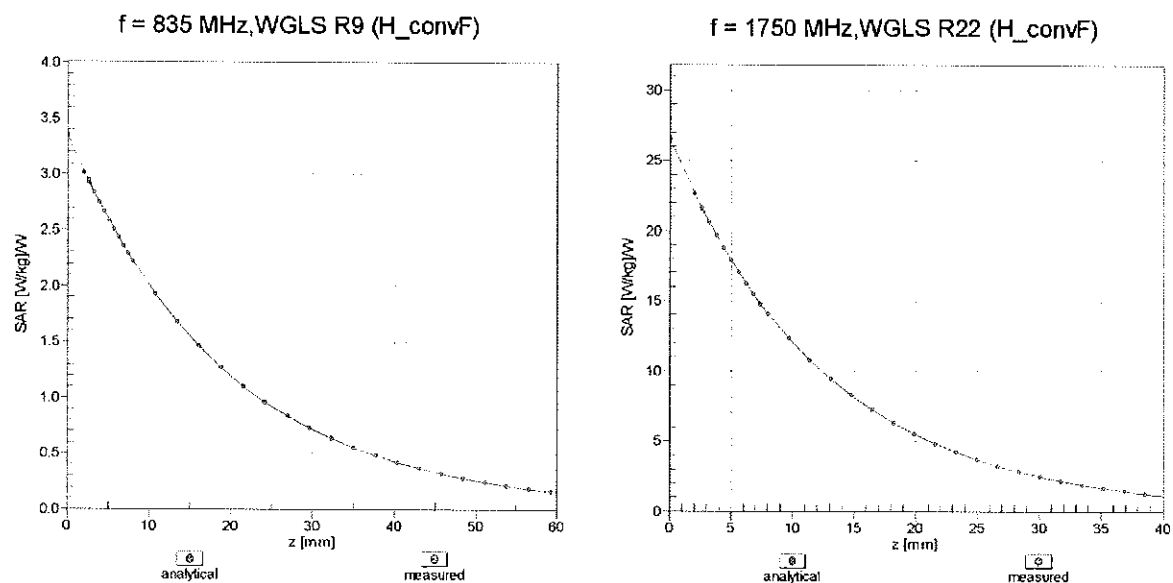

Deviation from Isotropy in Liquid

Error (ϕ , θ), $f = 900 \text{ MHz}$

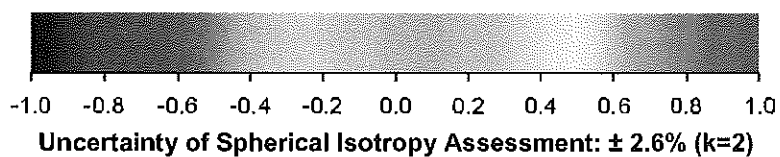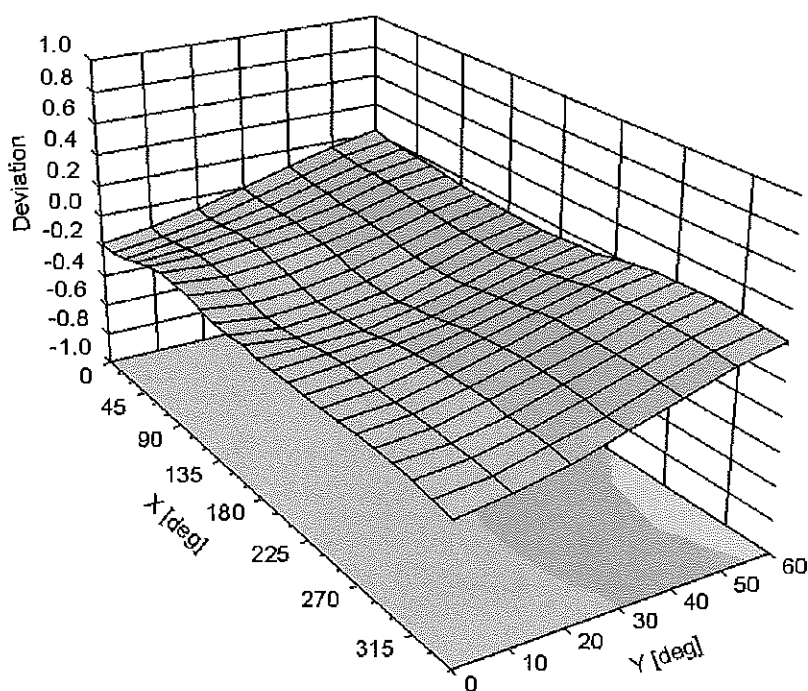

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-83.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **EX3-3589 Jan13**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3589**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **January 17, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	20-Jun-12 (No. DAE4-660_Jun12)	Jun-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: January 17, 2013			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3589

Manufactured: March 30, 2006
Calibrated: January 17, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.46	0.40	0.40	$\pm 10.1 \%$
DCP (mV) ^B	100.5	103.8	99.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	165.8	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		134.3	
		Z	0.0	0.0	1.0		140.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	8.70	8.70	8.70	0.39	0.96	± 12.0 %
835	41.5	0.90	8.40	8.40	8.40	0.52	0.74	± 12.0 %
1750	40.1	1.37	7.34	7.34	7.34	0.45	0.93	± 12.0 %
1900	40.0	1.40	7.09	7.09	7.09	0.80	0.65	± 12.0 %
2450	39.2	1.80	6.37	6.37	6.37	0.39	0.97	± 12.0 %
2600	39.0	1.96	6.19	6.19	6.19	0.30	1.12	± 12.0 %
5200	36.0	4.66	4.48	4.48	4.48	0.45	1.80	± 13.1 %
5300	35.9	4.76	4.27	4.27	4.27	0.45	1.80	± 13.1 %
5500	35.6	4.96	4.14	4.14	4.14	0.50	1.80	± 13.1 %
5600	35.5	5.07	3.81	3.81	3.81	0.55	1.80	± 13.1 %
5800	35.3	5.27	3.85	3.85	3.85	0.55	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	8.59	8.59	8.59	0.49	0.86	± 12.0 %
835	55.2	0.97	8.43	8.43	8.43	0.38	1.05	± 12.0 %
1750	53.4	1.49	7.87	7.87	7.87	0.44	0.89	± 12.0 %
1900	53.3	1.52	7.46	7.46	7.46	0.58	0.75	± 12.0 %
2450	52.7	1.95	7.07	7.07	7.07	0.80	0.50	± 12.0 %
2600	52.5	2.16	6.68	6.68	6.68	0.80	0.50	± 12.0 %
5200	49.0	5.30	3.99	3.99	3.99	0.50	1.90	± 13.1 %
5300	48.9	5.42	3.81	3.81	3.81	0.50	1.90	± 13.1 %
5500	48.6	5.65	3.52	3.52	3.52	0.55	1.90	± 13.1 %
5600	48.5	5.77	3.32	3.32	3.32	0.60	1.90	± 13.1 %
5800	48.2	6.00	3.66	3.66	3.66	0.60	1.90	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

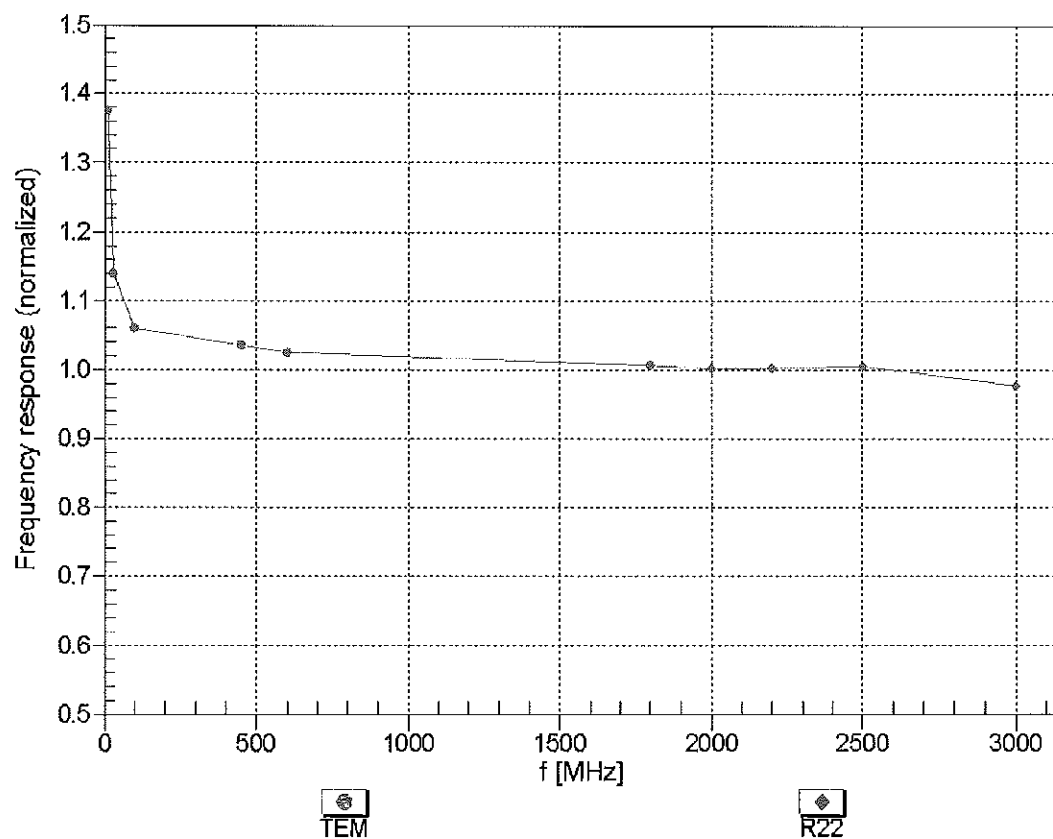



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM

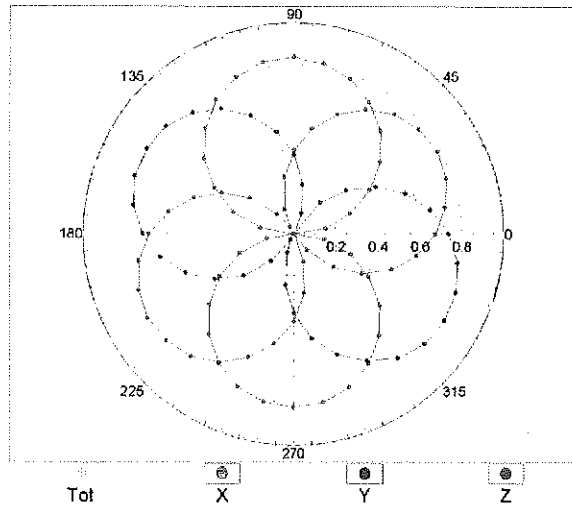


f=1800 MHz,R22

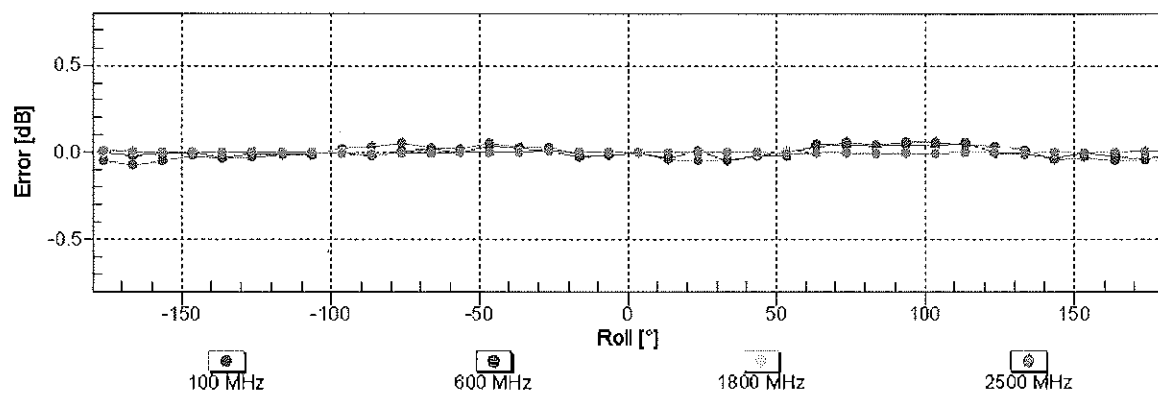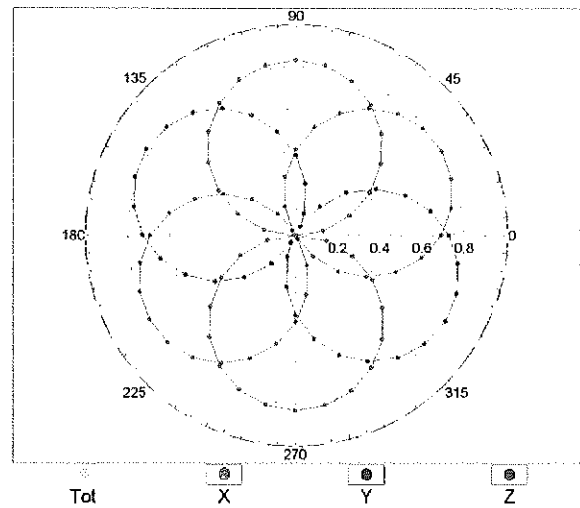

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


Dynamic Range f(SAR_{head})

(TEM cell , f = 900 MHz)

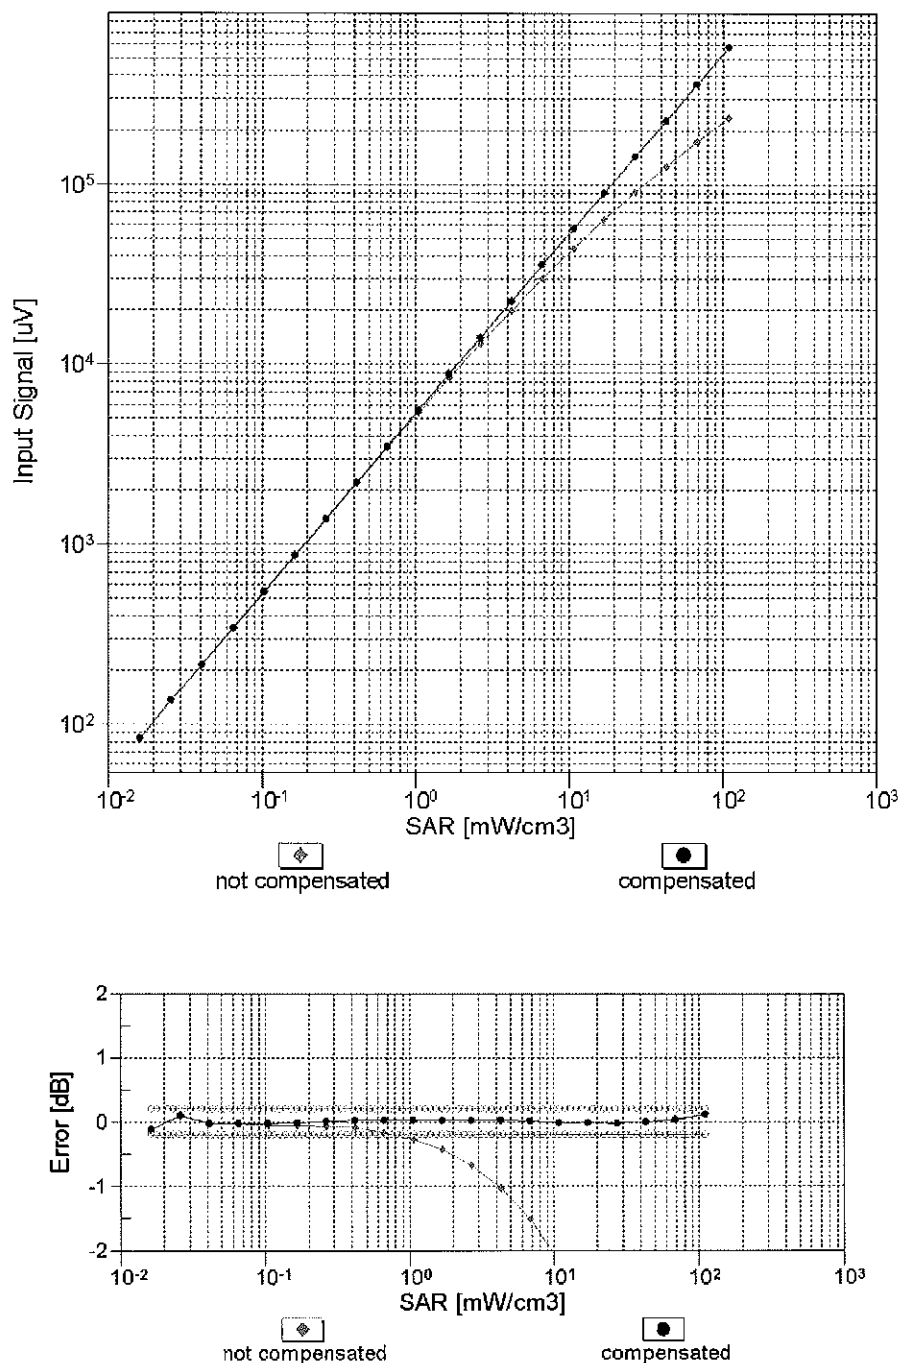



Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

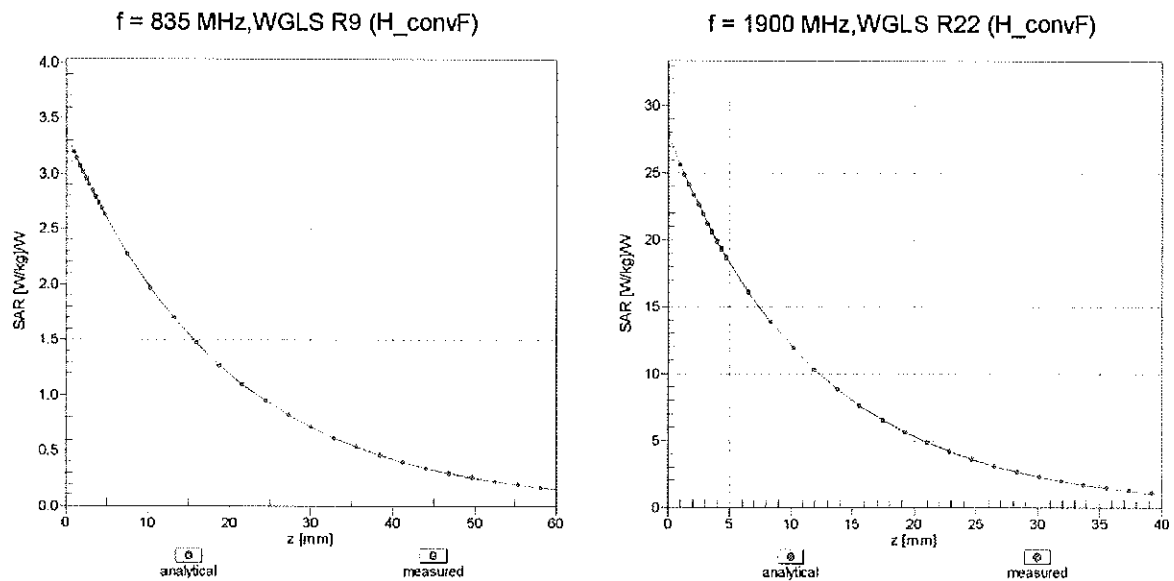

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

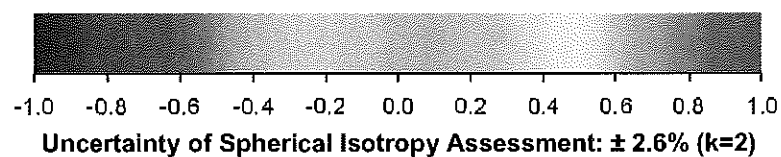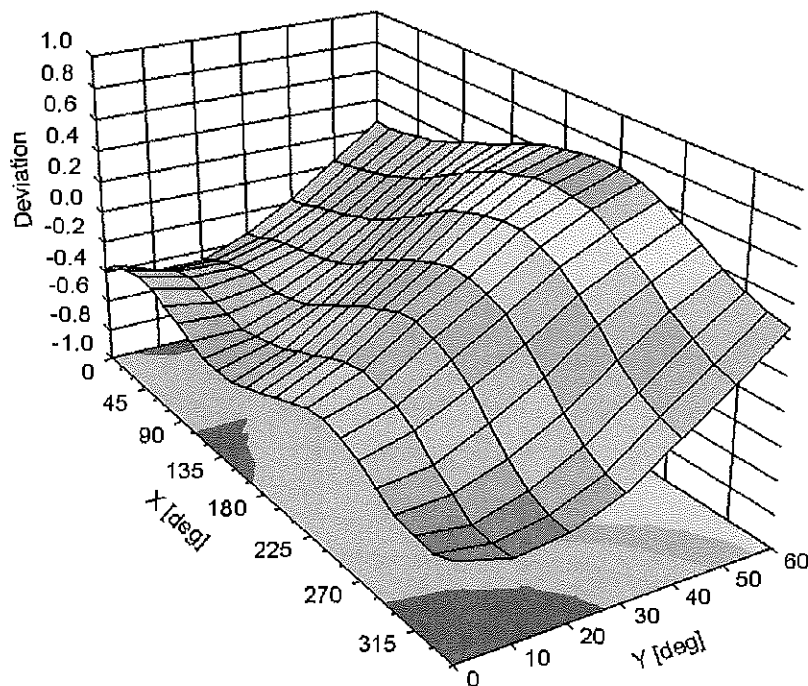

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-26.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

Table D-I
Composition of the Tissue Equivalent Matter

Frequency (MHz)	835	1750	1900	2450	5200-5800
Tissue	Body	Body	Body	Body	Body
Ingredients (% by weight)					
Bactericide	0.1				
DGBE		31	29.44	26.7	
HEC	1				
NaCl	0.94	0.2	0.39	0.1	
Sucrose	44.9				
Polysorbate (Tween) 80					20
Water	53.06	68.8	70.17	73.2	80

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/02/13 – 01/20/14	DUT Type: Portable Tablet	APPENDIX D: Page 1 of 1		

APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB 865664 D02v01, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2003 and FCC KDB 865664 D01 v01. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table E-I
SAR System Validation Summary

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE TYPE	PROBE CAL. POINT		COND.	PERM.	CW VALIDATION			MOD. VALIDATION		
							(σ)	(ϵ_r)	SENSI- TIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
G	750	1/20/2014	3209	ES3DV3	750	Body	0.961	54.12	PASS	PASS	PASS	N/A	N/A	N/A
K	835	12/19/2013	3333	ES3DV3	835	Body	1.006	53.18	PASS	PASS	PASS	GMSK	PASS	N/A
E	1750	1/3/2014	3914	EX3DV4	1750	Body	1.474	51.77	PASS	PASS	PASS	N/A	N/A	N/A
I	1900	7/1/2013	3319	ES3DV3	1900	Body	1.502	52.10	PASS	PASS	PASS	GMSK	PASS	N/A
D	2450	10/11/2013	3022	ES3DV2	2450	Body	2.008	52.50	PASS	PASS	PASS	OFDM	N/A	PASS
A	5200	1/23/2013	3589	EX3DV4	5200	Body	5.292	47.85	PASS	PASS	PASS	OFDM	N/A	PASS
A	5300	1/23/2013	3589	EX3DV4	5300	Body	5.477	47.47	PASS	PASS	PASS	OFDM	N/A	PASS
A	5500	1/23/2013	3589	EX3DV4	5500	Body	5.729	47.03	PASS	PASS	PASS	OFDM	N/A	PASS
A	5600	1/23/2013	3589	EX3DV4	5600	Body	5.916	46.70	PASS	PASS	PASS	OFDM	N/A	PASS
A	5800	1/23/2013	3589	EX3DV4	5800	Body	6.233	46.20	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE:

While the probes have been calibrated for both a CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.

FCC ID: A3LSMP905M	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/02/13 – 01/20/14	DUT Type: Portable Tablet	APPENDIX E: Page 1 of 1		

APPENDIX G: SENSOR TRIGGERING DATA SUMMARY

FCC ID: A3LSMP905M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 12/02/13 – 01/20/14	DUT Type: Portable Tablet	APPENDIX G: Page G1 of G5

A3LSMP905M Sensor Triggering Data Summary

Per FCC KDB Publication 616217 D04v01, this device was tested by the manufacturer to determine the proximity sensor triggering distances for the back and top edge of the device. The measured output power within ± 5 mm of the triggering points (or until touching the phantom) is included for back side and each applicable edge.

To ensure all production units are compliant it is necessary to test SAR at a distance 1mm less than the smallest distance from the device and SAR phantom (determined from these triggering tests according to the KDB 616217 D04v01) with the device at maximum output power without power reduction. These additional SAR Tests are included additionally to the SAR tests for the device touching the SAR phantom, with reduced power.

Back Side

Moving device toward the phantom:

KDB 616217 6.2.9 Measured Power[dBm]											
Distance[mm]	19	18	17	16	15	14	13	12	11	10	9
GSM850	33.30	33.31	33.23	33.28	33.22	25.90	25.66	25.60	25.73	25.70	25.87
GSM1900	29.73	29.74	29.80	29.67	29.83	20.78	20.73	20.82	20.62	20.78	20.70
GPRS 850 1Tx	33.29	33.12	33.32	33.25	33.44	25.92	25.86	25.71	25.77	25.77	25.80
GPRS 850 2Tx	31.44	31.12	31.10	31.38	31.30	24.34	24.17	24.22	24.23	24.25	24.22
GPRS 850 3Tx	29.59	29.53	29.32	29.35	29.62	22.90	22.81	22.78	22.86	22.81	22.62
GPRS 850 4Tx	28.34	28.33	28.36	28.28	28.28	21.21	21.24	21.23	21.21	21.34	21.43
GPRS 1900 1Tx	29.94	29.86	29.86	29.61	29.76	20.83	20.82	20.95	20.76	20.71	20.83
GPRS 1900 2Tx	27.62	27.84	27.82	27.68	27.92	18.67	18.82	18.60	18.92	18.72	18.80
GPRS 1900 3Tx	25.72	25.89	25.87	25.76	25.90	16.89	16.87	16.70	16.77	16.66	16.82
GPRS 1900 4Tx	24.92	24.87	24.67	24.84	24.70	15.92	15.92	15.61	15.93	15.69	15.82
WCDMA 850	22.61	22.86	22.66	22.76	22.77	18.73	18.63	18.70	18.71	18.82	18.88
WCDMA 1900	22.74	22.95	22.91	22.91	22.60	12.68	12.83	12.72	12.89	12.88	12.73
EDGE850 1Tx	26.72	26.66	26.80	26.63	26.77	19.75	19.93	19.70	19.90	19.70	19.95
EDGE850 2Tx	25.14	25.34	25.40	25.40	25.13	18.36	18.37	18.40	18.33	18.17	18.40
EDGE850 3Tx	23.52	23.44	23.40	23.52	23.59	16.48	16.63	16.33	16.53	16.60	16.53
EDGE850 4Tx	22.61	22.40	22.36	22.54	22.47	15.39	15.41	15.54	15.45	15.58	15.44
EDGE1900 1Tx	25.66	25.77	25.81	25.95	25.91	16.83	16.91	16.84	16.78	16.90	16.95
EDGE1900 2Tx	24.88	24.92	24.95	24.68	24.80	15.80	15.67	15.63	15.63	15.82	15.66
EDGE1900 3Tx	22.91	23.11	22.82	23.09	23.13	14.05	13.87	13.96	13.80	13.93	13.82
EDGE1900 4Tx	21.68	21.90	21.65	21.84	21.64	12.70	12.95	12.78	12.79	12.87	12.76
LTE B2	23.16	23.19	23.41	23.10	23.28	14.61	14.67	14.66	14.62	14.69	14.94
LTE B4	22.90	22.88	22.61	22.82	22.75	14.77	14.75	14.85	14.77	14.92	14.64
LTE B5	22.32	22.27	22.19	22.43	22.45	15.83	15.79	15.84	15.64	15.65	15.89
LTE B17	22.88	22.92	22.81	22.66	22.86	15.25	15.18	15.38	15.33	15.30	15.10

FCC ID: A3LSMP905M	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 12/02/13 – 01/20/14	DUT Type: Portable Tablet	APPENDIX G: Page G2 of G5

Moving device away from the phantom:

KDB 616217 6.2.9																
Measured Power[dBm]																
Distance[mm]	25	22	19	18	17	16	15	14	13	12	11	10	9	6	3	0
GSM850	33.12	33.19	33.34	33.37	33.13	33.40	33.31	25.66	25.83	25.80	25.90	25.72	25.82	25.63	25.64	25.65
GSM1900	29.70	29.70	29.90	29.63	29.72	29.87	29.92	20.64	20.80	20.75	20.84	20.88	20.76	20.95	20.93	20.72
GPRS 850 1Tx	33.24	33.32	33.19	33.18	33.29	33.16	33.15	25.82	25.91	25.65	25.74	25.92	25.90	25.90	25.61	25.88
GPRS 850 2Tx	31.18	31.36	31.34	31.27	31.13	31.43	31.36	24.27	24.22	24.24	24.39	24.29	24.40	24.16	24.39	24.26
GPRS 850 3Tx	29.53	29.31	29.50	29.64	29.53	29.59	29.65	22.60	22.94	22.68	22.64	22.91	22.88	22.91	22.60	22.73
GPRS 850 4Tx	28.30	28.36	28.37	28.25	28.37	28.33	28.45	21.31	21.21	21.20	21.12	21.14	21.40	21.12	21.22	21.15
GPRS 1900 1Tx	29.89	29.93	29.93	29.69	29.89	29.93	29.92	20.76	20.95	20.80	20.61	20.78	20.79	20.85	20.62	20.84
GPRS 1900 2Tx	27.81	27.83	27.91	27.68	27.73	27.64	27.89	18.94	18.79	18.90	18.78	18.93	18.60	18.81	18.74	18.87
GPRS 1900 3Tx	25.83	25.79	25.66	25.93	25.75	25.76	25.65	16.71	16.68	16.72	16.71	16.85	16.88	16.86	16.69	16.93
GPRS 1900 4Tx	24.85	24.70	24.85	24.68	24.63	24.90	24.82	15.72	15.85	15.60	15.95	15.88	15.76	15.83	15.82	15.80
WCDMA 850	22.71	22.86	22.80	22.85	22.93	22.86	22.95	18.76	18.70	18.62	18.67	18.67	18.89	18.77	18.86	18.82
WCDMA 1900	22.72	22.95	22.65	22.93	22.67	22.67	22.94	12.92	12.82	12.62	12.94	12.81	12.93	12.90	12.75	12.78
EDGE850 1Tx	26.82	26.74	26.70	26.85	26.93	26.66	26.63	19.65	19.71	19.62	19.79	19.85	19.76	19.61	19.68	19.70
EDGE850 2Tx	25.27	25.10	25.39	25.35	25.31	25.21	25.25	18.45	18.44	18.33	18.19	18.34	18.37	18.19	18.35	18.21
EDGE850 3Tx	23.49	23.43	23.31	23.52	23.48	23.41	23.54	16.40	16.59	16.49	16.52	16.46	16.32	16.53	16.60	16.30
EDGE850 4Tx	22.51	22.37	22.46	22.33	22.62	22.36	22.62	15.65	15.61	15.43	15.54	15.62	15.51	15.59	15.45	15.55
EDGE1900 1Tx	25.79	25.60	25.63	25.73	25.79	25.74	25.65	16.95	16.60	16.95	16.60	16.92	16.84	16.80	16.83	16.93
EDGE1900 2Tx	24.61	24.81	24.94	24.72	24.76	24.95	24.62	15.77	15.70	15.63	15.86	15.86	15.71	15.75	15.95	15.94
EDGE1900 3Tx	22.86	23.11	22.82	23.15	23.03	22.84	23.14	13.86	13.94	13.89	13.90	13.94	14.15	13.83	14.14	14.05
EDGE1900 4Tx	21.77	21.76	21.72	21.72	21.60	21.74	21.85	12.88	12.69	12.72	12.65	12.61	12.60	12.80	12.66	12.91
LTE B2	23.40	23.12	23.12	23.18	23.24	23.34	23.39	14.93	14.64	14.76	14.94	14.91	14.88	14.95	14.60	14.94
LTE B4	22.85	22.95	22.94	22.91	22.94	22.75	22.82	14.83	14.82	14.86	14.91	14.72	14.95	14.69	14.81	14.80
LTE B5	22.29	22.18	22.28	22.17	22.32	22.32	22.25	15.66	15.74	15.88	15.94	15.88	15.85	15.85	15.92	15.82
LTE B17	22.79	22.77	22.85	22.70	22.73	22.63	22.62	15.28	15.16	15.14	15.35	15.41	15.43	15.21	15.17	15.16

Based on the most conservative measured triggering distance of 14 mm, additional SAR measurements were required at 13 mm from the back side.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/02/13 – 01/20/14	DUT Type: Portable Tablet			APPENDIX G: Page G3 of G5

Left Edge

Moving device toward the phantom:

KDB 616217 6.2.9 Measured Power [dBm]											
Distance[mm]	19	18	17	16	15	14	13	12	11	10	9
GSM850	33.11	33.31	33.38	33.4	33.22	25.62	25.83	25.82	25.65	25.89	25.9
GSM1900	29.87	29.71	29.76	29.71	29.92	20.74	20.75	20.73	20.71	20.77	20.64
GPRS 850 1Tx	33.25	33.4	33.29	33.36	33.38	25.8	25.9	25.64	25.67	25.77	25.64
GPRS 850 2Tx	31.41	31.24	31.32	31.16	31.18	24.27	24.16	24.4	24.14	24.15	24.33
GPRS 850 3Tx	29.31	29.49	29.44	29.36	29.61	22.88	22.91	22.65	22.69	22.71	22.61
GPRS 850 4Tx	28.18	28.23	28.24	28.4	28.33	21.33	21.42	21.35	21.11	21.39	21.14
GPRS 1900 1Tx	29.88	29.72	29.85	29.89	29.92	20.75	20.77	20.73	20.95	20.78	20.63
GPRS 1900 2Tx	27.86	27.79	27.75	27.92	27.84	18.92	18.81	18.6	18.75	18.66	18.62
GPRS 1900 3Tx	25.73	25.91	25.84	25.64	25.66	16.61	16.65	16.7	16.92	16.62	16.7
GPRS 1900 4Tx	24.87	24.69	24.72	24.65	24.61	15.65	15.6	15.76	15.95	15.76	15.75
WCDMA 850	22.68	22.86	22.7	22.94	22.88	18.68	18.84	18.78	18.83	18.83	18.77
WCDMA 1900	22.91	22.81	22.63	22.84	22.62	12.86	12.74	12.81	12.64	12.68	12.64
EDGE850 1Tx	26.8	26.81	26.8	26.7	26.86	19.95	19.61	19.82	19.72	19.6	19.92
EDGE850 2Tx	25.1	25.42	25.44	25.27	25.13	18.14	18.35	18.28	18.35	18.15	18.25
EDGE850 3Tx	23.43	23.48	23.54	23.31	23.41	16.41	16.46	16.57	16.65	16.3	16.47
EDGE850 4Tx	22.36	22.36	22.38	22.55	22.57	15.5	15.51	15.53	15.42	15.45	15.56
EDGE1900 1Tx	25.88	25.68	25.82	25.71	25.87	16.86	16.79	16.61	16.63	16.78	16.75
EDGE1900 2Tx	24.8	24.7	24.87	24.94	24.85	15.73	15.79	15.8	15.66	15.78	15.82
EDGE1900 3Tx	23.08	23.05	23.14	23.12	22.83	13.81	13.83	13.99	14.03	14.08	14
EDGE1900 4Tx	21.93	21.88	21.63	21.85	21.77	12.61	12.64	12.79	12.91	12.6	12.94
LTE B2	23.11	23.3	23.26	23.44	23.26	14.94	14.68	14.82	14.62	14.9	14.68
LTE B4	22.95	22.93	22.83	22.89	22.74	14.92	14.61	14.6	14.84	14.8	14.75
LTE B5	22.32	22.16	22.23	22.1	22.13	15.75	15.75	15.75	15.81	15.73	15.79
LTE B17	22.95	22.72	22.9	22.62	22.66	15.12	15.23	15.19	15.29	15.15	15.17

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/02/13 – 01/20/14	DUT Type: Portable Tablet			APPENDIX G: Page G4 of G5

Moving device away from the phantom:

KDB 616217 6.2.9																
Measured Power[dBm]																
Distance[mm]	25	22	19	18	17	16	15	14	13	12	11	10	9	6	3	0
GSM850	33.26	33.18	33.21	33.25	33.45	33.35	33.15	25.75	25.70	25.89	25.61	25.95	25.80	25.90	25.94	25.88
GSM1900	29.87	29.68	29.65	29.62	29.88	29.79	29.89	20.81	20.68	20.60	20.94	20.75	20.83	20.87	20.61	20.82
GPRS 850 1Tx	33.34	33.22	33.45	33.32	33.30	33.27	33.18	25.64	25.92	25.93	25.86	25.69	25.83	25.92	25.95	25.79
GPRS 850 2Tx	31.40	31.19	31.15	31.19	31.41	31.10	31.13	24.29	24.27	24.36	24.10	24.20	24.28	24.32	24.25	24.37
GPRS 850 3Tx	29.48	29.65	29.57	29.56	29.45	29.38	29.63	22.84	22.64	22.85	22.85	22.87	22.82	22.67	22.95	22.81
GPRS 850 4Tx	28.45	28.18	28.20	28.37	28.13	28.28	28.21	21.12	21.23	21.18	21.23	21.28	21.11	21.10	21.38	21.14
GPRS 1900 1Tx	29.68	29.70	29.62	29.85	29.66	29.71	29.75	20.79	20.60	20.70	20.71	20.91	20.70	20.93	20.62	20.62
GPRS 1900 2Tx	27.82	27.93	27.84	27.61	27.82	27.94	27.81	18.87	18.84	18.91	18.84	18.67	18.66	18.75	18.84	18.84
GPRS 1900 3Tx	25.71	25.73	25.86	25.88	25.90	25.61	25.85	16.72	16.81	16.65	16.63	16.72	16.63	16.85	16.79	16.63
GPRS 1900 4Tx	24.82	24.82	24.79	24.87	24.81	24.63	24.69	15.61	15.95	15.81	15.83	15.93	15.84	15.74	15.80	15.95
WCDMA 850	22.74	22.62	22.87	22.92	22.69	22.78	22.80	18.66	18.78	18.74	18.65	18.86	18.67	18.64	18.88	18.81
WCDMA 1900	22.71	22.68	22.74	22.90	22.67	22.60	22.60	12.76	12.64	12.91	12.82	12.75	12.89	12.79	12.87	12.85
EDGE850 1Tx	26.91	26.93	26.62	26.64	26.83	26.61	26.82	19.88	19.76	19.65	19.62	19.88	19.65	19.71	19.68	19.69
EDGE850 2Tx	25.37	25.28	25.26	25.44	25.33	25.12	25.44	18.16	18.22	18.42	18.42	18.38	18.35	18.40	18.35	18.11
EDGE850 3Tx	23.35	23.34	23.54	23.41	23.63	23.52	23.56	16.50	16.48	16.31	16.37	16.40	16.38	16.41	16.43	16.60
EDGE850 4Tx	22.54	22.60	22.44	22.62	22.37	22.43	22.49	15.46	15.54	15.59	15.37	15.32	15.58	15.48	15.33	15.48
EDGE1900 1Tx	25.63	25.72	25.86	25.79	25.81	25.78	25.93	16.65	16.92	16.66	16.71	16.85	16.65	16.64	16.63	16.81
EDGE1900 2Tx	24.61	24.74	24.62	24.85	24.74	24.60	24.81	15.60	15.81	15.76	15.78	15.67	15.65	15.75	15.85	15.77
EDGE1900 3Tx	22.82	22.81	22.95	22.90	23.12	22.95	22.88	14.02	13.85	13.94	14.14	13.97	13.82	14.15	13.92	13.98
EDGE1900 4Tx	21.87	21.60	21.71	21.83	21.75	21.78	21.79	12.74	12.77	12.62	12.70	12.95	12.95	12.78	12.78	12.88
LTE B2	23.33	23.22	23.31	23.14	23.29	23.27	23.10	14.82	14.76	14.70	14.93	14.64	14.60	14.91	14.61	14.86
LTE B4	22.87	22.68	22.90	22.61	22.71	22.66	22.87	14.90	14.83	14.90	14.64	14.80	14.84	14.83	14.71	14.90
LTE B5	22.41	22.10	22.11	22.32	22.19	22.30	22.16	15.68	15.64	15.77	15.77	15.77	15.66	15.67	15.71	15.66
LTE B17	22.71	22.63	22.63	22.70	22.79	22.79	22.77	15.41	15.23	15.20	15.14	15.22	15.39	15.41	15.32	15.41

Based on the most conservative measured triggering distance of 14 mm, additional SAR measurements were required at 13 mm from the left edge.

FCC ID: A3LSMP905M		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 12/02/13 – 01/20/14	DUT Type: Portable Tablet			APPENDIX G: Page G5 of G5