



## SAR EVALUATION REPORT

**Applicant Name:**

Samsung Electronics, Co. Ltd.  
129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do 443-742, Korea

**Date of Testing:**

08/20/14 - 08/26/14

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Document Serial No.:**

OY1408191749.A3L

**FCC ID:**

**A3LSMR750B**

**APPLICANT:**

**SAMSUNG ELECTRONICS, CO. LTD.**

**DUT Type:**

Portable Wrist Device

**Application Type:**

Certification

**FCC Rule Part(s):**

CFR §2.1093

**Model(s):**

SM-R750B

| Equipment Class                                   | Band & Mode       | Tx Frequency        | SAR              |                        |
|---------------------------------------------------|-------------------|---------------------|------------------|------------------------|
|                                                   |                   |                     | 1 gm Head (W/kg) | 10 gm Extremity (W/kg) |
| TNB                                               | GSM/GPRS/EDGE 850 | 824.20 - 848.80 MHz | 0.10             | 0.20                   |
| TNB                                               | UMTS 850          | 826.40 - 846.60 MHz | < 0.1            | 0.11                   |
| DTS                                               | 2.4 GHz WLAN      | 2412 - 2462 MHz     | 0.11             | 0.24                   |
| DSS                                               | Bluetooth         | 2402 - 2480 MHz     | < 0.1            | 0.21                   |
| DTS                                               | Bluetooth LE      | 2402 - 2480 MHz     | N/A              |                        |
| <b>Simultaneous SAR per KDB 690783 D01v01r03:</b> |                   |                     | 0.20             | 0.44                   |

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
Randy Ortanez  
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: [sartick@mmfai.info](mailto:sartick@mmfai.info).

|                                          |                                                                                     |                                           |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                       |  | <b>SAR EVALUATION REPORT</b>              |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>OY1408191749.A3L | <b>Test Dates:</b><br>08/20/14 - 08/26/14                                           | <b>DUT Type:</b><br>Portable Wrist Device | Page 1 of 31                                                                          |                                        |

# T A B L E O F C O N T E N T S

|                                                       |                                                          |    |
|-------------------------------------------------------|----------------------------------------------------------|----|
| 1                                                     | DEVICE UNDER TEST .....                                  | 3  |
| 2                                                     | INTRODUCTION .....                                       | 7  |
| 3                                                     | DOSIMETRIC ASSESSMENT .....                              | 8  |
| 4                                                     | TEST CONFIGURATION POSITIONS FOR WRIST-WORN DEVICES..... | 9  |
| 5                                                     | RF EXPOSURE LIMITS .....                                 | 10 |
| 6                                                     | FCC MEASUREMENT PROCEDURES.....                          | 11 |
| 7                                                     | RF CONDUCTED POWERS.....                                 | 14 |
| 8                                                     | SYSTEM VERIFICATION.....                                 | 18 |
| 9                                                     | SAR DATA SUMMARY .....                                   | 20 |
| 10                                                    | FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....         | 23 |
| 11                                                    | SAR MEASUREMENT VARIABILITY .....                        | 26 |
| 12                                                    | EQUIPMENT LIST .....                                     | 27 |
| 13                                                    | MEASUREMENT UNCERTAINTIES .....                          | 28 |
| 14                                                    | CONCLUSION.....                                          | 29 |
| 15                                                    | REFERENCES .....                                         | 30 |
| APPENDIX A: SAR TEST PLOTS                            |                                                          |    |
| APPENDIX B: SAR DIPOLE VERIFICATION PLOTS             |                                                          |    |
| APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES |                                                          |    |
| APPENDIX D: SAR TISSUE SPECIFICATIONS                 |                                                          |    |
| APPENDIX E: SAR SYSTEM VALIDATION                     |                                                          |    |
| APPENDIX F: SAR TEST SETUP PHOTOGRAPHS                |                                                          |    |

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 2 of 31                    |

# 1 DEVICE UNDER TEST

## 1.1 Device Overview

| Band & Mode       | Operating Modes | Tx Frequency        |
|-------------------|-----------------|---------------------|
| GSM/GPRS/EDGE 850 | Voice/Data      | 824.20 - 848.80 MHz |
| UMTS 850          | Voice/Data      | 826.40 - 846.60 MHz |
| 2.4 GHz WLAN      | Data            | 2412 - 2462 MHz     |
| Bluetooth         | Data            | 2402 - 2480 MHz     |
| Bluetooth LE      | Data            | 2402 - 2480 MHz     |

## 1.2 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.


| Mode / Band       |         | Voice (dBm) | Burst Average GMSK (dBm) |             | Burst Average 8-PSK (dBm) |             |
|-------------------|---------|-------------|--------------------------|-------------|---------------------------|-------------|
|                   |         | 1 TX Slot   | 1 TX Slot                | 2 TX Slots  | 1 TX Slot                 | 2 TX Slots  |
| GSM/GPRS/EDGE 850 | Maximum | <b>33.0</b> | <b>33.0</b>              | <b>30.5</b> | <b>25.5</b>               | <b>25.5</b> |
|                   | Nominal | <b>32.5</b> | <b>32.5</b>              | <b>30.0</b> | <b>25.0</b>               | <b>25.0</b> |

| Mode / Band           |         | Modulated Average (dBm) |                  |                  |
|-----------------------|---------|-------------------------|------------------|------------------|
|                       |         | 3GPP RMC Rel 99         | 3GPP HSDPA Rel 5 | 3GPP HSUPA Rel 6 |
| UMTS Band 5 (850 MHz) | Maximum | <b>23.0</b>             | <b>22.0</b>      | <b>22.0</b>      |
|                       | Nominal | <b>22.5</b>             | <b>21.5</b>      | <b>21.5</b>      |

| Mode / Band            |         | Modulated Average (dBm) |
|------------------------|---------|-------------------------|
| IEEE 802.11b (2.4 GHz) | Maximum | <b>17.5</b>             |
|                        | Nominal | <b>17.0</b>             |
| IEEE 802.11g (2.4 GHz) | Maximum | <b>13.5</b>             |
|                        | Nominal | <b>13.0</b>             |
| IEEE 802.11n (2.4 GHz) | Maximum | <b>13.5</b>             |
|                        | Nominal | <b>13.0</b>             |
| Bluetooth              | Maximum | <b>18.0</b>             |
|                        | Nominal | <b>17.5</b>             |
| Bluetooth LE           | Maximum | <b>7.0</b>              |
|                        | Nominal | <b>6.5</b>              |

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 3 of 31                    |

### 1.3 DUT Antenna Locations

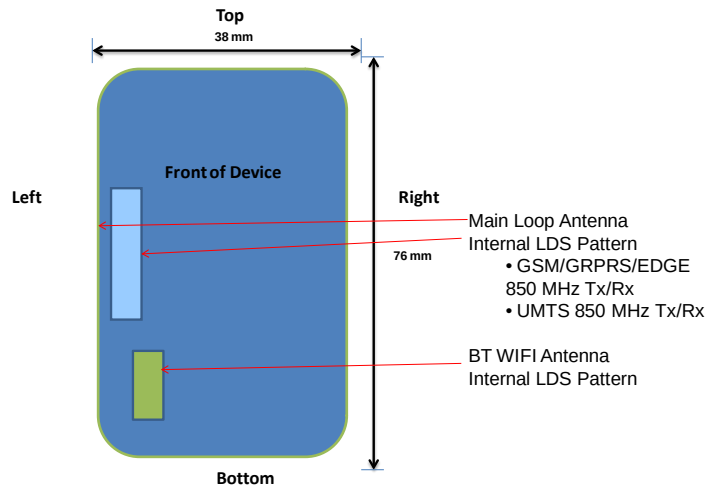

Note: Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.

**Figure 1-1**  
**DUT Antenna Locations**

### 1.4 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

**Table 1-1**  
**Simultaneous Transmission Scenarios**

| No. | Capable Transmit Configuration | Head | Extremity |
|-----|--------------------------------|------|-----------|
| 1   | GSM voice + 2.4 GHz Wi-Fi      | Yes  | Yes       |
| 2   | GSM voice + 2.4 GHz Bluetooth  | Yes  | Yes       |
| 3   | UMTS + 2.4 GHz Wi-Fi           | Yes  | Yes       |
| 4   | UMTS + 2.4 GHz Bluetooth       | Yes  | Yes       |
| 5   | GPRS/EDGE + 2.4 GHz Wi-Fi      | N/A  | Yes       |
| 6   | GPRS/EDGE + 2.4 GHz Bluetooth  | N/A  | Yes       |

- 2.4 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN scenario.

|                                          |                                                                                     |                                           |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                       |  | <b>SAR EVALUATION REPORT</b>              |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>OY1408191749.A3L | <b>Test Dates:</b><br>08/20/14 - 08/26/14                                           | <b>DUT Type:</b><br>Portable Wrist Device |                                                                                       | Page 4 of 31                           |

## 1.5 SAR Test Exclusions Applied

### (A) WIFI/BT

Per FCC KDB 447498 D01v05, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth LE (rounded to the nearest mW) and the antenna to user separation distance, head Bluetooth LE SAR was not required;  $[(5/10) * \sqrt{2.480}] = 0.8 < 3.0$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v05, the 10g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth LE (rounded to the nearest mW) and the antenna to user separation distance, extremity Bluetooth LE SAR was not required;  $[(5/5) * \sqrt{2.480}] = 1.6 < 7.5$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v02.

## 1.6 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

## 1.7 Guidance Applied

- FCC KDB Publication 941225 D01v02, D03v01 (2G/3G)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r03, D02v01r01 (SAR Measurements up to 6 GHz)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 5 of 31                    |

## 1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

|                   | Head Serial Number | Extremity Serial Number |
|-------------------|--------------------|-------------------------|
| GSM/GPRS/EDGE 850 | 30E70              | 30E68                   |
| UMTS 850          | 30E70              | 30E68                   |
| 2.4 GHz WLAN      | 314F4              | 314F4                   |
| Bluetooth         | 314F4              | 314F4                   |

|                                          |                                                                                                                                   |                                           |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>              |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>OY1408191749.A3L | <b>Test Dates:</b><br>08/20/14 - 08/26/14                                                                                         | <b>DUT Type:</b><br>Portable Wrist Device | Page 6 of 31                                                                          |                                        |

## 2

## INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### 2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

**Equation 2-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


|                                          |                                                                                                                                   |                                           |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>              |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>OY1408191749.A3L | <b>Test Dates:</b><br>08/20/14 - 08/26/14                                                                                         | <b>DUT Type:</b><br>Portable Wrist Device |                                                                                       | Page 7 of 31                           |

### 3 DOSIMETRIC ASSESSMENT

#### 3.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 3-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 3-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 3-1**  
**Sample SAR Area**  
**Scan**

**Table 3-1**  
**Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01\***

| Frequency | Maximum Area Scan Resolution (mm)<br>( $\Delta x_{area}, \Delta y_{area}$ ) | Maximum Zoom Scan Resolution (mm)<br>( $\Delta x_{zoom}, \Delta y_{zoom}$ ) | Maximum Zoom Scan Spatial Resolution (mm) |                        |                               | Minimum Zoom Scan Volume (mm)<br>(x,y,z) |
|-----------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------|------------------------|-------------------------------|------------------------------------------|
|           |                                                                             |                                                                             | Uniform Grid                              | Graded Grid            |                               |                                          |
|           |                                                                             |                                                                             | $\Delta z_{zoom}(n)$                      | $\Delta z_{zoom}(1)^*$ | $\Delta z_{zoom}(n>1)^*$      |                                          |
| ≤ 2 GHz   | ≤ 15                                                                        | ≤ 8                                                                         | ≤ 5                                       | ≤ 4                    | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 30                                     |
| 2-3 GHz   | ≤ 12                                                                        | ≤ 5                                                                         | ≤ 5                                       | ≤ 4                    | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 30                                     |
| 3-4 GHz   | ≤ 12                                                                        | ≤ 5                                                                         | ≤ 4                                       | ≤ 3                    | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 28                                     |
| 4-5 GHz   | ≤ 10                                                                        | ≤ 4                                                                         | ≤ 3                                       | ≤ 2.5                  | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 25                                     |
| 5-6 GHz   | ≤ 10                                                                        | ≤ 4                                                                         | ≤ 2                                       | ≤ 2                    | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 22                                     |

\*Also compliant to IEEE 1528-2013 Table 6

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 8 of 31                    |



## 4 TEST CONFIGURATION POSITIONS FOR WRIST-WORN DEVICES

### 4.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 4.2 Positioning for Head

Devices that are designed to be worn on the wrist may operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. When next-to-mouth SAR evaluation is required, the device is positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. The device is evaluated with wrist bands strapped together to represent normal use conditions. The 1-g head SAR Exclusion Thresholds found in KDB Publication 447498 D01v05 should be applied to determine SAR test requirements.

### 4.3 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. When extremity SAR evaluation is required, the device is evaluated with the back of the device touching the flat phantom, which is filled with body tissue-equivalent medium. The device is evaluated with wrist bands unstrapped and touching the phantom; the space between the device and the phantom must represent actual use conditions. The 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v05 should be applied to determine SAR test requirements.

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device | Page 9 of 31                                                                          |                                 |

## 5 RF EXPOSURE LIMITS

### 5.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 5.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 5-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

| HUMAN EXPOSURE LIMITS                                               |                                                                           |                                                                   |
|---------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------|
|                                                                     | UNCONTROLLED ENVIRONMENT<br><i>General Population</i><br>(W/kg) or (mW/g) | CONTROLLED ENVIRONMENT<br><i>Occupational</i><br>(W/kg) or (mW/g) |
| <b>Peak Spatial Average SAR</b><br>Head                             | 1.6                                                                       | 8.0                                                               |
| <b>Whole Body SAR</b>                                               | 0.08                                                                      | 0.4                                                               |
| <b>Peak Spatial Average SAR</b><br>Hands, Feet, Ankle, Wrists, etc. | 4.0                                                                       | 20                                                                |

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 10 of 31                   |

## 6 FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

### 6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

### 6.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

### 6.3 SAR Measurement Conditions for UMTS

#### 6.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

#### 6.3.2 Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 11 of 31                   |

### 6.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

### 6.3.4 Procedures Used to Establish RF Signal for SAR HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. Body exposure conditions are typically applicable to these devices, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with UMTS and requires an active DPCCH. The default test configuration is to measure SAR in UMTS without HSDPA, with an established radio link between the DUT and a communication test set with 12.2 kbps RMC mode configured in Test Loop Mode 1; and tested with HSDPA with FRC and a 12.2 kbps RMC using the highest SAR configuration in UMTS. SAR is selectively confirmed for other physical channel configurations according to output power, exposure conditions and device operating capabilities. Maximum output power is verified according to 3GPP TS 23.121 (Release 5) and SAR must be measured according to these maximum output conditions.

| Sub-Test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $\beta_c$         | $\beta_d$         | $\beta_d$<br>(SF) | $\beta_c/\beta_d$ | $\beta_{hs}$<br>(Note 1,<br>Note 2) | CM (dB)<br>(Note 3) | MPR (dB)<br>(Note 3) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------------------------|---------------------|----------------------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2/15              | 15/15             | 64                | 2/15              | 4/15                                | 0.0                 | 0.0                  |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 12/15<br>(Note 4) | 15/15<br>(Note 4) | 64                | 12/15<br>(Note 4) | 24/15                               | 1.0                 | 0.0                  |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 15/15             | 8/15              | 64                | 15/8              | 30/15                               | 1.5                 | 0.5                  |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 15/15             | 4/15              | 64                | 15/4              | 30/15                               | 1.5                 | 0.5                  |
| <p>Note 1: <math>\Delta_{ACK}</math>, <math>\Delta_{NACK}</math> and <math>\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c</math>.</p> <p>Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, <math>\Delta_{ACK}</math> and <math>\Delta_{NACK} = 8</math> (<math>A_{hs} = 30/15</math>) with <math>\beta_{hs} = 30/15 * \beta_c</math>, and <math>\Delta_{CQI} = 7</math> (<math>A_{hs} = 24/15</math>) with <math>\beta_{hs} = 24/15 * \beta_c</math>.</p> <p>Note 3: CM = 1 for <math>\beta_c/\beta_d = 12/15</math>, <math>\beta_{hs}/\beta_c = 24/15</math>. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.</p> |                   |                   |                   |                   |                                     |                     |                      |

Figure 6-1  
Table C.10.1.4 of TS 234.121-1

### 6.3.5 SAR Measurement Conditions for HSUPA Data Devices

SAR for body exposure configurations are measured according to the 'Body SAR Measurements' procedures in the 'WCDMA Handsets' section of the KDB 941225 D01 FCC 3G document. In addition, Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher of that measured without HSPA in 12.2 kbps RMC mode or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure.

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device | Page 12 of 31                                                                         |                                 |

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and EDCH configurations for HSPA should be configured according to the  $\beta$  values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of the FCC 3G document.

| Sub-test | $\beta_c$            | $\beta_d$            | $\beta_d$ (SF) | $\beta_c/\beta_d$    | $\beta_{hs}^{(1)}$ | $\beta_{ec}$ | $\beta_{ed}$                                 | $\beta_{ed}$ (SF) | $\beta_{ed}$ (codes) | CM <sup>(2)</sup> (dB) | MPR (dB) | AG <sup>(4)</sup> Index | E-TFCI |
|----------|----------------------|----------------------|----------------|----------------------|--------------------|--------------|----------------------------------------------|-------------------|----------------------|------------------------|----------|-------------------------|--------|
| 1        | 11/15 <sup>(3)</sup> | 15/15 <sup>(3)</sup> | 64             | 11/15 <sup>(3)</sup> | 22/15              | 209/225      | 1039/225                                     | 4                 | 1                    | 1.0                    | 0.0      | 20                      | 75     |
| 2        | 6/15                 | 15/15                | 64             | 6/15                 | 12/15              | 12/15        | 94/75                                        | 4                 | 1                    | 3.0                    | 2.0      | 12                      | 67     |
| 3        | 15/15                | 9/15                 | 64             | 15/9                 | 30/15              | 30/15        | $\beta_{ed1}: 47/15$<br>$\beta_{ed2}: 47/15$ | 4                 | 2                    | 2.0                    | 1.0      | 15                      | 92     |
| 4        | 2/15                 | 15/15                | 64             | 2/15                 | 4/15               | 2/15         | 56/75                                        | 4                 | 1                    | 3.0                    | 2.0      | 17                      | 71     |
| 5        | 15/15 <sup>(4)</sup> | 15/15 <sup>(4)</sup> | 64             | 15/15 <sup>(4)</sup> | 30/15              | 24/15        | 134/15                                       | 4                 | 1                    | 1.0                    | 0.0      | 21                      | 81     |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{IS} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCCH, HS-DPCCCH, E-DPDCH and E-DPCCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

## 6.4 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

### 6.4.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

### 6.4.2 Frequency Channel Configurations [24]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

Since the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg and if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

|                                          |                                                                                                                                   |                                           |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>              |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>OY1408191749.A3L | <b>Test Dates:</b><br>08/20/14 - 08/26/14                                                                                         | <b>DUT Type:</b><br>Portable Wrist Device | Page 13 of 31                                                                         |                                        |

## 7 RF CONDUCTED POWERS

### 7.1 GSM Conducted Powers

|         |                    | Maximum Burst-Averaged Output Power            |                         |                         |                         |                         |
|---------|--------------------|------------------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
|         |                    | Voice                                          | GPRS/EDGE Data (GMSK)   |                         | EDGE Data (8-PSK)       |                         |
| Band    | Channel            | GSM [dBm]<br>CS (1 Slot)                       | GPRS [dBm]<br>1 Tx Slot | GPRS [dBm]<br>2 Tx Slot | EDGE [dBm]<br>1 Tx Slot | EDGE [dBm]<br>2 Tx Slot |
| GSM 850 | 128                | 32.51                                          | 32.49                   | 30.09                   | 25.42                   | 25.34                   |
|         | 190                | 32.67                                          | 32.72                   | 30.25                   | 25.50                   | 25.32                   |
|         | 251                | 32.76                                          | 32.57                   | 30.28                   | 25.49                   | 25.49                   |
|         |                    | Calculated Maximum Frame-Averaged Output Power |                         |                         |                         |                         |
|         |                    | Voice                                          | GPRS/EDGE Data (GMSK)   |                         | EDGE Data (8-PSK)       |                         |
| Band    | Channel            | GSM [dBm]<br>CS (1 Slot)                       | GPRS [dBm]<br>1 Tx Slot | GPRS [dBm]<br>2 Tx Slot | EDGE [dBm]<br>1 Tx Slot | EDGE [dBm]<br>2 Tx Slot |
| GSM 850 | 128                | 23.48                                          | 23.46                   | 24.07                   | 16.39                   | 19.32                   |
|         | 190                | 23.64                                          | 23.69                   | 24.23                   | 16.47                   | 19.30                   |
|         | 251                | 23.73                                          | 23.54                   | 24.26                   | 16.46                   | 19.47                   |
| GSM 850 | Frame Avg.Targets: | 23.47                                          | 23.47                   | 23.98                   | 15.97                   | 18.98                   |

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. Per October 2013 TCB Workshop Notes, the configuration with the highest target frame averaged output power was evaluated for extremity SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 10** (Max 2 Tx uplink slots)  
**EDGE Multislot class: 10** (Max 2 Tx uplink slots)  
**DTM Multislot Class: N/A**



**Figure 7-1**  
**Power Measurement Setup**

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device | Page 14 of 31                                                                         |                                 |

## 7.2 UMTS Conducted Powers

| 3GPP Release Version | Mode  | 3GPP 34.121 Subtest | Cellular Band [dBm] |       |       | 3GPP MPR [dB] |
|----------------------|-------|---------------------|---------------------|-------|-------|---------------|
|                      |       |                     | 4132                | 4183  | 4233  |               |
| 99                   | WCDMA | 12.2 kbps RMC       | 22.78               | 22.70 | 22.73 | -             |
| 99                   |       | 12.2 kbps AMR       | 22.69               | 22.64 | 22.65 | -             |
| 6                    | HSDPA | Subtest 1           | 21.64               | 21.52 | 21.62 | 0             |
| 6                    |       | Subtest 2           | 21.63               | 21.52 | 21.54 | 0             |
| 6                    |       | Subtest 3           | 21.24               | 21.02 | 21.02 | 0.5           |
| 6                    |       | Subtest 4           | 21.33               | 21.12 | 21.01 | 0.5           |
| 6                    | HSUPA | Subtest 1           | 21.41               | 21.58 | 21.36 | 0             |
| 6                    |       | Subtest 2           | 19.79               | 19.92 | 20.37 | 2             |
| 6                    |       | Subtest 3           | 20.20               | 20.20 | 20.31 | 1             |
| 6                    |       | Subtest 4           | 20.97               | 21.17 | 20.99 | 2             |
| 6                    |       | Subtest 5           | 21.53               | 21.38 | 21.40 | 0             |

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSUPA subtests may be as low as 0 dB according to the chipset implementation in this model.



**Figure 7-2**  
**Power Measurement Setup**

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 15 of 31                   |



## 7.3 WLAN Conducted Powers

**Table 7-1**  
**IEEE 802.11b Average RF Power**

| Mode    | Freq<br>[MHz] | Channel | 802.11b (2.4 GHz) Conducted Power [dBm] |       |       |       |
|---------|---------------|---------|-----------------------------------------|-------|-------|-------|
|         |               |         | Data Rate [Mbps]                        |       |       |       |
|         |               |         | 1                                       | 2     | 5.5   | 11    |
| 802.11b | 2412          | 1*      | 17.12                                   | 17.01 | 17.01 | 17.09 |
| 802.11b | 2437          | 6*      | 17.14                                   | 17.17 | 17.09 | 17.16 |
| 802.11b | 2462          | 11*     | 17.19                                   | 17.30 | 17.23 | 17.09 |

**Table 7-2**  
**IEEE 802.11g Average RF Power**

| Mode    | Freq<br>[MHz] | Channel | 802.11g (2.4 GHz) Conducted Power [dBm] |       |       |       |       |       |       |       |
|---------|---------------|---------|-----------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |               |         | Data Rate [Mbps]                        |       |       |       |       |       |       |       |
|         |               |         | 6                                       | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11g | 2412          | 1       | 13.46                                   | 13.45 | 13.30 | 13.45 | 13.42 | 13.36 | 13.45 | 13.27 |
| 802.11g | 2437          | 6       | 12.91                                   | 12.95 | 12.72 | 12.89 | 12.85 | 12.89 | 12.99 | 12.76 |
| 802.11g | 2462          | 11      | 12.80                                   | 12.77 | 12.68 | 12.80 | 12.82 | 12.70 | 12.91 | 12.66 |

**Table 7-3**  
**IEEE 802.11n Average RF Power**


| Mode    | Freq<br>[MHz] | Channel | 802.11n (2.4 GHz) Conducted Power [dBm] |       |       |       |       |       |       |       |
|---------|---------------|---------|-----------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |               |         | Data Rate [Mbps]                        |       |       |       |       |       |       |       |
|         |               |         | 6.5                                     | 13    | 20    | 26    | 39    | 52    | 58    | 65    |
| 802.11n | 2412          | 1       | 12.65                                   | 12.54 | 12.62 | 12.63 | 12.72 | 12.58 | 12.65 | 12.64 |
| 802.11n | 2437          | 6       | 12.96                                   | 12.84 | 12.91 | 12.88 | 13.03 | 12.84 | 12.88 | 12.96 |
| 802.11n | 2462          | 11      | 12.74                                   | 12.68 | 12.76 | 12.73 | 12.77 | 12.74 | 12.70 | 12.77 |

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:


- For 2.4 GHz operations, highest average RF output power channel for the lowest data rate for IEEE 802.11b was selected for SAR evaluation. IEEE 802.11g/n modes were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 16 of 31                   |



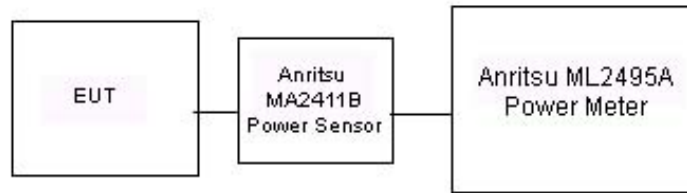

**Figure 7-3**  
**Power Measurement Setup for Bandwidths < 50 MHz**




**Figure 7-4**  
**Power Measurement Setup for Bandwidths > 50 MHz**

## 7.4 Bluetooth Conducted Powers

| Frequency [MHz] | Data Rate [Mbps] | Channel No. | Avg Conducted Power |        |
|-----------------|------------------|-------------|---------------------|--------|
|                 |                  |             | [dBm]               | [mW]   |
| 2402            | 1.0              | 0           | 16.10               | 40.719 |
| 2441            | 1.0              | 39          | 16.99               | 49.971 |
| 2480            | 1.0              | 78          | <b>17.80</b>        | 60.259 |
| 2402            | 2.0              | 0           | 12.51               | 17.828 |
| 2441            | 2.0              | 39          | 13.28               | 21.297 |
| 2480            | 2.0              | 78          | 13.63               | 23.069 |
| 2402            | 3.0              | 0           | 12.50               | 17.783 |
| 2441            | 3.0              | 39          | 13.33               | 21.549 |
| 2480            | 3.0              | 78          | 13.70               | 23.445 |

Note: The bolded data rate and channel above were tested for SAR.

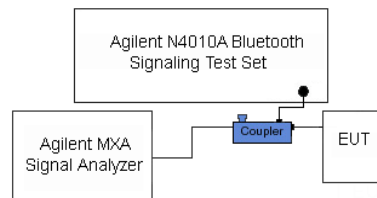

**Figure 7-5**  
**Power Measurement Setup**

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 17 of 31                   |

## 8

## SYSTEM VERIFICATION

## 8.1 Tissue Verification

**Table 8-1**  
**Measured Tissue Properties**

| Calibrated Date: | Tissue Type | Tissue Temp During Calibration (C°) | Measured Frequency (MHz) | Measured Conductivity, $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon$ | TARGET Conductivity, $\sigma$ (S/m) | TARGET Dielectric Constant, $\epsilon$ | % dev $\sigma$ | % dev $\epsilon$ |
|------------------|-------------|-------------------------------------|--------------------------|---------------------------------------|------------------------------------------|-------------------------------------|----------------------------------------|----------------|------------------|
| 8/25/2014        | 835H        | 21.5                                | 820                      | 0.888                                 | 40.032                                   | 0.899                               | 41.578                                 | -1.22%         | -3.72%           |
|                  |             |                                     | 835                      | 0.903                                 | 39.855                                   | 0.900                               | 41.500                                 | 0.33%          | -3.96%           |
|                  |             |                                     | 850                      | 0.916                                 | 39.642                                   | 0.916                               | 41.500                                 | 0.00%          | -4.48%           |
| 8/25/2014        | 2450H       | 23.9                                | 2401                     | 1.784                                 | 37.666                                   | 1.756                               | 39.287                                 | 1.59%          | -4.13%           |
|                  |             |                                     | 2450                     | 1.846                                 | 37.475                                   | 1.800                               | 39.200                                 | 2.56%          | -4.40%           |
|                  |             |                                     | 2499                     | 1.897                                 | 37.286                                   | 1.853                               | 39.138                                 | 2.37%          | -4.73%           |
| 8/26/2014        | 835B        | 23.6                                | 820                      | 0.978                                 | 53.802                                   | 0.969                               | 55.258                                 | 0.93%          | -2.63%           |
|                  |             |                                     | 835                      | 0.994                                 | 53.640                                   | 0.970                               | 55.200                                 | 2.47%          | -2.83%           |
|                  |             |                                     | 850                      | 1.007                                 | 53.492                                   | 0.988                               | 55.154                                 | 1.92%          | -3.01%           |
| 8/20/2014        | 2450B       | 22.0                                | 2401                     | 1.944                                 | 50.954                                   | 1.903                               | 52.765                                 | 2.15%          | -3.43%           |
|                  |             |                                     | 2450                     | 2.017                                 | 50.824                                   | 1.950                               | 52.700                                 | 3.44%          | -3.56%           |
|                  |             |                                     | 2499                     | 2.077                                 | 50.608                                   | 2.019                               | 52.638                                 | 2.87%          | -3.86%           |

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 18 of 31                   |

## 8.2 Test System Verification


Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 8-2**  
**System Verification Results – 1g SAR**

| System Verification<br>TARGET & MEASURED |                        |             |            |                |                  |                 |           |          |                                   |                                     |                                         |                             |
|------------------------------------------|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|-----------------------------------|-------------------------------------|-----------------------------------------|-----------------------------|
| SAR System #                             | Tissue Frequency (MHz) | Tissue Type | Date:      | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Dipole SN | Probe SN | Measured SAR <sub>1g</sub> (W/kg) | 1 W Target SAR <sub>1g</sub> (W/kg) | 1 W Normalized SAR <sub>1g</sub> (W/kg) | Deviation <sub>1g</sub> (%) |
| K                                        | 835                    | HEAD        | 08/25/2014 | 23.4           | 21.5             | 0.100           | 4d119     | 3287     | 0.915                             | 9.220                               | 9.150                                   | -0.76%                      |
| G                                        | 2450                   | HEAD        | 08/25/2014 | 22.3           | 23.9             | 0.100           | 797       | 3258     | 4.770                             | 51.800                              | 47.700                                  | -7.92%                      |

**Table 8-3**  
**System Verification Results – 10g SAR**

| System Verification<br>TARGET & MEASURED |                        |             |            |                |                  |                 |           |          |                                    |                                      |                                          |                              |
|------------------------------------------|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|------------------------------------|--------------------------------------|------------------------------------------|------------------------------|
| SAR System #                             | Tissue Frequency (MHz) | Tissue Type | Date:      | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Dipole SN | Probe SN | Measured SAR <sub>10g</sub> (W/kg) | 1 W Target SAR <sub>10g</sub> (W/kg) | 1 W Normalized SAR <sub>10g</sub> (W/kg) | Deviation <sub>10g</sub> (%) |
| D                                        | 835                    | BODY        | 08/26/2014 | 23.4           | 23.6             | 0.100           | 4d119     | 3263     | 0.621                              | 6.150                                | 6.210                                    | 0.98%                        |
| G                                        | 2450                   | BODY        | 08/20/2014 | 23.5           | 22.0             | 0.100           | 797       | 3258     | 2.410                              | 23.100                               | 24.100                                   | 4.33%                        |

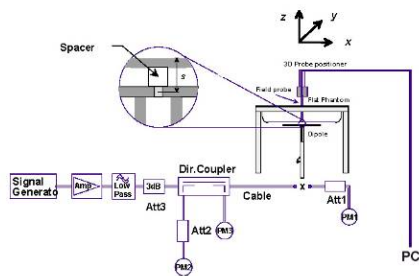

**Figure 8-1**  
**System Verification Setup Diagram**



**Figure 8-2**  
**System Verification Setup Photo**

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 19 of 31                   |

## 9

## SAR DATA SUMMARY

## 9.1 Standalone Head SAR Data

Table 9-1  
GSM 850 Head SAR

| MEASUREMENT RESULTS                                                                               |     |           |         |                             |                       |                  |       |                                                 |                      |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|-----|-----------|---------|-----------------------------|-----------------------|------------------|-------|-------------------------------------------------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |     | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side  | Test Position                                   | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch. |           |         |                             |                       |                  |       |                                                 |                      |            | (W/kg)   |                | (W/kg)          |        |
| 836.60                                                                                            | 190 | GSM 850   | GSM     | 33.0                        | 32.67                 | 0.04             | Front | 10 mm                                           | 30E70                | 1:8.3      | 0.090    | 1.079          | 0.097           | A1     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |           |         |                             |                       |                  |       | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                      |            |          |                |                 |        |

Table 9-2  
UMTS 850 Head SAR

| MEASUREMENT RESULTS                                                                               |      |           |         |                             |                       |                  |                                                 |               |                      |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|------|-----------|---------|-----------------------------|-----------------------|------------------|-------------------------------------------------|---------------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |      | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side                                            | Test Position | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch.  |           |         |                             |                       |                  |                                                 |               |                      |            | (W/kg)   |                | (W/kg)          |        |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 23.0                        | 22.70                 | 0.04             | Front                                           | 10 mm         | 30E70                | 1:1        | 0.031    | 1.072          | 0.033           | A2     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |      |           |         |                             |                       |                  | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |               |                      |            |          |                |                 |        |

Table 9-3  
DTS Head SAR

| MEASUREMENT RESULTS                                                                               |     |              |         |                             |                       |                  |       |                                                 |                      |                  |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|-----|--------------|---------|-----------------------------|-----------------------|------------------|-------|-------------------------------------------------|----------------------|------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |     | Mode         | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side  | Test Position                                   | Device Serial Number | Data Rate (Mbps) | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch. |              |         |                             |                       |                  |       |                                                 |                      |                  |            | (W/kg)   |                | (W/kg)          |        |
| 2462                                                                                              | 11  | IEEE 802.11b | DSSS    | 17.5                        | 17.19                 | -0.04            | Front | 10 mm                                           | 314F4                | 1                | 1:1        | 0.100    | 1.074          | 0.107           | A3     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |              |         |                             |                       |                  |       | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                      |                  |            |          |                |                 |        |

Table 9-4  
Bluetooth Head SAR

| MEASUREMENT RESULTS                                                                               |     |           |         |                             |                       |                  |                                                 |               |                      |                  |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|-----|-----------|---------|-----------------------------|-----------------------|------------------|-------------------------------------------------|---------------|----------------------|------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |     | Mode      | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side                                            | Test Position | Device Serial Number | Data Rate (Mbps) | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch. |           |         |                             |                       |                  |                                                 |               |                      |                  |            | (W/kg)   |                | (W/kg)          |        |
| 2480                                                                                              | 78  | Bluetooth | FHSS    | 18.0                        | 17.80                 | 0.12             | Front                                           | 10 mm         | 314F4                | 1                | 1:1        | 0.008    | 1.047          | 0.008           | A4     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |           |         |                             |                       |                  | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |               |                      |                  |            |          |                |                 |        |

|                                   |                                                                                                                                                                                                                                                                                 |                                    |                                 |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                | <div> <b>PCTEST</b><br/>ENGINEERING LABORATORY, INC.</div> <div>SAR EVALUATION REPORT</div> <div></div> |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                                                                                              | DUT Type:<br>Portable Wrist Device | Page 20 of 31                   |

## 9.2 Standalone Extremity SAR Data

**Table 9-5**  
**GPRS/UMTS Extremity SAR Data**

| MEASUREMENT RESULTS                                                                               |      |          |         |                             |                       |                  |                                                        |                      |                 |            |      |           |                |                  |        |
|---------------------------------------------------------------------------------------------------|------|----------|---------|-----------------------------|-----------------------|------------------|--------------------------------------------------------|----------------------|-----------------|------------|------|-----------|----------------|------------------|--------|
| FREQUENCY                                                                                         |      | Mode     | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing                                                | Device Serial Number | # of GPRS Slots | Duty Cycle | Side | SAR (10g) | Scaling Factor | Scaled SAR (10g) | Plot # |
| MHz                                                                                               | Ch.  |          |         |                             |                       |                  |                                                        |                      |                 |            |      | (W/kg)    |                | (W/kg)           |        |
| 836.60                                                                                            | 190  | GSM 850  | GPRS    | 30.5                        | 30.25                 | -0.07            | 0 mm                                                   | 30E68                | 2               | 1:4.15     | back | 0.187     | 1.059          | 0.198            | A5     |
| 836.60                                                                                            | 4183 | UMTS 850 | RMC     | 23.0                        | 22.70                 | -0.09            | 0 mm                                                   | 30E68                | N/A             | 1:1        | back | 0.105     | 1.072          | 0.113            | A6     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |      |          |         |                             |                       |                  | Extremity<br>4.0 W/kg (mW/g)<br>averaged over 10 grams |                      |                 |            |      |           |                |                  |        |

**Table 9-6**  
**WLAN Extremity SAR**

| MEASUREMENT RESULTS                                                                               |     |              |         |                             |                       |                  |                                                        |                      |                  |      |            |           |                |                  |        |
|---------------------------------------------------------------------------------------------------|-----|--------------|---------|-----------------------------|-----------------------|------------------|--------------------------------------------------------|----------------------|------------------|------|------------|-----------|----------------|------------------|--------|
| FREQUENCY                                                                                         |     | Mode         | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing                                                | Device Serial Number | Data Rate (Mbps) | Side | Duty Cycle | SAR (10g) | Scaling Factor | Scaled SAR (10g) | Plot # |
| MHz                                                                                               | Ch. |              |         |                             |                       |                  |                                                        |                      |                  |      |            | (W/kg)    |                | (W/kg)           |        |
| 2462                                                                                              | 11  | IEEE 802.11b | DSSS    | 17.5                        | 17.19                 | -0.18            | 0 mm                                                   | 314F4                | 1                | back | 1:1        | 0.222     | 1.074          | 0.238            | A7     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |              |         |                             |                       |                  | Extremity<br>4.0 W/kg (mW/g)<br>averaged over 10 grams |                      |                  |      |            |           |                |                  |        |

**Table 9-7**  
**Bluetooth Extremity SAR**

| MEASUREMENT RESULTS                                                                               |     |           |         |                             |                       |                  |                                                        |                      |                  |      |            |           |                |                  |        |
|---------------------------------------------------------------------------------------------------|-----|-----------|---------|-----------------------------|-----------------------|------------------|--------------------------------------------------------|----------------------|------------------|------|------------|-----------|----------------|------------------|--------|
| FREQUENCY                                                                                         |     | Mode      | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing                                                | Device Serial Number | Data Rate (Mbps) | Side | Duty Cycle | SAR (10g) | Scaling Factor | Scaled SAR (10g) | Plot # |
| MHz                                                                                               | Ch. |           |         |                             |                       |                  |                                                        |                      |                  |      |            | (W/kg)    |                | (W/kg)           |        |
| 2480                                                                                              | 78  | Bluetooth | FHSS    | 18.0                        | 17.80                 | -0.20            | 0 mm                                                   | 314F4                | 1                | back | 1:1        | 0.200     | 1.047          | 0.209            | A8     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |           |         |                             |                       |                  | Extremity<br>4.0 W/kg (mW/g)<br>averaged over 10 grams |                      |                  |      |            |           |                |                  |        |

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 21 of 31                   |

### 9.3 SAR Test Notes

#### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Per FCC KDB 865664 D01 v01, variability SAR tests were not required since the measured SAR results were less than 0.8 W/kg for 1g SAR and less than 2.0 W/kg for 10g SAR. Please see Section 11 for more information.

#### GSM Test Notes:

1. Justification for reduced test configurations per KDB Publication 941225 D03v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for extremity SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g SAR and  $\leq 2.0$  W/kg for 10g SAR then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g SAR and  $\leq 2.0$  W/kg for 10g SAR then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI operations: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11g/n modes were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. WIFI transmission was verified using an uncalibrated spectrum analyzer.
3. Since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is  $< 1.6$  W/kg, the reported 1g averaged SAR is  $< 0.8$  W/kg and reported 10g averaged SAR is  $< 2.0$  W/kg, SAR testing on other default channels was not required.

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 22 of 31                   |

## 10 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 10.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 10.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is  $\leq 1.6$  W/kg.

$$\text{Estimated SAR} = \frac{\sqrt{f \text{ (GHz)}}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Seperation Distance, mm}}$$

1g SAR estimation

$$\text{Estimated SAR} = \frac{\sqrt{f \text{ (GHz)}}}{18.75} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Seperation Distance, mm}}$$

10g SAR estimation

**Table 10-1**  
**Estimated SAR**

| Mode         | Frequency | Maximum Allowed Power | Estimated SAR (Head) | Separation Distance |
|--------------|-----------|-----------------------|----------------------|---------------------|
|              | [MHz]     | [dBm]                 | [W/kg]               | [mm]                |
| Bluetooth LE | 2480      | 7.00                  | 0.105                | 10                  |

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 23 of 31                   |

### 10.3 Head SAR Simultaneous Transmission Analysis

**Table 10-2**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Head at 1.0 cm)**

| Simult Tx | Configuration | GSM 850 SAR (W/kg)  | 2.4 GHz WLAN SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|-----------|---------------|---------------------|-------------------------|---------------------|
| Head SAR  | Front         | 0.097               | 0.107                   | <b>0.204</b>        |
| Simult Tx | Configuration | UMTS 850 SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | $\Sigma$ SAR (W/kg) |
| Head SAR  | Front         | 0.033               | 0.107                   | <b>0.140</b>        |

**Table 10-3**  
**Simultaneous Transmission Scenario with Bluetooth (Head at 1.0 cm)**

| Simult Tx | Configuration | GSM 850 SAR (W/kg)  | Bluetooth SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|-----------|---------------|---------------------|----------------------|---------------------|
| Head SAR  | Front         | 0.097               | 0.105                | <b>0.202</b>        |
| Simult Tx | Configuration | UMTS 850 SAR (W/kg) | Bluetooth SAR (W/kg) | $\Sigma$ SAR (W/kg) |
| Head SAR  | Front         | 0.033               | 0.105                | <b>0.138</b>        |

Note: Bluetooth LE SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion. Estimated Bluetooth LE was used for simultaneous transmission scenarios as it was more conservative than Bluetooth measurements.

|                                          |                                                                                     |                                           |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                       |  | <b>SAR EVALUATION REPORT</b>              |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>OY1408191749.A3L | <b>Test Dates:</b><br>08/20/14 - 08/26/14                                           | <b>DUT Type:</b><br>Portable Wrist Device | Page 24 of 31                                                                         |                                        |



## 10.4 Extremity Simultaneous Transmission Analysis

**Table 10-4**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Extremity at 0.0 cm)**

| Configuration | Mode     | 2G/3G SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|---------------|----------|------------------|-------------------------|---------------------|
| Back Side     | GSM 850  | 0.198            | 0.238                   | <b>0.436</b>        |
| Back Side     | UMTS 850 | 0.113            | 0.238                   | 0.351               |

**Table 10-5**  
**Simultaneous Transmission Scenario with Bluetooth (Extremity at 0.0 cm)**

| Configuration | Mode     | 2G/3G SAR (W/kg) | Bluetooth SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|---------------|----------|------------------|----------------------|---------------------|
| Back Side     | GSM 850  | 0.198            | 0.209                | 0.407               |
| Back Side     | UMTS 850 | 0.113            | 0.209                | 0.322               |

Note: Bluetooth LE SAR was not required to be measured per FCC KDB 447498. Measured Bluetooth was used for simultaneous transmission scenarios for extremity as it was more conservative than the estimated Bluetooth LE SAR.

## 10.5 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

|                                          |                                                                                     |                                           |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                       |  | <b>SAR EVALUATION REPORT</b>              |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>OY1408191749.A3L | <b>Test Dates:</b><br>08/20/14 - 08/26/14                                           | <b>DUT Type:</b><br>Portable Wrist Device | Page 25 of 31                                                                         |                                        |

## 11 SAR MEASUREMENT VARIABILITY

### 11.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability is assessed when measured 1g SAR is > 0.80 W/kg or 10g SAR is > 2.0 W/kg. Since highest measured SAR for this device was below these limits, measurement variability was not assessed.

### 11.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 26 of 31                   |

## 12 EQUIPMENT LIST

| Manufacturer    | Model           | Description                                   | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------|-----------------|-----------------------------------------------|------------|--------------|------------|---------------|
| Agilent         | 8648D           | (9kHz-4GHz) Signal Generator                  | 4/15/2014  | Annual       | 4/15/2015  | 3629U00687    |
| Agilent         | 8753ES          | S-Parameter Network Analyzer                  | 10/29/2013 | Annual       | 10/29/2014 | US39170122    |
| Agilent         | E4438C          | ESG Vector Signal Generator                   | 3/31/2014  | Annual       | 3/31/2015  | MY42082659    |
| Agilent         | N9020A          | MXA Signal Analyzer                           | 10/29/2013 | Annual       | 10/29/2014 | US46470561    |
| Agilent         | N4010A          | Wireless Connectivity Test Set                | CBT        | N/A          | CBT        | GB44450273    |
| Anritsu         | MA24106A        | USB Power Sensor                              | 5/14/2014  | Annual       | 5/14/2015  | 1244515       |
| Anritsu         | MA24106A        | USB Power Sensor                              | 5/14/2014  | Annual       | 5/14/2015  | 1248508       |
| Anritsu         | MA24106A        | USB Power Sensor                              | 5/15/2014  | Annual       | 5/15/2015  | 1244512       |
| Anritsu         | MA24106A        | USB Power Sensor                              | 5/15/2014  | Annual       | 5/15/2015  | 1244524       |
| Anritsu         | MA2411B         | Pulse Power Sensor                            | 11/14/2013 | Annual       | 11/14/2014 | 1126066       |
| Anritsu         | MA2481A         | Power Sensor                                  | 10/30/2013 | Annual       | 10/30/2014 | 5605          |
| Anritsu         | ML2469A         | Power Meter                                   | 3/14/2014  | Annual       | 3/14/2015  | 1306009       |
| Anritsu         | ML2495A         | Power Meter                                   | 10/31/2013 | Annual       | 10/31/2014 | 1039008       |
| Anritsu         | MT8820C         | Radio Communication Analyzer                  | 12/12/2013 | Annual       | 12/12/2014 | 6200901190    |
| Anritsu         | MT8820C         | Radio Communication Analyzer                  | 12/12/2013 | Annual       | 12/12/2014 | 6201300731    |
| Anritsu         | MT8820C         | Radio Communication Analyzer                  | 5/6/2014   | Annual       | 5/6/2015   | 6201144419    |
| COMTECH         | AR85729-5       | Solid State Amplifier                         | CBT        | N/A          | CBT        | M155A00-009   |
| COMTECH         | AR85729-5/5759B | Solid State Amplifier                         | CBT        | N/A          | CBT        | M3W1A00-1002  |
| Control Company | 4052            | Long Stem Thermometer                         | 9/27/2013  | Biennial     | 9/27/2015  | 130567447     |
| Control Company | 4353            | Long Stem Thermometer                         | 9/25/2012  | Biennial     | 9/25/2014  | 122541139     |
| Control Company | 4353            | Long Stem Thermometer                         | 9/25/2012  | Biennial     | 9/25/2014  | 122541143     |
| Gigatronics     | 8651A           | Universal Power Meter                         | 10/30/2013 | Annual       | 10/30/2014 | 8650319       |
| MCL             | BW-N6W5+        | 6dB Attenuator                                | CBT        | N/A          | CBT        | 1139          |
| Mini-Circuits   | BW-N20W5        | Power Attenuator                              | CBT        | N/A          | CBT        | 1226          |
| Mini-Circuits   | BW-N20W5+       | DC to 18 GHz Precision Fixed 20 dB Attenuator | CBT        | N/A          | CBT        | N/A           |
| Mini-Circuits   | NLP-1200+       | Low Pass Filter DC to 1000 MHz                | CBT        | N/A          | CBT        | N/A           |
| Mini-Circuits   | NLP-2950+       | Low Pass Filter DC to 2700 MHz                | CBT        | N/A          | CBT        | N/A           |
| Narda           | 4014C-6         | 4 - 8 GHz SMA 6 dB Directional Coupler        | CBT        | N/A          | CBT        | N/A           |
| Narda           | 4772-3          | Attenuator (3dB)                              | CBT        | N/A          | CBT        | 9406          |
| Narda           | BW-S3W2         | Attenuator (3dB)                              | CBT        | N/A          | CBT        | 120           |
| Pasternack      | PE2208-6        | Bidirectional Coupler                         | CBT        | N/A          | CBT        | N/A           |
| Pasternack      | PE2209-10       | Bidirectional Coupler                         | CBT        | N/A          | CBT        | N/A           |
| Rohde & Schwarz | CMU200          | Base Station Simulator                        | 6/6/2014   | Annual       | 6/6/2015   | 109892        |
| Rohde & Schwarz | CMW500          | Radio Communication Tester                    | 10/4/2013  | Annual       | 10/4/2014  | 108798        |
| Rohde & Schwarz | SME06           | Signal Generator                              | 10/30/2013 | Annual       | 10/30/2014 | 832026        |
| Seekonk         | NC-100          | Torque Wrench                                 | 3/18/2014  | Biennial     | 3/18/2016  | N/A           |
| Seekonk         | NC-100          | Torque Wrench                                 | 3/18/2014  | Biennial     | 3/18/2016  | N/A           |
| SPEAG           | DAE4            | Dasy Data Acquisition Electronics             | 11/19/2013 | Annual       | 11/19/2014 | 1408          |
| SPEAG           | DAE4            | Dasy Data Acquisition Electronics             | 5/14/2014  | Annual       | 5/14/2015  | 859           |
| SPEAG           | DAK-3.5         | Dielectric Assessment Kit                     | 5/6/2014   | Annual       | 5/6/2015   | 1070          |
| SPEAG           | ES3DV3          | SAR Probe                                     | 11/20/2013 | Annual       | 11/20/2014 | 3287          |
| SPEAG           | ES3DV3          | SAR Probe                                     | 5/15/2014  | Annual       | 5/15/2015  | 3263          |
| VWR             | 36934-158       | Wall-Mounted Thermometer                      | 8/8/2013   | Biennial     | 8/8/2015   | 130477866     |
| VWR             | 36934-158       | Wall-Mounted Thermometer                      | 8/8/2013   | Biennial     | 8/8/2015   | 130477877     |
| SPEAG           | D835V2          | 835 MHz SAR Dipole                            | 4/7/2014   | Annual       | 4/7/2015   | 4d119         |
| SPEAG           | D2450V2         | 2450 MHz SAR Dipole                           | 1/21/2014  | Annual       | 1/21/2015  | 797           |
| SPEAG           | ES3DV3          | SAR Probe                                     | 2/25/2014  | Annual       | 2/25/2015  | 3258          |
| SPEAG           | DAE4            | Dasy Data Acquisition Electronics             | 2/26/2014  | Annual       | 2/26/2015  | 665           |

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

|                                          |                                                                                     |                                           |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                       |  | <b>SAR EVALUATION REPORT</b>              |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>OY1408191749.A3L | <b>Test Dates:</b><br>08/20/14 - 08/26/14                                           | <b>DUT Type:</b><br>Portable Wrist Device |                                                                                       | Page 27 of 31                          |

# 13 MEASUREMENT UNCERTAINTIES

| a                                                                             | b                    | c             | d              | e=<br>f(d,k) | f                     | g                        | h =<br>c x f/e                 | i =<br>c x g/e                   | k              |
|-------------------------------------------------------------------------------|----------------------|---------------|----------------|--------------|-----------------------|--------------------------|--------------------------------|----------------------------------|----------------|
| Uncertainty<br>Component                                                      | IEEE<br>1528<br>Sec. | Tol.<br>(± %) | Prob.<br>Dist. | Div.         | c <sub>i</sub><br>1gm | c <sub>i</sub><br>10 gms | 1gm<br>u <sub>i</sub><br>(± %) | 10gms<br>u <sub>i</sub><br>(± %) | v <sub>i</sub> |
| <b>Measurement System</b>                                                     |                      |               |                |              |                       |                          |                                |                                  |                |
| Probe Calibration                                                             | E.2.1                | 6.0           | N              | 1            | 1.0                   | 1.0                      | 6.0                            | 6.0                              | ∞              |
| Axial Isotropy                                                                | E.2.2                | 0.25          | N              | 1            | 0.7                   | 0.7                      | 0.2                            | 0.2                              | ∞              |
| Hemishperical Isotropy                                                        | E.2.2                | 1.3           | N              | 1            | 1.0                   | 1.0                      | 1.3                            | 1.3                              | ∞              |
| Boundary Effect                                                               | E.2.3                | 0.4           | N              | 1            | 1.0                   | 1.0                      | 0.4                            | 0.4                              | ∞              |
| Linearity                                                                     | E.2.4                | 0.3           | N              | 1            | 1.0                   | 1.0                      | 0.3                            | 0.3                              | ∞              |
| System Detection Limits                                                       | E.2.5                | 5.1           | N              | 1            | 1.0                   | 1.0                      | 5.1                            | 5.1                              | ∞              |
| Readout Electronics                                                           | E.2.6                | 1.0           | N              | 1            | 1.0                   | 1.0                      | 1.0                            | 1.0                              | ∞              |
| Response Time                                                                 | E.2.7                | 0.8           | R              | 1.73         | 1.0                   | 1.0                      | 0.5                            | 0.5                              | ∞              |
| Integration Time                                                              | E.2.8                | 2.6           | R              | 1.73         | 1.0                   | 1.0                      | 1.5                            | 1.5                              | ∞              |
| RF Ambient Conditions                                                         | E.6.1                | 3.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Probe Positioner Mechanical Tolerance                                         | E.6.2                | 0.4           | R              | 1.73         | 1.0                   | 1.0                      | 0.2                            | 0.2                              | ∞              |
| Probe Positioning w/ respect to Phantom                                       | E.6.3                | 2.9           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation | E.5                  | 1.0           | R              | 1.73         | 1.0                   | 1.0                      | 0.6                            | 0.6                              | ∞              |
| <b>Test Sample Related</b>                                                    |                      |               |                |              |                       |                          |                                |                                  |                |
| Test Sample Positioning                                                       | E.4.2                | 6.0           | N              | 1            | 1.0                   | 1.0                      | 6.0                            | 6.0                              | 287            |
| Device Holder Uncertainty                                                     | E.4.1                | 3.32          | R              | 1.73         | 1.0                   | 1.0                      | 1.9                            | 1.9                              | ∞              |
| Output Power Variation - SAR drift measurement                                | 6.6.2                | 5.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.9                            | 2.9                              | ∞              |
| <b>Phantom &amp; Tissue Parameters</b>                                        |                      |               |                |              |                       |                          |                                |                                  |                |
| Phantom Uncertainty (Shape & Thickness tolerances)                            | E.3.1                | 4.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.3                            | 2.3                              | ∞              |
| Liquid Conductivity - deviation from target values                            | E.3.2                | 5.0           | R              | 1.73         | 0.64                  | 0.43                     | 1.8                            | 1.2                              | ∞              |
| Liquid Conductivity - measurement uncertainty                                 | E.3.3                | 3.8           | N              | 1            | 0.64                  | 0.43                     | 2.4                            | 1.6                              | 6              |
| Liquid Permittivity - deviation from target values                            | E.3.2                | 5.0           | R              | 1.73         | 0.60                  | 0.49                     | 1.7                            | 1.4                              | ∞              |
| Liquid Permittivity - measurement uncertainty                                 | E.3.3                | 4.5           | N              | 1            | 0.60                  | 0.49                     | 2.7                            | 2.2                              | 6              |
| <b>Combined Standard Uncertainty (k=1)</b>                                    |                      |               |                |              |                       |                          | RSS                            | 12.1                             | 11.7           |
| <b>Expanded Uncertainty</b><br>(95% CONFIDENCE LEVEL)                         |                      |               |                |              |                       |                          | k=2                            | 24.2                             | 23.5           |

The above measurement uncertainties are according to IEEE Std. 1528-2003

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 28 of 31                   |

## 14 CONCLUSION

### 14.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

|                                   |                                                                                     |                                    |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  | SAR EVALUATION REPORT              |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                  | DUT Type:<br>Portable Wrist Device |                                                                                       | Page 29 of 31                   |

## 15 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 30 of 31                   |

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

|                                   |                                                                                                                                                                                                        |                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                |  <b>SAR EVALUATION REPORT</b>  |                                    | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1408191749.A3L | Test Dates:<br>08/20/14 - 08/26/14                                                                                                                                                                     | DUT Type:<br>Portable Wrist Device | Page 31 of 31                   |

## APPENDIX A: SAR TEST DATA



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMR750B; Type: Portable Wrist Device; Serial: 30E70**

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.904 \text{ S/m}$ ;  $\epsilon_r = 39.832$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-25-2014; Ambient Temp: 23.4°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3287; ConvF(6.3, 6.3, 6.3); Calibrated: 11/20/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GSM 850, Head SAR, Front Side, Mid.ch**


**Area Scan (7x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.291 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.153 W/kg

**SAR(1 g) = 0.090 W/kg**

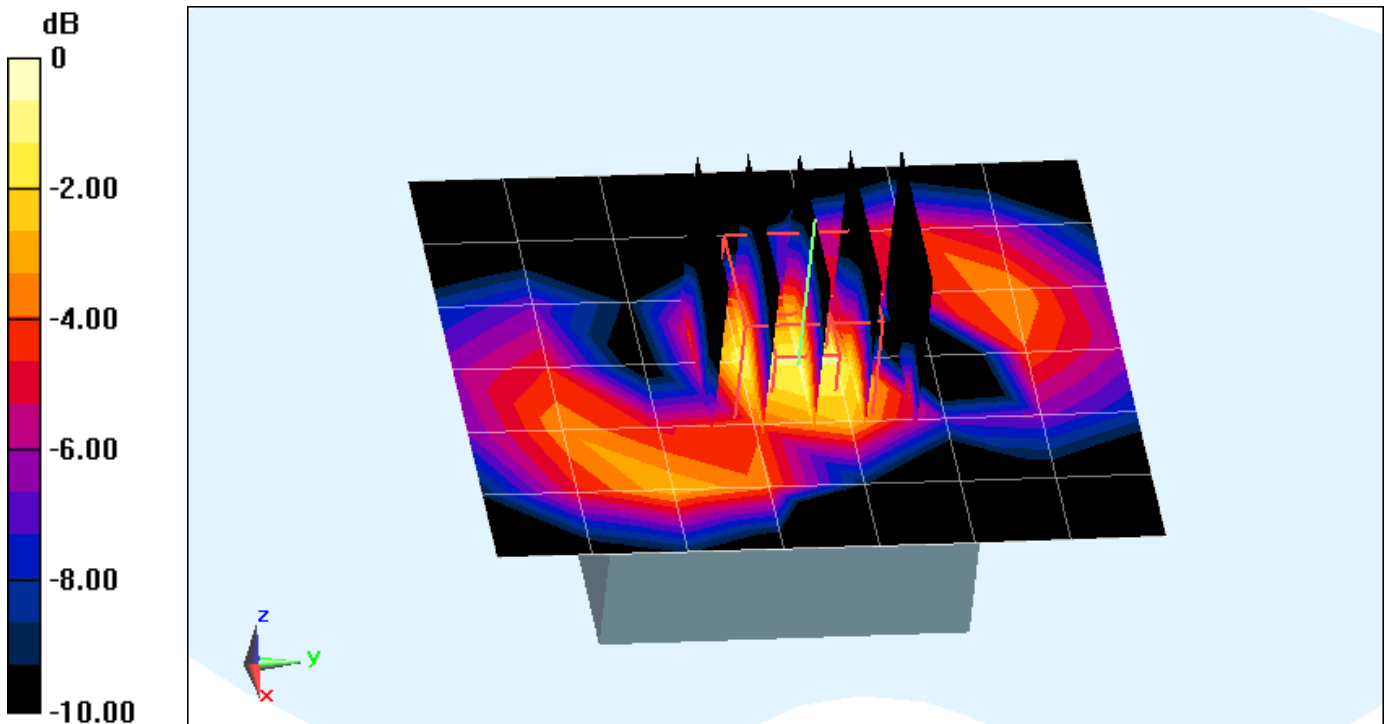

0 dB = 0.109 W/kg = -9.63 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMR750B; Type: Portable Wrist Device; Serial: 30E70**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.904 \text{ S/m}$ ;  $\epsilon_r = 39.832$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-25-2014; Ambient Temp: 23.4°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3287; ConvF(6.3, 6.3, 6.3); Calibrated: 11/20/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Head SAR, Front Side, Mid.ch**


**Area Scan (7x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.132 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0510 W/kg

**SAR(1 g) = 0.031 W/kg**

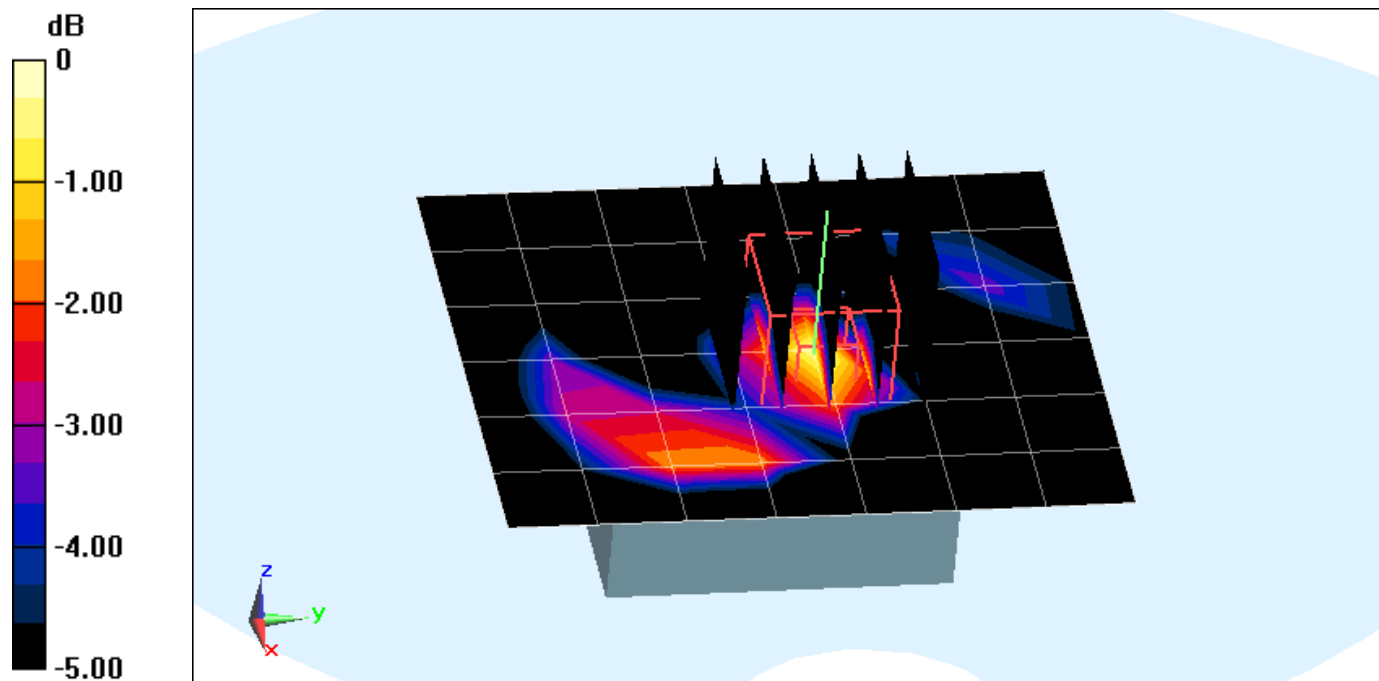

0 dB = 0.0364 W/kg = -14.39 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMR750B; Type: Portable Wrist Device; Serial: 314F4**

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head, Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 37.429$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-25-2014; Ambient Temp: 22.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3258; ConvF(4.52, 4.52, 4.52); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, Head SAR, Ch 11, 1 Mbps, Front Side**


**Area Scan (7x11x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.868 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.183 W/kg

**SAR(1 g) = 0.100 W/kg**

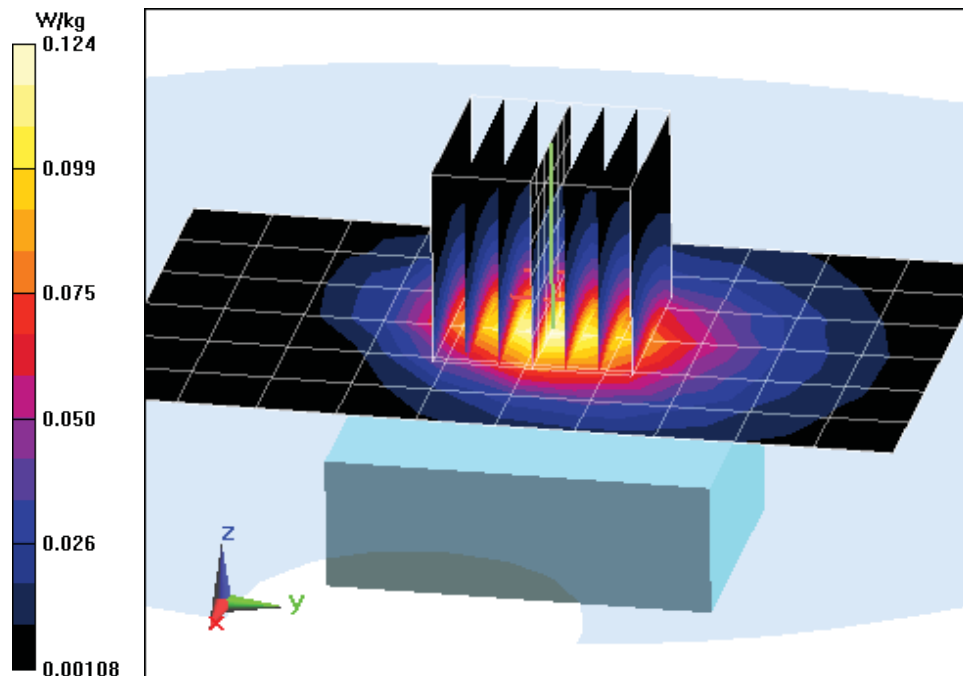

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMR750B; Type: Portable Wrist Device; Serial: 314F4**

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: 2450 Head, Medium parameters used (interpolated):

$f = 2480 \text{ MHz}$ ;  $\sigma = 1.877 \text{ S/m}$ ;  $\epsilon_r = 37.359$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-25-2014; Ambient Temp: 22.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3258; ConvF(4.52, 4.52, 4.52); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Bluetooth, Head SAR, Ch 78, 1 Mbps, Front Side**


**Area Scan (7x11x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.153 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0390 W/kg

**SAR(1 g) = 0.00827 W/kg**

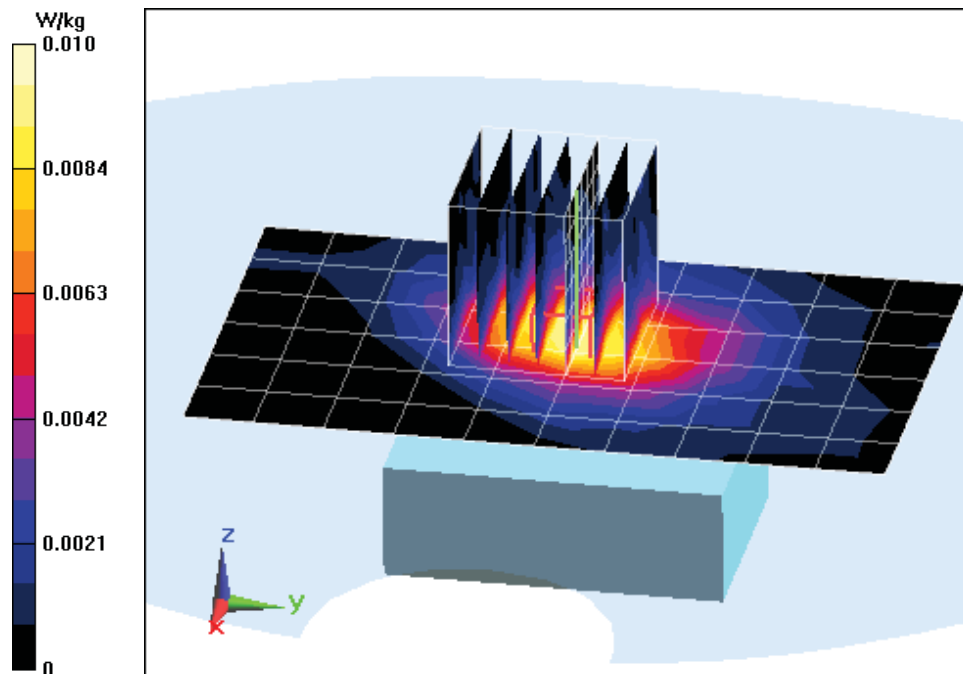

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMR750B; Type: Portable Wrist Device; Serial: 30E68**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.995 \text{ S/m}$ ;  $\epsilon_r = 53.624$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-26-2014; Ambient Temp: 23.4°C; Tissue Temp: 23.6°C

Probe: ES3DV3 - SN3263; ConvF(6.16, 6.16, 6.16); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 850, Extremity SAR, Back side, Mid.ch, 2 Tx Slots**


**Area Scan (7x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.95 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.580 W/kg

**SAR(10 g) = 0.187 W/kg**

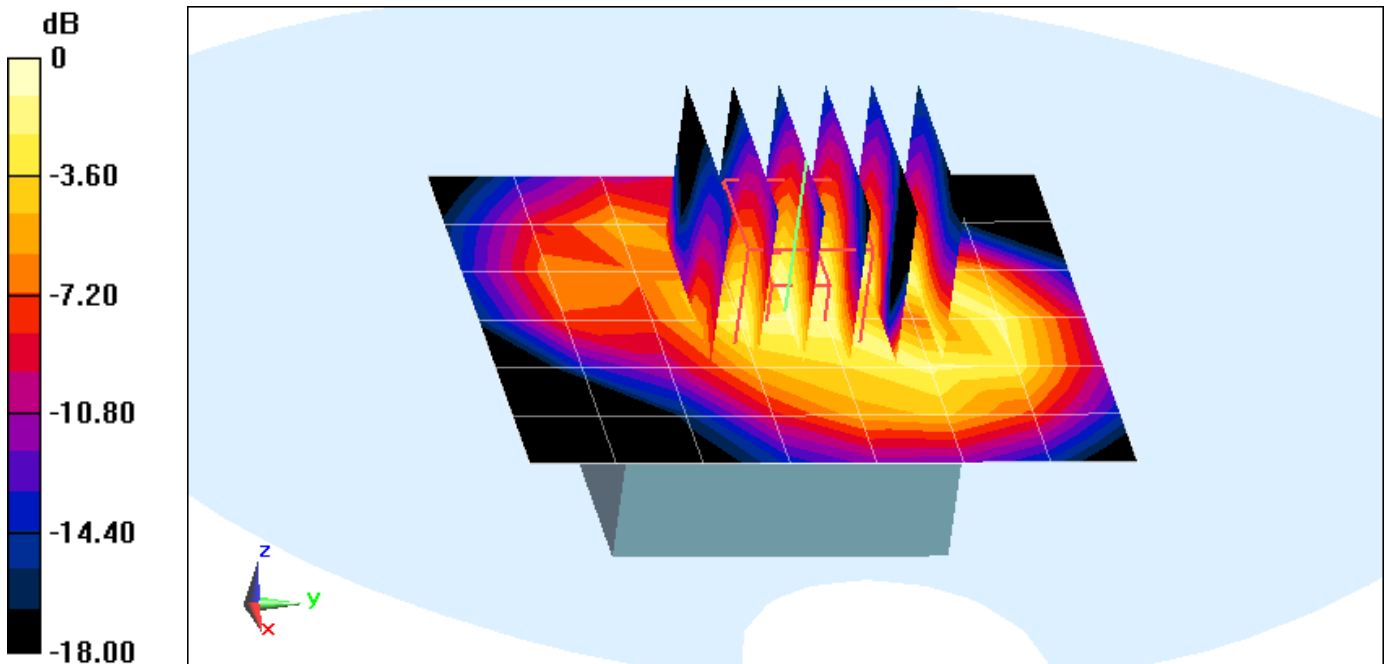

0 dB = 0.398 W/kg = -4.00 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMR750B; Type: Portable Wrist Device; Serial: 30E68**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.995 \text{ S/m}$ ;  $\epsilon_r = 53.624$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-26-2014; Ambient Temp: 23.4°C; Tissue Temp: 23.6°C

Probe: ES3DV3 - SN3263; ConvF(6.16, 6.16, 6.16); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Extremity SAR, Back side, Mid.ch**


**Area Scan (7x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.17 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.384 W/kg

**SAR(10 g) = 0.105 W/kg**

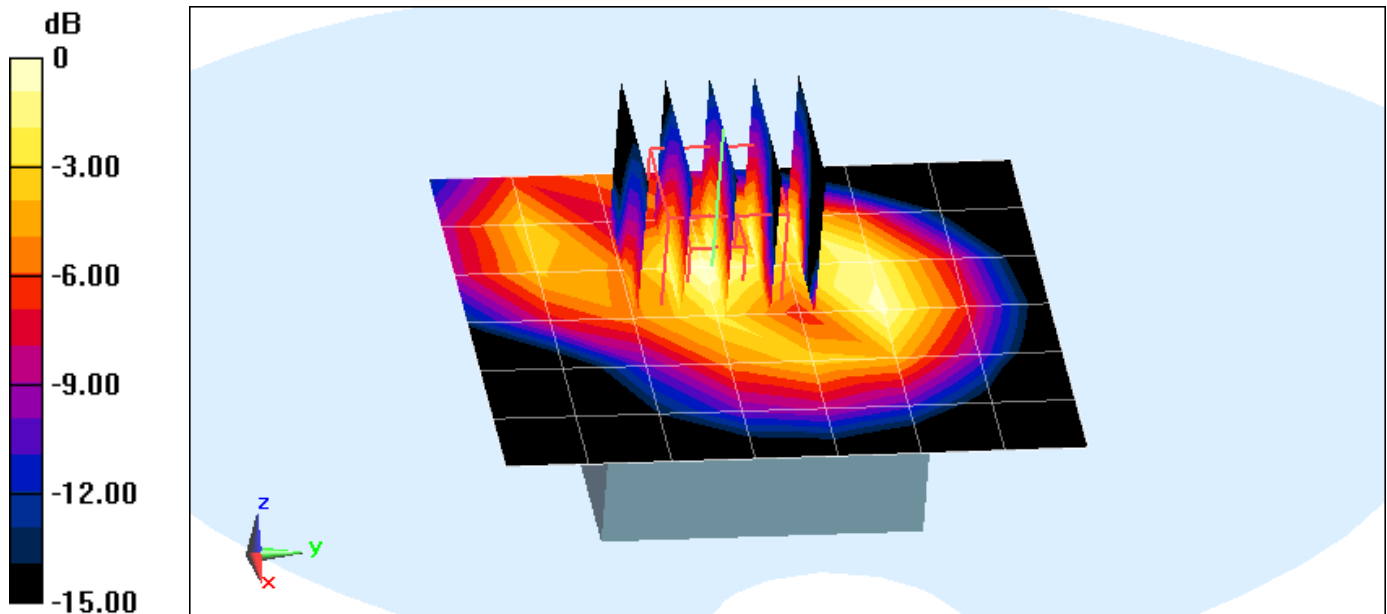

0 dB = 0.240 W/kg = -6.20 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMR750B; Type: Portable Wrist Device; Serial: 314F4**

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 2.032 \text{ S/m}$ ;  $\epsilon_r = 50.771$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-20-2014; Ambient Temp: 23.5°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3258; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, Extremity SAR, Ch 11, 1 Mbps, Back Side**


**Area Scan (7x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.66 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(10 g) = 0.222 W/kg**

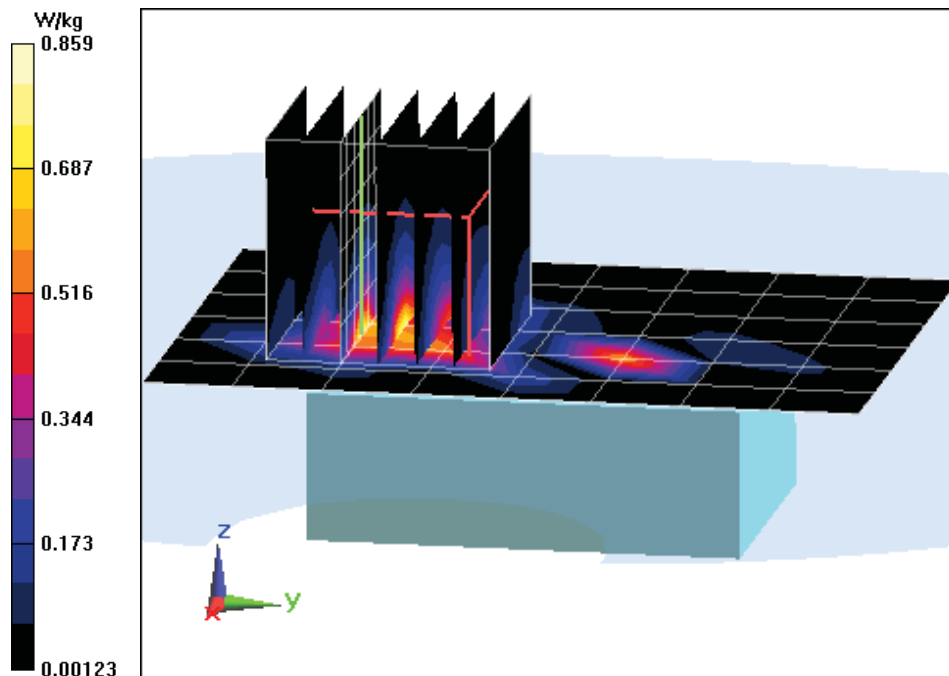

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMR750B; Type: Portable Wrist Device; Serial: 314F4**

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used (interpolated):

$f = 2480 \text{ MHz}$ ;  $\sigma = 2.054 \text{ S/m}$ ;  $\epsilon_r = 50.692$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08-20-2014; Ambient Temp: 23.5°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3258; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: Bluetooth, Extremity SAR, Ch 78, 1 Mbps, Back Side**


**Area Scan (7x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (8x9x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.05 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 2.26 W/kg

**SAR(10 g) = 0.200 W/kg**

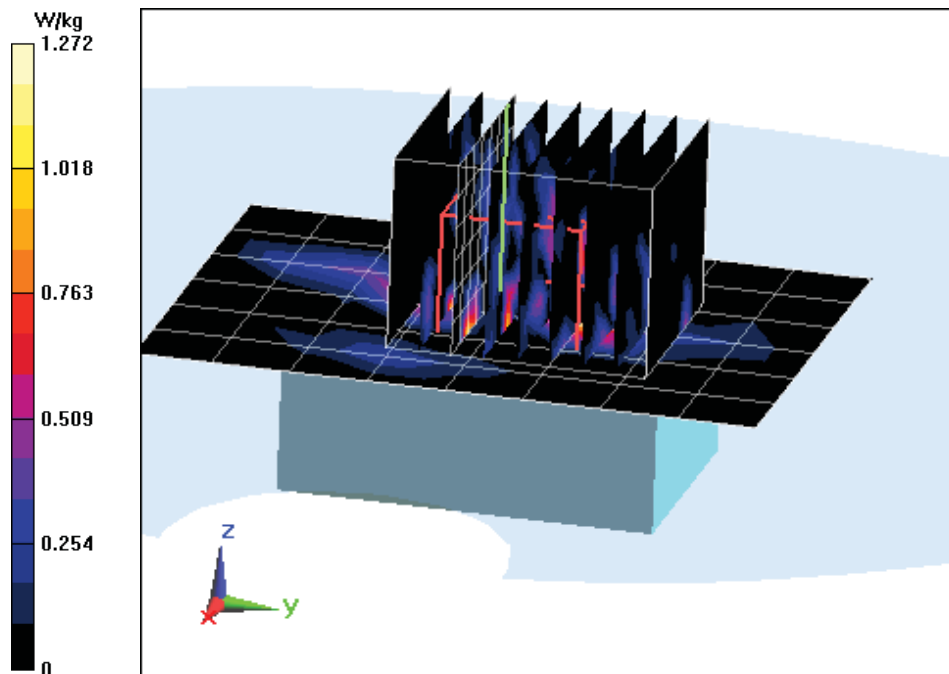



## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 39.855$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-25-2014; Ambient Temp: 23.4°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3287; ConvF(6.3, 6.3, 6.3); Calibrated: 11/20/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.915 W/kg**

Deviation = -0.76 %

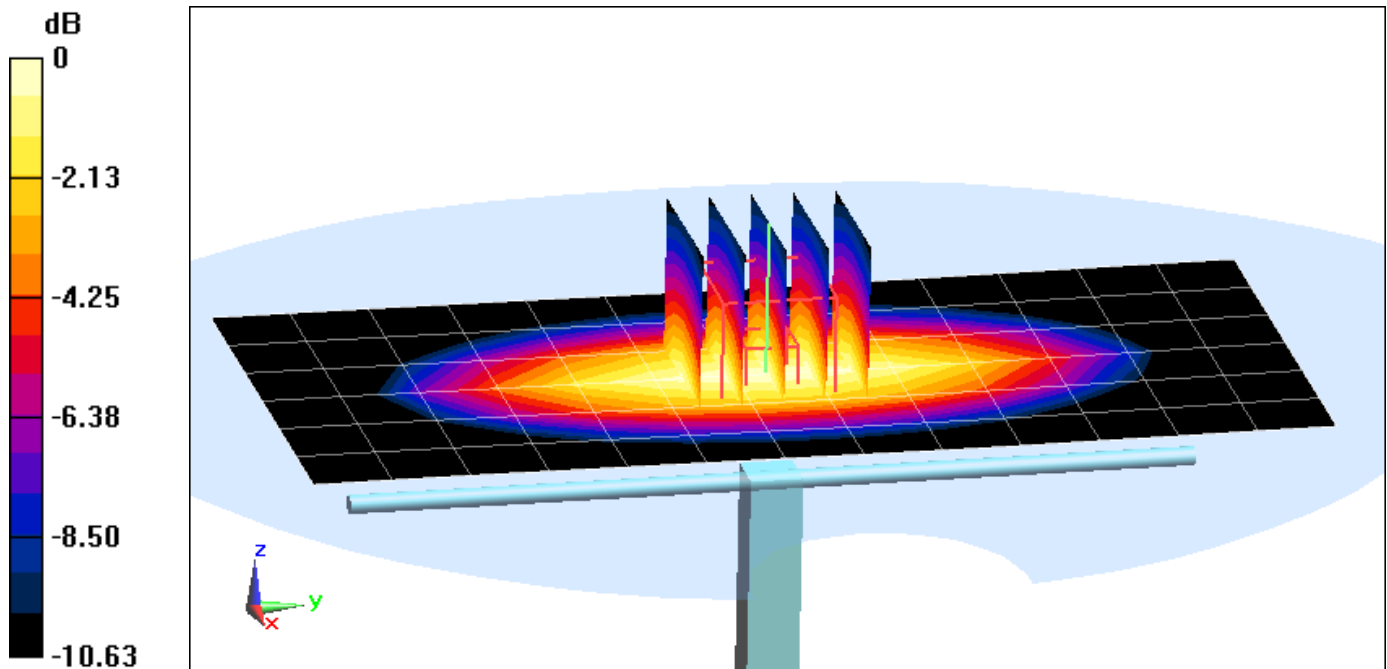

0 dB = 1.07 W/kg = 0.29 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head, Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 37.475$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-25-2014; Ambient Temp: 22.3°C; Tissue Temp: 23.9°C

Probe: ES3DV3 - SN3258; ConvF(4.52, 4.52, 4.52); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 10.3 W/kg

**SAR(1 g) = 4.77 W/kg**

Deviation = -7.92%

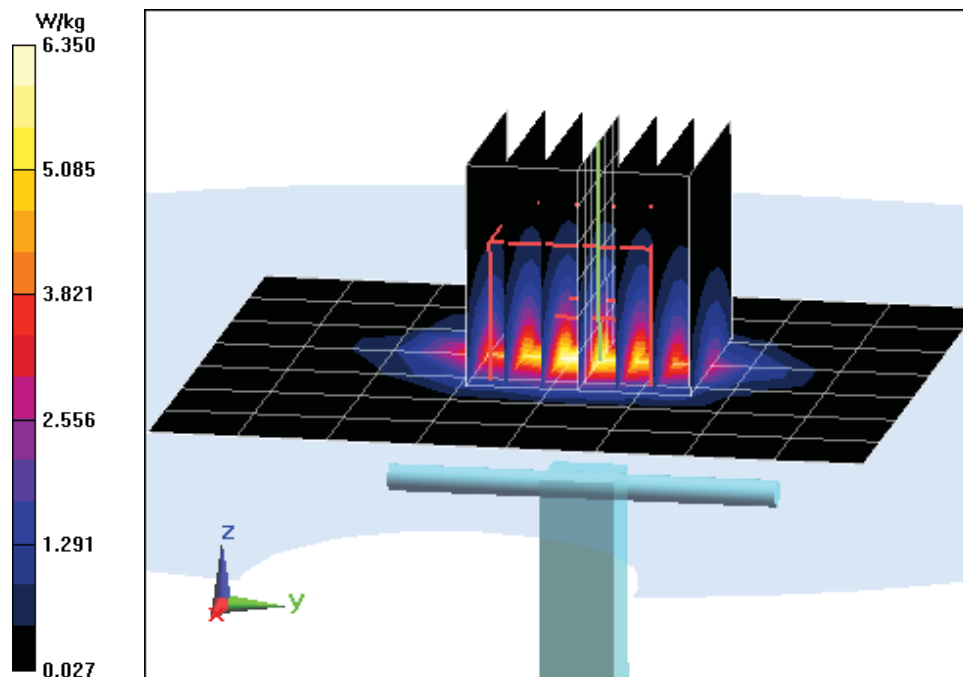

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.994 \text{ S/m}$ ;  $\epsilon_r = 53.64$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 08-26-2014; Ambient Temp: 23.4°C; Tissue Temp: 23.6°C

Probe: ES3DV3 - SN3263; ConvF(6.16, 6.16, 6.16); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(10 g) = 0.621 W/kg**

Deviation = 0.98 %

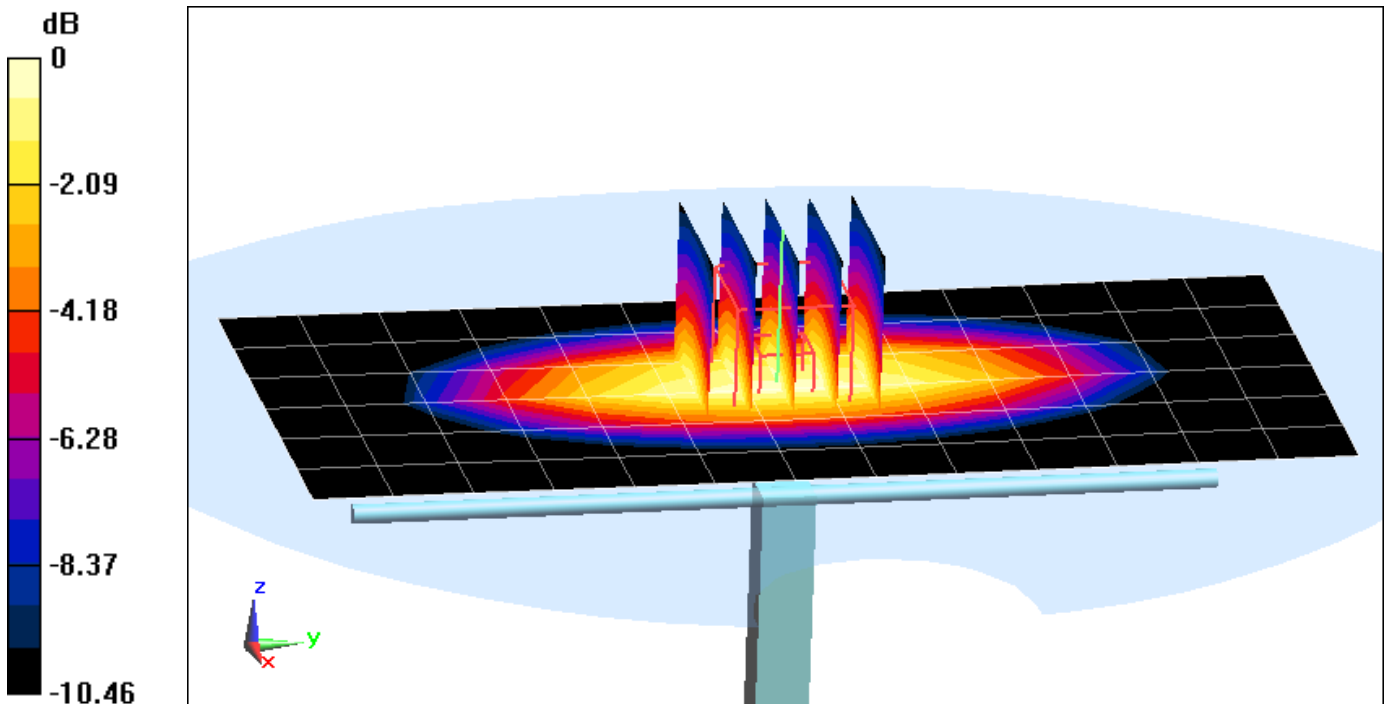

0 dB = 1.10 W/kg = 0.41 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.017 \text{ S/m}$ ;  $\epsilon_r = 50.824$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-20-2014; Ambient Temp: 23.5°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3258; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 11.2 W/kg

**SAR(10 g) = 2.41 W/kg**

Deviation = 4.33%

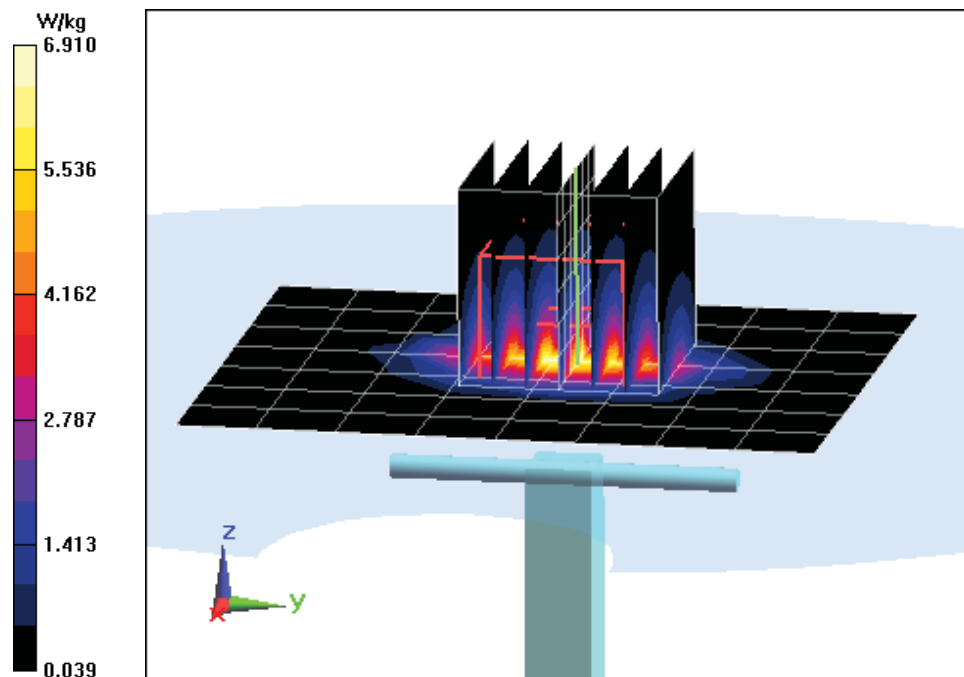

## APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **ES3-3263\_May14**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3263**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

CCV  
 7/17/14

Calibration date: **May 15, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498087      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-13 (No. ES3-3013_Dec13)    | Dec-14                 |
| DAE4                       | SN: 660         | 13-Dec-13 (No. DAE4-660_Dec13)    | Dec-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                                                                                                                 | Name           | Function              | Signature            |
|-----------------------------------------------------------------------------------------------------------------|----------------|-----------------------|----------------------|
| Calibrated by:                                                                                                  | Jeton Kastrati | Laboratory Technician |                      |
| Approved by:                                                                                                    | Katja Pokovic  | Technical Manager     |                      |
|                                                                                                                 |                |                       | Issued: May 15, 2014 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                |                       |                      |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(*f*)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



# Probe ES3DV3

## SN:3263

Manufactured: January 25, 2010  
Calibrated: May 15, 2014

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

## Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.21     | 1.24     | 1.13     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 103.8    | 102.3    | 104.7    |               |

## Modulation Calibration Parameters

| UID       | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C    | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----------|-----------------------------------------------|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0         | CW                                            | X | 0.0     | 0.0                          | 1.0  | 0.00    | 156.3    | $\pm 3.5 \%$              |
|           |                                               | Y | 0.0     | 0.0                          | 1.0  |         | 203.1    |                           |
|           |                                               | Z | 0.0     | 0.0                          | 1.0  |         | 197.2    |                           |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms)          | X | 2.33    | 59.4                         | 10.8 | 10.00   | 46.4     | $\pm 1.4 \%$              |
|           |                                               | Y | 4.39    | 63.4                         | 13.6 |         | 50.8     |                           |
|           |                                               | Z | 1.35    | 55.5                         | 7.8  |         | 39.6     |                           |
| 10011-CAB | UMTS-FDD (WCDMA)                              | X | 3.49    | 68.2                         | 19.1 | 2.91    | 126.7    | $\pm 0.7 \%$              |
|           |                                               | Y | 3.28    | 66.9                         | 18.5 |         | 120.7    |                           |
|           |                                               | Z | 2.74    | 63.1                         | 15.1 |         | 113.5    |                           |
| 10012-CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 3.51    | 72.0                         | 20.3 | 1.87    | 127.9    | $\pm 0.7 \%$              |
|           |                                               | Y | 3.21    | 69.4                         | 18.8 |         | 124.1    |                           |
|           |                                               | Z | 1.93    | 60.6                         | 12.6 |         | 113.3    |                           |
| 10013-CAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 11.30   | 70.8                         | 23.3 | 9.46    | 125.2    | $\pm 2.5 \%$              |
|           |                                               | Y | 12.42   | 72.7                         | 24.4 |         | 129.4    |                           |
|           |                                               | Z | 10.03   | 67.8                         | 21.1 |         | 105.5    |                           |
| 10021-DAB | GSM-FDD (TDMA, GMSK)                          | X | 24.45   | 99.1                         | 27.6 | 9.39    | 141.4    | $\pm 1.4 \%$              |
|           |                                               | Y | 29.93   | 99.5                         | 29.0 |         | 124.5    |                           |
|           |                                               | Z | 4.53    | 73.0                         | 18.1 |         | 111.6    |                           |
| 10023-DAB | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 25.10   | 99.7                         | 27.9 | 9.57    | 134.2    | $\pm 1.9 \%$              |
|           |                                               | Y | 24.85   | 96.1                         | 28.0 |         | 120.2    |                           |
|           |                                               | Z | 5.99    | 76.5                         | 19.1 |         | 142.5    |                           |
| 10024-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 24.34   | 93.0                         | 23.0 | 6.56    | 117.1    | $\pm 1.4 \%$              |
|           |                                               | Y | 26.49   | 92.6                         | 24.2 |         | 148.7    |                           |
|           |                                               | Z | 4.00    | 69.6                         | 13.8 |         | 136.6    |                           |
| 10027-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 51.24   | 99.9                         | 23.5 | 4.80    | 131.1    | $\pm 1.9 \%$              |
|           |                                               | Y | 56.83   | 99.5                         | 24.3 |         | 101.8    |                           |
|           |                                               | Z | 1.70    | 61.4                         | 9.1  |         | 107.7    |                           |
| 10028-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 60.12   | 99.6                         | 22.2 | 3.55    | 138.7    | $\pm 1.9 \%$              |
|           |                                               | Y | 64.73   | 99.9                         | 23.4 |         | 105.5    |                           |
|           |                                               | Z | 1.13    | 58.4                         | 6.0  |         | 116.0    |                           |
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)           | X | 77.27   | 99.6                         | 19.6 | 1.16    | 149.5    | $\pm 2.5 \%$              |
|           |                                               | Y | 60.44   | 99.7                         | 21.0 |         | 109.4    |                           |
|           |                                               | Z | 0.34    | 55.9                         | 2.9  |         | 131.4    |                           |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                         | X | 4.79    | 66.8                         | 19.0 | 4.57    | 124.5    | $\pm 0.9 \%$              |
|           |                                               | Y | 4.85    | 66.4                         | 18.8 |         | 125.6    |                           |
|           |                                               | Z | 4.06    | 63.4                         | 16.1 |         | 108.1    |                           |

|           |                                               |   |       |      |      |      |       |        |
|-----------|-----------------------------------------------|---|-------|------|------|------|-------|--------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                         | X | 3.93  | 66.1 | 18.5 | 3.97 | 119.8 | ±0.7 % |
|           |                                               | Y | 3.90  | 65.5 | 18.2 |      | 120.1 |        |
|           |                                               | Z | 3.29  | 62.4 | 15.3 |      | 108.5 |        |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                   | X | 4.68  | 66.9 | 18.7 | 3.98 | 131.2 | ±0.7 % |
|           |                                               | Y | 4.64  | 66.6 | 18.6 |      | 130.5 |        |
|           |                                               | Z | 4.15  | 64.5 | 16.5 |      | 118.8 |        |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)      | X | 6.61  | 68.1 | 20.0 | 5.67 | 137.5 | ±1.7 % |
|           |                                               | Y | 6.70  | 68.4 | 20.2 |      | 137.7 |        |
|           |                                               | Z | 5.90  | 65.6 | 17.9 |      | 124.0 |        |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)      | X | 6.44  | 67.5 | 19.8 | 5.80 | 135.1 | ±1.7 % |
|           |                                               | Y | 6.60  | 68.0 | 20.1 |      | 135.4 |        |
|           |                                               | Z | 5.75  | 64.9 | 17.6 |      | 121.8 |        |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)       | X | 6.14  | 67.1 | 19.7 | 5.75 | 131.6 | ±1.2 % |
|           |                                               | Y | 6.28  | 67.4 | 19.9 |      | 132.7 |        |
|           |                                               | Z | 5.62  | 65.5 | 18.2 |      | 118.4 |        |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.18 | 68.8 | 21.2 | 8.10 | 124.3 | ±1.9 % |
|           |                                               | Y | 10.60 | 69.7 | 21.8 |      | 126.2 |        |
|           |                                               | Z | 9.38  | 67.0 | 19.8 |      | 108.4 |        |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)      | X | 10.23 | 68.9 | 21.3 | 8.07 | 125.0 | ±1.9 % |
|           |                                               | Y | 10.56 | 69.6 | 21.7 |      | 127.1 |        |
|           |                                               | Z | 9.37  | 67.1 | 19.8 |      | 109.1 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)       | X | 10.23 | 75.7 | 26.0 | 9.28 | 125.0 | ±2.7 % |
|           |                                               | Y | 14.60 | 83.3 | 29.5 |      | 147.3 |        |
|           |                                               | Z | 8.05  | 69.7 | 22.3 |      | 106.3 |        |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)       | X | 6.12  | 67.0 | 19.6 | 5.75 | 131.6 | ±1.4 % |
|           |                                               | Y | 6.28  | 67.4 | 19.9 |      | 132.4 |        |
|           |                                               | Z | 5.49  | 64.7 | 17.4 |      | 117.9 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)       | X | 6.57  | 67.5 | 19.8 | 5.82 | 136.0 | ±1.4 % |
|           |                                               | Y | 6.71  | 67.9 | 20.1 |      | 137.1 |        |
|           |                                               | Z | 5.89  | 65.2 | 17.8 |      | 122.4 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 4.82  | 66.0 | 19.3 | 5.73 | 113.5 | ±1.4 % |
|           |                                               | Y | 5.12  | 66.3 | 19.4 |      | 116.6 |        |
|           |                                               | Z | 4.75  | 65.9 | 18.3 |      | 142.7 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 9.53  | 80.6 | 28.6 | 9.21 | 136.5 | ±2.2 % |
|           |                                               | Y | 11.32 | 81.6 | 28.8 |      | 109.2 |        |
|           |                                               | Z | 6.84  | 72.0 | 23.8 |      | 117.3 |        |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)         | X | 4.86  | 66.2 | 19.4 | 5.72 | 112.9 | ±1.2 % |
|           |                                               | Y | 5.10  | 66.2 | 19.4 |      | 115.9 |        |
|           |                                               | Z | 4.55  | 64.9 | 17.8 |      | 137.7 |        |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)         | X | 4.81  | 66.0 | 19.2 | 5.72 | 111.6 | ±1.2 % |
|           |                                               | Y | 5.13  | 66.4 | 19.5 |      | 116.1 |        |
|           |                                               | Z | 4.70  | 65.7 | 18.3 |      | 137.1 |        |
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 9.80  | 68.3 | 21.0 | 8.09 | 117.2 | ±2.2 % |
|           |                                               | Y | 10.23 | 69.1 | 21.6 |      | 121.5 |        |
|           |                                               | Z | 9.85  | 68.9 | 20.8 |      | 148.4 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)                       | X | 9.81  | 68.4 | 21.1 | 8.10 | 117.7 | ±2.2 % |
|           |                                                               | Y | 10.23 | 69.2 | 21.6 |      | 121.7 |        |
|           |                                                               | Z | 9.87  | 69.0 | 20.9 |      | 149.9 |        |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)                       | X | 9.71  | 68.3 | 21.0 | 8.03 | 117.8 | ±2.2 % |
|           |                                                               | Y | 10.12 | 69.1 | 21.6 |      | 121.0 |        |
|           |                                                               | Z | 8.90  | 66.6 | 19.6 |      | 104.1 |        |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)                        | X | 10.14 | 68.7 | 21.2 | 8.06 | 122.3 | ±1.9 % |
|           |                                                               | Y | 10.52 | 69.5 | 21.7 |      | 125.4 |        |
|           |                                                               | Z | 9.28  | 66.8 | 19.6 |      | 108.5 |        |
| 10225-CAB | UMTS-FDD (HSPA+)                                              | X | 7.25  | 67.8 | 19.9 | 5.97 | 146.3 | ±1.7 % |
|           |                                                               | Y | 7.32  | 67.5 | 19.8 |      | 149.3 |        |
|           |                                                               | Z | 6.52  | 65.7 | 18.0 |      | 130.7 |        |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)                         | X | 9.55  | 80.7 | 28.7 | 9.21 | 137.2 | ±2.5 % |
|           |                                                               | Y | 11.34 | 81.7 | 28.9 |      | 109.9 |        |
|           |                                                               | Z | 6.98  | 72.5 | 24.0 |      | 119.5 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)                       | X | 9.26  | 74.1 | 25.3 | 9.24 | 115.6 | ±3.3 % |
|           |                                                               | Y | 13.72 | 82.5 | 29.3 |      | 137.9 |        |
|           |                                                               | Z | 8.83  | 73.3 | 24.4 |      | 144.1 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)                      | X | 10.06 | 75.2 | 25.8 | 9.30 | 122.9 | ±2.7 % |
|           |                                                               | Y | 14.69 | 83.4 | 29.6 |      | 147.6 |        |
|           |                                                               | Z | 8.02  | 69.6 | 22.3 |      | 103.4 |        |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                     | X | 6.08  | 67.2 | 19.0 | 4.87 | 140.2 | ±1.2 % |
|           |                                                               | Y | 6.23  | 67.5 | 19.2 |      | 143.5 |        |
|           |                                                               | Z | 5.52  | 65.4 | 17.4 |      | 125.1 |        |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                      | X | 4.44  | 66.7 | 18.7 | 3.96 | 122.1 | ±0.7 % |
|           |                                                               | Y | 4.39  | 66.3 | 18.5 |      | 124.4 |        |
|           |                                                               | Z | 3.83  | 63.7 | 16.0 |      | 114.0 |        |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                | X | 3.64  | 66.7 | 18.6 | 3.46 | 115.7 | ±0.7 % |
|           |                                                               | Y | 3.60  | 66.0 | 18.2 |      | 118.0 |        |
|           |                                                               | Z | 3.17  | 64.2 | 16.3 |      | 108.4 |        |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                | X | 3.62  | 67.0 | 18.8 | 3.39 | 116.9 | ±0.9 % |
|           |                                                               | Y | 3.54  | 66.1 | 18.2 |      | 119.1 |        |
|           |                                                               | Z | 3.24  | 64.2 | 15.8 |      | 145.6 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                       | X | 6.43  | 67.5 | 19.8 | 5.81 | 132.0 | ±1.4 % |
|           |                                                               | Y | 6.60  | 68.0 | 20.1 |      | 134.9 |        |
|           |                                                               | Z | 5.81  | 65.4 | 18.0 |      | 115.0 |        |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                      | X | 7.04  | 68.1 | 20.2 | 6.06 | 137.5 | ±1.4 % |
|           |                                                               | Y | 7.19  | 68.6 | 20.5 |      | 140.3 |        |
|           |                                                               | Z | 6.26  | 65.7 | 18.2 |      | 119.6 |        |
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)     | X | 3.05  | 70.0 | 19.4 | 1.71 | 121.7 | ±0.7 % |
|           |                                                               | Y | 2.91  | 68.7 | 18.7 |      | 123.4 |        |
|           |                                                               | Z | 1.83  | 60.2 | 12.3 |      | 108.4 |        |
| 10316-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 10.05 | 68.7 | 21.4 | 8.36 | 117.3 | ±1.9 % |
|           |                                                               | Y | 10.57 | 69.7 | 22.0 |      | 122.8 |        |
|           |                                                               | Z | 9.11  | 66.5 | 19.7 |      | 103.1 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                    | X | 4.81  | 68.3 | 18.8 | 3.76 | 125.8 | ±0.7 % |
|           |                                                               | Y | 4.65  | 66.5 | 18.1 |      | 130.8 |        |
|           |                                                               | Z | 3.98  | 64.7 | 16.0 |      | 114.7 |        |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                    | X | 4.91  | 69.1 | 19.2 | 3.77 | 123.3 | ±0.7 % |
|           |                                                               | Y | 4.60  | 66.6 | 18.1 |      | 128.5 |        |
|           |                                                               | Z | 3.73  | 64.0 | 15.4 |      | 112.0 |        |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)     | X | 2.78  | 69.0 | 19.0 | 1.54 | 121.9 | ±0.7 % |
|           |                                                               | Y | 2.46  | 66.8 | 17.9 |      | 122.5 |        |
|           |                                                               | Z | 1.83  | 60.9 | 13.0 |      | 112.4 |        |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.88  | 68.4 | 21.2 | 8.23 | 116.6 | ±1.7 % |
|           |                                                               | Y | 10.29 | 69.2 | 21.7 |      | 121.5 |        |
|           |                                                               | Z | 9.25  | 67.3 | 20.2 |      | 103.4 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 8 and 9).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.42    | 6.42    | 6.42    | 0.72               | 1.18                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.23    | 6.23    | 6.23    | 0.27               | 2.02                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.41    | 5.41    | 5.41    | 0.74               | 1.23                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.08    | 5.08    | 5.08    | 0.80               | 1.16                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.47    | 4.47    | 4.47    | 0.80               | 1.22                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.33    | 4.33    | 4.33    | 0.66               | 1.41                    | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.19    | 6.19    | 6.19    | 0.52               | 1.41                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.16    | 6.16    | 6.16    | 0.68               | 1.28                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.98    | 4.98    | 4.98    | 0.38               | 1.91                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.78    | 4.78    | 4.78    | 0.66               | 1.35                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.27    | 4.27    | 4.27    | 0.72               | 1.13                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 4.11    | 4.11    | 4.11    | 0.74               | 1.07                    | ± 12.0 %    |


<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

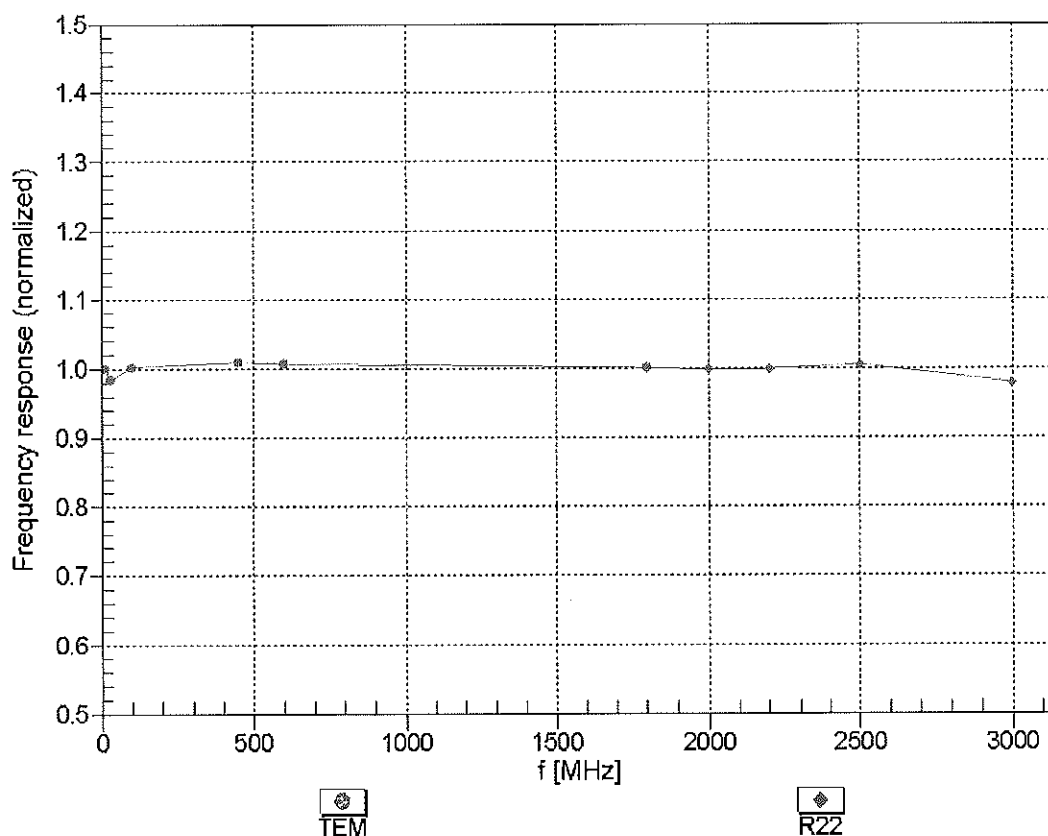


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )





## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM


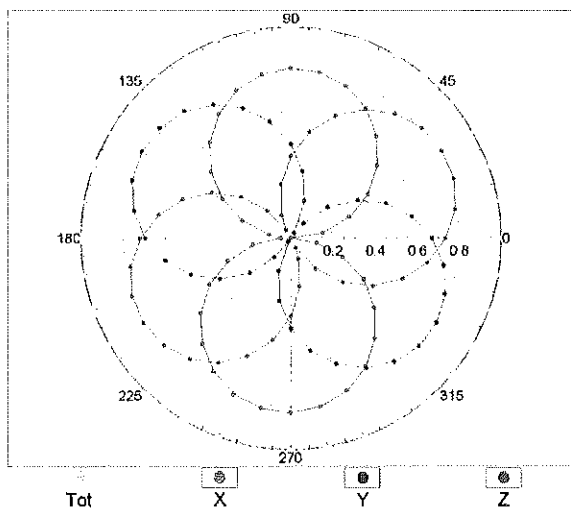


f=1800 MHz,R22

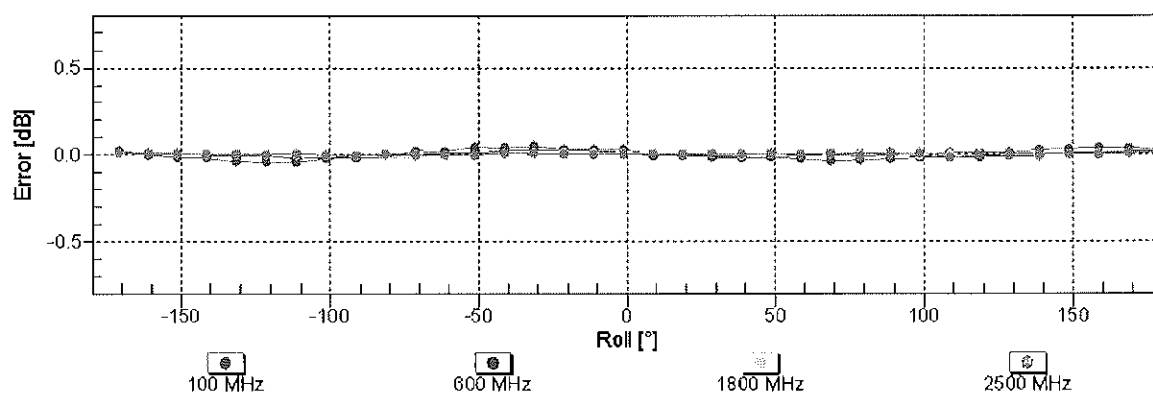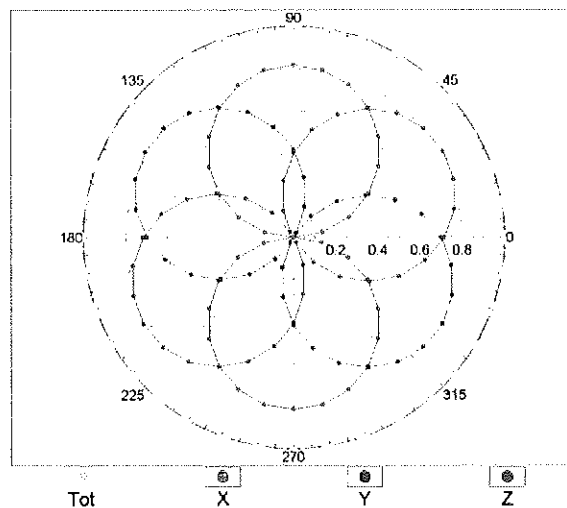


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

Dynamic Range f(SAR<sub>head</sub>)  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

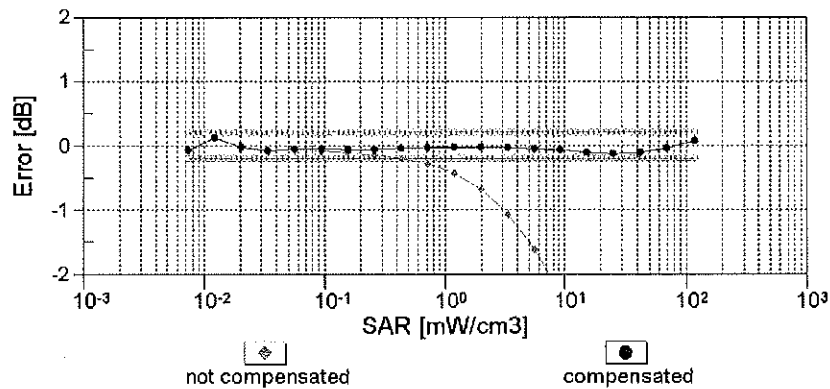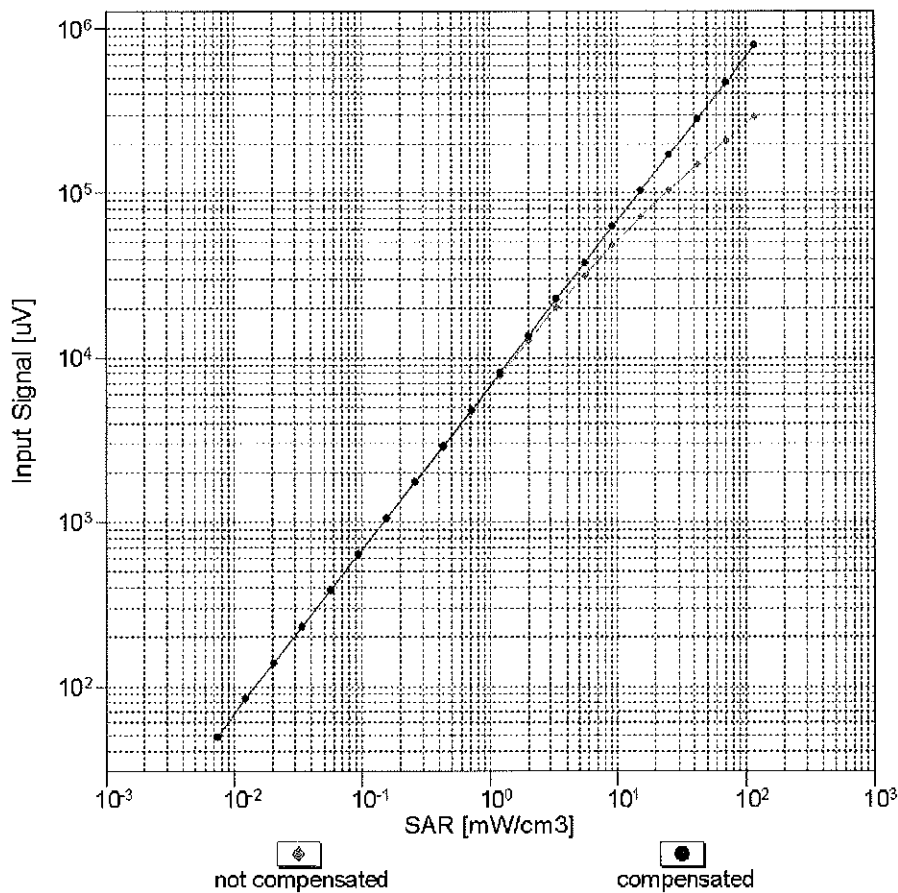



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

## Conversion Factor Assessment

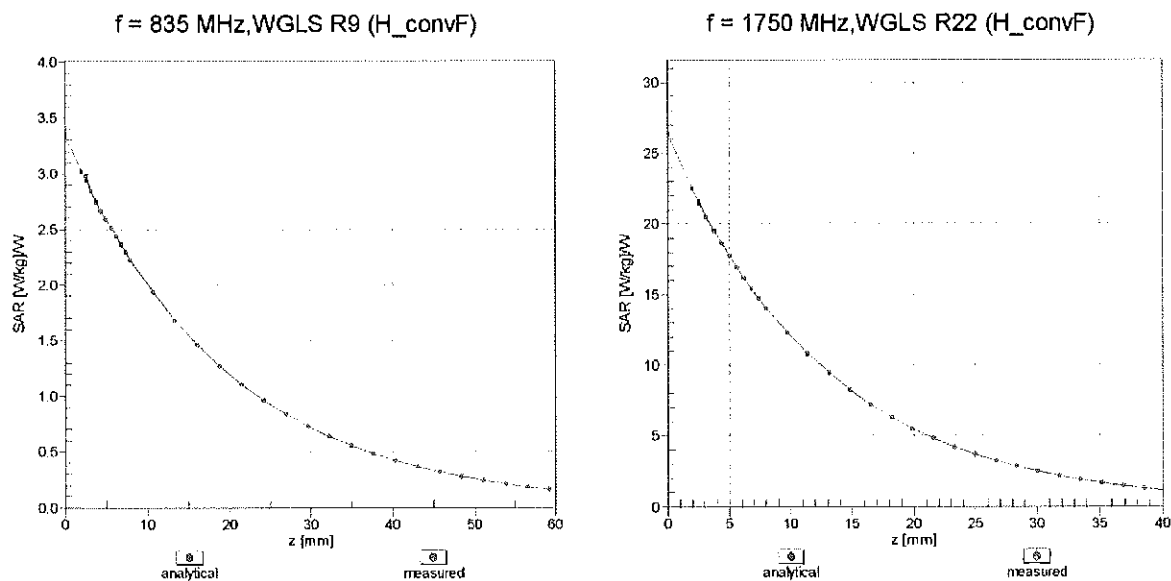

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

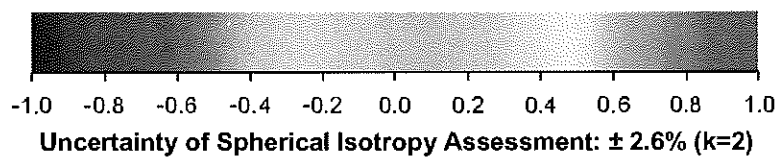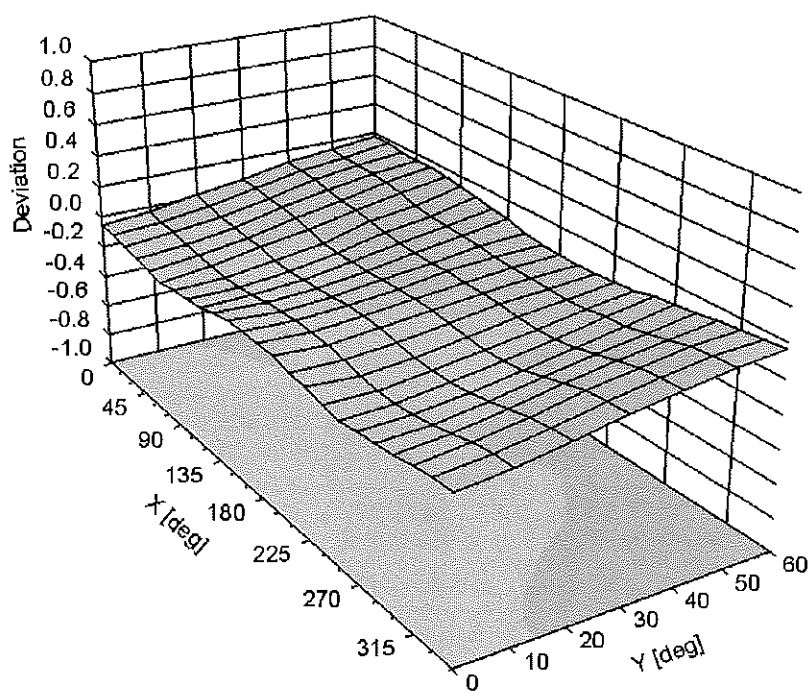

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3263

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -111.2     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2450V2-797\_Jan14**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 797**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 21, 2014**

CC ✓  
2/5/14

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | US37292783         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | MY41092317         | 09-Oct-13 (No. 217-01828)         | Oct-14                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-13 (No. 217-01736)         | Apr-14                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739)         | Apr-14                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-13 (No. ES3-3205_Dec13)    | Dec-14                 |
| DAE4                        | SN: 601            | 25-Apr-13 (No. DAE4-601_Apr13)    | Apr-14                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                |                |                       |           |
|----------------|----------------|-----------------------|-----------|
|                | Name           | Function              | Signature |
| Calibrated by: | Israe El-Naouq | Laboratory Technician |           |
| Approved by:   | Katja Pokovic  | Technical Manager     |           |

Issued: January 21, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.7     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 38.7 $\pm$ 6 % | 1.86 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 13.2 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 51.8 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.13 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.3 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 51.3 $\pm$ 6 % | 2.04 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 12.7 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 49.4 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 5.86 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 23.1 W/kg $\pm$ 16.5 % (k=2) |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $53.5 \Omega + 3.2 j\Omega$ |
| Return Loss                          | - 26.7 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.0 \Omega + 4.9 j\Omega$ |
| Return Loss                          | - 26.2 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.151 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | January 24, 2006 |



## DASY5 Validation Report for Head TSL

Date: 21.01.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.86$  S/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.151 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 27.5 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.13 W/kg**

Maximum value of SAR (measured) = 16.9 W/kg

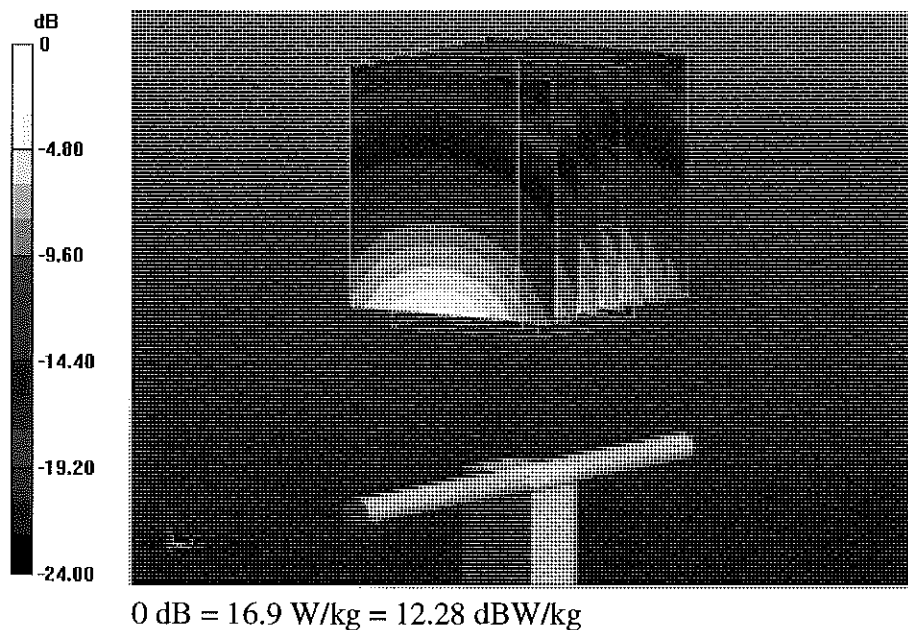

# Impedance Measurement Plot for Head TSL


21 Jan 2014 11:31:52  
 [CH1] S11 1 U FS 2: 53.512  $\angle$  3.2285  $\angle$  209.73 pH 2 450.000 000 MHz

\*  
 Del

CA

Avg  
 16

H1d

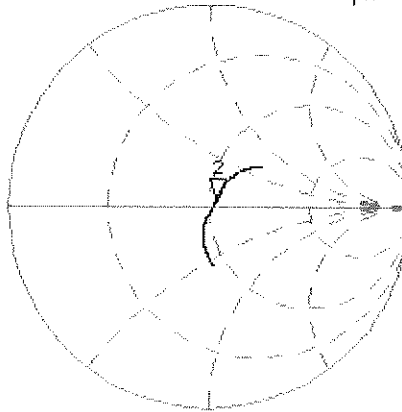


CH2 S11 LOG 5 dB/REF -20 dB 2:-26.730 dB 2 450.000 000 MHz

CA

Avg  
 16

H1d

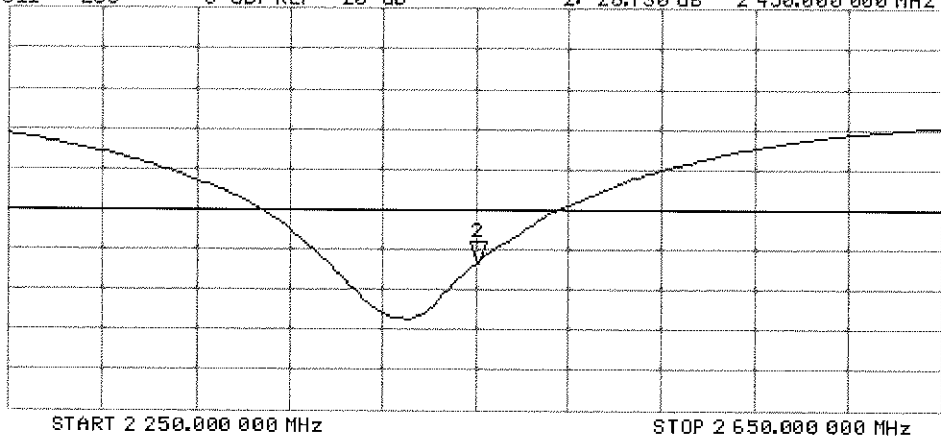

## DASY5 Validation Report for Body TSL

Date: 21.01.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.04$  S/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.709 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.4 W/kg

**SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.86 W/kg**

Maximum value of SAR (measured) = 16.8 W/kg

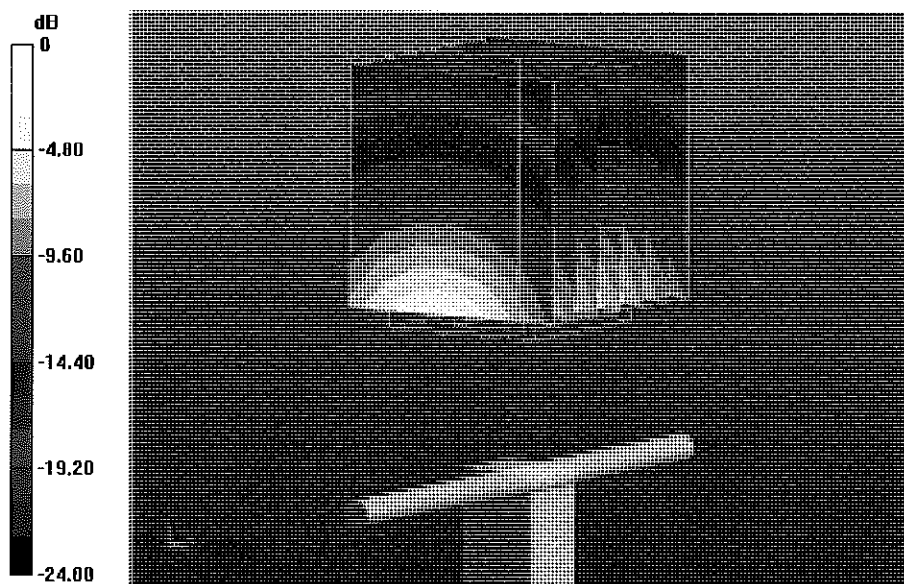


0 dB = 16.8 W/kg = 12.25 dBW/kg

Impedance Measurement Plot for Body TSL

21 Jan 2014 11:31:29

CH1 S11 1 U FS 2: 49.994  $\Omega$  4.9258  $\Omega$  319.98  $\mu$ H 2 450.000 000 MHz


\*  
Del  
CA

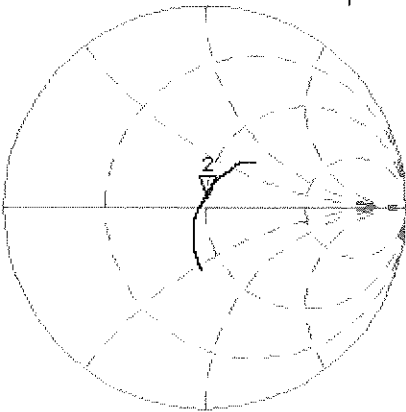

Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 2:-26.162 dB 2 450.000 000 MHz

CA  
Avg  
16  
H1d

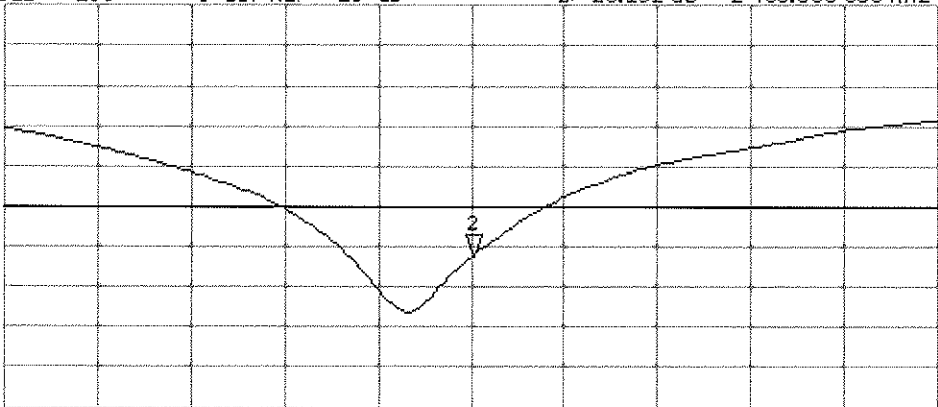

START 2 250.000 000 MHz

STOP 2 450.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d119\_Apr14**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d119**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

CCV  
4/25/14

Calibration date: **April 07, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | US37292783         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | MY41092317         | 09-Oct-13 (No. 217-01828)         | Oct-14                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 03-Apr-14 (No. 217-01918)         | Apr-15                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-13 (No. ES3-3205_Dec13)    | Dec-14                 |
| DAE4                        | SN: 601            | 25-Apr-13 (No. DAE4-601_Apr13)    | Apr-14                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                |                             |                                          |               |
|----------------|-----------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Leif Klysner</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Katja Pokovic</b>        | <b>Technical Manager</b>                 |               |

Issued: April 9, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.7     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 15 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 835 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.5           | 0.90 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 41.6 $\pm$ 6 % | 0.94 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.38 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.22 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.53 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.97 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.2           | 0.97 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 53.6 $\pm$ 6 % | 1.02 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.44 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 9.34 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.59 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 6.15 W/kg $\pm$ 16.5 % (k=2) |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.2 $\Omega$ - 1.6 j $\Omega$ |
| Return Loss                          | - 34.0 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.3 $\Omega$ - 4.5 j $\Omega$ |
| Return Loss                          | - 24.4 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.386 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | June 29, 2010 |



## DASY5 Validation Report for Head TSL

Date: 07.04.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d119**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.94$  S/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.289 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.59 W/kg


**SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.53 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

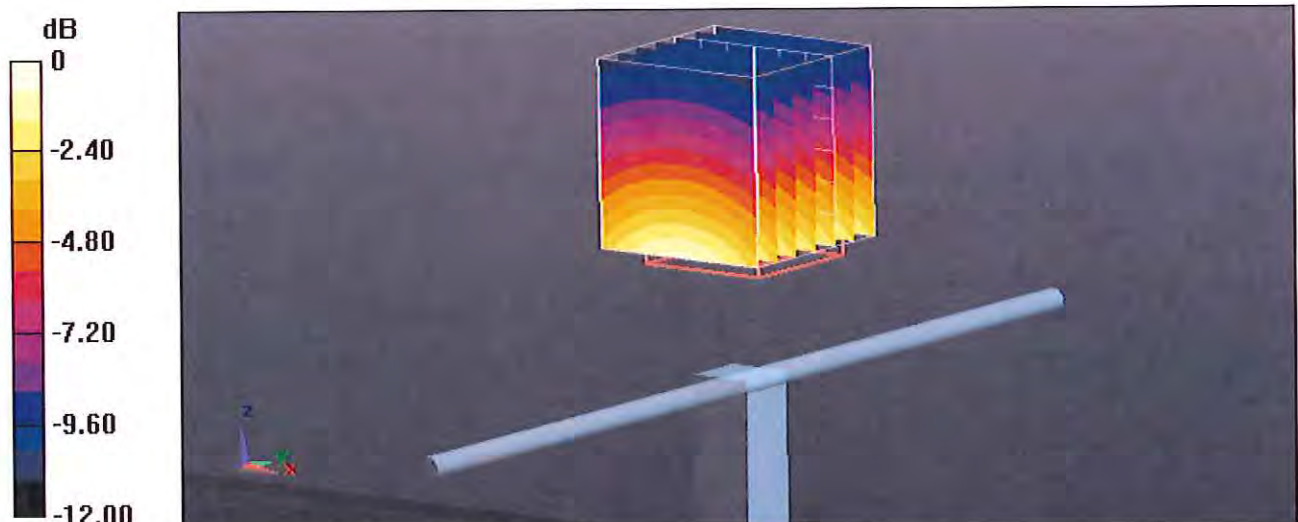

0 dB = 2.80 W/kg = 4.47 dBW/kg

## Impedance Measurement Plot for Head TSL

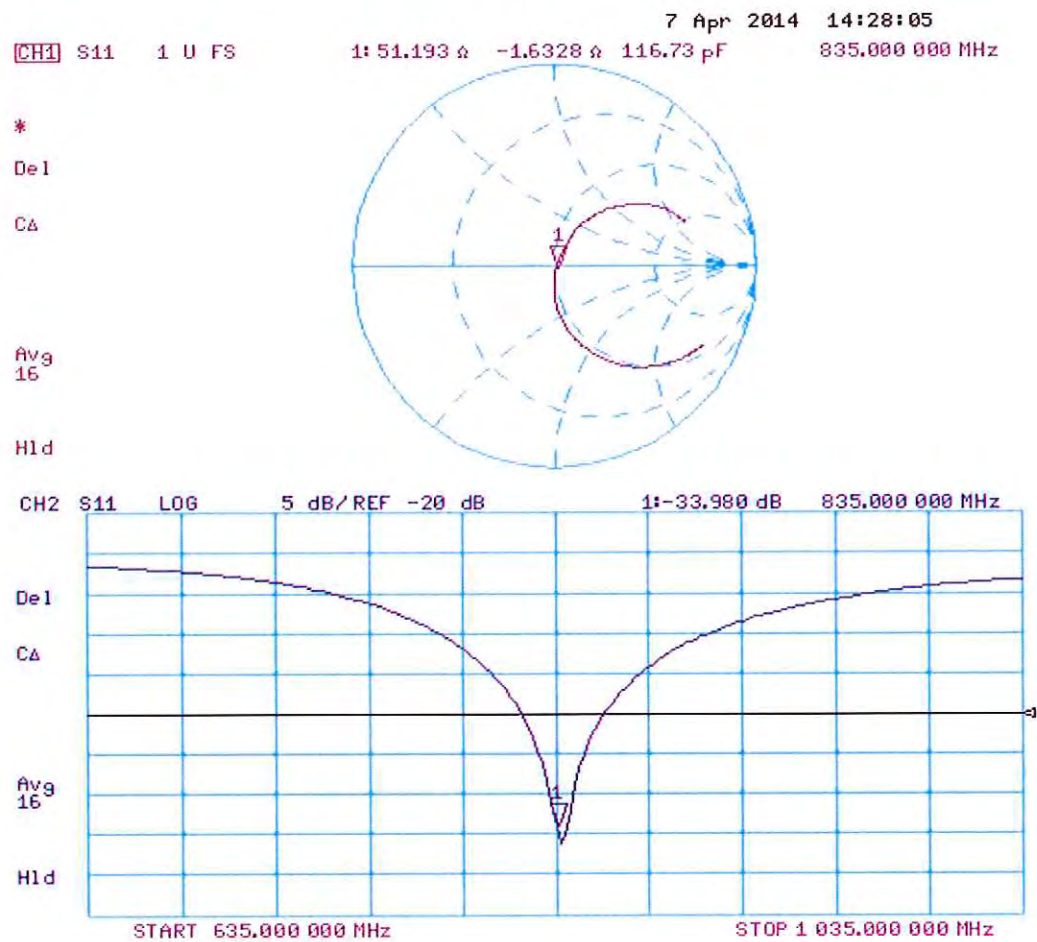



## DASY5 Validation Report for Body TSL

Date: 07.04.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d119**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.02$  S/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.594 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.61 W/kg

**SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg**

Maximum value of SAR (measured) = 2.85 W/kg

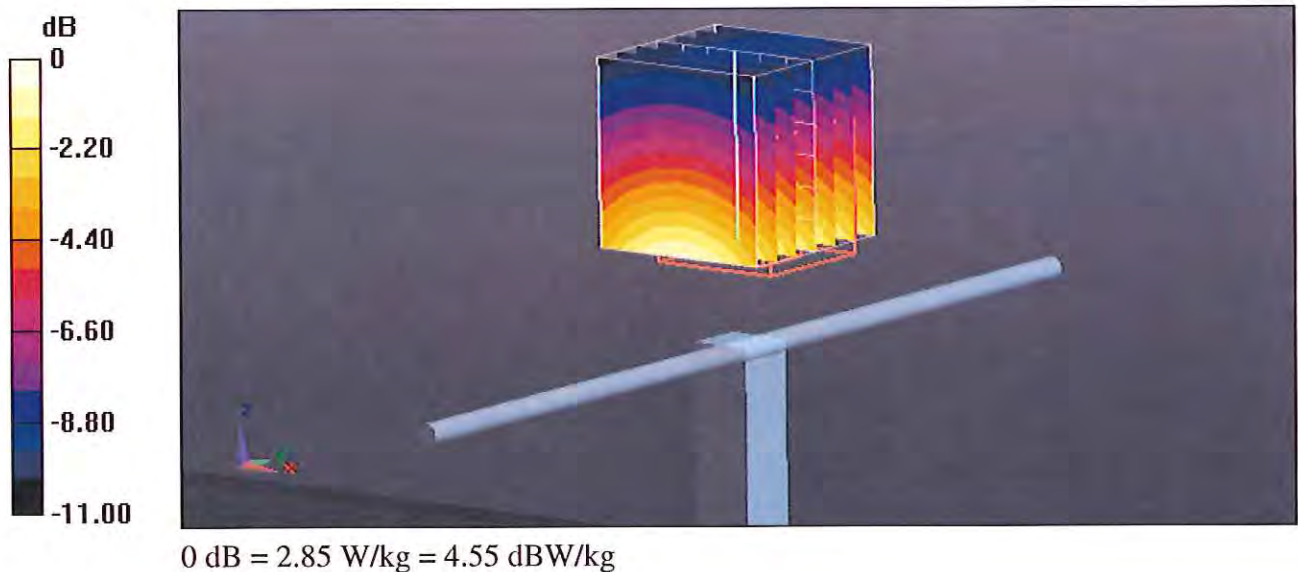

# Impedance Measurement Plot for Body TSL

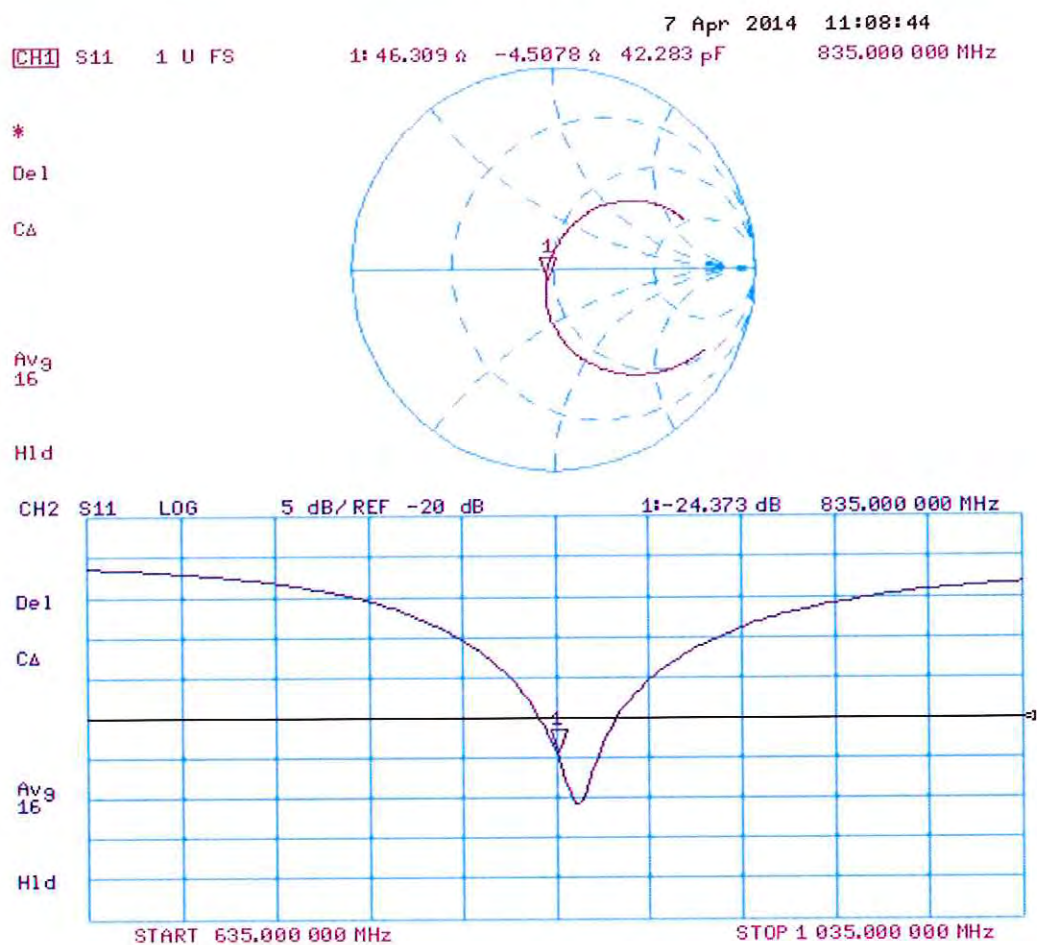



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3258\_Feb14**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3258**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

CCV  
 3/6/14

Calibration date: **February 25, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-13 (No. ES3-3013_Dec13)    | Dec-14                 |
| DAE4                       | SN: 660         | 13-Dec-13 (No. DAE4-660_Dec13)    | Dec-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                |                               |                                          |               |
|----------------|-------------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Israe El-Naouq</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Katja Pokovic</b>          | <b>Technical Manager</b>                 |               |

Issued: February 27, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3258

Manufactured: January 25, 2010  
Calibrated: February 25, 2014

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3258

## Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.29     | 1.19     | 1.23     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 104.5    | 107.0    | 103.0    |               |

## Modulation Calibration Parameters

| UID           | Communication System Name                |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C    | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|---------------|------------------------------------------|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0             | CW                                       | X | 0.0     | 0.0                          | 1.0  | 0.00    | 222.4    | $\pm 3.8 \%$              |
|               |                                          | Y | 0.0     | 0.0                          | 1.0  |         | 202.2    |                           |
|               |                                          | Z | 0.0     | 0.0                          | 1.0  |         | 207.1    |                           |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)     | X | 5.09    | 65.6                         | 14.1 | 10.00   | 44.8     | $\pm 1.9 \%$              |
|               |                                          | Y | 1.68    | 57.4                         | 9.3  |         | 40.7     |                           |
|               |                                          | Z | 4.01    | 62.4                         | 13.0 |         | 51.1     |                           |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                         | X | 3.34    | 67.5                         | 18.9 | 2.91    | 131.2    | $\pm 0.5 \%$              |
|               |                                          | Y | 3.43    | 67.9                         | 18.7 |         | 137.1    |                           |
|               |                                          | Z | 3.42    | 67.8                         | 19.0 |         | 146.0    |                           |
| 10012-<br>CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 3.40    | 70.9                         | 19.8 | 1.87    | 134.2    | $\pm 0.7 \%$              |
|               |                                          | Y | 3.19    | 70.2                         | 19.2 |         | 137.9    |                           |
|               |                                          | Z | 3.46    | 70.8                         | 19.6 |         | 149.6    |                           |
| 10021-<br>DAB | GSM-FDD (TDMA, GMSK)                     | X | 30.24   | 99.7                         | 28.7 | 9.39    | 131.2    | $\pm 1.4 \%$              |
|               |                                          | Y | 12.91   | 88.5                         | 23.9 |         | 147.5    |                           |
|               |                                          | Z | 30.37   | 99.5                         | 28.9 |         | 128.0    |                           |
| 10023-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0)              | X | 29.88   | 100.0                        | 29.0 | 9.57    | 123.0    | $\pm 1.9 \%$              |
|               |                                          | Y | 16.02   | 92.5                         | 25.4 |         | 140.7    |                           |
|               |                                          | Z | 30.01   | 100.0                        | 29.4 |         | 125.8    |                           |
| 10024-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)            | X | 44.57   | 99.7                         | 25.9 | 6.56    | 119.6    | $\pm 1.7 \%$              |
|               |                                          | Y | 28.97   | 95.3                         | 23.2 |         | 127.6    |                           |
|               |                                          | Z | 43.72   | 99.8                         | 26.3 |         | 120.1    |                           |
| 10027-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)          | X | 53.52   | 99.7                         | 24.4 | 4.80    | 129.4    | $\pm 2.2 \%$              |
|               |                                          | Y | 54.55   | 99.9                         | 22.9 |         | 143.3    |                           |
|               |                                          | Z | 51.63   | 99.7                         | 24.8 |         | 127.5    |                           |
| 10028-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)        | X | 58.93   | 99.8                         | 23.4 | 3.55    | 133.4    | $\pm 2.2 \%$              |
|               |                                          | Y | 77.54   | 99.7                         | 21.3 |         | 125.3    |                           |
|               |                                          | Z | 56.64   | 99.8                         | 23.8 |         | 130.8    |                           |
| 10032-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)      | X | 47.03   | 99.5                         | 21.3 | 1.16    | 136.3    | $\pm 1.7 \%$              |
|               |                                          | Y | 95.86   | 95.2                         | 17.1 |         | 138.2    |                           |
|               |                                          | Z | 39.68   | 100.0                        | 22.2 |         | 132.3    |                           |
| 10039-<br>CAB | CDMA2000 (1xRTT, RC1)                    | X | 4.84    | 66.8                         | 19.1 | 4.57    | 131.3    | $\pm 0.9 \%$              |
|               |                                          | Y | 4.75    | 67.0                         | 18.9 |         | 135.2    |                           |
|               |                                          | Z | 4.86    | 66.7                         | 19.0 |         | 127.2    |                           |



|           |                                               |   |       |      |      |      |       |        |
|-----------|-----------------------------------------------|---|-------|------|------|------|-------|--------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                         | X | 4.06  | 66.8 | 19.0 | 3.97 | 148.4 | ±0.7 % |
|           |                                               | Y | 3.96  | 66.6 | 18.6 |      | 134.7 |        |
|           |                                               | Z | 4.13  | 66.9 | 19.1 |      | 143.4 |        |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                   | X | 4.63  | 66.8 | 18.7 | 3.98 | 137.3 | ±0.7 % |
|           |                                               | Y | 4.75  | 67.5 | 18.8 |      | 148.4 |        |
|           |                                               | Z | 4.65  | 66.7 | 18.7 |      | 133.2 |        |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)      | X | 6.66  | 68.5 | 20.3 | 5.67 | 144.0 | ±1.2 % |
|           |                                               | Y | 6.27  | 67.1 | 19.3 |      | 130.6 |        |
|           |                                               | Z | 6.62  | 68.2 | 20.1 |      | 140.5 |        |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)      | X | 6.53  | 68.0 | 20.2 | 5.80 | 142.6 | ±1.4 % |
|           |                                               | Y | 6.17  | 66.8 | 19.3 |      | 129.2 |        |
|           |                                               | Z | 6.52  | 67.8 | 20.1 |      | 139.0 |        |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)       | X | 6.19  | 67.3 | 19.9 | 5.75 | 137.9 | ±1.4 % |
|           |                                               | Y | 6.12  | 67.3 | 19.6 |      | 149.5 |        |
|           |                                               | Z | 6.19  | 67.1 | 19.8 |      | 136.1 |        |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.49 | 69.5 | 21.7 | 8.10 | 132.4 | ±2.5 % |
|           |                                               | Y | 10.23 | 69.1 | 21.3 |      | 144.3 |        |
|           |                                               | Z | 10.45 | 69.3 | 21.6 |      | 129.5 |        |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)      | X | 10.46 | 69.5 | 21.7 | 8.07 | 133.9 | ±2.5 % |
|           |                                               | Y | 10.26 | 69.2 | 21.3 |      | 147.4 |        |
|           |                                               | Z | 10.47 | 69.4 | 21.7 |      | 130.5 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)       | X | 11.61 | 77.4 | 26.8 | 9.28 | 118.8 | ±3.0 % |
|           |                                               | Y | 9.89  | 75.2 | 25.7 |      | 144.9 |        |
|           |                                               | Z | 12.01 | 77.8 | 26.9 |      | 119.6 |        |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)       | X | 6.20  | 67.3 | 19.9 | 5.75 | 139.2 | ±1.2 % |
|           |                                               | Y | 5.86  | 66.2 | 19.0 |      | 128.5 |        |
|           |                                               | Z | 6.22  | 67.3 | 19.9 |      | 136.3 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)       | X | 6.63  | 67.8 | 20.1 | 5.82 | 144.1 | ±1.4 % |
|           |                                               | Y | 6.31  | 66.8 | 19.3 |      | 133.1 |        |
|           |                                               | Z | 6.66  | 67.7 | 20.0 |      | 140.9 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 5.25  | 67.5 | 20.2 | 5.73 | 143.6 | ±1.2 % |
|           |                                               | Y | 4.92  | 66.7 | 19.5 |      | 131.0 |        |
|           |                                               | Z | 5.29  | 67.4 | 20.2 |      | 140.7 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 13.49 | 87.5 | 31.6 | 9.21 | 139.0 | ±2.7 % |
|           |                                               | Y | 7.83  | 75.5 | 26.0 |      | 124.9 |        |
|           |                                               | Z | 13.47 | 86.5 | 31.1 |      | 137.8 |        |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)         | X | 5.22  | 67.4 | 20.1 | 5.72 | 144.3 | ±1.4 % |
|           |                                               | Y | 5.08  | 67.5 | 19.9 |      | 147.9 |        |
|           |                                               | Z | 5.26  | 67.2 | 20.0 |      | 139.6 |        |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)         | X | 5.24  | 67.5 | 20.1 | 5.72 | 144.5 | ±1.2 % |
|           |                                               | Y | 5.06  | 67.4 | 19.8 |      | 147.0 |        |
|           |                                               | Z | 5.29  | 67.3 | 20.1 |      | 139.2 |        |

|           |                                              |   |       |      |      |      |       |        |
|-----------|----------------------------------------------|---|-------|------|------|------|-------|--------|
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 10.12 | 69.1 | 21.6 | 8.09 | 128.8 | ±2.2 % |
|           |                                              | Y | 9.76  | 68.4 | 21.0 |      | 132.8 |        |
|           |                                              | Z | 10.08 | 68.9 | 21.5 |      | 123.4 |        |
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)      | X | 10.15 | 69.2 | 21.7 | 8.10 | 130.2 | ±2.2 % |
|           |                                              | Y | 9.77  | 68.5 | 21.0 |      | 134.1 |        |
|           |                                              | Z | 10.10 | 69.0 | 21.5 |      | 124.0 |        |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)      | X | 10.02 | 69.0 | 21.5 | 8.03 | 128.7 | ±2.2 % |
|           |                                              | Y | 9.67  | 68.5 | 21.0 |      | 133.3 |        |
|           |                                              | Z | 10.02 | 68.9 | 21.5 |      | 123.9 |        |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)       | X | 10.46 | 69.6 | 21.7 | 8.06 | 134.0 | ±2.2 % |
|           |                                              | Y | 10.09 | 68.8 | 21.1 |      | 139.7 |        |
|           |                                              | Z | 10.40 | 69.3 | 21.6 |      | 128.7 |        |
| 10225-CAB | UMTS-FDD (HSPA+)                             | X | 7.09  | 67.1 | 19.6 | 5.97 | 131.2 | ±1.4 % |
|           |                                              | Y | 6.98  | 67.2 | 19.4 |      | 138.0 |        |
|           |                                              | Z | 7.06  | 66.8 | 19.4 |      | 127.2 |        |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)        | X | 13.63 | 87.8 | 31.7 | 9.21 | 141.6 | ±3.0 % |
|           |                                              | Y | 7.85  | 75.5 | 26.0 |      | 126.5 |        |
|           |                                              | Z | 13.99 | 87.7 | 31.6 |      | 141.4 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)      | X | 12.86 | 81.4 | 28.9 | 9.24 | 142.1 | ±3.0 % |
|           |                                              | Y | 8.91  | 73.4 | 24.8 |      | 129.9 |        |
|           |                                              | Z | 13.15 | 81.4 | 28.8 |      | 142.0 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)     | X | 11.63 | 77.5 | 26.8 | 9.30 | 118.7 | ±3.0 % |
|           |                                              | Y | 9.62  | 74.3 | 25.2 |      | 138.4 |        |
|           |                                              | Z | 11.96 | 77.7 | 26.9 |      | 119.3 |        |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)    | X | 6.14  | 67.4 | 19.3 | 4.87 | 149.9 | ±0.9 % |
|           |                                              | Y | 5.90  | 66.9 | 18.7 |      | 132.8 |        |
|           |                                              | Z | 6.20  | 67.5 | 19.3 |      | 146.6 |        |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)     | X | 4.45  | 66.9 | 18.9 | 3.96 | 130.1 | ±0.7 % |
|           |                                              | Y | 4.50  | 67.2 | 18.8 |      | 137.9 |        |
|           |                                              | Z | 4.64  | 67.6 | 19.3 |      | 149.2 |        |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate               | X | 3.79  | 67.5 | 19.2 | 3.46 | 145.3 | ±0.7 % |
|           |                                              | Y | 3.74  | 67.5 | 18.9 |      | 128.2 |        |
|           |                                              | Z | 3.78  | 67.3 | 19.1 |      | 139.1 |        |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate               | X | 3.77  | 67.8 | 19.3 | 3.39 | 147.0 | ±0.5 % |
|           |                                              | Y | 3.69  | 67.7 | 18.9 |      | 130.1 |        |
|           |                                              | Z | 3.73  | 67.3 | 19.0 |      | 141.3 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)      | X | 6.52  | 67.9 | 20.1 | 5.81 | 141.4 | ±1.4 % |
|           |                                              | Y | 6.41  | 67.6 | 19.7 |      | 147.4 |        |
|           |                                              | Z | 6.51  | 67.7 | 20.1 |      | 135.4 |        |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)     | X | 7.17  | 68.7 | 20.7 | 6.06 | 147.7 | ±1.4 % |
|           |                                              | Y | 6.69  | 67.2 | 19.6 |      | 128.6 |        |
|           |                                              | Z | 7.12  | 68.4 | 20.5 |      | 142.0 |        |

|           |                                                           |   |      |      |      |      |       |        |
|-----------|-----------------------------------------------------------|---|------|------|------|------|-------|--------|
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 3.04 | 70.0 | 19.6 | 1.71 | 129.8 | ±0.5 % |
|           |                                                           | Y | 3.25 | 71.3 | 19.7 |      | 136.9 |        |
|           |                                                           | Z | 3.09 | 69.9 | 19.5 |      | 148.7 |        |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                | X | 4.73 | 67.3 | 18.6 | 3.76 | 135.7 | ±0.5 % |
|           |                                                           | Y | 4.93 | 69.1 | 19.0 |      | 141.5 |        |
|           |                                                           | Z | 4.73 | 67.1 | 18.4 |      | 132.7 |        |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                | X | 4.67 | 67.5 | 18.6 | 3.77 | 134.0 | ±0.5 % |
|           |                                                           | Y | 4.92 | 69.4 | 19.1 |      | 139.8 |        |
|           |                                                           | Z | 4.65 | 67.1 | 18.5 |      | 130.7 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 8 and 9).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3258

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.53    | 6.53    | 6.53    | 0.40               | 1.60                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.27    | 6.27    | 6.27    | 0.80               | 1.17                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.19    | 5.19    | 5.19    | 0.80               | 1.10                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.04    | 5.04    | 5.04    | 0.68               | 1.27                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.52    | 4.52    | 4.52    | 0.78               | 1.23                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.34    | 4.34    | 4.34    | 0.76               | 1.33                    | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3258

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.15    | 6.15    | 6.15    | 0.61               | 1.32                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.11    | 6.11    | 6.11    | 0.80               | 1.15                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.83    | 4.83    | 4.83    | 0.47               | 1.74                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.61    | 4.61    | 4.61    | 0.55               | 1.59                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.14    | 4.14    | 4.14    | 0.80               | 1.11                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 3.91    | 3.91    | 3.91    | 0.80               | 1.00                    | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


**Frequency Response of E-Field**  
(TEM-Cell:ifi110 EXX, Waveguide: R22)

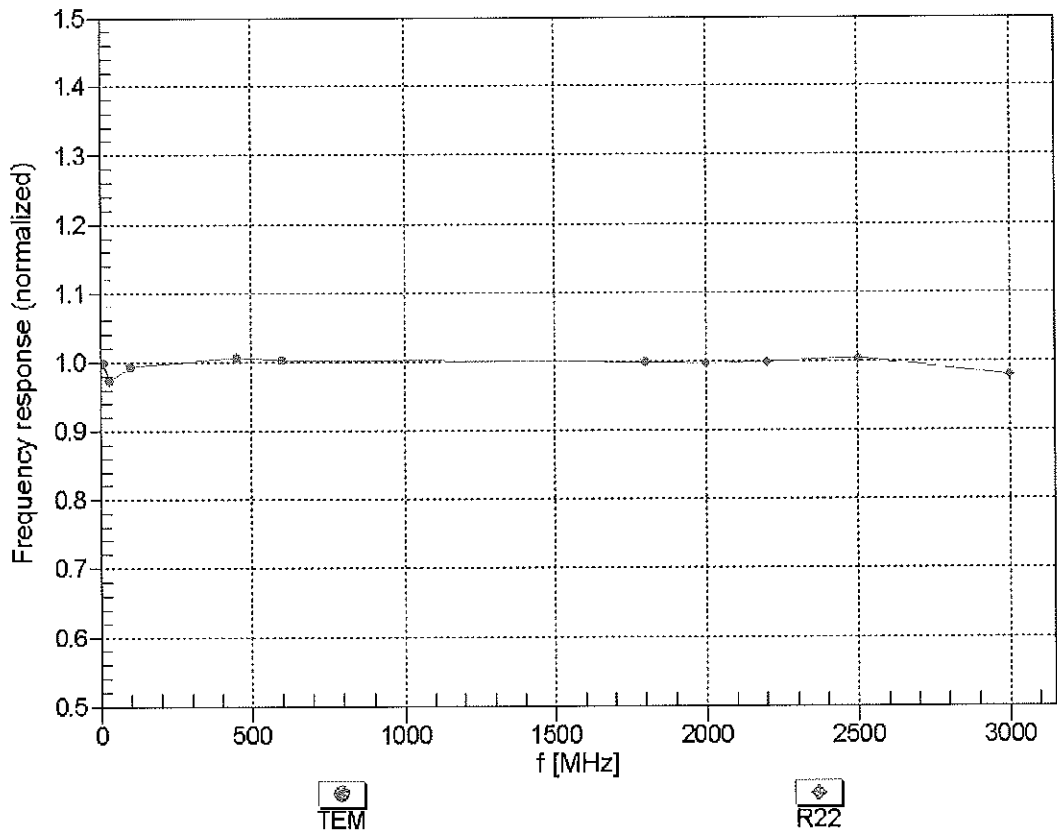



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

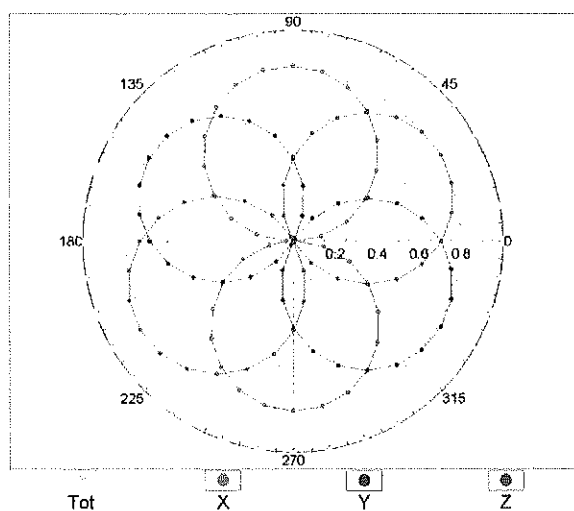


f=1800 MHz,R22

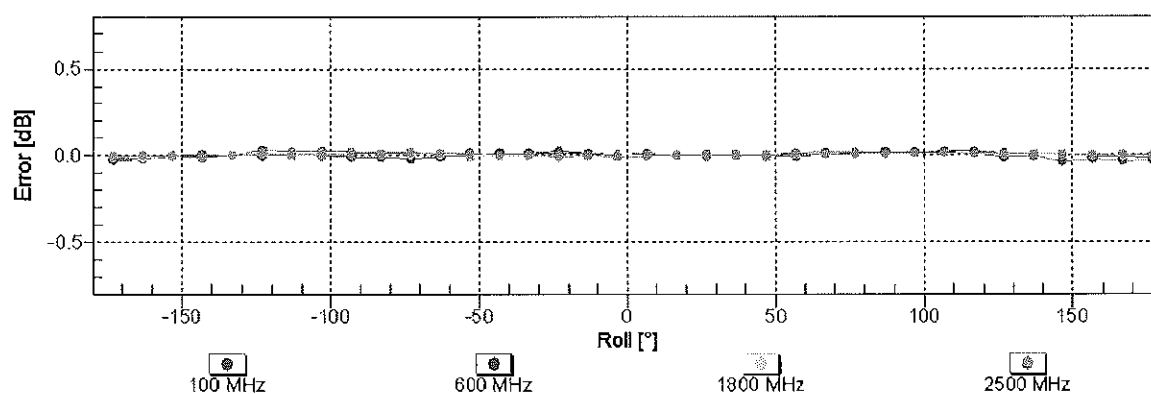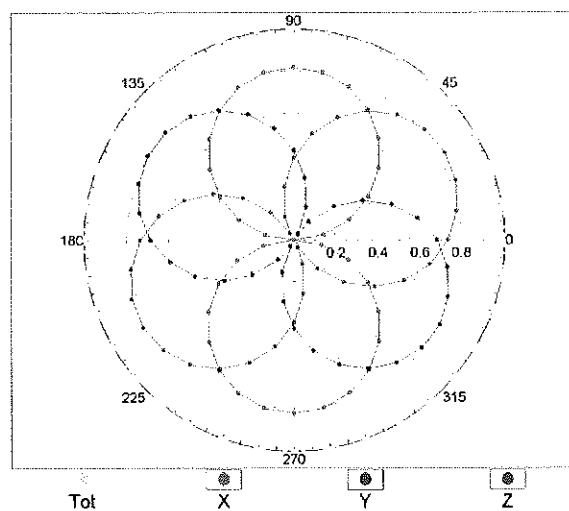

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

# Dynamic Range f(SAR<sub>head</sub>)


(TEM cell , f<sub>eval</sub>= 1900 MHz)

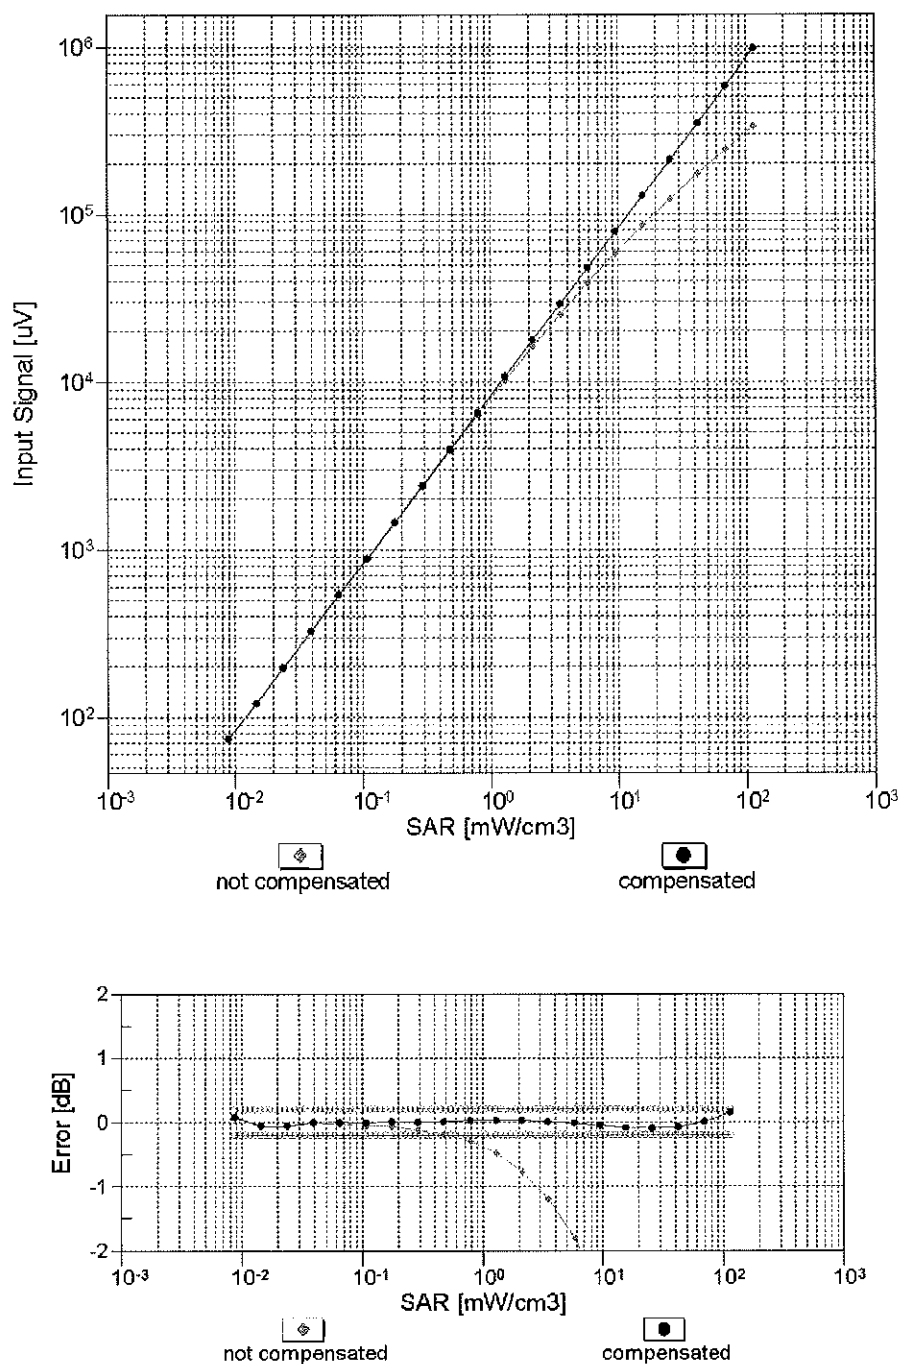

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)





## Conversion Factor Assessment

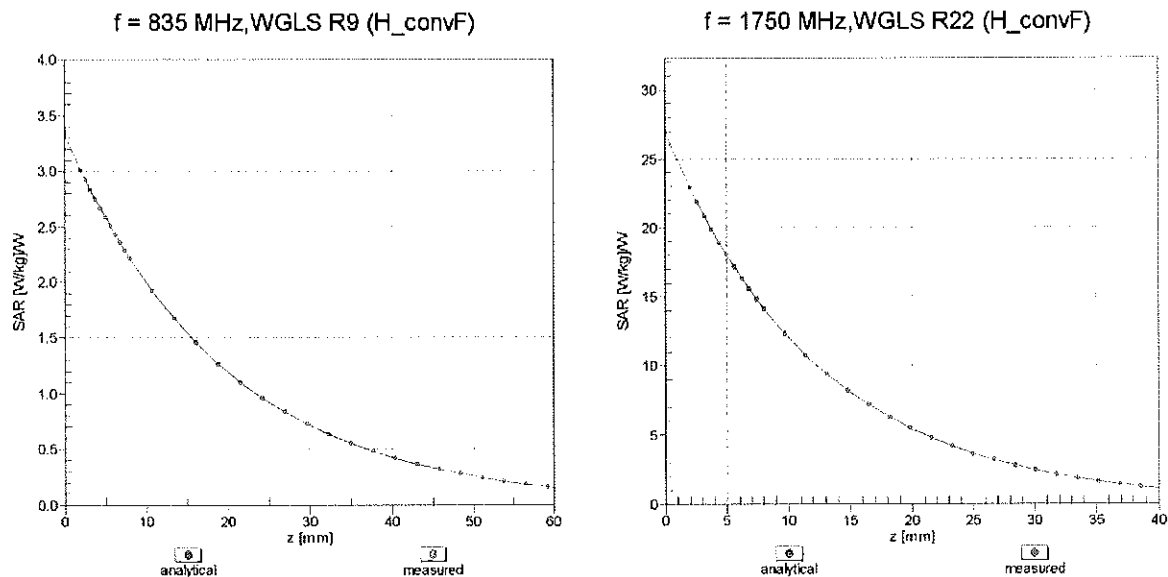

## Deviation from Isotropy in Liquid

Error ( $\phi, \vartheta$ ),  $f = 900 \text{ MHz}$

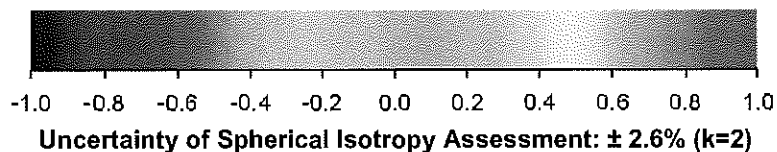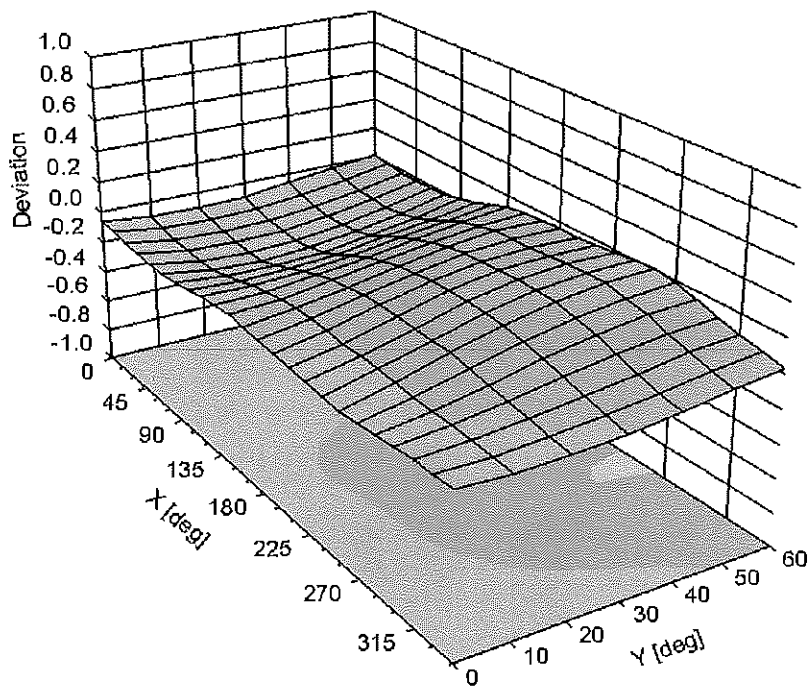

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3258

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -123.1     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3287\_Nov13**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3287**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **November 20, 2013**

CC  
11/20/2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 28-Dec-12 (No. ES3-3013_Dec12)    | Dec-13                 |
| DAE4                       | SN: 660         | 4-Sep-13 (No. DAE4-660_Sep13)     | Sep-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-15 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                                                                                                                 | Name          | Function              | Signature |
|-----------------------------------------------------------------------------------------------------------------|---------------|-----------------------|-----------|
| Calibrated by:                                                                                                  | Leif Klysner  | Laboratory Technician |           |
| Approved by:                                                                                                    | Kalja Pokovic | Technical Manager     |           |
| Issued: November 20, 2013                                                                                       |               |                       |           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |               |                       |           |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3287

Manufactured: June 7, 2010  
Calibrated: November 20, 2013

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

## Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.31     | 1.25     | 1.25     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 102.6    | 102.5    | 100.4    |               |

## Modulation Calibration Parameters

| UID           | Communication System Name                |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C    | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|---------------|------------------------------------------|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0             | CW                                       | X | 0.0     | 0.0                          | 1.0  | 0.00    | 157.3    | $\pm 2.7 \%$              |
|               |                                          | Y | 0.0     | 0.0                          | 1.0  |         | 159.9    |                           |
|               |                                          | Z | 0.0     | 0.0                          | 1.0  |         | 152.5    |                           |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)     | X | 2.23    | 57.9                         | 9.9  | 10.00   | 45.7     | $\pm 1.4 \%$              |
|               |                                          | Y | 2.13    | 57.6                         | 9.8  |         | 46.6     |                           |
|               |                                          | Z | 3.31    | 61.1                         | 11.8 |         | 47.6     |                           |
| 10011-<br>CAA | UMTS-FDD (WCDMA)                         | X | 3.25    | 66.3                         | 17.9 | 2.91    | 124.8    | $\pm 0.5 \%$              |
|               |                                          | Y | 3.16    | 65.7                         | 17.4 |         | 127.4    |                           |
|               |                                          | Z | 3.15    | 65.5                         | 17.4 |         | 122.8    |                           |
| 10012-<br>CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 3.08    | 68.7                         | 18.3 | 1.87    | 127.2    | $\pm 0.7 \%$              |
|               |                                          | Y | 3.03    | 68.2                         | 17.9 |         | 129.4    |                           |
|               |                                          | Z | 2.87    | 67.0                         | 17.3 |         | 126.5    |                           |
| 10021-<br>DAA | GSM-FDD (TDMA, GMSK)                     | X | 15.99   | 90.6                         | 25.0 | 9.39    | 99.9     | $\pm 1.2 \%$              |
|               |                                          | Y | 12.41   | 86.6                         | 23.6 |         | 101.5    |                           |
|               |                                          | Z | 29.18   | 99.9                         | 28.5 |         | 109.2    |                           |
| 10023-<br>DAA | GPRS-FDD (TDMA, GMSK, TN 0)              | X | 25.67   | 98.9                         | 27.8 | 9.57    | 97.9     | $\pm 1.7 \%$              |
|               |                                          | Y | 14.20   | 88.5                         | 24.3 |         | 100.6    |                           |
|               |                                          | Z | 27.68   | 99.8                         | 28.8 |         | 107.7    |                           |
| 10024-<br>DAA | GPRS-FDD (TDMA, GMSK, TN 0-1)            | X | 42.95   | 99.6                         | 24.9 | 6.56    | 124.4    | $\pm 1.4 \%$              |
|               |                                          | Y | 45.27   | 99.9                         | 24.8 |         | 128.8    |                           |
|               |                                          | Z | 42.64   | 99.6                         | 25.5 |         | 135.7    |                           |
| 10027-<br>DAA | GPRS-FDD (TDMA, GMSK, TN 0-1-2)          | X | 27.78   | 91.3                         | 21.1 | 4.80    | 136.0    | $\pm 1.4 \%$              |
|               |                                          | Y | 32.74   | 93.9                         | 21.9 |         | 146.6    |                           |
|               |                                          | Z | 23.93   | 89.5                         | 21.1 |         | 144.8    |                           |
| 10028-<br>DAA | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)        | X | 59.17   | 99.6                         | 22.4 | 3.55    | 142.5    | $\pm 1.2 \%$              |
|               |                                          | Y | 78.76   | 99.7                         | 21.7 |         | 104.9    |                           |
|               |                                          | Z | 38.06   | 94.2                         | 21.4 |         | 148.8    |                           |
| 10032-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)      | X | 93.35   | 99.7                         | 19.5 | 1.16    | 108.1    | $\pm 0.9 \%$              |
|               |                                          | Y | 96.67   | 94.0                         | 16.9 |         | 114.7    |                           |
|               |                                          | Z | 98.17   | 96.2                         | 18.2 |         | 108.9    |                           |
| 10039-<br>CAA | CDMA2000 (1xRTT, RC1)                    | X | 4.84    | 66.7                         | 18.8 | 4.57    | 126.5    | $\pm 0.9 \%$              |
|               |                                          | Y | 4.83    | 66.6                         | 18.6 |         | 134.4    |                           |
|               |                                          | Z | 4.76    | 66.0                         | 18.3 |         | 125.9    |                           |
| 10081-<br>CAA | CDMA2000 (1xRTT, RC3)                    | X | 4.00    | 66.2                         | 18.5 | 3.97    | 121.9    | $\pm 0.7 \%$              |
|               |                                          | Y | 3.91    | 65.5                         | 17.9 |         | 128.9    |                           |
|               |                                          | Z | 3.88    | 65.2                         | 17.8 |         | 120.7    |                           |

|           |                                          |   |       |      |      |      |       |        |
|-----------|------------------------------------------|---|-------|------|------|------|-------|--------|
| 10098-CAA | UMTS-FDD (HSUPA, Subtest 2)              | X | 4.66  | 66.6 | 18.4 | 3.98 | 132.5 | ±0.7 % |
|           |                                          | Y | 4.66  | 66.5 | 18.2 |      | 141.3 |        |
|           |                                          | Z | 4.54  | 65.9 | 17.9 |      | 130.7 |        |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.65  | 68.3 | 20.1 | 5.67 | 139.5 | ±1.4 % |
|           |                                          | Y | 6.69  | 68.3 | 19.9 |      | 148.9 |        |
|           |                                          | Z | 6.60  | 67.9 | 19.8 |      | 137.5 |        |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.52  | 67.8 | 20.0 | 5.80 | 137.3 | ±1.4 % |
|           |                                          | Y | 6.53  | 67.6 | 19.7 |      | 147.5 |        |
|           |                                          | Z | 6.51  | 67.6 | 19.8 |      | 135.3 |        |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)  | X | 6.19  | 67.2 | 19.7 | 5.75 | 134.3 | ±1.2 % |
|           |                                          | Y | 6.24  | 67.3 | 19.6 |      | 142.9 |        |
|           |                                          | Z | 6.23  | 67.1 | 19.6 |      | 132.3 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)  | X | 11.56 | 79.1 | 27.9 | 9.28 | 130.1 | ±3.0 % |
|           |                                          | Y | 11.01 | 76.8 | 26.2 |      | 141.9 |        |
|           |                                          | Z | 12.98 | 81.2 | 28.7 |      | 135.7 |        |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 6.25  | 67.4 | 19.8 | 5.75 | 135.1 | ±1.2 % |
|           |                                          | Y | 6.17  | 66.9 | 19.3 |      | 143.6 |        |
|           |                                          | Z | 6.16  | 66.8 | 19.4 |      | 132.8 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)  | X | 6.66  | 67.8 | 20.0 | 5.82 | 140.3 | ±1.4 % |
|           |                                          | Y | 6.72  | 67.9 | 19.9 |      | 148.8 |        |
|           |                                          | Z | 6.66  | 67.6 | 19.8 |      | 137.4 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 5.05  | 66.7 | 19.5 | 5.73 | 117.8 | ±0.9 % |
|           |                                          | Y | 4.93  | 66.0 | 18.9 |      | 125.0 |        |
|           |                                          | Z | 5.08  | 66.3 | 19.3 |      | 116.3 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 8.47  | 76.8 | 26.9 | 9.21 | 100.3 | ±2.2 % |
|           |                                          | Y | 8.06  | 74.6 | 25.3 |      | 107.5 |        |
|           |                                          | Z | 9.43  | 78.2 | 27.4 |      | 102.5 |        |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 4.98  | 66.3 | 19.3 | 5.72 | 118.2 | ±0.9 % |
|           |                                          | Y | 4.96  | 66.1 | 19.0 |      | 119.9 |        |
|           |                                          | Z | 5.03  | 66.1 | 19.1 |      | 116.1 |        |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)    | X | 5.06  | 66.7 | 19.6 | 5.72 | 118.7 | ±0.9 % |
|           |                                          | Y | 4.97  | 66.2 | 19.1 |      | 120.0 |        |
|           |                                          | Z | 5.03  | 66.1 | 19.1 |      | 116.3 |        |
| 10225-CAA | UMTS-FDD (HSPA+)                         | X | 6.78  | 66.1 | 18.9 | 5.97 | 105.3 | ±1.2 % |
|           |                                          | Y | 6.68  | 65.7 | 18.6 |      | 106.8 |        |
|           |                                          | Z | 7.32  | 67.6 | 19.7 |      | 148.0 |        |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 8.56  | 77.1 | 27.1 | 9.21 | 100.8 | ±1.9 % |
|           |                                          | Y | 8.33  | 75.8 | 26.1 |      | 103.8 |        |
|           |                                          | Z | 9.39  | 78.0 | 27.3 |      | 101.9 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 10.58 | 77.8 | 27.4 | 9.24 | 123.3 | ±2.5 % |
|           |                                          | Y | 10.48 | 76.9 | 26.5 |      | 128.1 |        |
|           |                                          | Z | 11.79 | 79.6 | 28.0 |      | 127.0 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 11.52 | 79.1 | 27.9 | 9.30 | 130.1 | ±2.7 % |
|           |                                          | Y | 11.24 | 77.7 | 26.9 |      | 136.0 |        |
|           |                                          | Z | 12.96 | 81.2 | 28.8 |      | 134.8 |        |

|           |                                                           |   |      |      |      |      |       |        |
|-----------|-----------------------------------------------------------|---|------|------|------|------|-------|--------|
| 10274-CAA | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                 | X | 6.14 | 67.4 | 19.0 | 4.87 | 145.5 | ±1.2 % |
|           |                                                           | Y | 6.19 | 67.4 | 19.0 |      | 149.2 |        |
|           |                                                           | Z | 6.10 | 66.9 | 18.8 |      | 142.3 |        |
| 10275-CAA | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                  | X | 4.41 | 66.4 | 18.3 | 3.96 | 126.4 | ±0.7 % |
|           |                                                           | Y | 4.43 | 66.3 | 18.2 |      | 130.4 |        |
|           |                                                           | Z | 4.36 | 65.9 | 18.0 |      | 123.8 |        |
| 10291-AAA | CDMA2000, RC3, SO55, Full Rate                            | X | 3.57 | 65.9 | 17.9 | 3.46 | 120.0 | ±0.5 % |
|           |                                                           | Y | 3.55 | 65.6 | 17.6 |      | 121.7 |        |
|           |                                                           | Z | 3.50 | 65.1 | 17.5 |      | 117.2 |        |
| 10292-AAA | CDMA2000, RC3, SO32, Full Rate                            | X | 3.55 | 66.1 | 18.0 | 3.39 | 121.3 | ±0.5 % |
|           |                                                           | Y | 3.54 | 66.0 | 17.8 |      | 123.6 |        |
|           |                                                           | Z | 3.45 | 65.2 | 17.4 |      | 118.9 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                   | X | 6.53 | 67.8 | 20.0 | 5.81 | 136.2 | ±1.2 % |
|           |                                                           | Y | 6.48 | 67.5 | 19.6 |      | 139.3 |        |
|           |                                                           | Z | 6.52 | 67.6 | 19.8 |      | 134.1 |        |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                  | X | 7.12 | 68.4 | 20.4 | 6.06 | 141.7 | ±1.4 % |
|           |                                                           | Y | 7.11 | 68.3 | 20.1 |      | 145.3 |        |
|           |                                                           | Z | 7.14 | 68.4 | 20.3 |      | 139.8 |        |
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 2.79 | 67.6 | 18.0 | 1.71 | 125.5 | ±0.5 % |
|           |                                                           | Y | 2.71 | 66.9 | 17.3 |      | 128.2 |        |
|           |                                                           | Z | 2.64 | 66.2 | 17.0 |      | 123.5 |        |
| 10403-AAA | CDMA2000 (1xEV-DO, Rev. 0)                                | X | 4.78 | 67.5 | 18.3 | 3.76 | 130.6 | ±0.5 % |
|           |                                                           | Y | 4.77 | 67.5 | 18.2 |      | 133.8 |        |
|           |                                                           | Z | 4.65 | 66.5 | 17.8 |      | 130.0 |        |
| 10404-AAA | CDMA2000 (1xEV-DO, Rev. A)                                | X | 4.83 | 68.2 | 18.6 | 3.77 | 129.2 | ±0.7 % |
|           |                                                           | Y | 4.68 | 67.4 | 18.0 |      | 131.9 |        |
|           |                                                           | Z | 4.52 | 66.3 | 17.7 |      | 128.7 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 7 and 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.52    | 6.52    | 6.52    | 0.47               | 1.46                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.30    | 6.30    | 6.30    | 0.40               | 1.59                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.27    | 5.27    | 5.27    | 0.63               | 1.34                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.08    | 5.08    | 5.08    | 0.62               | 1.37                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.43    | 4.43    | 4.43    | 0.79               | 1.28                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.29    | 4.29    | 4.29    | 0.77               | 1.38                    | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.09    | 6.09    | 6.09    | 0.55               | 1.37                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.04    | 6.04    | 6.04    | 0.55               | 1.39                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.93    | 4.93    | 4.93    | 0.39               | 1.73                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.67    | 4.67    | 4.67    | 0.38               | 1.75                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.17    | 4.17    | 4.17    | 0.60               | 1.20                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 4.00    | 4.00    | 4.00    | 0.60               | 1.10                    | ± 12.0 %    |


<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

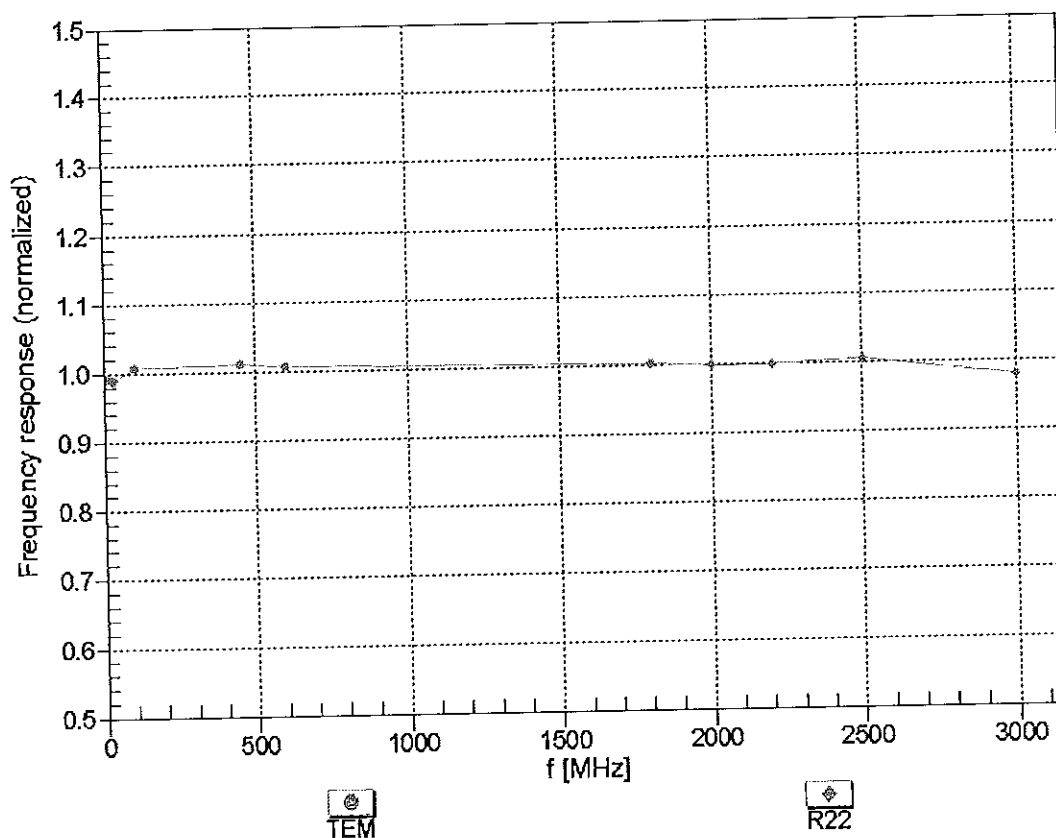



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM


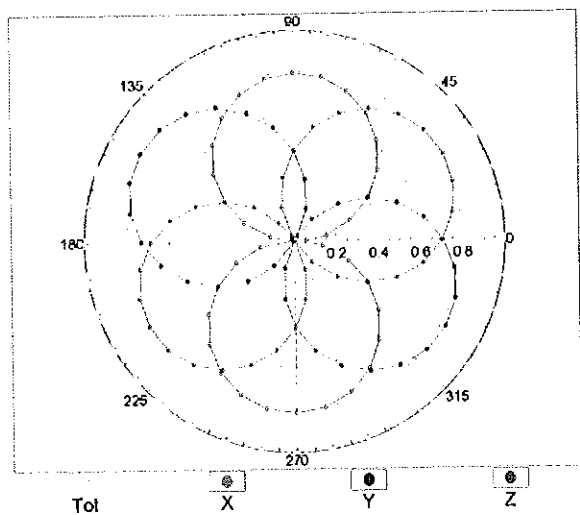


f=1800 MHz,R22

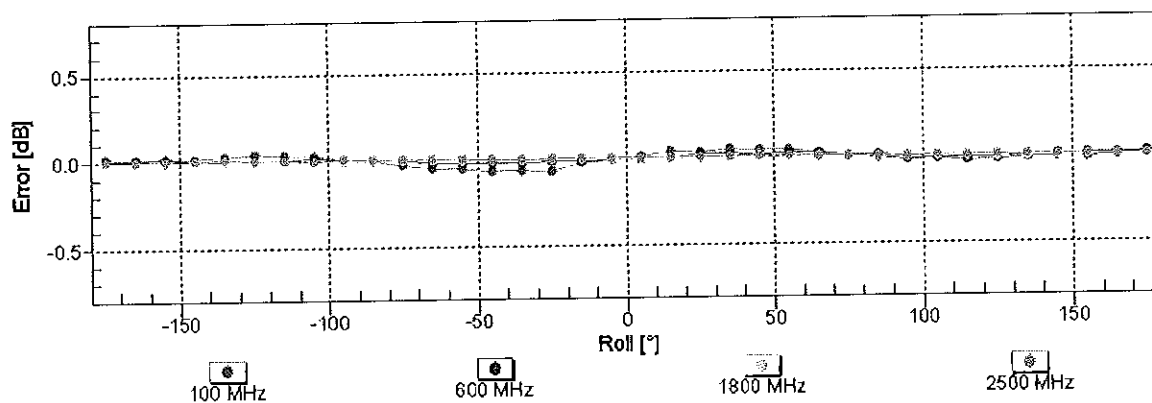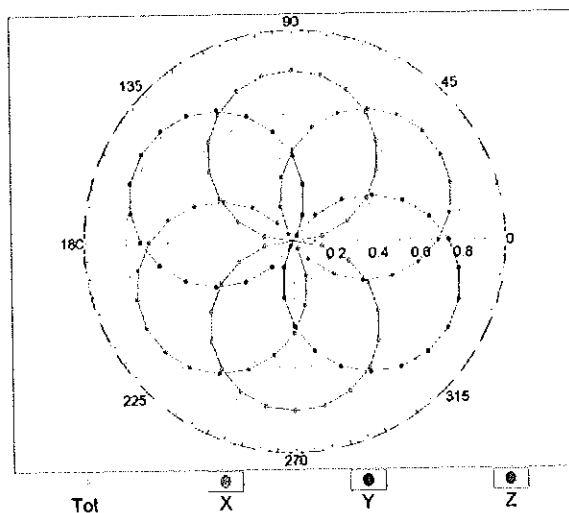


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

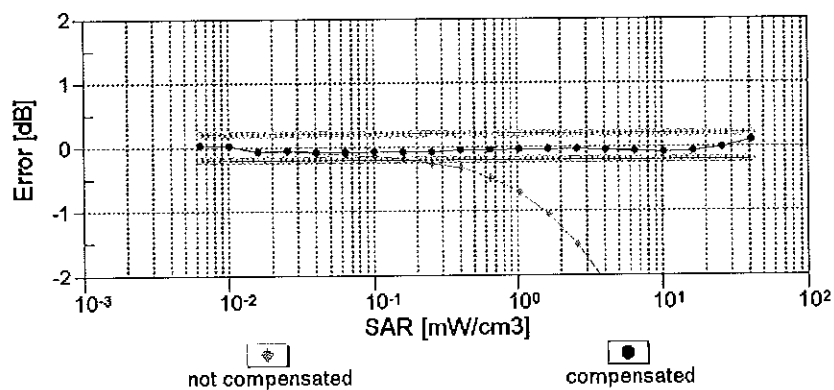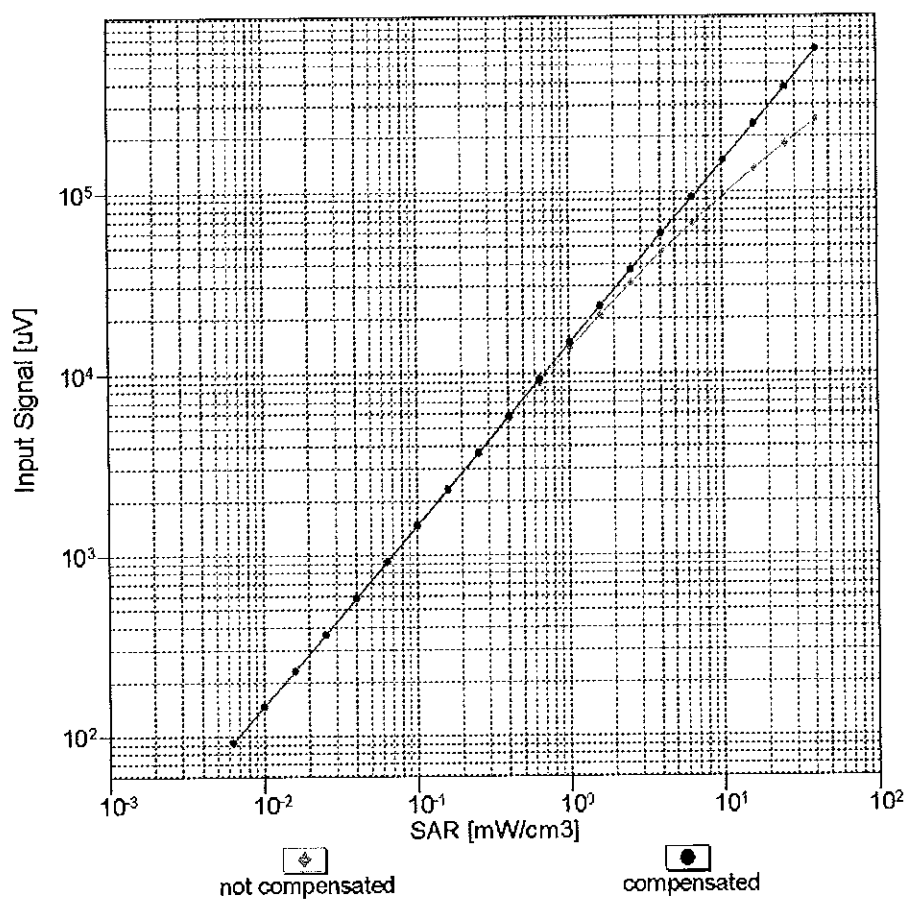



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

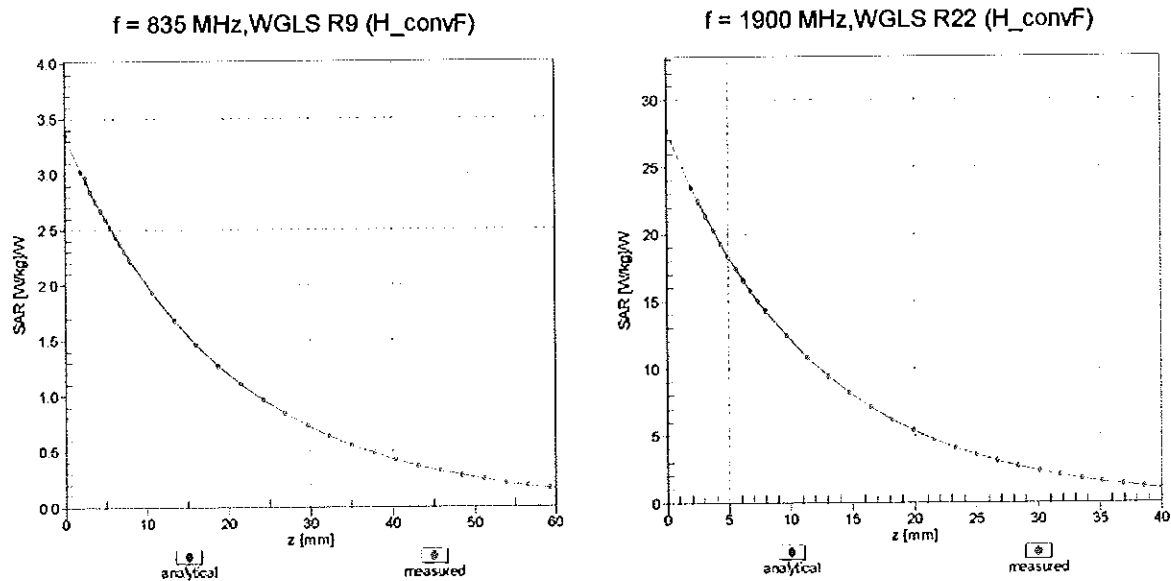

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

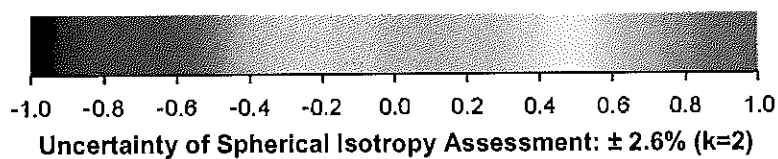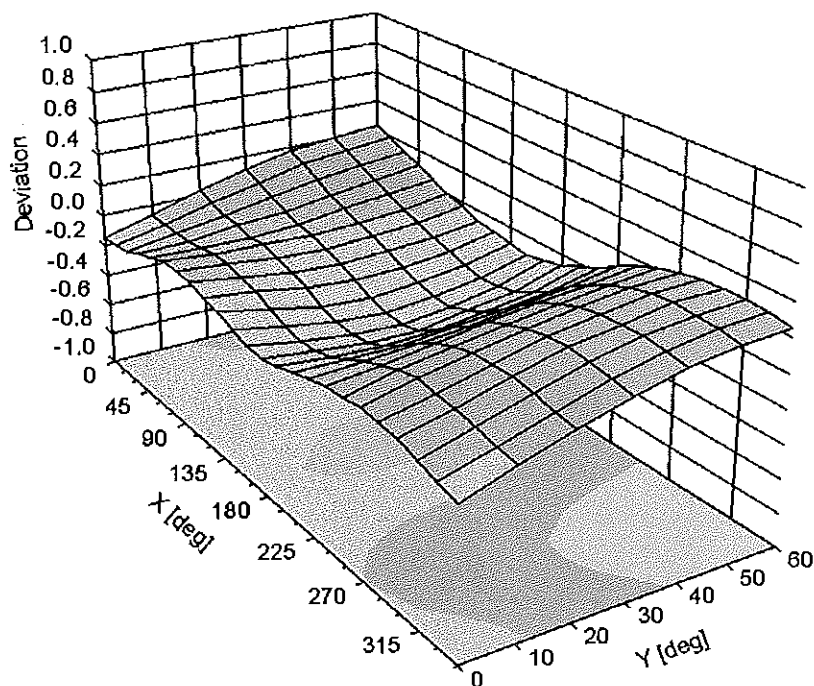

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287****Other Probe Parameters**

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -15        |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |

## APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity  $\epsilon$  can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where  $Y$  is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

**Table D-I**  
**Composition of the Tissue Equivalent Matter**

| Frequency (MHz)           | 835   | 835   | 2450       | 2450 |
|---------------------------|-------|-------|------------|------|
| Tissue                    | Head  | Body  | Head       | Body |
| Ingredients (% by weight) |       |       |            |      |
| Bactericide               | 0.1   | 0.1   | See page 2 |      |
| DGBE                      |       |       |            | 26.7 |
| HEC                       | 1     | 1     |            |      |
| NaCl                      | 1.45  | 0.94  |            | 0.1  |
| Sucrose                   | 57    | 44.9  |            |      |
| Water                     | 40.45 | 53.06 |            | 73.2 |

|                                           |                                                                                                                                   |                              |                                                                                       |                                        |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                        |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/20/14 - 08/26/14 | <b>DUT Type:</b><br>Portable Wrist Device                                                                                         | APPENDIX D:<br>Page 1 of 2   |                                                                                       |                                        |



## 2 Composition / Information on ingredients

The Item is composed of the following ingredients:

|                                               |                                                                                                                                                                                           |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| H <sub>2</sub> O                              | Water, 52 – 75%                                                                                                                                                                           |
| C <sub>8</sub> H <sub>18</sub> O <sub>3</sub> | Diethylene glycol monobutyl ether (DGBE), 25 – 48%<br>(CAS-No. 112-34-5, EC-No. 203-961-6, EC-index-No. 603-096-00-8)<br>Relevant for safety; Refer to the respective Safety Data Sheet*. |
| NaCl                                          | Sodium Chloride, <1.0%                                                                                                                                                                    |

Figure D-1

### Composition of 2.4 GHz Head Tissue Equivalent Matter

**Note:** 2.4 GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

#### Measurement Certificate / Material Test

|              |                                           |
|--------------|-------------------------------------------|
| Item Name    | Head Tissue Simulating Liquid (HSL2450V2) |
| Product No.  | SL AAH 245 BA (Charge: 130212-2)          |
| Manufacturer | SPEAG                                     |

#### Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

#### Setup Validation

Validation results were within  $\pm 2.5\%$  towards the target values of Methanol.

#### Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

#### Test Condition

|                 |                                                             |
|-----------------|-------------------------------------------------------------|
| Ambient         | Environment temperatur ( $22 \pm 3$ )°C and humidity < 70%. |
| TSL Temperature | 23°C                                                        |
| Test Date       | 13-Feb-13                                                   |
| Operator        | DI                                                          |

#### Additional Information

|                   |                         |
|-------------------|-------------------------|
| TSL Density       | 0.988 g/cm <sup>3</sup> |
| TSL Heat-capacity | 3.680 kJ/(kg*K)         |

| f (MHz) | Measured |       |       | Target |       |           | Diff. to Target [%] |  |
|---------|----------|-------|-------|--------|-------|-----------|---------------------|--|
|         | HP-e*    | HP-e* | sigma | eps    | sigma | delta-eps | delta-sigma         |  |
| 1900    | 40.4     | 11.94 | 1.26  | 40.0   | 1.40  | 1.0       | -9.9                |  |
| 1925    | 40.3     | 12.02 | 1.29  | 40.0   | 1.40  | 0.7       | -8.0                |  |
| 1950    | 40.2     | 12.11 | 1.31  | 40.0   | 1.40  | 0.5       | -6.2                |  |
| 1975    | 40.1     | 12.20 | 1.34  | 40.0   | 1.40  | 0.2       | -4.2                |  |
| 2000    | 40.0     | 12.29 | 1.37  | 40.0   | 1.40  | -0.1      | -2.3                |  |
| 2025    | 39.9     | 12.39 | 1.40  | 40.0   | 1.42  | -0.2      | -1.9                |  |
| 2050    | 39.8     | 12.49 | 1.42  | 39.9   | 1.44  | -0.4      | -1.4                |  |
| 2075    | 39.6     | 12.57 | 1.45  | 39.9   | 1.47  | -0.6      | -1.1                |  |
| 2100    | 39.5     | 12.65 | 1.48  | 39.8   | 1.49  | -0.7      | -0.7                |  |
| 2125    | 39.4     | 12.74 | 1.51  | 39.8   | 1.51  | -0.9      | -0.4                |  |
| 2150    | 39.3     | 12.82 | 1.53  | 39.7   | 1.53  | -1.0      | 0.0                 |  |
| 2175    | 39.2     | 12.89 | 1.56  | 39.7   | 1.56  | -1.2      | 0.3                 |  |
| 2200    | 39.1     | 12.97 | 1.59  | 39.6   | 1.58  | -1.3      | 0.6                 |  |
| 2225    | 39.0     | 13.04 | 1.61  | 39.6   | 1.60  | -1.5      | 0.9                 |  |
| 2250    | 38.9     | 13.11 | 1.64  | 39.6   | 1.62  | -1.7      | 1.2                 |  |
| 2275    | 38.8     | 13.20 | 1.67  | 39.5   | 1.64  | -1.8      | 1.6                 |  |
| 2300    | 38.7     | 13.28 | 1.70  | 39.5   | 1.67  | -2.0      | 2.0                 |  |
| 2325    | 38.6     | 13.35 | 1.73  | 39.4   | 1.69  | -2.1      | 2.3                 |  |
| 2350    | 38.5     | 13.42 | 1.75  | 39.4   | 1.71  | -2.3      | 2.6                 |  |
| 2375    | 38.4     | 13.50 | 1.78  | 39.3   | 1.73  | -2.4      | 2.9                 |  |
| 2400    | 38.3     | 13.58 | 1.81  | 39.3   | 1.76  | -2.6      | 3.3                 |  |
| 2425    | 38.2     | 13.65 | 1.84  | 39.2   | 1.78  | -2.7      | 3.6                 |  |
| 2450    | 38.1     | 13.73 | 1.87  | 39.2   | 1.80  | -2.9      | 4.0                 |  |
| 2475    | 38.0     | 13.79 | 1.90  | 39.2   | 1.83  | -3.1      | 3.9                 |  |
| 2500    | 37.9     | 13.85 | 1.93  | 39.1   | 1.85  | -3.3      | 3.9                 |  |
| 2525    | 37.8     | 13.94 | 1.96  | 39.1   | 1.88  | -3.4      | 4.0                 |  |
| 2550    | 37.7     | 14.02 | 1.99  | 39.1   | 1.91  | -3.6      | 4.2                 |  |
| 2575    | 37.6     | 14.09 | 2.02  | 39.0   | 1.94  | -3.8      | 4.3                 |  |
| 2600    | 37.5     | 14.17 | 2.05  | 39.0   | 1.96  | -4.0      | 4.6                 |  |
| 2625    | 37.4     | 14.23 | 2.08  | 39.0   | 1.99  | -4.2      | 4.4                 |  |
| 2650    | 37.3     | 14.29 | 2.11  | 38.9   | 2.02  | -4.3      | 4.4                 |  |
| 2675    | 37.1     | 14.36 | 2.14  | 38.9   | 2.06  | -4.5      | 4.5                 |  |
| 2700    | 37.0     | 14.43 | 2.17  | 38.9   | 2.07  | -4.8      | 4.6                 |  |

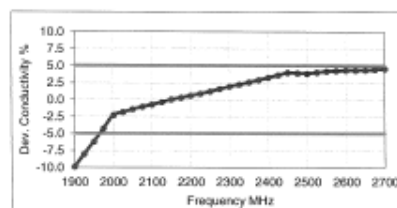
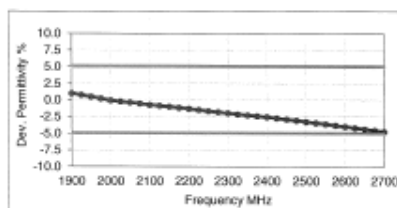


Figure D-2

### 2.4 GHz Head Tissue Equivalent Matter

|                                    |                                                                                     |                       |                                                                                       |                                 |
|------------------------------------|-------------------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMR750B                 |  | SAR EVALUATION REPORT |  | Reviewed by:<br>Quality Manager |
| Test Dates:<br>08/20/14 - 08/26/14 | DUT Type:<br>Portable Wrist Device                                                  |                       |                                                                                       | APPENDIX D:<br>Page 2 of 2      |

## APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB 865664 D02v01, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 v01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

**Table E-I**  
**SAR System Validation Summary**

| SAR SYSTEM # | FREQ. [MHz] | DATE      | PROBE SN | PROBE TYPE | PROBE CAL. POINT |      | COND.        | PERM.            | CW VALIDATION |                 |                | MOD. VALIDATION |             |      |
|--------------|-------------|-----------|----------|------------|------------------|------|--------------|------------------|---------------|-----------------|----------------|-----------------|-------------|------|
|              |             |           |          |            |                  |      | ( $\sigma$ ) | ( $\epsilon_r$ ) | SENSI-TIVITY  | PROBE LINEARITY | PROBE ISOTROPY | MOD. TYPE       | DUTY FACTOR | PAR  |
| K            | 835         | 6/23/2014 | 3287     | ES3DV3     | 835              | Head | 0.906        | 40.24            | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| G            | 2450        | 6/17/2014 | 3258     | ES3DV3     | 2450             | Head | 1.743        | 39.94            | PASS          | PASS            | PASS           | OFDM/TDD        | N/A         | PASS |

**Table E-II**  
**SAR System Validation Summary - Extremity SAR Considerations**

| SAR SYSTEM # | FREQ. [MHz] | DATE      | PROBE SN | PROBE TYPE | PROBE CAL. POINT |      | COND.        | PERM.            | CW VALIDATION |                 |                | MOD. VALIDATION |             |      |
|--------------|-------------|-----------|----------|------------|------------------|------|--------------|------------------|---------------|-----------------|----------------|-----------------|-------------|------|
|              |             |           |          |            |                  |      | ( $\sigma$ ) | ( $\epsilon_r$ ) | SENSI-TIVITY  | PROBE LINEARITY | PROBE ISOTROPY | MOD. TYPE       | DUTY FACTOR | PAR  |
| D            | 835         | 8/11/2014 | 3263     | ES3DV3     | 835              | Body | 1.000        | 53.26            | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| G            | 2450        | 6/17/2014 | 3258     | ES3DV3     | 2450             | Body | 2.024        | 51.13            | PASS          | PASS            | PASS           | OFDM/TDD        | N/A         | PASS |

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.

|                                           |                                                                                                                                   |                              |                                                                                       |                                        |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMR750B                        |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/20/14 - 08/26/14 | <b>DUT Type:</b><br>Portable Wrist Device                                                                                         |                              |                                                                                       | <b>APPENDIX E:</b><br>Page 1 of 1      |