



TEST REPORT

KCTL KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR20-SRF0140-A Page (1) of (20)				
1. Client ◦ Name : Samsung Electronics Co., Ltd. ◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea ◦ Date of Receipt : 2020-04-03 2. Use of Report : Certification 3. Name of Product and Model : Smart Wearable / SM-R850 4. Manufacturer and Country of Origin : Samsung Electronics Co., Ltd. / Vietnam 5. FCC ID : A3LSMR850 6. IC Certificate No. : 649E-SMR850 7. Date of Test : 2020-04-16 to 2020-05-20 8. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address: Address of testing location) 9. Test method used : FCC Part 15 subpart C, 15.247 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019 10. Test Results : Refer to the test result in the test report <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="width: 15%; text-align: center; vertical-align: middle;">Affirmation</td> <td style="width: 45%; padding: 5px;"> Tested by Name : Kwonse Kim (Signature) </td> <td style="width: 40%; padding: 5px;"> Technical Manager Name : Seungyong Kim (Signature) </td> </tr> </table> 2020-05-28 KCTL Inc. As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.			Affirmation	Tested by Name : Kwonse Kim (Signature)	Technical Manager Name : Seungyong Kim (Signature)
Affirmation	Tested by Name : Kwonse Kim (Signature)	Technical Manager Name : Seungyong Kim (Signature)			

REPORT REVISION HISTORY

Date	Revision	Page No
2020-05-27	Originally issued	-
2020-05-28	Updated	5

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR20-SRF0140 is superseded by the report No. KR20-SRF0140-A.

General remarks for test reports

Nothing significant to report.



CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Accessory information	5
2.2.	Model Information	5
3.	Introduction	5
3.1	Difference	5
3.2	Spot check verification data (Band-edge & Spurious emission).....	6
3.3	Reference Detail	7
4.	Test results	8
5.	Measurement equipment	20



1. General information

Client : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Manufacturer : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 Industry Canada Registration No. : 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : Smart Wearable
 Model : SM-R850
 Derivative model : SM-R850X, SM-R855X
 Frequency range : Bluetooth(BDR/EDR/BLE)_2 402 MHz ~ 2 480 MHz
 WIFI(802.11b/g/n20)_2 412 MHz ~ 2 472 MHz
 Modulation technique : Bluetooth(BDR/EDR)_ GFSK, $\pi/4$ DQPSK, 8DPSK
 Bluetooth(BLE)_ GFSK
 WIFI(802.11b/g/n20)_DSSS, OFDM
 Number of channels : Bluetooth(BDR/EDR)_79 ch
 Bluetooth(BLE)_40 ch
 WIFI(802.11b/g/n20)_13 ch
 Power source : DC 3.85 V
 Antenna specification : WIFI/Bluetooth(BDR/EDR/BLE)_LDS Antenna
 Antenna gain : WIFI/Bluetooth(BDR/EDR/BLE) : -6.34 dBi
 Software version : R850.001, R850X.001
 Hardware version : REV1.0
 Test device serial No. : Conducted(R3AN301WXGX)
 Radiated(R3AN301WLMF, R3AN301WGZD, R3AN301WBVM)
 Operation temperature : -30 °C ~ 50 °C

2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source	FCC ID & IC
Wireless charger	Samsung Electronics Co., Ltd.	EP-OR825	-	DC 5.0 V, 1.0 A	A3LEPOR825 / 649E-EPOR825

2.2. Model Information

The difference between basic model and derivative models is:

Hardware is identical with the basic model and software is as follows.

- a. For the model SM-R850:
 - Only LDU App is not added.
- b. For the model SM-R850X, SM-R855X:
 - All application of features are same with basic model.
 - Only LDU App is added.
 - These models are not filing for ISED filing.

3. Introduction

This report referenced from the FCC ID : A3LSMR855 and IC : 649E-SMR855.

Based on their similarity, the FCC Part 15C and RSS-247 (equipment class : DTS, DSS) reuse the original model's result and do spot-check, following the FCC KDB 484596 D01 v01.

And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

3.1 Difference

The FCC ID: A3LSMR850 & IC: 649E-SMR850 shares the same enclosure and circuit board as FCC ID: A3LSMR855 & IC: 649E-SMR855. The WIFI/BT/BLE antenna and surrounding circuitry and layout are identical between these two units. The only difference between the FCC ID: A3LSMR855 & IC: 649E-SMR855 and FCC ID: A3LSMR850 & IC: 649E-SMR850 is to remove the WCDMA/LTE transceiver, MMPA, L-FEMiD and E-SIM from FCC ID: A3LSMR855 & IC: 649E-SMR855.

As for all bands, they have been verified and the parent model test results under FCC ID : A3LSMR855 & IC: 649E-SMR855 shall remain representative of FCC ID : A3LSMR850 & IC: 649E-SMR850.

3.2 Spot check verification data (Band-edge & Spurious emission)

Test band	Test item	Test mode	Channel	Measured frequency (MHz)	SM-R855U (dBμV)		SM-R850 (dBμV)		Deviation (dB)	
					Avg.	Peak	Avg.	Peak	Avg.	Peak
2.4G WIFI	Band edge	802.11b	11	2 483.5 ~ 2 500	-	50.47	-	52.42	-	-1.95
	RSE		1	4 824	-	47.94	-	45.16	-	2.78
	Band edge	802.11g	1	2 310 ~ 2 390	51.77	62.98	51.28	65.09	0.49	-2.11
	RSE		1	4 824	-	42.45	-	41.92	-	0.53
	Band edge	802.11n HT20	1	2 310 ~ 2 390	51.98	61.43	49.13	59.55	2.85	1.88
	RSE		1	4 824	-	42.98	-	42.74	-	0.25
BT	Band edge	DH5	0	2 310 ~ 2 390	-	43.76	-	43.24	-	0.52
	RSE		78	4 960	-	44.53	-	47.30	-	-2.77
	Band edge	3DH5	78	2 483.5 ~ 2 500	-	44.68	-	43.18	-	1.50
	RSE		78	7 440	-	45.72	-	46.23	-	-0.51
BLE	Band edge	1Mbps Packet 37	39	2 483.5 ~ 2 500	-	43.56	-	43.65	-	-0.09
	RSE		39	7 440	-	44.73	-	44.75	-	-0.02

Notes:

- For FCC ID: A3LSMR850 & IC: 649E-SMR850 has been verified the performance as for WIFI, BT, BLE identical with the FCC ID: A3LSMR855 & IC: 649E-SMR855.
- Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC technical limits.
- The test procedure(s) in this report were performed in accordance as following.
 - ♦ KDB 484596 D01 v01

3.3 Reference Detail

Reference application that contains the reused reference data in the individual test reports.

Equipment Class	Reference FCC ID & IC	Application Type	Reference Test report Number	Exhibit Type	Variant Test Report Number	Date Reused
DTS	A3LSMR855, 649E-SMR855	Original	KP20-SRF0133(WIFI)	Test report	KP20-SRF0140	All
DTS	A3LSMR855, 649E-SMR855	Original	KP20-SRF0135(BLE)	Test report	KP20-SRF0140	All
DSS	A3LSMR855, 649E-SMR855	Original	KP20-SRF0134(BT)	Test report	KP20-SRF0140	All



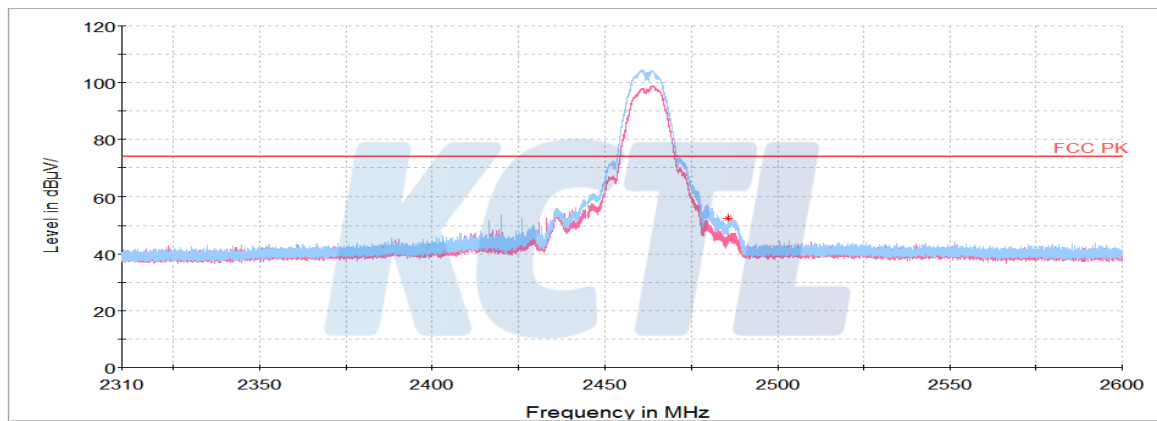
4. Test results

Test results (2.4G WIFI) 802.11b / Band-edge

11 Channel

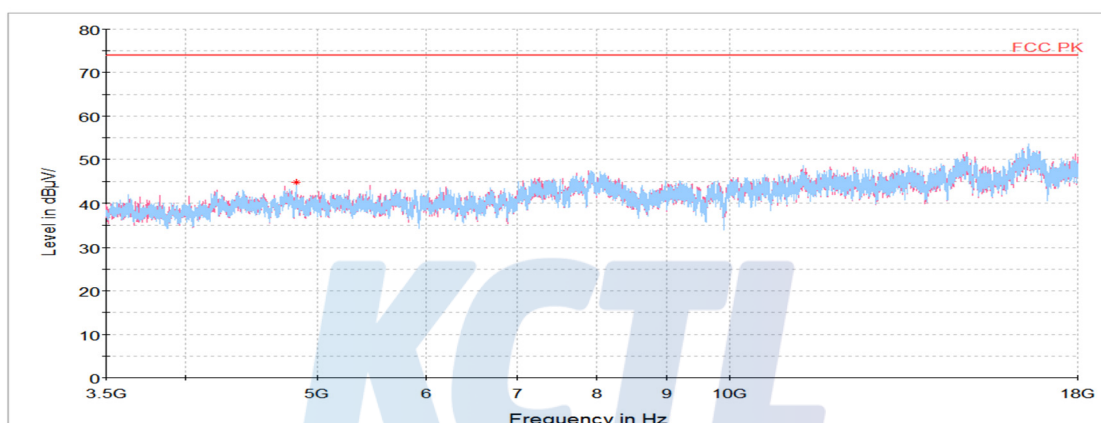
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 486.65 ¹⁾	H	49.57	32.07	-29.22	-	52.42	74.00	21.58
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge



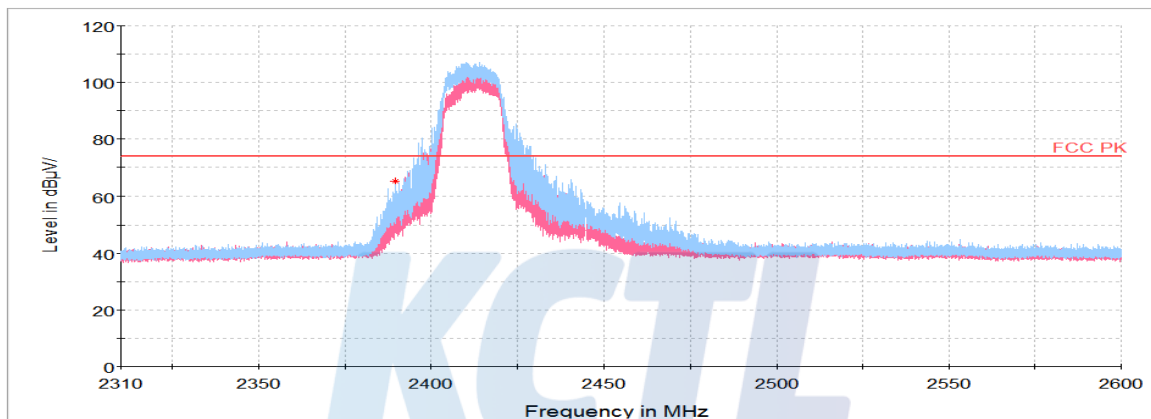
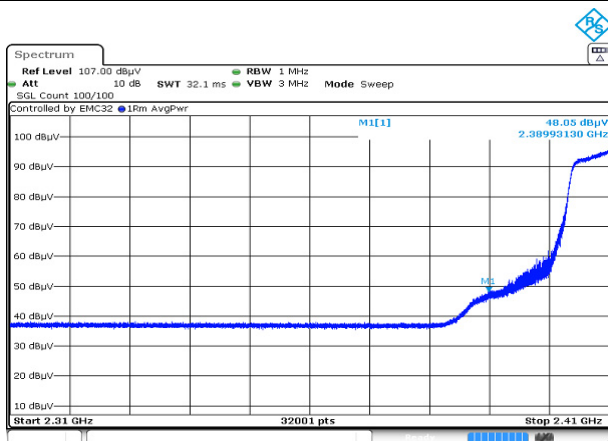
802.11b / Harmonic**1 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
4 821.31 ¹⁾	H	64.73	33.93	-53.50	-	45.16	74.00	28.84
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

802.11g / Band-edge**1 Channel**

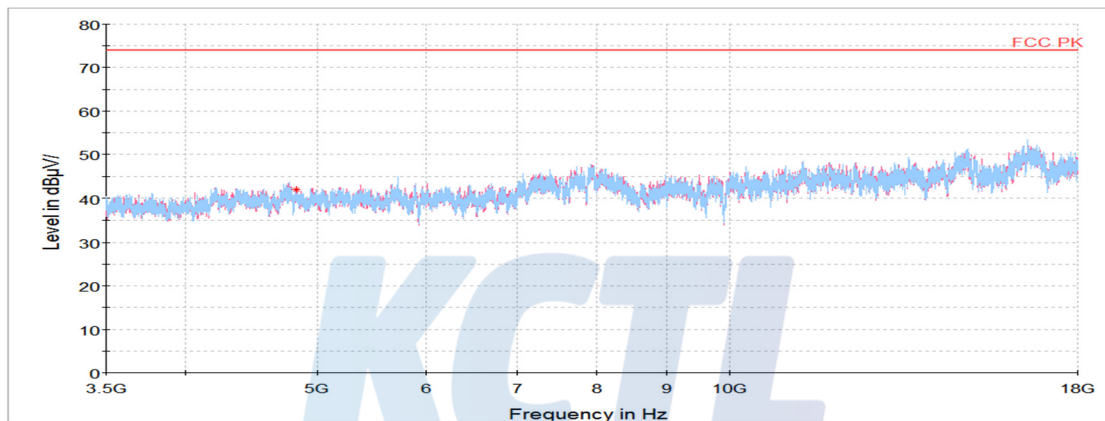
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 389.93 ¹⁾	H	36.24	31.88	-3.03	-	65.09	74.00	8.91
Average Data								
2 389.93 ¹⁾	H	48.05	31.88	-29.04	0.39	51.28	54.00	2.72

Horizontal/Vertical for Band-edge**Average data**

Blank

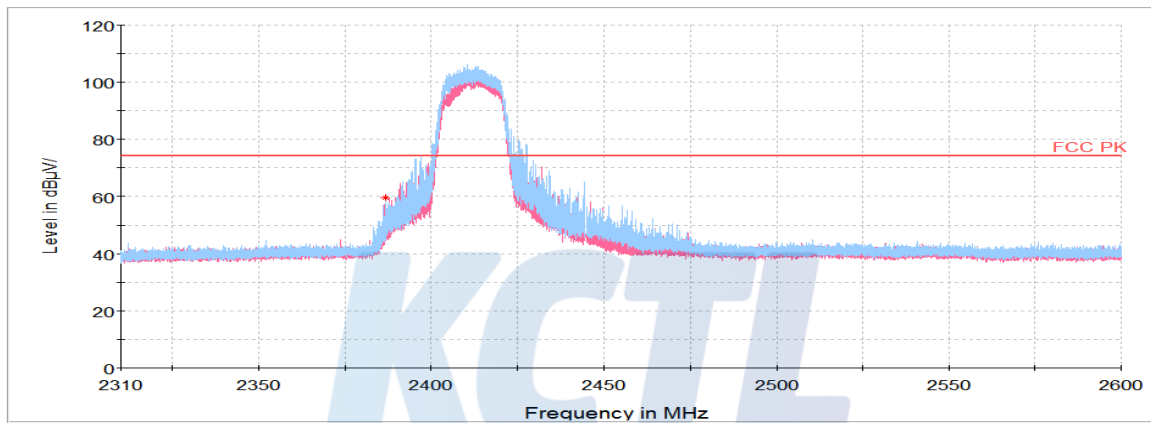
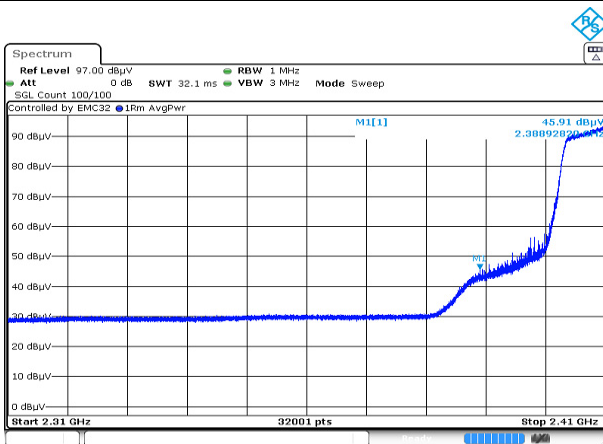
802.11g / Harmonic**1 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
4 822.67 ¹⁾	V	61.53	33.93	-53.54	-	41.92	74.00	32.08
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

802.11n HT20 / Band-edge**1 Channel**

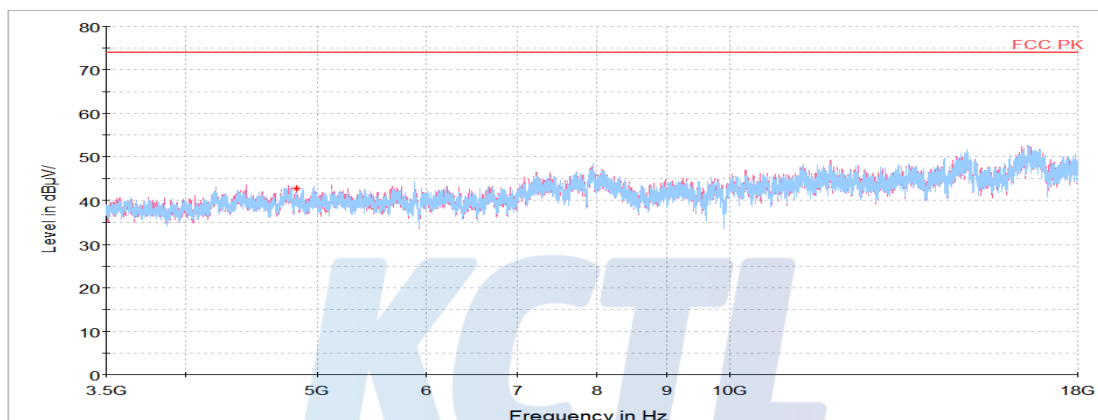
Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 388.93 ¹⁾	H	56.71	31.88	-29.04	-	59.55	74.00	14.45
Average Data								
2 388.93 ¹⁾	H	45.91	31.88	-29.04	0.38	49.13	54.00	4.87

Horizontal/Vertical for Band-edge**Average data**

Blank

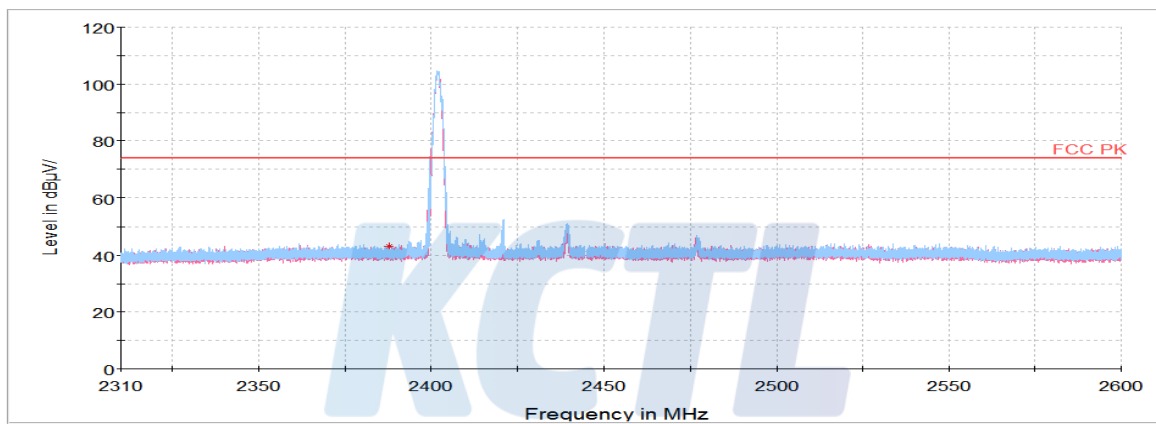
802.11n HT20 / Harmonic**1 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
4 825.84 ¹⁾	V	62.44	33.93	-53.63	-	42.74	74.00	31.26
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

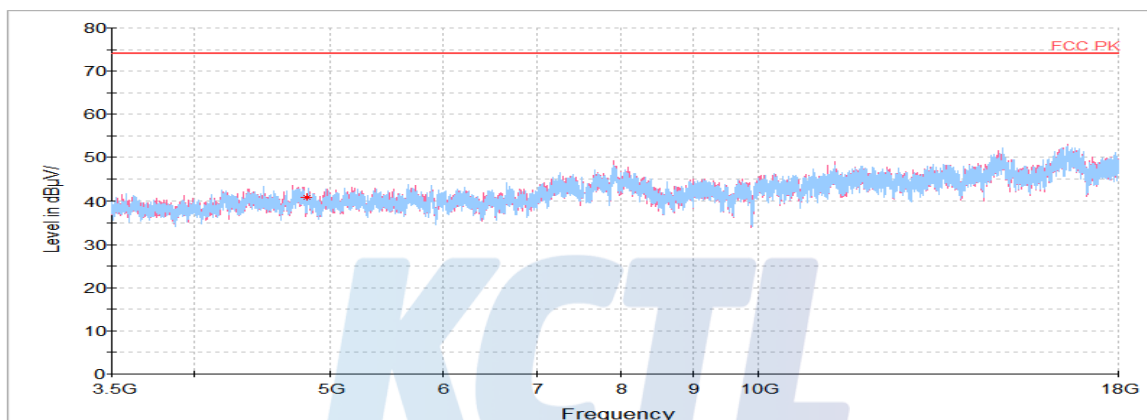
Test results (Bluetooth)
GFSK / Band-edge**0 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 387.81 ¹⁾	H	14.38	31.88	-3.02	-	43.24	74.00	30.76
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

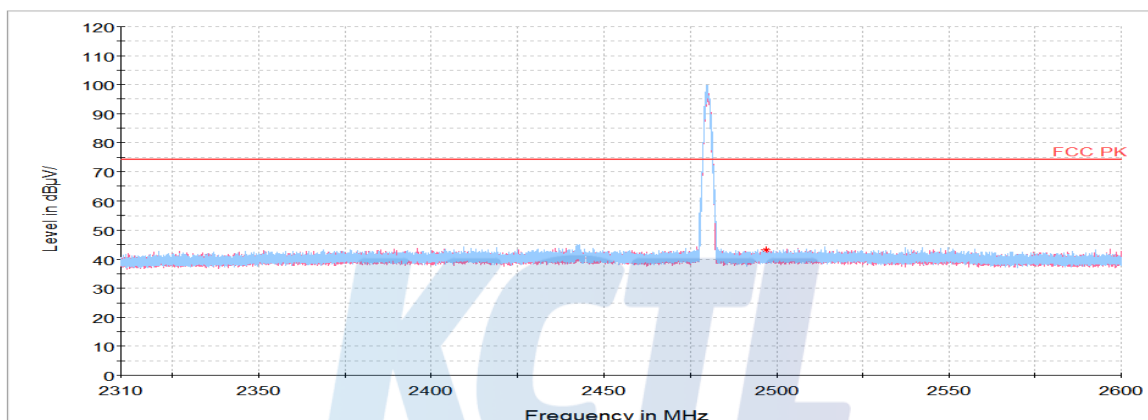
GFSK / Harmonic**78 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
4 960.42 ¹⁾	V	67.98	33.98	-54.66	-	47.30	74.00	26.70
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

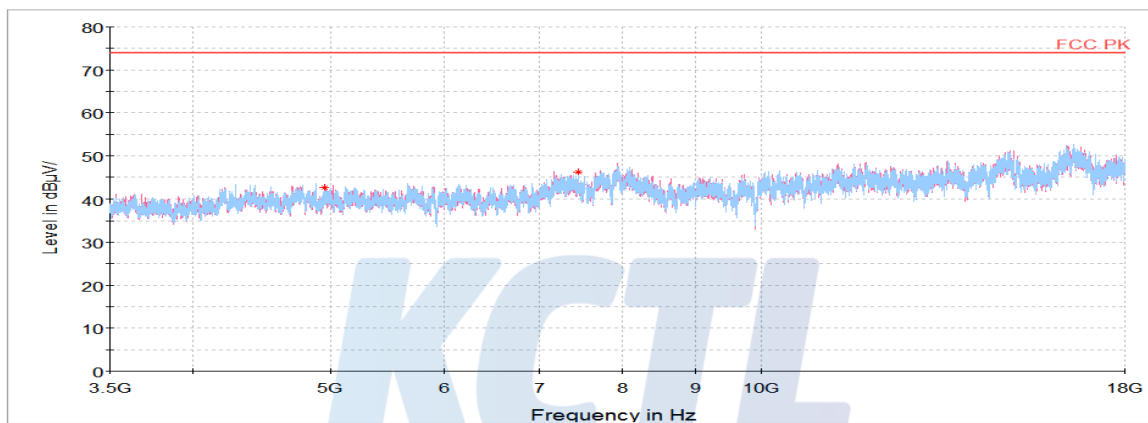
8DPSK / Band-edge**78 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 497.08 ¹⁾	V	40.34	32.09	-29.25	-	43.18	74.00	30.82
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

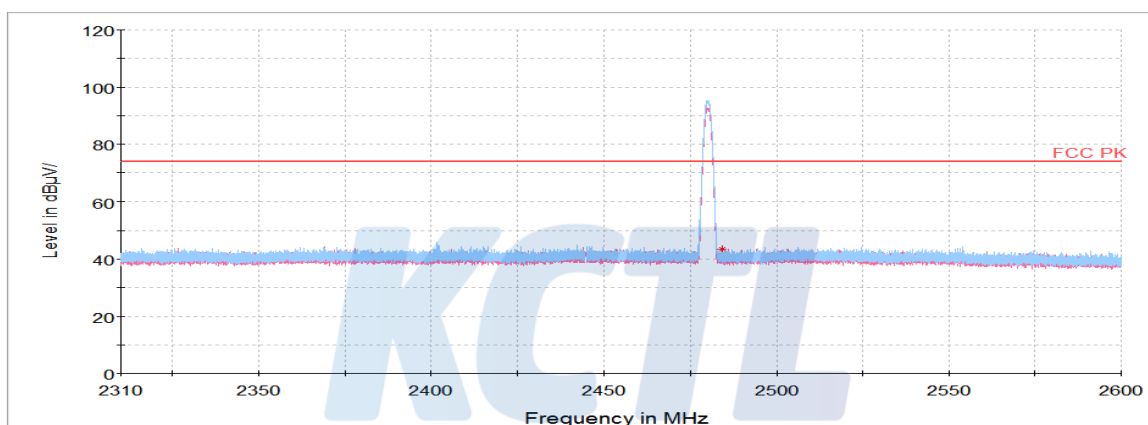
8DPSK / Harmonic**78 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
7 459.41 ¹⁾	H	62.96	35.40	-52.13	-	46.23	74.00	27.77
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

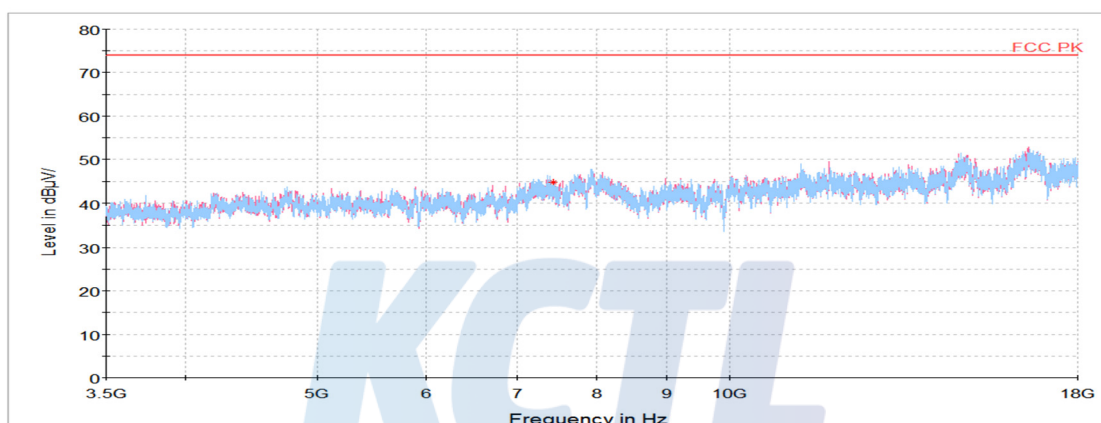
Test results (Bluetooth Low Energy)**BLE 1 MBit/s(37 Bytes) / Band-edge****39 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 484.24 ¹⁾	V	40.80	32.07	-29.22	-	43.65	74.00	30.35
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for Band-edge

BLE 1 MBit/s(37 Bytes) / Harmonic**39 Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
7 438.11 ¹⁾	V	61.56	35.40	-52.21	-	44.75	74.00	29.25
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

5. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV40	100988	21.01.03
EMI TEST RECEIVER	R&S	ESC17	100732	20.08.22
Bluetooth Tester	TESCOM	TC-3000C	3000C000270	20.07.31
Bi-Log Antenna	TESEQ	CBL 6112D	37876	20.07.20
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	22.04.23*
ATTENUATOR	Agilent	8491B	MY39270292	20.07.20
Horn antenna	ETS.lindgren	3117	155787	20.10.24
Horn antenna	ETS.lindgren	3116	00086632	21.02.17
Attenuator	API Inmet	40AH2W-10	10	20.08.01
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800-22-10P	2031196	21.02.12
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	21.01.22
LOOP Antenna	R&S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	21.05.11*
Vector Signal Generator	R&S	SMBV100A	257566	20.07.16
Signal Generator	R&S	SMR40	100007	21.04.08

*The equipment was used after finished calibration.

End of test report