

TEST REPORT

FCC BT Test for SM-S721U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2407-FC010

DATE OF ISSUE
July 18, 2024

Tested by
Jin Gwan Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2407-FC010

DATE OF ISSUE

July 18, 2024

Additional Model

SM-S721U1

Applicant**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name
Model Name**

Mobile Phone
SM-S721U

FCC ID

A3LSMS721U

Max. RF Output Power

Ant.1: 18.345 dBm (68.31 mW)
Ant.2: 15.832 dBm (38.30 mW)
Dual Ant.1+ Ant.2: 15.555 dBm (35.94 mW)

Date of Test

May 20, 2024 ~ July 18, 2024

Test Results

PASS

FCC Classification

FCC Part 15 Spread Spectrum Transmitter

Test Standard Used

FCC Rule Part(s): Part 15 subpart C 15.247

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 18, 2024	Initial Release

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. Requirements for Bluetooth transmitter(15.247)	8
3. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	9
GENERAL TEST PROCEDURES	9
DESCRIPTION OF TEST MODES	9
4. INSTRUMENT CALIBRATION	10
5. FACILITIES AND ACCREDITATIONS	10
FACILITIES	10
EQUIPMENT	10
6. ANTENNA REQUIREMENTS	10
7. MEASUREMENT UNCERTAINTY	11
8. DESCRIPTION OF TESTS	12
9. SUMMARY OF TEST RESULTS	31
10. TEST RESULT	32
10.1 PEAK POWER	32
10.2 BAND EDGES	37
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)	43
10.4 NUMBER OF HOPPING FREQUENCY	51
10.5 TIME OF OCCUPANCY (DWELL TIME)	56
10.6 SPURIOUS EMISSIONS	62
10.6.1 CONDUCTED SPURIOUS EMISSIONS	62
10.6.2 RADIATED SPURIOUS EMISSIONS	64
10.6.3 RADIATED RESTRICTED BAND EDGES	87
10.7 POWERLINE CONDUCTED EMISSIONS	95
11. LIST OF TEST EQUIPMENT	97
12. ANNEX A_ TEST SETUP PHOTO	100

1. EUT DESCRIPTION

Model	SM-S721U
Additional Model	SM-S721U1
EUT Type	Mobile Phone
Power Supply	DC 3.88 V
Frequency Range	2 402 MHz - 2 480 MHz
Max. RF Output Power	Ant.1: 18.345 dBm (68.31 mW) Ant.2: 15.832 dBm (38.30 mW) Dual Ant.1+ Ant.2: 15.555 dBm (35.94 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79 Channels, Minimum 20 Channels(AFH)
Antenna Specification	Type: Metal ANT.1 Peak Gain: -1.58 dBi, ANT.2 Peak Gain: -4.79 dBi
Serial number	Conducted : R3CX40SW7YH Radiated : 67d50971db197ece

ANTENNA CONFIGURATIONS

1. Below Tables are the possible configurations.

Configurations	SISO		Dual BT
	Ant1(Core-0)	Ant2(Core-1)	Ant1 & Ant2
Bluetooth	O	O	O

Amp.	SISO		Dual BT
	Ant1(Core-0)	Ant2(Core-1)	Ant1 & Ant2
ePA Mode	O	O	X
iPA Mode	O	O	O

Note:

O = Support, X = Not Support

2. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
Dual Bluetooth + 5 GHz WiFi MIMO			on	on			on	on	Scenario1
Dual Bluetooth + 6 GHz WiFi MIMO					on	on	on	on	
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

2. Requirements for Bluetooth transmitter(15.247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector and add the DCCF calculations.

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

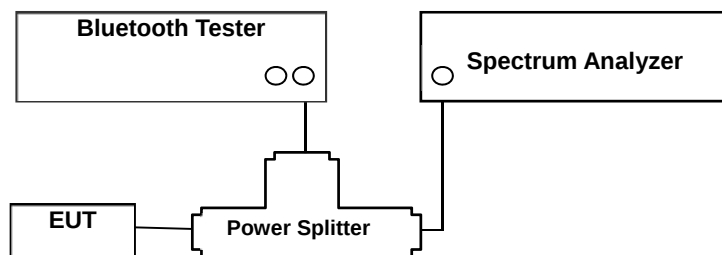

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013& Procedure 9(b) in KDB 558074 v05r02)


- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW $\geq$ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to § 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

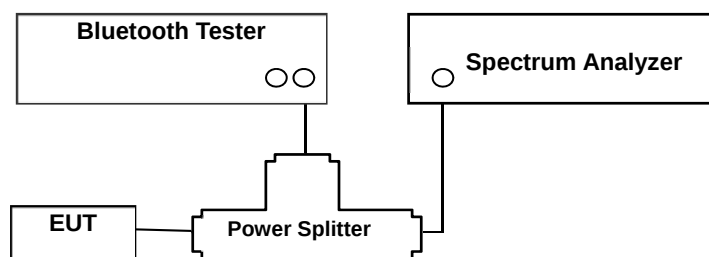

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013& Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to § 15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

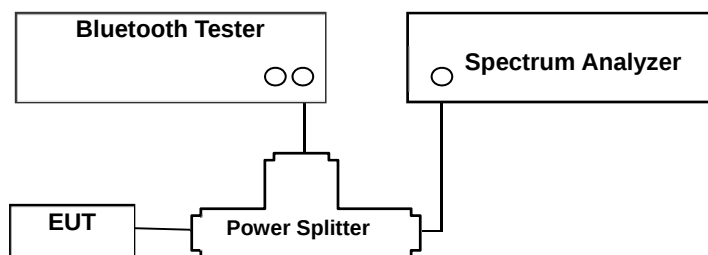

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013& Procedure 9(b) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW $\geq$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1 % to 5 % of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

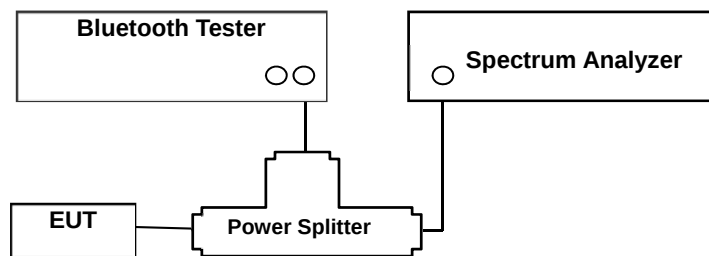

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013& Procedure 9(b) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW $\geq$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

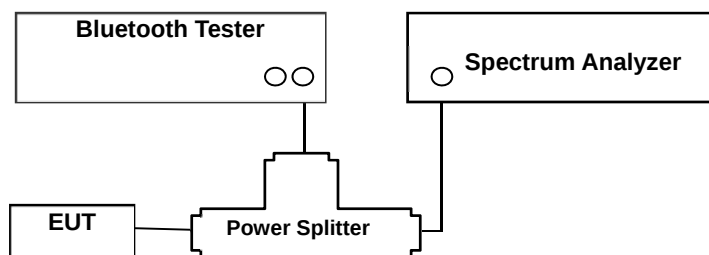

Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013& Procedure 9(b) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$
- 3-DH 5 (8DPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$

(2) AFH Mode

- DH 5 (GFSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$
- 3-DH 5 (8DPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

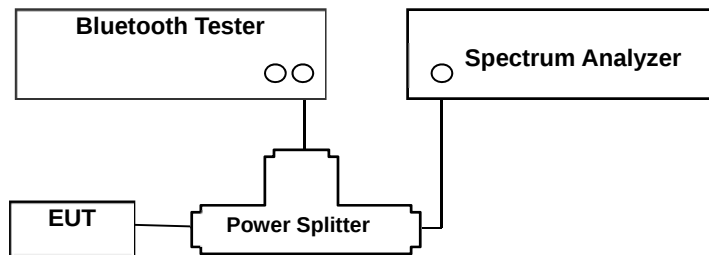

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013& Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span:30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	Factor(dB)
30	16.68
100	16.76
200	16.84
300	16.97
400	17.03
500	17.05
600	17.05
700	17.09
800	17.13
900	17.36
1 000	17.20
2 000	17.31
2 400	17.49
2 500	17.49
3 000	17.68
4 000	17.86
5 000	18.06
6 000	18.06
7 000	18.17
8 000	18.16
9 000	18.35
10 000	18.47
11 000	18.60
12 000	18.74
13 000	18.11
14 000	18.94
15 000	19.06
16 000	19.16
17 000	19.26
18 000	16.28
19 000	19.27
20 000	19.32
21 000	19.35
22 000	19.42
23 000	19.58
24 000	19.59
25 000	19.61
26 000	19.67

Note :

2400 ~ 2500 MHz is fundamental frequency range.


8.7. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

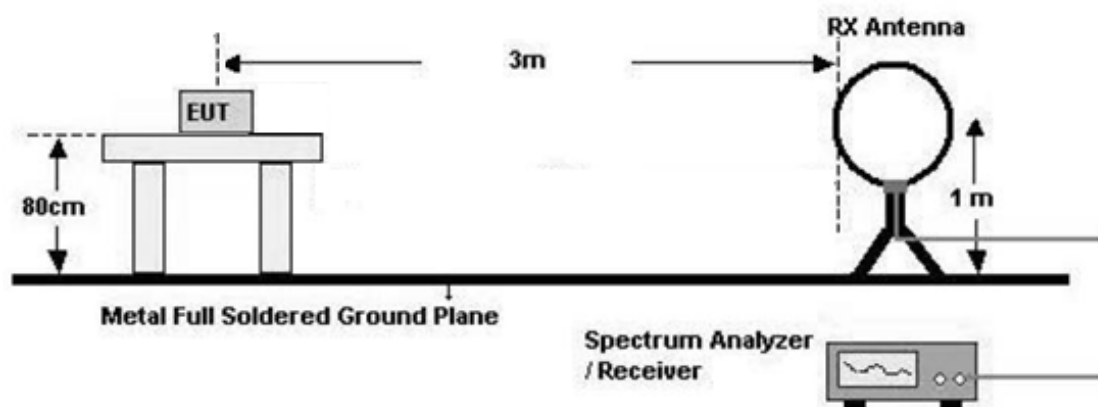

30 MHz - 1 GHz

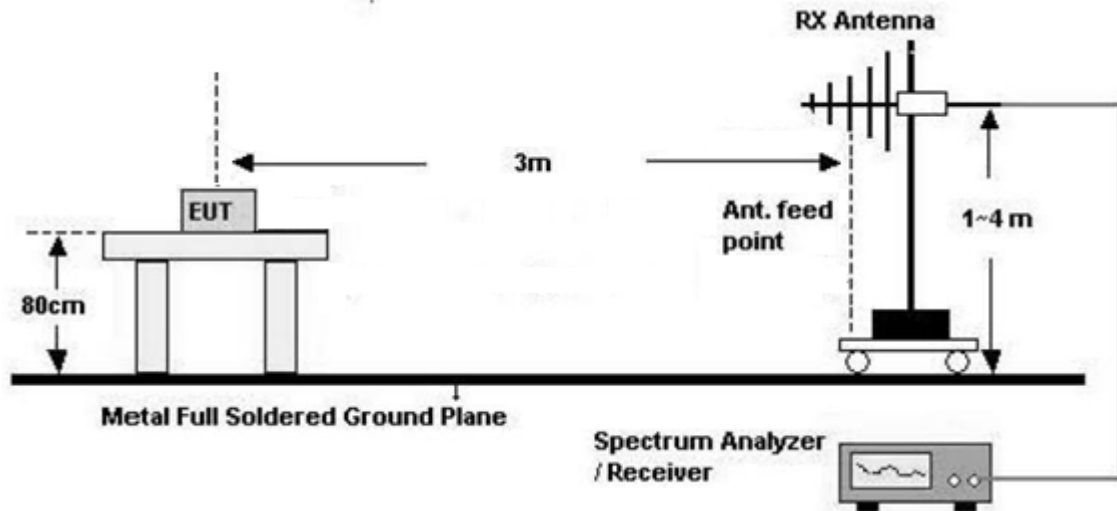

Above 1 GHz

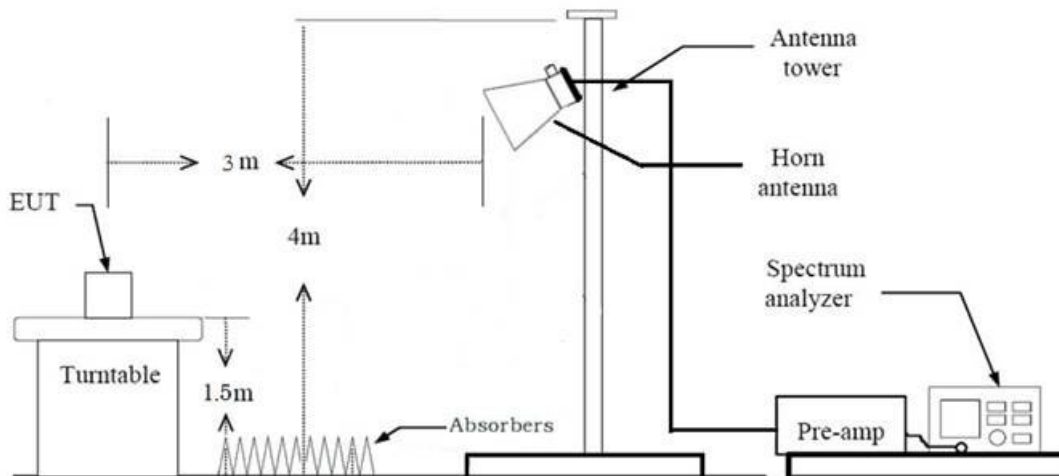

Test Procedure of Radiated spurious emissions(Below30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
 - ◆ Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -24.7314 dB
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total(Measurement Type : Peak)
= Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)

Total(Measurement Type : Average)

= Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) - Amp Gain(A.G)
+ D.C.C.F(AFH)

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
- ◆ Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -24.7314 dB
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
- 11.Total
 - (1)Measurement(Peak)
 - = Measured Value(Peak)
 - (2)Measurement(Avg)
 - = Measured Value(Peak) + D.C.C.F(AFH)
 - We apply to the offset in range 1 GHz - 18 GHz
 - The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone etc)
 - Worstcase : Stand alone
2. EUT Axis
 - (1) Ant.1
 - Radiated Spurious Emissions : Y-H
 - Radiated Restricted Band Edge : X-H
 - (2) Ant.2
 - Radiated Spurious Emissions : Y-H
 - Radiated Restricted Band Edge : Y-H
 - (3) Dual Ant.1+ Ant.2
 - Radiated Spurious Emissions : Y-H
 - Radiated Restricted Band Edge : X-H
3. All data rate of operation were investigated and the test results are worst case in highest data rate of each mode.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
5. SM-S721U, SM-S721U1 were tested and the worst case results are reported.
(Worst case: SM-S721U)
6. Radiated Spurious Emission
 - All mode of operation were investigated and the worst case results are reported.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5

Radiated test(DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y, Z
3. All of RSDB Scenario were investigated and the worst case configuration results are reported.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
Dual Bluetooth + 5 GHz WiFi MIMO			on	on			on	on	Scenario1
Dual Bluetooth + 6 GHz WiFi MIMO					on	on	on	on	
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

4. The RSDB mode test investigated both intermodulation and radiated spurious emissions.

And the worst results were reported.

- Worst result: Radiated spurious emissions
- Intermodulation: No signals are generated.
- Radiated spurious emissions: cf. Section 10.6.2.

5. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

RSDB Scenario 1	Description	Bluetooth Emission	5 GHz Emission
Dual Bluetooth + 5 GHz WiFi MIMO	Antenna	Dual ANT	Ant All
	Channel	78	177
	Data Rate	1 Mbps	6 Mbps
	Mode	GFSK	802.11a

Note : UNII RSDB Data refer to [UNII] Test Report

RSDB Scenario 3	Description	Bluetooth Emission	2.4GHz Emission	5 GHz Emission
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	Antenna	ANT1	ANT2	Ant All
	Channel	78	11	177
	Data Rate	1 Mbps	1 Mbps	6 Mbps
	Mode	GFSK	802.11b	802.11a

Note : DTS, UNII RSDB Data refer to [DTS], [UNII] Test Report

6. SM-S721U, SM-S721U1 were tested and the worst case results are reported.

(Worst case: SM-S721U)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone+ External accessories(Earphone, etc)+Travel Adapter

- Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

2. SM-S721U, SM-S721U1 were tested and the worst case results are reported.

(Worst case: SM-S721U)

Conducted test

1. The EUT was configured with data rate of highest power.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
2. AFH & Non-AFH were tested and the worst case results are reported.
(Worst case : Non-AFH)
3. SM-S721U, SM-S721U1 were tested and the worst case results are reported.
(Worst case: SM-S721U)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§ 15.247(a)(1)	N/A	Conducted	PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§ 15.247(b)(1)	<0.125 W		PASS
Carrier Frequency Separation	§ 15.247(a)(1)	>25 kHz or >2/3 of the 20 dB BW		PASS
Number of Hopping Frequencies	§ 15.247(a)(1)(iii)	≥ 15		PASS
Time of Occupancy	§ 15.247(a)(1)(iii)	<400 ms		PASS
Conducted Spurious Emissions	§ 15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§ 15.207(a)	cf. Section 8.8		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 8.7		PASS

Note: Average Power data refer to SAR report

10. TEST RESULT

10.1 PEAK POWER

[Ant.1]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	17.941	62.24	125
Mid	2441	18.345	68.31	
High	2480	16.765	47.48	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	17.356	54.40	125
Mid	2441	17.920	61.94	
High	2480	16.709	46.87	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	16.875	48.70	125
Mid	2441	17.342	54.23	
High	2480	16.289	42.55	

[Ant.2]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.832	38.30	125
Mid	2441	15.528	35.71	
High	2480	14.618	28.96	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.409	34.75	125
Mid	2441	14.984	31.51	
High	2480	14.303	26.93	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	14.979	31.47	125
Mid	2441	14.518	28.30	
High	2480	13.792	23.94	

[Dual Ant.1 + Ant. 2]

Channel	Frequency (MHz)	GFSK						Limit (mW)
		Dual Ant. 1		Dual Ant. 2		Dual(Ant. 1 + Ant. 2)		
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
Low	2402	13.321	21.48	11.600	14.45	15.555	35.94	125
Mid	2441	13.629	23.06	9.681	9.29	15.099	32.35	
High	2480	11.830	22.07	8.793	10.65	13.582	32.73	

Channel	Frequency (MHz)	8DPSK						Limit (mW)
		Dual Ant. 1		Dual Ant. 2		Dual(Ant. 1 + Ant. 2)		
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
Low	2402	12.295	16.96	11.005	12.60	14.708	29.57	125
Mid	2441	12.961	19.77	9.407	8.72	14.548	28.50	
High	2480	10.868	15.78	8.693	9.45	12.926	25.23	


Channel	Frequency (MHz)	π/4DQPSK						Limit (mW)
		Dual Ant. 1		Dual Ant. 2		Dual(Ant. 1 + Ant. 2)		
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
Low	2402	12.336	17.12	10.680	11.69	14.597	28.82	125
Mid	2441	12.591	18.16	9.020	7.98	14.173	26.14	
High	2480	10.548	15.19	8.340	9.04	12.593	24.24	

TEST PLOTS

Note :

In order to simplify the report, attached plots were only the worst case channel.


ANT.1 GFSK : Peak Power (CH. 39)

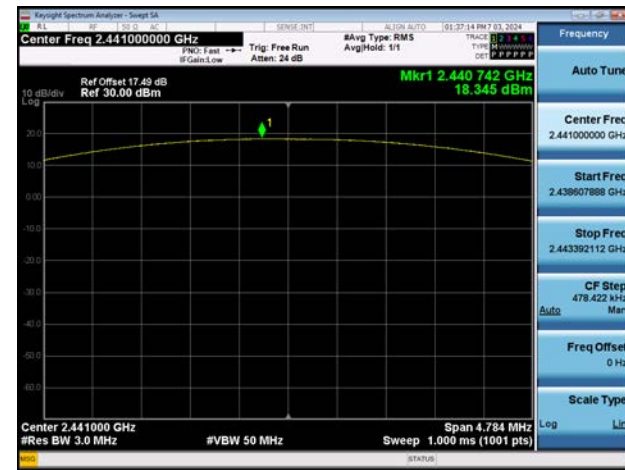

ANT.2 GFSK : Peak Power (CH. 0)




ANT.1 8DPSK : Peak Power (CH. 39)

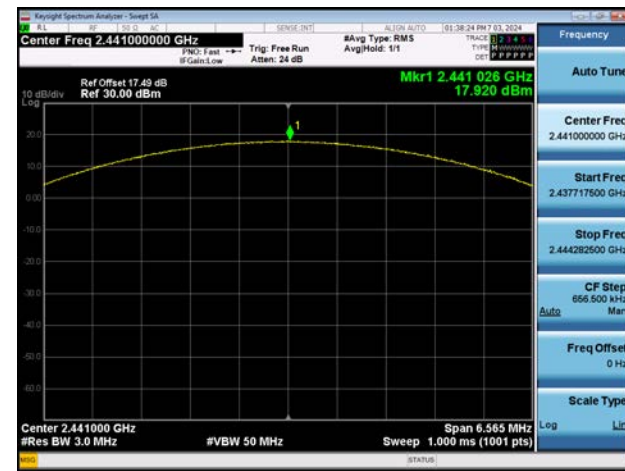

ANT.2 8DPSK : Peak Power (CH. 0)



ANT.1 π /4DQPSK : Peak Power (CH. 39)

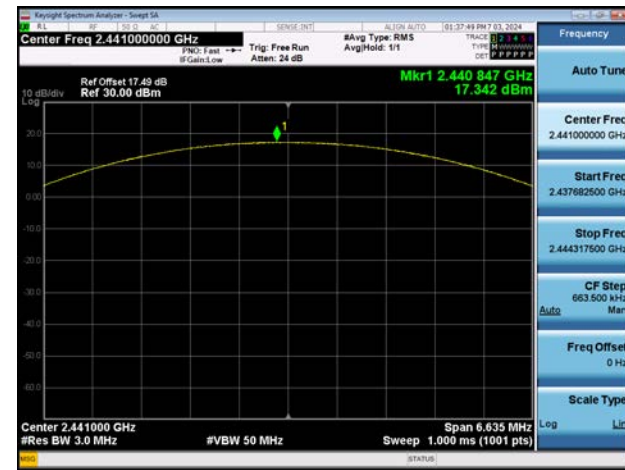


ANT.2 π /4DQPSK : Peak Power (CH. 0)



[Dual ANT]

Dual ANT.1 GFSK : Peak Power (CH. 39)

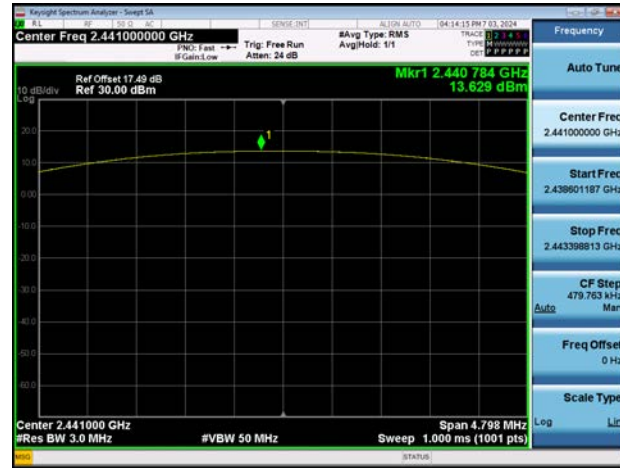

Dual ANT.2 GFSK : Peak Power (CH. 0)




Dual ANT.1 8DPSK : Peak Power (CH. 39)



Dual ANT.2 8DPSK : Peak Power (CH. 0)



Dual ANT.1 π /4DQPSK : Peak Power (CH. 39)

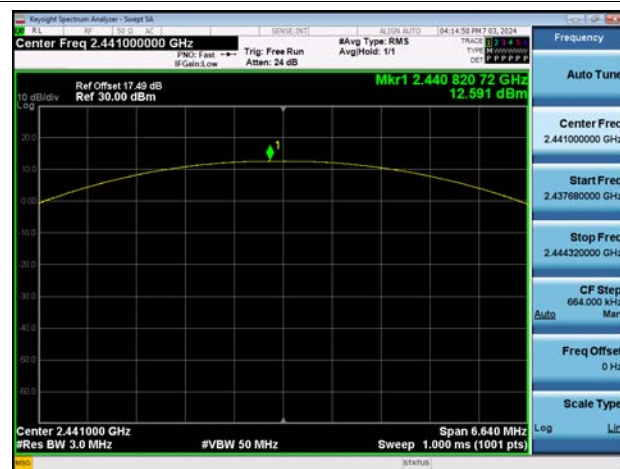

Dual ANT.2 π /4DQPSK : Peak Power (CH. 0)



10.2 BAND EDGES

[Ant. 1]

Without hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	58.450	52.127	52.551	20
Upper	63.237	60.575	60.258	

With hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	58.407	52.459	52.775	20
Upper	64.136	60.040	60.899	

[Ant. 2]

Without hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	56.060	55.539	54.937	20
Upper	61.092	57.666	58.431	

With hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	57.331	55.216	55.461	20
Upper	61.114	57.732	57.336	

[Dual Ant. 1]
Without hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	49.202	43.256	43.041	20
Upper	60.053	56.801	57.376	

With hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	48.767	43.138	43.290	20
Upper	61.028	56.279	52.903	

[Dual Ant. 2]
Without hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	56.943	48.956	49.241	20
Upper	57.343	54.044	54.334	

With hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)
	(dB)	(dB)	(dB)	
Lower	58.125	51.196	50.613	20
Upper	57.311	54.340	54.637	


TEST PLOTS

Note :


In order to simplify the report, attached plots were only the worst case mode.

-Without hopping


ANT.1 8DPSK Band Edge(CH.0)

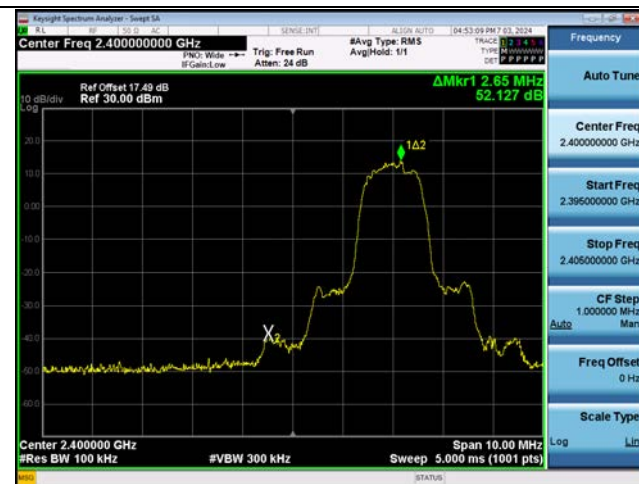


ANT.1 π /4DQPSK Band Edge(CH.78)

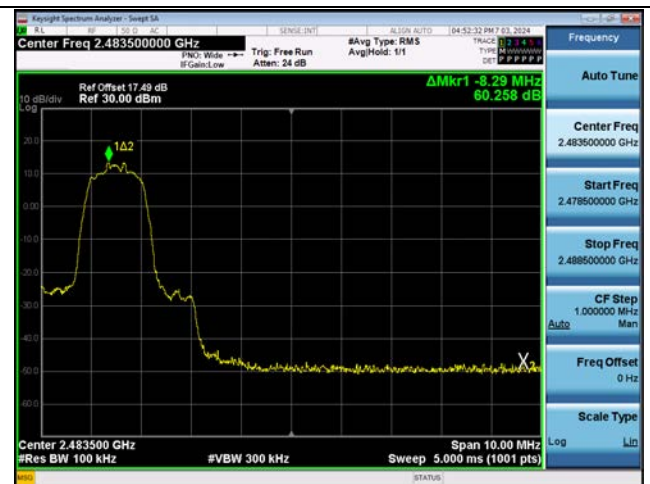

ANT.2 π /4DQPSK Band Edge(CH.0)

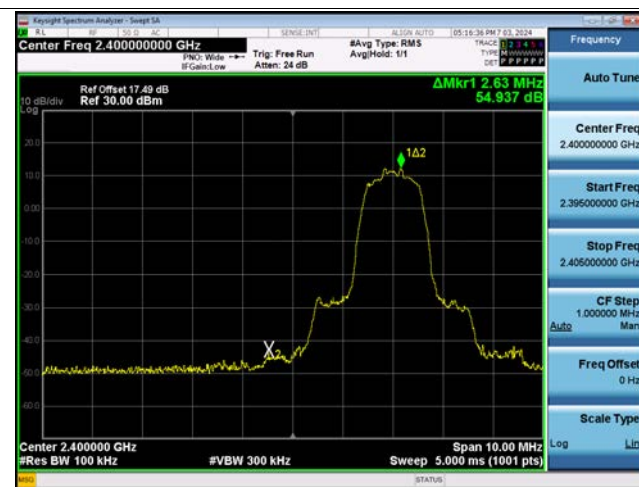

ANT.2 8DPSK Band Edge(CH.78)

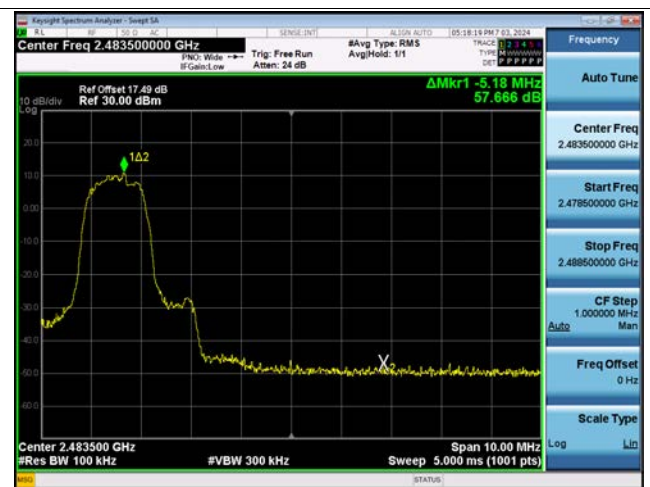


Dual ANT.1 $\pi/4$ DQPSK Band Edge(CH.0)



Dual ANT.1 8DPSK Band Edge(CH.78)



Dual ANT.2 8DPSK Band Edge(CH.0)

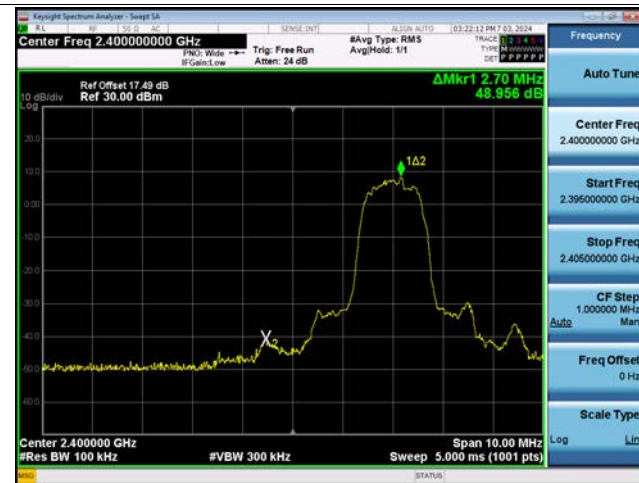

Dual ANT.2 8DPSK Band Edge(CH.78)




-With hopping

ANT.1 8DPSK Band Edge(CH.0)




ANT.1 8DPSK Band Edge(CH.78)

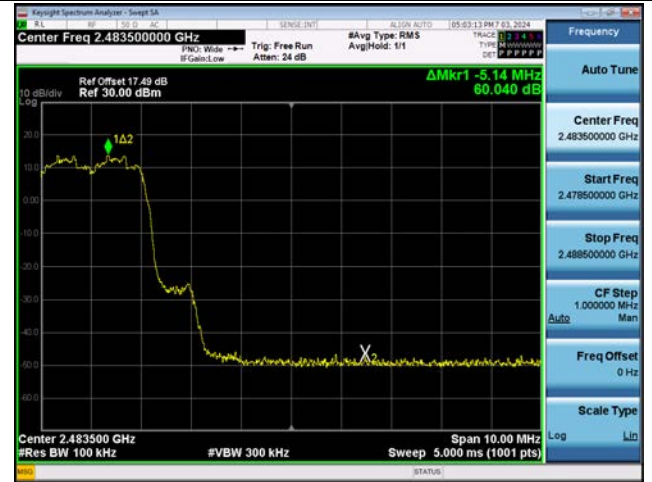

ANT.2 8DPSK Band Edge(CH.0)



ANT.2 π /4DQPSK Band Edge(CH.78)

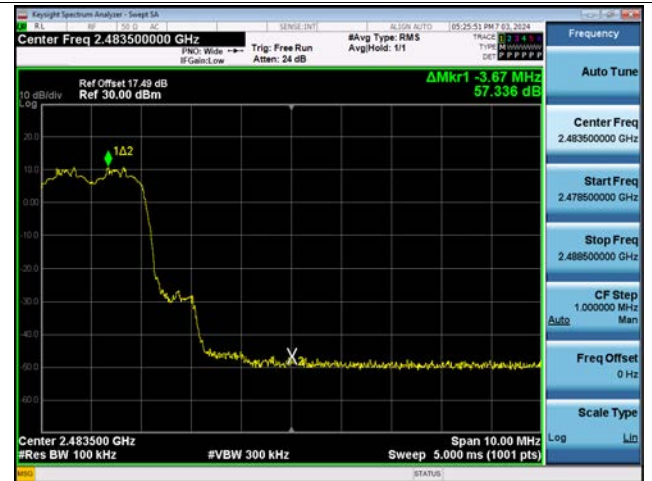

Dual ANT.1 8DPSK Band Edge(CH.0)



Dual ANT.1 $\pi/4$ DQPSK Band Edge(CH.78)



Dual ANT.2 $\pi/4$ DQPSK Band Edge(CH.0)



Dual ANT.2 8DPSK Band Edge(CH.78)



10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)

[Ant.1]

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	854.39	1181.9	1176.5
CH.39	854.95	1181.1	1179.1
CH.78	856.83	1184.7	1176.4

20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	958.7	1312	1327
CH.39	956.8	1313	1327
CH.78	958.2	1314	1325

Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
1001	994	994	>25 kHz or >2/3 of the 20 dB BW

[Ant.2]

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	851.74	1179.8	1175.0
CH.39	851.29	1180.1	1177.4
CH.78	851.39	1180.9	1175.0
20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	957.8	1312	1324
CH.39	954.6	1312	1333
CH.78	955.2	1313	1323
Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	998	991	>25 kHz or >2/3 of the 20 dB BW

[Dual Ant.1]

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	875.58	1228.8	1217.3
CH.39	872.31	1199.7	1188.8
CH.78	897.06	1242.9	1243.3
20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	959.0	1327	1350
CH.39	959.5	1319	1328
CH.78	1015	1325	1347
Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	998	1001	>25 kHz or >2/3 of the 20 dB BW

[Dual Ant.2]

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	863.13	1191.0	1183.0
CH.39	860.63	1189.0	1179.7
CH.78	862.32	1188.0	1182.3

20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	963.8	1320	1331
CH.39	960.5	1316	1326
CH.78	962.1	1315	1329


Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
1001	994	1001	>25 kHz or >2/3 of the 20 dB BW

TEST PLOTS(20 dB Bandwidth & 99% OBW)

Note:

In order to simplify the report, attached plots were only the widest 20 dB BW channel.

ANT. 1 GFSK 20 dB BW & 99% OBW (CH. 0)

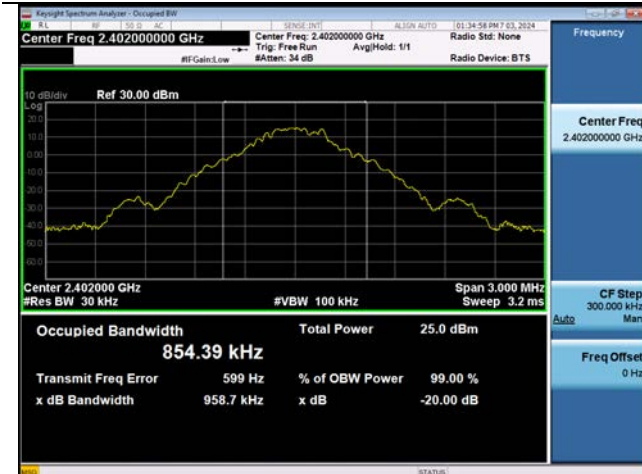


ANT. 2 GFSK 20 dB BW & 99% OBW (CH. 0)



ANT. 1 8DPSK 20 dB BW & 99% OBW (CH. 78)




ANT. 2 8DPSK 20 dB BW & 99% OBW (CH. 78)

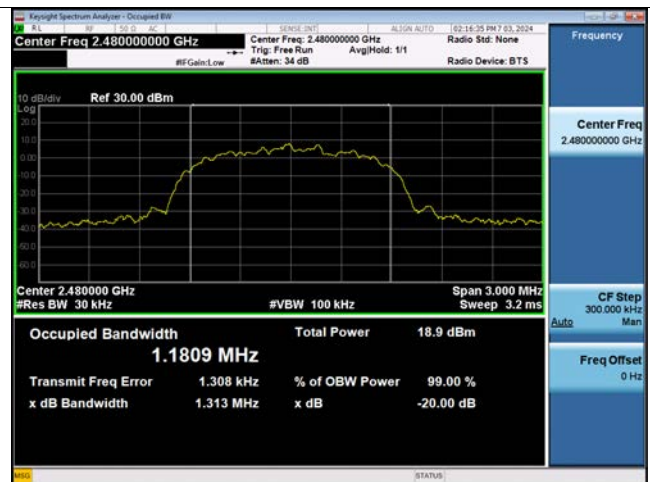


ANT. 1 π /4DQPSK 20 dB BW & 99% OBW (CH. 39)




ANT. 2 π /4DQPSK 20 dB BW & 99% OBW (CH. 39)

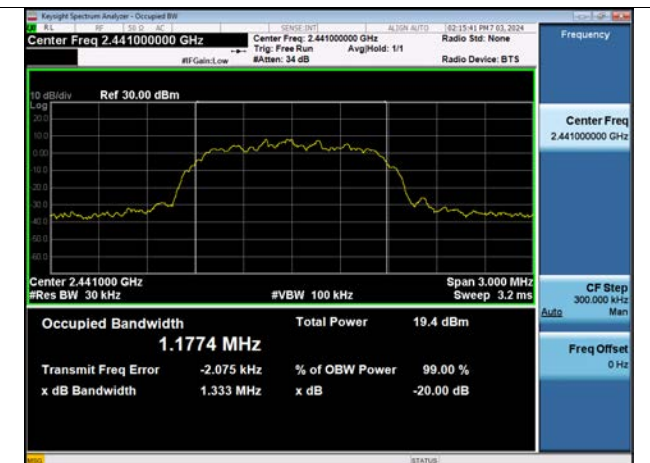

Dual ANT. 1 GFSK 20 dB BW & 99% OBW (CH. 78)

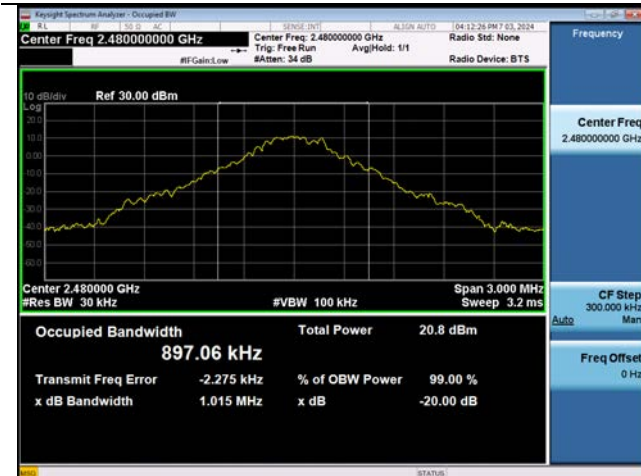


Dual ANT. 2 GFSK 20 dB BW & 99% OBW (CH. 0)

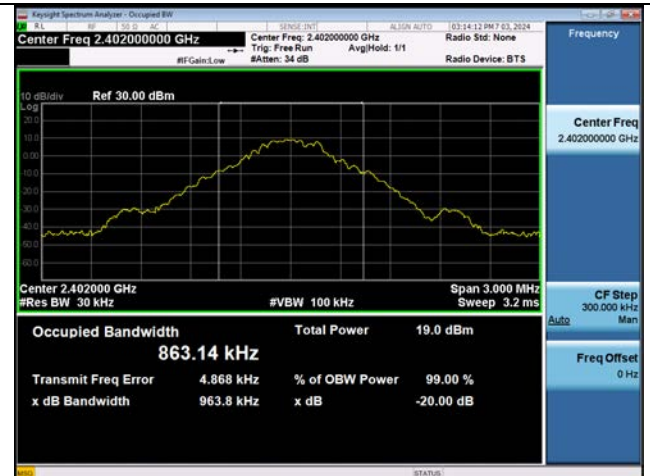

Dual ANT. 1 8DPSK 20 dB BW & 99% OBW (CH. 0)




Dual ANT. 2 8DPSK 20 dB BW & 99% OBW (CH. 0)

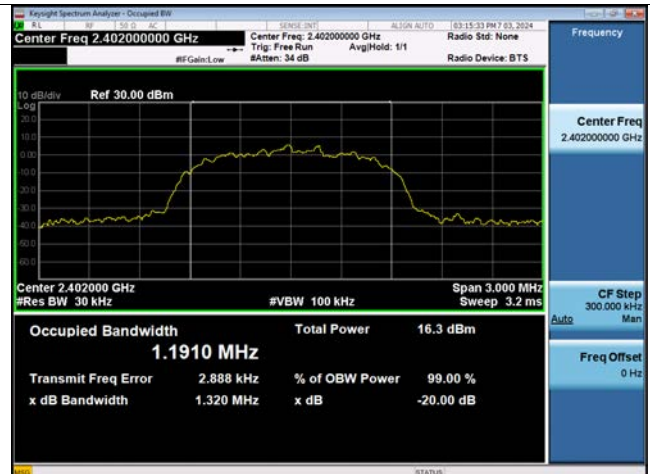

Dual ANT. 1 $\pi/4$ DQPSK 20 dB BW & 99% OBW (CH. 0)




Dual ANT. 2 $\pi/4$ DQPSK 20 dB BW & 99% OBW (CH. 0)



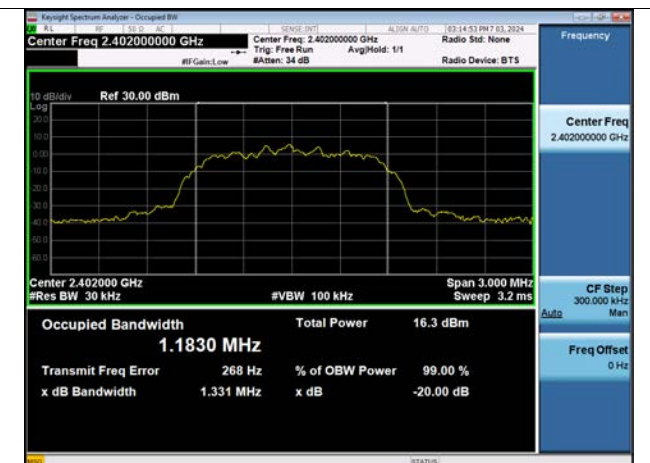


TEST PLOTS(Channel Separaton)


ANT. 1 GFSK : Channel Separation

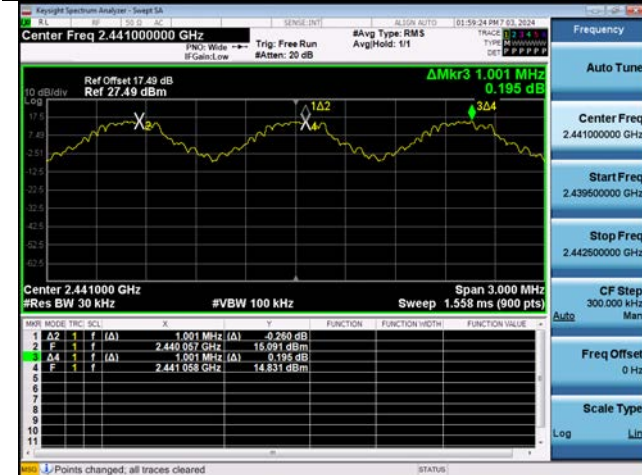

ANT. 2 GFSK : Channel Separation

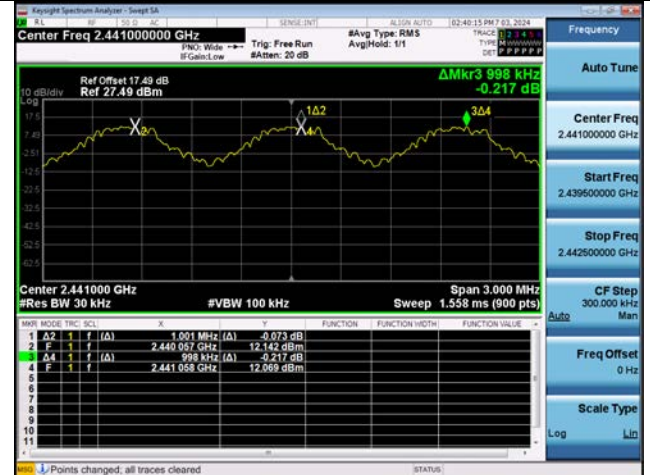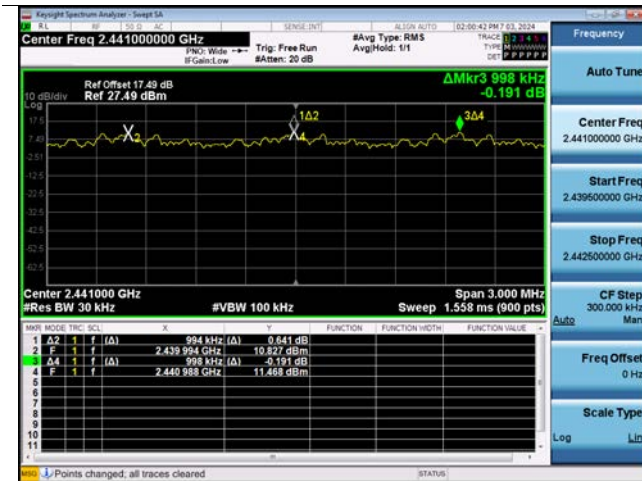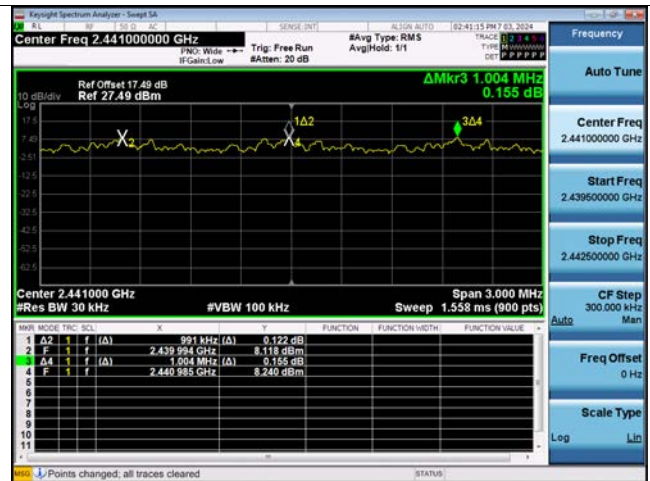
ANT. 1 $\pi/4$ DQPSK : Channel Separation

ANT. 2 $\pi/4$ DQPSK : Channel Separation

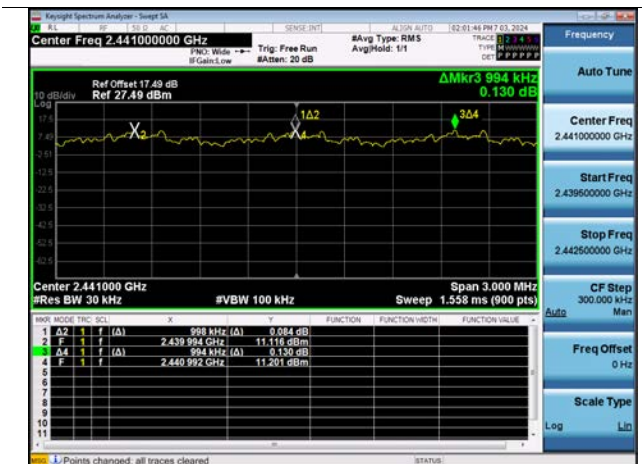
ANT. 1 8DPSK : Channel Separation



ANT. 2 8DPSK : Channel Separation




Dual ANT. 1 GFSK : Channel Separation




Dual ANT. 2 GFSK : Channel Separation



Dual ANT. 1 $\pi/4$ DQPSK : Channel Separation

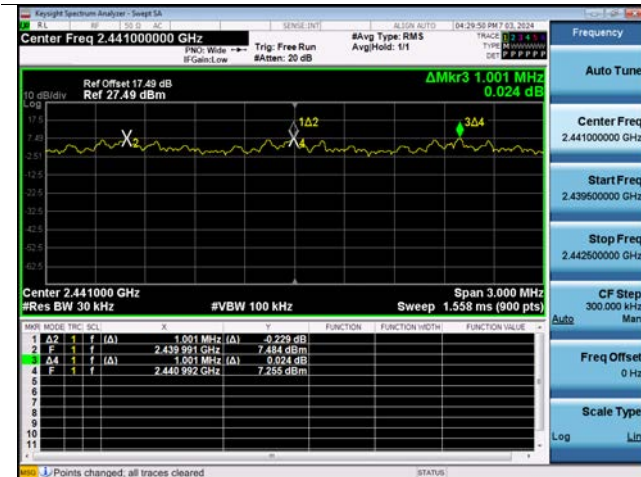

Dual ANT. 2 $\pi/4$ DQPSK : Channel Separation

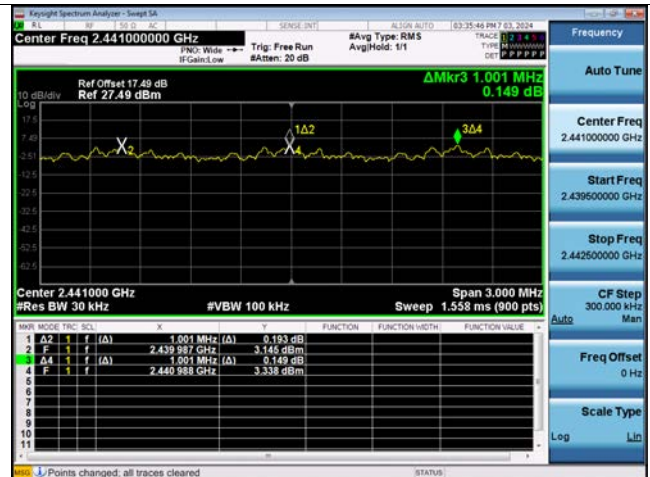

Dual ANT. 1 8DPSK : Channel Separation



Dual ANT. 2 8DPSK : Channel Separation



10.4 NUMBER OF HOPPING FREQUENCY

[Ant.1]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

[Ant.2]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

[Dual Ant.1]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

[Dual Ant.2]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15


Note :

In case of AFH mode, minimum number of hopping channels is 20.


TEST PLOTS

[ANT.1]

ANT.1 GFSK
Number of Channels (2.4 GHz - 2.441 GHz)

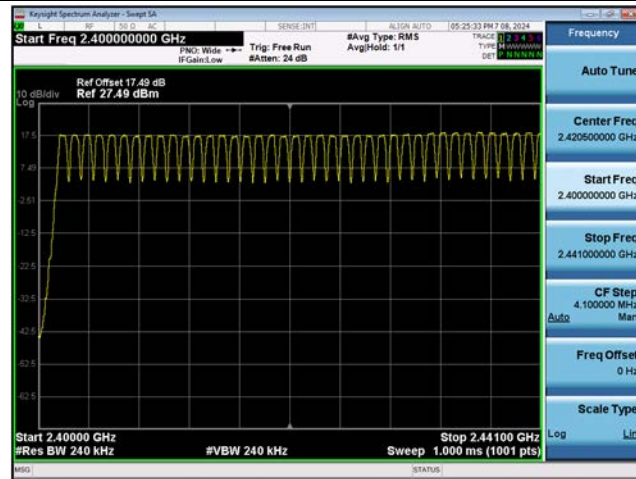

ANT.1 GFSK
Number of Channels (2.441 GHz - 2.483.5 GHz)

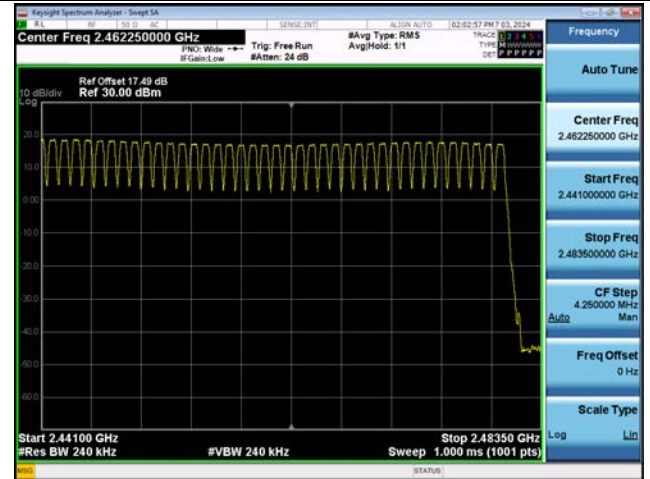

ANT.1 8DPSK
Number of Channels (2.4 GHz - 2.441 GHz)



ANT.1 8DPSK
Number of Channels (2.441 GHz - 2.483.5 GHz)



ANT.1 $\pi/4$ DQPSK
Number of Channels (2.4 GHz - 2.441 GHz)




ANT.1 $\pi/4$ DQPSK
Number of Channels (2.441 GHz - 2.483.5 GHz)



[ANT.2]


ANT.2 GFSK
Number of Channels (2.4 GHz - 2.441 GHz)

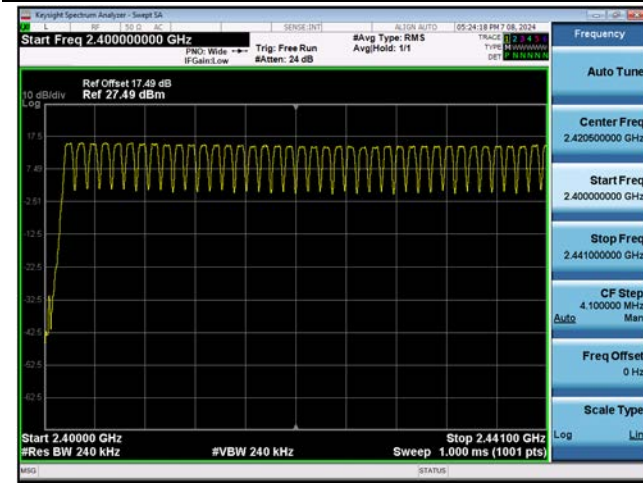

ANT.2 GFSK
Number of Channels (2.441 GHz - 2.483.5 GHz)



ANT.2 8DPSK
Number of Channels (2.4 GHz - 2.441 GHz)

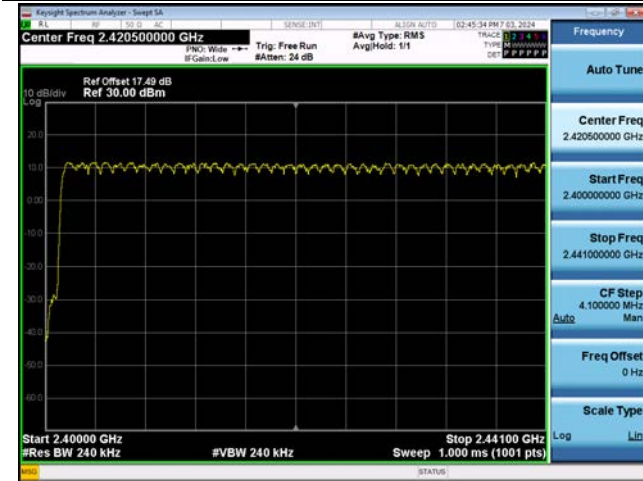

ANT.2 8DPSK
Number of Channels (2.441 GHz - 2.483.5 GHz)



ANT.2 $\pi/4$ DQPSK
Number of Channels (2.4 GHz - 2.441 GHz)




ANT.2 $\pi/4$ DQPSK
Number of Channels (2.441 GHz - 2.483.5 GHz)



[Dual ANT.1]


Dual ANT.1 GFSK
Number of Channels (2.4 GHz - 2.441 GHz)

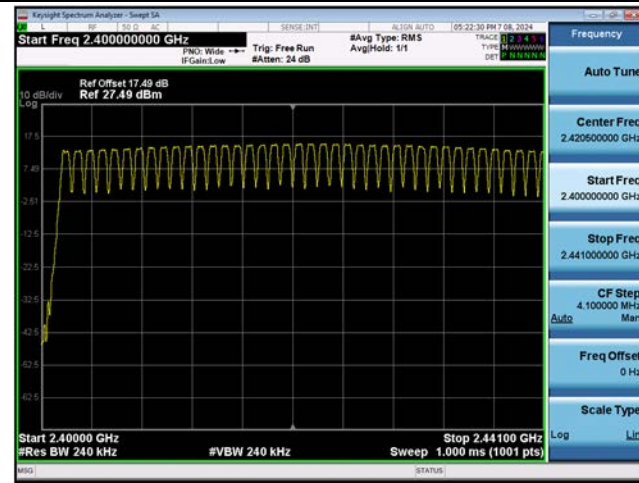

Dual ANT.1 GFSK
Number of Channels (2.441 GHz - 2.483.5 GHz)



Dual ANT.1 8DPSK
Number of Channels (2.4 GHz - 2.441 GHz)

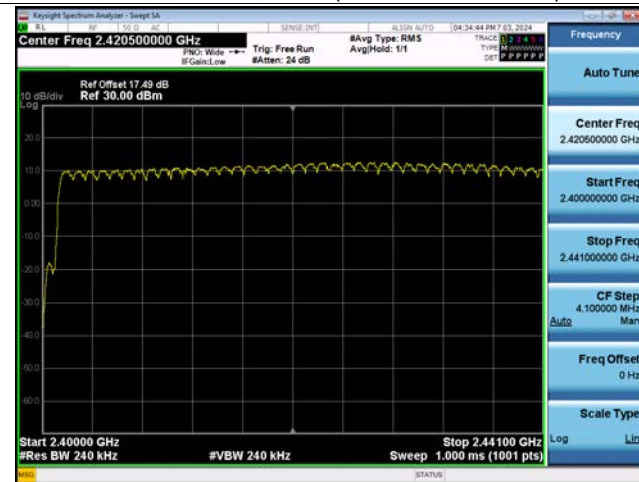

Dual ANT.1 8DPSK
Number of Channels (2.441 GHz - 2.483.5 GHz)



Dual ANT.1 $\pi/4$ DQPSK
Number of Channels (2.4 GHz - 2.441 GHz)




Dual ANT.1 $\pi/4$ DQPSK
Number of Channels (2.441 GHz - 2.483.5 GHz)




[Dual ANT.2]


Dual ANT.2 GFSK
Number of Channels (2.4 GHz - 2.441 GHz)

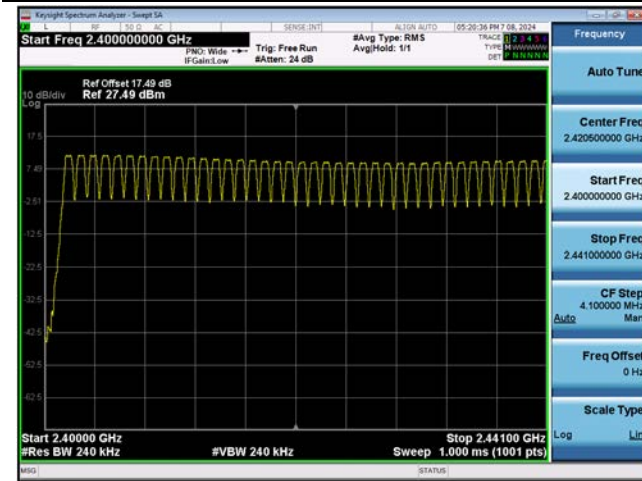

Dual ANT.2 GFSK
Number of Channels (2.441 GHz - 2.483.5 GHz)

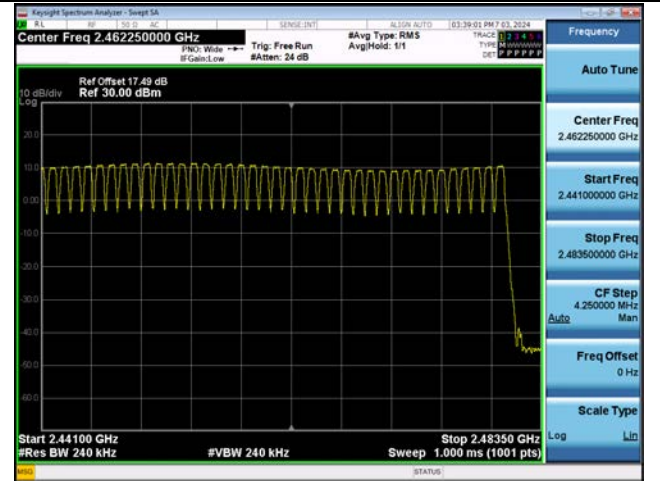

Dual ANT.2 8DPSK
Number of Channels (2.4 GHz - 2.441 GHz)

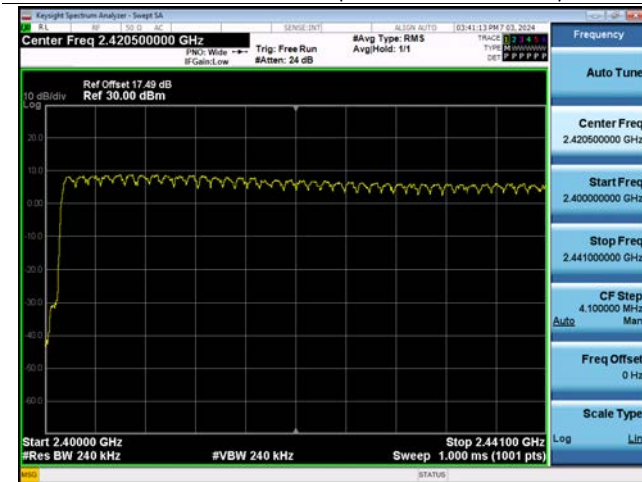


Dual ANT.2 8DPSK
Number of Channels (2.441 GHz - 2.483.5 GHz)



Dual ANT.2 $\pi/4$ DQPSK
Number of Channels (2.4 GHz - 2.441 GHz)



Dual ANT.2 $\pi/4$ DQPSK
Number of Channels (2.441 GHz - 2.483.5 GHz)

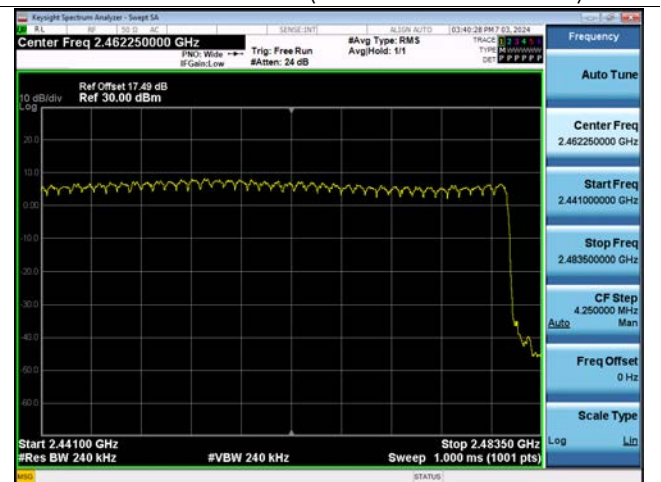

10.5 TIME OF OCCUPANCY (DWELL TIME)

[Ant.1]

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Low	2.890	2.890	2.890
	Mid	2.890	2.890	2.890
	High	2.890	2.890	2.890

Non-AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Low	308.27	308.27	308.27	31.6	400
	Mid	308.27	308.27	308.27	31.6	
	High	308.27	308.27	308.27	31.6	

AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Low	154.13	154.13	154.13	8.0	400
	Mid	154.13	154.13	154.13	8.0	
	High	154.13	154.13	154.13	8.0	

[Ant.2]

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Low	2.890	2.890	2.890
	Mid	2.885	2.890	2.890
	High	2.890	2.890	2.885

Non-AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Low	308.27	308.27	308.27	31.6	400
	Mid	307.73	308.27	308.27	31.6	
	High	308.27	308.27	307.73	31.6	

AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Low	154.13	154.13	154.13	8.0	400
	Mid	153.87	154.13	154.13	8.0	
	High	154.13	154.13	153.87	8.0	

[Dual Ant.1]

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Low	2.890	2.895	2.890
	Mid	2.890	2.890	2.890
	High	2.890	2.890	2.890

Non-AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Low	308.27	308.80	308.27	31.6	400
	Mid	308.27	308.27	308.27	31.6	
	High	308.27	308.27	308.27	31.6	

AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Low	154.13	154.40	154.13	8.0	400
	Mid	154.13	154.13	154.13	8.0	
	High	154.13	154.13	154.13	8.0	

[Dual Ant.2]

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Low	2.890	2.890	2.890
	Mid	2.885	2.895	2.890
	High	2.890	2.890	2.890

Non-AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Low	308.27	308.27	308.27	31.6	400
	Mid	307.73	308.80	308.27	31.6	
	High	308.27	308.27	308.27	31.6	

AFH Mode


	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Low	154.13	154.13	154.13	8.0	400
	Mid	153.87	154.40	154.13	8.0	
	High	154.13	154.13	154.13	8.0	

TEST PLOTS

Note:

In order to simplify the report, attached plots were only the lowest channel.


ANT.1 GFSK : Dwell Time(Ch. 0)

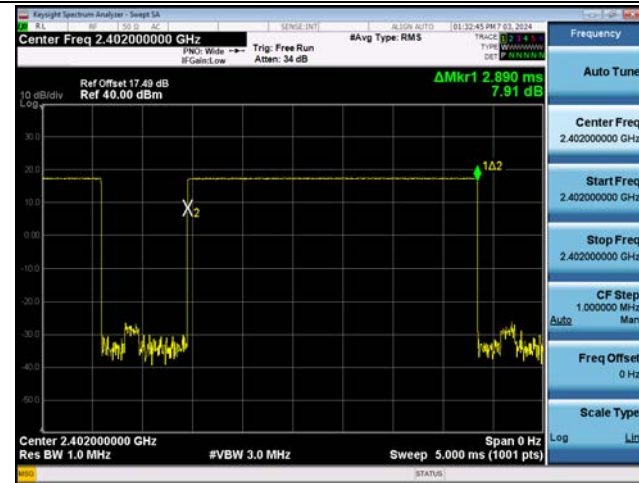


ANT.2 GFSK : Dwell Time(Ch. 0)




ANT.1 8DPSK : Dwell Time(Ch. 0)

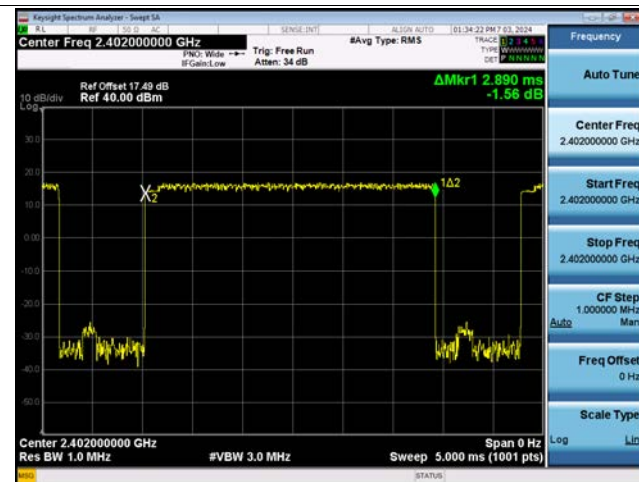

ANT.2 8DPSK : Dwell Time(Ch. 0)

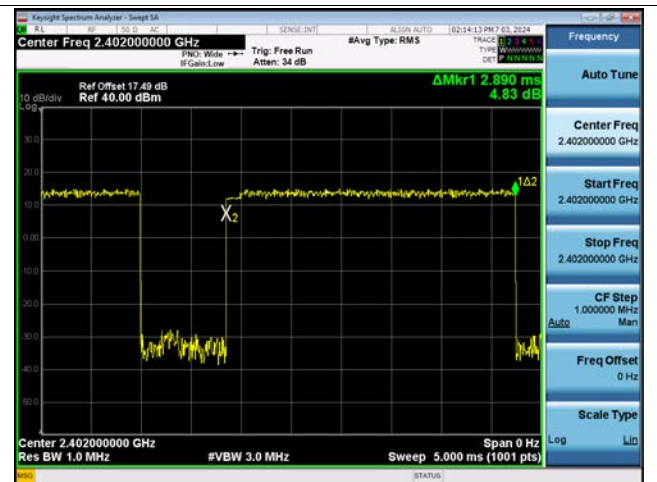

ANT.1 $\pi/4$ DQPSK : Dwell Time(Ch. 0)

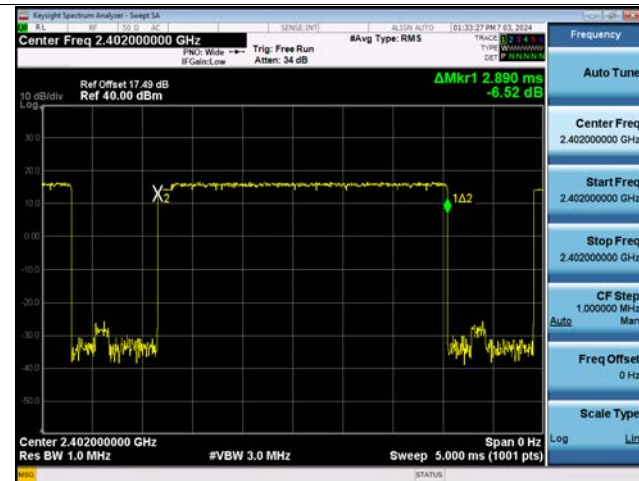

ANT.2 $\pi/4$ DQPSK : Dwell Time(Ch. 0)




Dual ANT.1 GFSK : Dwell Time(Ch. 0)



Dual ANT.2 GFSK : Dwell Time(Ch. 0)




Dual ANT.1 8DPSK : Dwell Time(Ch. 0)

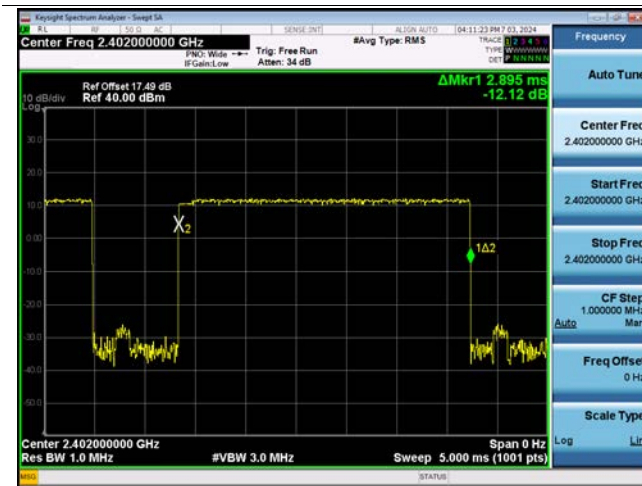

Dual ANT.2 8DPSK : Dwell Time(Ch. 0)


Dual ANT.1 $\pi/4$ DQPSK : Dwell Time(Ch. 0)

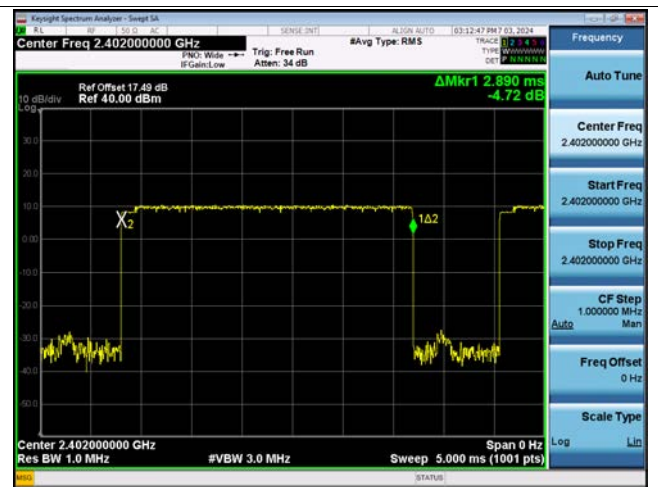Dual ANT.2 $\pi/4$ DQPSK : Dwell Time(Ch. 0)


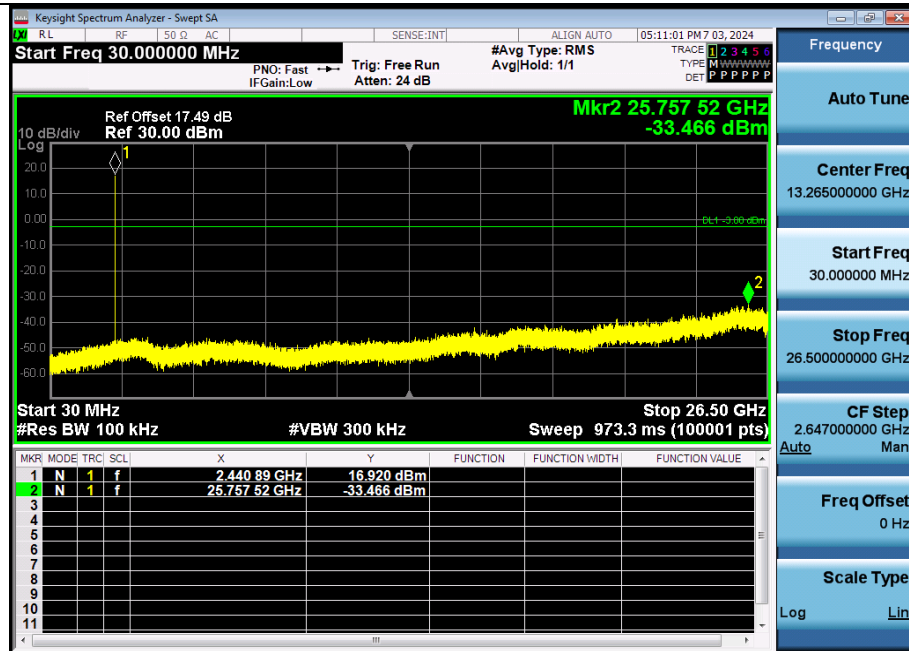
10.6 SPURIOUS EMISSIONS

10.6.1 CONDUCTED SPURIOUS EMISSIONS


In order to simplify the report, attached plots were only the worst case channel and data rate.

TEST PLOTS

Spurious Emission (30 MHz – 26.50 GHz) Ant.1, GFSK_CH. 39




Spurious Emission (30 MHz – 26.50 GHz) Ant.2, GFSK_CH.0

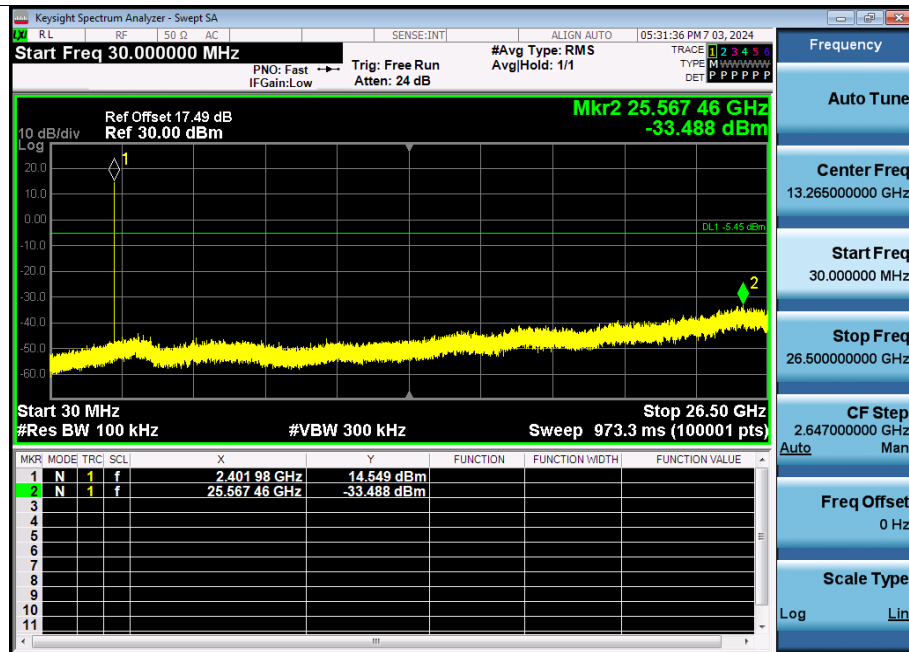


Note

1. Ant.1 Limit (dBm): -3.080, Ant.2 Limit (dBm): -5.451

Spurious Emission (30 MHz – 26.50 GHz) Dual Ant.1, GFSK_CH.39

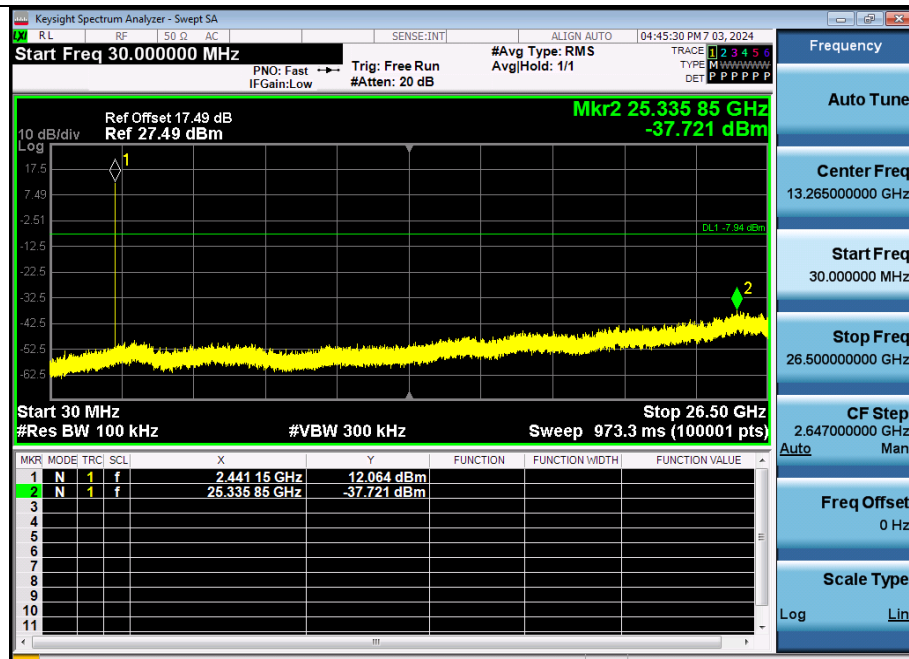

Spurious Emission (30 MHz – 26.50 GHz) Dual Ant.2, GFSK_CH.0

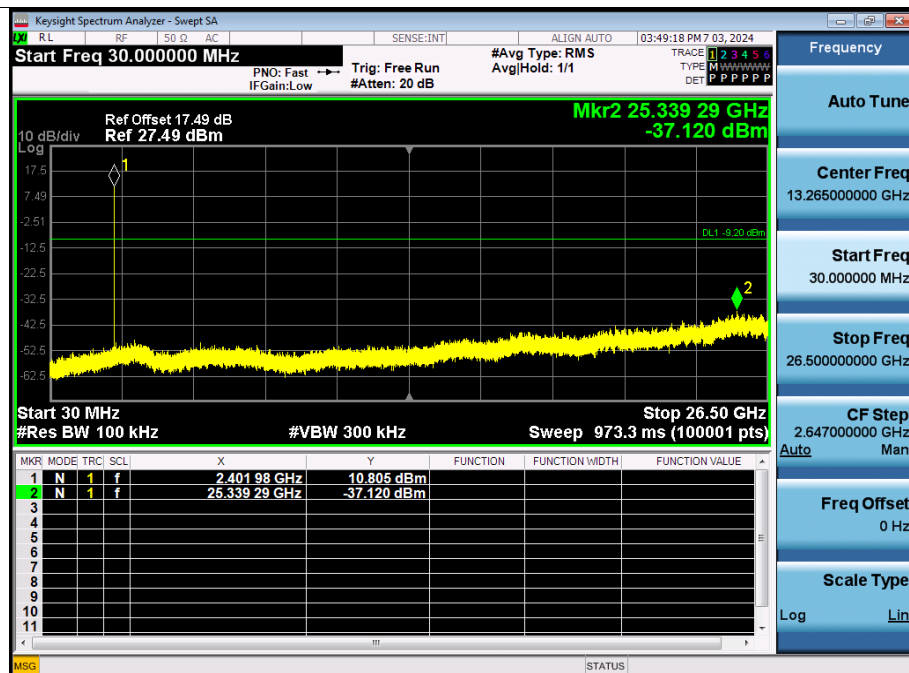

Note

1. Dual Ant.1 Limit (dBm): -7.936, Dual Ant.2 Limit (dBm): -9.195

10.6.2 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

[Ant.1]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4804	49.43	-3.55	V	0.00	45.88	73.98	28.10	PK
4804	49.43	-3.55	V	-24.73	21.15	53.98	32.83	AV
7206	46.74	0.40	V	0.00	47.14	73.98	26.84	PK
7206	46.74	0.40	V	-24.73	22.41	53.98	31.57	AV
4804	49.59	-3.55	H	0.00	46.04	73.98	27.94	PK
4804	49.59	-3.55	H	-24.73	21.31	53.98	32.67	AV
7206	46.76	0.40	H	0.00	47.16	73.98	26.82	PK
7206	46.76	0.40	H	-24.73	22.43	53.98	31.55	AV

Operation Mode	Normal(GFSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4882	50.12	-3.01	V	0.00	47.11	73.98	26.87	PK
4882	50.12	-3.01	V	-24.73	22.38	53.98	31.60	AV
7323	47.02	0.34	V	0.00	47.36	73.98	26.62	PK
7323	47.02	0.34	V	-24.73	22.63	53.98	31.35	AV
4882	50.51	-3.01	H	0.00	47.50	73.98	26.48	PK
4882	50.51	-3.01	H	-24.73	22.77	53.98	31.21	AV
7323	47.04	0.34	H	0.00	47.38	73.98	26.60	PK
7323	47.04	0.34	H	-24.73	22.65	53.98	31.33	AV

Operation Mode	Normal(GFSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	49.25	-2.89	V	0.00	46.36	73.98	27.62	PK
4960	49.25	-2.89	V	-24.73	21.63	53.98	32.35	AV
7440	47.39	0.50	V	0.00	47.89	73.98	26.09	PK
7440	47.39	0.50	V	-24.73	23.16	53.98	30.82	AV
4960	49.30	-2.89	H	0.00	46.41	73.98	27.57	PK
4960	49.30	-2.89	H	-24.73	21.68	53.98	32.30	AV
7440	47.51	0.50	H	0.00	48.01	73.98	25.97	PK
7440	47.51	0.50	H	-24.73	23.28	53.98	30.70	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4804	48.99	-3.55	V	0.00	45.44	73.98	28.54	PK
4804	48.99	-3.55	V	-24.73	20.71	53.98	33.27	AV
7206	46.62	0.40	V	0.00	47.02	73.98	26.96	PK
7206	46.62	0.40	V	-24.73	22.29	53.98	31.69	AV
4804	49.00	-3.55	H	0.00	45.45	73.98	28.53	PK
4804	49.00	-3.55	H	-24.73	20.72	53.98	33.26	AV
7206	46.67	0.40	H	0.00	47.07	73.98	26.91	PK
7206	46.67	0.40	H	-24.73	22.34	53.98	31.64	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4882	50.03	-3.01	V	0.00	47.02	73.98	26.96	PK
4882	50.03	-3.01	V	-24.73	22.29	53.98	31.69	AV
7323	47.27	0.34	V	0.00	47.61	73.98	26.37	PK
7323	47.27	0.34	V	-24.73	22.88	53.98	31.10	AV
4882	50.34	-3.01	H	0.00	47.33	73.98	26.65	PK
4882	50.34	-3.01	H	-24.73	22.60	53.98	31.38	AV
7323	47.34	0.34	H	0.00	47.68	73.98	26.30	PK
7323	47.34	0.34	H	-24.73	22.95	53.98	31.03	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4960	49.05	-2.89	V	0.00	46.16	73.98	27.82	PK
4960	49.05	-2.89	V	-24.73	21.43	53.98	32.55	AV
7440	47.29	0.50	V	0.00	47.79	73.98	26.19	PK
7440	47.29	0.50	V	-24.73	23.06	53.98	30.92	AV
4960	49.46	-2.89	H	0.00	46.57	73.98	27.41	PK
4960	49.46	-2.89	H	-24.73	21.84	53.98	32.14	AV
7440	47.32	0.50	H	0.00	47.82	73.98	26.16	PK
7440	47.32	0.50	H	-24.73	23.09	53.98	30.89	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4804	49.17	-3.55	V	0.00	45.62	73.98	28.36	PK
4804	49.17	-3.55	V	-24.73	20.89	53.98	33.09	AV
7206	46.08	0.40	V	0.00	46.48	73.98	27.50	PK
7206	46.08	0.40	V	-24.73	21.75	53.98	32.23	AV
4804	49.33	-3.55	H	0.00	45.78	73.98	28.20	PK
4804	49.33	-3.55	H	-24.73	21.05	53.98	32.93	AV
7206	46.18	0.40	H	0.00	46.58	73.98	27.40	PK
7206	46.18	0.40	H	-24.73	21.85	53.98	32.13	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4882	49.96	-3.01	V	0.00	46.95	73.98	27.03	PK
4882	49.96	-3.01	V	-24.73	22.22	53.98	31.76	AV
7323	47.10	0.34	V	0.00	47.44	73.98	26.54	PK
7323	47.10	0.34	V	-24.73	22.71	53.98	31.27	AV
4882	50.38	-3.01	H	0.00	47.37	73.98	26.61	PK
4882	50.38	-3.01	H	-24.73	22.64	53.98	31.34	AV
7323	47.23	0.34	H	0.00	47.57	73.98	26.41	PK
7323	47.23	0.34	H	-24.73	22.84	53.98	31.14	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	49.17	-2.89	V	0.00	46.28	73.98	27.70	PK
4960	49.17	-2.89	V	-24.73	21.55	53.98	32.43	AV
7440	47.01	0.50	V	0.00	47.51	73.98	26.47	PK
7440	47.01	0.50	V	-24.73	22.78	53.98	31.20	AV
4960	49.20	-2.89	H	0.00	46.31	73.98	27.67	PK
4960	49.20	-2.89	H	-24.73	21.58	53.98	32.40	AV
7440	47.05	0.50	H	0.00	47.55	73.98	26.43	PK
7440	47.05	0.50	H	-24.73	22.82	53.98	31.16	AV

[Ant.2]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4804	50.18	-3.55	V	0.00	46.63	73.98	27.35	PK
4804	50.18	-3.55	V	-24.73	21.90	53.98	32.08	AV
7206	47.43	0.40	V	0.00	47.83	73.98	26.15	PK
7206	47.43	0.40	V	-24.73	23.10	53.98	30.88	AV
4804	51.00	-3.55	H	0.00	47.45	73.98	26.53	PK
4804	51.00	-3.55	H	-24.73	22.72	53.98	31.26	AV
7206	47.68	0.40	H	0.00	48.08	73.98	25.90	PK
7206	47.68	0.40	H	-24.73	23.35	53.98	30.63	AV

Operation Mode	Normal(GFSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4882	50.73	-3.01	V	0.00	47.72	73.98	26.26	PK
4882	50.73	-3.01	V	-24.73	22.99	53.98	30.99	AV
7323	47.58	0.34	V	0.00	47.92	73.98	26.06	PK
7323	47.58	0.34	V	-24.73	23.19	53.98	30.79	AV
4882	51.02	-3.01	H	0.00	48.01	73.98	25.97	PK
4882	51.02	-3.01	H	-24.73	23.28	53.98	30.70	AV
7323	47.90	0.34	H	0.00	48.24	73.98	25.74	PK
7323	47.90	0.34	H	-24.73	23.51	53.98	30.47	AV

Operation Mode	Normal(GFSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	50.11	-2.89	V	0.00	47.22	73.98	26.76	PK
4960	50.11	-2.89	V	-24.73	22.49	53.98	31.49	AV
7440	47.66	0.50	V	0.00	48.16	73.98	25.82	PK
7440	47.66	0.50	V	-24.73	23.43	53.98	30.55	AV
4960	50.14	-2.89	H	0.00	47.25	73.98	26.73	PK
4960	50.14	-2.89	H	-24.73	22.52	53.98	31.46	AV
7440	47.86	0.50	H	0.00	48.36	73.98	25.62	PK
7440	47.86	0.50	H	-24.73	23.63	53.98	30.35	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4804	49.30	-3.55	V	0.00	45.75	73.98	28.23	PK
4804	49.30	-3.55	V	-24.73	21.02	53.98	32.96	AV
7206	47.36	0.40	V	0.00	47.76	73.98	26.22	PK
7206	47.36	0.40	V	-24.73	23.03	53.98	30.95	AV
4804	50.03	-3.55	H	0.00	46.48	73.98	27.50	PK
4804	50.03	-3.55	H	-24.73	21.75	53.98	32.23	AV
7206	47.40	0.40	H	0.00	47.80	73.98	26.18	PK
7206	47.40	0.40	H	-24.73	23.07	53.98	30.91	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4882	50.19	-3.01	V	0.00	47.18	73.98	26.80	PK
4882	50.19	-3.01	V	-24.73	22.45	53.98	31.53	AV
7323	47.25	0.34	V	0.00	47.59	73.98	26.39	PK
7323	47.25	0.34	V	-24.73	22.86	53.98	31.12	AV
4882	50.53	-3.01	H	0.00	47.52	73.98	26.46	PK
4882	50.53	-3.01	H	-24.73	22.79	53.98	31.19	AV
7323	47.33	0.34	H	0.00	47.67	73.98	26.31	PK
7323	47.33	0.34	H	-24.73	22.94	53.98	31.04	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4960	49.28	-2.89	V	0.00	46.39	73.98	27.59	PK
4960	49.28	-2.89	V	-24.73	21.66	53.98	32.32	AV
7440	47.42	0.50	V	0.00	47.92	73.98	26.06	PK
7440	47.42	0.50	V	-24.73	23.19	53.98	30.79	AV
4960	49.41	-2.89	H	0.00	46.52	73.98	27.46	PK
4960	49.41	-2.89	H	-24.73	21.79	53.98	32.19	AV
7440	47.55	0.50	H	0.00	48.05	73.98	25.93	PK
7440	47.55	0.50	H	-24.73	23.32	53.98	30.66	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4804	49.11	-3.55	V	0.00	45.56	73.98	28.42	PK
4804	49.11	-3.55	V	-24.73	20.83	53.98	33.15	AV
7206	47.25	0.40	V	0.00	47.65	73.98	26.33	PK
7206	47.25	0.40	V	-24.73	22.92	53.98	31.06	AV
4804	49.24	-3.55	H	0.00	45.69	73.98	28.29	PK
4804	49.24	-3.55	H	-24.73	20.96	53.98	33.02	AV
7206	47.47	0.40	H	0.00	47.87	73.98	26.11	PK
7206	47.47	0.40	H	-24.73	23.14	53.98	30.84	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4882	50.49	-3.01	V	0.00	47.48	73.98	26.50	PK
4882	50.49	-3.01	V	-24.73	22.75	53.98	31.23	AV
7323	47.11	0.34	V	0.00	47.45	73.98	26.53	PK
7323	47.11	0.34	V	-24.73	22.72	53.98	31.26	AV
4882	51.15	-3.01	H	0.00	48.14	73.98	25.84	PK
4882	51.15	-3.01	H	-24.73	23.41	53.98	30.57	AV
7323	47.17	0.34	H	0.00	47.51	73.98	26.47	PK
7323	47.17	0.34	H	-24.73	22.78	53.98	31.20	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	49.21	-2.89	V	0.00	46.32	73.98	27.66	PK
4960	49.21	-2.89	V	-24.73	21.59	53.98	32.39	AV
7440	47.02	0.50	V	0.00	47.52	73.98	26.46	PK
7440	47.02	0.50	V	-24.73	22.79	53.98	31.19	AV
4960	49.26	-2.89	H	0.00	46.37	73.98	27.61	PK
4960	49.26	-2.89	H	-24.73	21.64	53.98	32.34	AV
7440	47.06	0.50	H	0.00	47.56	73.98	26.42	PK
7440	47.06	0.50	H	-24.73	22.83	53.98	31.15	AV

[Dual Ant.1+ Ant.2]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4804	49.23	-3.55	V	0.00	45.68	73.98	28.30	PK
4804	49.23	-3.55	V	-24.73	20.95	53.98	33.03	AV
7206	46.69	0.40	V	0.00	47.09	73.98	26.89	PK
7206	46.69	0.40	V	-24.73	22.36	53.98	31.62	AV
4804	49.15	-3.55	H	0.00	45.60	73.98	28.38	PK
4804	49.15	-3.55	H	-24.73	20.87	53.98	33.11	AV
7206	46.72	0.40	H	0.00	47.12	73.98	26.86	PK
7206	46.72	0.40	H	-24.73	22.39	53.98	31.59	AV

Operation Mode	Normal(GFSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4882	51.15	-3.01	V	0.00	48.14	73.98	25.84	PK
4882	51.15	-3.01	V	-24.73	23.41	53.98	30.57	AV
7323	46.66	0.34	V	0.00	47.00	73.98	26.98	PK
7323	46.66	0.34	V	-24.73	22.27	53.98	31.71	AV
4882	51.61	-3.01	H	0.00	48.60	73.98	25.38	PK
4882	51.61	-3.01	H	-24.73	23.87	53.98	30.11	AV
7323	46.94	0.34	H	0.00	47.28	73.98	26.70	PK
7323	46.94	0.34	H	-24.73	22.55	53.98	31.43	AV

Operation Mode	Normal(GFSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	48.73	-2.89	V	0.00	45.84	73.98	28.14	PK
4960	48.73	-2.89	V	-24.73	21.11	53.98	32.87	AV
7440	48.17	0.50	V	0.00	48.67	73.98	25.31	PK
7440	48.17	0.50	V	-24.73	23.94	53.98	30.04	AV
4960	50.41	-2.89	H	0.00	47.52	73.98	26.46	PK
4960	50.41	-2.89	H	-24.73	22.79	53.98	31.19	AV
7440	48.27	0.50	H	0.00	48.77	73.98	25.21	PK
7440	48.27	0.50	H	-24.73	24.04	53.98	29.94	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4804	49.46	-3.55	V	0.00	45.91	73.98	28.07	PK
4804	49.46	-3.55	V	-24.73	21.18	53.98	32.80	AV
7206	46.52	0.40	V	0.00	46.92	73.98	27.06	PK
7206	46.52	0.40	V	-24.73	22.19	53.98	31.79	AV
4804	49.59	-3.55	H	0.00	46.04	73.98	27.94	PK
4804	49.59	-3.55	H	-24.73	21.31	53.98	32.67	AV
7206	46.53	0.40	H	0.00	46.93	73.98	27.05	PK
7206	46.53	0.40	H	-24.73	22.20	53.98	31.78	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4882	50.15	-3.01	V	0.00	47.14	73.98	26.84	PK
4882	50.15	-3.01	V	-24.73	22.41	53.98	31.57	AV
7323	47.41	0.34	V	0.00	47.75	73.98	26.23	PK
7323	47.41	0.34	V	-24.73	23.02	53.98	30.96	AV
4882	50.50	-3.01	H	0.00	47.49	73.98	26.49	PK
4882	50.50	-3.01	H	-24.73	22.76	53.98	31.22	AV
7323	47.45	0.34	H	0.00	47.79	73.98	26.19	PK
7323	47.45	0.34	H	-24.73	23.06	53.98	30.92	AV

Operation Mode	Normal($\pi/4$ DQPSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
4960	50.12	-2.89	V	0.00	47.23	73.98	26.75	PK
4960	50.12	-2.89	V	-24.73	22.50	53.98	31.48	AV
7440	47.15	0.50	V	0.00	47.65	73.98	26.33	PK
7440	47.15	0.50	V	-24.73	22.92	53.98	31.06	AV
4960	49.58	-2.89	H	0.00	46.69	73.98	27.29	PK
4960	49.58	-2.89	H	-24.73	21.96	53.98	32.02	AV
7440	47.16	0.50	H	0.00	47.66	73.98	26.32	PK
7440	47.16	0.50	H	-24.73	22.93	53.98	31.05	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2402 MHz
Channel No	CH. 0

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4804	49.19	-3.55	V	0.00	45.64	73.98	28.34	PK
4804	49.19	-3.55	V	-24.73	20.91	53.98	33.07	AV
7206	46.22	0.40	V	0.00	46.62	73.98	27.36	PK
7206	46.22	0.40	V	-24.73	21.89	53.98	32.09	AV
4804	49.36	-3.55	H	0.00	45.81	73.98	28.17	PK
4804	49.36	-3.55	H	-24.73	21.08	53.98	32.90	AV
7206	46.36	0.40	H	0.00	46.76	73.98	27.22	PK
7206	46.36	0.40	H	-24.73	22.03	53.98	31.95	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2441 MHz
Channel No	CH. 39

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4882	50.11	-3.01	V	0.00	47.10	73.98	26.88	PK
4882	50.11	-3.01	V	-24.73	22.37	53.98	31.61	AV
7323	47.28	0.34	V	0.00	47.62	73.98	26.36	PK
7323	47.28	0.34	V	-24.73	22.89	53.98	31.09	AV
4882	50.46	-3.01	H	0.00	47.45	73.98	26.53	PK
4882	50.46	-3.01	H	-24.73	22.72	53.98	31.26	AV
7323	47.33	0.34	H	0.00	47.67	73.98	26.31	PK
7323	47.33	0.34	H	-24.73	22.94	53.98	31.04	AV

Operation Mode	Normal(8DPSK)
Operating Frequency	2480 MHz
Channel No	CH. 78

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	49.88	-2.89	V	0.00	46.99	73.98	26.99	PK
4960	49.88	-2.89	V	-24.73	22.26	53.98	31.72	AV
7440	47.21	0.50	V	0.00	47.71	73.98	26.27	PK
7440	47.21	0.50	V	-24.73	22.98	53.98	31.00	AV
4960	49.76	-2.89	H	0.00	46.87	73.98	27.11	PK
4960	49.76	-2.89	H	-24.73	22.14	53.98	31.84	AV
7440	47.39	0.50	H	0.00	47.89	73.98	26.09	PK
7440	47.39	0.50	H	-24.73	23.16	53.98	30.82	AV

[DBS]

Scenario 1

Dual Bluetooth DH5_Ch.78 + Ant All(MIMO) 5 GHz 802.11a_Ch.177

Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	51.22	-4.82	V	0.00	46.40	73.98	27.58	PK
4960	51.22	-4.82	V	-24.73	21.66	53.98	32.32	AV
7440	52.34	2.13	V	0.00	54.47	73.98	19.51	PK
7440	52.34	2.13	V	-24.73	29.74	53.98	24.24	AV

Note : UNII RSDB Data refer to [UNII] Test Report

Scenario 3

Ant.1 Bluetooth DH5_Ch.78 + Ant.2 2.4 GHz 802.11b_Ch.11_ + Ant All(MIMO) 5 GHz 802.11a_Ch.177


Frequency	Measured Value	AF+CL-AG	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
4960	54.88	-4.82	H	0.00	50.06	73.98	23.92	PK
4960	54.88	-4.82	H	-24.73	25.32	53.98	28.66	AV
7440	48.93	2.13	H	0.00	51.06	73.98	22.92	PK
7440	48.93	2.13	H	-24.73	26.33	53.98	27.65	AV

Note : DTS, UNII RSDB Data refer to [DTS], [UNII] Test Report

RESULT PLOTS


[Ant.1]

Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.78 3rd Harmonic, Y-H)

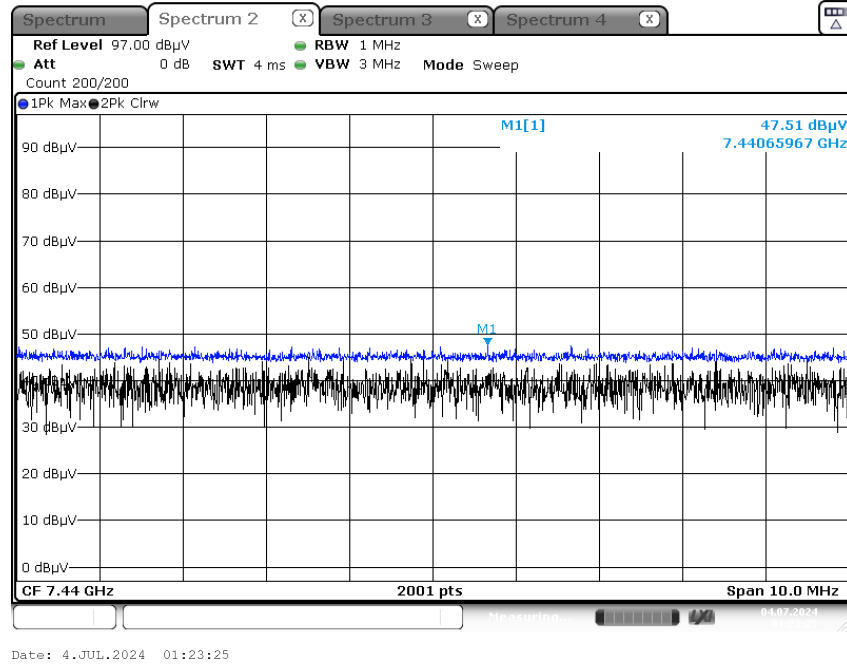


[Ant.2]

Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.78 3rd Harmonic, Y-H)

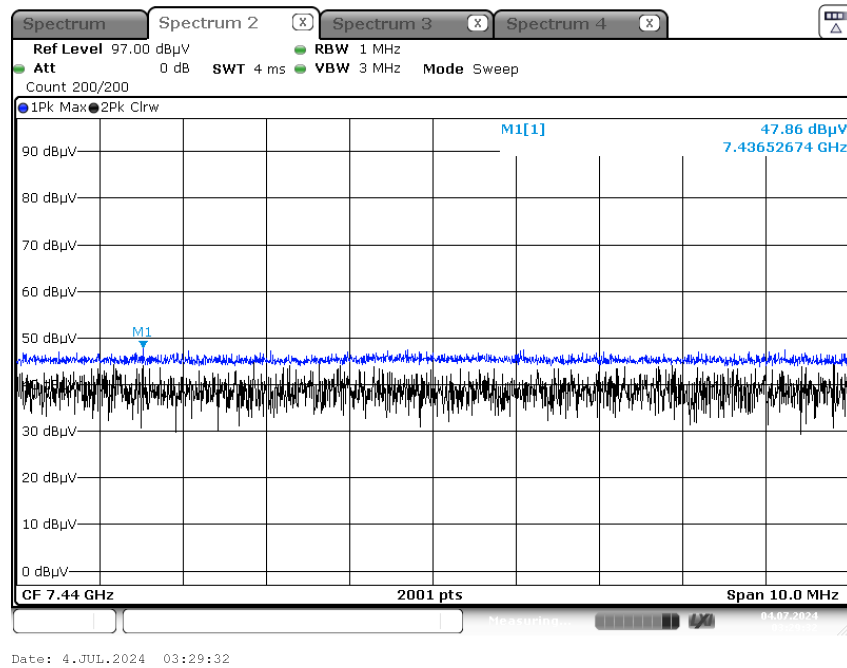

[Dual Ant.1+ Ant.2]

Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.78 3rd Harmonic, Y-H)

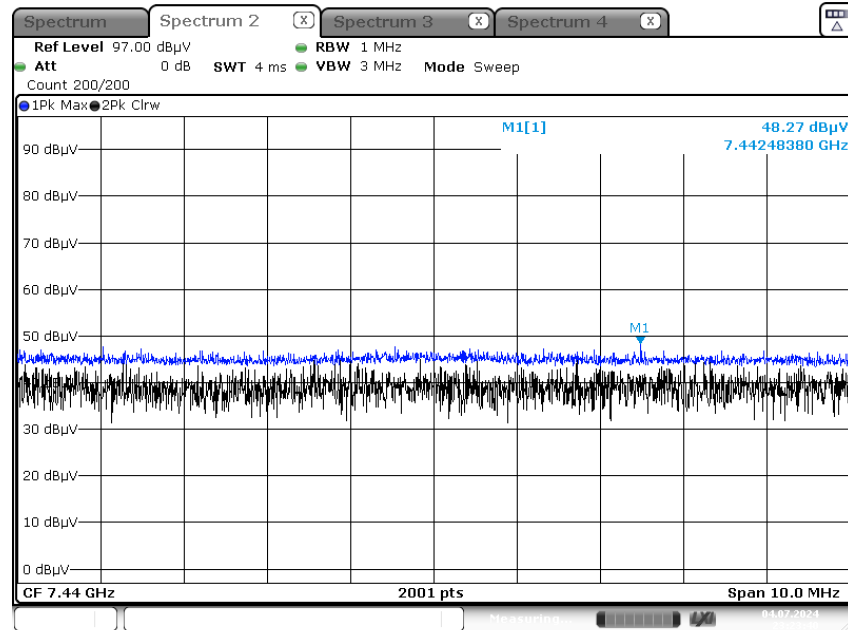


Date: 4.JUL.2024 23:23:40

[DBS]

Scenario 1

Dual Bluetooth DH5_Ch.78 + Ant All(MIMO) 5 GHz 802.11a_Ch.177


Radiated Spurious Emissions plot – Peak & Average Result (3rd Harmonic, Y-V)

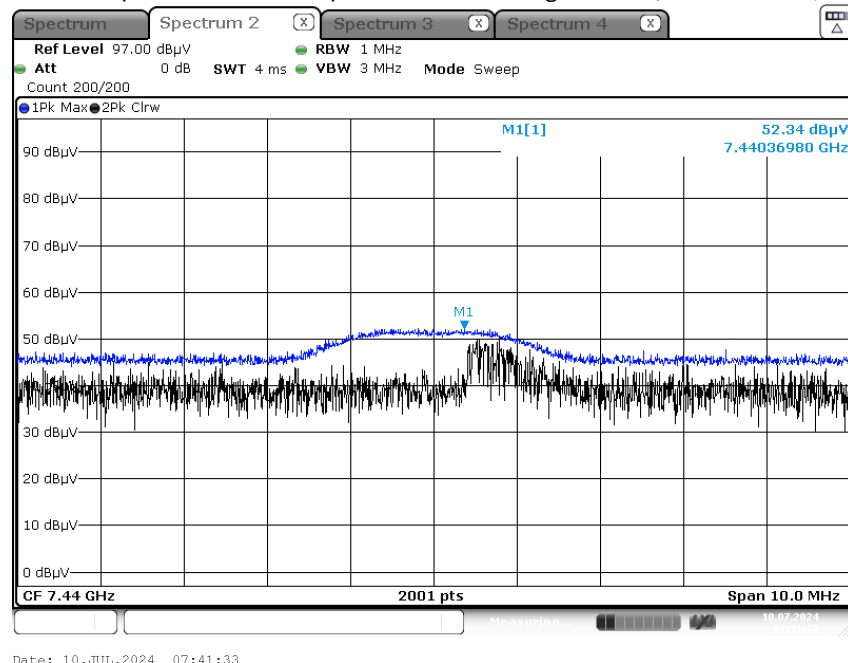

Scenario 3

Ant.1 Bluetooth DH5_Ch.78 + Ant.2 2.4 GHz 802.11b_Ch.11_ + Ant All(MIMO) 5 GHz 802.11a_Ch.177

Radiated Spurious Emissions plot – Peak & Average Result (3rd Harmonic, Z-H)

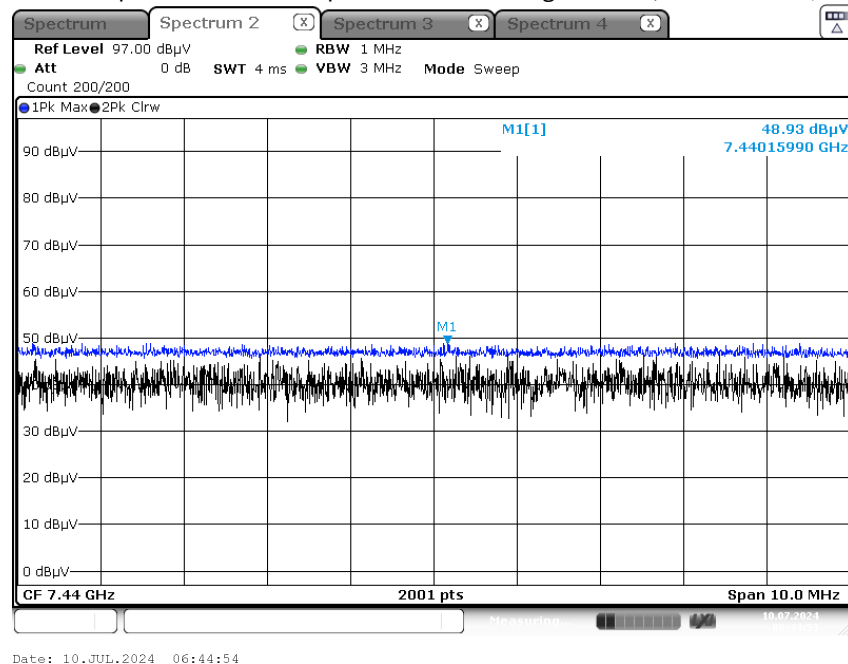

Note: Plots of worst case are only reported.

10.6.3 RADIATED RESTRICTED BAND EDGES

[Ant.1]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390.0	54.76	-	H	0.00	54.76	73.98	19.22	PK
2390.0	54.76	-	H	-24.73	30.03	53.98	23.95	AV
2390.0	54.69	-	V	0.00	54.69	73.98	19.29	PK
2390.0	54.69	-	V	-24.73	29.96	53.98	24.02	AV
2483.5	60.17	-	H	0.00	60.17	73.98	13.81	PK
2483.5	60.17	-	H	-24.73	35.44	53.98	18.54	AV
2483.5	60.02	-	V	0.00	60.02	73.98	13.96	PK
2483.5	60.02	-	V	-24.73	35.29	53.98	18.69	AV

Operation Mode	EDR(π /4DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB]	[dB μ V/m]	[dB μ V/m]	[dB]	
2390.0	54.99	-	H	0.00	54.99	73.98	18.99	PK
2390.0	54.99	-	H	-24.73	30.26	53.98	23.72	AV
2390.0	54.86	-	V	0.00	54.86	73.98	19.12	PK
2390.0	54.86	-	V	-24.73	30.13	53.98	23.85	AV
2483.5	68.27	-	H	0.00	68.27	73.98	5.71	PK
2483.5	68.27	-	H	-24.73	43.54	53.98	10.44	AV
2483.5	68.11	-	V	0.00	68.11	73.98	5.87	PK
2483.5	68.11	-	V	-24.73	43.38	53.98	10.60	AV

Operation Mode	EDR(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	56.14	-	H	0.00	56.14	73.98	17.84	PK
2390.0	56.14	-	H	-24.73	31.41	53.98	22.57	AV
2390.0	55.61	-	V	0.00	55.61	73.98	18.37	PK
2390.0	55.61	-	V	-24.73	30.88	53.98	23.10	AV
2483.5	67.26	-	H	0.00	67.26	73.98	6.72	PK
2483.5	67.26	-	H	-24.73	42.53	53.98	11.45	AV
2483.5	67.15	-	V	0.00	67.15	73.98	6.83	PK
2483.5	67.15	-	V	-24.73	42.42	53.98	11.56	AV

[Ant.2]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	54.43	-	H	0.00	54.43	73.98	19.55	PK
2390.0	54.43	-	H	-24.73	29.70	53.98	24.28	AV
2390.0	54.29	-	V	0.00	54.29	73.98	19.69	PK
2390.0	54.29	-	V	-24.73	29.56	53.98	24.42	AV
2483.5	65.33	-	H	0.00	65.33	73.98	8.65	PK
2483.5	65.33	-	H	-24.73	40.60	53.98	13.38	AV
2483.5	62.81	-	V	0.00	62.81	73.98	11.17	PK
2483.5	62.81	-	V	-24.73	38.08	53.98	15.90	AV

Operation Mode	EDR($\pi/4$ DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	55.03	-	H	0.00	55.03	73.98	18.95	PK
2390.0	55.03	-	H	-24.73	30.30	53.98	23.68	AV
2390.0	54.76	-	V	0.00	54.76	73.98	19.22	PK
2390.0	54.76	-	V	-24.73	30.03	53.98	23.95	AV
2483.5	65.45	-	H	0.00	65.45	73.98	8.53	PK
2483.5	65.45	-	H	-24.73	40.72	53.98	13.26	AV
2483.5	63.89	-	V	0.00	63.89	73.98	10.09	PK
2483.5	63.89	-	V	-24.73	39.16	53.98	14.82	AV

Operation Mode	EDR(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	54.38	-	H	0.00	54.38	73.98	19.60	PK
2390.0	54.38	-	H	-24.73	29.65	53.98	24.33	AV
2390.0	54.22	-	V	0.00	54.22	73.98	19.76	PK
2390.0	54.22	-	V	-24.73	29.49	53.98	24.49	AV
2483.5	64.43	-	H	0.00	64.43	73.98	9.55	PK
2483.5	64.43	-	H	-24.73	39.70	53.98	14.28	AV
2483.5	62.76	-	V	0.00	62.76	73.98	11.22	PK
2483.5	62.76	-	V	-24.73	38.03	53.98	15.95	AV

[Dual Ant.1+ Ant.2]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	55.30	-	H	0.00	55.30	73.98	18.68	PK
2390.0	55.30	-	H	-24.73	30.57	53.98	23.41	AV
2390.0	55.24	-	V	0.00	55.24	73.98	18.74	PK
2390.0	55.24	-	V	-24.73	30.51	53.98	23.47	AV
2483.5	59.73	-	H	0.00	59.73	73.98	14.25	PK
2483.5	59.73	-	H	-24.73	35.00	53.98	18.98	AV
2483.5	59.62	-	V	0.00	59.62	73.98	14.36	PK
2483.5	59.62	-	V	-24.73	34.89	53.98	19.09	AV

Operation Mode	EDR(π /4DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	55.23	-	H	0.00	55.23	73.98	18.75	PK
2390.0	55.23	-	H	-24.73	30.50	53.98	23.48	AV
2390.0	55.14	-	V	0.00	55.14	73.98	18.84	PK
2390.0	55.14	-	V	-24.73	30.41	53.98	23.57	AV
2483.5	67.89	-	H	0.00	67.89	73.98	6.09	PK
2483.5	67.89	-	H	-24.73	43.16	53.98	10.82	AV
2483.5	66.73	-	V	0.00	66.73	73.98	7.25	PK
2483.5	66.73	-	V	-24.73	42.00	53.98	11.98	AV


Operation Mode	EDR(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH. 0, CH. 78

Frequency	Measured Level	A.F+C.L	Pol.	Duty Cycle Correction	Total	Limit	Margin	Measurement Type
[MHz]	[dBμV]	[dB/m]	[H/V]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
2390.0	55.66	-	H	0.00	55.66	73.98	18.32	PK
2390.0	55.66	-	H	-24.73	30.93	53.98	23.05	AV
2390.0	55.38	-	V	0.00	55.38	73.98	18.60	PK
2390.0	55.38	-	V	-24.73	30.65	53.98	23.33	AV
2483.5	67.40	-	H	0.00	67.40	73.98	6.58	PK
2483.5	67.40	-	H	-24.73	42.67	53.98	11.31	AV
2483.5	66.93	-	V	0.00	66.93	73.98	7.05	PK
2483.5	66.93	-	V	-24.73	42.20	53.98	11.78	AV

RESULT PLOTS


[Ant.1]

Radiated Restricted Band Edges plot – Average & Peak Result ($\pi/4$ DQPSK, Ch.78, X-H)

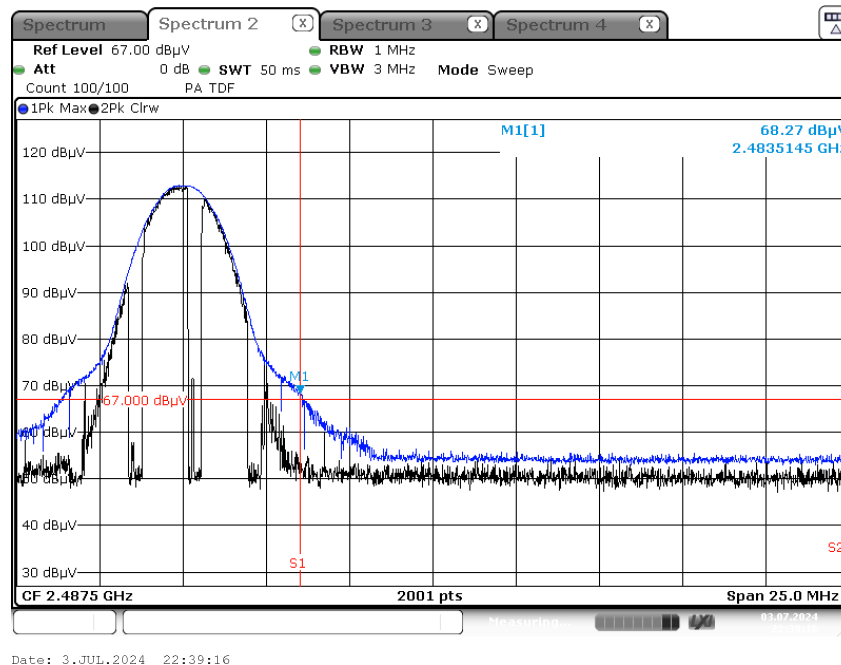


[Ant.2]

Radiated Restricted Band Edges plot – Average & Peak Result ($\pi/4$ DQPSK, Ch. 78, Y-H)

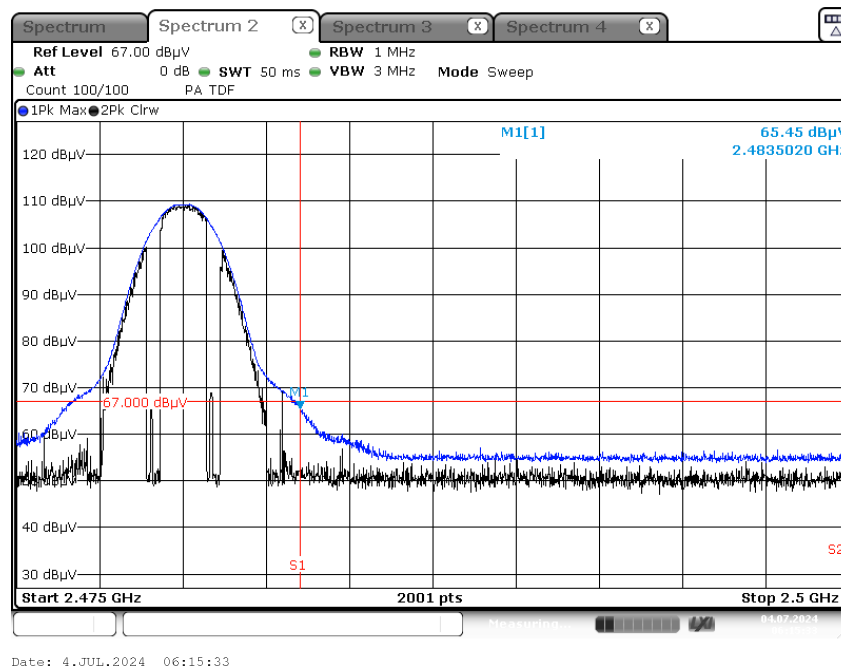

[Dual Ant.1+ Ant.2]

Radiated Restricted Band Edges plot – Average & Peak Result ($\pi/4$ DQPSK, Ch. 78, X-H)

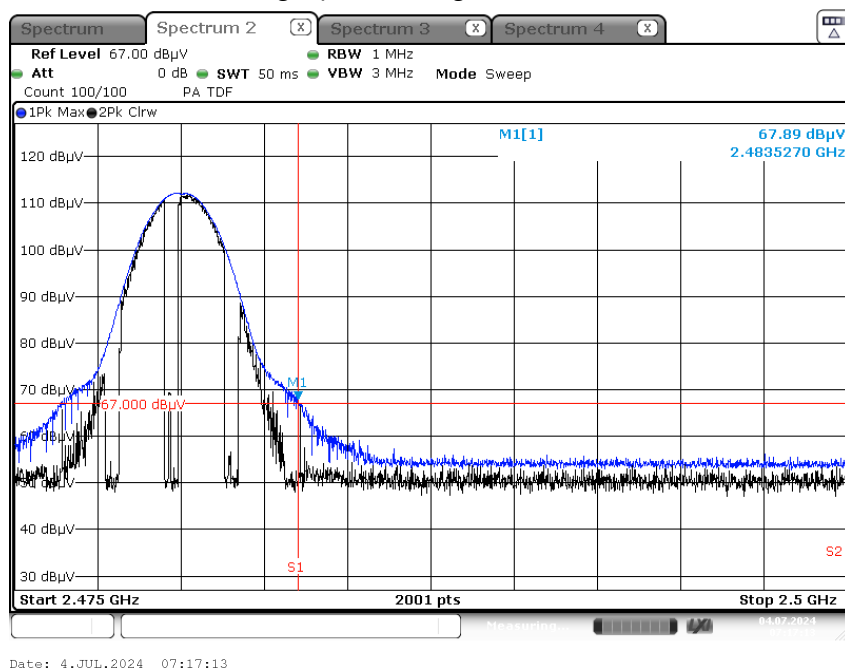

Note:

Plots of worst case are only reported.

10.7 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 2

Test Report

Common Information

EUT : SM-S721U
 Operating Conditions : BT Mode
 Comment :

Full Spectrum

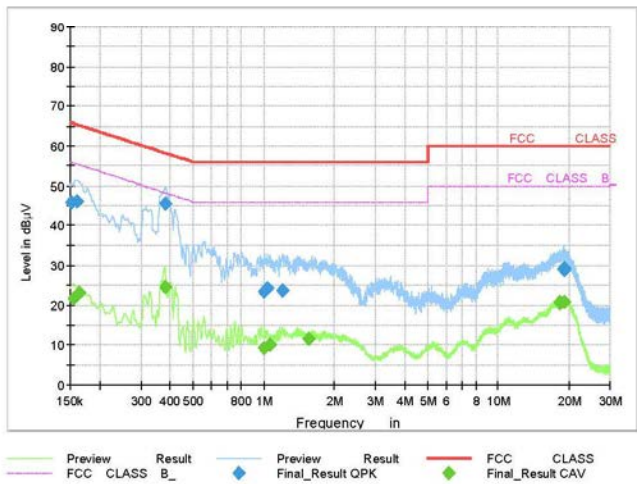

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1523	45.77	65.88	20.10	9.000	L1	9.6
0.1613	46.22	65.40	19.18	9.000	N	9.6
0.3818	45.60	58.24	12.64	9.000	L1	9.6
1.0085	23.38	56.00	32.62	9.000	L1	9.7
1.0378	24.15	56.00	31.85	9.000	L1	9.7
1.2065	23.73	56.00	32.27	9.000	L1	9.7
18.9815	29.12	60.00	30.88	9.000	L1	10.4
19.0625	28.94	60.00	31.06	9.000	L1	10.4
19.0850	29.36	60.00	30.64	9.000	L1	10.4

2024-07-10

오후 1:53:53

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1545	21.70	55.75	34.05	9.000	L1	9.6
0.1635	23.12	55.28	32.17	9.000	N	9.6
0.3795	24.63	48.29	23.66	9.000	L1	9.6
1.0063	9.30	46.00	36.70	9.000	N	9.7
1.0648	9.97	46.00	36.03	9.000	L1	9.7
1.5620	11.53	46.00	34.47	9.000	N	9.7
18.2008	20.54	50.00	29.46	9.000	L1	10.3
18.2255	20.65	50.00	29.35	9.000	L1	10.3
19.1300	20.86	50.00	29.14	9.000	L1	10.4

2024-07-10

오후 1:53:53

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	07/17/2025	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	07/02/2025	Annual
Temperature Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/04/2024	Annual
Power Meter	N1911A	Agilent	MY45100523	02/28/2025	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/22/2025	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/30/2024	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2025	Annual
DC Power Supply	E3632A	Agilent	KR01009150	04/18/2025	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	05/28/2025	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/20/2025	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/15/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller (Antenna mast & Turn Table)	CO3000	Innco system	CO3000/ 15421/57580623/G	N/A	N/A
Antenna Position Tower	MA4640	Innco system	9320422	04/05/2025	Biennial
Turn Table	N/A	Innco system	5930623	N/A	N/A
Loop Antenna	FMZB 1513	Schwarzbeck	1513-175	01/16/2025	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-1135	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	1151	07/14/2025	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01B	T&M system	TM2009001	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5- 2370/2520-60/12SS	Wainwright Instruments	2	01/02/2025	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	5	06/04/2025	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	6	06/04/2025	Annual
Band Reject Filter	WRCJV5100/5850- 40/50-8EEK	Wainwright Instruments	1	02/14/2025	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S5L1	03/12/2025	Annual
RF Switching System	FMSR -05B (ATT(10dB) + LNA1(1~18GHz))	T&M system	S5L2	03/12/2025	Annual
RF Switching System	FMSR -05B (ATT(3dB) + LNA1(1~18GHz))	T&M system	S5L3	03/12/2025	Annual
RF Switching System	FMSR -05B (LNA1(1~18GHz))	T&M system	S5L4	03/12/2025	Annual
RF Switching System	FMSR -05B (HPF(7~18GHz) + LNA2(6~18GHz))	T&M system	S5L5	03/12/2025	Annual
RF Switching System	FMSR -05B (Thru(30MHz ~ 18GHz))	T&M system	S5L6	03/12/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/19/2025	Annual
Spectrum Analyzer	FSV40 (9 kHz ~ 40 GHz)	Rohde & Schwarz	101510	03/28/2025	Annual

Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2407-FC010-P