

MEASUREMENT REPORT

FCC PART 15.225 NFC

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
10/8/2021-10/21/2021
Test Report Issue Date:
12/16/2021
Test Site/Location:
PCTEST Lab. Morgan Hill, CA, USA
Test Report Serial No.:
1M2109220110-16.A3L

FCC ID:	A3LSMS908E
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type:	Certification
Model:	SM-S908E/DS
Additional Model(s):	SM-S908E
EUT Type:	Portable Handset
Frequency:	13.56MHz
FCC Classification:	Low Power Communications Device Transmitter (DXX)
FCC Rule Part(s):	Part 15 Subpart C (15.225)
ISED Specification:	RSS-210 Issue 10
Test Procedure(s):	ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: A3LSMS908E		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 1 of 31

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope.....	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	Software and Firmware.....	4
2.5	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TEST	5
3.1	Evaluation Procedure.....	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	ANTENNA REQUIREMENTS	7
5.0	MEASUREMENT UNCERTAINTY	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	Bandwidth Measurement	11
7.3	Frequency Stability Test Data.....	13
7.4	In-Band Radiated Spurious Emissions	15
7.5	Out-of-Band Radiated Spurious Emissions.....	18
7.6	AC Line Conducted Emissions Measurement.....	25
8.0	CONCLUSION	31

FCC ID: A3LSMS908E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset	Page 2 of 31	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMS908E	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset	Page 3 of 31	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS908E**
The test data contained in this report pertains only to the emissions due to the NFC transmitter of the EUT.

Test Device Serial No.: 0507M, 0579M, 0229M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, Ultra Wideband

2.3 Test Configuration

The EUT was set to continuously transmit at 13.56MHz. This was performed using manufacturer software loaded on the phone to allow for continuous transmission. This device was tested in accordance with the guidance of ANSI C63.10-2013. See Sections 3.2 and 3.3 of this test report for a description of the AC line conducted emissions and radiated emissions test setups, respectively.

2.4 Software and Firmware

The test was conducted with firmware version S908USQU0AUJ9 installed on the EUT

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS908E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset	Page 4 of 31	

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are EPCOS 2X60A Power Line Filter (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.6. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: A3LSMS908E	 Proud to be part of 	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset	Page 5 of 31	

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS908E	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset	Page 6 of 31	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the EUT is **permanently attached**.
- This unit was tested with its standard battery.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMS908E	 Proud to be part of  element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset	Page 7 of 31	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Line Conducted Disturbance	2.75
Radiated Disturbance (<30MHz)	4.06
Radiated Disturbance (30MHz - 1GHz)	4.30

FCC ID: A3LSMS908E	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 8 of 31

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	3/31/2021	Annual	3/31/2022	MY49430244
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	6/8/2021	Annual	6/8/2022	224569
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	12/3/2020	Annual	12/3/2021	102327
Rohde & Schwarz	ESW44	EMI Test Receiver	11/9/2020	Annual	11/9/2021	101570
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/5/2021	Annual	4/5/2022	101063
Rohde & Schwarz	ENV216	Two-Line-V-Network (LISN)	12/7/2020	Annual	12/7/2021	101364

Table 6-1. Test Equipment List

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS908E	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset	Page 9 of 31	

7.0 TEST DATA

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
FCC ID: A3LSMS908E
FCC Classification: Low Power Communications Device Transmitter (DXX)
Frequencies Examined: 13.56MHz

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen [6.7]	Bandwidth Measurement	N/A	RADIATED	N/A	Section 7.2
15.225 (e)	RSS-210 [B.6]	Frequency Stability Tolerance	$\pm 0.01\%$ of Operating Frequency	Temperature Chamber	PASS	Section 7.3
15.225 (a)(b)(c)	RSS-210 [B.6]	In-Band Emissions	15,848 μ V/m @ 30m 13.553 – 13.567 MHz 334 μ V/m @ 30m 13.410 – 13.553 MHz 13.567 – 13.710 MHz 106 μ V/m @ 30m 13.110 – 13.410 MHz 13.710 – 14.010 MHz	RADIATED	PASS	Section 7.4
15.225 (d) 15.209	RSS-Gen [8.9]	Out-of-Band Emissions	Emissions outside of the specified band (13.110 – 14.010 MHz) must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.5
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen)	AC LINE CONDUCTED	PASS	Section 7.6

Table 7-1. Summary of Test Results

Note:

1. This unit was tested with its standard battery.
2. All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
3. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

FCC ID: A3LSMS908E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset	Page 10 of 31	

7.2 Bandwidth Measurement

§2.1049; RSS-Gen (6.7)

Test Overview and Limit

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequency. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 20dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 20. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

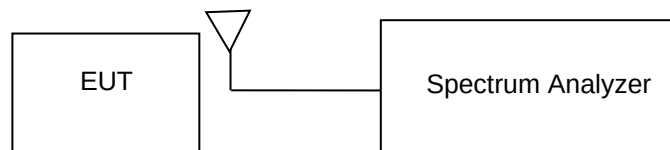


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 11 of 31

Frequency	20dB Bandwidth [kHz]	99% OBW [kHz]
13.56MHz	437.50	585.57

Table 7-2. 20dB and 99% Bandwidth Measurement



Plot 7-1. 20dB and 99% Bandwidth Plot

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 12 of 31

7.3 Frequency Stability Test Data

§15.225; RSS-210 (B.6)

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.10-2013. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -20°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 15.225, the frequency stability of the transmitter shall be maintained within $\pm 0.01\%$ of the center frequency.

Test Procedure Used

ANSI C63.10-2013 – Section 6.8

ASK

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -20°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

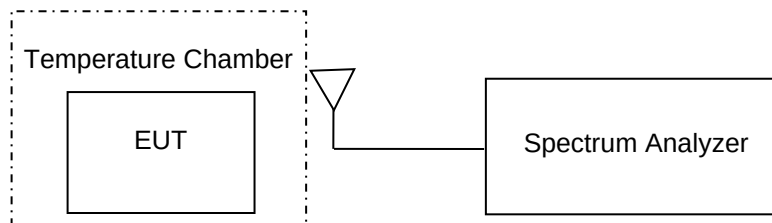


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

All possible configurations were investigated and only the worst case is reported.

FCC ID: A3LSMS908E	 Proud to be part of 	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 13 of 31

Frequency Stability Test Data

§15.225; RSS-210 (B.6)

OPERATING FREQUENCY: 13,559,500 Hz
REFERENCE VOLTAGE: 4.33 VDC
DEVIATION LIMIT: $\pm 0.01\% = 1356\text{Hz}$

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.33	+ 20 (Ref)	13,559,500	0	0.0000000
100 %		- 30	13,559,150	-350	-0.0025812
100 %		- 20	13,559,050	-450	-0.0033187
100 %		- 10	13,559,000	-500	-0.0036875
100 %		0	13,559,750	250	0.0018437
100 %		+ 10	13,558,500	-1,000	-0.0073749
100 %		+ 20	13,559,250	-250	-0.0018437
100 %		+ 30	13,558,750	-750	-0.0055312
100 %		+ 40	13,559,080	-420	-0.0030975
100 %		+ 50	13,559,250	-250	-0.0018437
BATT. ENDPOINT	3.65	+ 20	13,559,000	-500	-0.0036875

Table 7-3. Frequency Stability Test Data

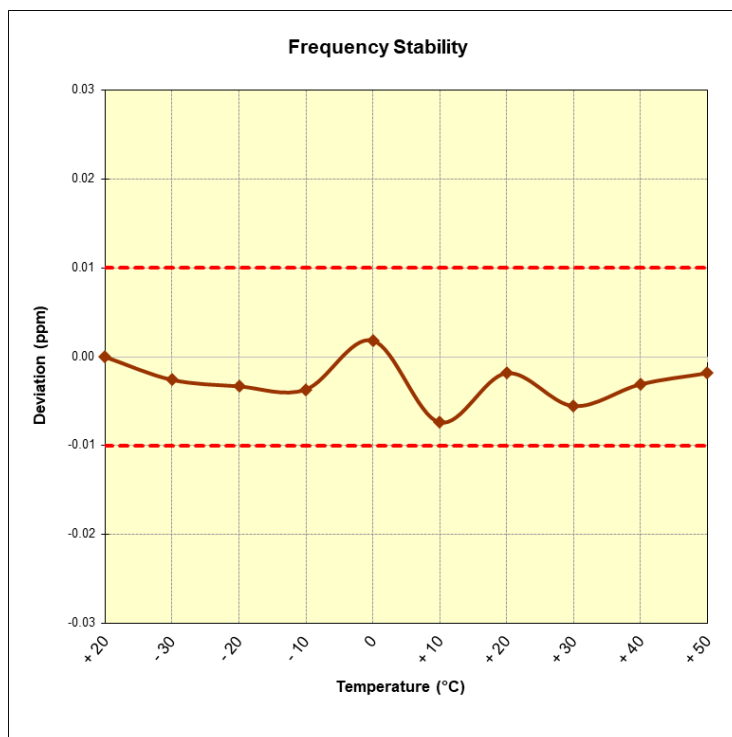


Figure 7-3. Frequency Stability Plot

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 14 of 31

7.4 In-Band Radiated Spurious Emissions

§15.225(a)(b)(c); RSS-210 (B.6)

Test Overview and Limit

The EUT was tested from 13.110 – 14.010 MHz. All in-band radiated spurious emissions are measured with a spectrum analyzer connected to a loop antenna while the EUT is operating at appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All in-band emissions appearing in a restricted band as specified in Section 15.225 of the Title 47 CFR must not exceed the limits shown in Table 7-4.

Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
13.553-13.567 MHz	15,848	30
13.410-13.553 MHz and 13.567-13.710 MHz	334	30
13.110-13.410 MHz and 13.710-14.010 MHz	106	30

Table 7-4. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.4.7

Test Settings

1. RBW = 9kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS908E	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 15 of 31

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

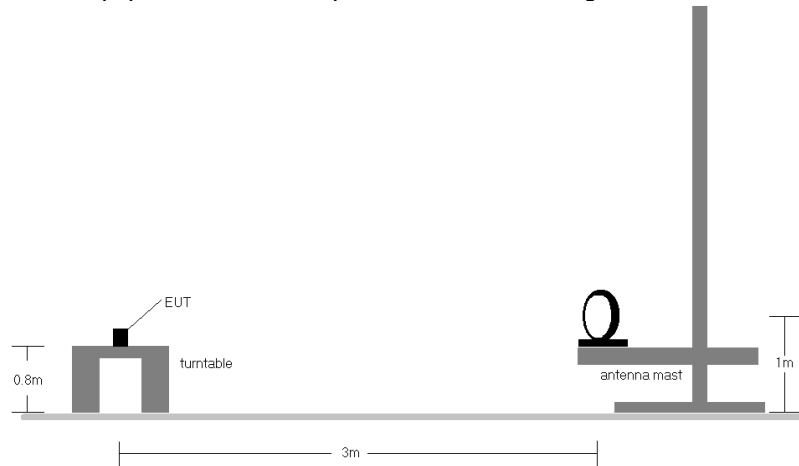


Figure 7-4. Radiated Test Setup

Test Notes:

1. All emissions lying in restricted bands specified in §15.225 and RSS-210 are below the limit shown in Table 7-4.
2. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.
3. All emissions were greater than 20 dB below the limit.
4. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
5. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2). Distance Extrapolation Factor = $20 \log_{10}(30/3)^2 = 40\text{dB}$.
6. The spectrum was investigated from 9kHz up to 30MHz using the loop antenna. Only the emissions shown in the table below were found to be significant.
7. All measurements were recorded using a spectrum analyzer employing a peak detector unless otherwise noted as quasi-peak for emissions below 960MHz.
8. All possible configurations were investigated and only the worst case is reported.


Sample Calculation

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}] + \text{Distance Extrapolation Factor} [\text{dB}]$
- $\text{AFCL} [\text{dB/m}] = (\text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}] + \text{Attenuator} [\text{dB}]) - \text{Preamplifier Gain} [\text{dB}]$
- Limit $[\text{dB}\mu\text{V/m}] = 20 * \text{Log} (\text{Limit} [\mu\text{V/m}])$
- Margin $[\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 16 of 31

In-Band Radiated Spurious Emission Measurements

§15.225(a)(b)(c); RSS-210 (B.6)

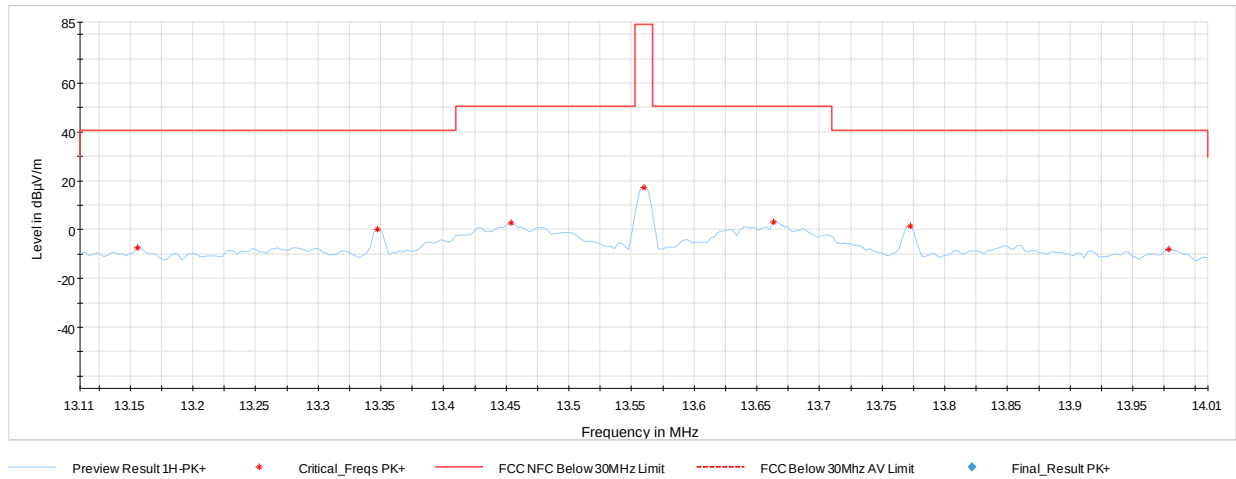

Plot 7-2. In Band Radiated Spurious Emissions

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	Field Strength @ 3m [dBμV/m]	Field Strength @ 30m [dBμV/m]	Limit @30m [dBμV/m]	Margin [dB]
13.156	X	100	103	-95.37	20.82	32.45	-7.55	40.51	-48.06
13.348	X	100	208	-87.69	20.82	40.13	0.13	40.51	-40.38
13.454	X	100	19	-84.92	20.82	42.90	2.90	50.47	-47.57
13.560	X	100	197	-70.61	20.82	57.21	17.21	84.00	-66.79
13.663	X	100	19	-84.57	20.82	43.25	3.25	50.47	-47.22
13.772	X	100	8	-86.46	20.82	41.36	1.36	40.51	-39.15
13.979	X	100	329	-95.76	20.82	32.06	-7.94	40.51	-48.45

Table 7-5. In-Band Radiated Measurements

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 17 of 31

7.5 Out-of-Band Radiated Spurious Emissions

§15.209 §15.225(d); RSS-Gen (8.9)

Test Overview and Limit

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110 – 14.010 MHz. All measurements were recorded using a spectrum analyzer employing a peak detector unless otherwise noted as quasi-peak for emissions below 960MHz.

All out-of-band emissions appearing in a restricted band as specified in Section 15.225 of the Title 47 CFR must not exceed the limits shown in Table 7-6 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-6. Radiated Limits – Out of band

Test Procedures Used

ANSI C63.10-2013 – Section 6.5.4

Test Settings

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 9kHz for emissions below 30MHz and 100kHz for emissions between 30MHz and 1GHz
3. VBW ≥ 3 x RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMS908E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 18 of 31

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

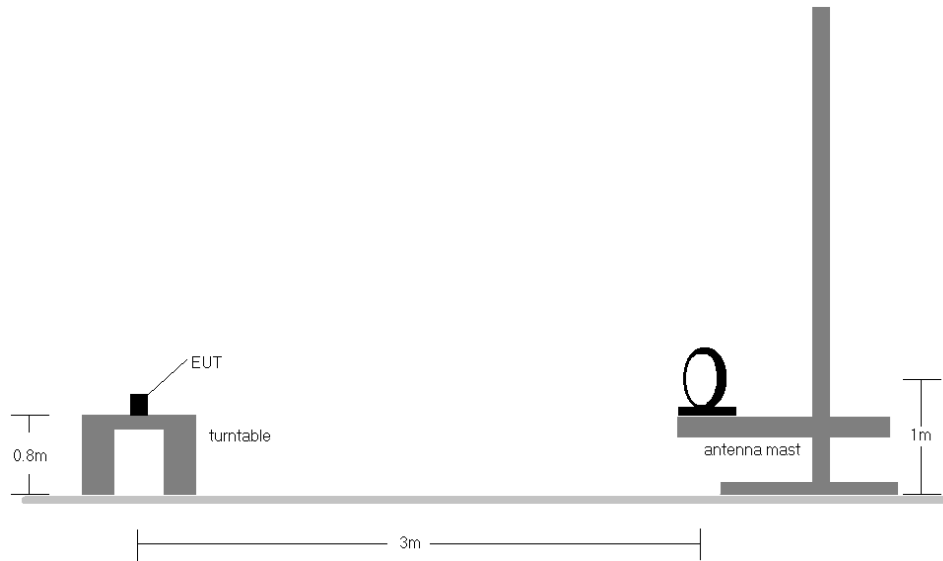


Figure 7-5. Radiated Test Setup < 30MHz

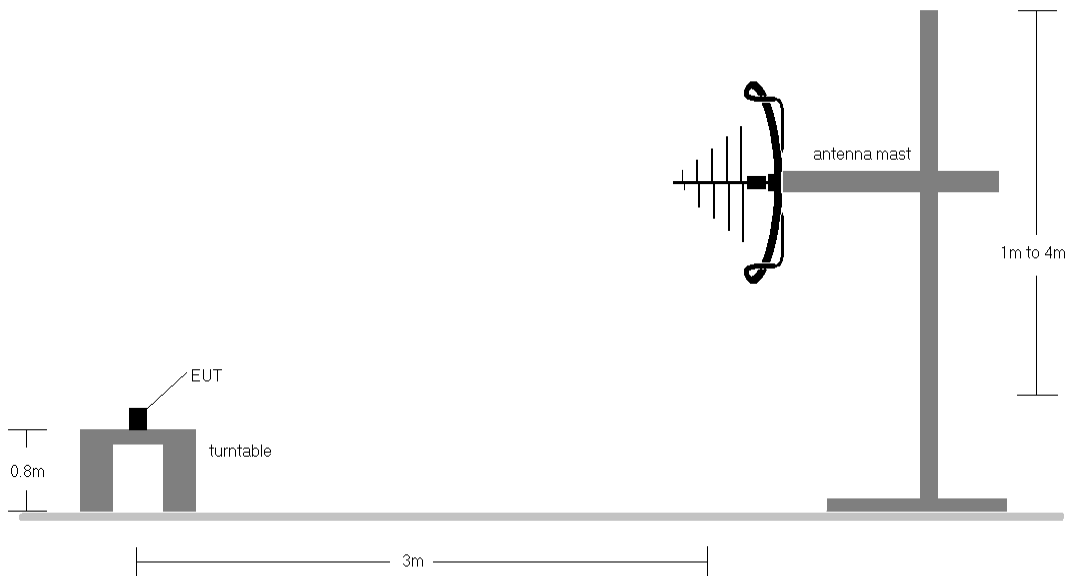


Figure 7-6. Radiated Test Setup > 30MHz

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 19 of 31

Test Notes:

1. A loop antenna was used to investigate emissions below 30MHz.
2. Radiated measurements below 30MHz were measured using a loop antenna. The antenna was positioned in three orthogonal planes (X front, Y side, Z top) and the position with the highest emission level is reported.
3. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. No spurious emissions levels were found to be greater than the level of the fundamental.
6. All possible configurations were investigated and only the worst case is reported.
7. The radiated limits for intentional radiators are shown in Table 7-7 through 7-9. At frequencies below 30 MHz, measurements were performed at 3m and the data was extrapolated to the specified measurement distance using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2).
 - a. Distance Extrapolation Factor $_{dB} = 20 \log_{10}(300/3)^2 = 80dB$ [For emissions within 9kHz-490kHz]
 - b. Distance Extrapolation Factor $_{dB} = 20 \log_{10}(30/3)^2 = 40dB$ [For emissions within 490kHz-30MHz]


Sample Calculation

- Field Strength Level $_{dB\mu V/m} = \text{Analyzer Level}_{dBm} + 107 + \text{AFCL}_{dB/m} + \text{Distance Extrapolation Factor}_{dB}$
- Distance Extrapolation Factor $_{dB}$ will be added only when applicable.
- $\text{AFCL}_{dB/m} = (\text{Antenna Factor}_{dB/m} + \text{Cable Loss}_{dB} + \text{Attenuator}_{dB}) - \text{Preamplifier Gain}_{dB}$
- $\text{Margin}_{dB} = \text{Field Strength Level}_{dB\mu V/m} - \text{Limit}_{dB\mu V/m}$

FCC ID: A3LSMS908E	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 20 of 31

Out-of-Band Radiated Spurious Emissions – Below 30MHz

§15.209 §15.225(d); RSS-Gen (8.9)

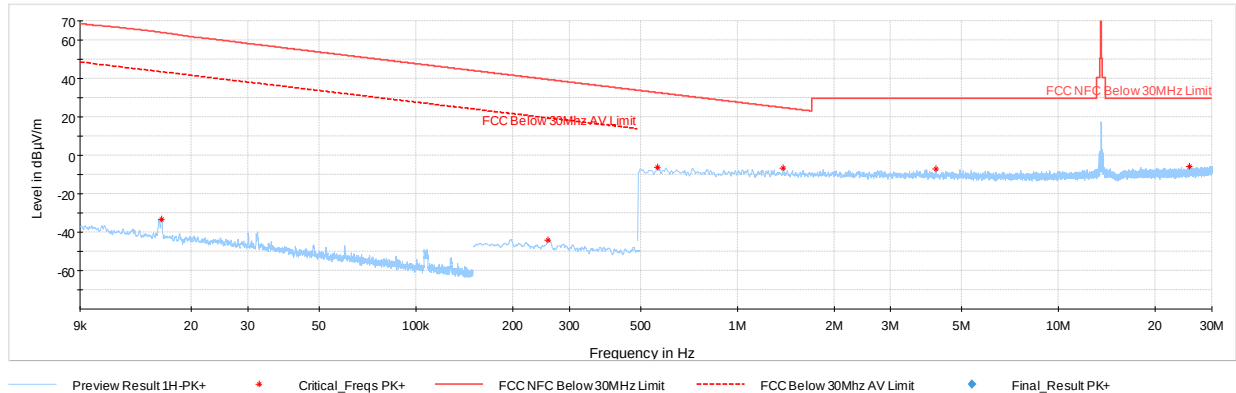


Plot 7-3. Radiated Spurious Emissions 9kHz – 30MHz (Pol. X)

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	Field Strength @ 3m [dBµV/m]	Field Strength @ 30m [dBµV/m]	Limit @30m [dBuV/m]	Field Strength @ 300m [dBµV/m]	Limit @300m [dBuV/m]	Margin [dB]
0.016	X	100	149	-80.17	19.99	46.82	-	-	-33.18	43.52	-76.70
0.258	X	100	245	-90.64	19.42	35.78	-	-	-44.22	19.39	-63.61
0.564	X	100	254	-93.07	19.62	33.55	-6.45	32.58	-	-	-39.03
1.390	X	100	194	-93.78	19.93	33.15	-6.85	24.74	-	-	-31.60
4.149	X	100	194	-94.31	20.17	32.86	-7.14	29.54	-	-	-36.69
27.120	X	100	93	-95.08	22.37	34.29	-5.71	29.54	-	-	-35.25

Table 7-7. Radiated Measurements (Pol. X)

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 21 of 31

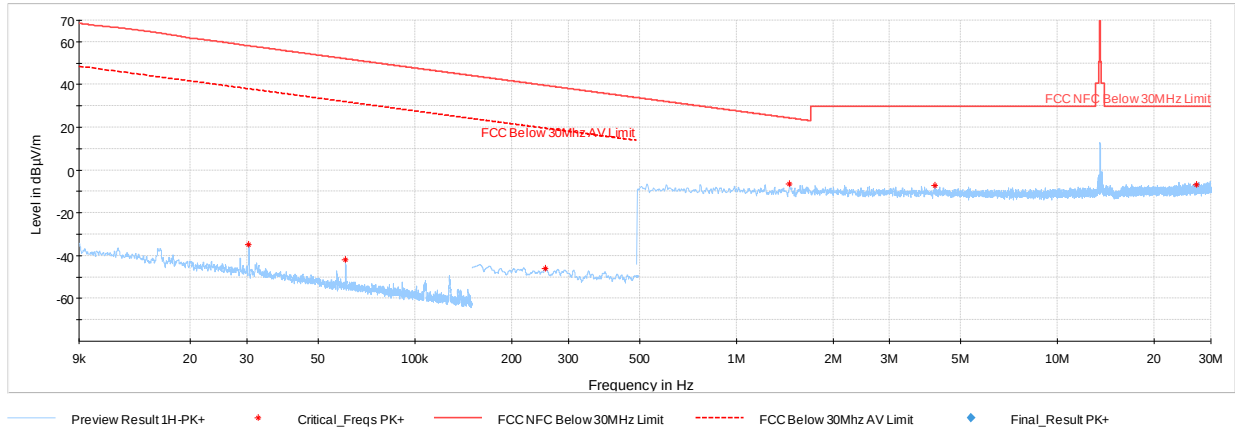


Plot 7-4. Radiated Spurious Emissions 9kHz – 30MHz (Pol. Y)

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	Field Strength @ 3m [dBμV/m]	Field Strength @ 30m [dBμV/m]	Limit @30m [dBμV/m]	Field Strength @ 300m [dBμV/m]	Limit @300m [dBμV/m]	Margin [dB]
0.030	Y	100	268	-82.63	20.88	45.25	-	-	-34.75	37.95	-72.70
0.061	Y	100	96	-88.76	19.98	38.22	-	-	-41.78	31.92	-73.70
0.255	Y	100	274	-92.36	19.42	34.06	-	-	-45.94	19.48	-65.42
1.464	Y	100	257	-93.31	19.93	33.62	-6.38	24.29	-	-	-30.67
4.158	Y	100	334	-94.52	20.17	32.65	-7.35	29.54	-	-	-36.89
27.120	Y	100	305	-96.51	22.54	33.03	-6.97	29.54	-	-	-36.51

Table 7-8. Radiated Measurements (Pol. Y)

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 22 of 31

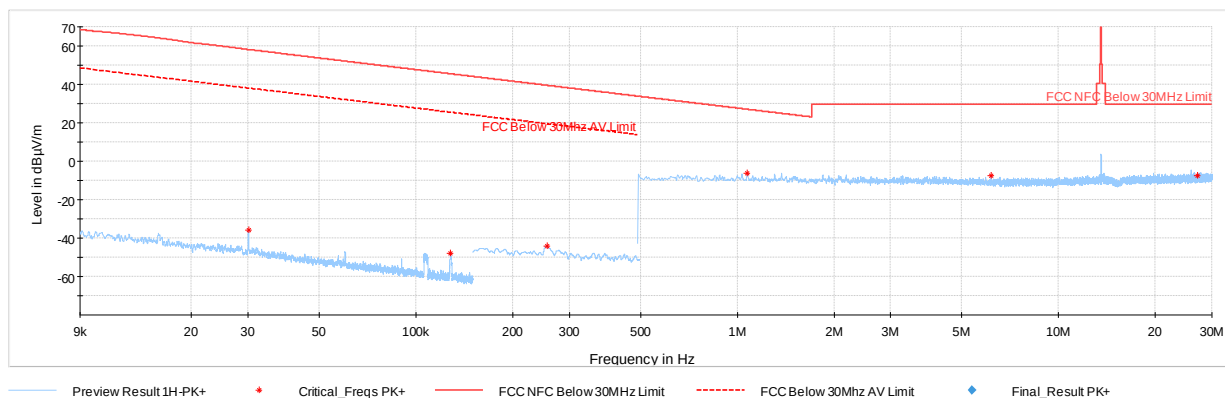

Plot 7-5. Radiated Spurious Emissions 9kHz – 30MHz (Pol. Z)


Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	Field Strength @ 3m [dBμV/m]	Field Strength @ 30m [dBμV/m]	Limit @30m [dBuV/m]	Field Strength @ 300m [dBμV/m]	Limit @300m [dBuV/m]	Margin [dB]
0.030	Z	100	4	-83.79	20.90	44.11	-	-	-35.89	38.03	-73.92
0.128	Z	100	212	-94.32	19.50	32.18	-	-	-47.82	25.44	-73.26
0.256	Z	100	352	-90.54	19.42	35.88	-	-	-44.12	19.44	-63.56
1.074	Z	100	157	-93.20	19.93	33.73	-6.27	26.98	-	-	-33.25
6.177	Z	100	305	-94.47	20.11	32.64	-7.36	29.54	-	-	-36.91
27.123	Z	100	208	-96.95	22.54	32.59	-7.41	29.54	-	-	-36.95

Table 7-9. Radiated Measurements (Pol. Z)

FCC ID: A3LSMS908E		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 23 of 31

Out-of-Band Radiated Spurious Emissions – 30MHz-1GHz

§15.209 §15.225(d); RSS-Gen (8.9)

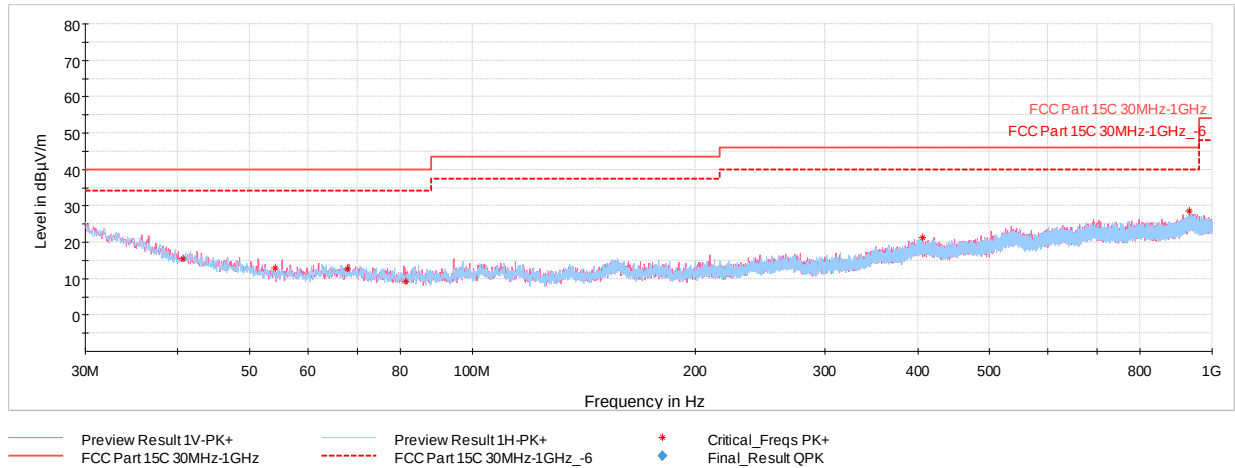

Plot 7-6. Radiated Spurious Emissions 30MHz – 1GHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
40.68	Max Peak	H	250	301	-73.73	-17.74	15.53	40.00	-24.47
54.24	Max Peak	H	100	50	-72.69	-21.36	12.95	40.00	-27.05
67.80	Max Peak	H	250	151	-73.46	-20.73	12.81	40.00	-27.19
81.36	Max Peak	H	250	179	-76.82	-21.01	9.17	40.00	-30.83
406.60	Max Peak	H	250	184	-77.57	-8.25	21.18	46.02	-24.84
932.25	Max Peak	H	100	291	-78.97	0.49	28.52	46.02	-17.50

Table 7-10. Radiated Measurements

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 24 of 31

7.6 AC Line Conducted Emissions Measurement

§15.207; RSS-Gen (8.8)

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-11. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS908E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 25 of 31

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


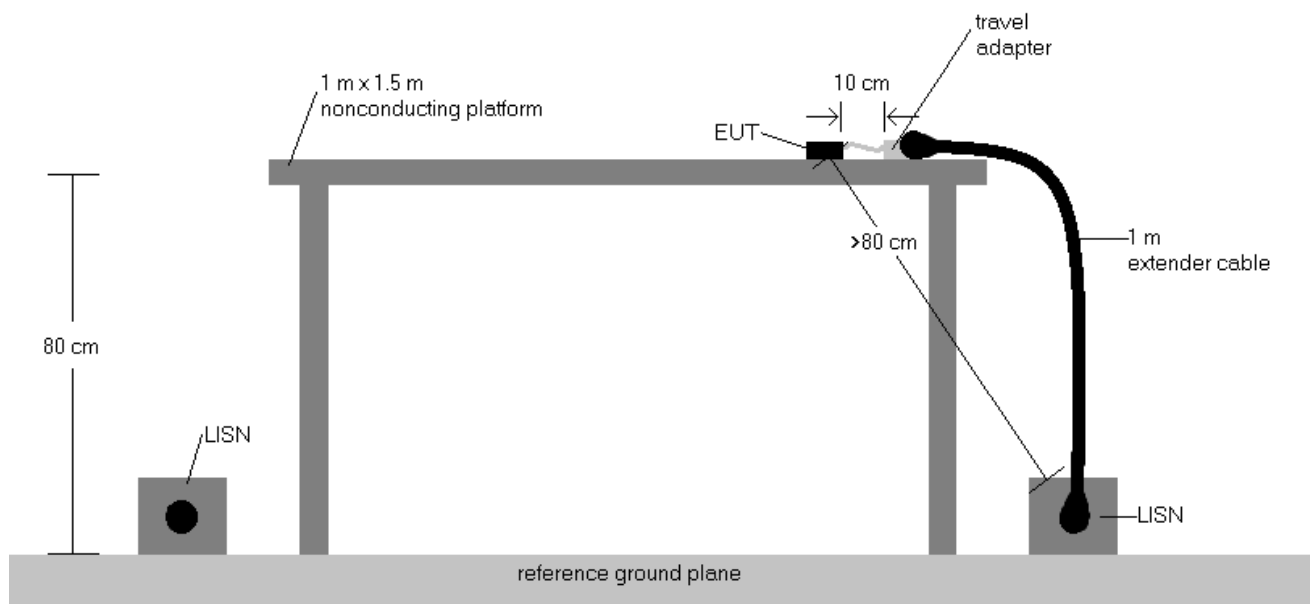


Figure 7-7. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
6. Traces shown in plot are made using a Quasi-peak and Average detectors.
7. Deviations to the Specifications: None.
8. All possible configurations were investigated and only the worst case is reported.

FCC ID: A3LSMS908E	 Proud to be part of 	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 26 of 31

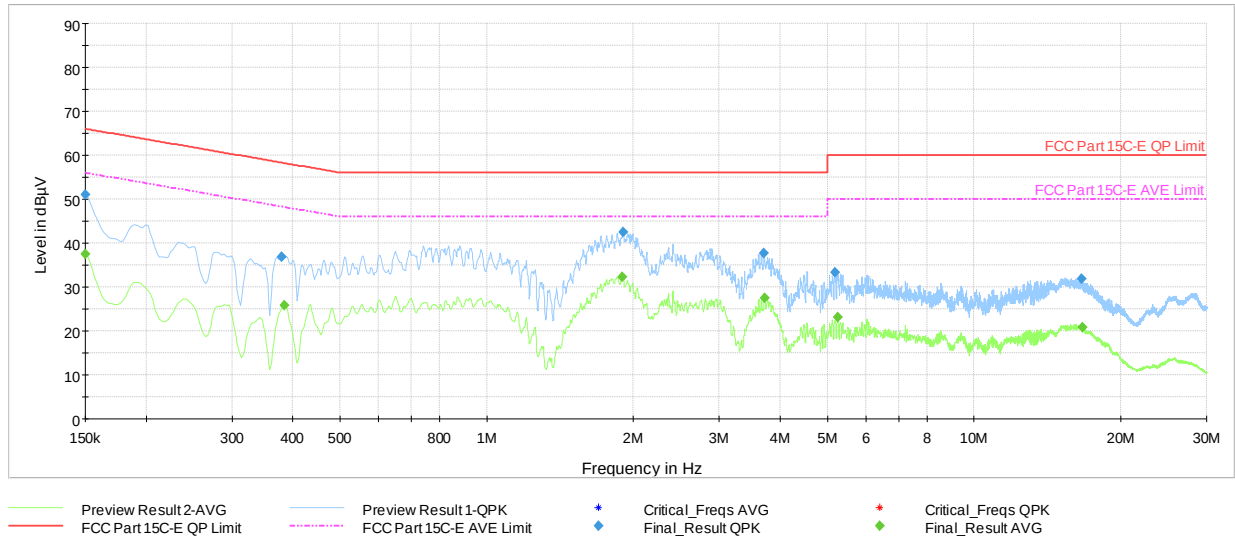


Plot 7-7. AC Line-Conducted Plot (L1)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.150	FINAL	51.11	—	66.00	-14.89	L1	GND
0.150	FINAL	—	37.51	56.00	-18.49	L1	GND
0.380	FINAL	36.97	—	58.29	-21.32	L1	GND
0.384	FINAL	—	25.82	48.19	-22.37	L1	GND
1.898	FINAL	—	32.30	46.00	-13.70	L1	GND
1.901	FINAL	42.44	—	56.00	-13.56	L1	GND
3.707	FINAL	37.68	—	56.00	-18.32	L1	GND
3.719	FINAL	—	27.40	46.00	-18.60	L1	GND
5.190	FINAL	33.33	—	60.00	-26.67	L1	GND
5.258	FINAL	—	23.08	50.00	-26.92	L1	GND
16.620	FINAL	31.86	—	60.00	-28.14	L1	GND
16.676	FINAL	—	20.92	50.00	-29.08	L1	GND

Table 7-12. AC Line-Conducted Data (L1)

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 27 of 31

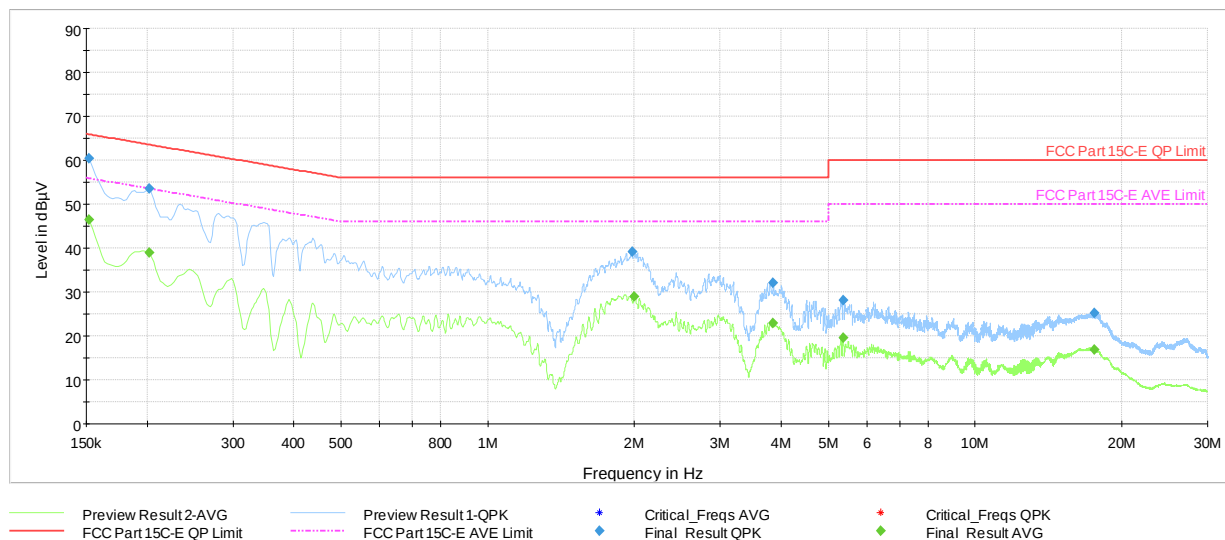


Plot 7-8. AC Line-Conducted Plot (N)

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.152	FINAL	60.36	—	65.88	-5.51	N	GND
0.152	FINAL	—	46.44	55.88	-9.44	N	GND
0.202	FINAL	53.62	—	63.54	-9.92	N	GND
0.202	FINAL	—	38.86	53.54	-14.67	N	GND
1.977	FINAL	39.13	—	56.00	-16.87	N	GND
1.997	FINAL	—	29.00	46.00	-17.00	N	GND
3.851	FINAL	—	22.89	46.00	-23.11	N	GND
3.854	FINAL	31.99	—	56.00	-24.01	N	GND
5.357	FINAL	—	19.67	50.00	-30.33	N	GND
5.375	FINAL	28.08	—	60.00	-31.92	N	GND
17.592	FINAL	—	16.98	50.00	-33.02	N	GND
17.594	FINAL	25.22	—	60.00	-34.78	N	GND

Table 7-13. AC Line-Conducted Data (N)

FCC ID: A3LSMS908E		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 28 of 31

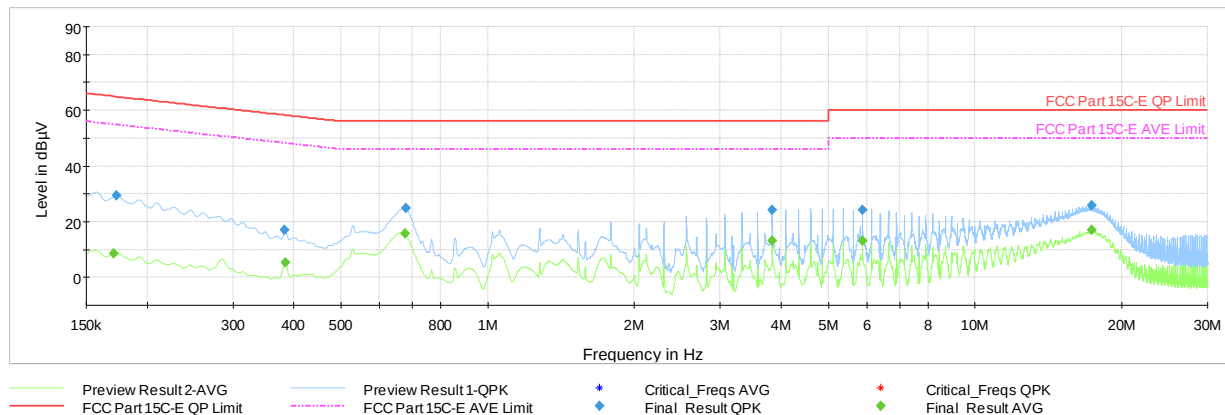


Plot 7-9. AC Line-Conducted Plot (L1) with WCP

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.171	FINAL	—	8.42	54.91	-46.49	L1	GND
0.173	FINAL	29.4	—	64.80	-35.39	L1	GND
0.383	FINAL	16.9	—	58.23	-41.29	L1	GND
0.385	FINAL	—	5.42	48.18	-42.76	L1	GND
0.675	FINAL	—	15.70	46.00	-30.30	L1	GND
0.680	FINAL	24.8	—	56.00	-31.21	L1	GND
3.834	FINAL	24.2	—	56.00	-31.76	L1	GND
3.834	FINAL	—	13.01	46.00	-32.99	L1	GND
5.879	FINAL	24.3	—	60.00	-35.75	L1	GND
5.879	FINAL	—	13.13	50.00	-36.87	L1	GND
17.379	FINAL	—	16.89	50.00	-33.11	L1	GND
17.379	FINAL	25.7	—	60.00	-34.30	L1	GND

Table 7-14. AC Line-Conducted Data (L1) with WCP

FCC ID: A3LSMS908E	PCTEST Proud to be part of element	MEASUREMENT REPORT (Certification)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 29 of 31

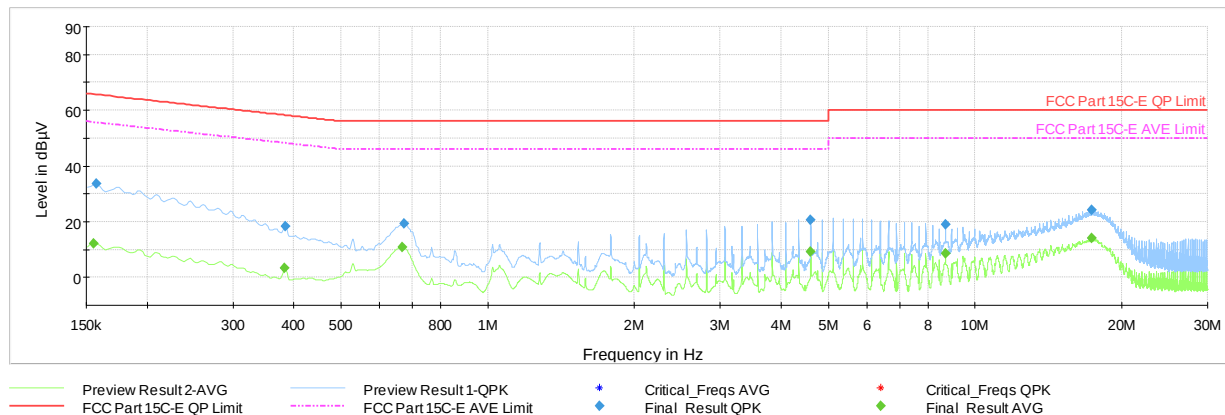

Plot 7-10. AC Line-Conducted Plot (N) with WCP

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.155	FINAL	—	12.20	55.71	-43.52	N	GND
0.158	FINAL	33.6	—	65.60	-31.98	N	GND
0.383	FINAL	—	3.24	48.23	-44.98	N	GND
0.385	FINAL	18.3	—	58.18	-39.86	N	GND
0.668	FINAL	—	10.90	46.00	-35.10	N	GND
0.673	FINAL	19.4	—	56.00	-36.56	N	GND
4.601	FINAL	20.7	—	56.00	-35.33	N	GND
4.601	FINAL	—	9.31	46.00	-36.69	N	GND
8.690	FINAL	19.1	—	60.00	-40.94	N	GND
8.690	FINAL	—	8.59	50.00	-41.41	N	GND
17.379	FINAL	—	14.00	50.00	-36.00	N	GND
17.379	FINAL	24.2	—	60.00	-35.80	N	GND

Table 7-15. AC Line-Conducted Data (N) with WCP

FCC ID: A3LSMS908E		MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 30 of 31

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS908E** has been tested to show compliance with Part 15 Subpart C (15.225) of the FCC Rules.

FCC ID: A3LSMS908E	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (Certification)		Approved by: Technical Manager
Test Report S/N: 1M2109220110-16.A3L	Test Dates: 10/8/2021-10/21/2021	EUT Type: Portable Handset		Page 31 of 31