



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics, Co. Ltd.
129, Samsung-ro, Maetan Dong
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Republic of Korea

Date of Testing:

06/12/13 - 06/17/13; 10/16/13-10/21/13

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1310172043.A3L

FCC ID:

A3LSMT217T

APPLICANT:

SAMSUNG ELECTRONICS, CO. LTD.

DUT Type:

Portable Tablet

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-T217T

Equipment Class	Band & Mode	Tx Frequency	Measured Conducted Power [dBm]	SAR
				1g Body (W/kg)
PCB	UMTS 850	826.40 - 846.60 MHz	23.16	0.57
PCB	UMTS 1750	1712.4 - 1752.5 MHz	22.87	0.74
PCB	UMTS 1900	1852.4 - 1907.6 MHz	22.66	0.66
PCB	LTE Band 17	706.5 - 713.5 MHz	24.96	0.19
PCB	LTE Band 5 (Cell)	825.5 - 847.5 MHz	24.66	0.37
PCB	LTE Band 4 (AWS)	1712.5 - 1752.5 MHz	23.19	0.75
PCB	LTE Band 2 (PCS)	1851.5 - 1908.5 MHz	23.30	0.69
DTS	2.4 GHz WLAN	2412 - 2462 MHz	14.95	0.38
DTS	Bluetooth LE	2402 - 2480 MHz	3.19	N/A
DTS	5.8 GHz WLAN	5745 - 5825 MHz	7.88	0.74
NII	5.2 GHz WLAN	5180 - 5240 MHz	8.19	0.64
NII	5.3 GHz WLAN	5260 - 5320 MHz	8.40	0.67
NII	5.5 GHz WLAN	5500 - 5700 MHz	8.45	0.87
DSS	Bluetooth	2402 - 2480 MHz	10.49	<0.1
Simultaneous SAR per KDB 690783 D01v01r02:				1.27

Note: Powers in the above table represent output powers for the SAR test configurations and may not represent the highest output powers for all configurations for each mode.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 1 of 63

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	8
3	INTRODUCTION	9
4	DOSIMETRIC ASSESSMENT	10
5	RF EXPOSURE LIMITS	11
6	SAR TESTING PROCEDURES	12
7	FCC MEASUREMENT PROCEDURES.....	13
8	RF CONDUCTED POWERS	17
9	SYSTEM VERIFICATION.....	43
10	SAR DATA SUMMARY	45
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	50
12	SAR MEASUREMENT VARIABILITY	56
13	EQUIPMENT LIST	57
14	MEASUREMENT UNCERTAINTIES	59
15	CONCLUSION.....	61
16	REFERENCES	62
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: SENSOR TRIGGERING INFORMATION		

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet	Page 2 of 63	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Data	826.40 - 846.60 MHz
UMTS 1750	Data	1712.4 - 1752.5 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 17	Data	706.5 - 713.5 MHz
LTE Band 5 (Cell)	Data	825.5 - 847.5 MHz
LTE Band 4 (AWS)	Data	1712.5 - 1752.5 MHz
LTE Band 2 (PCS)	Data	1851.5 - 1908.5 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
Bluetooth LE	Data	2402 - 2480 MHz
5.8 GHz WLAN	Data	5745 - 5825 MHz
5.2 GHz WLAN	Data	5180 - 5240 MHz
5.3 GHz WLAN	Data	5260 - 5320 MHz
5.5 GHz WLAN	Data	5500 - 5700 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses a proximity sensor for SAR compliance. The capacitive grip sensor is activated when used in close proximity to the user's body. The capacitive sensor is only applicable for tablet operations. There are no body worn accessories for this device.

Since the device is a full tablet size, the Body SAR was evaluated per FCC KDB Publication 616217 D04v01 for full sized tablets.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 3 of 63

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

With power backoff: capacitive sensor activated:

Mode / Band	Sensor State		Modulated Average (dBm)		
			3GPP RMC	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Active	Maximum	19.0	19.0	19.0
		Nominal	18.5	18.5	18.5
UMTS Band 4 (1750 MHz)	Active	Maximum	12.5	12.5	11.5
		Nominal	12.0	12.0	11.0
UMTS Band 2 (1900 MHz)	Active	Maximum	15.5	15.5	15.5
		Nominal	15.0	15.0	15.0
Mode / Band	Sensor State		Modulated Average (dBm)		
LTE Band 17	Active	Maximum	18.5		
		Nominal	18.0		
LTE Band 5 (Cell)	Active	Maximum	18.5		
		Nominal	18.0		
LTE Band 4 (AWS)	Active	Maximum	13.0		
		Nominal	12.5		
LTE Band 2 (PCS)	Active	Maximum	14.0		
		Nominal	13.5		


Max power: capacitive sensor not activated for body SAR testing configurations:

Mode / Band	Sensor State		Modulated Average (dBm)		
			3GPP RMC	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Not Active	Maximum	23.5	23.5	23.5
		Nominal	23.0	23.0	23.0
UMTS Band 4 (1750 MHz)	Not Active	Maximum	23.0	23.0	23.0
		Nominal	22.5	22.5	22.5
UMTS Band 2 (1900 MHz)	Not Active	Maximum	23.0	23.0	23.0
		Nominal	22.5	22.5	22.5
Mode / Band	Sensor State		Modulated Average (dBm)		
LTE Band 17	Not Active	Maximum	25.0		
		Nominal	24.5		
LTE Band 5 (Cell)	Not Active	Maximum	25.0		
		Nominal	24.5		
LTE Band 4 (AWS)	Not Active	Maximum	23.5		
		Nominal	23.0		
LTE Band 2 (PCS)	Not Active	Maximum	23.5		
		Nominal	23.0		

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet	Page 4 of 63	

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	15.5
	Nominal	15.0
IEEE 802.11g (2.4 GHz)	Maximum	11.5
	Nominal	11.0
IEEE 802.11n (2.4 GHz)	Maximum	10.5
	Nominal	10.0
IEEE 802.11a (5 GHz)	Maximum	8.5
	Nominal	8.0
IEEE 802.11n (5 GHz)	Maximum	7.5
	Nominal	7.0
Bluetooth	Maximum	10.5
	Nominal	10.0
Bluetooth LE	Maximum	3.5
	Nominal	3.0

1.4 DUT Antenna Locations

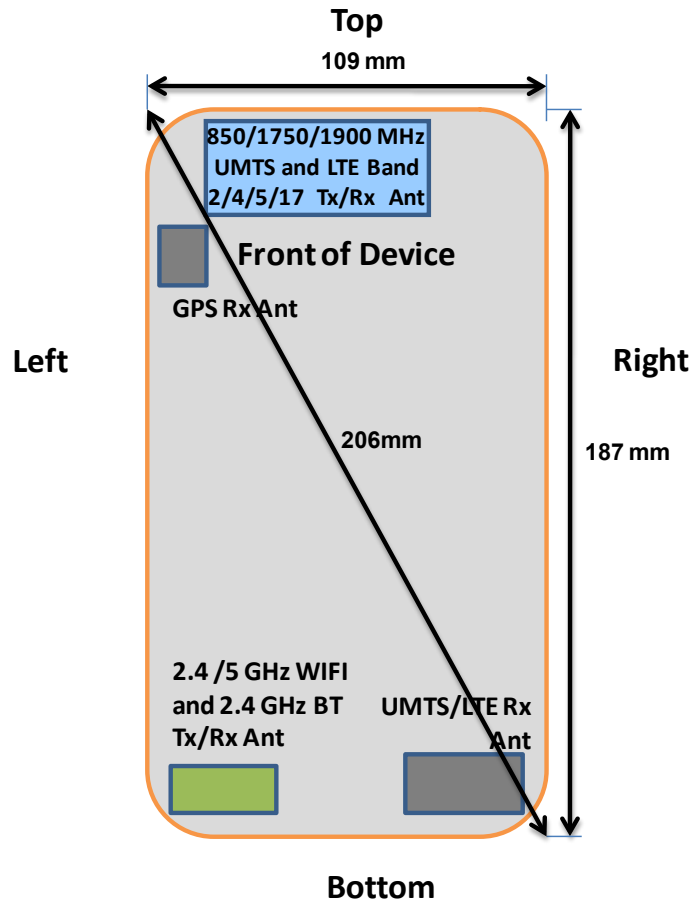

Note: Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.

Figure 1-1
DUT Antenna Locations

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 SAMSUNG	Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 5 of 63

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-2 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-2
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-1
Simultaneous Transmission Scenarios

No.	Capable Transmit Configurations	Body	Note
		FCC KDB 616217	
1	850/1750/1900 MHz UMTS Data + WIFI 2.4 GHz	Yes	3G Hotspot
2	Band2/4/5/17 LTE Data + WIFI 2.4 GHz	Yes	4G Hotspot
3	850/1750/1900 MHz UMTS Data + Bluetooth 2.4 GHz	Yes	
4	Band2/4/5/17 LTE Data + Bluetooth 2.4 GHz	Yes	
5	850/1750/1900 MHz UMTS Data + WIFI 5GHz	Yes	WIFI Direct
6	Band2/4/5/17 LTE Data + WIFI 5GHz	Yes	WIFI Direct

Notes:
1. UMTS/LTE use one modem and transceiver IC. The signals can not be transmitted simultaneously.
2. There are no new simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.

1.6 SAR Test Exclusions Applied

(A) WIFI/BT

Per FCC KDB 447498 D01 v05, the SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth LE (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth LE SAR was not required; $[(2/5) * \sqrt{2.44}] = 0.6 < 3.0$.

This device supports 20 MHz and 40 MHz Bandwidths for IEEE 802.11n for 5 GHz WIFI only. IEEE 802.11n was not evaluated for SAR since the average output power of 20 MHz and 40 MHz bandwidths was not more than 0.25 dB higher than the average output power of IEEE 802.11a.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 6 of 63

(B) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v02.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02.

1.7 Guidance Applied

- FCC KDB Publication 941225 D01-D06 (3G/4G)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05 (General SAR Guidance)
- FCC KDB Publication 865664 D01-D02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01 (Tablet SAR Consideration)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

Mode	Body Maximum Power Serial Number	Body Reduced Power Serial Number
UMTS 850	92	95
UMTS 1750	17	18
UMTS 1900	92	95
LTE Band 17	93	97
LTE Band 5 (Cell)	93	95
LTE Band 4 (AWS)	93	96
LTE Band 2 (PCS)	93	96
2.4 GHz WLAN	17	-
5 GHz WLAN	17	-
Bluetooth	17	-

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 7 of 63

2

LTE INFORMATION

LTE Information			
FCC ID	A3LSMT217T		
Form Factor	Portable Tablet		
Frequency Range of each LTE transmission band	LTE Band 17 (706.5 - 713.5 MHz)		
	LTE Band 5 (Cell) (825.5 - 847.5 MHz)		
	LTE Band 4 (AWS) (1712.5 - 1752.5 MHz)		
	LTE Band 2 (PCS) (1851.5 - 1908.5 MHz)		
Channel Bandwidths	LTE Band 17: 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 3 MHz, 5 MHz, 10 MHz		
	LTE Band 4 (AWS): 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
UE Category	3		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet	Page 8 of 63	

3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [24]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m^3)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 9 of 63

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

FCC ID: A3LSMT217T		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet			Page 10 of 63

5 RF EXPOSURE LIMITS

5.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 11 of 63

6 SAR TESTING PROCEDURES

6.1 SAR Testing for Tablet per KDB Publication 616217 D04v01

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v05 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

6.2 Additional Test Positions due to Proximity Sensor Considerations

This device uses a proximity sensor to reduce data powers in tablet-device use conditions.

While the device is touching the user on the antenna, the proximity sensors activate and thus reduce the maximum output power allowed. However, when the device is moved beyond the sensor triggering distance, the sensors de-activate and thus maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

FCC KDB 616217 D04 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional exposure conditions. Since the capacitive proximity sensor activation distance for the back side and top edge of the device is 15 mm, a conservative distance of 14 mm was tested for SAR on the back side and top edge at maximum power. Since the capacitive proximity sensor activation distance for the left edge of the device is 5 mm, a conservative distance of 4 mm was tested for SAR on the left edge, at maximum power. Sensor triggering distance summary data is included in Appendix G. The capacitive proximity sensor does not trigger power reduction from the front of the device.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antenna.

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 12 of 63

7 FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

7.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

7.3 SAR Measurement Conditions for UMTS

7.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

7.3.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 13 of 63

7.3.3 Procedures Used to Establish RF Signal for SAR HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. Body exposure conditions are typically applicable to these devices, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with UMTS and requires an active DPCCCH. The default test configuration is to measure SAR in UMTS without HSDPA, with an established radio link between the DUT and a communication test set with 12.2 kbps RMC mode configured in Test Loop Mode 1; and tested with HSDPA with FRC and a 12.2 kbps RMC using the highest SAR configuration in UMTS. SAR is selectively confirmed for other physical channel configurations according to output power, exposure conditions and device operating capabilities. Maximum output power is verified according to 3GPP TS 23.121 (Release 5) and SAR must be measured according to these maximum output conditions.

7.3.4 SAR Measurement Conditions for HSUPA Data Devices

SAR for body exposure configurations are measured according to the 'Body SAR Measurements' procedures in the 'WCDMA Handsets' section of the KDB 941225 D01 FCC 3G document. In addition, Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher of that measured without HSPA in 12.2 kbps RMC mode or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure. Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and EDCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of the FCC 3G document.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK} = \Delta_{NACK}$ and $\Delta_{OQI} = 8 \Rightarrow A_{15} = \beta_{15}/\beta_c = 30/15 \Rightarrow \beta_{15} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{15}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCCH, HS-DPCCH, E-DPDCCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

7.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 14 of 63

7.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

7.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

7.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r01:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 15 of 63

7.5 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

7.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

7.5.2 Frequency Channel Configurations [27]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these “required channels” were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was 0.25 dB or higher than the 802.11a mode.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg or if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 16 of 63

8 RF CONDUCTED POWERS

8.1 UMTS Conducted Powers

Table 8-1
Maximum UMTS Average RF Conducted Powers
Representing Capacitive Sensor not Active

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.10	23.16	23.09	22.99	22.87	22.78	22.48	22.66	22.49	-
6	HSDPA	Subtest 1	22.62	22.90	22.72	22.87	22.85	22.62	22.36	22.50	22.36	0
6		Subtest 2	22.71	22.84	22.87	22.91	22.82	22.70	22.23	22.32	22.22	0
6		Subtest 3	22.39	22.22	22.29	22.17	22.23	22.20	21.80	21.97	21.90	0.5
6		Subtest 4	22.23	22.16	22.25	22.22	22.34	22.11	21.85	21.87	21.78	0.5
6	HSUPA	Subtest 1	22.13	22.44	22.21	22.41	22.16	22.54	22.03	22.10	21.89	0
6		Subtest 2	21.12	21.15	21.25	21.18	21.20	21.34	20.99	20.44	20.80	2
6		Subtest 3	21.44	21.53	21.45	21.66	21.59	21.92	21.21	21.47	21.32	1
6		Subtest 4	21.49	21.45	21.36	21.85	21.74	21.85	21.05	21.25	21.09	2
6		Subtest 5	22.50	22.07	21.93	22.95	22.16	22.42	21.82	22.31	22.22	0

Table 8-2
Reduced UMTS Average RF Conducted Powers
Representing Capacitive Sensor Active

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	18.55	18.72	18.86	12.02	11.85	12.33	15.50	15.11	15.10	-
6	HSDPA	Subtest 1	18.33	18.51	18.61	12.10	11.55	12.09	15.33	14.94	14.80	0
6		Subtest 2	18.20	18.35	18.56	11.97	11.65	12.05	15.49	15.01	14.58	0
6		Subtest 3	17.68	17.84	18.05	11.77	10.93	11.42	14.35	14.57	14.46	0.5
6		Subtest 4	17.67	17.89	18.02	11.70	10.94	11.36	14.12	14.34	14.21	0.5
6	HSUPA	Subtest 1	17.89	17.90	18.11	11.00	10.53	10.51	14.47	14.52	14.43	0
6		Subtest 2	16.70	16.90	17.06	10.97	10.18	10.57	13.60	13.82	13.71	2
6		Subtest 3	17.25	17.13	17.23	11.33	10.57	11.04	13.53	13.74	13.11	1
6		Subtest 4	17.01	16.88	17.33	11.21	10.28	10.84	14.25	13.78	14.21	2
6		Subtest 5	17.97	17.73	18.53	11.26	10.67	11.10	14.44	14.48	14.39	0

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSUPA subtests may be up to 1 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



Figure 8-1
Power Measurement Setup

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 17 of 63

8.2 LTE Conducted Powers

8.2.1 LTE Band 17

Table 8-3
Maximum LTE Band 17 Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
710.0	23790	10	QPSK	1	0	24.96	0	0
710.0	23790	10	QPSK	1	25	24.77	0	0
710.0	23790	10	QPSK	1	49	24.91	0	0
710.0	23790	10	QPSK	25	0	23.75	1	0-1
710.0	23790	10	QPSK	25	12	23.70	1	0-1
710.0	23790	10	QPSK	25	25	23.60	1	0-1
710.0	23790	10	QPSK	50	0	23.50	1	0-1
710.0	23790	10	16QAM	1	0	23.73	1	0-1
710.0	23790	10	16QAM	1	25	23.61	1	0-1
710.0	23790	10	16QAM	1	49	23.69	1	0-1
710.0	23790	10	16QAM	25	0	22.61	2	0-2
710.0	23790	10	16QAM	25	12	22.61	2	0-2
710.0	23790	10	16QAM	25	25	22.63	2	0-2
710.0	23790	10	16QAM	50	0	22.59	2	0-2

Note: LTE Band 17 at 10 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

Table 8-4
Reduced LTE Band 17 Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
710.0	23790	10	QPSK	1	0	18.07	0	0
710.0	23790	10	QPSK	1	25	18.03	0	0
710.0	23790	10	QPSK	1	49	18.11	0	0
710.0	23790	10	QPSK	25	0	18.04	0	0-1
710.0	23790	10	QPSK	25	12	17.98	0	0-1
710.0	23790	10	QPSK	25	25	18.05	0	0-1
710.0	23790	10	QPSK	50	0	18.00	0	0-1
710.0	23790	10	16QAM	1	0	18.01	0	0-1
710.0	23790	10	16QAM	1	25	18.02	0	0-1
710.0	23790	10	16QAM	1	49	18.13	0	0-1
710.0	23790	10	16QAM	25	0	18.06	0	0-2
710.0	23790	10	16QAM	25	12	18.00	0	0-2
710.0	23790	10	16QAM	25	25	18.08	0	0-2
710.0	23790	10	16QAM	50	0	18.00	0	0-2

Note: LTE Band 17 at 10 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

Table 8-5
Maximum LTE Band 17 Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
710.0	23790	5	QPSK	1	0	24.55	0	0
710.0	23790	5	QPSK	1	12	24.49	0	0
710.0	23790	5	QPSK	1	24	24.70	0	0
710.0	23790	5	QPSK	12	0	23.63	1	0-1
710.0	23790	5	QPSK	12	6	23.62	1	0-1
710.0	23790	5	QPSK	12	13	23.71	1	0-1
710.0	23790	5	QPSK	25	0	23.72	1	0-1
710.0	23790	5	16-QAM	1	0	23.65	1	0-1
710.0	23790	5	16-QAM	1	12	23.56	1	0-1
710.0	23790	5	16-QAM	1	24	23.76	1	0-1
710.0	23790	5	16-QAM	12	0	22.67	2	0-2
710.0	23790	5	16-QAM	12	6	22.66	2	0-2
710.0	23790	5	16-QAM	12	13	22.71	2	0-2
710.0	23790	5	16-QAM	25	0	22.67	2	0-2

Note: LTE Band 17 at 5 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 18 of 63

Table 8-6
Reduced LTE Band 17 Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
710.0	23790	5	QPSK	1	0	18.09	0	0
710.0	23790	5	QPSK	1	12	18.03	0	0
710.0	23790	5	QPSK	1	24	18.10	0	0
710.0	23790	5	QPSK	12	0	18.06	0	0-1
710.0	23790	5	QPSK	12	6	18.09	0	0-1
710.0	23790	5	QPSK	12	13	18.07	0	0-1
710.0	23790	5	QPSK	25	0	18.03	0	0-1
710.0	23790	5	16-QAM	1	0	17.84	0	0-1
710.0	23790	5	16-QAM	1	12	17.87	0	0-1
710.0	23790	5	16-QAM	1	24	17.92	0	0-1
710.0	23790	5	16-QAM	12	0	18.01	0	0-2
710.0	23790	5	16-QAM	12	6	18.08	0	0-2
710.0	23790	5	16-QAM	12	13	18.03	0	0-2
710.0	23790	5	16-QAM	25	0	17.99	0	0-2

Note: LTE Band 17 at 5 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

8.2.2 LTE Band 5 (Cell)

Table 8-7
Maximum LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
836.5	20525	10	QPSK	1	0	24.57	0	0
836.5	20525	10	QPSK	1	25	24.56	0	0
836.5	20525	10	QPSK	1	49	24.66	0	0
836.5	20525	10	QPSK	25	0	23.24	1	0-1
836.5	20525	10	QPSK	25	12	23.22	1	0-1
836.5	20525	10	QPSK	25	25	23.33	1	0-1
836.5	20525	10	QPSK	50	0	23.17	1	0-1
836.5	20525	10	16QAM	1	0	23.31	1	0-1
836.5	20525	10	16QAM	1	25	23.28	1	0-1
836.5	20525	10	16QAM	1	49	23.55	1	0-1
836.5	20525	10	16QAM	25	0	22.34	2	0-2
836.5	20525	10	16QAM	25	12	22.33	2	0-2
836.5	20525	10	16QAM	25	25	22.40	2	0-2
836.5	20525	10	16QAM	50	0	22.21	2	0-2

Note: LTE Band 5 at 10 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

Table 8-8
Reduced LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
836.5	20525	10	QPSK	1	0	18.10	0	0
836.5	20525	10	QPSK	1	25	18.11	0	0
836.5	20525	10	QPSK	1	49	18.20	0	0
836.5	20525	10	QPSK	25	0	18.08	0	0-1
836.5	20525	10	QPSK	25	12	18.04	0	0-1
836.5	20525	10	QPSK	25	25	18.19	0	0-1
836.5	20525	10	QPSK	50	0	18.12	0	0-1
836.5	20525	10	16QAM	1	0	18.50	0	0-1
836.5	20525	10	16QAM	1	25	18.46	0	0-1
836.5	20525	10	16QAM	1	49	18.46	0	0-1
836.5	20525	10	16QAM	25	0	18.09	0	0-2
836.5	20525	10	16QAM	25	12	18.00	0	0-2
836.5	20525	10	16QAM	25	25	18.10	0	0-2
836.5	20525	10	16QAM	50	0	18.06	0	0-2

Note: LTE Band 5 at 10 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 19 of 63

Table 8-9
Maximum LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
826.5	20425	5	QPSK	1	0	24.45	0	0
826.5	20425	5	QPSK	1	12	24.54	0	0
826.5	20425	5	QPSK	1	24	24.56	0	0
826.5	20425	5	QPSK	12	0	23.46	1	0-1
826.5	20425	5	QPSK	12	6	23.47	1	0-1
826.5	20425	5	QPSK	12	13	23.43	1	0-1
826.5	20425	5	QPSK	25	0	23.26	1	0-1
826.5	20425	5	16-QAM	1	0	23.50	1	0-1
826.5	20425	5	16-QAM	1	12	23.67	1	0-1
826.5	20425	5	16-QAM	1	24	23.67	1	0-1
826.5	20425	5	16-QAM	12	0	22.42	2	0-2
826.5	20425	5	16-QAM	12	6	22.43	2	0-2
826.5	20425	5	16-QAM	12	13	22.49	2	0-2
826.5	20425	5	16-QAM	25	0	22.21	2	0-2
836.5	20525	5	QPSK	1	0	24.70	0	0
836.5	20525	5	QPSK	1	12	24.57	0	0
836.5	20525	5	QPSK	1	24	24.53	0	0
836.5	20525	5	QPSK	12	0	23.39	1	0-1
836.5	20525	5	QPSK	12	6	23.38	1	0-1
836.5	20525	5	QPSK	12	13	23.36	1	0-1
836.5	20525	5	QPSK	25	0	23.28	1	0-1
836.5	20525	5	16-QAM	1	0	23.36	1	0-1
836.5	20525	5	16-QAM	1	12	23.22	1	0-1
836.5	20525	5	16-QAM	1	24	23.57	1	0-1
836.5	20525	5	16-QAM	12	0	22.43	2	0-2
836.5	20525	5	16-QAM	12	6	22.34	2	0-2
836.5	20525	5	16-QAM	12	13	22.27	2	0-2
836.5	20525	5	16-QAM	25	0	22.24	2	0-2
846.5	20625	5	QPSK	1	0	24.32	0	0
846.5	20625	5	QPSK	1	12	24.32	0	0
846.5	20625	5	QPSK	1	24	24.38	0	0
846.5	20625	5	QPSK	12	0	23.31	1	0-1
846.5	20625	5	QPSK	12	6	23.31	1	0-1
846.5	20625	5	QPSK	12	13	23.46	1	0-1
846.5	20625	5	QPSK	25	0	23.36	1	0-1
846.5	20625	5	16-QAM	1	0	23.36	1	0-1
846.5	20625	5	16-QAM	1	12	23.09	1	0-1
846.5	20625	5	16-QAM	1	24	23.27	1	0-1
846.5	20625	5	16-QAM	12	0	22.37	2	0-2
846.5	20625	5	16-QAM	12	6	22.31	2	0-2
846.5	20625	5	16-QAM	12	13	22.54	2	0-2
846.5	20625	5	16-QAM	25	0	22.32	2	0-2

Table 8-10
Reduced LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
826.5	20425	5	QPSK	1	0	18.02	0	0
826.5	20425	5	QPSK	1	12	18.16	0	0
826.5	20425	5	QPSK	1	24	18.14	0	0
826.5	20425	5	QPSK	12	0	18.04	0	0-1
826.5	20425	5	QPSK	12	6	18.11	0	0-1
826.5	20425	5	QPSK	12	13	18.07	0	0-1
826.5	20425	5	QPSK	25	0	17.99	0	0-1
826.5	20425	5	16-QAM	1	0	17.76	0	0-1
826.5	20425	5	16-QAM	1	12	17.93	0	0-1
826.5	20425	5	16-QAM	1	24	17.88	0	0-1
826.5	20425	5	16-QAM	12	0	17.95	0	0-2
826.5	20425	5	16-QAM	12	6	18.02	0	0-2
826.5	20425	5	16-QAM	12	13	18.03	0	0-2
826.5	20425	5	16-QAM	25	0	17.93	0	0-2
836.5	20525	5	QPSK	1	0	18.24	0	0
836.5	20525	5	QPSK	1	12	18.17	0	0
836.5	20525	5	QPSK	1	24	18.23	0	0
836.5	20525	5	QPSK	12	0	18.11	0	0-1
836.5	20525	5	QPSK	12	6	18.03	0	0-1
836.5	20525	5	QPSK	12	13	18.09	0	0-1
836.5	20525	5	QPSK	25	0	17.98	0	0-1
836.5	20525	5	16-QAM	1	0	18.32	0	0-1
836.5	20525	5	16-QAM	1	12	18.26	0	0-1
836.5	20525	5	16-QAM	1	24	18.30	0	0-1
836.5	20525	5	16-QAM	12	0	18.08	0	0-2
836.5	20525	5	16-QAM	12	6	18.03	0	0-2
836.5	20525	5	16-QAM	12	13	18.10	0	0-2
836.5	20525	5	16-QAM	25	0	17.95	0	0-2
846.5	20625	5	QPSK	1	0	18.00	0	0
846.5	20625	5	QPSK	1	12	17.99	0	0
846.5	20625	5	QPSK	1	24	17.80	0	0
846.5	20625	5	QPSK	12	0	17.96	0	0-1
846.5	20625	5	QPSK	12	6	18.03	0	0-1
846.5	20625	5	QPSK	12	13	17.64	0	0-1
846.5	20625	5	QPSK	25	0	17.53	0	0-1
846.5	20625	5	16-QAM	1	0	18.06	0	0-1
846.5	20625	5	16-QAM	1	12	18.01	0	0-1
846.5	20625	5	16-QAM	1	24	17.83	0	0-1
846.5	20625	5	16-QAM	12	0	18.18	0	0-2
846.5	20625	5	16-QAM	12	6	18.15	0	0-2
846.5	20625	5	16-QAM	12	13	17.67	0	0-2
846.5	20625	5	16-QAM	25	0	17.54	0	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 21 of 63

Table 8-11
Maximum LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
825.5	20415	3	QPSK	1	0	24.33	0	0
825.5	20415	3	QPSK	1	7	24.30	0	0
825.5	20415	3	QPSK	1	14	24.36	0	0
825.5	20415	3	QPSK	8	0	23.51	1	0-1
825.5	20415	3	QPSK	8	4	23.40	1	0-1
825.5	20415	3	QPSK	8	7	23.58	1	0-1
825.5	20415	3	QPSK	15	0	23.32	1	0-1
825.5	20415	3	16-QAM	1	0	23.25	1	0-1
825.5	20415	3	16-QAM	1	7	23.22	1	0-1
825.5	20415	3	16-QAM	1	14	23.37	1	0-1
825.5	20415	3	16-QAM	8	0	22.46	2	0-2
825.5	20415	3	16-QAM	8	4	22.36	2	0-2
825.5	20415	3	16-QAM	8	7	22.46	2	0-2
825.5	20415	3	16-QAM	15	0	22.35	2	0-2
836.5	20525	3	QPSK	1	0	24.23	0	0
836.5	20525	3	QPSK	1	7	24.28	0	0
836.5	20525	3	QPSK	1	14	24.46	0	0
836.5	20525	3	QPSK	8	0	23.31	1	0-1
836.5	20525	3	QPSK	8	4	23.31	1	0-1
836.5	20525	3	QPSK	8	7	23.31	1	0-1
836.5	20525	3	QPSK	15	0	23.28	1	0-1
836.5	20525	3	16-QAM	1	0	23.76	1	0-1
836.5	20525	3	16-QAM	1	7	23.69	1	0-1
836.5	20525	3	16-QAM	1	14	23.81	1	0-1
836.5	20525	3	16-QAM	8	0	22.39	2	0-2
836.5	20525	3	16-QAM	8	4	22.37	2	0-2
836.5	20525	3	16-QAM	8	7	22.37	2	0-2
836.5	20525	3	16-QAM	15	0	22.38	2	0-2
847.5	20635	3	QPSK	1	0	24.39	0	0
847.5	20635	3	QPSK	1	7	24.43	0	0
847.5	20635	3	QPSK	1	14	24.40	0	0
847.5	20635	3	QPSK	8	0	23.32	1	0-1
847.5	20635	3	QPSK	8	4	23.33	1	0-1
847.5	20635	3	QPSK	8	7	23.33	1	0-1
847.5	20635	3	QPSK	15	0	23.37	1	0-1
847.5	20635	3	16-QAM	1	0	23.26	1	0-1
847.5	20635	3	16-QAM	1	7	23.19	1	0-1
847.5	20635	3	16-QAM	1	14	23.31	1	0-1
847.5	20635	3	16-QAM	8	0	22.21	2	0-2
847.5	20635	3	16-QAM	8	4	22.33	2	0-2
847.5	20635	3	16-QAM	8	7	22.25	2	0-2
847.5	20635	3	16-QAM	15	0	22.33	2	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 22 of 63

Table 8-12
Reduced LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
825.5	20415	3	QPSK	1	0	17.77	0	0
825.5	20415	3	QPSK	1	7	17.89	0	0
825.5	20415	3	QPSK	1	14	18.03	0	0
825.5	20415	3	QPSK	8	0	17.77	0	0-1
825.5	20415	3	QPSK	8	4	17.86	0	0-1
825.5	20415	3	QPSK	8	7	17.79	0	0-1
825.5	20415	3	QPSK	15	0	17.84	0	0-1
825.5	20415	3	16-QAM	1	0	17.50	0	0-1
825.5	20415	3	16-QAM	1	7	17.52	0	0-1
825.5	20415	3	16-QAM	1	14	17.59	0	0-1
825.5	20415	3	16-QAM	8	0	17.75	0	0-2
825.5	20415	3	16-QAM	8	4	17.69	0	0-2
825.5	20415	3	16-QAM	8	7	17.73	0	0-2
825.5	20415	3	16-QAM	15	0	17.86	0	0-2
836.5	20525	3	QPSK	1	0	17.88	0	0
836.5	20525	3	QPSK	1	7	17.96	0	0
836.5	20525	3	QPSK	1	14	17.90	0	0
836.5	20525	3	QPSK	8	0	17.91	0	0-1
836.5	20525	3	QPSK	8	4	18.01	0	0-1
836.5	20525	3	QPSK	8	7	18.03	0	0-1
836.5	20525	3	QPSK	15	0	17.91	0	0-1
836.5	20525	3	16-QAM	1	0	18.04	0	0-1
836.5	20525	3	16-QAM	1	7	18.05	0	0-1
836.5	20525	3	16-QAM	1	14	18.02	0	0-1
836.5	20525	3	16-QAM	8	0	17.95	0	0-2
836.5	20525	3	16-QAM	8	4	17.94	0	0-2
836.5	20525	3	16-QAM	8	7	17.88	0	0-2
836.5	20525	3	16-QAM	15	0	17.81	0	0-2
847.5	20635	3	QPSK	1	0	17.86	0	0
847.5	20635	3	QPSK	1	7	18.00	0	0
847.5	20635	3	QPSK	1	14	17.88	0	0
847.5	20635	3	QPSK	8	0	17.98	0	0-1
847.5	20635	3	QPSK	8	4	18.08	0	0-1
847.5	20635	3	QPSK	8	7	18.11	0	0-1
847.5	20635	3	QPSK	15	0	18.00	0	0-1
847.5	20635	3	16-QAM	1	0	17.74	0	0-1
847.5	20635	3	16-QAM	1	7	17.86	0	0-1
847.5	20635	3	16-QAM	1	14	17.83	0	0-1
847.5	20635	3	16-QAM	8	0	17.91	0	0-2
847.5	20635	3	16-QAM	8	4	18.02	0	0-2
847.5	20635	3	16-QAM	8	7	17.96	0	0-2
847.5	20635	3	16-QAM	15	0	17.98	0	0-2

8.2.3 LTE Band 4 (AWS)

Table 8-13
Maximum LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1732.5	20175	20	QPSK	1	0	23.12	0	0
1732.5	20175	20	QPSK	1	50	23.19	0	0
1732.5	20175	20	QPSK	1	99	23.18	0	0
1732.5	20175	20	QPSK	50	0	21.94	1	0-1
1732.5	20175	20	QPSK	50	25	21.99	1	0-1
1732.5	20175	20	QPSK	50	50	21.93	1	0-1
1732.5	20175	20	QPSK	100	0	21.97	1	0-1
1732.5	20175	20	16QAM	1	0	22.02	1	0-1
1732.5	20175	20	16QAM	1	50	21.96	1	0-1
1732.5	20175	20	16QAM	1	99	22.13	1	0-1
1732.5	20175	20	16QAM	50	0	20.95	2	0-2
1732.5	20175	20	16QAM	50	25	20.86	2	0-2
1732.5	20175	20	16QAM	50	50	20.91	2	0-2
1732.5	20175	20	16QAM	100	0	20.87	2	0-2

Note: LTE Band 4 at 20 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 23 of 63

Table 8-14
Reduced LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1732.5	20175	20	QPSK	1	0	12.58	0	0
1732.5	20175	20	QPSK	1	50	12.49	0	0
1732.5	20175	20	QPSK	1	99	12.63	0	0
1732.5	20175	20	QPSK	50	0	12.60	0	0-1
1732.5	20175	20	QPSK	50	25	12.46	0	0-1
1732.5	20175	20	QPSK	50	50	12.53	0	0-1
1732.5	20175	20	QPSK	100	0	12.50	0	0-1
1732.5	20175	20	16QAM	1	0	12.77	0	0-1
1732.5	20175	20	16QAM	1	50	12.21	0	0-1
1732.5	20175	20	16QAM	1	99	12.50	0	0-1
1732.5	20175	20	16QAM	50	0	12.49	0	0-2
1732.5	20175	20	16QAM	50	25	12.04	0	0-2
1732.5	20175	20	16QAM	50	50	12.16	0	0-2
1732.5	20175	20	16QAM	100	0	12.11	0	0-2

Note: LTE Band 4 at 20 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing

Table 8-15
Maximum LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1717.5	20025	15	QPSK	1	0	23.20	0	0
1717.5	20025	15	QPSK	1	36	23.31	0	0
1717.5	20025	15	QPSK	1	74	23.12	0	0
1717.5	20025	15	QPSK	36	0	22.05	1	0-1
1717.5	20025	15	QPSK	36	18	22.03	1	0-1
1717.5	20025	15	QPSK	36	37	22.04	1	0-1
1717.5	20025	15	QPSK	75	0	22.01	1	0-1
1717.5	20025	15	16QAM	1	0	22.01	1	0-1
1717.5	20025	15	16QAM	1	36	22.13	1	0-1
1717.5	20025	15	16QAM	1	74	22.03	1	0-1
1717.5	20025	15	16QAM	36	0	21.02	2	0-2
1717.5	20025	15	16QAM	36	18	21.00	2	0-2
1717.5	20025	15	16QAM	36	37	21.00	2	0-2
1717.5	20025	15	16QAM	75	0	21.03	2	0-2
1732.5	20175	15	QPSK	1	0	23.15	0	0
1732.5	20175	15	QPSK	1	36	23.12	0	0
1732.5	20175	15	QPSK	1	74	23.17	0	0
1732.5	20175	15	QPSK	36	0	21.93	1	0-1
1732.5	20175	15	QPSK	36	18	21.96	1	0-1
1732.5	20175	15	QPSK	36	37	21.96	1	0-1
1732.5	20175	15	QPSK	75	0	21.90	1	0-1
1732.5	20175	15	16QAM	1	0	22.17	1	0-1
1732.5	20175	15	16QAM	1	36	22.18	1	0-1
1732.5	20175	15	16QAM	1	74	22.18	1	0-1
1732.5	20175	15	16QAM	36	0	20.95	2	0-2
1732.5	20175	15	16QAM	36	18	20.98	2	0-2
1732.5	20175	15	16QAM	36	37	20.85	2	0-2
1732.5	20175	15	16QAM	75	0	20.76	2	0-2
1747.5	20325	15	QPSK	1	0	23.06	0	0
1747.5	20325	15	QPSK	1	36	23.00	0	0
1747.5	20325	15	QPSK	1	74	23.03	0	0
1747.5	20325	15	QPSK	36	0	21.86	1	0-1
1747.5	20325	15	QPSK	36	18	21.97	1	0-1
1747.5	20325	15	QPSK	36	37	21.96	1	0-1
1747.5	20325	15	QPSK	75	0	21.98	1	0-1
1747.5	20325	15	16QAM	1	0	22.47	1	0-1
1747.5	20325	15	16QAM	1	36	22.41	1	0-1
1747.5	20325	15	16QAM	1	74	22.47	1	0-1
1747.5	20325	15	16QAM	36	0	20.92	2	0-2
1747.5	20325	15	16QAM	36	18	21.05	2	0-2
1747.5	20325	15	16QAM	36	37	21.07	2	0-2
1747.5	20325	15	16QAM	75	0	20.91	2	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 24 of 63

Table 8-16
Reduced LTE Band 4 (AWS) Conducted Powers- 15 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1717.5	20025	15	QPSK	1	0	12.32	0	0
1717.5	20025	15	QPSK	1	36	12.47	0	0
1717.5	20025	15	QPSK	1	74	12.24	0	0
1717.5	20025	15	QPSK	36	0	12.33	0	0-1
1717.5	20025	15	QPSK	36	18	12.35	0	0-1
1717.5	20025	15	QPSK	36	37	12.45	0	0-1
1717.5	20025	15	QPSK	75	0	12.46	0	0-1
1717.5	20025	15	16QAM	1	0	12.33	0	0-1
1717.5	20025	15	16QAM	1	36	12.33	0	0-1
1717.5	20025	15	16QAM	1	74	12.23	0	0-1
1717.5	20025	15	16QAM	36	0	12.33	0	0-2
1717.5	20025	15	16QAM	36	18	12.31	0	0-2
1717.5	20025	15	16QAM	36	37	12.27	0	0-2
1717.5	20025	15	16QAM	75	0	12.28	0	0-2
1732.5	20175	15	QPSK	1	0	12.16	0	0
1732.5	20175	15	QPSK	1	36	12.13	0	0
1732.5	20175	15	QPSK	1	74	12.21	0	0
1732.5	20175	15	QPSK	36	0	12.35	0	0-1
1732.5	20175	15	QPSK	36	18	12.32	0	0-1
1732.5	20175	15	QPSK	36	37	12.18	0	0-1
1732.5	20175	15	QPSK	75	0	12.25	0	0-1
1732.5	20175	15	16QAM	1	0	12.22	0	0-1
1732.5	20175	15	16QAM	1	36	12.49	0	0-1
1732.5	20175	15	16QAM	1	74	12.69	0	0-1
1732.5	20175	15	16QAM	36	0	12.22	0	0-2
1732.5	20175	15	16QAM	36	18	12.21	0	0-2
1732.5	20175	15	16QAM	36	37	12.11	0	0-2
1732.5	20175	15	16QAM	75	0	12.18	0	0-2
1747.5	20325	15	QPSK	1	0	12.09	0	0
1747.5	20325	15	QPSK	1	36	12.13	0	0
1747.5	20325	15	QPSK	1	74	12.35	0	0
1747.5	20325	15	QPSK	36	0	12.16	0	0-1
1747.5	20325	15	QPSK	36	18	12.21	0	0-1
1747.5	20325	15	QPSK	36	37	12.17	0	0-1
1747.5	20325	15	QPSK	75	0	12.29	0	0-1
1747.5	20325	15	16QAM	1	0	12.33	0	0-1
1747.5	20325	15	16QAM	1	36	12.42	0	0-1
1747.5	20325	15	16QAM	1	74	12.39	0	0-1
1747.5	20325	15	16QAM	36	0	12.06	0	0-2
1747.5	20325	15	16QAM	36	18	12.11	0	0-2
1747.5	20325	15	16QAM	36	37	12.20	0	0-2
1747.5	20325	15	16QAM	75	0	12.37	0	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 25 of 63

Table 8-17
Maximum LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1715	20000	10	QPSK	1	0	23.33	0	0
1715	20000	10	QPSK	1	25	23.34	0	0
1715	20000	10	QPSK	1	49	23.30	0	0
1715	20000	10	QPSK	25	0	22.09	1	0-1
1715	20000	10	QPSK	25	12	22.13	1	0-1
1715	20000	10	QPSK	25	25	22.14	1	0-1
1715	20000	10	QPSK	50	0	22.01	1	0-1
1715	20000	10	16QAM	1	0	22.16	1	0-1
1715	20000	10	16QAM	1	25	22.21	1	0-1
1715	20000	10	16QAM	1	49	22.12	1	0-1
1715	20000	10	16QAM	25	0	21.09	2	0-2
1715	20000	10	16QAM	25	12	21.22	2	0-2
1715	20000	10	16QAM	25	25	21.14	2	0-2
1715	20000	10	16QAM	50	0	20.97	2	0-2
1732.5	20175	10	QPSK	1	0	22.97	0	0
1732.5	20175	10	QPSK	1	25	23.03	0	0
1732.5	20175	10	QPSK	1	49	22.97	0	0
1732.5	20175	10	QPSK	25	0	22.03	1	0-1
1732.5	20175	10	QPSK	25	12	22.00	1	0-1
1732.5	20175	10	QPSK	25	25	21.92	1	0-1
1732.5	20175	10	QPSK	50	0	21.94	1	0-1
1732.5	20175	10	16QAM	1	0	21.86	1	0-1
1732.5	20175	10	16QAM	1	25	21.91	1	0-1
1732.5	20175	10	16QAM	1	49	21.86	1	0-1
1732.5	20175	10	16QAM	25	0	21.01	2	0-2
1732.5	20175	10	16QAM	25	12	21.05	2	0-2
1732.5	20175	10	16QAM	25	25	21.00	2	0-2
1732.5	20175	10	16QAM	50	0	20.91	2	0-2
1750	20350	10	QPSK	1	0	23.09	0	0
1750	20350	10	QPSK	1	25	23.06	0	0
1750	20350	10	QPSK	1	49	23.09	0	0
1750	20350	10	QPSK	25	0	22.06	1	0-1
1750	20350	10	QPSK	25	12	21.98	1	0-1
1750	20350	10	QPSK	25	25	21.96	1	0-1
1750	20350	10	QPSK	50	0	21.91	1	0-1
1750	20350	10	16QAM	1	0	22.01	1	0-1
1750	20350	10	16QAM	1	25	21.89	1	0-1
1750	20350	10	16QAM	1	49	21.88	1	0-1
1750	20350	10	16QAM	25	0	21.05	2	0-2
1750	20350	10	16QAM	25	12	20.97	2	0-2
1750	20350	10	16QAM	25	25	20.98	2	0-2
1750	20350	10	16QAM	50	0	20.82	2	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 26 of 63

Table 8-18
Reduced LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1715	20000	10	QPSK	1	0	12.18	0	0
1715	20000	10	QPSK	1	25	12.33	0	0
1715	20000	10	QPSK	1	49	12.10	0	0
1715	20000	10	QPSK	25	0	12.19	0	0-1
1715	20000	10	QPSK	25	12	12.21	0	0-1
1715	20000	10	QPSK	25	25	12.31	0	0-1
1715	20000	10	QPSK	50	0	12.32	0	0-1
1715	20000	10	16QAM	1	0	12.19	0	0-1
1715	20000	10	16QAM	1	25	12.19	0	0-1
1715	20000	10	16QAM	1	49	12.09	0	0-1
1715	20000	10	16QAM	25	0	12.19	0	0-2
1715	20000	10	16QAM	25	12	12.17	0	0-2
1715	20000	10	16QAM	25	25	12.13	0	0-2
1715	20000	10	16QAM	50	0	12.14	0	0-2
1732.5	20175	10	QPSK	1	0	12.09	0	0
1732.5	20175	10	QPSK	1	25	12.02	0	0
1732.5	20175	10	QPSK	1	49	12.05	0	0
1732.5	20175	10	QPSK	25	0	12.03	0	0-1
1732.5	20175	10	QPSK	25	12	12.05	0	0-1
1732.5	20175	10	QPSK	25	25	12.03	0	0-1
1732.5	20175	10	QPSK	50	0	12.16	0	0-1
1732.5	20175	10	16QAM	1	0	12.03	0	0-1
1732.5	20175	10	16QAM	1	25	12.05	0	0-1
1732.5	20175	10	16QAM	1	49	12.10	0	0-1
1732.5	20175	10	16QAM	25	0	12.05	0	0-2
1732.5	20175	10	16QAM	25	12	12.04	0	0-2
1732.5	20175	10	16QAM	25	25	12.06	0	0-2
1732.5	20175	10	16QAM	50	0	12.08	0	0-2
1750	20350	10	QPSK	1	0	12.03	0	0
1750	20350	10	QPSK	1	25	12.10	0	0
1750	20350	10	QPSK	1	49	12.32	0	0
1750	20350	10	QPSK	25	0	12.13	0	0-1
1750	20350	10	QPSK	25	12	12.18	0	0-1
1750	20350	10	QPSK	25	25	12.14	0	0-1
1750	20350	10	QPSK	50	0	12.26	0	0-1
1750	20350	10	16QAM	1	0	12.30	0	0-1
1750	20350	10	16QAM	1	25	12.39	0	0-1
1750	20350	10	16QAM	1	49	12.36	0	0-1
1750	20350	10	16QAM	25	0	12.03	0	0-2
1750	20350	10	16QAM	25	12	12.08	0	0-2
1750	20350	10	16QAM	25	25	12.17	0	0-2
1750	20350	10	16QAM	50	0	12.34	0	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 27 of 63

Table 8-19
Maximum LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1712.5	19975	5	QPSK	1	0	23.34	0	0
1712.5	19975	5	QPSK	1	12	23.40	0	0
1712.5	19975	5	QPSK	1	24	23.40	0	0
1712.5	19975	5	QPSK	12	0	22.19	1	0-1
1712.5	19975	5	QPSK	12	6	22.12	1	0-1
1712.5	19975	5	QPSK	12	13	22.29	1	0-1
1712.5	19975	5	QPSK	25	0	22.06	1	0-1
1712.5	19975	5	16-QAM	1	0	22.34	1	0-1
1712.5	19975	5	16-QAM	1	12	22.30	1	0-1
1712.5	19975	5	16-QAM	1	24	22.40	1	0-1
1712.5	19975	5	16-QAM	12	0	21.16	2	0-2
1712.5	19975	5	16-QAM	12	6	21.15	2	0-2
1712.5	19975	5	16-QAM	12	13	21.24	2	0-2
1712.5	19975	5	16-QAM	25	0	21.03	2	0-2
1732.5	20175	5	QPSK	1	0	23.16	0	0
1732.5	20175	5	QPSK	1	12	23.17	0	0
1732.5	20175	5	QPSK	1	24	23.16	0	0
1732.5	20175	5	QPSK	12	0	22.11	1	0-1
1732.5	20175	5	QPSK	12	6	22.11	1	0-1
1732.5	20175	5	QPSK	12	13	22.12	1	0-1
1732.5	20175	5	QPSK	25	0	21.98	1	0-1
1732.5	20175	5	16-QAM	1	0	22.39	1	0-1
1732.5	20175	5	16-QAM	1	12	21.95	1	0-1
1732.5	20175	5	16-QAM	1	24	21.91	1	0-1
1732.5	20175	5	16-QAM	12	0	20.96	2	0-2
1732.5	20175	5	16-QAM	12	6	20.99	2	0-2
1732.5	20175	5	16-QAM	12	13	21.01	2	0-2
1732.5	20175	5	16-QAM	25	0	20.97	2	0-2
1752.5	20375	5	QPSK	1	0	23.06	0	0
1752.5	20375	5	QPSK	1	12	23.07	0	0
1752.5	20375	5	QPSK	1	24	23.03	0	0
1752.5	20375	5	QPSK	12	0	22.05	1	0-1
1752.5	20375	5	QPSK	12	6	22.06	1	0-1
1752.5	20375	5	QPSK	12	13	22.14	1	0-1
1752.5	20375	5	QPSK	25	0	21.93	1	0-1
1752.5	20375	5	16-QAM	1	0	21.86	1	0-1
1752.5	20375	5	16-QAM	1	12	21.89	1	0-1
1752.5	20375	5	16-QAM	1	24	21.90	1	0-1
1752.5	20375	5	16-QAM	12	0	21.11	2	0-2
1752.5	20375	5	16-QAM	12	6	21.07	2	0-2
1752.5	20375	5	16-QAM	12	13	21.12	2	0-2
1752.5	20375	5	16-QAM	25	0	20.96	2	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 28 of 63

Table 8-20
Reduced LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1712.5	19975	5	QPSK	1	0	12.49	0	0
1712.5	19975	5	QPSK	1	12	12.36	0	0
1712.5	19975	5	QPSK	1	24	12.13	0	0
1712.5	19975	5	QPSK	12	0	12.22	0	0-1
1712.5	19975	5	QPSK	12	6	12.24	0	0-1
1712.5	19975	5	QPSK	12	13	12.34	0	0-1
1712.5	19975	5	QPSK	25	0	12.35	0	0-1
1712.5	19975	5	16-QAM	1	0	12.22	0	0-1
1712.5	19975	5	16-QAM	1	12	12.22	0	0-1
1712.5	19975	5	16-QAM	1	24	12.12	0	0-1
1712.5	19975	5	16-QAM	12	0	12.22	0	0-2
1712.5	19975	5	16-QAM	12	6	12.20	0	0-2
1712.5	19975	5	16-QAM	12	13	12.16	0	0-2
1712.5	19975	5	16-QAM	25	0	12.17	0	0-2
1732.5	20175	5	QPSK	1	0	12.06	0	0
1732.5	20175	5	QPSK	1	12	12.05	0	0
1732.5	20175	5	QPSK	1	24	12.08	0	0
1732.5	20175	5	QPSK	12	0	12.06	0	0-1
1732.5	20175	5	QPSK	12	6	12.08	0	0-1
1732.5	20175	5	QPSK	12	13	12.06	0	0-1
1732.5	20175	5	QPSK	25	0	12.00	0	0-1
1732.5	20175	5	16-QAM	1	0	12.06	0	0-1
1732.5	20175	5	16-QAM	1	12	12.08	0	0-1
1732.5	20175	5	16-QAM	1	24	12.13	0	0-1
1732.5	20175	5	16-QAM	12	0	12.08	0	0-2
1732.5	20175	5	16-QAM	12	6	12.07	0	0-2
1732.5	20175	5	16-QAM	12	13	12.09	0	0-2
1732.5	20175	5	16-QAM	25	0	12.04	0	0-2
1752.5	20375	5	QPSK	1	0	12.06	0	0
1752.5	20375	5	QPSK	1	12	12.13	0	0
1752.5	20375	5	QPSK	1	24	12.35	0	0
1752.5	20375	5	QPSK	12	0	12.16	0	0-1
1752.5	20375	5	QPSK	12	6	12.21	0	0-1
1752.5	20375	5	QPSK	12	13	12.17	0	0-1
1752.5	20375	5	QPSK	25	0	12.29	0	0-1
1752.5	20375	5	16-QAM	1	0	12.33	0	0-1
1752.5	20375	5	16-QAM	1	12	12.42	0	0-1
1752.5	20375	5	16-QAM	1	24	12.39	0	0-1
1752.5	20375	5	16-QAM	12	0	12.06	0	0-2
1752.5	20375	5	16-QAM	12	6	12.11	0	0-2
1752.5	20375	5	16-QAM	12	13	12.20	0	0-2
1752.5	20375	5	16-QAM	25	0	12.37	0	0-2

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 29 of 63

8.2.4

LTE Band 2 (PCS)

Table 8-21
Maximum LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1860	18700	20	QPSK	1	0	23.28	0	0
1860	18700	20	QPSK	1	50	23.27	0	0
1860	18700	20	QPSK	1	99	23.16	0	0
1860	18700	20	QPSK	50	0	22.12	1	0-1
1860	18700	20	QPSK	50	25	21.97	1	0-1
1860	18700	20	QPSK	50	50	21.98	1	0-1
1860	18700	20	QPSK	100	0	22.09	1	0-1
1860	18700	20	16QAM	1	0	22.33	1	0-1
1860	18700	20	16QAM	1	50	22.13	1	0-1
1860	18700	20	16QAM	1	99	22.03	1	0-1
1860	18700	20	16QAM	50	0	21.01	2	0-2
1860	18700	20	16QAM	50	25	20.96	2	0-2
1860	18700	20	16QAM	50	50	21.01	2	0-2
1860	18700	20	16QAM	100	0	21.03	2	0-2
1880.0	18900	20	QPSK	1	0	22.98	0	0
1880.0	18900	20	QPSK	1	50	23.20	0	0
1880.0	18900	20	QPSK	1	99	23.22	0	0
1880.0	18900	20	QPSK	50	0	21.93	1	0-1
1880.0	18900	20	QPSK	50	25	22.01	1	0-1
1880.0	18900	20	QPSK	50	50	22.16	1	0-1
1880.0	18900	20	QPSK	100	0	22.01	1	0-1
1880.0	18900	20	16QAM	1	0	21.84	1	0-1
1880.0	18900	20	16QAM	1	50	21.98	1	0-1
1880.0	18900	20	16QAM	1	99	22.08	1	0-1
1880.0	18900	20	16QAM	50	0	20.84	2	0-2
1880.0	18900	20	16QAM	50	25	21.01	2	0-2
1880.0	18900	20	16QAM	50	50	21.07	2	0-2
1880.0	18900	20	16QAM	100	0	20.91	2	0-2
1900	19100	20	QPSK	1	0	23.30	0	0
1900	19100	20	QPSK	1	50	23.08	0	0
1900	19100	20	QPSK	1	99	22.86	0	0
1900	19100	20	QPSK	50	0	21.98	1	0-1
1900	19100	20	QPSK	50	25	21.85	1	0-1
1900	19100	20	QPSK	50	50	21.85	1	0-1
1900	19100	20	QPSK	100	0	21.96	1	0-1
1900	19100	20	16QAM	1	0	22.15	1	0-1
1900	19100	20	16QAM	1	50	21.93	1	0-1
1900	19100	20	16QAM	1	99	21.77	1	0-1
1900	19100	20	16QAM	50	0	20.97	2	0-2
1900	19100	20	16QAM	50	25	20.87	2	0-2
1900	19100	20	16QAM	50	50	20.84	2	0-2
1900	19100	20	16QAM	100	0	20.87	2	0-2

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 30 of 63

Table 8-22
Reduced LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1860	18700	20	QPSK	1	0	13.66	0	0
1860	18700	20	QPSK	1	50	13.41	0	0
1860	18700	20	QPSK	1	99	13.03	0	0
1860	18700	20	QPSK	50	0	13.55	0	0-1
1860	18700	20	QPSK	50	25	13.35	0	0-1
1860	18700	20	QPSK	50	50	13.27	0	0-1
1860	18700	20	QPSK	100	0	13.40	0	0-1
1860	18700	20	16QAM	1	0	13.90	0	0-1
1860	18700	20	16QAM	1	50	13.64	0	0-1
1860	18700	20	16QAM	1	99	13.54	0	0-1
1860	18700	20	16QAM	50	0	13.25	0	0-2
1860	18700	20	16QAM	50	25	13.07	0	0-2
1860	18700	20	16QAM	50	50	13.02	0	0-2
1860	18700	20	16QAM	100	0	13.10	0	0-2
1880.0	18900	20	QPSK	1	0	13.00	0	0
1880.0	18900	20	QPSK	1	50	13.70	0	0
1880.0	18900	20	QPSK	1	99	13.44	0	0
1880.0	18900	20	QPSK	50	0	13.41	0	0-1
1880.0	18900	20	QPSK	50	25	13.62	0	0-1
1880.0	18900	20	QPSK	50	50	13.63	0	0-1
1880.0	18900	20	QPSK	100	0	13.54	0	0-1
1880.0	18900	20	16QAM	1	0	13.10	0	0-1
1880.0	18900	20	16QAM	1	50	13.92	0	0-1
1880.0	18900	20	16QAM	1	99	13.80	0	0-1
1880.0	18900	20	16QAM	50	0	13.15	0	0-2
1880.0	18900	20	16QAM	50	25	13.35	0	0-2
1880.0	18900	20	16QAM	50	50	13.42	0	0-2
1880.0	18900	20	16QAM	100	0	13.31	0	0-2
1900	19100	20	QPSK	1	0	13.87	0	0
1900	19100	20	QPSK	1	50	13.64	0	0
1900	19100	20	QPSK	1	99	13.32	0	0
1900	19100	20	QPSK	50	0	13.85	0	0-1
1900	19100	20	QPSK	50	25	13.71	0	0-1
1900	19100	20	QPSK	50	50	13.59	0	0-1
1900	19100	20	QPSK	100	0	13.71	0	0-1
1900	19100	20	16QAM	1	0	14.00	0	0-1
1900	19100	20	16QAM	1	50	13.83	0	0-1
1900	19100	20	16QAM	1	99	13.56	0	0-1
1900	19100	20	16QAM	50	0	13.44	0	0-2
1900	19100	20	16QAM	50	25	13.34	0	0-2
1900	19100	20	16QAM	50	50	13.31	0	0-2
1900	19100	20	16QAM	100	0	13.46	0	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 31 of 63

Table 8-23
Maximum LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1857.5	18675	15	QPSK	1	0	23.31	0	0
1857.5	18675	15	QPSK	1	36	23.40	0	0
1857.5	18675	15	QPSK	1	74	23.11	0	0
1857.5	18675	15	QPSK	36	0	22.08	1	0-1
1857.5	18675	15	QPSK	36	18	22.03	1	0-1
1857.5	18675	15	QPSK	36	37	21.99	1	0-1
1857.5	18675	15	QPSK	75	0	21.96	1	0-1
1857.5	18675	15	16QAM	1	0	22.13	1	0-1
1857.5	18675	15	16QAM	1	36	22.09	1	0-1
1857.5	18675	15	16QAM	1	74	22.00	1	0-1
1857.5	18675	15	16QAM	36	0	21.03	2	0-2
1857.5	18675	15	16QAM	36	18	20.99	2	0-2
1857.5	18675	15	16QAM	36	37	20.96	2	0-2
1857.5	18675	15	16QAM	75	0	20.95	2	0-2
1880.0	18900	15	QPSK	1	0	23.01	0	0
1880.0	18900	15	QPSK	1	36	23.14	0	0
1880.0	18900	15	QPSK	1	74	23.33	0	0
1880.0	18900	15	QPSK	36	0	21.90	1	0-1
1880.0	18900	15	QPSK	36	18	21.92	1	0-1
1880.0	18900	15	QPSK	36	37	22.05	1	0-1
1880.0	18900	15	QPSK	75	0	21.94	1	0-1
1880.0	18900	15	16QAM	1	0	22.04	1	0-1
1880.0	18900	15	16QAM	1	36	22.24	1	0-1
1880.0	18900	15	16QAM	1	74	22.33	1	0-1
1880.0	18900	15	16QAM	36	0	20.91	2	0-2
1880.0	18900	15	16QAM	36	18	20.89	2	0-2
1880.0	18900	15	16QAM	36	37	20.99	2	0-2
1880.0	18900	15	16QAM	75	0	20.86	2	0-2
1902.5	19125	15	QPSK	1	0	23.08	0	0
1902.5	19125	15	QPSK	1	36	22.90	0	0
1902.5	19125	15	QPSK	1	74	22.84	0	0
1902.5	19125	15	QPSK	36	0	21.86	1	0-1
1902.5	19125	15	QPSK	36	18	21.71	1	0-1
1902.5	19125	15	QPSK	36	37	21.82	1	0-1
1902.5	19125	15	QPSK	75	0	21.78	1	0-1
1902.5	19125	15	16QAM	1	0	22.46	1	0-1
1902.5	19125	15	16QAM	1	36	22.33	1	0-1
1902.5	19125	15	16QAM	1	74	22.11	1	0-1
1902.5	19125	15	16QAM	36	0	20.83	2	0-2
1902.5	19125	15	16QAM	36	18	20.78	2	0-2
1902.5	19125	15	16QAM	36	37	20.86	2	0-2
1902.5	19125	15	16QAM	75	0	20.70	2	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 32 of 63

Table 8-24
Reduced LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1857.5	18675	15	QPSK	1	0	13.47	0	0
1857.5	18675	15	QPSK	1	36	13.57	0	0
1857.5	18675	15	QPSK	1	74	13.21	0	0
1857.5	18675	15	QPSK	36	0	13.57	0	0-1
1857.5	18675	15	QPSK	36	18	13.66	0	0-1
1857.5	18675	15	QPSK	36	37	13.52	0	0-1
1857.5	18675	15	QPSK	75	0	13.63	0	0-1
1857.5	18675	15	16QAM	1	0	13.79	0	0-1
1857.5	18675	15	16QAM	1	36	13.63	0	0-1
1857.5	18675	15	16QAM	1	74	13.47	0	0-1
1857.5	18675	15	16QAM	36	0	13.45	0	0-2
1857.5	18675	15	16QAM	36	18	13.37	0	0-2
1857.5	18675	15	16QAM	36	37	13.28	0	0-2
1857.5	18675	15	16QAM	75	0	13.35	0	0-2
1880.0	18900	15	QPSK	1	0	13.25	0	0
1880.0	18900	15	QPSK	1	36	13.65	0	0
1880.0	18900	15	QPSK	1	74	13.73	0	0
1880.0	18900	15	QPSK	36	0	13.64	0	0-1
1880.0	18900	15	QPSK	36	18	13.74	0	0-1
1880.0	18900	15	QPSK	36	37	13.58	0	0-1
1880.0	18900	15	QPSK	75	0	13.53	0	0-1
1880.0	18900	15	16QAM	1	0	13.07	0	0-1
1880.0	18900	15	16QAM	1	36	13.49	0	0-1
1880.0	18900	15	16QAM	1	74	13.53	0	0-1
1880.0	18900	15	16QAM	36	0	13.31	0	0-2
1880.0	18900	15	16QAM	36	18	13.44	0	0-2
1880.0	18900	15	16QAM	36	37	13.55	0	0-2
1880.0	18900	15	16QAM	75	0	13.51	0	0-2
1902.5	19125	15	QPSK	1	0	13.58	0	0
1902.5	19125	15	QPSK	1	36	13.30	0	0
1902.5	19125	15	QPSK	1	74	13.04	0	0
1902.5	19125	15	QPSK	36	0	13.43	0	0-1
1902.5	19125	15	QPSK	36	18	13.43	0	0-1
1902.5	19125	15	QPSK	36	37	13.42	0	0-1
1902.5	19125	15	QPSK	75	0	13.38	0	0-1
1902.5	19125	15	16QAM	1	0	13.64	0	0-1
1902.5	19125	15	16QAM	1	36	13.41	0	0-1
1902.5	19125	15	16QAM	1	74	13.11	0	0-1
1902.5	19125	15	16QAM	36	0	13.22	0	0-2
1902.5	19125	15	16QAM	36	18	13.16	0	0-2
1902.5	19125	15	16QAM	36	37	13.14	0	0-2
1902.5	19125	15	16QAM	75	0	13.11	0	0-2

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 33 of 63

Table 8-25
Maximum LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1855	18650	10	QPSK	1	0	23.21	0	0
1855	18650	10	QPSK	1	25	23.16	0	0
1855	18650	10	QPSK	1	49	23.18	0	0
1855	18650	10	QPSK	25	0	22.27	1	0-1
1855	18650	10	QPSK	25	12	22.07	1	0-1
1855	18650	10	QPSK	25	25	22.05	1	0-1
1855	18650	10	QPSK	50	0	22.00	1	0-1
1855	18650	10	16QAM	1	0	22.45	1	0-1
1855	18650	10	16QAM	1	25	22.49	1	0-1
1855	18650	10	16QAM	1	49	22.47	1	0-1
1855	18650	10	16QAM	25	0	21.07	2	0-2
1855	18650	10	16QAM	25	12	20.96	2	0-2
1855	18650	10	16QAM	25	25	21.01	2	0-2
1855	18650	10	16QAM	50	0	20.93	2	0-2
1880.0	18900	10	QPSK	1	0	23.22	0	0
1880.0	18900	10	QPSK	1	25	23.29	0	0
1880.0	18900	10	QPSK	1	49	23.16	0	0
1880.0	18900	10	QPSK	25	0	22.19	1	0-1
1880.0	18900	10	QPSK	25	12	21.99	1	0-1
1880.0	18900	10	QPSK	25	25	22.14	1	0-1
1880.0	18900	10	QPSK	50	0	22.00	1	0-1
1880.0	18900	10	16QAM	1	0	22.10	1	0-1
1880.0	18900	10	16QAM	1	25	22.03	1	0-1
1880.0	18900	10	16QAM	1	49	22.04	1	0-1
1880.0	18900	10	16QAM	25	0	21.09	2	0-2
1880.0	18900	10	16QAM	25	12	20.99	2	0-2
1880.0	18900	10	16QAM	25	25	21.09	2	0-2
1880.0	18900	10	16QAM	50	0	20.91	2	0-2
1905	19150	10	QPSK	1	0	22.98	0	0
1905	19150	10	QPSK	1	25	23.00	0	0
1905	19150	10	QPSK	1	49	22.85	0	0
1905	19150	10	QPSK	25	0	21.80	1	0-1
1905	19150	10	QPSK	25	12	21.77	1	0-1
1905	19150	10	QPSK	25	25	21.83	1	0-1
1905	19150	10	QPSK	50	0	21.72	1	0-1
1905	19150	10	16QAM	1	0	21.85	1	0-1
1905	19150	10	16QAM	1	25	21.84	1	0-1
1905	19150	10	16QAM	1	49	21.77	1	0-1
1905	19150	10	16QAM	25	0	20.86	2	0-2
1905	19150	10	16QAM	25	12	20.88	2	0-2
1905	19150	10	16QAM	25	25	20.94	2	0-2
1905	19150	10	16QAM	50	0	20.72	2	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 34 of 63

Table 8-26
Reduced LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1855	18650	10	QPSK	1	0	13.49	0	0
1855	18650	10	QPSK	1	25	13.47	0	0
1855	18650	10	QPSK	1	49	13.37	0	0
1855	18650	10	QPSK	25	0	13.69	0	0-1
1855	18650	10	QPSK	25	12	13.66	0	0-1
1855	18650	10	QPSK	25	25	13.53	0	0-1
1855	18650	10	QPSK	50	0	13.54	0	0-1
1855	18650	10	16QAM	1	0	13.62	0	0-1
1855	18650	10	16QAM	1	25	13.55	0	0-1
1855	18650	10	16QAM	1	49	13.39	0	0-1
1855	18650	10	16QAM	25	0	13.45	0	0-2
1855	18650	10	16QAM	25	12	13.39	0	0-2
1855	18650	10	16QAM	25	25	13.29	0	0-2
1855	18650	10	16QAM	50	0	13.30	0	0-2
1880.0	18900	10	QPSK	1	0	13.28	0	0
1880.0	18900	10	QPSK	1	25	13.66	0	0
1880.0	18900	10	QPSK	1	49	13.55	0	0
1880.0	18900	10	QPSK	25	0	13.67	0	0-1
1880.0	18900	10	QPSK	25	12	13.77	0	0-1
1880.0	18900	10	QPSK	25	25	13.60	0	0-1
1880.0	18900	10	QPSK	50	0	13.57	0	0-1
1880.0	18900	10	16QAM	1	0	13.35	0	0-1
1880.0	18900	10	16QAM	1	25	13.79	0	0-1
1880.0	18900	10	16QAM	1	49	13.69	0	0-1
1880.0	18900	10	16QAM	25	0	13.40	0	0-2
1880.0	18900	10	16QAM	25	12	13.47	0	0-2
1880.0	18900	10	16QAM	25	25	13.53	0	0-2
1880.0	18900	10	16QAM	50	0	13.55	0	0-2
1905	19150	10	QPSK	1	0	13.31	0	0
1905	19150	10	QPSK	1	25	13.56	0	0
1905	19150	10	QPSK	1	49	13.34	0	0
1905	19150	10	QPSK	25	0	13.75	0	0-1
1905	19150	10	QPSK	25	12	13.74	0	0-1
1905	19150	10	QPSK	25	25	13.53	0	0-1
1905	19150	10	QPSK	50	0	13.72	0	0-1
1905	19150	10	16QAM	1	0	13.67	0	0-1
1905	19150	10	16QAM	1	25	13.71	0	0-1
1905	19150	10	16QAM	1	49	13.47	0	0-1
1905	19150	10	16QAM	25	0	13.53	0	0-2
1905	19150	10	16QAM	25	12	13.50	0	0-2
1905	19150	10	16QAM	25	25	13.54	0	0-2
1905	19150	10	16QAM	50	0	13.55	0	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 35 of 63

Table 8-27
Maximum LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1852.5	18625	5	QPSK	1	0	23.27	0	0
1852.5	18625	5	QPSK	1	12	23.37	0	0
1852.5	18625	5	QPSK	1	24	23.44	0	0
1852.5	18625	5	QPSK	12	0	22.34	1	0-1
1852.5	18625	5	QPSK	12	6	22.22	1	0-1
1852.5	18625	5	QPSK	12	13	22.18	1	0-1
1852.5	18625	5	QPSK	25	0	22.30	1	0-1
1852.5	18625	5	16-QAM	1	0	22.18	1	0-1
1852.5	18625	5	16-QAM	1	12	22.26	1	0-1
1852.5	18625	5	16-QAM	1	24	22.21	1	0-1
1852.5	18625	5	16-QAM	12	0	21.10	2	0-2
1852.5	18625	5	16-QAM	12	6	21.16	2	0-2
1852.5	18625	5	16-QAM	12	13	21.10	2	0-2
1852.5	18625	5	16-QAM	25	0	21.08	2	0-2
1880.0	18900	5	QPSK	1	0	23.03	0	0
1880.0	18900	5	QPSK	1	12	23.06	0	0
1880.0	18900	5	QPSK	1	24	23.35	0	0
1880.0	18900	5	QPSK	12	0	22.05	1	0-1
1880.0	18900	5	QPSK	12	6	22.01	1	0-1
1880.0	18900	5	QPSK	12	13	22.05	1	0-1
1880.0	18900	5	QPSK	25	0	21.96	1	0-1
1880.0	18900	5	16-QAM	1	0	22.00	1	0-1
1880.0	18900	5	16-QAM	1	12	22.24	1	0-1
1880.0	18900	5	16-QAM	1	24	22.27	1	0-1
1880.0	18900	5	16-QAM	12	0	20.95	2	0-2
1880.0	18900	5	16-QAM	12	6	20.96	2	0-2
1880.0	18900	5	16-QAM	12	13	21.03	2	0-2
1880.0	18900	5	16-QAM	25	0	20.87	2	0-2
1907.5	19175	5	QPSK	1	0	22.90	0	0
1907.5	19175	5	QPSK	1	12	22.96	0	0
1907.5	19175	5	QPSK	1	24	22.76	0	0
1907.5	19175	5	QPSK	12	0	21.88	1	0-1
1907.5	19175	5	QPSK	12	6	22.00	1	0-1
1907.5	19175	5	QPSK	12	13	21.92	1	0-1
1907.5	19175	5	QPSK	25	0	21.91	1	0-1
1907.5	19175	5	16-QAM	1	0	21.72	1	0-1
1907.5	19175	5	16-QAM	1	12	21.78	1	0-1
1907.5	19175	5	16-QAM	1	24	21.61	1	0-1
1907.5	19175	5	16-QAM	12	0	20.97	2	0-2
1907.5	19175	5	16-QAM	12	6	21.00	2	0-2
1907.5	19175	5	16-QAM	12	13	20.95	2	0-2
1907.5	19175	5	16-QAM	25	0	20.94	2	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 36 of 63

Table 8-28
Reduced LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1852.5	18625	5	QPSK	1	0	13.64	0	0
1852.5	18625	5	QPSK	1	12	13.65	0	0
1852.5	18625	5	QPSK	1	24	13.70	0	0
1852.5	18625	5	QPSK	12	0	13.63	0	0-1
1852.5	18625	5	QPSK	12	6	13.72	0	0-1
1852.5	18625	5	QPSK	12	13	13.66	0	0-1
1852.5	18625	5	QPSK	25	0	13.64	0	0-1
1852.5	18625	5	16-QAM	1	0	13.82	0	0-1
1852.5	18625	5	16-QAM	1	12	13.93	0	0-1
1852.5	18625	5	16-QAM	1	24	13.83	0	0-1
1852.5	18625	5	16-QAM	12	0	13.44	0	0-2
1852.5	18625	5	16-QAM	12	6	13.40	0	0-2
1852.5	18625	5	16-QAM	12	13	13.37	0	0-2
1852.5	18625	5	16-QAM	25	0	13.36	0	0-2
1880.0	18900	5	QPSK	1	0	13.40	0	0
1880.0	18900	5	QPSK	1	12	13.78	0	0
1880.0	18900	5	QPSK	1	24	13.56	0	0
1880.0	18900	5	QPSK	12	0	13.75	0	0-1
1880.0	18900	5	QPSK	12	6	13.82	0	0-1
1880.0	18900	5	QPSK	12	13	13.79	0	0-1
1880.0	18900	5	QPSK	25	0	13.78	0	0-1
1880.0	18900	5	16-QAM	1	0	13.81	0	0-1
1880.0	18900	5	16-QAM	1	12	13.92	0	0-1
1880.0	18900	5	16-QAM	1	24	13.90	0	0-1
1880.0	18900	5	16-QAM	12	0	13.51	0	0-2
1880.0	18900	5	16-QAM	12	6	13.54	0	0-2
1880.0	18900	5	16-QAM	12	13	13.53	0	0-2
1880.0	18900	5	16-QAM	25	0	13.45	0	0-2
1907.5	19175	5	QPSK	1	0	13.50	0	0
1907.5	19175	5	QPSK	1	12	13.55	0	0
1907.5	19175	5	QPSK	1	24	13.21	0	0
1907.5	19175	5	QPSK	12	0	13.58	0	0-1
1907.5	19175	5	QPSK	12	6	13.59	0	0-1
1907.5	19175	5	QPSK	12	13	13.62	0	0-1
1907.5	19175	5	QPSK	25	0	13.67	0	0-1
1907.5	19175	5	16-QAM	1	0	13.64	0	0-1
1907.5	19175	5	16-QAM	1	12	13.65	0	0-1
1907.5	19175	5	16-QAM	1	24	13.58	0	0-1
1907.5	19175	5	16-QAM	12	0	13.41	0	0-2
1907.5	19175	5	16-QAM	12	6	13.40	0	0-2
1907.5	19175	5	16-QAM	12	13	13.42	0	0-2
1907.5	19175	5	16-QAM	25	0	13.37	0	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 37 of 63

Table 8-29
Maximum LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor not Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1851.5	18615	3	QPSK	1	0	23.27	0	0
1851.5	18615	3	QPSK	1	7	23.31	0	0
1851.5	18615	3	QPSK	1	14	23.49	0	0
1851.5	18615	3	QPSK	8	0	22.28	1	0-1
1851.5	18615	3	QPSK	8	4	22.30	1	0-1
1851.5	18615	3	QPSK	8	7	22.30	1	0-1
1851.5	18615	3	QPSK	15	0	22.29	1	0-1
1851.5	18615	3	16-QAM	1	0	22.16	1	0-1
1851.5	18615	3	16-QAM	1	7	22.23	1	0-1
1851.5	18615	3	16-QAM	1	14	22.25	1	0-1
1851.5	18615	3	16-QAM	8	0	21.12	2	0-2
1851.5	18615	3	16-QAM	8	4	21.04	2	0-2
1851.5	18615	3	16-QAM	8	7	21.07	2	0-2
1851.5	18615	3	16-QAM	15	0	21.15	2	0-2
1880.0	18900	3	QPSK	1	0	23.00	0	0
1880.0	18900	3	QPSK	1	7	22.99	0	0
1880.0	18900	3	QPSK	1	14	23.16	0	0
1880.0	18900	3	QPSK	8	0	22.09	1	0-1
1880.0	18900	3	QPSK	8	4	22.09	1	0-1
1880.0	18900	3	QPSK	8	7	22.12	1	0-1
1880.0	18900	3	QPSK	15	0	21.98	1	0-1
1880.0	18900	3	16-QAM	1	0	21.83	1	0-1
1880.0	18900	3	16-QAM	1	7	21.85	1	0-1
1880.0	18900	3	16-QAM	1	14	22.03	1	0-1
1880.0	18900	3	16-QAM	8	0	20.98	2	0-2
1880.0	18900	3	16-QAM	8	4	20.97	2	0-2
1880.0	18900	3	16-QAM	8	7	20.99	2	0-2
1880.0	18900	3	16-QAM	15	0	21.02	2	0-2
1908.5	19185	3	QPSK	1	0	22.88	0	0
1908.5	19185	3	QPSK	1	7	22.92	0	0
1908.5	19185	3	QPSK	1	14	22.78	0	0
1908.5	19185	3	QPSK	8	0	21.97	1	0-1
1908.5	19185	3	QPSK	8	4	21.93	1	0-1
1908.5	19185	3	QPSK	8	7	21.91	1	0-1
1908.5	19185	3	QPSK	15	0	21.89	1	0-1
1908.5	19185	3	16-QAM	1	0	22.33	1	0-1
1908.5	19185	3	16-QAM	1	7	22.29	1	0-1
1908.5	19185	3	16-QAM	1	14	22.15	1	0-1
1908.5	19185	3	16-QAM	8	0	20.99	2	0-2
1908.5	19185	3	16-QAM	8	4	20.92	2	0-2
1908.5	19185	3	16-QAM	8	7	20.91	2	0-2
1908.5	19185	3	16-QAM	15	0	20.93	2	0-2

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 38 of 63

Table 8-30
Reduced LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth
Representing Capacitive Sensor Active

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
1851.5	18615	3	QPSK	1	0	13.65	0	0
1851.5	18615	3	QPSK	1	7	13.72	0	0
1851.5	18615	3	QPSK	1	14	13.71	0	0
1851.5	18615	3	QPSK	8	0	13.74	0	0-1
1851.5	18615	3	QPSK	8	4	13.71	0	0-1
1851.5	18615	3	QPSK	8	7	13.72	0	0-1
1851.5	18615	3	QPSK	15	0	13.70	0	0-1
1851.5	18615	3	16-QAM	1	0	13.66	0	0-1
1851.5	18615	3	16-QAM	1	7	13.75	0	0-1
1851.5	18615	3	16-QAM	1	14	13.66	0	0-1
1851.5	18615	3	16-QAM	8	0	13.41	0	0-2
1851.5	18615	3	16-QAM	8	4	13.51	0	0-2
1851.5	18615	3	16-QAM	8	7	13.44	0	0-2
1851.5	18615	3	16-QAM	15	0	13.41	0	0-2
1880.0	18900	3	QPSK	1	0	13.38	0	0
1880.0	18900	3	QPSK	1	7	13.70	0	0
1880.0	18900	3	QPSK	1	14	13.41	0	0
1880.0	18900	3	QPSK	8	0	13.75	0	0-1
1880.0	18900	3	QPSK	8	4	13.83	0	0-1
1880.0	18900	3	QPSK	8	7	13.76	0	0-1
1880.0	18900	3	QPSK	15	0	13.78	0	0-1
1880.0	18900	3	16-QAM	1	0	13.81	0	0-1
1880.0	18900	3	16-QAM	1	7	13.82	0	0-1
1880.0	18900	3	16-QAM	1	14	13.80	0	0-1
1880.0	18900	3	16-QAM	8	0	13.52	0	0-2
1880.0	18900	3	16-QAM	8	4	13.60	0	0-2
1880.0	18900	3	16-QAM	8	7	13.52	0	0-2
1880.0	18900	3	16-QAM	15	0	13.53	0	0-2
1908.5	19185	3	QPSK	1	0	13.22	0	0
1908.5	19185	3	QPSK	1	7	13.22	0	0
1908.5	19185	3	QPSK	1	14	13.12	0	0
1908.5	19185	3	QPSK	8	0	13.28	0	0-1
1908.5	19185	3	QPSK	8	4	13.34	0	0-1
1908.5	19185	3	QPSK	8	7	13.25	0	0-1
1908.5	19185	3	QPSK	15	0	13.35	0	0-1
1908.5	19185	3	16-QAM	1	0	13.36	0	0-1
1908.5	19185	3	16-QAM	1	7	13.38	0	0-1
1908.5	19185	3	16-QAM	1	14	13.22	0	0-1
1908.5	19185	3	16-QAM	8	0	13.15	0	0-2
1908.5	19185	3	16-QAM	8	4	13.20	0	0-2
1908.5	19185	3	16-QAM	8	7	13.10	0	0-2
1908.5	19185	3	16-QAM	15	0	13.17	0	0-2

8.3 WLAN/Bluetooth Conducted Powers

Table 8-31
IEEE 802.11b Average RF Power

Mode	Freq [MHz]	Channel	802.11b (2.4 GHz) Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1*	14.76	14.92	14.89	14.92
802.11b	2437	6*	14.95	15.18	15.19	15.18
802.11b	2462	11*	14.90	15.18	15.15	15.18

Table 8-32
IEEE 802.11g Average RF Power

Mode	Freq [MHz]	Channel	802.11g (2.4 GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	10.60	10.93	10.90	10.94	10.90	10.87	10.95	10.83
802.11g	2437	6	10.75	11.22	11.20	11.18	11.15	11.09	11.09	11.37
802.11g	2462	11	10.86	11.20	11.20	11.23	11.10	11.21	11.18	11.14

FCC ID: A3LSMT217T		SAR EVALUATION REPORT					Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet				Page 39 of 63	

Table 8-33
IEEE 802.11n Average RF Power

Mode	Freq	Channel	802.11n (2.4 GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6.5	13	20	26	39	52	58	65
802.11n	2412	1	9.52	9.98	9.97	9.89	9.96	9.97	10.03	9.94
802.11n	2437	6	9.90	10.26	10.26	10.19	10.22	10.20	10.23	10.27
802.11n	2462	11	9.95	10.30	10.32	10.30	10.36	10.26	10.30	10.35

Table 8-34
IEEE 802.11a Average RF Power

Mode	Freq	Channel	802.11a (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6	9	12	18	24	36	48	54
802.11a	5180	36*	8.14	8.21	8.15	8.15	8.15	8.12	8.10	8.08
802.11a	5200	40	7.67	7.53	7.60	7.57	7.57	7.55	7.61	7.65
802.11a	5220	44	7.61	7.55	7.60	7.55	7.62	7.59	7.59	7.58
802.11a	5240	48*	8.19	8.21	8.21	8.26	8.12	8.17	8.17	8.12
802.11a	5260	52*	7.71	7.68	7.71	7.66	7.66	7.66	7.63	7.68
802.11a	5280	56	8.28	7.74	7.74	7.72	7.72	7.66	7.66	7.63
802.11a	5300	60	7.90	7.21	7.21	7.31	7.31	7.22	7.22	7.16
802.11a	5320	64*	8.40	6.68	6.66	6.71	6.72	6.64	6.64	6.69
802.11a	5500	100	7.63	7.57	7.59	7.62	7.57	7.63	7.62	7.57
802.11a	5520	104*	7.77	7.66	7.71	7.67	7.60	7.59	7.66	7.61
802.11a	5540	108	7.85	7.74	7.77	7.74	7.74	7.73	7.77	7.71
802.11a	5560	112	8.45	7.29	7.25	7.29	7.20	7.19	7.25	7.25
802.11a	5580	116*	8.40	7.17	7.15	7.25	7.28	7.19	7.12	7.20
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	7.73	7.30	7.30	7.35	7.24	7.33	7.29	7.32
802.11a	5680	136*	7.76	7.39	7.32	7.32	7.35	7.32	7.31	7.33
802.11a	5700	140	8.45	7.62	7.52	7.64	7.66	7.62	7.59	7.57
802.11a	5745	149*	7.63	7.59	7.70	7.65	7.69	7.60	7.47	7.62
802.11a	5765	153	7.85	7.64	7.60	7.63	7.70	7.65	7.62	7.56
802.11a	5785	157*	7.83	7.63	7.66	7.61	7.65	7.54	7.55	7.59
802.11a	5805	161*	7.88	7.65	7.60	7.61	7.59	7.60	7.55	7.55
802.11a	5825	165	7.85	7.60	7.60	7.65	7.60	7.55	7.55	7.71

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

(*) – indicates default channels per KDB Publication 248227 D01v01r02. When the adjacent channels are higher in power then the default channels, these “required channels” are considered for SAR testing instead of the default channels.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 40 of 63

Table 8-35
IEEE 802.11n Average RF Power – 20 MHz Bandwidth

Mode	Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	5180	36	6.70	6.73	6.70	6.75	6.71	6.70	6.74	6.72
802.11n	5200	40	6.28	6.26	6.28	6.28	6.26	6.26	6.20	6.17
802.11n	5220	44	6.18	6.30	6.28	6.20	6.19	6.19	6.20	6.18
802.11n	5240	48	6.71	6.75	6.67	6.68	6.69	6.59	6.68	6.62
802.11n	5260	52	7.26	7.39	7.26	7.21	7.25	7.25	7.17	7.21
802.11n	5280	56	7.22	7.24	7.25	7.23	7.27	7.23	7.25	7.30
802.11n	5300	60	6.71	6.79	6.82	6.70	6.67	6.65	6.80	6.63
802.11n	5320	64	7.32	7.32	7.24	7.25	7.27	7.28	7.22	7.20
802.11n	5500	100	6.20	6.20	6.21	6.22	6.21	6.15	6.15	6.14
802.11n	5520	104	6.26	6.35	6.25	6.26	6.20	6.21	6.22	6.17
802.11n	5540	108	6.31	6.33	6.36	6.30	6.26	6.22	6.27	6.31
802.11n	5560	112	6.83	6.81	6.82	6.79	6.76	6.78	6.70	6.80
802.11n	5580	116	6.78	6.75	6.77	6.78	6.72	6.72	6.65	6.75
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	7.02	6.87	6.85	6.86	6.85	6.81	6.85	6.78
802.11n	5680	136	6.87	6.90	6.80	6.86	6.90	6.77	6.91	6.87
802.11n	5700	140	6.92	6.91	6.95	6.93	6.91	6.92	6.97	6.93
802.11n	5745	149	7.02	6.95	6.95	6.96	7.04	6.98	6.95	7.03
802.11n	5765	153	7.02	7.02	7.02	6.97	7.00	6.95	7.00	6.99
802.11n	5785	157	6.96	7.03	6.97	6.98	7.00	6.96	6.95	6.91
802.11n	5805	161	7.03	7.04	7.04	7.00	6.97	7.02	7.00	7.02
802.11n	5825	165	7.02	7.02	7.02	7.00	6.97	6.95	7.00	7.02

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

Table 8-36
IEEE 802.11n Average RF Power – 40 MHz Bandwidth

Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13.5	27	40.5	54	81	108	121.5	135
802.11n	5190	38	6.72	6.70	6.71	6.62	6.61	6.73	6.66	6.70
802.11n	5230	46	6.70	6.72	6.75	6.66	6.52	6.60	6.63	6.60
802.11n	5270	54	6.60	6.70	6.76	6.58	6.66	6.75	6.75	6.66
802.11n	5310	62	7.29	7.34	7.42	7.22	7.30	7.28	7.34	7.31
802.11n	5510	102	6.75	6.75	6.95	6.68	6.82	6.65	6.70	6.70
802.11n	5550	110	6.90	6.89	6.88	6.82	6.86	6.82	6.85	6.88
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	6.45	6.45	6.41	6.55	6.45	6.54	6.44	6.49
802.11n	5755	151	6.78	6.65	6.74	6.69	6.68	6.60	6.75	6.55
802.11n	5795	159	6.65	6.69	6.75	6.75	6.58	6.63	6.64	6.80

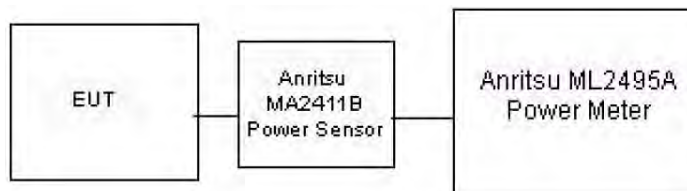


Figure 8-2
Power Measurement Setup

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 41 of 63

Table 8-37
Bluetooth RF Conducted Powers

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Peak Conducted Power		Avg Conducted Power	
			[dBm]	[mW]	[dBm]	[mW]
2402	1.0	0	10.69	11.717	10.49	11.204
2441	1.0	39	10.40	10.955	10.26	10.617
2480	1.0	78	9.87	9.701	9.72	9.366
2402	2.0	0	11.71	14.818	9.05	8.035
2441	2.0	39	11.43	13.884	8.79	7.561
2480	2.0	78	10.85	12.165	8.23	6.654
2402	3.0	0	11.93	15.606	9.11	8.139
2441	3.0	39	11.64	14.588	8.85	7.669
2480	3.0	78	11.13	12.969	8.29	6.740

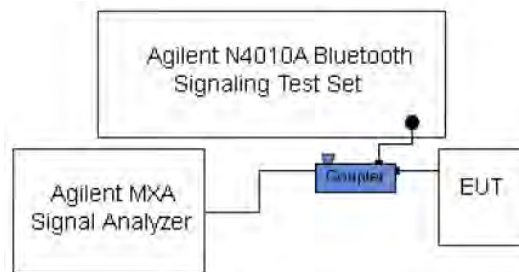


Figure 8-3
Power Measurement Setup

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 42 of 63

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/17/2013	750B	23.8	710	0.954	56.043	0.960	55.687	-0.63%	0.64%
			725	0.968	55.881	0.961	55.629	0.73%	0.45%
			740	0.982	55.704	0.963	55.570	1.97%	0.24%
			755	0.995	55.520	0.964	55.512	3.22%	0.01%
06/12/2013	835B	23.2	820	0.980	55.267	0.969	55.258	1.14%	0.02%
			835	1.010	55.903	0.970	55.200	4.12%	1.27%
			850	1.035	56.278	0.988	55.154	4.76%	2.04%
06/17/2013	1750B	23.2	1710	1.412	52.090	1.460	53.540	-3.29%	-2.71%
			1750	1.454	51.954	1.490	53.430	-2.42%	-2.76%
			1790	1.494	51.797	1.510	53.330	-1.06%	-2.87%
10/18/2013	1750B	22.4	1710	1.393	52.414	1.463	53.537	-4.78%	-2.10%
			1750	1.444	52.334	1.488	53.432	-2.96%	-2.05%
			1790	1.488	52.290	1.514	53.326	-1.72%	-1.94%
06/17/2013	1900B	23.1	1850	1.465	52.389	1.520	53.300	-3.62%	-1.71%
			1880	1.501	52.212	1.520	53.300	-1.25%	-2.04%
			1910	1.546	52.086	1.520	53.300	1.71%	-2.28%
10/16/2013	2450B	24.1	2401	1.886	51.370	1.903	52.765	-0.89%	-2.64%
			2450	1.954	51.260	1.950	52.700	0.21%	-2.73%
			2499	2.036	51.157	2.019	52.638	0.84%	-2.81%
10/21/2013	2450B	21.1	2401	1.857	51.294	1.903	52.765	-2.42%	-2.79%
			2450	1.929	51.139	1.950	52.700	-1.08%	-2.96%
			2499	2.006	50.982	2.019	52.638	-0.64%	-3.15%
10/20/2013	5200B-5800B	21.8	5180	5.371	47.718	5.276	49.041	1.80%	-2.70%
			5200	5.402	47.756	5.299	49.014	1.94%	-2.57%
			5240	5.466	47.547	5.346	48.960	2.24%	-2.89%
			5280	5.491	47.462	5.393	48.906	1.82%	-2.95%
			5300	5.532	47.424	5.416	48.879	2.14%	-2.98%
			5320	5.555	47.364	5.439	48.851	2.13%	-3.04%
			5500	5.778	46.918	5.650	48.607	2.27%	-3.47%
			5540	5.850	46.804	5.696	48.553	2.70%	-3.60%
			5560	5.872	46.764	5.720	48.526	2.66%	-3.63%
			5600	5.933	46.679	5.766	48.471	2.90%	-3.70%
			5700	6.084	46.494	5.883	48.336	3.42%	-3.81%
			5765	6.195	46.339	5.959	48.248	3.96%	-3.96%
			5785	6.218	46.284	5.982	48.220	3.95%	-4.01%
			5800	6.242	46.300	6.000	48.200	4.03%	-3.94%
			5805	6.258	46.344	6.006	48.193	4.20%	-3.84%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per IEEE 1528 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 43 of 63

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-2
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
G	750	BODY	06/17/2013	24.5	23.8	0.100	1046	3209	0.845	8.770	8.450	-3.65%
G	835	BODY	06/12/2013	24.5	23.7	0.100	4d132	3209	0.974	9.360	9.740	4.06%
B	1750	BODY	06/17/2013	23.8	23.0	0.100	1008	3287	3.760	38.200	37.600	-1.57%
D	1750	BODY	10/18/2013	23.3	22.5	0.100	1051	3022	3.530	37.800	35.300	-6.61%
E	1900	BODY	06/17/2013	23.6	23.3	0.100	5d148	3920	4.170	40.800	41.700	2.21%
G	2450	BODY	10/16/2013	24.5	24.1	0.100	882	3209	4.770	49.900	47.700	-4.41%
G	2450	BODY	10/21/2013	23.5	22.7	0.100	882	3209	5.010	49.900	50.100	0.40%
A	5200	BODY	10/20/2013	23.0	22.2	0.100	1057	3589	7.600	75.500	76.000	0.66%
A	5300	BODY	10/20/2013	23.0	22.2	0.100	1057	3589	7.930	75.300	79.300	5.31%
A	5500	BODY	10/20/2013	23.1	22.2	0.100	1057	3589	8.260	80.800	82.600	2.23%
A	5600	BODY	10/20/2013	23.2	22.3	0.100	1057	3589	8.310	80.300	83.100	3.49%
A	5800	BODY	10/20/2013	23.3	22.3	0.100	1057	3589	7.200	75.100	72.000	-4.13%

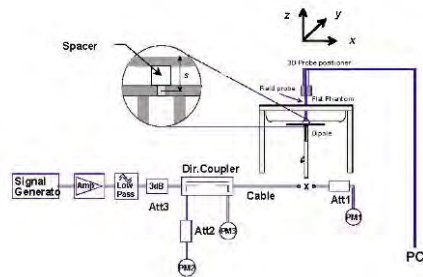


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 44 of 63

10 SAR DATA SUMMARY

10.1 Standalone Body SAR Data

Table 10-1
UMTS Body SAR Data

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR(1g)	Scaling Factor	Scaled SAR(1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	23.5	23.16	0.01	14 mm	92	1:1	back	0.166	1.081	0.179	
836.60	4183	UMTS 850	RMC	23.5	23.16	0.04	14 mm	92	1:1	top	0.139	1.081	0.150	
836.60	4183	UMTS 850	RMC	23.5	23.16	0.00	4 mm	92	1:1	left	0.061	1.081	0.066	
836.60	4183	UMTS 850	RMC	19.0	18.72	-0.04	0 mm	95	1:1	back	0.531	1.067	0.567	A1
836.60	4183	UMTS 850	RMC	19.0	18.72	0.02	0 mm	95	1:1	top	0.334	1.067	0.356	
836.60	4183	UMTS 850	RMC	19.0	18.72	0.04	0 mm	95	1:1	left	0.068	1.067	0.073	
1732.40	1412	UMTS 1750	RMC	23.0	22.87	0.02	14 mm	17	1:1	back	0.611	1.030	0.629	
1732.40	1412	UMTS 1750	RMC	23.0	22.87	0.01	10 mm	17	1:1	top	0.491	1.030	0.506	
1732.40	1412	UMTS 1750	RMC	23.0	22.87	0.02	4 mm	17	1:1	left	0.345	1.030	0.355	
1732.40	1412	UMTS 1750	RMC	12.5	11.85	0.04	0 mm	18	1:1	back	0.640	1.161	0.743	A2
1732.40	1412	UMTS 1750	RMC	12.5	11.85	-0.02	0 mm	18	1:1	top	0.390	1.161	0.453	
1732.40	1412	UMTS 1750	RMC	12.5	11.85	0.05	0 mm	18	1:1	left	0.081	1.161	0.094	
1880.00	9400	UMTS 1900	RMC	23.0	22.66	-0.07	14 mm	92	1:1	back	0.385	1.081	0.416	
1880.00	9400	UMTS 1900	RMC	23.0	22.66	0.04	14 mm	92	1:1	top	0.264	1.081	0.285	
1880.00	9400	UMTS 1900	RMC	23.0	22.66	0.02	4 mm	92	1:1	left	0.564	1.081	0.610	
1880.00	9400	UMTS 1900	RMC	15.5	15.11	-0.01	0 mm	95	1:1	back	0.604	1.094	0.661	A3
1880.00	9400	UMTS 1900	RMC	15.5	15.11	-0.05	0 mm	95	1:1	top	0.306	1.094	0.335	
1880.00	9400	UMTS 1900	RMC	15.5	15.11	0.02	0 mm	95	1:1	left	0.219	1.094	0.240	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-2
LTE Band 17 Body SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
710.00	23790	Mid	LTE Band 17	10	25.0	24.96	0.05	0	93	QPSK	1	0	14 mm	back	1:1	0.105	1.009	0.106	
710.00	23790	Mid	LTE Band 17	10	24.0	23.75	0.00	1	93	QPSK	25	0	14 mm	back	1:1	0.081	1.059	0.086	
710.00	23790	Mid	LTE Band 17	10	25.0	24.96	-0.01	0	93	QPSK	1	0	14 mm	top	1:1	0.066	1.009	0.067	
710.00	23790	Mid	LTE Band 17	10	24.0	23.75	0.02	1	93	QPSK	25	0	14 mm	top	1:1	0.048	1.059	0.051	
710.00	23790	Mid	LTE Band 17	10	25.0	24.96	0.12	0	93	QPSK	1	0	4 mm	left	1:1	0.053	1.009	0.053	
710.00	23790	Mid	LTE Band 17	10	24.0	23.75	-0.04	1	93	QPSK	25	0	4 mm	left	1:1	0.041	1.059	0.043	
710.00	23790	Mid	LTE Band 17	10	18.5	18.11	0.02	0	97	QPSK	1	49	0 mm	back	1:1	0.173	1.094	0.189	A4
710.00	23790	Mid	LTE Band 17	10	18.5	18.05	0.00	0	97	QPSK	25	25	0 mm	back	1:1	0.125	1.109	0.139	
710.00	23790	Mid	LTE Band 17	10	18.5	18.11	0.07	0	97	QPSK	1	49	0 mm	top	1:1	0.160	1.094	0.175	
710.00	23790	Mid	LTE Band 17	10	18.5	18.05	0.08	0	97	QPSK	25	25	0 mm	top	1:1	0.099	1.109	0.110	
710.00	23790	Mid	LTE Band 17	10	18.5	18.11	0.18	0	97	QPSK	1	49	0 mm	left	1:1	0.010	1.094	0.011	
710.00	23790	Mid	LTE Band 17	10	18.5	18.05	0.12	0	97	QPSK	25	25	0 mm	left	1:1	0.009	1.109	0.010	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak								Body 1.6 W/kg (mW/g) averaged over 1 gram											
Uncontrolled Exposure/General Population																			

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 45 of 63

Table 10-3
LTE Band 5 Body SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode		Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR[dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.															(W/kg)		(W/kg)	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.0	24.66	0.00	0	93	QPSK	1	49	14 mm	back	1:1	0.270	1.081	0.292	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.33	-0.08	1	93	QPSK	25	25	14 mm	back	1:1	0.203	1.167	0.237	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.0	24.66	-0.05	0	93	QPSK	1	49	14 mm	top	1:1	0.178	1.081	0.192	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.33	0.01	1	93	QPSK	25	25	14 mm	top	1:1	0.144	1.167	0.168	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.0	24.66	-0.05	0	93	QPSK	1	49	4 mm	left	1:1	0.068	1.081	0.074	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.33	0.06	1	93	QPSK	25	25	4 mm	left	1:1	0.052	1.167	0.061	
836.50	20525	Mid	LTE Band 5 (Cell)	10	18.5	18.20	0.00	0	95	QPSK	1	49	0 mm	back	1:1	0.314	1.072	0.337	
836.50	20525	Mid	LTE Band 5 (Cell)	10	18.5	18.19	-0.01	0	95	QPSK	25	25	0 mm	back	1:1	0.236	1.074	0.253	
836.50	20525	Mid	LTE Band 5 (Cell)	10	18.5	18.20	0.00	0	95	QPSK	1	49	0 mm	top	1:1	0.343	1.072	0.368	A5
836.50	20525	Mid	LTE Band 5 (Cell)	10	18.5	18.19	-0.10	0	95	QPSK	25	25	0 mm	top	1:1	0.312	1.074	0.335	
836.50	20525	Mid	LTE Band 5 (Cell)	10	18.5	18.20	-0.06	0	95	QPSK	1	49	0 mm	left	1:1	0.052	1.072	0.056	
836.50	20525	Mid	LTE Band 5 (Cell)	10	18.5	18.19	0.04	0	95	QPSK	25	25	0 mm	left	1:1	0.054	1.074	0.058	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 10-4
LTE Band 4 Body SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR[dB]	Device Serial Number	Modulation	RB Size	RBOffset	Spacing	Side	Duty Cycle	SAR(1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.19	0.07	0	93	QPSK	1	50	14 mm	back	1:1	0.459	1.074	0.493	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.99	-0.03	1	93	QPSK	50	25	14 mm	back	1:1	0.352	1.125	0.396	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.19	-0.03	0	93	QPSK	1	50	14 mm	top	1:1	0.292	1.074	0.314	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.99	0.08	1	93	QPSK	50	25	14 mm	top	1:1	0.219	1.125	0.246	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.19	-0.01	0	93	QPSK	1	50	4 mm	left	1:1	0.694	1.074	0.745	A6
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.99	0.09	1	93	QPSK	50	25	4 mm	left	1:1	0.507	1.125	0.570	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	13.0	12.63	0.01	0	96	QPSK	1	99	0 mm	back	1:1	0.355	1.089	0.387	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	13.0	12.60	0.01	0	96	QPSK	50	0	0 mm	back	1:1	0.403	1.096	0.442	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	13.0	12.63	0.07	0	96	QPSK	1	99	0 mm	top	1:1	0.151	1.089	0.164	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	13.0	12.60	-0.06	0	96	QPSK	50	0	0 mm	top	1:1	0.166	1.096	0.182	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	13.0	12.63	-0.01	0	96	QPSK	1	99	0 mm	left	1:1	0.144	1.089	0.157	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	13.0	12.60	-0.06	0	96	QPSK	50	0	0 mm	left	1:1	0.155	1.096	0.170	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 10-5
LTE Band 2 Body SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR[dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	23.30	0.01	0	93	QPSK	1	0	14 mm	back	1:1	0.456	1.047	0.477	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	22.16	0.07	1	93	QPSK	50	50	14 mm	back	1:1	0.311	1.081	0.336	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	23.30	0.03	0	93	QPSK	1	0	14 mm	top	1:1	0.348	1.047	0.364	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	22.16	0.01	1	93	QPSK	50	50	14 mm	top	1:1	0.248	1.081	0.268	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	23.30	0.04	0	93	QPSK	1	0	4 mm	left	1:1	0.658	1.047	0.689	A7
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	22.16	0.02	1	93	QPSK	50	50	4 mm	left	1:1	0.441	1.081	0.477	
1900.00	19100	High	LTE Band 2 (PCS)	20	14.0	13.87	0.03	0	96	QPSK	1	0	0 mm	back	1:1	0.584	1.030	0.602	
1900.00	19100	High	LTE Band 2 (PCS)	20	14.0	13.85	-0.04	0	96	QPSK	50	0	0 mm	back	1:1	0.611	1.035	0.632	
1900.00	19100	High	LTE Band 2 (PCS)	20	14.0	13.87	0.02	0	96	QPSK	1	0	0 mm	top	1:1	0.400	1.030	0.412	
1900.00	19100	High	LTE Band 2 (PCS)	20	14.0	13.85	0.01	0	96	QPSK	50	0	0 mm	top	1:1	0.399	1.035	0.413	
1900.00	19100	High	LTE Band 2 (PCS)	20	14.0	13.87	0.00	0	96	QPSK	1	0	0 mm	left	1:1	0.184	1.030	0.190	
1900.00	19100	High	LTE Band 2 (PCS)	20	14.0	13.85	0.04	0	96	QPSK	50	0	0 mm	left	1:1	0.206	1.035	0.213	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 46 of 63

**Table 10-6
DTS Body SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR(1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2437	6	IEEE 802.11b	DSSS	15.5	14.95	0.05	0 mm	17	1	back	1:1	0.299	1.135	0.339	
2437	6	IEEE 802.11b	DSSS	15.5	14.95	0.08	0 mm	17	1	bottom	1:1	0.331	1.135	0.376	A8
2437	6	IEEE 802.11b	DSSS	15.5	14.95	0.08	0 mm	17	1	left	1:1	0.022	1.135	0.025	
5805	161	IEEE 802.11a	OFDM	8.5	7.88	-0.08	0 mm	17	6	back	1:1	0.147	1.153	0.169	
5765	153	IEEE 802.11a	OFDM	8.5	7.85	-0.12	0 mm	17	6	bottom	1:1	0.637	1.161	0.740	A9
5785	157	IEEE 802.11a	OFDM	8.5	7.83	-0.14	0 mm	17	6	bottom	1:1	0.599	1.167	0.699	
5805	161	IEEE 802.11a	OFDM	8.5	7.88	-0.13	0 mm	17	6	bottom	1:1	0.596	1.153	0.687	
5805	161	IEEE 802.11a	OFDM	8.5	7.88	0.16	0 mm	17	6	left	1:1	0.019	1.153	0.022	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 10-7
NII Body SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR(1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5180	36	IEEE 802.11a	OFDM	8.5	8.14	0.03	0 mm	17	6	back	1:1	0.313	1.086	0.340	
5240	48	IEEE 802.11a	OFDM	8.5	8.19	0.00	0 mm	17	6	back	1:1	0.303	1.074	0.325	
5180	36	IEEE 802.11a	OFDM	8.5	8.14	0.12	0 mm	17	6	bottom	1:1	0.586	1.086	0.636	
5240	48	IEEE 802.11a	OFDM	8.5	8.19	-0.17	0 mm	17	6	bottom	1:1	0.562	1.074	0.604	
5240	48	IEEE 802.11a	OFDM	8.5	8.19	0.10	0 mm	17	6	left	1:1	0.038	1.074	0.041	
5280	56	IEEE 802.11a	OFDM	8.5	8.28	-0.02	0 mm	17	6	back	1:1	0.274	1.052	0.288	
5320	64	IEEE 802.11a	OFDM	8.5	8.40	-0.02	0 mm	17	6	back	1:1	0.268	1.023	0.274	
5280	56	IEEE 802.11a	OFDM	8.5	8.28	-0.19	0 mm	17	6	bottom	1:1	0.620	1.052	0.652	
5320	64	IEEE 802.11a	OFDM	8.5	8.40	-0.17	0 mm	17	6	bottom	1:1	0.655	1.023	0.670	
5320	64	IEEE 802.11a	OFDM	8.5	8.40	0.13	0 mm	17	6	left	1:1	0.036	1.023	0.037	
5700	140	IEEE 802.11a	OFDM	8.5	8.45	0.14	0 mm	17	6	back	1:1	0.201	1.012	0.203	
5540	108	IEEE 802.11a	OFDM	8.5	7.85	-0.16	0 mm	17	6	bottom	1:1	0.581	1.161	0.675	
5560	112	IEEE 802.11a	OFDM	8.5	8.45	-0.15	0 mm	17	6	bottom	1:1	0.857	1.012	0.867	A10
5700	140	IEEE 802.11a	OFDM	8.5	8.45	-0.13	0 mm	17	6	bottom	1:1	0.812	1.012	0.822	
5700	140	IEEE 802.11a	OFDM	8.5	8.45	0.11	0 mm	17	6	left	1:1	0.022	1.012	0.023	
5560	112	IEEE 802.11a	OFDM	8.5	8.45	-0.15	0 mm	17	6	bottom	1:1	0.774	1.012	0.783	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability measurement.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 47 of 63

Table 10-8
Bluetooth Body SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR(1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2402	0	Bluetooth	FHSS	10.5	10.49	-0.11	0 mm	17	1	back	1:1	0.053	1.002	0.053	A11
2402	0	Bluetooth	FHSS	10.5	10.49	-0.05	0 mm	17	1	bottom	1:1	0.042	1.002	0.042	
2402	0	Bluetooth	FHSS	10.5	10.49	-0.16	0 mm	17	1	left	1:1	0.003	1.002	0.003	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
7. Per FCC KDB 616217 D04 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v05 was applied to determine SAR test exclusion for adjacent edge configurations. SAR tests were required for top and left edge for the main antenna and bottom and left edge for the BT/WLAN antenna.

UMTS Notes:

1. UMTS mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, since the maximum output power variation across the required test channels is ≤ 0.5 dB, only middle channel was used. Since the reported (scaled) SAR measured at the middle channel for each test configuration is ≤ 0.8 W/kg, testing at the other channels was not required.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r01. Implementation of the general test procedures can be found in Section 7.4.4.
2. MPR is implemented by the manufacturer for device operating at max power with the capacitive sensor inactive. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 48 of 63

BT/WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz bandwidths) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
3. WIFI transmission was verified using an uncalibrated spectrum analyzer.
4. When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other default channels was not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate..
5. There is no proximity sensor power reduction mechanism applied for WIFI/BT modes.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 49 of 63

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to Tablets with built-in unlicensed transmitters such as 802.11a/b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

**Table 11-1
Estimated SAR**

Mode	Configurations	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
		[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth LE	Touching*	2441	3.50	5	0.083

Note:

1. For configurations excluded per 447498 D01v05, an estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR exclusion since the test separation distance was >50 mm.
2. (*) – Per FCC KDB Publication 447498, when the test separation distance is < 5 mm (touching), a distance of 5 mm is applied to determine estimated SAR.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 50 of 63

11.3 Body Simultaneous Transmission Analysis

Table 11-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body at 0 mm)

Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.567	0.339	0.906	Body SAR	Back	0.743	0.339	1.082
	Top	0.356	0.400	0.756		Top	0.453	0.400	0.853
	Bottom	0.400	0.376	0.776		Bottom	0.400	0.376	0.776
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.073	0.025	0.098		Left	0.094	0.025	0.119
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.661	0.339	1.000	Body SAR	Back	0.189	0.339	0.528
	Top	0.335	0.400	0.735		Top	0.175	0.400	0.575
	Bottom	0.400	0.376	0.776		Bottom	0.400	0.376	0.776
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.240	0.025	0.265		Left	0.011	0.025	0.036
Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.337	0.339	0.676	Body SAR	Back	0.442	0.339	0.781
	Top	0.368	0.400	0.768		Top	0.182	0.400	0.582
	Bottom	0.400	0.376	0.776		Bottom	0.400	0.376	0.776
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.058	0.025	0.083		Left	0.170	0.025	0.195
Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)					
Body SAR	Back	0.632	0.339	0.971					
	Top	0.413	0.400	0.813					
	Bottom	0.400	0.376	0.776					
	Right	0.400	0.400	0.800					
	Left	0.213	0.025	0.238					

Table 11-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Body at 0 mm)

Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.567	0.340	0.907	Body SAR	Back	0.743	0.340	1.083
	Top	0.356	0.400	0.756		Top	0.453	0.400	0.853
	Bottom	0.400	0.867	1.267		Bottom	0.400	0.867	1.267
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.073	0.041	0.114		Left	0.094	0.041	0.135
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.661	0.340	1.001	Body SAR	Back	0.189	0.340	0.529
	Top	0.335	0.400	0.735		Top	0.175	0.400	0.575
	Bottom	0.400	0.867	1.267		Bottom	0.400	0.867	1.267
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.240	0.041	0.281		Left	0.011	0.041	0.052

Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.337	0.340	0.677	Body SAR	Back	0.442	0.340	0.782
	Top	0.368	0.400	0.768		Top	0.182	0.400	0.582
	Bottom	0.400	0.867	1.267		Bottom	0.400	0.867	1.267
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.058	0.041	0.099		Left	0.170	0.041	0.211

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.632	0.340	0.972
	Top	0.413	0.400	0.813
	Bottom	0.400	0.867	1.267
	Right	0.400	0.400	0.800
	Left	0.213	0.041	0.254

Table 11-4
Simultaneous Transmission Scenario with Bluetooth (Body at 0 mm)

Simult Tx	Configuration	UMTS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.567	0.083	0.650	Body SAR	Back	0.743	0.083	0.826
	Top	0.356	0.400	0.756		Top	0.453	0.400	0.853
	Bottom	0.400	0.083	0.483		Bottom	0.400	0.083	0.483
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.073	0.083	0.156		Left	0.094	0.083	0.177

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.661	0.083	0.744	Body SAR	Back	0.189	0.083	0.272
	Top	0.335	0.400	0.735		Top	0.175	0.400	0.575
	Bottom	0.400	0.083	0.483		Bottom	0.400	0.083	0.483
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.240	0.083	0.323		Left	0.011	0.083	0.094

Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.337	0.083	0.420	Body SAR	Back	0.442	0.083	0.525
	Top	0.368	0.400	0.768		Top	0.182	0.400	0.582
	Bottom	0.400	0.083	0.483		Bottom	0.400	0.083	0.483
	Right	0.400	0.400	0.800		Right	0.400	0.400	0.800
	Left	0.058	0.083	0.141		Left	0.170	0.083	0.253

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.632	0.083	0.715
	Top	0.413	0.400	0.813
	Bottom	0.400	0.083	0.483
	Right	0.400	0.400	0.800
	Left	0.213	0.083	0.296

Estimated BT LE SAR was used to evaluate Back, Bottom and Left sums, since the estimated SAR results are more conservative than the measured Bluetooth SAR values for these configurations see Table 11-1.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 52 of 63

Table 11-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Back at 14 mm)

Configuration	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	UMTS 850	0.179	< 0.339	< 0.518
Back Side	UMTS 1750	0.629	< 0.339	< 0.968
Back Side	UMTS 1900	0.416	< 0.339	< 0.755
Back Side	LTE Band 17	0.106	< 0.339	< 0.445
Back Side	LTE Band 5 (Cell)	0.292	< 0.339	< 0.631
Back Side	LTE Band 4 (AWS)	0.493	< 0.339	< 0.832
Back Side	LTE Band 2 (PCS)	0.477	< 0.339	< 0.816

Table 11-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Back at 14 mm)

Configuration	Mode	3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	UMTS 850	0.179	< 0.34	< 0.519
Back Side	UMTS 1750	0.000	< 0.34	< 0.34
Back Side	UMTS 1900	0.416	< 0.34	< 0.756
Back Side	LTE Band 17	0.106	< 0.34	< 0.446
Back Side	LTE Band 5 (Cell)	0.292	< 0.34	< 0.632
Back Side	LTE Band 4 (AWS)	0.493	< 0.34	< 0.833
Back Side	LTE Band 2 (PCS)	0.477	< 0.34	< 0.817

Table 11-7
Simultaneous Transmission Scenario with Bluetooth (Back at 14 mm)

Configuration	Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Back Side	UMTS 850	0.179	< 0.083	< 0.262
Back Side	UMTS 1750	0.000	< 0.083	< 0.083
Back Side	UMTS 1900	0.416	< 0.083	< 0.499
Back Side	LTE Band 17	0.106	< 0.083	< 0.189
Back Side	LTE Band 5 (Cell)	0.292	< 0.083	< 0.375
Back Side	LTE Band 4 (AWS)	0.493	< 0.083	< 0.576
Back Side	LTE Band 2 (PCS)	0.477	< 0.083	< 0.56

Estimated BT LE SAR was used to evaluate Back sums, since the estimated SAR results is more conservative then the measured Bluetooth SAR values for this configuration see Table 11-1.

Table 11-8
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Top at 14 mm)

Configuration	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Top Edge	UMTS 850	0.150	0.400	0.550
Top Edge	UMTS 1750	0.506	0.400	0.906
Top Edge	UMTS 1900	0.285	0.400	0.685
Top Edge	LTE Band 17	0.067	0.400	0.467
Top Edge	LTE Band 5 (Cell)	0.192	0.400	0.592
Top Edge	LTE Band 4 (AWS)	0.314	0.400	0.714
Top Edge	LTE Band 2 (PCS)	0.364	0.400	0.764

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 53 of 63

Table 11-9
Simultaneous Transmission Scenario with 5 GHz WLAN (Top at 14 mm)

Configuration	Mode	3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Top Edge	UMTS 850	0.150	0.400	0.550
Top Edge	UMTS 1750	0.506	0.400	0.906
Top Edge	UMTS 1900	0.285	0.400	0.685
Top Edge	LTE Band 17	0.067	0.400	0.467
Top Edge	LTE Band 5 (Cell)	0.192	0.400	0.592
Top Edge	LTE Band 4 (AWS)	0.314	0.400	0.714
Top Edge	LTE Band 2 (PCS)	0.364	0.400	0.764

Table 11-10
Simultaneous Transmission Scenario with Bluetooth (Top at 14 mm)

Configuration	Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Top Edge	UMTS 850	0.150	0.400	0.550
Top Edge	UMTS 1750	0.506	0.400	0.906
Top Edge	UMTS 1900	0.285	0.400	0.685
Top Edge	LTE Band 17	0.067	0.400	0.467
Top Edge	LTE Band 5 (Cell)	0.192	0.400	0.592
Top Edge	LTE Band 4 (AWS)	0.314	0.400	0.714
Top Edge	LTE Band 2 (PCS)	0.364	0.400	0.764

Table 11-11
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Left at 4 mm)

Configuration	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Left Edge	UMTS 850	0.066	< 0.025	<0.091
Left Edge	UMTS 1750	0.355	< 0.025	<0.380
Left Edge	UMTS 1900	0.610	< 0.025	<0.635
Left Edge	LTE Band 17	0.053	< 0.025	<0.078
Left Edge	LTE Band 5 (Cell)	0.074	< 0.025	<0.099
Left Edge	LTE Band 4 (AWS)	0.745	< 0.025	<0.770
Left Edge	LTE Band 2 (PCS)	0.689	< 0.025	<0.714

Table 11-12
Simultaneous Transmission Scenario with 5 GHz WLAN (Left at 4 mm)

Configuration	Mode	3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Left Edge	UMTS 850	0.066	< 0.041	<0.107
Left Edge	UMTS 1750	0.355	< 0.041	<0.396
Left Edge	UMTS 1900	0.610	< 0.041	<0.651
Left Edge	LTE Band 17	0.053	< 0.041	<0.094
Left Edge	LTE Band 5 (Cell)	0.074	< 0.041	<0.115
Left Edge	LTE Band 4 (AWS)	0.745	< 0.041	<0.786
Left Edge	LTE Band 2 (PCS)	0.689	< 0.041	<0.730

Table 11-13
Simultaneous Transmission Scenario with Bluetooth (Left at 4 mm)

Configuration	Mode	3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Left Edge	UMTS 850	0.066	< 0.083	<0.149
Left Edge	UMTS 1750	0.355	< 0.083	<0.438
Left Edge	UMTS 1900	0.610	< 0.083	<0.693
Left Edge	LTE Band 17	0.053	< 0.083	<0.136
Left Edge	LTE Band 5 (Cell)	0.074	< 0.083	<0.157
Left Edge	LTE Band 4 (AWS)	0.745	< 0.083	<0.828
Left Edge	LTE Band 2 (PCS)	0.689	< 0.083	<0.772

Estimated BT LE SAR was used to evaluate Left sums, since the estimated SAR results is more conservative then the measured Bluetooth SAR values for this configuration see Table 11-1

Note:

1. For configurations excluded per 447498 D01v05, an estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR exclusion since the test separation distance was >50 mm.
2. For SAR summations for body 14 mm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
3. For SAR summations for body 4 mm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
4. The worst case 5 GHz WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has WIFI Direct / WIFI Display capability. Therefore, the summations above represent the absolute worst cases for simultaneous transmission with 5 GHz WLAN.

11.3 Simultaneous Transmission Conclusion

Based on the simultaneous transmission analysis guidance described in KDB Publication 447498, the above simultaneous transmission SAR analyses indicate that the device operating in any of the simultaneous transmission scenarios will not exceed the SAR limit.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 55 of 63

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 12-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
5600	5560.00	112	IEEE 802.11a	OFDM	6	bottom	0 mm	0.857	0.774	1.11	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 56 of 63

13 EQUIPMENT LIST

For Testing Performed Between 6/12/13 to 6/17/13:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	85047A	S-Parameter Test Set	N/A	N/A	N/A	2904A00579
Agilent	85070C	Dielectric Probe Kit	2/14/2013	Annual	2/14/2014	MY44300633
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	4/17/2013	Annual	4/17/2014	3629U00687
Agilent	E5515C	Wireless Communications Test Set	10/18/2012	Biennial	10/18/2014	GB43193563
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/16/2013	Annual	4/16/2014	MY45470194
Amplifier Research	551G4	5W, 800MHz-4.2GHz	CBT	N/A	CBT	21910
Anritsu	MA24106A	USB Power Sensor	8/22/2012	Annual	8/22/2013	1231535
Anritsu	MA24106A	USB Power Sensor	8/22/2012	Annual	8/22/2013	1231538
Anritsu	MA2411B	Pulse Power Sensor	12/5/2012	Annual	12/5/2013	1126066
Anritsu	MA2411B	Pulse Power Sensor	12/4/2012	Annual	12/4/2013	1207364
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	2400
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5318
Anritsu	ML2438A	Power Meter	12/4/2012	Annual	12/4/2013	1070030
Anritsu	ML2496A	Power Meter	11/28/2012	Annual	11/28/2013	1138001
Anritsu	MT8820C	Radio Communication Tester	11/6/2012	Annual	11/6/2013	6200901190
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4353	Long Stem Thermometer	9/25/2012	Biennial	9/25/2014	122539615
Control Company	36934-158	Wall-Mounted Thermometer	1/4/2012	Biennial	1/4/2014	122014488
Fisher Scientific	15-078J	Long Stem Thermometer	10/30/2012	Biennial	10/30/2014	122626059
Gigatronix	80701A	(0.05-18GHz) Power Sensor	10/10/2012	Annual	10/10/2013	1833460
Gigatronix	8651A	Universal Power Meter	10/10/2012	Annual	10/10/2013	8650319
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/3/2013	Annual	5/3/2014	836371/0079
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	2/8/2013	Annual	2/8/2014	101699
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/7/2011	Biennial	10/7/2013	103962
Seekonk	NC-100	Torque Wrench (8" lb)	11/29/2011	Triennial	11/29/2014	21053
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
SPEAG	D1765V2	1765 MHz SAR Dipole	5/14/2013	Annual	5/14/2014	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	2/6/2013	Annual	2/6/2014	5d148
SPEAG	D750V3	750 MHz Dipole	2/13/2013	Annual	2/13/2014	1046
SPEAG	D835V2	835 MHz SAR Dipole	1/7/2013	Annual	1/7/2014	4d132
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/6/2013	Annual	2/6/2014	649
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/13/2012	Annual	11/13/2013	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2013	Annual	3/8/2014	1334
SPEAG	ES3DV3	SAR Probe	3/15/2013	Annual	3/15/2014	3209
SPEAG	ES3DV3	SAR Probe	11/15/2012	Annual	11/15/2013	3287
SPEAG	EX3DV4	SAR Probe	2/27/2013	Annual	2/27/2014	3920
Tektronix	RSA6114A	Real Time Spectrum Analyzer	4/17/2013	Annual	4/17/2014	8010177
VWR	23226-658	Long Stem Thermometer	3/30/2012	Biennial	3/30/2014	122179874
VWR	36934-158	Wall-Mounted Thermometer	9/30/2011	Biennial	9/30/2013	111859323
VWR	62344-925	Mini-Thermometer	10/24/2011	Biennial	10/24/2013	111886443

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 57 of 63

For Testing Performed on 10/16/13 to 10/21/13:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	85047A	S-Parameter Test Set	N/A	N/A	N/A	2904A00579
Agilent	85070C	Dielectric Probe Kit	2/14/2013	Annual	2/14/2014	MY44300633
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	4/17/2013	Annual	4/17/2014	3629U00687
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/16/2013	Annual	4/16/2014	JP38020182
Agilent	E5515C	Wireless Communications Test Set	10/18/2012	Biennial	10/18/2014	GB43193563
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/16/2013	Annual	4/16/2014	MY45470194
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB44450273
Agilent	N9020A	MXA Signal Analyzer	11/9/2012	Annual	11/9/2013	US46470561
Amplifier Research	551G4	5W, 800MHz-4.2GHz	CBT	N/A	CBT	21910
Anritsu	MA2411B	Pulse Power Sensor	12/5/2012	Annual	12/5/2013	1126066
Anritsu	MA2411B	Pulse Power Sensor	12/4/2012	Annual	12/4/2013	1207364
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	2400
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5318
Anritsu	ML2438A	Power Meter	12/4/2012	Annual	12/4/2013	1070030
Anritsu	ML2496A	Power Meter	11/28/2012	Annual	11/28/2013	1138001
Anritsu	ML2495A	Power Meter	7/12/2013	Annual	7/12/2014	1328004
Anritsu	MT8820C	Radio Communication Tester	11/6/2012	Annual	11/6/2013	6200901190
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4353	Long Stem Thermometer	9/25/2012	Biennial	9/25/2014	122539615
Control Company	36934-158	Wall-Mounted Thermometer	1/4/2012	Biennial	1/4/2014	122014488
Fisher Scientific	15-078J	Long Stem Thermometer	10/30/2012	Biennial	10/30/2014	122626059
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/3/2013	Annual	5/3/2014	836371/0079
Seekonk	NC-100	Torque Wrench (8" lb)	11/29/2011	Triennial	11/29/2014	21053
SPEAG	D1750V2	1750 MHz SAR Dipole	4/30/2013	Annual	4/30/2014	1051
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/11/2013	Annual	1/11/2014	1057
SPEAG	D2450V2	2450 MHz SAR Dipole	2/11/2013	Annual	2/11/2014	882
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/17/2013	Annual	1/17/2014	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/21/2013	Annual	8/21/2014	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2013	Annual	3/8/2014	1334
SPEAG	ES3DV2	SAR Probe	8/22/2013	Annual	8/22/2014	3022
SPEAG	ES3DV3	SAR Probe	3/15/2013	Annual	3/15/2014	3209
SPEAG	EX3DV4	SAR Probe	1/17/2013	Annual	1/17/2014	3589
Tektronix	RSA6114A	Real Time Spectrum Analyzer	4/17/2013	Annual	4/17/2014	B010177
VWR	23226-658	Long Stem Thermometer	3/30/2012	Biennial	3/30/2014	122179874
VWR	62344-925	Mini-Thermometer	10/24/2011	Biennial	10/24/2013	111886443

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

All Equipments are calibrated during the test interval.

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 58 of 63

14 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.2	23.5
									299

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 59 of 63

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _f 1gm	c _g 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 60 of 63

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 61 of 63

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 62 of 63

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [29] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [30] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [31] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [32] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [33] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1310172043.A3L	Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet		Page 63 of 63

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 95

Communication System: UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.013 \text{ S/m}$; $\epsilon_r = 55.943$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.7°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (11x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.803 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.531 W/kg

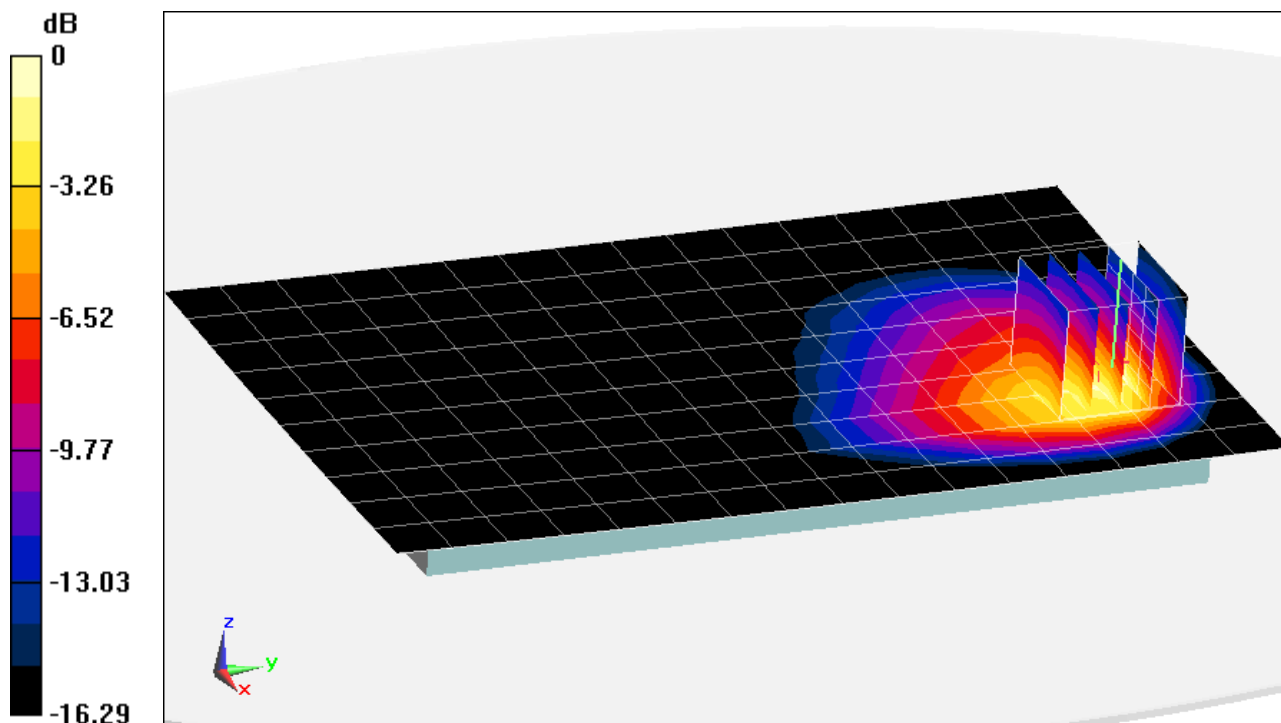

0 dB = 0.614 W/kg = -2.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 18

Communication System: UMTS ; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.422 \text{ S/m}$; $\epsilon_r = 52.369$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-18-2013; Ambient Temp: 23.3°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.75, 4.75, 4.75); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: AWS UMTS, Body SAR, Back side, Mid.ch


Area Scan (11x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.498 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.640 W/kg

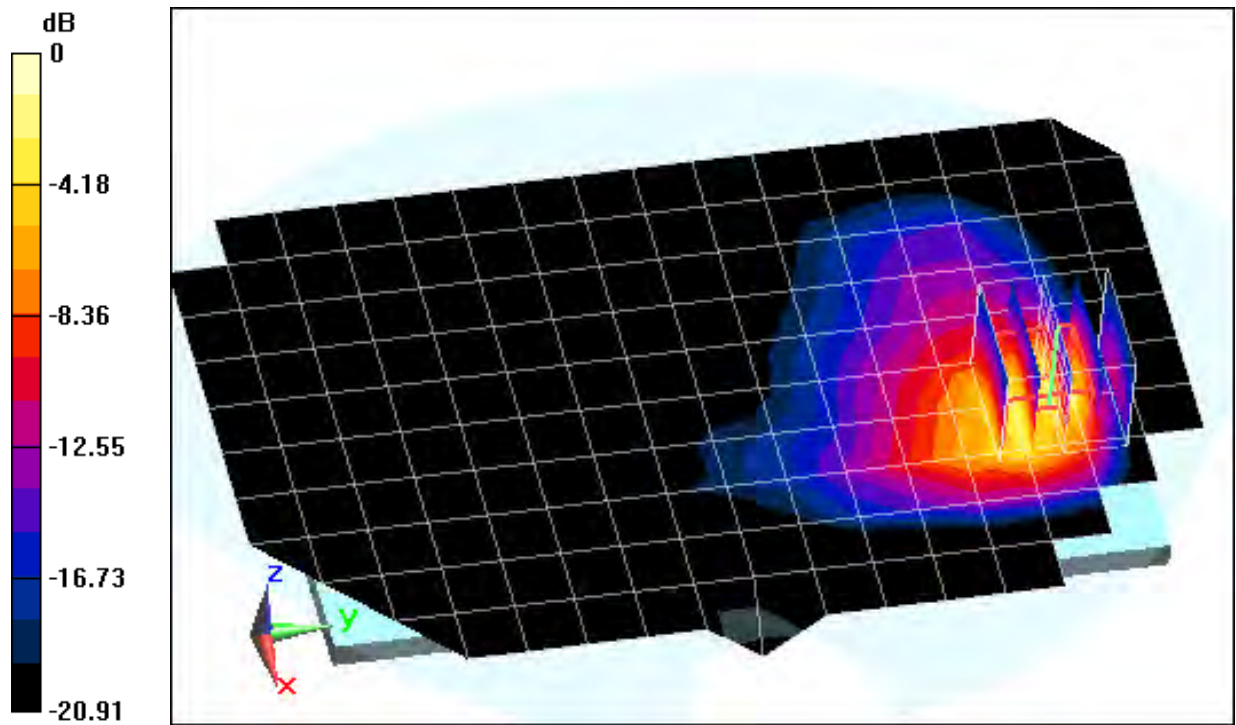

0 dB = 0.782 W/kg = -1.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 95

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.501 \text{ S/m}$; $\epsilon_r = 52.212$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-17-2013; Ambient Temp: 23.6°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (11x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.381 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.604 W/kg

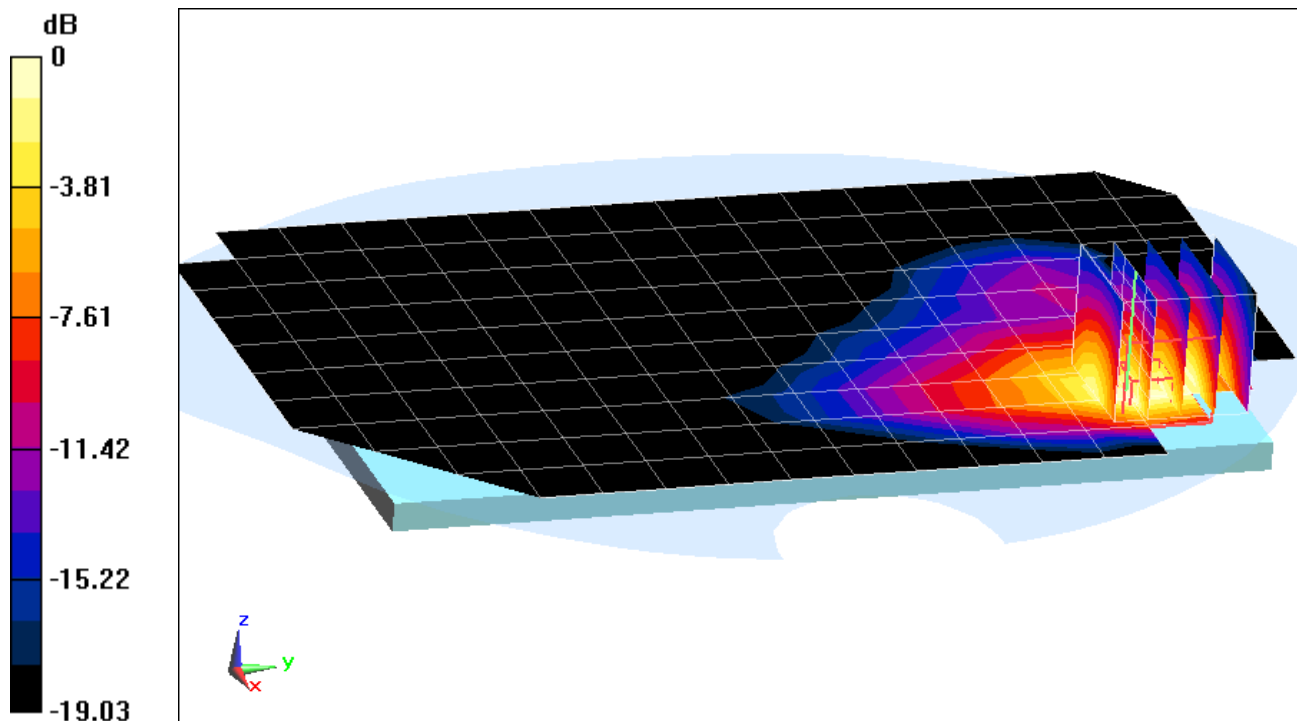

0 dB = 0.654 W/kg = -1.84 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 97

Communication System: LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$f = 710 \text{ MHz}$; $\sigma = 0.954 \text{ S/m}$; $\epsilon_r = 56.043$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-17-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3209; ConvF(6.38, 6.38, 6.38); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: LTE Band 17, Body SAR, Back side, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset


Area Scan (11x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.677 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.173 W/kg

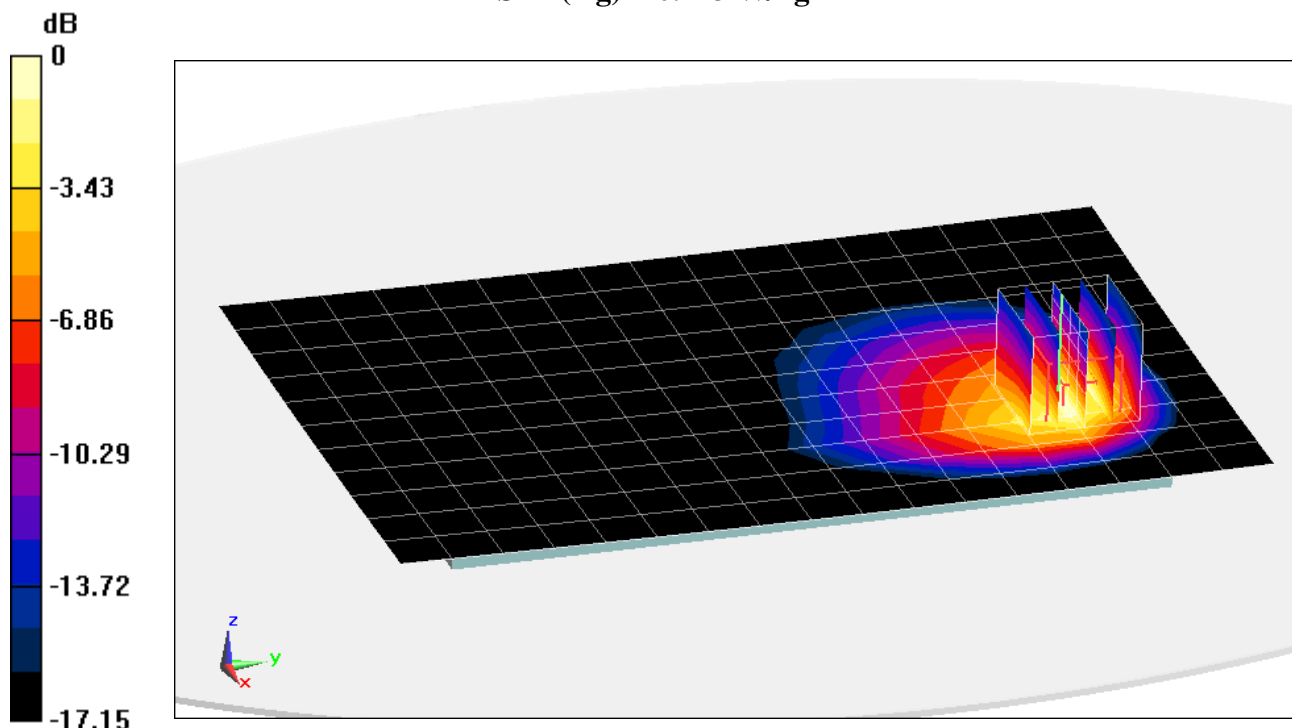

0 dB = 0.202 W/kg = -6.95 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 95

Communication System: LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 1.013 \text{ S/m}$; $\epsilon_r = 55.941$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.7°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: LTE Band 5 (Cell.), Body SAR, Top Edge, Mid.ch

10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset


Area Scan (13x12x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.364 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.343 W/kg

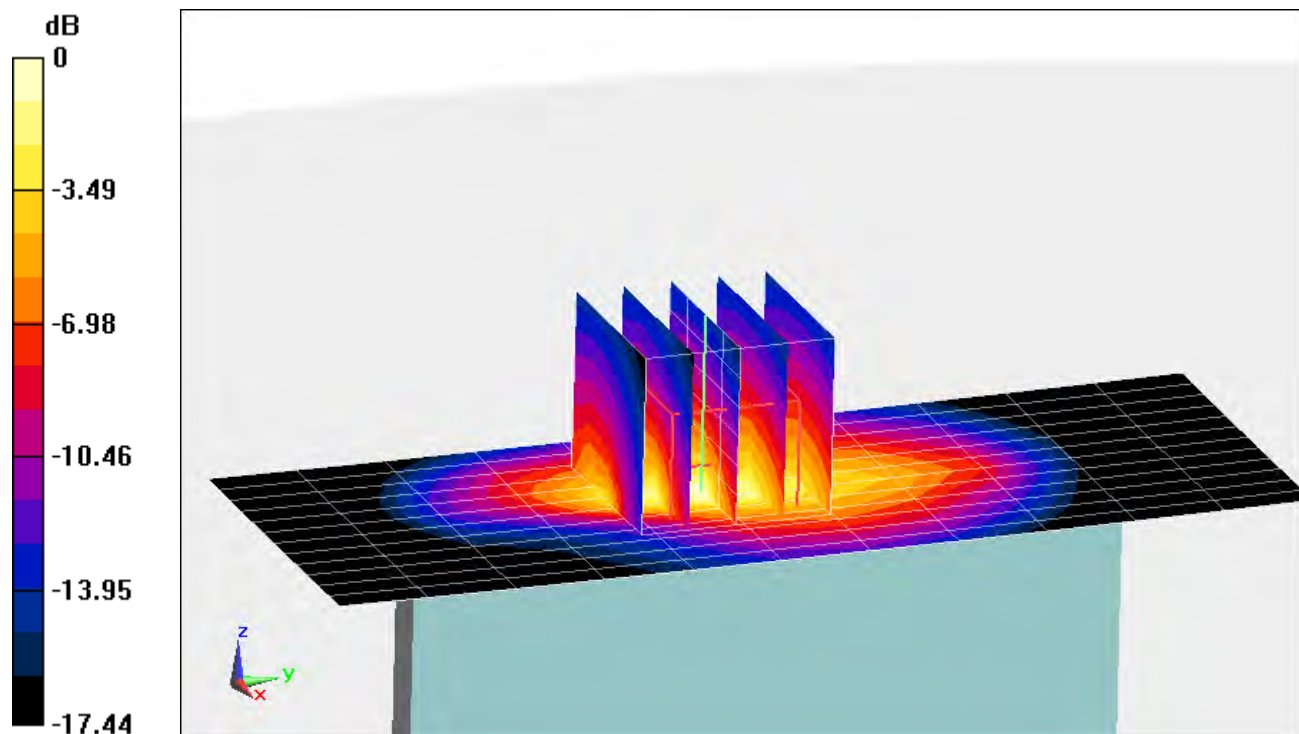

0 dB = 0.454 W/kg = -3.43 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 93

Communication System: LTE RF; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 52.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.4 cm

Test Date: 06-17-2013; Ambient Temp: 23.8°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(4.86, 4.86, 4.86); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: LTE Band 4 (AWS), Body SAR, Left Edge, Mid.ch

20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset


Area Scan (11x16x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.903 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.694 W/kg

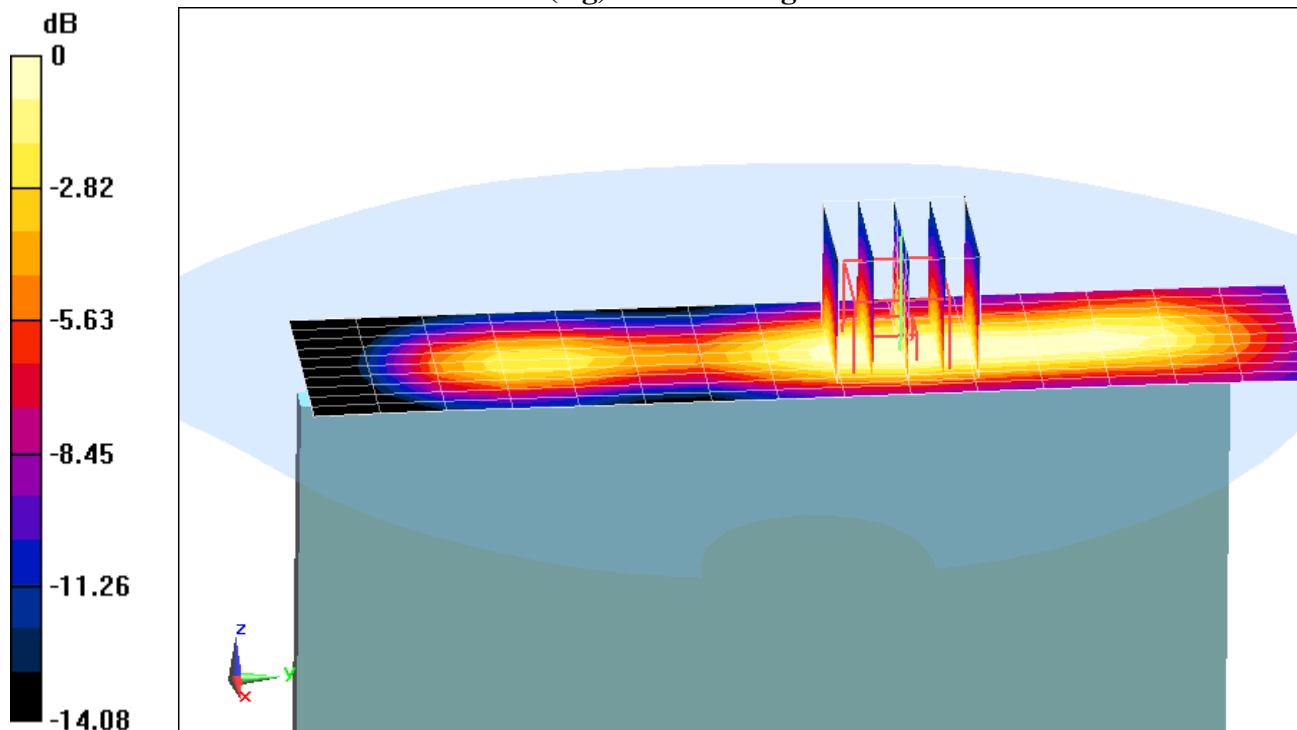

0 dB = 0.763 W/kg = -1.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 93

Communication System: LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.531 \text{ S/m}$; $\epsilon_r = 52.128$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.4 cm

Test Date: 06-17-2013; Ambient Temp: 23.6°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: LTE Band 2 (PCS), Body SAR, Left Edge, High.ch
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x17x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.126 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.658 W/kg

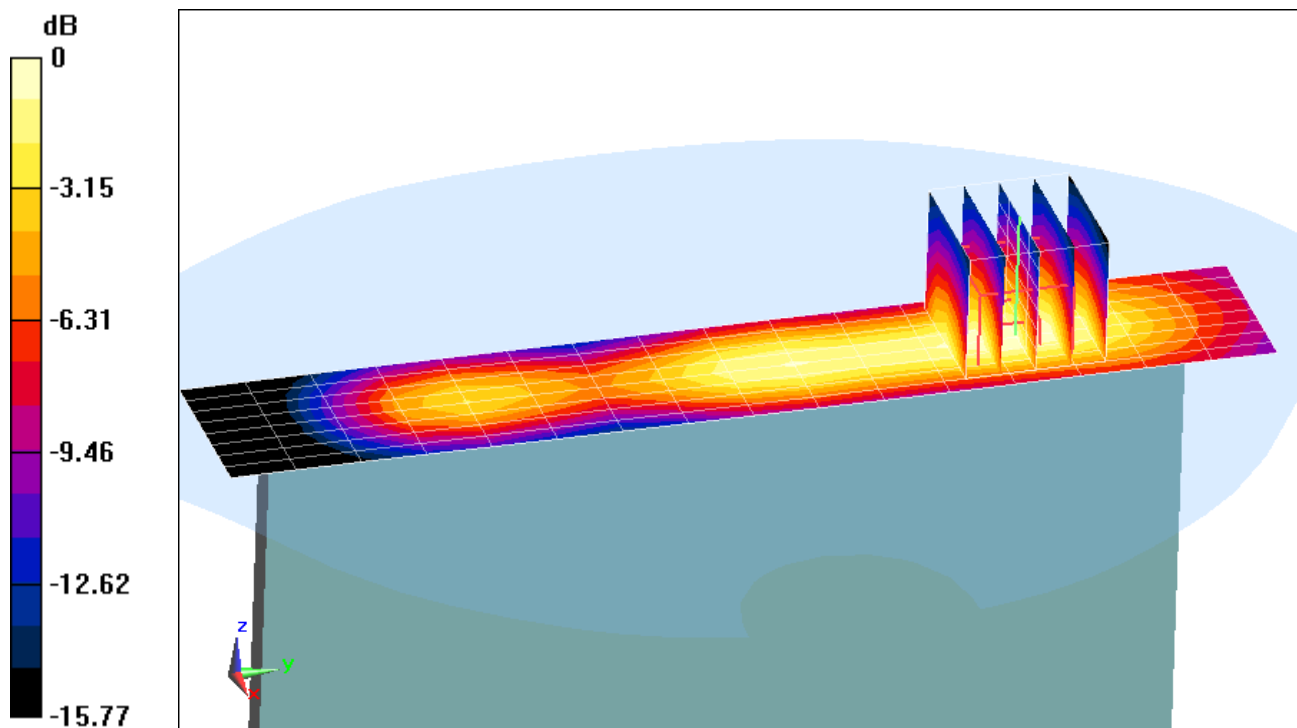

0 dB = 0.740 W/kg = -1.31 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 17

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.936 \text{ S/m}$; $\epsilon_r = 51.289$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-16-2013; Ambient Temp: 24.5°C; Tissue Temp: 24.1°C

Probe: ES3DV3 - SN3209; ConvF(4.34, 4.34, 4.34); Calibrated: 3/15/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11b, Body SAR, Ch 06, 1 Mbps, Bottom Edge


Area Scan (10x13x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.854 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.331 W/kg

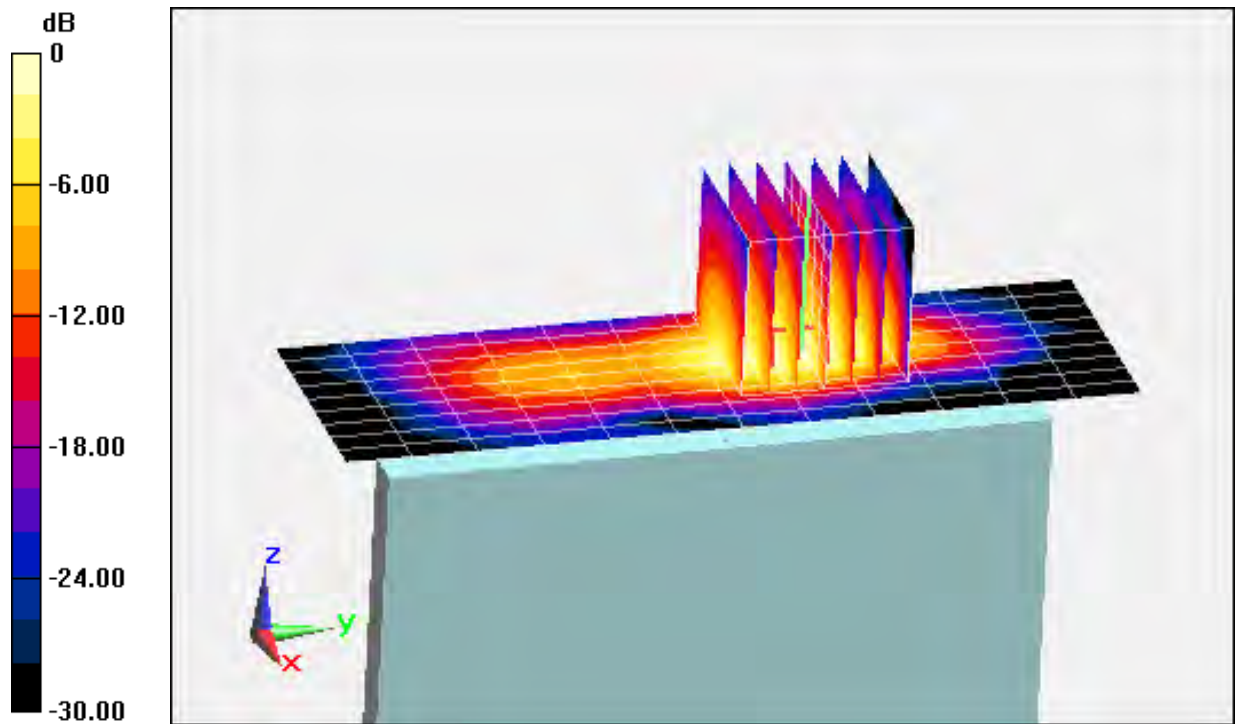

0 dB = 0.459 W/kg = -3.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 17

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5765 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5765 \text{ MHz}$; $\sigma = 6.195 \text{ S/m}$; $\epsilon_r = 46.339$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-20-2013; Ambient Temp: 23.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.8 GHz, Body SAR, Ch 153, 6 Mbps, Bottom Edge


Area Scan (13x16x1): Measurement grid: dx=5mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 11.127 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.08 W/kg

SAR(1 g) = 0.637 W/kg

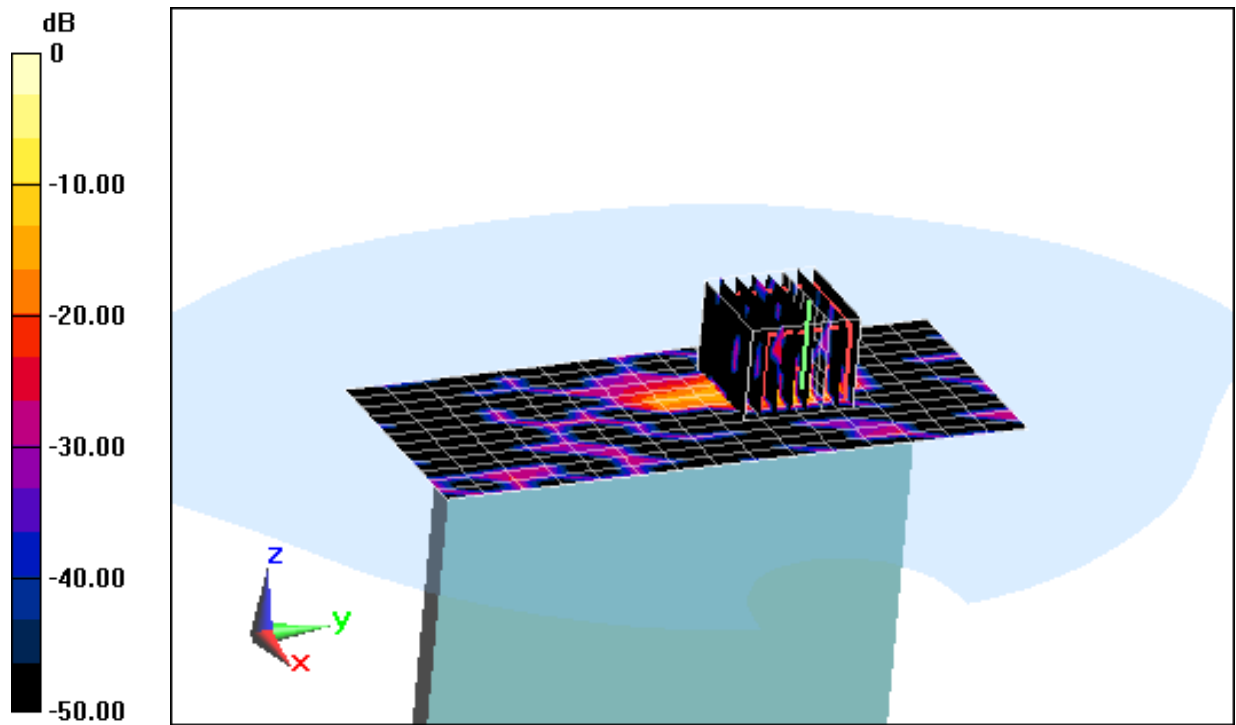

0 dB = 2.15 W/kg = 3.32 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 17

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5560 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5560 \text{ MHz}$; $\sigma = 5.872 \text{ S/m}$; $\epsilon_r = 46.764$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-20-2013; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(3.32, 3.32, 3.32); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.5 GHz, Body SAR, Ch 112, 6 Mbps, Bottom Edge


Area Scan (13x16x1): Measurement grid: $dx=5\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 13.679 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 5.05 W/kg

SAR(1 g) = 0.857 W/kg

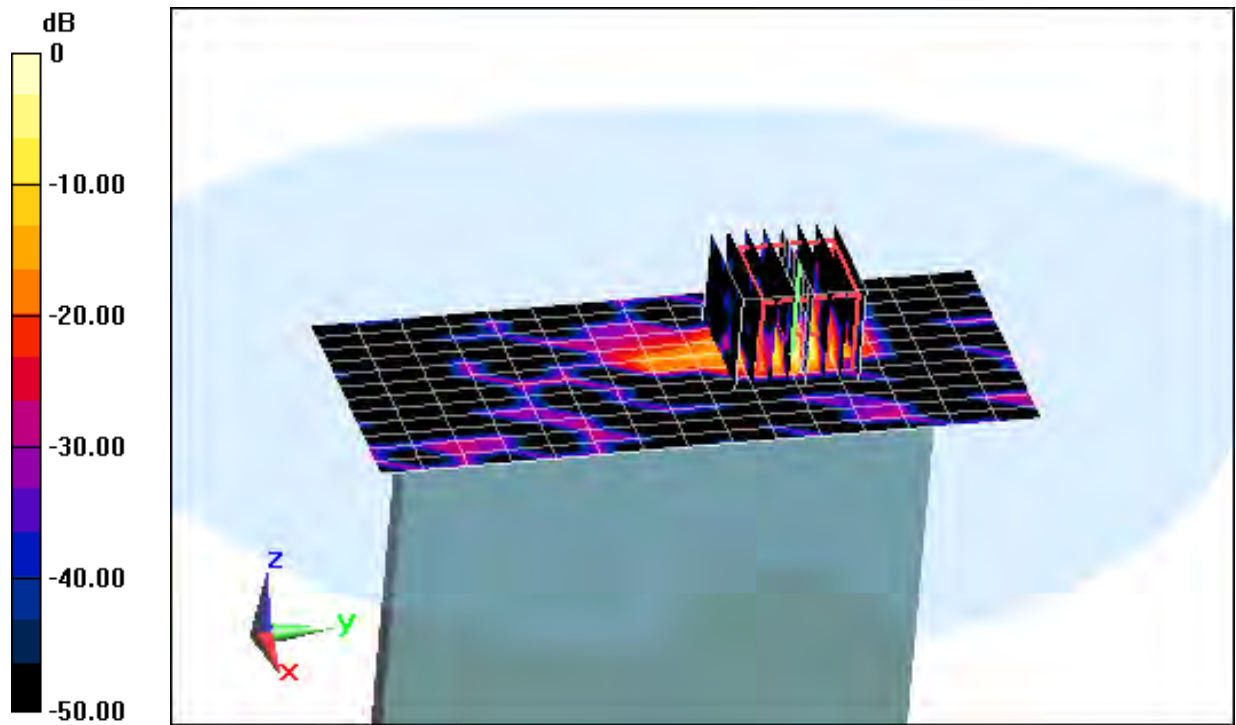

0 dB = 2.70 W/kg = 4.31 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT217T; Type: Portable Tablet; Serial: 17

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2402 \text{ MHz}$; $\sigma = 1.858 \text{ S/m}$; $\epsilon_r = 51.291$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 10-21-2013; Ambient Temp: 23.5°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3209; ConvF(4.34, 4.34, 4.34); Calibrated: 3/15/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: Bluetooth, Body SAR, Ch 0, 1 Mbps, Back Side


Area Scan (13x21x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.789 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.053 W/kg

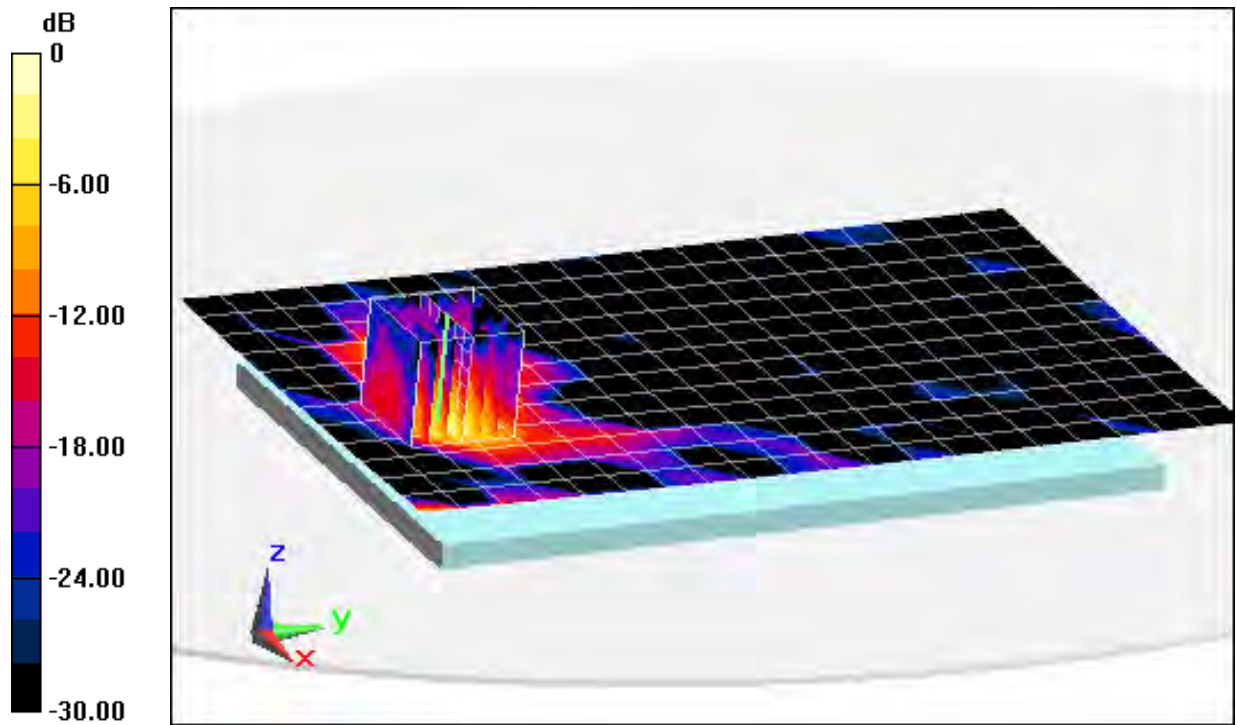

0 dB = 0.0771 W/kg = -11.13 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1046

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.991 \text{ S/m}$; $\epsilon_r = 55.581$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-17-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3209; ConvF(6.38, 6.38, 6.38); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.845 W/kg

Deviation = -3.65%

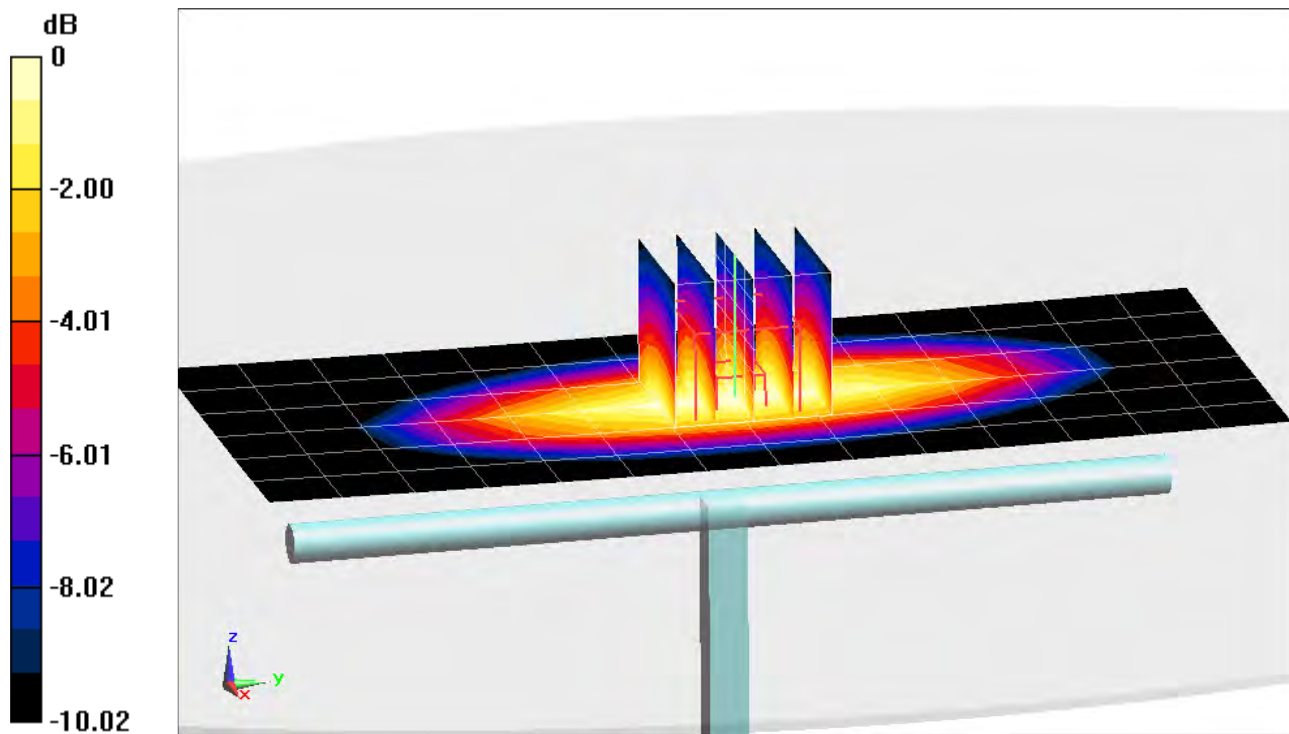

0 dB = 0.909 W/kg = -0.41 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 55.903$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space 1.5 cm

Test Date: 06-12-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.7°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.974 W/kg

Deviation = 4.06%

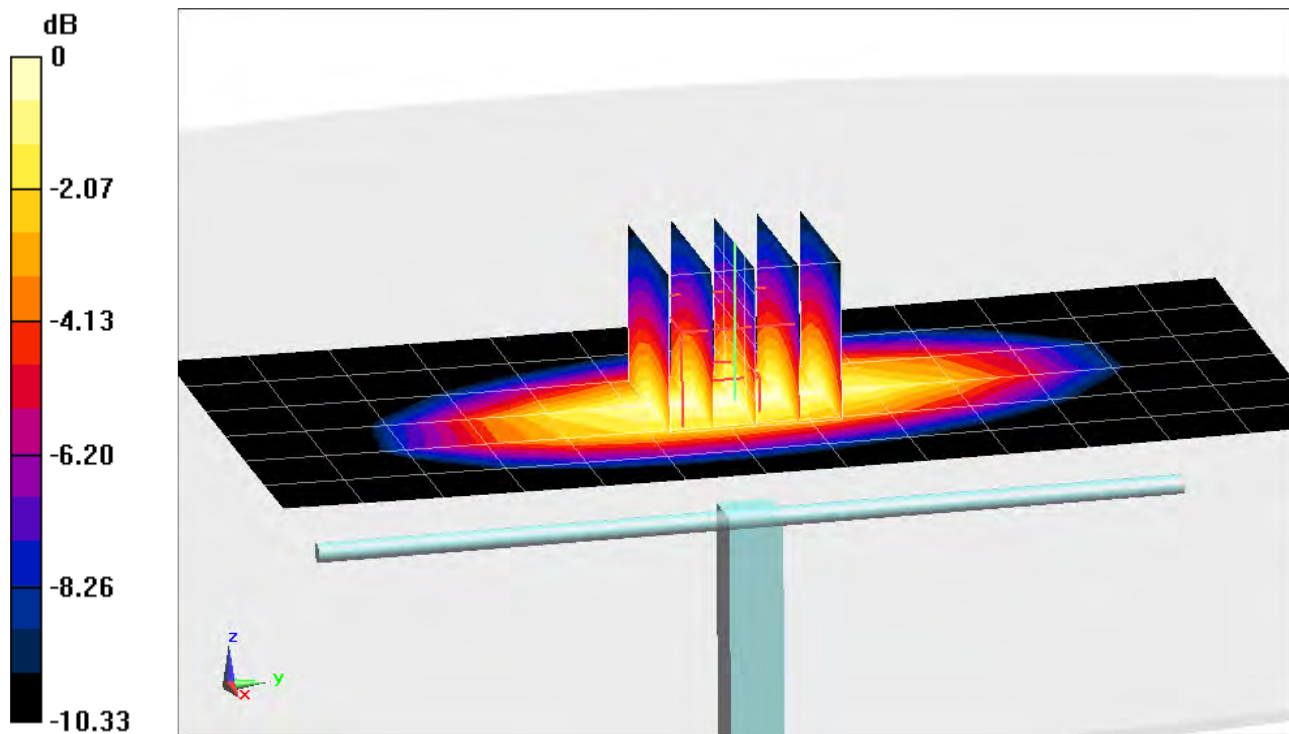

0 dB = 1.05 W/kg = 0.21 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.454 \text{ S/m}$; $\epsilon_r = 51.954$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-17-2013; Ambient Temp: 23.8°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(4.86, 4.86, 4.86); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

1750 MHz System Verification

Area Scan (6x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.68 W/kg

SAR(1 g) = 3.76 W/kg

Deviation = -1.57%

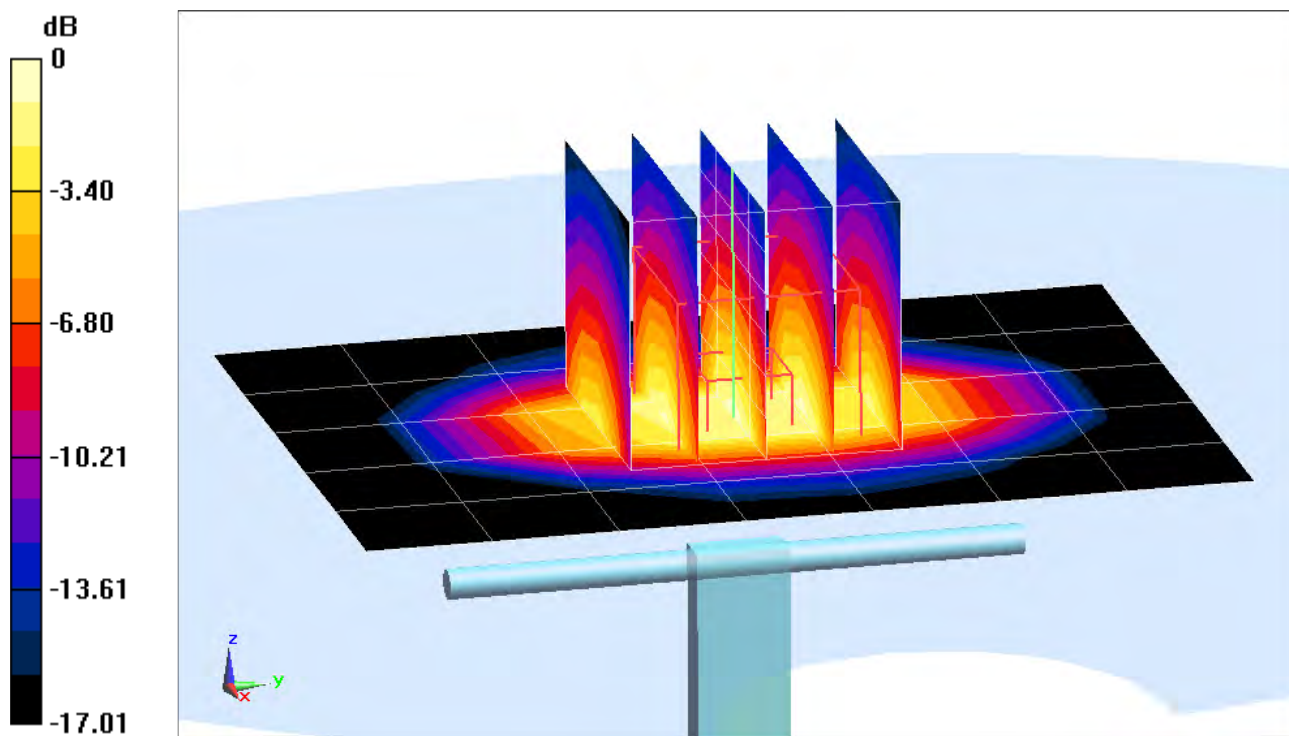

0 dB = 4.20 W/kg = 6.23 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.444 \text{ S/m}$; $\epsilon_r = 52.334$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-18-2013; Ambient Temp: 23.3°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.75, 4.75, 4.75); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.21 W/kg

SAR(1 g) = 3.53 W/kg

Deviation: -6.61%

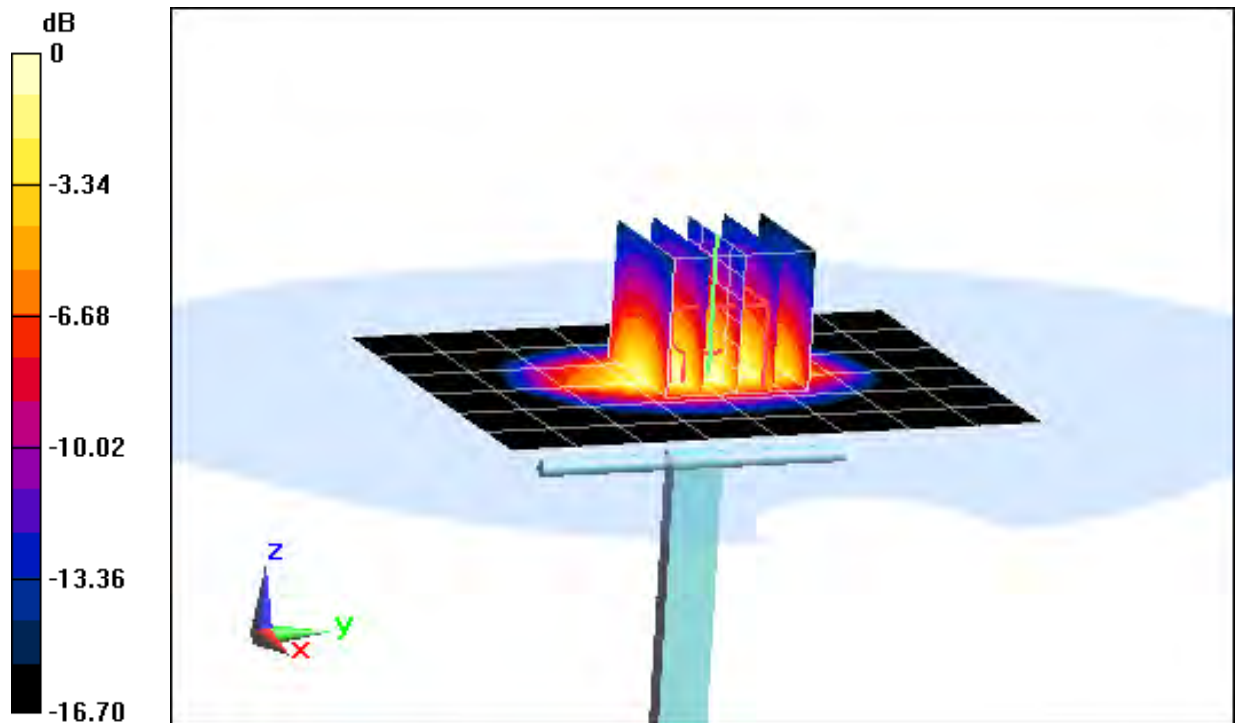

0 dB = 3.93 W/kg = 5.94 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.531 \text{ S/m}$; $\epsilon_r = 52.128$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-17-2013; Ambient Temp: 23.6°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.52 W/kg

SAR(1 g) = 4.17 W/kg

Deviation = 2.21%

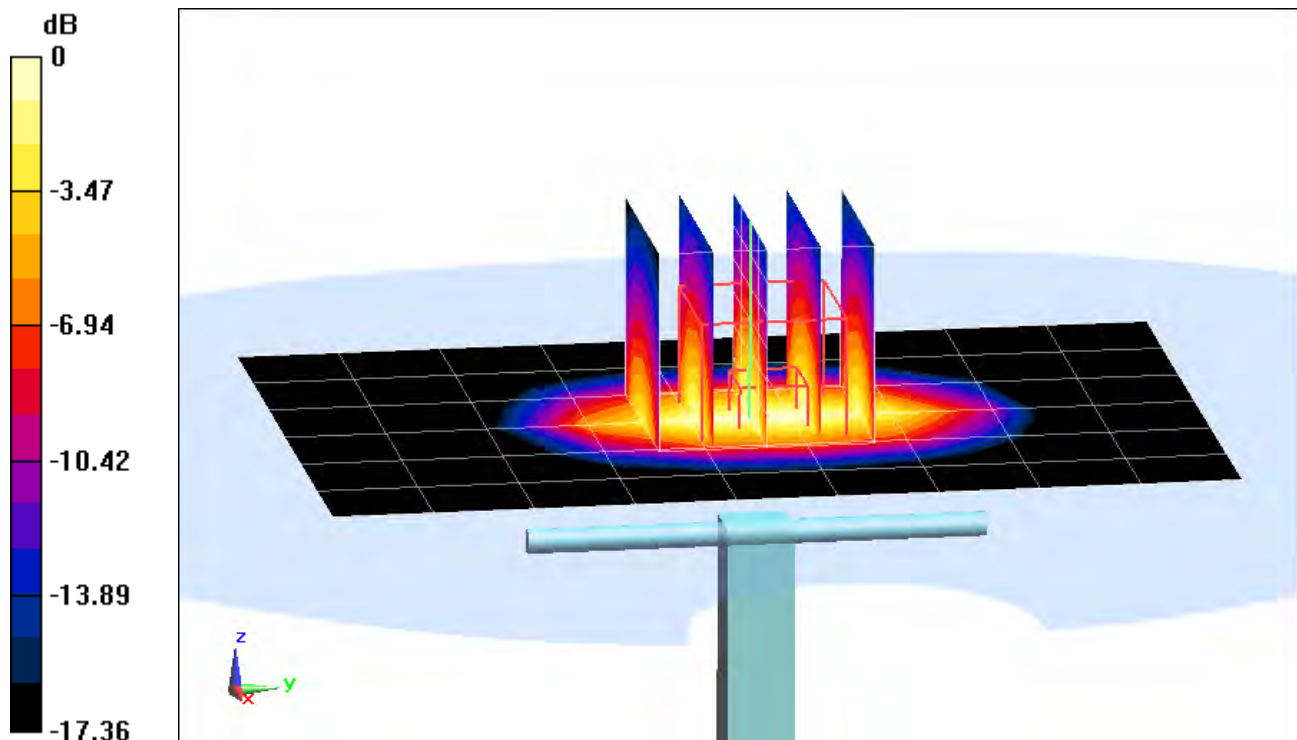

0 dB = 4.65 W/kg = 6.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 882

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.954 \text{ S/m}$; $\epsilon_r = 51.26$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-16-2013; Ambient Temp: 24.5°C; Tissue Temp: 24.1°C

Probe: ES3DV3 - SN3209; ConvF(4.34, 4.34, 4.34); Calibrated: 3/15/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 9.81 W/kg

SAR(1 g) = 4.77 W/kg

Deviation: -4.41%

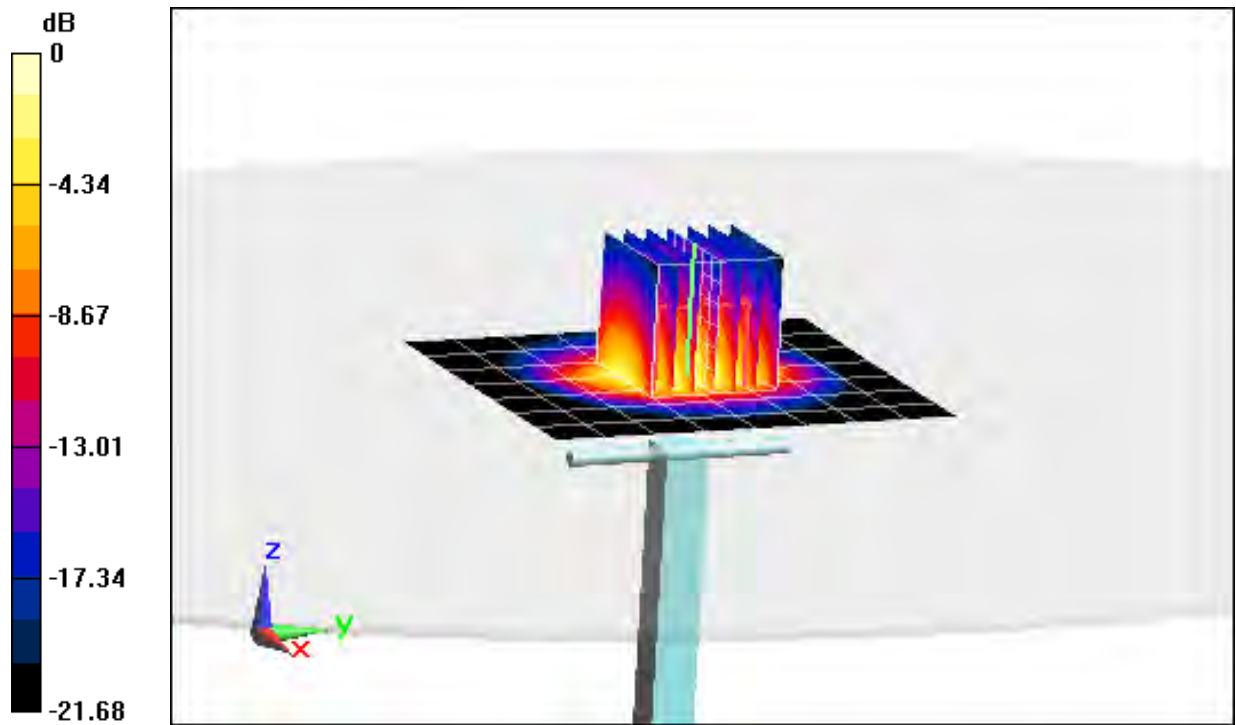

0 dB = 6.12 W/kg = 7.87 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 5.402 \text{ S/m}$; $\epsilon_r = 47.756$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space 1.0 cm

Test Date: 10-20-2013; Ambient Temp: 23.0°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN3589; ConvF(3.99, 3.99, 3.99); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5200MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 7.6 W/kg

Deviation: 0.66%

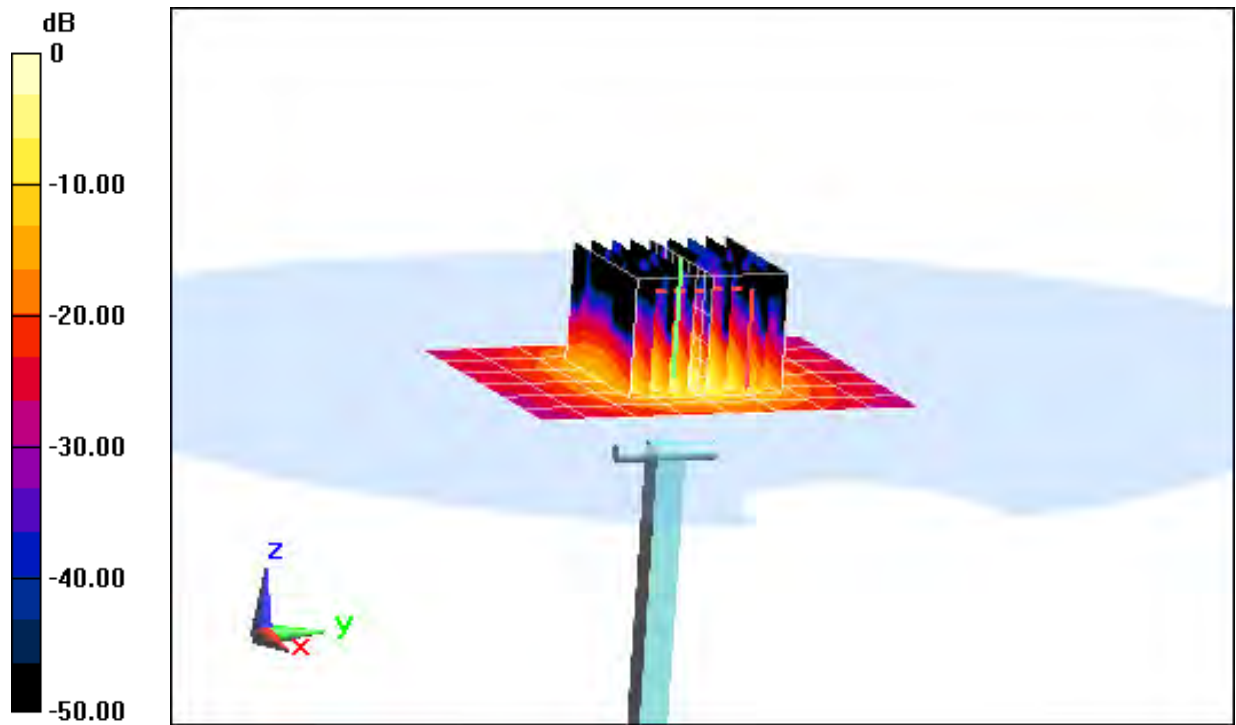

0 dB = 19.3 W/kg = 12.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.532 \text{ S/m}$; $\epsilon_r = 47.424$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-20-2013; Ambient Temp: 23.0°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5300MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 7.93 W/kg

Deviation: 5.31%

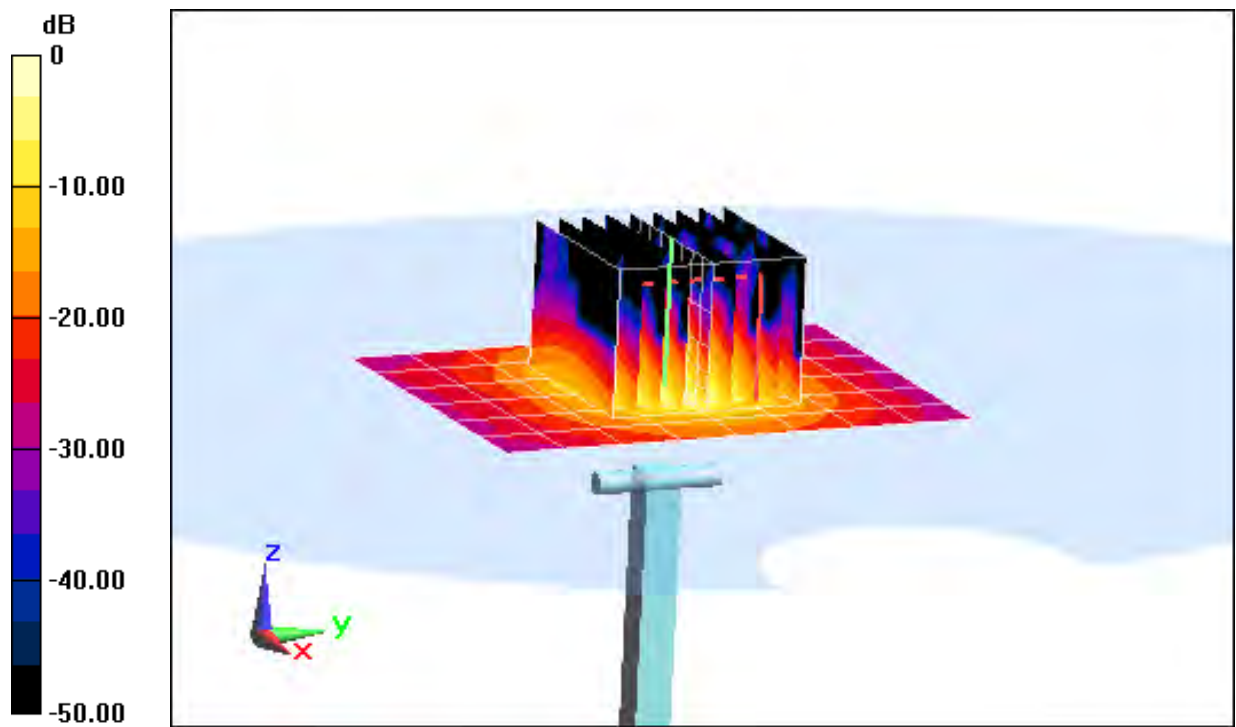

0 dB = 19.8 W/kg = 12.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.778 \text{ S/m}$; $\epsilon_r = 46.918$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-20-2013; Ambient Temp: 23.1°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN3589; ConvF(3.52, 3.52, 3.52); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5500MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 34.5 W/kg

SAR(1 g) = 8.26 W/kg

Deviation: 2.23%

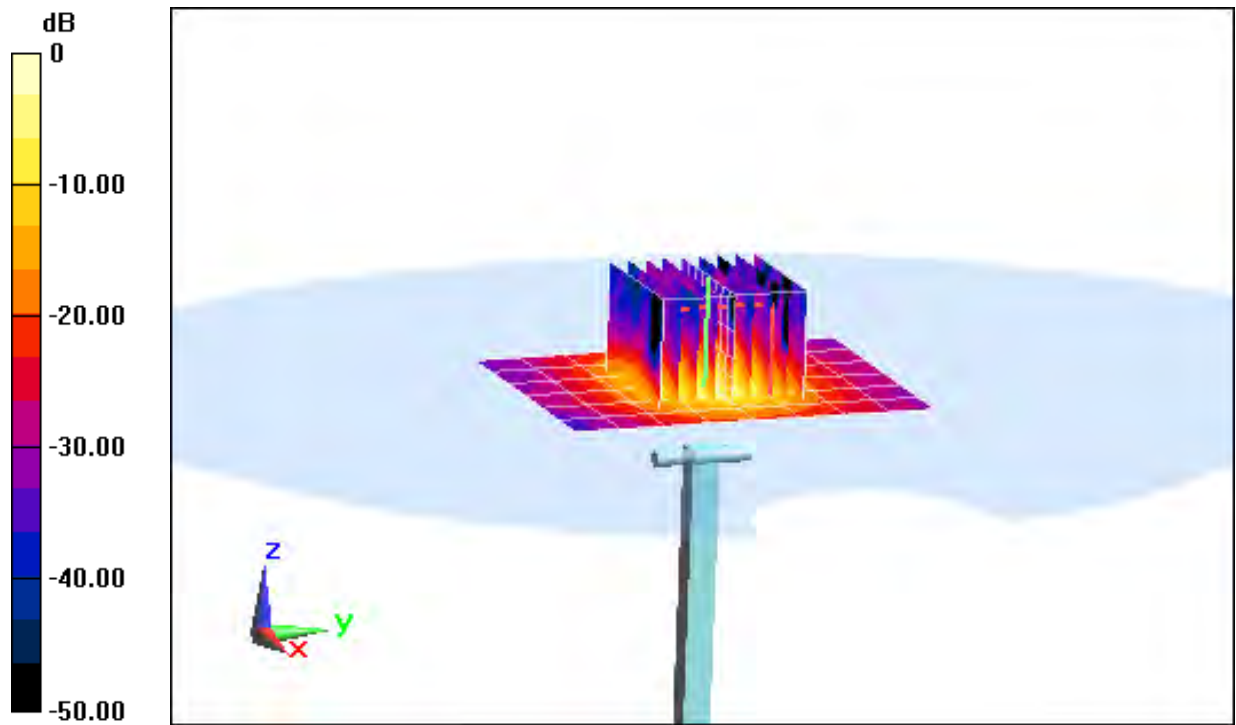

0 dB = 21.4 W/kg = 13.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.933 \text{ S/m}$; $\epsilon_r = 46.679$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-20-2013; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(3.32, 3.32, 3.32); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5600MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 33.5 W/kg

SAR(1 g) = 8.31 W/kg

Deviation: 3.49%

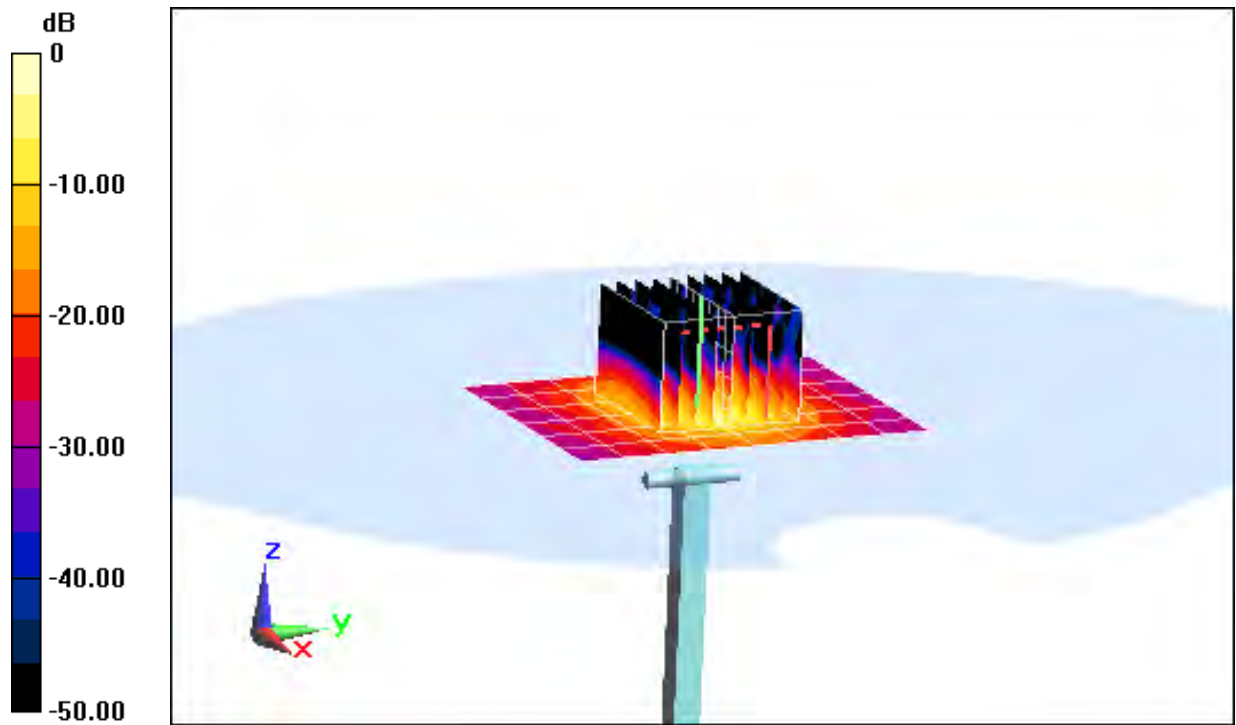

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.242 \text{ S/m}$; $\epsilon_r = 46.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-20-2013; Ambient Temp: 23.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

5800MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 35.4 W/kg

SAR(1 g) = 7.2 W/kg

Deviation: -4.13%

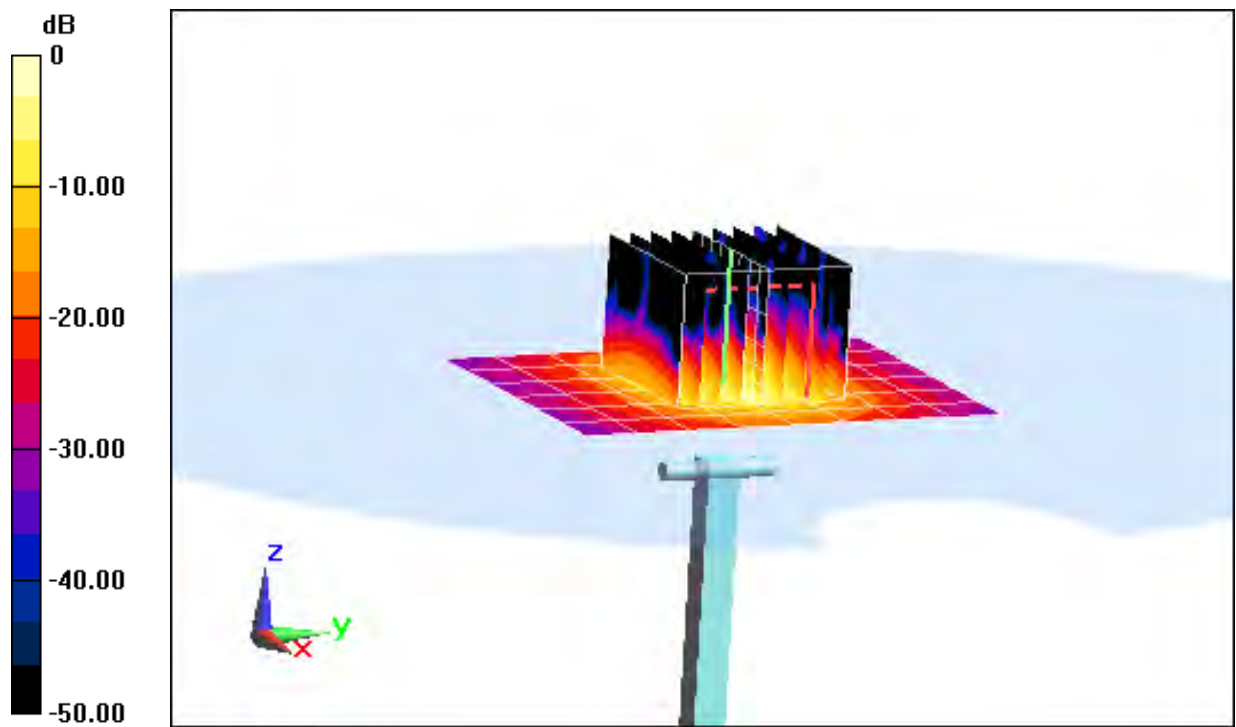

0 dB = 18.1 W/kg = 12.58 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D750V3-1046_Feb13**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1046**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **February 13, 2013**

✓
KOK
2/21/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 13, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.50 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.55 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.77 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.49 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.84 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.3 Ω + 1.4 j Ω
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	52.0 Ω - 1.1 j Ω
Return Loss	- 32.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.038 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 02, 2011

DASY5 Validation Report for Head TSL

Date: 13.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1046

Communication System: CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.28, 6.28, 6.28); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.942 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.41 W/kg



Maximum value of SAR (measured) = 2.55 W/kg

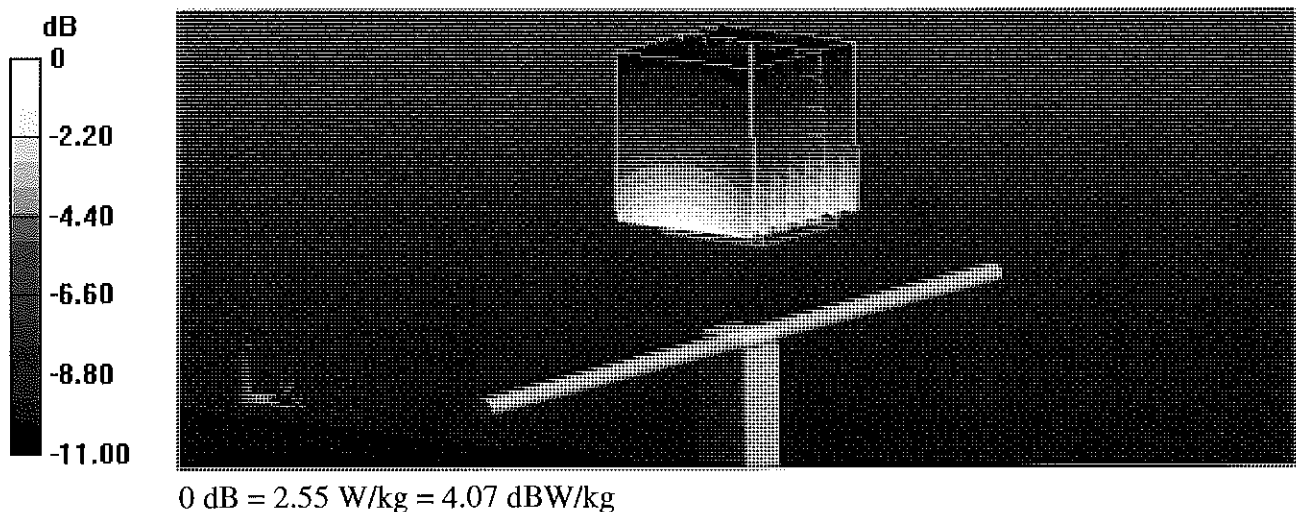

Impedance Measurement Plot for Head TSL

13 Feb 2013 16:15:52
 CH1 S11 1 U FS 1: 56.305 Ω 1.4043 Ω 298.00 pF 750.000 000 MHz

*
 Del
 Cor
 Avg
 16
 H1d

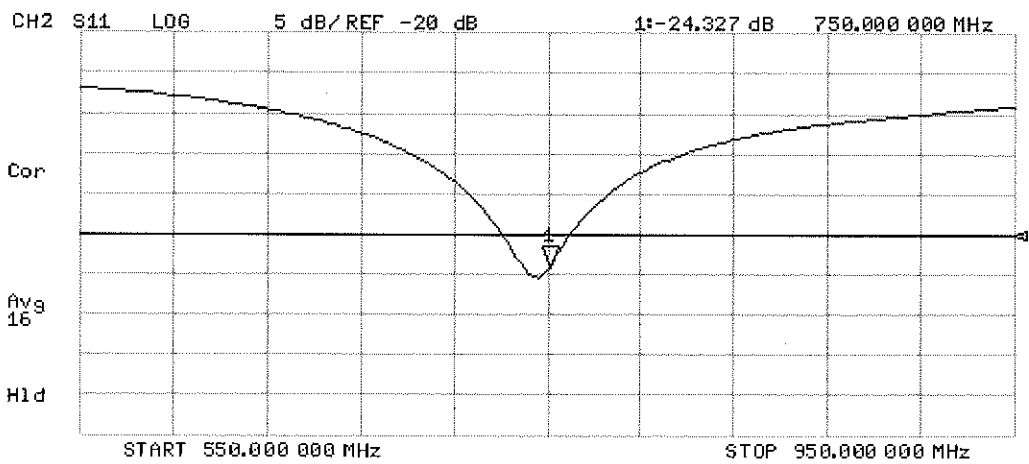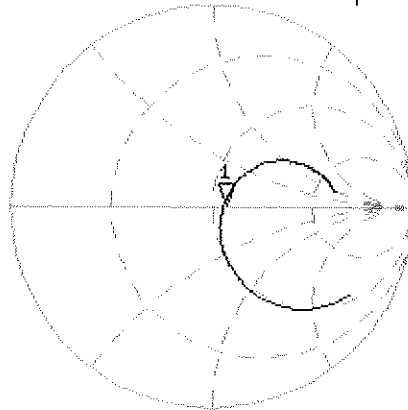

DASY5 Validation Report for Body TSL

Date: 13.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1046

Communication System: CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.11, 6.11, 6.11); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.942 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.49 W/kg

Maximum value of SAR (measured) = 2.61 W/kg

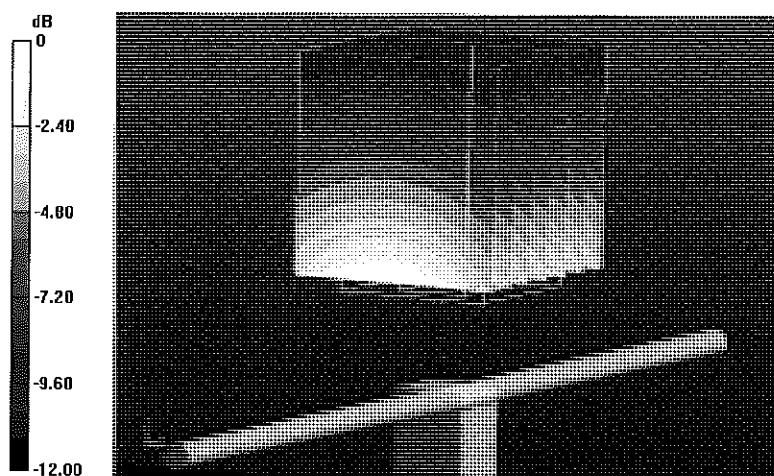


0 dB = 2.61 W/kg = 4.17 dBW/kg

Impedance Measurement Plot for Body TSL

13 Feb 2013 10:40:44
CH1 S11 1 U FS 1: 52.045 Ω -1.0898 Ω 194.71 pF 750.000 000 MHz

Del
CA

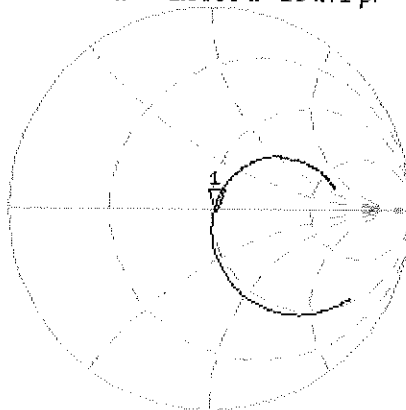

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -32.864 dB 750.000 000 MHz

CA

Avg
16

H1d

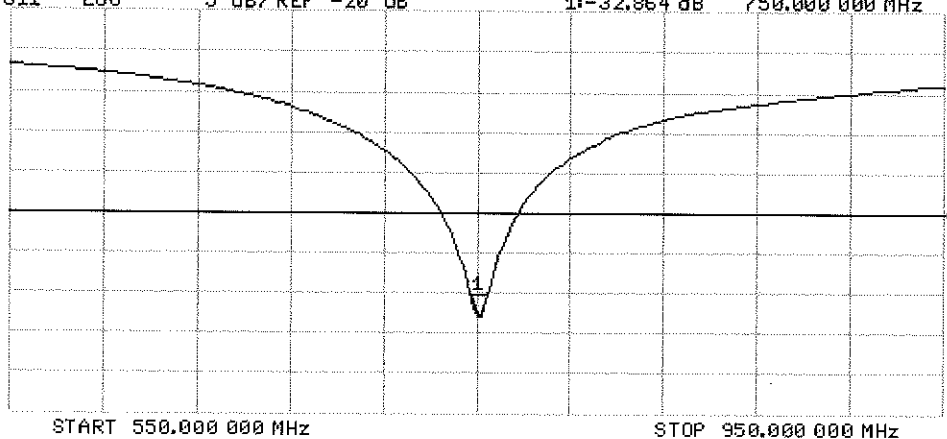



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d132_Jan13**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d132**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 07, 2013**

✓ KOK
 1/28/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 8, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	42.0 $\pm$ 6 %	0.92 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.45 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.66 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.29 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.7 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.38 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.36 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.20 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$54.2 \Omega + 1.3 j\Omega$
Return Loss	- 27.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.8 \Omega - 1.3 j\Omega$
Return Loss	- 34.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.391 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

DASY5 Validation Report for Head TSL

Date: 07.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d132

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.05, 6.05, 6.05); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.542 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 3.71 W/kg

SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 2.88 W/kg

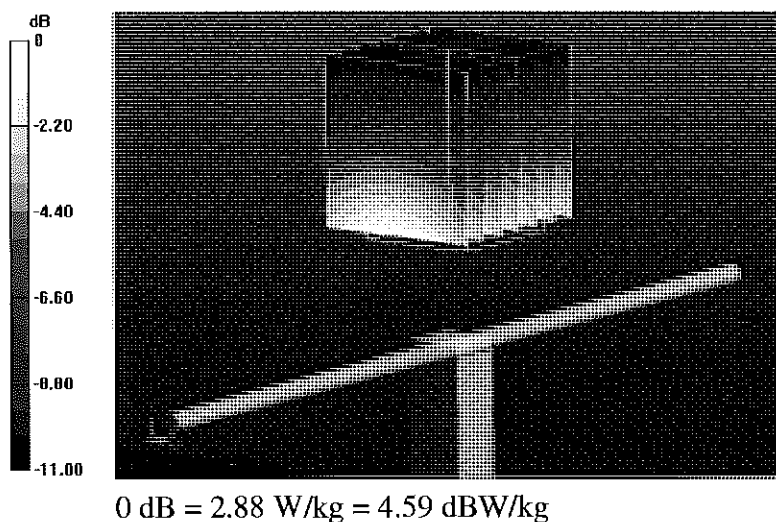

Impedance Measurement Plot for Head TSL

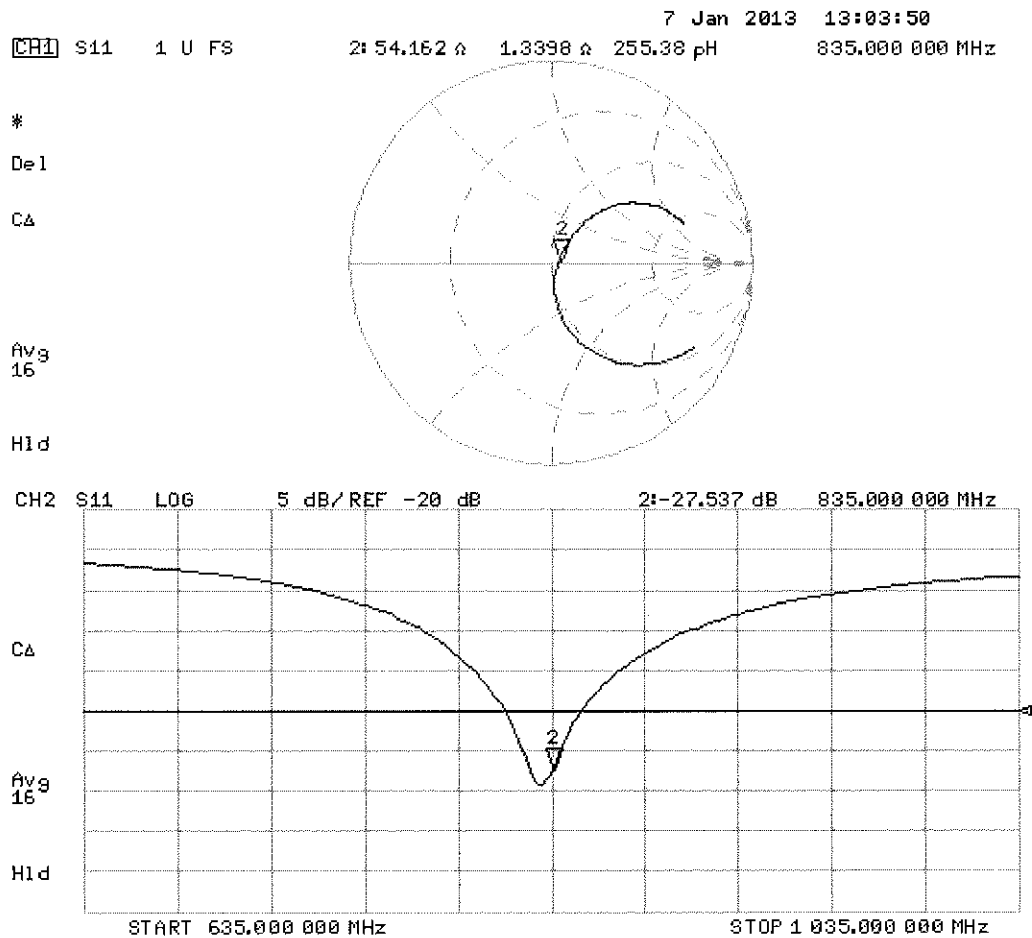

DASY5 Validation Report for Body TSL

Date: 07.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d132

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.512 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.47 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.57 W/kg


Maximum value of SAR (measured) = 2.77 W/kg

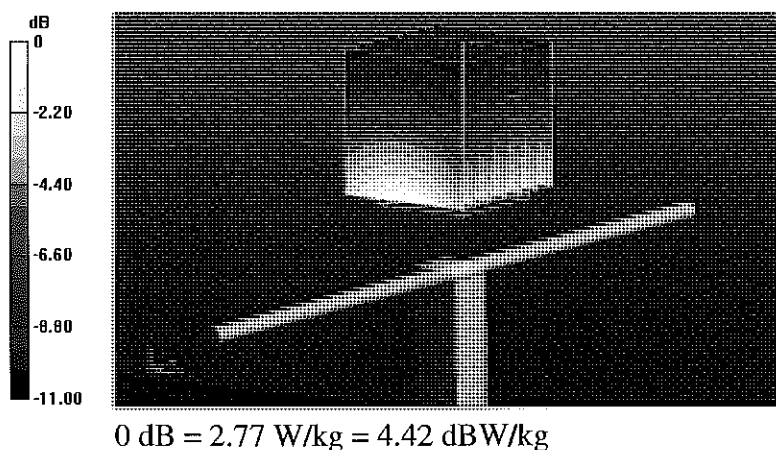

Impedance Measurement Plot for Body TSL


7 Jan 2013 10:07:01
 CH1 S11 1 U FS 2: 48.762 Ω -1.2773 Ω 149.22 pF 835.000 000 MHz

*
 Del
 CA
 Avg
 16
 H1d

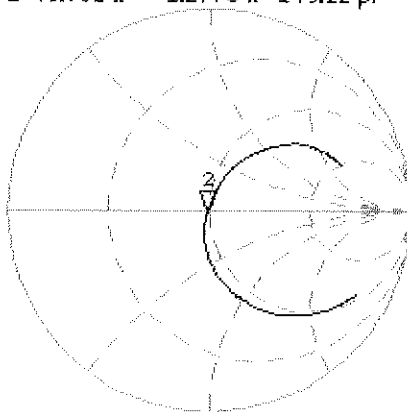

CH2 S11 LOG 5 dB/REF -20 dB 2: -34.896 dB 835.000 000 MHz

CA
 Avg
 16
 H1d

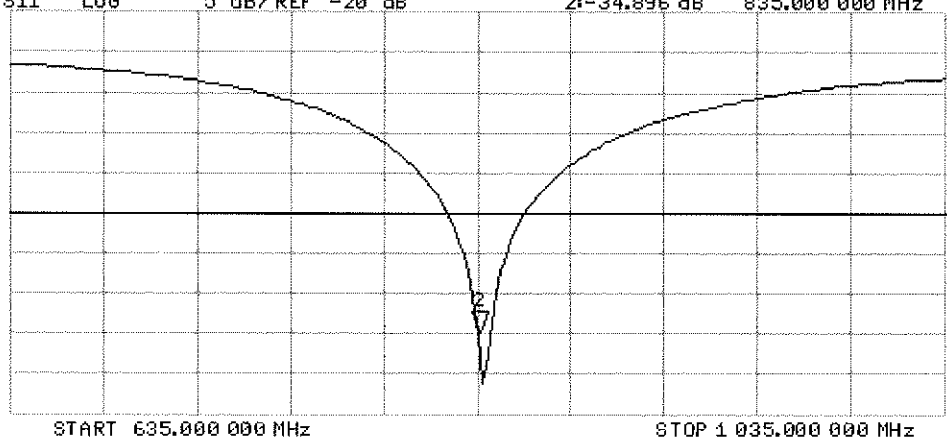



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1765V2-1008_May13**

CALIBRATION CERTIFICATE

Object **D1765V2 - SN: 1008**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 14, 2013**

*✓ 100K
5/23/13*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrat	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 15, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.1 $\pm$ 6 %	1.33 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.85 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.6 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.7 $\pm$ 6 %	1.47 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.53 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	38.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.3 Ω - 6.4 j Ω
Return Loss	- 23.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	43.8 Ω - 6.1 j Ω
Return Loss	- 20.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.211 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 06, 2005

DASY5 Validation Report for Head TSL

Date: 14.05.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN: 1008

Communication System: UID 0 - CW ; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.18, 5.18, 5.18); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.430 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 9.09 W/kg; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

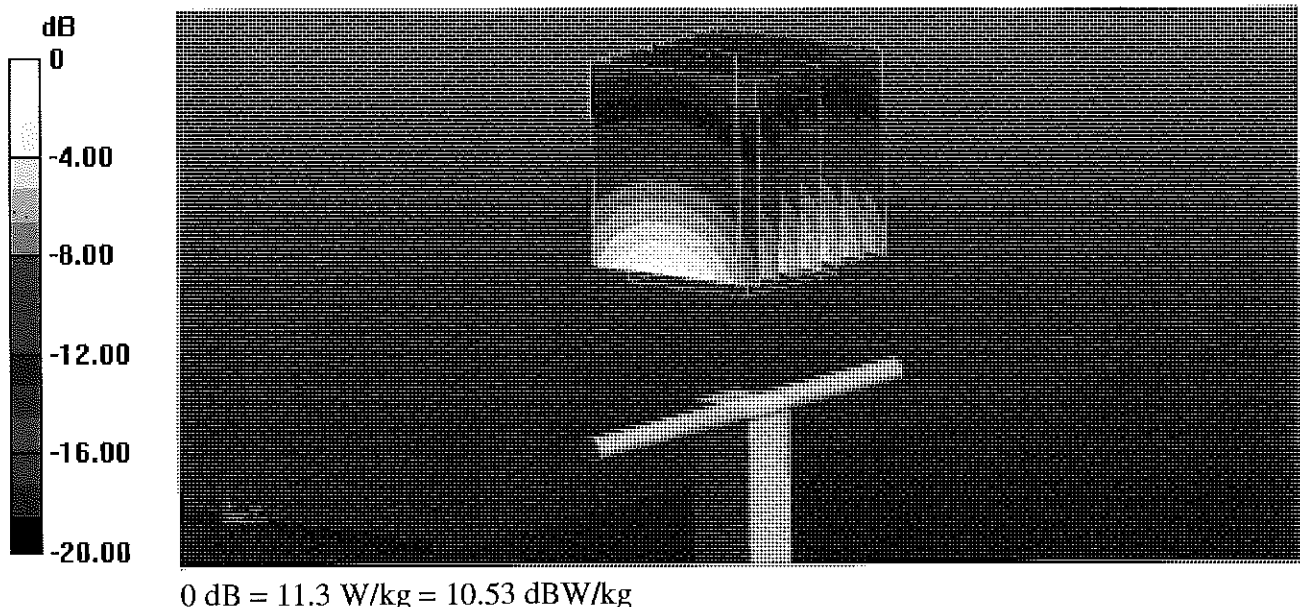

Impedance Measurement Plot for Head TSL

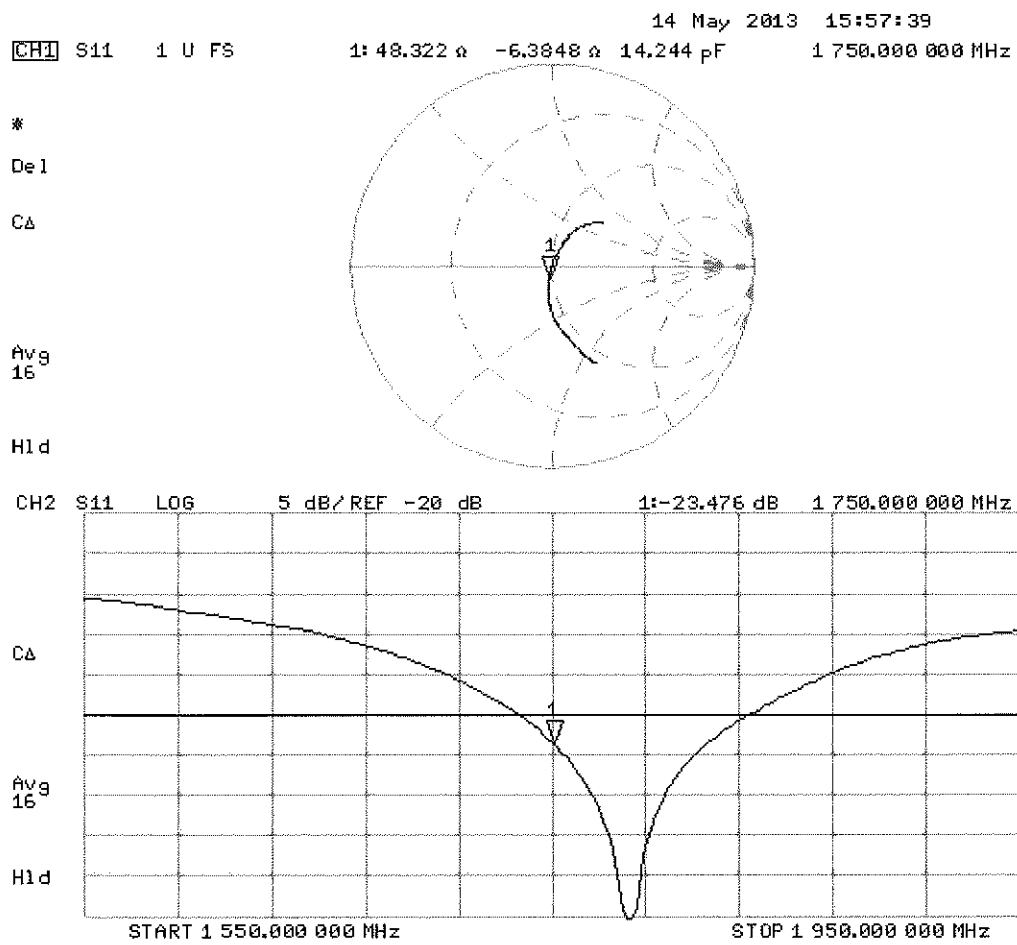

DASY5 Validation Report for Body TSL

Date: 13.05.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN: 1008

Communication System: UID 0 - CW ; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.83, 4.83, 4.83); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.430 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.53 W/kg; SAR(10 g) = 5.1 W/kg

Maximum value of SAR (measured) = 12.0 W/kg

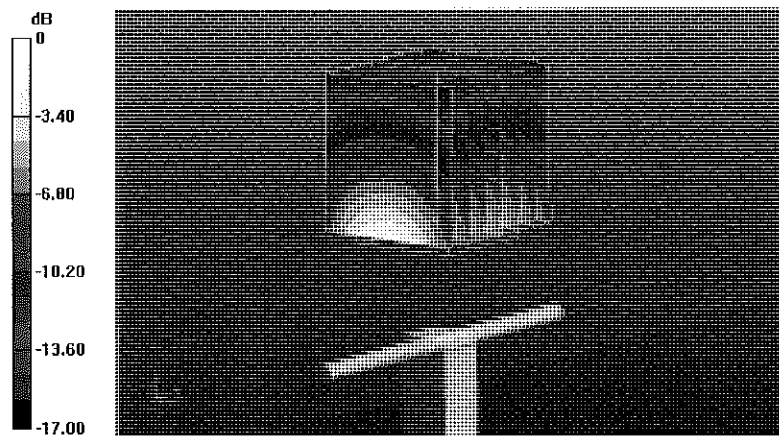


0 dB = 12.0 W/kg = 10.79 dBW/kg

Impedance Measurement Plot for Body TSL

13 May 2013 15:25:53
[CH1] S11 1 U FS 1: 43.775 Ω -6.1426 Ω 14.806 pF 1 750.000 000 MHz

*
De1
Cor

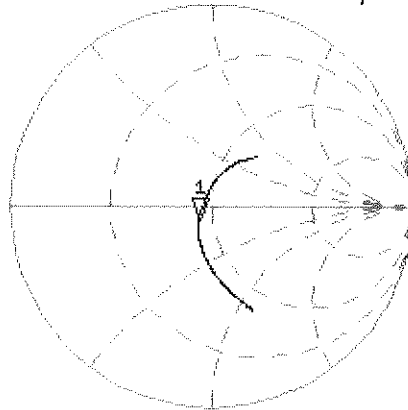



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1900V2-5d148_Feb13**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d148**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **February 06, 2013**

✓
KOK
2/21/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Leif Klysner** Name: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Technical Manager

Signature

Issued: February 6, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.4 $\pm$ 6 %	1.38 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.87 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.9 $\pm$ 6 %	1.53 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.45 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.7 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.1 Ω + 5.9 j Ω
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.3 Ω + 6.3 j Ω
Return Loss	- 23.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 06.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d148

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.98, 4.98, 4.98); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.534 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.18 W/kg


Maximum value of SAR (measured) = 12.1 W/kg

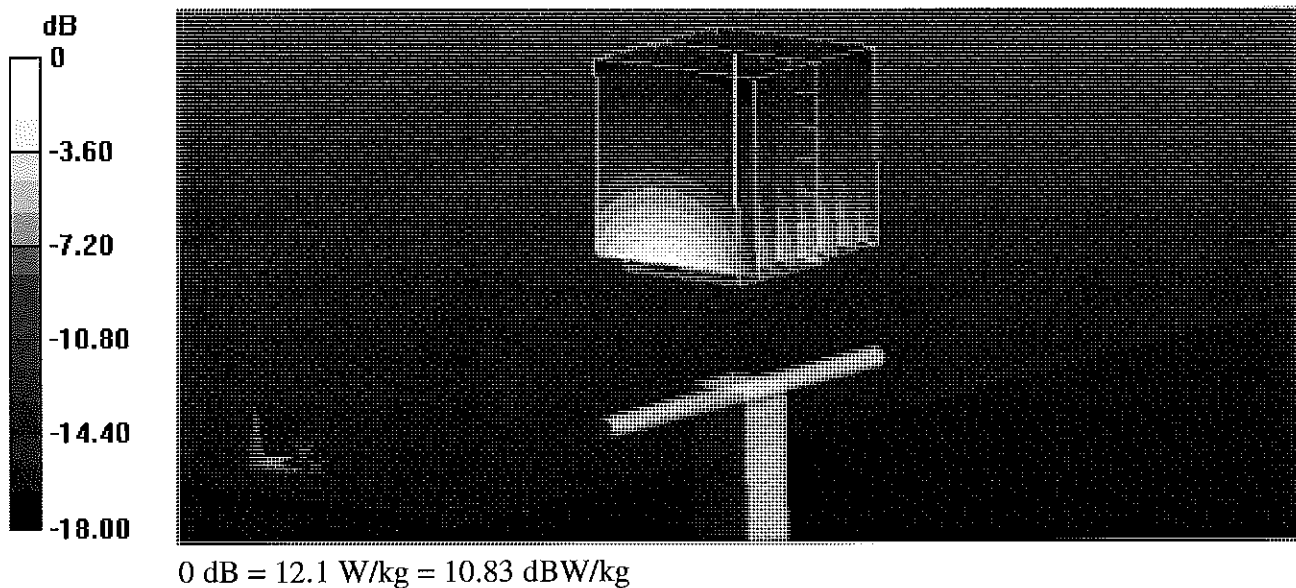

Impedance Measurement Plot for Head TSL


6 Feb 2013 09:25:10
 CH1 S11 1 U FS 1: 52.125 $\angle$ 5.8711 $\angle$ 491.80 μ H 1 900.000 000 MHz

*
 Del
 CA
 Avg
 16
 H1d

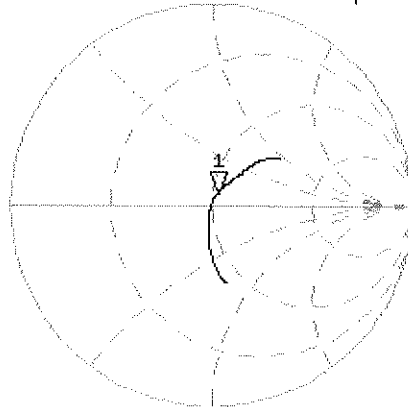

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.287 dB 1 900.000 000 MHz

CA
 Avg
 16
 H1d

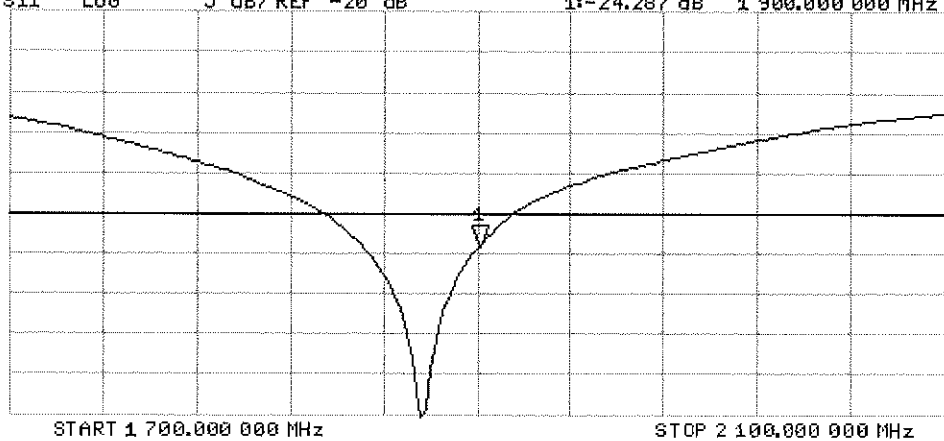

DASY5 Validation Report for Body TSL

Date: 06.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d148

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.6, 4.6, 4.6); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.534 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.45 W/kg

Maximum value of SAR (measured) = 13.1 W/kg

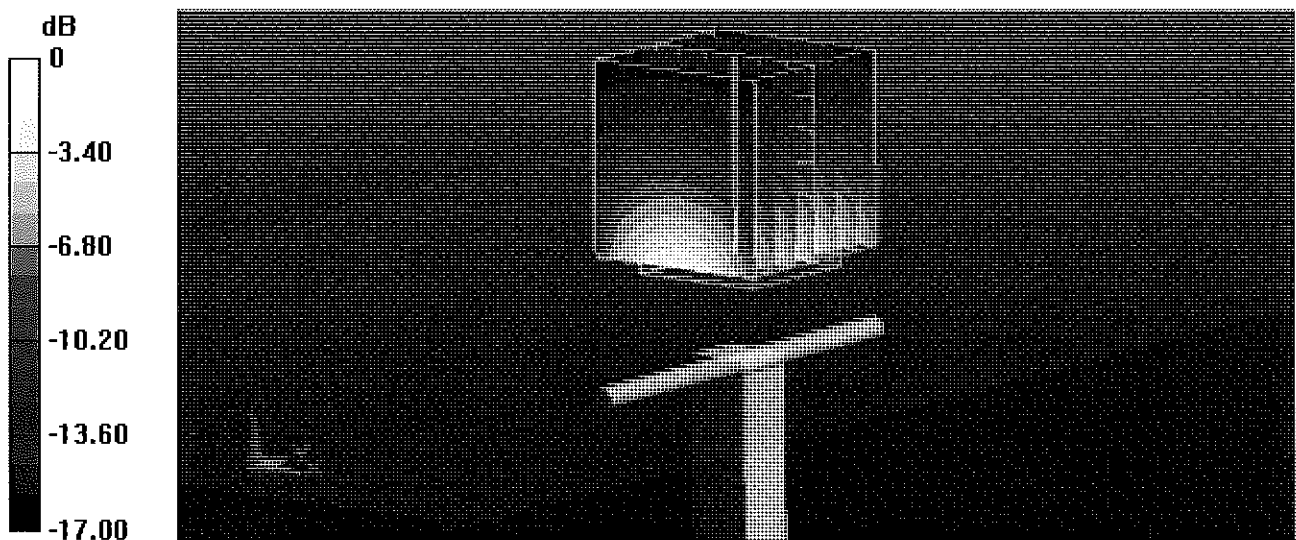


0 dB = 13.1 W/kg = 11.17 dBW/kg

Impedance Measurement Plot for Body TSL

6 Feb 2013 09:24:17
CH1 S11 1 U FS 1: 48.344 Ω 6.2715 Ω 525.34 μ H 1 900.000 000 MHz


*
De1
CA

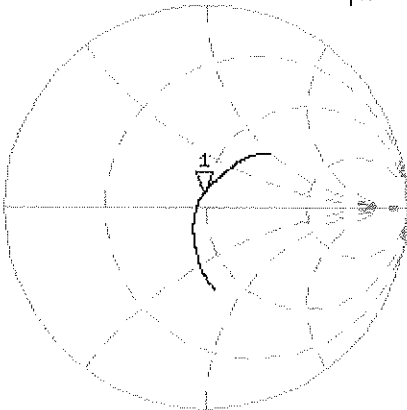

Avg
16
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.628 dB 1 900.000 000 MHz

CA
Avg
16
H1d

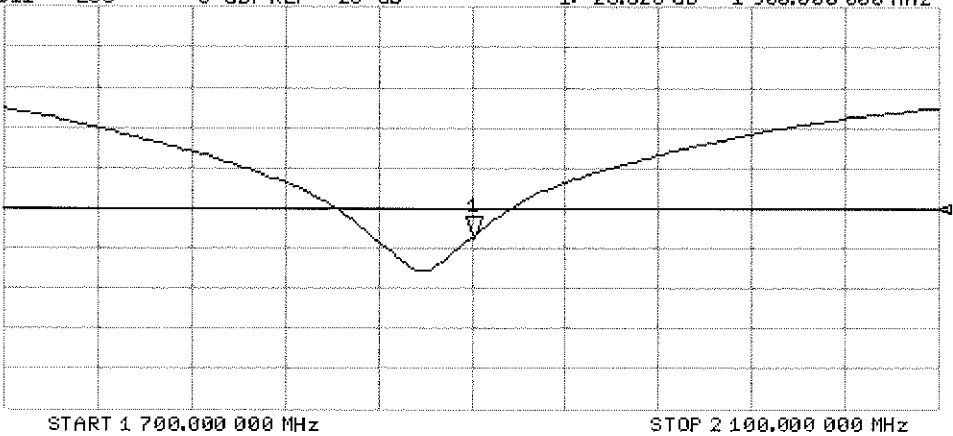



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D5GHzV2-1057_Jan13**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1057**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **January 11, 2013**

✓
KOK
1/29/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Israe El-Naouq** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

Israe El-Naouq
Katja Pokovic

Issued: January 11, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5300 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	34.6 $\pm$ 6 %	4.50 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.66 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	75.9 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.4 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	4.60 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.9 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.9 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	4.79 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.5 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.1 ± 6 %	4.88 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.8 ± 6 %	5.09 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.69 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	76.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.42 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.61 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.55 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	5.81 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	5.94 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.0 ± 6 %	6.21 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg ± 19.5 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.5 Ω - 9.8 j Ω
Return Loss	- 20.3 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	48.5 Ω - 4.5 j Ω
Return Loss	- 26.4 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	50.6 Ω - 5.8 j Ω
Return Loss	- 24.8 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	53.9 Ω - 3.8 j Ω
Return Loss	- 25.6 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	52.5 Ω - 4.4 j Ω
Return Loss	- 26.1 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.3 Ω - 7.9 j Ω
Return Loss	- 22.0 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	48.7 Ω - 3.2 j Ω
Return Loss	- 29.2 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	51.2 Ω - 4.8 j Ω
Return Loss	- 26.2 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	53.6 Ω - 2.1 j Ω
Return Loss	- 27.9 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	53.3 Ω - 2.9 j Ω
Return Loss	- 27.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

DASY5 Validation Report for Head TSL

Date: 11.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.5$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.6$ S/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.79$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 33.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.671 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 29.4 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.473 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.735 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.848 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 33.5 W/kg
SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.3 W/kg
Maximum value of SAR (measured) = 20.2 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 60.467 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 33.3 W/kg
SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.17 W/kg
Maximum value of SAR (measured) = 19.4 W/kg

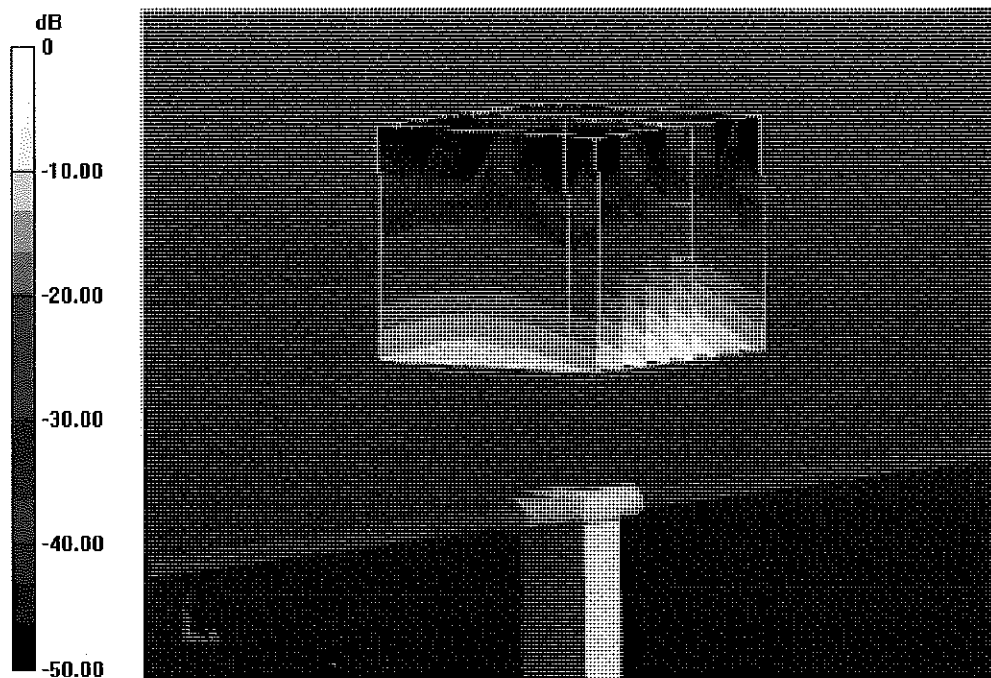

0 dB = 19.4 W/kg = 12.88 dBW/kg


Impedance Measurement Plot for Head TSL

11 Jan 2013 09:26:56
 [CH1] S11 1 U FS 1: 50.543 Ω -9.7754 Ω 3.1310 pF 5 200.000 000 MHz

*
 Del
 CA

Avg
 16

H1 d

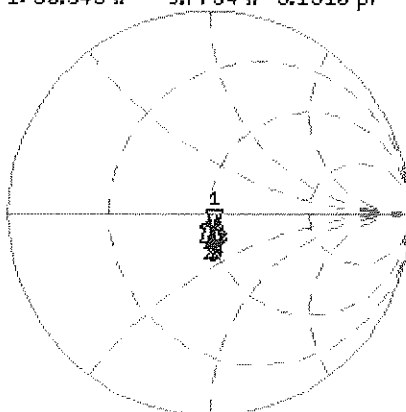

CH1 Markers


2: 48.508 Ω
 -4.4805 Ω
 5.30000 GHz
 3: 50.617 Ω
 -5.7559 Ω
 5.50000 GHz
 4: 53.891 Ω
 -3.8418 Ω
 5.60000 GHz
 5: 52.500 Ω
 -4.4160 Ω
 5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -20.273 dB 5 200.000 000 MHz

CA

Avg
 16

H1 d

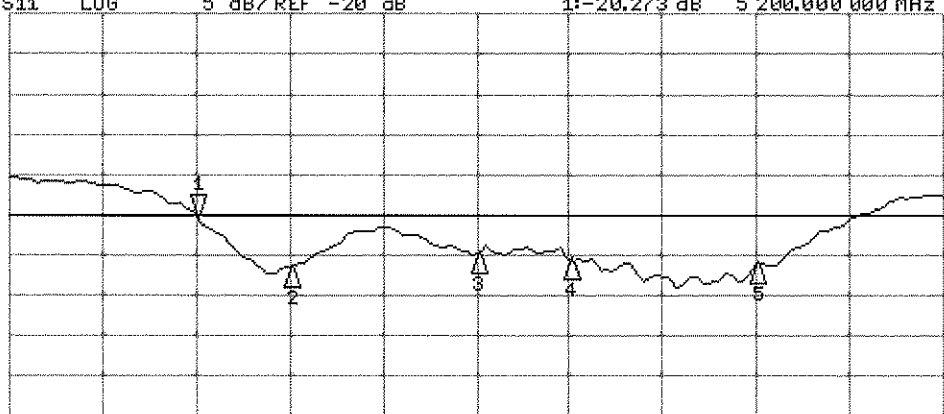

CH2 Markers

2: -26.396 dB
 5.30000 GHz
 3: -24.818 dB
 5.50000 GHz
 4: -25.573 dB
 5.60000 GHz
 5: -26.115 dB
 5.80000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 10.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.55$ S/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.81$ S/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.94$ S/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.21$ S/m; $\epsilon_r = 46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.074 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 7.61 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.924 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 30.9 W/kg

SAR(1 g) = 7.59 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.561 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 35.3 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.26 W/kg


Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.884 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 36.3 W/kg
SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.25 W/kg
Maximum value of SAR (measured) = 20.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 55.753 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 35.6 W/kg
SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.09 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

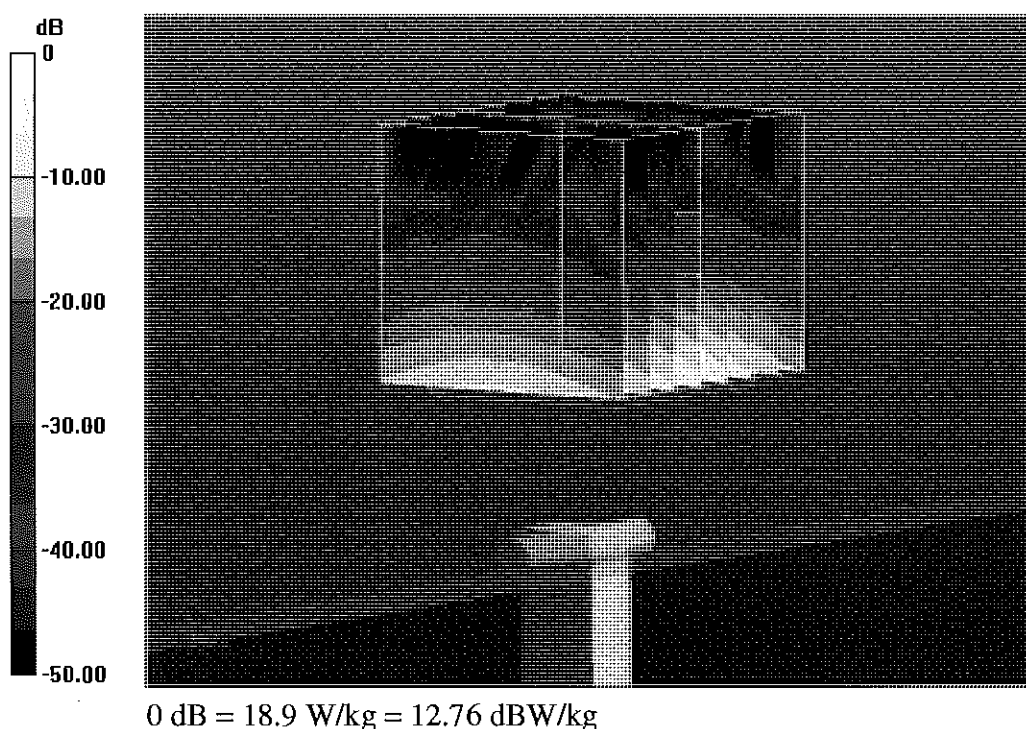

Impedance Measurement Plot for Body TSL

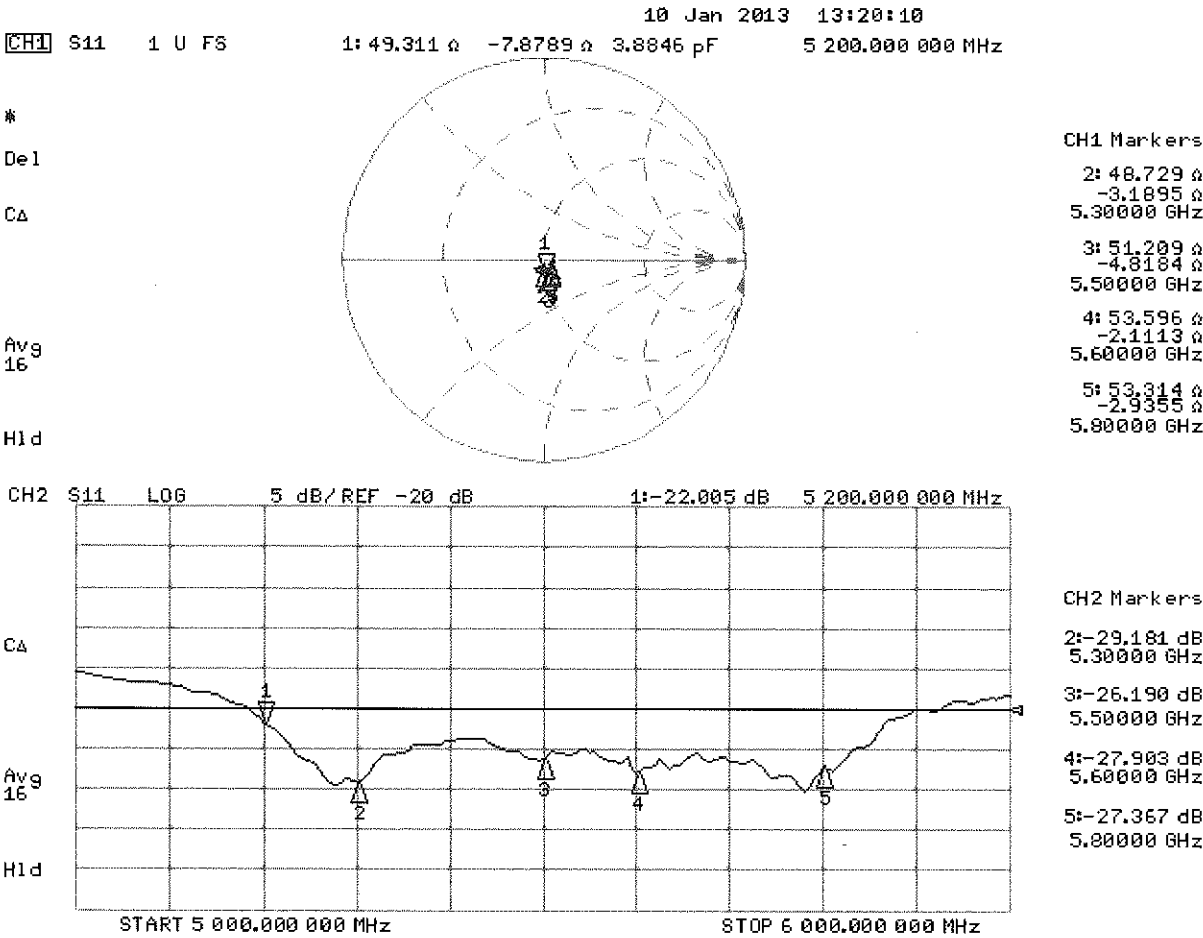



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3209_Mar13**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3209**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **March 15, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

✓ KOK
3/24/13

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Israe El-Naouq	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: March 15, 2013
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ES3DV3

SN:3209

Manufactured: October 14, 2008
Calibrated: March 15, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.35	1.33	1.14	$\pm 10.1 \%$
DCP (mV) ^B	99.2	97.8	98.3	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	163.6	$\pm 3.5 \%$
		Y	0.0	0.0	1.0		170.3	
		Z	0.0	0.0	1.0		158.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.74	6.74	6.74	0.76	1.18	± 12.0 %
835	41.5	0.90	6.46	6.46	6.46	0.31	1.81	± 12.0 %
1750	40.1	1.37	5.39	5.39	5.39	0.80	1.21	± 12.0 %
1900	40.0	1.40	5.21	5.21	5.21	0.78	1.26	± 12.0 %
2450	39.2	1.80	4.57	4.57	4.57	0.65	1.43	± 12.0 %
2600	39.0	1.96	4.43	4.43	4.43	0.75	1.36	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.38	6.38	6.38	0.80	1.16	± 12.0 %
835	55.2	0.97	6.28	6.28	6.28	0.52	1.45	± 12.0 %
1750	53.4	1.49	5.03	5.03	5.03	0.58	1.45	± 12.0 %
1900	53.3	1.52	4.77	4.77	4.77	0.70	1.36	± 12.0 %
2450	52.7	1.95	4.34	4.34	4.34	0.80	1.15	± 12.0 %
2600	52.5	2.16	4.11	4.11	4.11	0.80	1.00	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

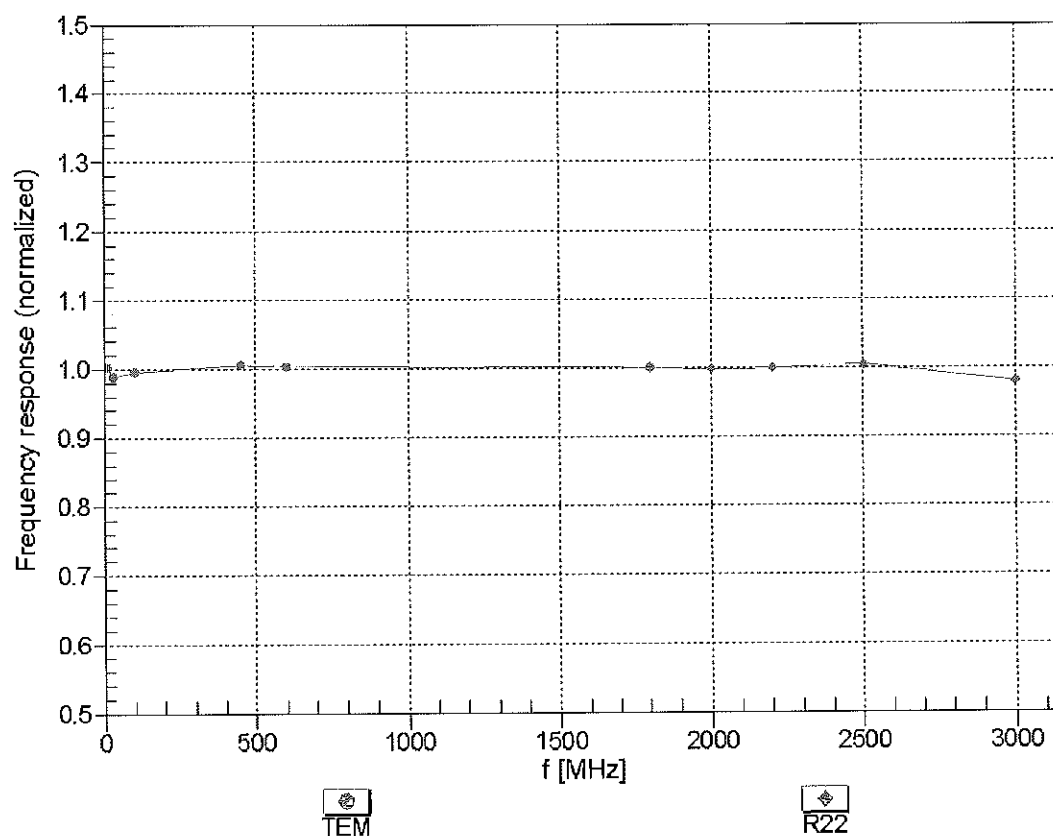



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


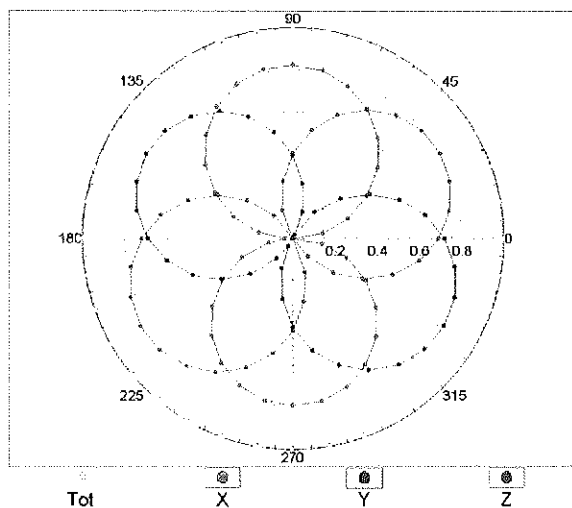


f=1800 MHz,R22

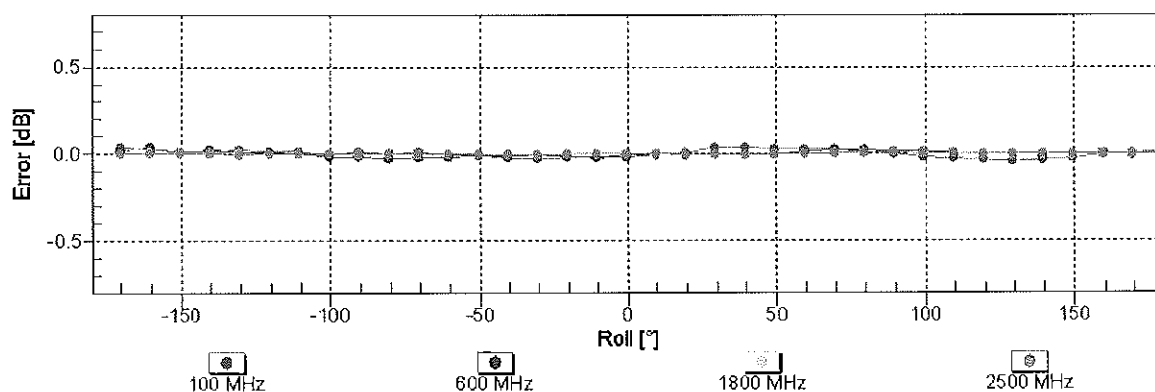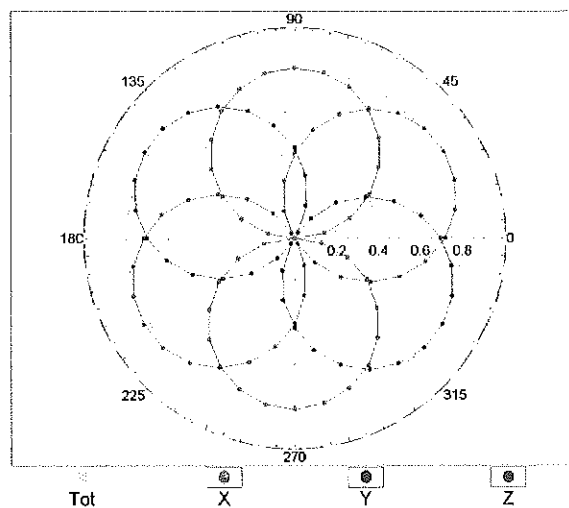


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

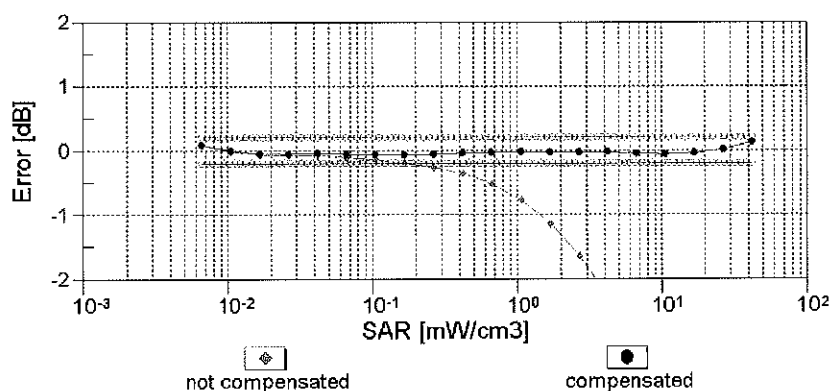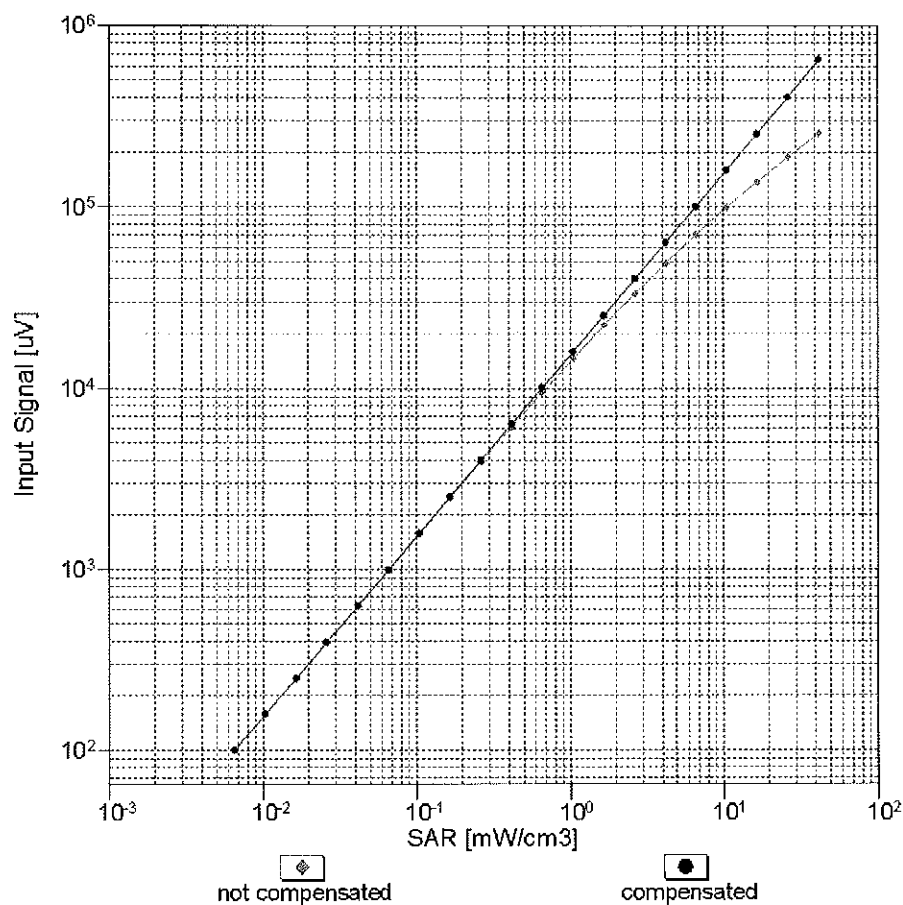



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

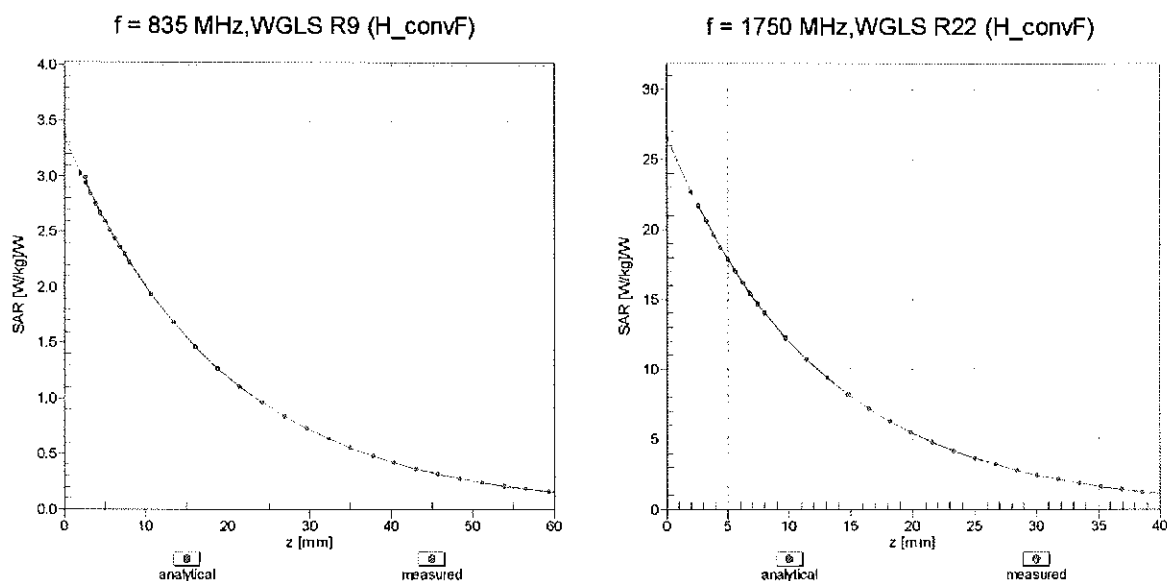

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

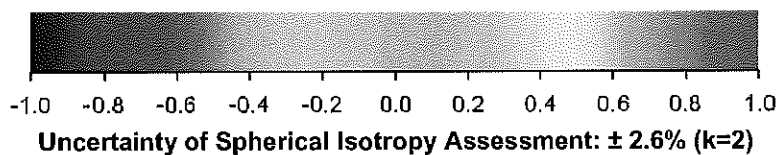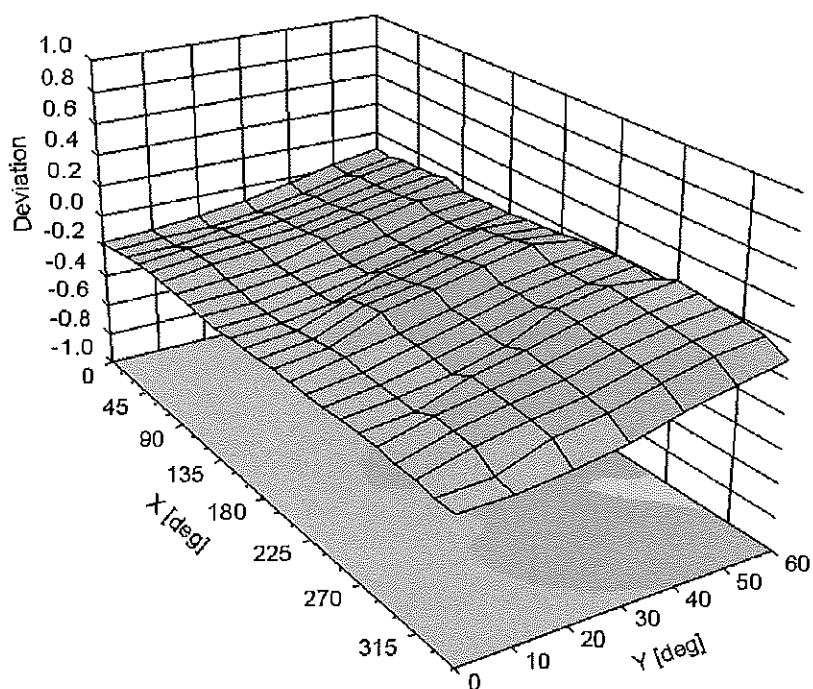

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-40.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **ES3-3287_Nov12**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3287**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **November 15, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 660	20-Jun-12 (No. DAE4-660_Jun12)	Jun-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			Issued: November 16, 2012



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ES3DV3

SN:3287

Manufactured: June 7, 2010
Calibrated: November 15, 2012

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.31	1.25	1.25	$\pm 10.1 \%$
DCP (mV) ^B	102.9	103.6	101.6	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
0	CW	0.00	X	0.0	0.0	1.0	116.8	$\pm 3.5 \%$
			Y	0.0	0.0	1.0	118.5	
			Z	0.0	0.0	1.0	154.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.40	6.40	6.40	0.20	2.54	± 12.0 %
835	41.5	0.90	6.17	6.17	6.17	0.34	1.68	± 12.0 %
1750	40.1	1.37	5.16	5.16	5.16	0.63	1.30	± 12.0 %
1900	40.0	1.40	4.96	4.96	4.96	0.48	1.55	± 12.0 %
2450	39.2	1.80	4.30	4.30	4.30	0.79	1.31	± 12.0 %
2600	39.0	1.96	4.19	4.19	4.19	0.80	1.31	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	6.14	6.14	6.14	0.28	2.06	± 12.0 %
835	55.2	0.97	6.06	6.06	6.06	0.42	1.63	± 12.0 %
1750	53.4	1.49	4.86	4.86	4.86	0.43	1.64	± 12.0 %
1900	53.3	1.52	4.69	4.69	4.69	0.56	1.54	± 12.0 %
2450	52.7	1.95	4.29	4.29	4.29	0.80	1.02	± 12.0 %
2600	52.5	2.16	4.12	4.12	4.12	0.64	0.92	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

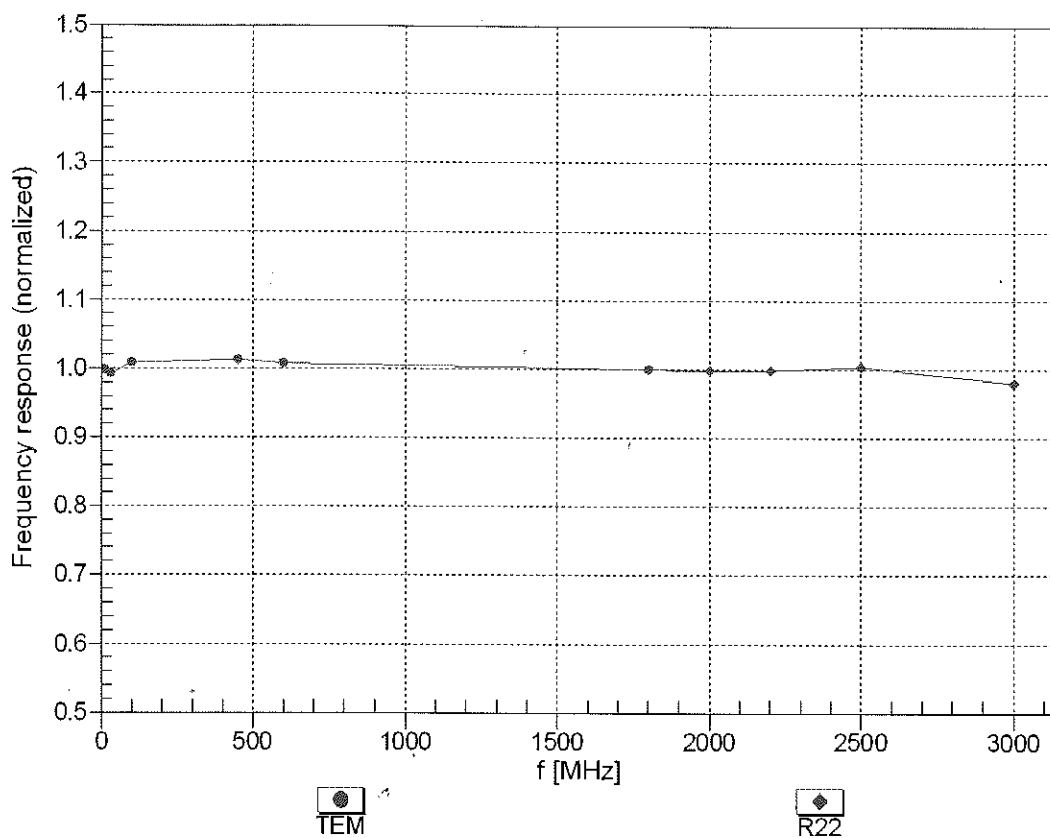



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM


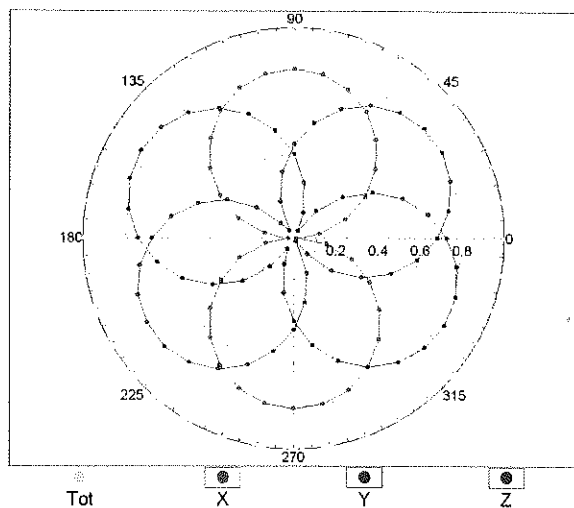


f=1800 MHz, R22

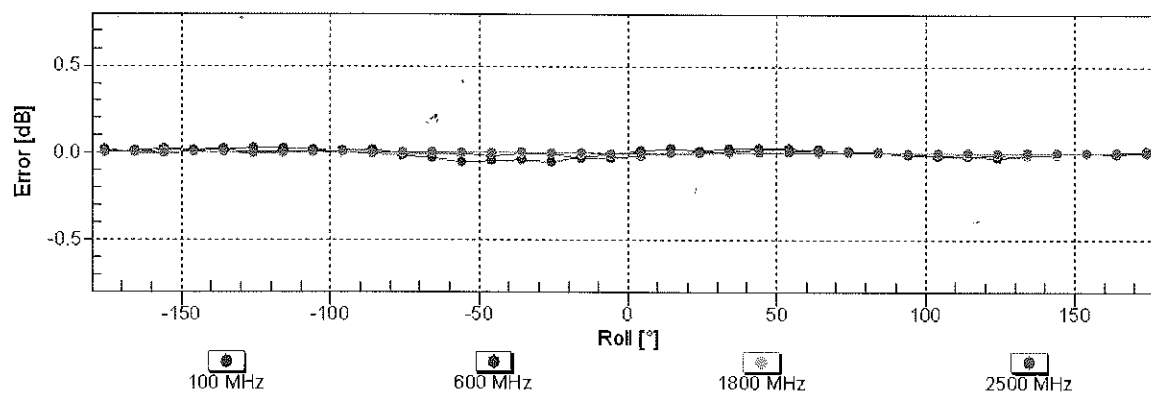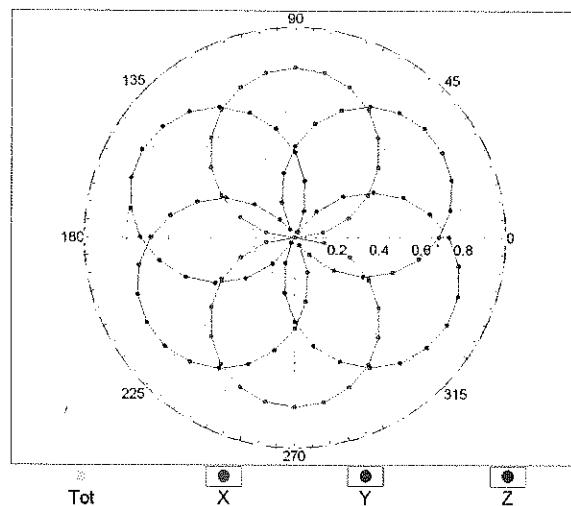


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

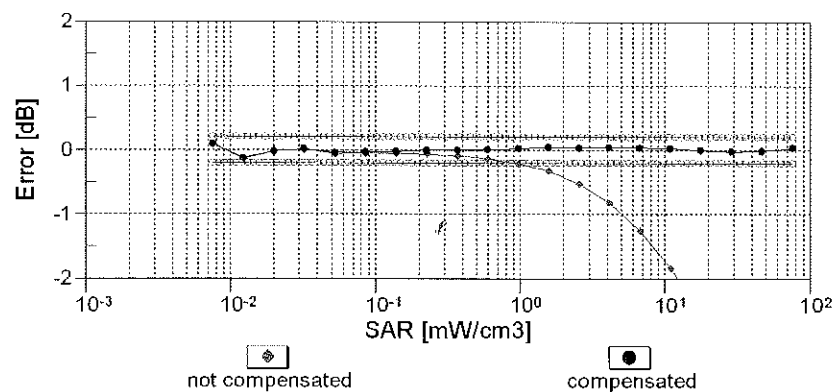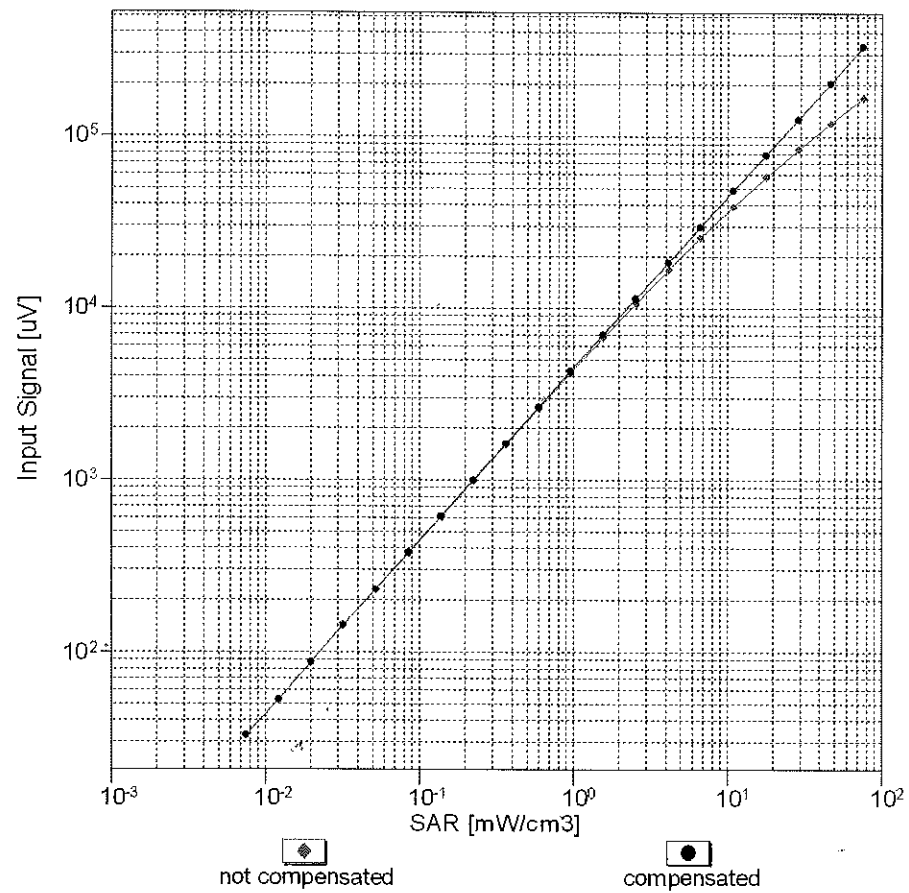



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

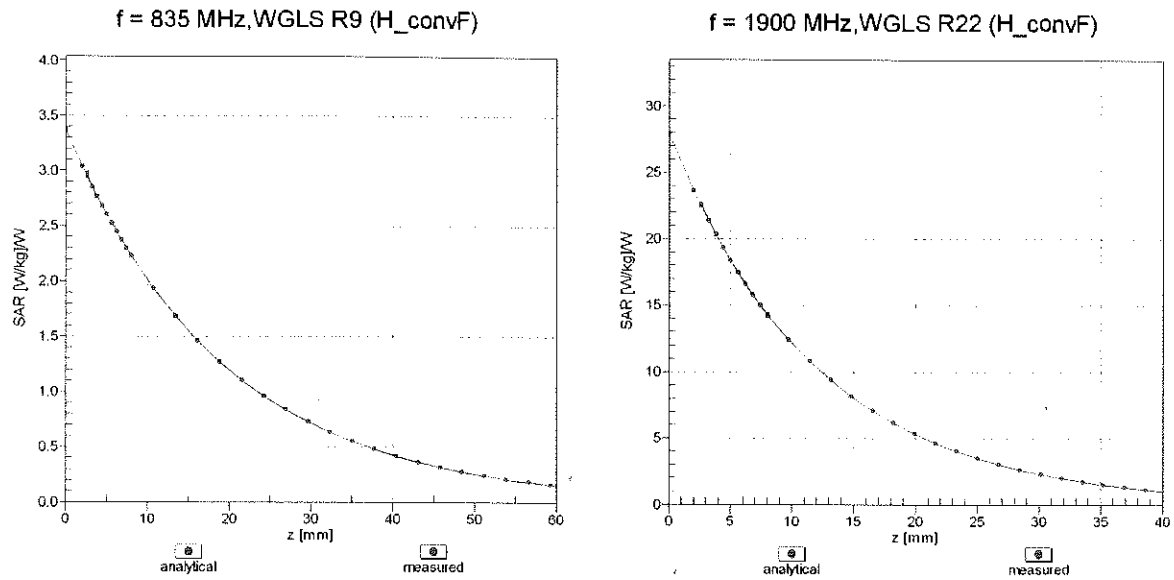

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

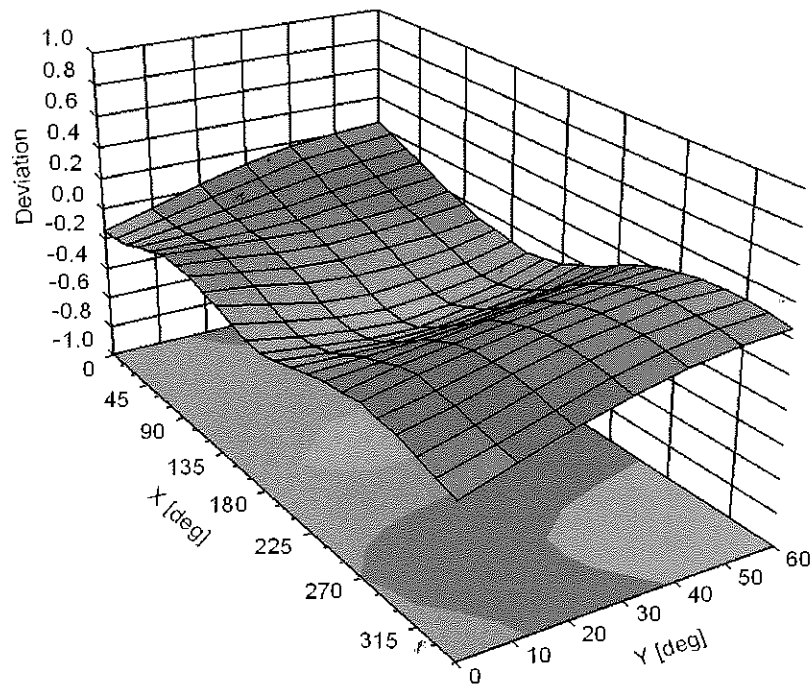

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-15.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **EX3-3589 Jan13**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3589**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **January 17, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	20-Jun-12 (No. DAE4-660_Jun12)	Jun-13
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: January 17, 2013			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3589

Manufactured: March 30, 2006
Calibrated: January 17, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.46	0.40	0.40	$\pm 10.1 \%$
DCP (mV) ^B	100.5	103.8	99.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	165.8	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		134.3	
		Z	0.0	0.0	1.0		140.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	8.70	8.70	8.70	0.39	0.96	± 12.0 %
835	41.5	0.90	8.40	8.40	8.40	0.52	0.74	± 12.0 %
1750	40.1	1.37	7.34	7.34	7.34	0.45	0.93	± 12.0 %
1900	40.0	1.40	7.09	7.09	7.09	0.80	0.65	± 12.0 %
2450	39.2	1.80	6.37	6.37	6.37	0.39	0.97	± 12.0 %
2600	39.0	1.96	6.19	6.19	6.19	0.30	1.12	± 12.0 %
5200	36.0	4.66	4.48	4.48	4.48	0.45	1.80	± 13.1 %
5300	35.9	4.76	4.27	4.27	4.27	0.45	1.80	± 13.1 %
5500	35.6	4.96	4.14	4.14	4.14	0.50	1.80	± 13.1 %
5600	35.5	5.07	3.81	3.81	3.81	0.55	1.80	± 13.1 %
5800	35.3	5.27	3.85	3.85	3.85	0.55	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	8.59	8.59	8.59	0.49	0.86	± 12.0 %
835	55.2	0.97	8.43	8.43	8.43	0.38	1.05	± 12.0 %
1750	53.4	1.49	7.87	7.87	7.87	0.44	0.89	± 12.0 %
1900	53.3	1.52	7.46	7.46	7.46	0.58	0.75	± 12.0 %
2450	52.7	1.95	7.07	7.07	7.07	0.80	0.50	± 12.0 %
2600	52.5	2.16	6.68	6.68	6.68	0.80	0.50	± 12.0 %
5200	49.0	5.30	3.99	3.99	3.99	0.50	1.90	± 13.1 %
5300	48.9	5.42	3.81	3.81	3.81	0.50	1.90	± 13.1 %
5500	48.6	5.65	3.52	3.52	3.52	0.55	1.90	± 13.1 %
5600	48.5	5.77	3.32	3.32	3.32	0.60	1.90	± 13.1 %
5800	48.2	6.00	3.66	3.66	3.66	0.60	1.90	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

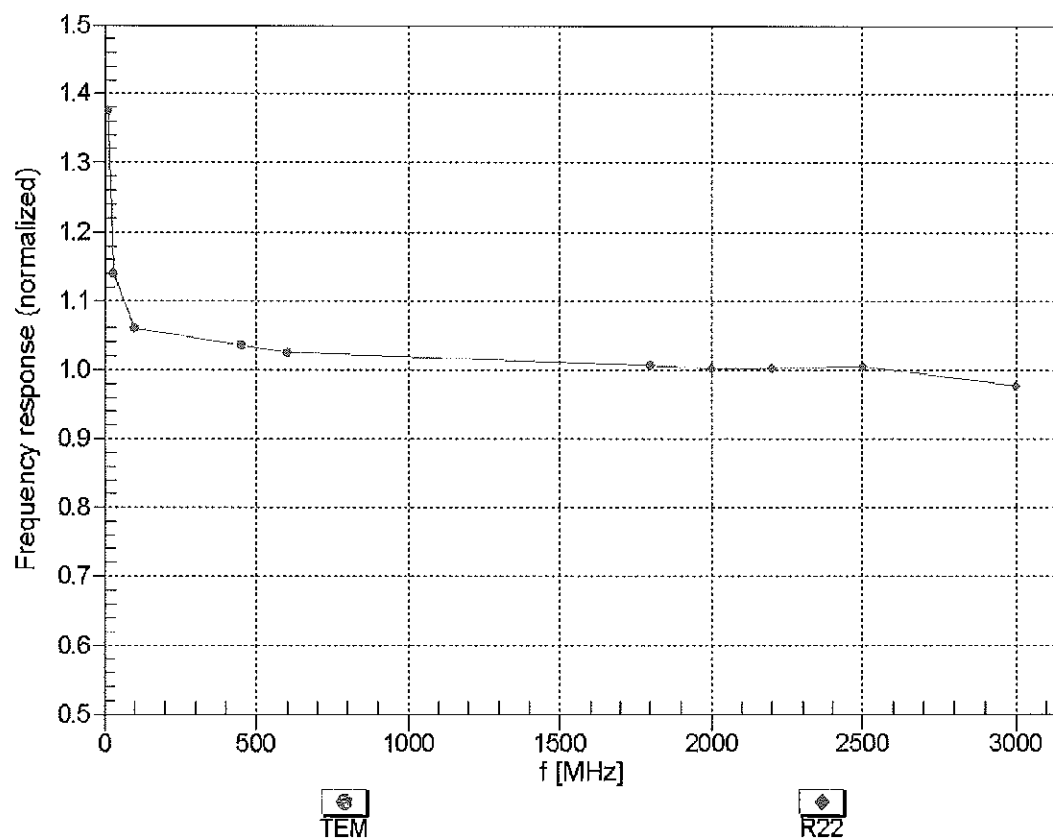



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM

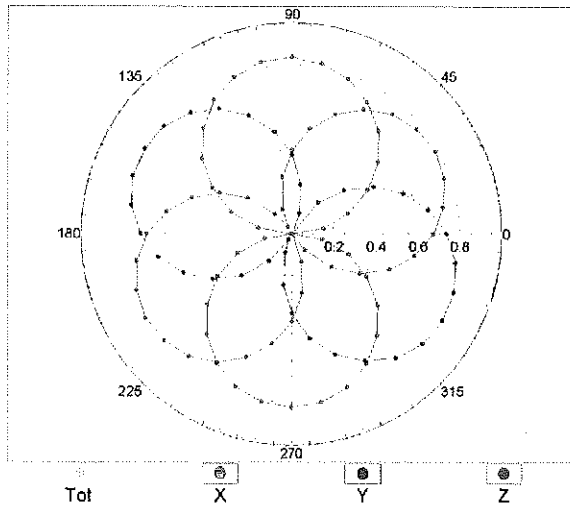


f=1800 MHz,R22

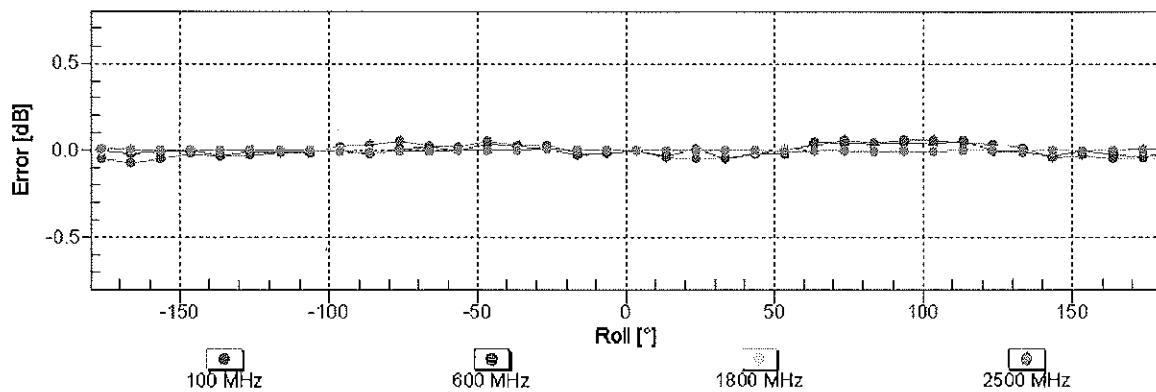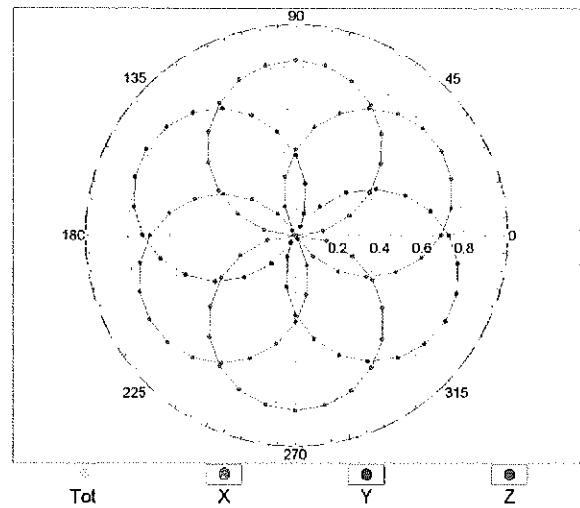

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


Dynamic Range f(SAR_{head})

(TEM cell , f = 900 MHz)

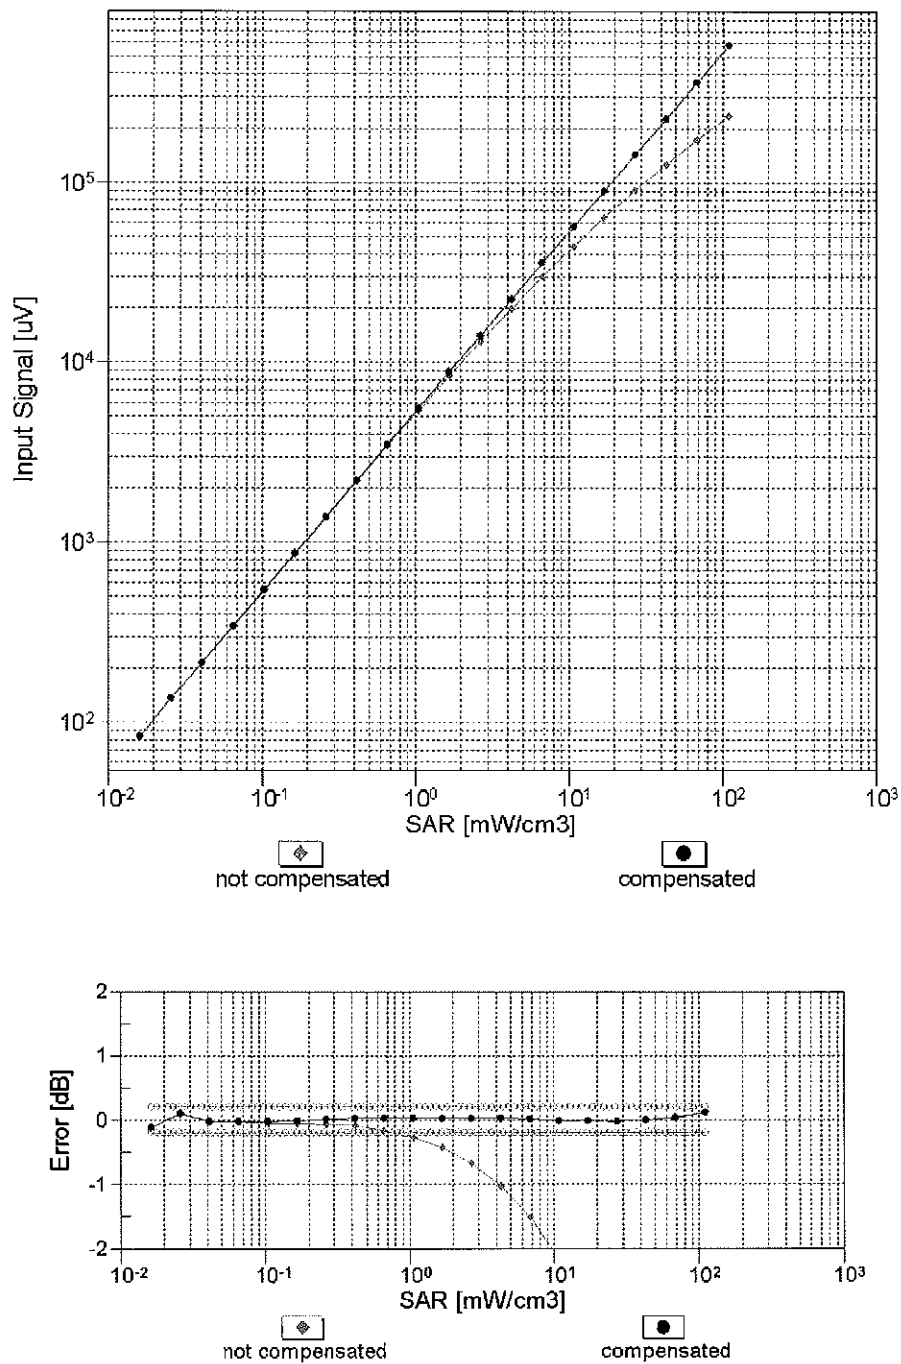



Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

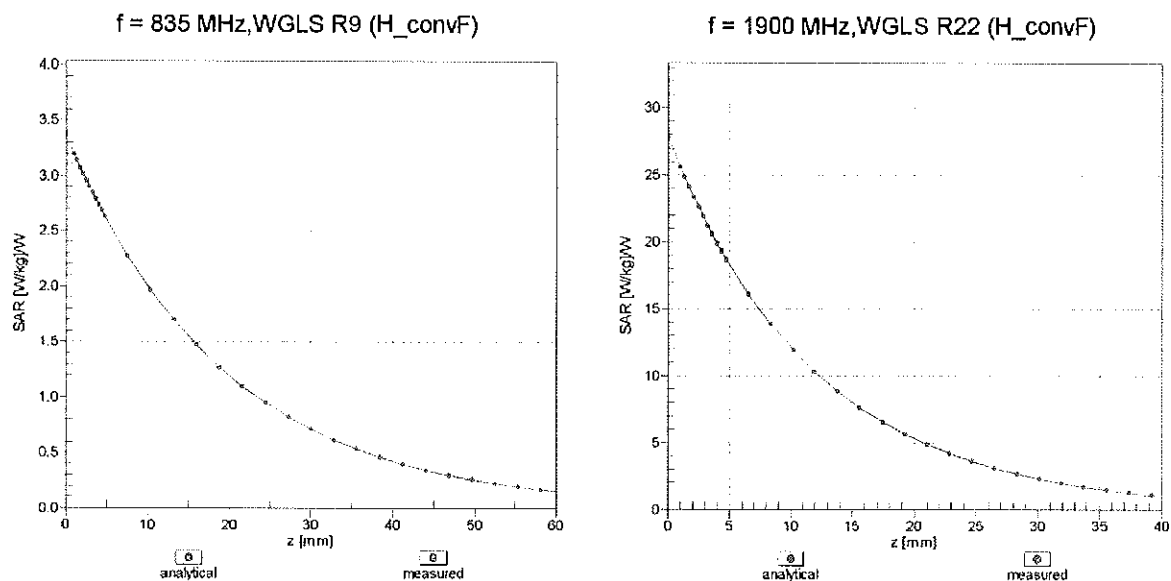

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$

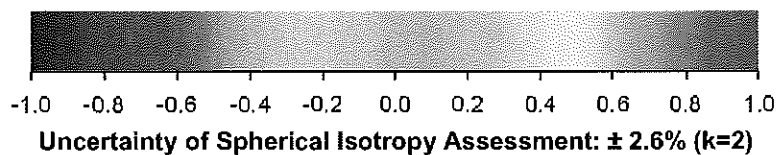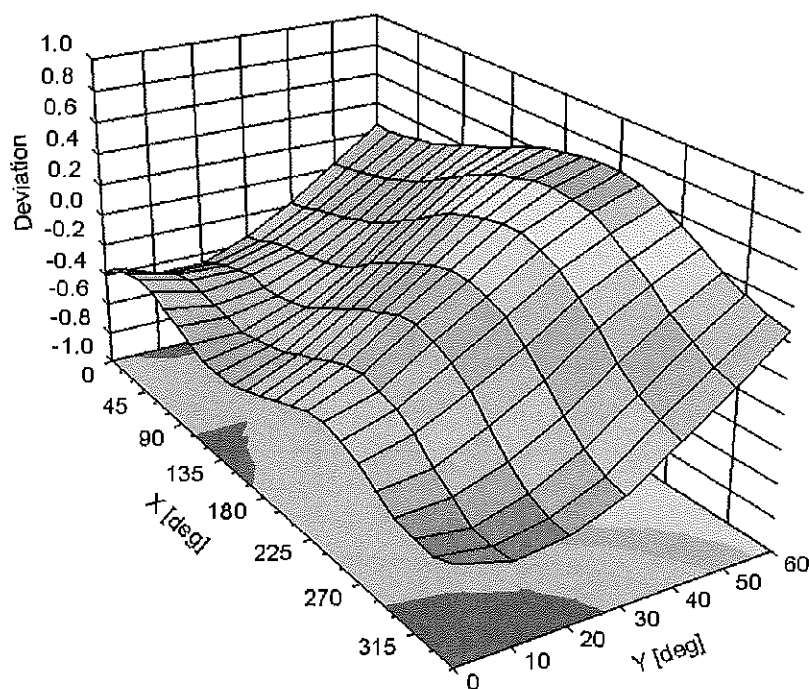

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-26.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **EX3-3920_Feb13/2**

CALIBRATION CERTIFICATE (Replacement of No: EX3-3920_Feb13)

Object **EX3DV4 - SN:3920**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4**
Calibration procedure for dosimetric E-field probes

Calibration date: **February 27, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

✓
KOK
3/24/13

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-12 (No. 217-01508)	Apr-13
Power sensor E4412A	MY41498087	29-Mar-12 (No. 217-01508)	Apr-13
Reference 3 dB Attenuator	SN: S5054 (3c)	27-Mar-12 (No. 217-01531)	Apr-13
Reference 20 dB Attenuator	SN: S5086 (20b)	27-Mar-12 (No. 217-01529)	Apr-13
Reference 30 dB Attenuator	SN: S5129 (30b)	27-Mar-12 (No. 217-01532)	Apr-13
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-11)	In house check: Apr-13
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: March 5, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3920

Manufactured: December 18, 2012
Calibrated: February 27, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3920

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.34	0.50	0.50	$\pm 10.1 \%$
DCP (mV) ^B	101.2	101.0	99.1	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	134.3	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		164.7	
		Z	0.0	0.0	1.0		161.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3920

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	9.86	9.86	9.86	0.19	1.39	± 12.0 %
835	41.5	0.90	9.58	9.58	9.58	0.77	0.54	± 12.0 %
1750	40.1	1.37	7.97	7.97	7.97	0.57	0.69	± 12.0 %
1900	40.0	1.40	7.73	7.73	7.73	0.54	0.73	± 12.0 %
2450	39.2	1.80	7.04	7.04	7.04	0.40	0.82	± 12.0 %
2600	39.0	1.96	6.80	6.80	6.80	0.49	0.76	± 12.0 %
5200	36.0	4.66	4.87	4.87	4.87	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.73	4.73	4.73	0.37	1.80	± 13.1 %
5500	35.6	4.96	4.52	4.52	4.52	0.39	1.80	± 13.1 %
5600	35.5	5.07	4.17	4.17	4.17	0.50	1.80	± 13.1 %
5800	35.3	5.27	4.02	4.02	4.02	0.45	1.80	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3920

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	9.57	9.57	9.57	0.43	0.83	± 12.0 %
835	55.2	0.97	9.42	9.42	9.42	0.36	0.98	± 12.0 %
1750	53.4	1.49	7.59	7.59	7.59	0.43	0.78	± 12.0 %
1900	53.3	1.52	7.38	7.38	7.38	0.33	0.91	± 12.0 %
2450	52.7	1.95	7.07	7.07	7.07	0.80	0.55	± 12.0 %
2600	52.5	2.16	6.73	6.73	6.73	0.80	0.56	± 12.0 %
5200	49.0	5.30	4.23	4.23	4.23	0.51	1.90	± 13.1 %
5300	48.9	5.42	4.13	4.13	4.13	0.49	1.90	± 13.1 %
5500	48.6	5.65	3.63	3.63	3.63	0.52	1.90	± 13.1 %
5600	48.5	5.77	3.62	3.62	3.62	0.49	1.90	± 13.1 %
5800	48.2	6.00	3.91	3.91	3.91	0.54	1.90	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

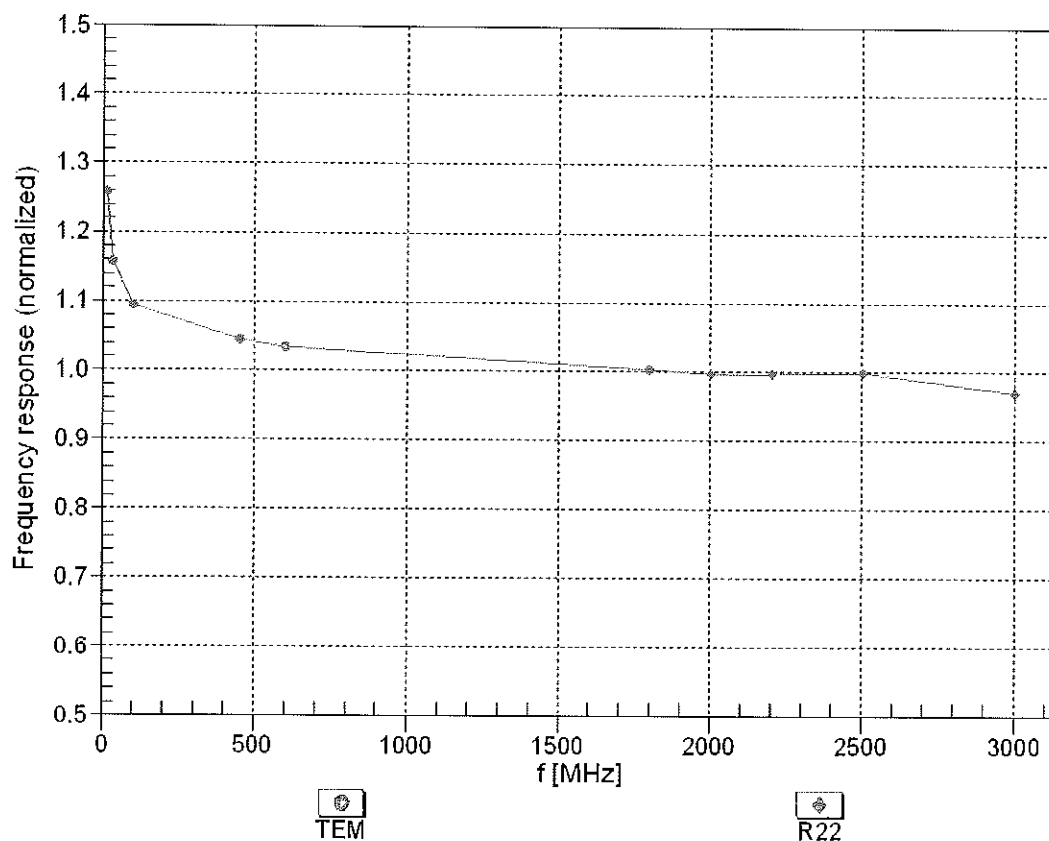



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

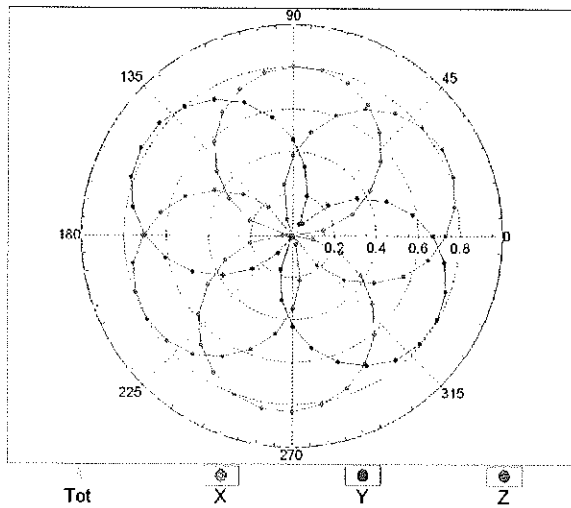


f=1800 MHz,R22

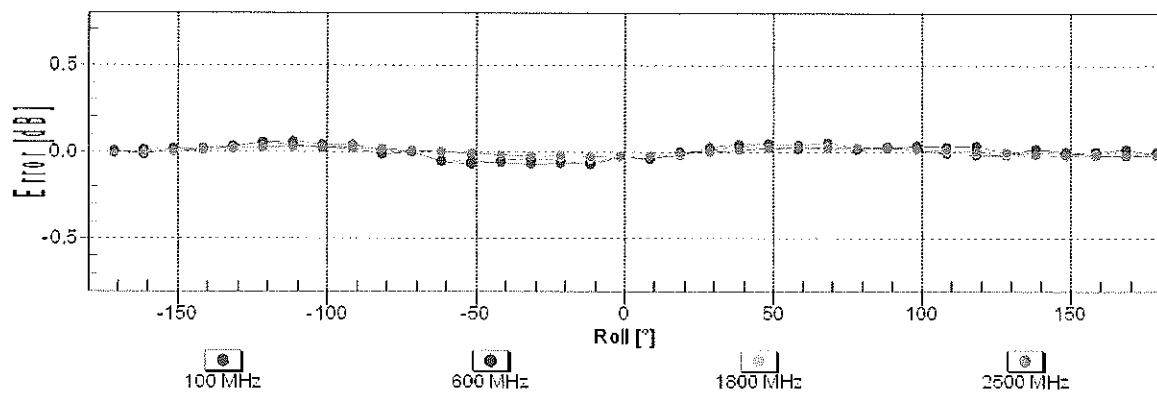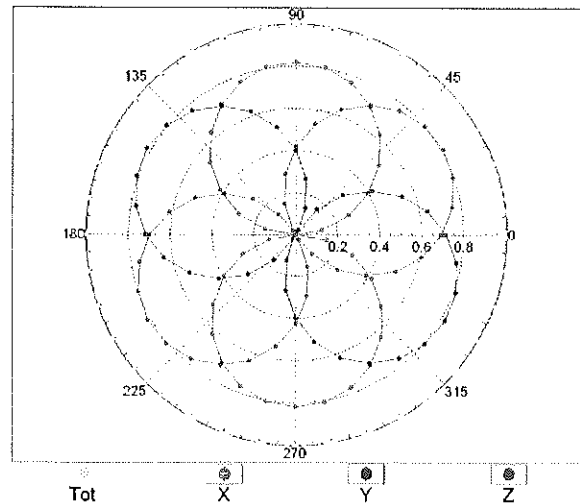


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

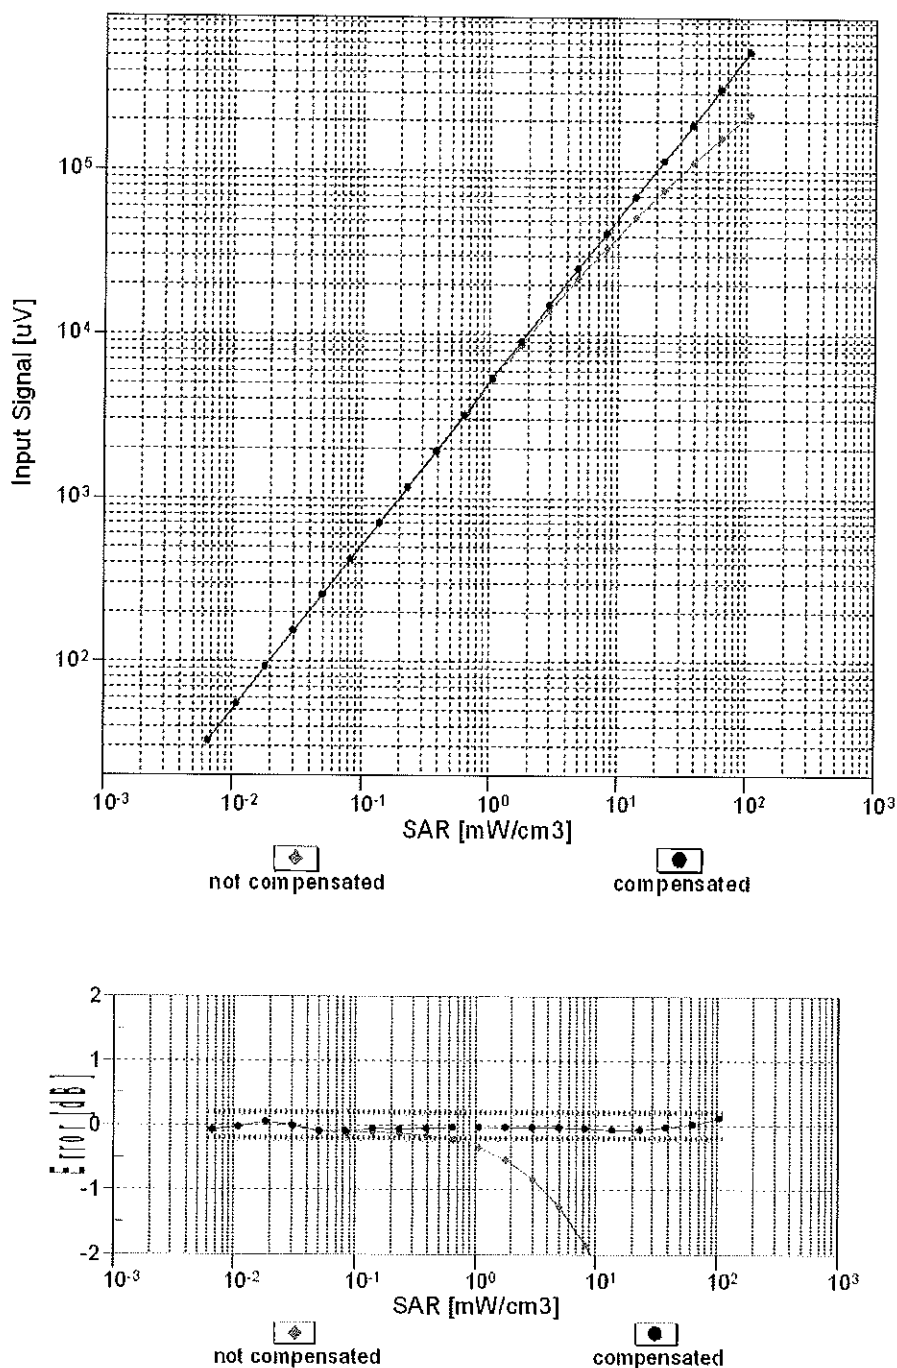



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

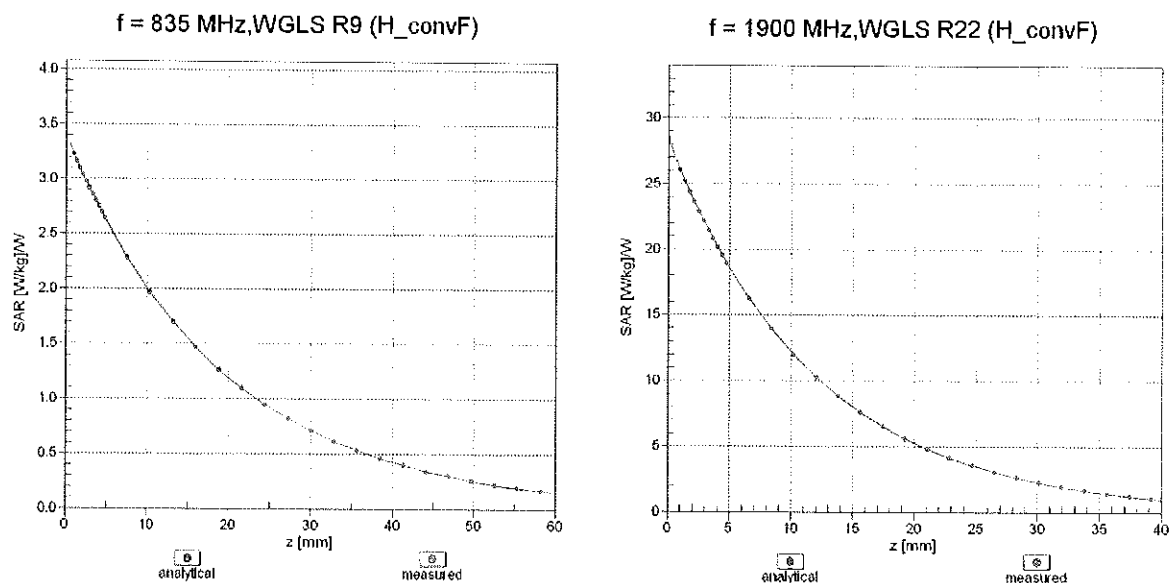

Deviation from Isotropy in Liquid

Error (ϕ , θ), $f = 900 \text{ MHz}$

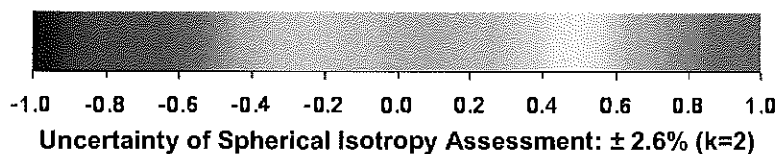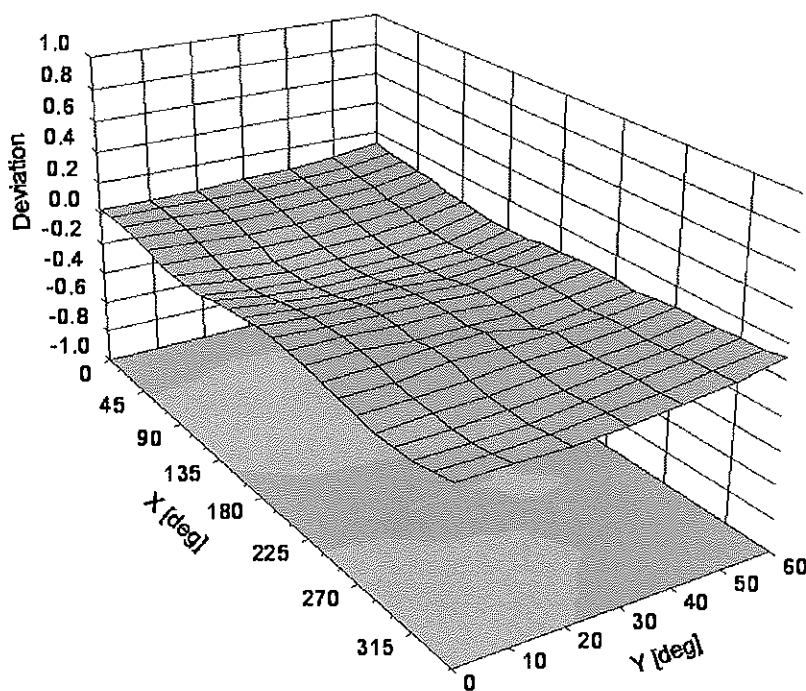

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3920

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-21.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3022_Aug13**

CALIBRATION CERTIFICATE

Object **ES3DV2 - SN:3022**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 22, 2013**

UTC
9/13/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: August 23, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ES3DV2

SN:3022

Manufactured: April 15, 2003
Calibrated: August 22, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.00	1.04	0.99	± 10.1 %
DCP (mV) ^B	100.7	97.4	99.7	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	178.6	±3.0 %
		Y	0.0	0.0	1.0		141.9	
		Z	0.0	0.0	1.0		134.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.21	6.21	6.21	0.19	2.37	± 12.0 %
835	41.5	0.90	6.09	6.09	6.09	0.30	1.70	± 12.0 %
1750	40.1	1.37	5.19	5.19	5.19	0.65	1.23	± 12.0 %
1900	40.0	1.40	5.03	5.03	5.03	0.51	1.43	± 12.0 %
2450	39.2	1.80	4.36	4.36	4.36	0.51	1.51	± 12.0 %
2600	39.0	1.96	4.16	4.16	4.16	0.74	1.29	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	5.92	5.92	5.92	0.24	1.99	± 12.0 %
835	55.2	0.97	5.91	5.91	5.91	0.29	1.85	± 12.0 %
1750	53.4	1.49	4.75	4.75	4.75	0.52	1.52	± 12.0 %
1900	53.3	1.52	4.49	4.49	4.49	0.49	1.56	± 12.0 %
2450	52.7	1.95	4.01	4.01	4.01	0.70	1.02	± 12.0 %
2600	52.5	2.16	3.85	3.85	3.85	0.58	0.90	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

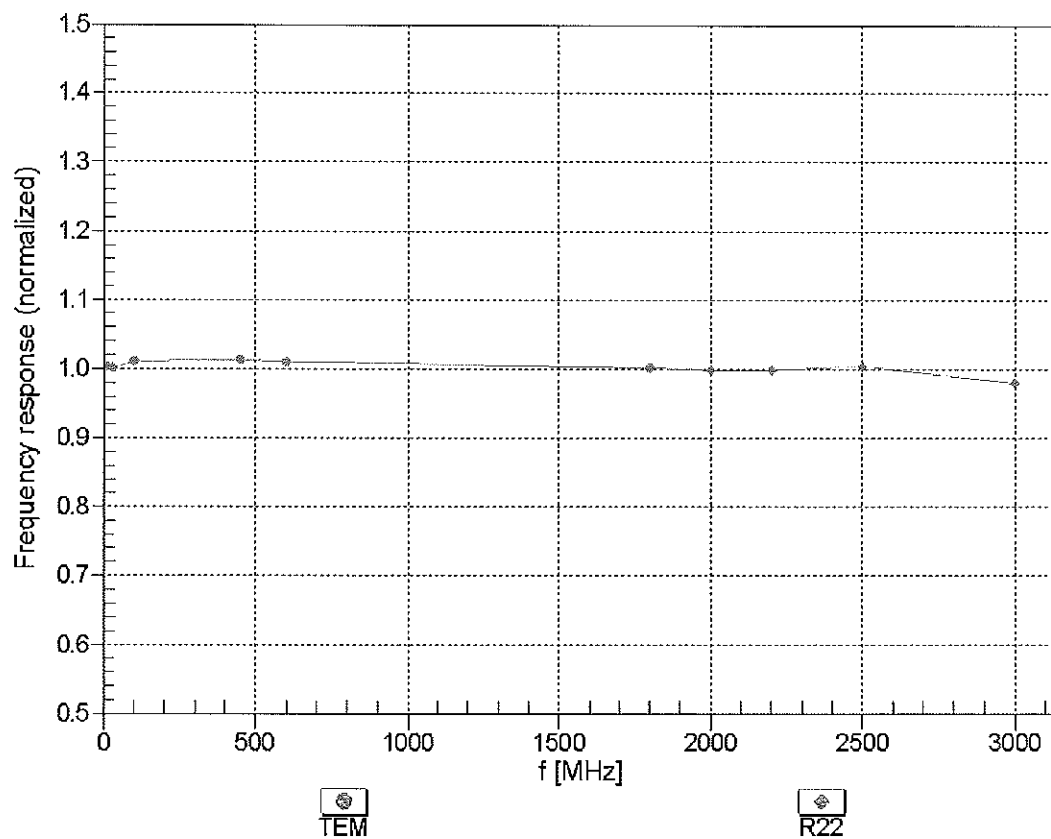



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

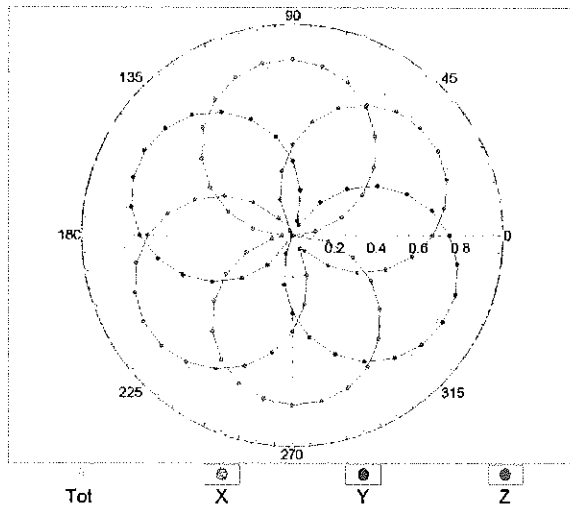


f=1800 MHz,R22

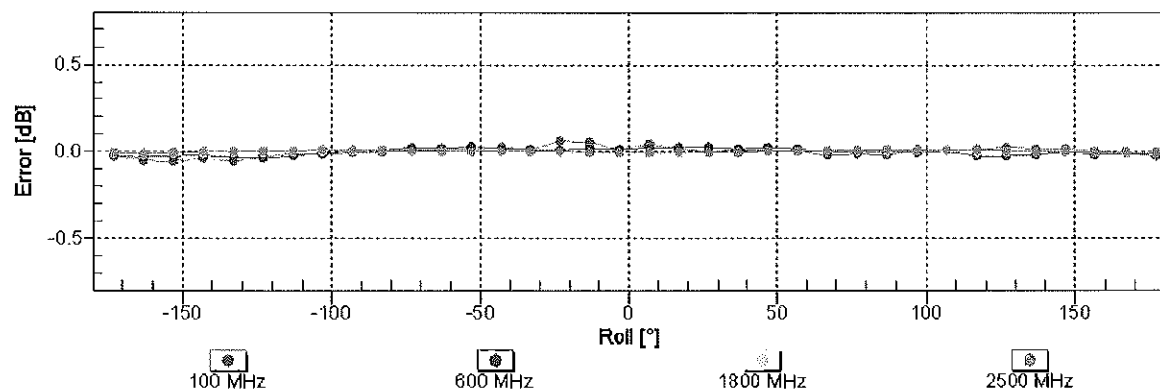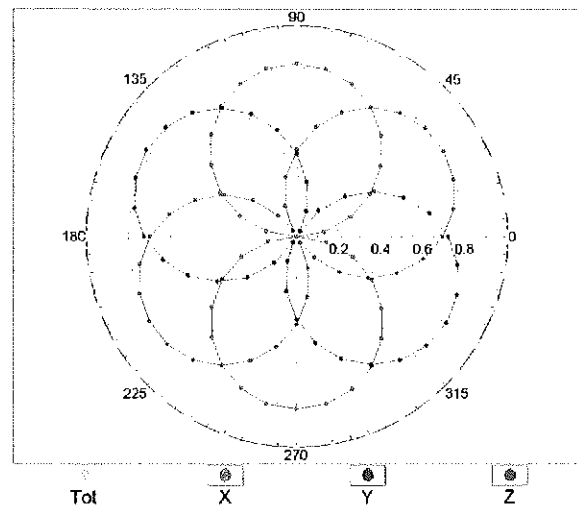


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

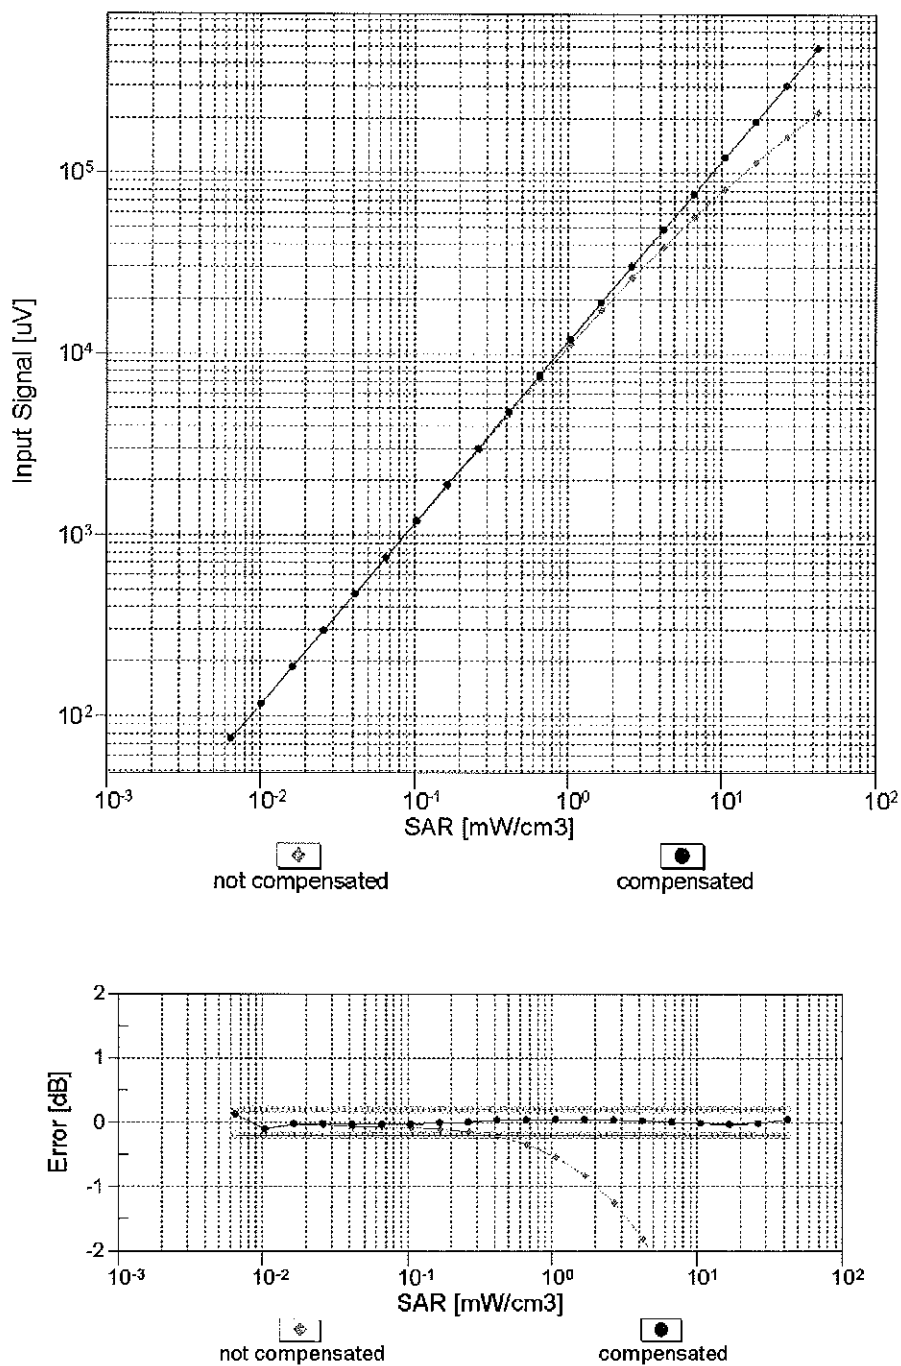



Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

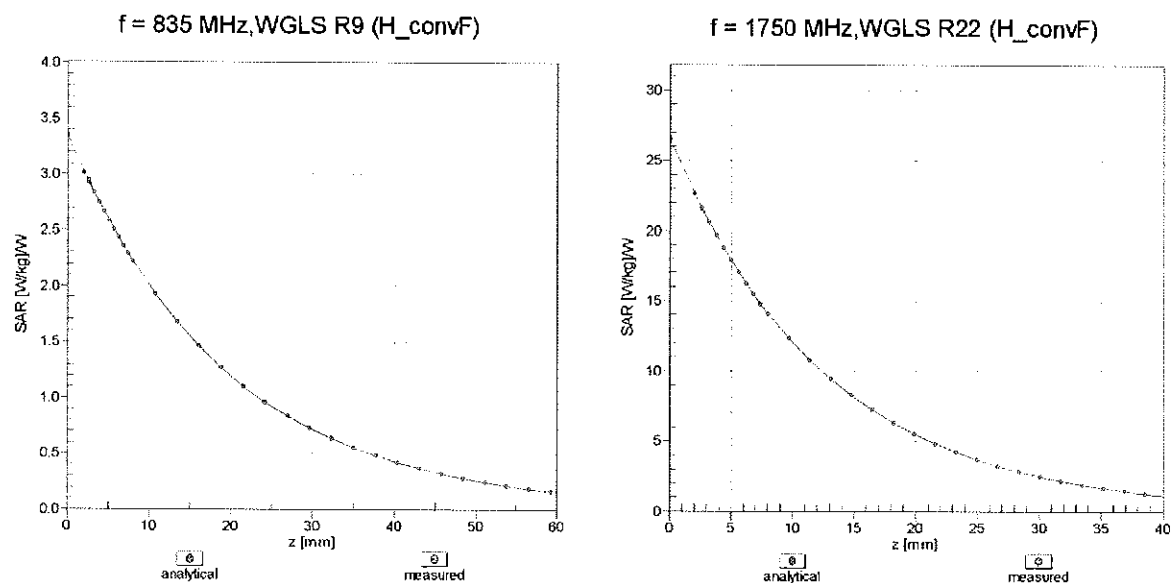

Deviation from Isotropy in Liquid

Error (ϕ , θ), $f = 900 \text{ MHz}$

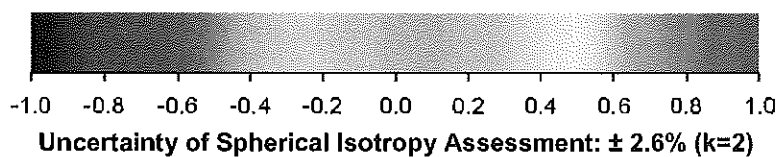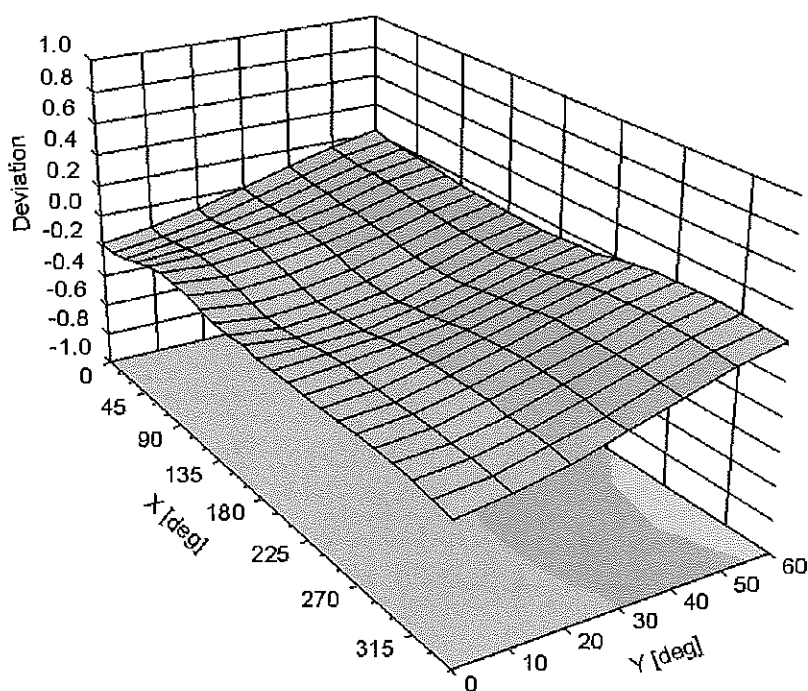

DASY/EASY - Parameters of Probe: ES3DV2 - SN:3022

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-83.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1750V2-1051_Apr13**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN: 1051**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **April 30, 2013**

✓
 LOK
 5/8/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Claudio Leubler** Name: **Claudio Leubler** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Technical Manager

Issued: April 30, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.1 $\pm$ 6 %	1.33 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.83 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.5 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.8 $\pm$ 6 %	1.50 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.55 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$50.9 \Omega + 0.3 j\Omega$
Return Loss	- 40.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.0 \Omega + 0.4 j\Omega$
Return Loss	- 30.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.222 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 19, 2010

DASY5 Validation Report for Head TSL

Date: 30.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1051

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.18, 5.18, 5.18); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (8x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.104 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 9.01 W/kg; SAR(10 g) = 4.83 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

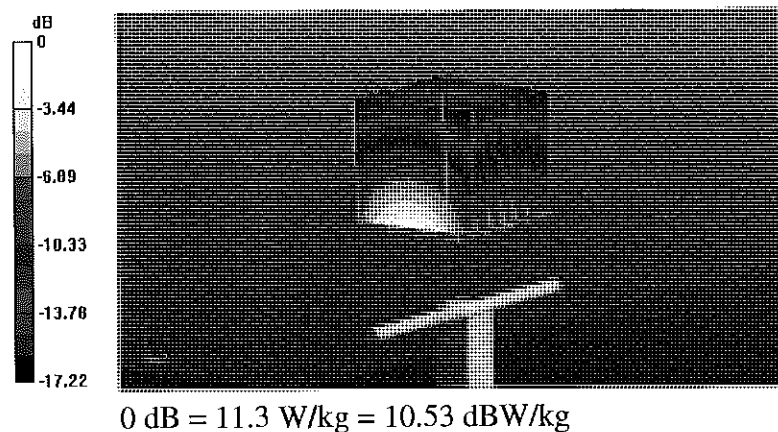


Impedance Measurement Plot for Head TSL

30 Apr 2013 12:59:57
 [CH1] S11 1 U FS 1: 50.889 Ω 0.2813 Ω 25.578 μH 1 750.000 000 MHz

*
 Del
 C Δ

Avg
 4

H1d

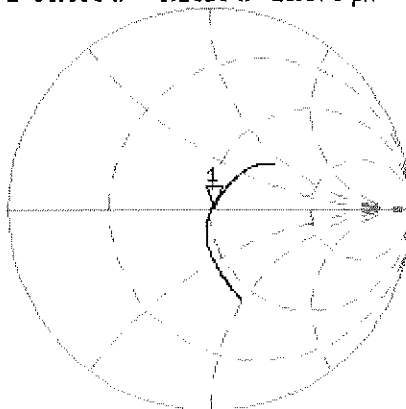


CH2 S11 LOG 5 dB/REF -20 dB 1:-40.692 dB 1 750.000 000 MHz

C Δ

Avg
 4

H1d

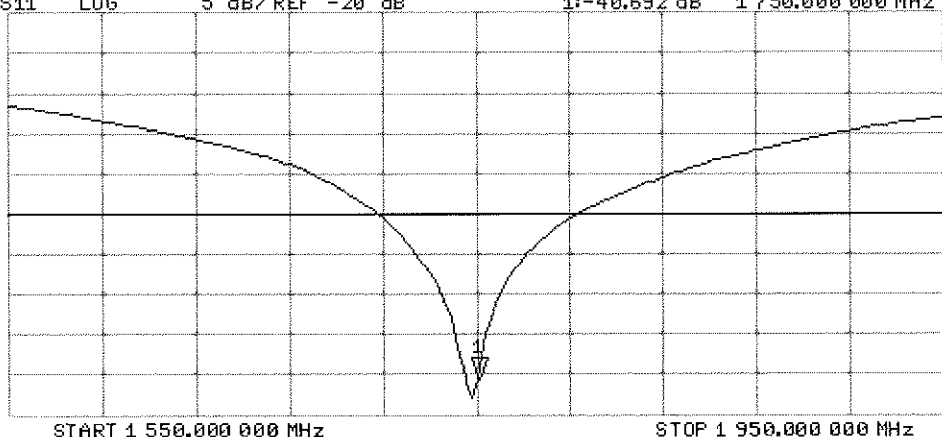

DASY5 Validation Report for Body TSL

Date: 30.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1051

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.83, 4.83, 4.83); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.473 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.55 W/kg; SAR(10 g) = 5.13 W/kg

Maximum value of SAR (measured) = 12.0 W/kg

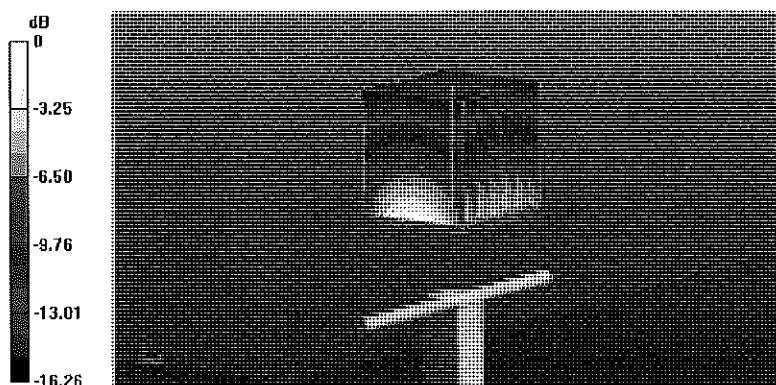


0 dB = 12.0 W/kg = 10.79 dBW/kg

Impedance Measurement Plot for Body TSL


30 Apr 2013 12:59:14
 [CH1] S11 1 U FS 1: 46.998 Ω 0.4160 Ω 37.835 pF 1 750.000 000 MHz

*
 Del
 CA
 Avg
 16
 H1d

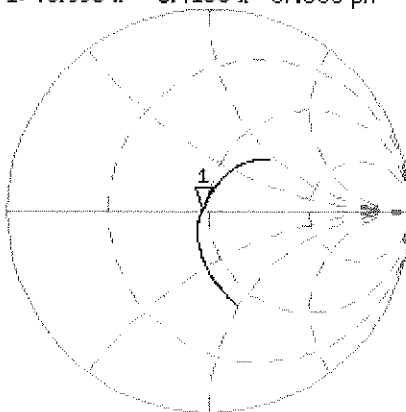

CH2 S11 LOG 5 dB/REF -20 dB 1:-30.102 dB 1 750.000 000 MHz

CA
 Avg
 16
 H1d

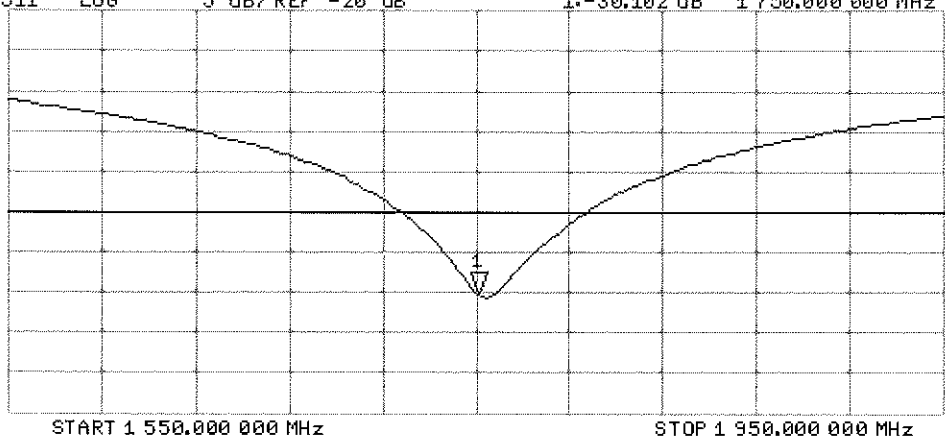



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2450V2-882_Feb13**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 882**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **February 11, 2013**

✓
KOK
2/21/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Israe El-Naouq** Name: **Israe El-Naouq** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Israe El-Naouq
Katja Pokovic

Issued: February 11, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.85 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	50.9 $\pm$ 6 %	2.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.8 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.9 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.91 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.3 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.6 Ω - 0.4 j Ω
Return Loss	- 29.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.5 Ω + 1.2 j Ω
Return Loss	- 37.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.157 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 06, 2011

DASY5 Validation Report for Head TSL

Date: 11.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 882

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.806 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.07 W/kg


Maximum value of SAR (measured) = 16.7 W/kg

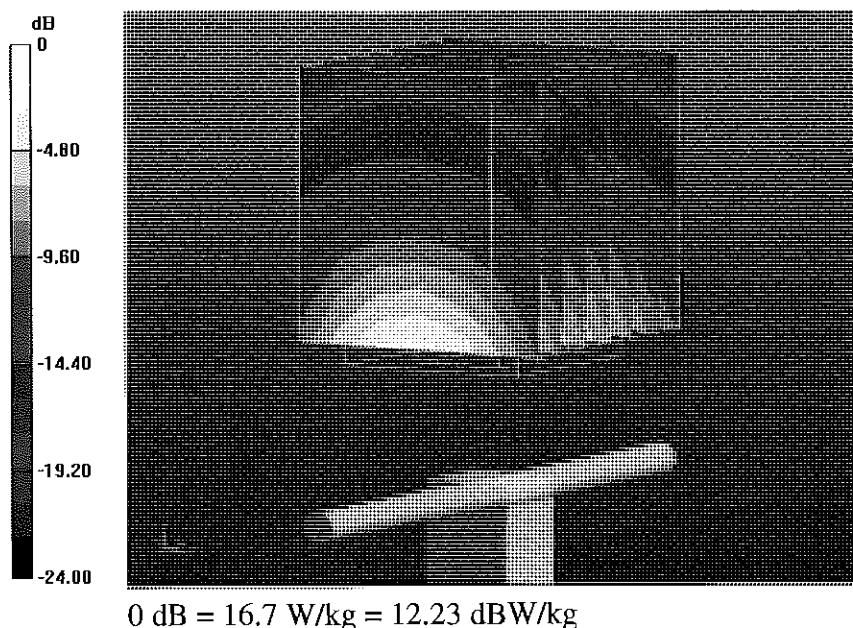

Impedance Measurement Plot for Head TSL

11 Feb 2013 11:51:51
 [CH1] S11 1 U FS 1: 53.639 Ω -363.28 m Ω 178.82 pF 2 450.000 000 MHz

*
 Del
 Cor

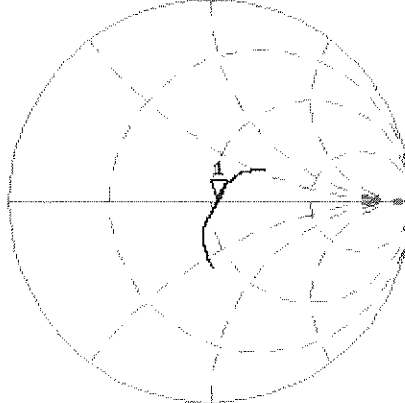


Avg
 16
 H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-29.047 dB 2 450.000 000 MHz

Cor

Avg
 16

H1d

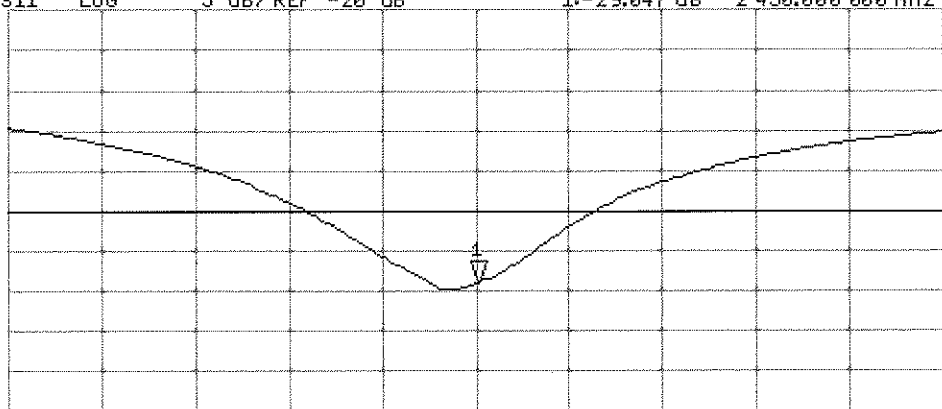

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 11.02.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 882

Communication System: CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.474 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.91 W/kg


Maximum value of SAR (measured) = 16.9 W/kg

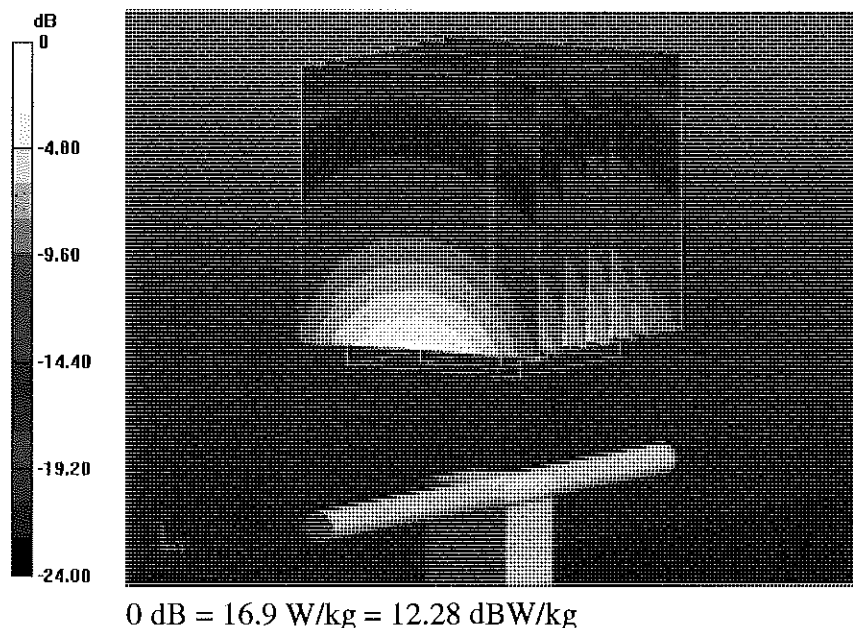

Impedance Measurement Plot for Body TSL

11 Feb 2013 11:51:25
CH1 S11 1 U FS 1: 49.500 Ω 1.2461 μ 80.948 pH 2 450.000 000 MHz

*
De1
Cor

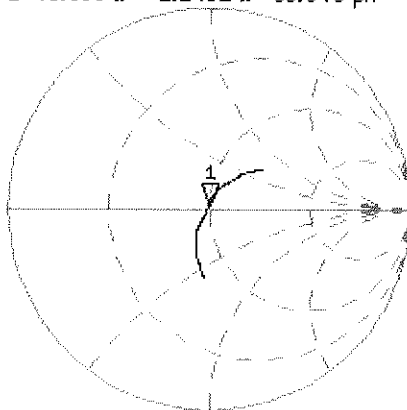

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -37.374 dB 2 450.000 000 MHz

Cor

Avg
16

H1d

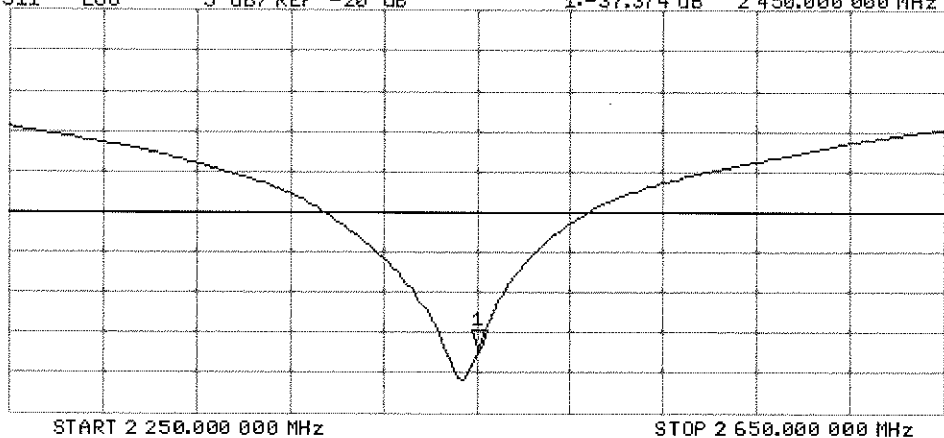

APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

Table D-I
Composition of the Tissue Equivalent Matter

Frequency (MHz)	750	835	1750	1900	2450	5200-5800
Tissue	Body	Body	Body	Body	Body	Body
Ingredients (% by weight)						
Bactericide	See Next Page	0.1				
DGBE			31	29.44	26.7	
HEC		1				
NaCl		0.94	0.2	0.39	0.1	
Sucrose		44.9				
Polysorbate (Tween) 80						20
Water		53.06	68.8	70.17	73.2	80

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 06/12/13 – 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet			APPENDIX D: Page 1 of 2

2 Composition / Information on ingredients

The Item is composed of the following ingredients:

H ₂ O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7%
Relevant for safety; Refer to the respective Safety Data Sheet*.	

Figure D-1

Composition of 750 MHz Body Tissue Equivalent Matter

Note: 750MHz liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

Measurement Certificate / Material Test

Item Name	Body Tissue Simulating Liquid (MSL750)
Product No.	SL AAM 075 AA (Charge: 111130-3)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe (type DAK).

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient Condition 22°C ; 30% humidity
TSL Temperature 22°C
Test Date 7-Dec-11

Additional Information

TSL Density 1.212 g/cm³
TSL Heat-capacity 3.006 kJ/(kg*K)

Results

f [MHz]	Measured			Target			Diff. to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma		Δ-eps	Δ-sigma
600	57.9	25.01	0.83	56.1	0.95		3.1	-12.3
625	57.6	24.66	0.86	56.0	0.95		2.9	-10.1
650	57.4	24.31	0.88	55.9	0.96		2.6	-8.0
675	57.1	24.02	0.90	55.8	0.96		2.3	-5.8
700	56.8	23.74	0.92	55.7	0.96		2.0	-3.7
725	56.6	23.50	0.95	55.6	0.96		1.7	-1.5
750	56.4	23.26	0.97	55.5	0.96		1.5	0.8
775	56.1	23.06	0.99	55.4	0.97		1.2	3.0
800	55.8	22.86	1.02	55.3	0.97		0.9	5.2
825	55.6	22.72	1.04	55.2	0.98		0.6	6.6
850	55.5	22.64	1.05	55.2	0.98		0.5	7.3
875	55.4	22.57	1.07	55.2	0.99		0.4	8.0
900	55.1	22.44	1.09	55.1	1.02		0.1	7.2
925	54.9	22.31	1.12	55.0	1.05		-0.2	6.4
950	54.7	22.20	1.14	55.0	1.08		-0.5	7.5
975	54.5	22.09	1.17	54.9	1.08		-0.9	8.5
1000	54.3	21.99	1.19	54.9	1.09		-1.2	9.7
1000	54.1	21.89	1.22	54.8	1.10		-1.4	10.9

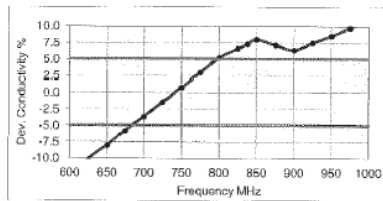
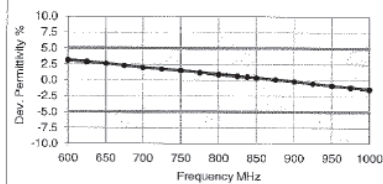


Figure D-2

750MHz Body Tissue Equivalent Matter

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 06/12/13 – 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet	APPENDIX D: Page 2 of 2		

APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB 865664 D02v01, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2003 and FCC KDB 865664 D01 v01. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table E-I
SAR System Validation Summary

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE TYPE	PROBE CAL. POINT		COND.	PERM.	CW VALIDATION			MOD. VALIDATION		
							(σ)	(ϵ_r)	SENSI- TIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
G	750	3/28/2013	3209	ES3DV3	750	Body	0.974	55.21	PASS	PASS	PASS	N/A	N/A	N/A
G	835	3/26/2013	3209	ES3DV3	835	Body	1.006	54.42	PASS	PASS	PASS	GMSK	PASS	N/A
B	1750	1/28/2013	3287	ES3DV3	1750	Body	1.524	52.77	PASS	PASS	PASS	N/A	N/A	N/A
D	1750	10/16/2012	3288	ES3DV3	1750	Body	1.524	52.04	PASS	PASS	PASS	N/A	N/A	N/A
E	1900	3/5/2013	3920	EX3DV4	1900	Body	1.574	52.42	PASS	PASS	PASS	GMSK	PASS	N/A
G	2450	3/29/2013	3209	ES3DV3	2450	Body	2.044	52.61	PASS	PASS	PASS	OFDM	N/A	PASS
A	5200	1/23/2013	3589	EX3DV4	5200	Body	5.292	47.85	PASS	PASS	PASS	OFDM	N/A	PASS
A	5300	1/23/2013	3589	EX3DV4	5300	Body	5.477	47.47	PASS	PASS	PASS	OFDM	N/A	PASS
A	5500	1/23/2013	3589	EX3DV4	5500	Body	5.729	47.03	PASS	PASS	PASS	OFDM	N/A	PASS
A	5600	1/23/2013	3589	EX3DV4	5600	Body	6.233	46.20	PASS	PASS	PASS	OFDM	N/A	PASS
A	5800	1/23/2013	3589	EX3DV4	5800	Body	6.233	46.20	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: All measurements were performed using probes calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet			APPENDIX E: Page 1 of 1

APPENDIX G: SENSOR TRIGGERING DATA SUMMARY

FCC ID: A3LSMT217T	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet	APPENDIX G: Page G1 of G4

A3LSMT217T Sensor Triggering Data Summary

Per FCC KDB Publication 616217 D04v01, this device was tested by the manufacturer to determine the proximity sensor triggering distances for the back and top edge of the device. The measured output power within ± 5 mm of the triggering points (or until touching the phantom) is included for back side and each applicable edge.

To ensure all production units are compliant it is necessary to test SAR at a distance 1mm less than the smallest distance from the device and SAR phantom (determined from these triggering tests according to the KDB 616217 D04v01) with the device at maximum output power without power reduction. These additional SAR Tests are included additionally to the SAR tests for the device touching the SAR phantom, with reduced power.

The operational description contains information explaining how this device remains compliant in the event of a sensor malfunction.

Back Side

Moving device toward the phantom:

KDB616217 6.2.6 Measured Power [dBm]											
Distance [mm]	20	19	18	17	16	15	14	13	12	11	10
WCDMA1900	22.55	22.47	22.59	22.52	22.53	15.02	14.90	14.93	14.92	15.09	15.05
WCDMA1750	22.53	22.48	22.53	22.53	22.56	12.05	12.01	11.93	11.92	11.98	12.03
WCDMA 850	22.97	22.95	22.95	23.05	22.96	18.48	18.40	18.55	18.60	18.49	18.50
LTE BAND 2	23.02	23.10	22.96	23.10	22.93	13.58	13.46	13.44	13.54	13.48	13.44
LTE BAND 4	23.03	23.05	23.02	23.02	22.98	12.55	12.48	12.50	12.53	12.46	12.46
LTE BAND 5	24.53	24.60	24.47	24.47	24.40	18.09	18.06	18.00	17.98	17.98	17.97
LTE BAND 17	24.43	24.60	24.43	24.54	24.45	17.95	18.02	18.07	17.97	18.06	18.02

Moving device away from the phantom:

KDB616217 6.2.8 Measured Power [dBm]																
Distance [mm]	26	25	20	19	18	17	16	15	14	13	12	11	10	9	8	7
WCDMA1900	22.60	22.52	22.54	22.40	22.43	22.40	22.44	15.00	15.02	15.00	14.98	15.10	15.04	15.06	14.91	14.94
WCDMA1750	22.51	22.58	22.50	22.60	22.50	22.43	22.52	11.90	12.04	11.96	11.99	12.01	12.10	11.93	11.92	12.08
WCDMA 850	22.96	23.01	22.96	23.05	22.91	23.07	22.96	18.50	18.54	18.47	18.47	18.42	18.40	18.58	18.44	18.48
LTE BAND 2	22.92	23.05	22.95	23.05	22.91	22.92	23.07	13.58	13.52	13.52	13.42	13.45	13.44	13.50	13.45	13.55
LTE BAND 4	22.57	23.04	23.05	23.10	23.05	22.53	23.01	12.45	12.47	12.57	12.45	12.50	12.60	12.43	12.52	12.52
LTE BAND 5	24.00	24.62	24.62	24.60	24.55	24.50	24.53	18.01	17.96	18.05	17.95	17.92	17.98	18.08	17.90	17.96
LTE BAND 17	24.45	24.61	24.51	24.45	24.51	24.52	24.44	18.03	17.99	17.95	18.05	18.06	17.96	18.02	17.96	18.03

Based on the most conservative measured triggering distance of 15 mm, additional SAR measurements were required at 14 mm from the back side.

FCC ID: A3LSMT217T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet			APPENDIX G: Page G2 of G4

Top Edge

Moving device toward the phantom:

KDB616217 6.2.6 Measured Power [dBm]											
Distance[mm]	20	19	18	17	16	15	14	13	12	11	10
WCDMA1900	22.44	22.51	22.60	22.48	22.57	14.98	15.06	14.99	14.98	14.92	15.10
WCDMA1750	22.57	22.50	22.47	22.47	22.54	12.02	11.90	12.06	12.10	12.00	12.04
WCDMA 850	22.95	23.05	23.03	23.09	23.01	18.45	18.42	18.50	18.40	18.47	18.48
LTE BAND 2	22.92	22.93	22.99	23.06	23.05	13.45	13.58	13.47	13.40	13.57	13.51
LTE BAND 4	23.08	22.98	23.10	23.10	22.99	12.52	12.53	12.53	12.57	12.52	12.43
LTE BAND 5	24.43	24.53	24.55	24.51	24.57	17.92	17.91	18.03	18.02	18.09	18.09
LTE BAND 17	24.60	24.52	24.53	24.44	24.80	17.97	17.96	18.06	18.08	18.02	18.08

Moving device away from the phantom:

KDB616217 6.2 Measured Power [dBm]																	
Distance[mm]	26	23	20	19	18	17	16	15	14	13	12	11	10	7	4	1	0
WCDMA1900	22.50	22.59	22.49	22.54	22.47	22.42	22.43	14.96	14.90	15.09	15.04	15.09	15.02	14.98	15.00	14.98	14.97
WCDMA1750	22.57	22.59	22.41	22.44	22.60	22.57	22.55	11.97	11.90	11.98	12.09	12.01	12.08	12.09	12.09	11.90	11.92
WCDMA 850	23.00	22.93	23.04	23.10	22.95	23.07	22.95	18.45	18.49	18.53	18.55	18.46	18.51	18.50	18.50	18.54	18.44
LTE BAND 2	22.97	23.03	23.09	23.00	22.90	22.93	22.96	13.48	13.45	13.42	13.55	13.40	13.47	13.50	13.42	13.40	13.57
LTE BAND 4	23.08	23.07	23.07	23.07	23.04	22.98	23.00	12.57	12.49	12.42	12.57	12.44	12.49	12.50	12.55	12.58	12.48
LTE BAND 5	24.49	24.42	24.40	24.57	24.59	24.59	24.58	17.97	18.08	17.96	17.95	17.95	18.07	17.96	18.06	18.07	17.92
LTE BAND 17	24.51	24.57	24.56	24.40	24.44	24.41	24.61	18.00	17.99	18.10	18.09	17.86	18.07	17.86	17.90	17.93	18.02

Based on the most conservative measured triggering distance of 15 mm, additional SAR measurements were required at 14 mm from the top edge.

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet			APPENDIX G: Page G3 of G4

Left Edge

Moving device toward the phantom:

KDB616217 6.2.6											
Measured Power [dBm]											
Distance[mm]	10	9	8	7	6	5	4	3	2	1	0
WCDMA1900	22.45	22.47	22.43	22.60	22.44	15.00	15.08	15.09	15.06	14.97	15.03
WCDMA1750	22.59	22.58	22.47	22.44	22.40	12.06	12.01	12.02	11.94	12.07	11.94
WCDMA 850	22.94	23.08	22.96	22.95	23.06	18.58	18.41	18.58	18.55	18.60	18.57
LTE BAND 2	22.93	23.08	22.97	22.94	22.93	13.60	13.51	13.55	13.44	13.51	13.51
LTE BAND 4	22.98	22.96	22.92	22.97	22.92	12.60	12.52	12.46	12.57	12.54	12.52
LTE BAND 5	24.55	24.54	24.45	24.60	24.52	17.95	18.00	18.03	18.06	17.91	18.05
LTE BAND 17	24.51	24.42	24.59	24.60	24.53	18.00	17.90	17.90	17.98	17.90	18.07

Moving device away from the phantom:

KDB16217 6.2.8													
Measured Power [dBm]													
Distance[mm]	16	13	10	9	8	7	6	5	4	3	2	1	0
WCDMA1900	22.48	22.58	22.57	22.50	22.41	22.41	22.53	15.05	14.98	15.06	14.96	14.95	15.03
WCDMA1750	22.60	22.42	22.47	22.44	22.47	22.41	22.40	12.09	12.07	12.00	11.99	11.95	12.00
WCDMA 850	22.96	23.01	22.99	23.01	22.90	23.02	23.00	18.60	18.60	18.58	18.42	18.43	18.60
LTE BAND 2	23.03	22.90	22.99	22.95	22.94	22.92	23.07	13.48	13.42	13.50	13.49	13.40	13.50
LTE BAND 4	22.96	23.02	22.94	23.03	23.00	23.01	22.98	12.57	12.50	12.44	12.49	12.58	12.42
LTE BAND 5	24.58	24.54	24.50	24.50	24.60	24.56	24.42	17.93	17.96	17.95	18.10	18.06	17.95
LTE BAND 17	24.52	24.51	24.59	24.55	24.40	24.47	24.59	18.08	18.00	18.09	18.08	18.00	18.06

Based on the most conservative measured triggering distance of 5 mm, additional SAR measurements were required at 4 mm from the left edge.

FCC ID: A3LSMT217T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 06/12/13 - 06/17/13; 10/16/13-10/21/13	DUT Type: Portable Tablet			APPENDIX G: Page G4 of G4