



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics, Co. Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:

06/11/2014 - 07/01/2014

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

OY1406111216.A3L

FCC ID:

A3LSMT707V

APPLICANT:

SAMSUNG ELECTRONICS, CO. LTD.

DUT Type:

Portable Tablet

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-T707V

Equipment Class	Band & Mode	Tx Frequency	SAR
			1 gm Body (W/kg)
PCB	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	1.09
PCB	UMTS 850	826.40 - 846.60 MHz	1.03
PCB	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	1.09
PCB	UMTS 1900	1852.4 - 1907.6 MHz	1.05
PCB	LTE Band 13	782 MHz	0.97
PCB	LTE Band 4 (AWS)	1712.5 - 1752.5 MHz	1.04
PCB	LTE Band 2 (PCS)	1852.5 - 1907.5 MHz	1.08
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.62
DTS	5.8 GHz WLAN	5745 - 5825 MHz	0.51
DTS	Bluetooth LE	2402 - 2480 MHz	N/A
NII	5.2 GHz WLAN	5180 - 5240 MHz	1.02
NII	5.3 GHz WLAN	5260 - 5320 MHz	1.07
NII	5.5 GHz WLAN	5500 - 5700 MHz	0.87
DSS	Bluetooth	2402 - 2480 MHz	0.15
Simultaneous SAR per KDB 690783 D01v01r02:			1.59

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 1 of 96

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	8
3	INTRODUCTION	9
4	DOSIMETRIC ASSESSMENT	10
5	SAR TESTING PROCEDURES	11
6	RF EXPOSURE LIMITS	12
7	FCC MEASUREMENT PROCEDURES.....	13
8	RF CONDUCTED POWERS	17
9	SYSTEM VERIFICATION.....	46
10	SAR DATA SUMMARY	48
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	53
12	SAR MEASUREMENT VARIABILITY	90
13	EQUIPMENT LIST	91
14	MEASUREMENT UNCERTAINTIES	92
15	CONCLUSION.....	94
16	REFERENCES	95
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: SENSOR TRIGGERING DATA SUMMARY		

FCC ID: A3LSMT707V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 2 of 96	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Data	824.20 - 848.80 MHz
UMTS 850	Data	826.40 - 846.60 MHz
GSM/GPRS/EDGE 1900	Data	1850.20 - 1909.80 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 13	Data	782 MHz
LTE Band 4 (AWS)	Data	1712.5 - 1752.5 MHz
LTE Band 2 (PCS)	Data	1852.5 - 1907.5 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
5.8 GHz WLAN	Data	5745 - 5825 MHz
Bluetooth LE	Data	2402 - 2480 MHz
5.2 GHz WLAN	Data	5180 - 5240 MHz
5.3 GHz WLAN	Data	5260 - 5320 MHz
5.5 GHz WLAN	Data	5500 - 5700 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses a sensor for SAR compliance. The sensor is activated when used in close proximity to the user's body. The sensor triggers power reduction for data modes and is only applicable for tablet operations.

Since the device is a full tablet size, the Body SAR was evaluated per FCC KDB Publication 616217 D04v01 for full sized tablets.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

Maximum Power:

Mode / Band		Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.5	31.5	30.0	28.5	27.5	26.0	24.5	23.5
	Nominal	33.0	31.0	29.5	28.0	27.0	25.5	24.0	23.0
GSM/GPRS/EDGE 1900	Maximum	30.5	29.5	27.5	26.5	26.5	25.5	23.5	22.5
	Nominal	30.0	29.0	27.0	26.0	26.0	25.0	23.0	22.0

Mode / Band		Modulated Average (dBm)		
		3GPP RMC Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6
UMTS Band 5 (850 MHz)	Maximum	23.5	23.5	23.0
	Nominal	23.0	23.0	22.5
UMTS Band 2 (1900 MHz)	Maximum	23.5	23.5	23.0
	Nominal	23.0	23.0	22.5

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 3 of 96

Mode / Band		Modulated Average (dBm)
LTE Band 13	Maximum	23.5
	Nominal	23.0
LTE Band 4 (AWS)	Maximum	23.5
	Nominal	23.0
LTE Band 2 (PCS)	Maximum	23.5
	Nominal	23.0
Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz) - SISO	Maximum	12.5
	Nominal	12.0
IEEE 802.11g (2.4 GHz) - SISO	Maximum	11.5
	Nominal	11.0
IEEE 802.11n (2.4 GHz) - SISO	Maximum	10.5
	Nominal	10.0
IEEE 802.11n (2.4 GHz) - MIMO	Maximum	12.5
	Nominal	12.0
IEEE 802.11a/n/ac (5 GHz) - SISO	Maximum	8.0
	Nominal	7.5
IEEE 802.11a/n/ac (5 GHz) - MIMO	Maximum	8.5
	Nominal	8.0
Bluetooth	Maximum	11.0
	Nominal	10.5
Bluetooth LE	Maximum	8.0
	Nominal	7.5

Reduced Power – Body at 0 mm:


Mode / Band		Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	27.5	24.5	23.0	21.5	23.0	22.0	21.0	20.0
	Nominal	27.0	24.0	22.5	21.0	22.5	21.5	20.5	19.5
GSM/GPRS/EDGE 1900	Maximum	21.0	19.5	18.0	16.5	19.0	18.0	17.0	16.5
	Nominal	20.5	19.0	17.5	16.0	18.5	17.5	16.5	16.0

Mode / Band		Modulated Average (dBm)		
		3GPP RMC Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6
UMTS Band 5 (850 MHz)	Maximum	19.5	18.5	18.0
	Nominal	19.0	18.0	17.5
UMTS Band 2 (1900 MHz)	Maximum	12.0	10.5	10.5
	Nominal	11.5	10.0	10.0

Mode / Band		Modulated Average (dBm)
LTE Band 13	Maximum	20.0
	Nominal	19.5
LTE Band 4 (AWS)	Maximum	11.5
	Nominal	11.0
LTE Band 2 (PCS)	Maximum	12.5
	Nominal	12.0

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 4 of 96

1.4 DUT Antenna Locations

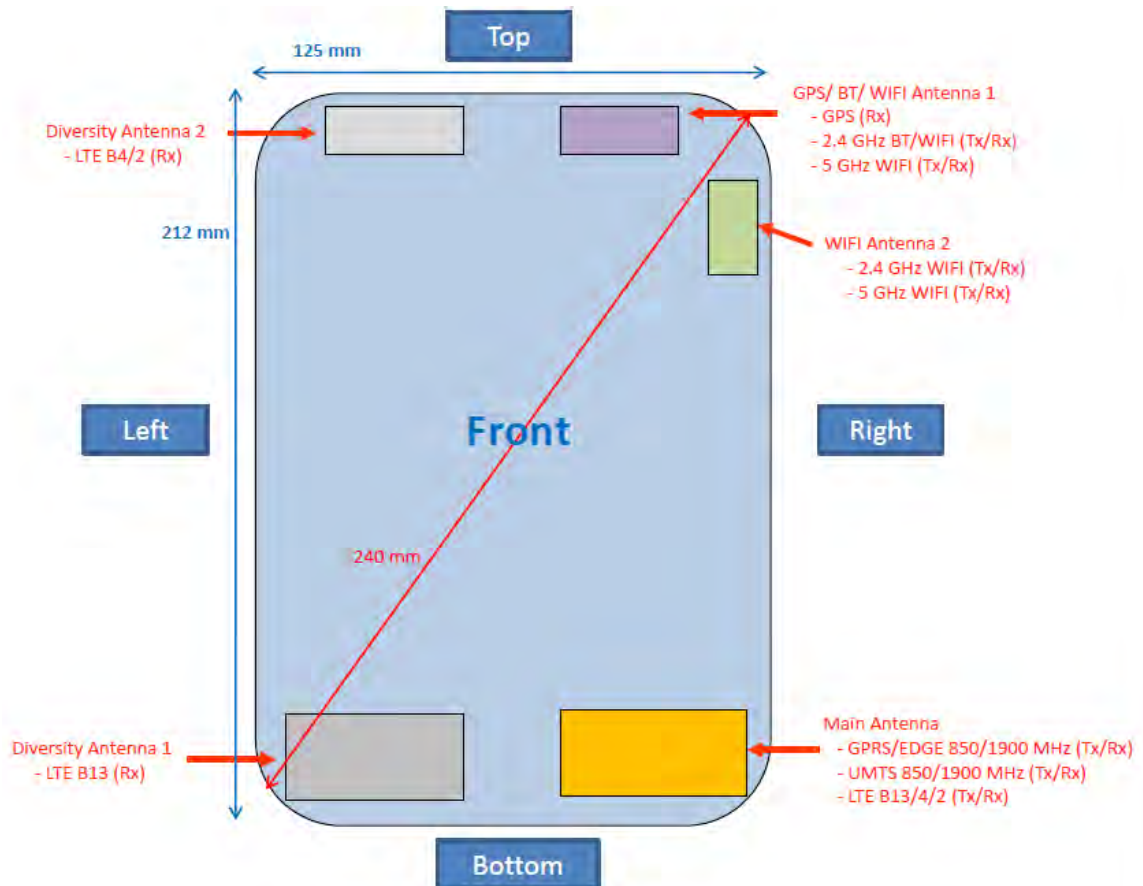

Note: Exact antenna dimensions and separation distances are shown in the Technical Descriptions.

Figure 1-1
DUT Antenna Locations

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-2 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-2
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

FCC ID: A3LSMT707V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 5 of 96

Table 1-1
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	UMTS + 2.4 GHz WI-FI	Yes
2	UMTS + 5 GHz WI-FI	Yes
3	UMTS + 2.4 GHz Bluetooth	Yes
4	LTE + 2.4 GHz WI-FI	Yes
5	LTE + 5 GHz WI-FI	Yes
6	LTE + 2.4 GHz Bluetooth	Yes
7	GPRS/EDGE + 2.4 GHz WI-FI	Yes
8	GPRS/EDGE + 5 GHz WI-FI	Yes
9	GPRS/EDGE + 2.4 GHz Bluetooth	Yes

1. Bluetooth, 2.4 GHz, and 5 GHz share the same antenna path and cannot transmit simultaneously.
2. GPRS/EDGE, UMTS and LTE share the same antenna path and cannot transmit simultaneously.
3. This device supports 2x2 MIMO Tx for WLAN 802.11n/ac. Each WLAN antenna can transmit independently or together when operating with MIMO.

1.6 SAR Test Exclusions Applied

(A) WIFI/BT

Per FCC KDB 447498 D01v05, the SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth LE (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth LE SAR was not required; $[(6/5) * \sqrt{2.440}] = 1.9 < 3.0$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of SISO 5 GHz WLAN (rounded to the nearest mW) and the antenna to user separation distance, SISO 5 GHz WLAN SAR was not required; $[(6/5) * \sqrt{5.825}] = 2.9 < 3.0$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) No new 5 GHz channels

FCC ID: A3LSMT707V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 6 of 96	

(B) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v02.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02.

1.7 Guidance Applied

- FCC KDB Publication 941225 D01-D05 (2G/3G/4G)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05 (General SAR Guidance)
- FCC KDB Publication 865664 D01-D02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01 (Tablet SAR Consideration)
- October 2013 TBC Workshop Notes (GPRS Considerations)

1.8 Device Serial Numbers

Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Maximum Power S/N	Reduced Power S/N
GSM/GPRS/EDGE 850	707V-1	707V-13
UMTS 850	707V-2	707V-12
GSM/GPRS/EDGE 1900	707V-1	707V-13
UMTS 1900	707V-2	707V-12
LTE Band 13	707V-3	707V-11
LTE Band 4 (AWS)	707V-4	707V-9
LTE Band 2 (PCS)	707V-5	707V-10
2.4 GHz WLAN	707V-6	-
5 GHz WLAN	707V-6	-
Bluetooth	707V-6	-

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 7 of 96

2

LTE INFORMATION

LTE Information			
FCC ID	A3LSMT707V		
Form Factor	Portable Tablet		
Frequency Range of each LTE transmission band	LTE Band 13 (782 MHz)		
	LTE Band 4 (AWS) (1712.5 - 1752.5 MHz)		
	LTE Band 2 (PCS) (1852.5 - 1907.5 MHz)		
Channel Bandwidths	LTE Band 13: 10 MHz		
	LTE Band 4 (AWS): 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 13: 10 MHz	782 (23230)	782 (23230)	782 (23230)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
UE Category	3		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 8 of 96

3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m^3)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 9 of 96

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMT707V		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet			Page 10 of 96

5 SAR TESTING PROCEDURES

5.1 SAR Testing for Tablet per FCC KDB Publication 616217 D04v01

Due to its size this device can be used in full sized tablet exposure conditions. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v05 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

5.2 Additional Test Positions due to Sensor Considerations

This device uses a sensor to reduce data powers in tablet-device use conditions.

When the sensor detects a user is touching the device on or near to the antenna the device reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

FCC KDB 616217 D04 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional exposure conditions. Since the sensor activation distance for the back side of the device is 15 mm, a conservative distance of 14 mm was tested for SAR on the back side at maximum power. Since the sensor activation distance for the bottom edge of the device is 13 mm, a conservative distance of 12 mm was tested for SAR on the bottom edge at maximum power. Since the sensor activation distance for the right edge of the device is 17 mm, a conservative distance of 16 mm was tested for SAR on the right edge at maximum power. Sensor triggering distance summary data is included in Appendix G. The sensor does not trigger power reduction from the front of the device.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antenna.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 11 of 96

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 12 of 96

7 FCC MEASUREMENT PROCEDURES

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

7.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

7.3 SAR Measurement Conditions for UMTS

7.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

7.3.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

7.3.3 Procedures Used to Establish RF Signal for SAR HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. Body exposure conditions are typically applicable to these devices, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with UMTS and requires an active DPCCH. The default test configuration is to measure SAR in UMTS without HSDPA, with an established radio link between the DUT and a communication test set with 12.2

FCC ID: A3LSMT707V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 13 of 96

kbps RMC mode configured in Test Loop Mode 1; and tested with HSDPA with FRC and a 12.2 kbps RMC using the highest SAR configuration in UMTS. SAR is selectively confirmed for other physical channel configurations according to output power, exposure conditions and device operating capabilities. Maximum output power is verified according to 3GPP TS 23.121 (Release 5) and SAR must be measured according to these maximum output conditions.

Sub-Test	β_c	β_a	β_a (SF)	β_c/β_a	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{hs} = 30/15$) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ ($A_{hs} = 24/15$) with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_a = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Figure 7-1
Table C.10.1.4 of TS 234.121-1

7.3.4 SAR Measurement Conditions for HSPA Data Devices

SAR for body exposure configurations are measured according to the 'Body SAR Measurements' procedures in the 'WCDMA Handsets' section of the KDB 941225 D01 FCC 3G document. In addition, Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher of that measured without HSPA in 12.2 kbps RMC mode or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and EDCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of the FCC 3G document.

Sub-test	β_c	β_a	β_a (SF)	β_c/β_a	$\beta_{hs}^{(1)}$	β_{hs}	β_{sd}	β_{sd} (SF)	β_{sd} (codes)	CM ⁽²⁾ (dB)	MPR ⁽³⁾ (dB)	AG ⁽⁴⁾ Index	E-TFCl
1	11/15 ⁽⁵⁾	15/15 ⁽⁵⁾	64	11/15 ⁽⁵⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{hs} = 47/15$ $\beta_{sd} = 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁶⁾	15/15 ⁽⁶⁾	64	15/15 ⁽⁶⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_a = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_a ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_a = 15/15$.

Note 4: For subtest 5 the β_c/β_a ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_a = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{sd} can not be set directly; it is set by Absolute Grant Value.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 14 of 96

7.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

7.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

7.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r01:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

FCC ID: A3LSMT707V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 15 of 96

7.5 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n/ac transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

7.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

7.5.2 Frequency Channel Configurations [24]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these “required channels” were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was higher than 0.25 dB or more than the 802.11a mode.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg and if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

7.5.3 MIMO SAR Considerations

Per KDB 248227, SAR for MIMO was measured with both transmitting simultaneously and was evaluated independently of SISO operation. For 2.4 GHz and 5 GHz MIMO, 802.11n was evaluated.

FCC ID: A3LSMT707V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 16 of 96

8 RF CONDUCTED POWERS

8.1 GSM Conducted Powers

Table 8-1
Maximum GPRS/ EDGE Average RF Conducted Powers

		Maximum Burst-Averaged Output Power							
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.50	31.50	29.91	28.20	26.70	26.00	24.50	23.44
	190	33.48	31.23	29.77	28.12	26.51	25.87	24.38	23.25
	251	33.40	31.05	29.58	28.11	26.41	25.73	24.33	23.22
GSM 1900	512	30.21	29.34	27.34	26.31	25.59	25.44	23.43	22.40
	661	30.37	29.45	27.42	26.37	25.63	25.35	23.40	22.43
	810	30.48	29.50	27.50	26.45	25.74	25.37	23.36	22.35
		Calculated Maximum Frame-Averaged Output Power							
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.47	25.48	25.65	25.19	17.67	19.98	20.24	20.43
	190	24.45	25.21	25.51	25.11	17.48	19.85	20.12	20.24
	251	24.37	25.03	25.32	25.10	17.38	19.71	20.07	20.21
GSM 1900	512	21.18	23.32	23.08	23.30	16.56	19.42	19.17	19.39
	661	21.34	23.43	23.16	23.36	16.60	19.33	19.14	19.42
	810	21.45	23.48	23.24	23.44	16.71	19.35	19.10	19.34
GSM 850	Frame Avg. Targets:	23.97	24.98	25.24	24.99	17.97	19.48	19.74	19.99
GSM 1900		20.97	22.98	22.74	22.99	16.97	18.98	18.74	18.99

Table 8-2
Reduced GPRS/ EDGE Average RF Conducted Powers

		Maximum Burst-Averaged Output Power							
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	27.48	24.45	22.93	21.41	22.85	21.74	20.83	19.98
	190	27.39	24.29	22.83	21.23	22.68	21.72	20.78	19.57
	251	27.20	24.17	22.65	21.20	22.50	21.25	20.31	19.44
GSM 1900	512	20.68	18.79	17.27	15.40	18.56	17.06	15.93	14.98
	661	20.76	19.08	17.52	15.66	18.60	17.50	16.12	15.10
	810	21.00	19.46	17.93	16.12	18.80	17.60	16.50	15.50
		Calculated Maximum Frame-Averaged Output Power							
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	18.45	18.43	18.67	18.40	13.82	15.72	16.57	16.97
	190	18.36	18.27	18.57	18.22	13.65	15.70	16.52	16.56
	251	18.17	18.15	18.39	18.19	13.47	15.23	16.05	16.43
GSM 1900	512	11.65	12.77	13.01	12.39	9.53	11.04	11.67	11.97
	661	11.73	13.06	13.26	12.65	9.57	11.48	11.86	12.09
	810	11.97	13.44	13.67	13.11	9.77	11.58	12.24	12.49
GSM 850	Frame Avg. Targets:	17.97	17.98	18.24	17.99	13.47	15.48	16.24	16.49
GSM 1900		11.47	12.98	13.24	12.99	9.47	11.48	12.24	12.99

Notes:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- October 2013 TCB Workshop Notes, the source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for body SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: C
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 8-1
Power Measurement Setup

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 18 of 96	

8.2 UMTS Conducted Powers

Maximum Power:

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.14	22.99	22.92	23.26	23.35	23.34	-
6	HSDPA	Subtest 1	22.72	22.69	22.49	23.04	23.16	23.12	0
6		Subtest 2	23.10	22.96	22.88	23.12	22.96	22.93	0
6		Subtest 3	22.32	22.30	22.18	22.70	22.69	22.66	0.5
6		Subtest 4	22.72	22.64	22.90	22.76	23.17	22.24	0.5
6	HSUPA	Subtest 1	22.65	22.49	22.61	22.54	22.52	22.62	0
6		Subtest 2	21.70	21.43	21.55	21.90	21.78	21.93	2
6		Subtest 3	21.88	21.80	21.56	22.10	22.01	22.22	1
6		Subtest 4	21.85	22.12	21.52	22.54	22.48	22.25	2
6		Subtest 5	21.92	21.96	22.35	22.72	22.91	22.17	0

Reduced Power - Body at 0mm:

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	19.22	19.38	19.13	10.96	12.00	11.93	-
6	HSDPA	Subtest 1	17.95	18.32	18.02	9.71	10.40	10.33	0
6		Subtest 2	18.21	18.38	18.07	9.76	10.43	10.36	0
6		Subtest 3	17.70	17.99	17.55	9.25	9.95	9.88	0.5
6		Subtest 4	17.61	17.91	17.65	9.26	9.97	9.93	0.5
6	HSUPA	Subtest 1	17.58	17.51	17.96	9.26	10.30	10.37	0
6		Subtest 2	16.52	17.07	16.86	8.23	8.53	9.01	2
6		Subtest 3	16.91	16.83	17.05	8.48	9.34	9.47	1
6		Subtest 4	16.58	16.54	16.32	8.19	9.23	8.80	2
6		Subtest 5	17.65	17.54	18.00	9.21	10.31	10.41	0

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 1 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



Figure 8-2
Power Measurement Setup

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 19 of 96

8.3 LTE Conducted Powers

8.3.1 LTE Band 13 Maximum Power

Table 8-3
LTE Band 13 Conducted Powers – 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	782.0	23230	10	QPSK	1	0	22.64	0	0
	782.0	23230	10	QPSK	1	25	23.50	0	0
	782.0	23230	10	QPSK	1	49	23.43	0	0
	782.0	23230	10	QPSK	25	0	22.50	0-1	1
	782.0	23230	10	QPSK	25	12	22.43	0-1	1
	782.0	23230	10	QPSK	25	25	22.43	0-1	1
	782.0	23230	10	QPSK	50	0	22.37	0-1	1
	782.0	23230	10	16QAM	1	0	21.65	0-1	1
	782.0	23230	10	16QAM	1	25	22.49	0-1	1
	782.0	23230	10	16QAM	1	49	22.43	0-1	1
	782.0	23230	10	16QAM	25	0	21.37	0-2	2
	782.0	23230	10	16QAM	25	12	21.43	0-2	2
	782.0	23230	10	16QAM	25	25	21.50	0-2	2
	782.0	23230	10	16QAM	50	0	21.27	0-2	2

8.3.2 LTE Band 13 Reduced Power - Body at 0mm

Table 8-4
LTE Band 13 Conducted Powers – 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	782.0	23230	10	QPSK	1	0	19.84	0	0
	782.0	23230	10	QPSK	1	25	20.00	0	0
	782.0	23230	10	QPSK	1	49	19.99	0	0
	782.0	23230	10	QPSK	25	0	19.98	0-1	0
	782.0	23230	10	QPSK	25	12	20.00	0-1	0
	782.0	23230	10	QPSK	25	25	19.97	0-1	0
	782.0	23230	10	QPSK	50	0	19.88	0-1	0
	782.0	23230	10	16QAM	1	0	19.99	0-1	0
	782.0	23230	10	16QAM	1	25	19.97	0-1	0
	782.0	23230	10	16QAM	1	49	20.00	0-1	0
	782.0	23230	10	16QAM	25	0	19.87	0-2	0
	782.0	23230	10	16QAM	25	12	20.00	0-2	0
	782.0	23230	10	16QAM	25	25	19.97	0-2	0
	782.0	23230	10	16QAM	50	0	19.94	0-2	0

8.3.3 LTE Band 4 Maximum Power

Table 8-5
LTE Band 4 Conducted Powers – 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	23.43	0	0
	1732.5	20175	20	QPSK	1	50	23.45	0	0
	1732.5	20175	20	QPSK	1	99	23.46	0	0
	1732.5	20175	20	QPSK	50	0	22.27	0-1	1
	1732.5	20175	20	QPSK	50	25	22.30	0-1	1
	1732.5	20175	20	QPSK	50	50	22.31	0-1	1
	1732.5	20175	20	QPSK	100	0	22.27	0-1	1
	1732.5	20175	20	16QAM	1	0	22.42	0-1	1
	1732.5	20175	20	16QAM	1	50	22.39	0-1	1
	1732.5	20175	20	16QAM	1	99	22.29	0-1	1
	1732.5	20175	20	16QAM	50	0	21.30	0-2	2
	1732.5	20175	20	16QAM	50	25	21.26	0-2	2
	1732.5	20175	20	16QAM	50	50	21.26	0-2	2
	1732.5	20175	20	16QAM	100	0	21.30	0-2	2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 21 of 96

Table 8-6
LTE Band 4 Conducted Powers – 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	23.49	0	0
	1717.5	20025	15	QPSK	1	36	23.39	0	0
	1717.5	20025	15	QPSK	1	74	23.42	0	0
	1717.5	20025	15	QPSK	36	0	22.32	0-1	1
	1717.5	20025	15	QPSK	36	18	22.19	0-1	1
	1717.5	20025	15	QPSK	36	37	22.34	0-1	1
	1717.5	20025	15	QPSK	75	0	21.98	0-1	1
	1717.5	20025	15	16QAM	1	0	22.17	0-1	1
	1717.5	20025	15	16QAM	1	36	22.28	0-1	1
	1717.5	20025	15	16QAM	1	74	22.34	0-1	1
	1717.5	20025	15	16QAM	36	0	21.16	0-2	2
	1717.5	20025	15	16QAM	36	18	21.06	0-2	2
Mid	1717.5	20025	15	16QAM	36	37	21.31	0-2	2
	1717.5	20025	15	16QAM	75	0	21.05	0-2	2
	1732.5	20175	15	QPSK	1	0	23.49	0	0
	1732.5	20175	15	QPSK	1	36	23.48	0	0
	1732.5	20175	15	QPSK	1	74	23.42	0	0
	1732.5	20175	15	QPSK	36	0	22.34	0-1	1
	1732.5	20175	15	QPSK	36	18	22.21	0-1	1
	1732.5	20175	15	QPSK	36	37	22.35	0-1	1
	1732.5	20175	15	QPSK	75	0	22.03	0-1	1
	1732.5	20175	15	16QAM	1	0	22.24	0-1	1
	1732.5	20175	15	16QAM	1	36	22.33	0-1	1
	1732.5	20175	15	16QAM	1	74	22.43	0-1	1
High	1732.5	20175	15	16QAM	36	0	21.25	0-2	2
	1732.5	20175	15	16QAM	36	18	21.15	0-2	2
	1732.5	20175	15	16QAM	36	37	21.35	0-2	2
	1732.5	20175	15	16QAM	75	0	21.11	0-2	2
	1747.5	20325	15	QPSK	1	0	23.44	0	0
	1747.5	20325	15	QPSK	1	36	23.44	0	0
	1747.5	20325	15	QPSK	1	74	23.39	0	0
	1747.5	20325	15	QPSK	36	0	22.26	0-1	1
	1747.5	20325	15	QPSK	36	18	22.21	0-1	1
	1747.5	20325	15	QPSK	36	37	22.25	0-1	1
	1747.5	20325	15	QPSK	75	0	22.03	0-1	1
	1747.5	20325	15	16QAM	1	0	22.22	0-1	1
	1747.5	20325	15	16QAM	1	36	22.29	0-1	1
	1747.5	20325	15	16QAM	1	74	22.34	0-1	1
	1747.5	20325	15	16QAM	36	0	21.18	0-2	2
	1747.5	20325	15	16QAM	36	18	21.11	0-2	2
	1747.5	20325	15	16QAM	36	37	21.33	0-2	2
	1747.5	20325	15	16QAM	75	0	21.04	0-2	2

Table 8-7
LTE Band 4 Conducted Powers – 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	23.40	0	0
	1715	20000	10	QPSK	1	25	23.49	0	0
	1715	20000	10	QPSK	1	49	23.41	0	0
	1715	20000	10	QPSK	25	0	22.33	0-1	1
	1715	20000	10	QPSK	25	12	22.19	0-1	1
	1715	20000	10	QPSK	25	25	22.24	0-1	1
	1715	20000	10	QPSK	50	0	22.01	0-1	1
	1715	20000	10	16QAM	1	0	22.19	0-1	1
	1715	20000	10	16QAM	1	25	22.26	0-1	1
	1715	20000	10	16QAM	1	49	22.34	0-1	1
	1715	20000	10	16QAM	25	0	21.18	0-2	2
	1715	20000	10	16QAM	25	12	21.02	0-2	2
Mid	1715	20000	10	16QAM	25	25	21.39	0-2	2
	1715	20000	10	16QAM	50	0	21.01	0-2	2
	1732.5	20175	10	QPSK	1	0	23.29	0	0
	1732.5	20175	10	QPSK	1	25	23.17	0	0
	1732.5	20175	10	QPSK	1	49	23.32	0	0
	1732.5	20175	10	QPSK	25	0	22.14	0-1	1
	1732.5	20175	10	QPSK	25	12	22.27	0-1	1
	1732.5	20175	10	QPSK	25	25	22.39	0-1	1
	1732.5	20175	10	QPSK	50	0	22.08	0-1	1
	1732.5	20175	10	16QAM	1	0	22.41	0-1	1
	1732.5	20175	10	16QAM	1	25	22.46	0-1	1
	1732.5	20175	10	16QAM	1	49	22.38	0-1	1
	1732.5	20175	10	16QAM	25	0	21.38	0-2	2
	1732.5	20175	10	16QAM	25	12	21.33	0-2	2
High	1732.5	20175	10	16QAM	25	25	21.44	0-2	2
	1732.5	20175	10	16QAM	50	0	21.21	0-2	2
	1750	20350	10	QPSK	1	0	23.43	0	0
	1750	20350	10	QPSK	1	25	23.34	0	0
	1750	20350	10	QPSK	1	49	23.45	0	0
	1750	20350	10	QPSK	25	0	22.17	0-1	1
	1750	20350	10	QPSK	25	12	22.22	0-1	1
	1750	20350	10	QPSK	25	25	22.19	0-1	1
	1750	20350	10	QPSK	50	0	22.12	0-1	1
	1750	20350	10	16QAM	1	0	22.29	0-1	1
	1750	20350	10	16QAM	1	25	22.33	0-1	1
	1750	20350	10	16QAM	1	49	22.43	0-1	1
	1750	20350	10	16QAM	25	0	21.22	0-2	2
	1750	20350	10	16QAM	25	12	21.19	0-2	2
	1750	20350	10	16QAM	25	25	21.36	0-2	2
	1750	20350	10	16QAM	50	0	21.07	0-2	2

Table 8-8
LTE Band 4 Conducted Powers – 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	23.41	0	0
	1712.5	19975	5	QPSK	1	12	23.36	0	0
	1712.5	19975	5	QPSK	1	24	23.41	0	0
	1712.5	19975	5	QPSK	12	0	22.27	0-1	1
	1712.5	19975	5	QPSK	12	6	22.15	0-1	1
	1712.5	19975	5	QPSK	12	13	22.33	0-1	1
	1712.5	19975	5	QPSK	25	0	21.90	0-1	1
	1712.5	19975	5	16-QAM	1	0	22.07	0-1	1
	1712.5	19975	5	16-QAM	1	12	22.22	0-1	1
	1712.5	19975	5	16-QAM	1	24	22.31	0-1	1
	1712.5	19975	5	16-QAM	12	0	21.14	0-2	2
	1712.5	19975	5	16-QAM	12	6	20.99	0-2	2
Mid	1712.5	19975	5	16-QAM	12	13	21.28	0-2	2
	1712.5	19975	5	16-QAM	25	0	20.99	0-2	2
	1732.5	20175	5	QPSK	1	0	23.49	0	0
	1732.5	20175	5	QPSK	1	12	23.31	0	0
	1732.5	20175	5	QPSK	1	24	23.37	0	0
	1732.5	20175	5	QPSK	12	0	22.38	0-1	1
	1732.5	20175	5	QPSK	12	6	22.33	0-1	1
	1732.5	20175	5	QPSK	12	13	22.32	0-1	1
	1732.5	20175	5	QPSK	25	0	22.30	0-1	1
	1732.5	20175	5	16-QAM	1	0	22.44	0-1	1
	1732.5	20175	5	16-QAM	1	12	22.45	0-1	1
	1732.5	20175	5	16-QAM	1	24	22.22	0-1	1
High	1732.5	20175	5	16-QAM	12	0	21.46	0-2	2
	1732.5	20175	5	16-QAM	12	6	21.42	0-2	2
	1732.5	20175	5	16-QAM	12	13	21.40	0-2	2
	1732.5	20175	5	16-QAM	25	0	21.31	0-2	2
	1752.5	20375	5	QPSK	1	0	23.44	0	0
	1752.5	20375	5	QPSK	1	12	23.37	0	0
	1752.5	20375	5	QPSK	1	24	23.35	0	0
	1752.5	20375	5	QPSK	12	0	22.19	0-1	1
	1752.5	20375	5	QPSK	12	6	22.17	0-1	1
	1752.5	20375	5	QPSK	12	13	22.16	0-1	1
	1752.5	20375	5	QPSK	25	0	22.00	0-1	1
	1752.5	20375	5	16-QAM	1	0	22.18	0-1	1
	1752.5	20375	5	16-QAM	1	12	22.19	0-1	1
	1752.5	20375	5	16-QAM	1	24	22.32	0-1	1
	1752.5	20375	5	16-QAM	12	0	21.12	0-2	2
	1752.5	20375	5	16-QAM	12	6	21.06	0-2	2
	1752.5	20375	5	16-QAM	12	13	21.29	0-2	2
	1752.5	20375	5	16-QAM	25	0	21.02	0-2	2

8.3.4 LTE Band 4 (AWS) Reduced Power - Body at 0mm

Table 8-9
LTE Band 4 Conducted Powers – 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	11.25	0	0
	1732.5	20175	20	QPSK	1	50	11.24	0	0
	1732.5	20175	20	QPSK	1	99	10.98	0	0
	1732.5	20175	20	QPSK	50	0	10.95	0-1	0
	1732.5	20175	20	QPSK	50	25	11.20	0-1	0
	1732.5	20175	20	QPSK	50	50	11.00	0-1	0
	1732.5	20175	20	QPSK	100	0	10.90	0-1	0
	1732.5	20175	20	16QAM	1	0	10.95	0-1	0
	1732.5	20175	20	16QAM	1	50	10.90	0-1	0
	1732.5	20175	20	16QAM	1	99	10.83	0-1	0
	1732.5	20175	20	16QAM	50	0	10.76	0-2	0
	1732.5	20175	20	16QAM	50	25	10.93	0-2	0
	1732.5	20175	20	16QAM	50	50	10.84	0-2	0
	1732.5	20175	20	16QAM	100	0	10.80	0-2	0

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 25 of 96

Table 8-10
LTE Band 4 Conducted Powers – 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	10.50	0	0
	1717.5	20025	15	QPSK	1	36	10.37	0	0
	1717.5	20025	15	QPSK	1	74	10.58	0	0
	1717.5	20025	15	QPSK	36	0	10.42	0-1	0
	1717.5	20025	15	QPSK	36	18	10.48	0-1	0
	1717.5	20025	15	QPSK	36	37	10.52	0-1	0
	1717.5	20025	15	QPSK	75	0	10.55	0-1	0
	1717.5	20025	15	16QAM	1	0	10.54	0-1	0
	1717.5	20025	15	16QAM	1	36	10.65	0-1	0
	1717.5	20025	15	16QAM	1	74	10.57	0-1	0
	1717.5	20025	15	16QAM	36	0	10.08	0-2	0
	1717.5	20025	15	16QAM	36	18	10.05	0-2	0
Mid	1717.5	20025	15	16QAM	36	37	10.09	0-2	0
	1717.5	20025	15	16QAM	75	0	10.04	0-2	0
	1732.5	20175	15	QPSK	1	0	10.92	0	0
	1732.5	20175	15	QPSK	1	36	11.05	0	0
	1732.5	20175	15	QPSK	1	74	11.01	0	0
	1732.5	20175	15	QPSK	36	0	10.72	0-1	0
	1732.5	20175	15	QPSK	36	18	10.98	0-1	0
	1732.5	20175	15	QPSK	36	37	11.04	0-1	0
	1732.5	20175	15	QPSK	75	0	10.96	0-1	0
	1732.5	20175	15	16QAM	1	0	10.95	0-1	0
	1732.5	20175	15	16QAM	1	36	11.03	0-1	0
	1732.5	20175	15	16QAM	1	74	11.07	0-1	0
High	1732.5	20175	15	16QAM	36	0	10.80	0-2	0
	1732.5	20175	15	16QAM	36	18	10.96	0-2	0
	1732.5	20175	15	16QAM	36	37	10.94	0-2	0
	1732.5	20175	15	16QAM	75	0	10.84	0-2	0
	1747.5	20325	15	QPSK	1	0	10.88	0	0
	1747.5	20325	15	QPSK	1	36	10.55	0	0
	1747.5	20325	15	QPSK	1	74	10.57	0	0
	1747.5	20325	15	QPSK	36	0	10.77	0-1	0
	1747.5	20325	15	QPSK	36	18	10.74	0-1	0
	1747.5	20325	15	QPSK	36	37	10.66	0-1	0
	1747.5	20325	15	QPSK	75	0	10.63	0-1	0
	1747.5	20325	15	16QAM	1	0	10.74	0-1	0
	1747.5	20325	15	16QAM	1	36	10.51	0-1	0
	1747.5	20325	15	16QAM	1	74	10.63	0-1	0
	1747.5	20325	15	16QAM	36	0	10.50	0-2	0
	1747.5	20325	15	16QAM	36	18	10.57	0-2	0
	1747.5	20325	15	16QAM	36	37	10.55	0-2	0
	1747.5	20325	15	16QAM	75	0	10.56	0-2	0

Table 8-11
LTE Band 4 Conducted Powers – 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	10.72	0	0
	1715	20000	10	QPSK	1	25	10.36	0	0
	1715	20000	10	QPSK	1	49	10.56	0	0
	1715	20000	10	QPSK	25	0	10.56	0-1	0
	1715	20000	10	QPSK	25	12	10.53	0-1	0
	1715	20000	10	QPSK	25	25	10.55	0-1	0
	1715	20000	10	QPSK	50	0	10.57	0-1	0
	1715	20000	10	16QAM	1	0	10.59	0-1	0
	1715	20000	10	16QAM	1	25	10.56	0-1	0
	1715	20000	10	16QAM	1	49	10.50	0-1	0
	1715	20000	10	16QAM	25	0	10.55	0-2	0
	1715	20000	10	16QAM	25	12	10.00	0-2	0
Mid	1715	20000	10	16QAM	25	25	10.01	0-2	0
	1715	20000	10	16QAM	50	0	10.06	0-2	0
	1732.5	20175	10	QPSK	1	0	10.51	0	0
	1732.5	20175	10	QPSK	1	25	10.55	0	0
	1732.5	20175	10	QPSK	1	49	10.82	0	0
	1732.5	20175	10	QPSK	25	0	10.66	0-1	0
	1732.5	20175	10	QPSK	25	12	10.69	0-1	0
	1732.5	20175	10	QPSK	25	25	10.72	0-1	0
	1732.5	20175	10	QPSK	50	0	10.80	0-1	0
	1732.5	20175	10	16QAM	1	0	10.81	0-1	0
	1732.5	20175	10	16QAM	1	25	10.76	0-1	0
	1732.5	20175	10	16QAM	1	49	11.02	0-1	0
High	1732.5	20175	10	16QAM	25	0	10.56	0-2	0
	1732.5	20175	10	16QAM	25	12	10.50	0-2	0
	1732.5	20175	10	16QAM	25	25	10.52	0-2	0
	1732.5	20175	10	16QAM	50	0	10.51	0-2	0
	1750	20350	10	QPSK	1	0	10.97	0	0
	1750	20350	10	QPSK	1	25	10.66	0	0
	1750	20350	10	QPSK	1	49	10.68	0	0
	1750	20350	10	QPSK	25	0	10.89	0-1	0
	1750	20350	10	QPSK	25	12	10.74	0-1	0
	1750	20350	10	QPSK	25	25	10.82	0-1	0
	1750	20350	10	QPSK	50	0	10.73	0-1	0
	1750	20350	10	16QAM	1	0	10.88	0-1	0
	1750	20350	10	16QAM	1	25	10.73	0-1	0
	1750	20350	10	16QAM	1	49	10.78	0-1	0
	1750	20350	10	16QAM	25	0	10.53	0-2	0
	1750	20350	10	16QAM	25	12	10.58	0-2	0
	1750	20350	10	16QAM	25	25	10.52	0-2	0
	1750	20350	10	16QAM	50	0	10.55	0-2	0

Table 8-12
LTE Band 4 Conducted Powers – 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	10.57	0	0
	1712.5	19975	5	QPSK	1	12	10.54	0	0
	1712.5	19975	5	QPSK	1	24	10.15	0	0
	1712.5	19975	5	QPSK	12	0	10.62	0-1	0
	1712.5	19975	5	QPSK	12	6	10.63	0-1	0
	1712.5	19975	5	QPSK	12	13	10.56	0-1	0
	1712.5	19975	5	QPSK	25	0	10.60	0-1	0
	1712.5	19975	5	16-QAM	1	0	10.55	0-1	0
	1712.5	19975	5	16-QAM	1	12	10.54	0-1	0
	1712.5	19975	5	16-QAM	1	24	10.17	0-1	0
	1712.5	19975	5	16-QAM	12	0	10.57	0-2	0
	1712.5	19975	5	16-QAM	12	6	10.55	0-2	0
Mid	1712.5	19975	5	16-QAM	12	13	10.10	0-2	0
	1712.5	19975	5	16-QAM	25	0	10.53	0-2	0
	1732.5	20175	5	QPSK	1	0	10.51	0	0
	1732.5	20175	5	QPSK	1	12	10.51	0	0
	1732.5	20175	5	QPSK	1	24	10.64	0	0
	1732.5	20175	5	QPSK	12	0	10.68	0-1	0
	1732.5	20175	5	QPSK	12	6	10.75	0-1	0
	1732.5	20175	5	QPSK	12	13	10.70	0-1	0
	1732.5	20175	5	QPSK	25	0	10.77	0-1	0
	1732.5	20175	5	16-QAM	1	0	10.50	0-1	0
	1732.5	20175	5	16-QAM	1	12	10.52	0-1	0
	1732.5	20175	5	16-QAM	1	24	10.65	0-1	0
	1732.5	20175	5	16-QAM	12	0	10.55	0-2	0
	1732.5	20175	5	16-QAM	12	6	10.50	0-2	0
High	1732.5	20175	5	16-QAM	12	13	10.54	0-2	0
	1732.5	20175	5	16-QAM	25	0	10.53	0-2	0
	1752.5	20375	5	QPSK	1	0	10.69	0	0
	1752.5	20375	5	QPSK	1	12	10.75	0	0
	1752.5	20375	5	QPSK	1	24	10.79	0	0
	1752.5	20375	5	QPSK	12	0	10.69	0-1	0
	1752.5	20375	5	QPSK	12	6	10.66	0-1	0
	1752.5	20375	5	QPSK	12	13	10.80	0-1	0
	1752.5	20375	5	QPSK	25	0	10.70	0-1	0
	1752.5	20375	5	16-QAM	1	0	10.83	0-1	0
	1752.5	20375	5	16-QAM	1	12	10.88	0-1	0
	1752.5	20375	5	16-QAM	1	24	10.95	0-1	0
	1752.5	20375	5	16-QAM	12	0	10.51	0-2	0
	1752.5	20375	5	16-QAM	12	6	10.56	0-2	0
	1752.5	20375	5	16-QAM	12	13	10.55	0-2	0
	1752.5	20375	5	16-QAM	25	0	10.53	0-2	0

8.3.5 LTE Band 2 (PCS) Maximum Power

Table 8-13
LTE Band 2 Conducted Powers – 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	23.49	0	0
	1860	18700	20	QPSK	1	50	23.47	0	0
	1860	18700	20	QPSK	1	99	23.33	0	0
	1860	18700	20	QPSK	50	0	22.36	0-1	1
	1860	18700	20	QPSK	50	25	22.32	0-1	1
	1860	18700	20	QPSK	50	50	22.20	0-1	1
	1860	18700	20	QPSK	100	0	22.28	0-1	1
	1860	18700	20	16QAM	1	0	22.35	0-1	1
	1860	18700	20	16QAM	1	50	22.29	0-1	1
	1860	18700	20	16QAM	1	99	22.20	0-1	1
	1860	18700	20	16QAM	50	0	21.27	0-2	2
	1860	18700	20	16QAM	50	25	21.25	0-2	2
	1860	18700	20	16QAM	50	50	21.17	0-2	2
	1860	18700	20	16QAM	100	0	21.24	0-2	2
	1880.0	18900	20	QPSK	1	0	23.45	0	0
	1880.0	18900	20	QPSK	1	50	23.49	0	0
Mid	1880.0	18900	20	QPSK	1	99	23.26	0	0
	1880.0	18900	20	QPSK	50	0	22.39	0-1	1
	1880.0	18900	20	QPSK	50	25	22.44	0-1	1
	1880.0	18900	20	QPSK	50	50	22.34	0-1	1
	1880.0	18900	20	QPSK	100	0	22.37	0-1	1
	1880.0	18900	20	16QAM	1	0	22.29	0-1	1
	1880.0	18900	20	16QAM	1	50	22.39	0-1	1
	1880.0	18900	20	16QAM	1	99	22.41	0-1	1
	1880.0	18900	20	16QAM	50	0	21.34	0-2	2
	1880.0	18900	20	16QAM	50	25	21.36	0-2	2
	1880.0	18900	20	16QAM	50	50	21.39	0-2	2
	1880.0	18900	20	16QAM	100	0	21.40	0-2	2
High	1900	19100	20	QPSK	1	0	23.01	0	0
	1900	19100	20	QPSK	1	50	23.50	0	0
	1900	19100	20	QPSK	1	99	22.81	0	0
	1900	19100	20	QPSK	50	0	21.99	0-1	1
	1900	19100	20	QPSK	50	25	22.40	0-1	1
	1900	19100	20	QPSK	50	50	22.46	0-1	1
	1900	19100	20	QPSK	100	0	22.27	0-1	1
	1900	19100	20	16QAM	1	0	22.08	0-1	1
	1900	19100	20	16QAM	1	50	21.92	0-1	1
	1900	19100	20	16QAM	1	99	22.04	0-1	1
	1900	19100	20	16QAM	50	0	20.98	0-2	2
	1900	19100	20	16QAM	50	25	21.32	0-2	2
	1900	19100	20	16QAM	50	50	21.37	0-2	2
	1900	19100	20	16QAM	100	0	21.25	0-2	2

Table 8-14
LTE Band 2 Conducted Powers – 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	23.32	0	0
	1857.5	18675	15	QPSK	1	36	23.45	0	0
	1857.5	18675	15	QPSK	1	74	23.31	0	0
	1857.5	18675	15	QPSK	36	0	22.36	0-1	1
	1857.5	18675	15	QPSK	36	18	22.45	0-1	1
	1857.5	18675	15	QPSK	36	37	22.36	0-1	1
	1857.5	18675	15	QPSK	75	0	22.28	0-1	1
	1857.5	18675	15	16QAM	1	0	22.34	0-1	1
	1857.5	18675	15	16QAM	1	36	22.46	0-1	1
	1857.5	18675	15	16QAM	1	74	22.45	0-1	1
	1857.5	18675	15	16QAM	36	0	21.29	0-2	2
	1857.5	18675	15	16QAM	36	18	21.35	0-2	2
	1857.5	18675	15	16QAM	36	37	21.32	0-2	2
	1857.5	18675	15	16QAM	75	0	21.37	0-2	2
Mid	1880.0	18900	15	QPSK	1	0	23.37	0	0
	1880.0	18900	15	QPSK	1	36	23.49	0	0
	1880.0	18900	15	QPSK	1	74	23.41	0	0
	1880.0	18900	15	QPSK	36	0	22.30	0-1	1
	1880.0	18900	15	QPSK	36	18	22.46	0-1	1
	1880.0	18900	15	QPSK	36	37	22.30	0-1	1
	1880.0	18900	15	QPSK	75	0	22.27	0-1	1
	1880.0	18900	15	16QAM	1	0	22.27	0-1	1
	1880.0	18900	15	16QAM	1	36	22.40	0-1	1
	1880.0	18900	15	16QAM	1	74	22.47	0-1	1
	1880.0	18900	15	16QAM	36	0	21.29	0-2	2
	1880.0	18900	15	16QAM	36	18	21.40	0-2	2
	1880.0	18900	15	16QAM	36	37	21.27	0-2	2
	1880.0	18900	15	16QAM	75	0	21.29	0-2	2
High	1902.5	19125	15	QPSK	1	0	23.44	0	0
	1902.5	19125	15	QPSK	1	36	23.40	0	0
	1902.5	19125	15	QPSK	1	74	23.39	0	0
	1902.5	19125	15	QPSK	36	0	22.22	0-1	1
	1902.5	19125	15	QPSK	36	18	22.47	0-1	1
	1902.5	19125	15	QPSK	36	37	22.34	0-1	1
	1902.5	19125	15	QPSK	75	0	22.26	0-1	1
	1902.5	19125	15	16QAM	1	0	22.25	0-1	1
	1902.5	19125	15	16QAM	1	36	22.50	0-1	1
	1902.5	19125	15	16QAM	1	74	22.37	0-1	1
	1902.5	19125	15	16QAM	36	0	21.27	0-2	2
	1902.5	19125	15	16QAM	36	18	21.34	0-2	2
	1902.5	19125	15	16QAM	36	37	21.26	0-2	2
	1902.5	19125	15	16QAM	75	0	21.24	0-2	2

Table 8-15
LTE Band 2 Conducted Powers – 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	23.33	0	0
	1855	18650	10	QPSK	1	25	23.42	0	0
	1855	18650	10	QPSK	1	49	23.27	0	0
	1855	18650	10	QPSK	25	0	22.29	0-1	1
	1855	18650	10	QPSK	25	12	22.13	0-1	1
	1855	18650	10	QPSK	25	25	22.10	0-1	1
	1855	18650	10	QPSK	50	0	22.09	0-1	1
	1855	18650	10	16QAM	1	0	22.35	0-1	1
	1855	18650	10	16QAM	1	25	22.21	0-1	1
	1855	18650	10	16QAM	1	49	22.13	0-1	1
	1855	18650	10	16QAM	25	0	21.22	0-2	2
	1855	18650	10	16QAM	25	12	21.11	0-2	2
	1855	18650	10	16QAM	25	25	21.08	0-2	2
	1855	18650	10	16QAM	50	0	21.05	0-2	2
Mid	1880.0	18900	10	QPSK	1	0	23.37	0	0
	1880.0	18900	10	QPSK	1	25	23.48	0	0
	1880.0	18900	10	QPSK	1	49	23.25	0	0
	1880.0	18900	10	QPSK	25	0	22.26	0-1	1
	1880.0	18900	10	QPSK	25	12	22.35	0-1	1
	1880.0	18900	10	QPSK	25	25	22.17	0-1	1
	1880.0	18900	10	QPSK	50	0	22.24	0-1	1
	1880.0	18900	10	16QAM	1	0	22.21	0-1	1
	1880.0	18900	10	16QAM	1	25	22.37	0-1	1
	1880.0	18900	10	16QAM	1	49	22.21	0-1	1
	1880.0	18900	10	16QAM	25	0	21.26	0-2	2
	1880.0	18900	10	16QAM	25	12	21.22	0-2	2
	1880.0	18900	10	16QAM	25	25	21.29	0-2	2
	1880.0	18900	10	16QAM	50	0	21.25	0-2	2
High	1905	19150	10	QPSK	1	0	23.01	0	0
	1905	19150	10	QPSK	1	25	23.36	0	0
	1905	19150	10	QPSK	1	49	22.63	0	0
	1905	19150	10	QPSK	25	0	21.89	0-1	1
	1905	19150	10	QPSK	25	12	22.38	0-1	1
	1905	19150	10	QPSK	25	25	22.37	0-1	1
	1905	19150	10	QPSK	50	0	22.17	0-1	1
	1905	19150	10	16QAM	1	0	21.88	0-1	1
	1905	19150	10	16QAM	1	25	21.74	0-1	1
	1905	19150	10	16QAM	1	49	21.96	0-1	1
	1905	19150	10	16QAM	25	0	20.88	0-2	2
	1905	19150	10	16QAM	25	12	21.20	0-2	2
	1905	19150	10	16QAM	25	25	21.28	0-2	2
	1905	19150	10	16QAM	50	0	21.14	0-2	2

Table 8-16
LTE Band 2 Conducted Powers – 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	23.30	0	0
	1852.5	18625	5	QPSK	1	12	23.41	0	0
	1852.5	18625	5	QPSK	1	24	23.37	0	0
	1852.5	18625	5	QPSK	12	0	22.34	0-1	1
	1852.5	18625	5	QPSK	12	6	22.04	0-1	1
	1852.5	18625	5	QPSK	12	13	22.05	0-1	1
	1852.5	18625	5	QPSK	25	0	22.15	0-1	1
	1852.5	18625	5	16-QAM	1	0	22.30	0-1	1
	1852.5	18625	5	16-QAM	1	12	22.13	0-1	1
	1852.5	18625	5	16-QAM	1	24	22.18	0-1	1
	1852.5	18625	5	16-QAM	12	0	21.28	0-2	2
	1852.5	18625	5	16-QAM	12	6	21.05	0-2	2
	1852.5	18625	5	16-QAM	12	13	21.03	0-2	2
	1852.5	18625	5	16-QAM	25	0	21.05	0-2	2
Mid	1880.0	18900	5	QPSK	1	0	23.39	0	0
	1880.0	18900	5	QPSK	1	12	23.43	0	0
	1880.0	18900	5	QPSK	1	24	23.23	0	0
	1880.0	18900	5	QPSK	12	0	22.18	0-1	1
	1880.0	18900	5	QPSK	12	6	22.32	0-1	1
	1880.0	18900	5	QPSK	12	13	22.26	0-1	1
	1880.0	18900	5	QPSK	25	0	22.14	0-1	1
	1880.0	18900	5	16-QAM	1	0	22.15	0-1	1
	1880.0	18900	5	16-QAM	1	12	22.38	0-1	1
	1880.0	18900	5	16-QAM	1	24	22.26	0-1	1
	1880.0	18900	5	16-QAM	12	0	21.21	0-2	2
	1880.0	18900	5	16-QAM	12	6	21.31	0-2	2
	1880.0	18900	5	16-QAM	12	13	21.27	0-2	2
	1880.0	18900	5	16-QAM	25	0	21.17	0-2	2
High	1907.5	19175	5	QPSK	1	0	23.09	0	0
	1907.5	19175	5	QPSK	1	12	23.45	0	0
	1907.5	19175	5	QPSK	1	24	22.59	0	0
	1907.5	19175	5	QPSK	12	0	21.91	0-1	1
	1907.5	19175	5	QPSK	12	6	22.31	0-1	1
	1907.5	19175	5	QPSK	12	13	22.43	0-1	1
	1907.5	19175	5	QPSK	25	0	22.19	0-1	1
	1907.5	19175	5	16-QAM	1	0	21.96	0-1	1
	1907.5	19175	5	16-QAM	1	12	21.81	0-1	1
	1907.5	19175	5	16-QAM	1	24	21.92	0-1	1
	1907.5	19175	5	16-QAM	12	0	20.89	0-2	2
	1907.5	19175	5	16-QAM	12	6	21.27	0-2	2
	1907.5	19175	5	16-QAM	12	13	21.25	0-2	2
	1907.5	19175	5	16-QAM	25	0	21.09	0-2	2

8.3.6 LTE Band 2 (PCS) Reduced Power

Table 8-17
LTE Band 2 Conducted Powers – 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	12.45	0	0
	1860	18700	20	QPSK	1	50	12.36	0	0
	1860	18700	20	QPSK	1	99	12.40	0	0
	1860	18700	20	QPSK	50	0	12.37	0-1	0
	1860	18700	20	QPSK	50	25	12.34	0-1	0
	1860	18700	20	QPSK	50	50	12.30	0-1	0
	1860	18700	20	QPSK	100	0	12.31	0-1	0
	1860	18700	20	16QAM	1	0	12.41	0-1	0
	1860	18700	20	16QAM	1	50	12.47	0-1	0
	1860	18700	20	16QAM	1	99	12.38	0-1	0
	1860	18700	20	16QAM	50	0	12.45	0-2	0
	1860	18700	20	16QAM	50	25	12.46	0-2	0
	1860	18700	20	16QAM	50	50	12.32	0-2	0
	1860	18700	20	16QAM	100	0	12.43	0-2	0
	1880.0	18900	20	QPSK	1	0	12.29	0	0
	1880.0	18900	20	QPSK	1	50	12.45	0	0
Mid	1880.0	18900	20	QPSK	1	99	12.44	0	0
	1880.0	18900	20	QPSK	50	0	12.43	0-1	0
	1880.0	18900	20	QPSK	50	25	12.39	0-1	0
	1880.0	18900	20	QPSK	50	50	12.43	0-1	0
	1880.0	18900	20	QPSK	100	0	12.40	0-1	0
	1880.0	18900	20	16QAM	1	0	12.46	0-1	0
	1880.0	18900	20	16QAM	1	50	12.41	0-1	0
	1880.0	18900	20	16QAM	1	99	12.43	0-1	0
	1880.0	18900	20	16QAM	50	0	12.39	0-2	0
	1880.0	18900	20	16QAM	50	25	12.46	0-2	0
	1880.0	18900	20	16QAM	50	50	12.41	0-2	0
	1880.0	18900	20	16QAM	100	0	12.43	0-2	0
High	1900	19100	20	QPSK	1	0	12.37	0	0
	1900	19100	20	QPSK	1	50	12.46	0	0
	1900	19100	20	QPSK	1	99	12.45	0	0
	1900	19100	20	QPSK	50	0	12.40	0-1	0
	1900	19100	20	QPSK	50	25	12.47	0-1	0
	1900	19100	20	QPSK	50	50	12.42	0-1	0
	1900	19100	20	QPSK	100	0	12.36	0-1	0
	1900	19100	20	16QAM	1	0	12.33	0-1	0
	1900	19100	20	16QAM	1	50	12.39	0-1	0
	1900	19100	20	16QAM	1	99	12.43	0-1	0
	1900	19100	20	16QAM	50	0	12.47	0-2	0
	1900	19100	20	16QAM	50	25	12.44	0-2	0
	1900	19100	20	16QAM	50	50	12.40	0-2	0
	1900	19100	20	16QAM	100	0	12.39	0-2	0

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 33 of 96	

Table 8-18
LTE Band 2 Conducted Powers – 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	12.11	0	0
	1857.5	18675	15	QPSK	1	36	12.26	0	0
	1857.5	18675	15	QPSK	1	74	12.27	0	0
	1857.5	18675	15	QPSK	36	0	12.24	0-1	0
	1857.5	18675	15	QPSK	36	18	12.15	0-1	0
	1857.5	18675	15	QPSK	36	37	12.17	0-1	0
	1857.5	18675	15	QPSK	75	0	12.19	0-1	0
	1857.5	18675	15	16QAM	1	0	12.24	0-1	0
	1857.5	18675	15	16QAM	1	36	12.17	0-1	0
	1857.5	18675	15	16QAM	1	74	12.01	0-1	0
	1857.5	18675	15	16QAM	36	0	11.50	0-2	0
	1857.5	18675	15	16QAM	36	18	11.55	0-2	0
Mid	1857.5	18675	15	16QAM	36	37	11.57	0-2	0
	1857.5	18675	15	16QAM	75	0	11.51	0-2	0
	1880.0	18900	15	QPSK	1	0	11.66	0	0
	1880.0	18900	15	QPSK	1	36	11.82	0	0
	1880.0	18900	15	QPSK	1	74	11.98	0	0
	1880.0	18900	15	QPSK	36	0	11.50	0-1	0
	1880.0	18900	15	QPSK	36	18	11.50	0-1	0
	1880.0	18900	15	QPSK	36	37	11.86	0-1	0
	1880.0	18900	15	QPSK	75	0	11.74	0-1	0
	1880.0	18900	15	16QAM	1	0	12.21	0-1	0
	1880.0	18900	15	16QAM	1	36	12.31	0-1	0
	1880.0	18900	15	16QAM	1	74	12.00	0-1	0
High	1880.0	18900	15	16QAM	36	0	11.66	0-2	0
	1880.0	18900	15	16QAM	36	18	11.73	0-2	0
	1880.0	18900	15	16QAM	36	37	11.86	0-2	0
	1880.0	18900	15	16QAM	75	0	11.72	0-2	0
	1902.5	19125	15	QPSK	1	0	12.40	0	0
	1902.5	19125	15	QPSK	1	36	12.30	0	0
	1902.5	19125	15	QPSK	1	74	12.23	0	0
	1902.5	19125	15	QPSK	36	0	12.45	0-1	0
	1902.5	19125	15	QPSK	36	18	12.41	0-1	0
	1902.5	19125	15	QPSK	36	37	12.37	0-1	0
	1902.5	19125	15	QPSK	75	0	12.45	0-1	0
	1902.5	19125	15	16QAM	1	0	12.50	0-1	0
	1902.5	19125	15	16QAM	1	36	12.46	0-1	0
	1902.5	19125	15	16QAM	1	74	12.49	0-1	0
	1902.5	19125	15	16QAM	36	0	12.44	0-2	0
	1902.5	19125	15	16QAM	36	18	12.50	0-2	0
	1902.5	19125	15	16QAM	36	37	12.40	0-2	0
	1902.5	19125	15	16QAM	75	0	12.38	0-2	0

Table 8-19
LTE Band 2 Conducted Powers – 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	12.19	0	0
	1855	18650	10	QPSK	1	25	12.44	0	0
	1855	18650	10	QPSK	1	49	12.31	0	0
	1855	18650	10	QPSK	25	0	12.05	0-1	0
	1855	18650	10	QPSK	25	12	12.14	0-1	0
	1855	18650	10	QPSK	25	25	12.17	0-1	0
	1855	18650	10	QPSK	50	0	12.16	0-1	0
	1855	18650	10	16QAM	1	0	11.94	0-1	0
	1855	18650	10	16QAM	1	25	11.86	0-1	0
	1855	18650	10	16QAM	1	49	11.93	0-1	0
	1855	18650	10	16QAM	25	0	12.31	0-2	0
	1855	18650	10	16QAM	25	12	12.34	0-2	0
	1855	18650	10	16QAM	25	25	12.18	0-2	0
	1855	18650	10	16QAM	50	0	12.25	0-2	0
Mid	1880.0	18900	10	QPSK	1	0	11.68	0	0
	1880.0	18900	10	QPSK	1	25	11.72	0	0
	1880.0	18900	10	QPSK	1	49	11.93	0	0
	1880.0	18900	10	QPSK	25	0	11.72	0-1	0
	1880.0	18900	10	QPSK	25	12	11.77	0-1	0
	1880.0	18900	10	QPSK	25	25	11.86	0-1	0
	1880.0	18900	10	QPSK	50	0	11.84	0-1	0
	1880.0	18900	10	16QAM	1	0	11.93	0-1	0
	1880.0	18900	10	16QAM	1	25	12.00	0-1	0
	1880.0	18900	10	16QAM	1	49	12.16	0-1	0
	1880.0	18900	10	16QAM	25	0	11.74	0-2	0
	1880.0	18900	10	16QAM	25	12	11.69	0-2	0
	1880.0	18900	10	16QAM	25	25	11.87	0-2	0
	1880.0	18900	10	16QAM	50	0	11.73	0-2	0
High	1905	19150	10	QPSK	1	0	12.34	0	0
	1905	19150	10	QPSK	1	25	12.16	0	0
	1905	19150	10	QPSK	1	49	12.33	0	0
	1905	19150	10	QPSK	25	0	12.42	0-1	0
	1905	19150	10	QPSK	25	12	12.48	0-1	0
	1905	19150	10	QPSK	25	25	12.31	0-1	0
	1905	19150	10	QPSK	50	0	12.29	0-1	0
	1905	19150	10	16QAM	1	0	12.15	0-1	0
	1905	19150	10	16QAM	1	25	12.10	0-1	0
	1905	19150	10	16QAM	1	49	11.65	0-1	0
	1905	19150	10	16QAM	25	0	12.40	0-2	0
	1905	19150	10	16QAM	25	12	12.28	0-2	0
	1905	19150	10	16QAM	25	25	12.27	0-2	0
	1905	19150	10	16QAM	50	0	12.38	0-2	0

Table 8-20
LTE Band 2 Conducted Powers – 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	12.19	0	0
	1852.5	18625	5	QPSK	1	12	12.15	0	0
	1852.5	18625	5	QPSK	1	24	12.33	0	0
	1852.5	18625	5	QPSK	12	0	12.29	0-1	0
	1852.5	18625	5	QPSK	12	6	12.15	0-1	0
	1852.5	18625	5	QPSK	12	13	12.13	0-1	0
	1852.5	18625	5	QPSK	25	0	12.30	0-1	0
	1852.5	18625	5	16-QAM	1	0	12.05	0-1	0
	1852.5	18625	5	16-QAM	1	12	12.03	0-1	0
	1852.5	18625	5	16-QAM	1	24	12.18	0-1	0
	1852.5	18625	5	16-QAM	12	0	12.15	0-2	0
	1852.5	18625	5	16-QAM	12	6	12.22	0-2	0
Mid	1852.5	18625	5	16-QAM	12	13	12.28	0-2	0
	1852.5	18625	5	16-QAM	25	0	12.30	0-2	0
	1880.0	18900	5	QPSK	1	0	12.12	0	0
	1880.0	18900	5	QPSK	1	12	12.14	0	0
	1880.0	18900	5	QPSK	1	24	12.14	0	0
	1880.0	18900	5	QPSK	12	0	12.36	0-1	0
	1880.0	18900	5	QPSK	12	6	12.25	0-1	0
	1880.0	18900	5	QPSK	12	13	12.32	0-1	0
	1880.0	18900	5	QPSK	25	0	12.29	0-1	0
	1880.0	18900	5	16-QAM	1	0	11.60	0-1	0
	1880.0	18900	5	16-QAM	1	12	11.74	0-1	0
	1880.0	18900	5	16-QAM	1	24	11.81	0-1	0
High	1880.0	18900	5	16-QAM	12	0	11.69	0-2	0
	1880.0	18900	5	16-QAM	12	6	11.70	0-2	0
	1880.0	18900	5	16-QAM	12	13	11.73	0-2	0
	1880.0	18900	5	16-QAM	25	0	11.64	0-2	0
	1907.5	19175	5	QPSK	1	0	12.36	0	0
	1907.5	19175	5	QPSK	1	12	12.38	0	0
	1907.5	19175	5	QPSK	1	24	12.50	0	0
	1907.5	19175	5	QPSK	12	0	12.45	0-1	0
	1907.5	19175	5	QPSK	12	6	12.24	0-1	0
	1907.5	19175	5	QPSK	12	13	12.33	0-1	0
	1907.5	19175	5	QPSK	25	0	12.23	0-1	0
	1907.5	19175	5	16-QAM	1	0	12.15	0-1	0
	1907.5	19175	5	16-QAM	1	12	12.28	0-1	0
	1907.5	19175	5	16-QAM	1	24	12.35	0-1	0
	1907.5	19175	5	16-QAM	12	0	12.19	0-2	0
	1907.5	19175	5	16-QAM	12	6	12.32	0-2	0
	1907.5	19175	5	16-QAM	12	13	12.29	0-2	0
	1907.5	19175	5	16-QAM	25	0	12.20	0-2	0

8.4 Antenna 1 WLAN Conducted Powers

Table 8-21
IEEE 802.11b Average RF Power

Mode	Freq [MHz]	Channel	802.11b Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1*	11.81	11.88	11.92	11.96
802.11b	2437	6*	12.31	12.40	12.41	12.43
802.11b	2462	11*	11.96	12.08	12.03	12.02

Table 8-22
IEEE 802.11g Average RF Power

Mode	Freq [MHz]	Channel	802.11g Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	11.43	11.44	11.41	11.49	11.47	11.45	11.43	11.49
802.11g	2437	6	11.01	11.00	11.21	11.03	11.20	11.13	11.23	11.17
802.11g	2462	11	11.47	11.39	11.48	11.47	11.41	11.49	11.44	11.46

Table 8-23
IEEE 802.11n Average RF Power

Mode	Freq [MHz]	Channel	802.11n (2.4GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	10.39	10.36	10.29	10.48	10.41	10.47	10.39	10.37
802.11n	2437	6	9.71	9.74	9.64	9.87	9.83	9.70	9.96	9.85
802.11n	2462	11	10.36	10.33	10.23	10.31	10.45	10.45	10.28	10.25

Table 8-24
IEEE 802.11a Average RF Power

Mode	Freq [MHz]	Channel	802.11a Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11a	5180	36	6.67	6.63	6.69	6.64	6.65	6.71	6.72	6.68
802.11a	5200	40	6.61	6.59	6.66	6.57	6.58	6.70	6.68	6.59
802.11a	5220	44	6.68	6.63	6.61	6.63	6.60	6.62	6.64	6.72
802.11a	5240	48	6.71	6.70	6.68	6.68	6.68	6.69	6.70	6.71
802.11a	5260	52	7.09	7.21	7.15	7.20	7.19	7.14	7.12	7.18
802.11a	5280	56	7.01	7.19	7.07	7.07	7.05	7.11	7.10	7.09
802.11a	5300	60	7.01	7.11	7.07	7.12	7.09	7.09	7.06	7.10
802.11a	5320	64	7.04	7.14	7.17	7.12	7.06	7.09	7.05	7.11
802.11a	5500	100	7.28	7.34	7.32	7.37	7.39	7.36	7.30	7.38
802.11a	5520	104	7.19	7.23	7.23	7.27	7.33	7.34	7.23	7.31
802.11a	5540	108	7.17	7.24	7.18	7.21	7.28	7.27	7.21	7.26
802.11a	5560	112	7.06	7.18	7.19	7.20	7.17	7.07	7.02	7.14
802.11a	5580	116	6.98	6.99	7.01	7.03	7.15	7.00	7.08	7.14
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	6.99	7.06	7.04	7.06	7.18	6.98	7.03	7.09
802.11a	5680	136	7.04	7.10	7.07	7.16	7.20	7.11	7.07	7.13
802.11a	5700	140	6.89	6.93	6.89	7.02	6.95	6.93	6.95	6.94
802.11a	5745	149	7.65	7.93	7.93	7.71	7.86	7.93	7.85	7.94
802.11a	5765	153	7.70	7.78	7.80	7.68	7.75	7.76	7.73	7.77
802.11a	5785	157	7.38	7.65	7.69	7.37	7.74	7.64	7.81	7.75
802.11a	5805	161	7.21	7.33	7.35	7.30	7.26	7.36	7.43	7.45
802.11a	5825	165	6.87	7.17	7.11	6.84	7.15	7.08	7.18	7.12

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 37 of 96

Table 8-25
IEEE 802.11n Average RF Power – 20 MHz Bandwidth

Mode	Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	5180	36	6.79	6.89	6.82	6.76	6.65	6.67	6.90	6.87
802.11n	5200	40	6.83	6.89	6.88	6.83	6.77	6.77	6.88	6.84
802.11n	5220	44	6.88	6.84	6.87	6.86	6.75	6.75	6.78	6.80
802.11n	5240	48	6.90	6.88	6.90	6.88	6.82	6.73	6.75	6.94
802.11n	5260	52	6.91	6.88	6.85	6.89	6.91	6.95	6.83	6.96
802.11n	5280	56	6.95	6.97	6.88	7.01	6.93	7.02	6.80	6.96
802.11n	5300	60	6.84	6.79	6.72	6.82	6.88	6.87	6.73	6.84
802.11n	5320	64	6.69	6.69	6.68	6.72	6.59	6.70	6.60	6.76
802.11n	5500	100	7.21	7.19	7.18	7.04	6.97	6.93	7.04	7.26
802.11n	5520	104	7.08	7.07	7.06	6.87	6.90	6.82	6.91	7.12
802.11n	5540	108	7.19	7.11	7.13	7.00	6.88	7.00	7.02	7.26
802.11n	5560	112	7.23	7.20	7.16	7.07	6.98	7.04	7.06	7.24
802.11n	5580	116	7.16	7.16	7.14	6.97	6.87	6.94	7.00	7.21
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	7.21	7.19	7.11	7.09	6.93	6.95	7.00	7.24
802.11n	5680	136	7.18	7.11	7.07	6.98	6.99	6.83	6.98	7.21
802.11n	5700	140	7.14	7.11	7.10	6.99	6.94	6.84	6.94	7.13
802.11n	5745	149	7.65	7.77	7.73	7.52	7.43	7.43	7.60	7.75
802.11n	5765	153	7.76	7.77	7.66	7.46	7.45	7.42	7.57	7.78
802.11n	5785	157	7.77	7.79	7.72	7.51	7.38	7.45	7.68	7.71
802.11n	5805	161	7.71	7.66	7.68	7.52	7.38	7.39	7.52	7.65
802.11n	5825	165	7.81	7.83	7.79	7.60	7.40	7.50	7.58	7.79

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

Table 8-26
IEEE 802.11n Average RF Power – 40 MHz Bandwidth

Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13.5	27	40.5	54	81	108	121.5	135
802.11n	5190	38	6.63	6.60	6.66	6.81	6.73	6.87	6.88	6.79
802.11n	5230	46	6.74	6.70	6.69	6.91	6.91	6.78	6.76	6.90
802.11n	5270	54	6.87	6.77	6.82	6.93	6.86	6.84	6.82	6.74
802.11n	5310	62	6.64	6.52	6.52	6.79	6.63	6.76	6.71	6.78
802.11n	5510	102	7.08	7.13	7.06	7.10	7.17	7.15	7.12	7.04
802.11n	5550	110	7.21	7.24	7.12	7.23	7.35	7.31	7.22	7.26
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	7.23	7.26	7.18	7.17	7.21	7.22	7.15	7.13
802.11n	5755	151	7.32	7.38	7.41	7.53	7.58	7.58	7.57	7.50
802.11n	5795	159	7.00	7.04	7.09	7.14	7.21	7.30	7.23	7.12

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

Table 8-27
IEEE 802.11ac Average RF Power – 80 MHz Bandwidth


Mode	Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
			Data Rate [Mbps]									
			29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5210	42	7.54	7.41	7.38	7.57	7.51	7.65	7.76	7.63	7.73	7.71
802.11ac	5290	58	7.49	7.23	6.99	7.50	7.48	7.55	7.42	7.56	7.56	7.65
802.11ac	5530	106	7.98	7.93	7.94	7.89	7.88	7.90	7.87	7.83	7.95	7.87
802.11ac	5775	155	7.43	7.31	7.34	7.45	7.64	7.57	7.62	7.50	7.49	7.45

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 38 of 96	

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- 5 GHz WLAN were excluded per FCC KDB 447498 D01v05.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

Power Measurements for Signals < 50 MHz Bandwidth



Power Measurements for signals > 50 MHz Bandwidth




Figure 8-3
Power Measurement Setup

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 39 of 96

8.5 Antenna 2 WLAN Conducted Powers

Table 8-28
IEEE 802.11b Average RF Power

Mode	Freq [MHz]	Channel	802.11b Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1*	12.41	12.49	12.44	12.47
802.11b	2437	6*	12.47	12.45	12.41	12.43
802.11b	2462	11*	12.14	12.39	12.48	12.42

Table 8-29
IEEE 802.11g Average RF Power

Mode	Freq [MHz]	Channel	802.11g Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	10.81	10.67	10.91	10.68	10.98	10.79	10.94	10.97
802.11g	2437	6	11.25	11.03	11.33	11.09	11.42	11.30	11.40	11.41
802.11g	2462	11	10.89	10.68	11.03	10.70	11.13	10.83	11.06	11.05

Table 8-30
IEEE 802.11n Average RF Power

Mode	Freq [MHz]	Channel	802.11n (2.4GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	9.74	9.73	9.71	9.92	9.96	9.96	10.06	10.06
802.11n	2437	6	10.34	10.36	10.31	10.49	10.32	10.39	10.42	10.34
802.11n	2462	11	9.98	9.93	9.95	10.10	10.21	10.27	10.30	10.21

Table 8-31
IEEE 802.11a Average RF Power

Mode	Freq [MHz]	Channel	802.11a Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11a	5180	36	7.26	6.99	7.06	7.19	7.26	7.17	7.16	7.37
802.11a	5200	40	6.97	6.71	6.76	6.94	6.94	6.90	6.83	7.06
802.11a	5220	44	6.87	6.62	6.60	6.86	6.86	6.75	6.80	7.02
802.11a	5240	48	6.94	6.67	6.73	6.84	6.86	6.82	6.86	7.02
802.11a	5260	52	6.90	6.57	6.56	6.81	6.78	6.82	7.02	6.98
802.11a	5280	56	6.88	6.54	6.59	6.85	6.76	6.83	6.92	6.99
802.11a	5300	60	6.89	6.55	6.50	6.81	6.73	6.78	7.01	7.02
802.11a	5320	64	6.76	6.51	6.45	6.68	6.58	6.75	6.89	6.87
802.11a	5500	100	7.44	7.27	7.25	7.36	7.39	7.40	7.44	7.47
802.11a	5520	104	7.35	7.19	7.22	7.28	7.31	7.28	7.39	7.33
802.11a	5540	108	7.23	6.99	7.08	7.17	7.18	7.21	7.22	7.28
802.11a	5560	112	7.64	7.49	7.45	7.56	7.50	7.57	7.65	7.63
802.11a	5580	116	7.50	7.36	7.29	7.35	7.51	7.46	7.56	7.45
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	7.52	7.33	7.24	7.49	7.50	7.47	7.53	7.52
802.11a	5680	136	7.27	7.09	7.06	7.11	7.26	7.25	7.27	7.32
802.11a	5700	140	7.30	7.13	7.08	7.14	7.24	7.29	7.32	7.32
802.11a	5745	149	7.94	7.89	7.98	7.99	7.95	7.99	7.94	7.98
802.11a	5765	153	7.45	7.40	7.44	7.59	7.42	7.54	7.46	7.63
802.11a	5785	157	7.55	7.54	7.61	7.64	7.55	7.63	7.57	7.79
802.11a	5805	161	7.62	7.54	7.68	7.64	7.56	7.71	7.75	7.81
802.11a	5825	165	7.67	7.66	7.74	7.76	7.64	7.73	7.67	7.92

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 40 of 96

Table 8-32
IEEE 802.11n Average RF Power – 20 MHz Bandwidth

Mode	Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	5180	36	6.90	6.94	7.03	6.98	6.93	6.99	6.88	6.84
802.11n	5200	40	7.00	7.02	6.97	7.01	6.96	7.05	7.02	6.98
802.11n	5220	44	6.70	6.72	6.86	6.77	6.76	6.83	6.66	6.60
802.11n	5240	48	6.59	6.72	6.72	6.70	6.64	6.72	6.49	6.58
802.11n	5260	52	6.89	6.82	6.90	6.86	6.83	6.94	6.79	6.75
802.11n	5280	56	6.60	6.61	6.58	6.63	6.49	6.63	6.49	6.40
802.11n	5300	60	6.66	6.54	6.66	6.60	6.62	6.72	6.59	6.48
802.11n	5320	64	6.50	6.47	6.47	6.43	6.39	6.56	6.42	6.39
802.11n	5500	100	7.42	7.40	7.37	7.41	7.36	7.38	7.32	7.31
802.11n	5520	104	7.37	7.33	7.36	7.40	7.32	7.38	7.24	7.18
802.11n	5540	108	7.18	7.23	7.13	7.25	7.05	7.21	7.03	7.08
802.11n	5560	112	6.89	6.87	6.85	6.90	6.75	6.88	6.72	6.80
802.11n	5580	116	6.71	6.64	6.68	6.72	6.57	6.72	6.68	6.62
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	7.23	7.18	7.13	7.14	7.13	7.19	7.15	7.17
802.11n	5680	136	7.42	7.46	7.38	7.46	7.33	7.37	7.30	7.25
802.11n	5700	140	7.11	7.14	7.01	7.11	7.08	7.06	6.95	7.06
802.11n	5745	149	7.36	7.25	7.19	7.17	7.22	7.31	7.26	7.24
802.11n	5765	153	7.13	7.09	6.91	7.02	7.04	7.04	7.03	7.02
802.11n	5785	157	7.16	6.99	6.93	6.95	7.08	7.08	7.09	7.14
802.11n	5805	161	7.03	6.96	6.80	6.83	6.88	7.04	6.97	6.97
802.11n	5825	165	6.85	6.77	6.74	6.65	6.69	6.79	6.77	6.66

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

Table 8-33
IEEE 802.11n Average RF Power – 40 MHz Bandwidth

Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13.5	27	40.5	54	81	108	121.5	135
802.11n	5190	38	7.10	7.27	7.23	7.45	7.48	7.35	7.37	7.30
802.11n	5230	46	7.18	7.19	7.26	7.39	7.37	7.30	7.33	7.30
802.11n	5270	54	7.13	7.14	7.06	7.11	7.13	7.14	7.12	7.14
802.11n	5310	62	6.87	6.83	6.73	7.14	7.01	6.94	7.13	7.05
802.11n	5510	102	7.30	7.39	7.57	7.56	7.53	7.45	7.43	7.39
802.11n	5550	110	7.54	7.68	7.85	7.76	7.72	7.67	7.62	7.60
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	7.51	7.68	7.74	7.77	7.68	7.63	7.67	7.61
802.11n	5755	151	7.79	7.83	7.71	7.88	7.79	7.81	7.77	7.74
802.11n	5795	159	7.59	7.70	7.50	7.63	7.58	7.61	7.56	7.56

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

Table 8-34
IEEE 802.11ac Average RF Power – 80 MHz Bandwidth


Mode	Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
			Data Rate [Mbps]									
			29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5210	42	7.39	7.32	7.26	7.41	7.36	7.43	7.47	7.43	7.47	7.48
802.11ac	5290	58	7.32	7.37	7.34	7.36	7.40	7.40	7.37	7.36	7.34	7.35
802.11ac	5530	106	7.41	7.24	7.25	7.49	7.57	7.56	7.57	7.46	7.33	7.39
802.11ac	5775	155	7.24	7.13	7.23	7.34	7.04	7.30	7.46	7.41	7.35	7.41

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 41 of 96	

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- 5 GHz WLAN were excluded per FCC KDB 447498 D01v05.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

Power Measurements for Signals < 50 MHz Bandwidth



Power Measurements for signals > 50 MHz Bandwidth




Figure 8-4
Power Measurement Setup

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 42 of 96

8.6 MIMO WLAN Conducted Powers

Table 8-35
IEEE 802.11n Average RF Power

Mode	Freq [MHz]	Channel	Data Rate [Mbps]
			13
802.11n	2412	1	12.06
802.11n	2437	6	12.26
802.11n	2462	11	12.02

Table 8-36
IEEE 802.11n Average RF Power – 20 MHz Bandwidth

Mode	Freq [MHz]	Channel	Data Rate [Mbps]
			13
802.11n	5180	36*	8.47
802.11n	5200	40	8.47
802.11n	5220	44	8.47
802.11n	5240	48*	8.40
802.11n	5260	52*	7.77
802.11n	5280	56	7.77
802.11n	5300	60	7.85
802.11n	5320	64*	7.82
802.11n	5500	100	7.92
802.11n	5520	104*	7.84
802.11n	5540	108	7.79
802.11n	5560	112	7.79
802.11n	5580	116*	8.49
802.11n	5600	120	N/A
802.11n	5620	124	N/A
802.11n	5640	128	N/A
802.11n	5660	132	8.10
802.11n	5680	136*	7.96
802.11n	5700	140	7.93
802.11n	5745	149*	8.49
802.11n	5765	153	8.49
802.11n	5785	157*	8.16
802.11n	5805	161	8.02
802.11n	5825	165*	8.02

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

(*) – indicates default channels per KDB Publication 248227 D01v01r02. When the adjacent channels are higher in power than the default channels, these “required channels” are considered for SAR testing instead of the default channels.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 43 of 96

Table 8-37
IEEE 802.11n Average RF Power – 40 MHz Bandwidth

Mode	Freq [MHz]	Channel	Data Rate [Mbps]
			27
802.11n	5190	38	8.14
802.11n	5230	46	8.13
802.11n	5270	54	7.57
802.11n	5310	62	7.66
802.11n	5510	102	7.67
802.11n	5550	110	7.36
802.11n	5590	118	N/A
802.11n	5630	126	N/A
802.11n	5670	134	7.29
802.11n	5755	151	7.73
802.11n	5795	159	7.22

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

Table 8-38
IEEE 802.11ac Average RF Power – 80 MHz Bandwidth

Mode	Freq [MHz]	Channel	Data Rate [Mbps]
			58.5
802.11ac	5210	42	8.23
802.11ac	5290	58	8.09
802.11ac	5530	106	7.67
802.11ac	5775	155	7.13

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11n were selected for SAR evaluation.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11n were selected for SAR evaluation.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.
- Per KDB 662911 v02r01, the individual spectra for each 2x2 MIMO WIFI Antenna were summed mathematically in linear power units for the MIMO output power measurements

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 44 of 96	

8.7 Bluetooth Conducted Powers

Table 8-39
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	8.73	7.462
2441	1.0	39	10.76	11.923
2480	1.0	78	10.39	10.946
2402	2.0	0	3.84	2.423
2441	2.0	39	6.77	4.754
2480	2.0	78	5.56	3.597
2402	3.0	0	3.72	2.353
2441	3.0	39	6.65	4.626
2480	3.0	78	5.43	3.491

Justification for reduced test configurations for BT channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:

- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

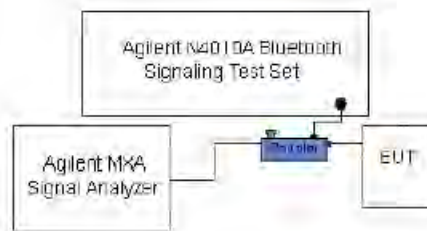


Figure 8-5
Power Measurement Setup

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 45 of 96

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
6/12/2014	750B	22.5	725	0.951	54.586	0.961	55.629	-1.04%	-1.87%
			740	0.965	54.427	0.963	55.570	0.21%	-2.06%
			755	0.979	54.240	0.964	55.512	1.56%	-2.29%
			770	0.993	54.060	0.965	55.453	2.90%	-2.51%
			785	1.008	53.896	0.966	55.395	4.35%	-2.71%
6/11/2014	835B	22.8	820	0.987	54.270	0.969	55.258	1.86%	-1.79%
			835	1.002	54.094	0.970	55.200	3.30%	-2.00%
			850	1.016	53.948	0.988	55.154	2.83%	-2.19%
6/16/2014	835B	23.4	820	1.002	54.772	0.969	55.258	3.41%	-0.88%
			835	1.017	54.617	0.970	55.200	4.85%	-1.06%
			850	1.030	54.470	0.988	55.154	4.25%	-1.24%
6/11/2014	1750B	22.5	1710	1.434	53.025	1.463	53.537	-1.98%	-0.96%
			1750	1.480	52.828	1.488	53.432	-0.54%	-1.13%
			1790	1.522	52.656	1.514	53.326	0.53%	-1.26%
6/16/2014	1900B	23.0	1850	1.448	51.557	1.520	53.300	-4.74%	-3.27%
			1880	1.482	51.503	1.520	53.300	-2.50%	-3.37%
			1910	1.516	51.372	1.520	53.300	-0.26%	-3.62%
6/17/2014	2450B	22.4	2401	1.956	51.261	1.903	52.765	2.79%	-2.85%
			2450	2.024	51.126	1.950	52.700	3.79%	-2.99%
			2499	2.084	50.907	2.019	52.638	3.22%	-3.29%
6/23/2014	5200B - 5800B	23.0	5180	5.477	47.362	5.276	49.041	3.81%	-3.42%
			5200	5.500	47.385	5.299	49.014	3.79%	-3.32%
			5220	5.514	47.317	5.323	48.987	3.59%	-3.41%
			5260	5.557	47.241	5.369	48.933	3.50%	-3.46%
			5300	5.620	47.117	5.416	48.879	3.77%	-3.60%
			5500	5.873	46.816	5.650	48.607	3.95%	-3.68%
			5580	5.996	46.729	5.743	48.499	4.41%	-3.65%
			5600	6.009	46.678	5.766	48.471	4.21%	-3.70%
			5660	6.100	46.557	5.837	48.390	4.51%	-3.79%
7/1/2014	5200B-5800B	23.6	5745	6.196	47.234	5.936	48.275	4.38%	-2.16%
			5765	6.225	47.203	5.959	48.248	4.46%	-2.17%
			5785	6.249	47.175	5.982	48.220	4.46%	-2.17%
			5800	6.258	47.101	6.000	48.200	4.30%	-2.28%
			5825	6.306	47.015	6.029	48.166	4.59%	-2.39%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 46 of 96

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-2
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
D	750	BODY	06/12/2014	24.5	22.5	0.100	1003	3022	0.909	8.770	9.090	3.65%
K	835	BODY	06/11/2014	24.4	23.0	0.100	4d119	3287	0.993	9.340	9.930	6.32%
K	835	BODY	06/16/2014	24.1	23.4	0.100	4d119	3287	0.935	9.340	9.350	0.11%
J	1750	BODY	06/11/2014	21.6	22.5	0.100	1051	3332	3.460	37.400	34.600	-7.49%
D	1900	BODY	06/16/2014	24.1	23.0	0.100	5d149	3022	3.980	40.500	39.800	-1.73%
G	2450	BODY	06/17/2014	23.6	22.9	0.100	797	3258	5.260	49.400	52.600	6.48%
A	5200	BODY	06/23/2014	22.5	23.0	0.100	1007	3920	7.350	72.600	73.500	1.24%
A	5300	BODY	06/23/2014	22.5	23.0	0.100	1007	3920	7.220	74.700	72.200	-3.35%
A	5500	BODY	06/23/2014	22.5	23.0	0.100	1007	3920	7.530	75.900	75.300	-0.79%
A	5600	BODY	06/23/2014	22.5	23.0	0.100	1007	3920	7.840	77.300	78.400	1.42%
E	5800	BODY	07/01/2014	23.8	24.2	0.100	1057	3914	6.980	74.300	69.800	-6.06%

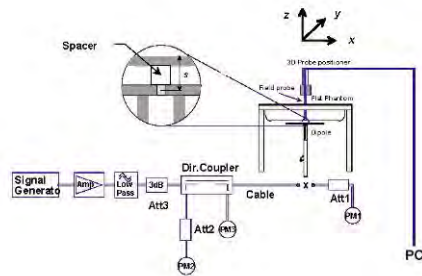


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 47 of 96

10 SAR DATA SUMMARY

10.1 Standalone Body SAR Data

Table 10-1
GPRS/ UMTS Body SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	GPRS 850	GPRS	23.0	22.93	-0.01	0 mm	707V-13	3	1:2.76	back	0.832	1.016	0.845	
836.60	190	GPRS 850	GPRS	23.0	22.83	0.05	0 mm	707V-13	3	1:2.76	back	1.050	1.040	1.092	A1
848.80	251	GPRS 850	GPRS	23.0	22.65	0.07	0 mm	707V-13	3	1:2.76	back	0.874	1.084	0.947	
836.60	190	GPRS 850	GPRS	23.0	22.83	-0.13	0 mm	707V-13	3	1:2.76	bottom	0.482	1.040	0.501	
836.60	190	GPRS 850	GPRS	23.0	22.83	0.10	0 mm	707V-13	3	1:2.76	right	0.335	1.040	0.348	
824.20	128	GPRS 850	GPRS	30.0	29.91	-0.09	14 mm	707V-1	3	1:2.76	back	0.776	1.021	0.792	
836.60	190	GPRS 850	GPRS	30.0	29.77	0.01	14 mm	707V-1	3	1:2.76	back	0.918	1.054	0.968	
848.80	251	GPRS 850	GPRS	30.0	29.58	-0.05	14 mm	707V-1	3	1:2.76	back	0.935	1.102	1.030	
836.60	190	GPRS 850	GPRS	30.0	29.77	-0.05	12 mm	707V-1	3	1:2.76	bottom	0.619	1.054	0.652	
836.60	190	GPRS 850	GPRS	30.0	29.77	0.00	16 mm	707V-1	3	1:2.76	right	0.159	1.054	0.168	
836.60	190	GPRS 850	GPRS	23.0	22.83	0.01	0 mm	707V-13	3	1:2.76	back	1.020	1.040	1.061	
826.40	4132	UMTS 850	RMC	19.5	19.22	0.10	0 mm	707V-12	N/A	1:1	back	0.963	1.067	1.028	
836.60	4183	UMTS 850	RMC	19.5	19.38	0.07	0 mm	707V-12	N/A	1:1	back	0.971	1.028	0.998	A2
846.60	4233	UMTS 850	RMC	19.5	19.13	0.03	0 mm	707V-12	N/A	1:1	back	0.892	1.089	0.971	
836.60	4183	UMTS 850	RMC	19.5	19.38	-0.14	0 mm	707V-12	N/A	1:1	bottom	0.261	1.028	0.268	
836.60	4183	UMTS 850	RMC	19.5	19.38	0.09	0 mm	707V-12	N/A	1:1	right	0.441	1.028	0.453	
836.60	4183	UMTS 850	RMC	23.5	22.99	0.01	14 mm	707V-2	N/A	1:1	back	0.271	1.125	0.305	
836.60	4183	UMTS 850	RMC	23.5	22.99	-0.02	12 mm	707V-2	N/A	1:1	bottom	0.137	1.125	0.154	
836.60	4183	UMTS 850	RMC	23.5	22.99	0.03	16 mm	707V-2	N/A	1:1	right	0.072	1.125	0.081	
1850.20	512	GPRS 1900	GPRS	18.0	17.27	0.00	0 mm	707V-13	3	1:2.76	back	0.864	1.183	1.022	
1880.00	661	GPRS 1900	GPRS	18.0	17.52	0.01	0 mm	707V-13	3	1:2.76	back	0.974	1.117	1.088	
1909.80	810	GPRS 1900	GPRS	18.0	17.93	0.08	0 mm	707V-13	3	1:2.76	back	1.070	1.016	1.087	A3
1909.80	810	GPRS 1900	GPRS	18.0	17.93	0.05	0 mm	707V-13	3	1:2.76	bottom	0.595	1.016	0.605	
1909.80	810	GPRS 1900	GPRS	18.0	17.93	-0.09	0 mm	707V-13	3	1:2.76	right	0.164	1.016	0.167	
1850.20	512	GPRS 1900	GPRS	26.5	26.31	-0.06	14 mm	707V-1	4	1:2.076	back	0.963	1.045	1.006	
1880.00	661	GPRS 1900	GPRS	26.5	26.37	0.02	14 mm	707V-1	4	1:2.076	back	0.996	1.030	1.026	
1909.80	810	GPRS 1900	GPRS	26.5	26.45	0.00	14 mm	707V-1	4	1:2.076	back	0.970	1.012	0.982	
1880.00	661	GPRS 1900	GPRS	26.5	26.37	0.00	12 mm	707V-1	4	1:2.076	bottom	0.605	1.030	0.623	
1880.00	661	GPRS 1900	GPRS	26.5	26.37	-0.03	16 mm	707V-1	4	1:2.076	right	0.193	1.030	0.199	
1852.40	9262	UMTS 1900	RMC	12.0	10.96	-0.05	0 mm	707V-12	N/A	1:1	back	0.659	1.271	0.838	
1880.00	9400	UMTS 1900	RMC	12.0	12.00	-0.03	0 mm	707V-12	N/A	1:1	back	0.959	1.000	0.959	
1907.60	9538	UMTS 1900	RMC	12.0	11.93	-0.04	0 mm	707V-12	N/A	1:1	back	1.030	1.016	1.046	A4
1880.00	9400	UMTS 1900	RMC	12.0	12.00	-0.05	0 mm	707V-12	N/A	1:1	bottom	0.409	1.000	0.409	
1880.00	9400	UMTS 1900	RMC	12.0	12.00	0.01	0 mm	707V-12	N/A	1:1	right	0.144	1.000	0.144	
1880.00	9400	UMTS 1900	RMC	23.5	23.35	-0.01	14 mm	707V-2	N/A	1:1	back	0.129	1.035	0.134	
1880.00	9400	UMTS 1900	RMC	23.5	23.35	0.16	12 mm	707V-2	N/A	1:1	bottom	0.071	1.035	0.073	
1880.00	9400	UMTS 1900	RMC	23.5	23.35	0.01	16 mm	707V-2	N/A	1:1	right	0.271	1.035	0.280	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body								
Spatial Peak							1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population							averaged over 1 gram								

Note: Variability is highlighted in blue.

Table 10-2
LTE Band 13 Body SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	20.00	-0.03	0	707V-11	QPSK	1	25	0 mm	back	1:1	0.968	1.000	0.968	A5	
782.00	23230	Mid	LTE Band 13	10	20.0	-0.02	0	707V-11	QPSK	25	12	0 mm	back	1:1	0.918	1.000	0.918		
782.00	23230	Mid	LTE Band 13	10	20.0	-19.88	-0.02	0	707V-11	QPSK	50	0	0 mm	back	1:1	0.896	1.028	0.921	
782.00	23230	Mid	LTE Band 13	10	20.0	-0.00	-0.05	0	707V-11	QPSK	1	25	0 mm	bottom	1:1	0.535	1.000	0.535	
782.00	23230	Mid	LTE Band 13	10	20.0	-0.00	-0.05	0	707V-11	QPSK	25	12	0 mm	bottom	1:1	0.507	1.000	0.507	
782.00	23230	Mid	LTE Band 13	10	20.0	-0.00	-0.08	0	707V-11	QPSK	1	25	0 mm	right	1:1	0.384	1.000	0.384	
782.00	23230	Mid	LTE Band 13	10	20.0	-0.00	-0.08	0	707V-11	QPSK	25	12	0 mm	right	1:1	0.371	1.000	0.371	
782.00	23230	Mid	LTE Band 13	10	23.5	23.50	0.03	0	707V-3	QPSK	1	25	14 mm	back	1:1	0.550	1.000	0.550	
782.00	23230	Mid	LTE Band 13	10	22.5	22.50	0.06	1	707V-3	QPSK	25	0	14 mm	back	1:1	0.417	1.000	0.417	
782.00	23230	Mid	LTE Band 13	10	23.5	23.50	-0.04	0	707V-3	QPSK	1	25	12 mm	bottom	1:1	0.206	1.000	0.206	
782.00	23230	Mid	LTE Band 13	10	22.5	22.50	-0.07	1	707V-3	QPSK	25	0	12 mm	bottom	1:1	0.161	1.000	0.161	
782.00	23230	Mid	LTE Band 13	10	23.5	23.50	0.02	0	707V-3	QPSK	1	25	16 mm	right	1:1	0.083	1.000	0.083	
782.00	23230	Mid	LTE Band 13	10	22.5	22.50	0.03	1	707V-3	QPSK	25	0	16 mm	right	1:1	0.064	1.000	0.064	
782.00	23230	Mid	LTE Band 13	10	20.0	-0.00	-0.01	0	707V-11	QPSK	1	25	0 mm	back	1:1	0.964	1.000	0.964	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body									
Spatial Peak										1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 1 gram									

Note: Variability is highlighted in blue.

Table 10-3
LTE Band 4 (AWS) Body SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	11.5	11.25	-0.03	0	707V-9	QPSK	1	0	0 mm	back	1:1	0.983	1.059	1.041	A6
1732.50	20175	Mid	LTE Band 4 (AWS)	20	11.5	11.20	-0.01	0	707V-9	QPSK	50	25	0 mm	back	1:1	0.922	1.072	0.988	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	11.5	10.90	-0.04	0	707V-9	QPSK	100	0	0 mm	back	1:1	0.867	1.148	0.995	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	11.5	11.25	0.01	0	707V-9	QPSK	1	0	0 mm	bottom	1:1	0.197	1.059	0.209	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	11.5	11.20	0.00	0	707V-9	QPSK	50	25	0 mm	bottom	1:1	0.195	1.072	0.209	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	11.5	11.25	0.03	0	707V-9	QPSK	1	0	0 mm	right	1:1	0.106	1.059	0.112	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	11.5	11.20	0.00	0	707V-9	QPSK	50	25	0 mm	right	1:1	0.086	1.072	0.092	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.46	-0.01	0	707V-4	QPSK	1	99	14 mm	back	1:1	0.064	1.009	0.065	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.31	-0.01	1	707V-4	QPSK	50	50	14 mm	back	1:1	0.059	1.045	0.062	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.46	-0.02	0	707V-4	QPSK	1	99	12 mm	bottom	1:1	0.387	1.009	0.390	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.31	-0.02	1	707V-4	QPSK	50	50	12 mm	bottom	1:1	0.278	1.045	0.291	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	23.46	-0.06	0	707V-4	QPSK	1	99	16 mm	right	1:1	0.187	1.009	0.189	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.31	0.00	1	707V-4	QPSK	50	50	16 mm	right	1:1	0.182	1.045	0.190	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	11.5	11.25	-0.03	0	707V-9	QPSK	1	0	0 mm	back	1:1	0.909	1.059	0.963	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Note: Variability is highlighted in blue.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 49 of 96

Table 10-4
LTE Band 2 (PCS) Body SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
1860.00	18700	Low	LTE Band 2 (PCS)	20	12.5	12.45	0.02	0	707V-10	QPSK	1	0	0 mm	back	1:1	1.060	1.012	1.073	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	12.5	12.45	0.02	0	707V-10	QPSK	1	50	0 mm	back	1:1	1.060	1.012	1.073	
1900.00	19100	High	LTE Band 2 (PCS)	20	12.5	12.46	0.02	0	707V-10	QPSK	1	50	0 mm	back	1:1	0.981	1.009	0.990	
1860.00	18700	Low	LTE Band 2 (PCS)	20	12.5	12.37	-0.07	0	707V-10	QPSK	50	0	0 mm	back	1:1	1.030	1.030	1.061	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	12.5	12.43	0.05	0	707V-10	QPSK	50	0	0 mm	back	1:1	1.020	1.016	1.036	
1900.00	19100	High	LTE Band 2 (PCS)	20	12.5	12.47	0.03	0	707V-10	QPSK	50	25	0 mm	back	1:1	0.972	1.007	0.979	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	12.5	12.40	0.01	0	707V-10	QPSK	100	0	0 mm	back	1:1	1.010	1.023	1.033	
1900.00	19100	High	LTE Band 2 (PCS)	20	12.5	12.46	0.14	0	707V-10	QPSK	1	50	0 mm	bottom	1:1	0.571	1.009	0.576	
1900.00	19100	High	LTE Band 2 (PCS)	20	12.5	12.47	-0.12	0	707V-10	QPSK	50	25	0 mm	bottom	1:1	0.588	1.007	0.592	
1900.00	19100	High	LTE Band 2 (PCS)	20	12.5	12.46	0.04	0	707V-10	QPSK	1	50	0 mm	right	1:1	0.120	1.009	0.121	
1900.00	19100	High	LTE Band 2 (PCS)	20	12.5	12.47	0.10	0	707V-10	QPSK	50	25	0 mm	right	1:1	0.111	1.007	0.112	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.49	0.00	0	707V-5	QPSK	1	0	14 mm	back	1:1	0.940	1.002	0.942	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	23.49	0.06	0	707V-5	QPSK	1	50	14 mm	back	1:1	1.080	1.002	1.082	A7
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	23.50	0.00	0	707V-5	QPSK	1	50	14 mm	back	1:1	1.060	1.000	1.060	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.5	22.36	0.00	1	707V-5	QPSK	50	0	14 mm	back	1:1	0.746	1.033	0.771	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	22.44	0.02	1	707V-5	QPSK	50	25	14 mm	back	1:1	0.824	1.014	0.836	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	22.46	-0.03	1	707V-5	QPSK	50	50	14 mm	back	1:1	0.841	1.009	0.849	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	22.37	0.05	1	707V-5	QPSK	100	0	14 mm	back	1:1	0.786	1.030	0.810	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	23.49	0.19	0	707V-5	QPSK	1	0	12 mm	bottom	1:1	0.844	1.002	0.846	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	23.49	-0.07	0	707V-5	QPSK	1	50	12 mm	bottom	1:1	1.000	1.002	1.002	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	23.50	-0.02	0	707V-5	QPSK	1	50	12 mm	bottom	1:1	0.999	1.000	0.999	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	22.46	0.00	1	707V-5	QPSK	50	50	12 mm	bottom	1:1	0.772	1.009	0.779	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	22.37	0.04	1	707V-5	QPSK	100	0	12 mm	bottom	1:1	0.771	1.030	0.794	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	23.50	-0.02	0	707V-5	QPSK	1	50	16 mm	right	1:1	0.249	1.000	0.249	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	22.46	0.00	1	707V-5	QPSK	50	50	16 mm	right	1:1	0.195	1.009	0.197	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	12.5	23.49	0.02	0	707V-5	QPSK	1	50	14 mm	back	1:1	1.010	0.080	1.012	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Variability is highlighted in blue.

Table 10-5
WLAN Body SAR Antenna 1

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2437	6	IEEE 802.11b	DSSS	12.5	12.31	-0.06	0 mm	707V-6	1	back	1:1	0.498	1.045	0.520	
2437	6	IEEE 802.11b	DSSS	12.5	12.31	-0.02	0 mm	707V-6	1	top	1:1	0.578	1.045	0.604	A8
2437	6	IEEE 802.11b	DSSS	12.5	12.31	0.13	0 mm	707V-6	1	right	1:1	0.029	1.045	0.030	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 10-6
WLAN Body SAR Antenna 2

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2412	1	IEEE 802.11b	DSSS	12.5	12.41	-0.08	0 mm	707V-6	1	back	1:1	0.535	1.021	0.546	
2437	6	IEEE 802.11b	DSSS	12.5	12.47	-0.20	0 mm	707V-6	1	back	1:1	0.540	1.007	0.544	
2462	11	IEEE 802.11b	DSSS	12.5	12.14	-0.15	0 mm	707V-6	1	back	1:1	0.572	1.086	0.621	
2437	6	IEEE 802.11b	DSSS	12.5	12.47	0.07	0 mm	707V-6	1	top	1:1	0.204	1.007	0.205	
2437	6	IEEE 802.11b	DSSS	12.5	12.47	0.13	0 mm	707V-6	1	right	1:1	0.350	1.007	0.352	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 10-7
WLAN Body SAR MIMO

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2437	6	IEEE 802.11n	OFDM	12.5	12.26	-0.15	0 mm	707V-6	13	back	1:1	0.473	1.057	0.500	
2437	6	IEEE 802.11n	OFDM	12.5	12.26	0.18	0 mm	707V-6	13	top	1:1	0.492	1.057	0.520	
2437	6	IEEE 802.11n	OFDM	12.5	12.26	-0.07	0 mm	707V-6	13	right	1:1	0.183	1.057	0.193	
5745	149	IEEE 802.11n	OFDM	8.5	8.49	0.03	0 mm	707V-6	13	back	1:1	0.438	1.002	0.439	
5765	153	IEEE 802.11n	OFDM	8.5	8.49	-0.03	0 mm	707V-6	13	back	1:1	0.439	1.002	0.440	
5825	165	IEEE 802.11n	OFDM	8.5	8.02	0.03	0 mm	707V-6	13	back	1:1	0.458	1.117	0.512	A9
5745	149	IEEE 802.11n	OFDM	8.5	8.49	-0.09	0 mm	707V-6	13	top	1:1	0.437	1.002	0.438	
5765	153	IEEE 802.11n	OFDM	8.5	8.49	0.11	0 mm	707V-6	13	top	1:1	0.427	1.002	0.428	
5825	165	IEEE 802.11n	OFDM	8.5	8.02	0.09	0 mm	707V-6	13	top	1:1	0.369	1.117	0.412	
5745	149	IEEE 802.11n	OFDM	8.5	8.49	-0.11	0 mm	707V-6	13	right	1:1	0.336	1.002	0.337	
5765	153	IEEE 802.11n	OFDM	8.5	8.49	-0.07	0 mm	707V-6	13	right	1:1	0.355	1.002	0.356	
5825	165	IEEE 802.11n	OFDM	8.5	8.02	-0.05	0 mm	707V-6	13	right	1:1	0.268	1.117	0.299	
5180	36	IEEE 802.11n	OFDM	8.5	8.47	-0.03	0 mm	707V-6	13	back	1:1	1.010	1.007	1.017	A10
5220	44	IEEE 802.11n	OFDM	8.5	8.47	0.04	0 mm	707V-6	13	back	1:1	0.890	1.007	0.896	
5180	36	IEEE 802.11n	OFDM	8.5	8.47	0.06	0 mm	707V-6	13	top	1:1	0.345	1.007	0.347	
5220	44	IEEE 802.11n	OFDM	8.5	8.47	0.05	0 mm	707V-6	13	top	1:1	0.366	1.007	0.369	
5180	36	IEEE 802.11n	OFDM	8.5	8.47	0.08	0 mm	707V-6	13	right	1:1	0.815	1.007	0.821	
5220	44	IEEE 802.11n	OFDM	8.5	8.47	0.05	0 mm	707V-6	13	right	1:1	0.812	1.007	0.818	
5180	36	IEEE 802.11n	OFDM	8.5	8.47	-0.04	0 mm	707V-6	13	back	1:1	1.010	1.007	1.017	
5260	52	IEEE 802.11n	OFDM	8.5	7.77	-0.01	0 mm	707V-6	13	back	1:1	0.900	1.183	1.065	
5300	60	IEEE 802.11n	OFDM	8.5	7.85	0.01	0 mm	707V-6	13	back	1:1	0.831	1.161	0.965	
5260	52	IEEE 802.11n	OFDM	8.5	7.77	0.08	0 mm	707V-6	13	top	1:1	0.391	1.183	0.463	
5300	60	IEEE 802.11n	OFDM	8.5	7.85	0.07	0 mm	707V-6	13	top	1:1	0.424	1.161	0.492	
5260	52	IEEE 802.11n	OFDM	8.5	7.77	0.05	0 mm	707V-6	13	right	1:1	0.861	1.183	1.019	
5300	60	IEEE 802.11n	OFDM	8.5	7.85	0.07	0 mm	707V-6	13	right	1:1	0.880	1.161	1.022	
5260	52	IEEE 802.11n	OFDM	8.5	7.77	-0.05	0 mm	707V-6	13	back	1:1	0.870	1.183	1.029	
5500	100	IEEE 802.11n	OFDM	8.5	7.92	0.10	0 mm	707V-6	13	back	1:1	0.467	1.143	0.534	
5580	116	IEEE 802.11n	OFDM	8.5	8.49	0.05	0 mm	707V-6	13	back	1:1	0.429	1.002	0.430	
5660	132	IEEE 802.11n	OFDM	8.5	8.10	-0.02	0 mm	707V-6	13	back	1:1	0.267	1.096	0.293	
5500	100	IEEE 802.11n	OFDM	8.5	7.92	0.08	0 mm	707V-6	13	top	1:1	0.449	1.143	0.513	
5580	116	IEEE 802.11n	OFDM	8.5	8.49	0.08	0 mm	707V-6	13	top	1:1	0.453	1.002	0.454	
5660	132	IEEE 802.11n	OFDM	8.5	8.10	0.06	0 mm	707V-6	13	top	1:1	0.404	1.096	0.443	
5500	100	IEEE 802.11n	OFDM	8.5	7.92	0.00	0 mm	707V-6	13	right	1:1	0.757	1.143	0.865	
5580	116	IEEE 802.11n	OFDM	8.5	8.49	0.05	0 mm	707V-6	13	right	1:1	0.481	1.002	0.482	
5660	132	IEEE 802.11n	OFDM	8.5	8.10	0.02	0 mm	707V-6	13	right	1:1	0.325	1.096	0.356	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Variabilities are highlighted in blue.

Table 10-8
Bluetooth Body SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Serial [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2441	39	Bluetooth	FHSS	11.0	10.76	-0.05	0 mm	707V-6	1	back	1:1	0.139	1.057	0.147	A11
2441	39	Bluetooth	FHSS	11.0	10.76	0.13	0 mm	707V-6	1	top	1:1	0.096	1.057	0.101	
2441	39	Bluetooth	FHSS	11.0	10.76	0.09	0 mm	707V-6	1	right	1:1	0.003	1.057	0.003	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 51 of 96
© 2014 PCTEST Engineering Laboratory, Inc.				REV 13.0 M 12/04/2013

10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in KDB 616217 D04v01r01, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
7. Per FCC KDB 616217 D04 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v05 was applied to determine SAR test exclusion for adjacent edge configurations. Bottom and Right Edge SAR tests were required for the main antenna. Top and Right Edge SAR tests were required for the WLAN antenna.

GPRS Test Notes:

1. Justification for reduced test configurations per KDB Publication 941225 D03v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for Body SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, when the reported (scaled) SAR measured at the middle channel > 0.8 W/kg then testing at the other channels is required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r01. The general test procedures used for testing can be found in Section 7.4.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b (SISO) and 802.11n (MIMO). Other IEEE 802.11 modes (including 802.11g) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b (SISO) and 802.11n (MIMO) mode.
2. For SISO 5GHz WLAN, SAR was not required based on the maximum conducted power and the antenna to user separation distance. Please see section 1.6 for more information.
3. Per KDB 248227, SAR for MIMO was measured with both transmitting simultaneously and was evaluated in dependently of SISO operation. For 2.4 GHz MIMO and 5 GHz MIMO, 802.11n was evaluated.
4. WIFI transmission was verified using an uncalibrated spectrum analyzer.
5. When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is > 1.6 W/kg or the reported 1g averaged SAR is > 0.8 W/kg, SAR testing on other default channels was required.
6. There is no sensor power reduction mechanism applied for WIFI/BT modes.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 52 of 96

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to data devices with built-in unlicensed transmitters such as 802.11a/b/g/n/ac and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 11-1
Estimated SAR

Mode	Configuration	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
		[MHz]	[dBm]	[mm]	[W/kg]
5 GHz WLAN (SISO)	Touching*, Back Side, Top Edge, and Right Edge	5825	8.00	5	0.386
5 GHz WLAN (SISO)	Back Side	5825	8.00	14	0.138
5 GHz WLAN (SISO)	Right Edge**	5825	8.00	16	0.121
Bluetooth LE	Touching*, Back Side, Top Edge	2440	8.00	5	0.250
Bluetooth LE	Back Side	2440	8.00	14	0.089
Bluetooth LE	Right Edge	2440	8.00	19	0.066

Note:

1. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.
2. (*) – Per FCC KDB Publication 447498, when the test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.
3. (**) – For 5 GHz WLAN (SISO), Right Edge a conservative distance of 16mm is applied for Antenna 1 and Antenna 2 to determine estimated SAR.
4. For configurations excluded per 447498 D01v05, an estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR exclusion when the test separation distance was >50 mm.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 53 of 96

11.3 Body SAR Simultaneous Transmission Analysis

Table 11-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Antenna 1 (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.092	0.520	See Note 1	0.01	Body SAR	Back	1.028	0.520	1.548	N/A
	Top	0.400	0.604	1.004	N/A		Top	0.400	0.604	1.004	N/A
	Bottom	0.501	0.400	0.901	N/A		Bottom	0.268	0.400	0.668	N/A
	Right	0.348	0.030	0.378	N/A		Right	0.453	0.030	0.483	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.088	0.520	See Note 1	0.01	Body SAR	Back	1.046	0.520	1.566	N/A
	Top	0.400	0.604	1.004	N/A		Top	0.400	0.604	1.004	N/A
	Bottom	0.605	0.400	1.005	N/A		Bottom	0.409	0.400	0.809	N/A
	Right	0.167	0.030	0.197	N/A		Right	0.144	0.030	0.174	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.968	0.520	1.488	N/A	Body SAR	Back	1.041	0.520	1.561	N/A
	Top	0.400	0.604	1.004	N/A		Top	0.400	0.604	1.004	N/A
	Bottom	0.535	0.400	0.935	N/A		Bottom	0.209	0.400	0.609	N/A
	Right	0.384	0.030	0.414	N/A		Right	0.112	0.030	0.142	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
			Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR			
			Body SAR	Back	1.073	0.520	1.593	N/A			
				Top	0.400	0.604	1.004	N/A			
				Bottom	0.592	0.400	0.992	N/A			
				Right	0.121	0.030	0.151	N/A			
				Left	0.400	0.400	0.800	N/A			

Table 11-3
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Antenna 2 (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.092	0.621	See Note 1	0.01	Body SAR	Back	1.028	0.621	See Note 1	0.01
	Top	0.400	0.205	0.605	N/A		Top	0.400	0.205	0.605	N/A
	Bottom	0.501	0.400	0.901	N/A		Bottom	0.268	0.400	0.668	N/A
	Right	0.348	0.352	0.700	N/A		Right	0.453	0.352	0.805	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.088	0.621	See Note 1	0.01	Body SAR	Back	1.046	0.621	See Note 1	0.01
	Top	0.400	0.205	0.605	N/A		Top	0.400	0.205	0.605	N/A
	Bottom	0.605	0.400	1.005	N/A		Bottom	0.409	0.400	0.809	N/A
	Right	0.167	0.352	0.519	N/A		Right	0.144	0.352	0.496	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.968	0.621	1.589	N/A	Body SAR	Back	1.041	0.621	See Note 1	0.01
	Top	0.400	0.205	0.605	N/A		Top	0.400	0.205	0.605	N/A
	Bottom	0.535	0.400	0.935	N/A		Bottom	0.209	0.400	0.609	N/A
	Right	0.384	0.352	0.736	N/A		Right	0.112	0.352	0.464	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR						
Body SAR	Back	1.073	0.621	See Note 1	0.01						
	Top	0.400	0.205	0.605	N/A						
	Bottom	0.592	0.400	0.992	N/A						
	Right	0.121	0.352	0.473	N/A						
	Left	0.400	0.400	0.800	N/A						

Table 11-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN - MIMO (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.092	0.500	1.592	N/A	Body SAR	Back	1.028	0.500	1.528	N/A
	Top	0.400	0.520	0.920	N/A		Top	0.400	0.520	0.920	N/A
	Bottom	0.501	0.400	0.901	N/A		Bottom	0.268	0.400	0.668	N/A
	Right	0.348	0.193	0.541	N/A		Right	0.453	0.193	0.646	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.088	0.500	1.588	N/A	Body SAR	Back	1.046	0.500	1.546	N/A
	Top	0.400	0.520	0.920	N/A		Top	0.400	0.520	0.920	N/A
	Bottom	0.605	0.400	1.005	N/A		Bottom	0.409	0.400	0.809	N/A
	Right	0.167	0.193	0.360	N/A		Right	0.144	0.193	0.337	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.968	0.500	1.468	N/A	Body SAR	Back	1.041	0.500	1.541	N/A
	Top	0.400	0.520	0.920	N/A		Top	0.400	0.520	0.920	N/A
	Bottom	0.535	0.400	0.935	N/A		Bottom	0.209	0.400	0.609	N/A
	Right	0.384	0.193	0.577	N/A		Right	0.112	0.193	0.305	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
			Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR			
			Body SAR	Back	1.073	0.500	1.573	N/A			
				Top	0.400	0.520	0.920	N/A			
				Bottom	0.592	0.400	0.992	N/A			
				Right	0.121	0.193	0.314	N/A			
				Left	0.400	0.400	0.800	N/A			

Table 11-5
Simultaneous Transmission Scenario with 5 GHz WLAN - Antenna 1 (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.092	0.386	1.478	N/A	Body SAR	Back	1.028	0.386	1.414	N/A
	Top	0.400	0.386	0.786	N/A		Top	0.400	0.386	0.786	N/A
	Bottom	0.501	0.400	0.901	N/A		Bottom	0.268	0.400	0.668	N/A
	Right	0.348	0.386	0.734	N/A		Right	0.453	0.386	0.839	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.088	0.386	1.474	N/A	Body SAR	Back	1.046	0.386	1.432	N/A
	Top	0.400	0.386	0.786	N/A		Top	0.400	0.386	0.786	N/A
	Bottom	0.605	0.400	1.005	N/A		Bottom	0.409	0.400	0.809	N/A
	Right	0.167	0.386	0.553	N/A		Right	0.144	0.386	0.530	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.968	0.386	1.354	N/A	Body SAR	Back	1.041	0.386	1.427	N/A
	Top	0.400	0.386	0.786	N/A		Top	0.400	0.386	0.786	N/A
	Bottom	0.535	0.400	0.935	N/A		Bottom	0.209	0.400	0.609	N/A
	Right	0.384	0.386	0.770	N/A		Right	0.112	0.386	0.498	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
			Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR			
			Body SAR	Back	1.073	0.386	1.459	N/A			
				Top	0.400	0.386	0.786	N/A			
				Bottom	0.592	0.400	0.992	N/A			
				Right	0.121	0.386	0.507	N/A			
				Left	0.400	0.400	0.800	N/A			

Table 11-6

Simultaneous Transmission Scenario with 5 GHz WLAN - Antenna 2 (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.092	0.386	1.478	N/A	Body SAR	Back	1.028	0.386	1.414	N/A
	Top	0.400	0.386	0.786	N/A		Top	0.400	0.386	0.786	N/A
	Bottom	0.501	0.400	0.901	N/A		Bottom	0.268	0.400	0.668	N/A
	Right	0.348	0.386	0.734	N/A		Right	0.453	0.386	0.839	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.088	0.386	1.474	N/A	Body SAR	Back	1.046	0.386	1.432	N/A
	Top	0.400	0.386	0.786	N/A		Top	0.400	0.386	0.786	N/A
	Bottom	0.605	0.400	1.005	N/A		Bottom	0.409	0.400	0.809	N/A
	Right	0.167	0.386	0.553	N/A		Right	0.144	0.386	0.530	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.968	0.386	1.354	N/A	Body SAR	Back	1.041	0.386	1.427	N/A
	Top	0.400	0.386	0.786	N/A		Top	0.400	0.386	0.786	N/A
	Bottom	0.535	0.400	0.935	N/A		Bottom	0.209	0.400	0.609	N/A
	Right	0.384	0.386	0.770	N/A		Right	0.112	0.386	0.498	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
			Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR			
			Body SAR	Back	1.073	0.386	1.459	N/A			
				Top	0.400	0.386	0.786	N/A			
				Bottom	0.592	0.400	0.992	N/A			
				Right	0.121	0.386	0.507	N/A			
				Left	0.400	0.400	0.800	N/A			

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 58 of 96	

Table 11-7
Simultaneous Transmission Scenario with 5 GHz WLAN - MIMO (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.092	1.065	See Note 1	0.02	Body SAR	Back	1.028	1.065	See Note 1	0.02
	Top	0.400	0.513	0.913	N/A		Top	0.400	0.513	0.913	N/A
	Bottom	0.501	0.400	0.901	N/A		Bottom	0.268	0.400	0.668	N/A
	Right	0.348	1.022	1.370	N/A		Right	0.453	1.022	1.475	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.088	1.065	See Note 1	0.02	Body SAR	Back	1.046	1.065	See Note 1	0.02
	Top	0.400	0.513	0.913	N/A		Top	0.400	0.513	0.913	N/A
	Bottom	0.605	0.400	1.005	N/A		Bottom	0.409	0.400	0.809	N/A
	Right	0.167	1.022	1.189	N/A		Right	0.144	1.022	1.166	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.968	1.065	See Note 1	0.02	Body SAR	Back	1.041	1.065	See Note 1	0.02
	Top	0.400	0.513	0.913	N/A		Top	0.400	0.513	0.913	N/A
	Bottom	0.535	0.400	0.935	N/A		Bottom	0.209	0.400	0.609	N/A
	Right	0.384	1.022	1.406	N/A		Right	0.112	1.022	1.134	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
			Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR			
			Body SAR	Back	1.073	1.065	See Note 1	0.02			
				Top	0.400	0.513	0.913	N/A			
				Bottom	0.592	0.400	0.992	N/A			
				Right	0.121	1.022	1.143	N/A			
				Left	0.400	0.400	0.800	N/A			

Table 11-8
Simultaneous Transmission Scenario with Bluetooth (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.092	0.250	1.342	N/A	Body SAR	Back	1.028	0.250	1.278	N/A
	Top	0.400	0.250	0.650	N/A		Top	0.400	0.250	0.650	N/A
	Bottom	0.501	0.400	0.901	N/A		Bottom	0.268	0.400	0.668	N/A
	Right	0.348	0.066	0.414	N/A		Right	0.453	0.066	0.519	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	1.088	0.250	1.338	N/A	Body SAR	Back	1.046	0.250	1.296	N/A
	Top	0.400	0.250	0.650	N/A		Top	0.400	0.250	0.650	N/A
	Bottom	0.605	0.400	1.005	N/A		Bottom	0.409	0.400	0.809	N/A
	Right	0.167	0.066	0.233	N/A		Right	0.144	0.066	0.210	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
Simult Tx	Configuration	LTE Band 13 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.968	0.250	1.218	N/A	Body SAR	Back	1.041	0.250	1.291	N/A
	Top	0.400	0.250	0.650	N/A		Top	0.400	0.250	0.650	N/A
	Bottom	0.535	0.400	0.935	N/A		Bottom	0.209	0.400	0.609	N/A
	Right	0.384	0.066	0.450	N/A		Right	0.112	0.066	0.178	N/A
	Left	0.400	0.400	0.800	N/A		Left	0.400	0.400	0.800	N/A
			Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR			
			Body SAR	Back	1.073	0.250	1.323	N/A			
				Top	0.400	0.250	0.650	N/A			
				Bottom	0.592	0.400	0.992	N/A			
				Right	0.121	0.066	0.187	N/A			
				Left	0.400	0.400	0.800	N/A			

Table 11-9
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Antenna 1 (Back at 14 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GPRS 850	1.030	<0.52	<1.550	N/A
Back Side	UMTS 850	0.305	<0.52	<0.825	N/A
Back Side	GPRS 1900	1.026	<0.52	<1.546	N/A
Back Side	UMTS 1900	0.134	<0.52	<0.654	N/A
Back Side	LTE Band 13	0.550	<0.52	<1.070	N/A
Back Side	LTE Band 4 (AWS)	0.065	<0.52	<0.585	N/A
Back Side	LTE Band 2 (PCS)	1.082	<0.52	See Note 1	<0.01

Table 11-10
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Antenna 2 (Back at 14 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GPRS 850	1.030	<0.621	See Note 1	<0.01
Back Side	UMTS 850	0.305	<0.621	<0.926	N/A
Back Side	GPRS 1900	1.026	<0.621	See Note 1	<0.01
Back Side	UMTS 1900	0.134	<0.621	<0.755	N/A
Back Side	LTE Band 13	0.550	<0.621	<1.171	N/A
Back Side	LTE Band 4 (AWS)	0.065	<0.621	<0.686	N/A
Back Side	LTE Band 2 (PCS)	1.082	<0.621	See Note 1	<0.01

Table 11-11
Simultaneous Transmission Scenario with 2.4 GHz WLAN - MIMO (Back at 14 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GPRS 850	1.030	<0.500	<1.530	N/A
Back Side	UMTS 850	0.305	<0.500	<0.805	N/A
Back Side	GPRS 1900	1.026	<0.500	<1.526	N/A
Back Side	UMTS 1900	0.134	<0.500	<0.634	N/A
Back Side	LTE Band 13	0.550	<0.500	<1.050	N/A
Back Side	LTE Band 4 (AWS)	0.065	<0.500	<0.565	N/A
Back Side	LTE Band 2 (PCS)	1.082	<0.500	<1.582	N/A

Table 11-12
Simultaneous Transmission Scenario with 5 GHz WLAN - Antenna 1 (Back at 14 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GPRS 850	1.030	0.138	1.168	N/A
Back Side	UMTS 850	0.305	0.138	0.443	N/A
Back Side	GPRS 1900	1.026	0.138	1.164	N/A
Back Side	UMTS 1900	0.134	0.138	0.272	N/A
Back Side	LTE Band 13	0.550	0.138	0.688	N/A
Back Side	LTE Band 4 (AWS)	0.065	0.138	0.203	N/A
Back Side	LTE Band 2 (PCS)	1.082	0.138	1.220	N/A

Table 11-13
Simultaneous Transmission Scenario with 5 GHz WLAN - Antenna 2 (Back at 14 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GPRS 850	1.030	0.138	1.168	N/A
Back Side	UMTS 850	0.305	0.138	0.443	N/A
Back Side	GPRS 1900	1.026	0.138	1.164	N/A
Back Side	UMTS 1900	0.134	0.138	0.272	N/A
Back Side	LTE Band 13	0.550	0.138	0.688	N/A
Back Side	LTE Band 4 (AWS)	0.065	0.138	0.203	N/A
Back Side	LTE Band 2 (PCS)	1.082	0.138	1.220	N/A

Table 11-14
Simultaneous Transmission Scenario with 5 GHz WLAN - MIMO (Back at 14 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GPRS 850	1.030	<1.065	See Note 1	<0.02
Back Side	UMTS 850	0.305	<1.065	<1.370	N/A
Back Side	GPRS 1900	1.026	<1.065	See Note 1	<0.02
Back Side	UMTS 1900	0.134	<1.065	<1.199	N/A
Back Side	LTE Band 13	0.550	<1.065	See Note 1	<0.01
Back Side	LTE Band 4 (AWS)	0.065	<1.065	<1.130	N/A
Back Side	LTE Band 2 (PCS)	1.082	<1.065	See Note 1	<0.02

Table 11-15
Simultaneous Transmission Scenario with Bluetooth (Back at 14 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GPRS 850	1.030	<0.147	<1.177	N/A
Back Side	UMTS 850	0.305	<0.147	<1.177	N/A
Back Side	GPRS 1900	1.026	<0.147	<1.177	N/A
Back Side	UMTS 1900	0.134	<0.147	<1.177	N/A
Back Side	LTE Band 13	0.550	<0.147	<1.177	N/A
Back Side	LTE Band 4 (AWS)	0.065	<0.147	<1.177	N/A
Back Side	LTE Band 2 (PCS)	1.082	<0.147	<1.177	N/A

Table 11-16
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Antenna 1 (Bottom at 12 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Bottom Edge	GPRS 850	0.652	0.400	1.052	N/A
Bottom Edge	UMTS 850	0.154	0.400	0.554	N/A
Bottom Edge	GPRS 1900	0.623	0.400	1.023	N/A
Bottom Edge	UMTS 1900	0.073	0.400	0.473	N/A
Bottom Edge	LTE Band 13	0.206	0.400	0.606	N/A
Bottom Edge	LTE Band 4 (AWS)	0.390	0.400	0.790	N/A
Bottom Edge	LTE Band 2 (PCS)	1.002	0.400	1.402	N/A

Table 11-17
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Antenna 2 (Bottom at 12 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Bottom Edge	GPRS 850	0.652	0.400	1.052	N/A
Bottom Edge	UMTS 850	0.154	0.400	0.554	N/A
Bottom Edge	GPRS 1900	0.623	0.400	1.023	N/A
Bottom Edge	UMTS 1900	0.073	0.400	0.473	N/A
Bottom Edge	LTE Band 13	0.206	0.400	0.606	N/A
Bottom Edge	LTE Band 4 (AWS)	0.390	0.400	0.790	N/A
Bottom Edge	LTE Band 2 (PCS)	1.002	0.400	1.402	N/A

Table 11-18
Simultaneous Transmission Scenario with 2.4 GHz WLAN - MIMO (Bottom at 12 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Bottom Edge	GPRS 850	0.652	0.400	1.052	N/A
Bottom Edge	UMTS 850	0.154	0.400	0.554	N/A
Bottom Edge	GPRS 1900	0.623	0.400	1.023	N/A
Bottom Edge	UMTS 1900	0.073	0.400	0.473	N/A
Bottom Edge	LTE Band 13	0.206	0.400	0.606	N/A
Bottom Edge	LTE Band 4 (AWS)	0.390	0.400	0.790	N/A
Bottom Edge	LTE Band 2 (PCS)	1.002	0.400	1.402	N/A

Table 11-19
Simultaneous Transmission Scenario with 5 GHz WLAN - Antenna 1 (Bottom at 12 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Bottom Edge	GPRS 850	0.652	0.400	1.052	N/A
Bottom Edge	UMTS 850	0.154	0.400	0.554	N/A
Bottom Edge	GPRS 1900	0.623	0.400	1.023	N/A
Bottom Edge	UMTS 1900	0.073	0.400	0.473	N/A
Bottom Edge	LTE Band 13	0.206	0.400	0.606	N/A
Bottom Edge	LTE Band 4 (AWS)	0.390	0.400	0.790	N/A
Bottom Edge	LTE Band 2 (PCS)	1.002	0.400	1.402	N/A

Table 11-20
Simultaneous Transmission Scenario with 5 GHz WLAN - Antenna 2 (Bottom at 12 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Bottom Edge	GPRS 850	0.652	0.400	1.052	N/A
Bottom Edge	UMTS 850	0.154	0.400	0.554	N/A
Bottom Edge	GPRS 1900	0.623	0.400	1.023	N/A
Bottom Edge	UMTS 1900	0.073	0.400	0.473	N/A
Bottom Edge	LTE Band 13	0.206	0.400	0.606	N/A
Bottom Edge	LTE Band 4 (AWS)	0.390	0.400	0.790	N/A
Bottom Edge	LTE Band 2 (PCS)	1.002	0.400	1.402	N/A

Table 11-21
Simultaneous Transmission Scenario with 5 GHz WLAN - MIMO (Bottom at 12 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Bottom Edge	GPRS 850	0.652	0.400	1.052	N/A
Bottom Edge	UMTS 850	0.154	0.400	0.554	N/A
Bottom Edge	GPRS 1900	0.623	0.400	1.023	N/A
Bottom Edge	UMTS 1900	0.073	0.400	0.473	N/A
Bottom Edge	LTE Band 13	0.206	0.400	0.606	N/A
Bottom Edge	LTE Band 4 (AWS)	0.390	0.400	0.790	N/A
Bottom Edge	LTE Band 2 (PCS)	1.002	0.400	1.402	N/A

Table 11-22
Simultaneous Transmission Scenario with Bluetooth (Bottom at 12 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Bottom Edge	GPRS 850	0.652	0.400	1.052	N/A
Bottom Edge	UMTS 850	0.154	0.400	0.554	N/A
Bottom Edge	GPRS 1900	0.623	0.400	1.023	N/A
Bottom Edge	UMTS 1900	0.073	0.400	0.473	N/A
Bottom Edge	LTE Band 13	0.206	0.400	0.606	N/A
Bottom Edge	LTE Band 4 (AWS)	0.390	0.400	0.790	N/A
Bottom Edge	LTE Band 2 (PCS)	1.002	0.400	1.402	N/A

Table 11-23
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Antenna 1 (Right at 16 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Right Edge	GPRS 850	0.168	<0.03	<0.198	N/A
Right Edge	UMTS 850	0.081	<0.03	<0.111	N/A
Right Edge	GPRS 1900	0.199	<0.03	<0.229	N/A
Right Edge	UMTS 1900	0.280	<0.03	<0.310	N/A
Right Edge	LTE Band 13	0.083	<0.03	<0.113	N/A
Right Edge	LTE Band 4 (AWS)	0.190	<0.03	<0.220	N/A
Right Edge	LTE Band 2 (PCS)	0.249	<0.03	<0.279	N/A

Table 11-24
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Antenna 2 (Right at 16 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Right Edge	GPRS 850	0.168	<0.352	<0.520	N/A
Right Edge	UMTS 850	0.081	<0.352	<0.433	N/A
Right Edge	GPRS 1900	0.199	<0.352	<0.551	N/A
Right Edge	UMTS 1900	0.280	<0.352	<0.632	N/A
Right Edge	LTE Band 13	0.083	<0.352	<0.435	N/A
Right Edge	LTE Band 4 (AWS)	0.190	<0.352	<0.542	N/A
Right Edge	LTE Band 2 (PCS)	0.249	<0.352	<0.601	N/A

Table 11-25
Simultaneous Transmission Scenario with 2.4 GHz WLAN - MIMO (Right at 16 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Right Edge	GPRS 850	0.168	<0.193	<0.361	N/A
Right Edge	UMTS 850	0.081	<0.193	<0.274	N/A
Right Edge	GPRS 1900	0.199	<0.193	<0.392	N/A
Right Edge	UMTS 1900	0.280	<0.193	<0.473	N/A
Right Edge	LTE Band 13	0.083	<0.193	<0.276	N/A
Right Edge	LTE Band 4 (AWS)	0.190	<0.193	<0.383	N/A
Right Edge	LTE Band 2 (PCS)	0.249	<0.193	<0.442	N/A

Table 11-26
Simultaneous Transmission Scenario with 5 GHz WLAN - Antenna 1 (Right at 16 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Right Edge	GPRS 850	0.168	0.121	0.289	N/A
Right Edge	UMTS 850	0.081	0.121	0.202	N/A
Right Edge	GPRS 1900	0.199	0.121	0.320	N/A
Right Edge	UMTS 1900	0.280	0.121	0.401	N/A
Right Edge	LTE Band 13	0.083	0.121	0.204	N/A
Right Edge	LTE Band 4 (AWS)	0.190	0.121	0.311	N/A
Right Edge	LTE Band 2 (PCS)	0.249	0.121	0.370	N/A

Table 11-27
Simultaneous Transmission Scenario with 5 GHz WLAN - Antenna 2 (Right at 16 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Right Edge	GPRS 850	0.168	0.121	0.289	N/A
Right Edge	UMTS 850	0.081	0.121	0.202	N/A
Right Edge	GPRS 1900	0.199	0.121	0.320	N/A
Right Edge	UMTS 1900	0.280	0.121	0.401	N/A
Right Edge	LTE Band 13	0.083	0.121	0.204	N/A
Right Edge	LTE Band 4 (AWS)	0.190	0.121	0.311	N/A
Right Edge	LTE Band 2 (PCS)	0.249	0.121	0.370	N/A

Table 11-28
Simultaneous Transmission Scenario with 5 GHz WLAN - MIMO (Right at 16 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Right Edge	GPRS 850	0.168	<1.022	<1.190	N/A
Right Edge	UMTS 850	0.081	<1.022	<1.103	N/A
Right Edge	GPRS 1900	0.199	<1.022	<1.221	N/A
Right Edge	UMTS 1900	0.280	<1.022	<1.302	N/A
Right Edge	LTE Band 13	0.083	<1.022	<1.105	N/A
Right Edge	LTE Band 4 (AWS)	0.190	<1.022	<1.212	N/A
Right Edge	LTE Band 2 (PCS)	0.249	<1.022	<1.271	N/A

Table 11-29
Simultaneous Transmission Scenario with Bluetooth (Right at 16 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Right Edge	GPRS 850	0.168	<0.066	<0.234	N/A
Right Edge	UMTS 850	0.081	<0.066	<0.147	N/A
Right Edge	GPRS 1900	0.199	<0.066	<0.265	N/A
Right Edge	UMTS 1900	0.280	<0.066	<0.346	N/A
Right Edge	LTE Band 13	0.083	<0.066	<0.149	N/A
Right Edge	LTE Band 4 (AWS)	0.190	<0.066	<0.256	N/A
Right Edge	LTE Band 2 (PCS)	0.249	<0.066	<0.315	N/A

Note:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not higher than 0.04 per FCC KDB 447498 D01v05. See Section 11.4 for detailed SPLS ratio analysis.
2. For SAR summations for body back at 14 mm, 2.4 GHz WLAN, 2.4 GHz Bluetooth, and 5 GHz MIMO WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for 2.4 GHz WLAN, 2.4 GHz Bluetooth, and 5 GHz MIMO WLAN was more conservative. “<” denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
3. For SAR summations for body right edge at 16 mm, 2.4 GHz WLAN and 5 GHz MIMO WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for 2.4 GHz WLAN and 5 GHz MIMO WLAN was more conservative. “<” denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
4. For SAR summation for body back side at 14mm and right edge at 16 mm, estimated SISO 5 GHz WLAN SAR values were used.
5. For SAR summation for body right edge at 16 mm, estimated Bluetooth SAR values were used.
6. For configurations excluded per 447498 D01v05, an estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR exclusion when the test separation distance was >50 mm.
7. SISO 5 GHz WLAN was excluded per FCC KDB 447498 D01v05 (Please see section 1.6 for more information). Therefore, estimated 5 GHz SAR values in table 11-1 were used for summation purposes.

11.4 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v05, when the sum of the standalone transmitters is more than 1.6 W/kg, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 , simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{T_{X1} - T_{X2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

FCC ID: A3LSMT707V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet	Page 66 of 96	

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with GPRS 850 MHz antenna operating at limited output power with 2.4 GHz WIFI Antenna 1.

Table 11-30
Peak SAR Locations for Body Back Side at 0 mm GPRS 850 MHz and 2.4 GHz WLAN Antenna 1

Mode/Band	x (mm)	y (mm)
GPRS 850	-69.50	-85.50
802.11b	-55.40	96.00

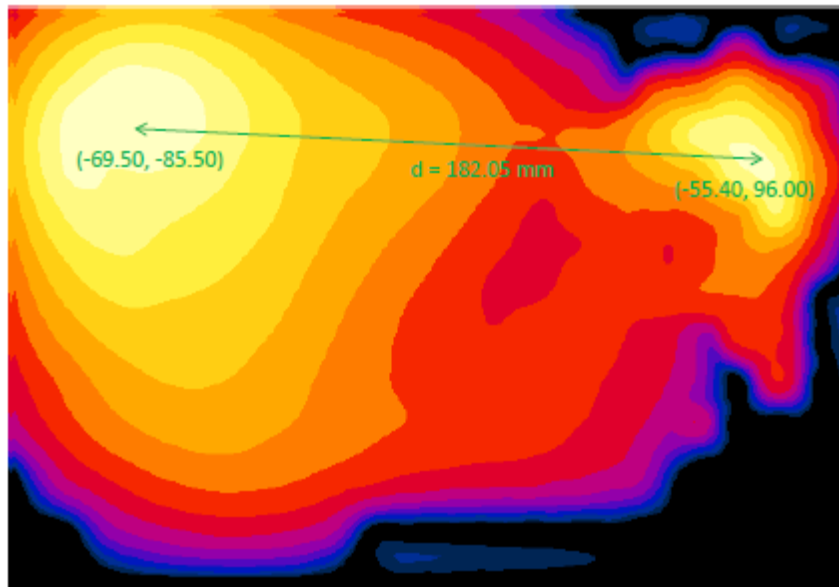


Figure 11-1
Peak SAR Locations for Body Back Side at 0 mm GPRS 850 MHz and 2.4 GHz WLAN Antenna 1

Table 11-31
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 850	802.11b	1.092	0.52	1.612	182.05	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with GPRS 1900 MHz antenna operating at limited output power with 2.4 GHz WIFI Antenna 1.

Table 11-32
Peak SAR Locations for Body Back Side at 0 mm GPRS 1900 MHz and 2.4 GHz WLAN Antenna 1

Mode/Band	x (mm)	y (mm)
GPRS 1900	-71.00	-97.00
802.11b	-55.40	96.00

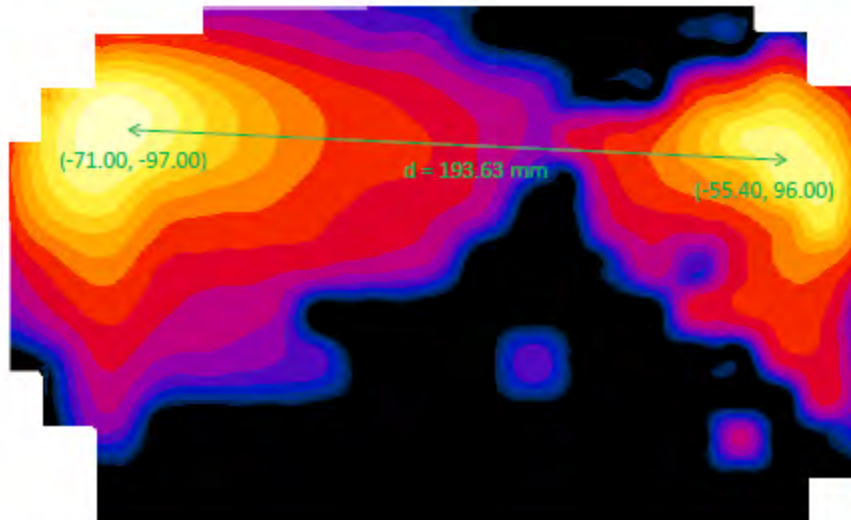


Figure 11-2
Peak SAR Locations for Body Back Side at 0 mm GPRS 1900 MHz and 2.4 GHz WLAN Antenna 1

Table 11-33
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11b	1.088	0.52	1.608	193.63	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with GPRS 850 MHz antenna operating at limited output power with 2.4 GHz WIFI Antenna 2.

Table 11-34
Peak SAR Locations for Body Back Side at 0 mm GPRS 850 MHz and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
GPRS 850	-69.50	-85.50
802.11b	-72.00	76.00

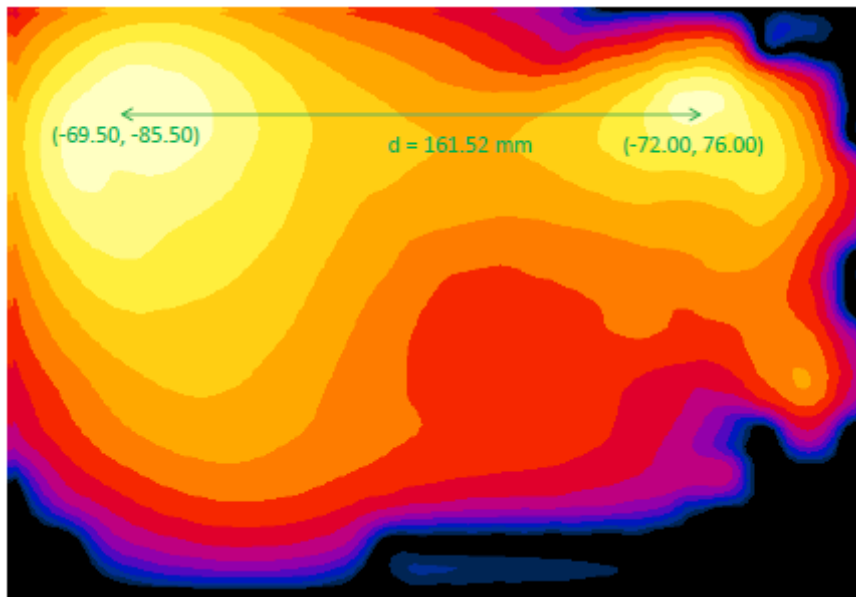


Figure 11-3
Peak SAR Locations for Body Back Side at 0 mm GPRS 850 MHz and 2.4 GHz WLAN Antenna 2

Table 11-35
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 850	802.11b	1.092	0.621	1.713	161.52	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with UMTS 850 MHz antenna operating at limited output power with 2.4 GHz WIFI Antenna 2.

Table 11-36
Peak SAR Locations for Body Back Side at 0 mm UMTS 850 MHz and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
UMTS 850	-70.00	-90.00
802.11b	-72.00	76.00

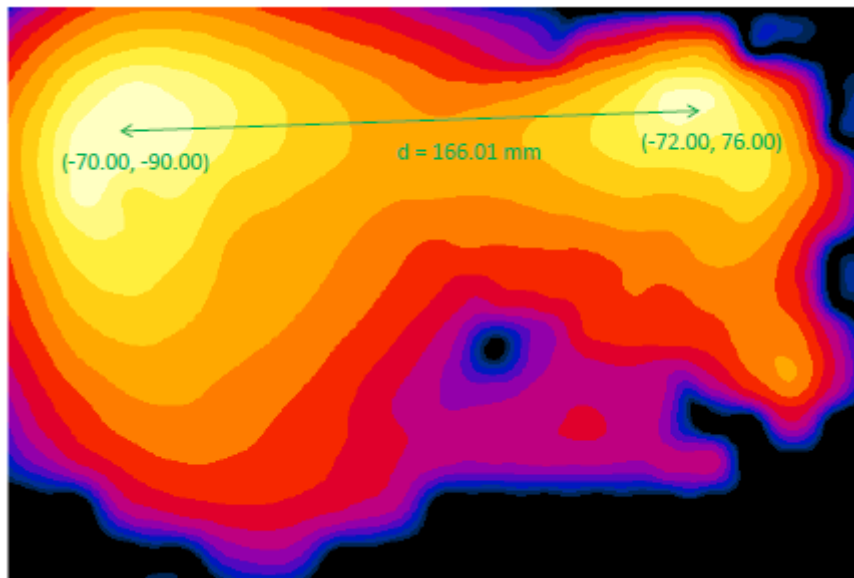


Figure 11-4
Peak SAR Locations for Body Back Side at 0 mm UMTS 850 MHz and 2.4 GHz WLAN Antenna 2

Table 11-37
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 850	802.11b	1.028	0.621	1.649	166.01	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with GPRS 1900 MHz antenna operating at limited output power with 2.4 GHz WIFI Antenna 2.

Table 11-38
Peak SAR Locations for Body Back Side at 0 mm GPRS 1900 MHz and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
GPRS 1900	-71.00	-97.00
802.11b	-72.00	76.00

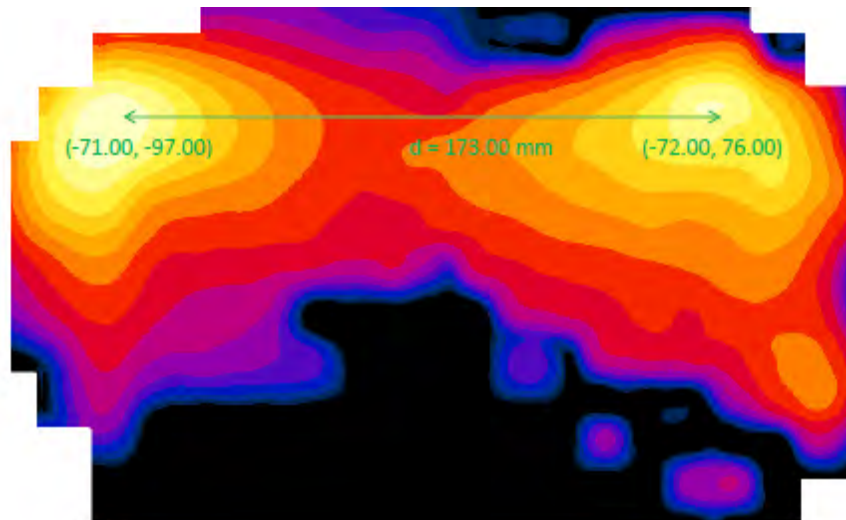


Figure 11-5
Peak SAR Locations for Body Back Side at 0 mm GPRS 1900 MHz and 2.4 GHz WLAN Antenna 2

Table 11-39
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11b	1.088	0.621	1.709	173	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with UMTS 1900 MHz antenna operating at limited output power with 2.4 GHz WIFI Antenna 2.

Table 11-40
Peak SAR Locations for Body Back Side at 0 mm UMTS 1900 MHz and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
UMTS 1900	-64.50	-91.00
802.11b	-72.00	76.00

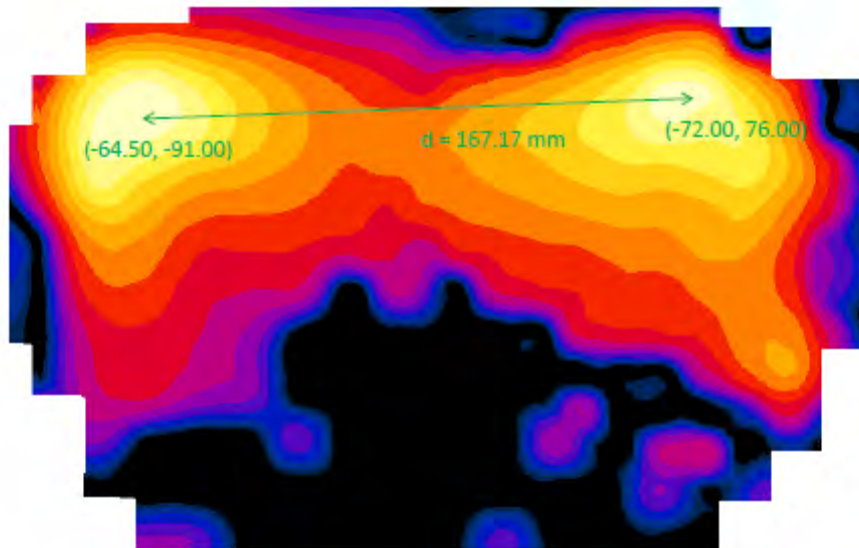


Figure 11-6
Peak SAR Locations for Body Back Side at 0 mm UMTS 1900 MHz and 2.4 GHz WLAN Antenna 2

Table 11-41
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 1900	802.11b	1.046	0.621	1.667	167.17	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with LTE Band 4 antenna operating at limited output power with 2.4 GHz WIFI Antenna 2.

Table 11-42
Peak SAR Locations for Body Back Side at 0 mm LTE Band 4 and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
LTE Band 4	-64.00	-96.00
802.11b	-72.00	76.00

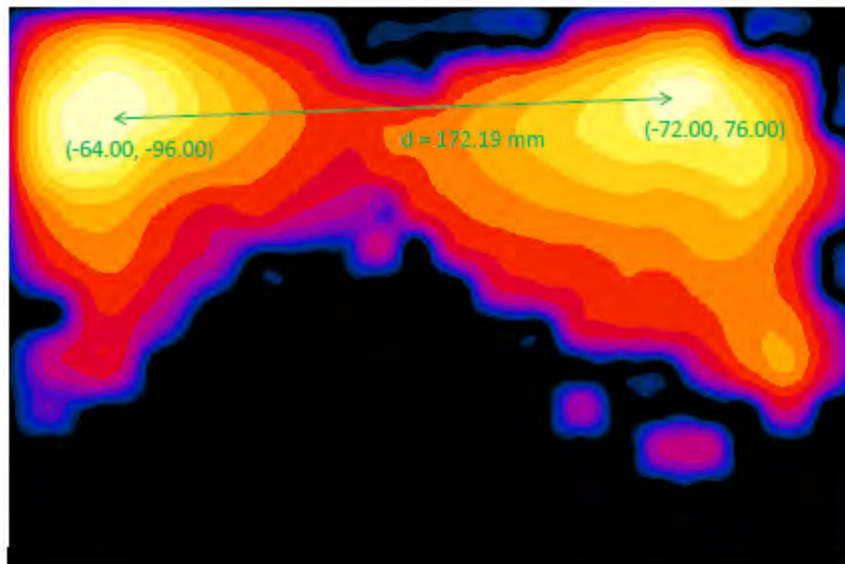


Figure 11-7
Peak SAR Locations for Body Back Side at 0 mm LTE Band 4 and 2.4 GHz WLAN Antenna 2

Table 11-43
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 4	802.11b	1.041	0.621	1.662	172.19	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with LTE Band 2 antenna operating at limited output power with 2.4 GHz WIFI Antenna 2.

Table 11-44
Peak SAR Locations for Body Back Side at 0 mm LTE Band 2 and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
LTE Band 2	-68.00	-101.00
802.11b	-72.00	76.00

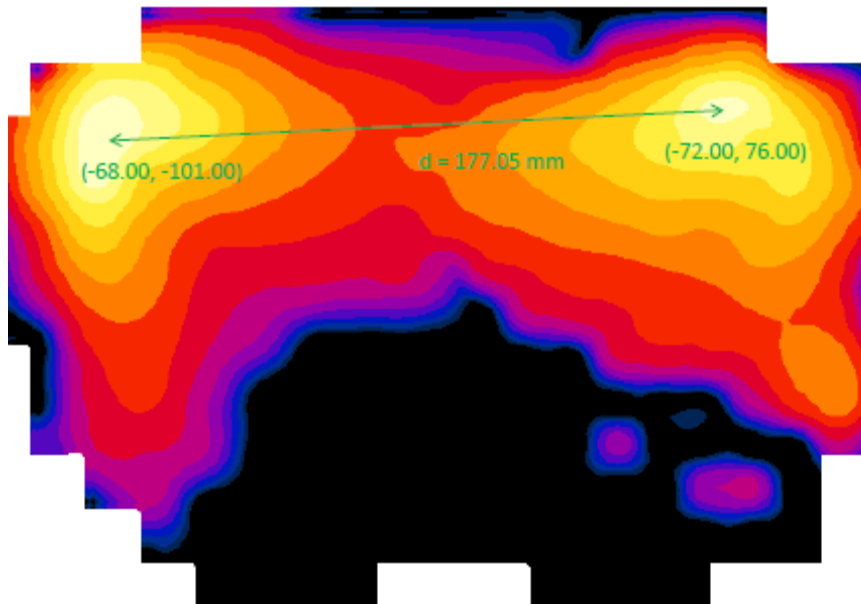


Figure 11-8
Peak SAR Locations for Body Back Side at 0 mm LTE Band 2 and 2.4 GHz WLAN Antenna 2

Table 11-45
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 2	802.11b	1.073	0.621	1.694	177.05	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with GPRS 850 MHz antenna operating at limited output power with 5 GHz WIFI MIMO.

Table 11-46
Peak SAR Locations for Body Back Side at 0 mm GPRS 850 MHz and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
GPRS 850	-69.50	-85.50
802.11n	-79.70	78.00

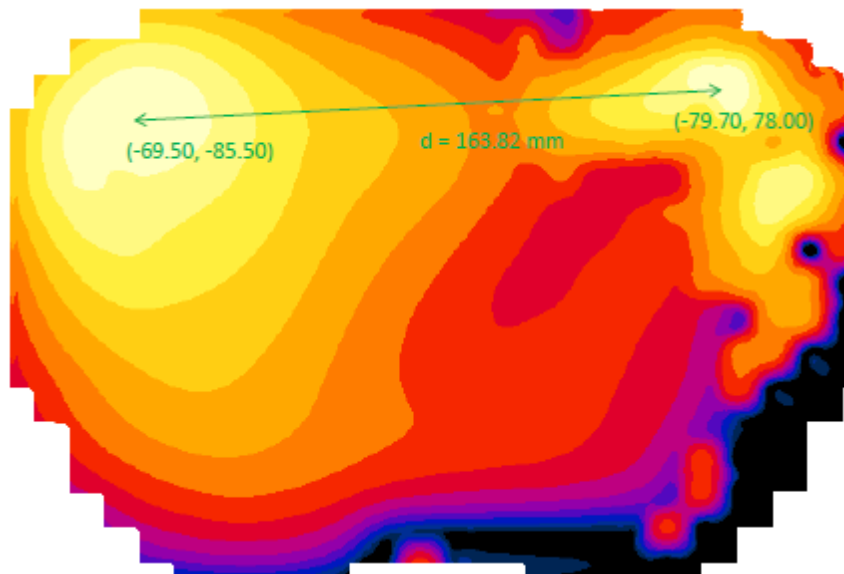


Figure 11-9
Peak SAR Locations for Body Back Side at 0 mm GPRS 850 MHz and 5 GHz WLAN MIMO

Table 11-47
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 850	802.11n	1.092	1.065	2.157	163.82	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with UMTS 850 MHz antenna operating at limited output power with 5 GHz WIFI MIMO.

Table 11-48
Peak SAR Locations for Body Back Side at 0 mm UMTS 850 MHz and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
UMTS 850	-70.00	-90.00
802.11n	-79.70	78.00

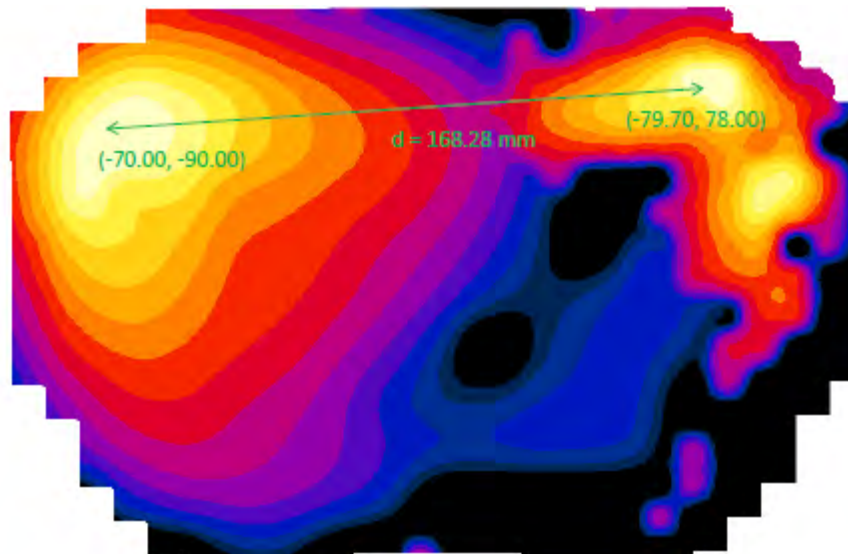


Figure 11-10
Peak SAR Locations for Body Back Side at 0 mm UMTS 850 MHz and 5 GHz WLAN MIMO

Table 11-49
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 850	802.11n	1.028	1.065	2.109	168.28	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with GPRS 1900 MHz antenna operating at limited output power with 5 GHz WIFI MIMO.

Table 11-50
Peak SAR Locations for Body Back Side at 0 mm GPRS 1900 MHz and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
GPRS 1900	-71.00	-97.00
802.11n	-79.70	78.00

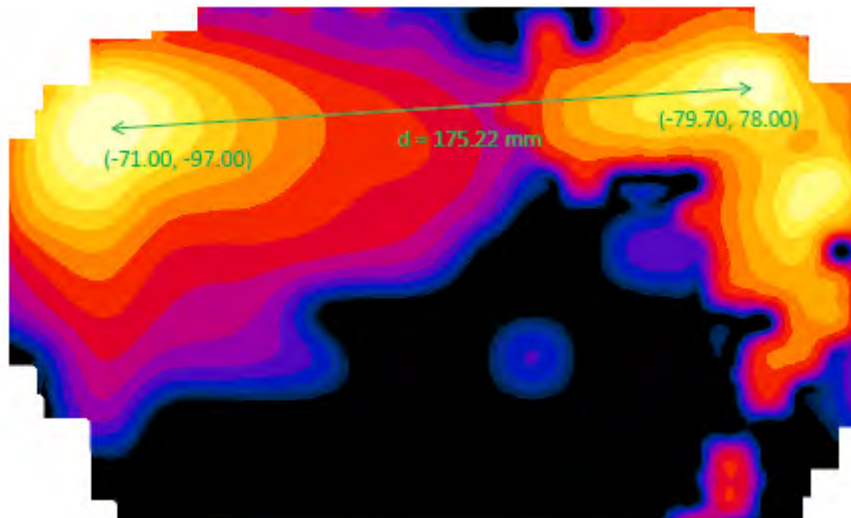


Figure 11-11
Peak SAR Locations for Body Back Side at 0 mm GPRS 1900 MHz and 5 GHz WLAN MIMO

Table 11-51
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11n	1.088	1.065	2.153	175.22	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with UMTS 1900 MHz antenna operating at limited output power with 5 GHz WIFI MIMO.

Table 11-52
Peak SAR Locations for Body Back Side at 0 mm UMTS 1900 MHz and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
UMTS 1900	-64.50	-91.00
802.11n	-79.70	78.00

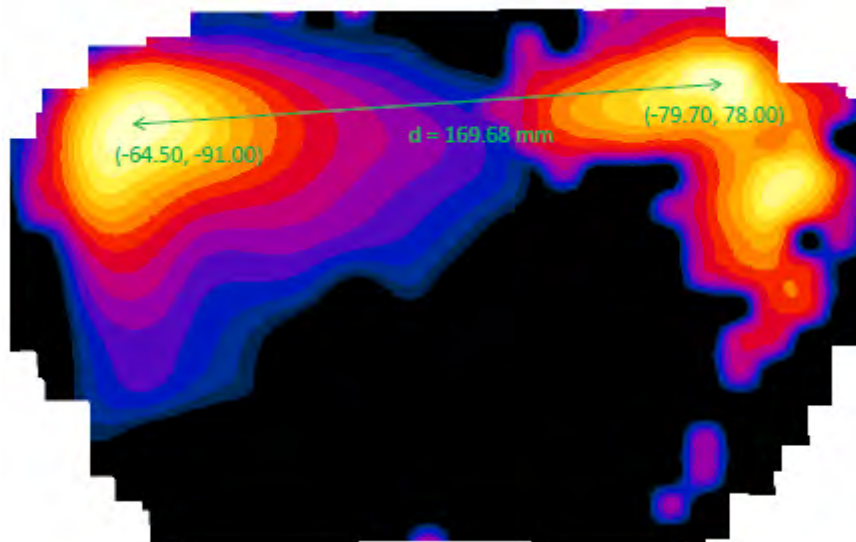


Figure 11-12
Peak SAR Locations for Body Back Side at 0 mm UMTS 1900 MHz and 5 GHz WLAN MIMO

Table 11-53
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 1900	802.11n	1.046	1.065	2.111	169.68	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with LTE Band 13 antenna operating at limited output power with 5 GHz WIFI MIMO.

Table 11-54
Peak SAR Locations for Body Back Side at 0 mm LTE Band 13 and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
LTE Band 13	-54.00	-98.50
802.11n	-79.70	78.00

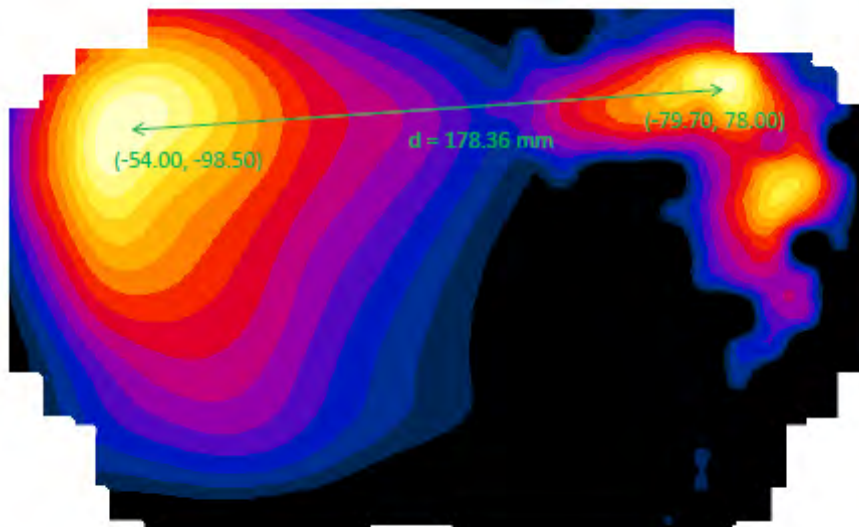


Figure 11-13
Peak SAR Locations for Body Back Side at 0 mm LTE Band 13 and 5 GHz WLAN MIMO

Table 11-55
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 13	802.11n	0.968	1.065	2.033	178.36	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with LTE Band 4 antenna operating at limited output power with 5 GHz WIFI MIMO.

Table 11-56
Peak SAR Locations for Body Back Side at 0 mm LTE Band 4 and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
LTE Band 4	-64.00	-96.00
802.11n	-79.70	78.00

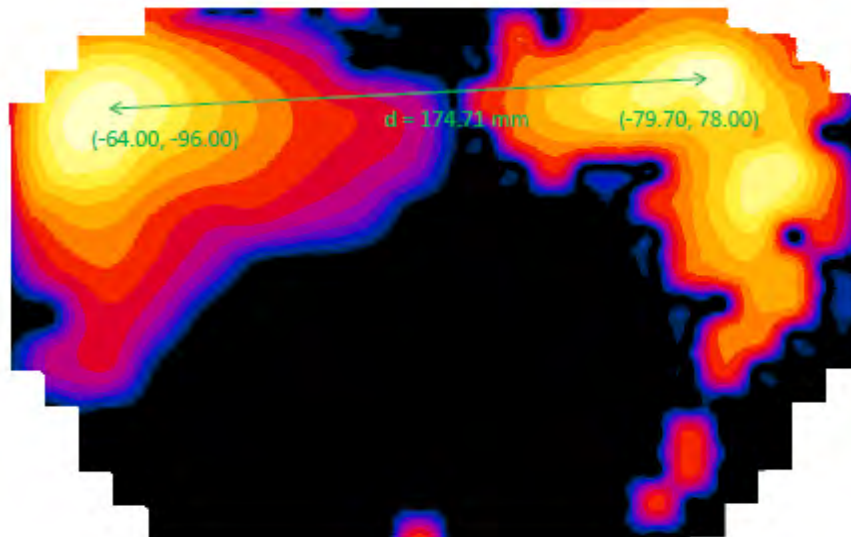


Figure 11-14
Peak SAR Locations for Body Back Side at 0 mm LTE Band 4 and 5 GHz WLAN MIMO

Table 11-57
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 4	802.11n	1.041	1.065	2.106	174.71	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 0 mm with LTE Band 2 antenna operating at limited output power with 5 GHz WIFI MIMO.

Table 11-58
Peak SAR Locations for Body Back Side at 0 mm LTE Band 2 and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
LTE Band 2	-68.00	-101.00
802.11n	-79.70	78.00

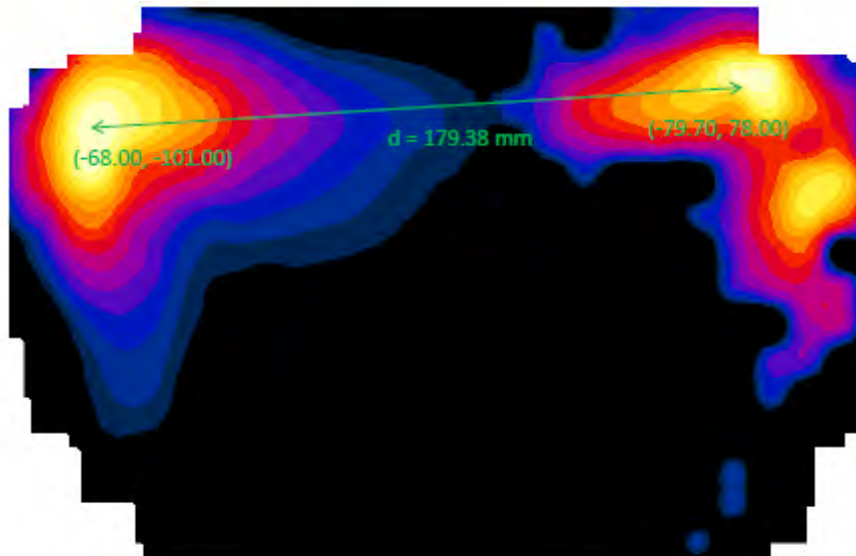


Figure 11-15
Peak SAR Locations for Body Back Side at 0 mm LTE Band 2 and 5 GHz WLAN MIMO

Table 11-59
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 2	802.11n	1.073	1.065	2.138	179.38	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 14 mm with LTE Band 2 antenna operating at maximum output power with 2.4 GHz WIFI Antenna 1.

Table 11-60
Peak SAR Locations for Body Back Side at 14 mm LTE Band 2 and 2.4 GHz WLAN Antenna 1

Mode/Band	x (mm)	y (mm)
LTE Band 2	-57.50	-108.00
802.11b	-55.40	96.00

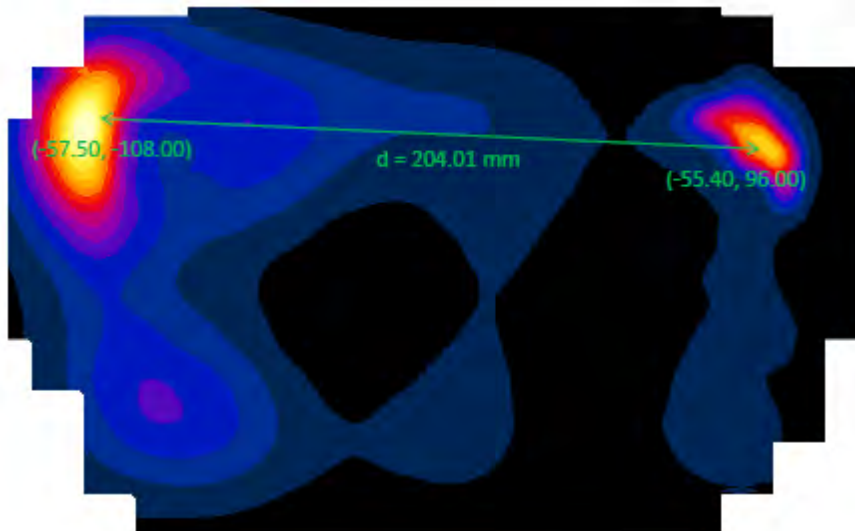


Figure 11-16
Peak SAR Locations for Body Back Side at 14 mm LTE Band 2 and 2.4 GHz WLAN Antenna 1

Table 11-61
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 2	802.11b	1.082	<0.52	<1.602	204.01	<0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 14 mm with GPRS 850 MHz antenna operating at maximum output power with 2.4 GHz WIFI Antenna 2.

Table 11-62
Peak SAR Locations for Body Back Side at 14 mm GPRS 850 MHz and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
GPRS 850	-61.50	-75.00
802.11b	-72.00	76.00

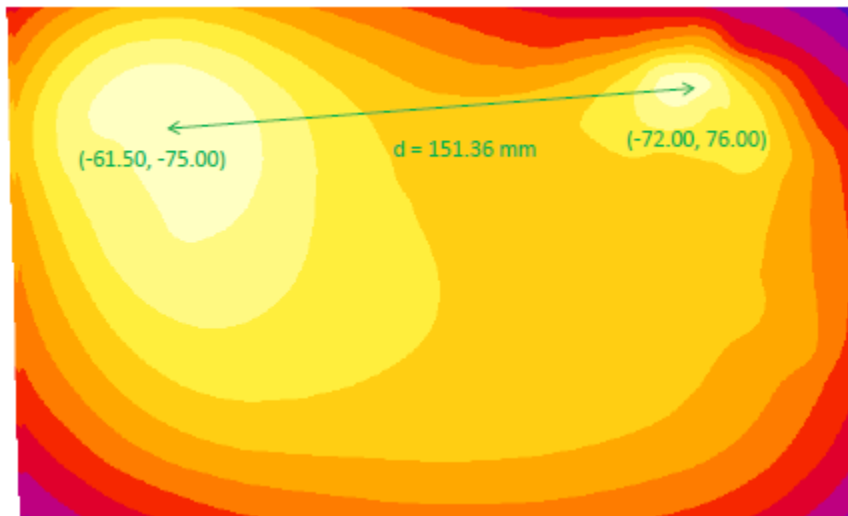


Figure 11-17
Peak SAR Locations for Body Back Side at 14 mm GPRS 850 MHz and 2.4 GHz WLAN Antenna 2

Table 11-63
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 850	802.11b	1.03	<0.621	<1.651	151.36	<0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 14 mm with GPRS 1900 MHz antenna operating at maximum output power with 2.4 GHz WIFI Antenna 2.

Table 11-64
Peak SAR Locations for Body Back Side at 14 mm GPRS 1900 MHz and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
GPRS 1900	-60.00	-99.00
802.11b	-72.00	76.00

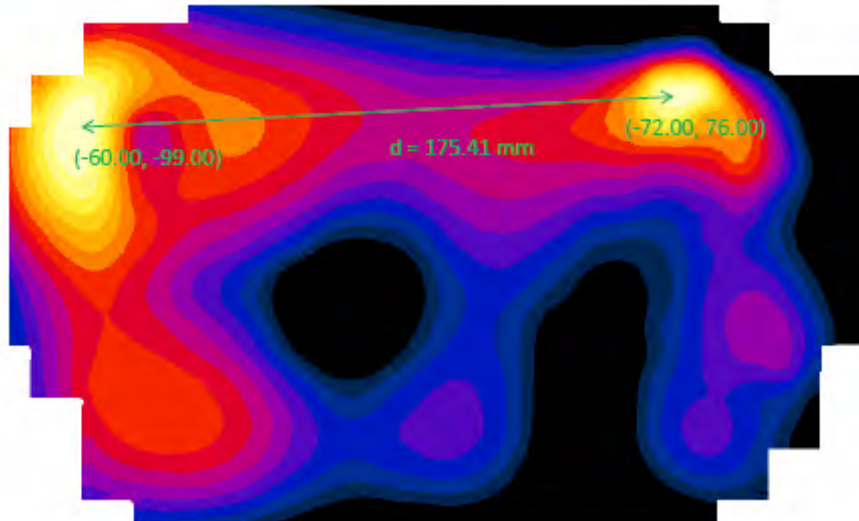


Figure 11-18
Peak SAR Locations for Body Back Side at 14 mm GPRS 1900 MHz and 2.4 GHz WLAN Antenna 2

Table 11-65
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11b	1.026	<0.621	<1.647	175.41	<0.01

FCC ID: A3LSMT707V		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet			Page 84 of 96

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 14 mm with LTE Band 2 antenna operating at maximum output power with 2.4 GHz WIFI Antenna 2.

Table 11-66
Peak SAR Locations for Body Back Side at 14 mm LTE Band 2 and 2.4 GHz WLAN Antenna 2

Mode/Band	x (mm)	y (mm)
LTE Band 2	-57.50	-108.00
802.11b	-72.00	76.00

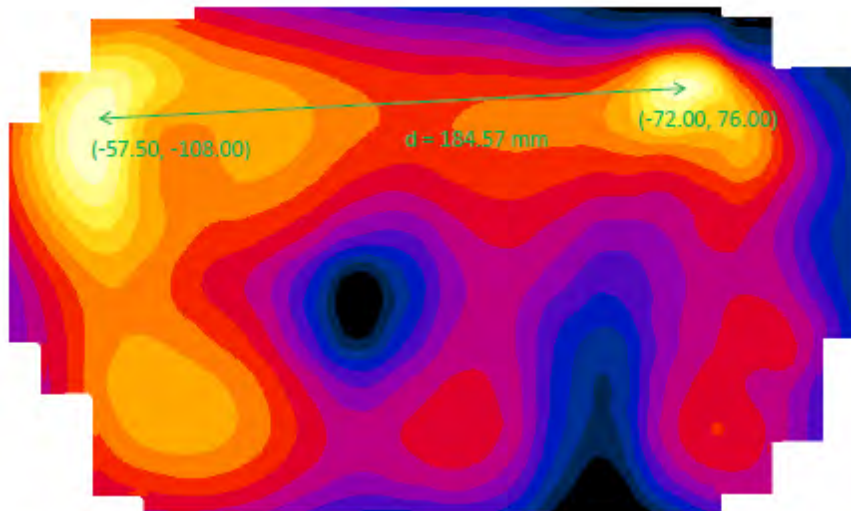


Figure 11-19
Peak SAR Locations for Body Back Side at 14 mm LTE Band 2 and 2.4 GHz WLAN Antenna 2

Table 11-67
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 2	802.11b	1.082	<0.621	<1.703	184.57	<0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 14 mm with GPRS 850 MHz antenna operating at maximum output power with 5 GHz WIFI MIMO.

Table 11-68
Peak SAR Locations for Body Back Side at 14 mm GPRS 850 MHz and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
GPRS 850	-61.50	-75.00
802.11n	-79.70	78.00

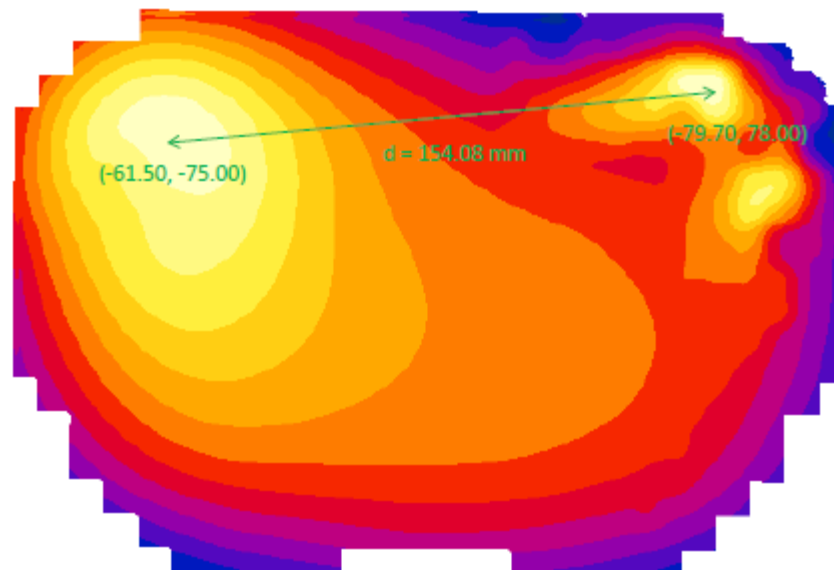


Figure 11-20
Peak SAR Locations for Body Back Side at 14 mm GPRS 850 MHz and 5 GHz WLAN MIMO

Table 11-69
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 850	802.11n	1.03	<1.065	<2.095	154.08	<0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 14 mm with GPRS 1900 MHz antenna operating at maximum output power with 5 GHz WIFI MIMO.

Table 11-70
Peak SAR Locations for Body Back Side at 14 mm GPRS 1900 MHz and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
GPRS 1900	-60.00	-99.00
802.11n	-79.70	78.00

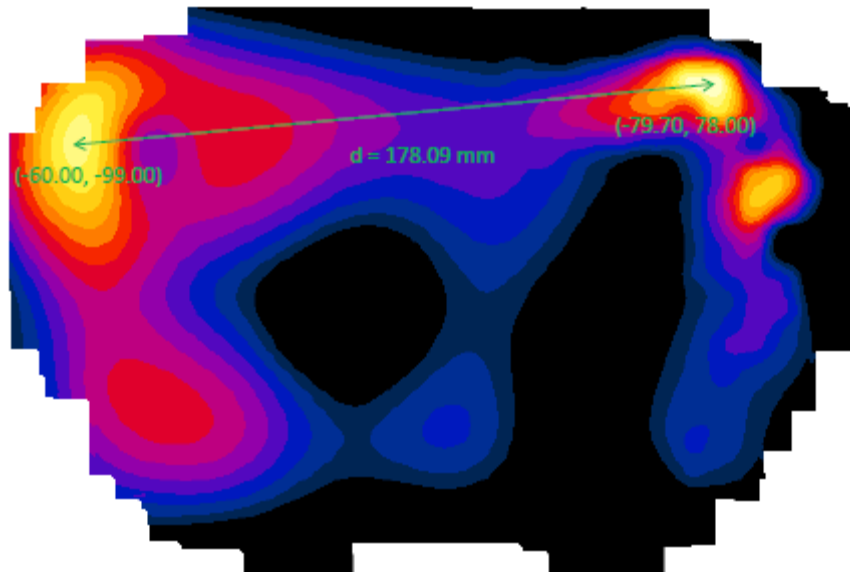


Figure 11-21
Peak SAR Locations for Body Back Side at 14 mm GPRS 1900 MHz and 5 GHz WLAN MIMO

Table 11-71
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11n	1.026	<1.065	<2.091	178.09	<0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 14 mm with LTE Band 13 antenna operating at maximum output power with 5 GHz WIFI MIMO.

Table 11-72
Peak SAR Locations for Body Back Side at 14 mm LTE Band 13 and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
LTE Band 13	-68.00	-82.00
802.11n	-79.70	78.00

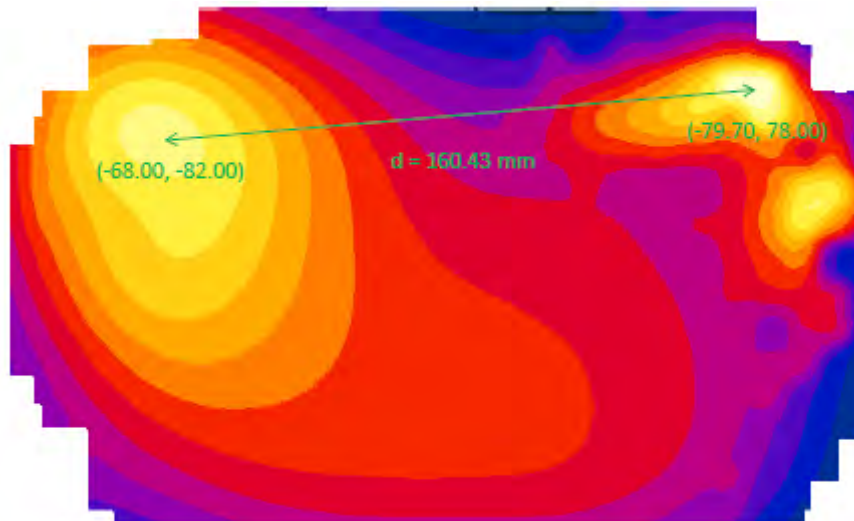


Figure 11-22
Peak SAR Locations for Body Back Side at 14 mm LTE Band 13 and 5 GHz WLAN MIMO

Table 11-73
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 13	802.11n	0.55	<1.065	<1.615	160.43	<0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back Side configuration at a separation distance of 14 mm with LTE Band 2 antenna operating at maximum output power with 5 GHz WIFI MIMO.

Table 11-74
Peak SAR Locations for Body Back Side at 14 mm LTE Band 2 and 5 GHz WLAN MIMO

Mode/Band	x (mm)	y (mm)
LTE Band 2	-57.50	-108.00
802.11n	-79.70	78.00

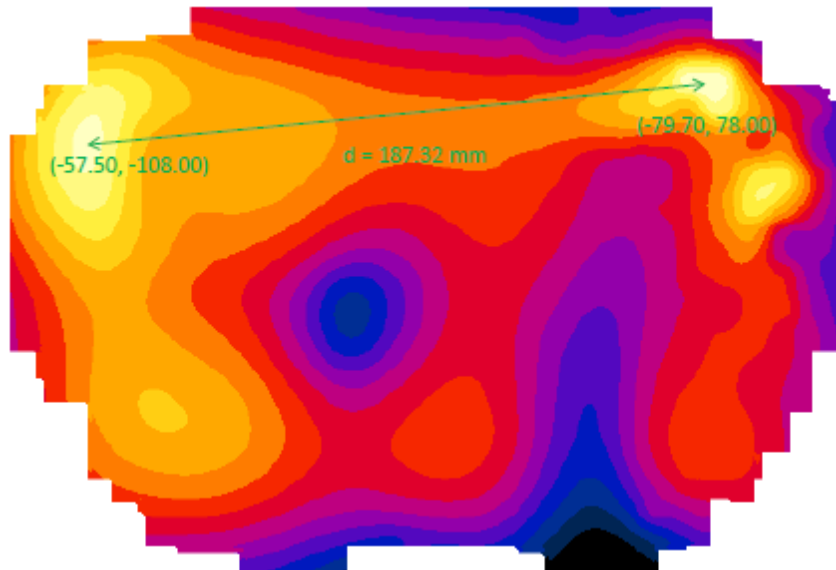


Figure 11-23
Peak SAR Locations for Body Back Side at 14 mm LTE Band 2 and 5 GHz WLAN MIMO

Table 11-75
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 2	802.11n	1.082	<1.065	<2.147	187.32	<0.02

11.5 Simultaneous Transmission Conclusion

The above numerical summed SAR and SPLSR analysis results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 12-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	# of Time Slots	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)	(W/kg)
835	836.60	190	GPRS 850	GPRS	3	N/A	back	0 mm	1.050	1.020	1.03	N/A	N/A
750	782.00	23230	LTE Band 13	QPSK, 1 RB, 25 RB Offset	N/A	N/A	back	0 mm	0.968	0.964	1.00	N/A	N/A
1750	1732.50	20175	LTE Band 4 (AWS)	QPSK, 1 RB, 0 RB Offset	N/A	N/A	back	0 mm	0.983	0.909	1.08	N/A	N/A
1900	1880.00	18900	LTE Band 2 (PCS)	QPSK, 1 RB, 50 RB Offset	N/A	N/A	back	14 mm	1.080	1.010	1.07	N/A	N/A
5200	5180.00	36	IEEE 802.11n	OFDM	N/A	13	back	0 mm	1.010	1.010	1.00	N/A	N/A
5300	5260.00	52	IEEE 802.11n	OFDM	N/A	13	back	0 mm	0.900	0.870	1.03	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram				

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 90 of 96

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/30/2013	Annual	10/30/2014	1833460
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/15/2014	Annual	4/15/2015	MY45470194
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	4/15/2014	Annual	4/15/2015	3629U00687
SPEAG	D1750V2	1750 MHz SAR Dipole	4/10/2014	Annual	4/10/2015	1051
SPEAG	D1900V2	1900 MHz SAR Dipole	7/22/2013	Annual	7/22/2014	5d149
SPEAG	D2450V2	2450 MHz SAR Dipole	1/21/2014	Annual	1/21/2015	797
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
SPEAG	D5GHzv2	5 GHz SAR Dipole	9/23/2013	Annual	9/23/2014	1007
SPEAG	D5GHzv2	5 GHz SAR Dipole	1/27/2014	Annual	1/27/2015	1057
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
SPEAG	D750V3	750 MHz Dipole	1/20/2014	Annual	1/20/2015	1003
SPEAG	D835V2	835 MHz SAR Dipole	4/7/2014	Annual	4/7/2015	4d119
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Rohde & Schwarz	CMU200	Base Station Simulator	6/6/2014	Annual	6/6/2015	109892
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/21/2013	Annual	8/21/2014	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/18/2013	Annual	11/18/2014	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/19/2013	Annual	11/19/2014	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/19/2013	Annual	11/19/2014	1408
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/12/2013	Annual	12/12/2014	649
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/26/2014	Annual	2/26/2015	665
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	11/13/2013	Annual	11/13/2014	1091
Mitutoyo	CD-6"CSX	Digital Caliper	5/8/2014	Biennial	5/8/2016	13264162
Fisher Scientific	15-077-960	Digital Thermometer	11/6/2012	Biennial	11/6/2014	122640025
Rohde & Schwarz	NRVD	Dual Channel Power Meter	10/12/2012	Biennial	10/12/2014	101695
Agilent	E4438C	ESG Vector Signal Generator	3/31/2014	Annual	3/31/2015	MY42082659
Agilent	E4438C	ESG Vector Signal Generator	4/1/2014	Annual	4/1/2015	MY47270002
Control Company	4353	Long Stem Thermometer	9/25/2012	Biennial	9/25/2014	122541143
Fisher Scientific	15-078J	Long Stem Thermometer	10/30/2012	Biennial	10/30/2014	122626059
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	10/4/2013	Annual	10/4/2014	108798
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Agilent	N5182A	MXG Vector Signal Generator	4/15/2014	Annual	4/15/2015	MY47420800
Rohde & Schwarz	NRV-232	Peak Power Sensor	10/12/2012	Biennial	10/12/2014	836019/013
Anritsu	ML2495A	Power Meter	10/31/2013	Annual	10/31/2014	1039008
Anritsu	ML2469A	Power Meter	3/14/2014	Annual	3/14/2015	1306009
Anritsu	MA2481A	Power Sensor	10/30/2013	Annual	10/30/2014	5605
Anritsu	MA2411B	Pulse Power Sensor	11/14/2013	Annual	11/14/2014	1126066
Anritsu	MA2411B	Pulse Power Sensor	2/3/2014	Annual	2/3/2015	1339018
Anritsu	MT8820C	Radio Communication Analyzer	12/12/2013	Annual	12/12/2014	6200901190
Tektronix	RSA6114A	Real Time Spectrum Analyzer	4/16/2014	Annual	4/16/2015	B010177
SPEAG	ES3DV2	SAR Probe	8/22/2013	Annual	8/22/2014	3022
SPEAG	EX3DV4	SAR Probe	10/23/2013	Annual	10/23/2014	3914
SPEAG	ES3DV3	SAR Probe	11/20/2013	Annual	11/20/2014	3287
SPEAG	ES3DV3	SAR Probe	11/25/2013	Annual	11/25/2014	3332
SPEAG	EX3DV4	SAR Probe	12/18/2013	Annual	12/18/2014	3920
SPEAG	ES3DV3	SAR Probe	2/25/2014	Annual	2/25/2015	3258
Rohde & Schwarz	SME06	Signal Generator	10/30/2013	Annual	10/30/2014	832026
Rohde & Schwarz	NRVS	Single Channel Power Meter	10/31/2013	Annual	10/31/2014	835360/0079
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M1S5A00-009
Agilent	8753ES	S-Parameter Network Analyzer	10/29/2013	Annual	10/29/2014	US39170122
Fisher Scientific	S97611	Thermometer	4/12/2013	Biennial	4/12/2015	130219303
Fisher Scientific	S97611	Thermometer	4/12/2013	Biennial	4/12/2015	130219304
Seekonk	NC-100	Torque Wrench	3/18/2014	Biennial	3/18/2016	N/A
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Gigatronics	8651A	Universal Power Meter	10/30/2013	Annual	10/30/2014	8650319
Anritsu	MA24106A	USB Power Sensor	12/18/2013	Annual	12/18/2014	1344555
Anritsu	MA24106A	USB Power Sensor	12/18/2013	Annual	12/18/2014	1344556
VWR	36934-158	Wall-Mounted Thermometer	8/8/2013	Biennial	8/8/2015	130477877
VWR	36934-158	Wall-Mounted Thermometer	8/8/2013	Biennial	8/8/2015	130477866

Note:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
2. Each equipment item was used solely within its respective calibration period.

FCC ID: A3LSMT707V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 91 of 96

14 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.2	23.5
									299

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 92 of 96

Applicable for frequencies less than 6000 MHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 93 of 96

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 94 of 96

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 95 of 96

- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMT707V		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1406111216.A3L	Test Dates: 06/11/14 - 07/01/14	DUT Type: Portable Tablet		Page 96 of 96

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-13

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body, Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.018 \text{ S/m}$; $\epsilon_r = 54.601$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-16-2014; Ambient Temp: 24.1°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3287; ConvF(6.04, 6.04, 6.04); Calibrated: 11/20/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Body SAR, Back Side, Mid.ch, 3 Tx Slots


Area Scan (12x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.70 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.05 W/kg

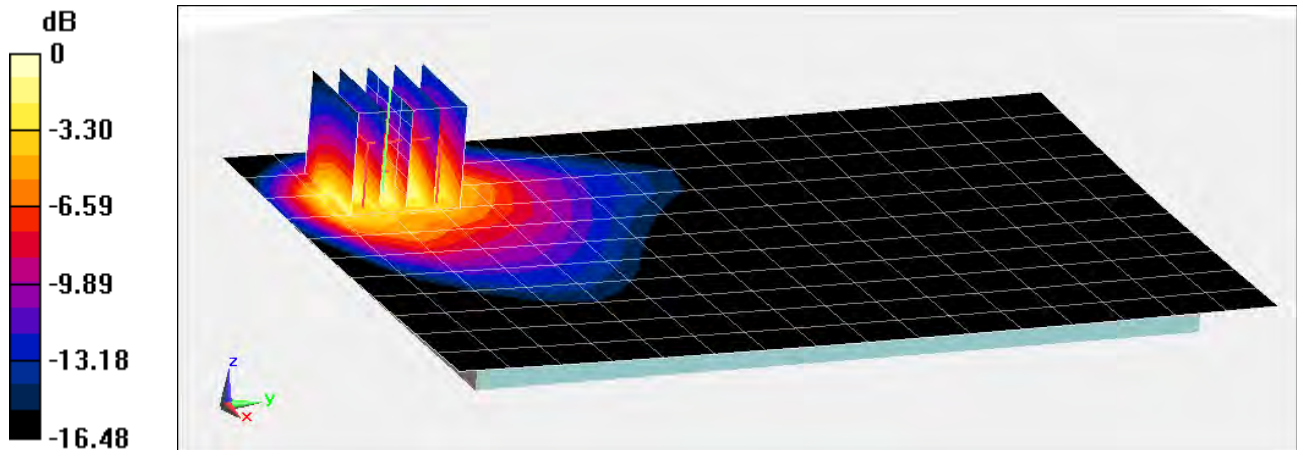

0 dB = 1.34 W/kg = 1.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-12

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.003 \text{ S/m}$; $\epsilon_r = 54.078$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-11-2014; Ambient Temp: 24.4°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(6.04, 6.04, 6.04); Calibrated: 11/20/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back Side, Mid.ch


Area Scan (13x19x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.90 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.971 W/kg

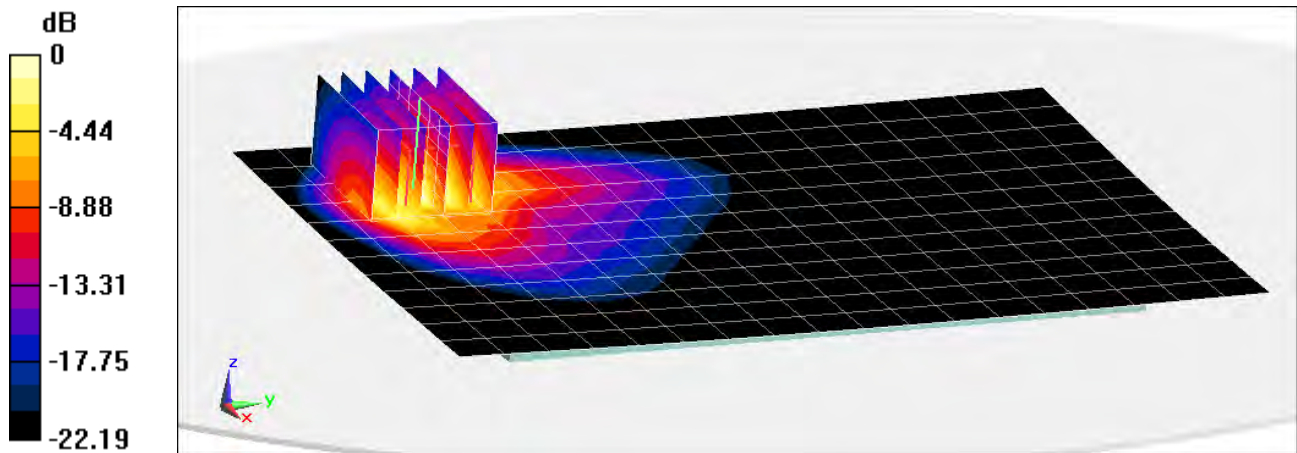

0 dB = 1.21 W/kg = 0.83 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-13

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body, Medium parameters used:

$f = 1910 \text{ MHz}$; $\sigma = 1.516 \text{ S/m}$; $\epsilon_r = 51.372$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-16-2014; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Back side, High.ch, 3 Tx Slots


Area Scan (11x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.86 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.07 W/kg

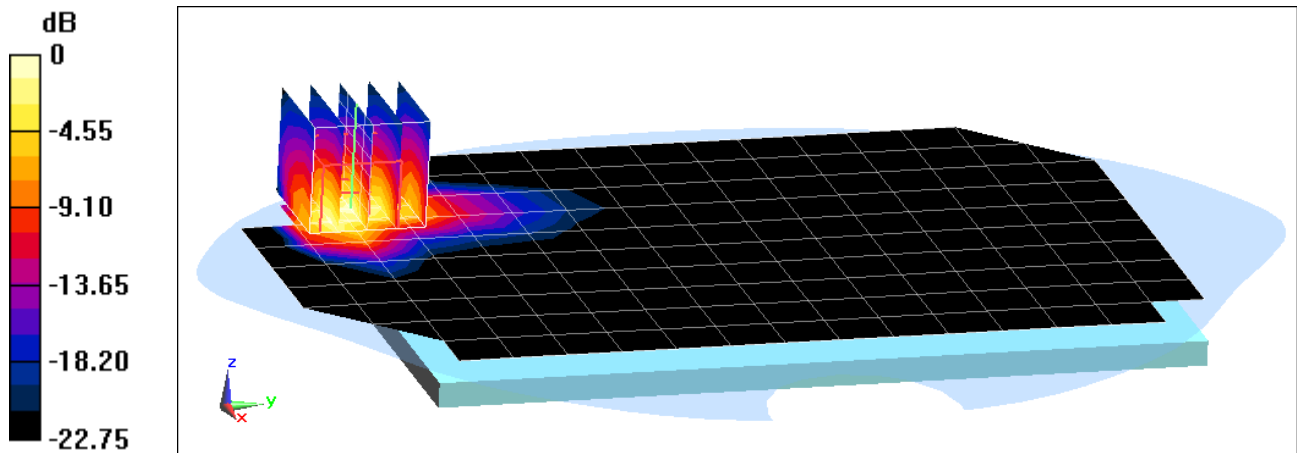

0 dB = 1.58 W/kg = 1.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-12

Communication System: UID 0, UMTS, Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.513 \text{ S/m}$; $\epsilon_r = 51.382$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-16-2014; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Back side, High.ch


Area Scan (13x18x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.80 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 1.03 W/kg

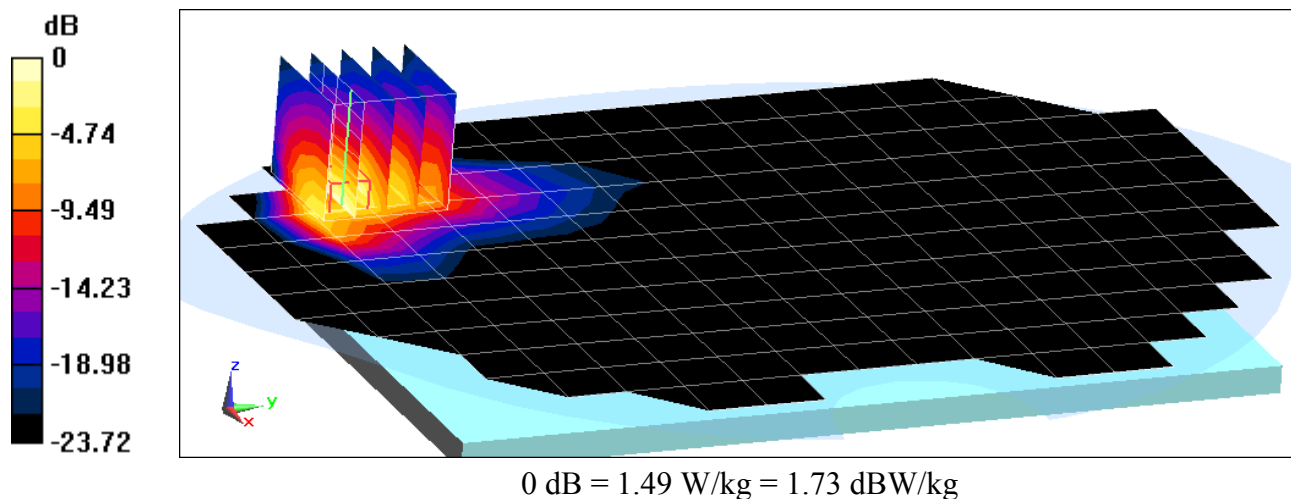

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-11

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body, Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 1.005 \text{ S/m}$; $\epsilon_r = 53.929$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-12-2014; Ambient Temp: 24.5°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(5.92, 5.92, 5.92); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (12x18x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.42 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.968 W/kg

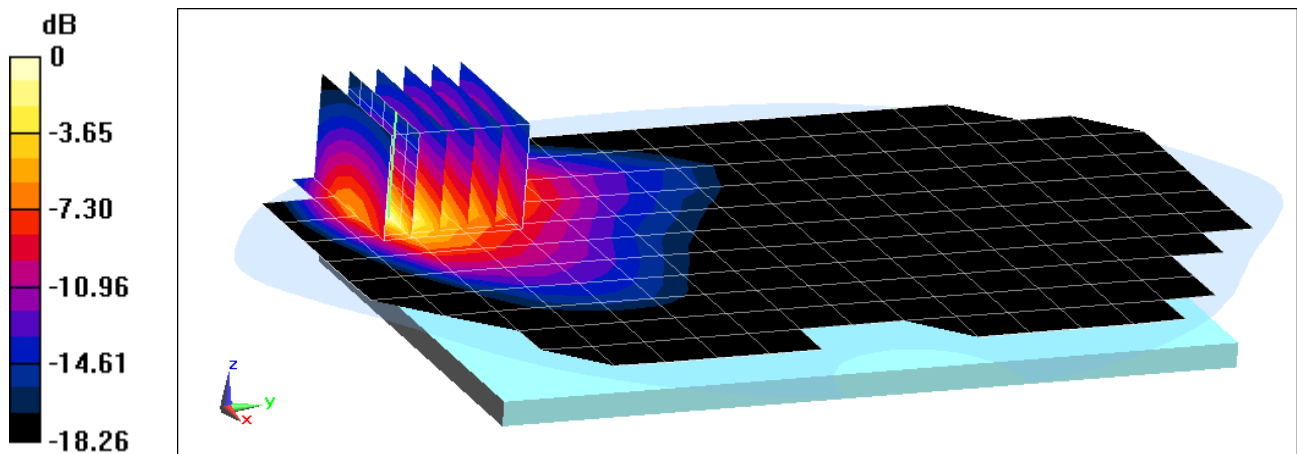

0 dB = 1.35 W/kg = 1.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-9

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body, Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.46 \text{ S/m}$; $\epsilon_r = 52.914$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-11-2014; Ambient Temp: 21.6°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3332; ConvF(4.93, 4.93, 4.93); Calibrated: 11/25/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 11/18/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**



Area Scan (12x18x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.90 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 0.983 W/kg

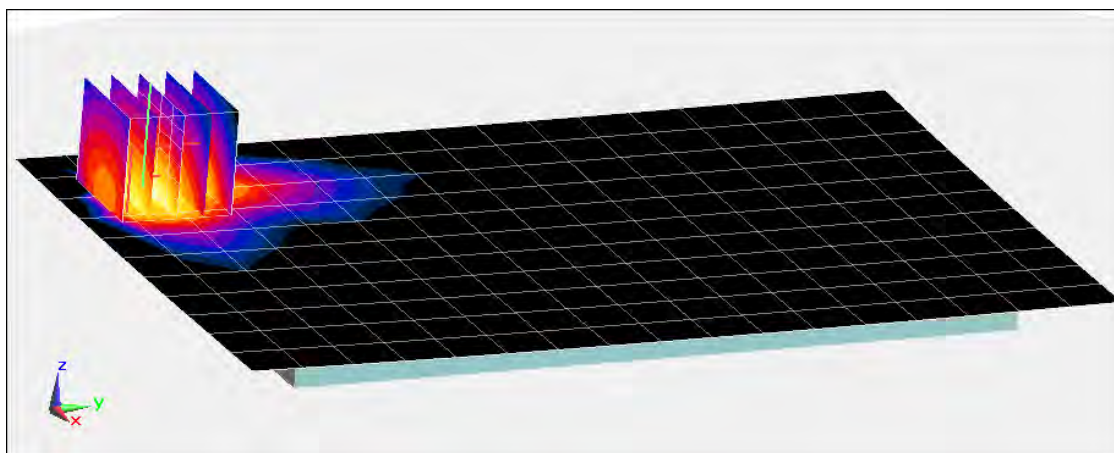

0 dB = 1.23 W/kg = 0.90 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-5

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.482 \text{ S/m}$; $\epsilon_r = 51.503$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.4 cm

Test Date: 06-16-2014; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (13x18x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.97 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.08 W/kg

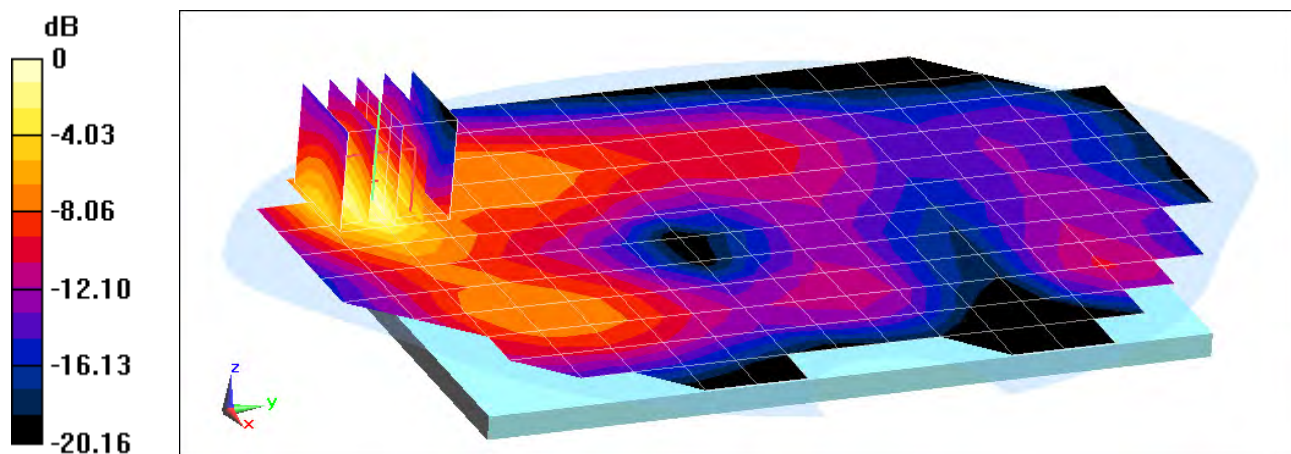

0 dB = 1.21 W/kg = 0.83 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-6

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.006 \text{ S/m}$; $\epsilon_r = 51.162$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-17-2014; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3258; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, Body SAR, Ch 06, 1 Mbps, Top Edge, Antenna 1


Area Scan (10x16x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.16 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.578 W/kg

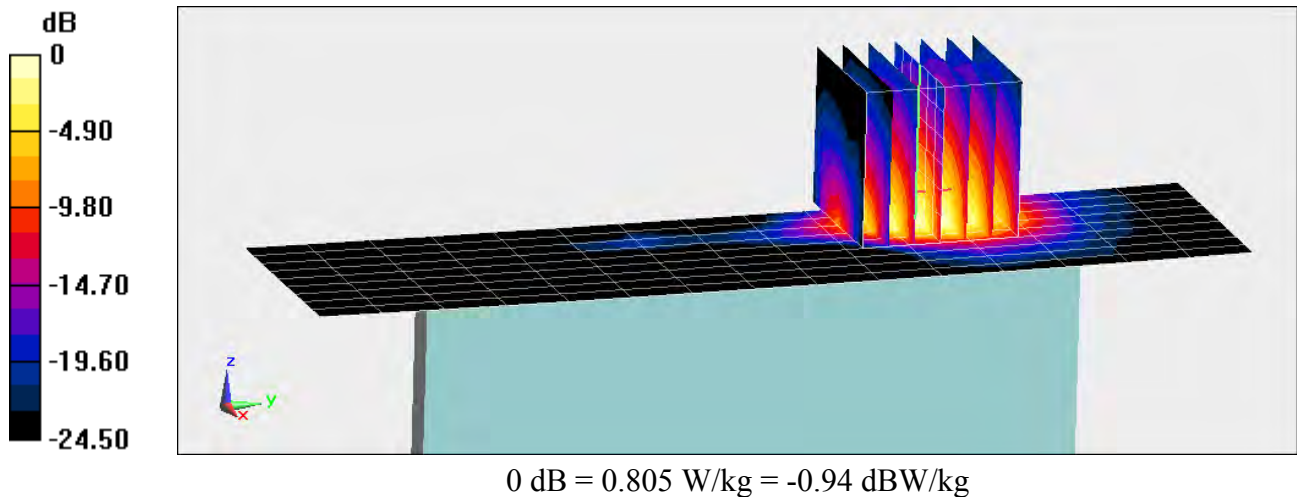

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-6

Communication System: UID 0, IEEE 802.11n; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5825 \text{ MHz}$; $\sigma = 6.306 \text{ S/m}$; $\epsilon_r = 47.015$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 07-01-2014; Ambient Temp: 23.8°C; Tissue Temp: 24.2°C

Probe: EX3DV4 - SN3914; ConvF(4.14, 4.14, 4.14); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11n, 5.8 GHz, Body SAR, Ch 165, 13 Mbps, Back Side, MIMO


Area Scan (17x26x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 6.414 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 0.458 W/kg

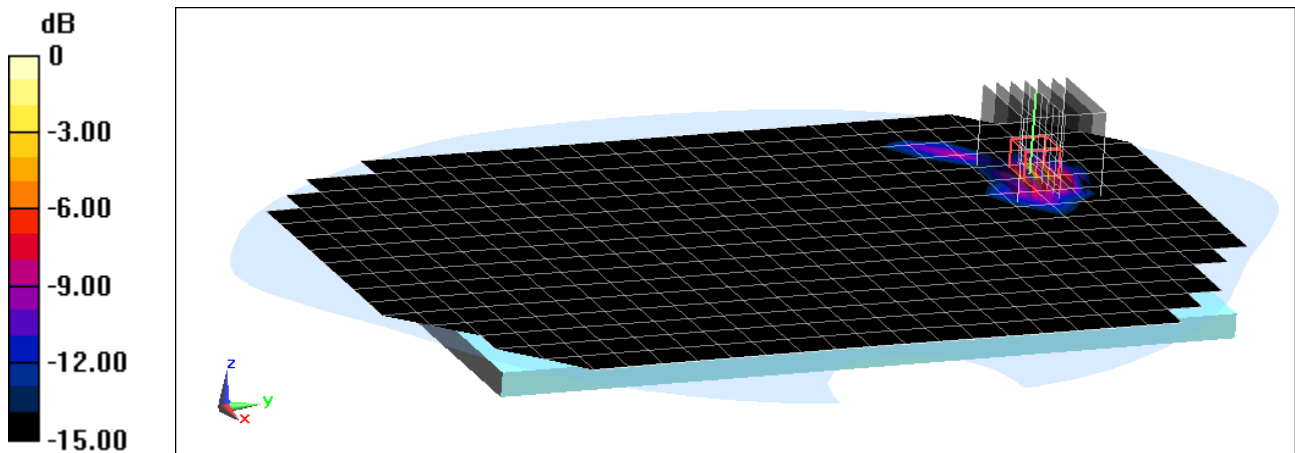

0 dB = 1.79 W/kg = 2.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-6

Communication System: UID 0, IEEE 802.11n; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5180 \text{ MHz}$; $\sigma = 5.477 \text{ S/m}$; $\epsilon_r = 47.362$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-23-2014; Ambient Temp: 22.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3920; ConvF(4.23, 4.23, 4.23); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11n, 5.2 GHz, Body SAR, Ch 36, 13 Mbps, Back Side, MIMO


Area Scan (18x26x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 8.791 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 7.55 W/kg

SAR(1 g) = 1.01 W/kg

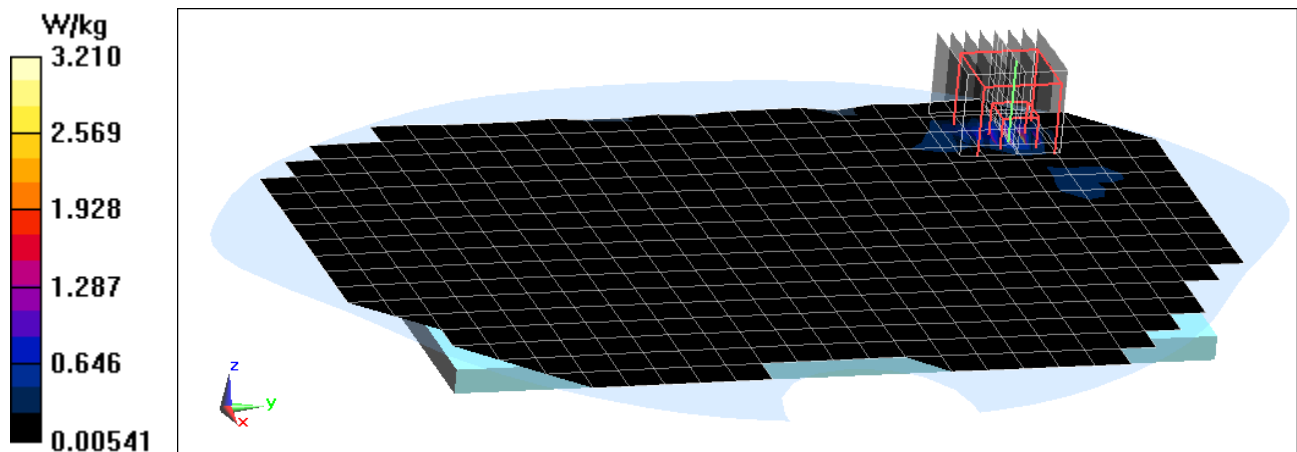

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT707V; Type: Portable Tablet; Serial: 707V-6

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 2.012 \text{ S/m}$; $\epsilon_r = 51.151$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-17-2014; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3258; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side


Area Scan (15x22x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.224 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.139 W/kg

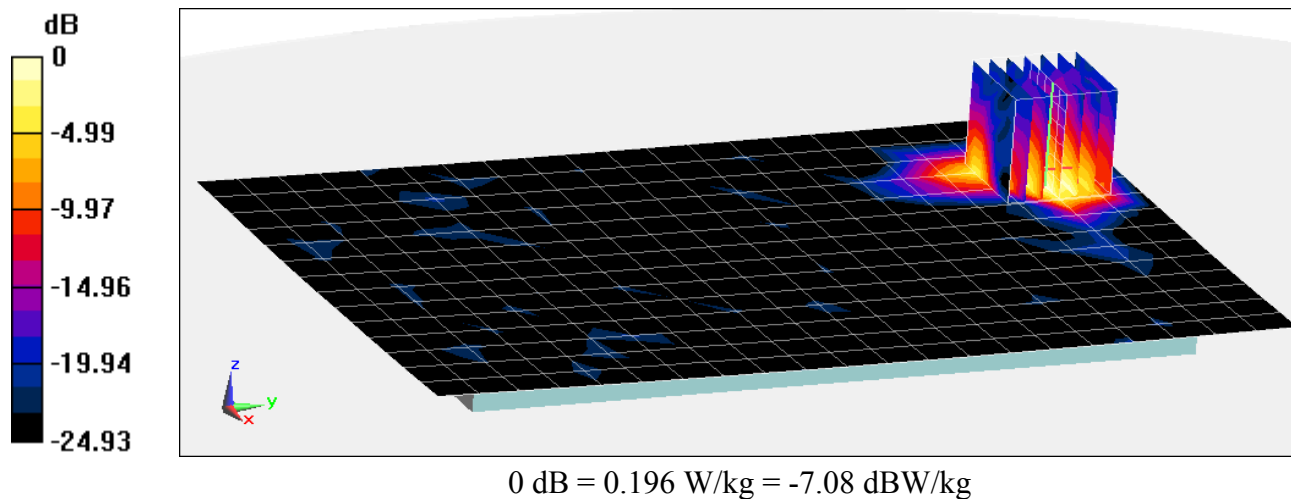

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body, Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.974 \text{ S/m}$; $\epsilon_r = 54.302$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-12-2014; Ambient Temp: 24.5°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(5.92, 5.92, 5.92); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.909 W/kg

Deviation = 3.65%

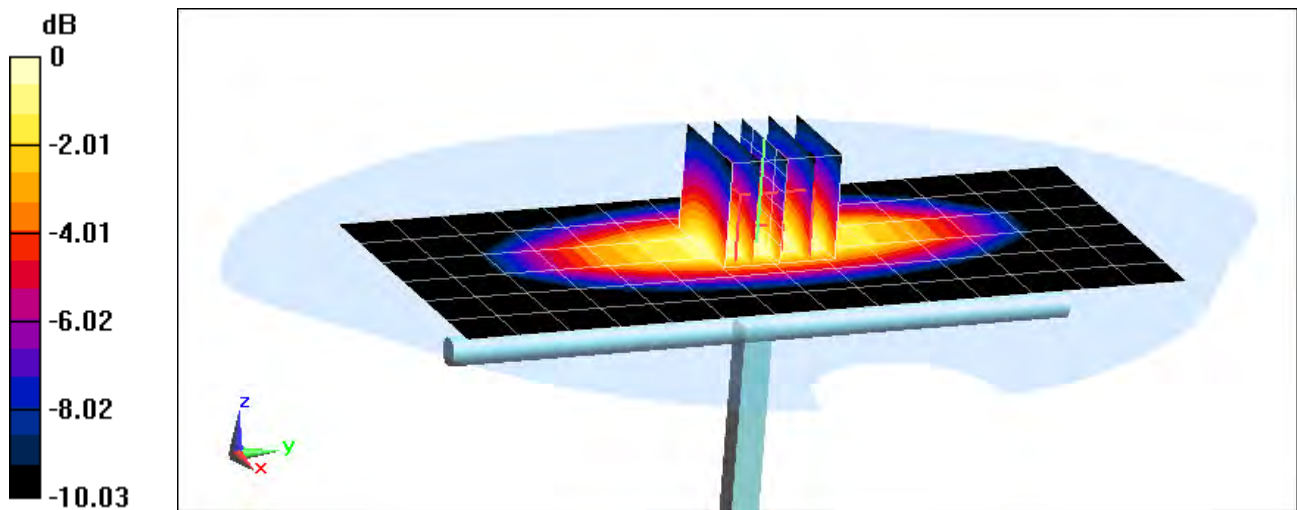

0 dB = 1.06 W/kg = 0.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 54.094$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-11-2014; Ambient Temp: 24.4°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(6.04, 6.04, 6.04); Calibrated: 11/20/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.993 W/kg

Deviation = 6.32%

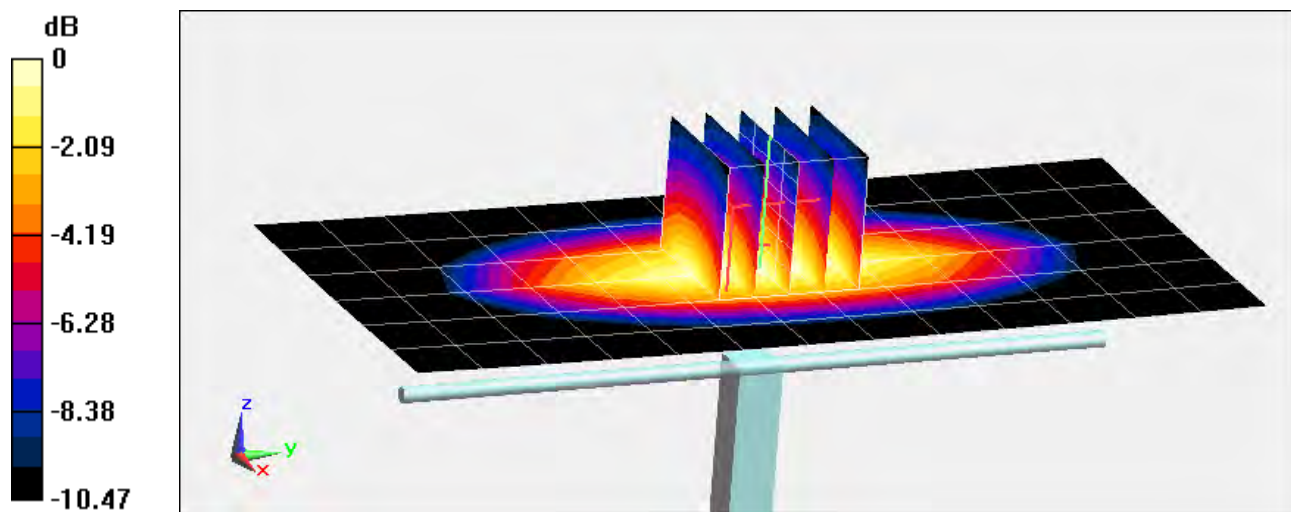

0 dB = 1.16 W/kg = 0.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body, Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 52.828$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-11-2014; Ambient Temp: 21.6°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3332; ConvF(4.93, 4.93, 4.93); Calibrated: 11/25/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 11/18/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 5.99 W/kg

SAR(1 g) = 3.46 W/kg

Deviation = -7.49%

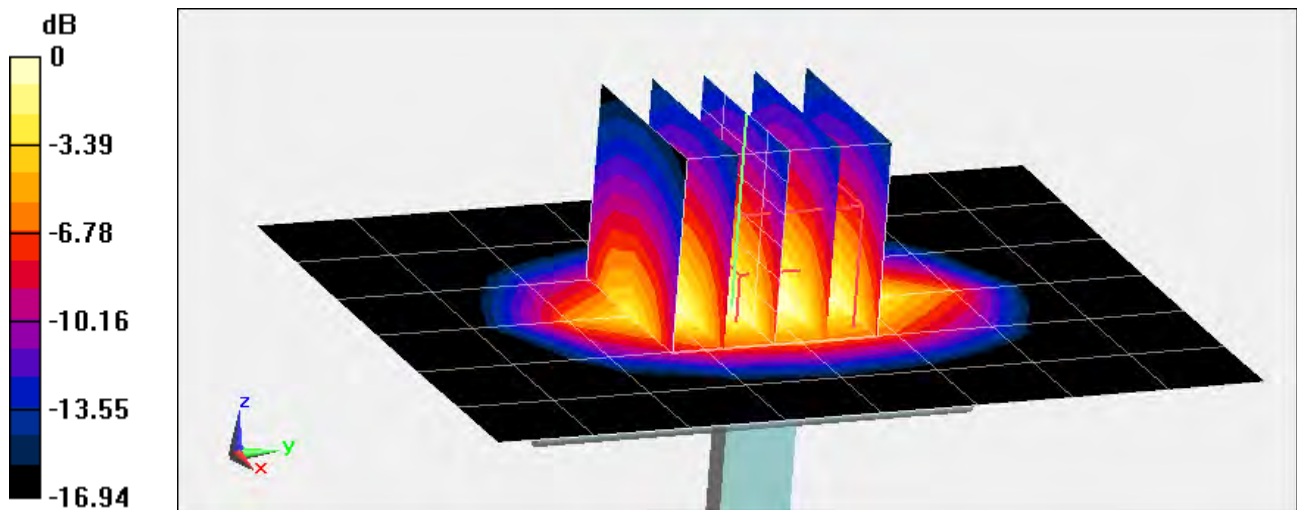

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.505 \text{ S/m}$; $\epsilon_r = 51.416$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-16-2014; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 6.86 W/kg

SAR(1 g) = 3.98 W/kg

Deviation = -1.73%

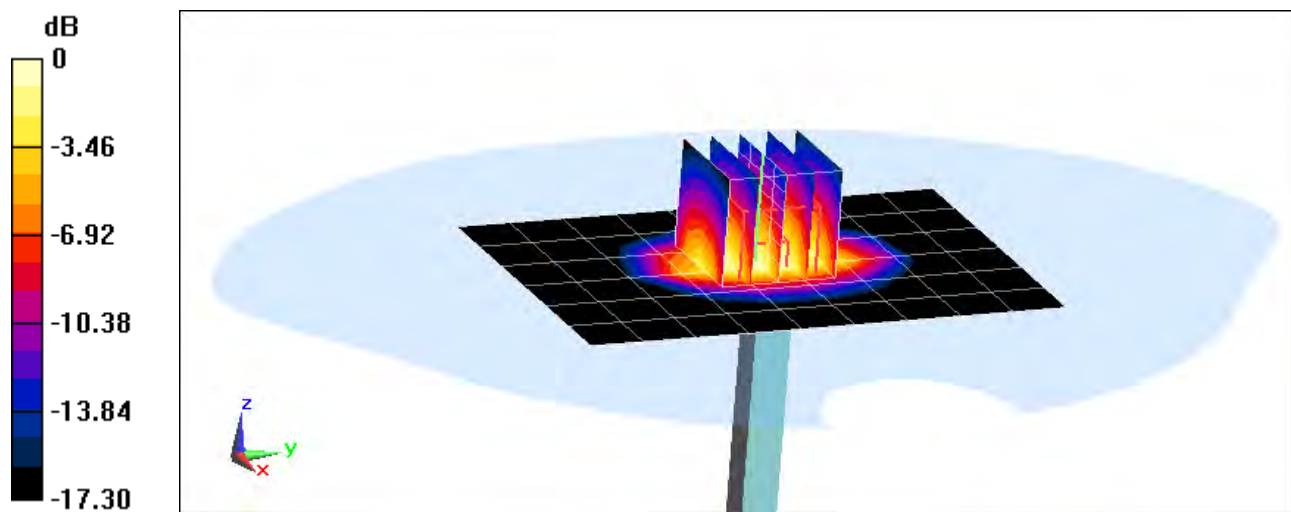

0 dB = 4.99 W/kg = 6.98 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.024 \text{ S/m}$; $\epsilon_r = 51.126$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-17-2014; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3258; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.26 W/kg

Deviation = 6.48%

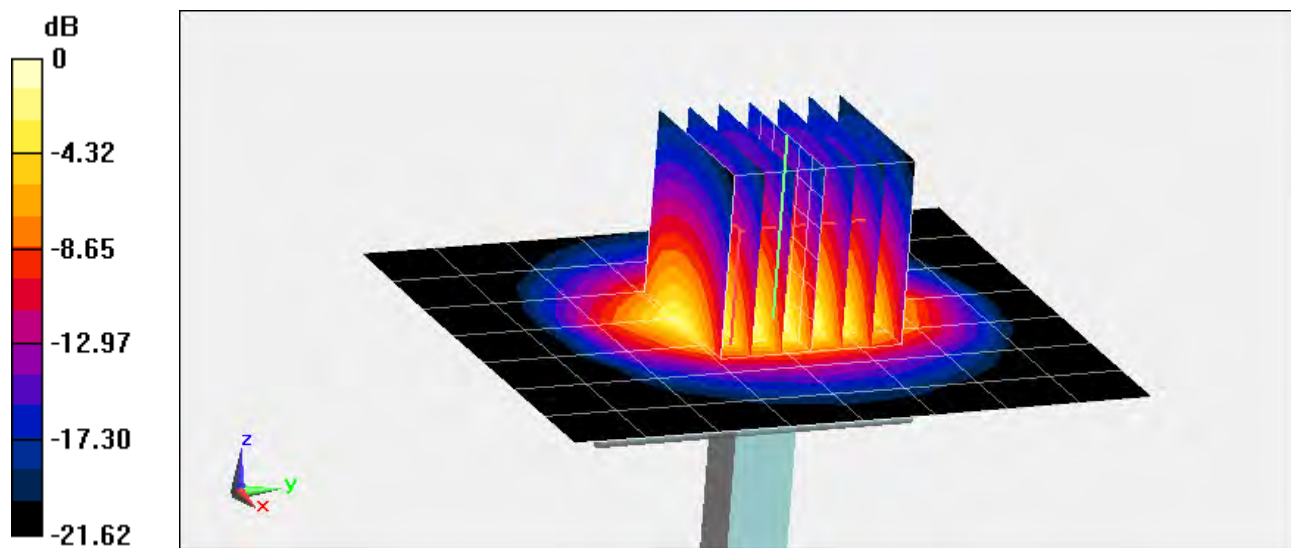

0 dB = 6.78 W/kg = 8.31 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1007

Communication System: UID 0, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 5.5 \text{ S/m}$; $\epsilon_r = 47.385$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-23-2014; Ambient Temp: 22.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3920; ConvF(4.23, 4.23, 4.23); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7331)

5200 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 32.5 W/kg

SAR(1 g) = 7.35 W/kg

Deviation = 1.24%

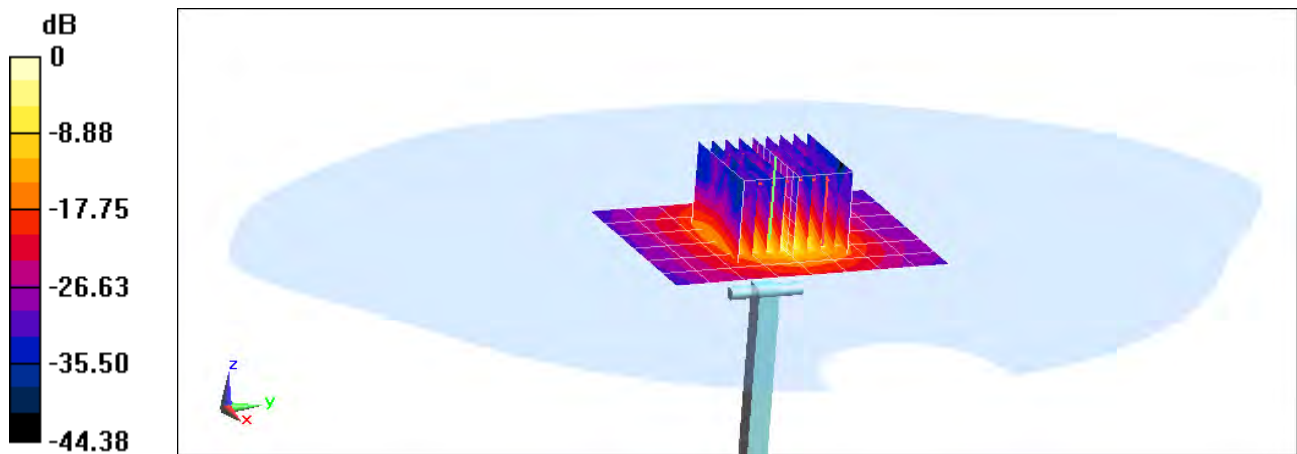

0 dB = 18.3 W/kg = 12.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1007

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.62 \text{ S/m}$; $\epsilon_r = 47.117$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-23-2014; Ambient Temp: 22.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3920; ConvF(4.11, 4.11, 4.11); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 7.22 W/kg

Deviation = -3.35%

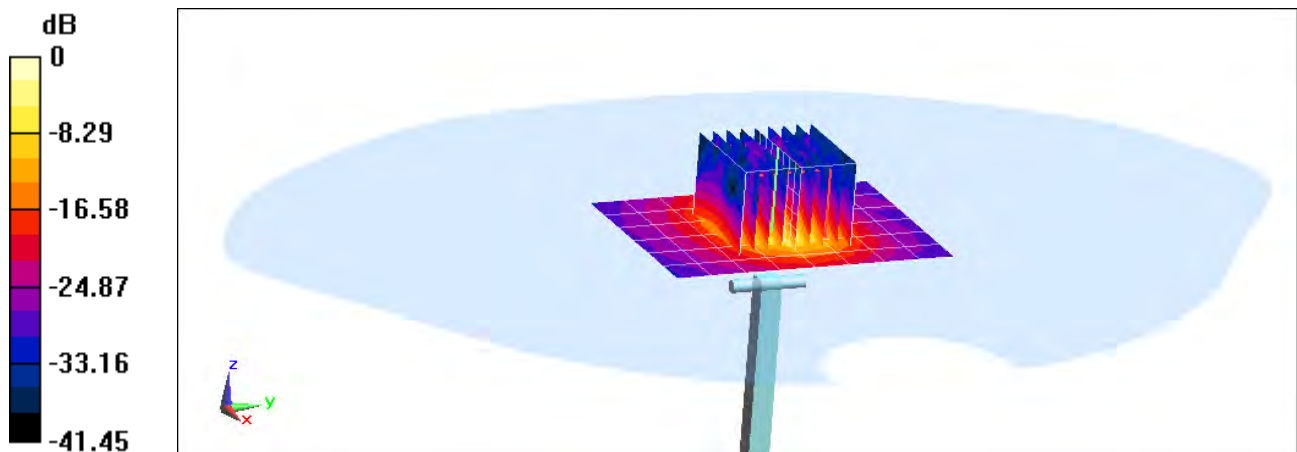

0 dB = 18.1 W/kg = 12.58 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1007

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.873 \text{ S/m}$; $\epsilon_r = 46.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-23-2014; Ambient Temp: 22.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3920; ConvF(3.8, 3.8, 3.8); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7331)

5500 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 34.9 W/kg

SAR(1 g) = 7.53 W/kg

Deviation = -0.79%

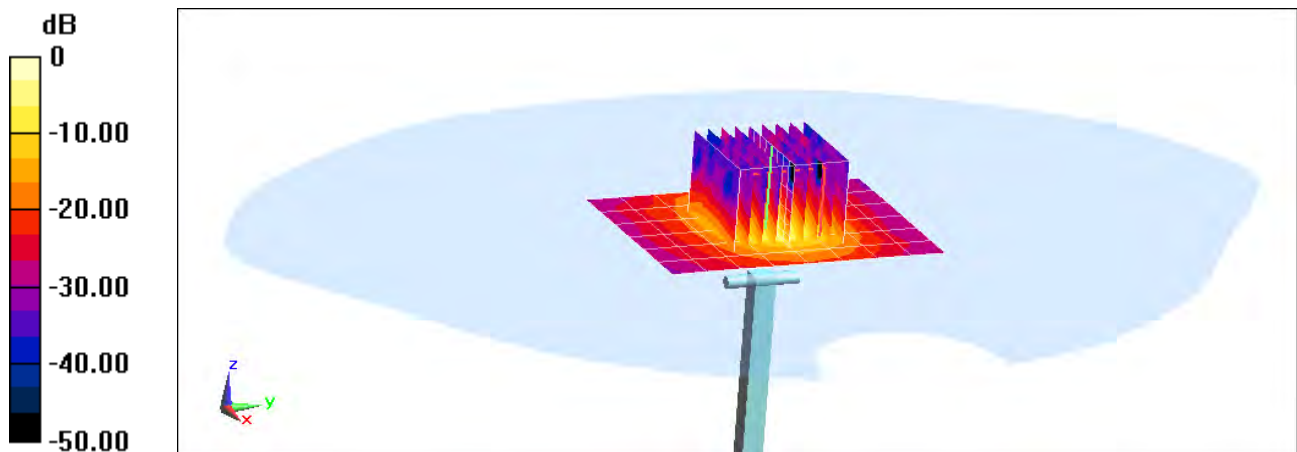

0 dB = 19.4 W/kg = 12.88 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1007

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 6.009 \text{ S/m}$; $\epsilon_r = 46.678$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-23-2014; Ambient Temp: 22.5°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3920; ConvF(3.62, 3.62, 3.62); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 36.2 W/kg

SAR(1 g) = 7.84 W/kg

Deviation = 1.42%

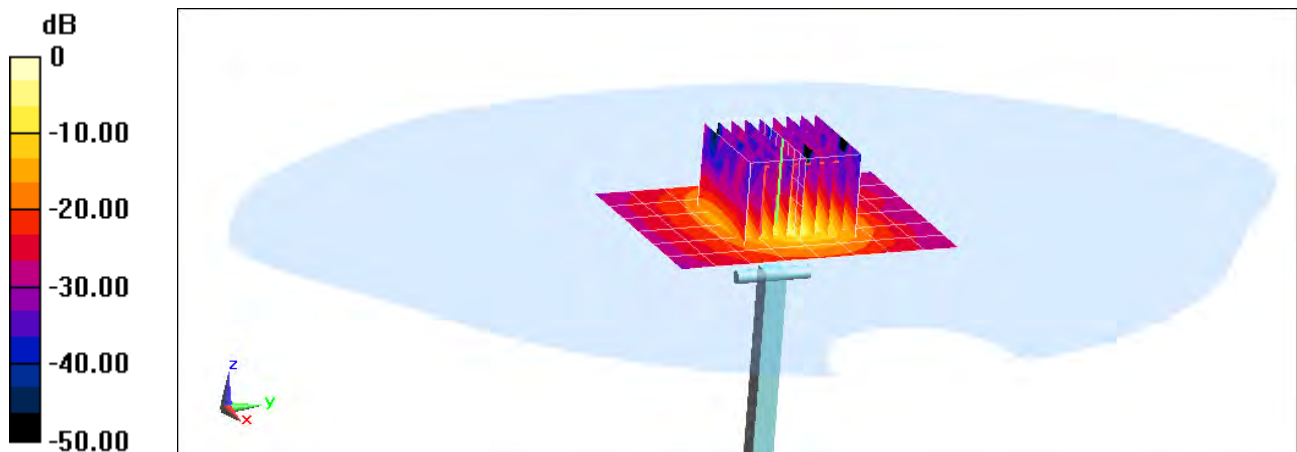

0 dB = 20.0 W/kg = 13.01 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.258 \text{ S/m}$; $\epsilon_r = 47.101$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-01-2014; Ambient Temp: 23.8°C; Tissue Temp: 24.2°C

Probe: EX3DV4 - SN3914; ConvF(4.14, 4.14, 4.14); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.6 W/kg

SAR(1 g) = 6.98 W/kg

Deviation = -6.06%

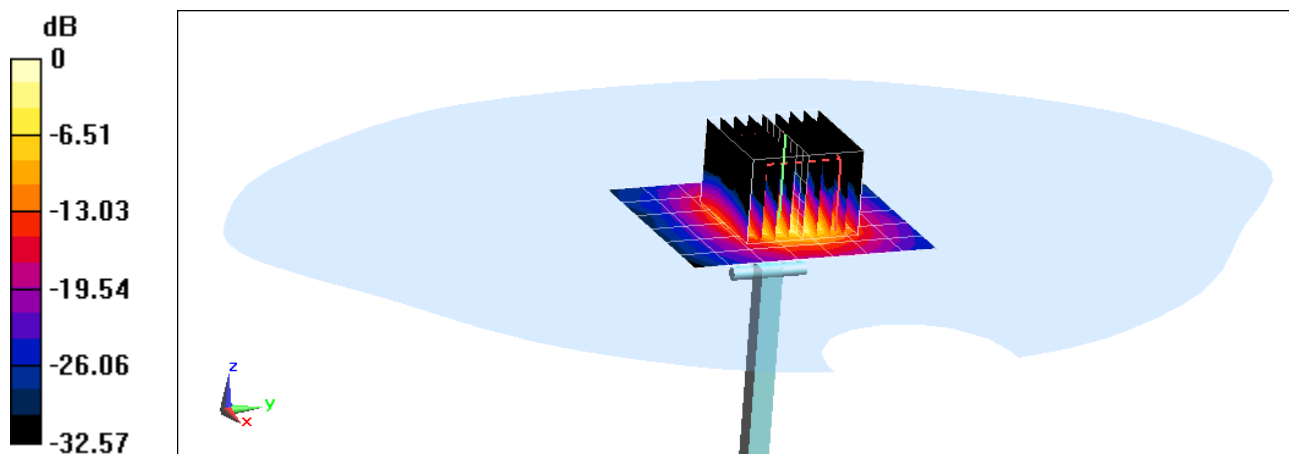

0 dB = 18.4 W/kg = 12.65 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D750V3-1003_Jan14**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1003**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 20, 2014**

CC
21/14 ✓

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Israe El-Naouq** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Israe El-Naouq
Katja Pokovic

Issued: January 21, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.8 $\pm$ 6 %	0.92 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.37 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.46 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.0 $\pm$ 6 %	0.98 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.24 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.77 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.78 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.7 Ω - 0.2 j Ω
Return Loss	- 27.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.5 Ω - 2.6 j Ω
Return Loss	- 31.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.043 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 21, 2009

DASY5 Validation Report for Head TSL

Date: 20.01.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.37, 6.37, 6.37); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.711 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.4 W/kg

Maximum value of SAR (measured) = 2.51 W/kg

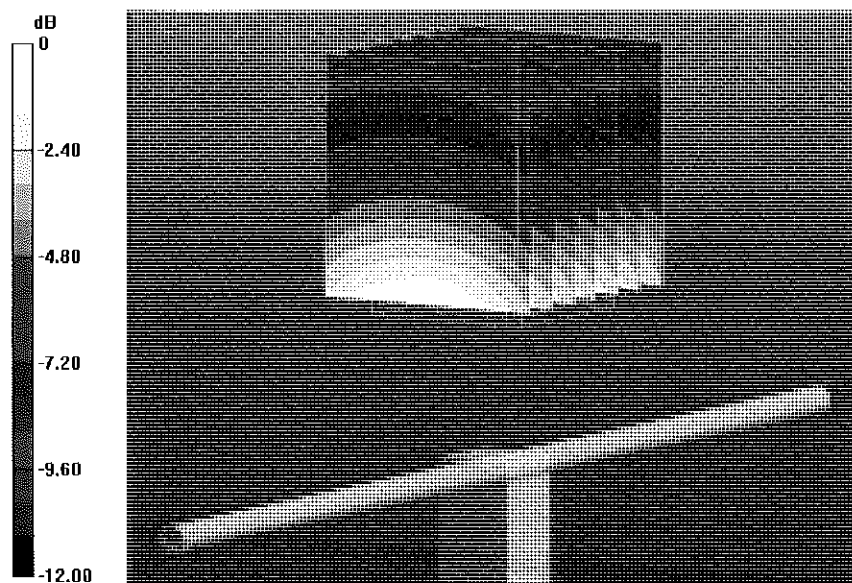


0 dB = 2.51 W/kg = 4.00 dBW/kg

Impedance Measurement Plot for Head TSL

20 Jan 2014 16:36:06
 CH1 S11 1 U FS 1: 54.678 Ω -156.25 m Ω 1.3581 nF 750.000 000 MHz

*
 Del
 CA

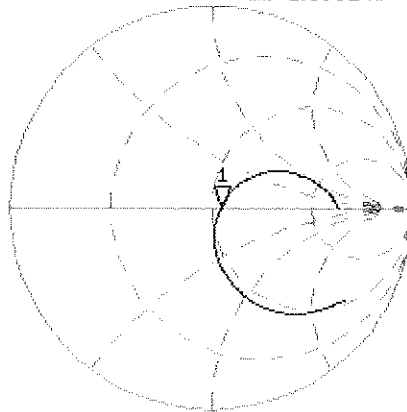

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -26.992 dB 750.000 000 MHz

CA

Avg
 16

H1d

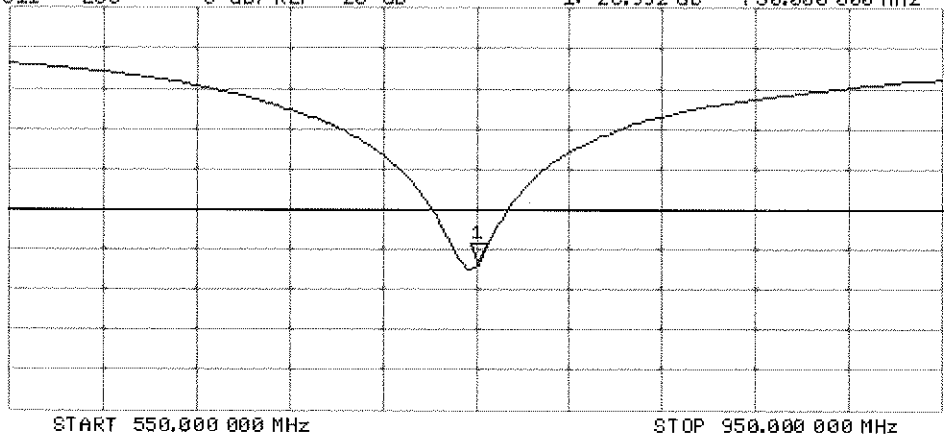

DASY5 Validation Report for Body TSL

Date: 20.01.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.13, 6.13, 6.13); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.082 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.31 W/kg

SAR(1 g) = 2.24 W/kg; SAR(10 g) = 1.47 W/kg

Maximum value of SAR (measured) = 2.58 W/kg

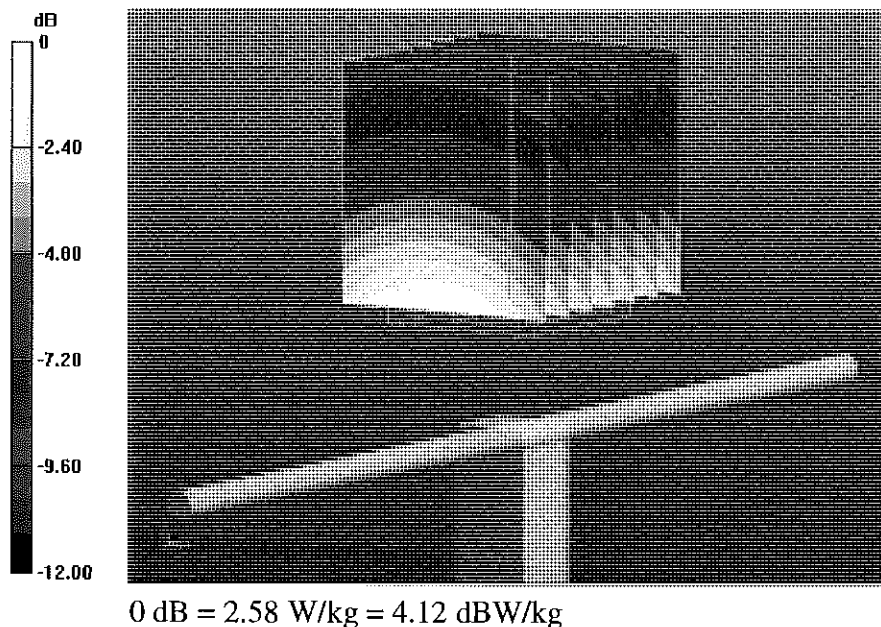

Impedance Measurement Plot for Body TSL

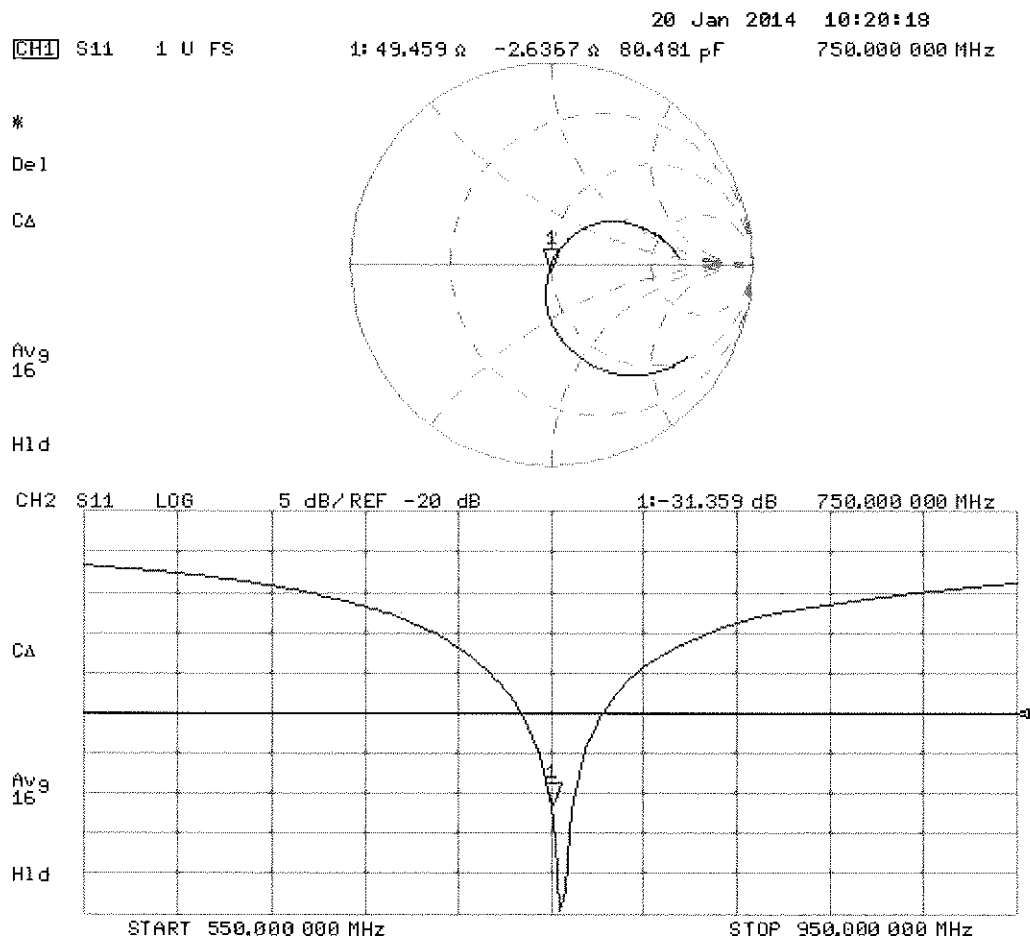



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d119_Apr14**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d119**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

CCV
4/25/14

Calibration date: **April 07, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Name** **Function** **Signature**
Leif Klysner **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Issued: April 9, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.6 $\pm$ 6 %	0.94 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.22 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.97 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.6 $\pm$ 6 %	1.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.44 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.34 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.15 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.2 Ω - 1.6 j Ω
Return Loss	- 34.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.3 Ω - 4.5 j Ω
Return Loss	- 24.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.386 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 29, 2010

DASY5 Validation Report for Head TSL

Date: 07.04.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d119

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.289 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.59 W/kg


SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

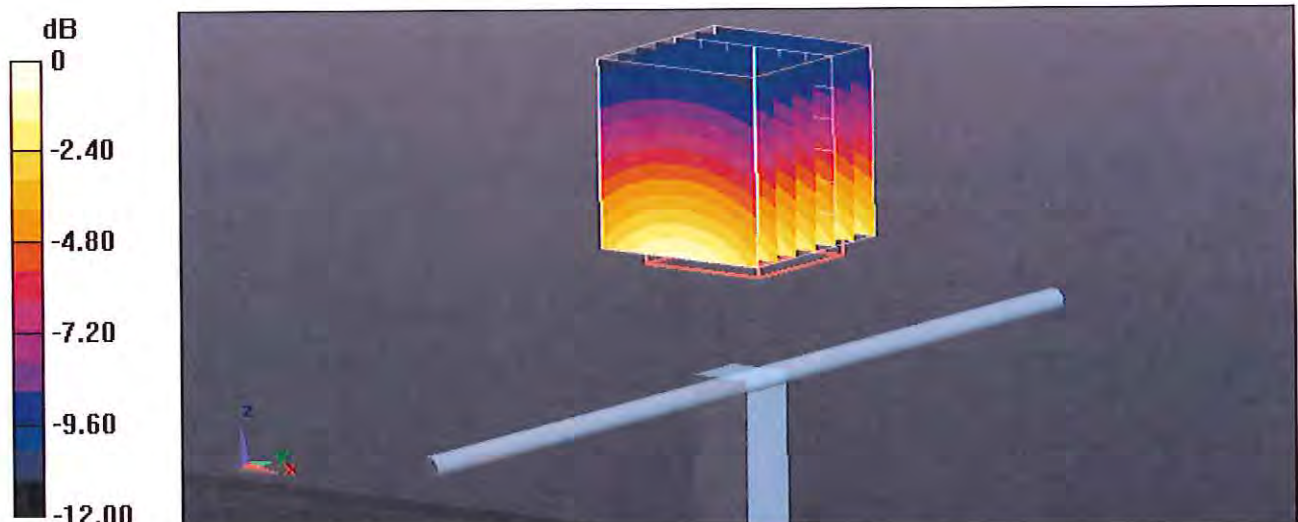

0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

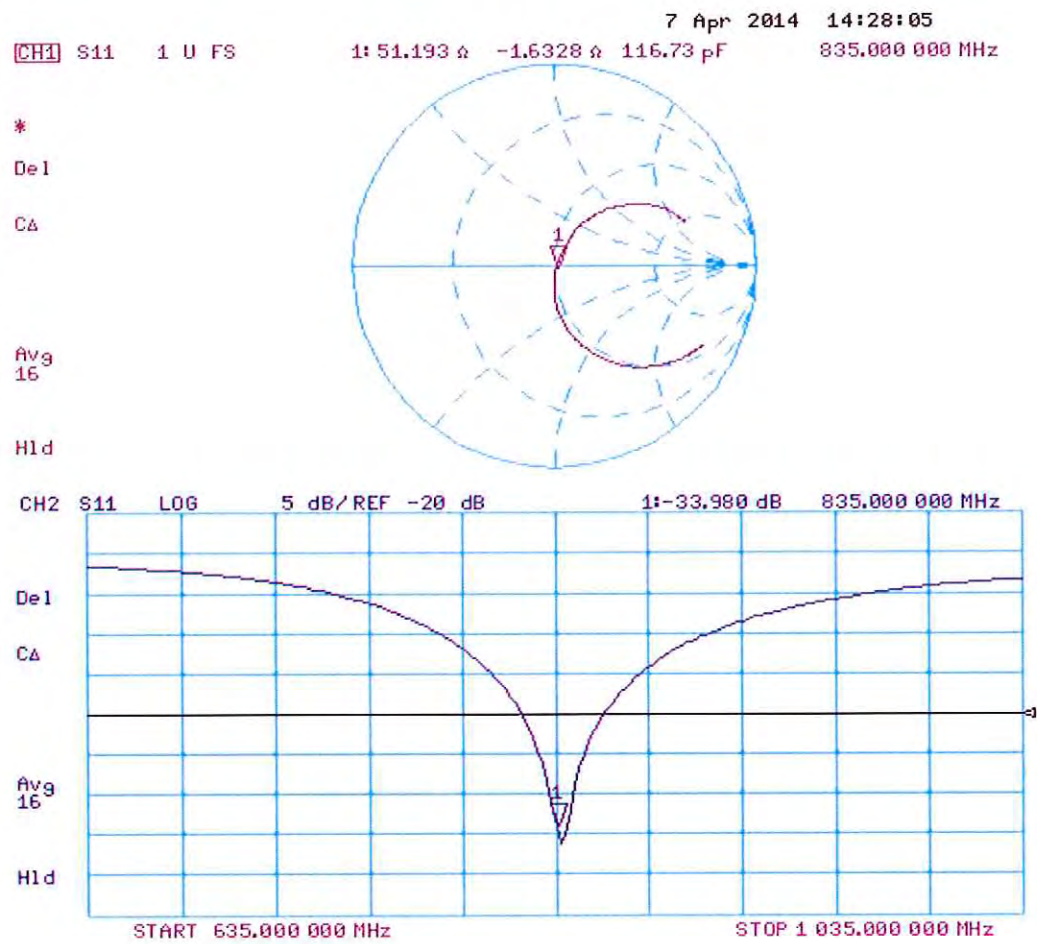

DASY5 Validation Report for Body TSL

Date: 07.04.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d119

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.594 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 2.85 W/kg

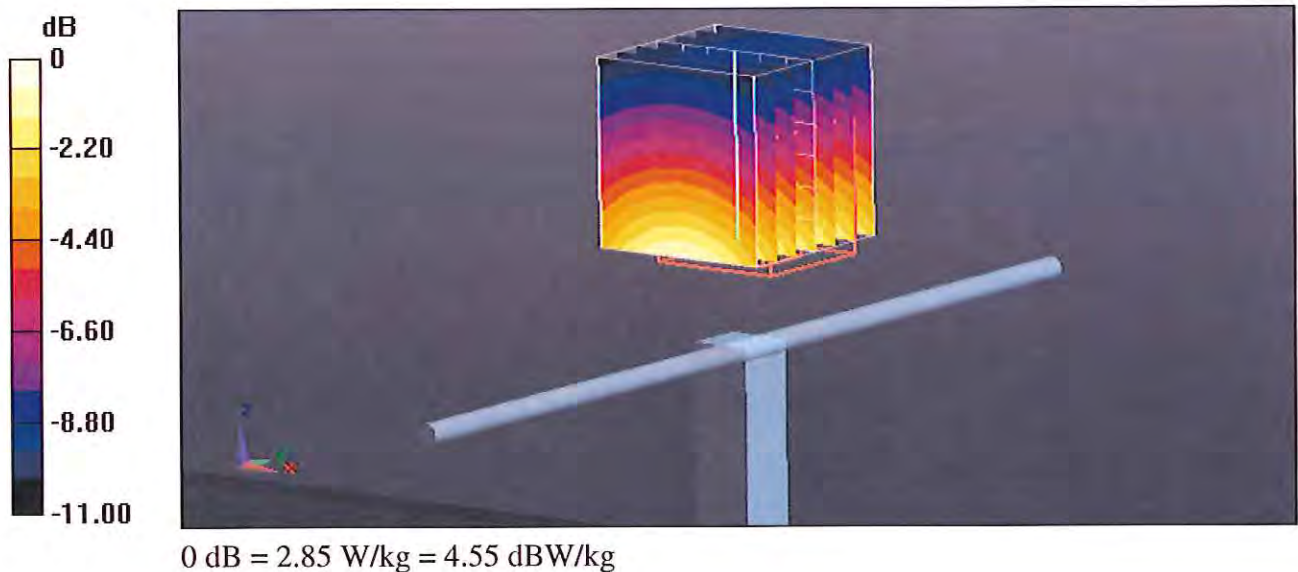

Impedance Measurement Plot for Body TSL

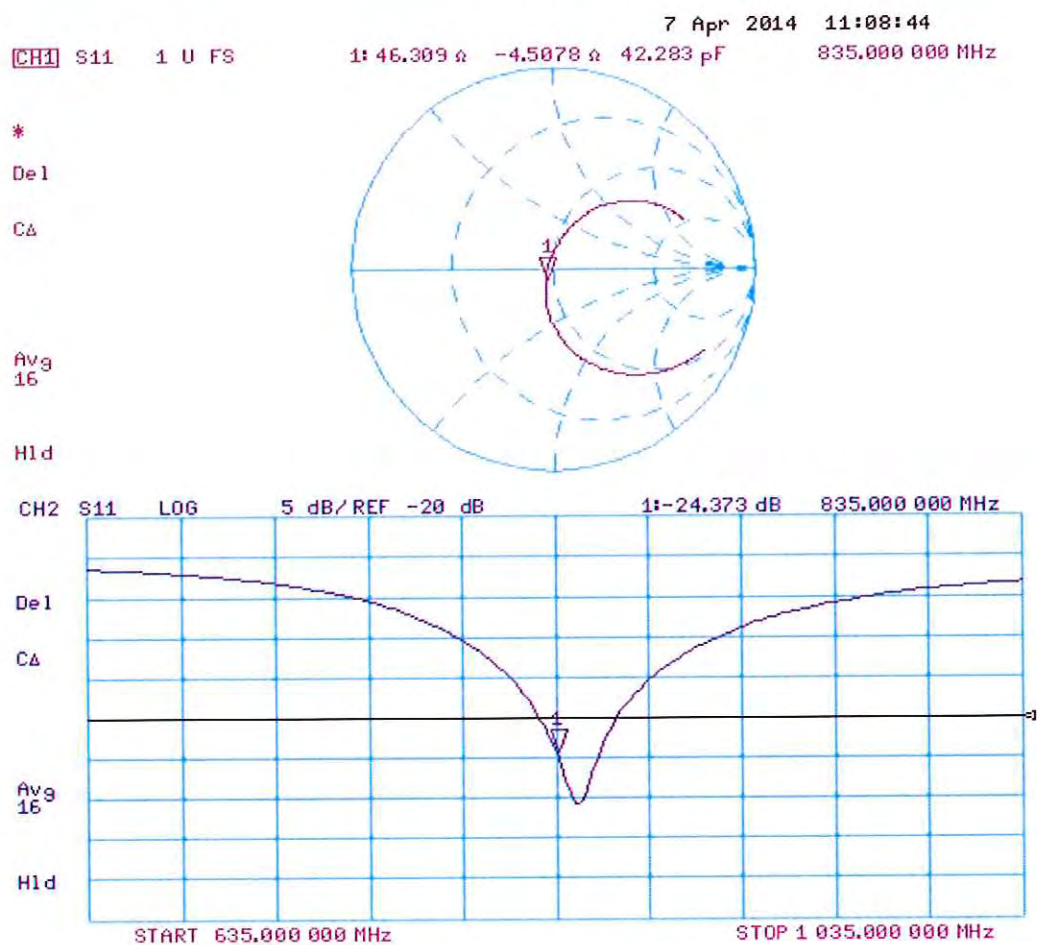



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1750V2-1051_Apr14**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN: 1051**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **April 10, 2014**

✓
KOK
5/7/14

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Israe El-Naouq** Name: **Israe El-Naouq** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature

Issued: April 10, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.1 $\pm$ 6 %	1.35 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.02 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.2 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.79 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.2 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.0 $\pm$ 6 %	1.48 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.37 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.04 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.1 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.7 Ω + 0.4 j Ω
Return Loss	- 41.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.8 Ω + 0.8 j Ω
Return Loss	- 29.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.222 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 19, 2010

DASY5 Validation Report for Head TSL

Date: 10.04.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1051

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.23, 5.23, 5.23); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.631 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 16.2 W/kg


SAR(1 g) = 9.02 W/kg; SAR(10 g) = 4.79 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

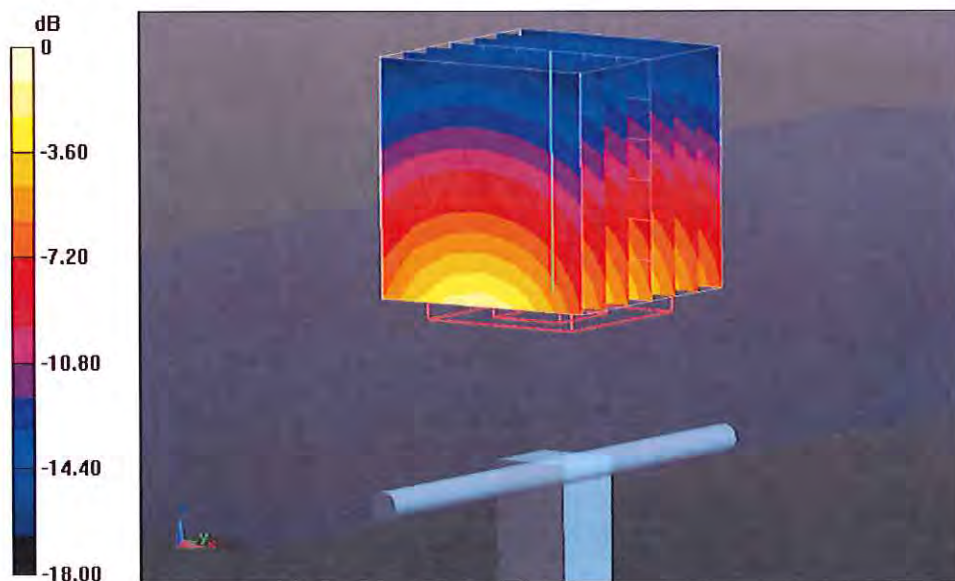

0 dB = 11.3 W/kg = 10.53 dBW/kg

Impedance Measurement Plot for Head TSL

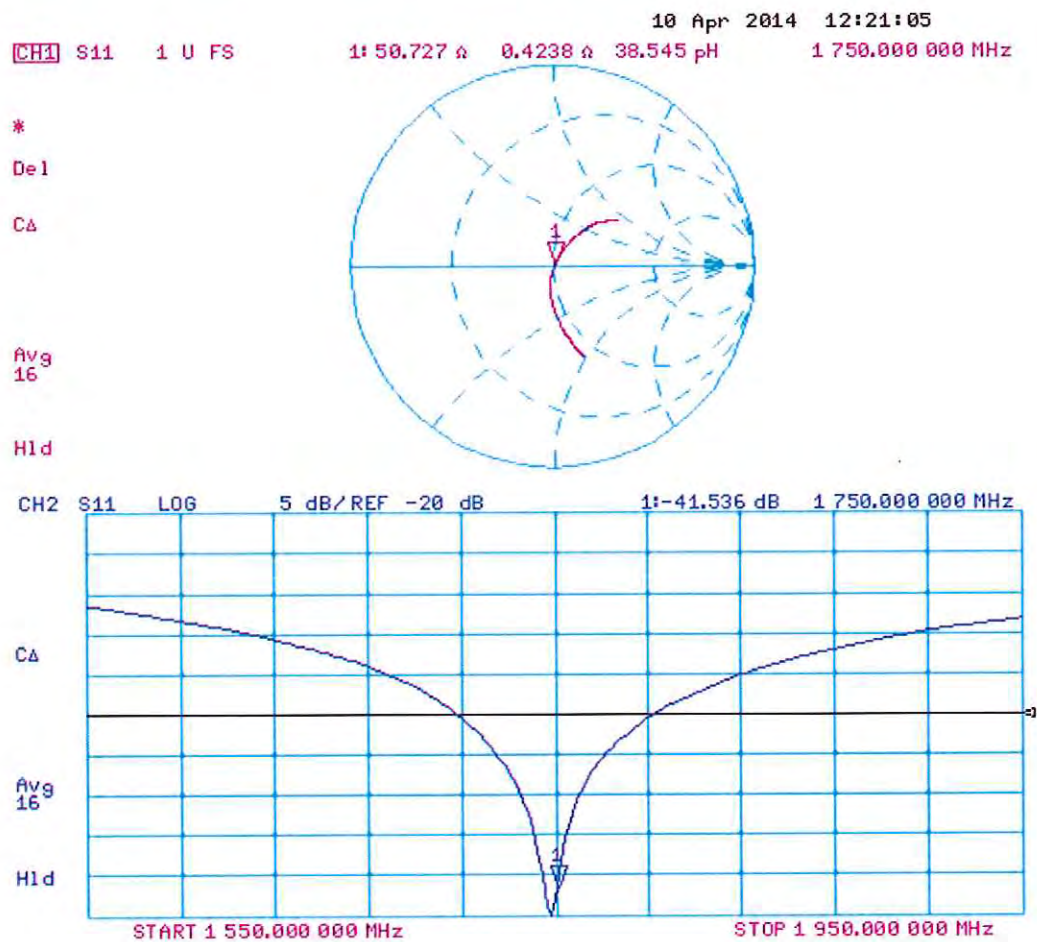

DASY5 Validation Report for Body TSL

Date: 10.04.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1051

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.89, 4.89, 4.89); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.321 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.37 W/kg; SAR(10 g) = 5.04 W/kg

Maximum value of SAR (measured) = 11.8 W/kg

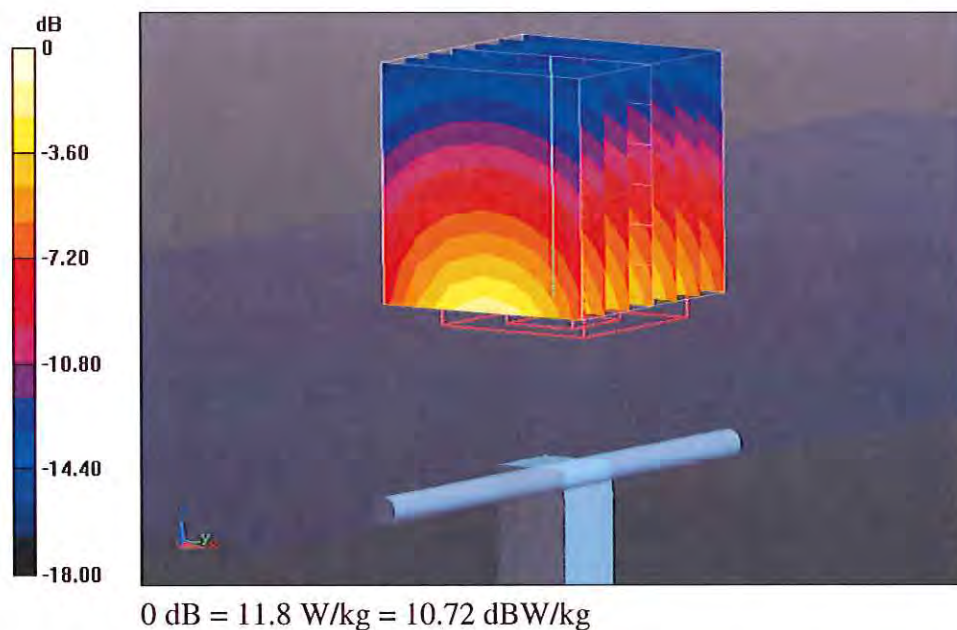

Impedance Measurement Plot for Body TSL

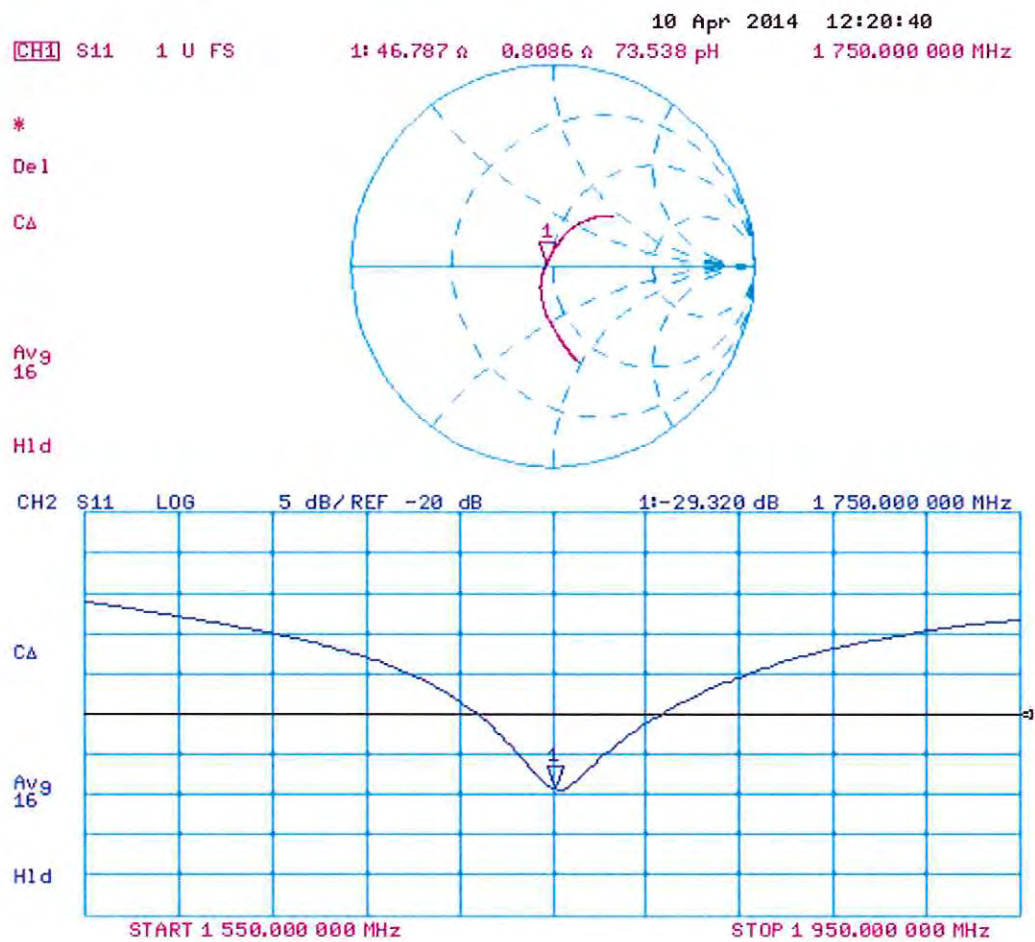



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1900V2-5d149_Jul13**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d149**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 22, 2013**

✓
 KOK
 8/19/13

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 22, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.9 $\pm$ 6 %	1.36 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.99 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.3 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.4 $\pm$ 6 %	1.49 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.36 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.6 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.9\ \Omega + 6.0\ j\Omega$
Return Loss	- 23.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.5\ \Omega + 6.4\ j\Omega$
Return Loss	- 23.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 22.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149

Communication System: UID 0 - CW ; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.98, 4.98, 4.98); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.173 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 9.99 W/kg; SAR(10 g) = 5.28 W/kg

Maximum value of SAR (measured) = 12.4 W/kg

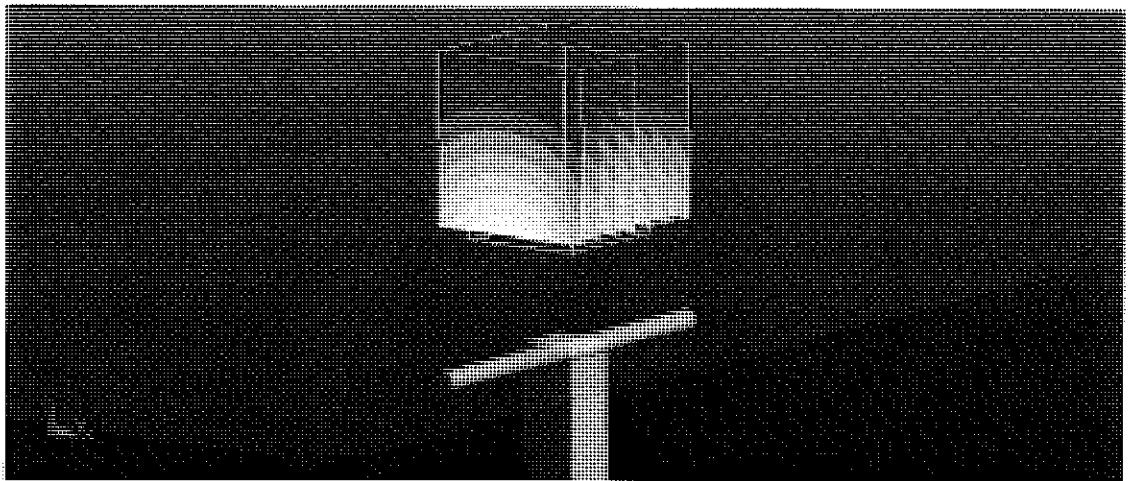

0 dB = 12.4 W/kg = 10.93 dBW/kg


Impedance Measurement Plot for Head TSL

22 Jul 2013 11:59:34
 CH1 S11 1 U FS 1: 52.941 Ω 6.0059 Ω 503.09 μ H 1 900.000 000 MHz

*
 Del
 CA

Avg
 16

H1d

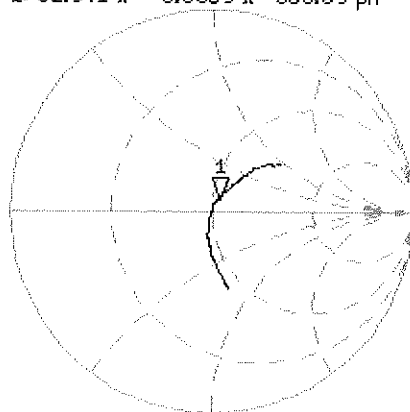


CH2 S11 LOG 5 dB/REF -20 dB 1:-23.758 dB 1 900.000 000 MHz

CA

Avg
 16

H1d

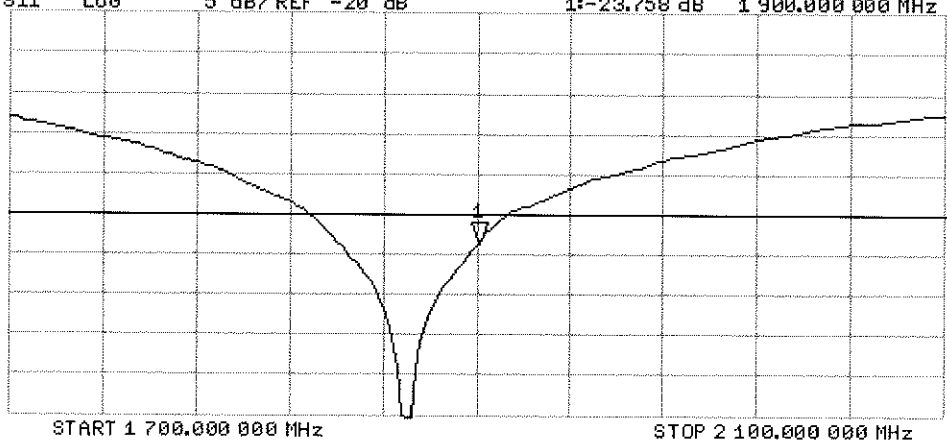

DASY5 Validation Report for Body TSL

Date: 22.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149

Communication System: UID 0 - CW ; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.6, 4.6, 4.6); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.173 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.36 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

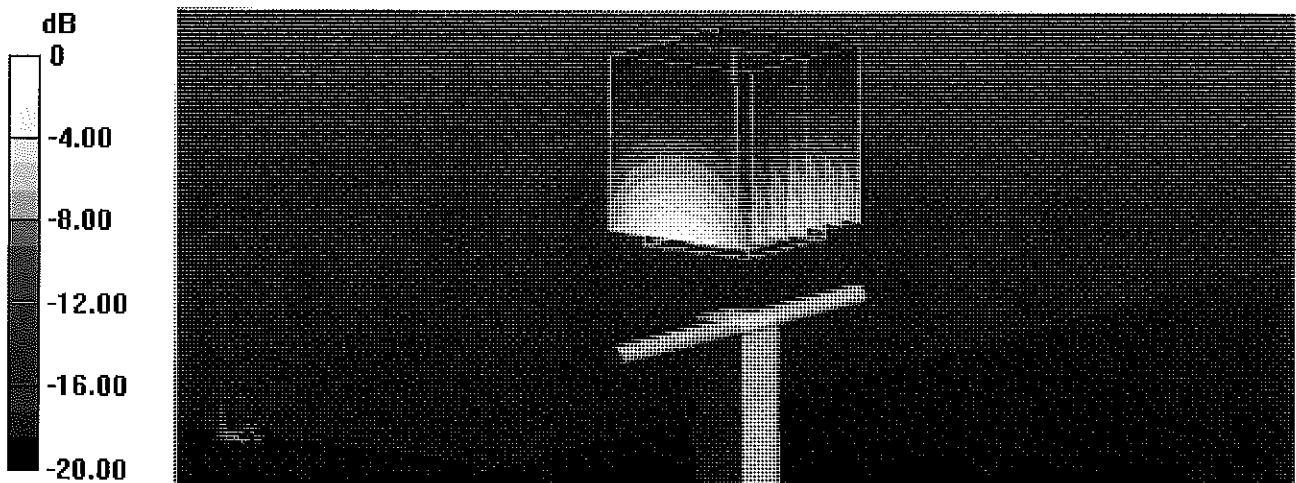


0 dB = 12.6 W/kg = 11.00 dBW/kg

Impedance Measurement Plot for Body TSL

22 Jul 2013 11:32:14
CH1 S11 1 U FS 1: 48.525 Δ 6.3906 Δ 535.32 pH 1 900.000 000 MHz

*
De1
CA

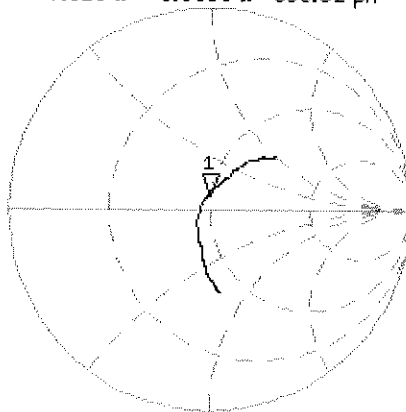

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.547 dB 1 900.000 000 MHz

CA

Avg
16

H1d

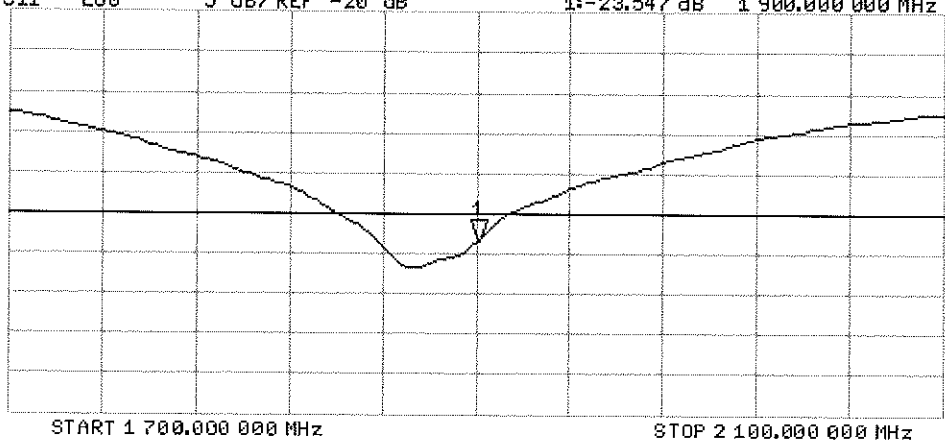



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2450V2-797_Jan14**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 797**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 21, 2014**

CC ✓
2/5/14

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.



All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Israe El-Naouq** Name: **Israe El-Naouq** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Technical Manager

Signature: 


Issued: January 21, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.7 $\pm$ 6 %	1.86 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.13 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.3 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.3 $\pm$ 6 %	2.04 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.7 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.86 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.1 W/kg $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.5 \Omega + 3.2 j\Omega$
Return Loss	- 26.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$50.0 \Omega + 4.9 j\Omega$
Return Loss	- 26.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.151 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 24, 2006

DASY5 Validation Report for Head TSL

Date: 21.01.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.151 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.13 W/kg

Maximum value of SAR (measured) = 16.9 W/kg

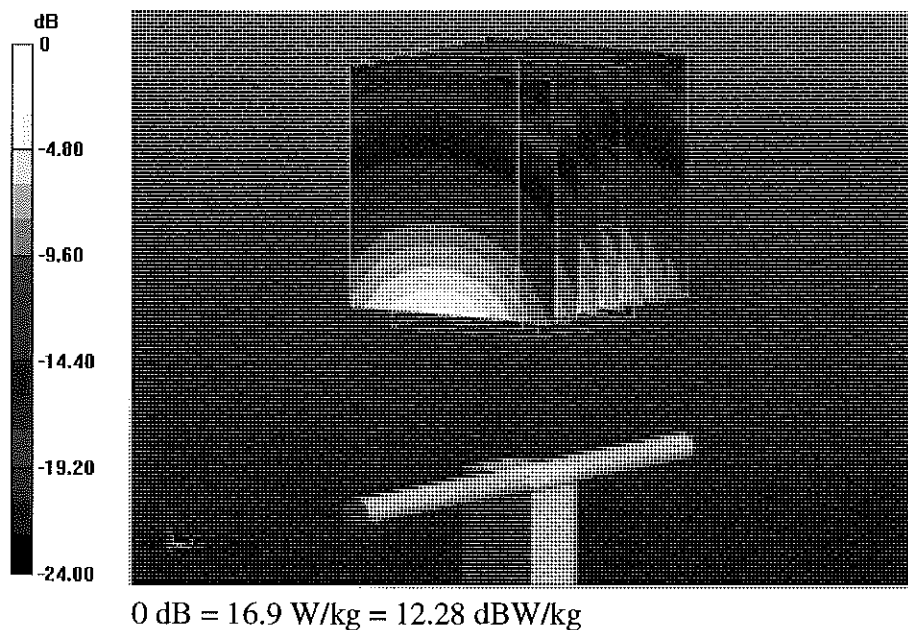

Impedance Measurement Plot for Head TSL


21 Jan 2014 11:31:52
 [CH1] S11 1 U FS 2: 53.512 $\angle$ 3.2285 $\angle$ 209.73 pH 2 450.000 000 MHz

*
 Del

CA

Avg
 16

H1d

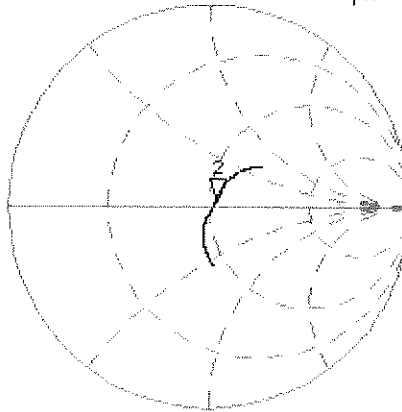


CH2 S11 LOG 5 dB/REF -20 dB 2:-26.730 dB 2 450.000 000 MHz

CA

Avg
 16

H1d

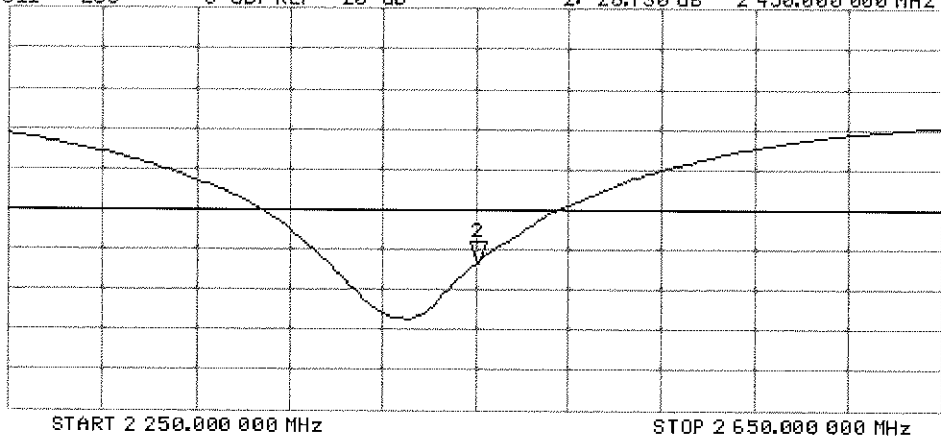

DASY5 Validation Report for Body TSL

Date: 21.01.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.709 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.4 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.86 W/kg

Maximum value of SAR (measured) = 16.8 W/kg

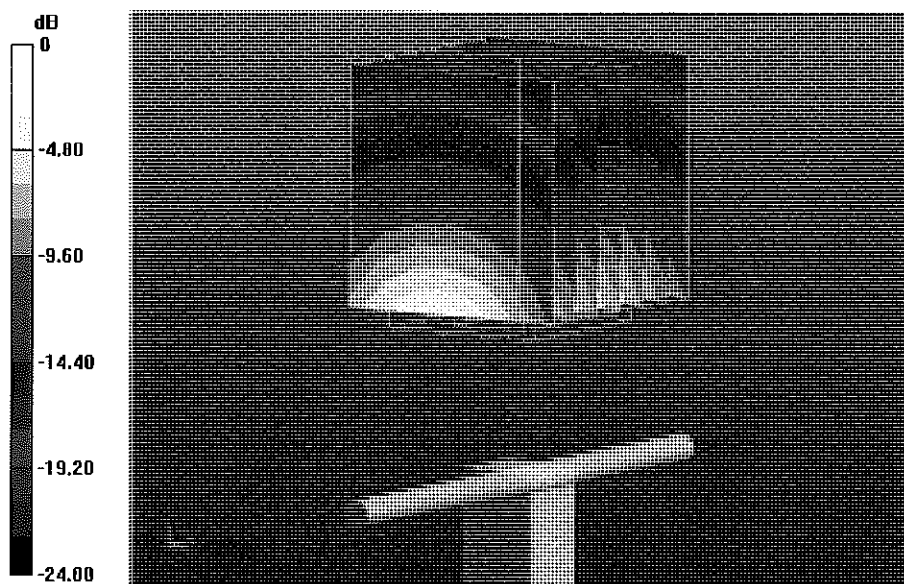


0 dB = 16.8 W/kg = 12.25 dBW/kg

Impedance Measurement Plot for Body TSL

21 Jan 2014 11:31:29
CH1 S11 1 U FS 2: 49.994 Ω 4.9258 Ω 319.98 μH 2 450.000 000 MHz

*
Del
CA

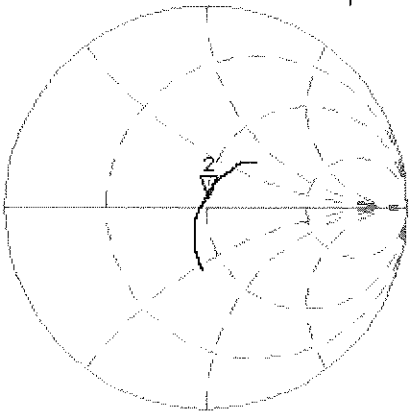


Avg
16
H1d

CH2 S11 LOG 5 dB/REF -20 dB 2:-26.162 dB 2 450.000 000 MHz

CA

Avg
16

H1d

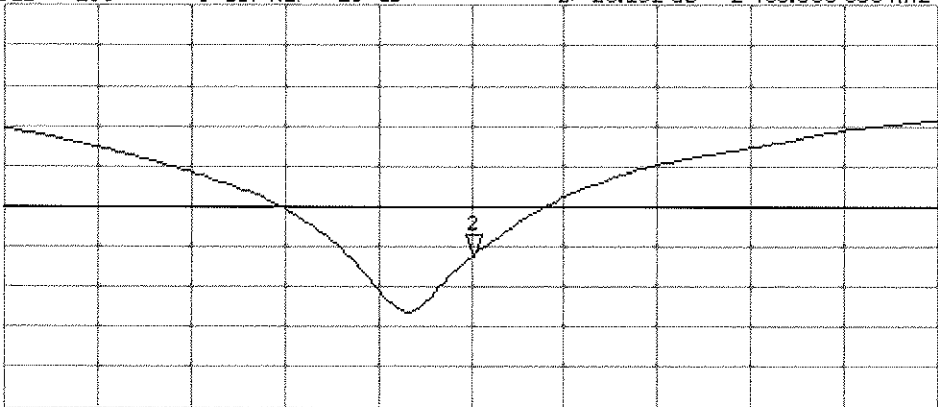

START 2 250.000 000 MHz STOP 2 450.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D5GHzV2-1007_Sep13/2**

CALIBRATION CERTIFICATE (Replacement of No: D5GHzV2-1007_Sep13)

Object **D5GHzV2 - SN: 1007**

Calibration procedure(s) **QA CAL-22.v2**
 Calibration procedure for dipole validation kits between 3-6 GHz

CC✓
 10/15/13

Calibration date: **September 23, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

Calibrated by: **Leif Klysner** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: October 4, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5300 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.8 $\pm$ 6 %	4.48 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.77 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.5 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.2 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.6 ± 6 %	4.62 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.04 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.2 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.9 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	4.76 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.32 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.0 ± 6 %	5.07 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.78 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.3 ± 6 %	5.36 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.28 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	72.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.03 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.1 ± 6 %	5.56 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.49 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.8 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.8 ± 6 %	5.75 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.61 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.11 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.6 ± 6 %	5.88 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	6.17 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.31 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	72.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.02 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.1 W/kg ± 19.5 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	52.4 Ω - 11.0 j Ω
Return Loss	- 19.2 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	56.8 Ω - 4.4 j Ω
Return Loss	- 22.3 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	48.8 Ω - 5.4 j Ω
Return Loss	- 25.1 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	57.3 Ω - 8.7 j Ω
Return Loss	- 19.5 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	56.9 Ω + 1.6 j Ω
Return Loss	- 23.5 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	53.1 Ω - 10.3 j Ω
Return Loss	- 19.7 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	54.3 Ω - 1.5 j Ω
Return Loss	- 27.2 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	49.7 Ω - 3.6 j Ω
Return Loss	- 28.7 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	58.2 Ω - 5.2 j Ω
Return Loss	- 20.9 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	58.7 Ω + 3.9 j Ω
Return Loss	- 21.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.201 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 28, 2003

DASY5 Validation Report for Head TSL

Date: 23.09.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1007

Communication System: UID 0 - CW ; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.48$ S/m; $\epsilon_r = 35.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 35.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.07$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.505 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 18.1 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.817 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 29.7 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.029 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.403 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 31.3 W/kg

SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 19.3 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.987 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 31.9 W/kg


SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.2 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

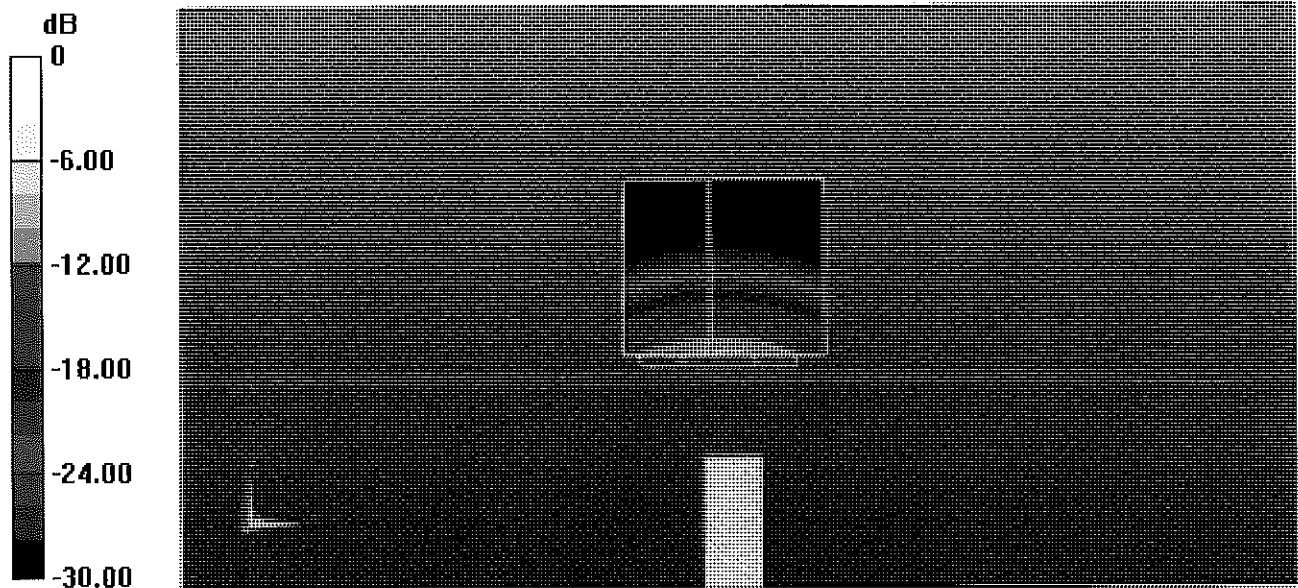

0 dB = 19.0 W/kg = 12.79 dBW/kg

Impedance Measurement Plot for Head TSL

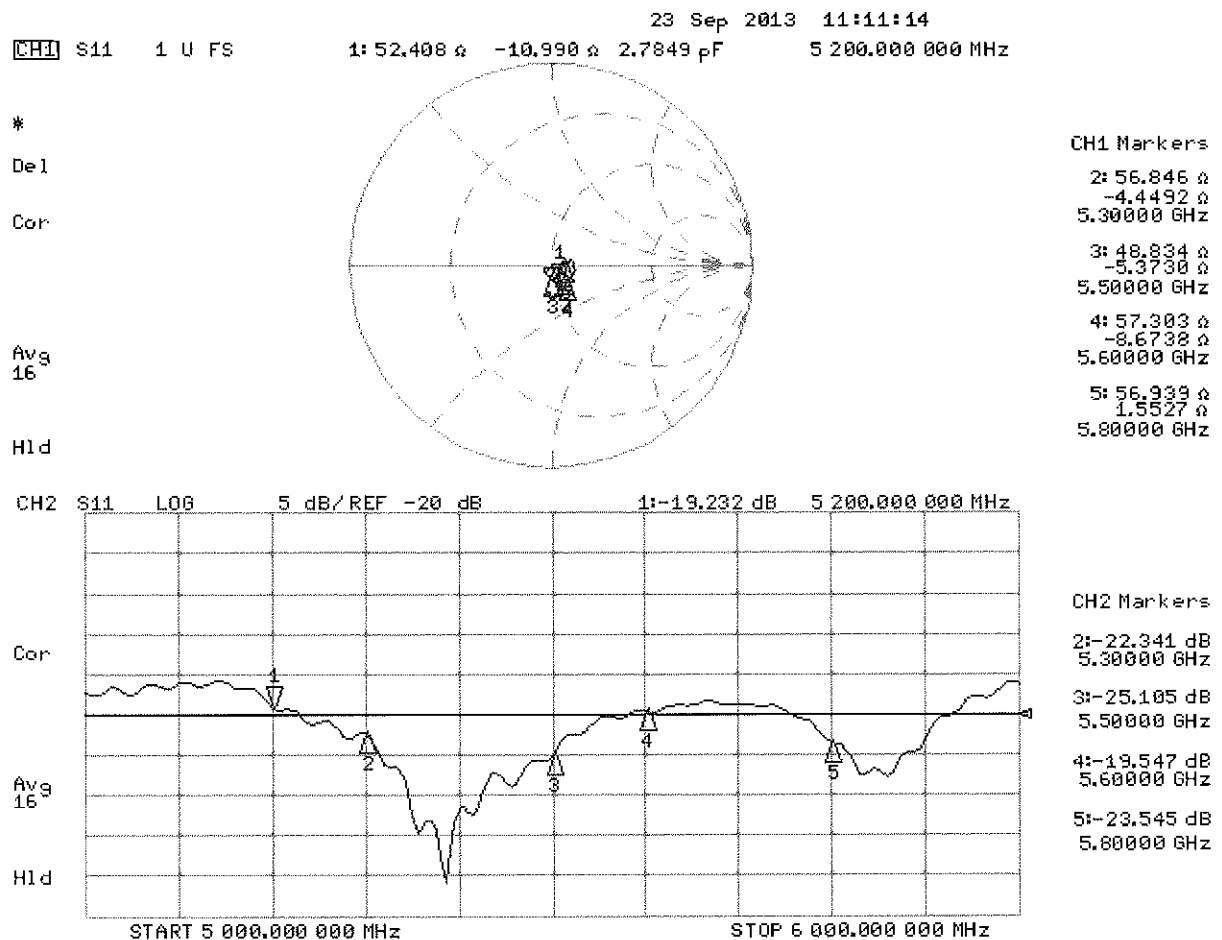

DASY5 Validation Report for Body TSL

Date: 20.09.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1007

Communication System: UID 0 - CW ; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.36$ S/m; $\epsilon_r = 48.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.56$ S/m; $\epsilon_r = 48.1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.75$ S/m; $\epsilon_r = 47.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.606 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 7.28 W/kg; SAR(10 g) = 2.03 W/kg

Maximum value of SAR (measured) = 17.2 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.305 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.49 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.471 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 7.61 W/kg; SAR(10 g) = 2.11 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.333 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 19.1 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 55.389 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 34.1 W/kg

SAR(1 g) = 7.31 W/kg; SAR(10 g) = 2.02 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

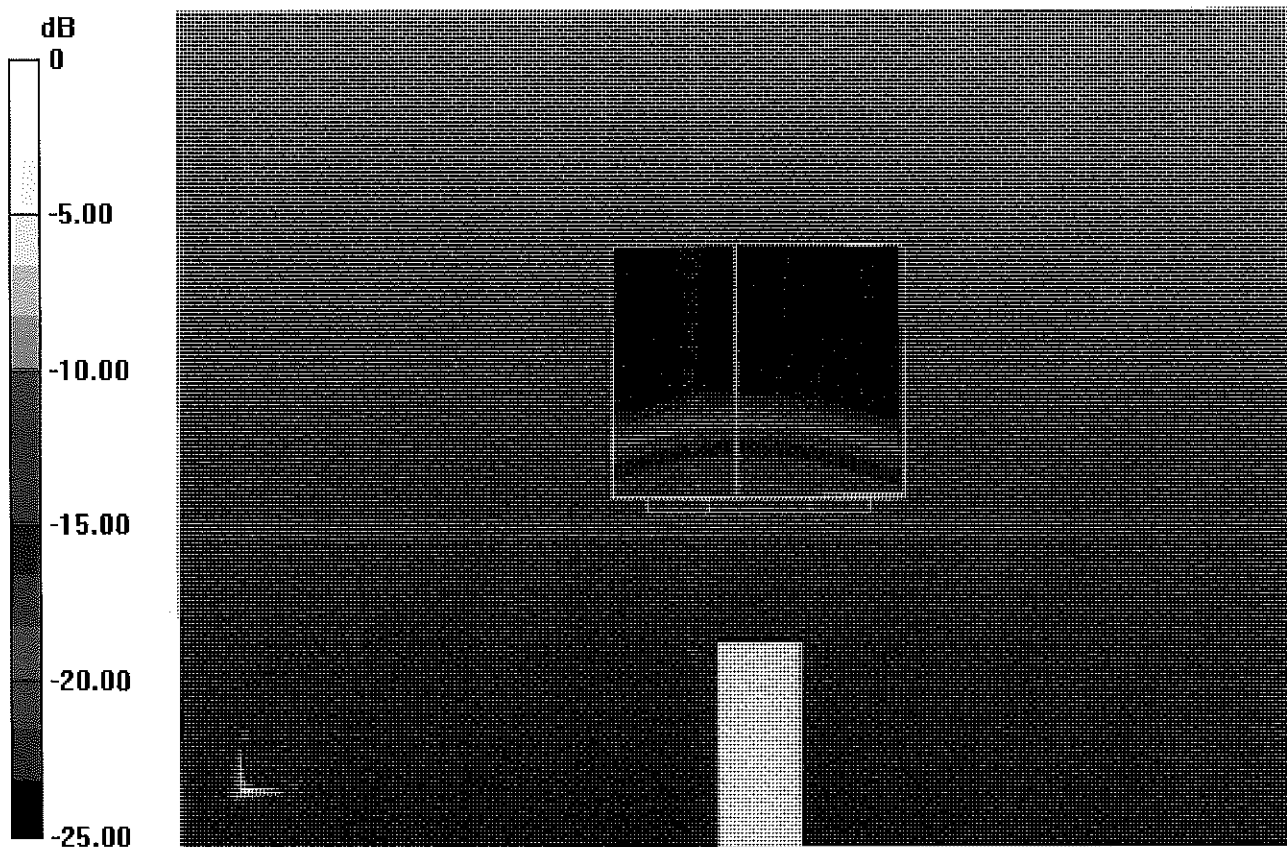

Impedance Measurement Plot for Body TSL

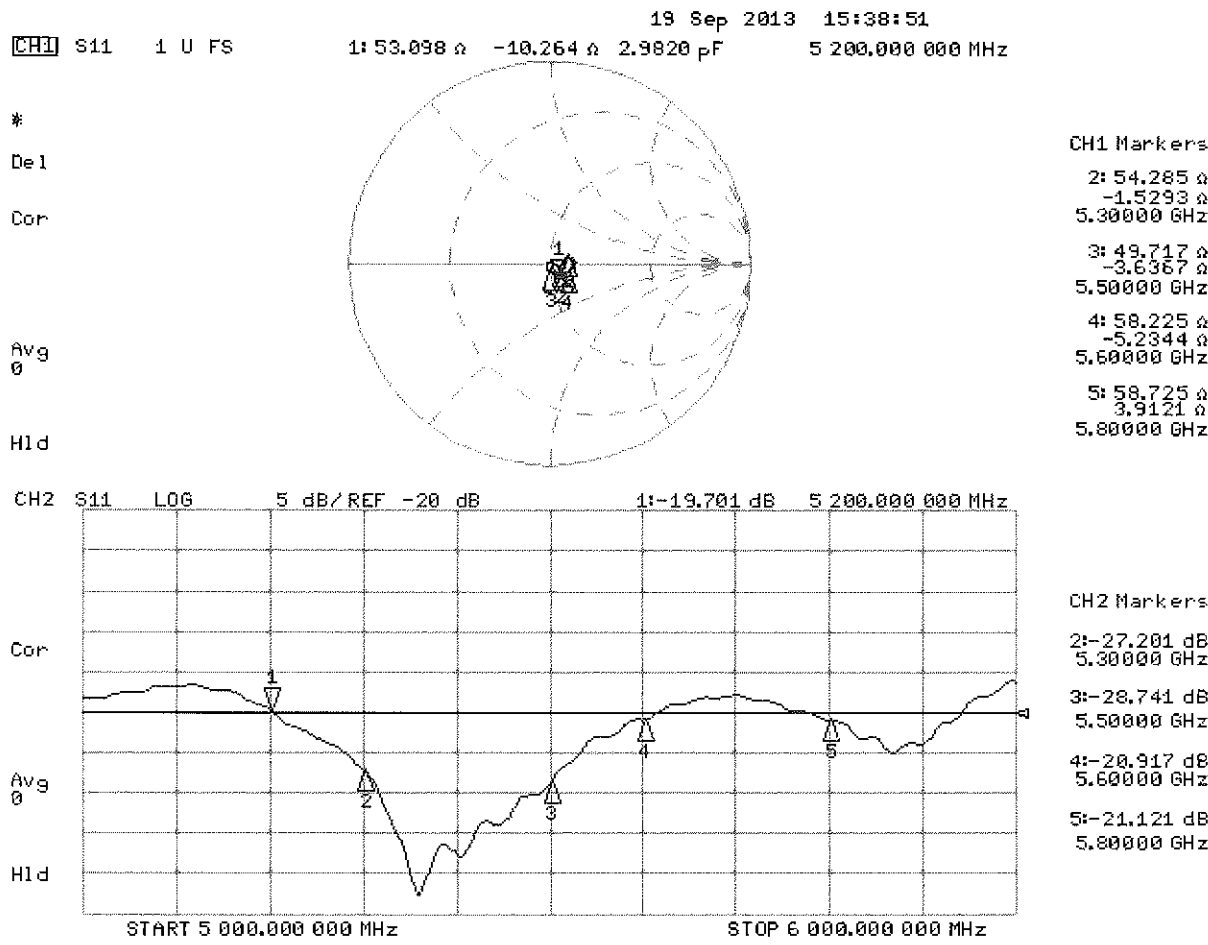



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D5GHzV2-1057_Jan14**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1057**

Calibration procedure(s) **QA CAL-22.v2**
Calibration procedure for dipole validation kits between 3-6 GHz

Calibration date: **January 27, 2014**

CC
2/5/14 ✓

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	US37292783	09-Oct-13 (No. 217-01827)	Oct-14
Power sensor HP 8481A	MY41092317	09-Oct-13 (No. 217-01828)	Oct-14
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe EX3DV4	SN: 3503	30-Dec-13 (No. EX3-3503_Dec13)	Dec-14
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

Calibrated by: **Israe El-Naouq** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Israe El-Naouq

Katja Pokovic

Issued: January 27, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz $\pm$ 1 MHz 5300 MHz $\pm$ 1 MHz 5500 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.0 $\pm$ 6 %	4.45 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.85 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.0 W/kg $\pm$ 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.3 W/kg $\pm$ 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.9 ± 6 %	4.54 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.0 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.8 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.6 ± 6 %	4.74 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.50 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	84.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.5 ± 6 %	4.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.8 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	5.07 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.00 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.6 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	5.44 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.58 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.2 ± 6 %	5.57 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.79 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.84 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.96 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6 ± 6 %	5.98 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.07 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.24 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.2 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	6.23 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.48 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg ± 19.5 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	43.1 Ω - 4.6 j Ω
Return Loss	- 21.0 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	46.5 Ω - 1.3 j Ω
Return Loss	- 28.1 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	46.2 Ω - 2.5 j Ω
Return Loss	- 26.4 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	48.9 Ω - 5.7 j Ω
Return Loss	- 24.6 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	48.7 Ω - 3.1 j Ω
Return Loss	- 29.5 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.4 Ω - 7.7 j Ω
Return Loss	- 22.2 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	49.6 Ω - 3.0 j Ω
Return Loss	- 30.3 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	50.8 Ω - 3.9 j Ω
Return Loss	- 28.0 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	55.4 Ω - 2.5 j Ω
Return Loss	- 25.0 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	52.3 Ω - 0.7 j Ω
Return Loss	- 32.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.186 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

DASY5 Validation Report for Head TSL

Date: 27.01.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.45$ S/m; $\epsilon_r = 35$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 34.5$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.07$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.52, 5.52, 5.52); Calibrated: 30.12.2013, ConvF(5.2, 5.2, 5.2); Calibrated: 30.12.2013, ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2013, ConvF(4.86, 4.86, 4.86); Calibrated: 30.12.2013, ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.497 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.444 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 31.2 W/kg

SAR(1 g) = 8.36 W/kg; SAR(10 g) = 2.4 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.807 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 8.5 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.194 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 33.2 W/kg
SAR(1 g) = 8.42 W/kg; SAR(10 g) = 2.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 60.646 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 32.9 W/kg
SAR(1 g) = 8 W/kg; SAR(10 g) = 2.28 W/kg
Maximum value of SAR (measured) = 19.9 W/kg

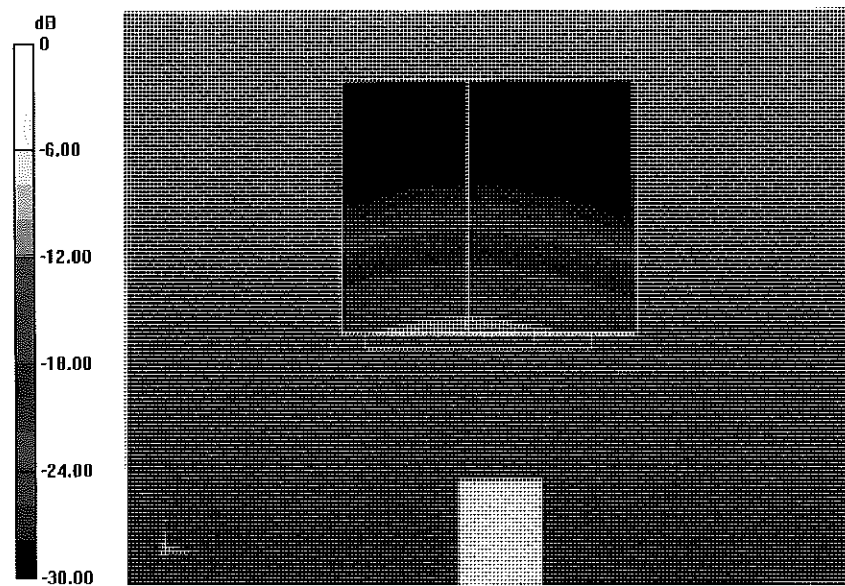


0 dB = 19.9 W/kg = 12.99 dBW/kg

Impedance Measurement Plot for Head TSL

27 Jan 2014 17:12:04
 CH1 S11 1 U FS 1: 43.092 Ω -4.5938 Ω 6.6627 pF 5 200.000 000 MHz

*
 Del
 Cor
 Avg
 16
 H1d

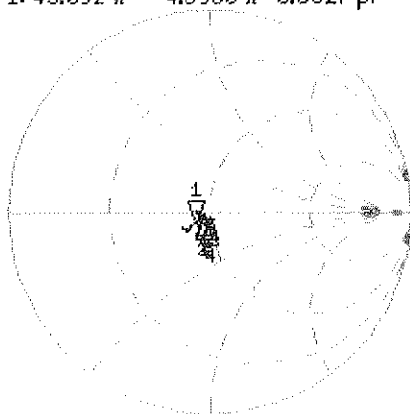


CH1 Markers

2: 46.475 Ω
 -1.3496 Ω
 5.30000 GHz
 3: 46.150 Ω
 -2.5078 Ω
 5.50000 GHz
 4: 48.900 Ω
 -5.6932 Ω
 5.60000 GHz
 5: 48.734 Ω
 -3.0762 Ω
 5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -21.014 dB 5 200.000 000 MHz

Del
 Cor
 Avg
 16
 H1d

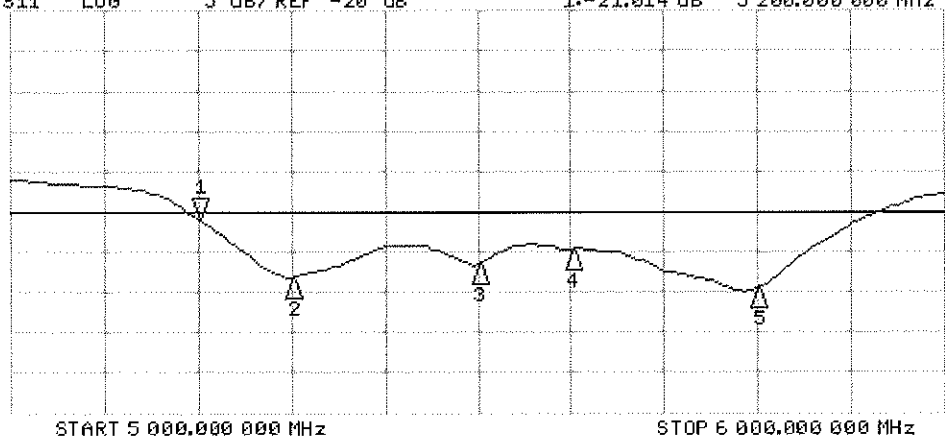

CH2 Markers

2: -28.145 dB
 5.30000 GHz
 3: -26.415 dB
 5.50000 GHz
 4: -24.640 dB
 5.60000 GHz
 5: -29.464 dB
 5.80000 GHz

DASY5 Validation Report for Body TSL

Date: 24.01.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1057

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.57$ S/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.84$ S/m; $\epsilon_r = 46.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.23$ S/m; $\epsilon_r = 46.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2013, ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2013, ConvF(4.52, 4.52, 4.52); Calibrated: 30.12.2013, ConvF(4.3, 4.3, 4.3); Calibrated: 30.12.2013, ConvF(4.47, 4.47, 4.47); Calibrated: 30.12.2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.809 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 7.58 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.585 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 32.2 W/kg

SAR(1 g) = 7.79 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.364 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 34.4 W/kg

SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 57.864 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 35.8 W/kg

SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 19.8 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.817 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 35.1 W/kg

SAR(1 g) = 7.48 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

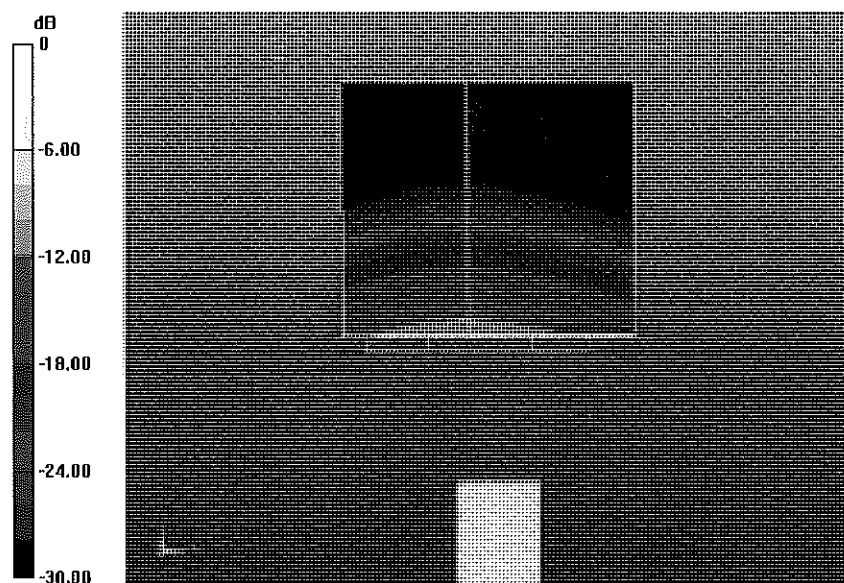


0 dB = 18.8 W/kg = 12.74 dBW/kg

Impedance Measurement Plot for Body TSL

24 Jan 2014 15:50:22
CH1 S11 1 U FS 1: 49.354 Ω -7.7188 Ω 3.9652 pF 5 200.000 000 MHz


*
 Del
 Cor
 Avg
 16
 H1d

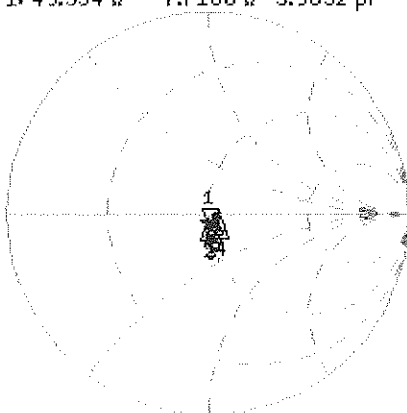

CH1 Markers
 2: 49.559 Ω
 -3.0176 Ω
 5.30000 GHz
 3: 50.793 Ω
 -3.9160 Ω
 5.50000 GHz
 4: 55.393 Ω
 -2.5176 Ω
 5.60000 GHz
 5: 52.320 Ω
 -716.80 m Ω
 5.80000 GHz

CH2 S11 L06 5 dB/REF -20 dB 1:-22.190 dB 5 200.000 000 MHz

Cor
 Avg
 16
 H1d

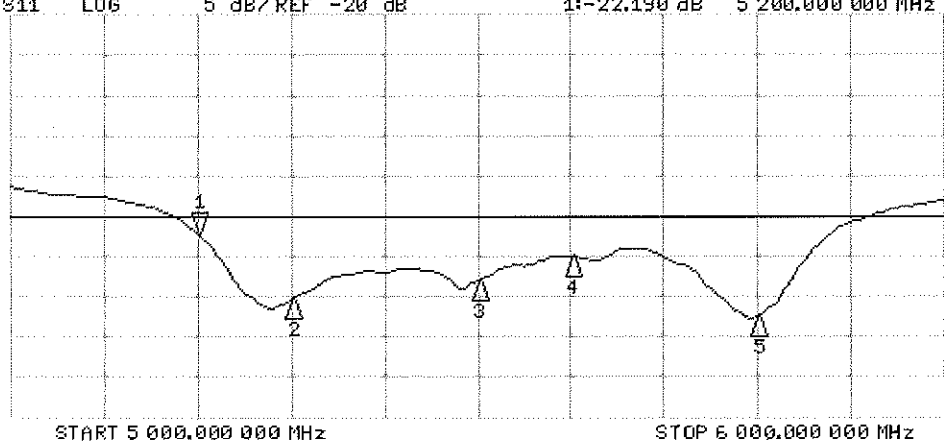

CH2 Markers
 2:-30.277 dB
 5.30000 GHz
 3:-28.039 dB
 5.50000 GHz
 4:-24.960 dB
 5.60000 GHz
 5:-32.401 dB
 5.80000 GHz