



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
Bluetooth & DTS/UNII a/b/g/n/ac & ANT+ Tablet

**FCC ID: A3LSMT710
Model Name: SM-T710**

**Report Number: 15K20544-S1B
Issue Date: 6/2/2015**

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by
**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



TL-637

Revision History


Rev.	Date	Revisions	Revised By
--	5/24/2015	Initial Issue	Justin Park
A	5/27/2015	1. Sec 6.1. : Updated Table	Justin Park
B	6/2/2015	1. Sec 10.1., 10.2. : Added Wi-Fi Area Scan Max. SAR 2. Sec 12. : Updated Simultaneous Transmission SAR Analysis 3. Sec 10., 12.. : Added Wi-Fi MIMO Data	Justin Park

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	10
6.	Device Under Test (DUT) Information	11
6.1.	DUT Description	11
6.2.	Wireless Technologies.....	11
6.3.	Nominal and Maximum Output Power.....	12
6.4.	Power Reduction by Proximity Sensing	13
6.4.1.	Proximity Sensor Triggering Distance (KDB 616217 §6.2).....	13
7.	RF Exposure Conditions (Test Configurations).....	15
7.1.	Standalone SAR Test Exclusion Considerations.....	15
7.2.	Required Test Configurations	19
8.	Dielectric Property Measurements & System Check	20
8.1.	Dielectric Property Measurements	20
8.2.	System Check.....	23
9.	Conducted Output Power Measurements.....	25
9.1.	Wi-Fi 2.4GHz (DTS Band)	25
9.2.	Wi-Fi 5GHz (U-NII Bands).....	26
9.3.	Bluetooth	30
10.	Measured and Reported (Scaled) SAR Results.....	31
10.1.	Wi-Fi (DTS Band)	32
10.2.	Wi-Fi (U-NII Band).....	33
10.3.	Bluetooth.....	34
11.	SAR Measurement Variability.....	35
12.	Simultaneous Transmission SAR Analysis.....	36
12.1.	Sum of the SAR for Wi-Fi & BT	39
	Appendixes	40

<i>A_15K20544-S1_SAR Photos & Ant. Locations</i>	<i>40</i>
<i>B_15K20544-S1_SAR Highest Test Plots</i>	<i>40</i>
<i>C_15K20544-S1_SAR System Check Plots</i>	<i>40</i>
<i>D_15K20544-S1_SAR Tissue Ingredients</i>	<i>40</i>
<i>E_15K20544-S1_SAR Probe Cal. Certificates</i>	<i>40</i>
<i>F_15K20544-S1_SAR Dipole Cal. Certificates</i>	<i>40</i>

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID	A3LSMT710			
Model Name	SM-T710			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)				
Exposure Category	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
The Highest Reported SAR (W/kg)				
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS (BT)
Standalone	N/A	0.746	1.049	0.234
Simultaneous TX Body		0.746	1.049	0.419
Date Tested	4/7/2015 to 5/28/2015			
Test Results	Pass			
Note: The Wi-Fi (DTS/U-NII) and Bluetooth SAR measurement results from the original filling can be found in SAR test report 15K20515-S1D, FCC ID A3LSMT715. The WLAN/BT antennas and surrounding circuitry is the same between these two units, and tune up power targets are identical for WLAN/BT operations. Therefore, SAR data for WLAN/BT from the original filling was used for this model. Spot checks for WLAN/BT were performed to ensure that the SAR measurements for both devices are the same.				
UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.				
Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.				
Approved & Released By:		Prepared By:		
				
JiHo Choi Operations Manager UL Korea, Ltd Suwon Laboratory		Justin Park Engineer UL Korea, Ltd Suwon Laboratory		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- o 248227 D01 802.11 Wi-Fi SAR v02
- o 447498 D01 General RF Exposure Guidance v05r02
- o 616217 D04 SAR for laptop and tablets v01r01
- o 690783 D01 SAR Listings on Grants v01r03
- o 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- o 865664 D02 RF Exposure Reporting v01r01
- o 941225 D06 Hotspot Mode v02

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

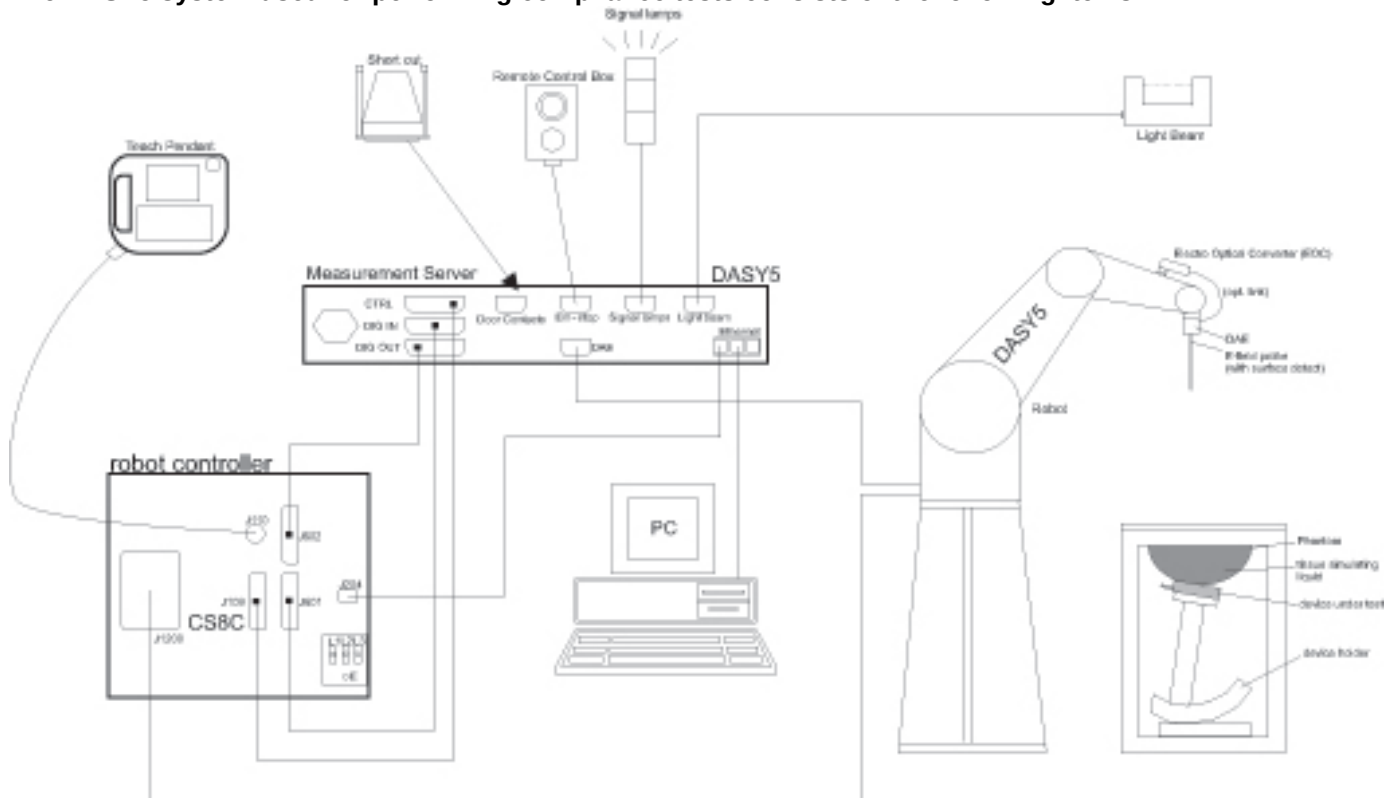

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	9-23-2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1196	8-5-2015
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	11-13-2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	9-23-2015
Power Sensor	Agilent	U2000A	MY54260010	9-23-2015
Power Sensor	Agilent	U2000A	MY54260007	9-23-2015
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	11-7-2015
Directional Coupler	Agilent	772D	MY52180193	9-22-2015
Directional Coupler	Agilent	778D	MY52180432	9-22-2015
Low Pass Filter	MICROLAB	LA-15N	03943	11-4-2015
Low Pass Filter	FILTRON	L14012FL	1410003S	11-4-2015
Low Pass Filter	MICROLAB	LA-60N	03942	11-5-2015
Attenuator	Agilent	8491B/003	MY39269292	9-22-2015
Attenuator	Agilent	8491B/010	MY39269315	9-22-2015
Attenuator	Agilent	8491B/020	MY39269298	9-22-2015
E-Field Probe (SAR 1)	SPEAG	EX3DV4	7330	2-12-2016
E-Field Probe (SAR 2)	SPEAG	EX3DV4	7313	8-27-2015
E-Field Probe (SAR 3)	SPEAG	EX3DV4	7323	12-5-2015
Data Acquisition Electronics (SAR 1)	SPEAG	DAE4	1468	1-12-2016
Data Acquisition Electronics (SAR 2)	SPEAG	DAE4	1447	8-25-2015
Data Acquisition Electronics (SAR 3)	SPEAG	DAE4	1446	8-27-2015
System Validation Dipole	SPEAG	D2450V2	939	8-11-2015
System Validation Dipole	SPEAG	D5GHzV2	1184	8-22-2015
Thermometer (SAR 1)	Lutron	MHB-382SD	AH.53049	11-18-2015
Thermometer (SAR 2)	Lutron	MHB-382SD	AH.50215	11-18-2015
Thermometer (SAR 3)	Lutron	MHB-382SD	AH.50213	11-18-2015

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	11-17-2015

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 198.2 mm x 134.5 mm Overall Diagonal: 230 mm Display Diagonal: 203.5 mm
Back Cover	☒ The rechargeable battery is not user accessible.
Battery Options	☒ The rechargeable battery is not user accessible.
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. Mobile Hotspot is not supported
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☒ Wi-Fi Direct (Wi-Fi 5 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	100%
	Does this device support bands 5.60 ~ 5.65 GHz? ☐ Yes ☒ No		
	Does this device support Band gap channel? ☐ Yes ☒ No		
Bluetooth	2.4 GHz	Version 4.1 LE	77.5% (DH5)

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): ~ 0.5		Max. RF Output Power (dBm)		Reduce RF Output Power (dBm)	
RF Air interface	Mode	Main, Sub Ant		Main, Sub Ant	
		Target	Max. Power limit	Target	Max. Power limit
WiFi 2.4 GHz	802.11b	16.0	16.5	11.0	11.5
	802.11g	13.0	13.5	11.0	11.5
	802.11n HT20	13.0	13.5	11.0	11.5
WiFi 5 GHz	802.11a	12.0	12.5	7.0	7.5
	802.11n HT20	12.0	12.5	7.0	7.5
	802.11n HT40	11.0	11.5	7.0	7.5
	802.11ac VHT20	11.0	11.5	7.0	7.5
	802.11ac VHT40	11.0	11.5	7.0	7.5
	802.11ac VHT80	10.0	10.5	7.0	7.5
Bluetooth		9.2	9.7	N/A	
Bluetooth LE		5.0	5.5	N/A	


6.4. Power Reduction by Proximity Sensing

6.4.1. Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Rear of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

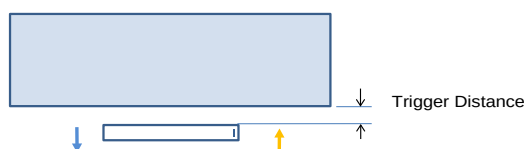

Proximity Sensor Trigger Distance Assessment
KDB 616217 §6.2, **Rear**

LEGEND

- ➡ Direction of DUT travel for determination of power reduction triggering point
- ➡ Direction of DUT travel for determination of full power resumption triggering point


Summary of Trigger Distances

Tissue simulating liquid	Trigger distance - Rear	
	Moving toward phantom	Moving from phantom
2450 muscle	10 mm	10 mm
5000 muscle	10 mm	10 mm

Proximity Sensor Triggering Distance Measurement Results**Wi-Fi 2.4GHz and 5GHz**

Rear, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance	6	7	8	9	10	11	12	13	14	15
2.4G Wi-Fi 11b	11.0	11.2	10.9	11.1	16.1	16.2	15.8	15.9	16.1	16.2
2.4G Wi-Fi 11g,n	11.1	10.9	10.9	10.9	12.9	13.2	13.2	12.9	13.0	13.1
5GHz Wi-Fi(20MHz BW) 11a,n	7.2	7.1	6.8	7.2	11.8	12.0	12.1	12.2	12.1	11.8
5GHz Wi-Fi(20MHz BW) 11ac	7.2	6.9	6.8	7.2	10.9	10.8	11.0	11.0	11.1	10.8
5GHz Wi-Fi(40MHz BW) 11n,ac	7.2	6.9	7.1	7.1	11.2	11.0	10.8	10.9	11.2	11.1
5GHz Wi-Fi(80MHz BW) 11,ac	7.1	7.1	6.8	7.0	10.2	9.9	10.0	9.8	10.1	10.2

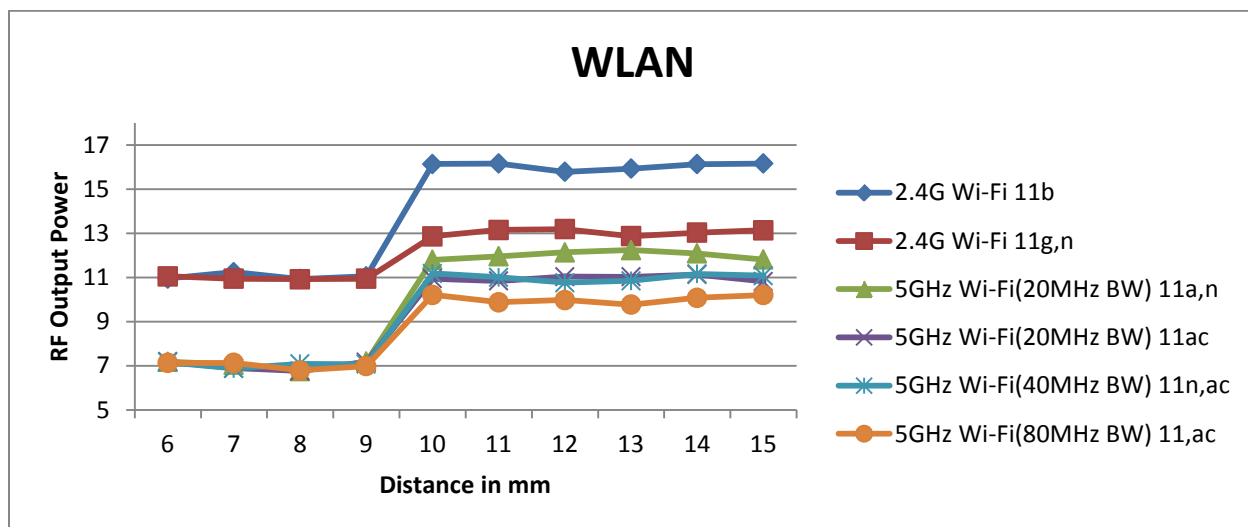

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- o When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- o When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WLAN

Antennas < 50mm to adjacent edges

SISO

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Ant 1	Full Power, Proximity Sensor Off															
	Wi-Fi 2.4 GHz	2462	16.50	45	0.3	180.2	30	9	91.5		14.1	> 50 mm	2.4	7.8	> 50 mm	
	Wi-Fi 5.2 GHz	5240	12.50	18	0.3	180.2	30	9	91.5		-MEASURE- 8.2	> 50 mm	-EXEMPT- 1.4	-MEASURE- 4.6	> 50 mm	
	Wi-Fi 5.3 GHz	5320	12.50	18	0.3	180.2	30	9	91.5		-MEASURE- 8.3	> 50 mm	-EXEMPT- 1.4	-MEASURE- 4.6	> 50 mm	
	Wi-Fi 5.5 GHz	5700	12.50	18	0.3	180.2	30	9	91.5		-MEASURE- 8.6	> 50 mm	-EXEMPT- 1.4	-MEASURE- 4.8	> 50 mm	
	Wi-Fi 5.8 GHz	5825	12.50	18	0.3	180.2	30	9	91.5		-MEASURE- 8.7	> 50 mm	-EXEMPT- 1.4	-MEASURE- 4.8	> 50 mm	
	Bluetooth	2480	9.70	9	0.3	180.2	30	9	91.5		-MEASURE- 2.8	> 50 mm	-EXEMPT- 0.5	-MEASURE- 1.6	> 50 mm	
	Power Back-off, Proximity Sensor On															
	Wi-Fi 2.4 GHz	2462	11.50	14	0.3						4.4					
	Wi-Fi 5.2 GHz	5240	7.50	6	0.3						-MEASURE- 2.7					
	Wi-Fi 5.3 GHz	5320	7.50	6	0.3						-EXEMPT- 2.8					
	Wi-Fi 5.5 GHz	5700	7.50	6	0.3						-EXEMPT- 2.9					
	Wi-Fi 5.8 GHz	5825	7.50	6	0.3						-EXEMPT- 2.9					
Ant 2	Full Power, Proximity Sensor Off															
	Wi-Fi 2.4 GHz	2462	16.50	45	0.3	149	84	17	11		14.1	> 50 mm	> 50 mm	4.2	6.4	
	Wi-Fi 5.2 GHz	5240	12.50	18	0.3	149	84	17	11		-MEASURE- 8.2	> 50 mm	> 50 mm	-MEASURE- 2.4	-MEASURE- 3.7	
	Wi-Fi 5.3 GHz	5320	12.50	18	0.3	149	84	17	11		-MEASURE- 8.3	> 50 mm	> 50 mm	-EXEMPT- 2.4	-MEASURE- 3.8	
	Wi-Fi 5.5 GHz	5700	12.50	18	0.3	149	84	17	11		-MEASURE- 8.6	> 50 mm	> 50 mm	-EXEMPT- 2.5	-MEASURE- 3.9	
	Wi-Fi 5.8 GHz	5825	12.50	18	0.3	149	84	17	11		-MEASURE- 8.7	> 50 mm	> 50 mm	-EXEMPT- 2.6	-MEASURE- 3.9	
	Power Back-off, Proximity Sensor On															
	Wi-Fi 2.4 GHz	2462	11.50	14	0.3						4.4					
	Wi-Fi 5.2 GHz	5240	7.50	6	0.3						-MEASURE- 2.7					
	Wi-Fi 5.3 GHz	5320	7.50	6	0.3						-EXEMPT- 2.8					
	Wi-Fi 5.5 GHz	5700	7.50	6	0.3						-EXEMPT- 2.9					
	Wi-Fi 5.8 GHz	5825	7.50	6	0.3						-EXEMPT- 2.9					

MIMO

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Ant 1	Full Power, Proximity Sensor Off															
	Wi-Fi 2.4 GHz	2462	13.50	22	0.3	180.2	30	9	91.5		6.9 -MEASURE-	> 50 mm	1.2 -EXEMPT-	3.8 -MEASURE-	> 50 mm	
	Wi-Fi 5.2 GHz	5240	12.50	18	0.3	180.2	30	9	91.5		8.2 -MEASURE-	> 50 mm	1.4 -EXEMPT-	4.6 -MEASURE-	> 50 mm	
	Wi-Fi 5.3 GHz	5320	12.50	18	0.3	180.2	30	9	91.5		8.3 -MEASURE-	> 50 mm	1.4 -EXEMPT-	4.6 -MEASURE-	> 50 mm	
	Wi-Fi 5.5 GHz	5700	12.50	18	0.3	180.2	30	9	91.5		8.6 -MEASURE-	> 50 mm	1.4 -EXEMPT-	4.8 -MEASURE-	> 50 mm	
	Wi-Fi 5.8 GHz	5825	12.50	18	0.3	180.2	30	9	91.5		8.7 -MEASURE-	> 50 mm	1.4 -EXEMPT-	4.8 -MEASURE-	> 50 mm	
	Power Back-off, Proximity Sensor On															
	Wi-Fi 2.4 GHz	2462	11.50	14	0.3						4.4 -MEASURE-					
	Wi-Fi 5.2 GHz	5240	7.50	6	0.3						2.7 -EXEMPT-					
	Wi-Fi 5.3 GHz	5320	7.50	6	0.3						2.8 -EXEMPT-					
	Wi-Fi 5.5 GHz	5700	7.50	6	0.3						2.9 -EXEMPT-					
	Wi-Fi 5.8 GHz	5825	7.50	6	0.3						2.9 -EXEMPT-					
Ant 2	Full Power, Proximity Sensor Off															
	Wi-Fi 2.4 GHz	2462	13.50	22	0.3	149	84	17	11		6.9 -MEASURE-	> 50 mm	> 50 mm	2 -EXEMPT-	3.1 -MEASURE-	
	Wi-Fi 5.2 GHz	5240	12.50	18	0.3	149	84	17	11		8.2 -MEASURE-	> 50 mm	> 50 mm	2.4 -EXEMPT-	3.7 -MEASURE-	
	Wi-Fi 5.3 GHz	5320	12.50	18	0.3	149	84	17	11		8.3 -MEASURE-	> 50 mm	> 50 mm	2.4 -EXEMPT-	3.8 -MEASURE-	
	Wi-Fi 5.5 GHz	5700	12.50	18	0.3	149	84	17	11		8.6 -MEASURE-	> 50 mm	> 50 mm	2.5 -EXEMPT-	3.9 -MEASURE-	
	Wi-Fi 5.8 GHz	5825	12.50	18	0.3	149	84	17	11		8.7 -MEASURE-	> 50 mm	> 50 mm	2.6 -EXEMPT-	3.9 -MEASURE-	
	Power Back-off, Proximity Sensor On															
	Wi-Fi 2.4 GHz	2462	11.50	14	0.3						4.4 -MEASURE-					
	Wi-Fi 5.2 GHz	5240	7.50	6	0.3						2.7 -EXEMPT-					
	Wi-Fi 5.3 GHz	5320	7.50	6	0.3						2.8 -EXEMPT-					
	Wi-Fi 5.5 GHz	5700	7.50	6	0.3						2.9 -EXEMPT-					
	Wi-Fi 5.8 GHz	5825	7.50	6	0.3						2.9 -EXEMPT-					

Note(s):

- According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.

Antennas > 50mm to adjacent edges

SISO

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Ant 1	Full Power, Proximity Sensor Off															
	Wi-Fi 2.4 GHz	2462	16.50	45	0.3	180.2	30	9	91.5		< 50 mm	1397.6 mW -EXEMPT-	< 50 mm	< 50 mm	510.6 mW -EXEMPT-	
	Wi-Fi 5.2 GHz	5240	12.50	18	0.3	180.2	30	9	91.5		< 50 mm	1367.5 mW -EXEMPT-	< 50 mm	< 50 mm	480.5 mW -EXEMPT-	
	Wi-Fi 5.3 GHz	5320	12.50	18	0.3	180.2	30	9	91.5		< 50 mm	1367 mW -EXEMPT-	< 50 mm	< 50 mm	480 mW -EXEMPT-	
	Wi-Fi 5.5 GHz	5700	12.50	18	0.3	180.2	30	9	91.5		< 50 mm	1364.8 mW -EXEMPT-	< 50 mm	< 50 mm	477.8 mW -EXEMPT-	
	Wi-Fi 5.8 GHz	5825	12.50	18	0.3	180.2	30	9	91.5		< 50 mm	1364.2 mW -EXEMPT-	< 50 mm	< 50 mm	477.2 mW -EXEMPT-	
	Bluetooth	2480	9.70	9	0.3	180.2	30	9	91.5		< 50 mm	1397.3 mW -EXEMPT-	< 50 mm	< 50 mm	510.3 mW -EXEMPT-	
	Power Back-off, Proximity Sensor On															
	Wi-Fi 2.4 GHz	2462	11.50	14	0.3						< 50 mm					
	Wi-Fi 5.2 GHz	5240	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.3 GHz	5320	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.5 GHz	5700	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.8 GHz	5825	7.50	6	0.3						< 50 mm					
Ant 2	Full Power, Proximity Sensor Off															
	Wi-Fi 2.4 GHz	2462	16.50	45	0.3	149	84	17	11		< 50 mm	1085.6 mW -EXEMPT-	435.6 mW -EXEMPT-	< 50 mm	< 50 mm	
	Wi-Fi 5.2 GHz	5240	12.50	18	0.3	149	84	17	11		< 50 mm	1055.5 mW -EXEMPT-	405.5 mW -EXEMPT-	< 50 mm	< 50 mm	
	Wi-Fi 5.3 GHz	5320	12.50	18	0.3	149	84	17	11		< 50 mm	1055 mW -EXEMPT-	405 mW -EXEMPT-	< 50 mm	< 50 mm	
	Wi-Fi 5.5 GHz	5700	12.50	18	0.3	149	84	17	11		< 50 mm	1052.8 mW -EXEMPT-	402.8 mW -EXEMPT-	< 50 mm	< 50 mm	
	Wi-Fi 5.8 GHz	5825	12.50	18	0.3	149	84	17	11		< 50 mm	1052.2 mW -EXEMPT-	402.2 mW -EXEMPT-	< 50 mm	< 50 mm	
	Power Back-off, Proximity Sensor On															
	Wi-Fi 2.4 GHz	2462	11.50	14	0.3						< 50 mm					
	Wi-Fi 5.2 GHz	5240	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.3 GHz	5320	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.5 GHz	5700	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.8 GHz	5825	7.50	6	0.3						< 50 mm					

MIMO

Antenn a	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Ant 1	Full Power, Proximity Sensor Off															
	Wi-Fi 2.4 GHz	2462	13.50	22	0.3	180.2	30	9	91.5		< 50 mm	1397.6 mW -EXEMPT-	< 50 mm	< 50 mm	510.6 mW -EXEMPT-	
	Wi-Fi 5.2 GHz	5240	12.50	18	0.3	180.2	30	9	91.5		< 50 mm	1367.5 mW -EXEMPT-	< 50 mm	< 50 mm	480.5 mW -EXEMPT-	
	Wi-Fi 5.3 GHz	5320	12.50	18	0.3	180.2	30	9	91.5		< 50 mm	1367 mW -EXEMPT-	< 50 mm	< 50 mm	480 mW -EXEMPT-	
	Wi-Fi 5.5 GHz	5700	12.50	18	0.3	180.2	30	9	91.5		< 50 mm	1364.8 mW -EXEMPT-	< 50 mm	< 50 mm	477.8 mW -EXEMPT-	
	Wi-Fi 5.8 GHz	5825	12.50	18	0.3	180.2	30	9	91.5		< 50 mm	1364.2 mW -EXEMPT-	< 50 mm	< 50 mm	477.2 mW -EXEMPT-	
	Power Back-off, Proximity Sensor On															
	Wi-Fi 2.4 GHz	2462	11.50	14	0.3						< 50 mm					
	Wi-Fi 5.2 GHz	5240	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.3 GHz	5320	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.5 GHz	5700	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.8 GHz	5825	7.50	6	0.3						< 50 mm					
Ant 2	Full Power, Proximity Sensor Off															
	Wi-Fi 2.4 GHz	2462	13.50	22	0.3	149	84	17	11		< 50 mm	1085.6 mW -EXEMPT-	435.6 mW -EXEMPT-	< 50 mm	< 50 mm	
	Wi-Fi 5.2 GHz	5240	12.50	18	0.3	149	84	17	11		< 50 mm	1055.5 mW -EXEMPT-	405.5 mW -EXEMPT-	< 50 mm	< 50 mm	
	Wi-Fi 5.3 GHz	5320	12.50	18	0.3	149	84	17	11		< 50 mm	1055 mW -EXEMPT-	405 mW -EXEMPT-	< 50 mm	< 50 mm	
	Wi-Fi 5.5 GHz	5700	12.50	18	0.3	149	84	17	11		< 50 mm	1052.8 mW -EXEMPT-	402.8 mW -EXEMPT-	< 50 mm	< 50 mm	
	Wi-Fi 5.8 GHz	5825	12.50	18	0.3	149	84	17	11		< 50 mm	1052.2 mW -EXEMPT-	402.2 mW -EXEMPT-	< 50 mm	< 50 mm	
	Power Back-off, Proximity Sensor On															
	Wi-Fi 2.4 GHz	2462	11.50	14	0.3						< 50 mm					
	Wi-Fi 5.2 GHz	5240	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.3 GHz	5320	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.5 GHz	5700	7.50	6	0.3						< 50 mm					
	Wi-Fi 5.8 GHz	5825	7.50	6	0.3						< 50 mm					

Note(s):

- According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

7.2. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Pwr Back-off	Rear	Edge 1	Edge 2	Edge 3	Edge 4
			(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)
Wi-Fi 2.4 GHz SISO (Antenna 1)	OFF	Yes	No	No	Yes	No
	ON	Yes	No	No	No	No
Wi-Fi 2.4 GHz SISO (Antenna 2)	OFF	Yes	No	No	Yes	Yes
	ON	Yes	No	No	No	No
Wi-Fi 2.4 GHz MIMO	OFF	Yes	No	No	Yes	Yes
	ON	Yes	No	No	No	No
Wi-Fi 5 GHz SISO (Antenna 1)	OFF	Yes	No	No	Yes	No
	ON	No	No	No	No	No
Wi-Fi 5 GHz SISO (Antenna 2)	OFF	Yes	No	No	No	Yes
	ON	No	No	No	No	No
Wi-Fi 5 GHz MIMO	OFF	Yes	No	No	Yes	Yes
	ON	No	No	No	No	No
Bluetooth	OFF	No	No	No	No	No

Note(s):

1. Yes = Testing is required.
2. No = Testing is not required.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
4-20-2015	Body 2450	e'	50.6400	Relative Permittivity (ϵ_r):	50.64	52.70	-3.91	5
		e''	14.8900	Conductivity (σ):	2.03	1.95	4.02	5
	Body 2410	e'	50.7900	Relative Permittivity (ϵ_r):	50.79	52.76	-3.73	5
		e''	14.8200	Conductivity (σ):	1.99	1.91	4.11	5
	Body 2475	e'	50.5600	Relative Permittivity (ϵ_r):	50.56	52.67	-4.00	5
		e''	14.9900	Conductivity (σ):	2.06	1.99	3.92	5
4-22-2015	Body 5180	e'	48.0500	Relative Permittivity (ϵ_r):	48.05	49.05	-2.03	5
		e''	18.3100	Conductivity (σ):	5.27	5.27	0.04	5
	Body 5200	e'	48.0100	Relative Permittivity (ϵ_r):	48.01	49.02	-2.06	5
		e''	18.3500	Conductivity (σ):	5.31	5.29	0.21	5
	Body 5600	e'	47.4200	Relative Permittivity (ϵ_r):	47.42	48.48	-2.18	5
		e''	18.6500	Conductivity (σ):	5.81	5.76	0.80	5
	Body 5800	e'	47.1600	Relative Permittivity (ϵ_r):	47.16	48.20	-2.16	5
		e''	18.8900	Conductivity (σ):	6.09	6.00	1.53	5
	Body 5825	e'	47.0800	Relative Permittivity (ϵ_r):	47.08	48.20	-2.32	5
		e''	18.8700	Conductivity (σ):	6.11	6.00	1.86	5
4-28-2015	Body 5180	e'	48.3600	Relative Permittivity (ϵ_r):	48.36	49.05	-1.40	5
		e''	18.8700	Conductivity (σ):	5.44	5.27	3.10	5
	Body 5200	e'	48.3100	Relative Permittivity (ϵ_r):	48.31	49.02	-1.45	5
		e''	18.9000	Conductivity (σ):	5.46	5.29	3.21	5
	Body 5600	e'	47.5600	Relative Permittivity (ϵ_r):	47.56	48.48	-1.89	5
		e''	19.2400	Conductivity (σ):	5.99	5.76	3.99	5
	Body 5800	e'	47.1700	Relative Permittivity (ϵ_r):	47.17	48.20	-2.14	5
		e''	19.4000	Conductivity (σ):	6.26	6.00	4.27	5
	Body 5825	e'	47.1300	Relative Permittivity (ϵ_r):	47.13	48.20	-2.22	5
		e''	19.4500	Conductivity (σ):	6.30	6.00	4.99	5
5-26-2015	Body 5180	e'	48.5100	Relative Permittivity (ϵ_r):	48.51	49.05	-1.09	5
		e''	18.7100	Conductivity (σ):	5.39	5.27	2.23	5
	Body 5200	e'	48.4600	Relative Permittivity (ϵ_r):	48.46	49.02	-1.14	5
		e''	18.7300	Conductivity (σ):	5.42	5.29	2.28	5
	Body 5600	e'	47.7800	Relative Permittivity (ϵ_r):	47.78	48.48	-1.44	5
		e''	19.1300	Conductivity (σ):	5.96	5.76	3.40	5
	Body 5800	e'	47.4500	Relative Permittivity (ϵ_r):	47.45	48.20	-1.56	5
		e''	19.3300	Conductivity (σ):	6.23	6.00	3.90	5
	Body 5825	e'	47.4100	Relative Permittivity (ϵ_r):	47.41	48.20	-1.64	5
		e''	19.3600	Conductivity (σ):	6.27	6.00	4.51	5

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
5-26-2015	Body 5180	e'	47.1800	Relative Permittivity (ε _r):	47.18	49.05	-3.81	5
		e"	18.6000	Conductivity (σ):	5.36	5.27	1.63	5
	Body 5200	e'	47.1700	Relative Permittivity (ε _r):	47.17	49.02	-3.77	5
		e"	18.6100	Conductivity (σ):	5.38	5.29	1.63	5
	Body 5600	e'	46.4600	Relative Permittivity (ε _r):	46.46	48.48	-4.16	5
		e"	18.8700	Conductivity (σ):	5.88	5.76	1.99	5
	Body 5800	e'	46.2300	Relative Permittivity (ε _r):	46.23	48.20	-4.09	5
		e"	19.1200	Conductivity (σ):	6.17	6.00	2.77	5
	Body 5825	e'	46.1500	Relative Permittivity (ε _r):	46.15	48.20	-4.25	5
		e"	19.0900	Conductivity (σ):	6.18	6.00	3.05	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
5-26-2015	Body 2450	e'	52.0600	Relative Permittivity (ϵ_r):	52.06	52.70	-1.21	5
		e''	14.5600	Conductivity (σ):	1.98	1.95	1.72	5
	Body 2410	e'	52.2100	Relative Permittivity (ϵ_r):	52.21	52.76	-1.04	5
		e''	14.4300	Conductivity (σ):	1.93	1.91	1.37	5
	Body 2475	e'	51.9800	Relative Permittivity (ϵ_r):	51.98	52.67	-1.31	5
		e''	14.6700	Conductivity (σ):	2.02	1.99	1.70	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	939	8-11-2014	2450	1g	52.1	51.4
				10g	24.2	24
D5GHzV2	1184	8-22-2014	5200	1g	79.5	77.1
				10g	22.7	21.5
			5600	1g	83.3	82.7
				10g	23.5	22.8
			5800	1g	79.2	76.9
				10g	22.4	21.3

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
4-20-2015	D2450V2	939	Body	1g	5.40	54.00	51.4	5.06	1,2
				10g	2.47	24.70	24.00	2.92	
4-22-2015	D5GhzV2 (5200)	1184	Body	1g	7.84	78.40	77.1	1.69	
				10g	2.23	22.30	21.5	3.72	
4-22-2015	D5GhzV2 (5600)	1184	Body	1g	8.22	82.20	82.7	-0.60	
				10g	2.31	23.10	22.8	1.32	
4-22-2015	D5GhzV2 (5800)	1184	Body	1g	7.42	74.20	76.9	-3.51	
				10g	2.10	21.00	21.3	-1.41	
4-28-2015	D5GhzV2 (5200)	1184	Body	1g	7.50	75.00	77.1	-2.72	
				10g	2.12	21.20	21.5	-1.40	
4-28-2015	D5GhzV2 (5600)	1184	Body	1g	7.89	78.90	82.7	-4.59	
				10g	2.20	22.00	22.8	-3.51	
4-28-2015	D5GhzV2 (5800)	1184	Body	1g	7.32	73.20	76.9	-4.81	
				10g	2.03	20.30	21.3	-4.69	
5-26-2015	D5GhzV2 (5200)	1184	Body	1g	8.11	81.10	77.1	5.19	
				10g	2.34	23.40	21.5	8.84	
5-26-2015	D5GhzV2 (5600)	1184	Body	1g	8.72	87.20	82.7	5.44	
				10g	2.48	24.80	22.8	8.77	
5-26-2015	D5GhzV2 (5800)	1184	Body	1g	7.89	78.90	76.9	2.60	
				10g	2.25	22.50	21.3	5.63	

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
5-26-2015	D5GhzV2 (5200)	1184	Body	1g	8.18	81.80	77.1	6.10	
				10g	2.29	22.90	21.5	6.51	
5-26-2015	D5GhzV2 (5600)	1184	Body	1g	7.85	78.50	82.7	-5.08	
				10g	2.16	21.60	22.8	-5.26	
5-26-2015	D5GhzV2 (5800)	1184	Body	1g	7.92	79.20	76.9	2.99	3,4
				10g	2.19	21.90	21.3	2.82	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.
	Type	Serial #			Zoom Scan to 100 mW	Normalize to 1 W			
5-26-2015	D2450V2	939	Body	1g	5.30	53.00	51.40	3.11	5,6
				10g	2.44	24.40	24.00	1.67	

9. Conducted Output Power Measurements

9.1. Wi-Fi 2.4GHz (DTS Band)

SISO

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduced Pwr.		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
SISO Chain 0	2.4	802.11b	1 Mbps	1	2412	16.0	16.5	Yes	11.0	11.5	Yes
				6	2437	16.5			11.5		
				11	2462	16.5			11.0		
		802.11g	6 Mbps	1	2412	Not Required	13.5	No	11.3	11.5	No
				6	2437				11.0		
				11	2462				11.0		
		802.11n (HT20)	6.5 Mbps	1	2412	Not Required	13.5	No	11.1	11.5	No
				6	2437				10.5		
				11	2462				11.3		
SISO Chain 1	2.4	802.11b	1 Mbps	1	2412	15.9	16.5	Yes	11.2	11.5	Yes
				6	2437	16.5			11.5		
				11	2462	16.0			11.3		
		802.11g	6 Mbps	1	2412	Not Required	13.5	No	10.5	11.5	No
				6	2437				10.5		
				11	2462				10.7		
		802.11n (HT20)	6.5 Mbps	1	2412	Not Required	13.5	No	10.5	11.5	No
				6	2437				10.3		
				11	2462				10.5		

MIMO

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduced Pwr.		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
MIMO Chain 0	2.4	802.11n (HT20)	6.5 Mbps	1	2412	13.2	13.5	Yes	10.9	11.5	Yes
				6	2437	13.5			10.3		
				11	2462	13.2			11.3		
MIMO Chain 1	2.4	802.11n (HT20)	6.5 Mbps	1	2412	13.1	13.5	Yes	10.4	11.5	Yes
				6	2437	13.3			10.1		
				11	2462	12.6			11.0		

Note(s):

- Output Power and SAR is not required for 802.11g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.2. Wi-Fi 5GHz (U-NII Bands)

SISO Antenna 1

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr			
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	
SISO Ant 1	5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	12.1	12.5	Yes	Not Required	7.5	No	
				56	5280	12.4						
				60	5300	12.4						
				64	5320	12.4						
		802.11n (HT20)	6.5 Mbps	52	5260	12.1	12.5	No		7.5	No	
				56	5280	12.2						
				60	5300	12.1						
		802.11n (HT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310	Not Required	11.5	No		7.5	No	
			802.11ac (VHT20)	6.5 Mbps	52 ~ 64		5260 ~ 5320	11.5		No	7.5	No
				802.11ac (VHT40)	13.5 Mbps		54 ~ 62	5270 ~ 5310		11.5	No	7.5
		802.11ac (VHT80)	29.3 Mbps	58	5290		10.5	No		7.5	7.5	Yes
		5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	12.0	12.5	Yes	Not Required	7.5	No
	104				5520	12.3						
	108				5540	12.4						
	112				5560	12.4						
	116				5580	12.5						
	132				5660	12.4						
	136				5680	12.4						
	140				5700	12.2						
	802.11n (HT20)		6.5 Mbps	100	5500	12.1	12.5	No	7.5		No	
				104	5520	12.4						
				108	5540	12.3						
				112	5560	12.5						
				116	5580	12.2						
				132	5660	12.2						
				136	5680	12.3						
				140	5700	12.2						
	802.11n (HT40)		13.5 Mbps	102 ~ 134	5510 ~ 5670	Not Required	11.5	No	7.5		No	
	802.11ac (VHT20)		6.5 Mbps	100 ~ 140	5500 ~ 5700		11.5	No	7.5		No	
	802.11ac (VHT40)		13.5 Mbps	102 ~ 134	5510 ~ 5670		11.5	No	7.5		No	
	802.11ac (VHT80)		29.3 Mbps	106	5530		10.5	No	7.5	7.5	Yes	
	5.8 (U-NII 3)	802.11a	6 Mbps	149	5745	12.3	12.5	Yes	Not Required	7.5	No	
				153	5765	12.4						
				157	5785	12.5						
				161	5805	12.4						
				165	5825	12.2						
		802.11n (HT20)	6.5 Mbps	149	5745	12.2	12.5	No		7.5	No	
				153	5765	12.3						
				157	5785	12.4						
				161	5805	12.3						
				165	5825	12.4						
		802.11n (HT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795	Not Required	11.5	No		7.5	No	
		802.11ac (VHT20)	6.5 Mbps	149 ~ 165	5745 ~ 5825		11.5	No		7.5	No	
		802.11ac (VHT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795		11.5	No		7.5	No	
		802.11ac (VHT80)	29.3 Mbps	155	5775		10.5	No	7.3	7.5	Yes	

SISO Antenna 2

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
SISO Ant 1	5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	12.1	12.5	Yes	Not Required	7.5	No
				56	5280	12.3	12.5				
				60	5300	12.4	12.5				
				64	5320	12.4	12.5				
		802.11n (HT20)	6.5 Mbps	52	5260	12.1	12.5	No		7.5	No
				56	5280	12.1	12.5				
				60	5300	12.0	12.5				
				64	5320	12.0	12.5				
		802.11n (HT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	52 ~ 64	5260 ~ 5320		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	58	5290		10.5	No		7.5	7.5
	5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	12.3	12.5	Yes	Not Required	7.5	No
				104	5520	12.4					
				108	5540	12.3					
				112	5560	12.3					
				116	5580	12.5					
				132	5660	12.5					
				136	5680	12.3					
				140	5700	12.3					
		802.11n (HT20)	6.5 Mbps	100	5500	12.2	12.5	No		7.5	No
				104	5520	12.0					
				108	5540	12.0					
				112	5560	12.1					
				116	5580	12.3					
				132	5660	12.2					
				136	5680	12.4					
				140	5700	12.2					
		802.11n (HT40)	13.5 Mbps	102 ~ 134	5510 ~ 5670	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	100 ~ 140	5500 ~ 5700		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	102 ~ 134	5510 ~ 5670		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	106	5530		10.5	No		7.5	7.5
	5.8 (U-NII 3)	802.11a	6 Mbps	149	5745	12.4	12.5	Yes	Not Required	7.5	No
				153	5765	12.5					
				157	5785	12.5					
				161	5805	12.4					
				165	5825	12.2					
		802.11n (HT20)	6.5 Mbps	149	5745	12.1	12.5	No		7.5	No
				153	5765	12.2					
				157	5785	12.1					
				161	5805	12.1					
				165	5825	12.2					
		802.11n (HT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	149 ~ 165	5745 ~ 5825		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	155	5775		10.5	No		7.5	7.5

MIMO Antenna 1

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
MIMO Ant 1	5.3 (U-NII 2A)	802.11n (HT20)	6.5 Mbps	52	5260	12.3	12.5	Yes	Not Required	7.5	No
				56	5280	12.1	12.5				
				60	5300	12.2	12.5				
				64	5320	12.2	12.5				
		802.11n (HT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	52 ~ 64	5260 ~ 5320		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	58	5290		10.5	No	7.0	7.5	Yes
	5.5 (U-NII 2C)	802.11n (HT20)	6.5 Mbps	100	5500	12.5	12.5	Yes	Not Required	7.5	No
				104	5520	12.3					
				108	5540	12.4					
				112	5560	12.2					
				116	5580	12.1					
				132	5660	12.2					
				136	5680	12.1					
				140	5700	12.2					
		802.11n (HT40)	13.5 Mbps	102 ~ 134	5510 ~ 5670	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	100 ~ 140	5500 ~ 5700		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	102 ~ 134	5510 ~ 5670		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	106	5530		10.5	No	7.3	7.5	Yes
	5.8 (U-NII 3)	802.11n (HT20)	6.5 Mbps	149	5745	12.1	12.5	Yes	Not Required	7.5	No
				153	5765	12.1					
				157	5785	12.1					
				161	5805	12.2					
				165	5825	12.2					
		802.11n (HT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	149 ~ 165	5745 ~ 5825		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	155	5775		10.5	No	7.5	7.5	Yes

MIMO Antenna 2

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
MIMO Ant 2	5.3 (U-NII 2A)	802.11n (HT20)	6.5 Mbps	52	5260	12.3	12.5	Yes	Not Required	7.5	No
				56	5280	12.1	12.5				
				60	5300	12.4	12.5				
				64	5320	12.2	12.5				
		802.11n (HT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	52 ~ 64	5260 ~ 5320		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	58	5290		10.5	No	5.6	7.5	Yes
	5.5 (U-NII 2C)	802.11n (HT20)	6.5 Mbps	100	5500	12.4	12.5	Yes	Not Required	7.5	No
				104	5520	12.2					
				108	5540	12.1					
				112	5560	12.2					
				116	5580	12.2					
				132	5660	12.4					
				136	5680	12.2					
				140	5700	12.1					
		802.11n (HT40)	13.5 Mbps	102 ~ 134	5510 ~ 5670	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	100 ~ 140	5500 ~ 5700		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	102 ~ 134	5510 ~ 5670		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	106	5530		10.5	No	6.5	7.5	Yes
	5.8 (U-NII 3)	802.11n (HT20)	6.5 Mbps	149	5745	12.2	12.5	Yes	Not Required	7.5	No
				153	5765	12.1					
				157	5785	12.1					
				161	5805	12.1					
				165	5825	12.3					
		802.11n (HT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795	Not Required	11.5	No		7.5	No
		802.11ac (VHT20)	6.5 Mbps	149 ~ 165	5745 ~ 5825		11.5	No		7.5	No
		802.11ac (VHT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795		11.5	No		7.5	No
		802.11ac (VHT80)	29.3 Mbps	155	5775		10.5	No	6.7	7.5	Yes

Note(s):

- Output Power and SAR measurement is not required for 802.11n/ac (V)HT20/(V)HT40/VHT80 channels when the specified tune-up tolerances for 802.11n/ac (V)HT20/(V)HT40/VHT80 are lower than 802.11a by more than ½ dB and the measured SAR is ≤ 1.2 W/Kg.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.3. Bluetooth

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Avg Pwr (mW)
2.4	V3.0 + BDR, GFSK	0	2402	7.67	5.85
		39	2441	9.70	9.33
		78	2480	7.69	5.88
	V3.0 + EDR, $\pi/4$ DQPSK	0	2402	4.14	2.59
		39	2441	5.61	3.64
		78	2480	3.28	2.13
	V3.0 + EDR, 8-DPSK	0	2402	4.25	2.66
		39	2441	5.74	3.75
		78	2480	3.48	2.23
	V4.0 LE, GFSK	0	2402	2.44	1.75
		19	2440	4.87	3.07
		39	2480	3.52	2.25

10. Measured and Reported (Scaled) SAR Results

KDB 248227 D01 SAR meas for 802.11 v02:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - o For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - o When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - o The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. Wi-Fi (DTS Band)

Frequency Band	Mode	Antenna	RF Exposure Conditions	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b	SISO Main	Body	Off	9	Rear	6	2437.0	0.434	16.5	16.5	0.346	0.346	
					0	Edge 3	6	2437.0	0.207	16.5	16.5			
					0	Rear	6	2437.0	0.823	11.5	11.5	0.746	0.746	1
		SISO Sub	Body	Off	9	Rear	6	2437.0	0.055	16.5	16.5	0.052	0.052	
					0	Edge 3	6	2437.0	0.028	16.5	16.5			
					0	Edge 4	6	2437.0	0.038	16.5	16.5			
	802.11n	MIMO Main	Body	On	0	Rear	6	2437.0	0.175	11.5	11.5	0.185	0.185	
					9	Rear	6	2437.0	0.112	13.5	13.5	0.096	0.096	
					0	Edge 3	6	2437.0	0.093	13.5	13.5			
		MIMO Sub	Body	On	0	Rear	11	2462.0	0.658	11.5	11.3	0.514	0.538	
					9	Rear	6	2437.0	0.115	13.5	13.3	0.028	0.029	
					0	Edge 4	6	2437.0	0.028	13.5	13.3			
		MIMO Sub	Body	On	0	Rear	11	2462.0	0.658	11.5	11.0	0.175	0.196	

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
5. All Wi-Fi (DTS Band) SAR data- used in this report were taken from SAR report 15K20515-S1D, submitted under FCC ID A3LSMT715. Both models share identical antennas and output power. Spot checks were performed on model SM-T710 to ensure SAR values were the same between both models.

10.2. Wi-Fi (U-NII Band)

Frequency Band	Mode	Antenna	RF Exposure Conditions	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11a	SISO Main	Body	Off	9	Rear	60	5300.0	0.301	12.5	12.4	0.171	0.175	
	802.11ac (VHT80)				0	Edge 3	60	5300.0	0.228	12.5	12.4			
	802.11a	SISO Sub	Body	Off	9	Rear	60	5300.0	0.007	12.5	12.4	0.001	0.001	
	802.11ac (VHT80)				0	Edge 4	60	5300.0	0.009	12.5	12.4			
	802.11a	MIMO Main	Body	Off	9	Rear	52	5260.0	0.210	12.5	12.3	0.154	0.161	
	802.11ac (VHT80)				0	Edge 3	52	5260.0	0.270	12.5	12.3			
	802.11a	MIMO Sub	Body	Off	9	Rear	58	5290.0	1.010	7.5	7.0	0.935	1.049	2
	802.11ac (VHT80)				0	Rear	58	5290.0	1.010	7.5	5.6	0.068	0.106	
5.5 GHz U-NII 2C	802.11a	SISO Main	Body	Off	9	Rear	116	5580.0	0.415	12.5	12.5	0.274	0.274	
	802.11ac (VHT80)				0	Edge 3	116	5580.0	0.196	12.5	12.5			
	802.11a	SISO Sub	Body	Off	9	Rear	106	5530.0	1.100	7.5	7.5	0.735	0.735	
	802.11ac (VHT80)				0	Edge 4	106	5530.0	0.146	7.5	7.5	0.073	0.073	
	802.11a	MIMO Main	Body	Off	9	Rear	100	5500.0	0.490	12.5	12.5	0.305	0.305	
	802.11ac (VHT80)				0	Edge 3	100	5500.0	0.180	12.5	12.5			
	802.11a	MIMO Sub	Body	Off	9	Rear	106	5530.0	1.624	7.5	7.3	0.963	1.008	3
	802.11ac (VHT80)				0	Rear	106	5530.0	1.624	7.5	6.5	0.057	0.072	
5.8 GHz U-NII 3	802.11a	SISO Main	Body	Off	9	Rear	157	5785.0	0.390	12.5	12.5	0.221	0.221	
	802.11ac (VHT80)				0	Edge 3	157	5785.0	0.209	12.5	12.5			
	802.11a	SISO Sub	Body	Off	9	Rear	155	5775.0	0.762	7.5	7.3	0.730	0.764	4
	802.11ac (VHT80)				0	Rear	155	5775.0	0.033	7.5	7.5	0.020	0.020	
	802.11a	MIMO Main	Body	Off	9	Rear	165	5825.0	0.260	12.5	12.2	0.154	0.165	
	802.11ac (VHT80)				0	Edge 3	165	5825.0	0.200	12.5	12.2			
	802.11a	MIMO Sub	Body	Off	9	Rear	155	5775.0	0.925	7.5	7.5	0.592	0.592	
	802.11ac (VHT80)				0	Rear	155	5775.0	0.030	12.5	12.3	0.015	0.016	

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
- All Wi-Fi (U-NII Band) SAR data- used in this report were taken from SAR report 15K20515-S1D, submitted under FCC ID A3LSMT715. Both models share identical antennas and output power. Spot checks were performed on model SM-T710 to ensure SAR values were the same between both models.

10.3. Bluetooth

Measured SAR

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	GFSK	0	Rear	39	2441.0	9.7	9.7	0.234	0.234	5

Note(s):

All Bluetooth SAR data- used in this report were taken from SAR report 15K20515-S1D, submitted under FCC ID A3LSMT715. Both models share identical antennas and output power. Spot checks were performed on model SM-T710 to ensure SAR values were the same between both models.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
2400	Wi-Fi 802.11b/g/n	Standalone	Rear	No	0.746	N/A	N/A
	Bluetooth	Standalone	Rear	No	0.234	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Standalone	Rear	Yes	0.935	0.873	1.07
5500	Wi-Fi 802.11a/n/ac	Standalone	Rear	Yes	0.963	0.914	1.05
5800	Wi-Fi 802.11a/n/ac	Standalone	Rear	No	0.73	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Standalone	1	DTS	+	BT
	2	U-NII	+	BT
Notes:				
1. DTS and U-NII supports Wi-Fi Direct.				
2. DTS Radio can transmit simultaneously with Bluetooth Radio.				
3. U-NII Radio can transmit simultaneously with Bluetooth Radio.				

Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for SAR estimation

- When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
- Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg
- Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values < 1.2 W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.

Estimated SAR for WLAN

SISO (Main)

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Full Power, Proximity Sensor Off															
Wi-Fi 2.4 GHz	2462	16.50	45	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.314	-MEASURE	0.400	
Wi-Fi 5.2 GHz	5240	12.50	18	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.183	-MEASURE	0.400	
Wi-Fi 5.3 GHz	5320	12.50	18	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.185	-MEASURE	0.400	
Wi-Fi 5.5 GHz	5700	12.50	18	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.191	-MEASURE	0.400	
Wi-Fi 5.8 GHz	5825	12.50	18	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.193	-MEASURE	0.400	
Bluetooth	2480	9.70	9	0.3	180.2	30	9	91.5		0.378	0.400	0.063	0.210	0.400	
Power Back-off, Proximity Sensor On															
Wi-Fi 2.4 GHz	2462	11.50	14	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.098	0.325	0.400	
Wi-Fi 5.2 GHz	5240	7.50	6	0.3	180.2	30	9	91.5		0.366	0.400	0.061	0.203	0.400	
Wi-Fi 5.3 GHz	5320	7.50	6	0.3	180.2	30	9	91.5		0.369	0.400	0.062	0.205	0.400	
Wi-Fi 5.5 GHz	5700	7.50	6	0.3	180.2	30	9	91.5		0.382	0.400	0.064	0.212	0.400	
Wi-Fi 5.8 GHz	5825	7.50	6	0.3	180.2	30	9	91.5		0.386	0.400	0.064	0.215	0.400	

SISO (Sub)

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Full Power, Proximity Sensor Off															
Wi-Fi 2.4 GHz	2462	16.50	45	0.3	149	84	17	11		-MEASURE	0.400	0.400	-MEASURE	-MEASURE	
Wi-Fi 5.2 GHz	5240	12.50	18	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.323	-MEASURE	
Wi-Fi 5.3 GHz	5320	12.50	18	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.326	-MEASURE	
Wi-Fi 5.5 GHz	5700	12.50	18	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.337	-MEASURE	
Wi-Fi 5.8 GHz	5825	12.50	18	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.341	-MEASURE	
Power Back-off, Proximity Sensor On															
Wi-Fi 2.4 GHz	2462	11.50	14	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.172	0.266	
Wi-Fi 5.2 GHz	5240	7.50	6	0.3	149	84	17	11		0.366	0.400	0.400	0.108	0.166	
Wi-Fi 5.3 GHz	5320	7.50	6	0.3	149	84	17	11		0.369	0.400	0.400	0.109	0.168	
Wi-Fi 5.5 GHz	5700	7.50	6	0.3	149	84	17	11		0.382	0.400	0.400	0.112	0.174	
Wi-Fi 5.8 GHz	5825	7.50	6	0.3	149	84	17	11		0.386	0.400	0.400	0.114	0.176	

MIMO (Main)

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Full Power, Proximity Sensor Off															
Wi-Fi 2.4 GHz	2462	13.50	22	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.153	-MEASURE	0.400	
Wi-Fi 5.2 GHz	5240	12.50	18	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.183	-MEASURE	0.400	
Wi-Fi 5.3 GHz	5320	12.50	18	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.185	-MEASURE	0.400	
Wi-Fi 5.5 GHz	5700	12.50	18	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.191	-MEASURE	0.400	
Wi-Fi 5.8 GHz	5825	12.50	18	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.193	-MEASURE	0.400	
Power Back-off, Proximity Sensor On															
Wi-Fi 2.4 GHz	2462	11.50	14	0.3	180.2	30	9	91.5		-MEASURE	0.400	0.098	0.325	0.400	
Wi-Fi 5.2 GHz	5240	7.50	6	0.3	180.2	30	9	91.5		0.366	0.400	0.061	0.203	0.400	
Wi-Fi 5.3 GHz	5320	7.50	6	0.3	180.2	30	9	91.5		0.369	0.400	0.062	0.205	0.400	
Wi-Fi 5.5 GHz	5700	7.50	6	0.3	180.2	30	9	91.5		0.382	0.400	0.064	0.212	0.400	
Wi-Fi 5.8 GHz	5825	7.50	6	0.3	180.2	30	9	91.5		0.386	0.400	0.064	0.215	0.400	

MIMO (Sub)

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Full Power, Proximity Sensor Off															
Wi-Fi 2.4 GHz	2462	13.50	22	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.271	-MEASURE	
Wi-Fi 5.2 GHz	5240	12.50	18	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.323	-MEASURE	
Wi-Fi 5.3 GHz	5320	12.50	18	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.326	-MEASURE	
Wi-Fi 5.5 GHz	5700	12.50	18	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.337	-MEASURE	
Wi-Fi 5.8 GHz	5825	12.50	18	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.341	-MEASURE	
Power Back-off, Proximity Sensor On															
Wi-Fi 2.4 GHz	2462	11.50	14	0.3	149	84	17	11		-MEASURE	0.400	0.400	0.172	0.266	
Wi-Fi 5.2 GHz	5240	7.50	6	0.3	149	84	17	11		0.366	0.400	0.400	0.108	0.166	
Wi-Fi 5.3 GHz	5320	7.50	6	0.3	149	84	17	11		0.369	0.400	0.400	0.109	0.168	
Wi-Fi 5.5 GHz	5700	7.50	6	0.3	149	84	17	11		0.382	0.400	0.400	0.112	0.174	
Wi-Fi 5.8 GHz	5825	7.50	6	0.3	149	84	17	11		0.386	0.400	0.400	0.114	0.176	

12.1. Sum of the SAR for Wi-Fi & BT

RF Exposure conditions	① DTS (Sub Ant)	② U-NII (Sub Ant)	③ BT (Main Ant)	① + ③ DTS + BT		② + ③ U-NII + BT	
				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)	Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Rear	0.185	0.073	0.234	0.419	No	0.307	No

RF Exposure conditions	① DTS (Main+Sub)	SPLSR (Yes/ No)	② U-NII (Main+Sub)	SPLSR (Yes/ No)
Rear	0.538	No	1.049	No

Note(s):

All Wi-Fi and Bluetooth SAR values (measured or estimated) used in this report were taken from SAR report 15K20515-S1D, submitted under FCC ID A3LSMT715

Appendixes

Refer to separated files for the following appendixes.

A_15K20544-S1_SAR Photos & Ant. Locations

B_15K20544-S1_SAR Highest Test Plots

C_15K20544-S1_SAR System Check Plots

D_15K20544-S1_SAR Tissue Ingredients

E_15K20544-S1_SAR Probe Cal. Certificates

F_15K20544-S1_SAR Dipole Cal. Certificates

END OF REPORT