



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Tablet + Bluetooth/BLE and DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER : SM-T715

FCC ID: A3LSMT715

REPORT NUMBER: 15K20515-E2

ISSUE DATE: MAY 18, 2015

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by

**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



ACCREDITED

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	05/18/15	Initial issue	CY Choi

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE	7
5.5. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. MEASUREMENT METHODS	11
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	11
8.1. ON TIME AND DUTY CYCLE RESULTS.....	11
9. SUMMARY TABLE	12
10. ANTENNA PORT TEST RESULTS	13
10.1. 6 dB BANDWIDTH	13
10.2. 99% BANDWIDTH	17
10.3. OUTPUT POWER	21
10.4. AVERAGE POWER	25
10.5. PSD.....	26
10.6. CONDUCTED SPURIOUS EMISSIONS	30
11. RADIATED TEST RESULTS	37
11.1. LIMITS AND PROCEDURE.....	37
11.2. TRANSMITTER ABOVE 1 GHz.....	38
11.3. WORST-CASE BELOW 1 GHz	48
12. AC POWER LINE CONDUCTED EMISSIONS	50
13. SETUP PHOTOS	53

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Tablet+Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+
MODEL NUMBER: SM-T715
SERIAL NUMBER: R32G300YQRF (RADIATED); R32G300Y5RF (CONDUCTED)
DATE TESTED: APRIL 16 - MAY 18, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Ji Ho Choi
Suwon Lab Manager
UL Korea, Ltd.

Tested By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-823, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1
☐	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Tablet + Bluetooth/BLE, DTS/UNII a/b/g/n/ac and ANT+. This test report addresses the DTS (BLE) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

Frequency Range [MHz]	Mode	Detector	Output Power [dBm]	Output Power [mW]
2402 - 2480	BLE	Peak	5.27	3.37
		Average	4.87	3.07

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antennas, with a maximum gain of -4.56 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA12EWE	N/A	N/A
Data Cable	SAMSUNG	ECB-DG925UWE	N/A	N/A
Earphone	SAMSUNG	GH59-11129H	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

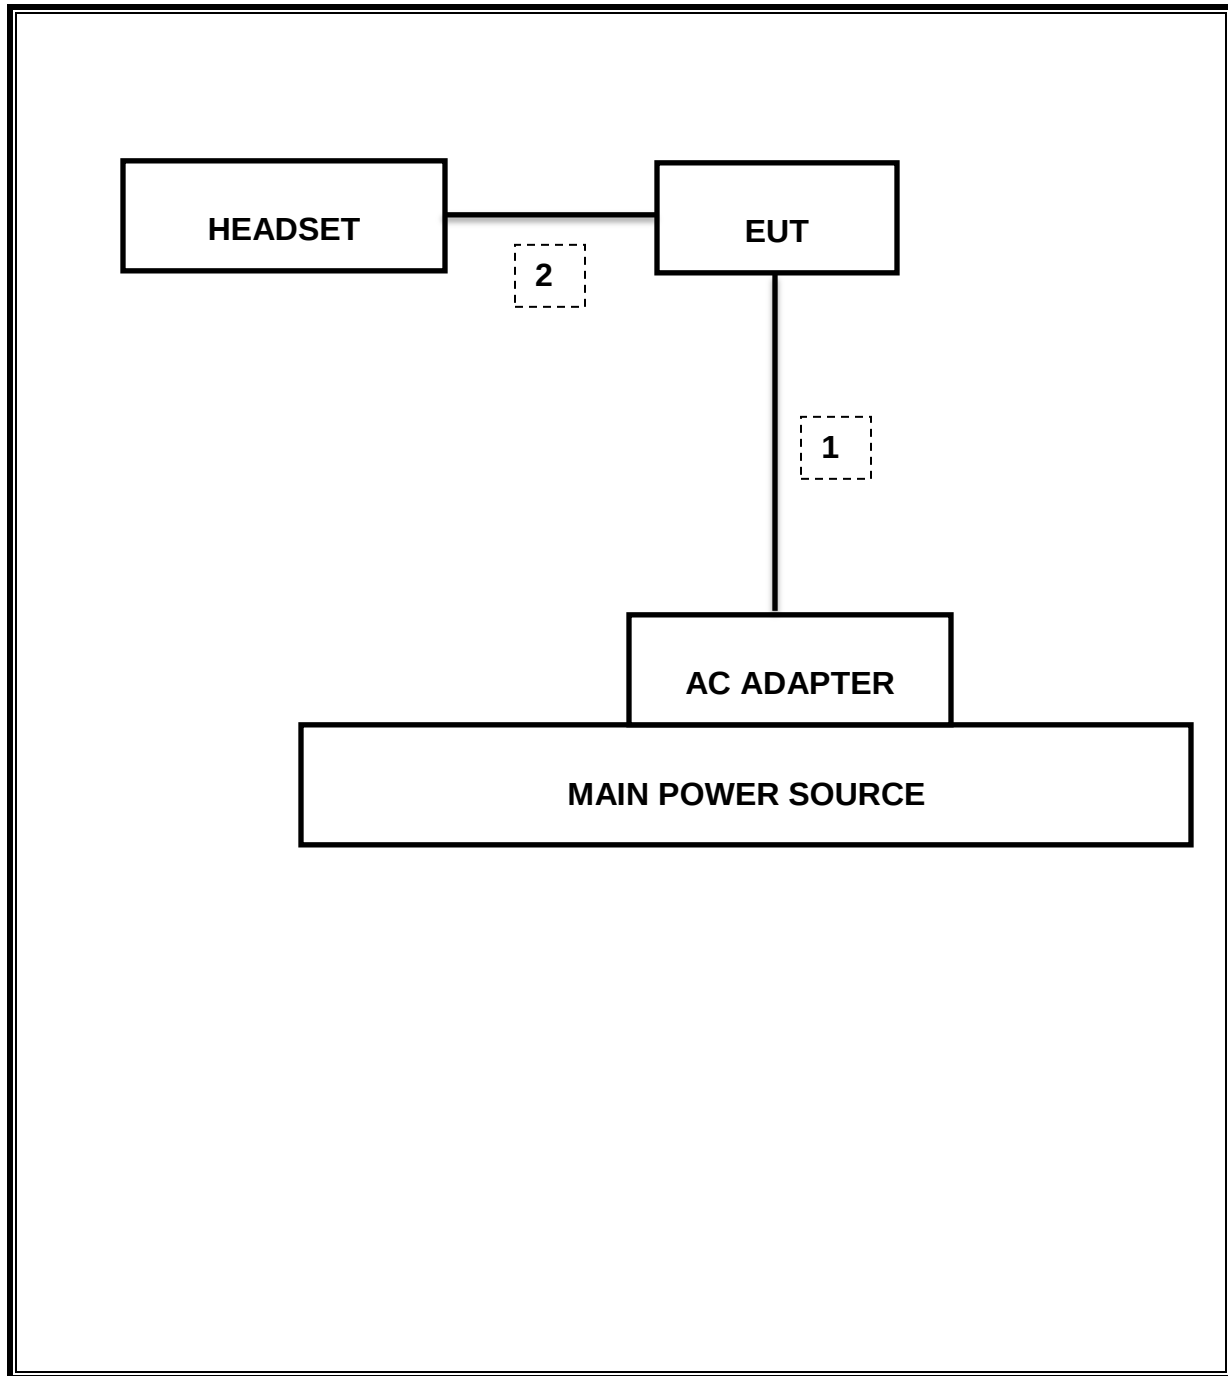

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	950	11-17-15
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-15
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-15
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	11-17-15
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	11-18-15
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	09-23-15
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	11-17-15
Average Power Sensor	R&S	NRZ-Z91	102681	11-17-15
Average Power Sensor	Agilent / HP	U2000	MY54270007	09-23-15
EMI Test Receive, 40 GHz	R&S	ESU40	100439	11-17-15
EMI Test Receive, 3 GHz	R&S	ESR3	101832	11-17-15
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	11-17-15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	11-17-15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	11-17-15
LISN	R&S	ENV-216	101836	04-09-16
LISN	R&S	ENV-216	101837	04-09-16

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGPM-G is used for power and PKPSD is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.

8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS


None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
BLE	0.388	0.625	0.622	62.2%	2.06	2.575

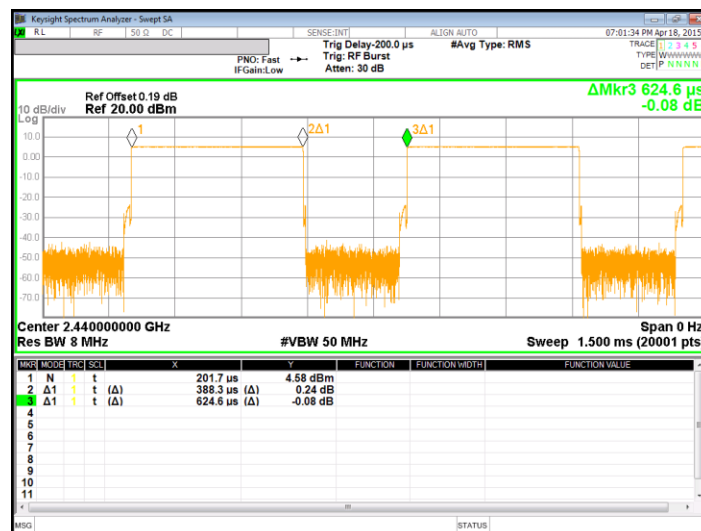

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	707.7 kHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-53.570 dBm
15.247	TX conducted output power	<30dBm		Pass	4.87 dBm
15.247	PSD	<8dBm		Pass	-8.21 dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	31.06 dBuV (AV)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	50.21 dBuV/m (AV)

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minimum Limit [kHz]
Low	2402	715.3	500.0
Mid	2440	718.7	500.0
High	2480	707.7	500.0
Worst		707.7	

6 dB BANDWIDTH PLOTS

LOW CHANNEL

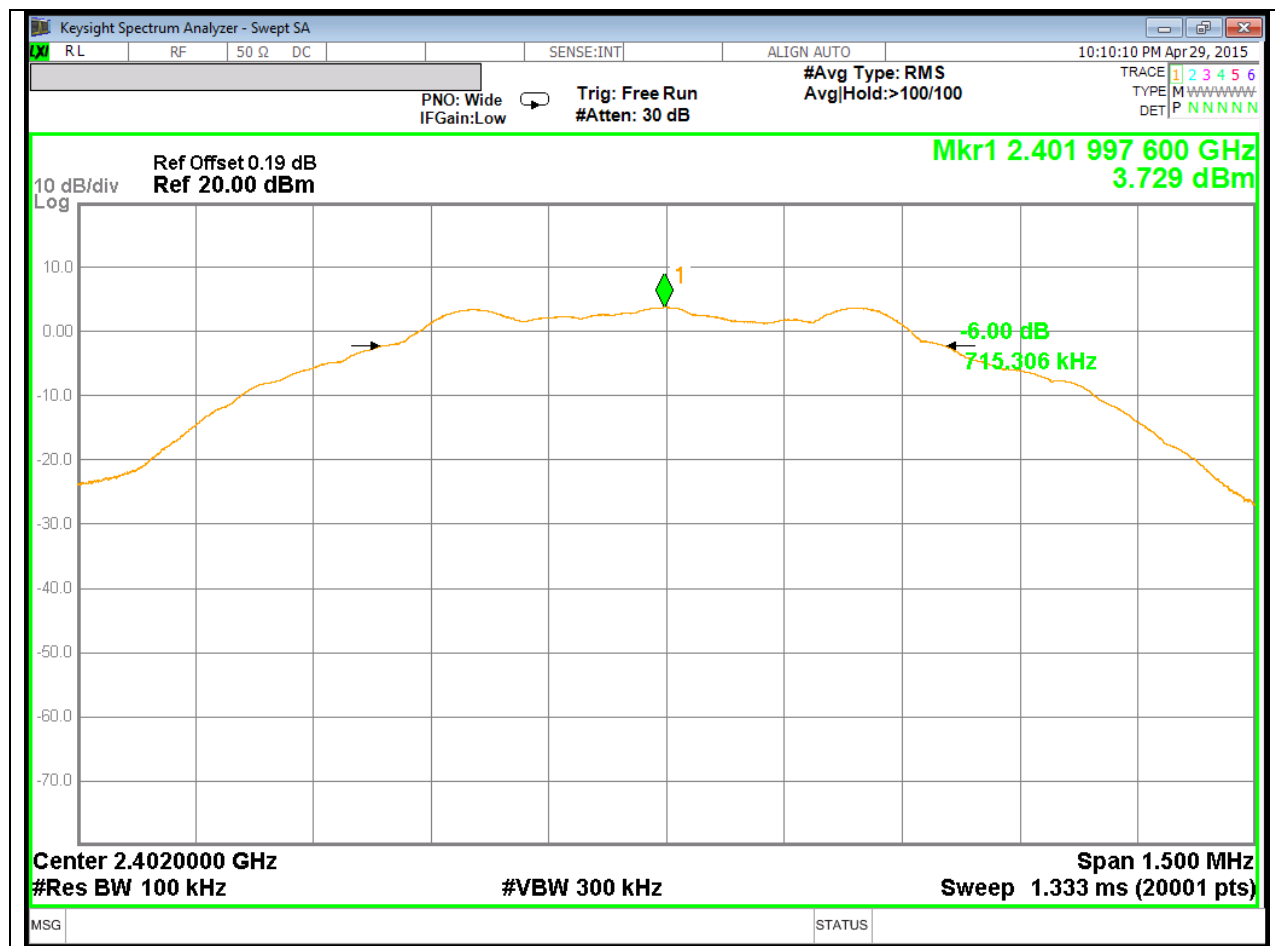

Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω DC SENSE:INT ALIGN AUTO 10:11:33 PM Apr 29, 2015

PNO: Wide IFGain:Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS Avg|Hold:>100/100

TRACE 1 2 3 4 5 6 TYPE M NNNNNN DET P NNNNNN

Ref Offset 0.19 dB Ref 20.00 dB

Mkr1 2.479 988 600 GHz 3.591 dBm

10 dB/div Log

6.00 dB 707.705 kHz

Center 2.480000 GHz #Res BW 100 kHz #VBW 300 kHz Span 1.500 MHz Sweep 1.333 ms (20001 pts)

MSG STATUS

The image shows a Keysight Spectrum Analyzer interface. The main display is a log-scale plot of power spectral density (PSD) versus frequency. The y-axis is labeled '10 dB/div Log' and ranges from -70.0 to 10.0 dBm. The x-axis represents frequency, with a center frequency of 2.480000 GHz and a span of 1.500 MHz. A swept signal is shown as an orange line. A green diamond marker is placed on the signal at 2.4799886 GHz with a power level of 3.591 dBm. A green arrow indicates a 6.00 dB bandwidth of 707.705 kHz. The interface includes various control panels at the top and bottom, such as frequency settings, resolution bandwidth (100 kHz), video bandwidth (300 kHz), and measurement parameters like average type (RMS) and hold time (>100/100).

10.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE


Reference to KDB558074 D01 DTS Meas Guidance v03r02: The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS


Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2402	1.057
Mid	2440	1.057
High	2480	1.068
Worst		1.068

99% BANDWIDTH PLOTS


LOW CHANNEL

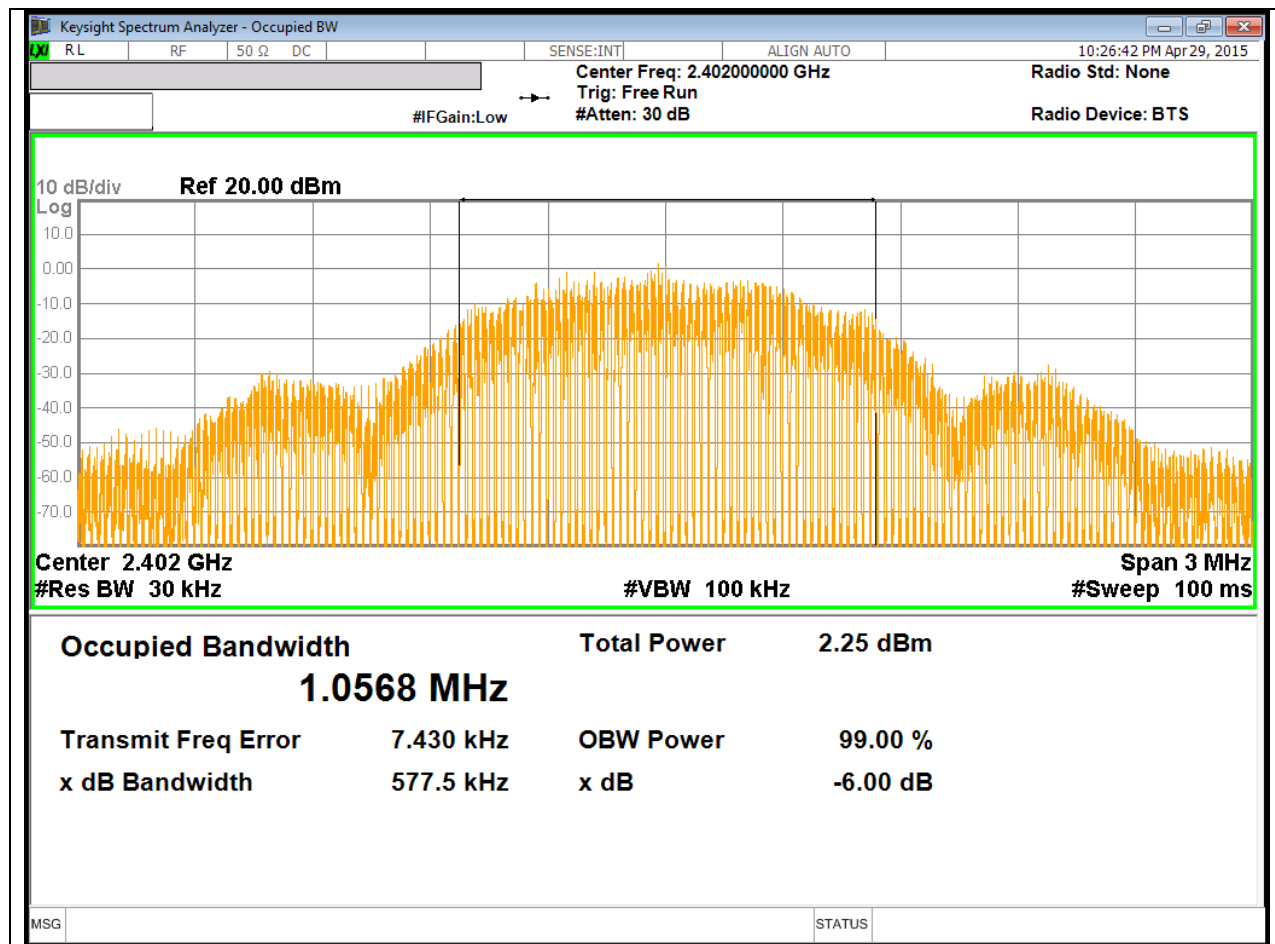

MID CHANNEL

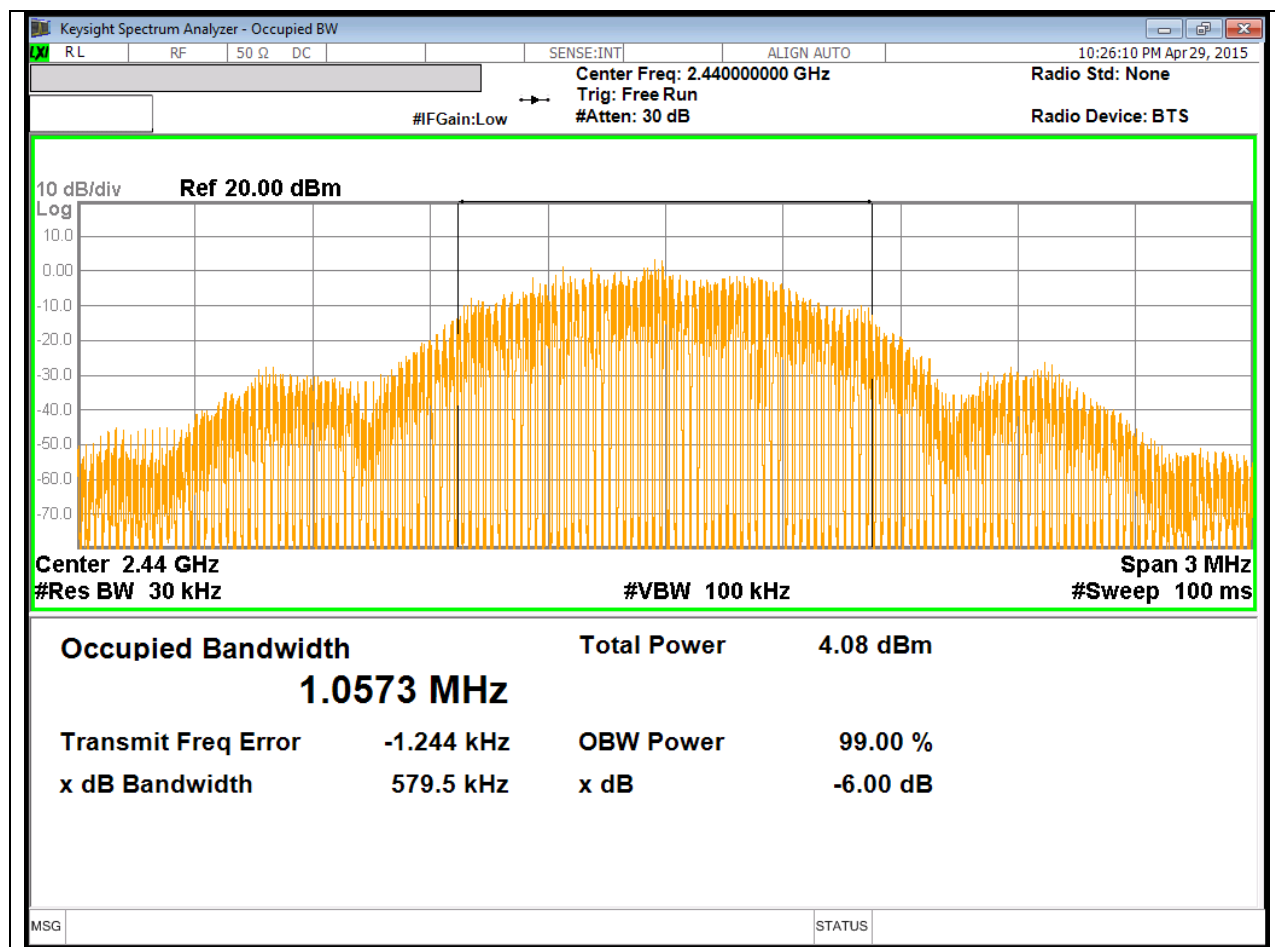

HIGH CHANNEL

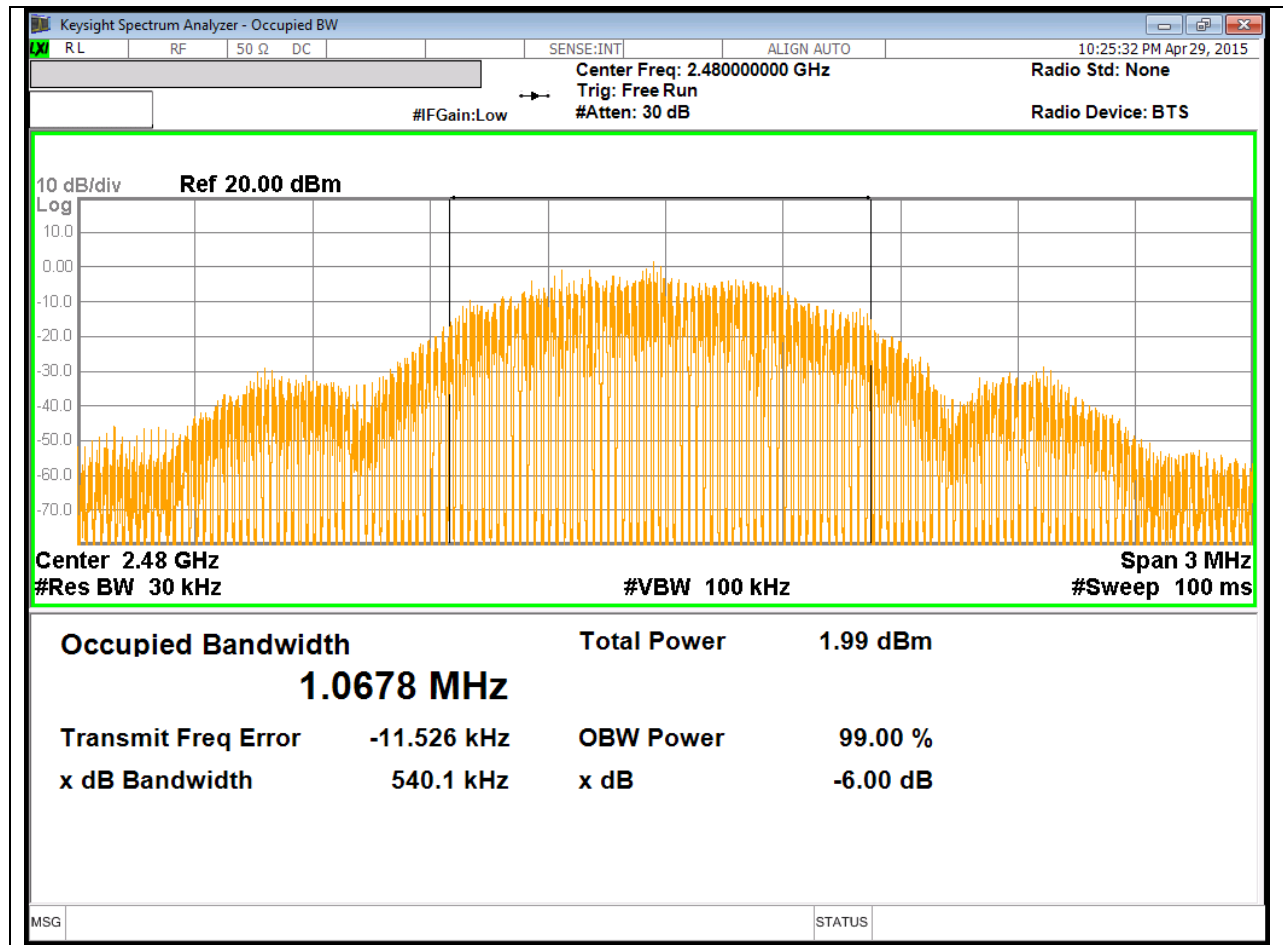

10.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r02 under section 9.1.1 utilizing spectrum analyzer.

RESULTS


Channel	Frequency [MHz]	Peak Power Reading [dBm]	Limit [dBm]	Margin [dB]
Low	2402	2.855	30.000	-27.145
Mid	2440	5.273	30.000	-24.727
High	2480	3.991	30.000	-26.009
Worst		5.273		-24.727

OUTPUT POWER PLOTS


LOW CHANNEL

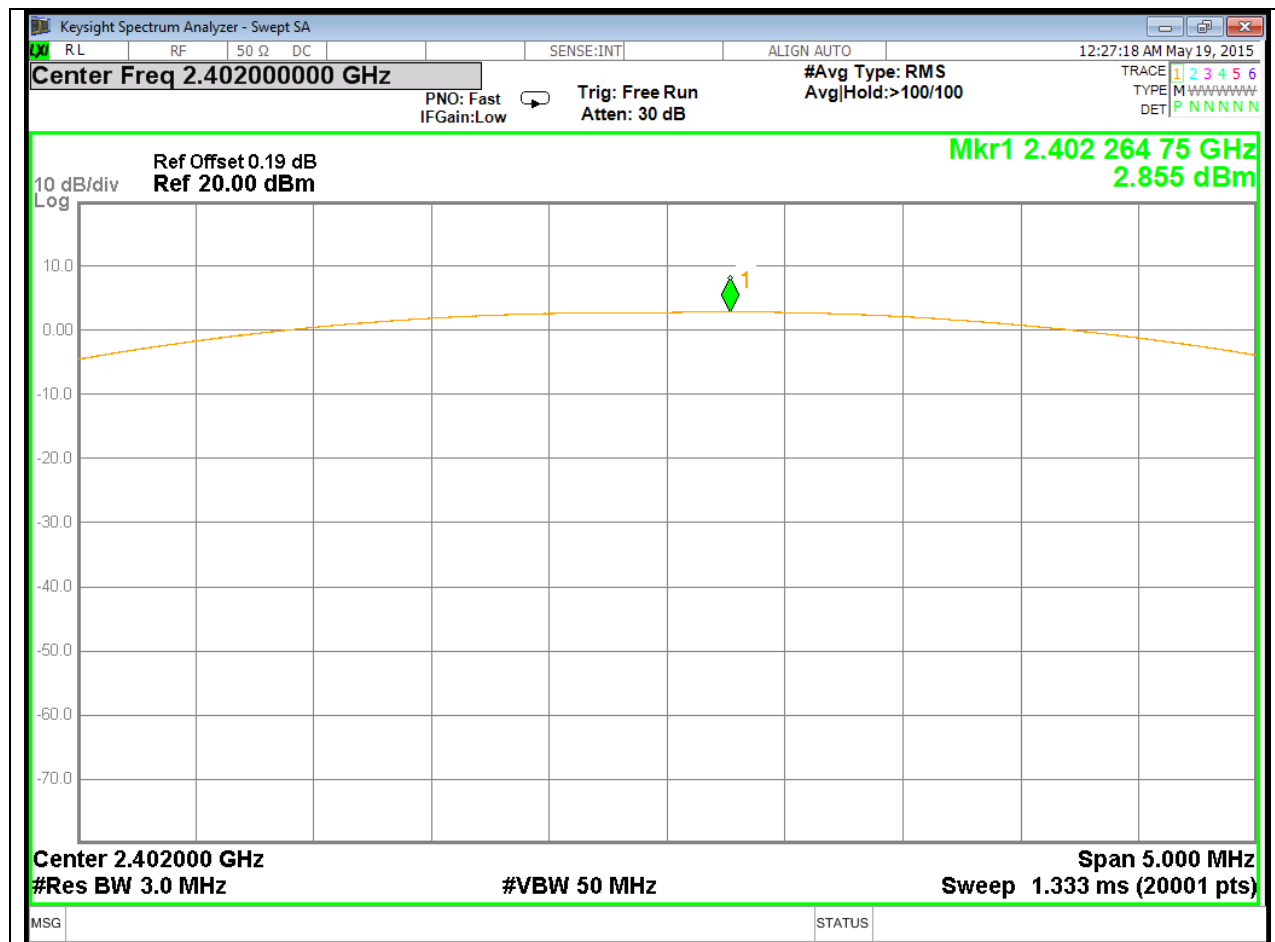

MID CHANNEL

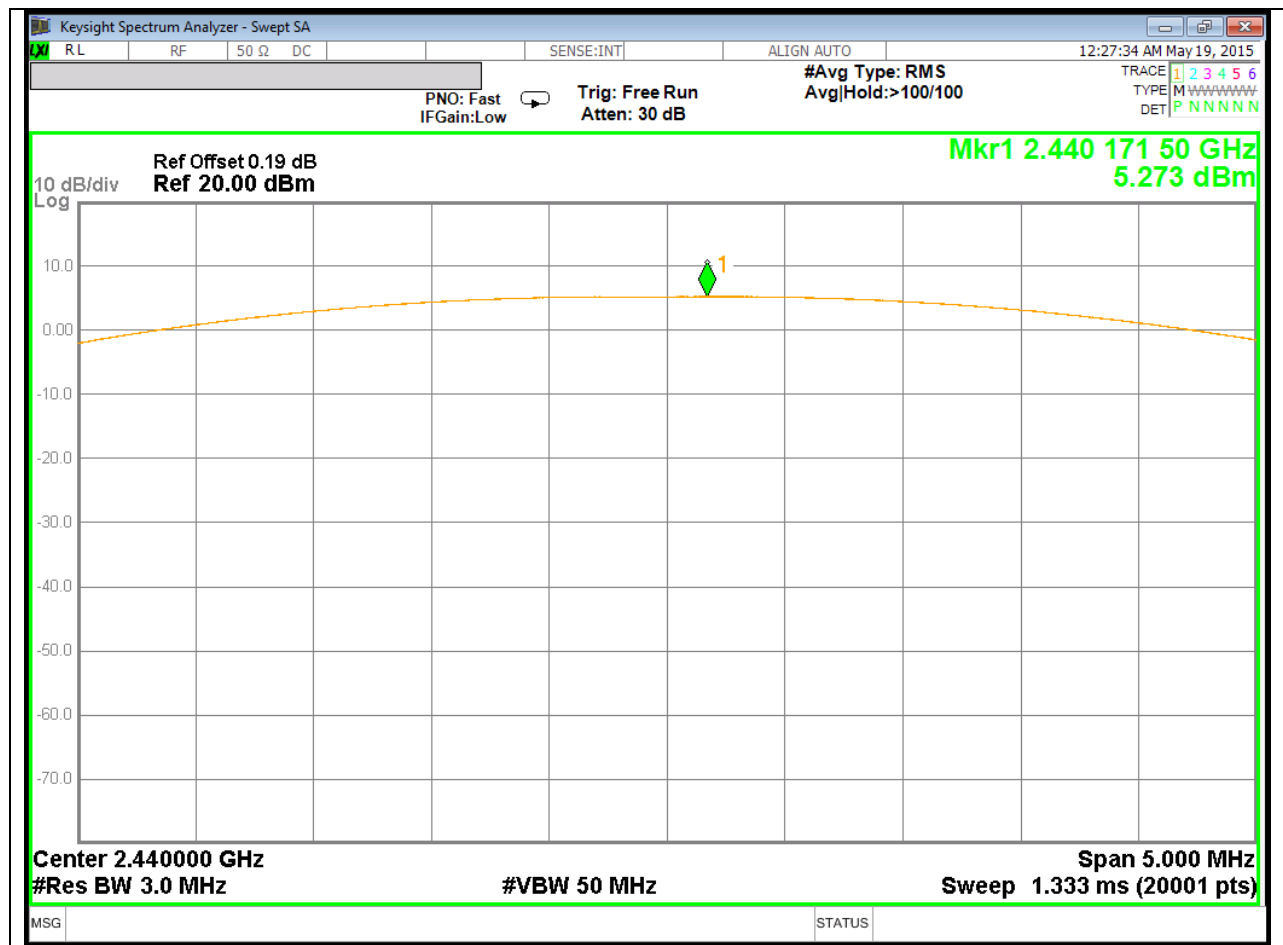

HIGH CHANNEL

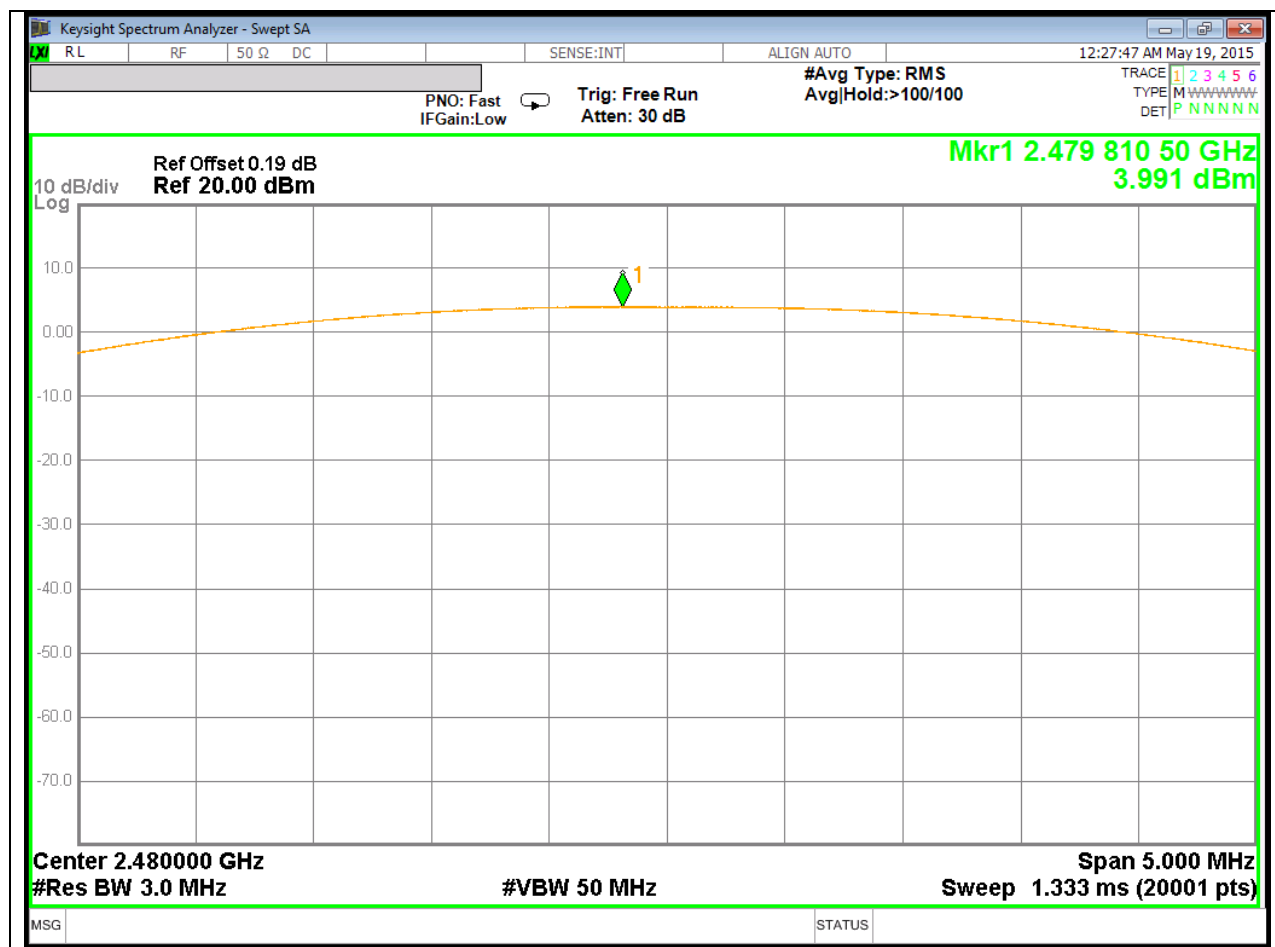

10.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	2.44	1.75
Middle	2440	4.87	3.07
High	2480	3.52	2.25

10.5. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE


Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r02

RESULTS


Channel	Frequency [MHz]	PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2402	-9.98	8.00	-17.98
Mid	2440	-8.21	8.00	-16.21
High	2480	-10.20	8.00	-18.20

POWER SPECTRAL DENSITY PLOTS


LOW CHANNEL

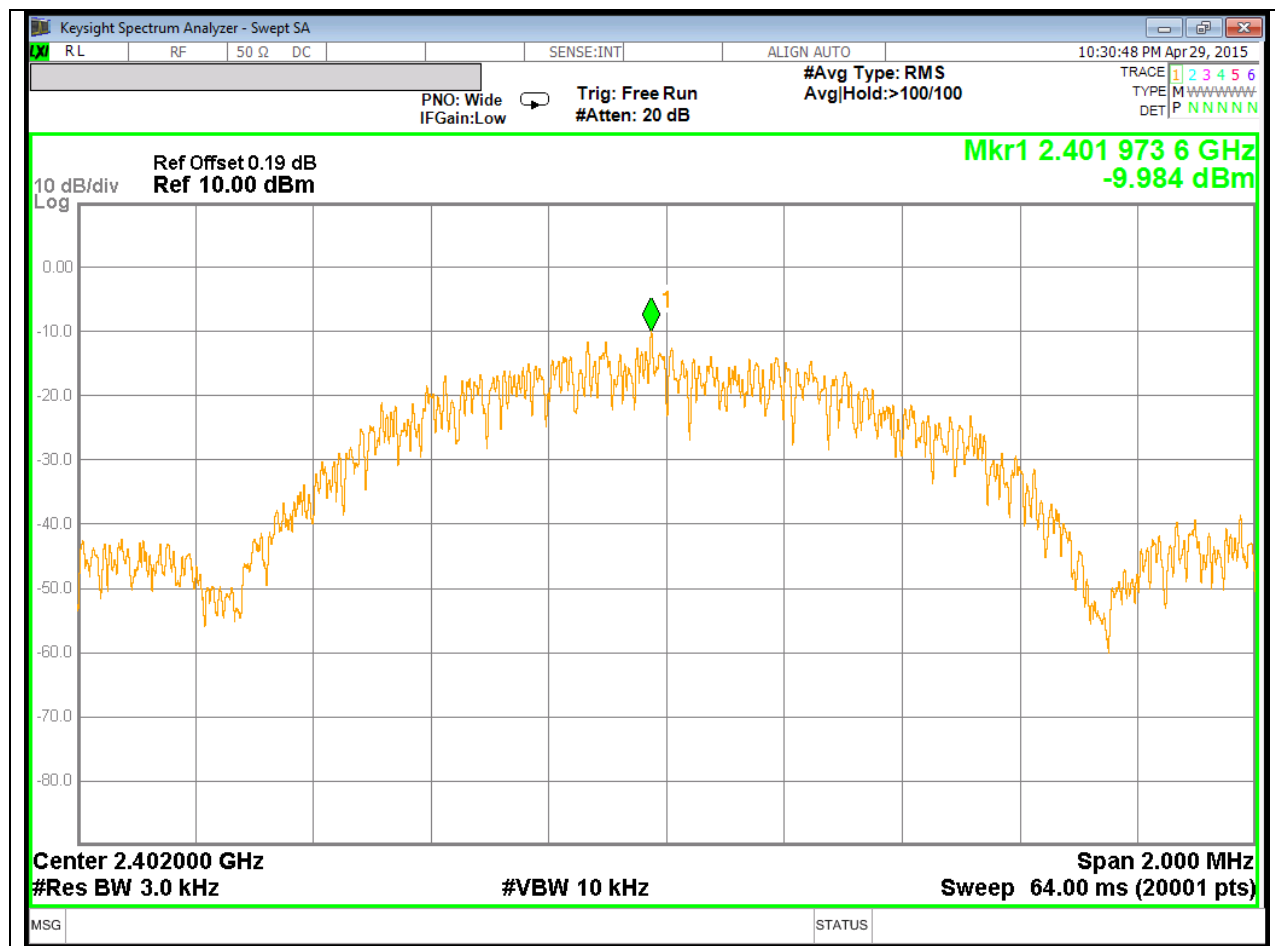

MID CHANNEL

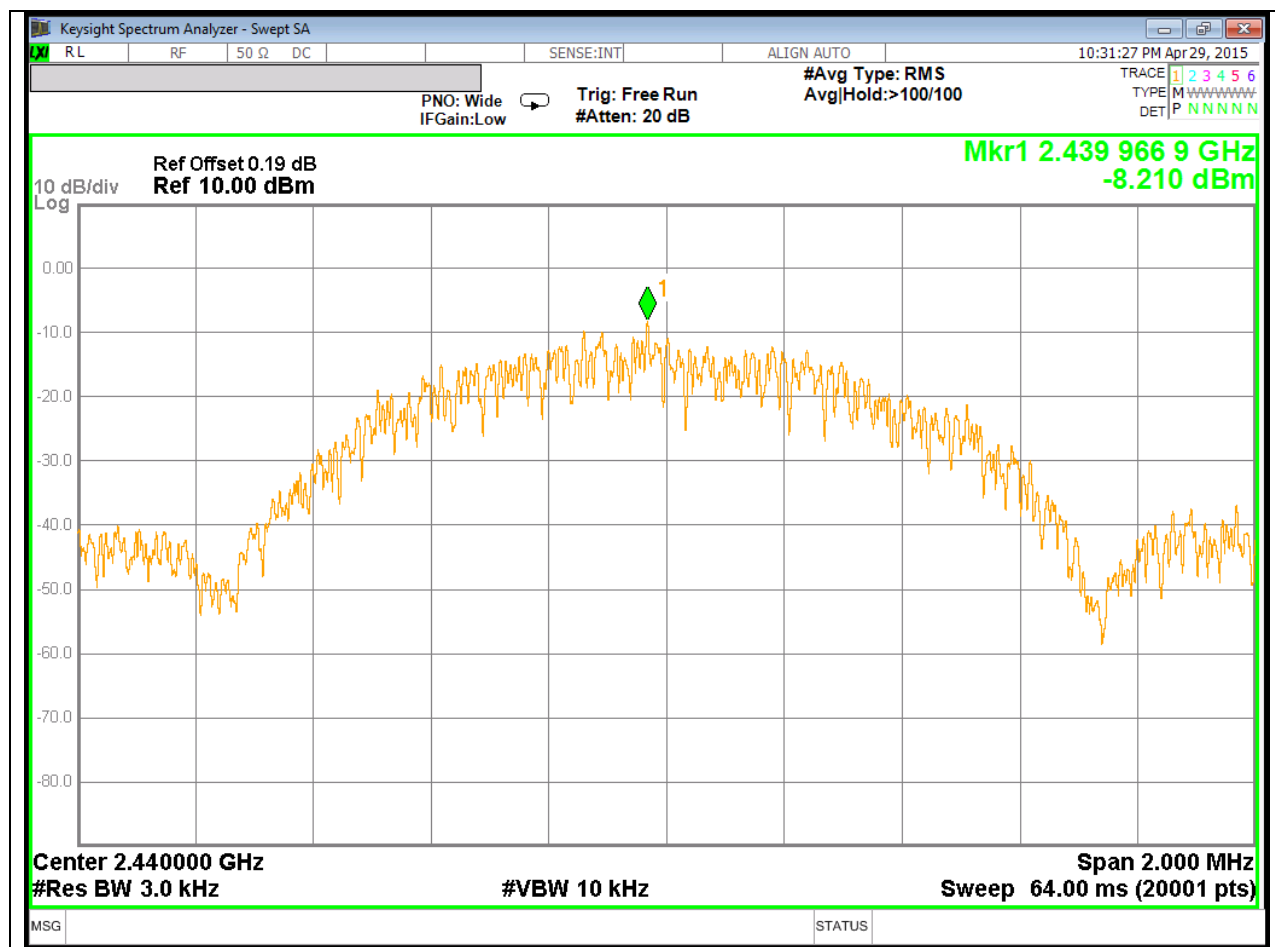

HIGH CHANNEL

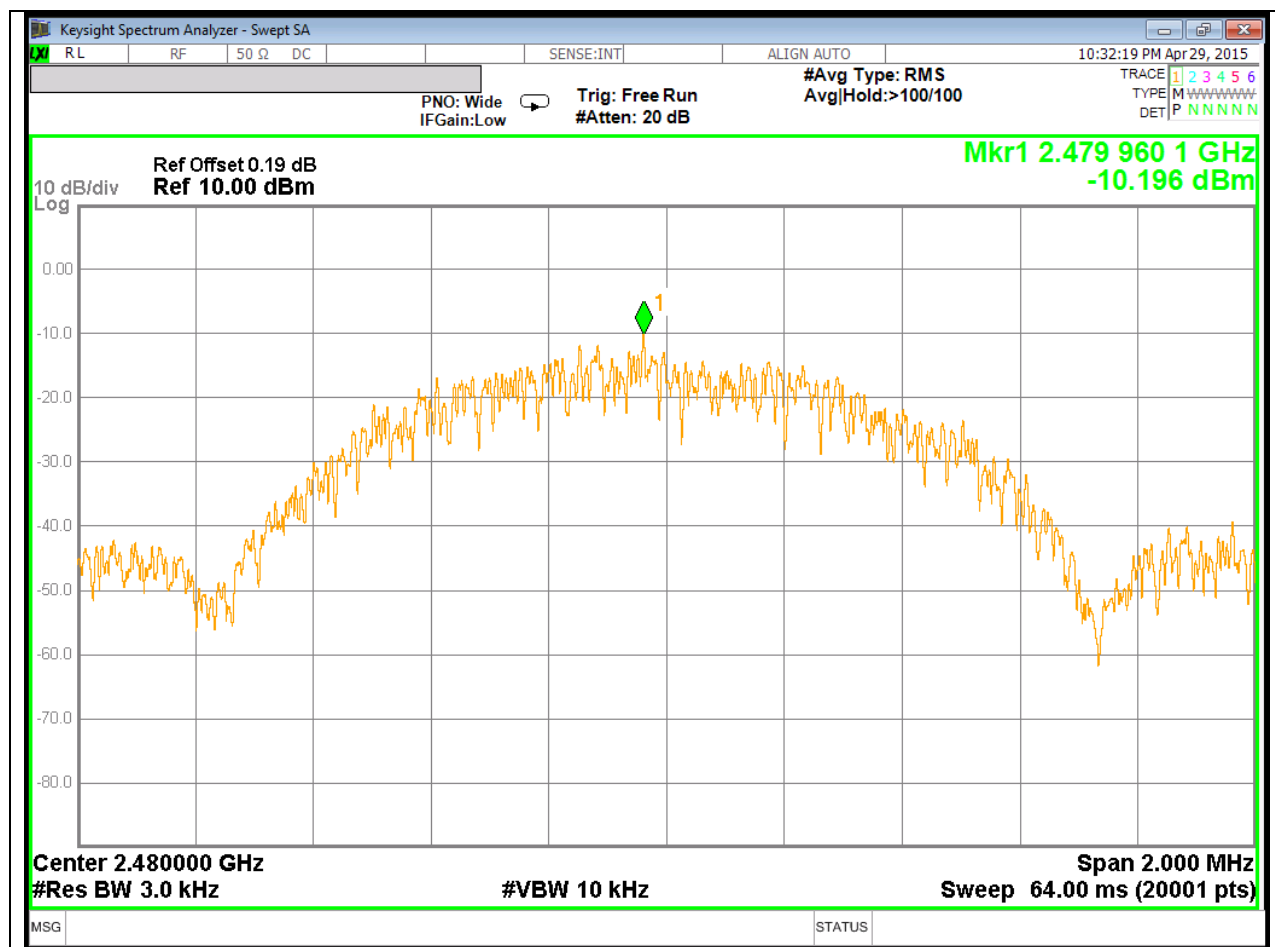

10.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

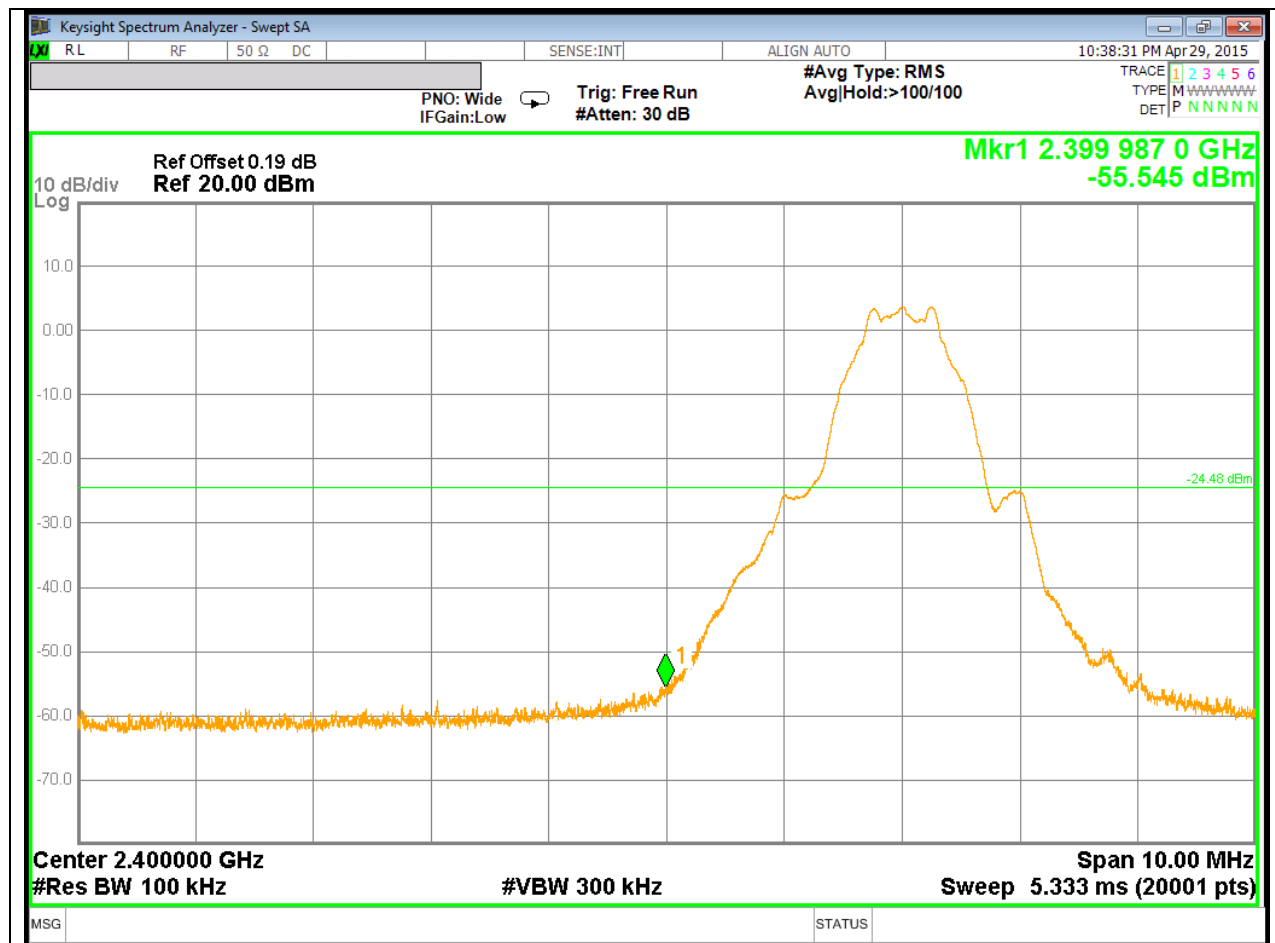

LOW CHANNEL SPURIOUS

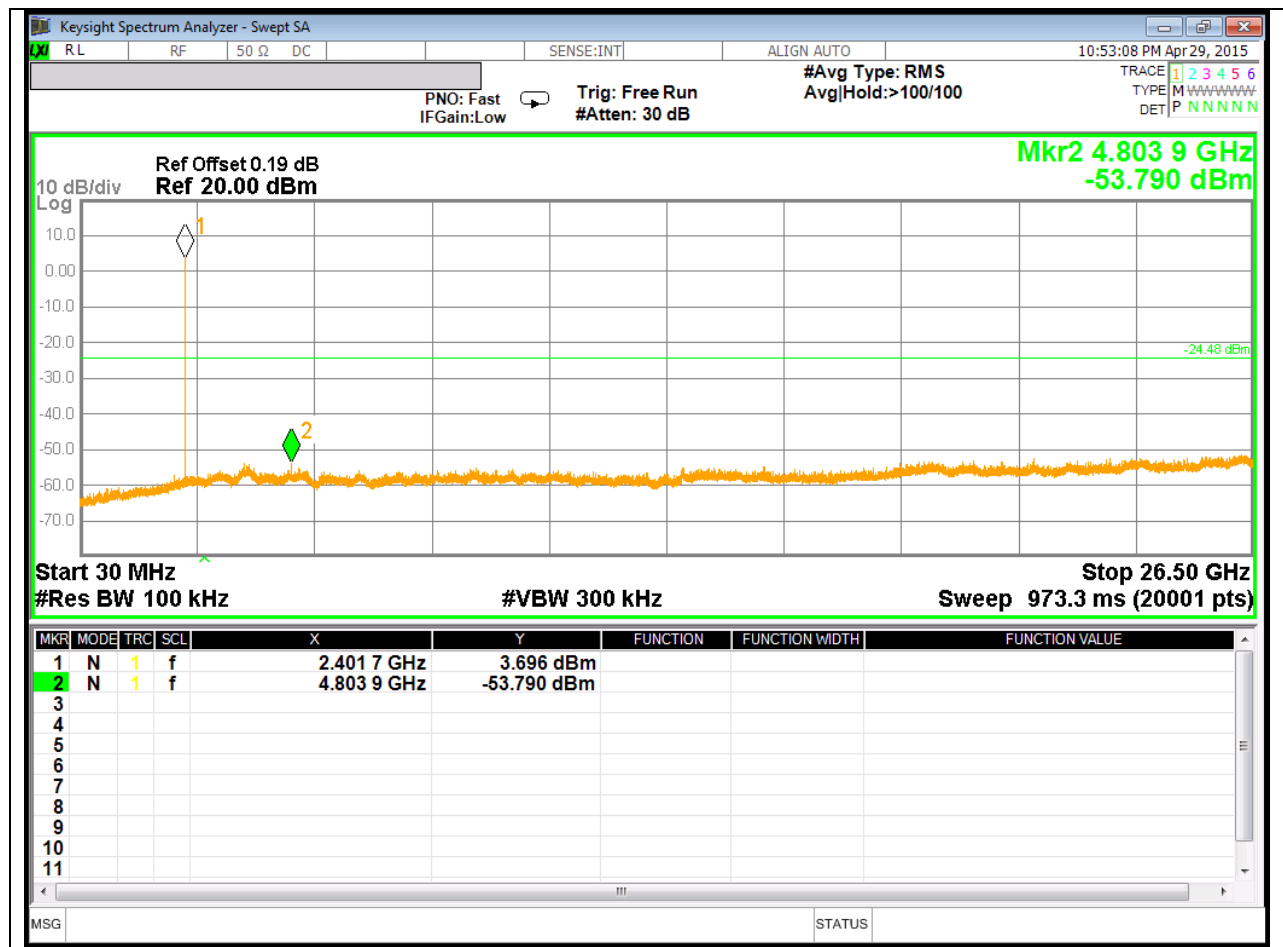


SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL REFERENCE




MID CHANNEL SPURIOUS

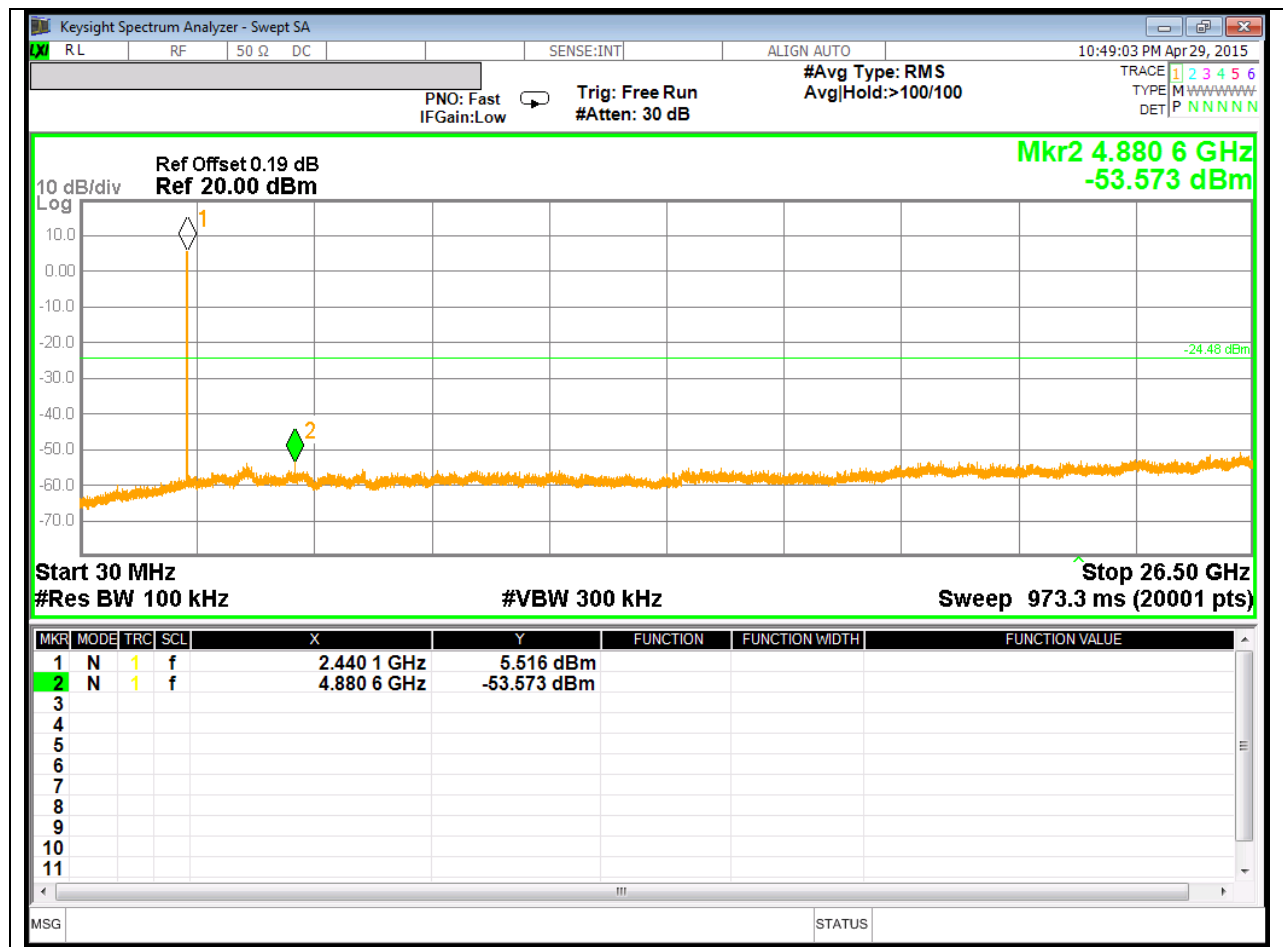


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

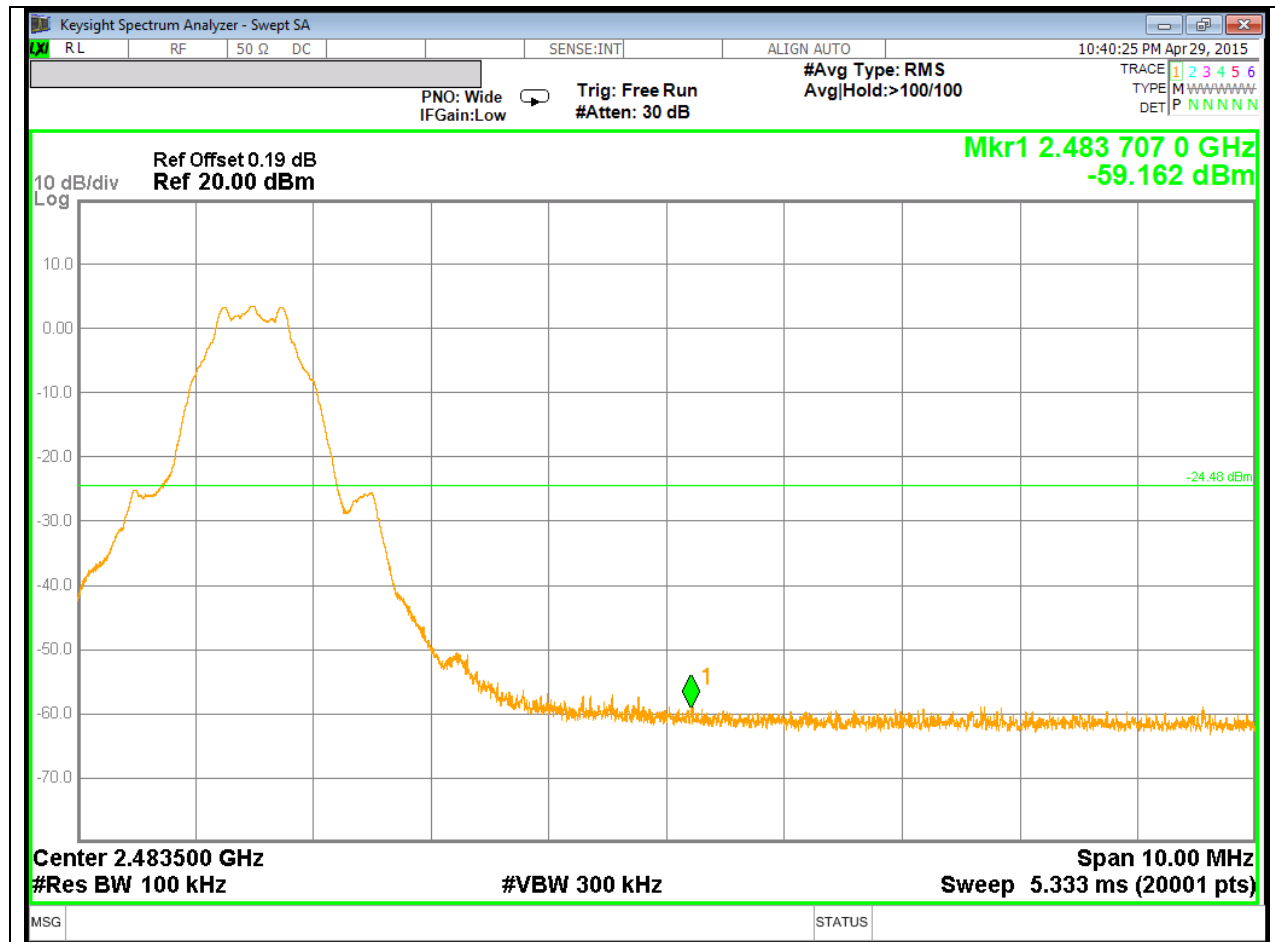

HIGH CHANNEL SPURIOUS

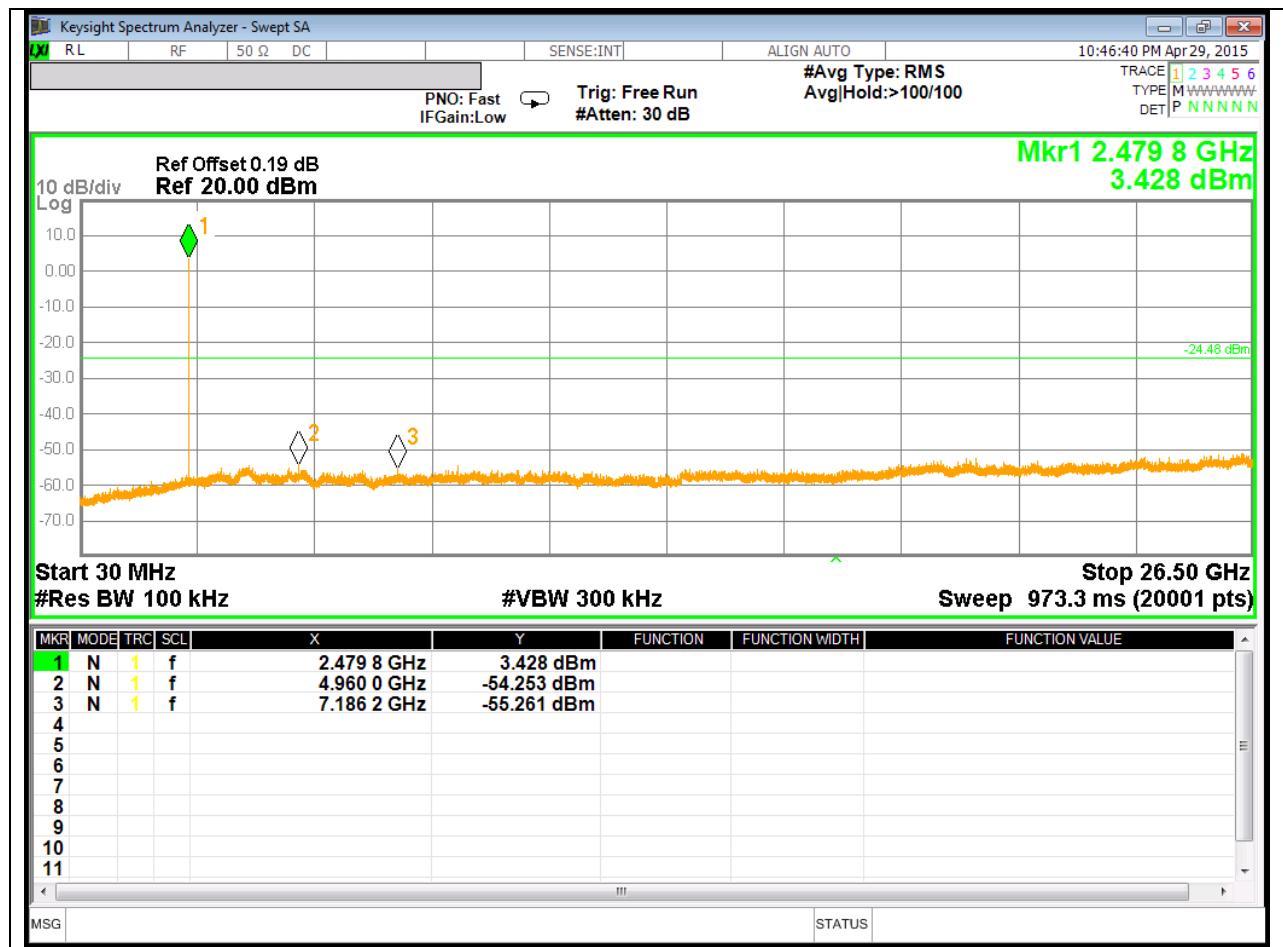

11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log (1/x)$. For this sample: $DCF = 10\log(1/0.622)=2.06\text{dB}$ (Spectrum Analyzer round it up to 2.06dB)

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

11.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

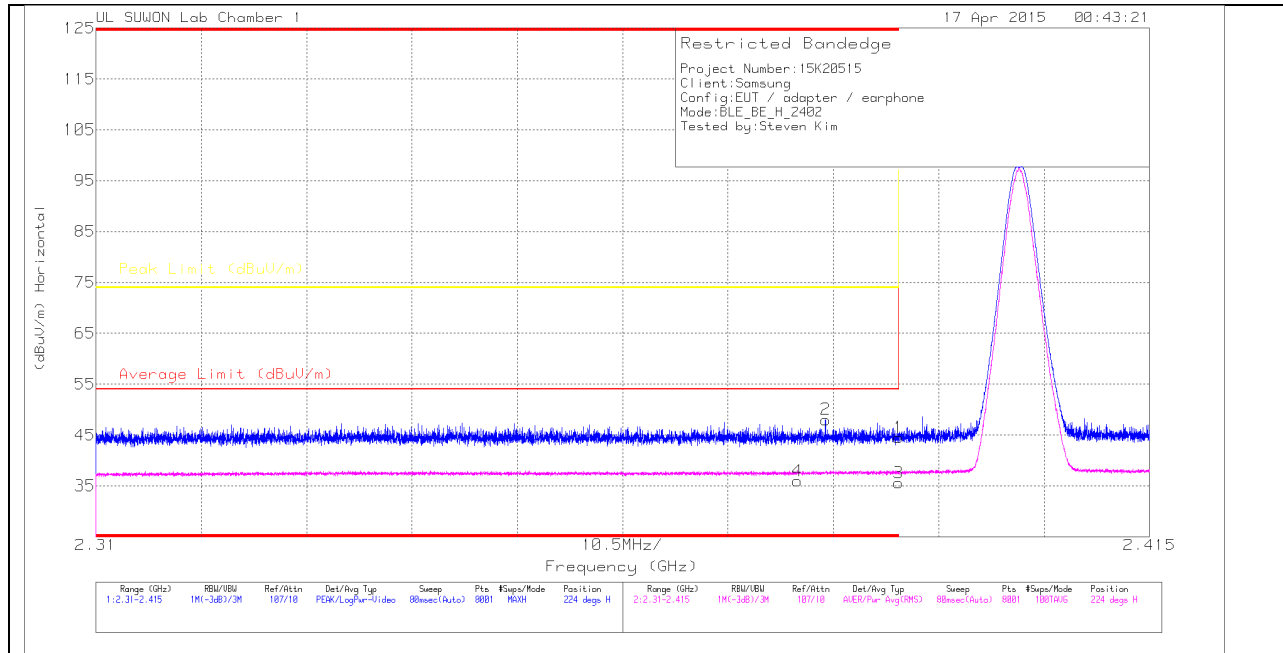

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_2_10dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.4	Pk	27.9	-22.8	0	44.5	-	-	74	-29.5	224	172	H
2	* 2.383	42.94	Pk	27.9	-22.8	0	48.04	-	-	74	-25.96	224	172	H
3	* 2.39	30.52	RMS	27.9	-22.8	2.06	37.68	54	-16.32	-	-	224	172	H
4	* 2.38	30.91	RMS	27.9	-22.8	2.06	38.07	54	-15.93	-	-	224	172	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

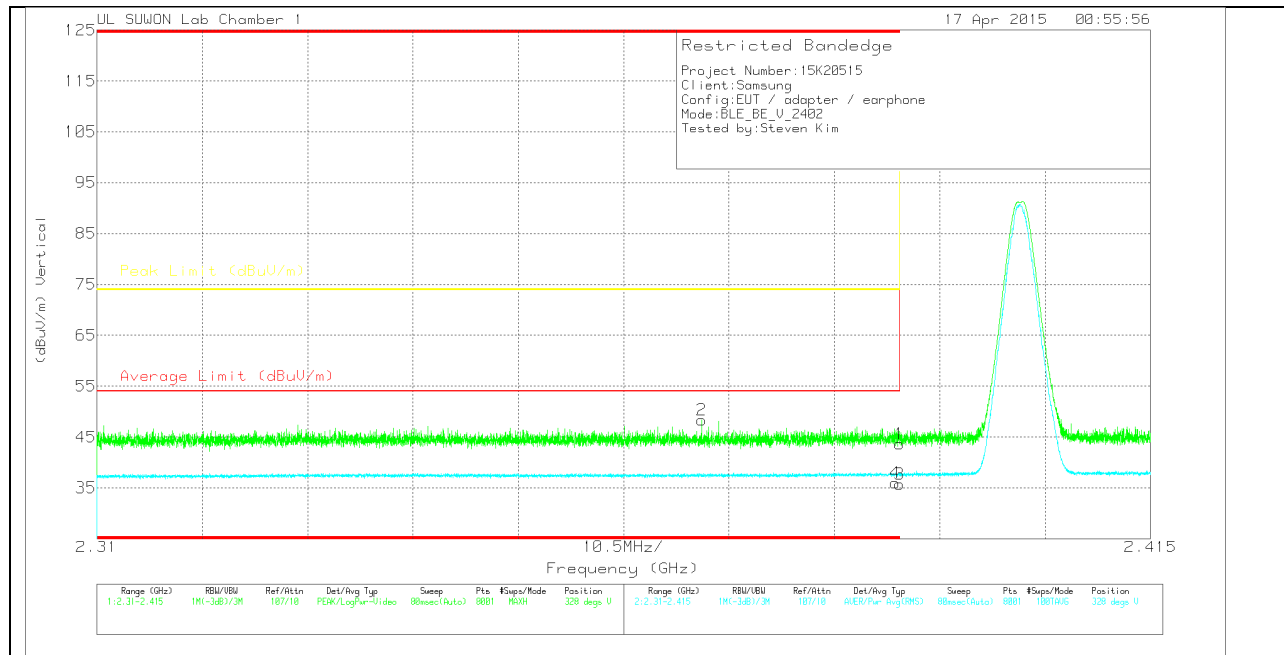

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_2_10dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.51	Pk	27.9	-22.8	0	43.61	-	-	74	-30.39	328	165	V
2	* 2.37	43.34	Pk	27.8	-22.8	0	48.34	-	-	74	-25.66	328	165	V
3	* 2.39	30.58	RMS	27.9	-22.8	2.06	37.74	54	-16.26	-	-	328	165	V
4	* 2.39	30.85	RMS	27.9	-22.8	2.06	38.01	54	-15.99	-	-	328	165	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

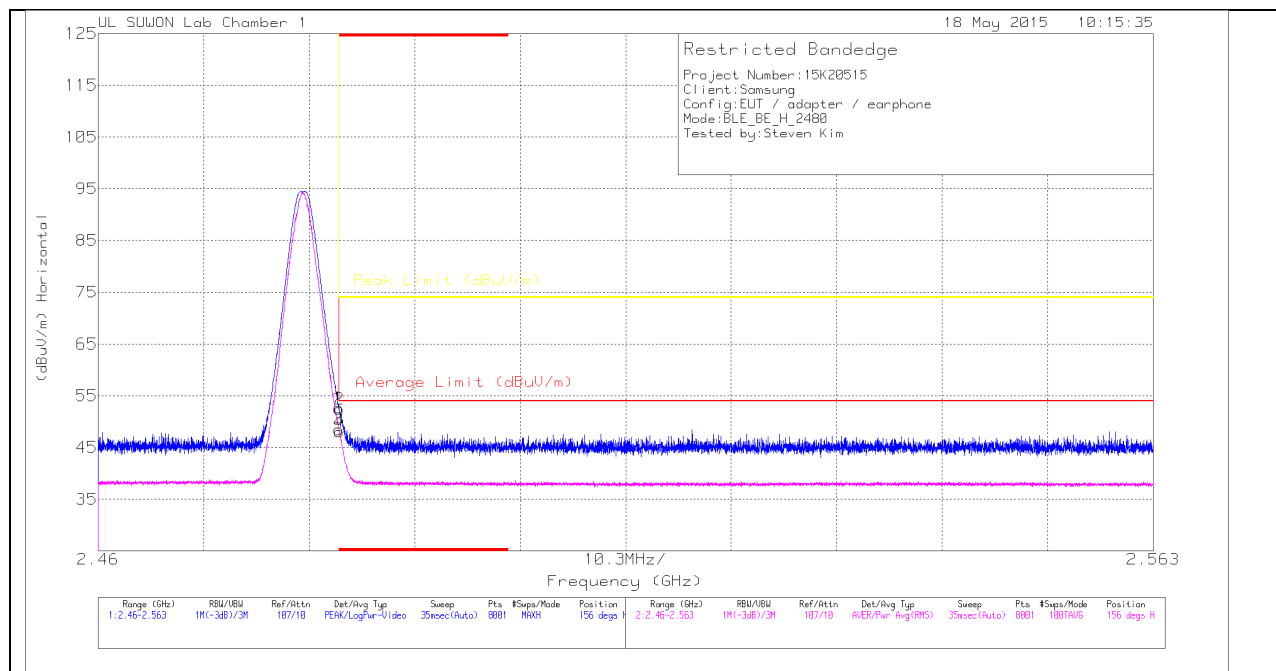

HORIZONTAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.35	Pk	27.9	-22.6	0	52.65	-	-	74	-21.35	156	241	H
2	* 2.484	47.12	Pk	27.9	-22.6	0	52.42	-	-	74	-21.58	156	241	H
3	* 2.484	41.14	RMS	27.9	-22.6	2.06	48.5	54	-5.5	-	-	156	241	H
4	* 2.484	40.69	RMS	27.9	-22.6	2.06	48.05	54	-5.95	-	-	156	241	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

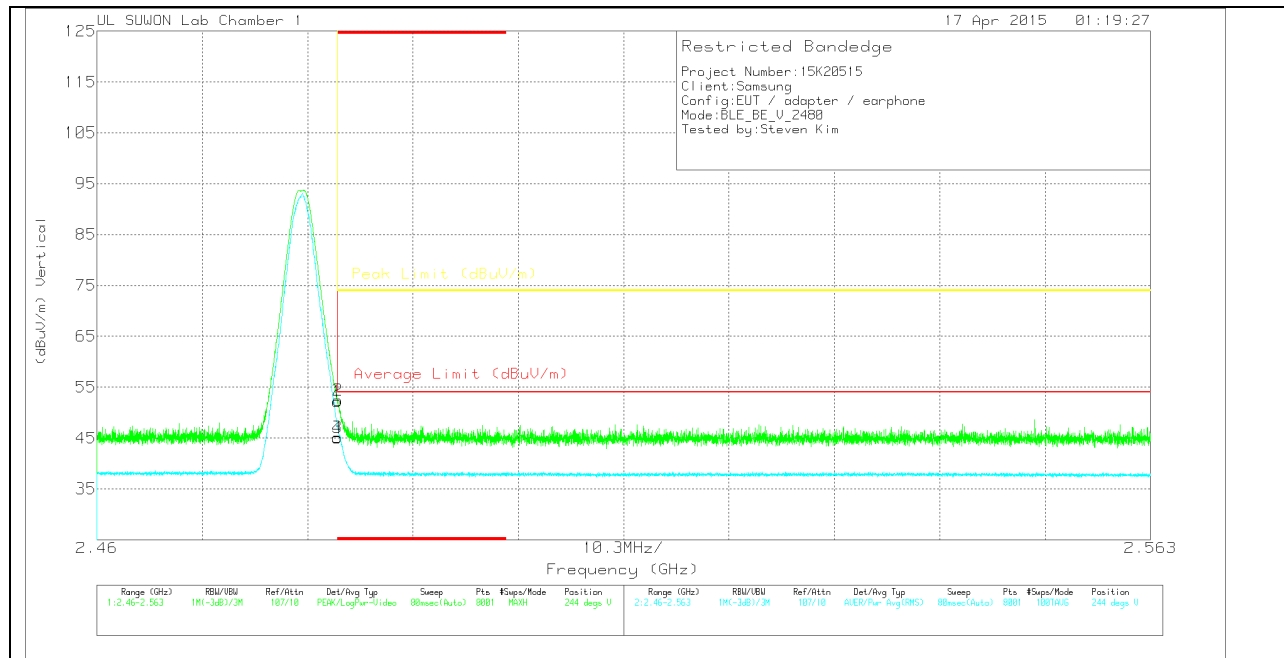

VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_2_10d B	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.92	Pk	27.9	-22.6	0	52.22	-	-	74	-21.78	244	202	V
2	* 2.484	47.14	Pk	27.9	-22.6	0	52.44	-	-	74	-21.56	244	202	V
3	* 2.484	39.78	RMS	27.9	-22.6	2.06	47.14	54	-6.86	-	-	244	202	V
4	* 2.484	39.67	RMS	27.9	-22.6	2.06	47.03	54	-6.97	-	-	244	202	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

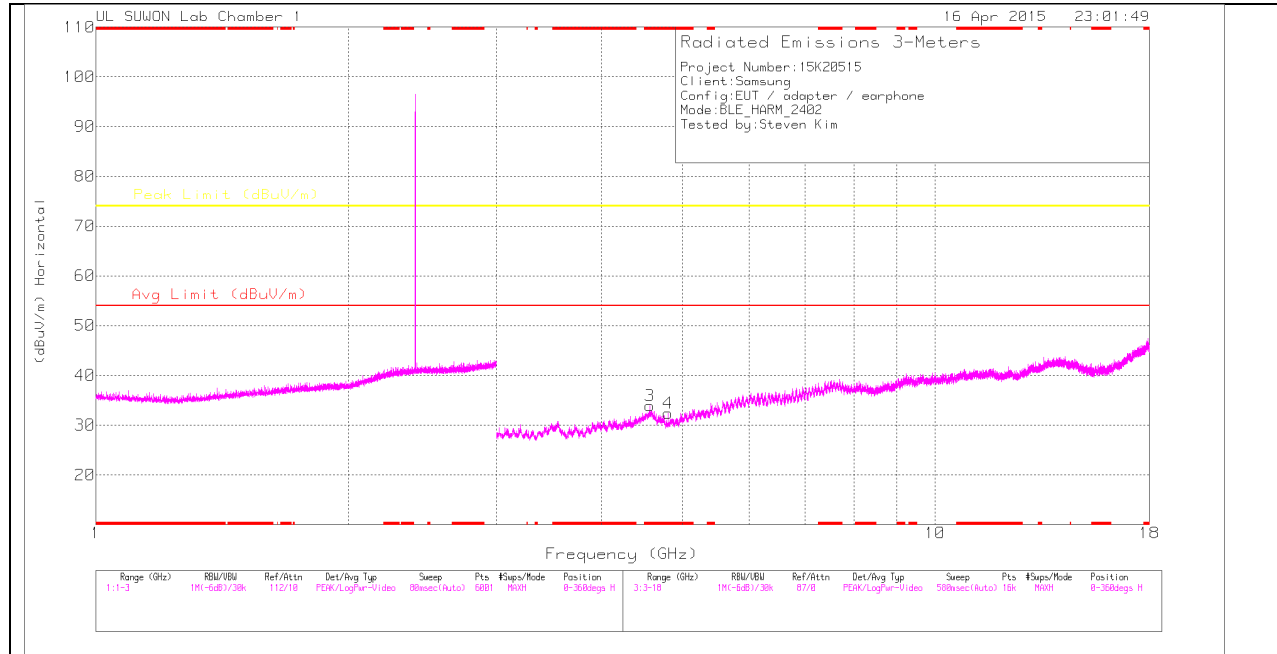

LOW CHANNEL VERTICAL

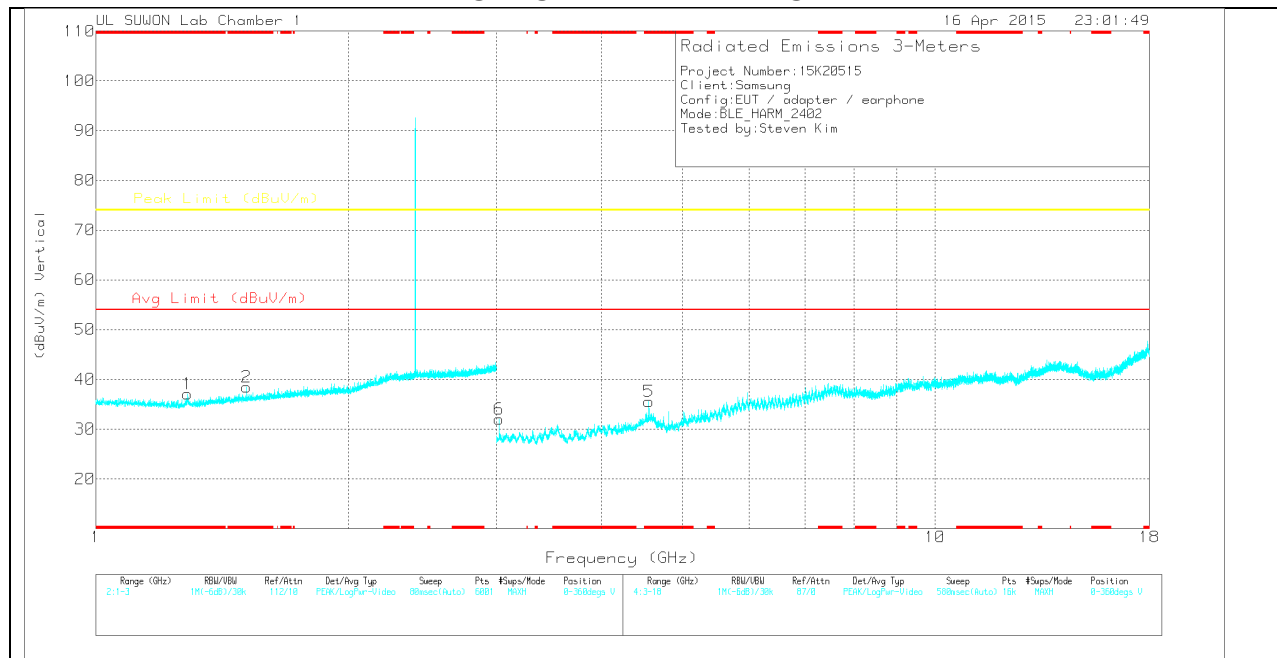

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_2_10dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.286	38.09	PK	23.7	-24.7	0	37.09	-	-	74	-36.91	0-360	100	V
2	* 1.512	38.17	PK	24.6	-24.3	0	38.47	-	-	74	-35.53	0-360	100	V
3	* 4.567	30.78	PK	31.8	-28.7	0	33.88	-	-	74	-40.12	0-360	200	H
4	* 4.804	30.31	PK	31.9	-29.8	0	32.41	-	-	74	-41.59	0-360	100	H
5	* 4.559	32.48	PK	31.8	-28.7	0	35.58	-	-	74	-38.42	0-360	200	V
6	3.023	34.3	PK	28.8	-31.1	0	32	-	-	-	-	0-360	200	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

MID CHANNEL HORIZONTAL

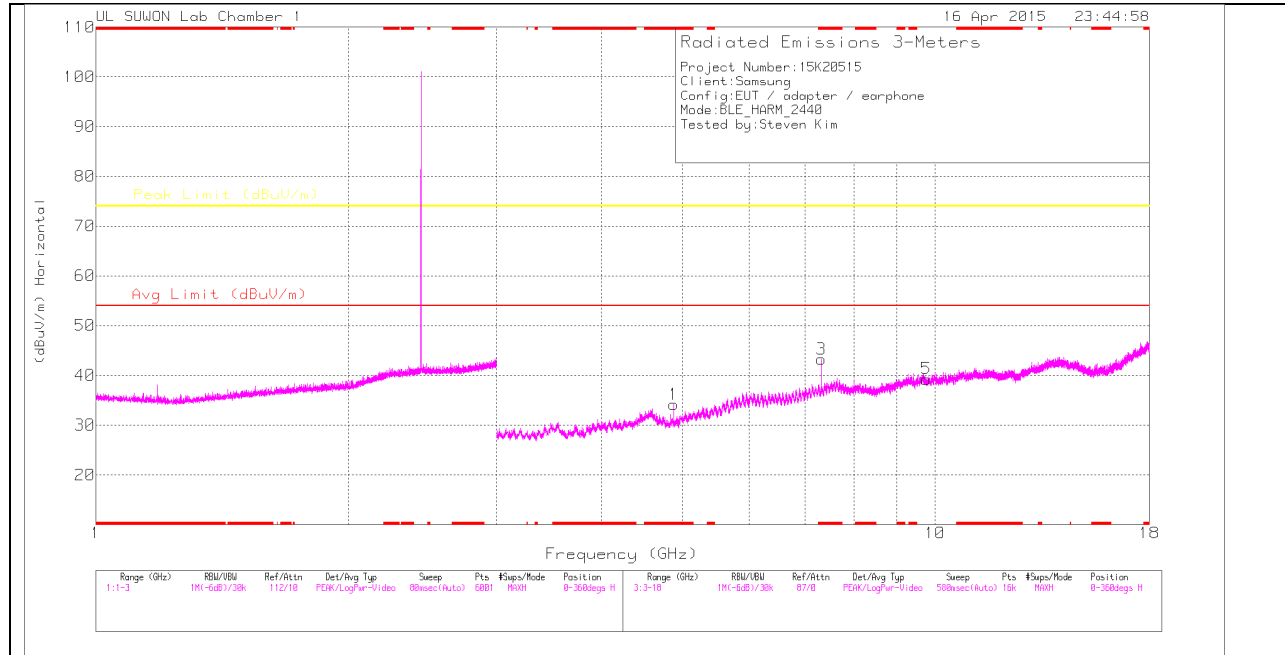

MID CHANNEL VERTICAL

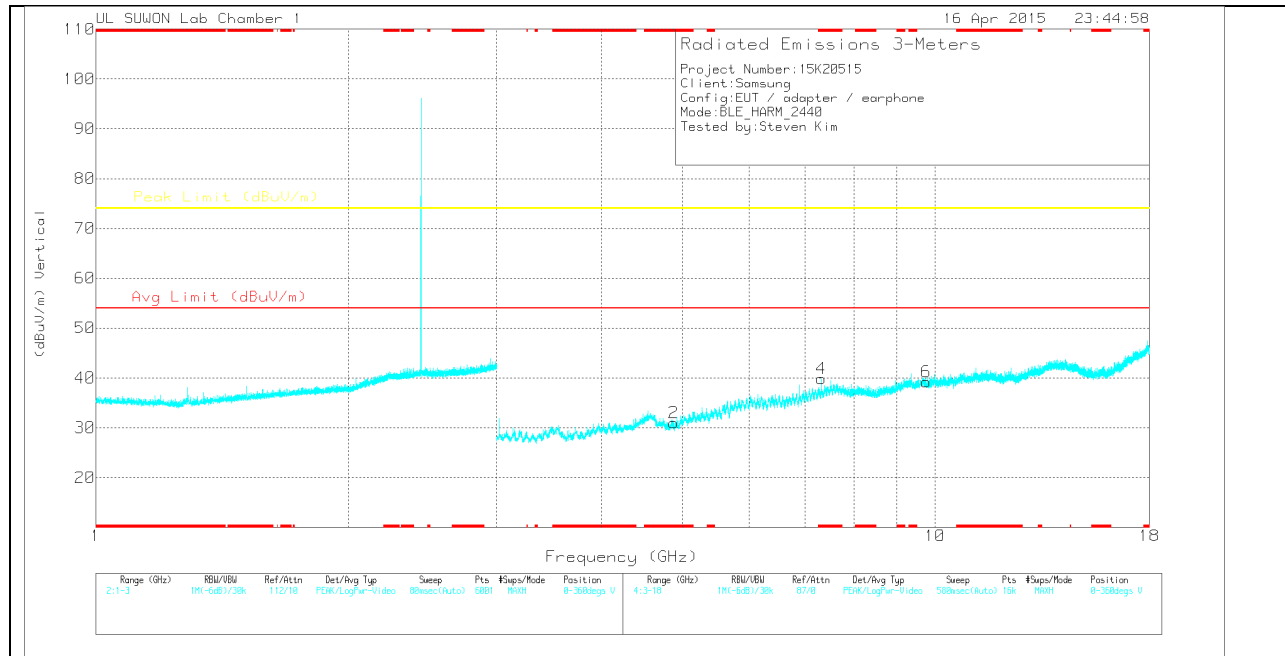

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_3_3GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.88	31.31	PK	32	-29.1	0	34.21	-	-	74	-39.79	0-360	100	H
3	* 7.321	31.75	PK	37.1	-25.6	0	43.25	-	-	74	-30.75	0-360	200	H
5	9.762	23.69	PK	37.6	-22	0	39.29	-	-	-	-	0-360	200	H
2	* 4.882	28.11	PK	32	-29.1	0	31.01	-	-	74	-42.99	0-360	100	V
4	* 7.319	28.35	PK	37.1	-25.6	0	39.85	-	-	74	-34.15	0-360	100	V
6	9.764	23.62	PK	37.6	-22	0	39.22	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_3_3 GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.32	38.73	PK2	37.1	-25.6	0	50.23	-	-	74	-23.77	135	196	H
* 7.319	30.44	MAv1	37.1	-25.6	2.06	44	54	-10	-	-	135	196	H
* 4.88	42.15	PK2	32	-29.1	0	45.05	-	-	74	-28.95	184	144	H
* 4.88	31.44	MAv1	32	-29.1	2.06	36.4	54	-17.6	-	-	184	144	H
* 7.313	38.44	PK2	37.1	-25.7	0	49.84	-	-	74	-24.16	261	269	H
* 7.31	30.15	MAv1	37.1	-25.7	2.06	43.61	54	-10.39	-	-	261	269	H
* 7.312	42.42	PK2	37.1	-25.7	0	53.82	-	-	74	-20.18	106	100	V
* 7.31	36.75	MAv1	37.1	-25.7	2.06	50.21	54	-3.79	-	-	106	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL HORIZONTAL

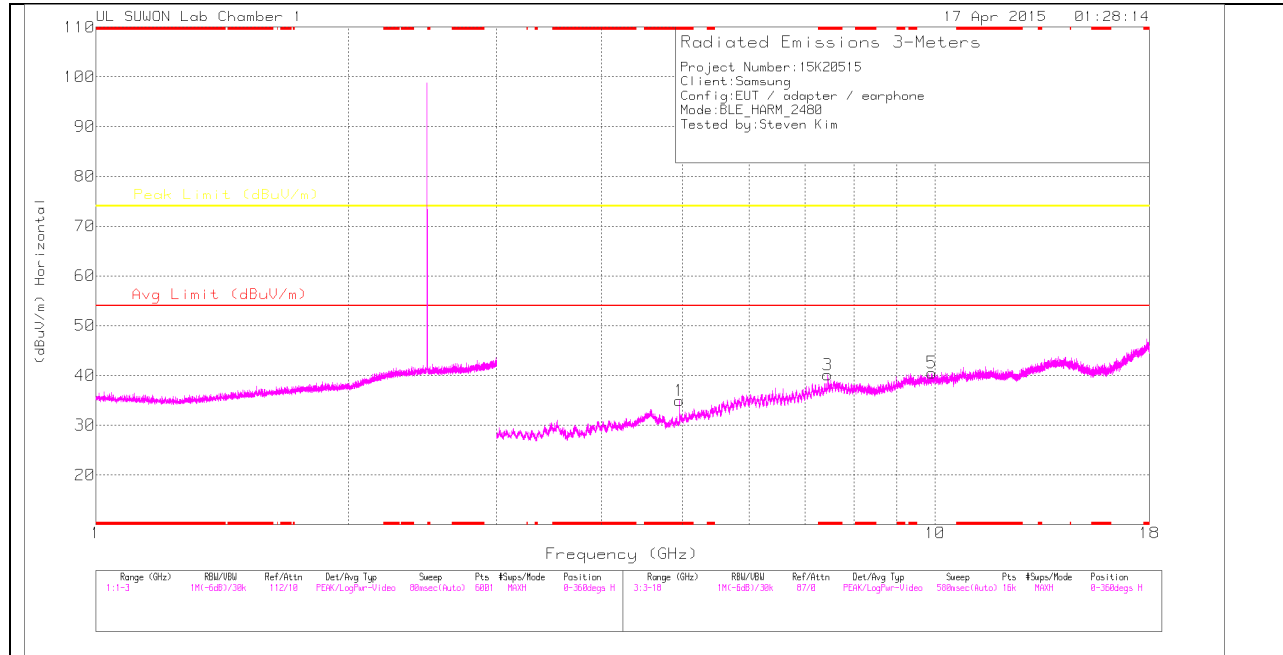

HIGH CHANNEL VERTICAL

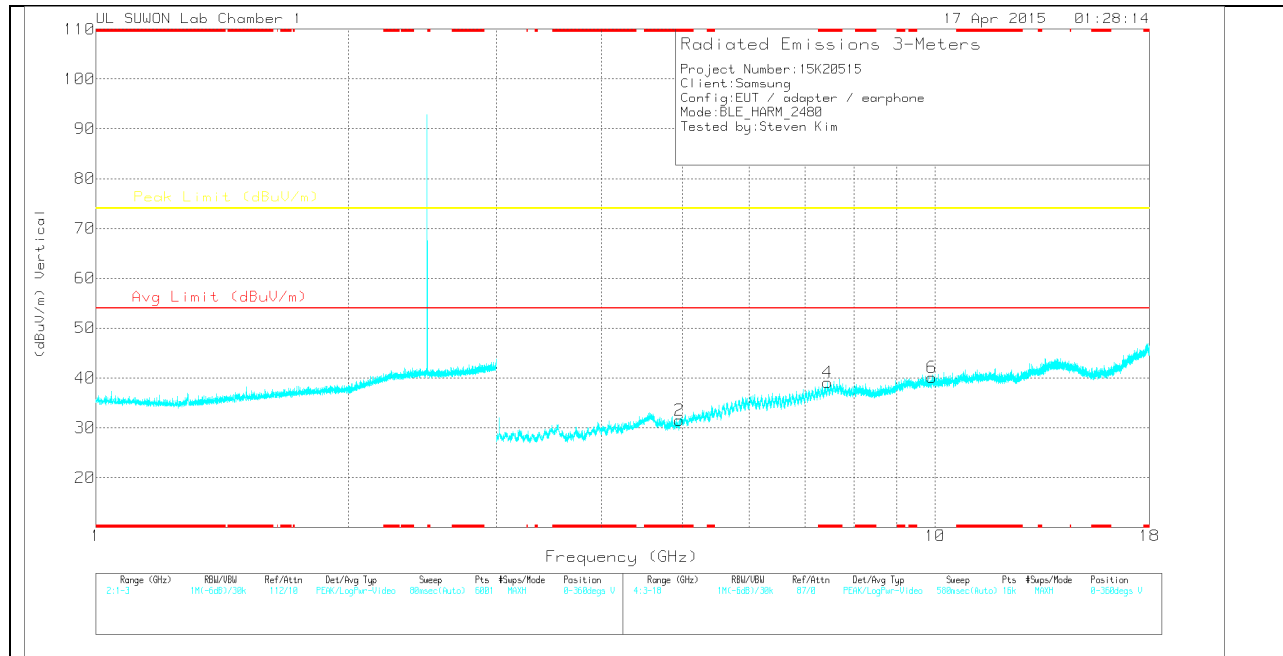

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_3_3GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.959	31.75	PK	32.1	-28.9	0	34.95	-	-	74	-39.05	0-360	100	H
3	* 7.439	27.57	PK	37.3	-24.8	0	40.07	-	-	74	-33.93	0-360	100	H
5	9.911	23.15	PK	37.9	-20.5	0	40.55	-	-	-	-	0-360	200	H
2	* 4.96	28.35	PK	32.1	-28.9	0	31.55	-	-	74	-42.45	0-360	100	V
4	* 7.439	26.6	PK	37.3	-24.8	0	39.1	-	-	74	-34.9	0-360	100	V
6	9.911	22.74	PK	37.9	-20.5	0	40.14	-	-	-	-	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3115D Factor	Path_3_3 GHP	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	39.78	PK2	32.1	-28.9	0	42.98	-	-	74	-31.02	184	136	H
* 4.96	32.28	MAv1	32.1	-28.9	2.06	37.54	54	-16.46	-	-	184	136	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average


11.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

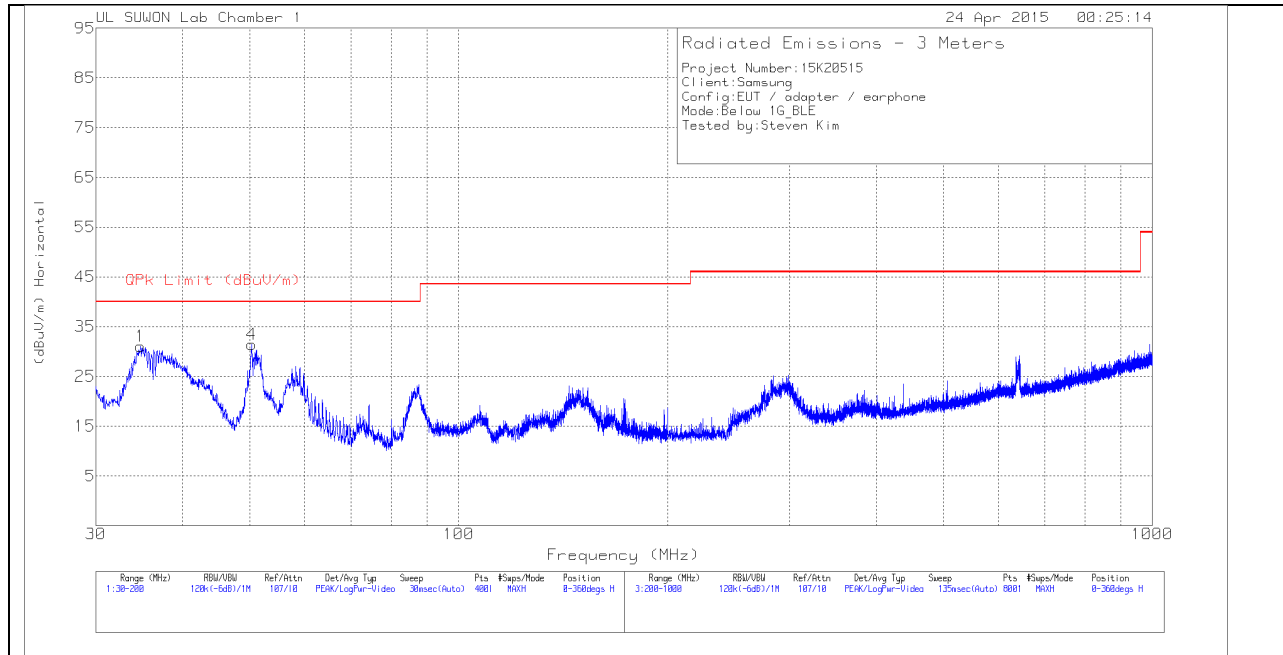

VERTICAL PLOT

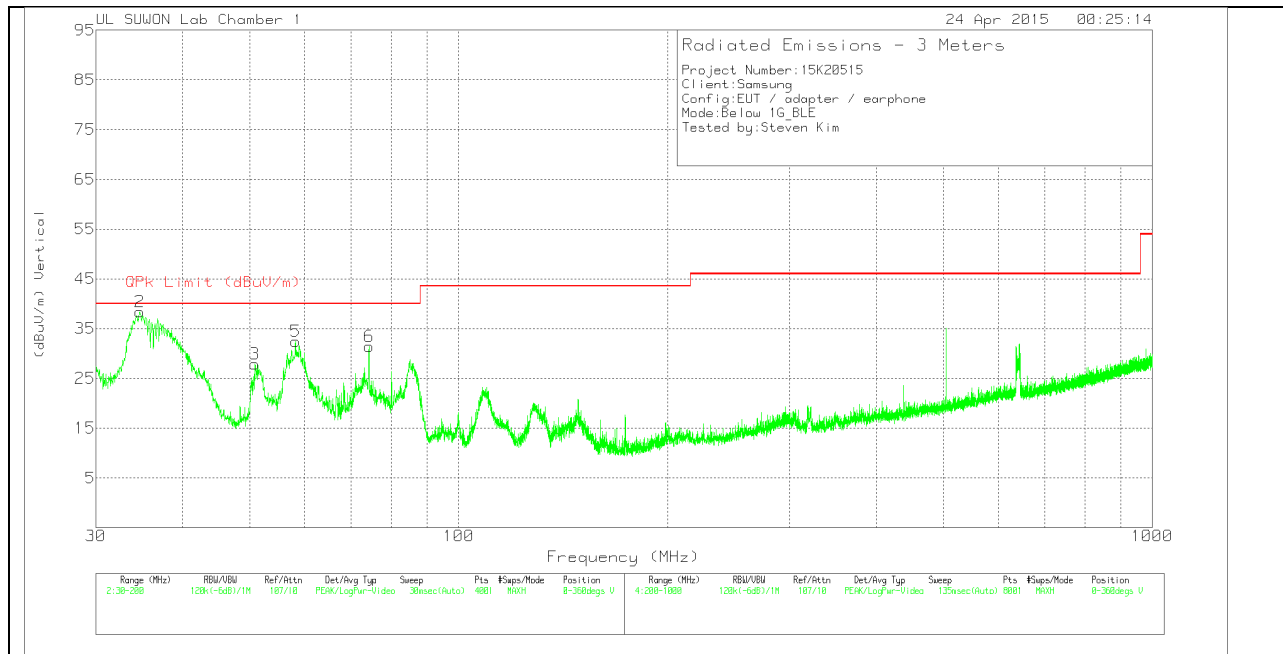

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	34.8025	51	Pk	10.5	-30.4	31.1	40	-8.9	0-360	300	H
4	50.3575	47.76	Pk	13.8	-30.1	31.46	40	-8.54	0-360	400	H
2	34.7175	58.24	Pk	10.5	-30.4	38.34	40	-1.66	0-360	101	V
3	50.8675	44.14	Pk	13.8	-30.1	27.84	40	-12.16	0-360	400	V
5	58.1775	49.57	Pk	12.9	-30	32.47	40	-7.53	0-360	101	V
6	74.2425	52.69	Pk	8.5	-29.7	31.49	40	-8.51	0-360	101	V

Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
34.8328	53.32	Qp	10.5	-30.4	33.42	40	-6.58	23	118	V

Qp - Quasi-Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

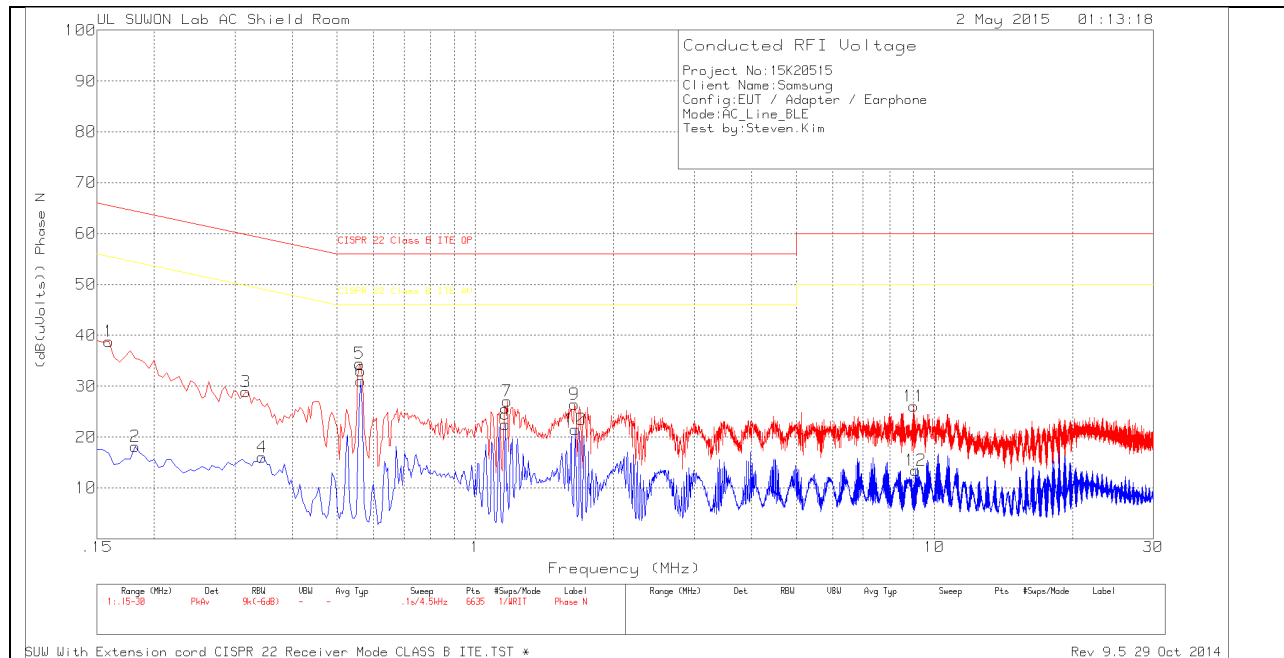

LINE 1 RESULTS


Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN HPF ON and Extension cord	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.159	28.81	Pk	10	0	38.81	65.52	-26.71	-	-
2	.1815	8.08	Av	10.1	0	18.18	-	-	54.42	-36.24
3	.3165	19.05	Pk	9.9	0	28.95	59.8	-30.85	-	-
4	.3435	6.08	Av	10	0	16.08	-	-	49.12	-33.04
5	.5595	24.32	Pk	10.1	0	34.42	56	-21.58	-	-
6	.564	20.96	Av	10.1	0	31.06	-	-	46	-14.94
7	1.176	17.3	Pk	9.8	0	27.1	56	-28.9	-	-
8	1.1625	12.74	Av	9.8	0	22.54	-	-	46	-23.46
9	1.644	16.58	Pk	9.8	.1	26.48	56	-29.52	-	-
10	1.653	11.61	Av	9.8	.1	21.51	-	-	46	-24.49
11	9.033	15.94	Pk	10	.1	26.04	60	-33.96	-	-
12	9.114	3.2	Av	10	.2	13.4	-	-	50	-36.6

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

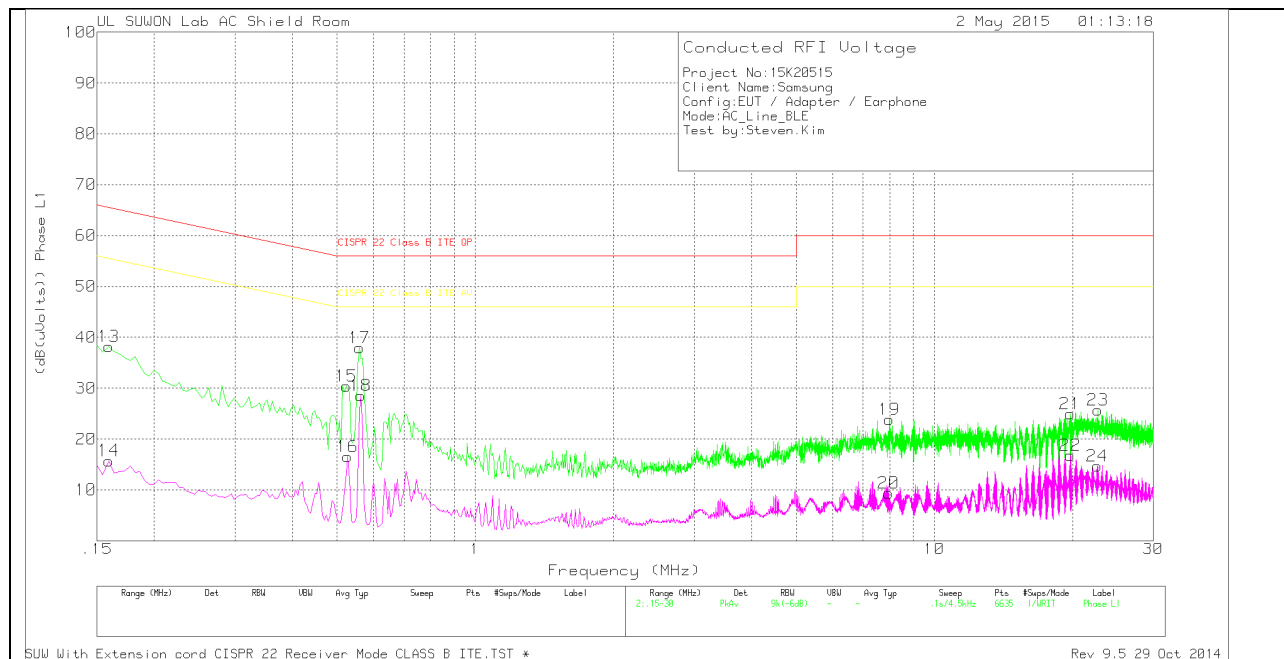

LINE 2 RESULTS

Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith extension cord_L1	CE Shield Room	Corrected Reading (dBuV)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.159	28.18	Pk	10	0	38.18	65.52	-27.34	-	-
14	.159	5.74	Av	10	0	15.74	-	-	55.52	-39.78
15	.5235	20.32	Pk	10.1	0	30.42	56	-25.58	-	-
16	.528	6.45	Av	10.1	0	16.55	-	-	46	-29.45
17	.5595	27.82	Pk	10.1	0	37.92	56	-18.08	-	-
18	.564	18.44	Av	10.1	0	28.54	-	-	46	-17.46
19	7.971	13.87	Pk	9.9	.1	23.87	60	-36.13	-	-
20	7.9575	-61	Av	9.9	.1	9.39	-	-	50	-40.61
21	19.7745	14.38	Pk	10.4	.2	24.98	60	-35.02	-	-
22	19.7835	6.16	Av	10.4	.2	16.76	-	-	50	-33.24
23	22.7175	14.98	Pk	10.5	.2	25.68	60	-34.32	-	-
24	22.6365	4.02	Av	10.5	.2	14.72	-	-	50	-35.28

Pk - Peak detector

Av - Average detection