

FCC BT REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
July 15, 2020

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2007-FC015

FCC ID: A3LSMT878U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-T878U

EUT Type: Tablet

Max. RF Output Power: Ant.1: 16.033 dBm (40.11 mW)
Ant.2: 16.305 dBm (42.71 mW)

Frequency Range: 2402 MHz - 2480 MHz (Bluetooth)

Modulation type GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)

FCC Classification: FCC Part 15 Spread Spectrum Transmitter

FCC Rule Part(s): Part 15 subpart C 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2007-FC015

REVIEWED BY



Report prepared by : Jeong Ho Kim
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2007-FC015	July 15, 2020	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS for Blue tooth.....	6
2. Requirements for Bluetooth transmitter(15.247).....	7
3. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
5. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
6. ANTENNA REQUIREMENTS	9
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS.....	11
9. SUMMARY OF TEST RESULTS	29
10. TEST RESULT	30
10.1 PEAK POWER	30
10.2 BAND EDGES.....	42
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW).....	56
10.4 NUMBER OF HOPPING FREQUENCY	72
10.5 TIME OF OCCUPANCY (DWELL TIME)	79
10.6 SPURIOUS EMISSIONS.....	91
10.6.1 CONDUCTED SPURIOUS EMISSIONS	91
10.6.2 RADIATED SPURIOUS EMISSIONS.....	106
10.6.3 RADIATED RESTRICTED BAND EDGES	119
10.7 POWERLINE CONDUCTED EMISSIONS	127
11. LIST OF TEST EQUIPMENT	131
12. ANNEX A_ TEST SETUP PHOTO.....	133

1. EUT DESCRIPTION

Model	SM-T878U
Additional Model	-
EUT Type	Tablet
Power Supply	DC 3.85 V
Battery Information	Model: EB-BT875ABY Type: Li-ion Battery
Travel Adapter Information	Model : EP-TA200 Manufacture: RFTech
Data Cable Information	Model : EP-DT725BBE Manufacture: KSDCO
Ear-jack Information	Model : GHSS028-K8 Manufacture: BUJEON
S-PEN Information	Model : EJ-PT870 Manufacture: WACOM
Keyboard Information	Model : EF-DT870 Manufacture: SAMSUNG
Frequency Range	2 402 MHz ~ 2 480 MHz
Max. RF Output Power	Ant.1: 16.033 dBm (40.11 mW) Ant.2: 16.305 dBm (42.71 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79 Channels, Minimum 20 Channels(AFH)
Antenna Specification	Antenna type: Metal Peak Gain: Ant.1: 0.90 dBi / Ant.2: -0.50 dBi
Date(s) of Tests	May 28, 2020 ~ July 01, 2020

ANTENNA CONFIGURATIONS for Blue tooth

1. The device employs 2 BT Antenna. Below are the possible configurations

Configurations	SISO	
	Ant1	Ant2
Bluetooth	O	O

Note:

(1) O = Support, X = Not Support

(2) SISO = Single Input Single Output

2. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna.

Not RSDB	2.4G/5GHz WIFI		2.4GHz Bluetooth		Test case
	Ant1	Ant2	Ant1	Ant2	
Bluetooth + 5 GHz	C	B/C	A		O
	C	C	A		O
	C	C		A	O

2. Requirements for Bluetooth transmitter(15.247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

(1) The antennas of this E.U.T are permanently attached.

(2) The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

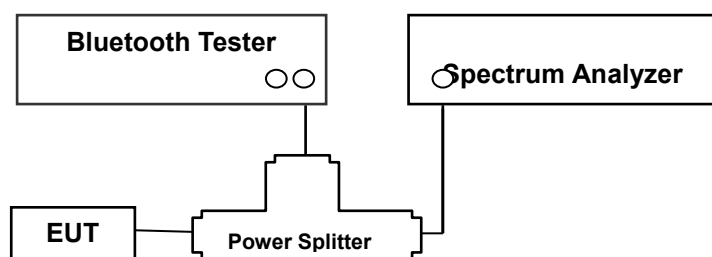

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013 & Procedure 10(b)(6)(i) in KDB 558074 v05r02)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW ≥ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

Sample Calculation


$$\begin{aligned}\text{Output Power} &= \text{Spectrum Reading Power} + \text{Power Splitter loss} + \text{Cable loss}(2 \text{ ea}) \\ &= 10 \text{ dBm} + 6 \text{ dB} + 1.5 \text{ dB} = 17.5 \text{ dBm}\end{aligned}$$

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

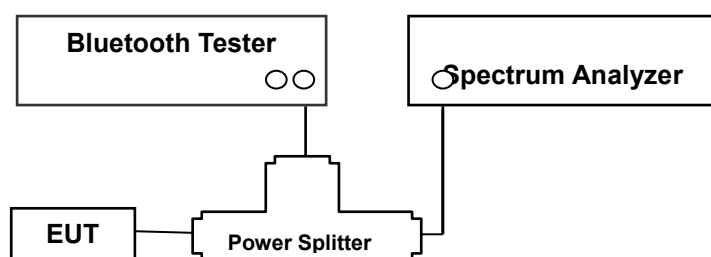

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to §15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

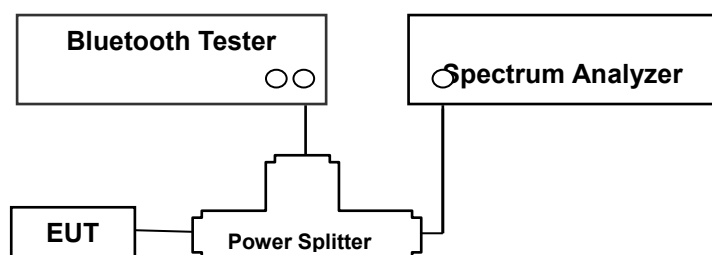

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW $\geq$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1% to 5% of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

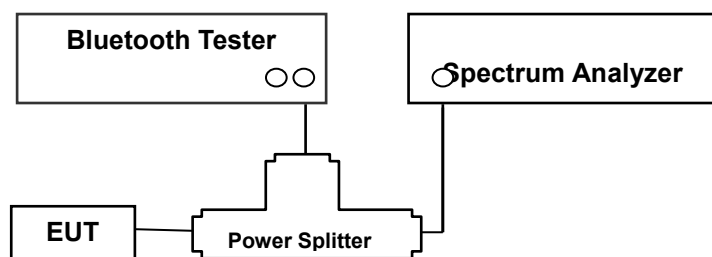

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW $\geq$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

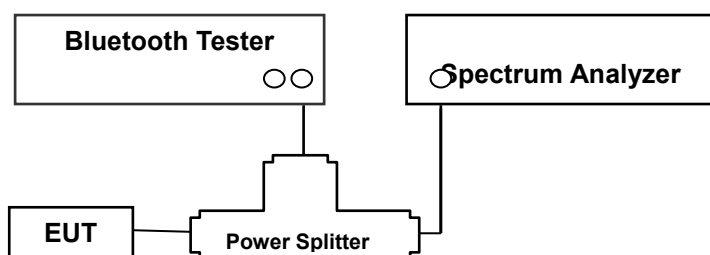

Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013 & Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$
- 3-DH 5 (8DPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27 \text{ (ms)}$

(2) AFH Mode

- DH 5 (GFSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$
- 3-DH 5 (8DPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13 \text{ (ms)}$

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

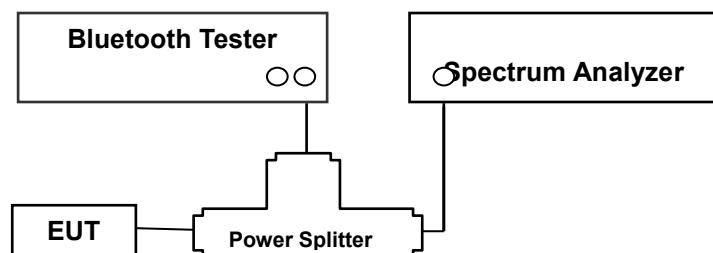

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	Factor(dB)
30	16.30
100	16.38
200	16.47
300	16.58
400	16.64
500	16.66
600	16.66
700	16.70
800	16.73
900	16.79
1000	16.82
2000	17.21
2400	17.37
2480	17.39
2500	17.39
3000	17.60
4000	17.75
5000	18.01
5150	18.03
5850	18.18
6000	18.18
7000	18.34
8000	18.46
9000	18.59
10000	18.72
11000	18.81
12000	18.97
13000	19.14
14000	19.09
15000	19.16
16000	19.22
17000	19.29
18000	19.40
19000	19.45
20000	19.55
21000	19.88
22000	19.92
23000	20.12
24000	19.99
25000	20.11
26000	20.12

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Cable loss(2 EA) + Splitter loss(6 dB) + EUT Cable loss(1 EA)


8.7. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

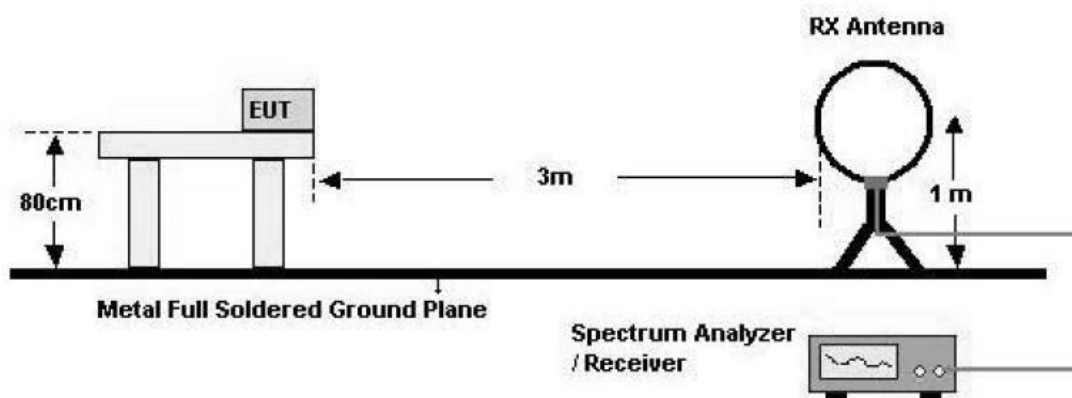

30 MHz - 1 GHz

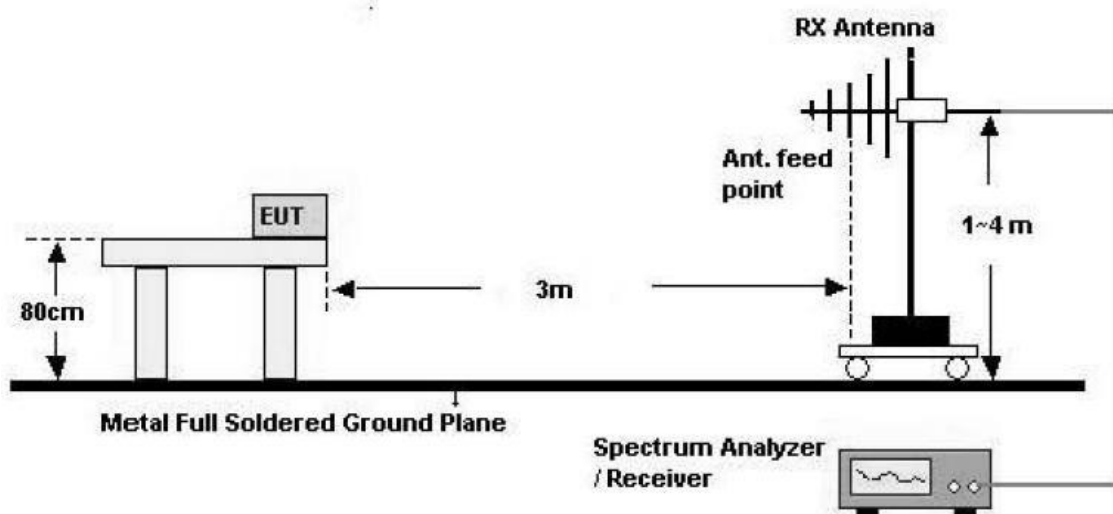

Above 1 GHz

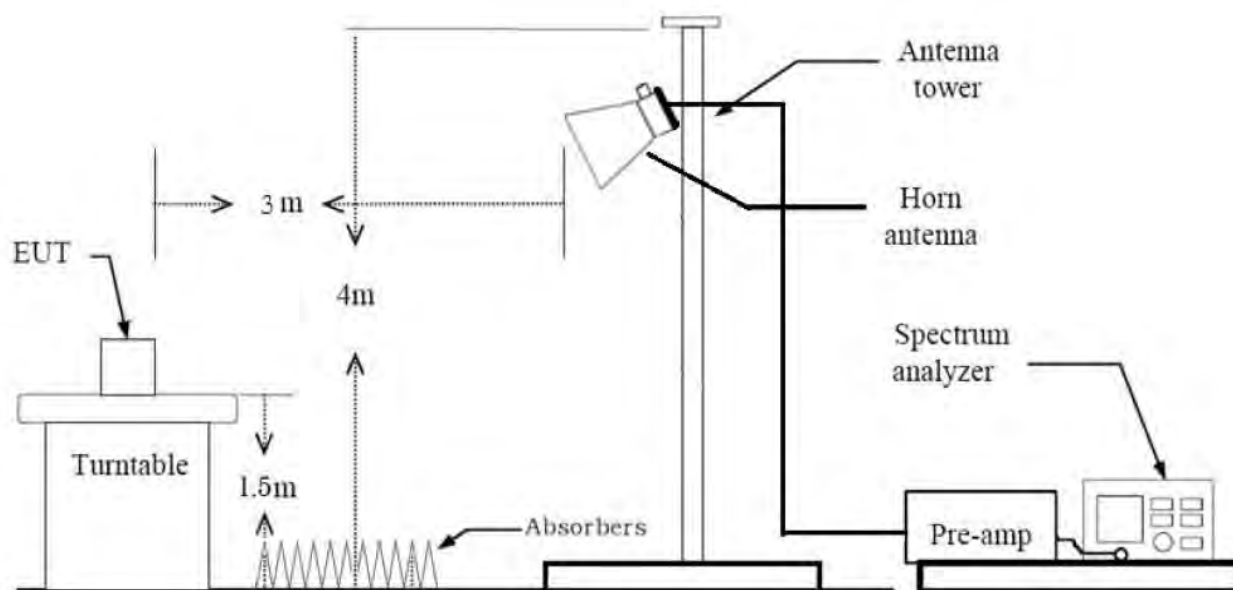

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※ In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions

from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz
9. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
10. Total
= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
11. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories (Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
3. All data rate of operation were investigated and the test results are worst case in highest data rate of each mode.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(Non-DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
3. The following tables show the worst case configurations determined during testing.

Test Case 1

Description	Bluetooth Emission	5 GHz Emission
Antenna	Ant 1	Ant 2
Channel	39	36
Data Rate	339 bytes	6Mbps
Mode	GFSK : DH5	802.11a

Test Case 2

Description	Bluetooth Emission	5 GHz Emission
Antenna	Ant 1	Ant 1 + Ant 2
Channel	0	165
Data Rate	339 bytes	6Mbps
Mode	GFSK : DH5	802.11a

Test Case 3

Description	Bluetooth Emission	5 GHz Emission
Antenna	Ant 2	Ant 1 + Ant 2
Channel	78	48
Data Rate	339 bytes	6Mbps
Mode	GFSK : DH5	802.11a

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter

 - Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with data rate of highest power.

- GFSK : DH5

- $\pi/4$ DQPSK : 2-DH5

- 8DPSK : 3-DH5

2. AFH & Non-AFH were tested and the worst case results are reported.

- (Worst case : Non-AFH)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.247(a)(1)	N/A	Conducted	PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§15.247(b)(1)	< 0.125 W		PASS
Carrier Frequency Separation	§15.247(a)(1)	> 25 kHz or >2/3 of the 20dB BW		PASS
Number of Hopping Frequencies	§15.247(a)(1)(iii)	≥ 15		PASS
Time of Occupancy	§15.247(a)(1)(iii)	< 400 ms		PASS
Conducted Spurious Emissions	§15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§15.207(a)	cf. Section 8.8		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.7		PASS

10. TEST RESULT

10.1 PEAK POWER

[Ant.1]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	14.125	25.85	125
Mid	2441	14.504	28.21	
High	2480	14.015	25.21	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.646	36.69	125
Mid	2441	16.033	40.11	
High	2480	15.604	36.34	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.307	33.94	125
Mid	2441	15.604	36.34	
High	2480	15.180	32.96	

[Ant.2]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	13.334	21.55	125
Mid	2441	14.736	29.76	
High	2480	14.432	27.75	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	14.870	30.69	125
Mid	2441	16.305	42.71	
High	2480	16.057	40.34	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	14.548	28.50	125
Mid	2441	15.870	38.64	
High	2480	15.578	36.12	

Note:

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the splitter and cable combination.

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.


Actual value of loss for the splitter and cable combination is 17.37 dB at 2400 MHz
and is 17.39 dB at 2500 MHz.

So, 17.39 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

[Ant.1]


Test Plots (GFSK)

Peak Power (CH.0)

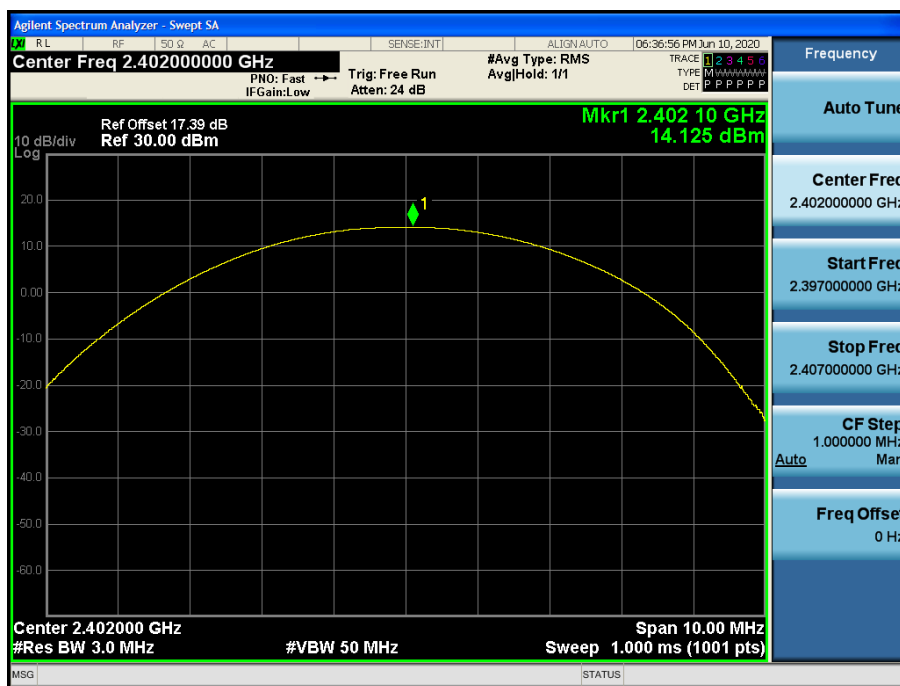


Test Plots (GFSK)


Peak Power (CH.39)

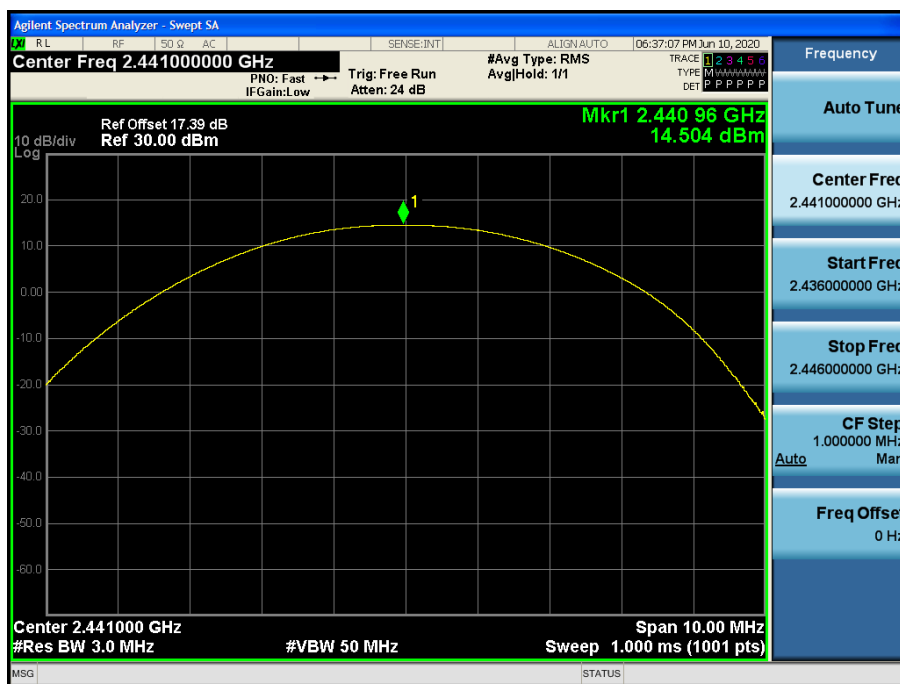

Test Plots (GFSK)
Peak Power (CH.78)

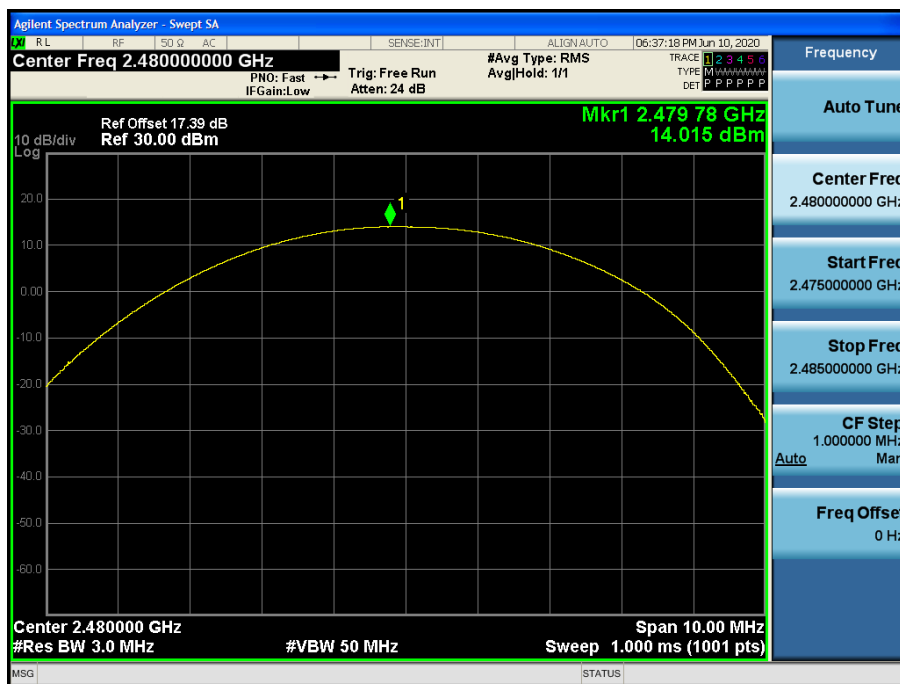


Test Plots (8DPSK)
Peak Power (CH.0)

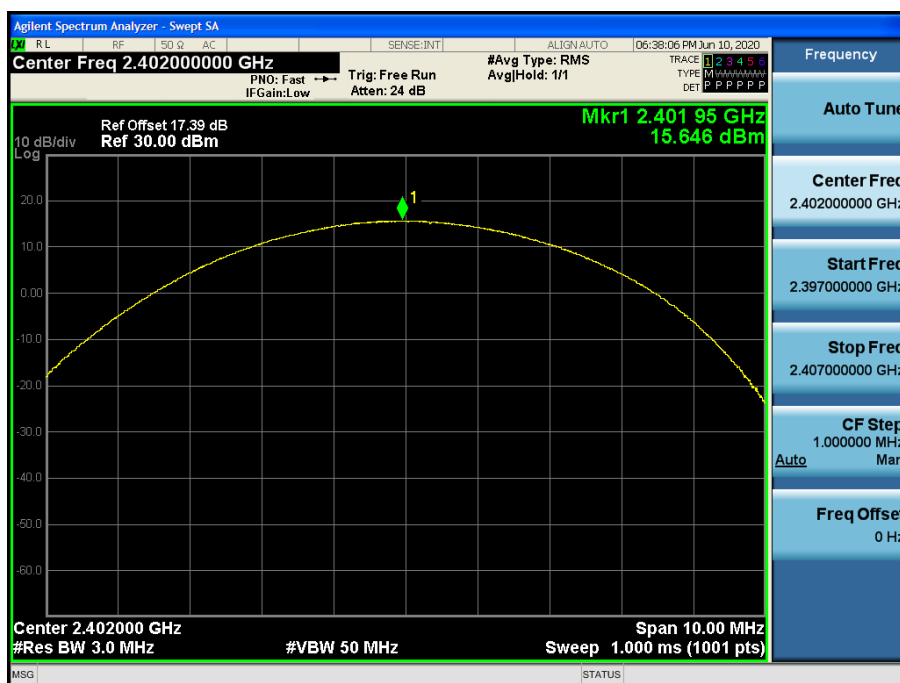


Test Plots (8DPSK)

Peak Power (CH.39)

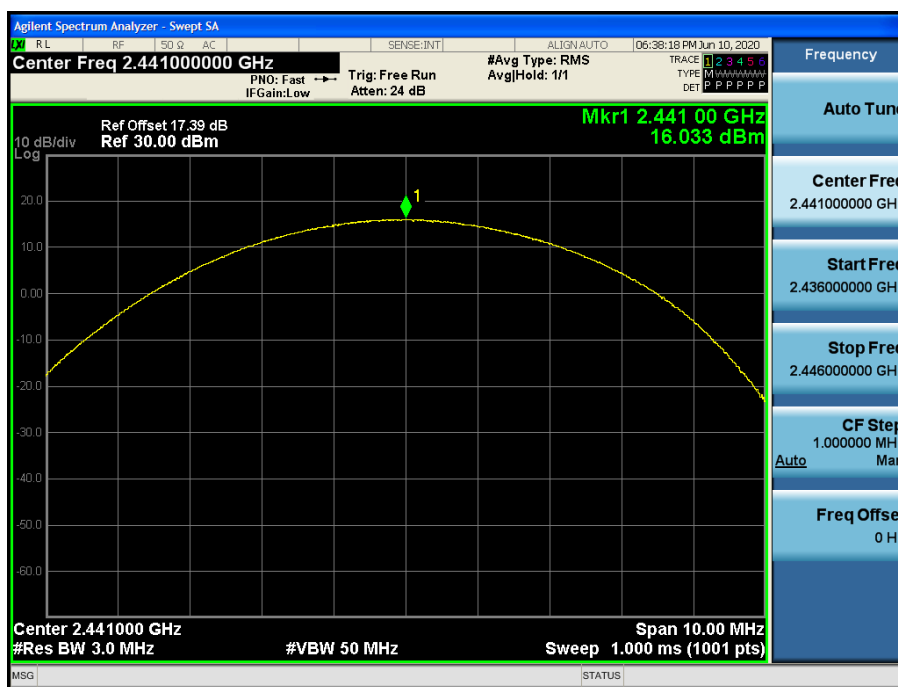


Test Plots (8DPSK)

Peak Power (CH.78)

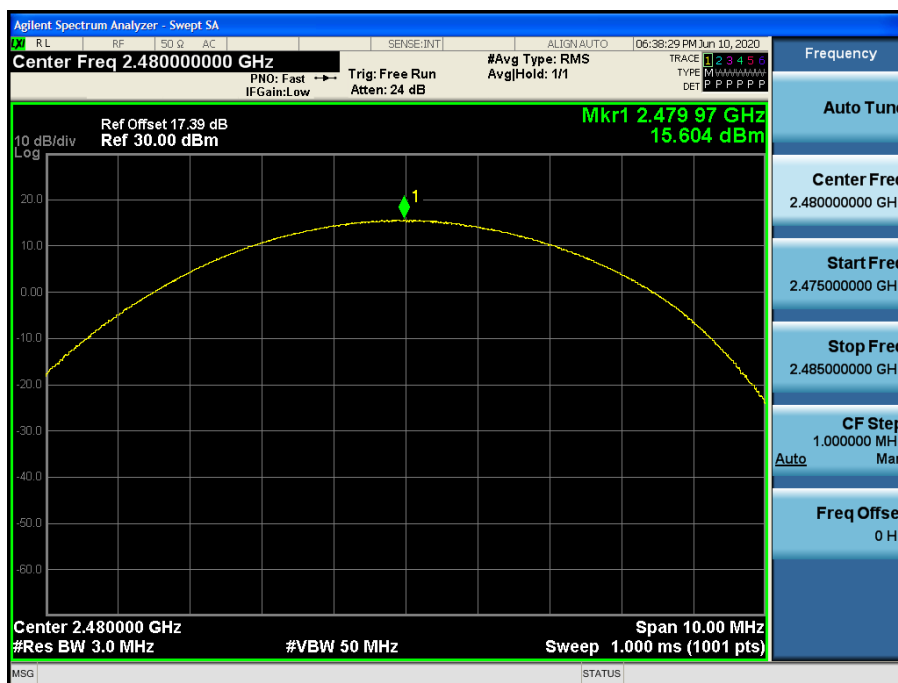


Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.0)

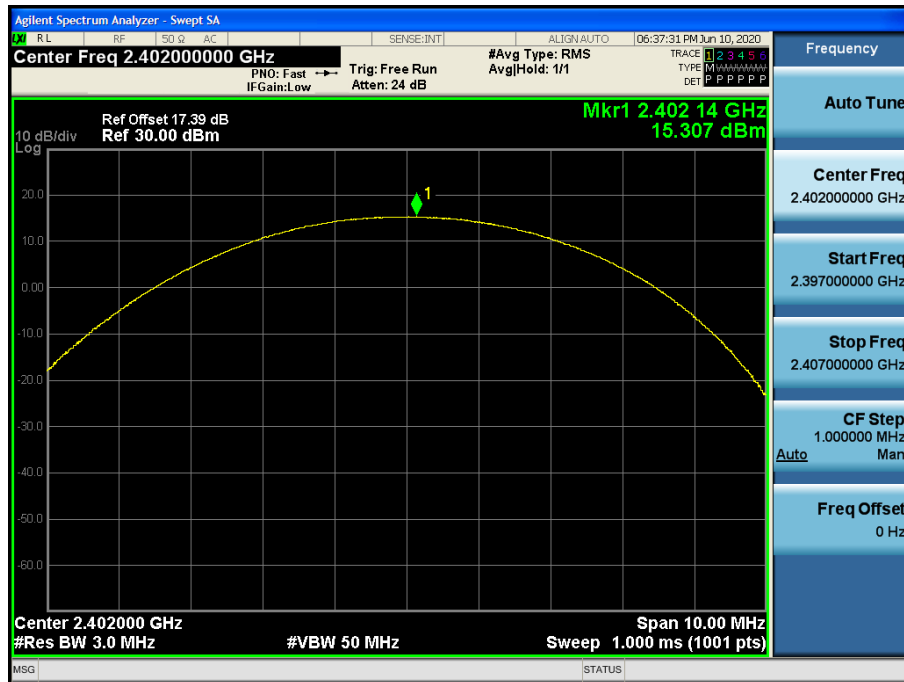


Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.39)

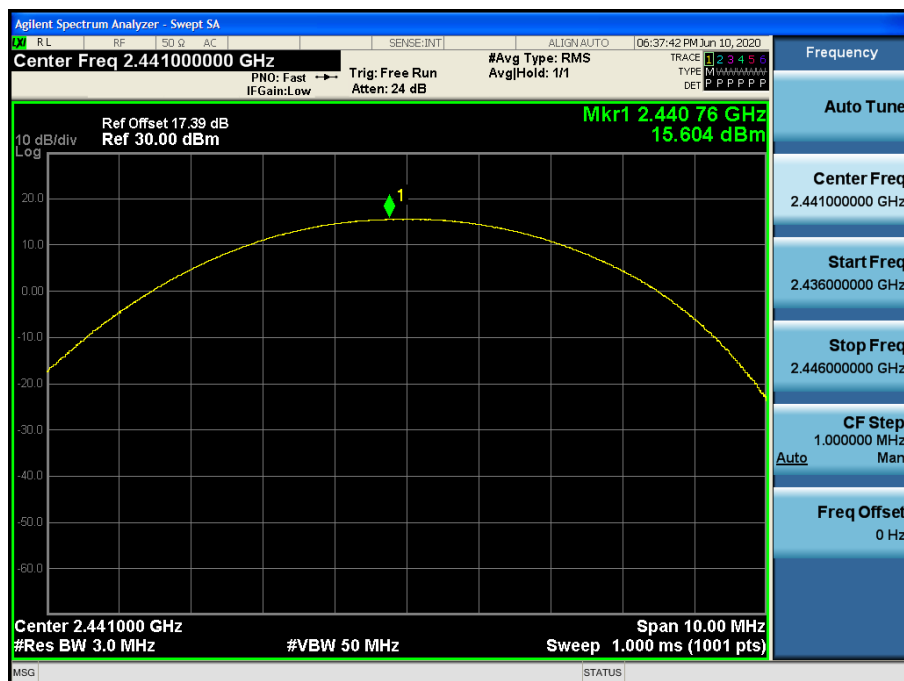

Test Plots ($\pi/4$ DQPSK)


Peak Power (CH.78)

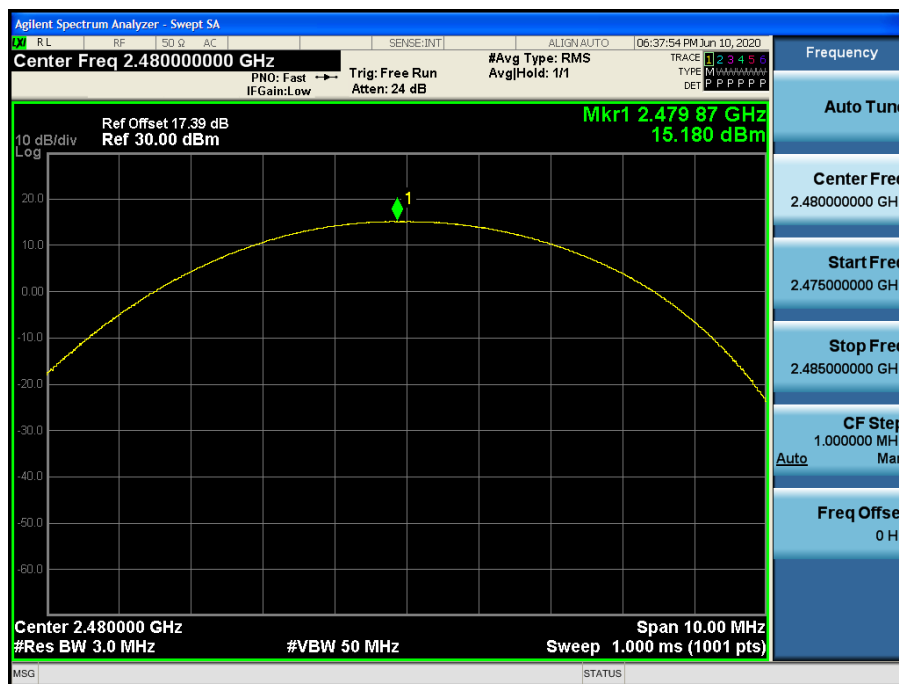

[Ant.2]


Test Plots (GFSK)

Peak Power (CH.0)

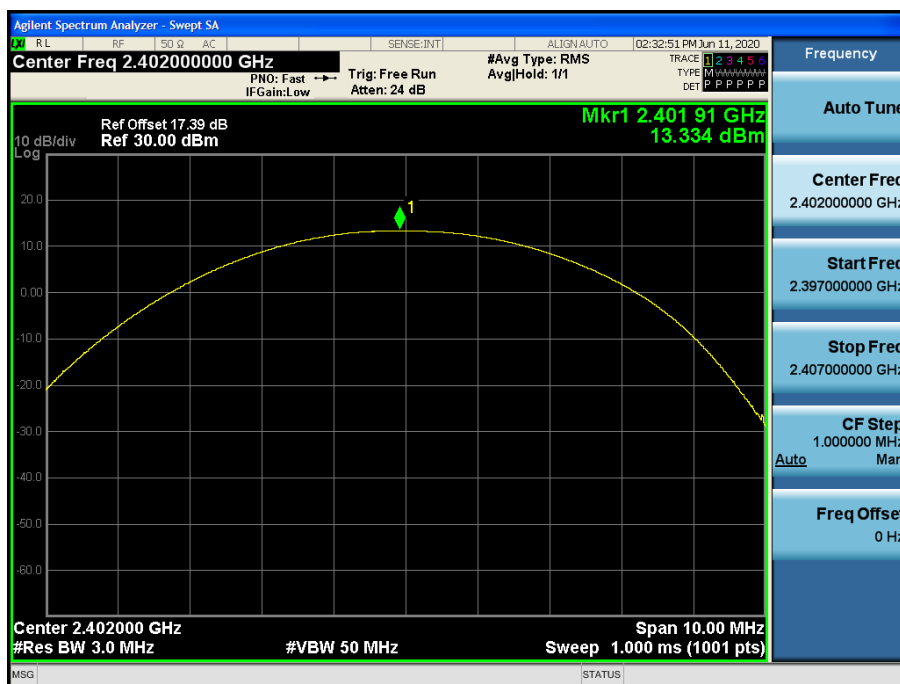


Test Plots (GFSK)


Peak Power (CH.39)

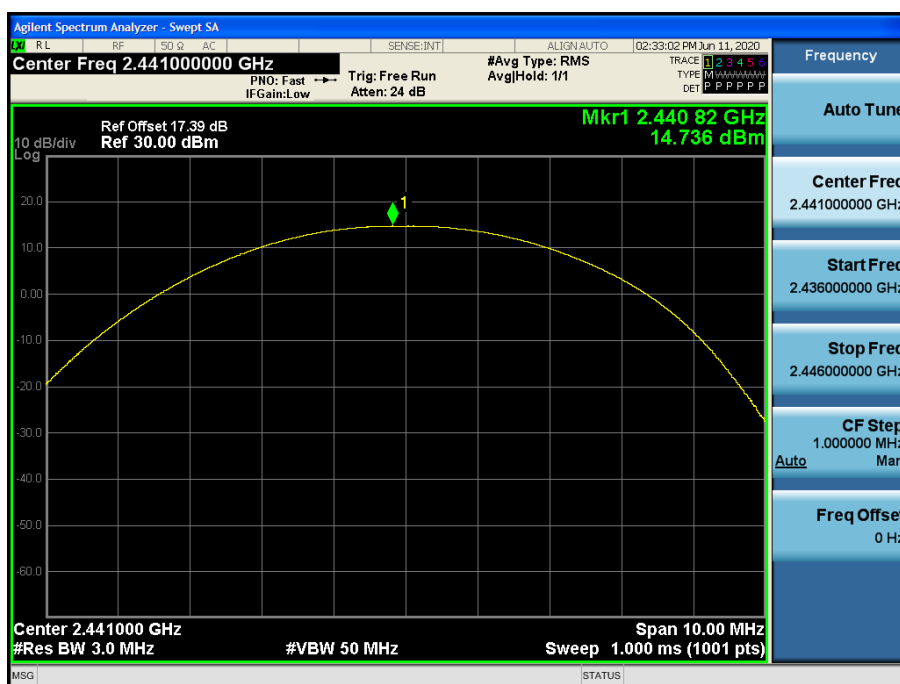

Test Plots (GFSK)
Peak Power (CH.78)

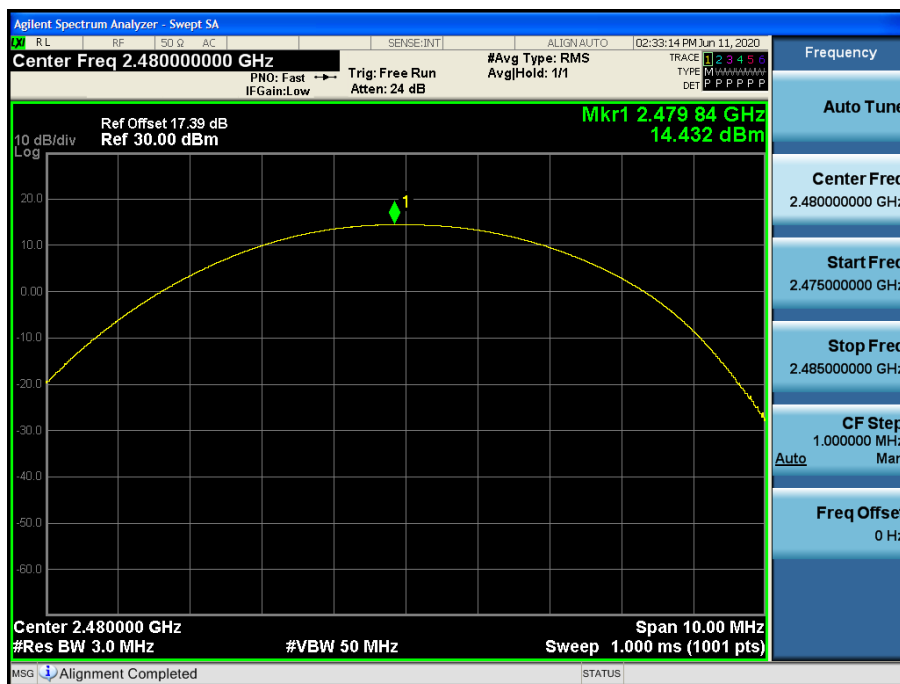


Test Plots (8DPSK)
Peak Power (CH.0)

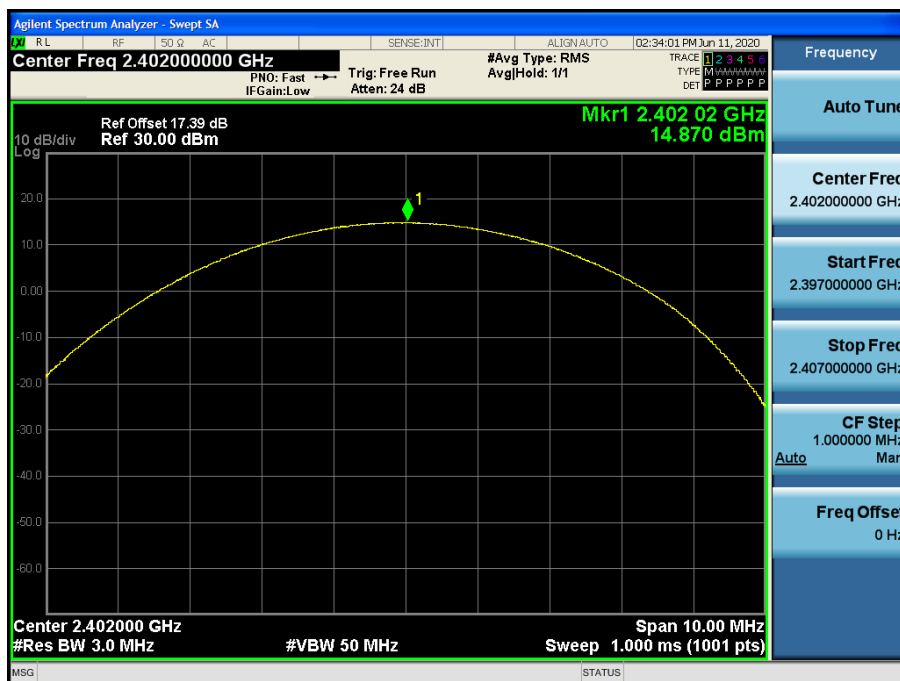


Test Plots (8DPSK)

Peak Power (CH.39)

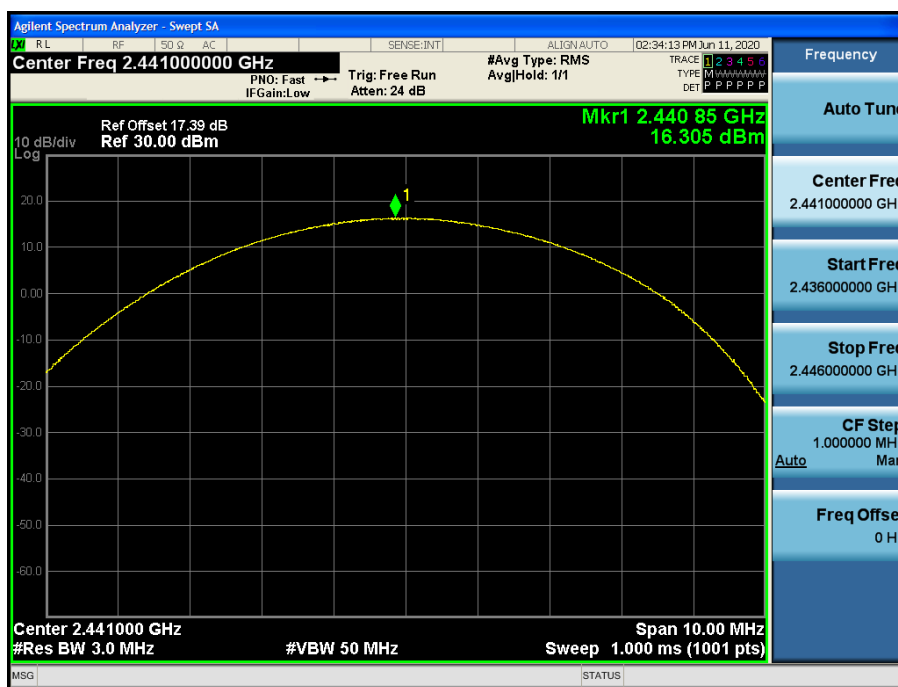


Test Plots (8DPSK)

Peak Power (CH.78)

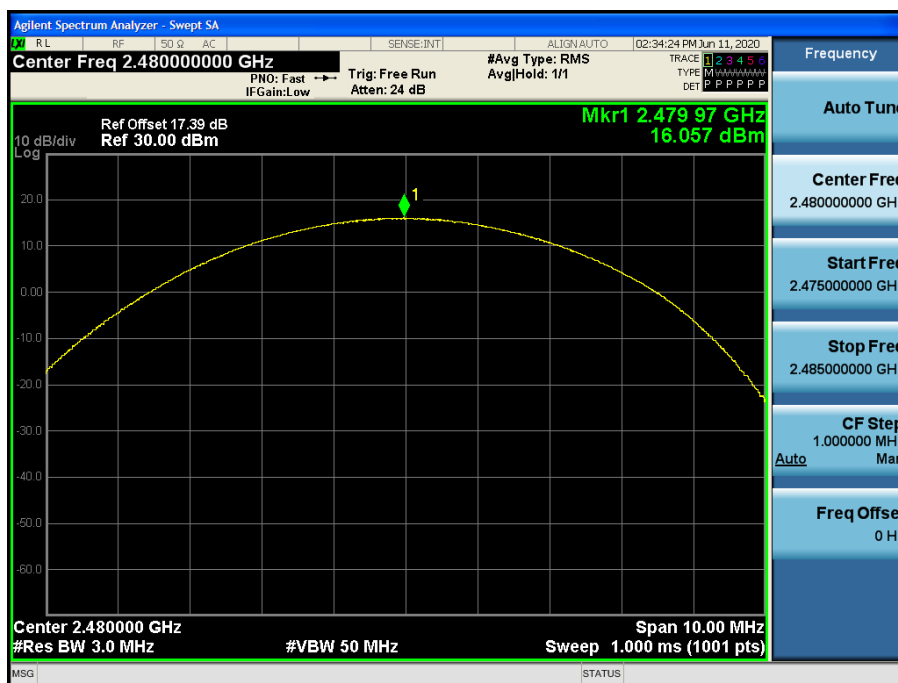


Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.0)

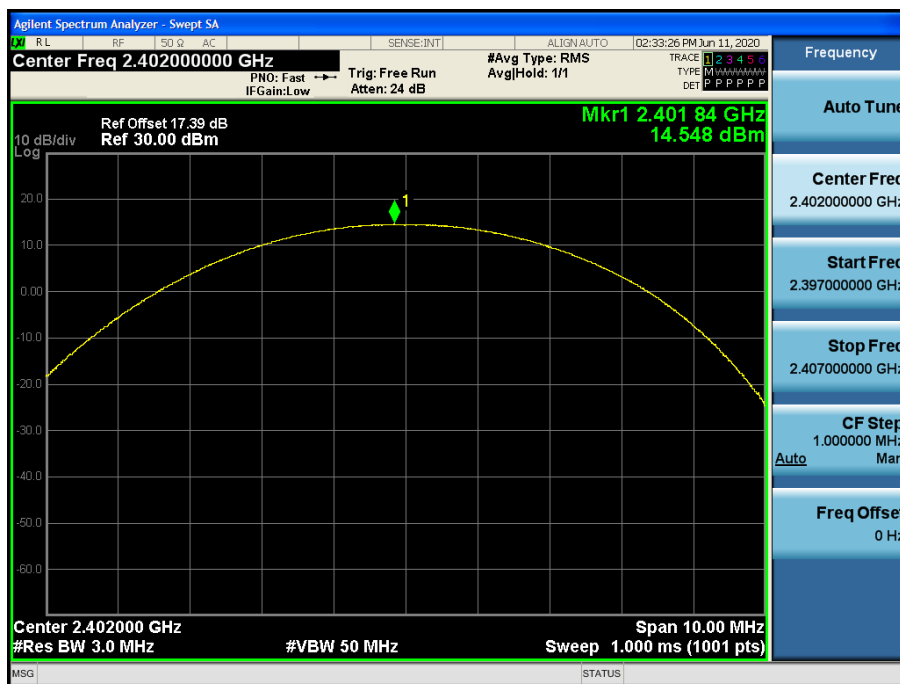


Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.39)

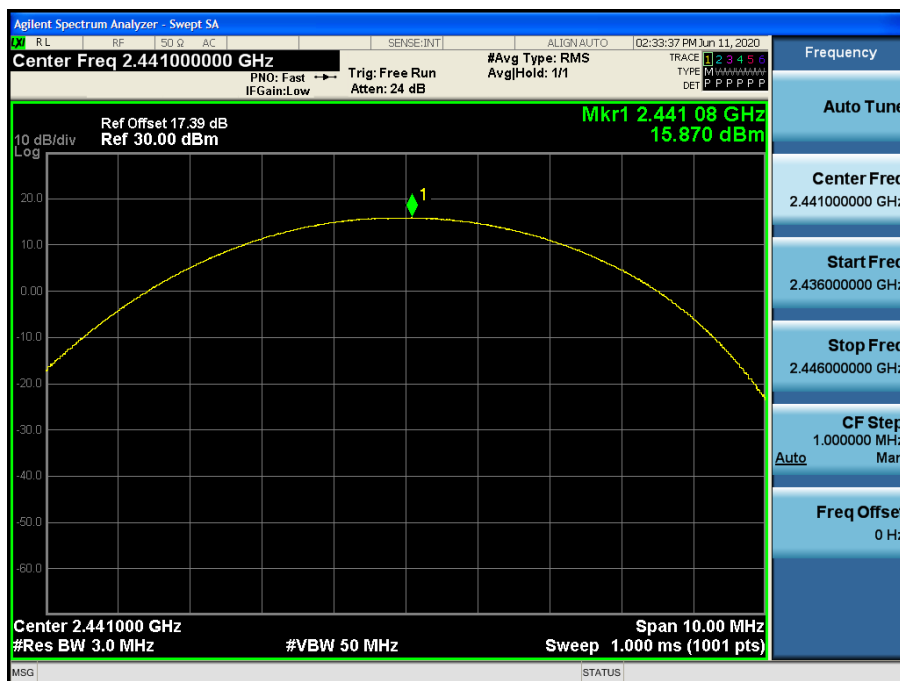

Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.78)

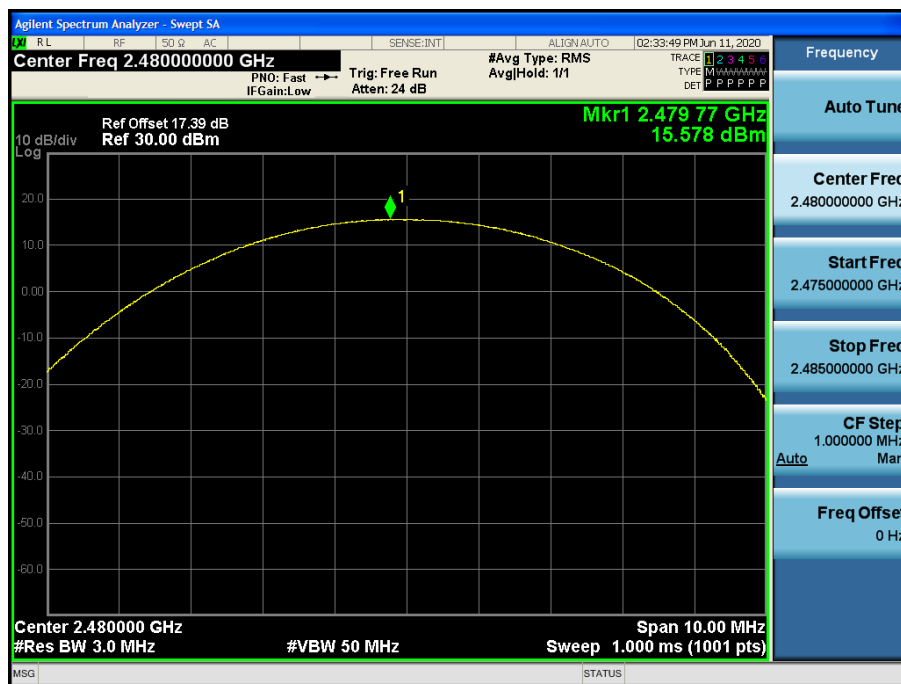

10.2 BAND EDGES

[Ant.1]

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	61.094	60.637	60.268	20
Upper	63.257	62.274	63.308	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	62.109	62.073	58.745	20
Upper	63.125	63.195	62.263	

[Ant.2]

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	59.668	59.877	59.148	20
Upper	62.611	62.868	61.989	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	60.536	59.594	60.920	20
Upper	62.515	62.307	60.957	

Note :

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the splitter and cable combination.

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

Actual value of loss for the splitter and cable combination is 17.37 dB at 2400 MHz


and is 17.39 dB at 2500 MHz.

So, 17.39 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

[Ant.1]


Test Plots without hopping (GFSK)

Band Edges (CH.0)

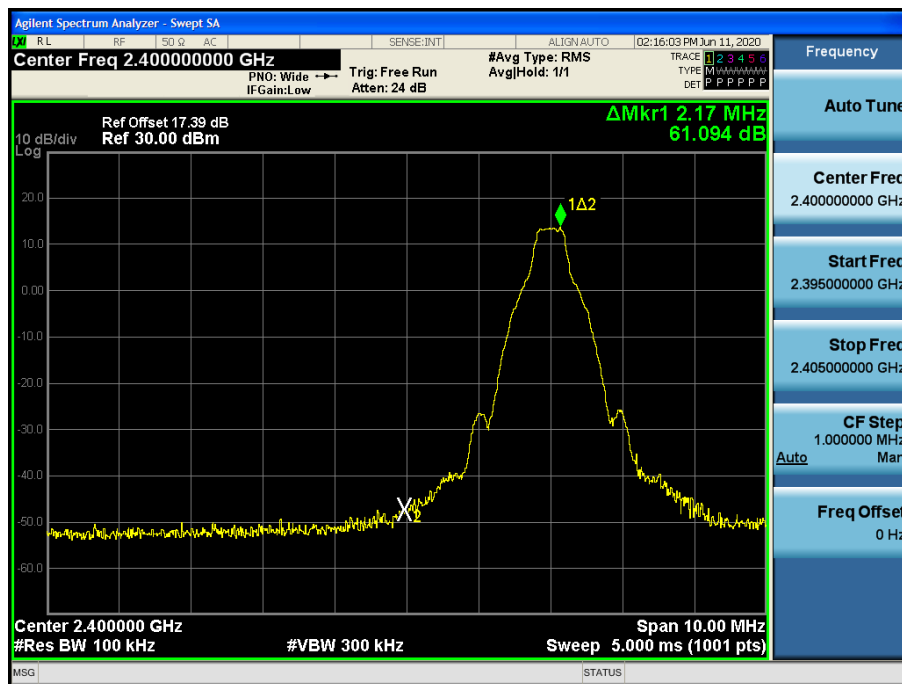


Test Plots without hopping (GFSK)

Band Edges (CH.78)

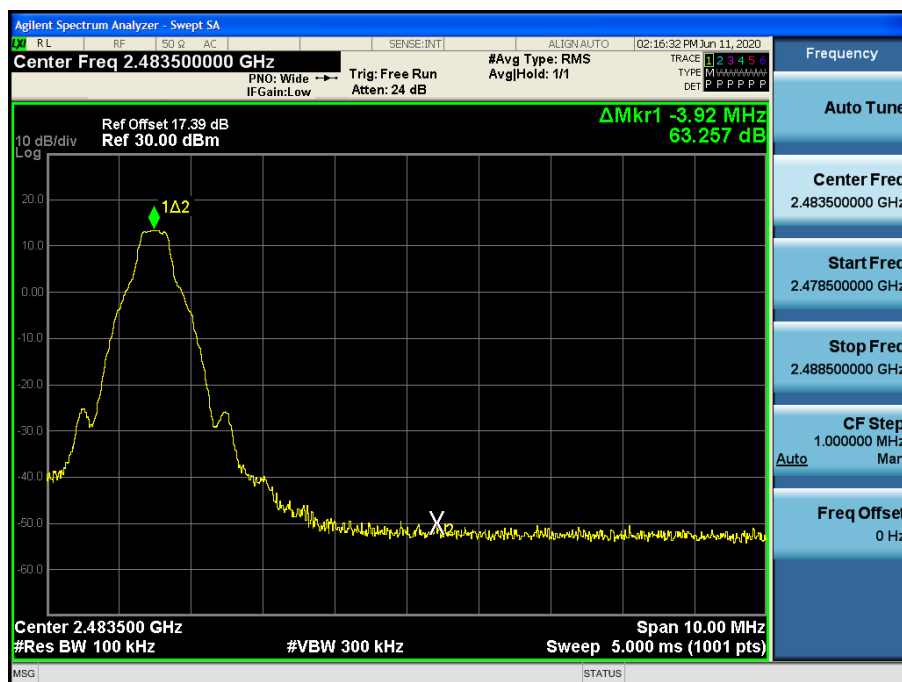


Test Plots without hopping (8DPSK)

Band Edges (CH.0)

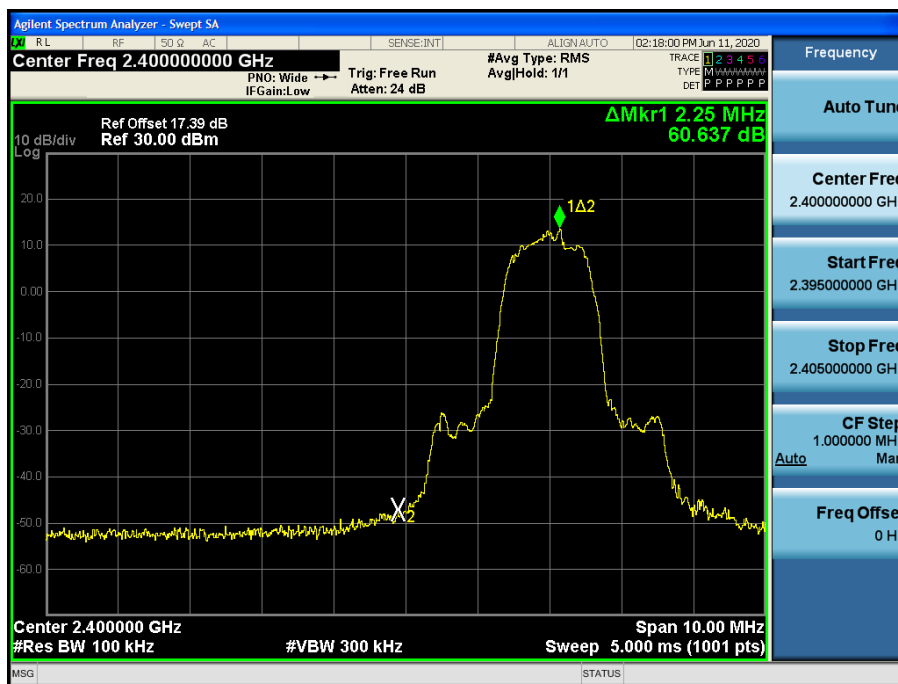


Test Plots without hopping (8DPSK)

Band Edges (CH.78)

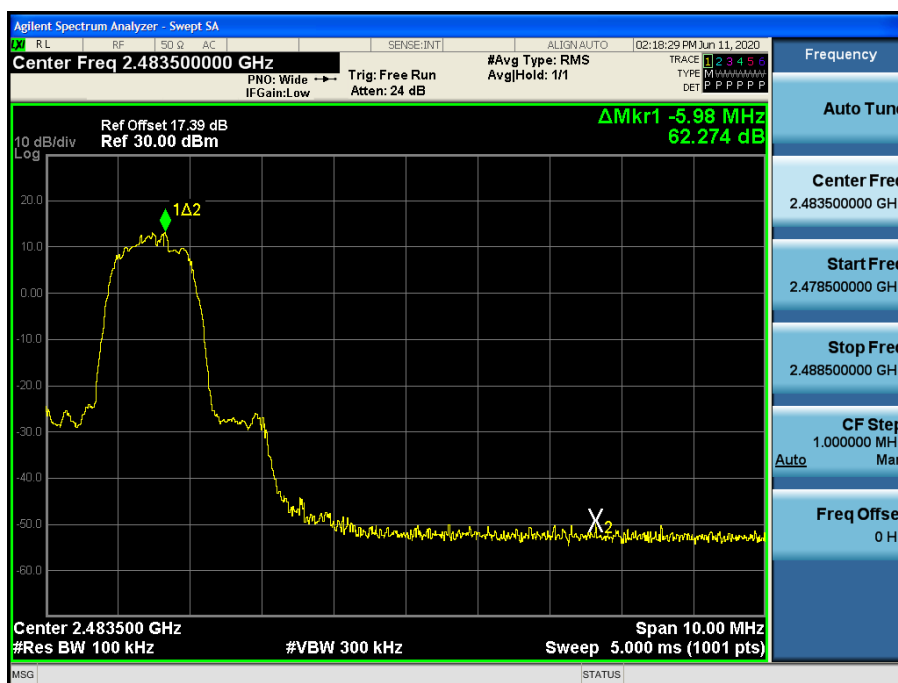


Test Plots without hopping ($\pi/4$ DQPSK)


Band Edges (CH.0)

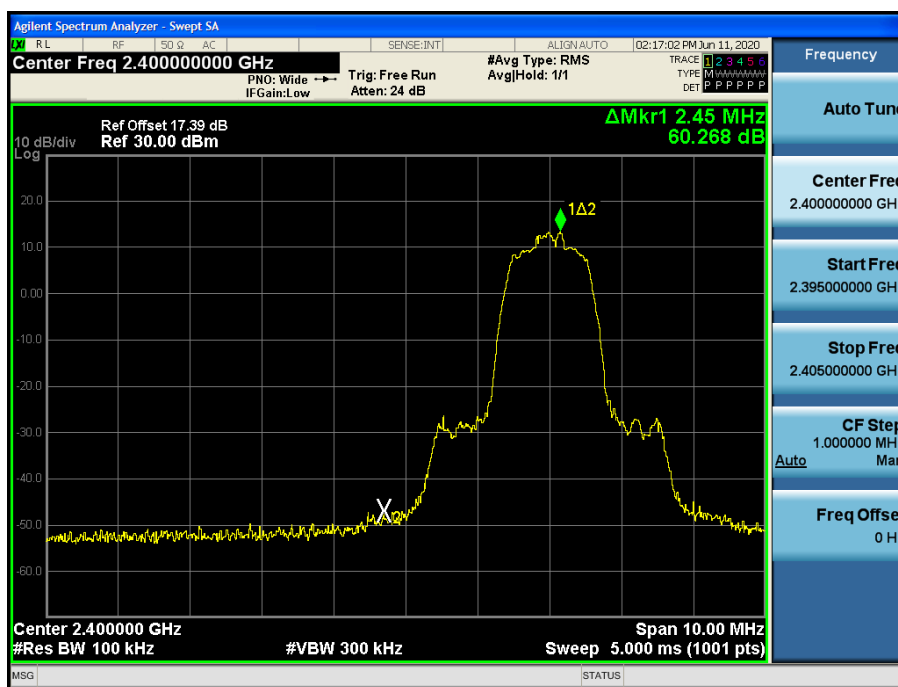
Test Plots without hopping ($\pi/4$ DQPSK)


Band Edges (CH.78)

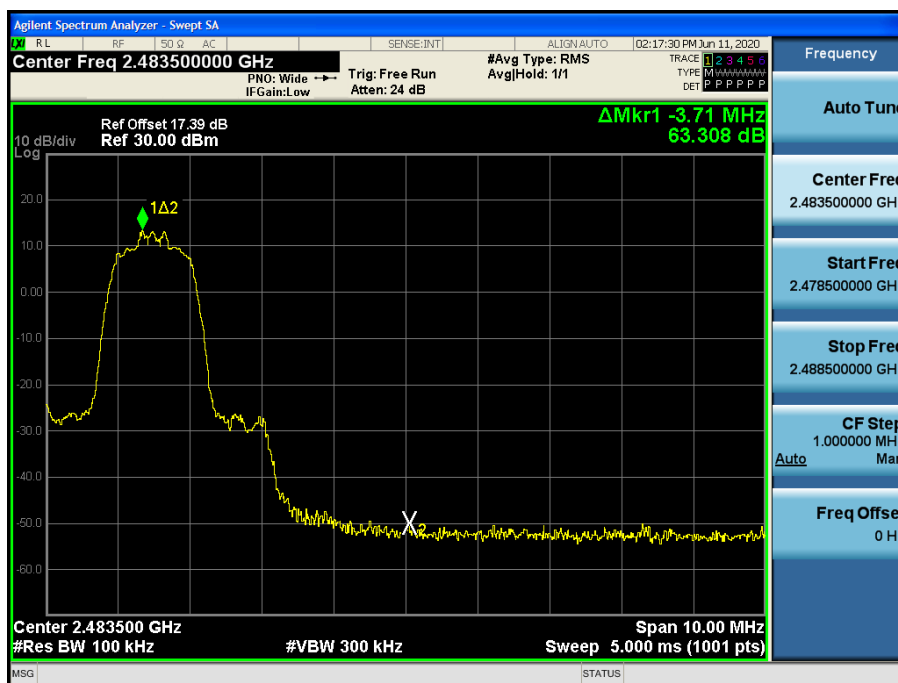

Test Plots with hopping (GFSK)
Band Edges (CH.0)

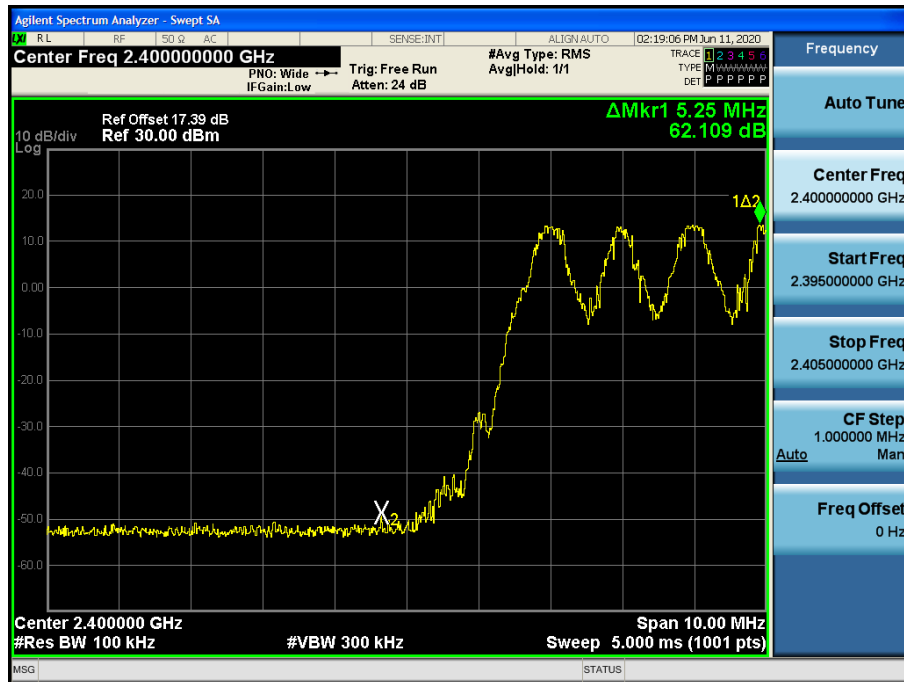


Test Plots with hopping (GFSK)
Band Edges (CH.78)

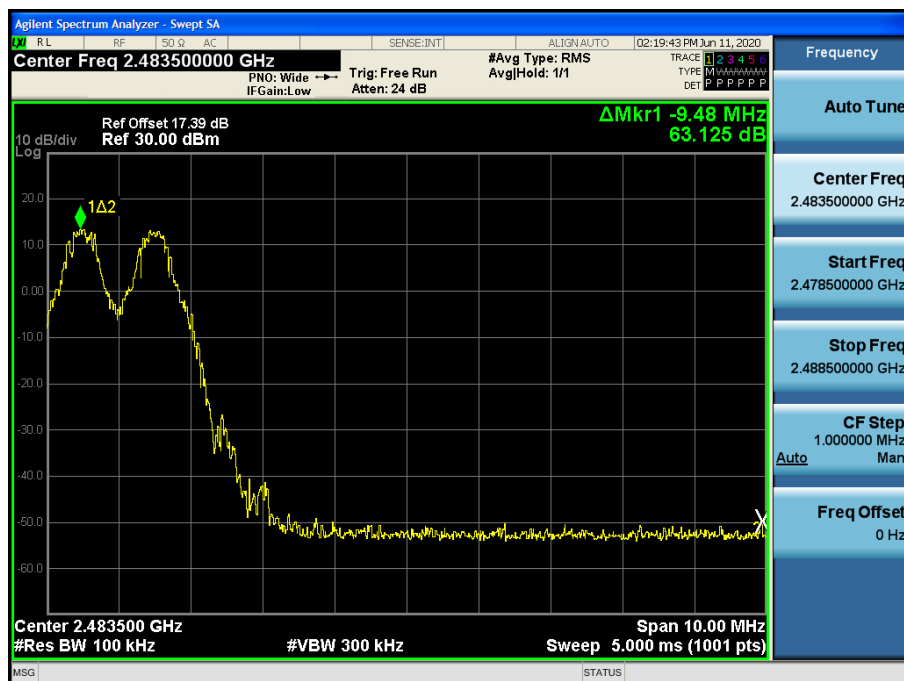


Test Plots with hopping (8DPSK)

Band Edges (CH.0)

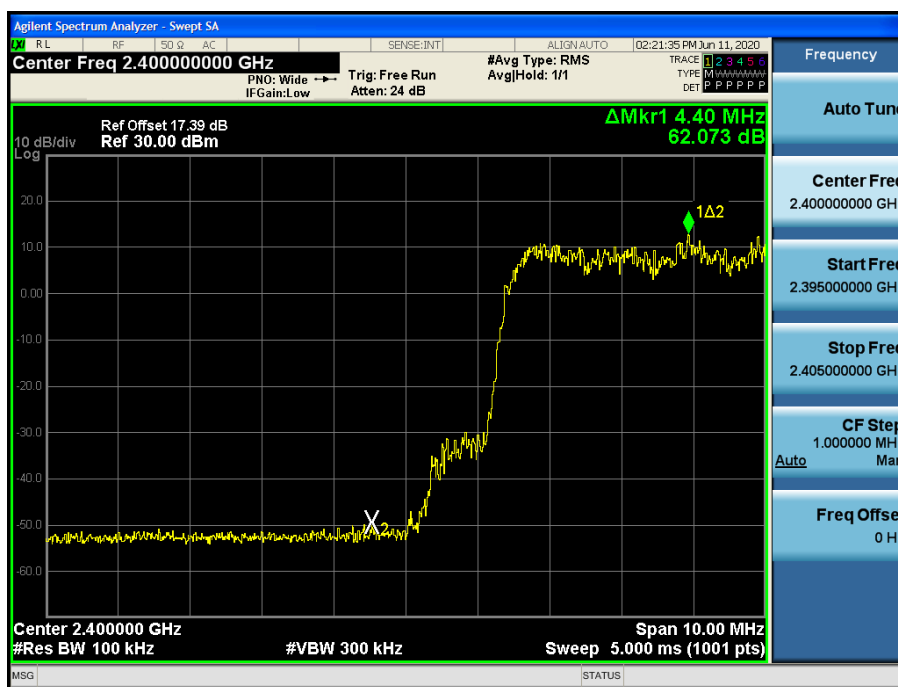


Test Plots with hopping (8DPSK)

Band Edges (CH.78)

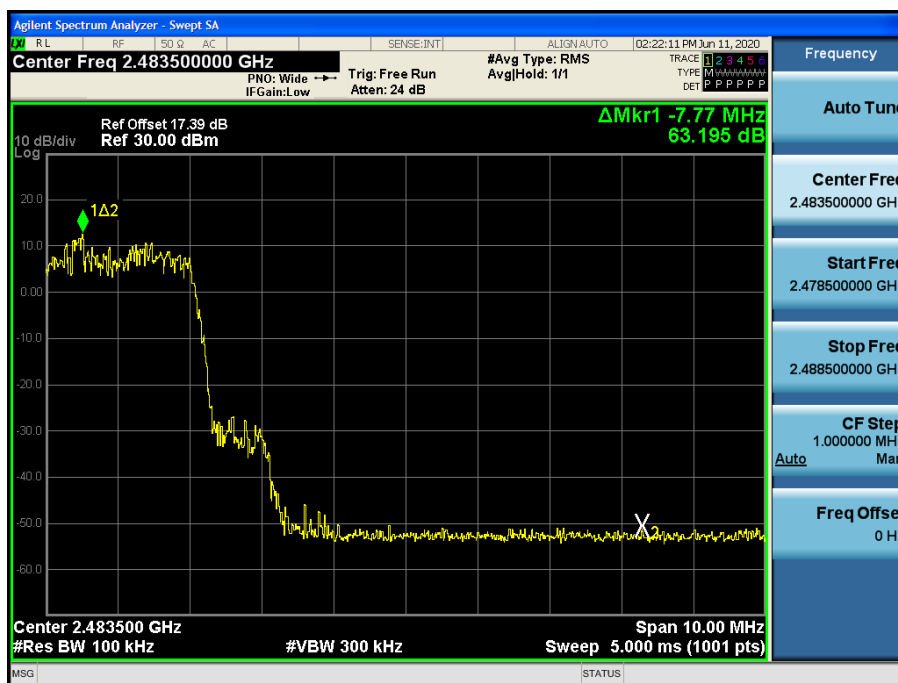

Test Plots with hopping ($\pi/4$ DQPSK)
Band Edges (CH.0)

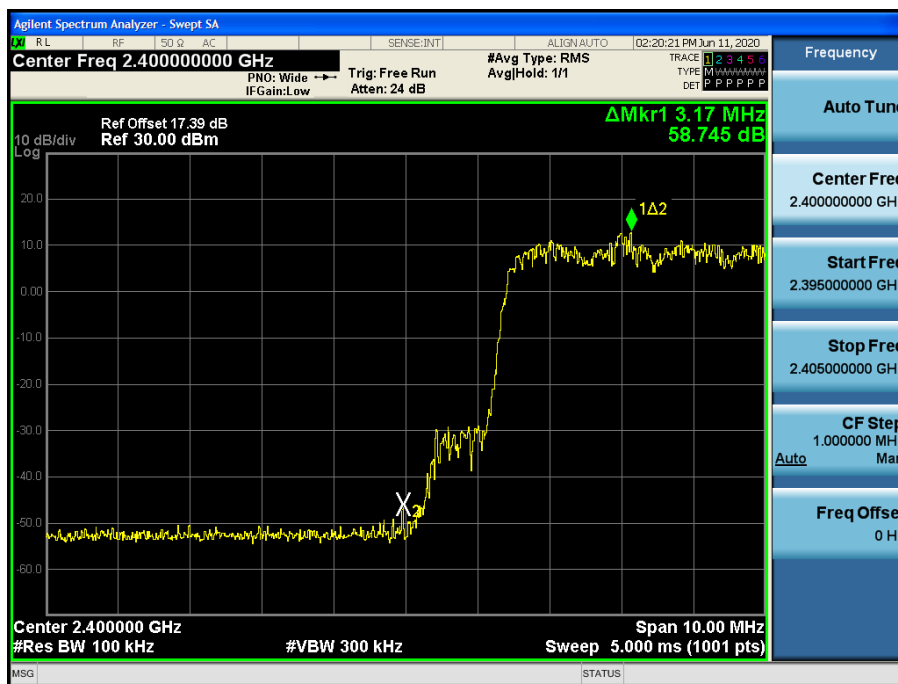


Test Plots with hopping ($\pi/4$ DQPSK)
Band Edges (CH.78)



[Ant.2]


Test Plots without hopping (GFSK)

Band Edges (CH.0)

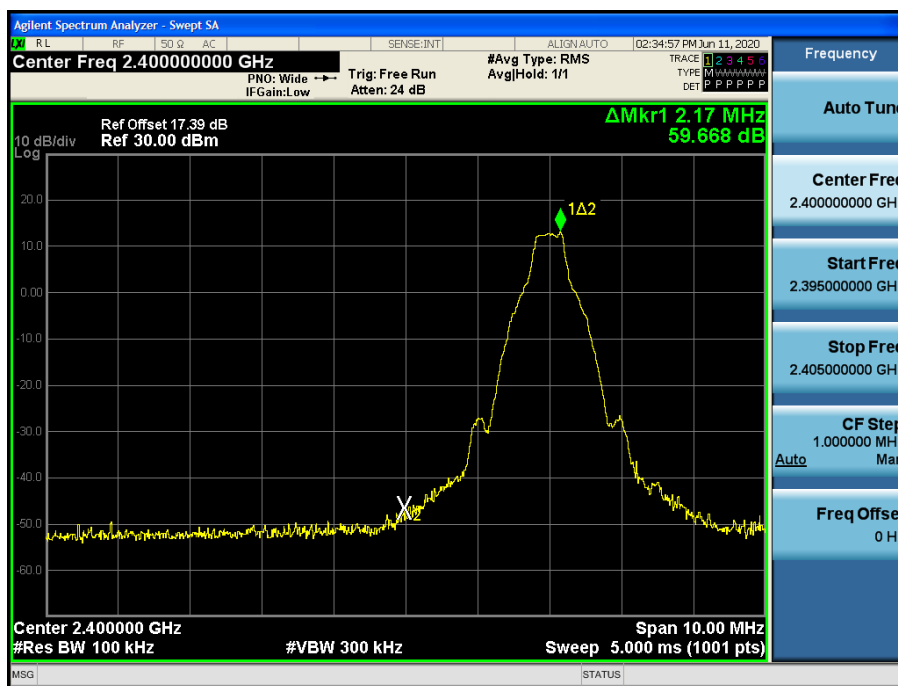


Test Plots without hopping (GFSK)

Band Edges (CH.78)

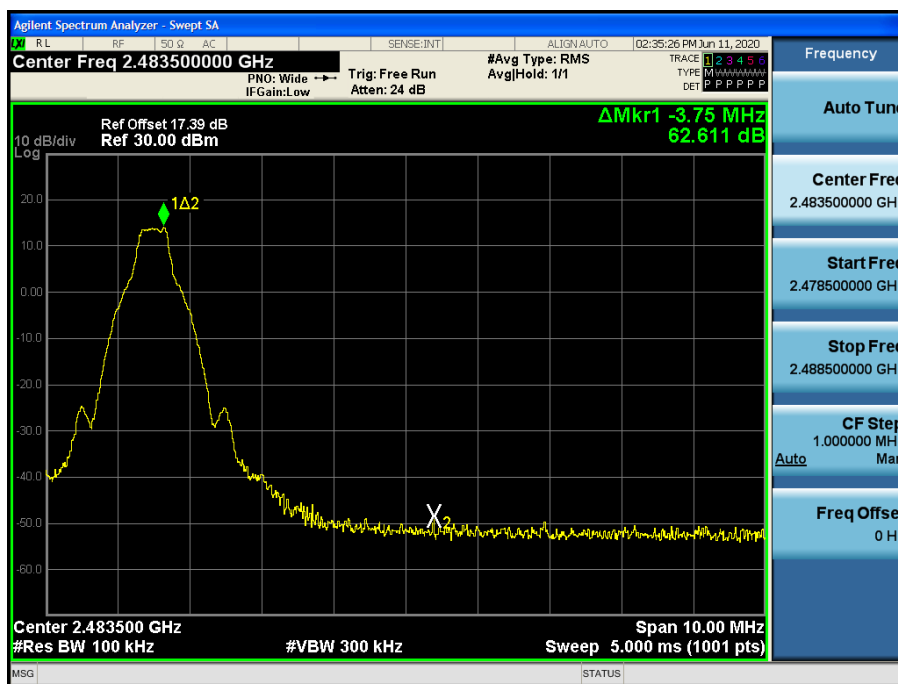


Test Plots without hopping (8DPSK)

Band Edges (CH.0)

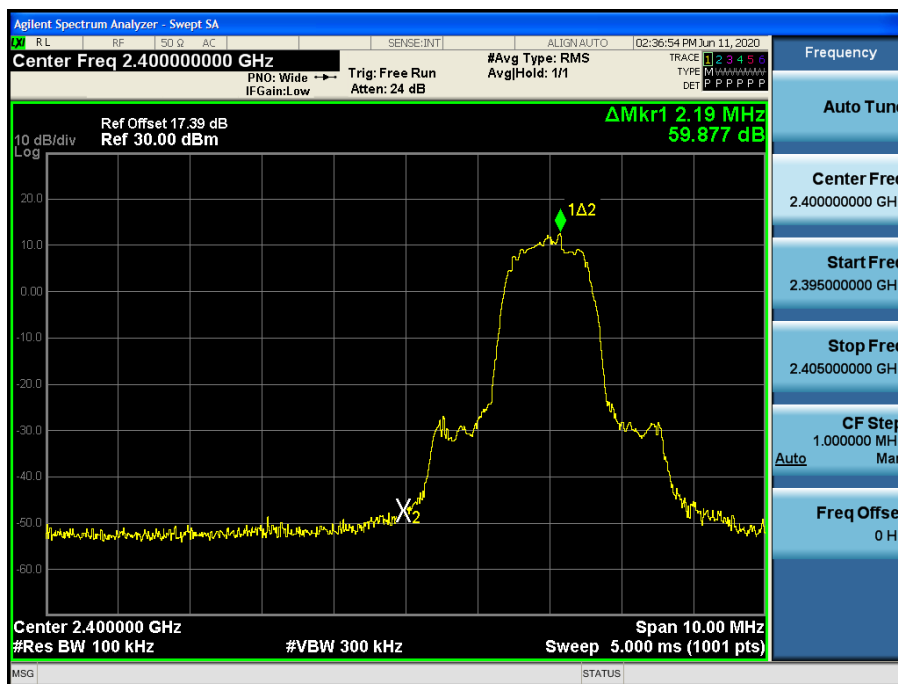


Test Plots without hopping (8DPSK)

Band Edges (CH.78)

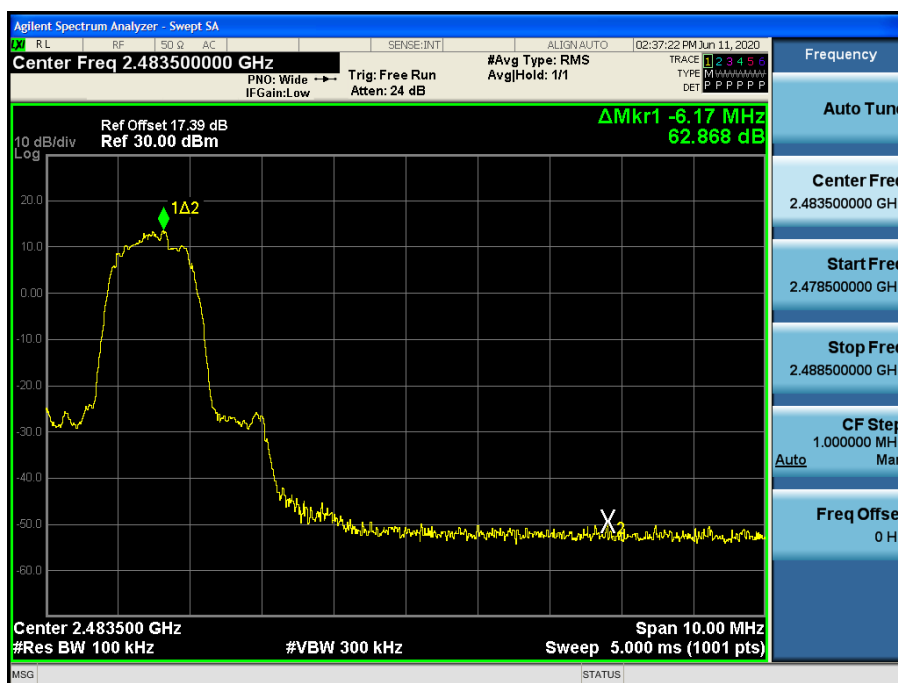


Test Plots without hopping ($\pi/4$ DQPSK)

Band Edges (CH.0)

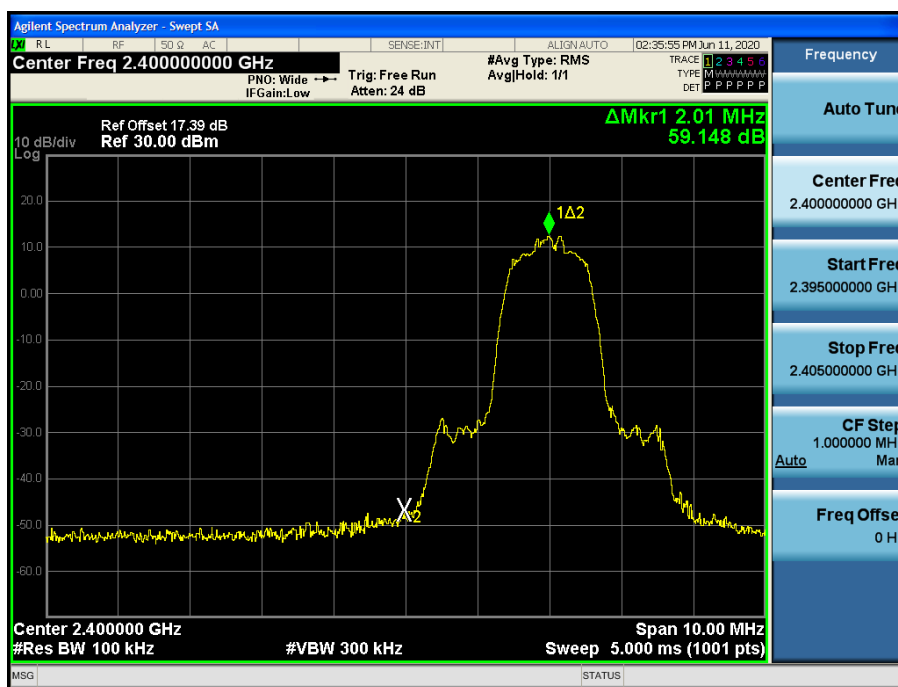


Test Plots without hopping ($\pi/4$ DQPSK)

Band Edges (CH.78)

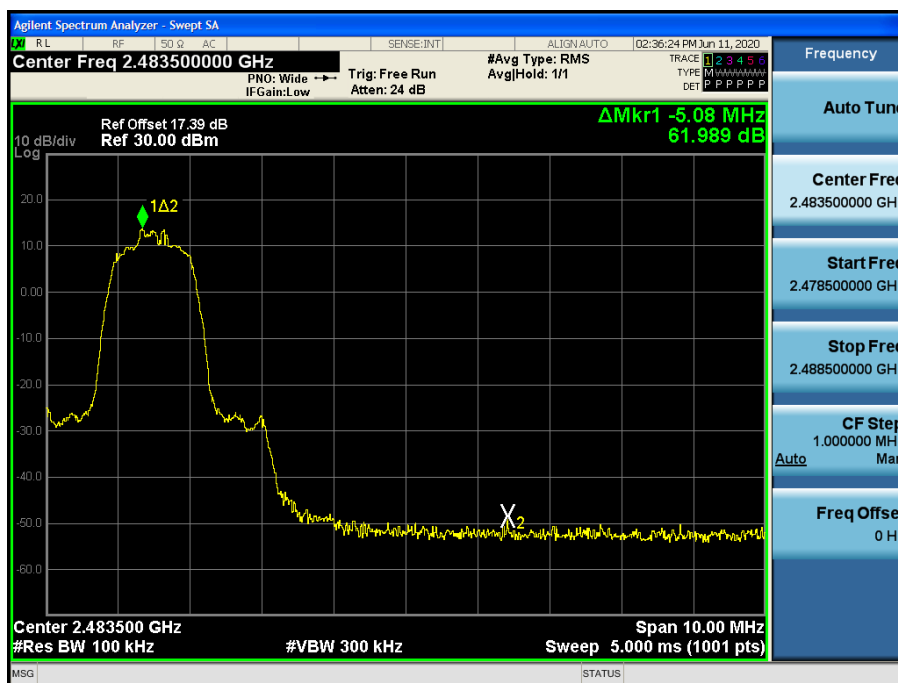


Test Plots with hopping (GFSK)

Band Edges (CH.0)

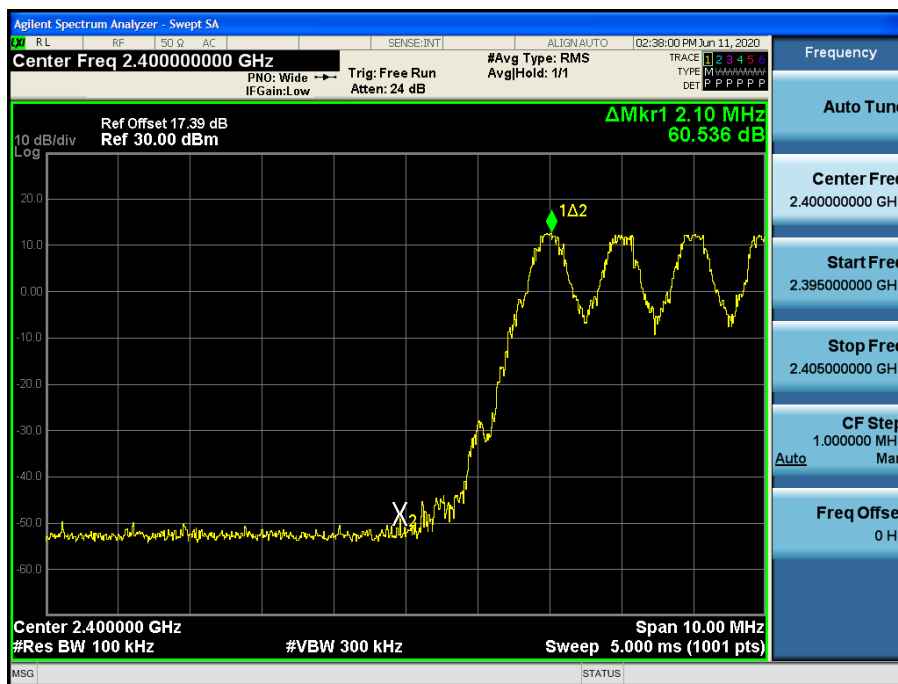


Test Plots with hopping (GFSK)

Band Edges (CH.78)

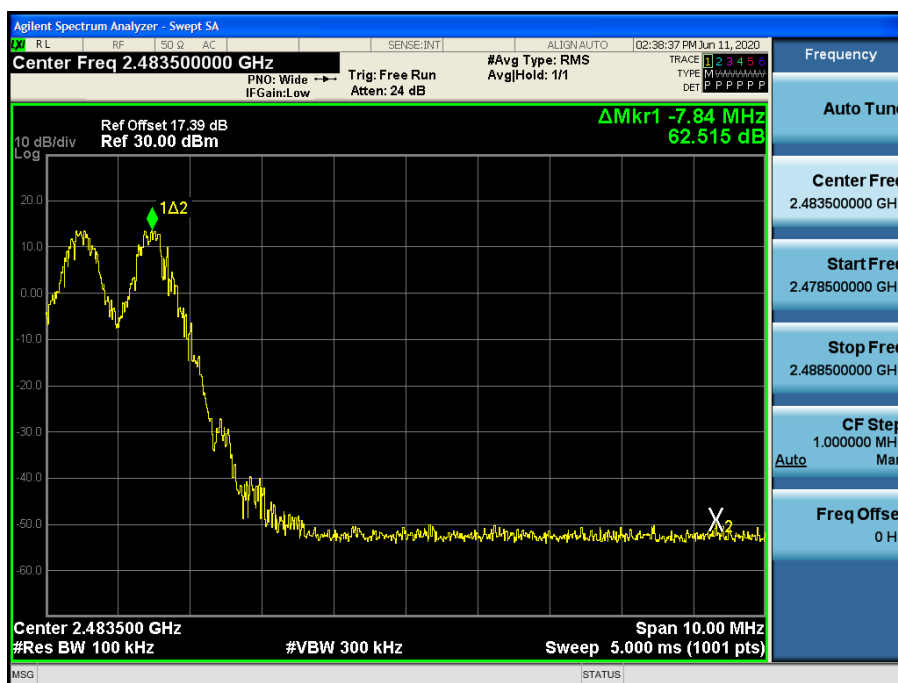

Test Plots with hopping (8DPSK)

Band Edges (CH.0)

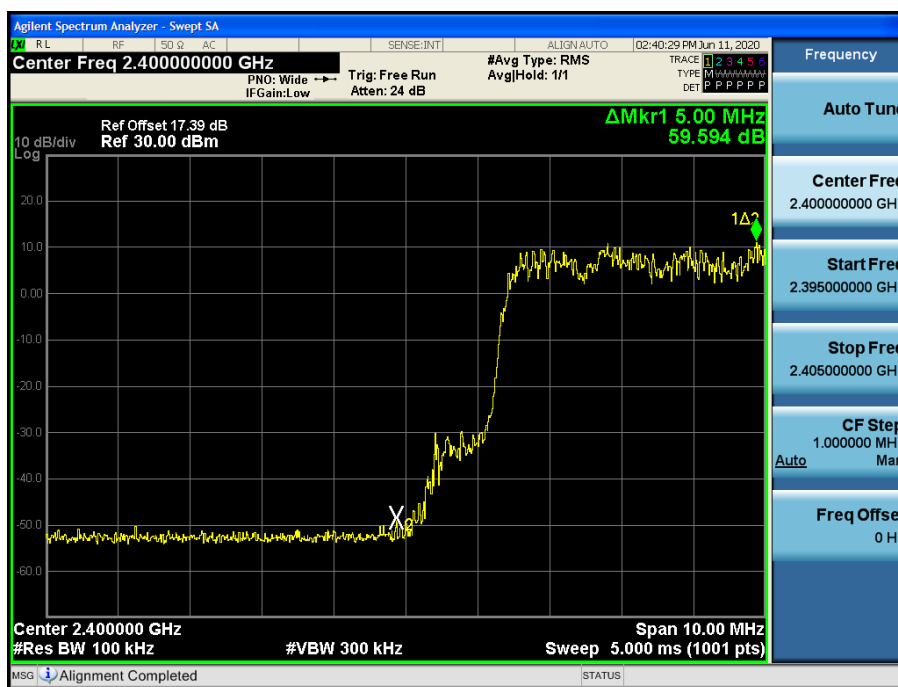


Test Plots with hopping (8DPSK)

Band Edges (CH.78)



Test Plots with hopping ($\pi/4$ DQPSK)
Band Edges (CH.0)

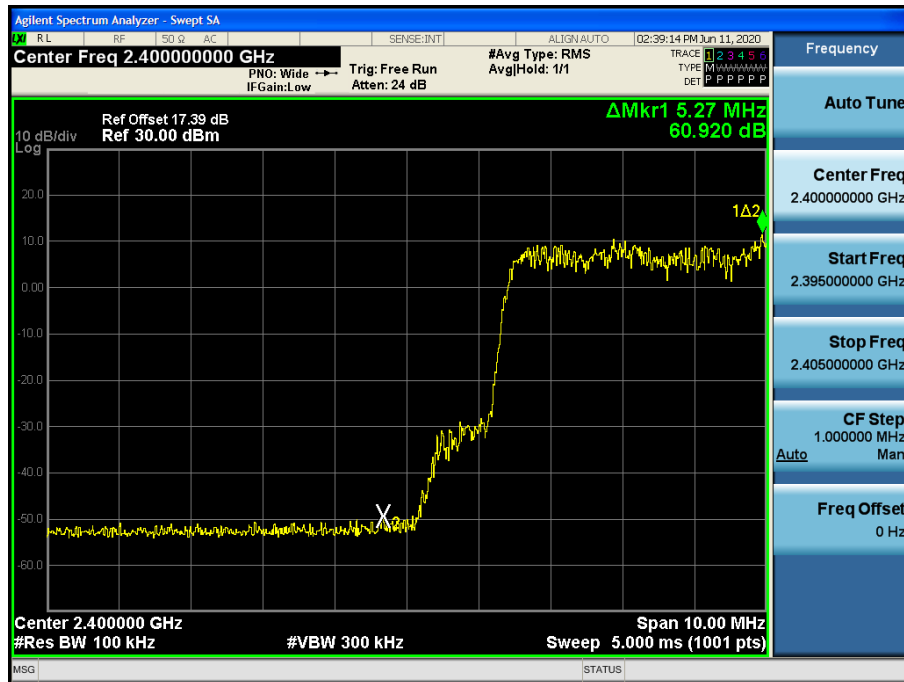

Test Plots with hopping ($\pi/4$ DQPSK)
Band Edges (CH.78)



10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)

[Ant.1]

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	831.35	1180.8	1176.6
CH.39	836.51	1181.7	1171.5
CH.78	829.44	1182.1	1175.4

20dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	943.8	1307	1315
CH.39	943.0	1306	1312
CH.78	945.1	1306	1312

Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	958	981	>25 kHz or >2/3 of the 20dB BW

[Ant.2]

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	830.67	1182.9	1177.4
CH.39	831.47	1181.5	1173.1
CH.78	834.31	1181.8	1175.5

20dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	943.4	1307	1313
CH.39	943.3	1314	1323
CH.78	943.1	1306	1311

Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
1001	998	994	>25 kHz or >2/3 of the 20dB BW

[Ant.1]


Test Plots (GFSK)

Channel Separation




Test Plots (8DPSK)

Channel Separation

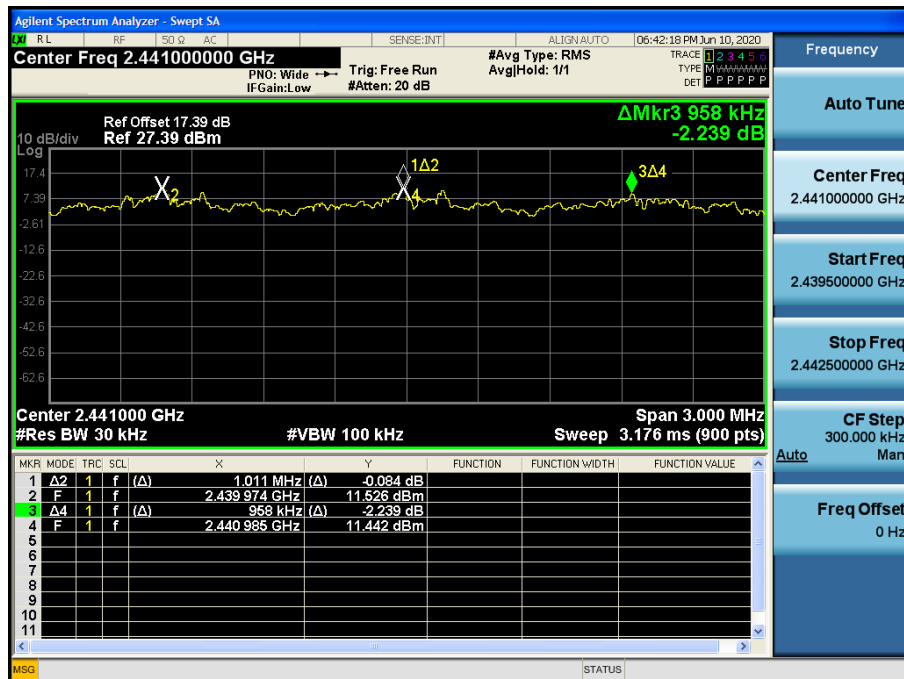


Test Plots ($\pi/4$ DQPSK)

Channel Separation

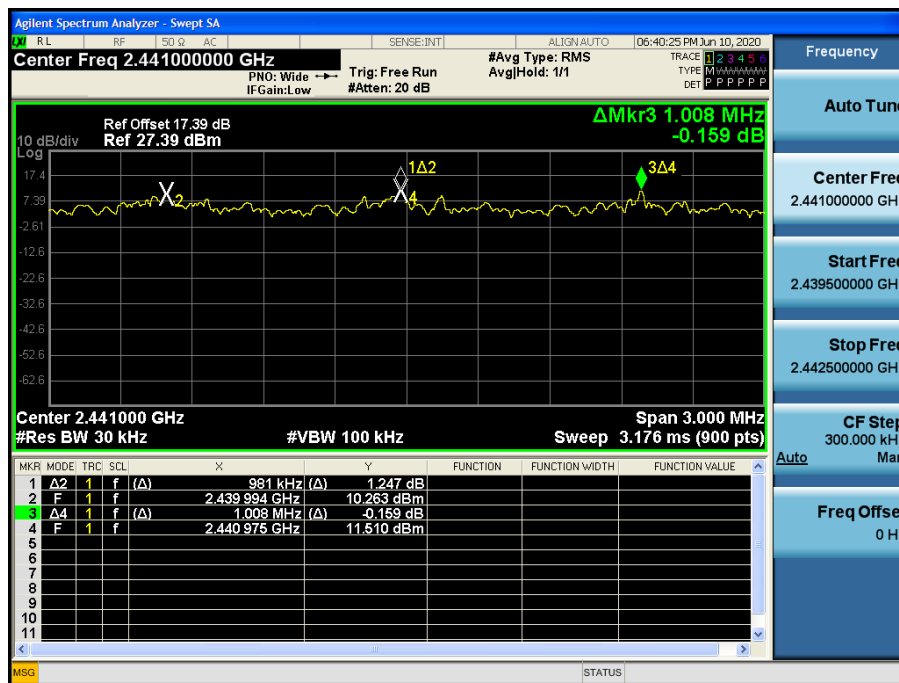


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

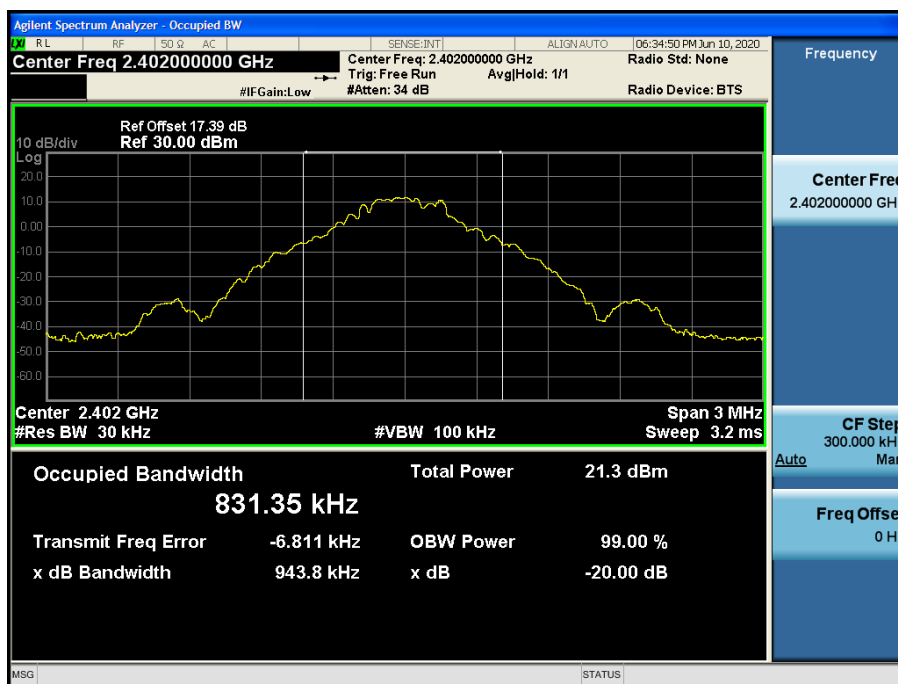


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

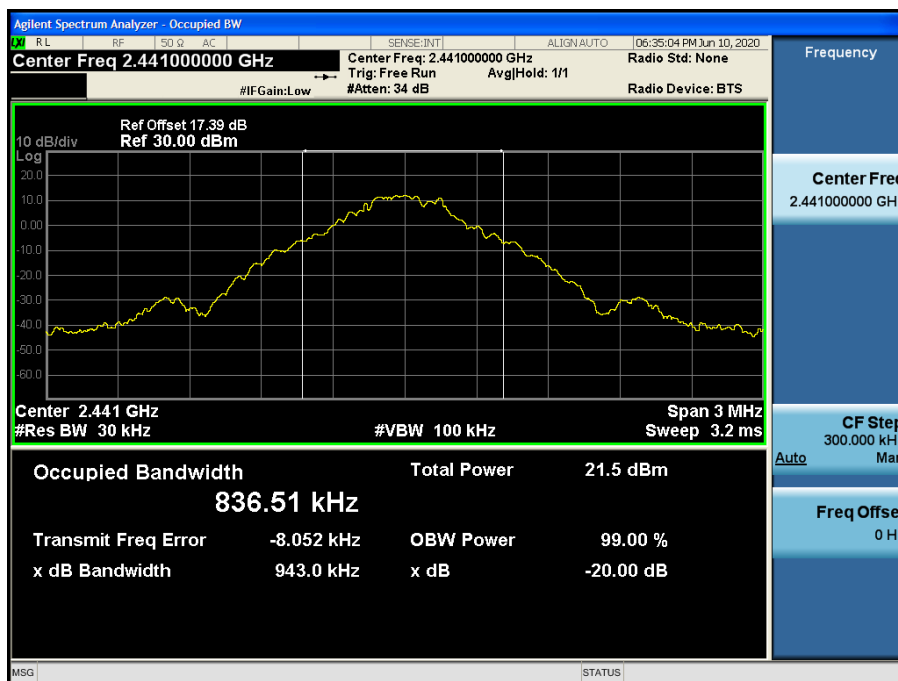


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

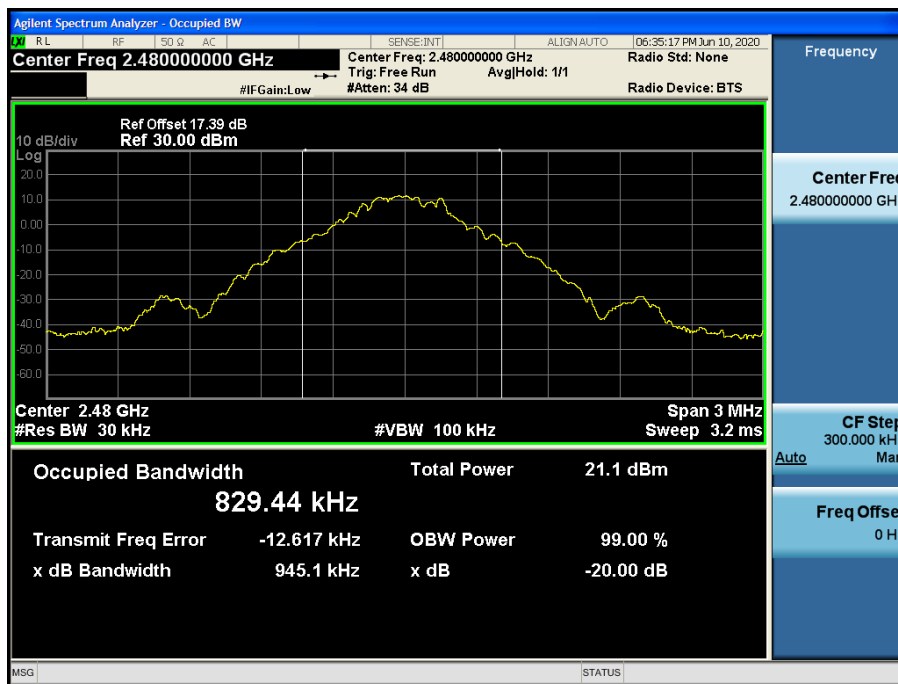


Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

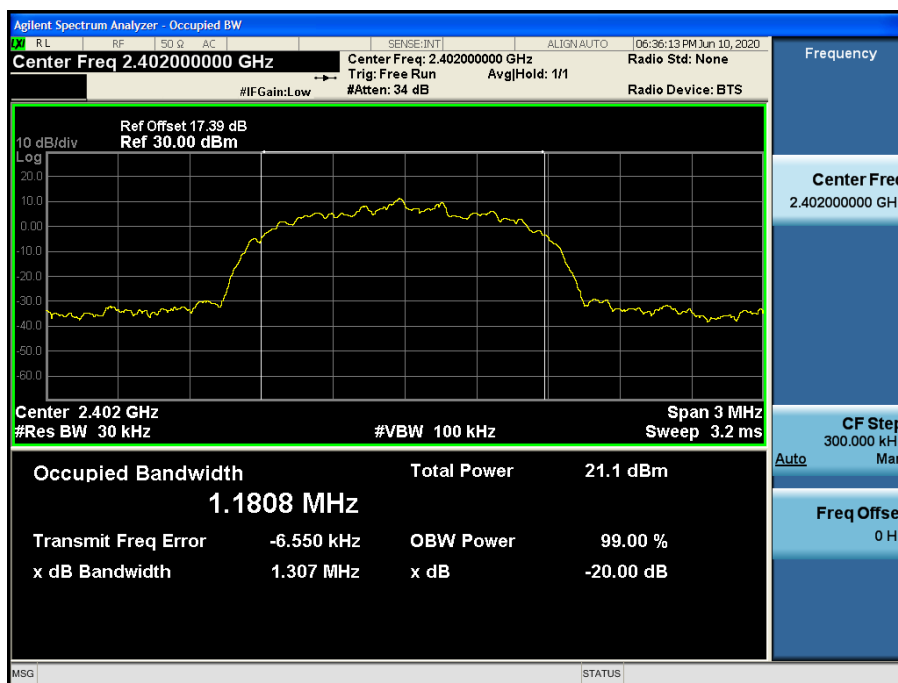


Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

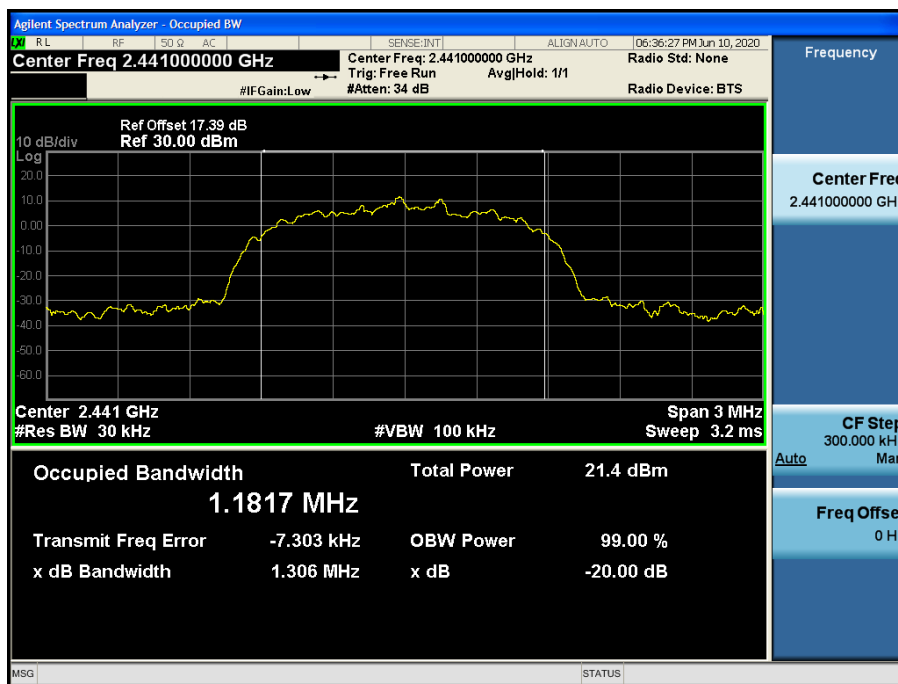


Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

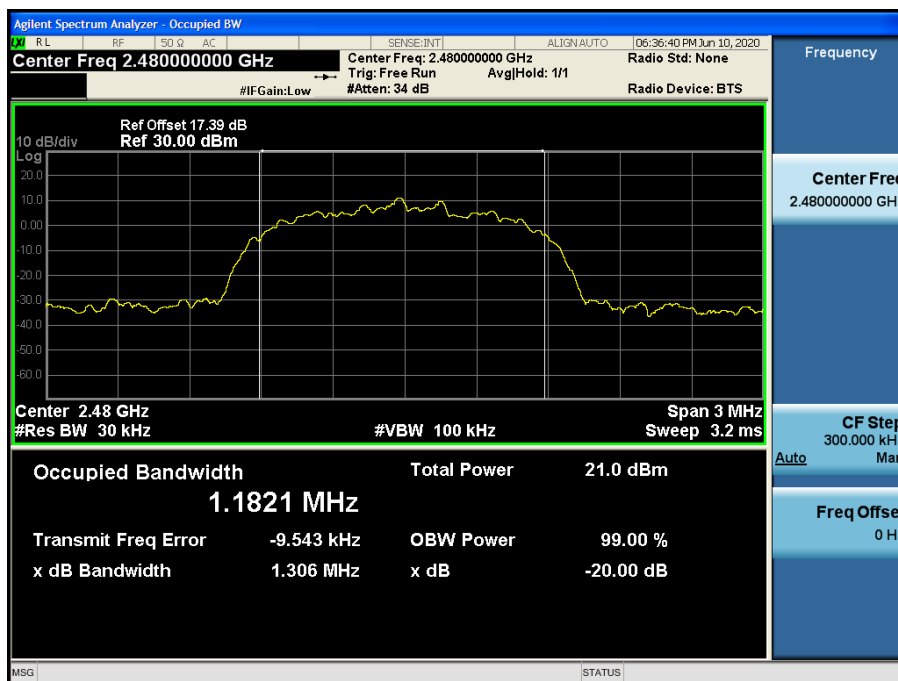


Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

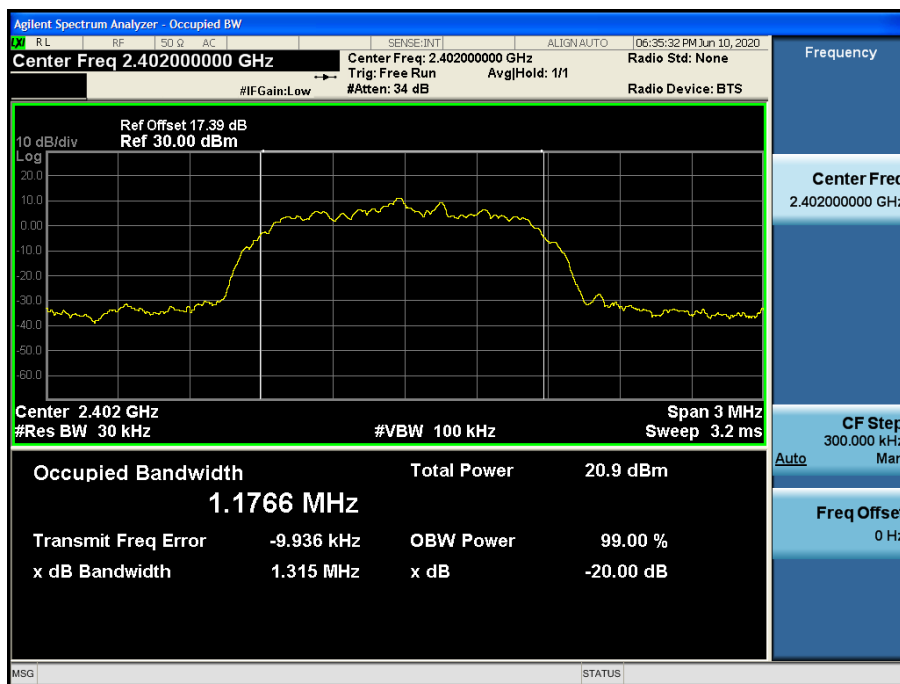


Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

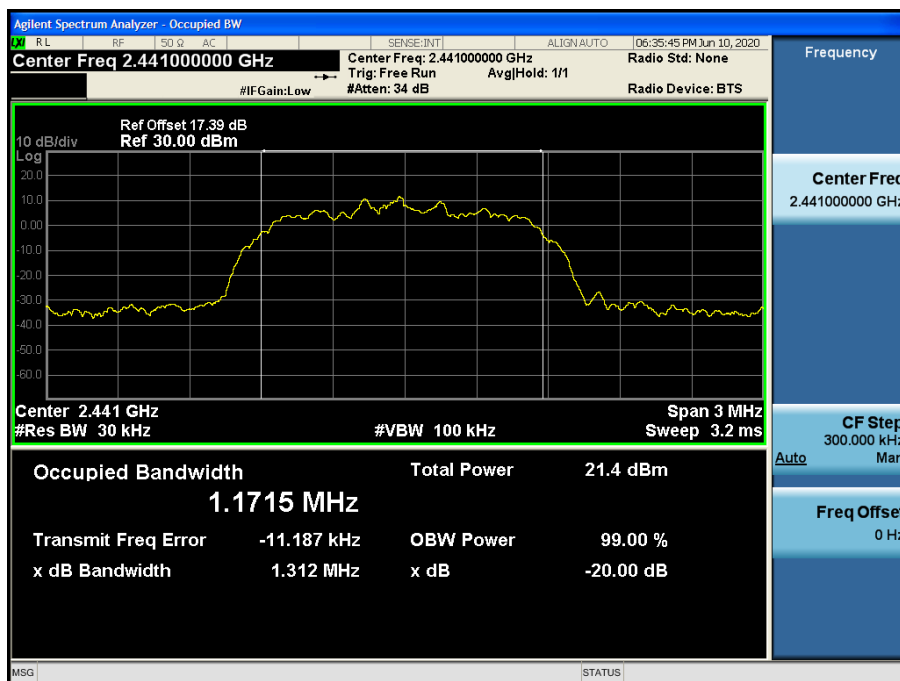

Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

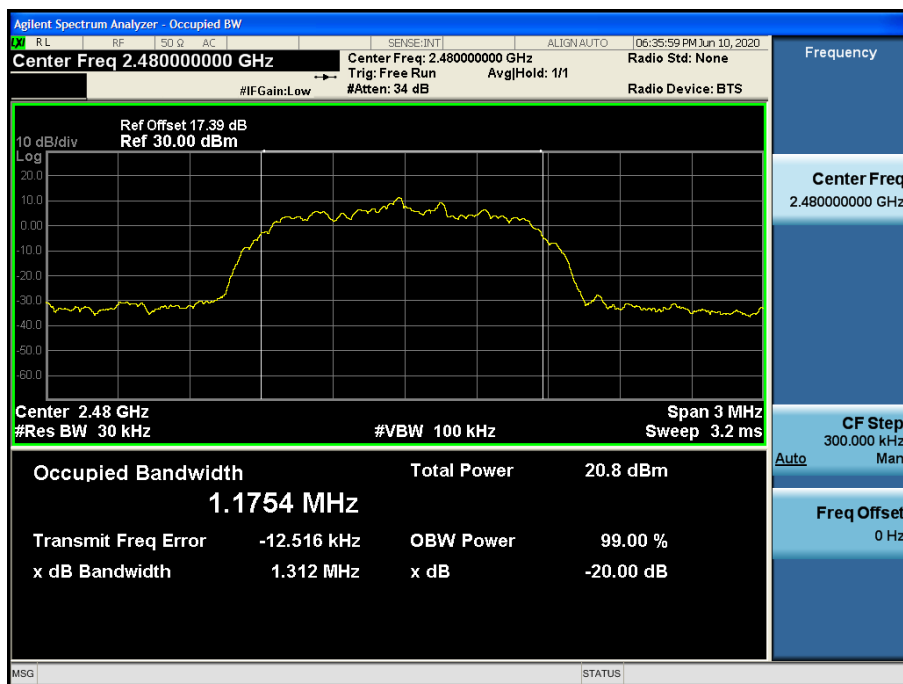

[Ant.2]


Test Plots (GFSK)

Channel Separation




Test Plots (8DPSK)

Channel Separation

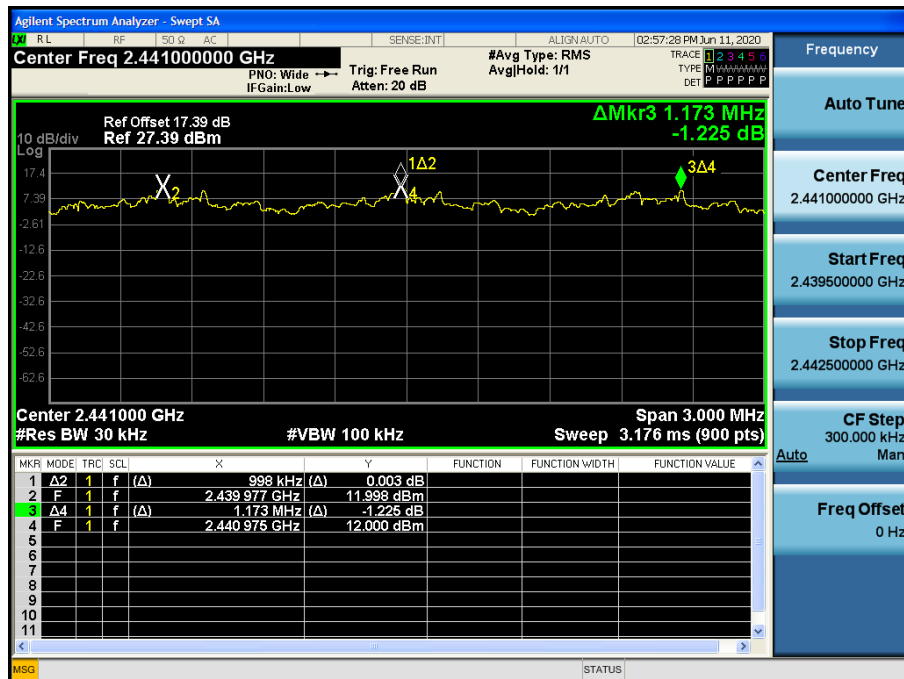


Test Plots ($\pi/4$ DQPSK)

Channel Separation

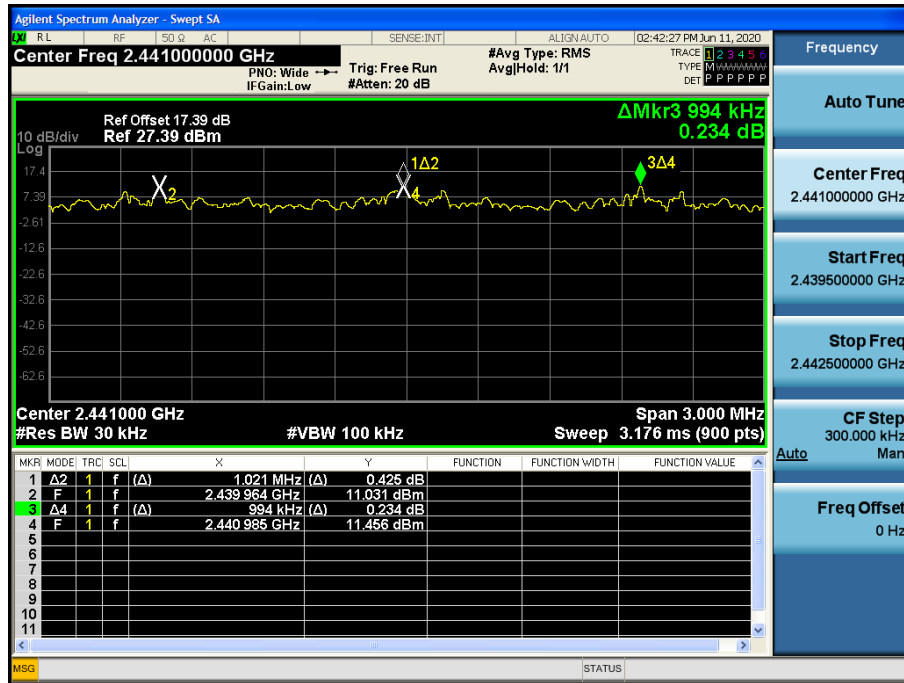


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

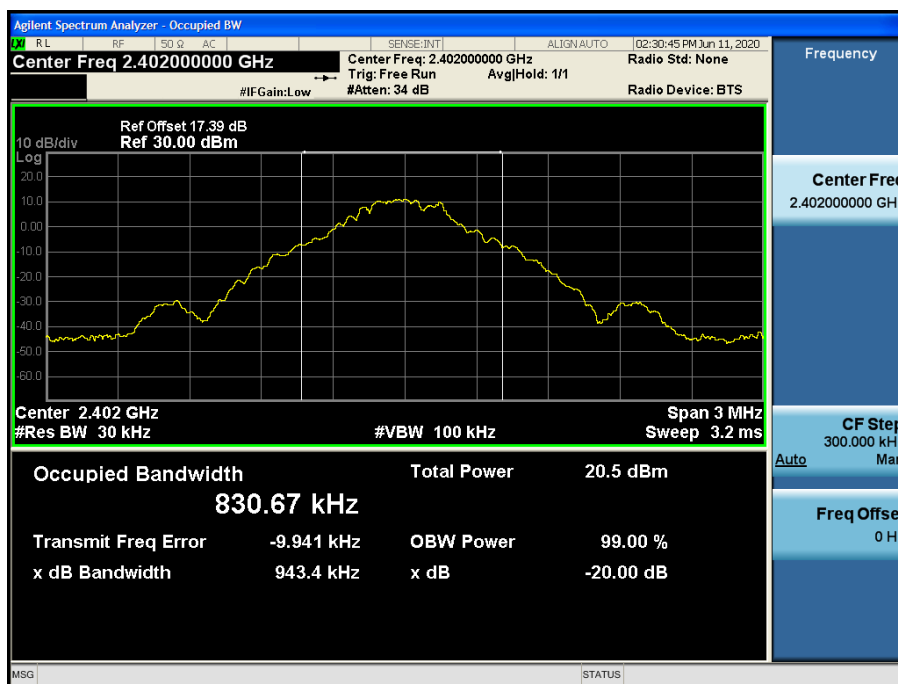


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

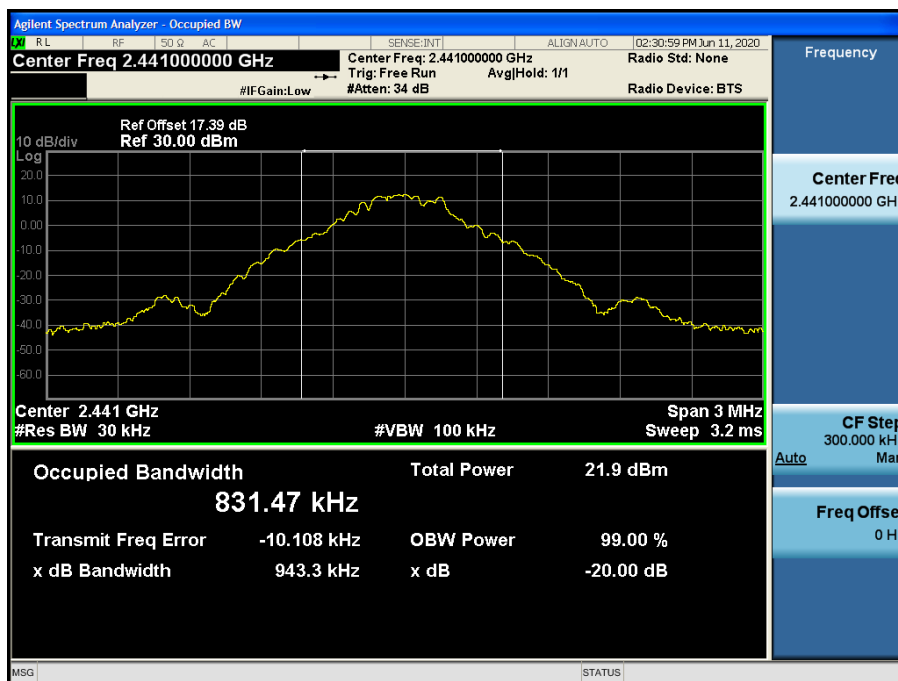


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

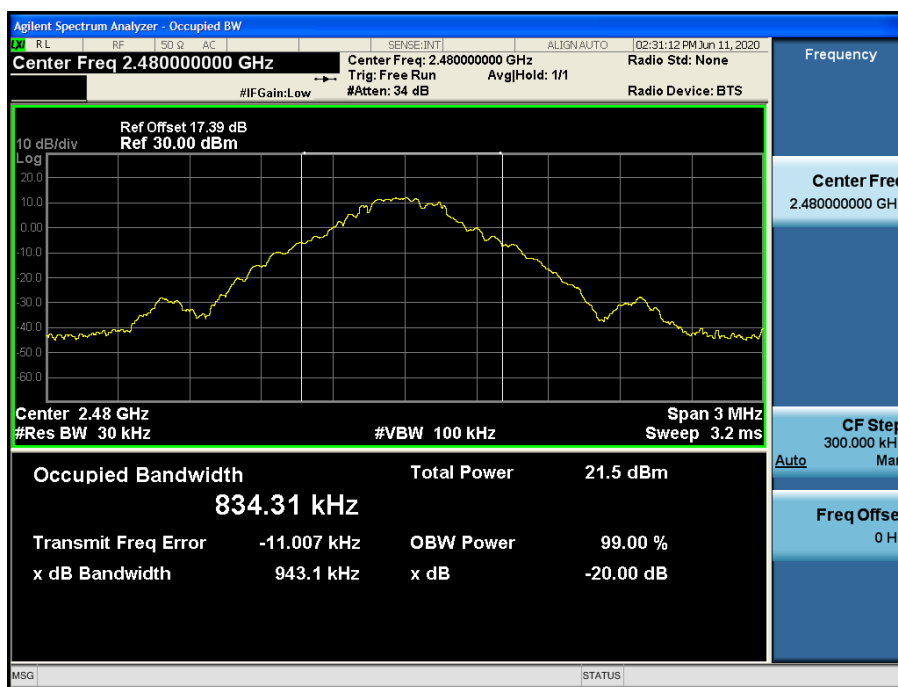


Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

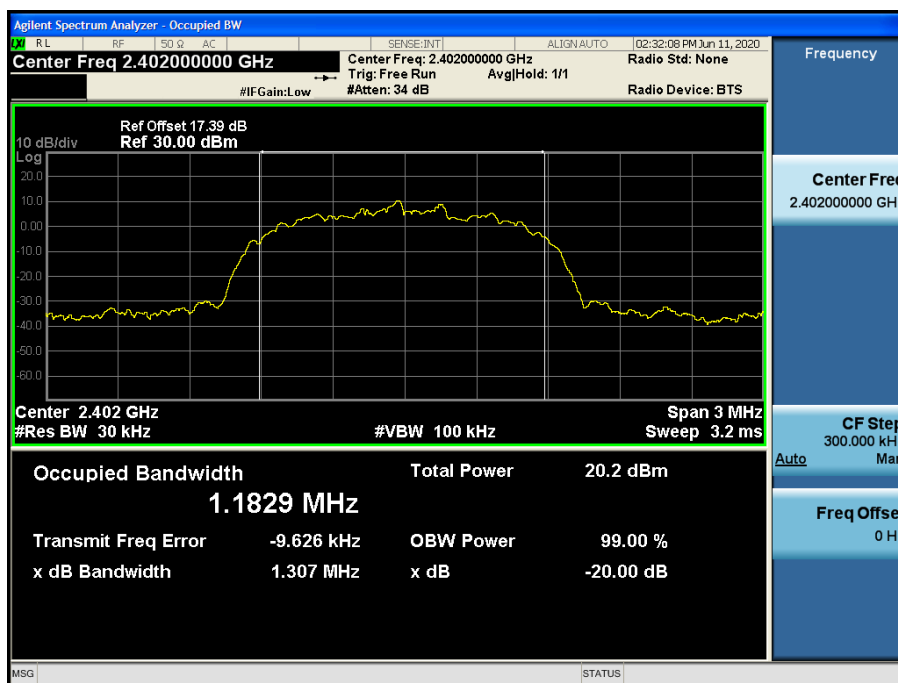


Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

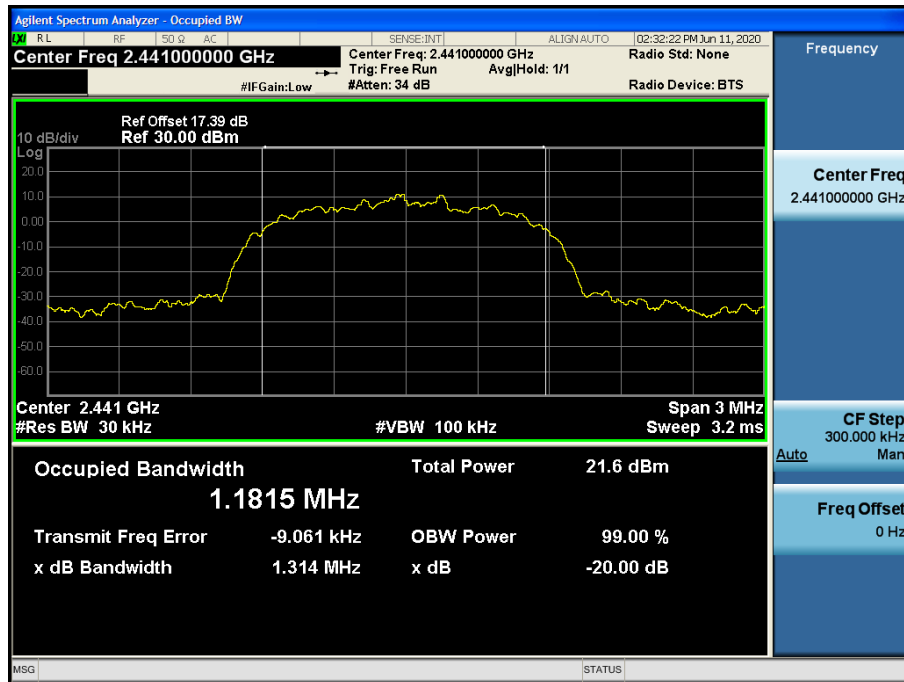


Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

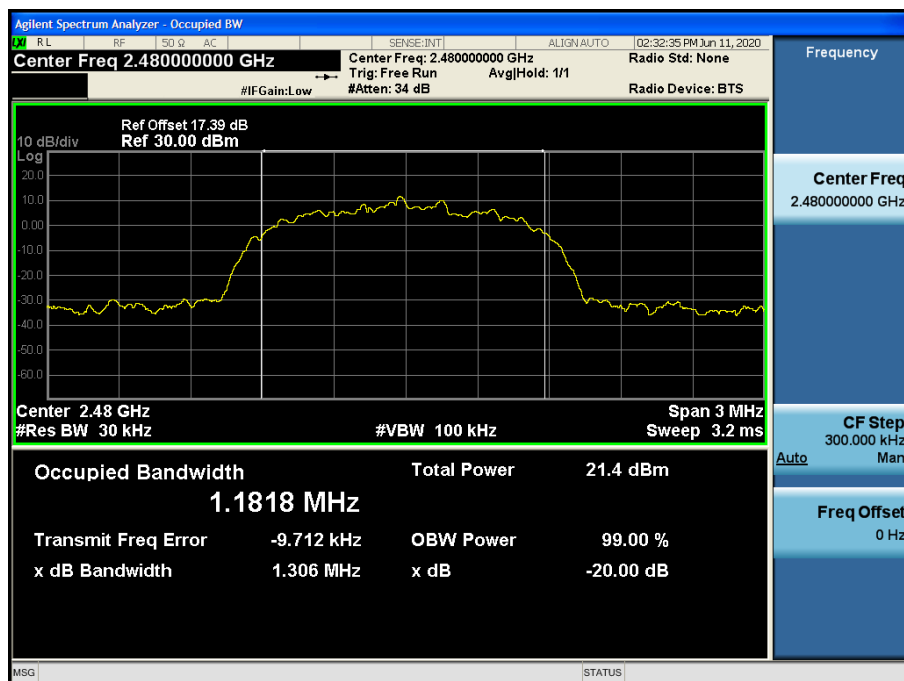


Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

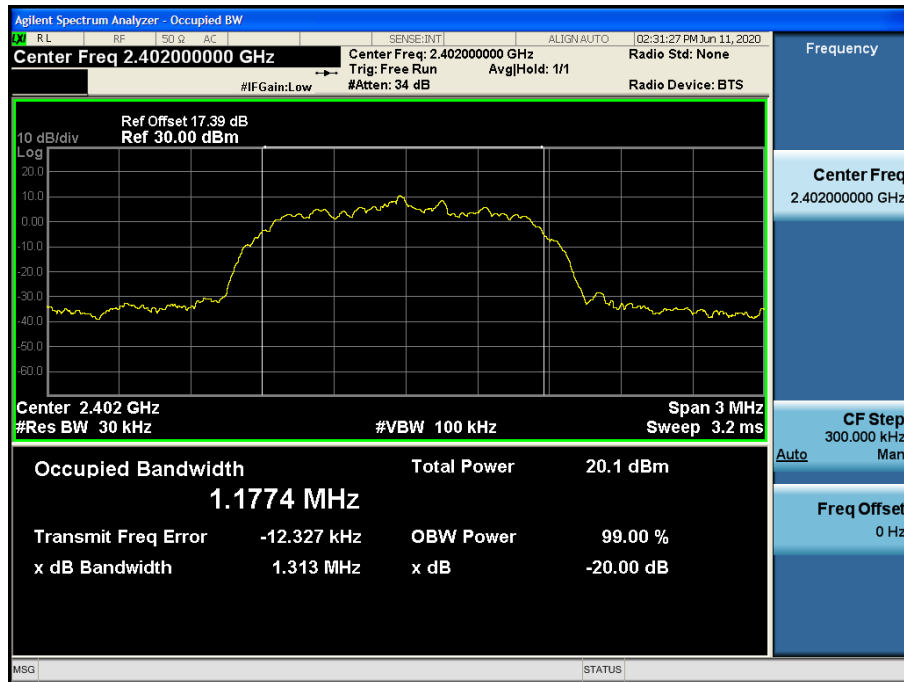


Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

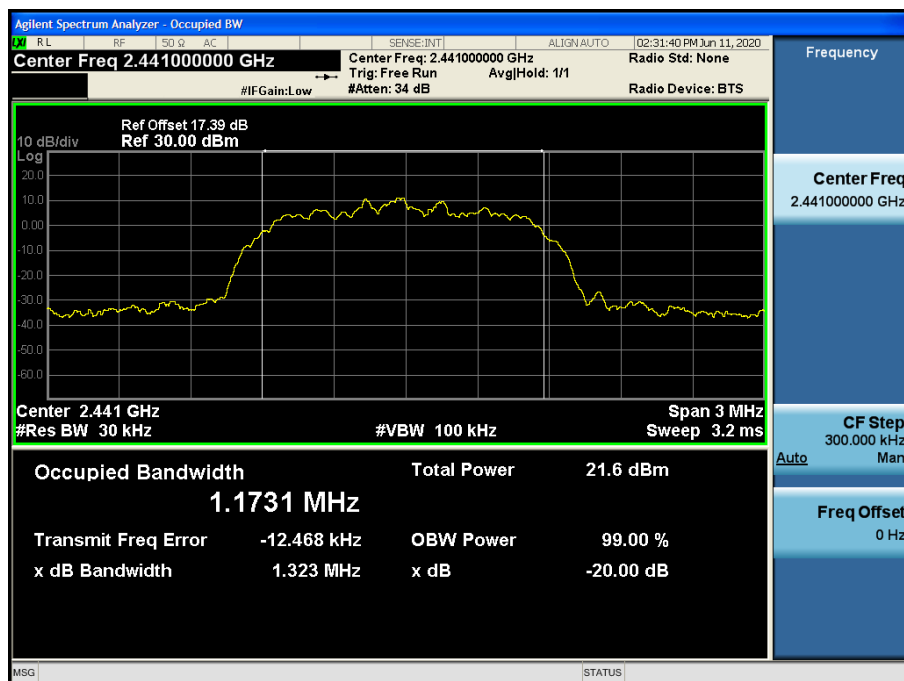

Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

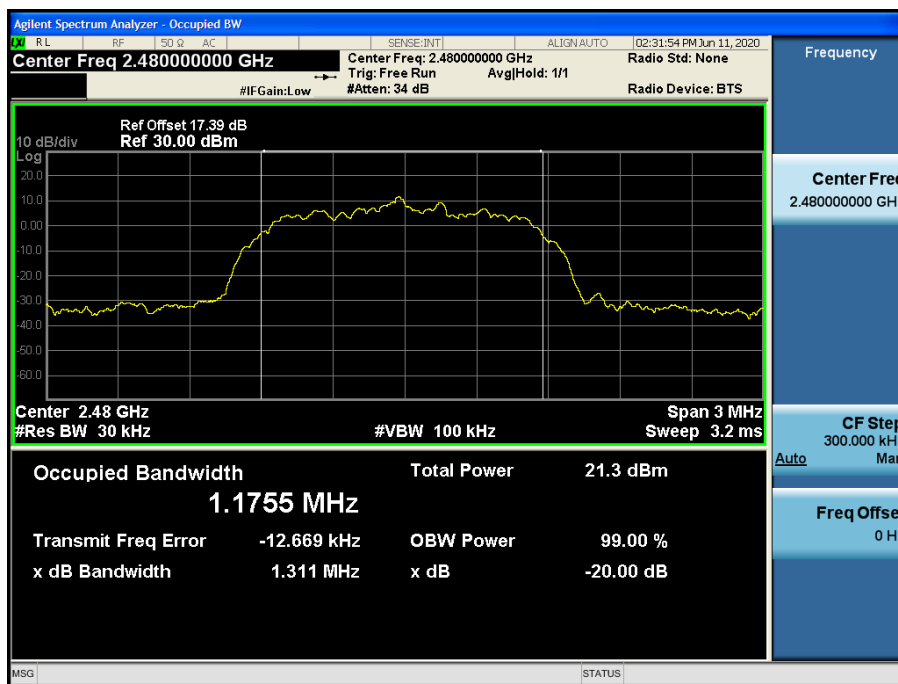

10.4 NUMBER OF HOPPING FREQUENCY

[Ant.1]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

[Ant.2]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15


Note :

In case of AFH mode, minimum number of hopping channels is 20.

[Ant.1]


Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)

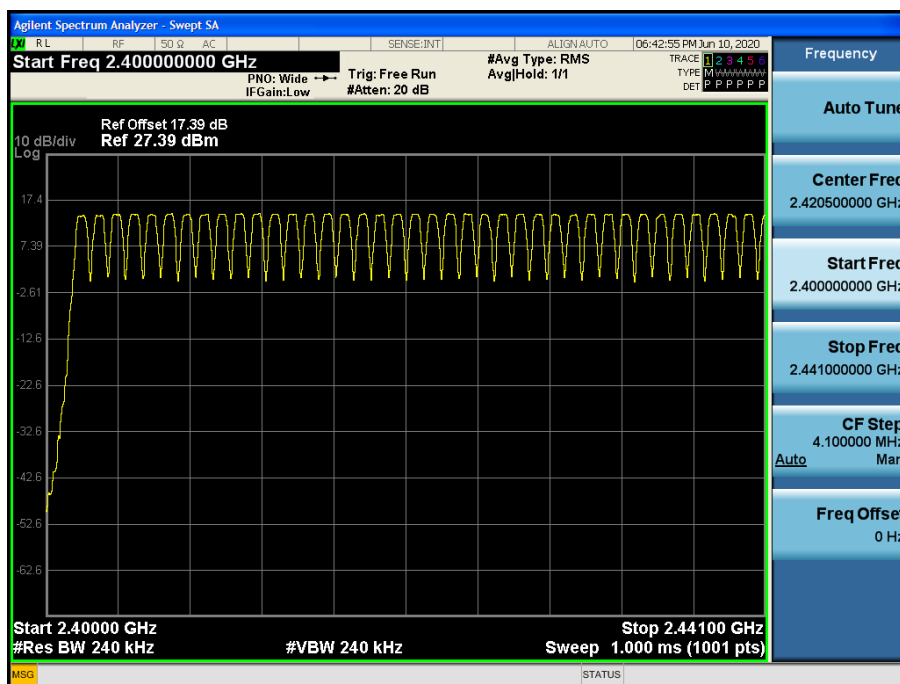


Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.482 GHz)

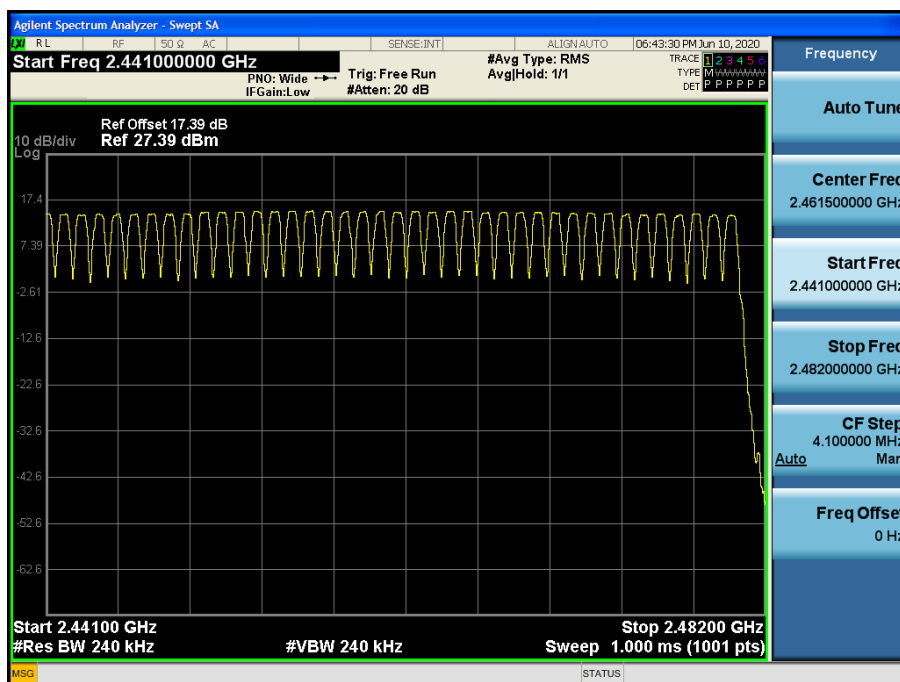


Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

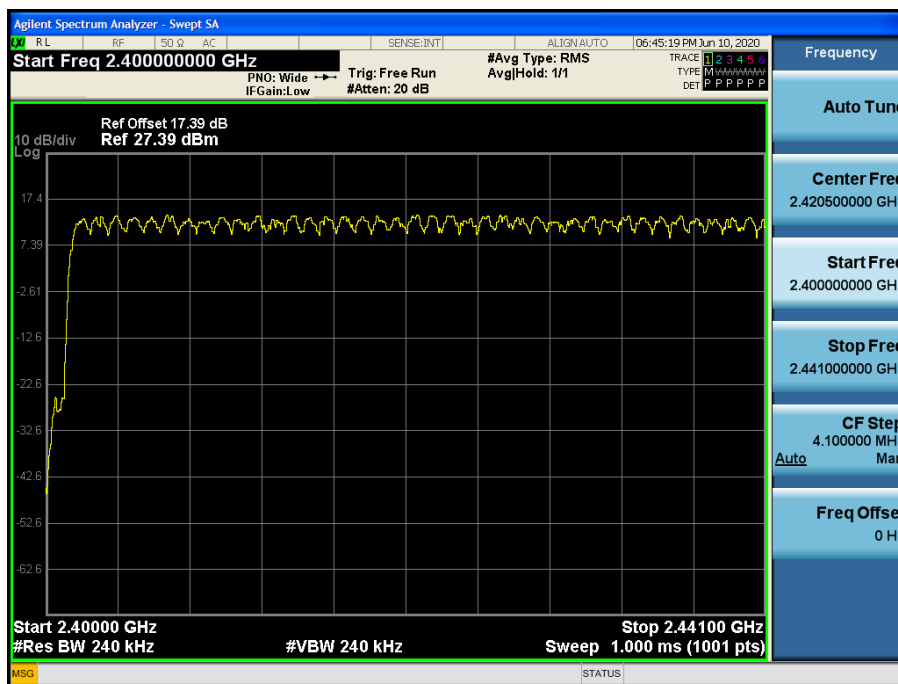


Test Plots (8DPSK)

Number of Channels (2.441 GHz - 2.482 GHz)

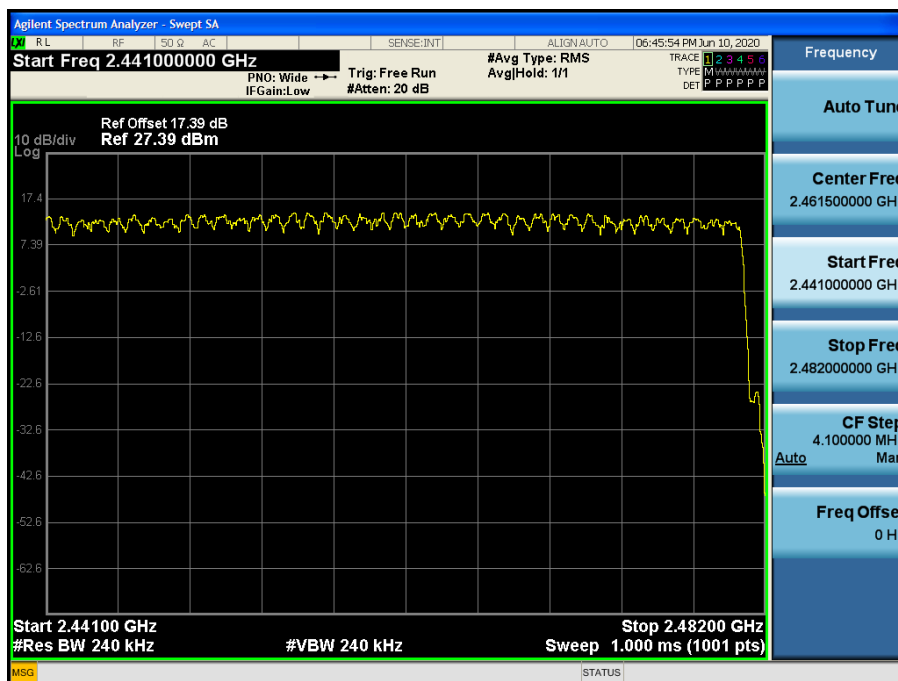


Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

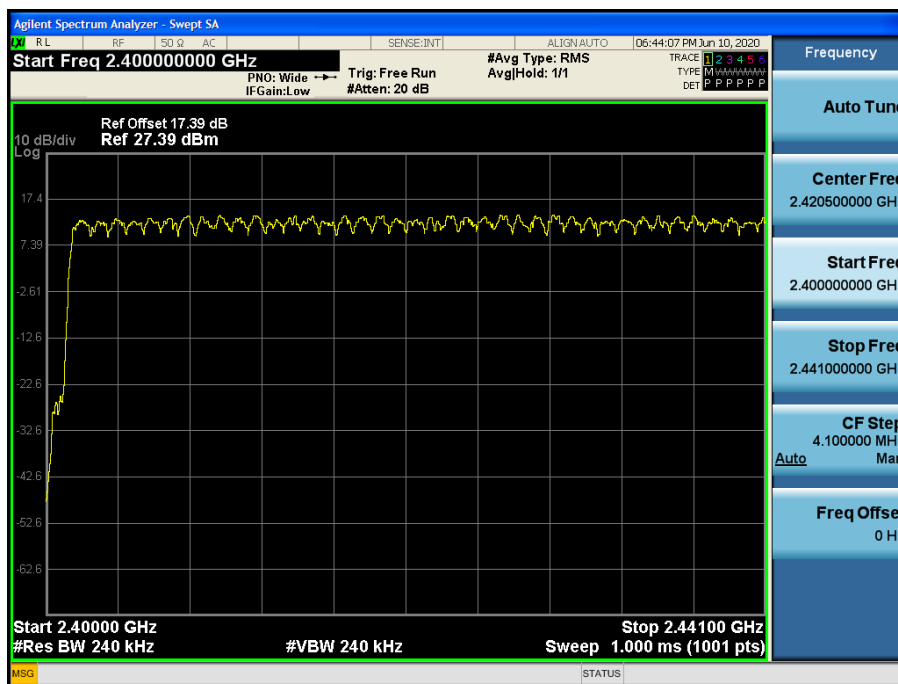
Test Plots ($\pi/4$ DQPSK)


Number of Channels (2.441 GHz - 2.482 GHz)

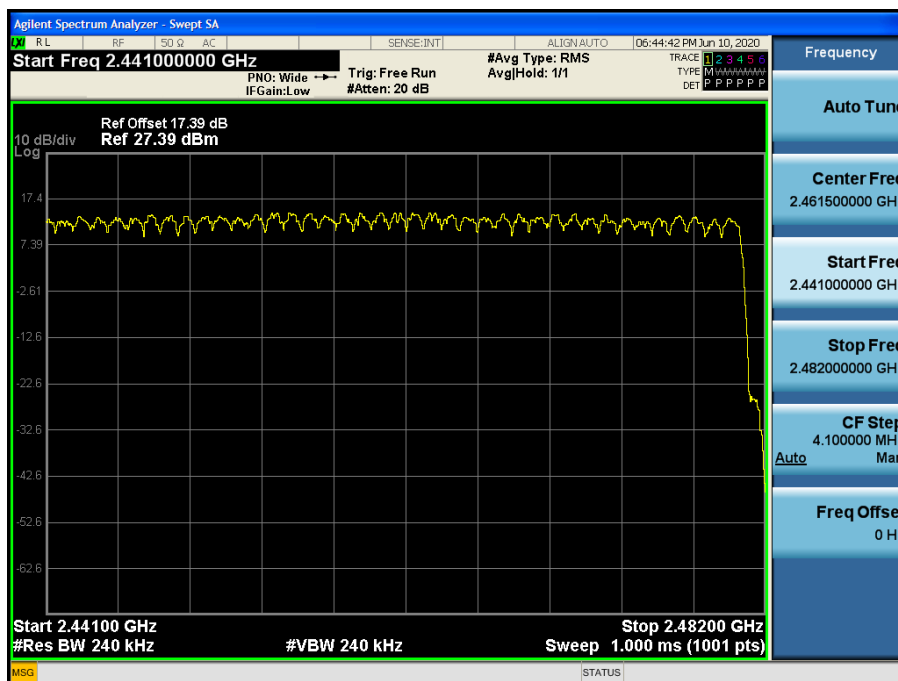

[Ant.2]


Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)

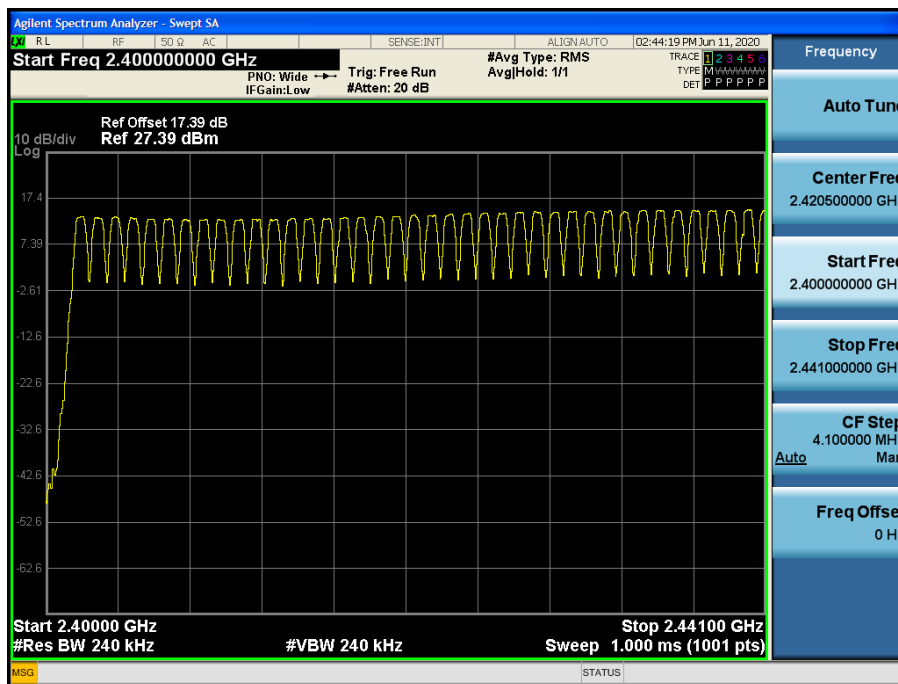


Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.482 GHz)

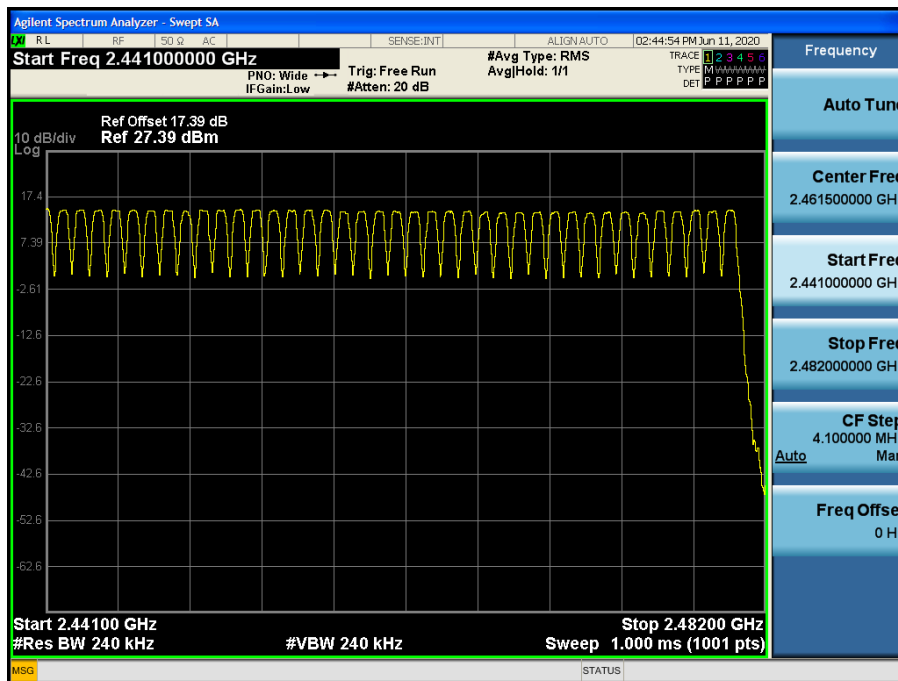


Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

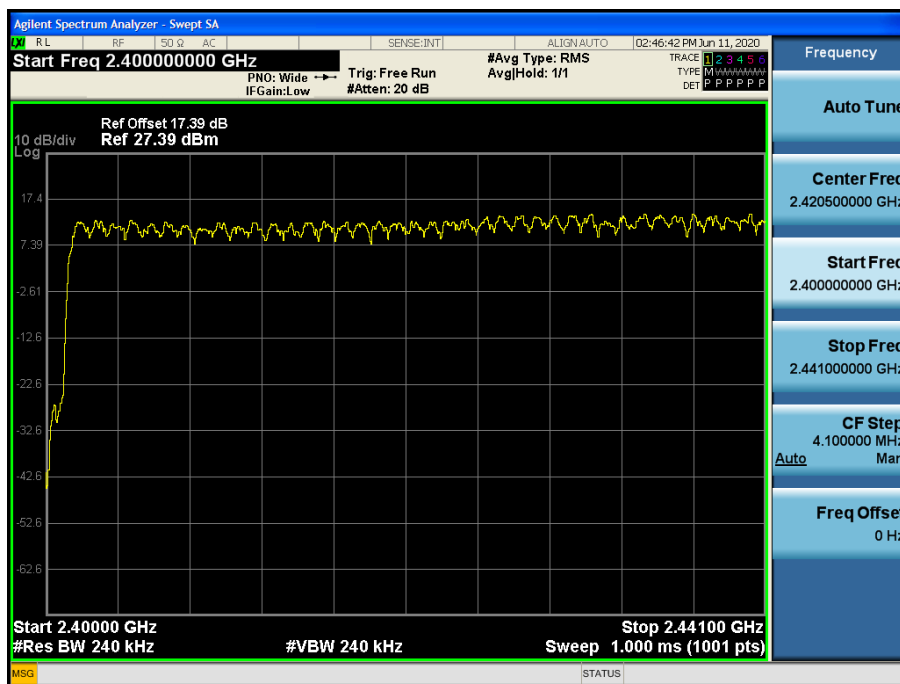


Test Plots (8DPSK)

Number of Channels (2.441 GHz - 2.482 GHz)

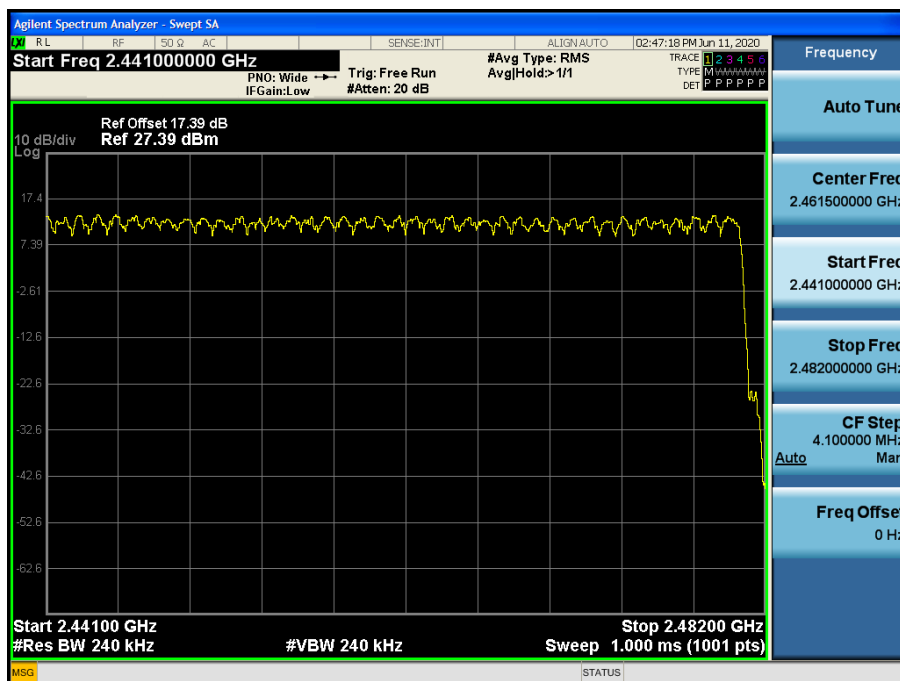


Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

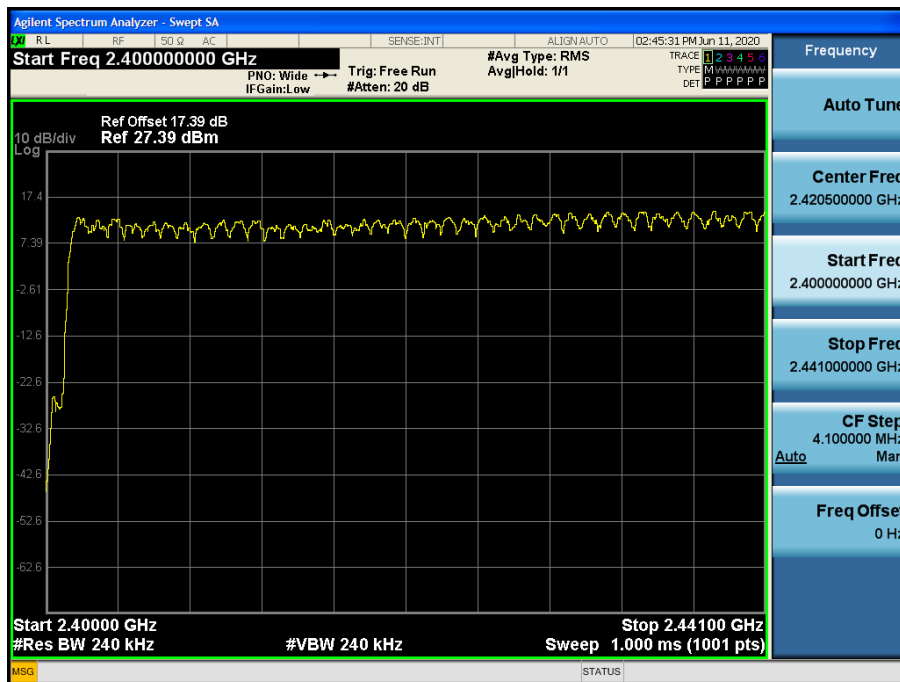
Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.441 GHz - 2.482 GHz)

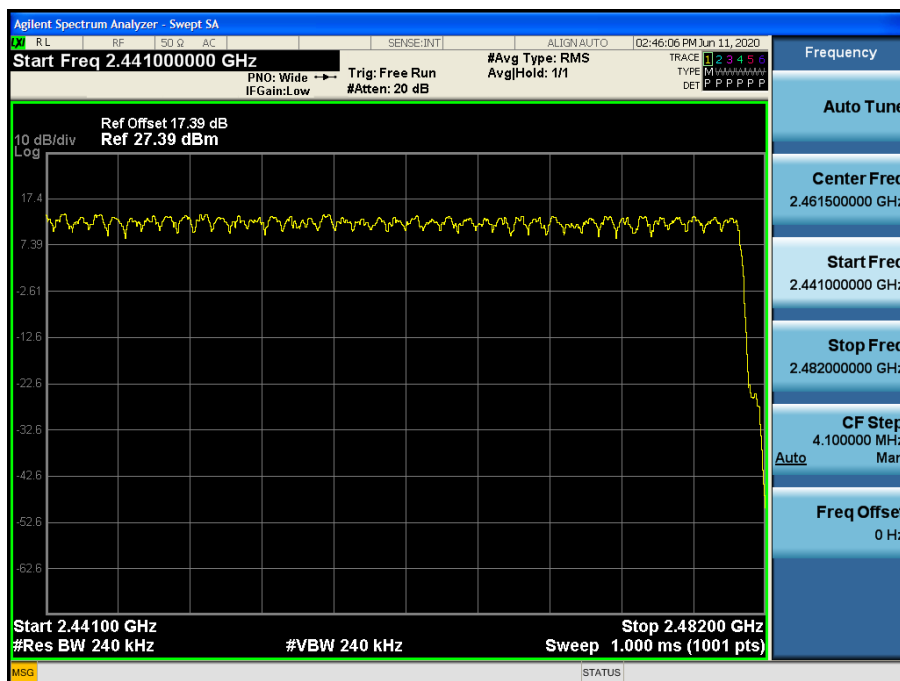

10.5 TIME OF OCCUPANCY (DWELL TIME)

[Ant.1]

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.880	2.890	2.890
	Mid	2.880	2.885	2.885
	High	2.885	2.890	2.885

Non-AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	307.20	308.27	308.27	31.6	400
	Mid	307.20	307.73	307.73	31.6	
	High	307.73	308.27	307.73	31.6	

AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	153.60	154.13	154.13	8.0	400
	Mid	153.60	153.87	153.87	8.0	
	High	153.87	154.13	153.87	8.0	

[Ant.2]

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.880	2.890	2.885
	Mid	2.885	2.885	2.885
	High	2.885	2.885	2.885

Non-AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	307.20	308.27	307.73	31.6	400
	Mid	307.73	307.73	307.73	31.6	
	High	307.73	307.73	307.73	31.6	


A FH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	153.60	154.13	153.87	8.0	400
	Mid	153.87	153.87	153.87	8.0	
	High	153.87	153.87	153.87	8.0	

[Ant.1]


Test Plots (GFSK)

Dwell Time (CH.0)

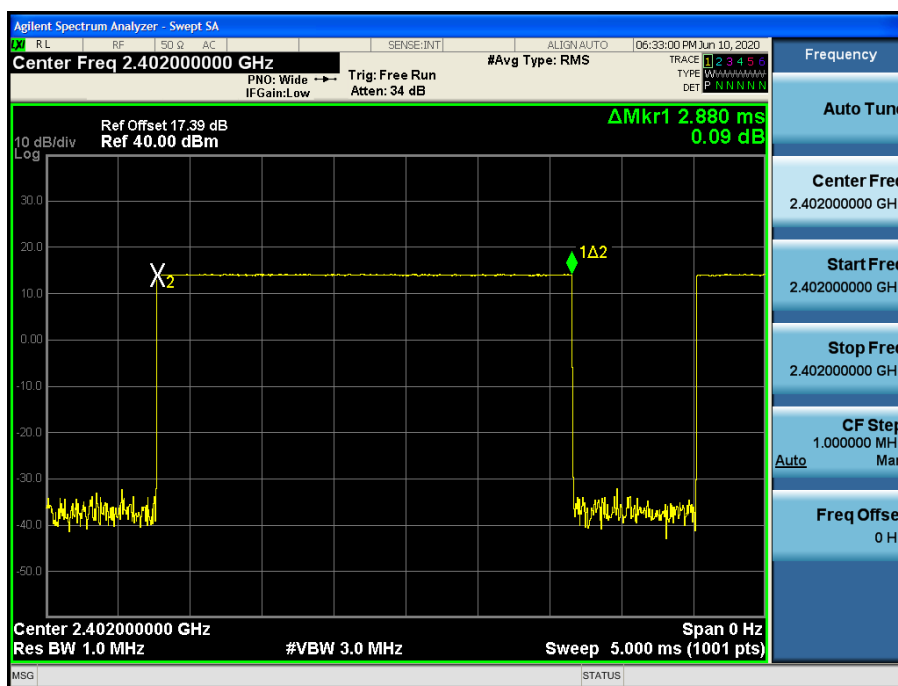


Test Plots (GFSK)


Dwell Time (CH.39)

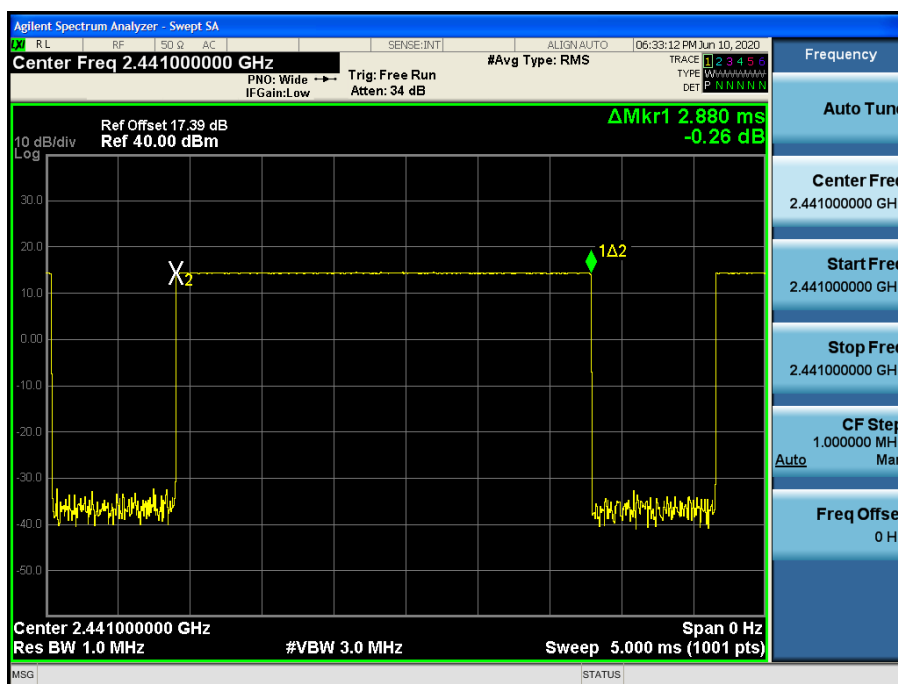

Test Plots (GFSK)
Dwell Time (CH.78)

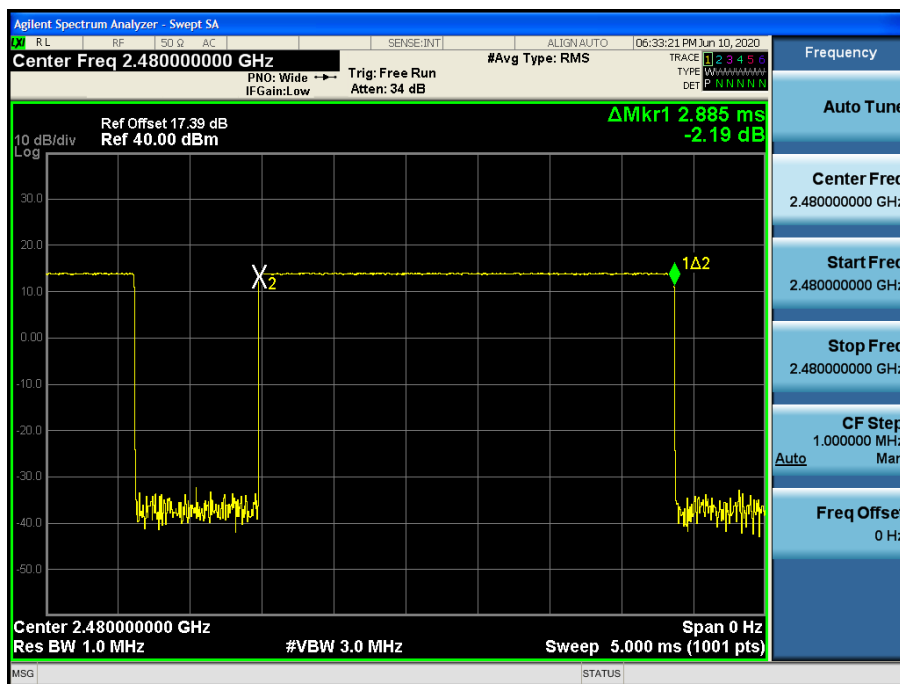


Test Plots (8DPSK)
Dwell Time (CH.0)

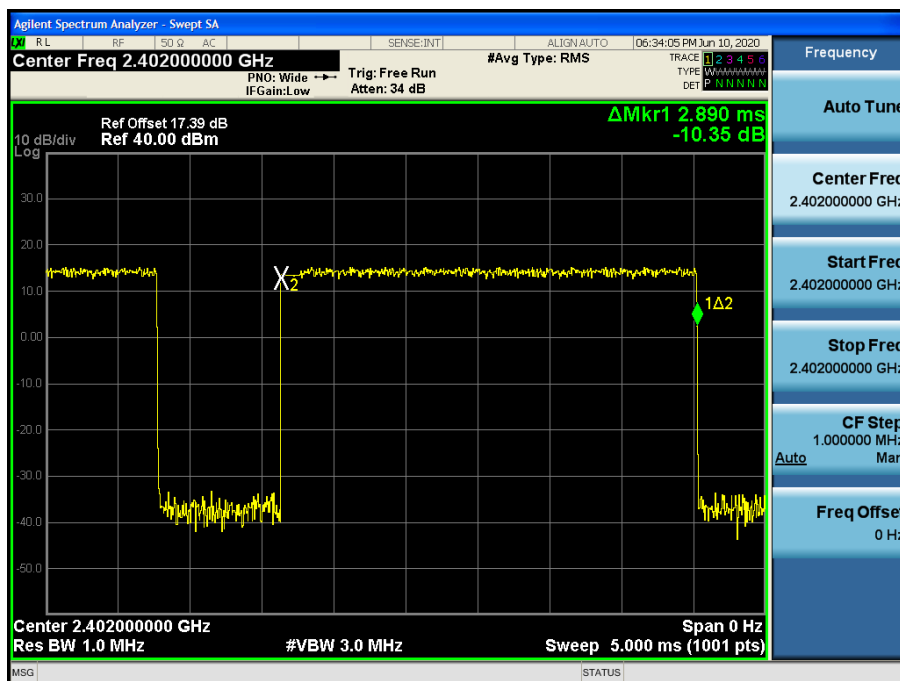


Test Plots (8DPSK)

Dwell Time (CH.39)

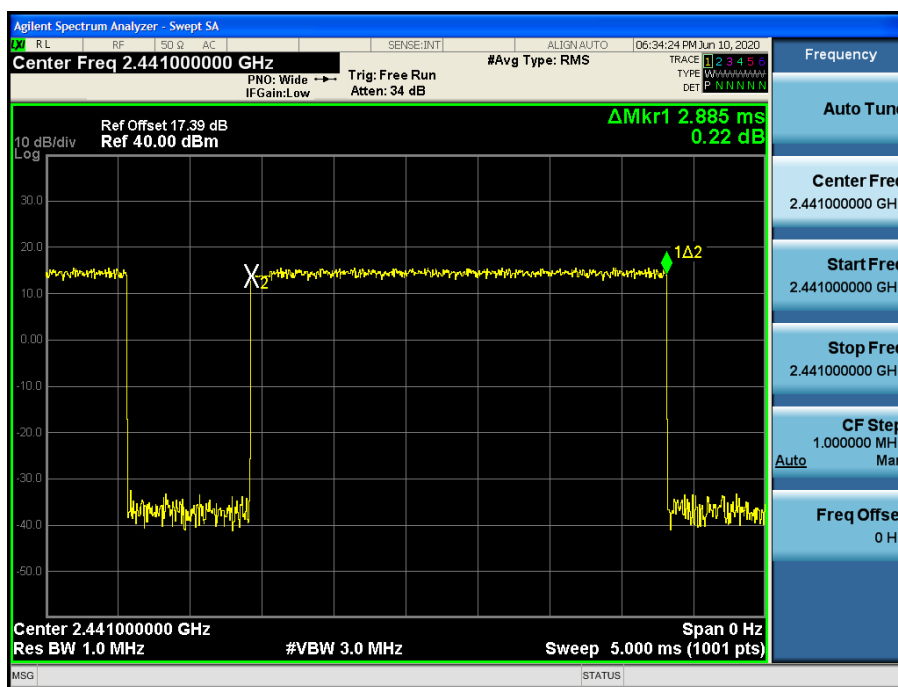


Test Plots (8DPSK)

Dwell Time (CH.78)

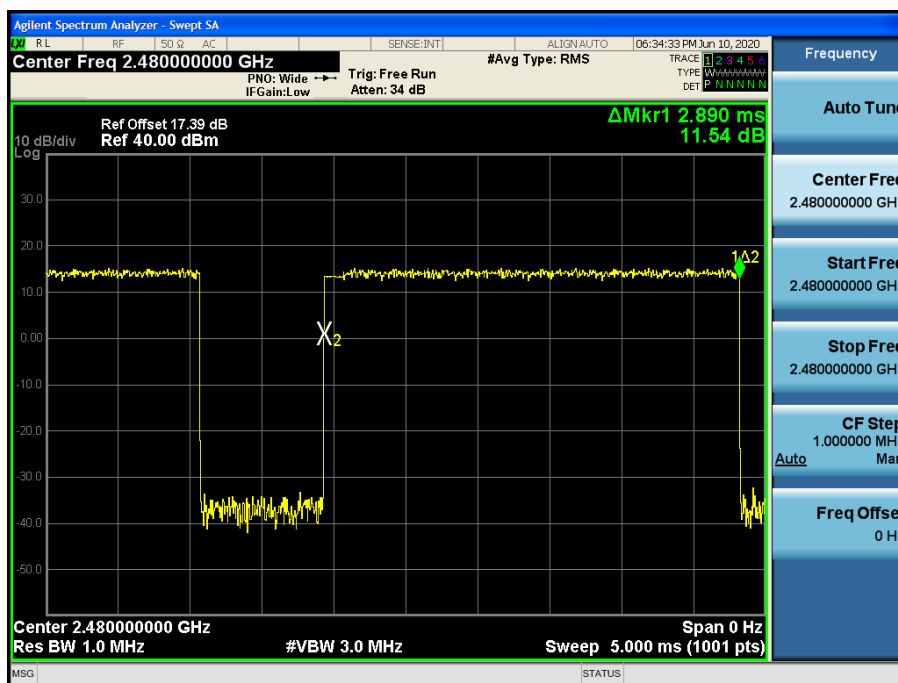


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

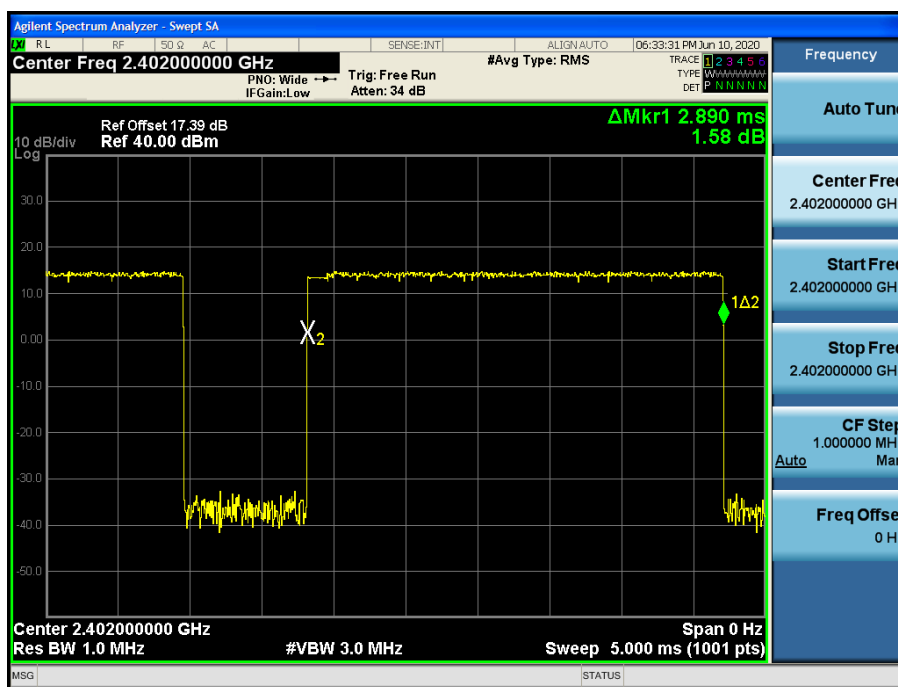


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

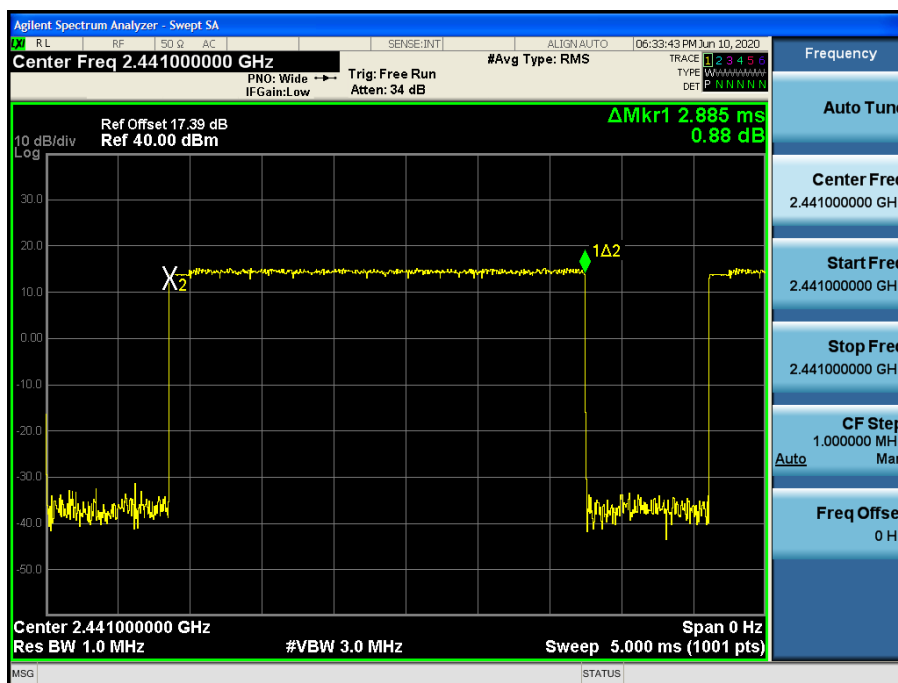

Test Plots ($\pi/4$ DQPSK)


Dwell Time (CH.78)

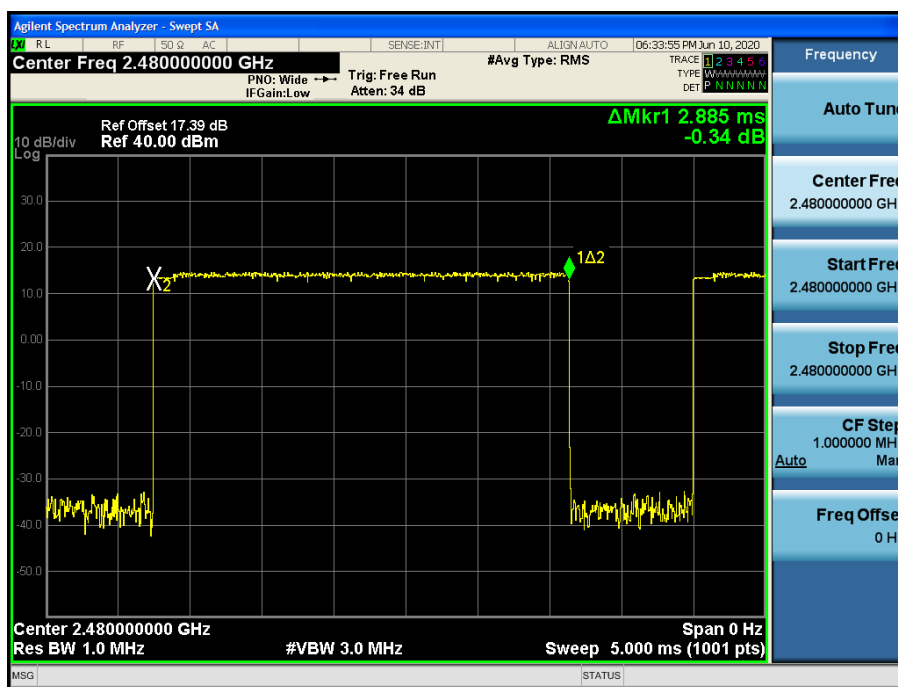

[Ant.2]


Test Plots (GFSK)

Dwell Time (CH.0)

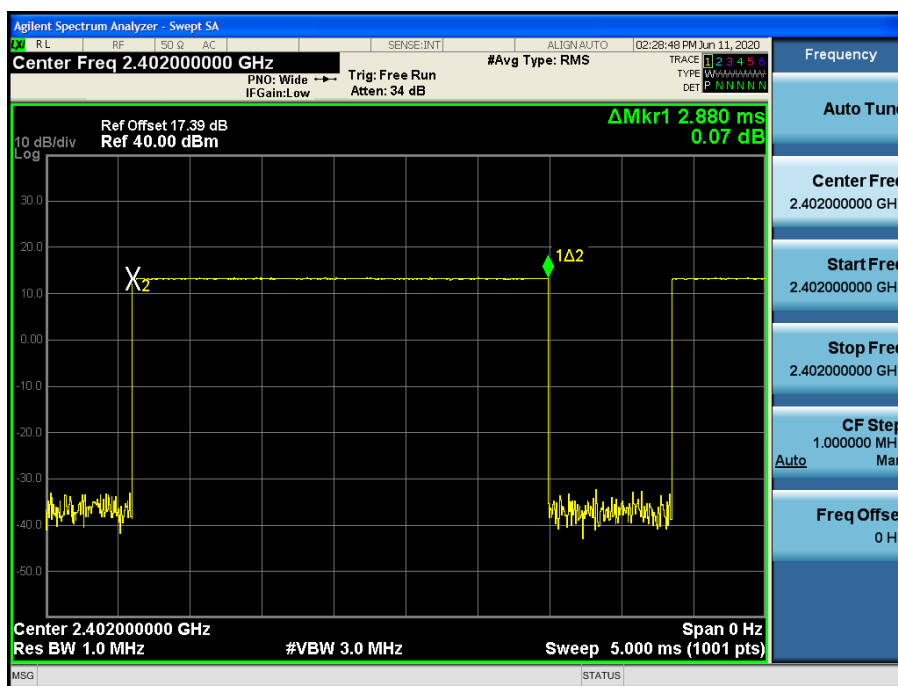


Test Plots (GFSK)


Dwell Time (CH.39)

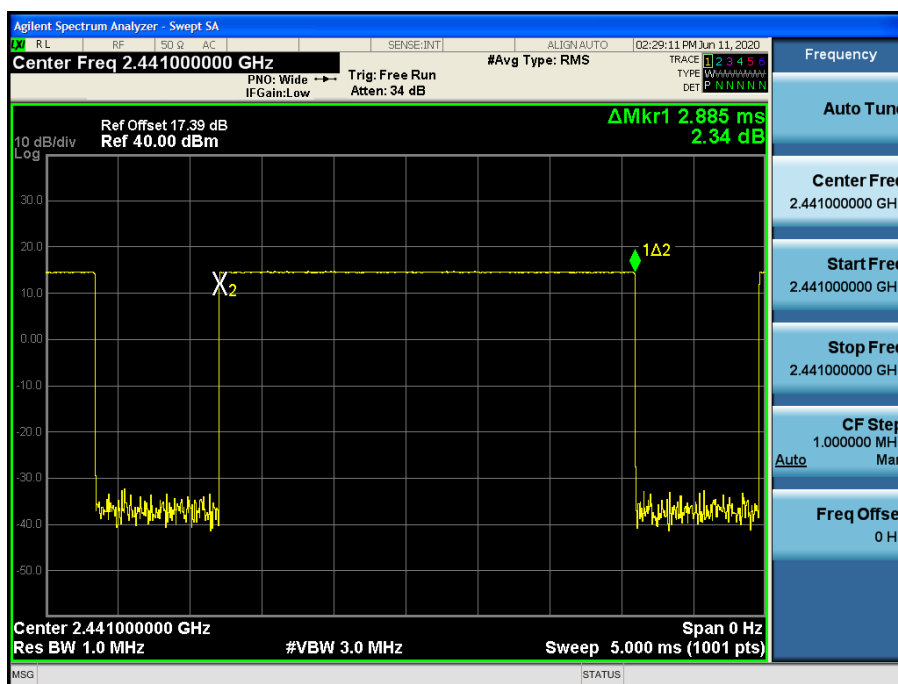

Test Plots (GFSK)
Dwell Time (CH.78)

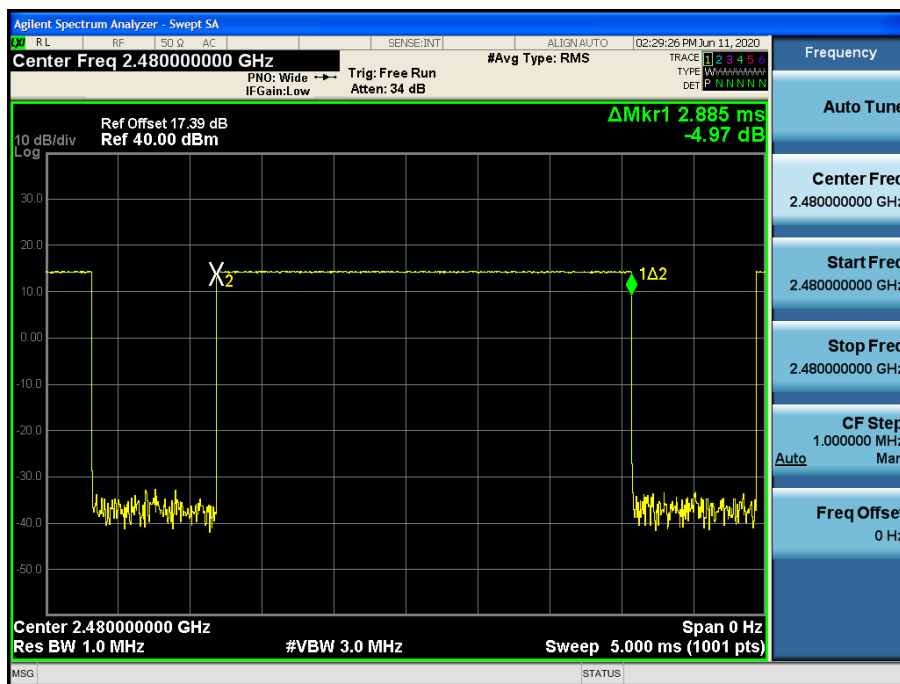


Test Plots (8DPSK)
Dwell Time (CH.0)

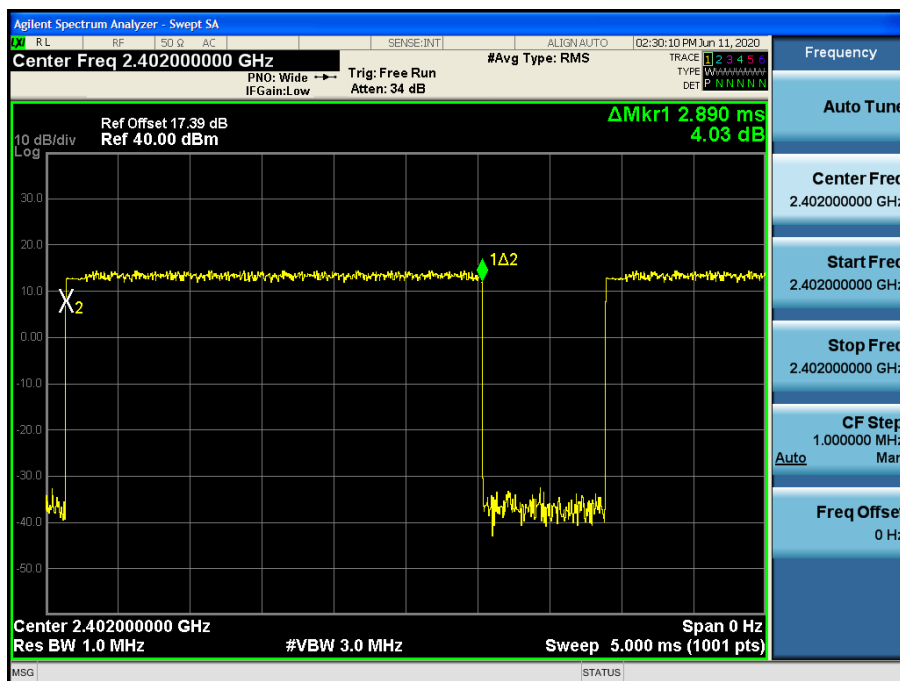


Test Plots (8DPSK)

Dwell Time (CH.39)

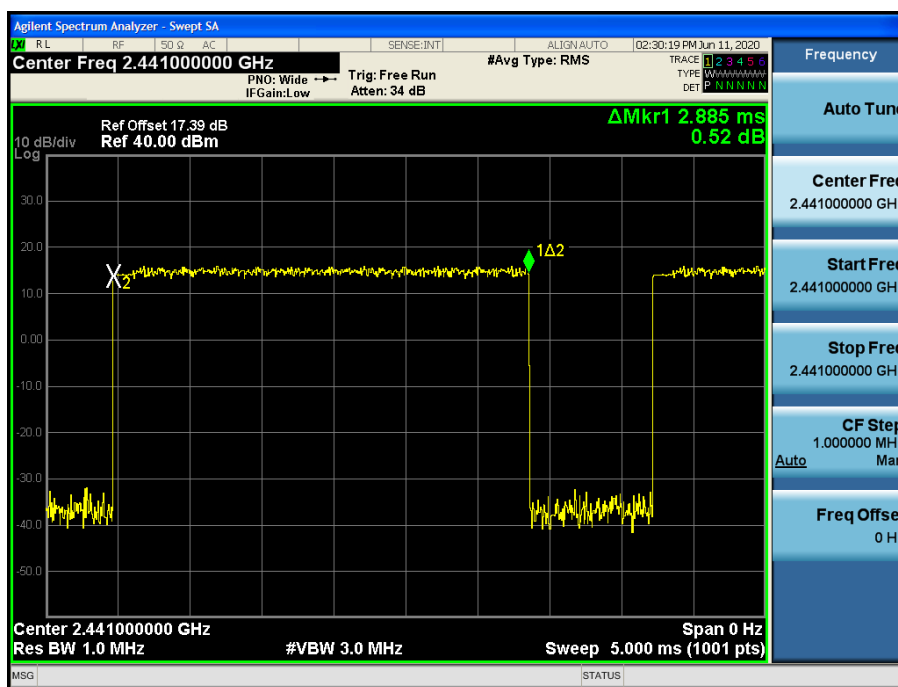


Test Plots (8DPSK)

Dwell Time (CH.78)

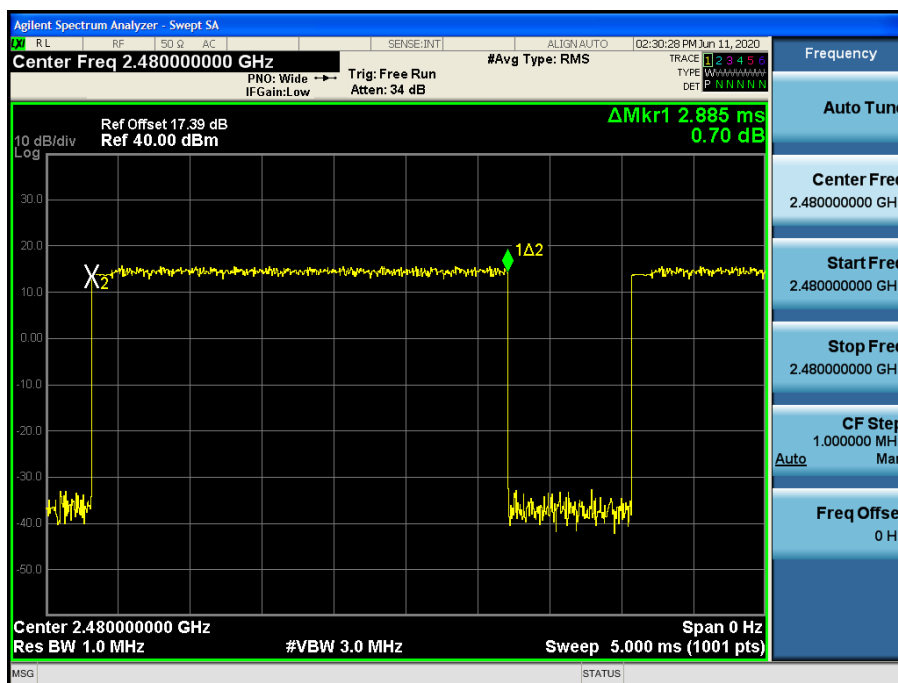


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

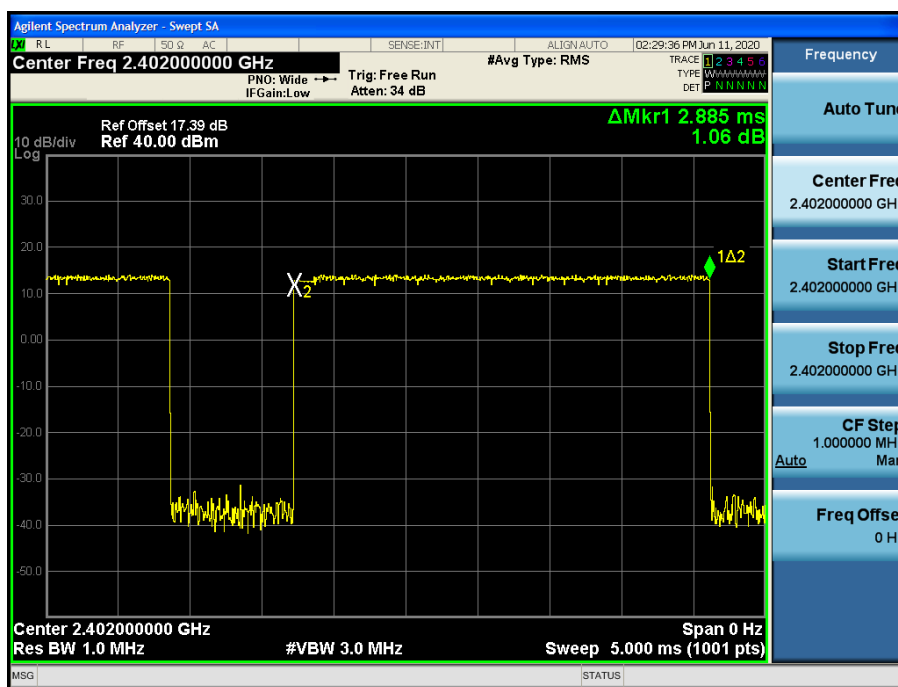


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

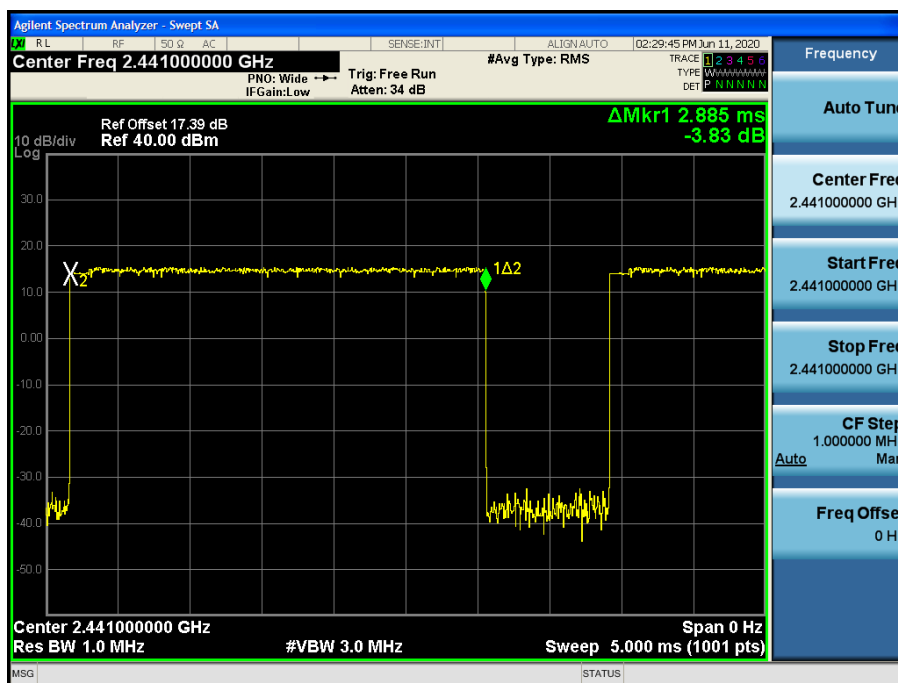

Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.78)

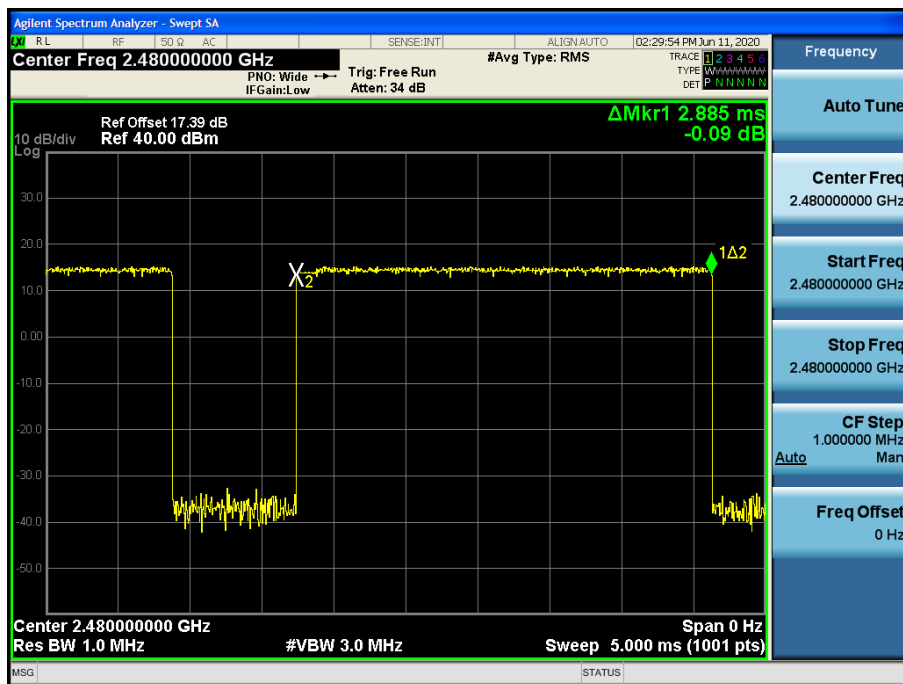

10.6 SPURIOUS EMISSIONS

10.6.1 CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

[Ant.1]


Test Plots (8DPSK)- 30 MHz - 1 GHz

Spurious Emission (CH.39)

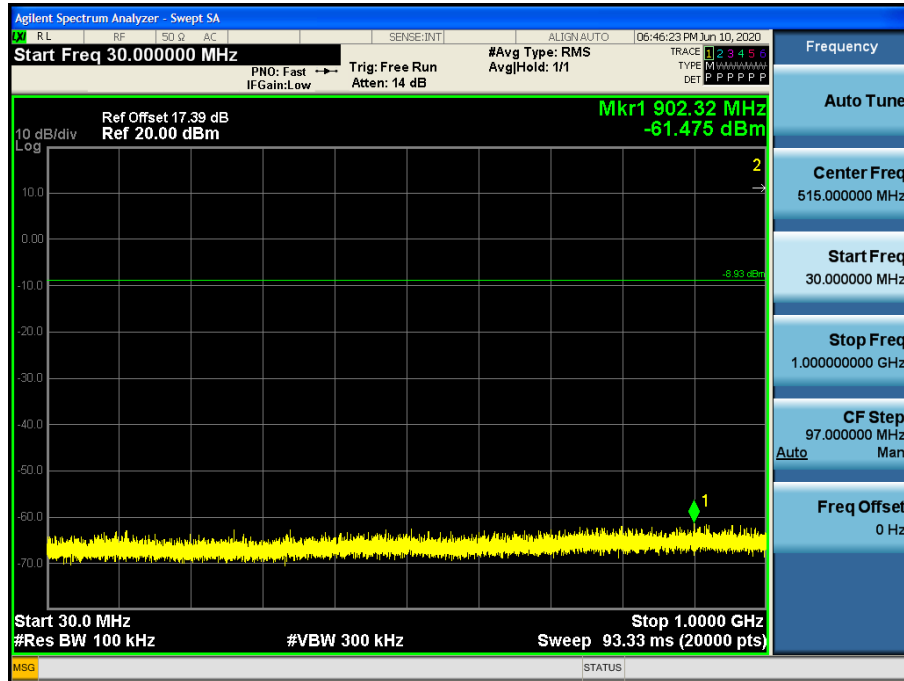


Test Plots (8DPSK)- 1 GHz – 3 GHz

Spurious Emission (CH.39)

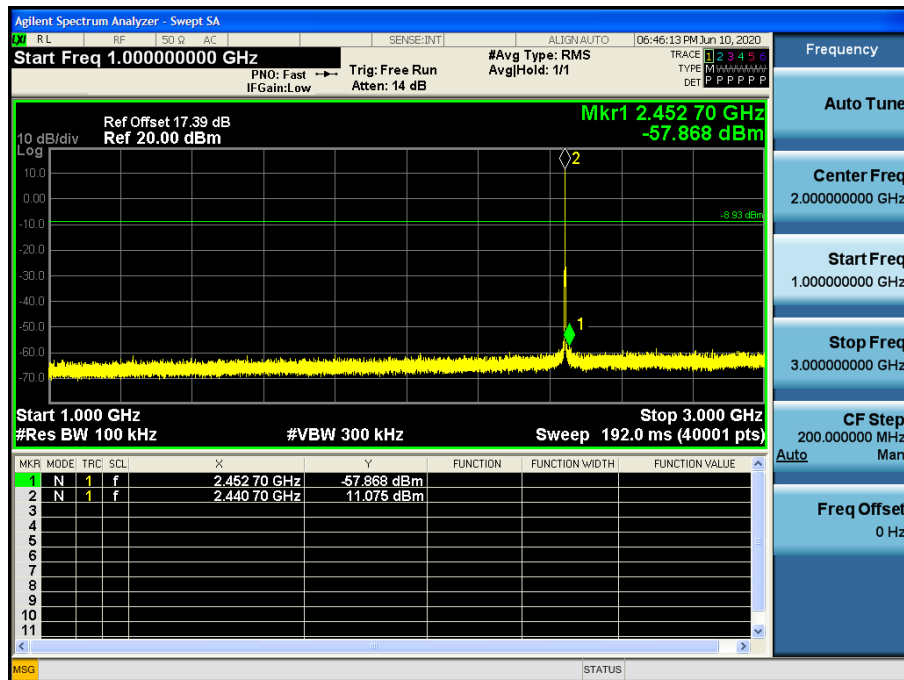


Test Plots(8DPSK)- 3 GHz - 5 GHz

Spurious Emission (CH.39)

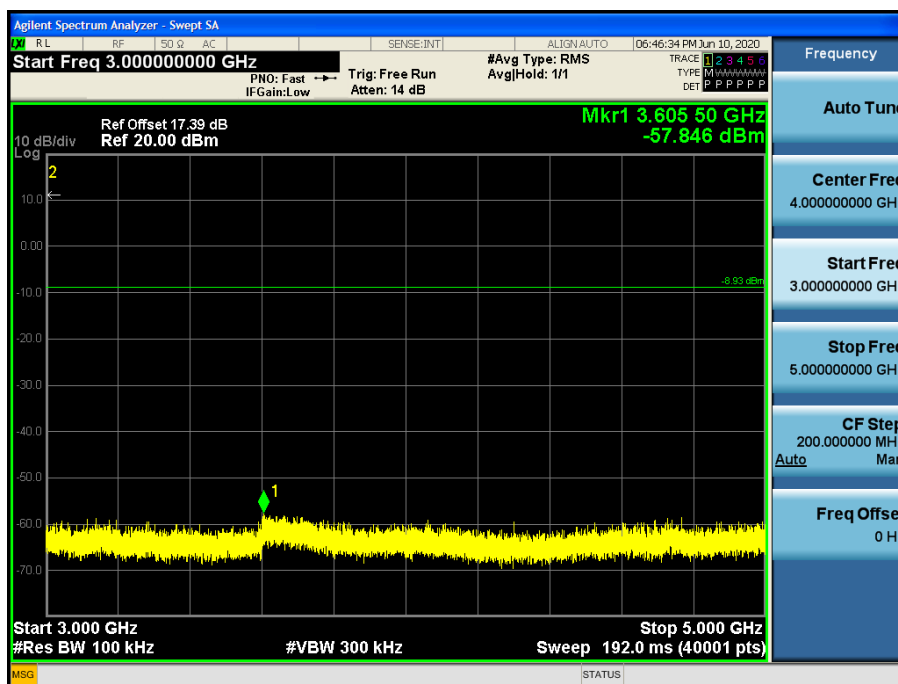


Test Plots (8DPSK)- 5 GHz - 7 GHz

Spurious Emission (CH.39)

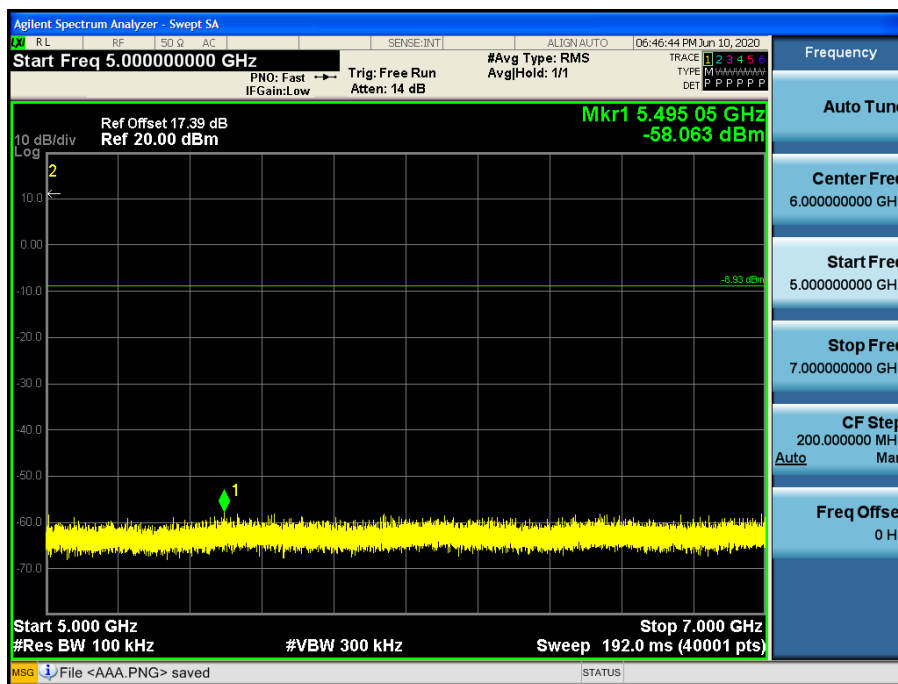


Test Plots(8DPSK)- 7 GHz - 9 GHz

Spurious Emission (CH.39)

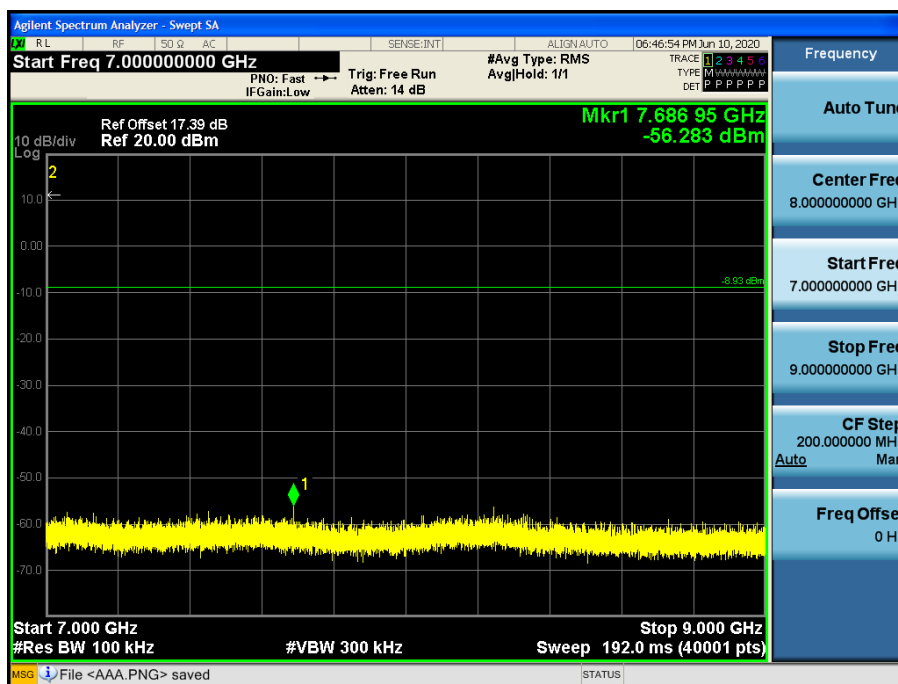


Test Plots(8DPSK)- 9 GHz - 11 GHz

Spurious Emission (CH.39)

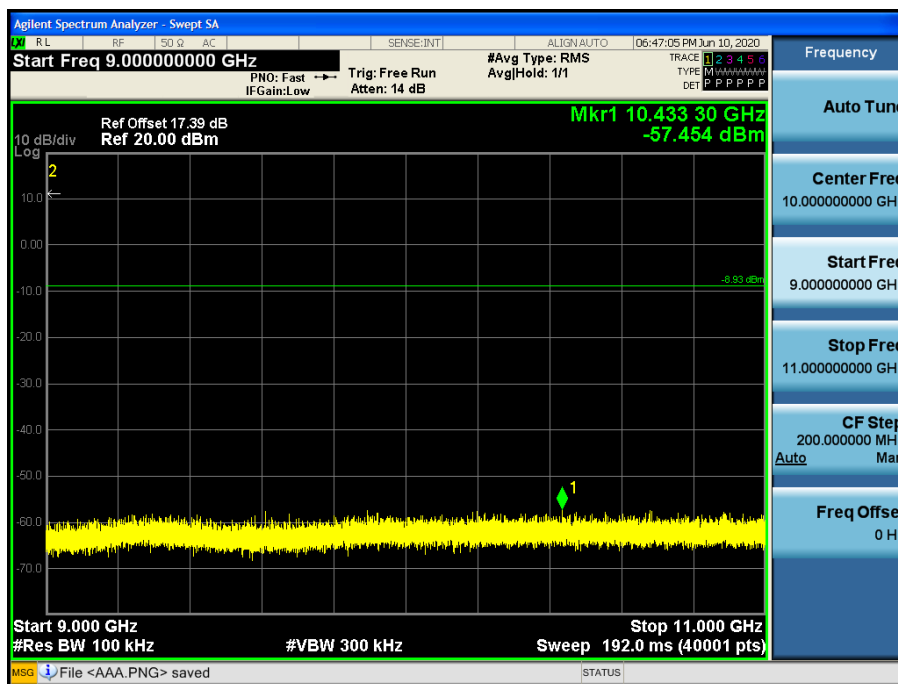


Test Plots(8DPSK) 11 GHz - 13 GHz

Spurious Emission (CH.39)

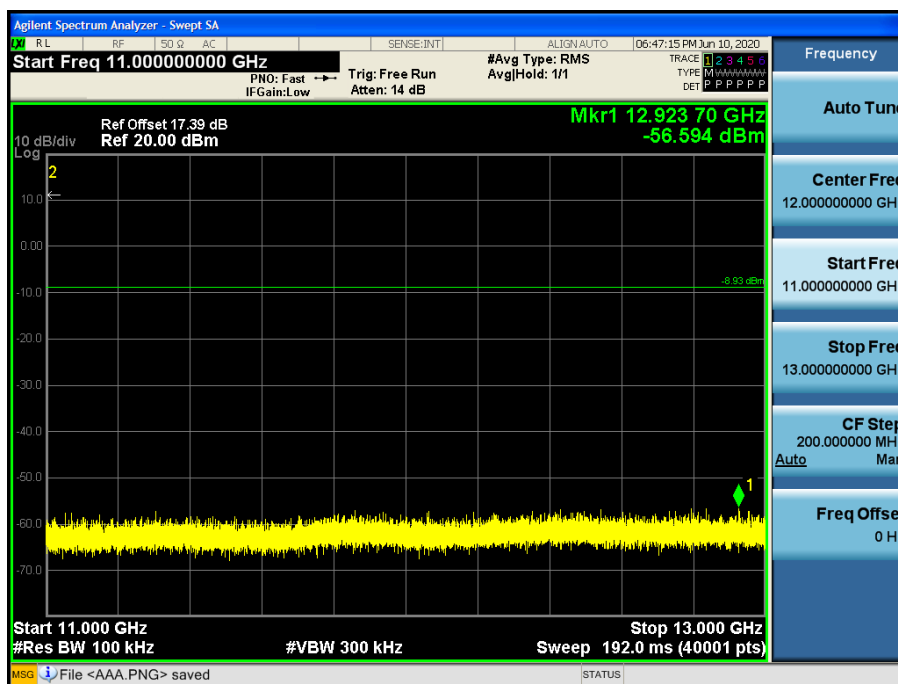


Test Plots (8DPSK)- 13 GHz – 15 GHz

Spurious Emission (CH.39)

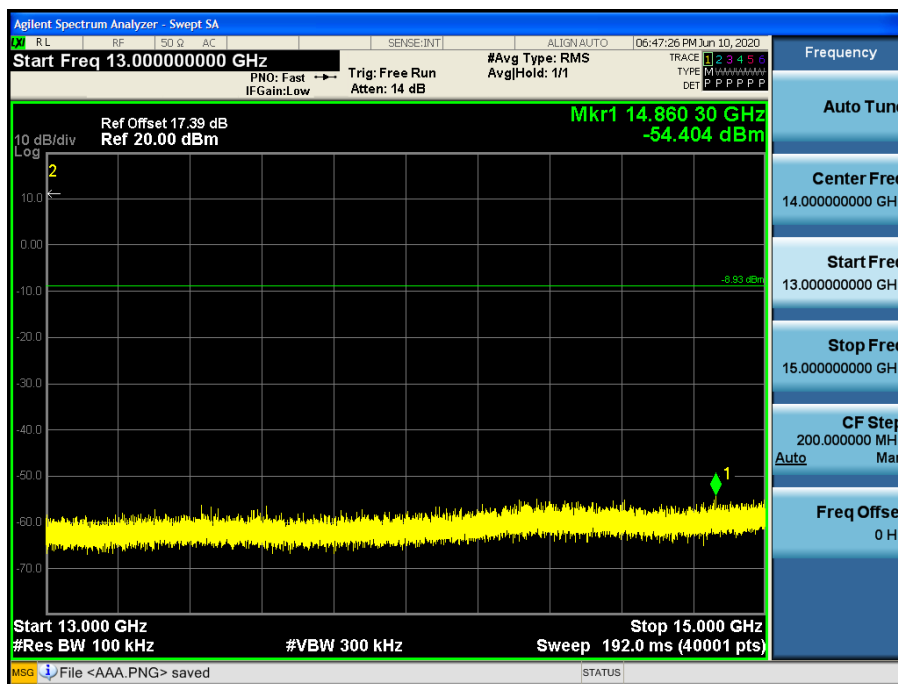


Test Plots(8DPSK)– 15 GHz - 17 GHz

Spurious Emission (CH.39)

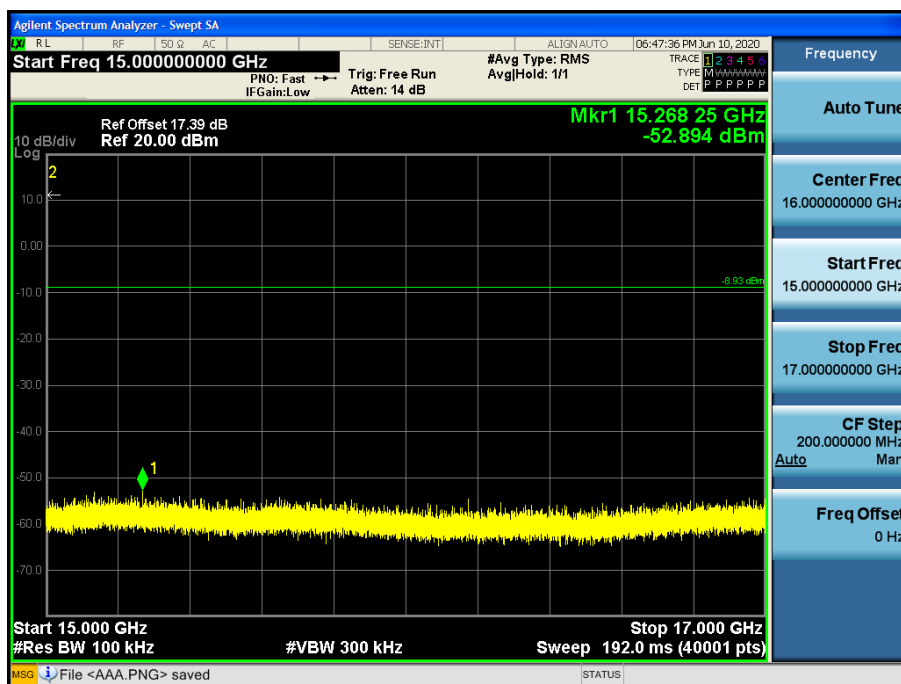


Test Plots(8DPSK)- 17 GHz - 19 GHz

Spurious Emission (CH.39)

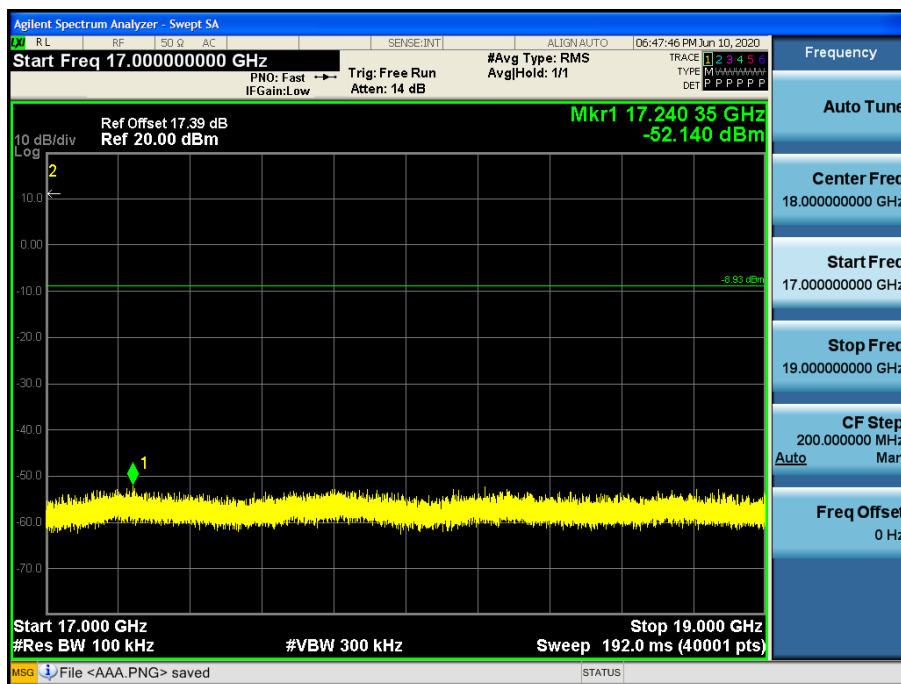


Test Plots (8DPSK)- 19 GHz - 21 GHz

Spurious Emission (CH.39)

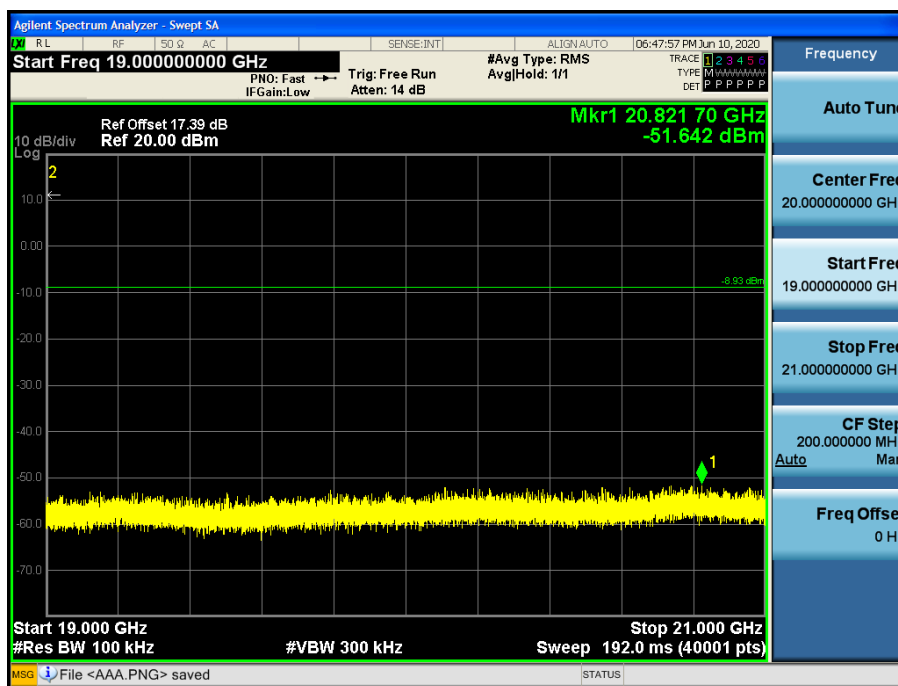


Test Plots (8DPSK)- 21 GHz - 23 GHz

Spurious Emission (CH.39)

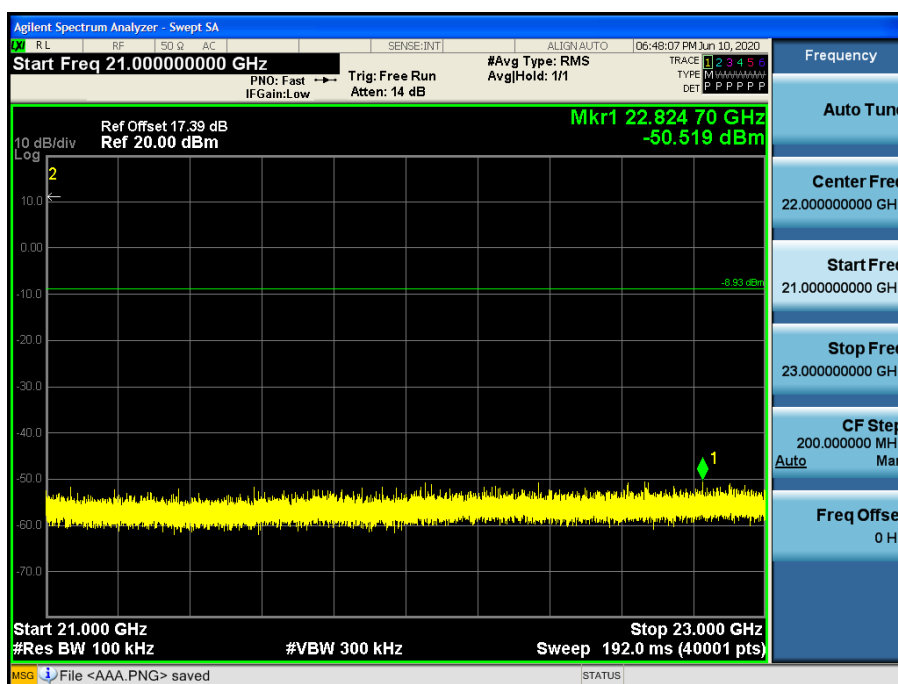

Test Plots (8DPSK)- 23 GHz - 25 GHz


Spurious Emission (CH.39)

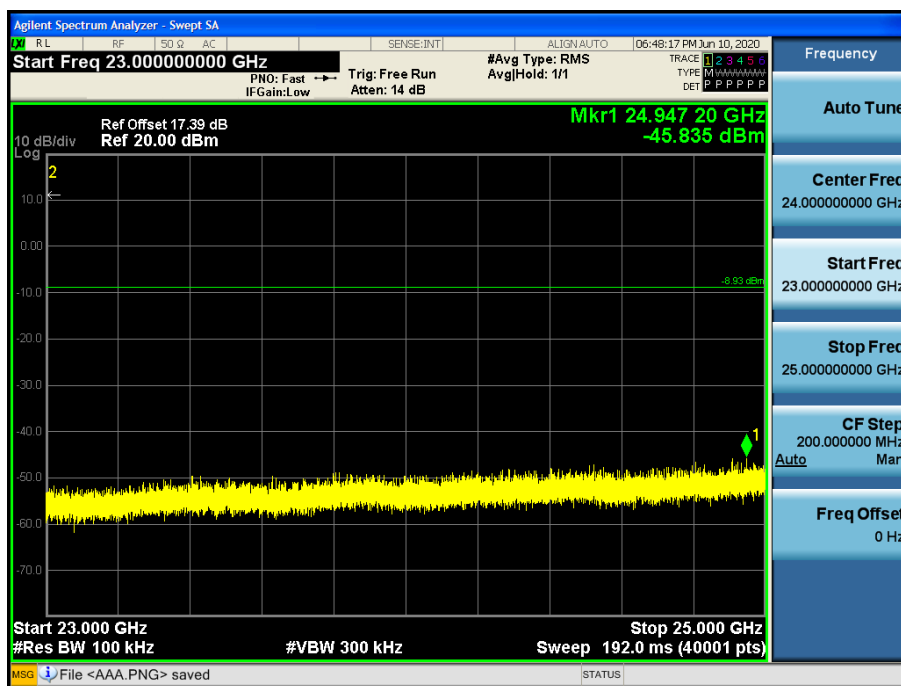

[Ant.2]


Test Plots (8DPSK)- 30 MHz - 1 GHz

Spurious Emission (CH.39)

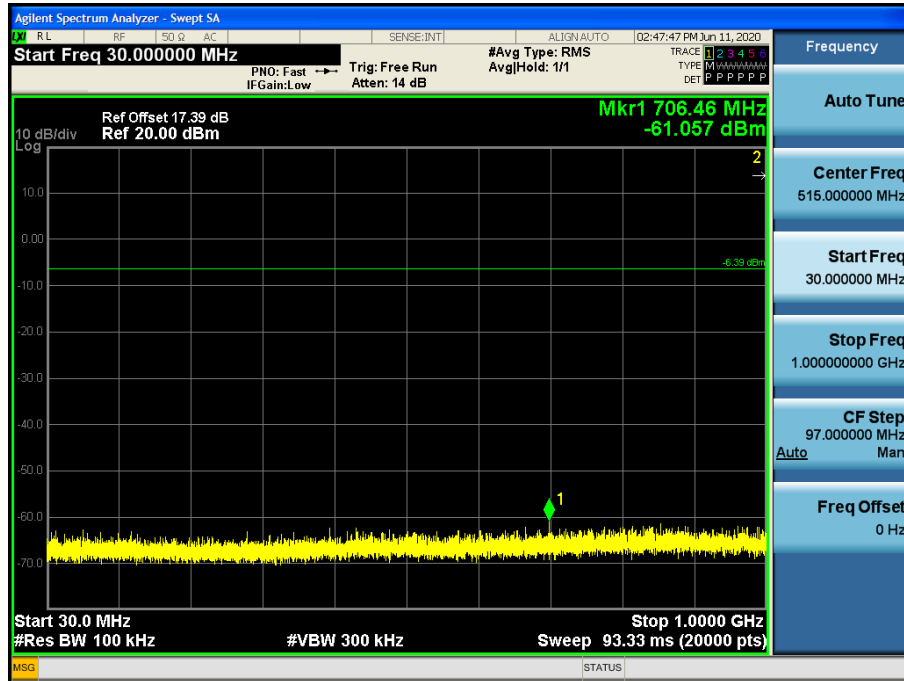


Test Plots (8DPSK)- 1 GHz – 3 GHz

Spurious Emission (CH.39)

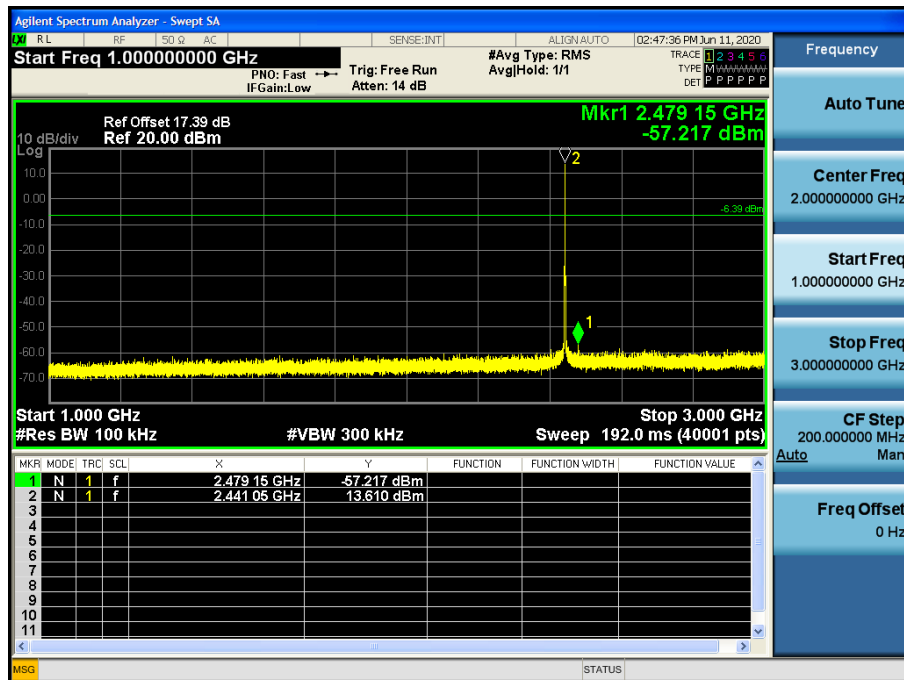


Test Plots(8DPSK)- 3 GHz - 5 GHz

Spurious Emission (CH.39)

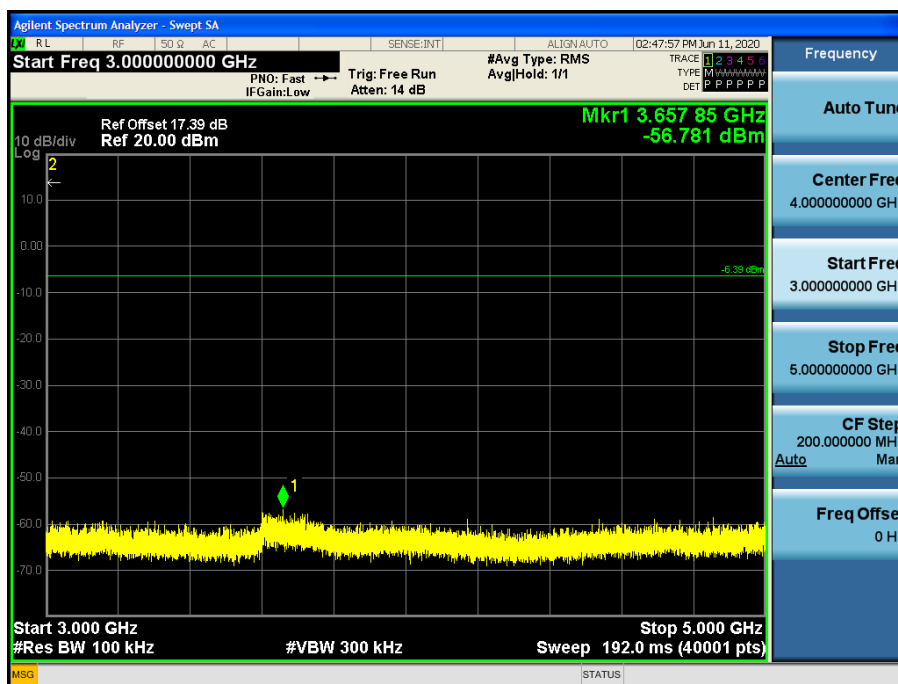


Test Plots (8DPSK)- 5 GHz - 7 GHz

Spurious Emission (CH.39)

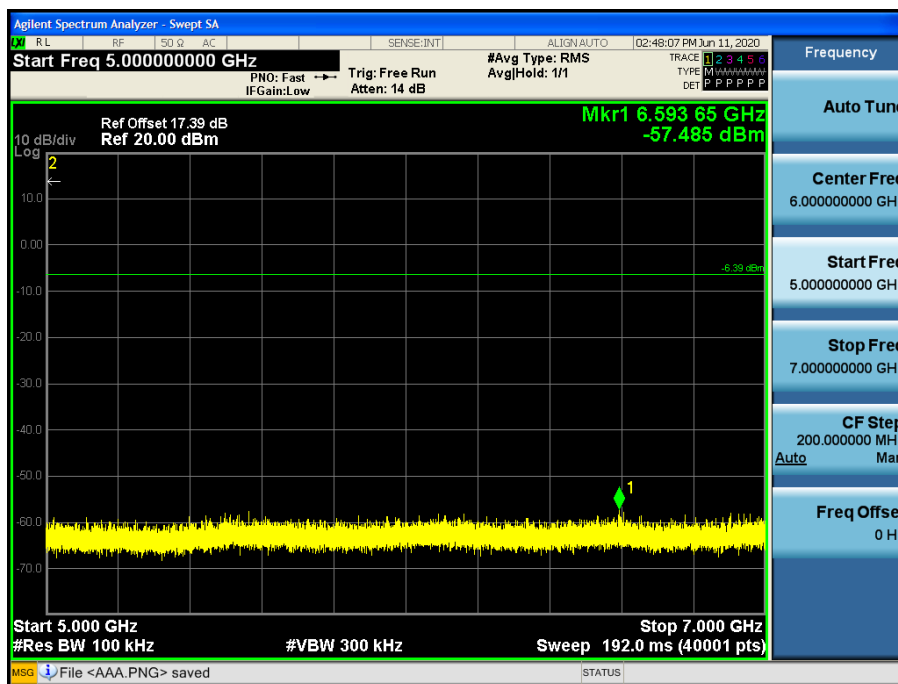


Test Plots(8DPSK)- 7 GHz - 9 GHz

Spurious Emission (CH.39)

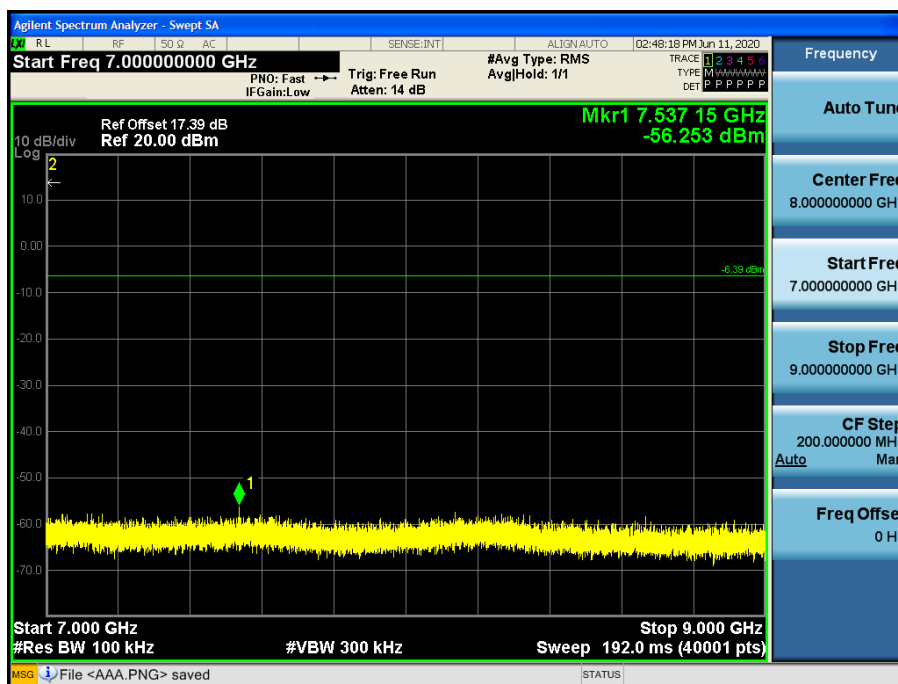


Test Plots(8DPSK)- 9 GHz - 11 GHz

Spurious Emission (CH.39)

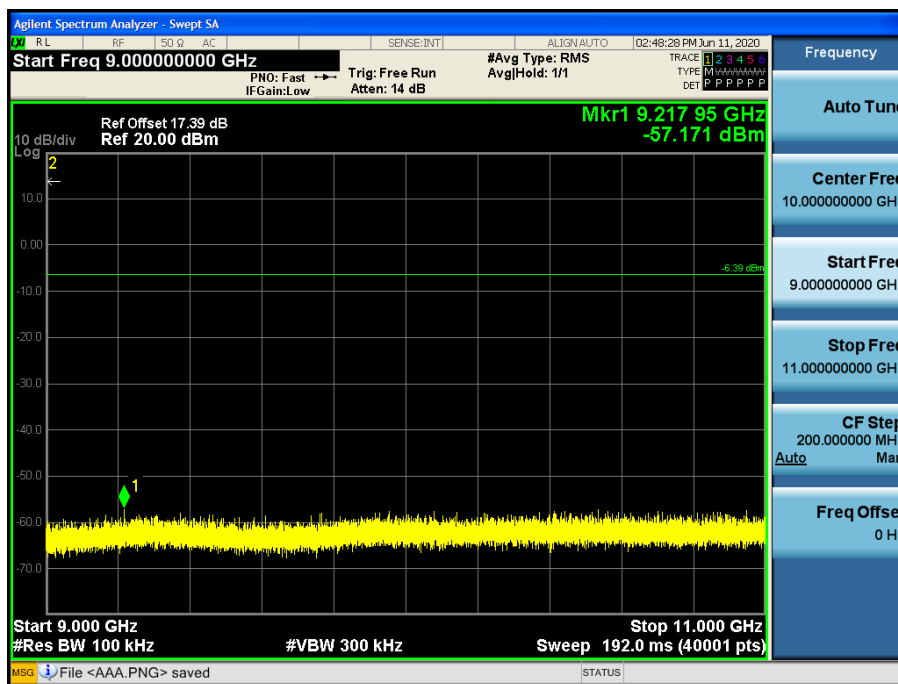


Test Plots(8DPSK) 11 GHz - 13 GHz

Spurious Emission (CH.39)

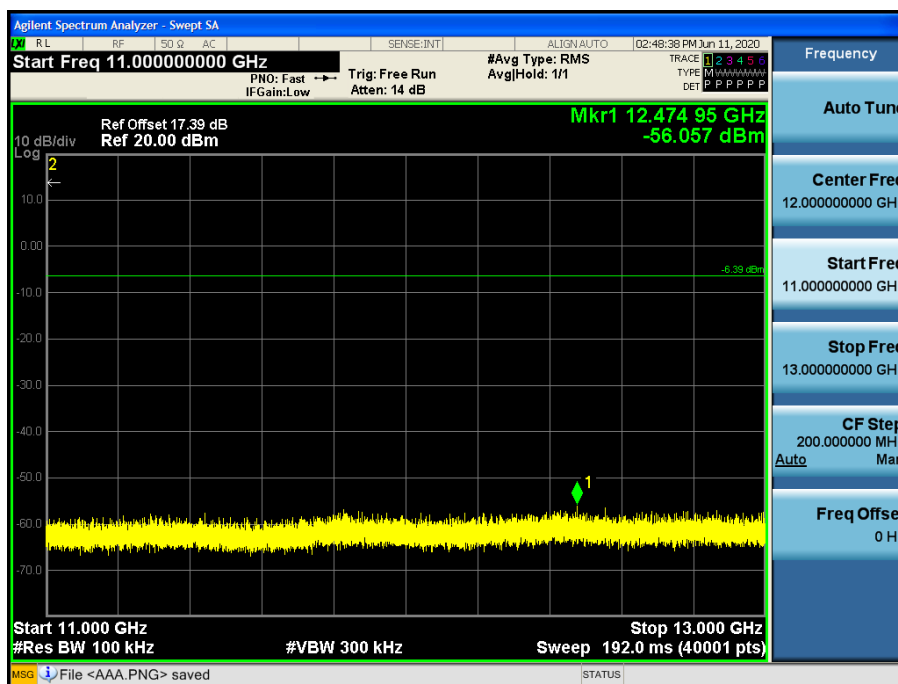


Test Plots (8DPSK)- 13 GHz – 15 GHz

Spurious Emission (CH.39)

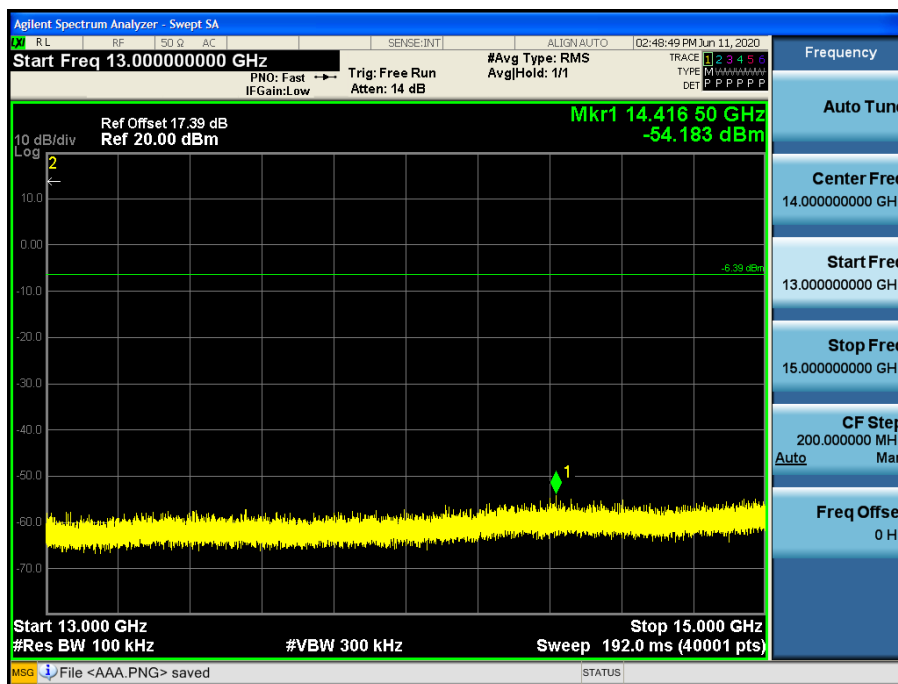


Test Plots(8DPSK)– 15 GHz - 17 GHz

Spurious Emission (CH.39)

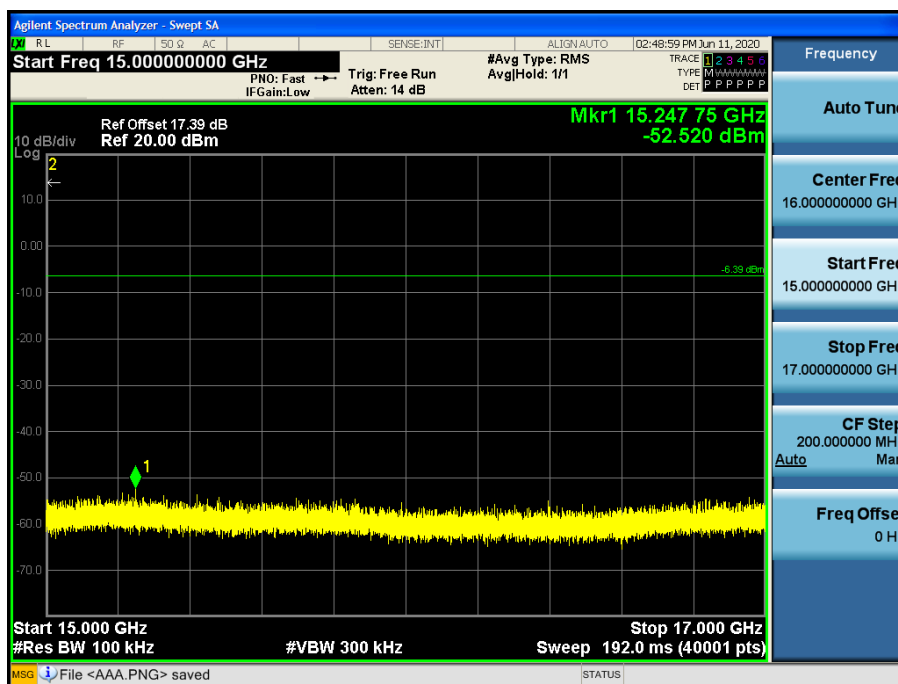


Test Plots(8DPSK)- 17 GHz - 19 GHz

Spurious Emission (CH.39)

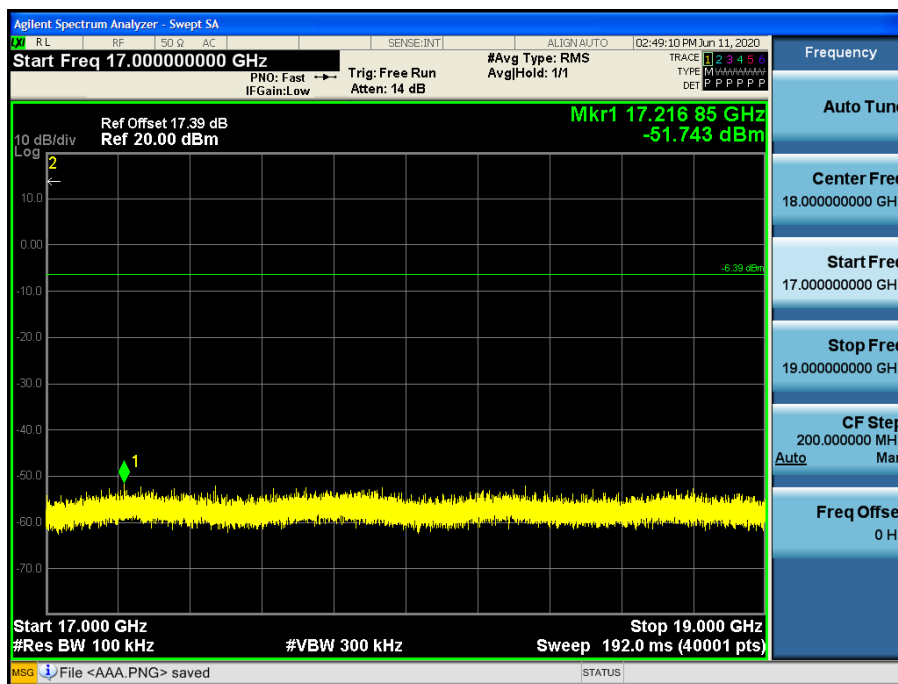


Test Plots (8DPSK)- 19 GHz - 21 GHz

Spurious Emission (CH.39)

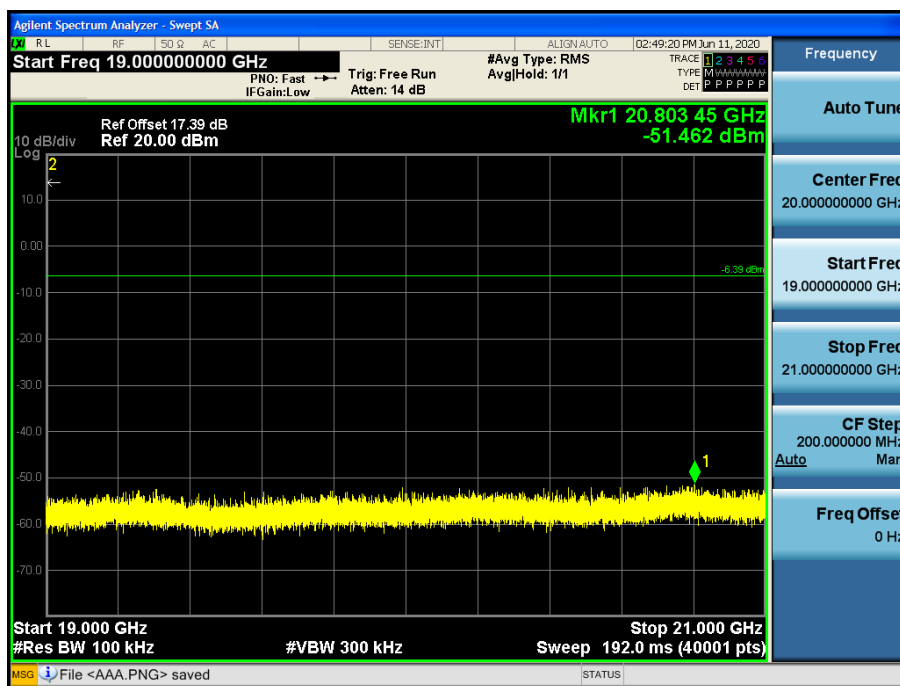


Test Plots (8DPSK)- 21 GHz - 23 GHz

Spurious Emission (CH.39)

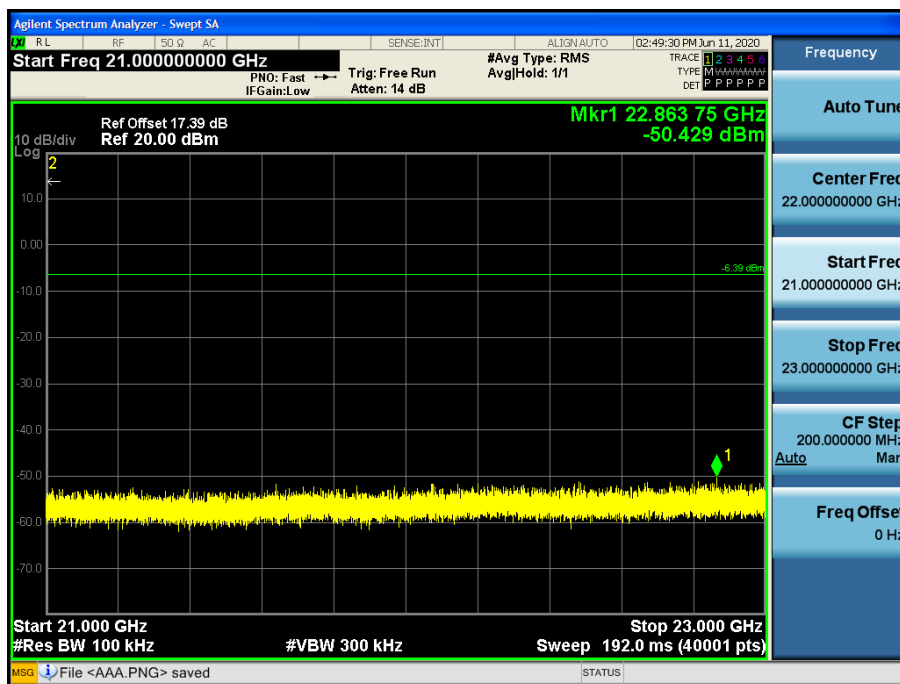

Test Plots (8DPSK)- 23 GHz - 25 GHz

Spurious Emission (CH.39)

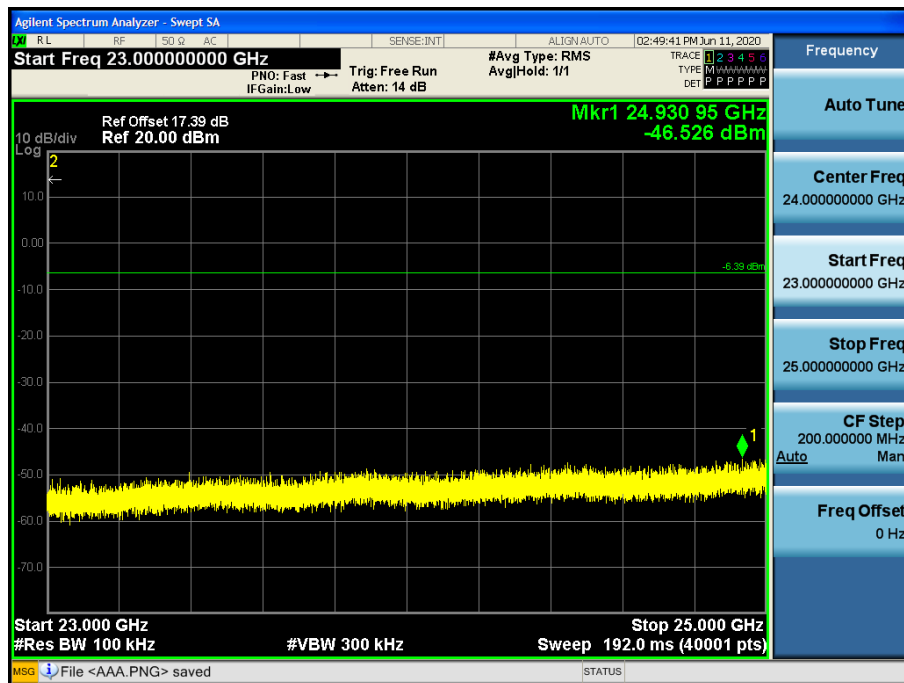

10.6.2 RADIATED SPURIOUS EMISSIONS**Frequency Range : 9 kHz – 30MHz**

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log$ (specific distance / test distance) (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz
[Ant.1]

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measuremen t Type
4804	41.89	1.83	V	0.00	43.72	73.98	30.26	PK
4804	41.89	1.83	V	-24.73	18.99	53.98	34.99	AV
7206	38.19	9.65	V	0.00	47.84	73.98	26.14	PK
7206	38.19	9.65	V	-24.73	23.11	53.98	30.87	AV
4804	42.30	1.83	H	0.00	44.13	73.98	29.85	PK
4804	42.30	1.83	H	-24.73	19.40	53.98	34.58	AV
7206	38.22	9.65	H	0.00	47.87	73.98	26.11	PK
7206	38.22	9.65	H	-24.73	23.14	53.98	30.84	AV

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measuremen t Type
4882	40.77	2.31	V	0.00	43.08	73.98	30.90	PK
4882	40.77	2.31	V	-24.73	18.35	53.98	35.63	AV
7323	37.59	9.96	V	0.00	47.55	73.98	26.43	PK
7323	37.59	9.96	V	-24.73	22.82	53.98	31.16	AV
4882	41.85	2.31	H	0.00	44.16	73.98	29.82	PK
4882	41.85	2.31	H	-24.73	19.43	53.98	34.55	AV
7323	37.78	9.96	H	0.00	47.74	73.98	26.24	PK
7323	37.78	9.96	H	-24.73	23.01	53.98	30.97	AV

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measuremen t Type
4960	40.63	2.26	V	0.00	42.89	73.98	31.09	PK
4960	40.63	2.26	V	-24.73	18.16	53.98	35.82	AV
7440	38.02	9.78	V	0.00	47.80	73.98	26.18	PK
7440	38.02	9.78	V	-24.73	23.07	53.98	30.91	AV
4960	41.92	2.26	H	0.00	44.18	73.98	29.80	PK
4960	41.92	2.26	H	-24.73	19.45	53.98	34.53	AV
7440	38.63	9.78	H	0.00	48.41	73.98	25.57	PK
7440	38.63	9.78	H	-24.73	23.68	53.98	30.30	AV

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	41.02	1.83	V	0.00	42.85	73.98	31.13	PK
4804	41.02	1.83	V	-24.73	18.12	53.98	35.86	AV
7206	37.72	9.65	V	0.00	47.37	73.98	26.61	PK
7206	37.72	9.65	V	-24.73	22.64	53.98	31.34	AV
4804	42.28	1.83	H	0.00	44.11	73.98	29.87	PK
4804	42.28	1.83	H	-24.73	19.38	53.98	34.60	AV
7206	38.36	9.65	H	0.00	48.01	73.98	25.97	PK
7206	38.36	9.65	H	-24.73	23.28	53.98	30.70	AV

Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.42	2.31	V	0.00	42.73	73.98	31.25	PK
4882	40.42	2.31	V	-24.73	18.00	53.98	35.98	AV
7323	36.98	9.96	V	0.00	46.94	73.98	27.04	PK
7323	36.98	9.96	V	-24.73	22.21	53.98	31.77	AV
4882	41.38	2.31	H	0.00	43.69	73.98	30.29	PK
4882	41.38	2.31	H	-24.73	18.96	53.98	35.02	AV
7323	38.07	9.96	H	0.00	48.03	73.98	25.95	PK
7323	38.07	9.96	H	-24.73	23.30	53.98	30.68	AV

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.00	2.26	V	0.00	43.26	73.98	30.72	PK
4960	41.00	2.26	V	-24.73	18.53	53.98	35.45	AV
7440	37.73	9.78	V	0.00	47.51	73.98	26.47	PK
7440	37.73	9.78	V	-24.73	22.78	53.98	31.20	AV
4960	41.45	2.26	H	0.00	43.71	73.98	30.27	PK
4960	41.45	2.26	H	-24.73	18.98	53.98	35.00	AV
7440	38.38	9.78	H	0.00	48.16	73.98	25.82	PK
7440	38.38	9.78	H	-24.73	23.43	53.98	30.55	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	41.45	1.83	V	0.00	43.28	73.98	30.70	PK
4804	41.45	1.83	V	-24.73	18.55	53.98	35.43	AV
7206	37.62	9.65	V	0.00	47.27	73.98	26.71	PK
7206	37.62	9.65	V	-24.73	22.54	53.98	31.44	AV
4804	42.61	1.83	H	0.00	44.44	73.98	29.54	PK
4804	42.61	1.83	H	-24.73	19.71	53.98	34.27	AV
7206	38.01	9.65	H	0.00	47.66	73.98	26.32	PK
7206	38.01	9.65	H	-24.73	22.93	53.98	31.05	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.51	2.31	V	0.00	42.82	73.98	31.16	PK
4882	40.51	2.31	V	-24.73	18.09	53.98	35.89	AV
7323	37.09	9.96	V	0.00	47.05	73.98	26.93	PK
7323	37.09	9.96	V	-24.73	22.32	53.98	31.66	AV
4882	42.71	2.31	H	0.00	45.02	73.98	28.96	PK
4882	42.71	2.31	H	-24.73	20.29	53.98	33.69	AV
7323	38.55	9.96	H	0.00	48.51	73.98	25.47	PK
7323	38.55	9.96	H	-24.73	23.78	53.98	30.20	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.54	2.26	V	0.00	43.80	73.98	30.18	PK
4960	41.54	2.26	V	-24.73	19.07	53.98	34.91	AV
7440	38.06	9.78	V	0.00	47.84	73.98	26.14	PK
7440	38.06	9.78	V	-24.73	23.11	53.98	30.87	AV
4960	42.15	2.26	H	0.00	44.41	73.98	29.57	PK
4960	42.15	2.26	H	-24.73	19.68	53.98	34.30	AV
7440	39.00	9.78	H	0.00	48.78	73.98	25.20	PK
7440	39.00	9.78	H	-24.73	24.05	53.98	29.93	AV

[Ant.2]

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	41.56	1.83	V	0.00	43.39	73.98	30.59	PK
4804	41.56	1.83	V	-24.73	18.66	53.98	35.32	AV
7206	37.17	9.65	V	0.00	46.82	73.98	27.16	PK
7206	37.17	9.65	V	-24.73	22.09	53.98	31.89	AV
4804	42.32	1.83	H	0.00	44.15	73.98	29.83	PK
4804	42.32	1.83	H	-24.73	19.42	53.98	34.56	AV
7206	38.16	9.65	H	0.00	47.81	73.98	26.17	PK
7206	38.16	9.65	H	-24.73	23.08	53.98	30.90	AV

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.84	2.31	V	0.00	43.15	73.98	30.83	PK
4882	40.84	2.31	V	-24.73	18.42	53.98	35.56	AV
7323	38.45	9.96	V	0.00	48.41	73.98	25.57	PK
7323	38.45	9.96	V	-24.73	23.68	53.98	30.30	AV
4882	41.19	2.31	H	0.00	43.50	73.98	30.48	PK
4882	41.19	2.31	H	-24.73	18.77	53.98	35.21	AV
7323	38.92	9.96	H	0.00	48.88	73.98	25.10	PK
7323	38.92	9.96	H	-24.73	24.15	53.98	29.83	AV

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.09	2.26	V	0.00	43.35	73.98	30.63	PK
4960	41.09	2.26	V	-24.73	18.62	53.98	35.36	AV
7440	38.14	9.78	V	0.00	47.92	73.98	26.06	PK
7440	38.14	9.78	V	-24.73	23.19	53.98	30.79	AV
4960	41.44	2.26	H	0.00	43.70	73.98	30.28	PK
4960	41.44	2.26	H	-24.73	18.97	53.98	35.01	AV
7440	39.41	9.78	H	0.00	49.19	73.98	24.79	PK
7440	39.41	9.78	H	-24.73	24.46	53.98	29.52	AV

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	40.19	1.83	V	0.00	42.02	73.98	31.96	PK
4804	40.19	1.83	V	-24.73	17.29	53.98	36.69	AV
7206	38.31	9.65	V	0.00	47.96	73.98	26.02	PK
7206	38.31	9.65	V	-24.73	23.23	53.98	30.75	AV
4804	41.31	1.83	H	0.00	43.14	73.98	30.84	PK
4804	41.31	1.83	H	-24.73	18.41	53.98	35.57	AV
7206	38.73	9.65	H	0.00	48.38	73.98	25.60	PK
7206	38.73	9.65	H	-24.73	23.65	53.98	30.33	AV

Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.38	2.31	V	0.00	42.69	73.98	31.29	PK
4882	40.38	2.31	V	-24.73	17.96	53.98	36.02	AV
7323	38.28	9.96	V	0.00	48.24	73.98	25.74	PK
7323	38.28	9.96	V	-24.73	23.51	53.98	30.47	AV
4882	40.47	2.31	H	0.00	42.78	73.98	31.20	PK
4882	40.47	2.31	H	-24.73	18.05	53.98	35.93	AV
7323	38.37	9.96	H	0.00	48.33	73.98	25.65	PK
7323	38.37	9.96	H	-24.73	23.60	53.98	30.38	AV

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	40.27	2.26	V	0.00	42.53	73.98	31.45	PK
4960	40.27	2.26	V	-24.73	17.80	53.98	36.18	AV
7440	38.57	9.78	V	0.00	48.35	73.98	25.63	PK
7440	38.57	9.78	V	-24.73	23.62	53.98	30.36	AV
4960	41.71	2.26	H	0.00	43.97	73.98	30.01	PK
4960	41.71	2.26	H	-24.73	19.24	53.98	34.74	AV
7440	38.76	9.78	H	0.00	48.54	73.98	25.44	PK
7440	38.76	9.78	H	-24.73	23.81	53.98	30.17	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	40.07	1.83	V	0.00	41.90	73.98	32.08	PK
4804	40.07	1.83	V	-24.73	17.17	53.98	36.81	AV
7206	37.79	9.65	V	0.00	47.44	73.98	26.54	PK
7206	37.79	9.65	V	-24.73	22.71	53.98	31.27	AV
4804	41.73	1.83	H	0.00	43.56	73.98	30.42	PK
4804	41.73	1.83	H	-24.73	18.83	53.98	35.15	AV
7206	38.43	9.65	H	0.00	48.08	73.98	25.90	PK
7206	38.43	9.65	H	-24.73	23.35	53.98	30.63	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.17	2.31	V	0.00	42.48	73.98	31.50	PK
4882	40.17	2.31	V	-24.73	17.75	53.98	36.23	AV
7323	38.08	9.96	V	0.00	48.04	73.98	25.94	PK
7323	38.08	9.96	V	-24.73	23.31	53.98	30.67	AV
4882	41.51	2.31	H	0.00	43.82	73.98	30.16	PK
4882	41.51	2.31	H	-24.73	19.09	53.98	34.89	AV
7323	38.41	9.96	H	0.00	48.37	73.98	25.61	PK
7323	38.41	9.96	H	-24.73	23.64	53.98	30.34	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	40.53	2.26	V	0.00	42.79	73.98	31.19	PK
4960	40.53	2.26	V	-24.73	18.06	53.98	35.92	AV
7440	38.65	9.78	V	0.00	48.43	73.98	25.55	PK
7440	38.65	9.78	V	-24.73	23.70	53.98	30.28	AV
4960	41.53	2.26	H	0.00	43.79	73.98	30.19	PK
4960	41.53	2.26	H	-24.73	19.06	53.98	34.92	AV
7440	38.97	9.78	H	0.00	48.75	73.98	25.23	PK
7440	38.97	9.78	H	-24.73	24.02	53.98	29.96	AV

[Non-DBS Mode]

Test Case 1:

Operation Mode: 5 GHz Ant.2 6Mbps ch.36(5180MHz) / BT Ant.1 ch.39(2441MHz) DH5 (GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	40.70	2.31	V	0.00	43.01	73.98	30.97	PK
4882	40.70	2.31	V	-24.73	18.28	53.98	35.70	AV
7323	37.99	9.96	V	0.00	47.95	73.98	26.03	PK
7323	37.99	9.96	V	-24.73	23.22	53.98	30.76	AV
4882	41.64	2.31	H	0.00	43.95	73.98	30.03	PK
4882	41.64	2.31	H	-24.73	19.22	53.98	34.76	AV
7323	38.14	9.96	H	0.00	48.10	73.98	25.88	PK
7323	38.14	9.96	H	-24.73	23.37	53.98	30.61	AV

Test Case 2

Operation Mode: 5 GHz Ant.All 6Mbps ch.165(5825MHz) / BT Ant.1 ch.0(2402MHz) DH5 (GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	42.11	1.83	V	0.00	43.94	73.98	30.04	PK
4804	42.11	1.83	V	-24.73	19.21	53.98	34.77	AV
7206	37.04	9.65	V	0.00	46.69	73.98	27.29	PK
7206	37.04	9.65	V	-24.73	21.96	53.98	32.02	AV
4804	43.43	1.83	H	0.00	45.26	73.98	28.72	PK
4804	43.43	1.83	H	-24.73	20.53	53.98	33.45	AV
7206	38.44	9.65	H	0.00	48.09	73.98	25.89	PK
7206	38.44	9.65	H	-24.73	23.36	53.98	30.62	AV

Test Case 3


Operation Mode: 5 GHz Ant.All 6Mbps ch.48(5240MHz) / BT Ant.2 ch.78(2480MHz) DH5 (GFSK)

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	41.19	2.26	V	0.00	43.45	73.98	30.53	PK
4960	41.19	2.26	V	-24.73	18.72	53.98	35.26	AV
7440	38.09	9.78	V	0.00	47.87	73.98	26.11	PK
7440	38.09	9.78	V	-24.73	23.14	53.98	30.84	AV
4960	43.18	2.26	H	0.00	45.44	73.98	28.54	PK
4960	43.18	2.26	H	-24.73	20.71	53.98	33.27	AV
7440	39.05	9.78	H	0.00	48.83	73.98	25.15	PK
7440	39.05	9.78	H	-24.73	24.10	53.98	29.88	AV

RESULT PLOTS (Worst case : Y-H)


[Ant.1]

Radiated Spurious Emissions plot – Peak Reading (GFSK, Ch.78 3rd Harmonic)

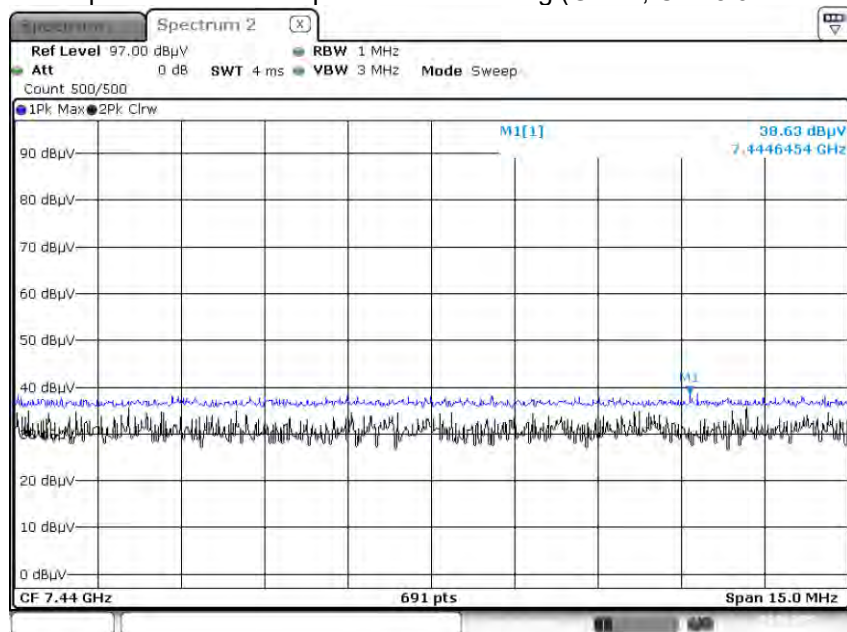


Date: 4 JUN 2020 09:19:03

Radiated Spurious Emissions plot – Peak Reading ($\pi/4$ DQPSK, Ch.78 3rd Harmonic)

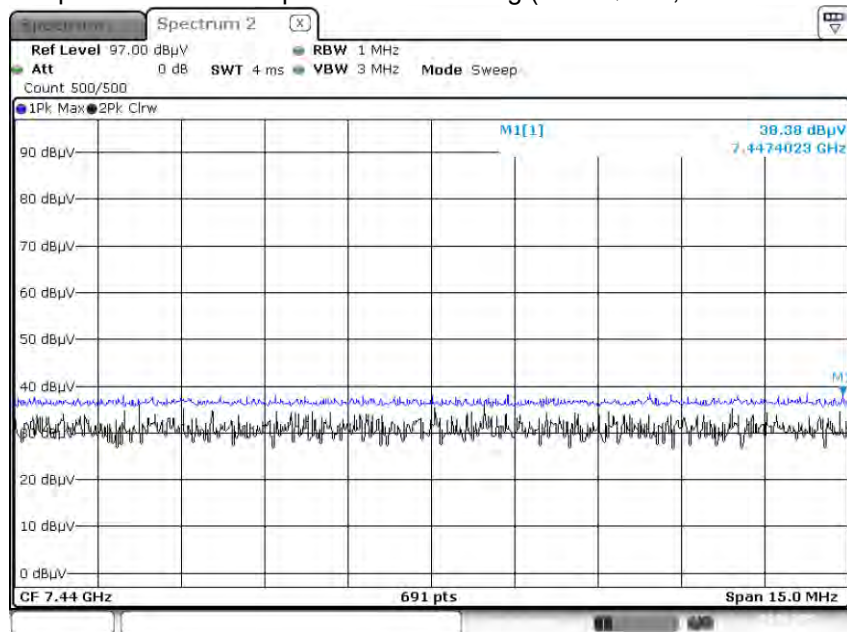

Date: 4 JUN 2020 09:32:39


Radiated Spurious Emissions plot – Peak Reading (8DPSK, Ch.78 3rd Harmonic)

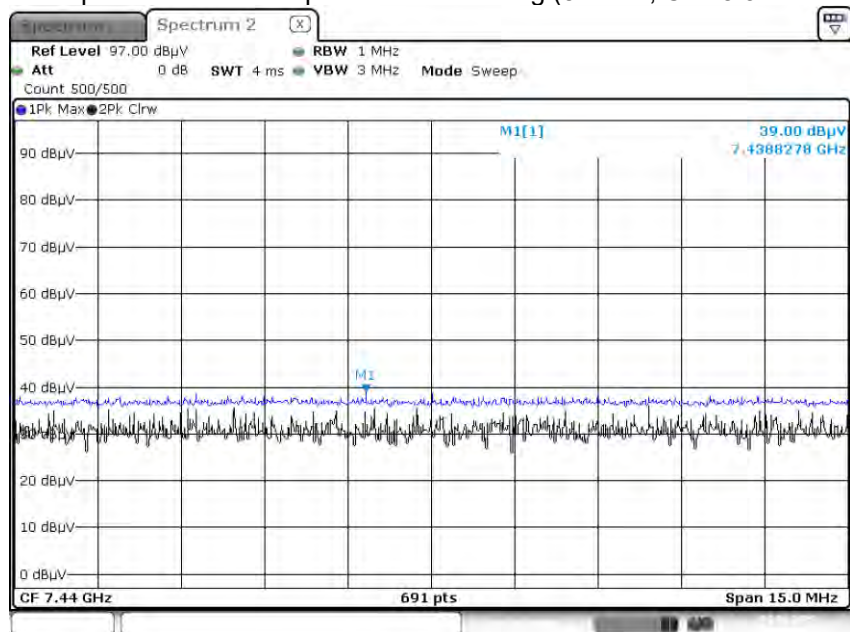

Date: 4 JUN 2020 09:34:35


[Ant.2]

Radiated Spurious Emissions plot – Peak Reading (GFSK, Ch.78 3rd Harmonic)

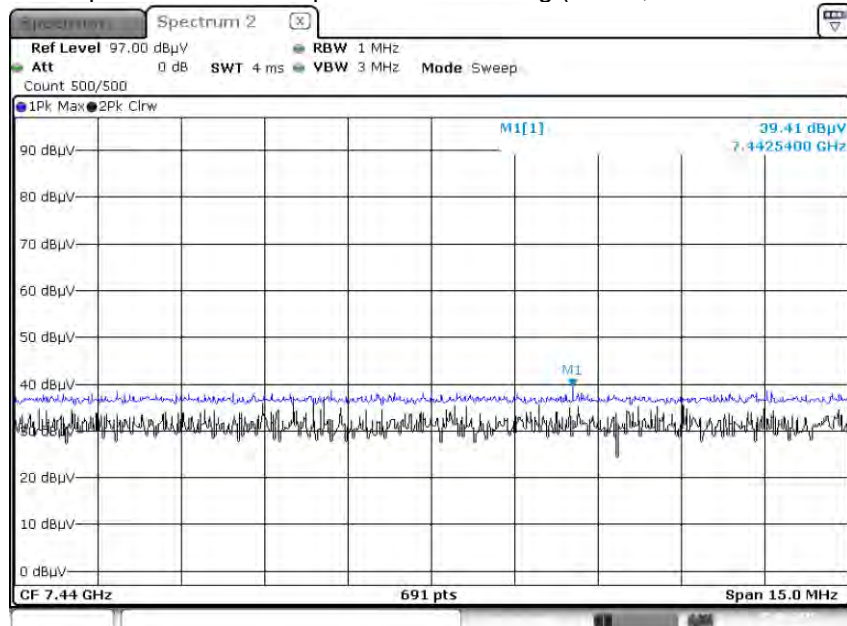


Date: 5 JUN 2020 11:36:03

Radiated Spurious Emissions plot – Peak Reading ($\pi/4$ DQPSK, Ch.78 3rd Harmonic)

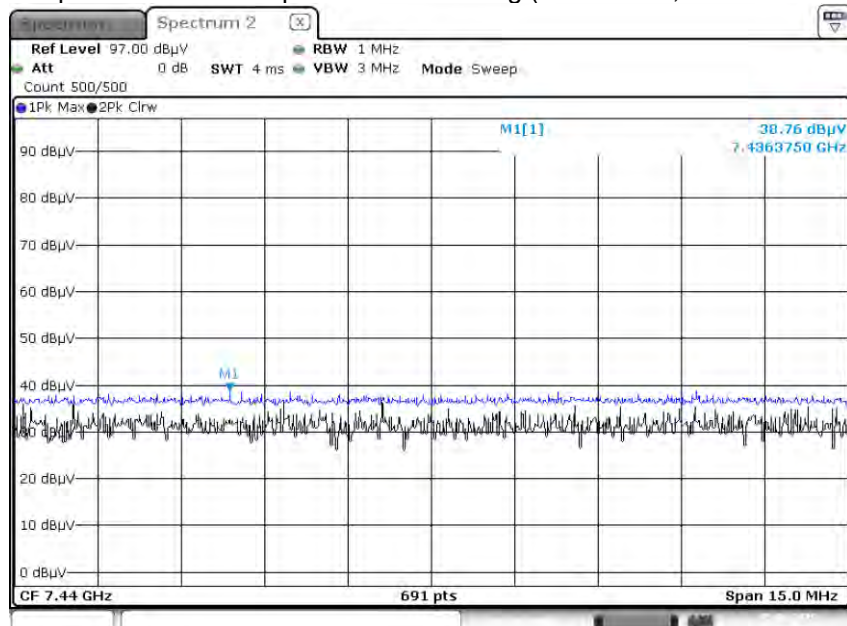

Date: 5 JUN 2020 11:37:36


Radiated Spurious Emissions plot – Peak Reading (8DPSK, Ch.78 3rd Harmonic)

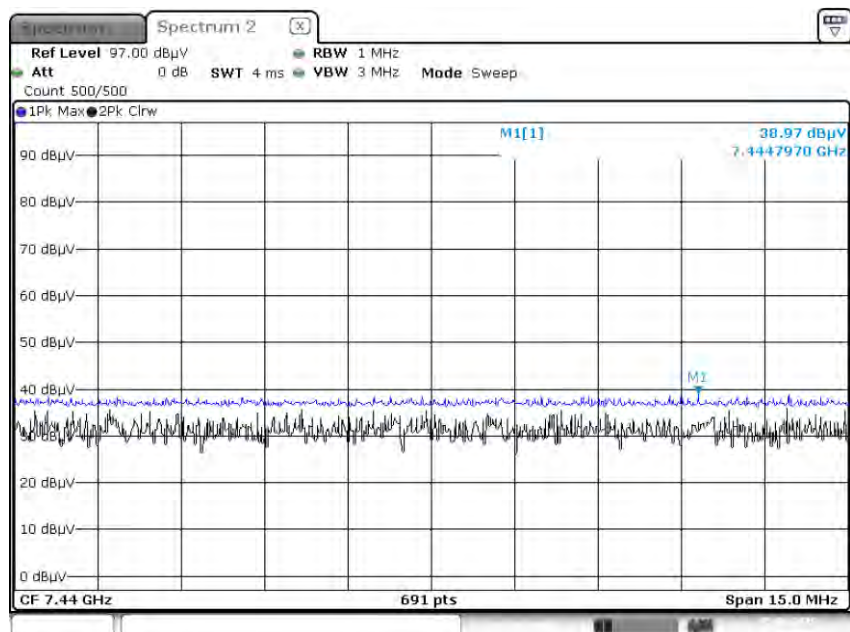

Date: 5 JUN 2020 11:38:46

[DBS Mode] – Test Case 3

Average Reading [DBS Mode] Peak Reading
(Non DBS : 5 GHz Ant.All 6Mbps ch.48(5240MHz) / BT Ant.2 ch.78(2480MHz) DH5 (GFSK), Z-H)

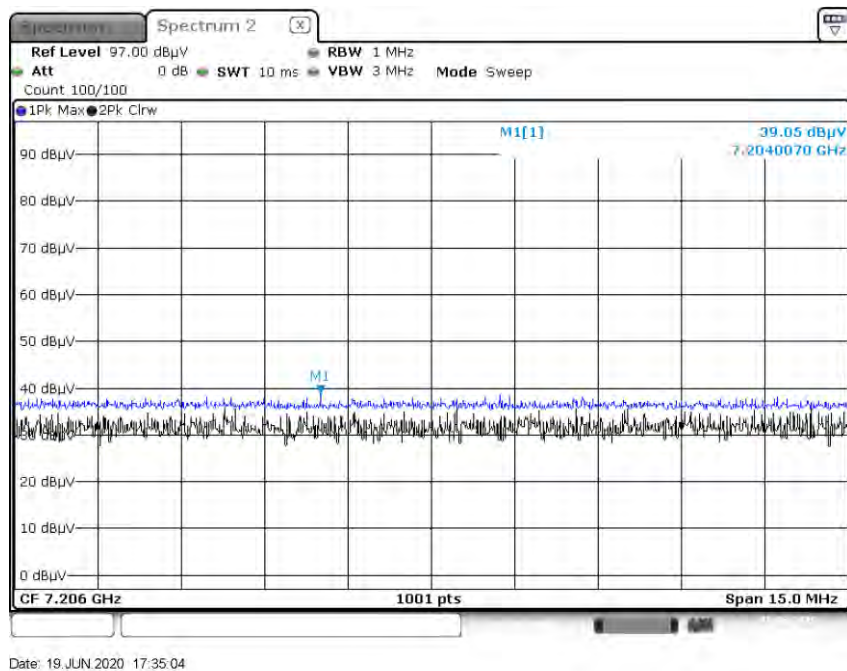

Note:

Plot of worst case are only reported.

10.6.3 RADIATED RESTRICTED BAND EDGES

[Ant.1]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading [dBuV]	A.F + C.L - Amp + Att + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.07	2.61	H	0	53.68	73.98	20.30	PK
2390.0	51.07	2.61	H	-24.73	28.95	53.98	25.03	AV
2390.0	50.87	2.61	V	0	53.48	73.98	20.50	PK
2390.0	50.87	2.61	V	-24.73	28.75	53.98	25.23	AV
2483.5	59.54	3.13	H	0	62.67	73.98	11.31	PK
2483.5	59.54	3.13	H	-24.73	37.94	53.98	16.04	AV
2483.5	58.24	3.13	V	0	61.37	73.98	12.61	PK
2483.5	58.24	3.13	V	-24.73	36.64	53.98	17.34	AV

Operation Mode	EDR($\pi/4$ DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading [dBuV]	A.F + C.L - Amp + Att + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.25	2.61	H	0	53.86	73.98	20.12	PK
2390.0	51.25	2.61	H	-24.73	29.13	53.98	24.85	AV
2390.0	50.91	2.61	V	0	53.52	73.98	20.46	PK
2390.0	50.91	2.61	V	-24.73	28.79	53.98	25.19	AV
2483.5	58.89	3.13	H	0	62.02	73.98	11.96	PK
2483.5	58.89	3.13	H	-24.73	37.29	53.98	16.69	AV
2483.5	56.81	3.13	V	0	59.94	73.98	14.04	PK
2483.5	56.81	3.13	V	-24.73	35.21	53.98	18.77	AV

Operation Mode

EDR(8DPSK)

Operating Frequency

2402 MHz, 2480 MHz

Channel No

CH 0, CH 78

Frequency [MHz]	Reading [dBuV]	A.F + C.L - Amp + Att + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.05	2.61	H	0	53.66	73.98	20.32	PK
2390.0	51.05	2.61	H	-24.73	28.93	53.98	25.05	AV
2390.0	50.08	2.61	V	0	52.69	73.98	21.29	PK
2390.0	50.08	2.61	V	-24.73	27.96	53.98	26.02	AV
2483.5	58.88	3.13	H	0	62.01	73.98	11.97	PK
2483.5	58.88	3.13	H	-24.73	37.28	53.98	16.70	AV
2483.5	56.44	3.13	V	0	59.57	73.98	14.41	PK
2483.5	56.44	3.13	V	-24.73	34.84	53.98	19.14	AV

[Ant.2]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading [dBuV]	A.F + C.L - Amp + Att + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	49.84	2.61	H	0	52.45	73.98	21.53	PK
2390.0	49.84	2.61	H	-24.73	27.72	53.98	26.26	AV
2390.0	49.17	2.61	V	0	51.78	73.98	22.20	PK
2390.0	49.17	2.61	V	-24.73	27.05	53.98	26.93	AV
2483.5	60.26	3.13	H	0	63.39	73.98	10.59	PK
2483.5	60.26	3.13	H	-24.73	38.66	53.98	15.32	AV
2483.5	59.71	3.13	V	0	62.84	73.98	11.14	PK
2483.5	59.71	3.13	V	-24.73	38.11	53.98	15.87	AV

Operation Mode	EDR($\pi/4$ DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading [dBuV]	A.F + C.L - Amp + Att + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	50.42	2.61	H	0	53.03	73.98	20.95	PK
2390.0	50.42	2.61	H	-24.73	28.30	53.98	25.68	AV
2390.0	48.81	2.61	V	0	51.42	73.98	22.56	PK
2390.0	48.81	2.61	V	-24.73	26.69	53.98	27.29	AV
2483.5	59.94	3.13	H	0	63.07	73.98	10.91	PK
2483.5	59.94	3.13	H	-24.73	38.34	53.98	15.64	AV
2483.5	58.74	3.13	V	0	61.87	73.98	12.11	PK
2483.5	58.74	3.13	V	-24.73	37.14	53.98	16.84	AV


Operation Mode	EDR(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading [dBuV]	A.F + C.L - Amp + Att + D.F [dB]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	50.02	2.61	H	0	52.63	73.98	21.35	PK
2390.0	50.02	2.61	H	-24.73	27.90	53.98	26.08	AV
2390.0	49.64	2.61	V	0	52.25	73.98	21.73	PK
2390.0	49.64	2.61	V	-24.73	27.52	53.98	26.46	AV
2483.5	59.48	3.13	H	0	62.61	73.98	11.37	PK
2483.5	59.48	3.13	H	-24.73	37.88	53.98	16.10	AV
2483.5	58.86	3.13	V	0	61.99	73.98	11.99	PK
2483.5	58.86	3.13	V	-24.73	37.26	53.98	16.72	AV

RESULT PLOTS


[Ant.1]

Radiated Restricted Band Edges plot – Peak Reading (GFSK, Ch.78, Z-H)

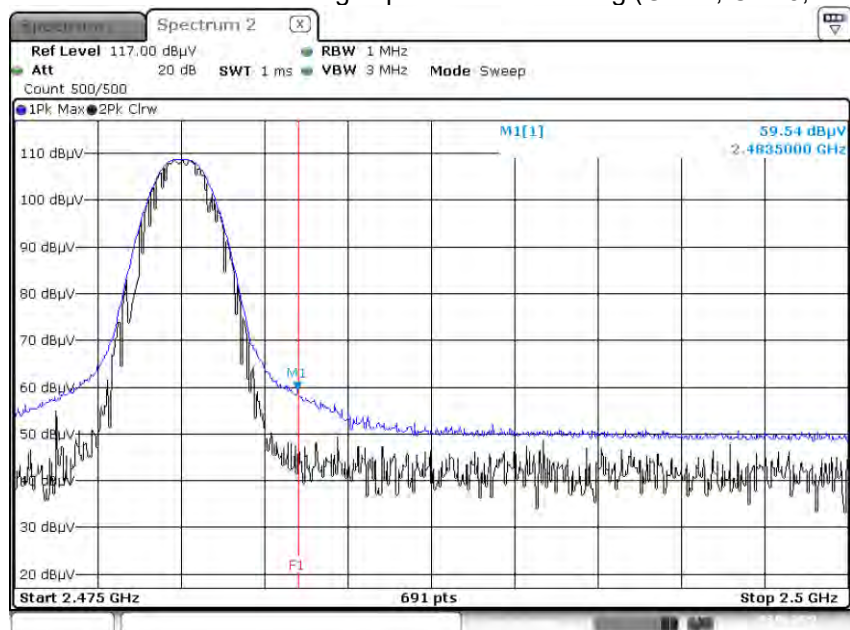


Date: 3 JUN 2020 18:26:34

Radiated Restricted Band Edges plot – Peak Reading ($\pi/4$ DQPSK, Ch.78, Z-H)

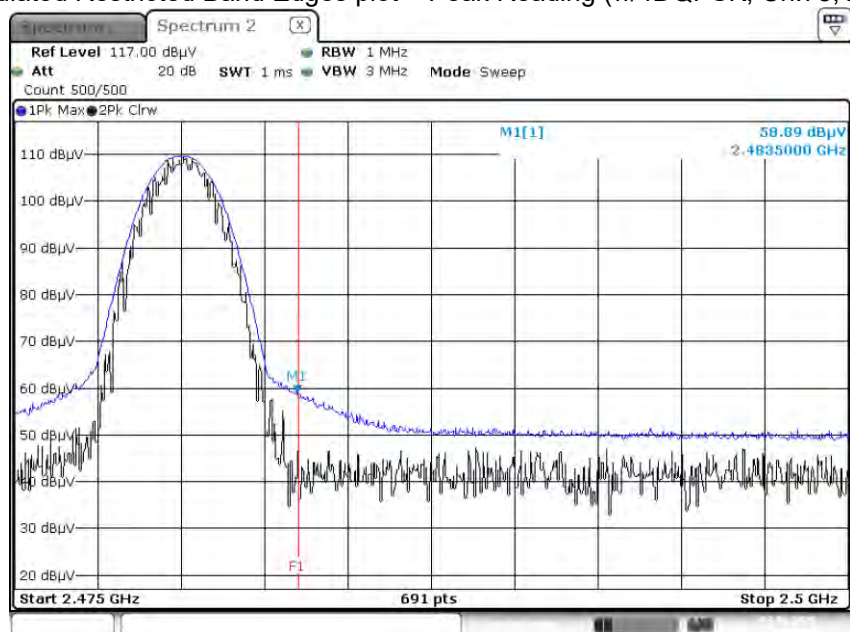

Date: 3 JUN 2020 18:42:03


Radiated Restricted Band Edges plot – Peak Reading (8DPSK, Ch.78, Z-H)

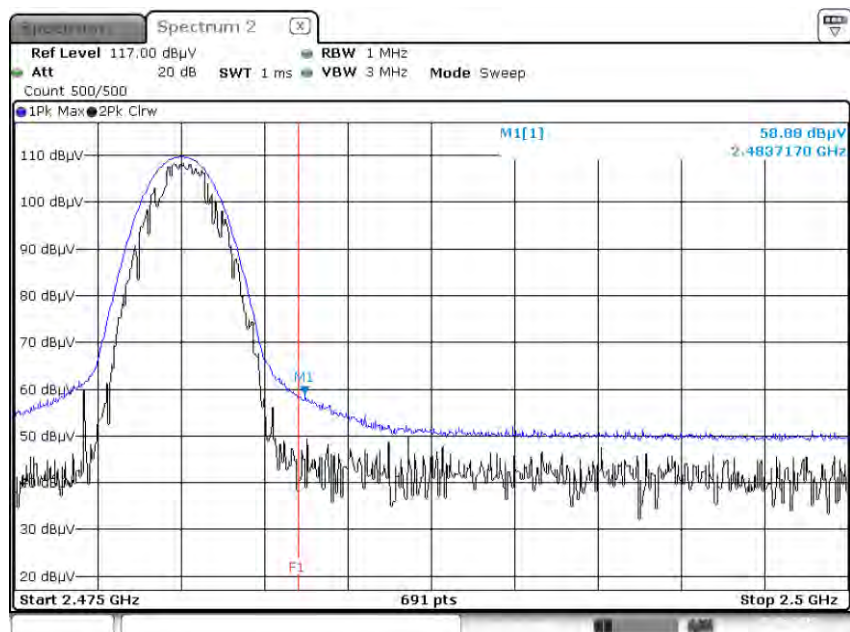

Date: 3 JUN 2020 18:43:43


[Ant.2]

Radiated Restricted Band Edges plot – Peak Reading (GFSK, Ch.78, X-H)

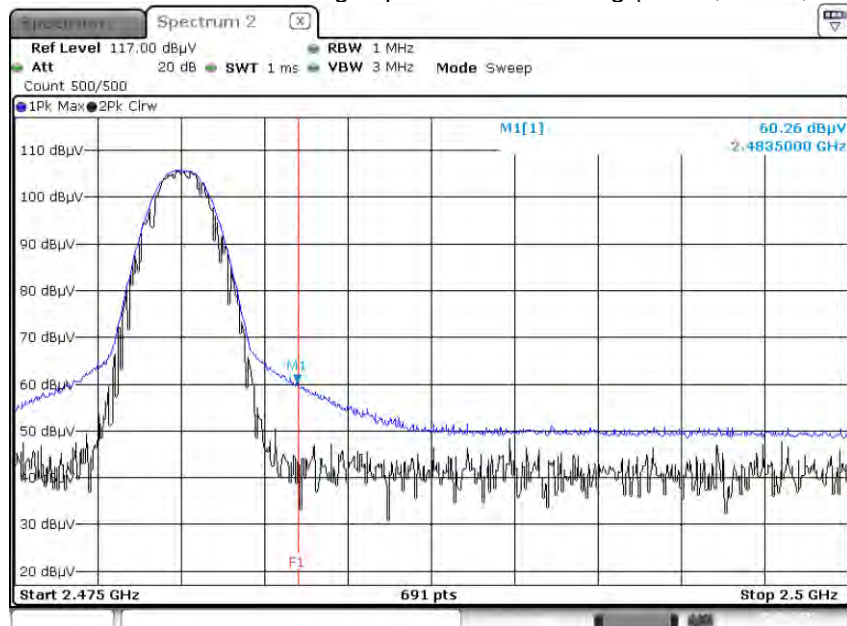


Date: 5 JUN 2020 09:33:25

Radiated Restricted Band Edges plot – Peak Reading ($\pi/4$ DQPSK, Ch.78, X-H)

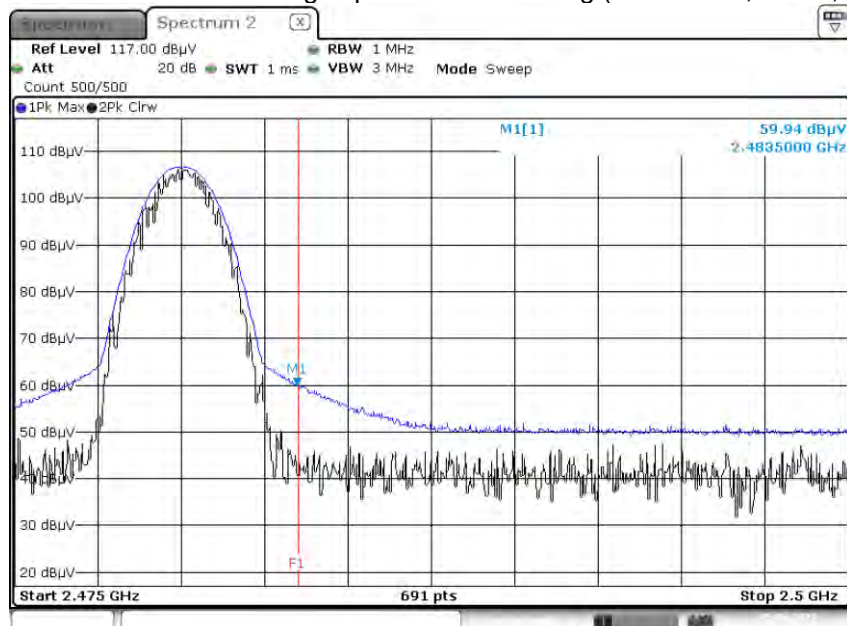

Date: 5 JUN 2020 09:37:15

Radiated Restricted Band Edges plot – Peak Reading (8DPSK, Ch.78, X-H)

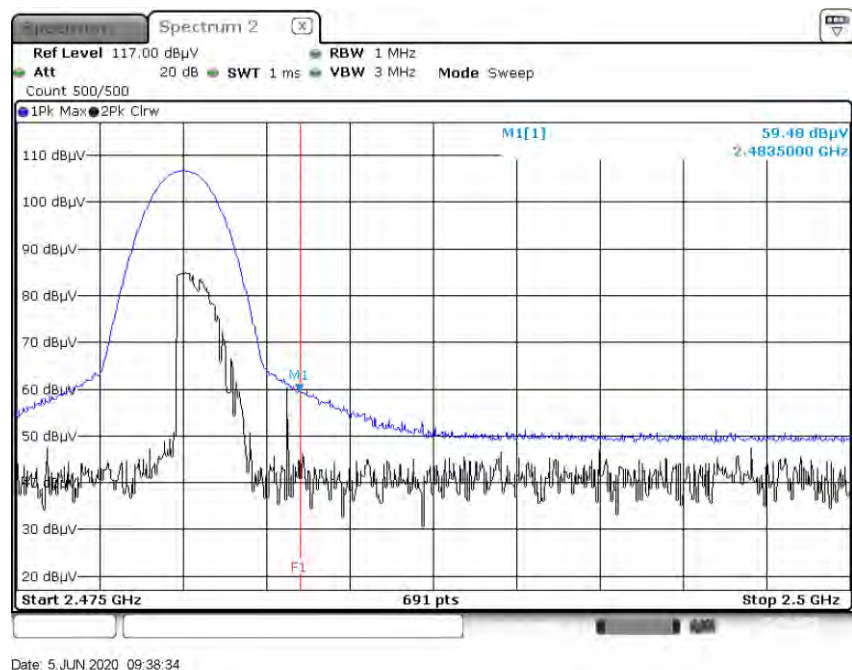

Note:

Plot of worst case are only reported.

10.7 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

BT MODE_L1


1 / 2

HCT TEST Report

Common Information

EUT: SM-T878U
Manufacturer: SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions: BT MODE_L1

FCC CLASS B_Exten Cable

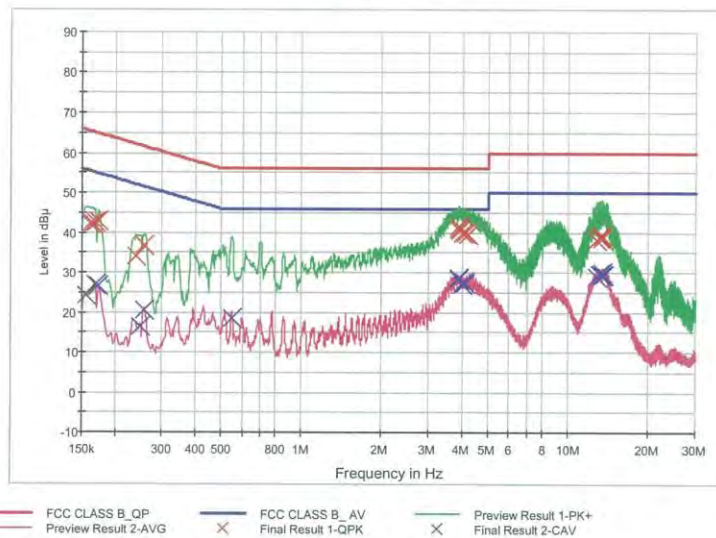

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.160000	42.2	9.000	Off	L1	9.8	23.2	65.5
0.164000	42.2	9.000	Off	L1	9.8	23.1	65.3
0.168000	42.5	9.000	Off	L1	9.8	22.6	65.1
0.172000	43.0	9.000	Off	L1	9.8	21.9	64.9
0.240000	34.2	9.000	Off	L1	9.8	27.9	62.1
0.258000	36.9	9.000	Off	L1	9.8	24.6	61.5
3.886000	41.0	9.000	Off	L1	10.0	15.0	56.0
3.892000	41.4	9.000	Off	L1	10.0	14.6	56.0
3.904000	40.5	9.000	Off	L1	10.0	15.5	56.0
3.998000	39.9	9.000	Off	L1	10.0	16.1	56.0
4.124000	39.9	9.000	Off	L1	10.0	16.1	56.0
4.188000	39.4	9.000	Off	L1	10.0	16.6	56.0
12.822000	38.2	9.000	Off	L1	10.3	21.8	60.0
13.146000	38.9	9.000	Off	L1	10.3	21.1	60.0
13.302000	39.0	9.000	Off	L1	10.3	21.0	60.0
13.322000	39.2	9.000	Off	L1	10.3	20.8	60.0
13.362000	38.6	9.000	Off	L1	10.3	21.4	60.0
13.418000	39.2	9.000	Off	L1	10.3	20.8	60.0

2020-06-22

오후 4:29:30

BT MODE_L1

2 / 2

Final Result 2

Frequency (MHz)	C Average (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.156000	24.3	9.000	Off	L1	9.8	31.4	55.7
0.168000	27.1	9.000	Off	L1	9.8	28.0	55.1
0.172000	26.6	9.000	Off	L1	9.8	28.3	54.9
0.248000	16.4	9.000	Off	L1	9.8	35.5	51.8
0.258000	20.6	9.000	Off	L1	9.8	30.9	51.5
0.548000	18.5	9.000	Off	L1	9.8	27.5	46.0
3.886000	28.4	9.000	Off	L1	10.0	17.6	46.0
3.892000	28.6	9.000	Off	L1	10.0	17.4	46.0
3.998000	26.8	9.000	Off	L1	10.0	19.2	46.0
4.004000	27.1	9.000	Off	L1	10.0	18.9	46.0
4.038000	27.6	9.000	Off	L1	10.0	18.4	46.0
4.124000	27.4	9.000	Off	L1	10.0	18.6	46.0
12.822000	29.0	9.000	Off	L1	10.3	21.0	50.0
13.146000	29.6	9.000	Off	L1	10.3	20.4	50.0
13.302000	29.6	9.000	Off	L1	10.3	20.4	50.0
13.362000	29.4	9.000	Off	L1	10.3	20.6	50.0
13.418000	30.0	9.000	Off	L1	10.3	20.0	50.0
13.464000	29.4	9.000	Off	L1	10.3	20.6	50.0

2020-06-22

오후 4:29:30

Conducted Emissions (Line 2)

BT MODE_N


1 / 2

HCT TEST Report

Common Information

EUT: SM-T878U
Manufacturer: SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions: BT MODE_N

FCC CLASS B_Exten Cable

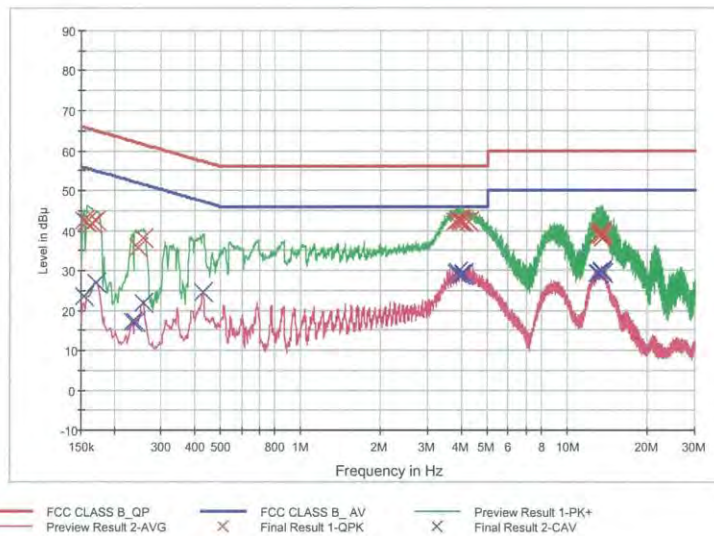

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	42.6	9.000	Off	N	9.8	23.2	65.8
0.158000	42.2	9.000	Off	N	9.8	23.3	65.6
0.164000	42.0	9.000	Off	N	9.8	23.3	65.3
0.170000	42.6	9.000	Off	N	9.8	22.3	65.0
0.246000	35.7	9.000	Off	N	9.8	26.2	61.9
0.258000	38.1	9.000	Off	N	9.8	23.4	61.5
3.804000	42.2	9.000	Off	N	10.0	13.8	56.0
3.894000	42.7	9.000	Off	N	10.0	13.3	56.0
3.962000	42.2	9.000	Off	N	10.0	13.8	56.0
3.984000	42.6	9.000	Off	N	10.0	13.4	56.0
4.066000	42.3	9.000	Off	N	10.0	13.7	56.0
4.242000	42.2	9.000	Off	N	10.0	13.8	56.0
13.076000	38.8	9.000	Off	N	10.4	21.2	60.0
13.180000	39.6	9.000	Off	N	10.4	20.4	60.0
13.346000	39.8	9.000	Off	N	10.4	20.2	60.0
13.350000	39.0	9.000	Off	N	10.4	21.0	60.0
13.428000	39.3	9.000	Off	N	10.4	20.7	60.0
13.614000	38.2	9.000	Off	N	10.4	21.8	60.0

2020-06-22

오후 4:38:17

BT MODE_N

2 / 2

Final Result 2

Frequency (MHz)	C Average (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	23.7	9.000	Off	N	9.8	32.1	55.8
0.170000	27.0	9.000	Off	N	9.8	28.0	55.0
0.234000	17.2	9.000	Off	N	9.8	35.1	52.3
0.240000	17.0	9.000	Off	N	9.8	35.1	52.1
0.256000	22.0	9.000	Off	N	9.8	29.6	51.6
0.430000	24.5	9.000	Off	N	9.8	22.8	47.3
3.812000	29.4	9.000	Off	N	10.0	16.6	46.0
3.894000	29.7	9.000	Off	N	10.0	16.3	46.0
3.962000	29.0	9.000	Off	N	10.0	17.0	46.0
4.058000	29.1	9.000	Off	N	10.0	16.9	46.0
4.062000	29.1	9.000	Off	N	10.0	16.9	46.0
4.066000	29.3	9.000	Off	N	10.0	16.7	46.0
12.994000	29.3	9.000	Off	N	10.4	20.7	50.0
13.076000	29.3	9.000	Off	N	10.4	20.7	50.0
13.346000	29.9	9.000	Off	N	10.4	20.1	50.0
13.350000	29.7	9.000	Off	N	10.4	20.3	50.0
13.428000	29.8	9.000	Off	N	10.4	20.2	50.0
13.604000	29.3	9.000	Off	N	10.4	20.7	50.0

2020-06-22

오후 4:38:17

11. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/10/2020	Annual	100584
ESPAC	SU-642 / Temperature Chamber	08/14/2019	Annual	0093000718
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	03/23/2020	Annual	MY49432108
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Agilent	N1921A / Power Sensor	03/23/2020	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/24/2020	Annual	10545
Hewlett Packard	E3632A / DC Power Supply	09/27/2019	Annual	MY40004427
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	18N-20dB / Attenuator(20 dB)	03/23/2020	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	03/02/2020	Annual	100808

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Weinschel	2-3 / Attenuator (3 dB)	10/08/2019	Annual	BR0617
Rohde & Schwarz	FSV(10 Hz ~ 40 GHz) / Spectrum Analyzer	05/13/2020	Annual	101055
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/21/2020	Annual	F6
TNM system	FBSM-05B / ATT(10dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / ATT(3dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / LNA1(1~18GHz)	01/21/2020	Annual	25540
TNM system	FBSM-05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/21/2020	Annual	28550
TNM system	FBSM-05B / Thru(30MHz ~ 18GHz)	01/21/2020	Annual	None

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2007-FC015-P