



RF EXPOSURE REPORT

Applicant Name:

Samsung Electronics, Co. Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Evaluation:

08/19/13

Evaluation Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1308121572-R1.A3L

FCC ID:

A3LSMV700

APPLICANT:

SAMSUNG ELECTRONICS, CO. LTD.

DUT Type:

BT wrist device

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-V700

Test Device Serial No.:

Pre-Production [S/N: 10C45, 10B22]

Equipment Class	Band & Mode	Tx Frequency	Measured Conducted Power [dBm]
DSS/DTSS	Bluetooth	2402 - 2480 MHz	8.62

Note: This revised Test Report (S/N: 0Y1308121572-R1.A3L) supersedes and replaces the previously issued test report on the same subject EUT for the same type of testing as indicated. Please discard or destroy the previously issued test report (S/N: 0Y1308121572.A3L) and dispose of it accordingly.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the evaluation report. Results reported herein relate only to the item(s) listed.

I attest to the accuracy of the evaluation. All evaluations reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these evaluations and vouch for the qualifications of all persons taking them. Results reported herein relate only to the item(s) listed.


Randy Ortanez
President



FCC ID A3LSMV700		RF EXPOSURE REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device		Page 1 of 10

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	FCC RF EXPOSURE LIMITS.....	5
3	RF CONDUCTED POWERS.....	6
4	EQUIPMENT LIST.....	7
5	CONCLUSION.....	8
6	REFERENCES	9

FCC ID A3LSMV700		RF EXPOSURE REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 2 of 10	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
Bluetooth	Data	2402 - 2480 MHz

1.2 DUT Antenna Locations

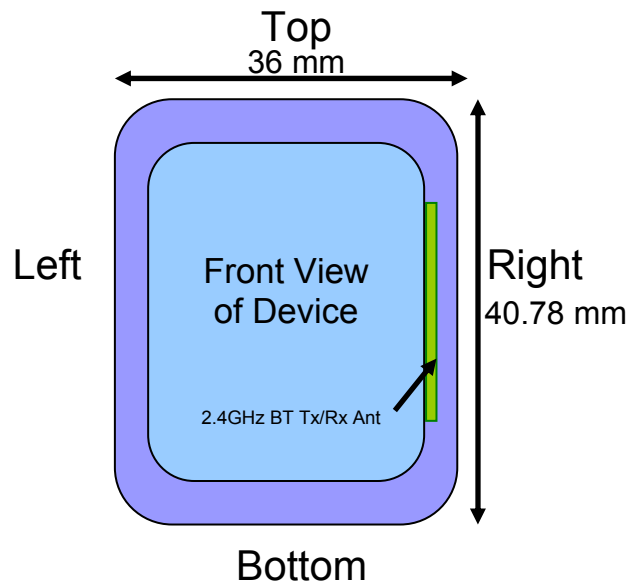


Figure 1-1
DUT Antenna Locations

1.3 SAR Test Exclusions Applied

(A) Bluetooth

Per FCC KDB 447498 D01v05, the SAR exclusion threshold for distances $\leq 50\text{mm}$ is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth SAR was not required for either 1g SAR or 10g extremity SAR; $[(8 / 5) * \sqrt{2.441}] = 2.5 < 3.0$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID A3LSMV700		RF EXPOSURE REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 3 of 10	

1.4 Simultaneous Transmission

This DUT cannot transmit in any simultaneous transmission scenarios.

1.5 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.6 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications.

Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	9.0
	Nominal	8.5

1.7 FCC Guidance Applied

- FCC KDB Publication 447498 D01v05 (General SAR Guidance)

FCC ID A3LSMV700	 RF EXPOSURE REPORT 		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 4 of 10

2 FCC RF EXPOSURE LIMITS

2.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

2.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 2-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID A3LSMV700	 RF EXPOSURE REPORT 		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 5 of 10

3 RF CONDUCTED POWERS

3.1 Bluetooth Conducted Powers

Table 3-1
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	8.46	7.010
2441	1.0	39	8.62	7.275
2480	1.0	78	8.53	7.133
2402	2.0	0	6.99	4.996
2441	2.0	39	7.17	5.218
2480	2.0	78	7.08	5.103
2402	3.0	0	7.06	5.084
2441	3.0	39	7.23	5.279
2480	3.0	78	7.13	5.170

Table 3-2
Bluetooth LE Average RF Power

Frequency [MHz]	Channel No.	Bluetooth Mode	Peak Conducted Power	
			[dBm]	[mW]
2402	0	LE	6.91	4.909
2440	19	LE	7.19	5.241
2480	39	LE	7.15	5.193

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth SAR was not required for either 1g SAR or 10g extremity SAR; $[(8 / 5) * \sqrt{2.441}] = 2.5 < 3.0$. Bluetooth LE SAR was also not required for either 1g SAR or 10g extremity SAR; $[(6 / 5) * \sqrt{2.440}] = 1.9 < 3.0$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

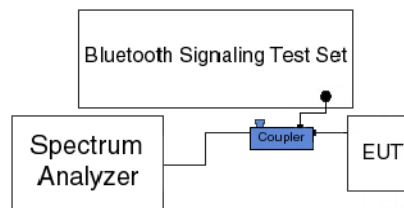


Figure 3-1
Power Measurement Setup

FCC ID A3LSMV700		RF EXPOSURE REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 6 of 10	

4 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	BT1	Bluetooth Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	BT2	Bluetooth Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	1937A03348
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	4/17/2013	Annual	4/17/2014	3008A00985
Agilent	85650A	Quasi-Peak Adapter	4/17/2013	Annual	4/17/2014	2043A00301
Agilent	87405C	Pre-amplifier (0.1 - 18 GHz)	3/11/2013	Annual	3/11/2014	MY53010007
Agilent	E4407B	ESA Spectrum Analyzer	4/16/2013	Annual	4/16/2014	US39210313
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	4/18/2013	Annual	4/18/2014	US42510244
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/16/2013	Annual	4/16/2014	MY45470194
Agilent	N4010A	Wireless Connectivity Test Set	N/A			GB46170464
Agilent	N5183A	MXG Analog Signal Generator	1/6/2013	Annual	1/6/2014	MY50141900
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N9030A	PXA Signal Analyzer (26.5GHz)	4/18/2013	Annual	4/18/2014	MY49432391
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/11/2013	Annual	1/11/2014	MY52350166
Agilent	N9038A	MXE EMI Receiver	12/8/2012	Annual	12/8/2013	MY51210133
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Annual	6/26/2014	121034
Emco	3115	Horn Antenna (1-18GHz)	1/12/2012	Biennial	1/12/2014	9704-5182
Emco	3816/2	LISN	2/12/2013	Biennial	2/12/2015	9709-1077
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/24/2013	Biennial	7/24/2015	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Rohde & Schwarz	CMU200	Base Station Simulator	5/3/2013	Annual	5/3/2014	836371/0079
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Solar Electronics	8012-50-R-24-BNC	LISN	6/20/2013	Biennial	6/20/2015	310233
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	6/19/2013	Biennial	6/19/2015	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

FCC ID A3LSMV700	 RF EXPOSURE REPORT 		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 7 of 10

5 CONCLUSION

5.1 Evaluation Conclusion

The RF exposure evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

FCC ID A3LSMV700		RF EXPOSURE REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 8 of 10	

6

REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID A3LSMV700	 RF EXPOSURE REPORT 		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 9 of 10

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [26] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID A3LSMV700	 RF EXPOSURE REPORT 		Reviewed by: Quality Manager
Document S/N: 0Y1308121572-R1.A3L	Date of Evaluation: 08/19/13	DUT Type: BT wrist device	Page 10 of 10