

FCC ANT⁺ REPORT

FCC Certification

Applicant Name:
SAMSUNG Electronics Co.,Ltd.**Address:**
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea**Date of Issue:**

October 26, 2015

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1510-F036**HCT FRN:** 0005866421**FCC ID : A3LSMW2016****APPLICANT : SAMSUNG Electronics Co., Ltd.****FCC Model(s):** SM-W2016**EUT Type:** Mobile Phone**Max. RF Output Power:** 96.91 dB μ V/m**Frequency Range:** 2402 MHz -2480 MHz**Modulation type** GFSK**FCC Classification:** Low Power communication Device Transmitter(DXX)**FCC Rule Part(s):** Part 15.249**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

**Report prepared by**
: Kyung Soo Kang**Test Engineer of RF Team****Approved by**
: Sang Jun Lee**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1510-F036	October 26, 2015	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	6
7. SUMMARY TEST OF RESULTS	7
8. TEST RESULT	8
8.1 DUTY CYCLE.....	8
8.2 OCCUPIED BANDWIDTH MEASUREMENT	10
8.3 RADIATED MEASUREMENT.....	13
8.3.1 FUNDAMENTAL FIELD STRENGTH LEVEL MEASUREMENT	13
8.3.2 RADIATED SPURIOUS EMISSIONS.....	18
8.3.3 RADIATED BAND EDGES MEASUREMENTS.....	31
8.4 POWERLINE CONDUCTED EMISSIONS	37
9.LIST OF TEST EQUIPMENT	42
9.1 LIST OF TEST EQUIPMENT (Conducted Test)	42
9.2 LIST OF TEST EQUIPMENT (Radiated Test).....	43

1. GENERAL INFORMATION

Applicant: SAMSUNG Electronics Co.,Ltd.
Address: 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do 16677, Rep. of Korea
FCC ID: A3LSMW2016
EUT Type: Mobile Phone
Model name(s): SM-W2016
Date(s) of Tests: September 01, 2015 ~ October 20, 2015
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
(IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

FCC Model Name	SM-W2016	
EUT Type	Mobile Phone	
Power Supply	DC 3.85 V	
Battery Information	Model: EB-BW201ABE Type: Secondary Li-On Battery	
Frequency Range	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
Fundamental Field Strength Level	Peak	96.91 dB μ V/m
	Average	50.75 dB μ V/m
Operating Mode	ANT+	
Modulation Type	GFSK	
Number of Channels	79 Channels	
Antenna Specification	Manufacturer: Partron Antenna type: INTERNAL ANTENNA Peak Gain : -1.95 dBi	

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) Operating Under §15.249” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.249 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Occupied Bandwidth	§2.1049	N/A	CONDUCTED	PASS
Duty Cycle	§15.35(c)	N/A		N/A
AC Power line Conducted Emissions	§15.207	cf. Section 8.4		PASS
Fundamental Field Strength Level	§15.249(a)(e)	< 50 mV/m	RADIATED	PASS
Harmonic Field Strength Level	§15.249(a)(e)	< 500 mV/m		PASS
General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	§15.205, 15.209, 15.249(d)(e)	< 15.209 limits or 50dB below the level of the fundamental		PASS


8. TEST RESULT

8.1 DUTY CYCLE

Test Requirements §15.35(c)

(c) Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification

■ TEST CONFIGURATION

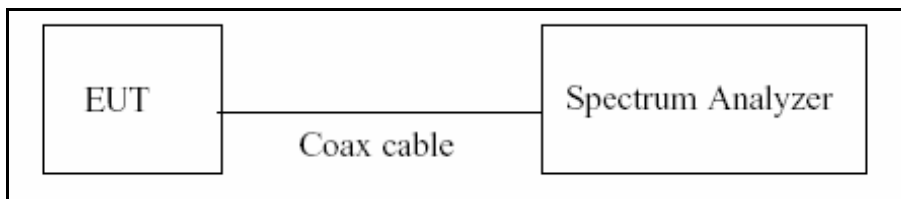


■ TEST RESULTS

$$\begin{aligned} \text{DCCF} &= 20 \cdot \log_{10}(\text{Pulse width} / \text{Period of the pulse train}) \\ &= 20 \cdot \log_{10}(2 \times 0.246 \text{ ms} / 100 \text{ ms}) = -46.1607 \text{ dB} \end{aligned}$$


DCCF
-46.16 dB

■ TEST RESULTS PLOTS

Pulse Width plot

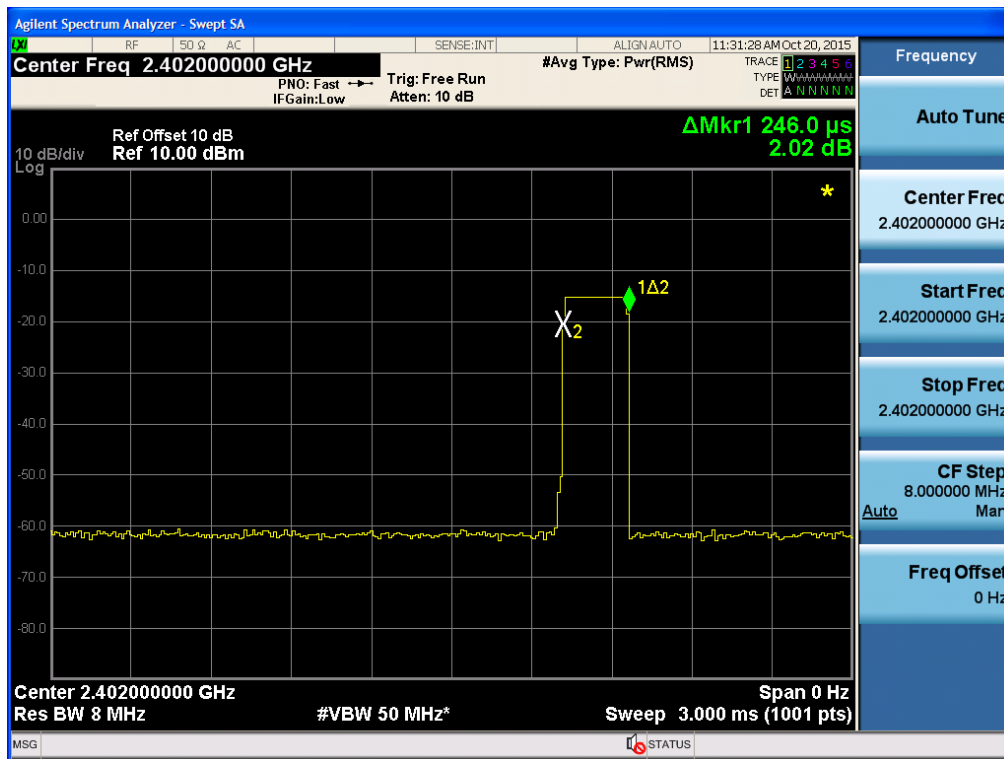

Period of the Pulse Train

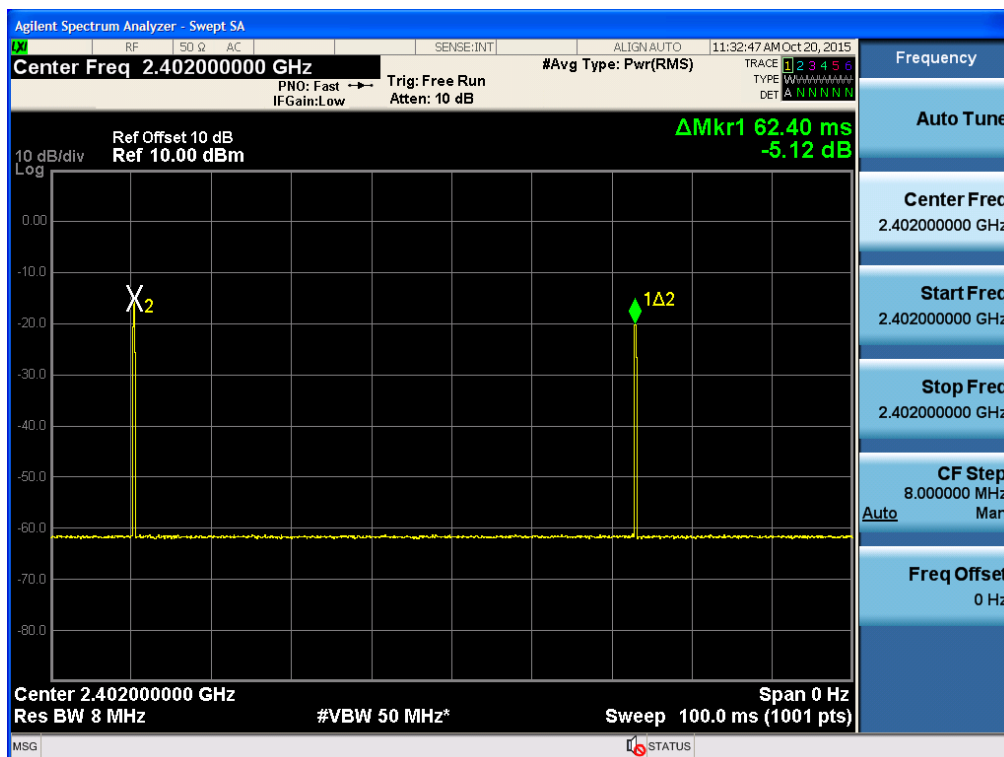


8.2 OCCUPIED BANDWIDTH MEASUREMENT

Test Requirements and limit, §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

RBW = 1% to 3% of the 99% bandwidth.

VBW $\geq$ 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

■ TEST RESULTS

ANT+ Mode	99% Bandwidth
Frequency[MHz]	(MHz)
2402	1.029
2440	1.021
2480	1.020

■ RESULT PLOTS


Occupied Bandwidth plot (Low)

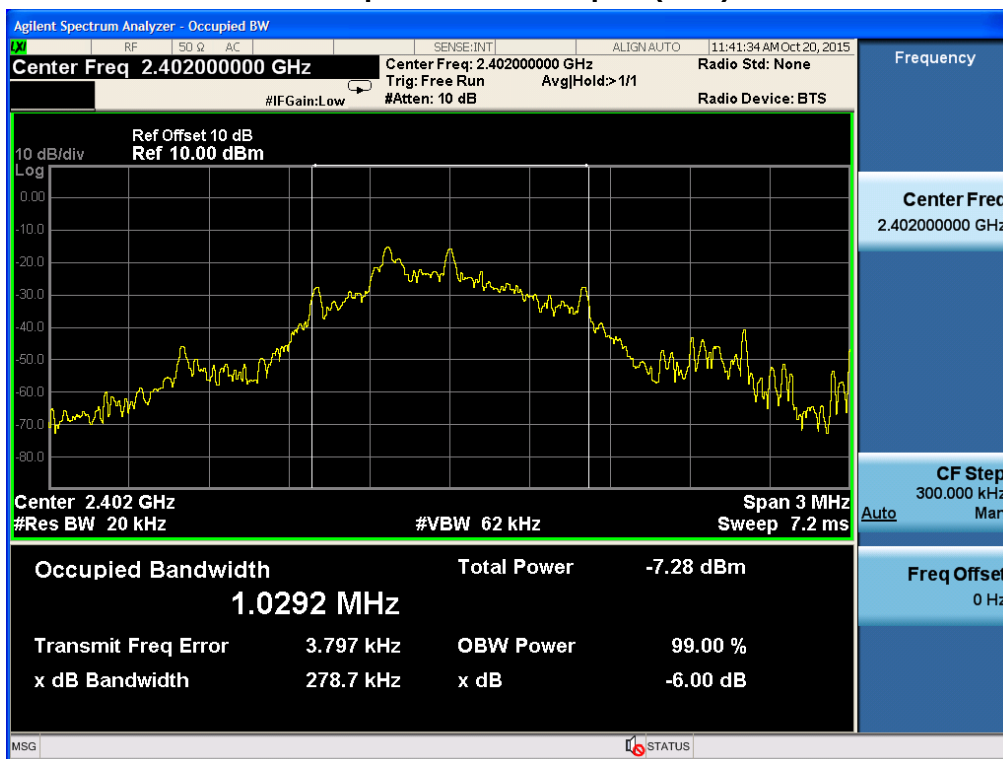

Occupied Bandwidth plot (Mid)



Occupied Bandwidth plot (High)

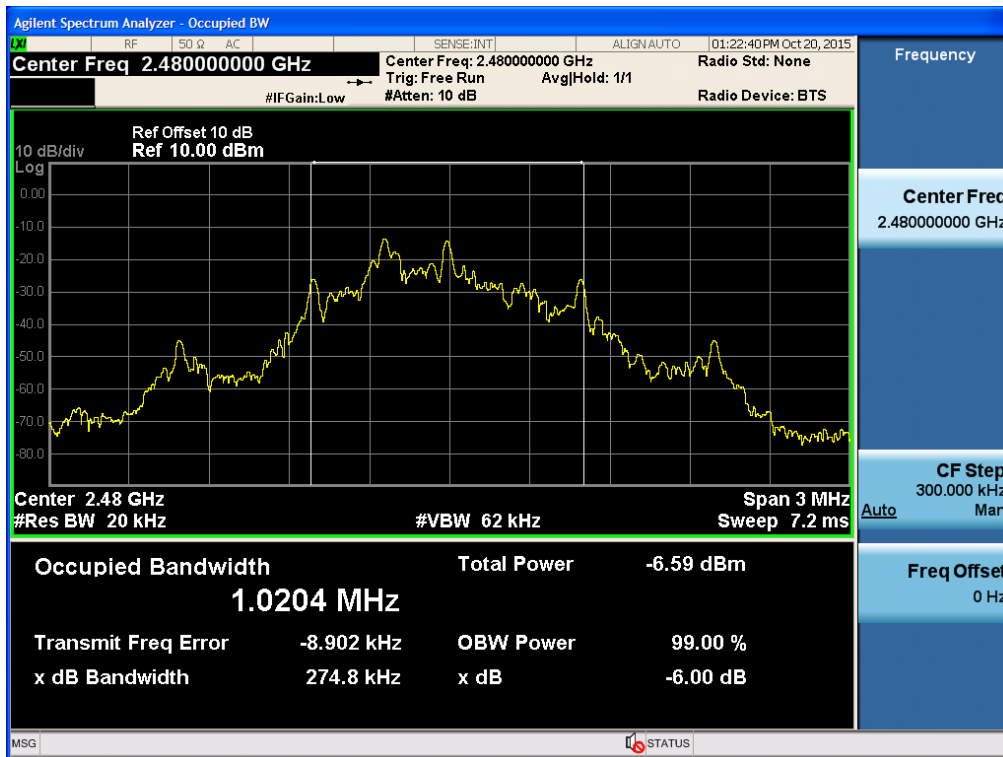

8.3 RADIATED MEASUREMENT.

8.3.1 FUNDAMENTAL FIELD STRENGTH LEVEL MEASUREMENT

Test Requirements and limit, §15.249(a)(e)

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts meter)	Field strength of harmonics (millivolts meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(e) As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

The maximum permissible average field strength level is 50 mV/m (93.98 dBuV/m).

The maximum permissible peak field strength level is 500 mV/m (113.98 dBuV/m).

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
 - a. Peak: 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 3 \times$ RBW
 - b. Average: 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.

TEST RESULTS for Close


Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2402	54.87	31.45	V	0.00	86.32	113.98	27.66	PK
2402	54.87	31.45	V	-46.16	40.16	93.98	53.82	AV
2402	56.97	31.45	H	0.00	88.42	113.98	25.56	PK
2402	56.97	31.45	H	-46.16	42.26	93.98	51.72	AV
2441	57.58	31.59	V	0.00	89.17	113.98	24.81	PK
2441	57.58	31.59	V	-46.16	43.01	93.98	50.97	AV
2441	58.83	31.59	H	0.00	90.42	113.98	23.56	PK
2441	58.83	31.59	H	-46.16	44.26	93.98	49.72	AV
2480	54.68	31.45	V	0.00	86.13	113.98	27.85	PK
2480	54.68	31.45	V	-46.16	39.97	93.98	54.01	AV
2480	55.84	31.45	H	0.00	87.29	113.98	26.69	PK
2480	55.84	31.45	H	-46.16	41.13	93.98	52.85	AV

Note :

1. Average field strength data is determined by applying the duty cycle correction factor(DCCF) found in Section 8.1 to the measured peak field strength values.
2. Peak: Total = Reading Value + Antenna Factor + Cable Loss
Average: Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Correction
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

■ RESULT PLOTS

Fundamental Field Strength plot (Ch. Mid)

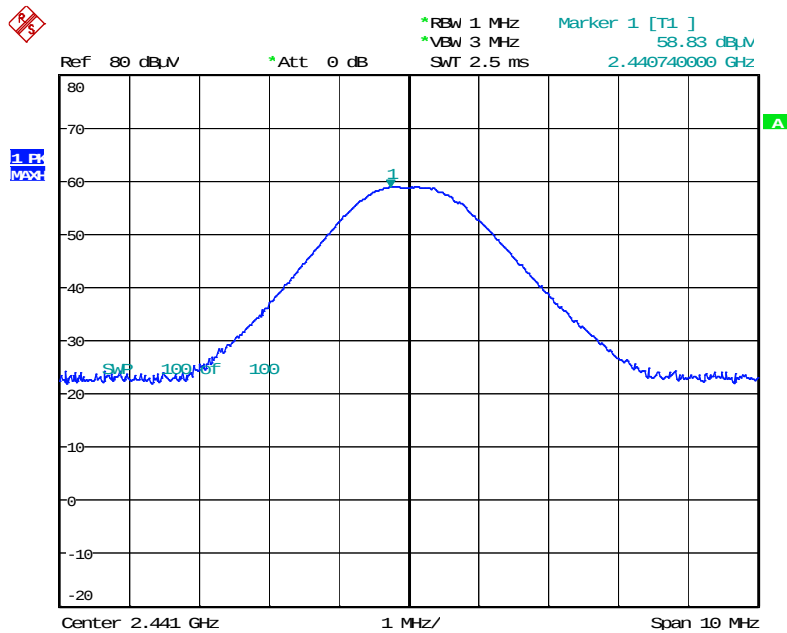

Date: 14.OCT.2015 06:11:38

Note : Only the worst case plots for Fundamental Field Strength

TEST RESULTS for Open


Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2402	62.56	31.45	V	0.00	94.01	113.98	19.97	PK
2402	62.56	31.45	V	-46.16	47.85	93.98	46.13	AV
2402	64.44	31.45	H	0.00	95.89	113.98	18.09	PK
2402	64.44	31.45	H	-46.16	49.73	93.98	44.25	AV
2441	63.48	31.59	V	0.00	95.07	113.98	18.91	PK
2441	63.48	31.59	V	-46.16	48.91	93.98	45.07	AV
2441	65.32	31.59	H	0.00	96.91	113.98	17.07	PK
2441	65.32	31.59	H	-46.16	50.75	93.98	43.23	AV
2480	61.37	31.45	V	0.00	92.82	113.98	21.16	PK
2480	61.37	31.45	V	-46.16	46.66	93.98	47.32	AV
2480	63.22	31.45	H	0.00	94.67	113.98	19.31	PK
2480	63.22	31.45	H	-46.16	48.51	93.98	45.47	AV

Note :

1. Average field strength data is determined by applying the duty cycle correction factor(DCCF) found in Section 8.1 to the measured peak field strength values.
2. Peak: Total = Reading Value + Antenna Factor + Cable Loss
Average: Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Correction
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

■ RESULT PLOTS

Fundamental Field Strength plot (Ch. Mid)

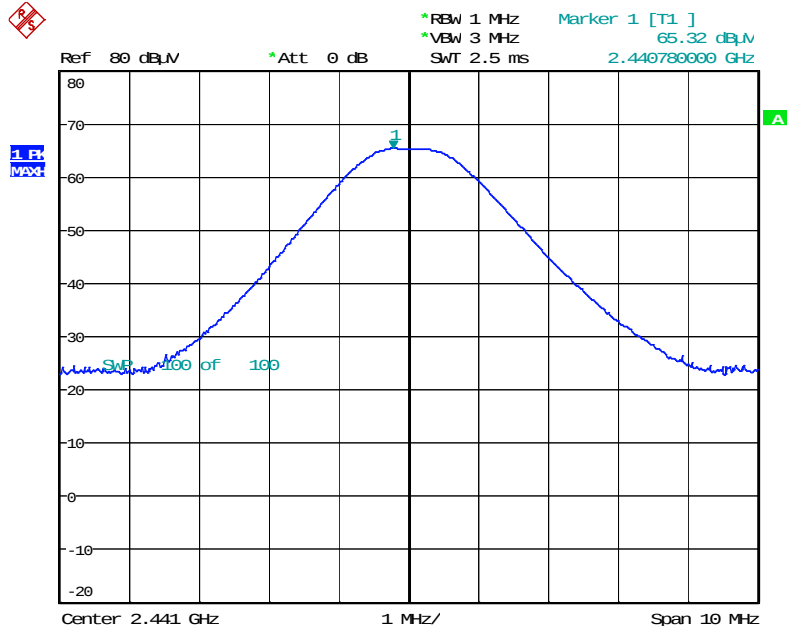

Date: 14.OCT.2015 06:34:14

Note : Only the worst case plots for Fundamental Field Strength

8.3.2 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.249(d)(e)


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


(e) As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Test Configuration


Below 30 MHz

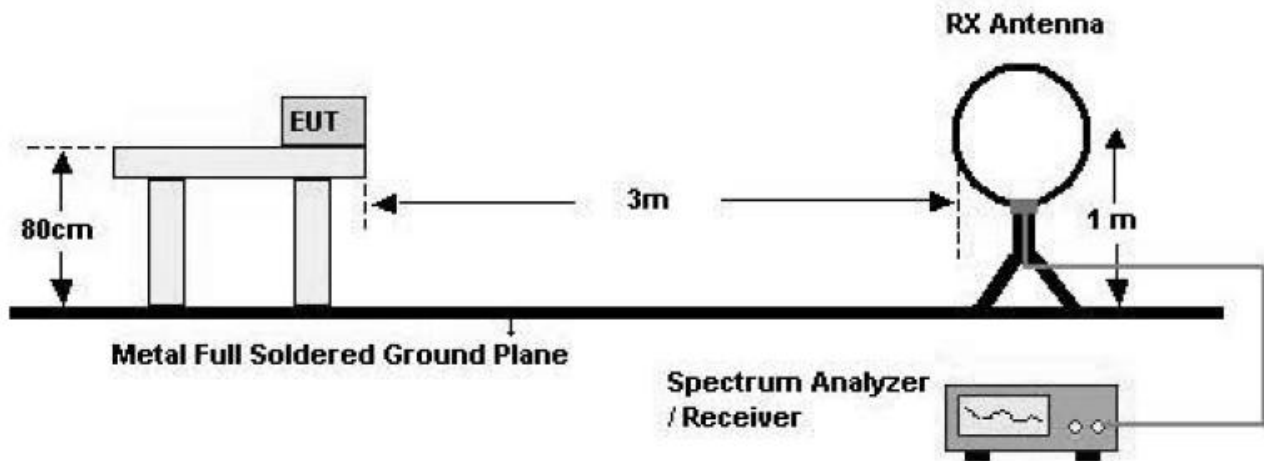

30 MHz - 1 GHz

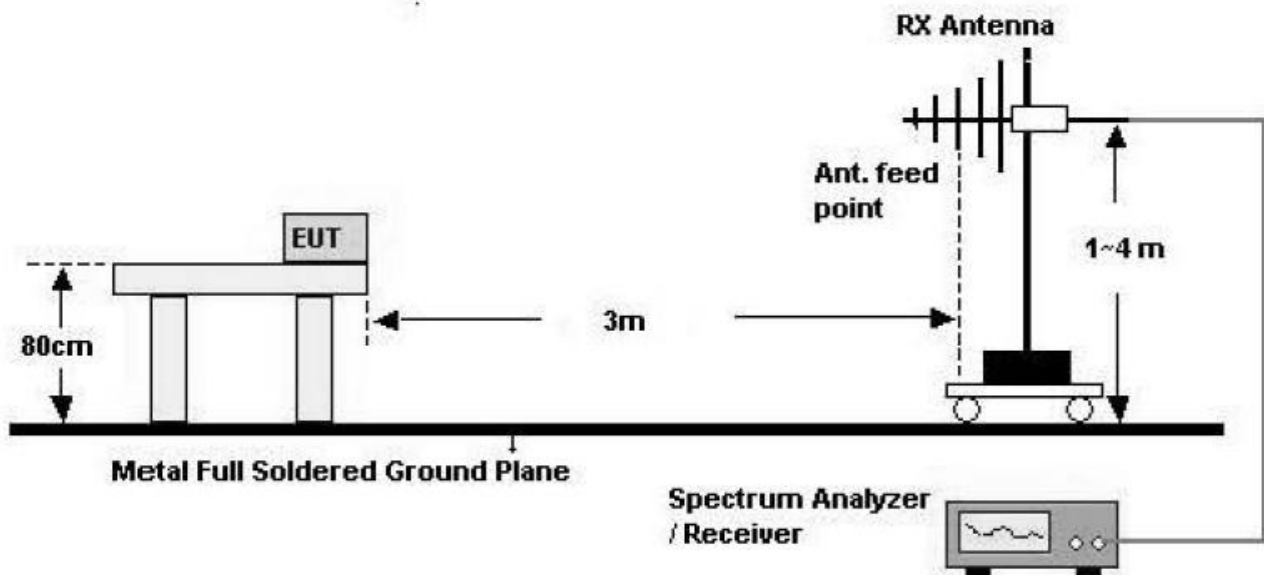

Above 1 GHz

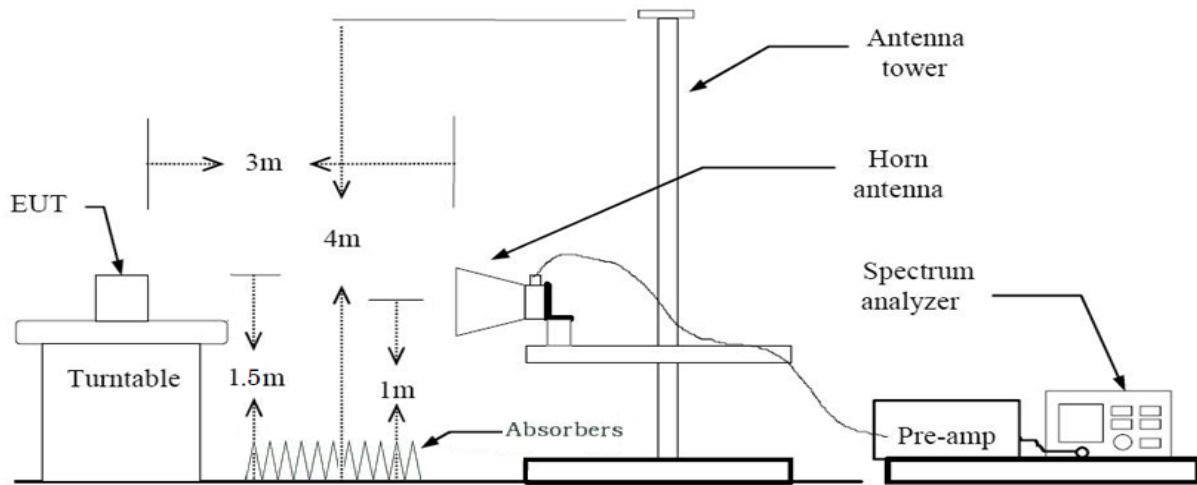

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
 - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.

Note :

1. We are performed the RSE and radiated band edge using standard radiated method.
2. The duty cycle factor for ANT+ mode.

ANT+ Mode	T _{on} (ms)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
	0.246	4065	10000

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}\mu\text{V}/\text{m}$	dBm/m	dBm	(H/V)	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}\mu\text{V}/\text{m}$	dBm/m	dBm	(H/V)	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Close

Above 1 GHz

Operation Frequency: 2402 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	49.43	-2.16	V	47.27	73.98	26.71	PK
4804	35.09	-2.16	V	32.93	53.98	21.05	AV
7206	45.27	7.31	V	52.58	73.98	21.40	PK
7206	31.79	7.31	V	39.10	53.98	14.88	AV
4804	49.48	-2.16	H	47.32	73.98	26.66	PK
4804	35.15	-2.16	H	32.99	53.98	20.99	AV
7206	45.60	7.31	H	52.91	73.98	21.07	PK
7206	31.85	7.31	H	39.16	53.98	14.82	AV

※ A.F: ANTENNA FACTOR

C.L: CABLE LOSS

AMP G: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.

We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Frequency: 2441 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	49.58	-1.95	V	47.63	73.98	26.35	PK
4882	36.12	-1.95	V	34.17	53.98	19.81	AV
7323	45.44	7.34	V	52.78	73.98	21.20	PK
7323	31.65	7.34	V	38.99	53.98	14.99	AV
4882	49.71	-1.95	H	47.76	73.98	26.22	PK
4882	36.24	-1.95	H	34.29	53.98	19.69	AV
7323	45.48	7.34	H	52.82	73.98	21.16	PK
7323	31.71	7.34	H	39.05	53.98	14.93	AV

※ A.F: ANTENNA FACTOR

C.L: CABLE LOSS

AMP G: AMPLIFIER GAIN

Notes:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
- Spectrum setting:
 - Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Frequency: 2480 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	49.35	-1.84	V	47.51	73.98	26.47	PK
4960	35.17	-1.84	V	33.33	53.98	20.65	AV
7440	46.28	7.13	V	53.41	73.98	20.57	PK
7440	31.80	7.13	V	38.93	53.98	15.05	AV
4960	49.47	-1.84	H	47.63	73.98	26.35	PK
4960	35.34	-1.84	H	33.50	53.98	20.48	AV
7440	46.39	7.13	H	53.52	73.98	20.46	PK
7440	31.82	7.13	H	38.95	53.98	15.03	AV

※ A.F: ANTENNA FACTOR

C.L: CABLE LOSS


AMP G: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ **RESULT PLOTS**

Radiated Spurious Emissions plot – Average Reading (Ch. Low 3rd Harmonic)

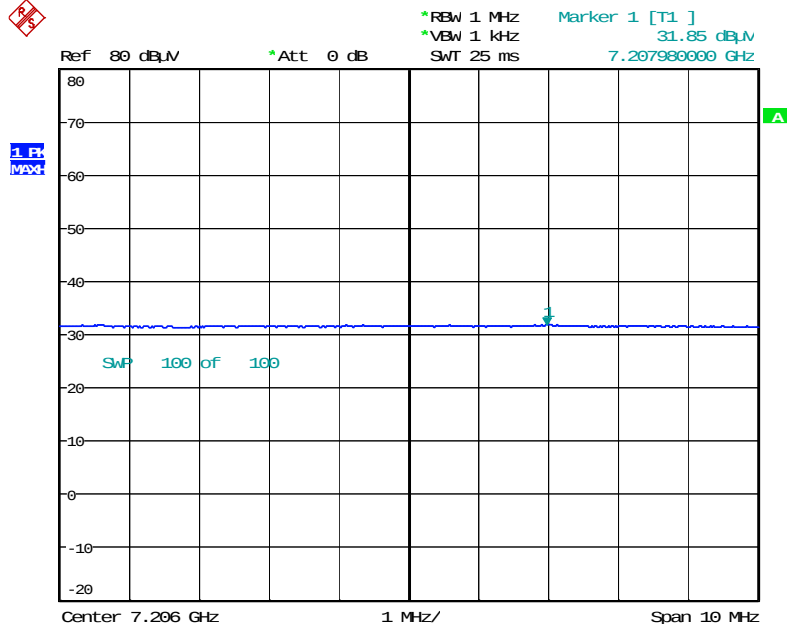

Date: 14.OCT.2015 06:51:18

Radiated Spurious Emissions plot – Peak Reading (Ch. Low 3rd Harmonic)

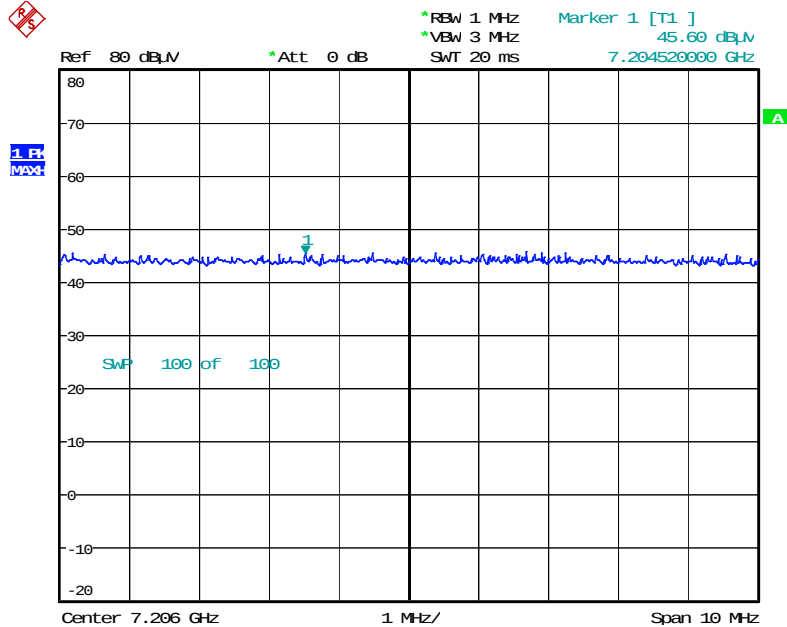

Date: 14.OCT.2015 06:51:51

Note : Only the worst case plots for Radiated Spurious Emissions.

Open

Above 1 GHz

Operation Frequency: 2402 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	49.25	-2.16	V	47.09	73.98	26.89	PK
4804	35.25	-2.16	V	33.09	53.98	20.89	AV
7206	45.50	7.31	V	52.81	73.98	21.17	PK
7206	32.02	7.31	V	39.33	53.98	14.65	AV
4804	48.77	-2.16	H	46.61	73.98	27.37	PK
4804	35.23	-2.16	H	33.07	53.98	20.91	AV
7206	45.31	7.31	H	52.62	73.98	21.36	PK
7206	31.96	7.31	H	39.27	53.98	14.71	AV

※ A.F: ANTENNA FACTOR

C.L: CABLE LOSS

AMP G: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Frequency: 2441 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	50.12	-1.95	V	48.17	73.98	25.81	PK
4882	36.75	-1.95	V	34.80	53.98	19.18	AV
7323	45.69	7.34	V	53.03	73.98	20.95	PK
7323	31.97	7.34	V	39.31	53.98	14.67	AV
4882	49.88	-1.95	H	47.93	73.98	26.05	PK
4882	36.53	-1.95	H	34.58	53.98	19.40	AV
7323	45.87	7.34	H	53.21	73.98	20.77	PK
7323	31.94	7.34	H	39.28	53.98	14.70	AV

※ A.F: ANTENNA FACTOR

C.L: CABLE LOSS

AMP G: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Frequency: 2480 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	49.61	-1.84	V	47.77	73.98	26.21	PK
4960	35.77	-1.84	V	33.93	53.98	20.05	AV
7440	46.52	7.13	V	53.65	73.98	20.33	PK
7440	31.94	7.13	V	39.07	53.98	14.91	AV
4960	49.14	-1.84	H	47.30	73.98	26.68	PK
4960	35.28	-1.84	H	33.44	53.98	20.54	AV
7440	46.25	7.13	H	53.38	73.98	20.60	PK
7440	31.68	7.13	H	38.81	53.98	15.17	AV

※ A.F: ANTENNA FACTOR

C.L: CABLE LOSS


AMP G: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ **RESULT PLOTS**

Radiated Spurious Emissions plot – Average Reading (Ch. Low 3rd Harmonic)

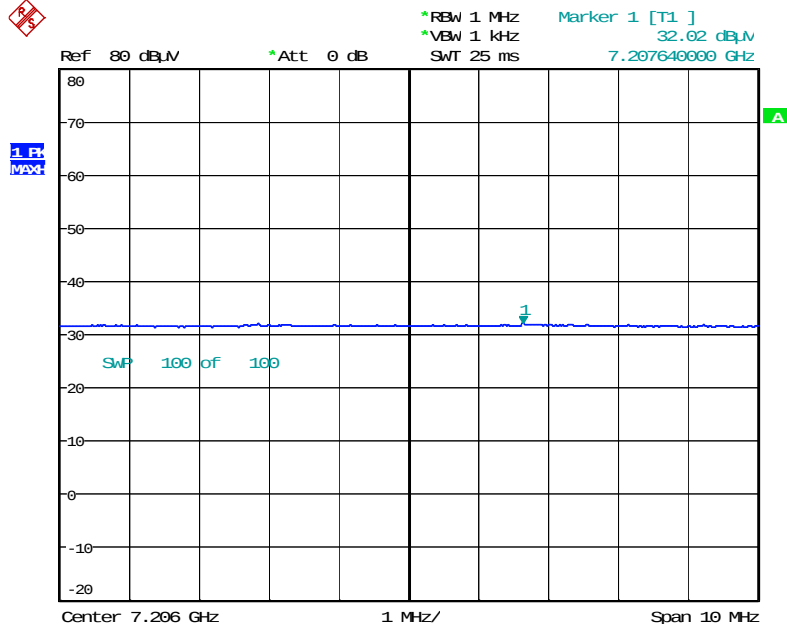

Date: 14.OCT.2015 06:46:30

Radiated Spurious Emissions plot – Peak Reading (Ch. Low 3rd Harmonic)

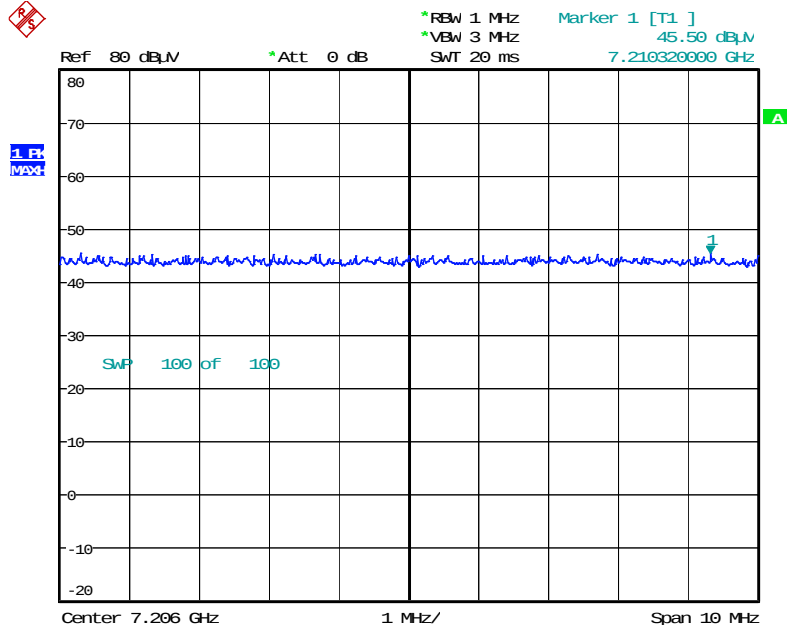

Date: 14.OCT.2015 06:46:55

Note : Only the worst case plots for Radiated Spurious Emissions.

8.3.3 RADIATED BAND EDGES MEASUREMENTS

Test Requirements and limit, §15.205, §15.209, §15.249

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or tho the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Close

Operation Mode	ANT+
Operating Frequency	2402 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	25.27	31.47	H	56.74	73.98	17.24	PK
2390.0	12.10	31.47	H	43.57	53.98	10.41	AV
2390.0	25.13	31.47	V	56.60	73.98	17.38	PK
2390.0	12.07	31.47	V	43.54	53.98	10.44	AV

※ A.F: ANTENNA FACTOR

C.L: CABLE LOSS

Notes:

- Frequency range of measurement = 2310 ~ 2400 MHz
- Total = Fundamental Reading Value + Antenna Factor + Cable Loss
- Spectrum setting:
 - Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Operation Mode

ANT+

Operating Frequency

2480 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2483.5	25.03	31.46	H	56.49	73.98	17.49	PK
2483.5	12.27	31.46	H	43.73	53.98	10.25	AV
2483.5	24.74	31.46	V	56.20	73.98	17.78	PK
2483.5	12.23	31.46	V	43.69	53.98	10.29	AV

※ A.F: ANTENNA FACTOR
C.L: CABLE LOSS


Notes:

- Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
- Total = Fundamental Reading Value + Antenna Factor + Cable Loss
- Spectrum setting:
 - Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.

We performed using a reduced video BW method was done with the analyzer in linear mode.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ RESULT PLOTS

Radiated Restricted Band Edges plot – Average Reading (High Ch.)

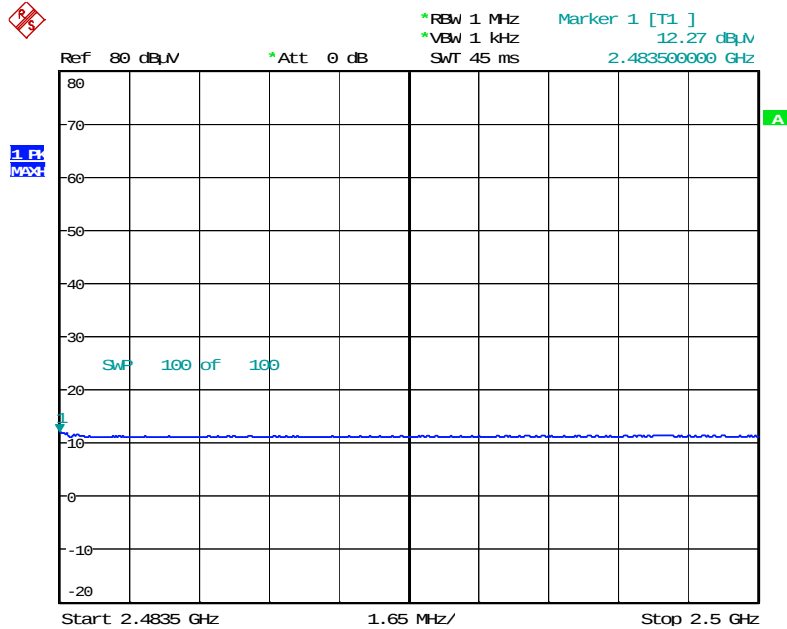

Date: 14.OCT.2015 03:26:49

Radiated Restricted Band Edges plot – Peak Reading (High Ch.)

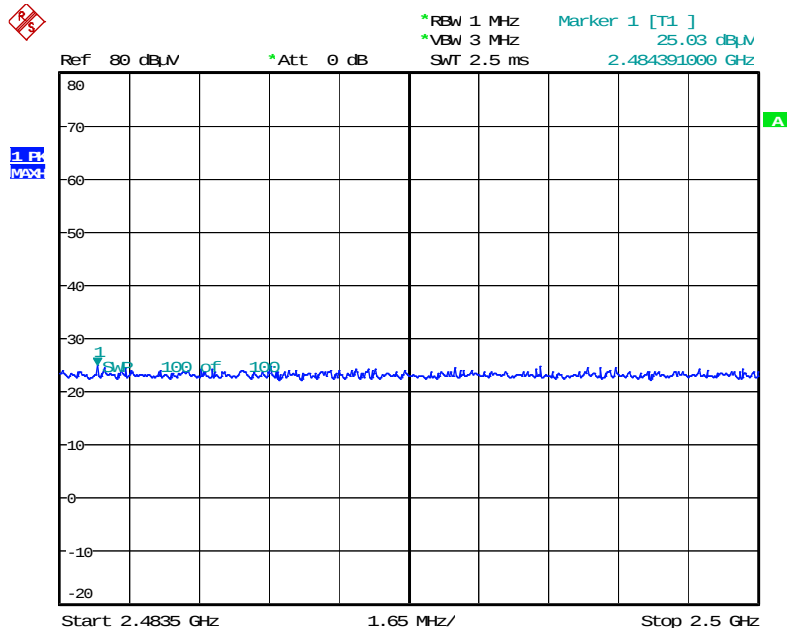

Date: 14.OCT.2015 06:15:34

Note : Only the worst case plots for Radiated Restricted Band Edges.

Open

Operation Mode

ANT+

Operating Frequency

2402 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	25.90	31.47	H	57.37	73.98	16.61	PK
2390.0	12.18	31.47	H	43.65	53.98	10.33	AV
2390.0	25.34	31.47	V	56.81	73.98	17.17	PK
2390.0	12.14	31.47	V	43.61	53.98	10.37	AV

※ A.F: ANTENNA FACTOR

C.L: CABLE LOSS

Notes:

- Frequency range of measurement = 2310 ~ 2400 MHz
- Total = Fundamental Reading Value + Antenna Factor + Cable Loss
- Spectrum setting:
 - Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

Operation Mode

ANT+

Operating Frequency

2480 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2483.5	26.88	31.46	H	58.34	73.98	15.64	PK
2483.5	18.29	31.46	H	49.75	53.98	4.23	AV
2483.5	26.11	31.46	V	57.57	73.98	16.41	PK
2483.5	17.54	31.46	V	49.00	53.98	4.98	AV

※ A.F: ANTENNA FACTOR
C.L: CABLE LOSS


Notes:

- Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
- Total = Fundamental Reading Value + Antenna Factor + Cable Loss
- Spectrum setting:
 - Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds.

We performed using a reduced video BW method was done with the analyzer in linear mode.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ RESULT PLOTS

Radiated Restricted Band Edges plot – Average Reading (High Ch.)

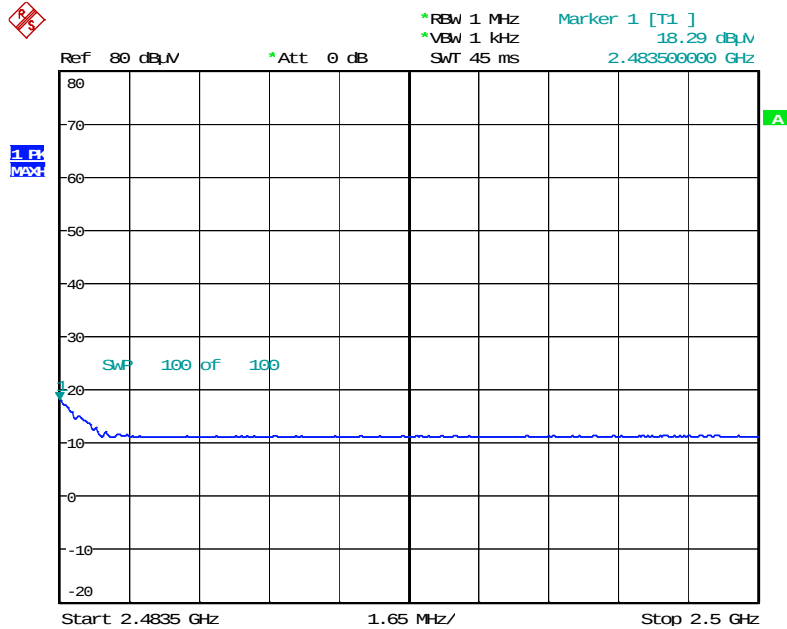

Date: 14.OCT.2015 06:22:53

Radiated Restricted Band Edges plot – Peak Reading (High Ch.)

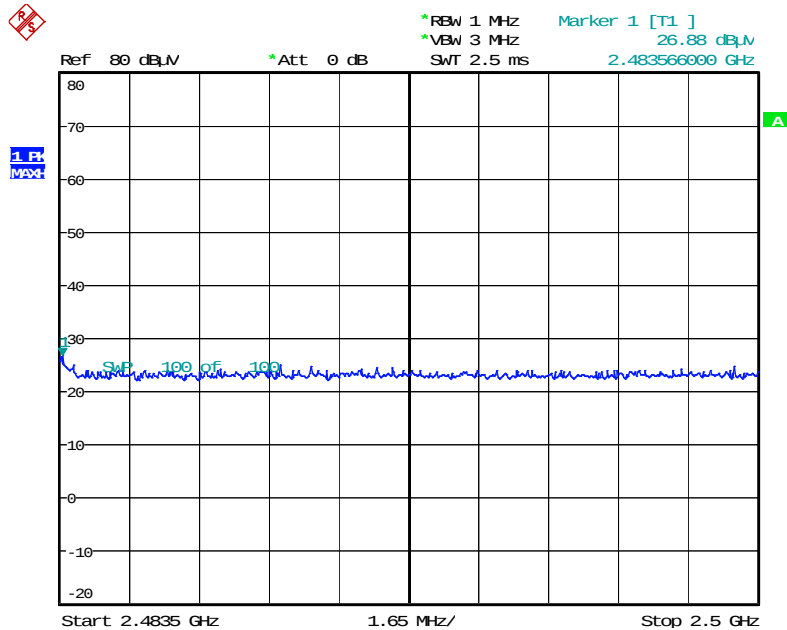

Date: 14.OCT.2015 06:23:38

Note : Only the worst case plots for Radiated Restricted Band Edges.

8.4 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

RESULT PLOTS

Conducted Emissions (Line 1)

EMI Auto Test(11)


1 / 2

HCT TEST Report

Common Information

EUT: SM-W2016
Manufacturer: SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions: ANT+ MODE
Operator Name: KS KANG

FCC CLASS B

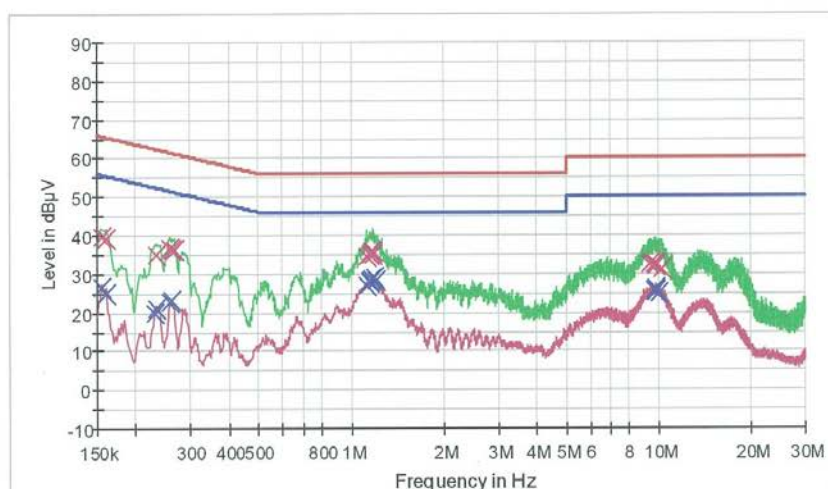

— FCCCLASS B_OP — FCCCLASS B_AV — Preview Result 1-PK
— Preview Result 2-AVG — Final Result 1-CPK — Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.156000	39.6	9.000	Off	N	9.6	26.1	65.7
0.160000	39.0	9.000	Off	N	9.6	26.5	65.5
0.232000	34.8	9.000	Off	N	9.6	27.6	62.4
0.258000	36.5	9.000	Off	N	9.6	25.0	61.5
0.262000	36.3	9.000	Off	N	9.6	25.1	61.4
0.266000	36.0	9.000	Off	N	9.6	25.2	61.2
1.122000	34.4	9.000	Off	N	9.7	21.6	56.0
1.148000	35.2	9.000	Off	N	9.7	20.8	56.0
1.164000	35.9	9.000	Off	N	9.7	20.1	56.0
1.176000	35.0	9.000	Off	N	9.7	21.0	56.0
1.180000	36.0	9.000	Off	N	9.7	20.0	56.0
1.184000	35.8	9.000	Off	N	9.7	20.2	56.0
9.400000	32.6	9.000	Off	N	9.9	27.4	60.0
9.488000	32.7	9.000	Off	N	9.9	27.3	60.0
9.622000	32.6	9.000	Off	N	9.9	27.4	60.0
9.816000	32.3	9.000	Off	N	10.0	27.7	60.0

10/16/2015

2:59:20

EMI Auto Test(11)

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
9.836000	32.1	9.000	Off	N	10.0	27.9	60.0
10.208000	31.3	9.000	Off	N	10.0	28.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.156000	26.4	9.000	Off	N	9.6	29.3	55.7
0.160000	24.9	9.000	Off	N	9.6	30.6	55.5
0.230000	19.9	9.000	Off	N	9.6	32.5	52.4
0.234000	21.3	9.000	Off	N	9.6	31.1	52.3
0.258000	22.6	9.000	Off	N	9.6	28.9	51.5
0.262000	23.1	9.000	Off	N	9.6	28.3	51.4
1.122000	27.2	9.000	Off	N	9.7	18.8	46.0
1.146000	27.9	9.000	Off	N	9.7	18.1	46.0
1.156000	28.1	9.000	Off	N	9.7	17.9	46.0
1.168000	28.8	9.000	Off	N	9.7	17.2	46.0
1.192000	28.9	9.000	Off	N	9.7	17.1	46.0
1.208000	28.1	9.000	Off	N	9.7	17.9	46.0
9.622000	25.7	9.000	Off	N	9.9	24.3	50.0
9.744000	25.8	9.000	Off	N	10.0	24.2	50.0
9.748000	25.9	9.000	Off	N	10.0	24.1	50.0
9.816000	25.6	9.000	Off	N	10.0	24.4	50.0
9.836000	25.5	9.000	Off	N	10.0	24.5	50.0
10.014000	24.8	9.000	Off	N	10.0	25.2	50.0

10/16/2015

2:59:20

Conducted Emissions (Line 2)

EMI Auto Test(11)


1 / 2

HCT TEST Report

Common Information

EUT: SM-W2016
Manufacturer: SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions: ANT+ MODE
Operator Name: KS KANG

FCC CLASS B

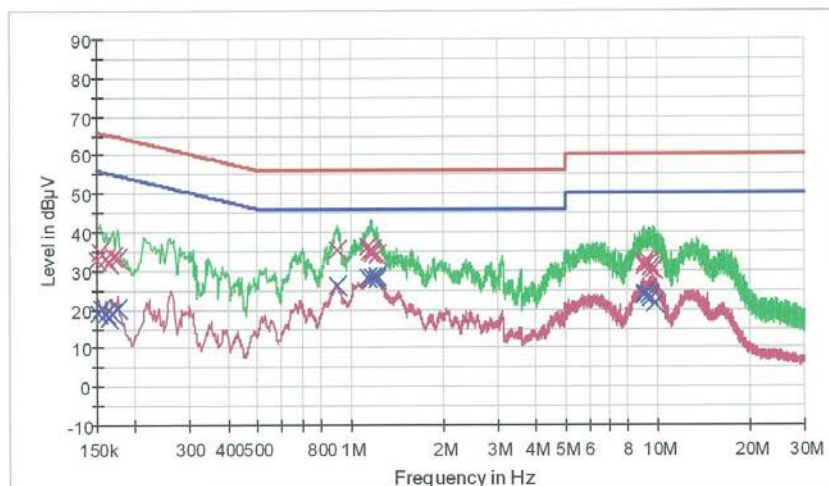

— FCCCLASS B_QP — FCCCLASS B_AV — Preview Result 1-PK
— Preview Result 2-AVG — Final Result 1-QPK — Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	32.8	9.000	Off	L1	9.6	33.2	66.0
0.154000	35.0	9.000	Off	L1	9.6	30.8	65.8
0.160000	33.4	9.000	Off	L1	9.6	32.1	65.5
0.164000	31.9	9.000	Off	L1	9.6	33.4	65.3
0.170000	33.6	9.000	Off	L1	9.6	31.4	65.0
0.176000	33.2	9.000	Off	L1	9.6	31.5	64.7
0.910000	35.2	9.000	Off	L1	9.7	20.8	56.0
1.140000	36.4	9.000	Off	L1	9.7	19.6	56.0
1.156000	34.8	9.000	Off	L1	9.7	21.2	56.0
1.172000	35.2	9.000	Off	L1	9.7	20.8	56.0
1.180000	34.7	9.000	Off	L1	9.7	21.3	56.0
1.216000	34.2	9.000	Off	L1	9.7	21.8	56.0
9.016000	31.3	9.000	Off	L1	9.9	28.7	60.0
9.064000	31.3	9.000	Off	L1	9.9	28.7	60.0
9.080000	32.1	9.000	Off	L1	9.9	27.9	60.0
9.316000	32.1	9.000	Off	L1	9.9	27.9	60.0

10/16/2015

3:08:30

EMI Auto Test(11)

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
9.466000	30.8	9.000	Off	L1	9.9	29.2	60.0
9.620000	30.3	9.000	Off	L1	10.0	29.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.152000	19.0	9.000	Off	L1	9.6	36.9	55.9
0.156000	20.3	9.000	Off	L1	9.6	35.4	55.7
0.160000	18.8	9.000	Off	L1	9.6	36.7	55.5
0.164000	17.7	9.000	Off	L1	9.6	37.6	55.3
0.168000	18.8	9.000	Off	L1	9.6	36.3	55.1
0.176000	20.1	9.000	Off	L1	9.6	34.6	54.7
0.910000	26.2	9.000	Off	L1	9.7	19.8	46.0
1.140000	28.2	9.000	Off	L1	9.7	17.8	46.0
1.180000	28.1	9.000	Off	L1	9.7	17.9	46.0
1.184000	28.4	9.000	Off	L1	9.7	17.6	46.0
1.216000	28.6	9.000	Off	L1	9.7	17.4	46.0
1.220000	27.9	9.000	Off	L1	9.7	18.1	46.0
9.016000	23.7	9.000	Off	L1	9.9	26.3	50.0
9.064000	24.1	9.000	Off	L1	9.9	25.9	50.0
9.080000	23.8	9.000	Off	L1	9.9	26.2	50.0
9.384000	23.5	9.000	Off	L1	9.9	26.5	50.0
9.504000	22.8	9.000	Off	L1	10.0	27.2	50.0
9.760000	21.4	9.000	Off	L1	10.0	28.6	50.0

10/16/2015

3:08:30

9.LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT (Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/13/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	03/18/2015	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9020A / SIGNAL ANALYZER	07/02/2015	Annual	MY50510304
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2015	Annual	MY45241059
Agilent	87300B/Directional Coupler	12/08/2014	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC POWER SUPPLY	03/11/2015	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/23/2015	Annual	07560

9.2 LIST OF TEST EQUIPMENT (Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/30/2015	Biennial	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/22/2015	Annual	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	06/29/2015	Annual	8
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/15/2015	Annual	1
Rohde & Schwarz	LOOP ANTENNA	09/03/2014	Biennial	1513-175
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964