

SAR Data Report 02112111

Start : 21-Nov-02 11:19:41 am
End : 21-Nov-02 11:26:08 am
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 836.49 MHz
Transmit Pwr : 0.450 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM RIGHT-3
Phantom Type : Right Ear
Tissue Type : Brain
Tissue Dielectric : 42.000
Tissue Conductivity : 0.910
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.700
Calibrated Conductivity : 0.890
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 5.800
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383
Cheek
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=72.0 y=13.0 = 1.02 W/kg

Zoom Scan - Max Peak SAR Value at x=73.0 y=16.0 z=0.0 = 1.44 W/kg


Max 1g SAR at x=74.0 y=15.0 z=0.0 = 1.05 W/kg

Max 10g SAR at x=73.0 y=14.0 z=0.0 = 0.71 W/kg

SAR - Z Axis
at Hotspot x:73.0 y:16.0

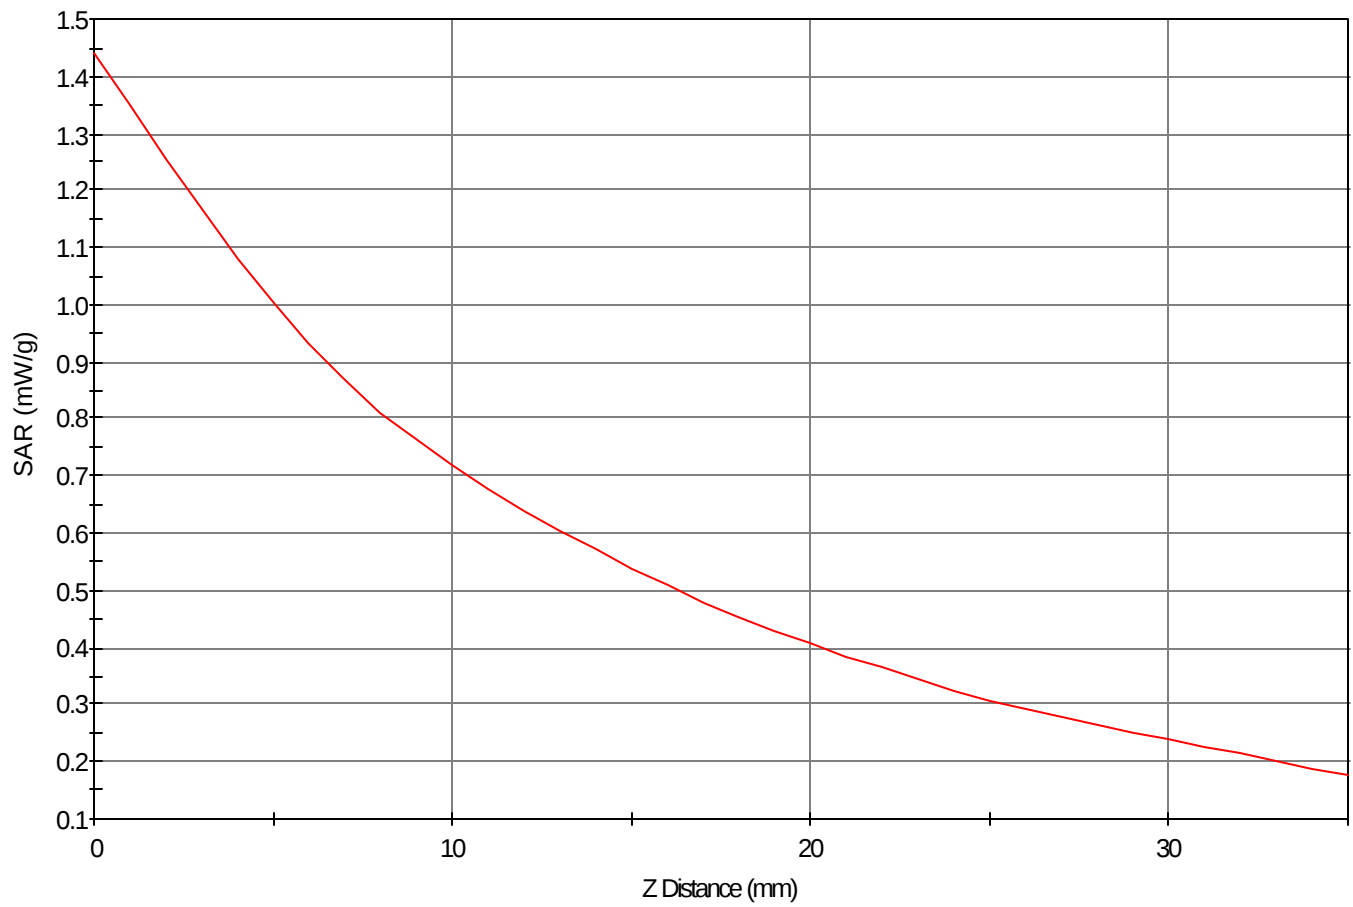

1g SAR Values

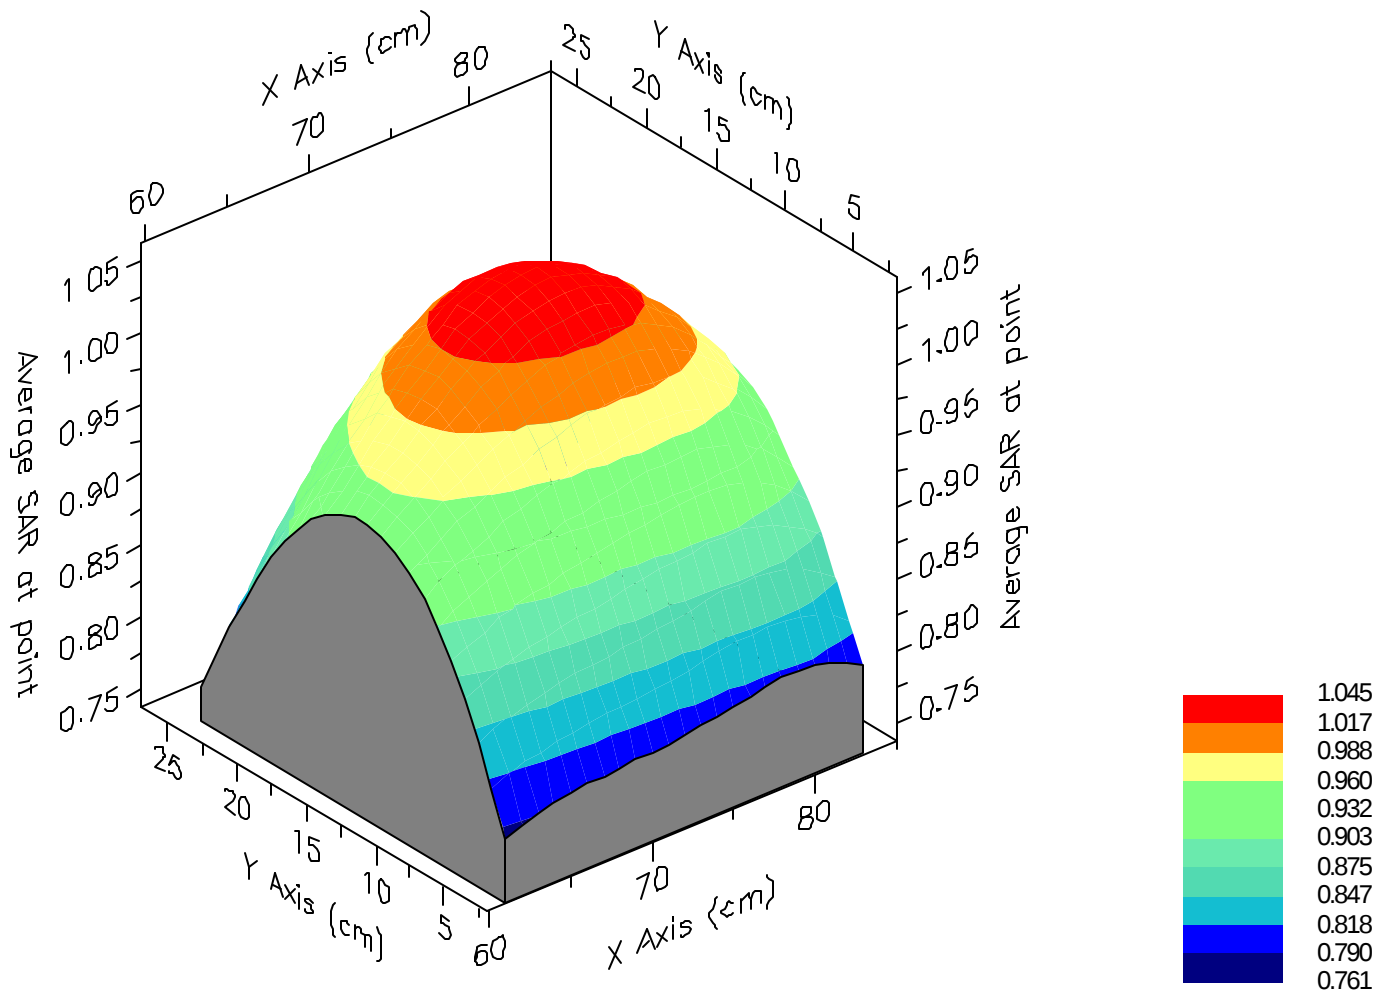



SAR Data Report 02112123

Start : 21-Nov-02 02:21:17 pm
End : 21-Nov-02 02:27:29 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 836.49 MHz
Transmit Pwr : 0.450 W
Antenna Type : Helical
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM RIGHT-3
Phantom Type : Right Ear
Tissue Type : Brain
Tissue Dielectric : 42.000
Tissue Conductivity : 0.910
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.700
Calibrated Conductivity : 0.890
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 5.800
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383
Tilt
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=64.0 y=14.0 = 0.25 W/kg

Zoom Scan - Max Peak SAR Value at x=66.0 y=14.0 z=0.0 = 0.35 W/kg


Max 1g SAR at x=66.0 y=14.0 z=0.0 = 0.26 W/kg

Max 10g SAR at x=64.0 y=14.0 z=0.0 = 0.18 W/kg

SAR - Z Axis
at Hotspot x:66.0 y:14.0

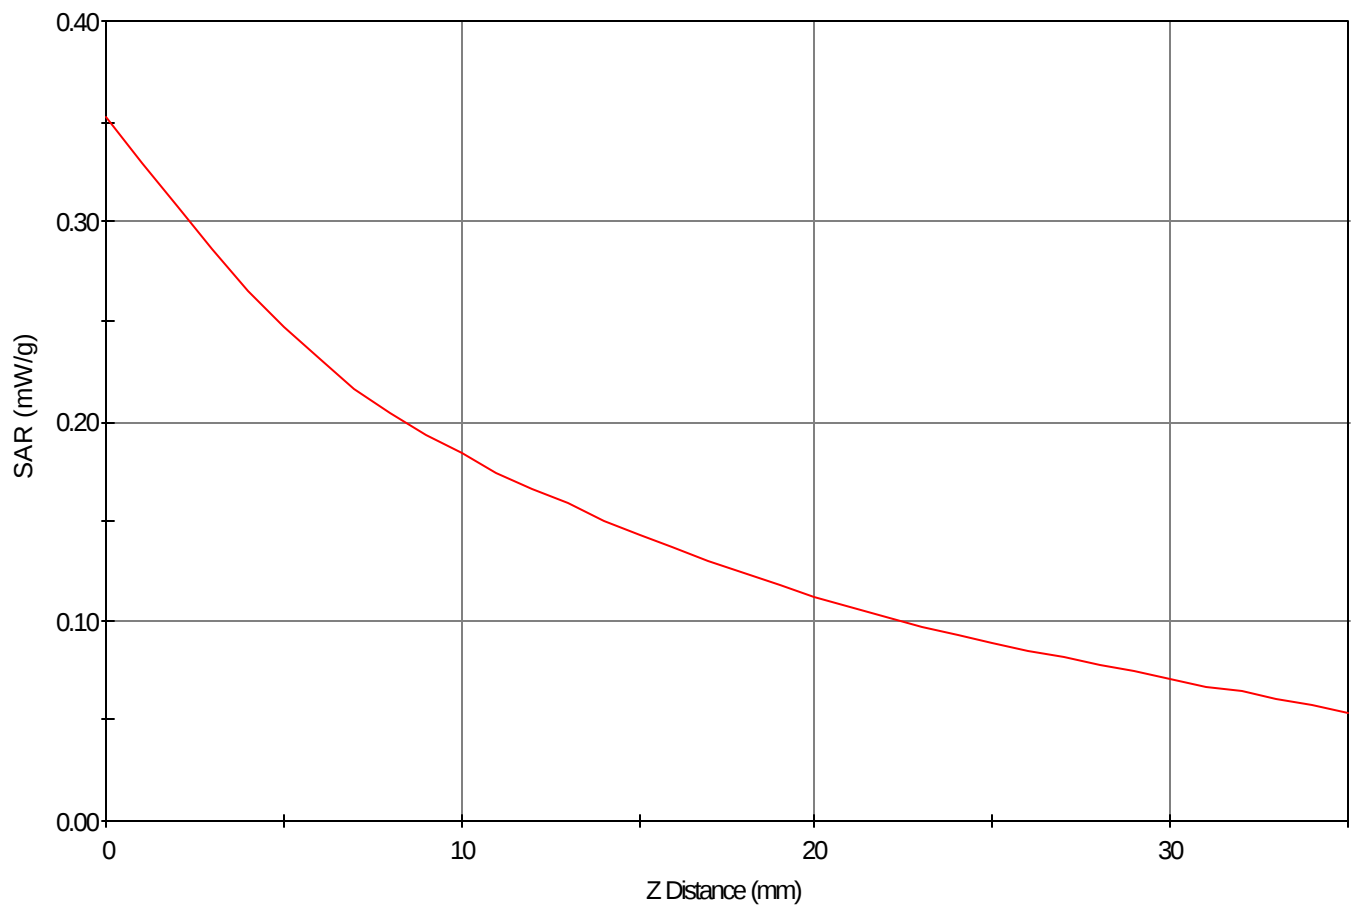

1g SAR Values

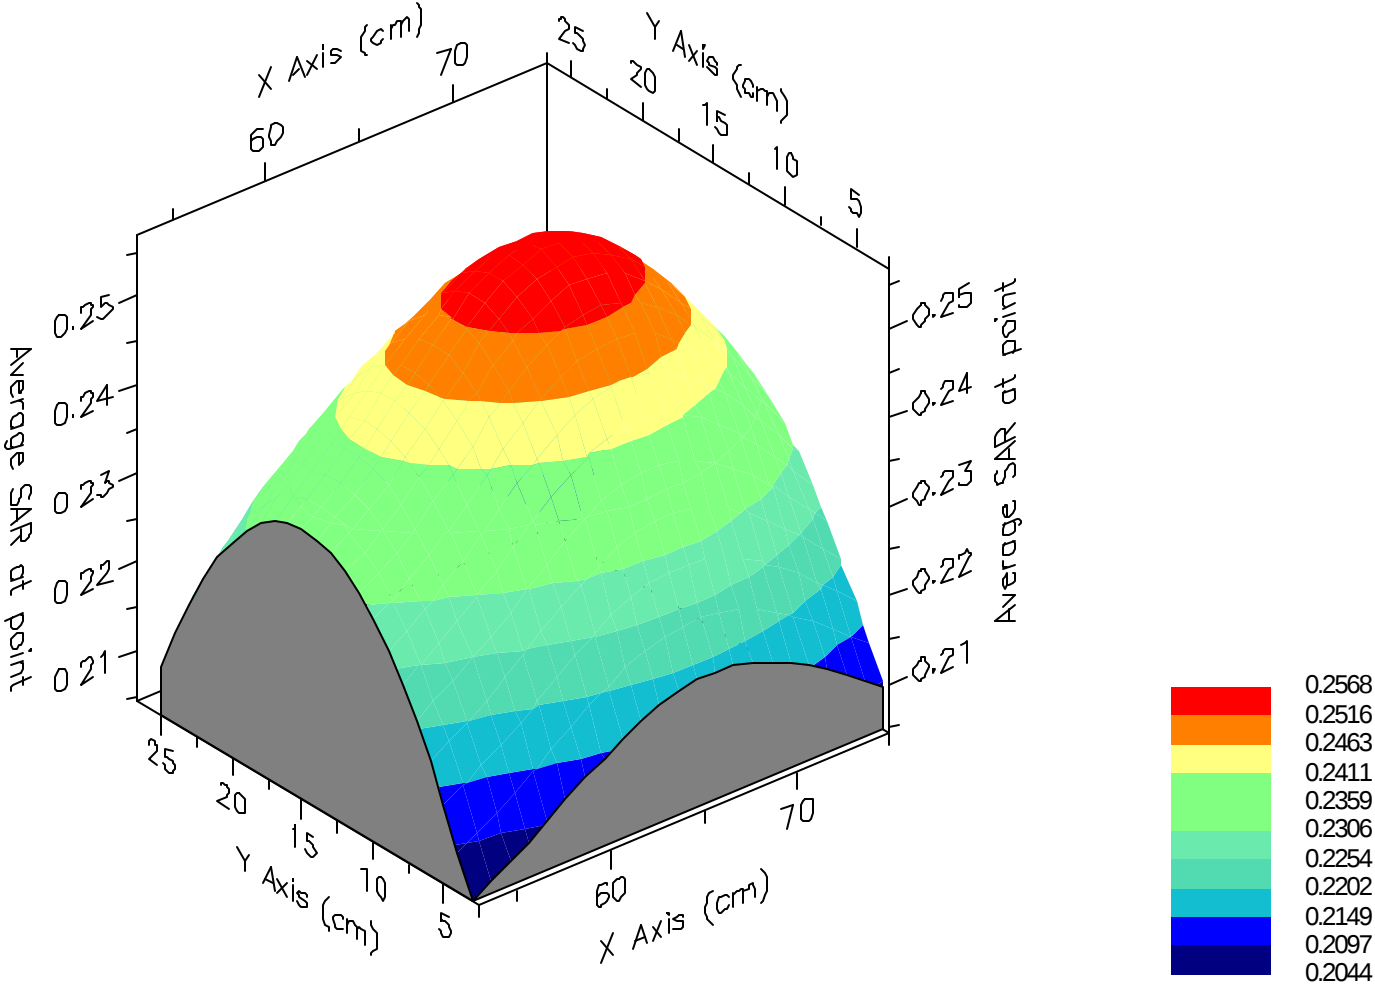



SAR Data Report 02112117

Start : 21-Nov-02 12:19:04 pm
End : 21-Nov-02 12:26:51 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 836.49 MHz
Transmit Pwr : 0.450 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM LEFT-3
Phantom Type : Left Ear
Tissue Type : Brain
Tissue Dielectric : 42.000
Tissue Conductivity : 0.910
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.700
Calibrated Conductivity : 0.890
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 5.800
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383
Cheek
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=70.0 y=7.0 = 1.04 W/kg

Zoom Scan - Max Peak SAR Value at x=70.0 y=10.0 z=0.0 = 1.40 W/kg


Max 1g SAR at x=70.0 y=9.0 z=0.0 = 1.06 W/kg

Max 10g SAR at x=70.0 y=8.0 z=0.0 = 0.74 W/kg

SAR - Z Axis
at Hotspot x:70.0 y:10.0

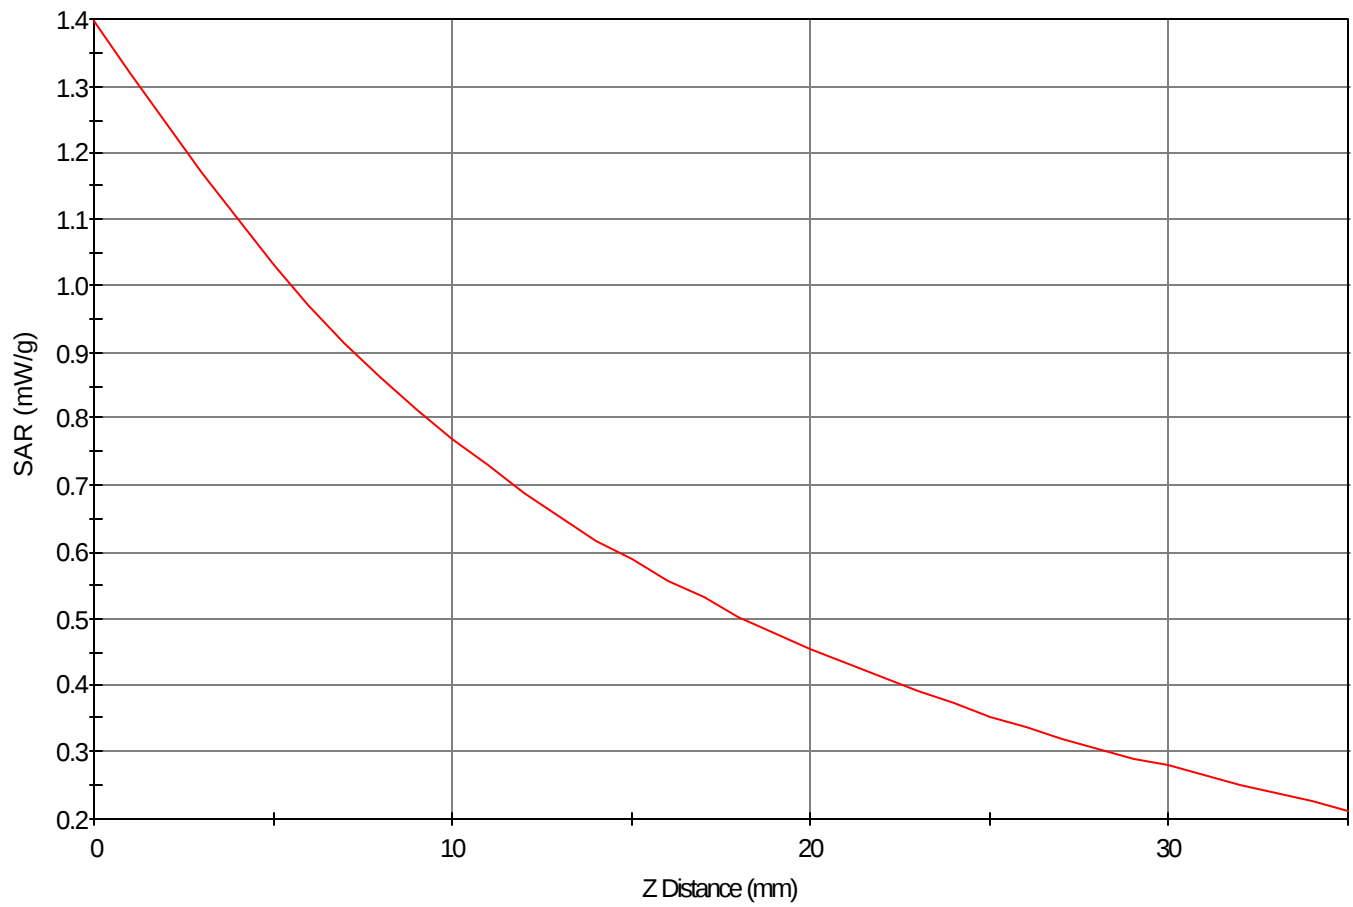

1g SAR Values

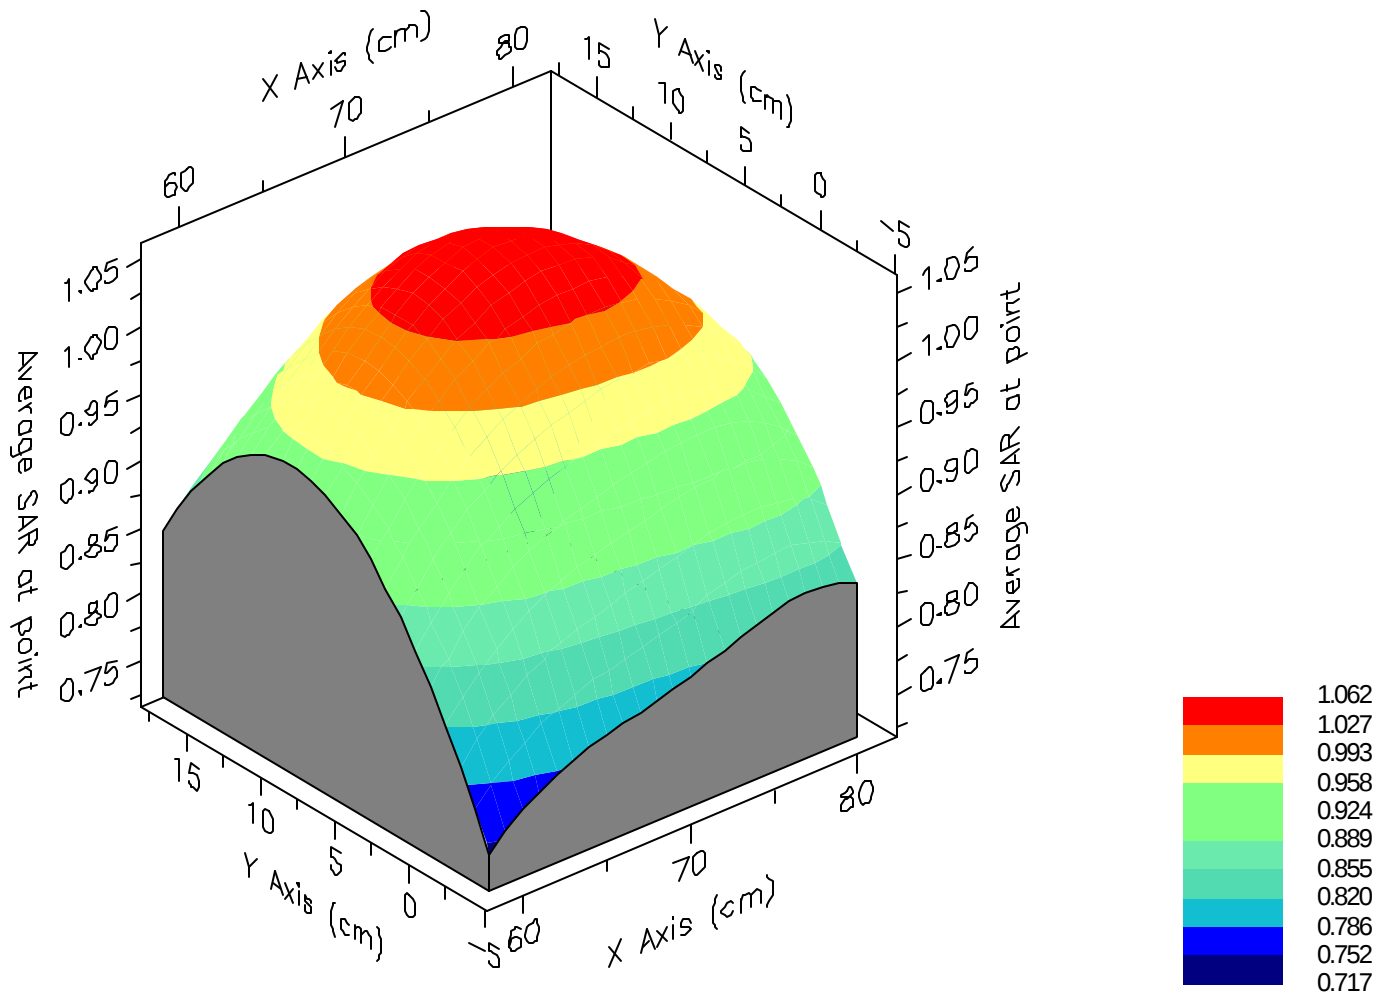



SAR Data Report 02112120

Start : 21-Nov-02 02:04:23 pm
End : 21-Nov-02 02:10:34 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 848.97 MHz
Transmit Pwr : 0.450 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM LEFT-3
Phantom Type : Left Ear
Tissue Type : Brain
Tissue Dielectric : 42.000
Tissue Conductivity : 0.910
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.700
Calibrated Conductivity : 0.890
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 5.800
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383
Tilt
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=53.0 y=11.0 = 0.18 W/kg

Zoom Scan - Max Peak SAR Value at x=52.0 y=13.0 z=0.0 = 0.26 W/kg


Max 1g SAR at x=52.0 y=13.0 z=0.0 = 0.19 W/kg

Max 10g SAR at x=51.0 y=12.0 z=0.0 = 0.14 W/kg

SAR - Z Axis
at Hotspot x:52.0 y:13.0

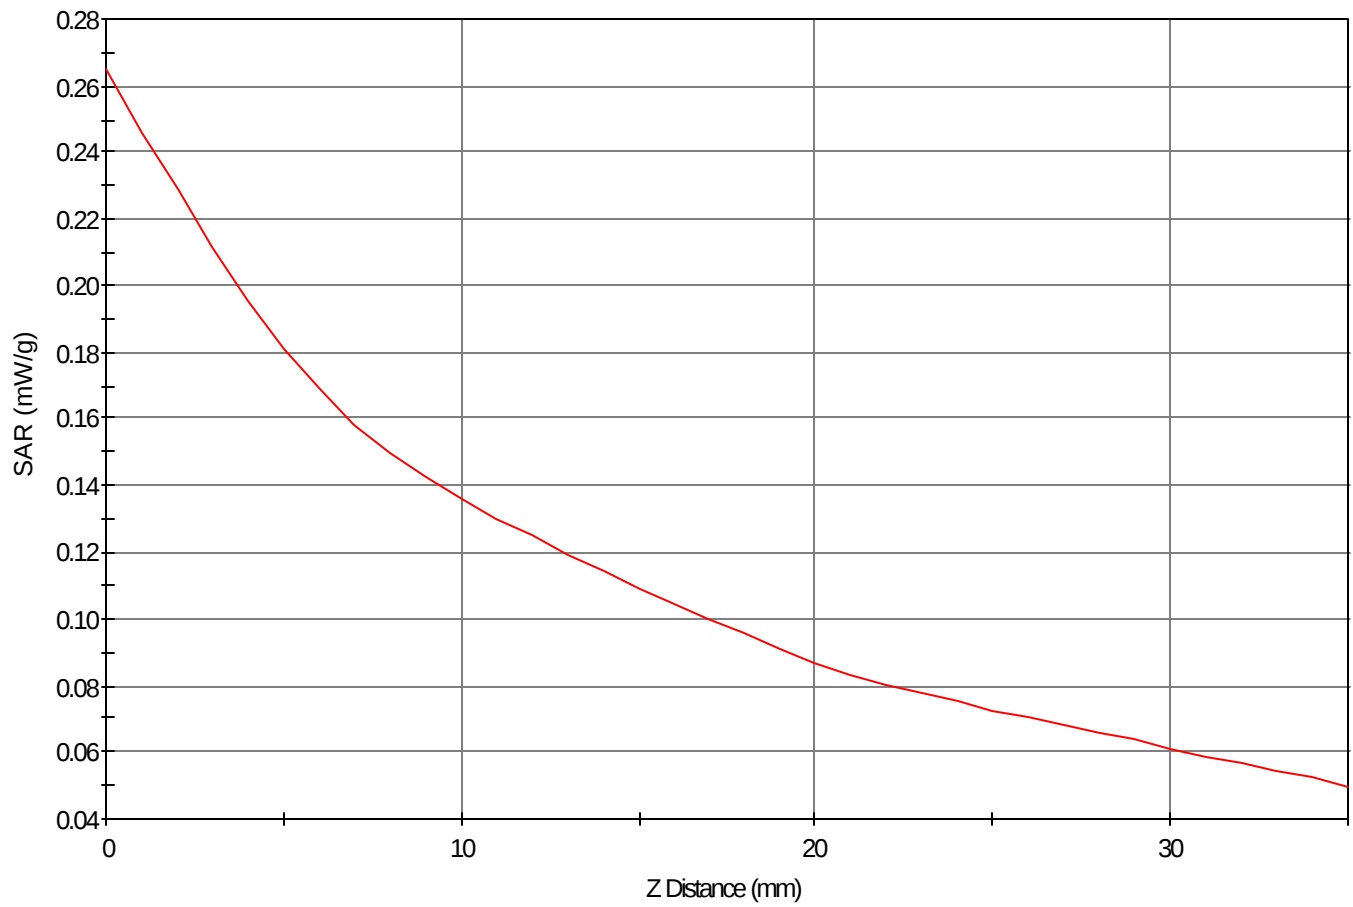

1g SAR Values

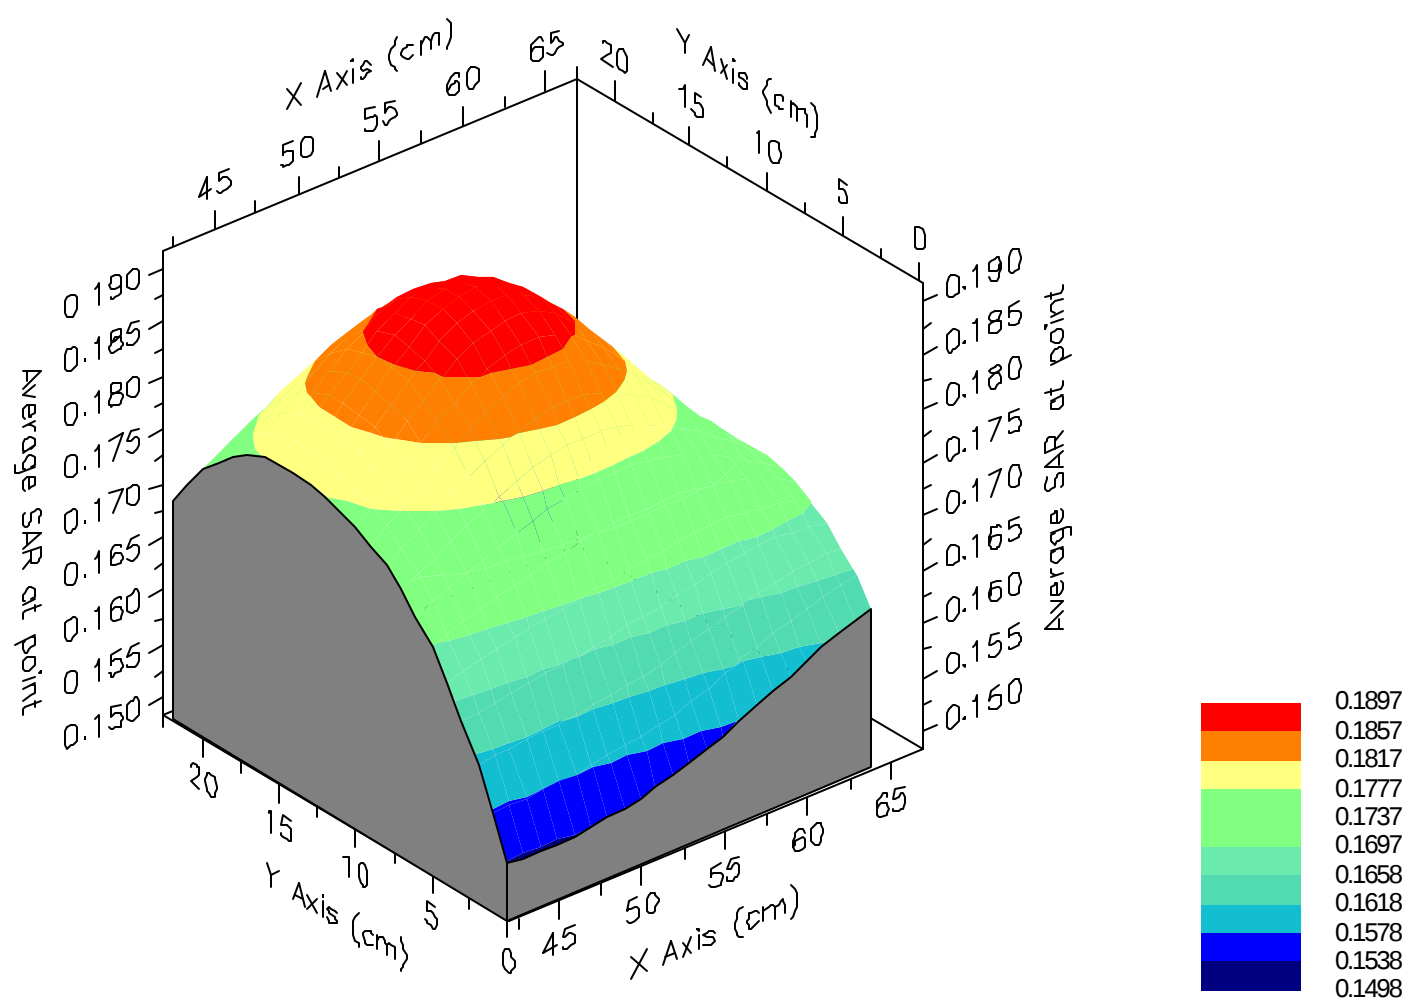



SAR Data Report 02112126

Start : 21-Nov-02 02:48:41 pm
End : 21-Nov-02 02:55:12 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 835.89 MHz
Transmit Pwr : 0.280 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM RIGHT-3
Phantom Type : Right Ear
Tissue Type : Brain
Tissue Dielectric : 42.000
Tissue Conductivity : 0.910
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.700
Calibrated Conductivity : 0.890
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 5.800
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

CDMA Mode CH-363
Cheek
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=71.0 y=13.0 = 0.62 W/kg

Zoom Scan - Max Peak SAR Value at x=72.0 y=15.0 z=0.0 = 0.86 W/kg


Max 1g SAR at x=73.0 y=14.0 z=0.0 = 0.63 W/kg

Max 10g SAR at x=73.0 y=13.0 z=0.0 = 0.43 W/kg

SAR - Z Axis
at Hotspot x:72.0 y:15.0

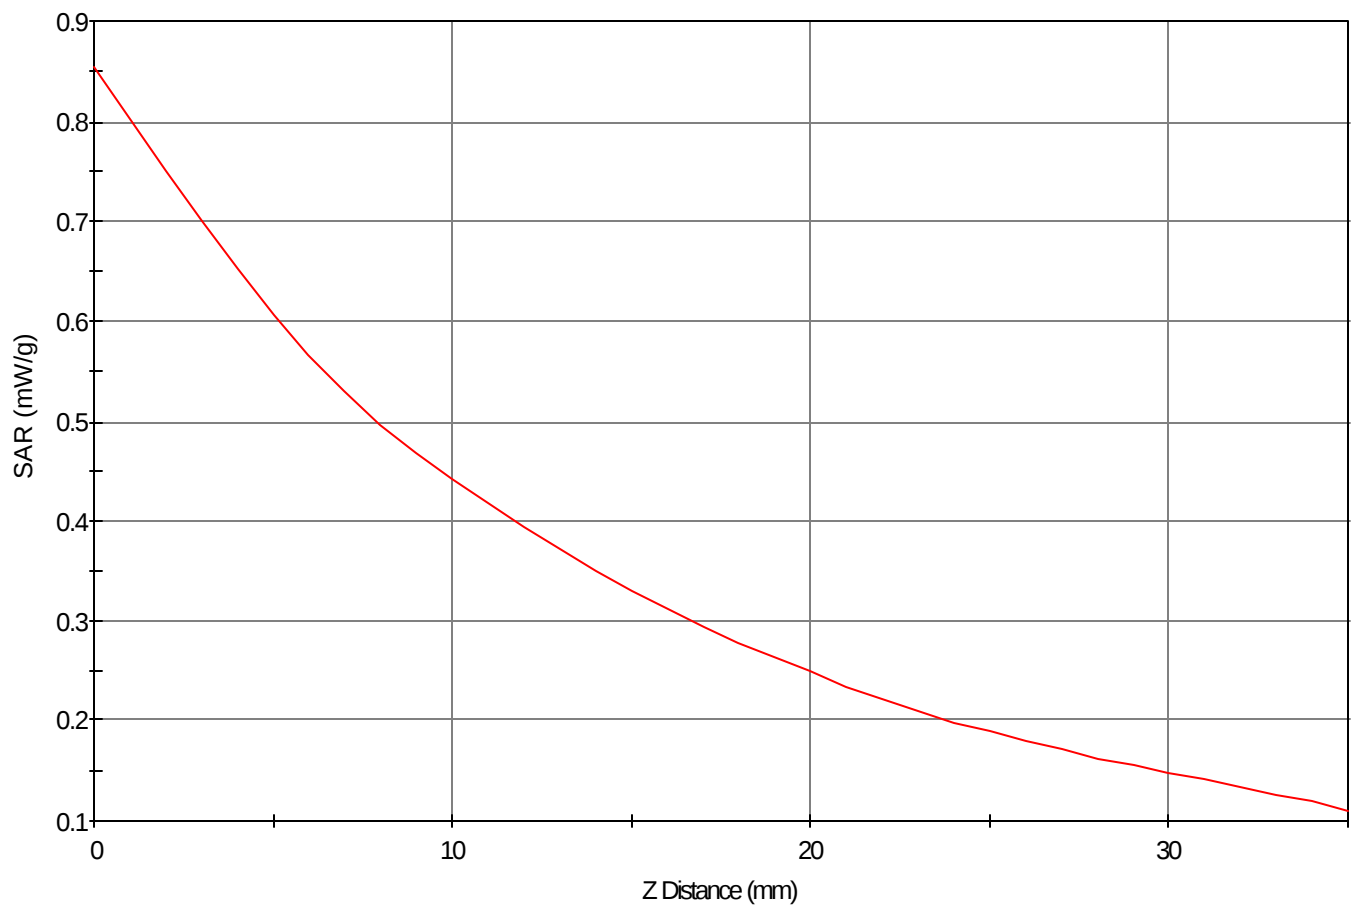

1g SAR Values

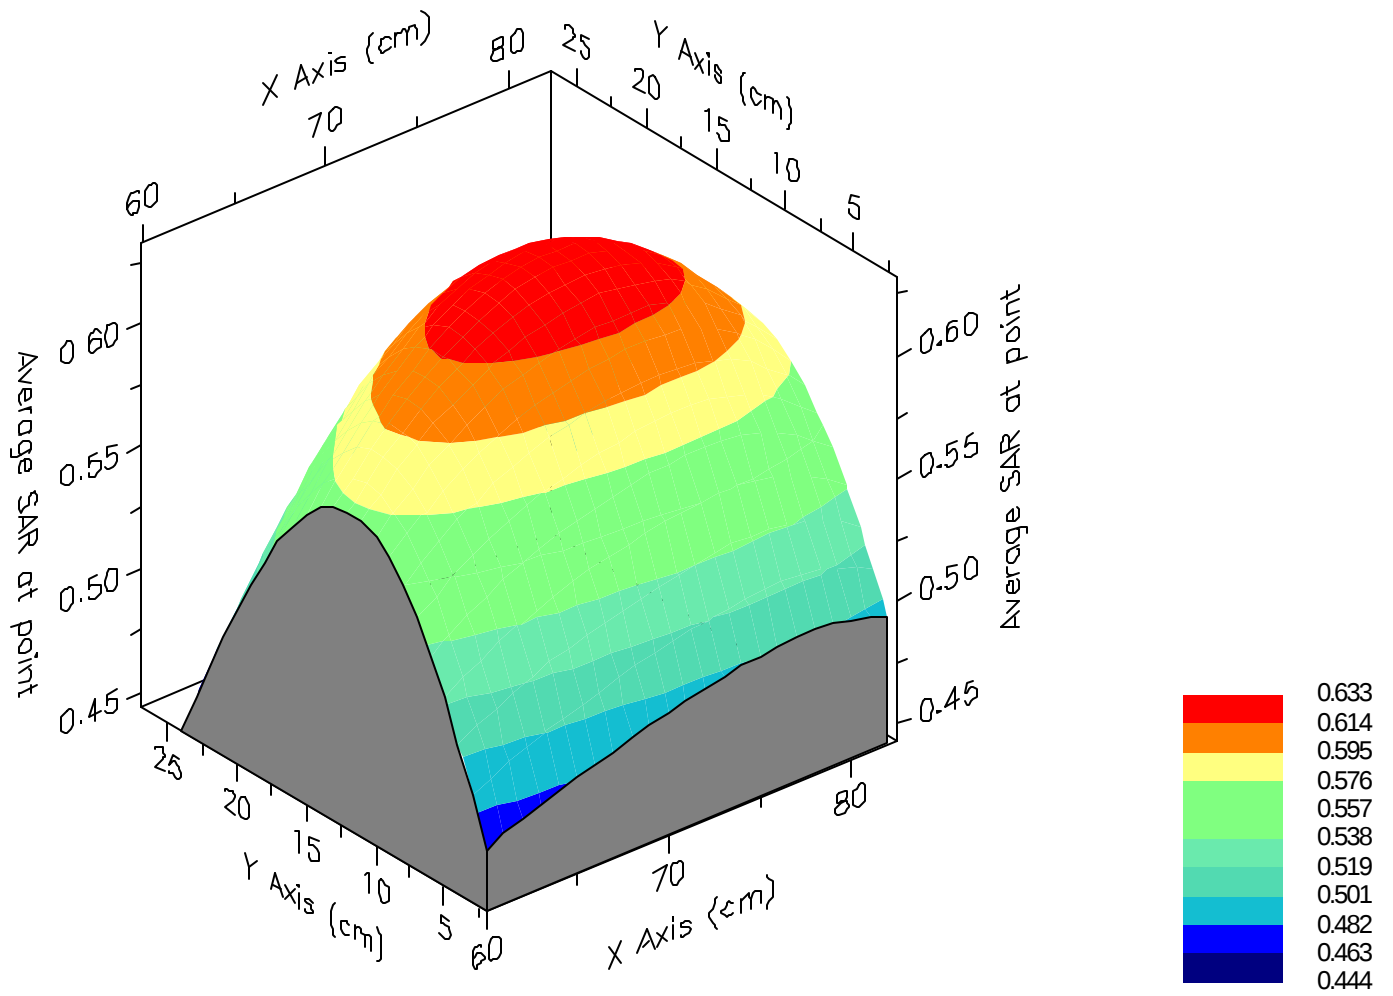



SAR Data Report 02112128

Start : 21-Nov-02 03:07:31 pm
End : 21-Nov-02 03:14:00 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 835.89 MHz
Transmit Pwr : 0.280 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM RIGHT-3
Phantom Type : Right Ear
Tissue Type : Brain
Tissue Dielectric : 42.000
Tissue Conductivity : 0.910
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.700
Calibrated Conductivity : 0.890
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 5.800
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

CDMA Mode CH-363
Tilt
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=60.0 y=15.0 = 0.16 W/kg

Zoom Scan - Max Peak SAR Value at x=52.0 y=15.0 z=0.0 = 0.21 W/kg


Max 1g SAR at x=57.0 y=16.0 z=0.0 = 0.15 W/kg

Max 10g SAR at x=60.0 y=15.0 z=0.0 = 0.11 W/kg

SAR - Z Axis
at Hotspot x:52.0 y:15.0

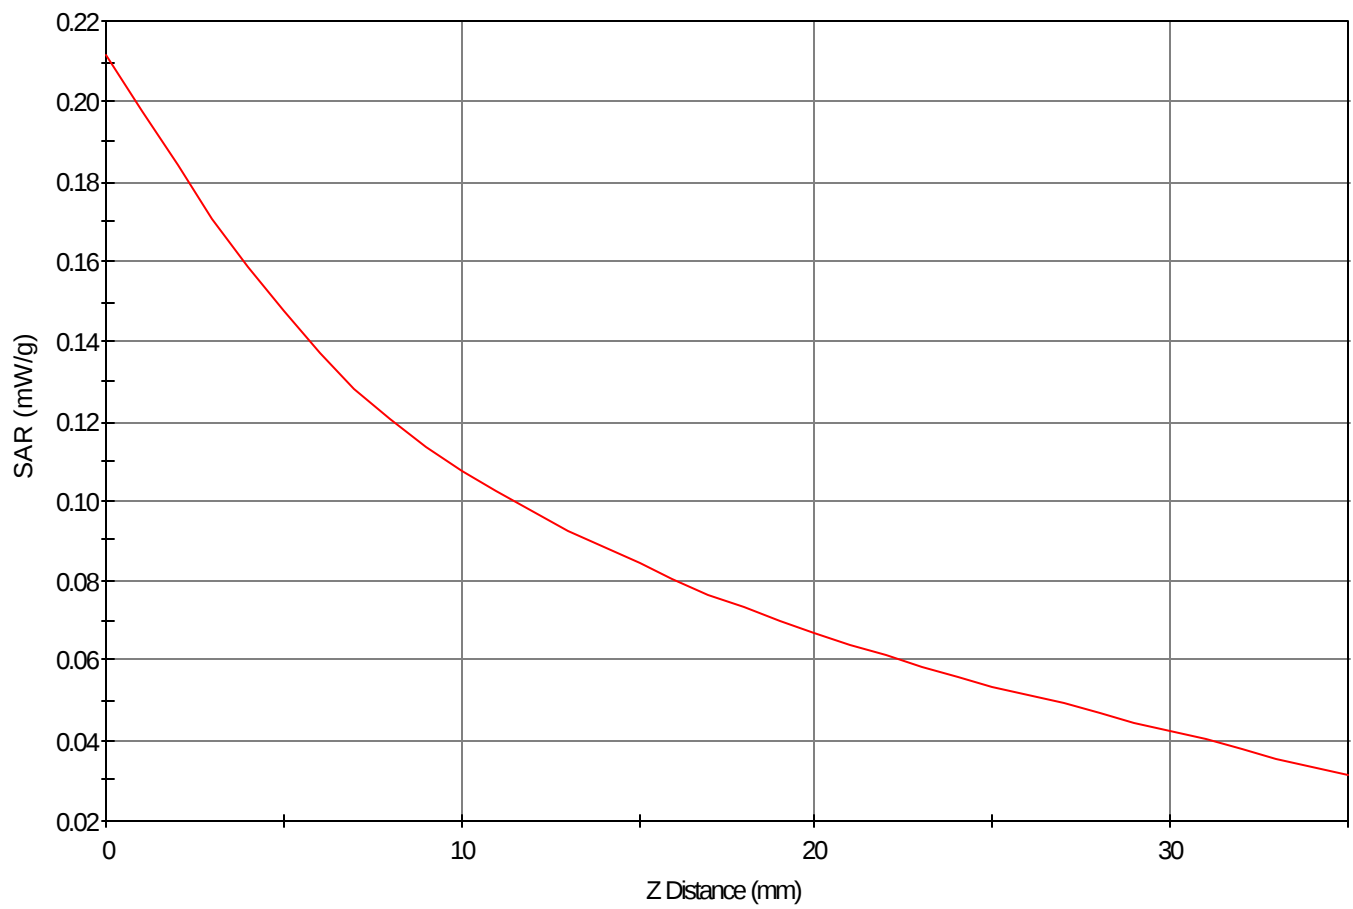

1g SAR Values

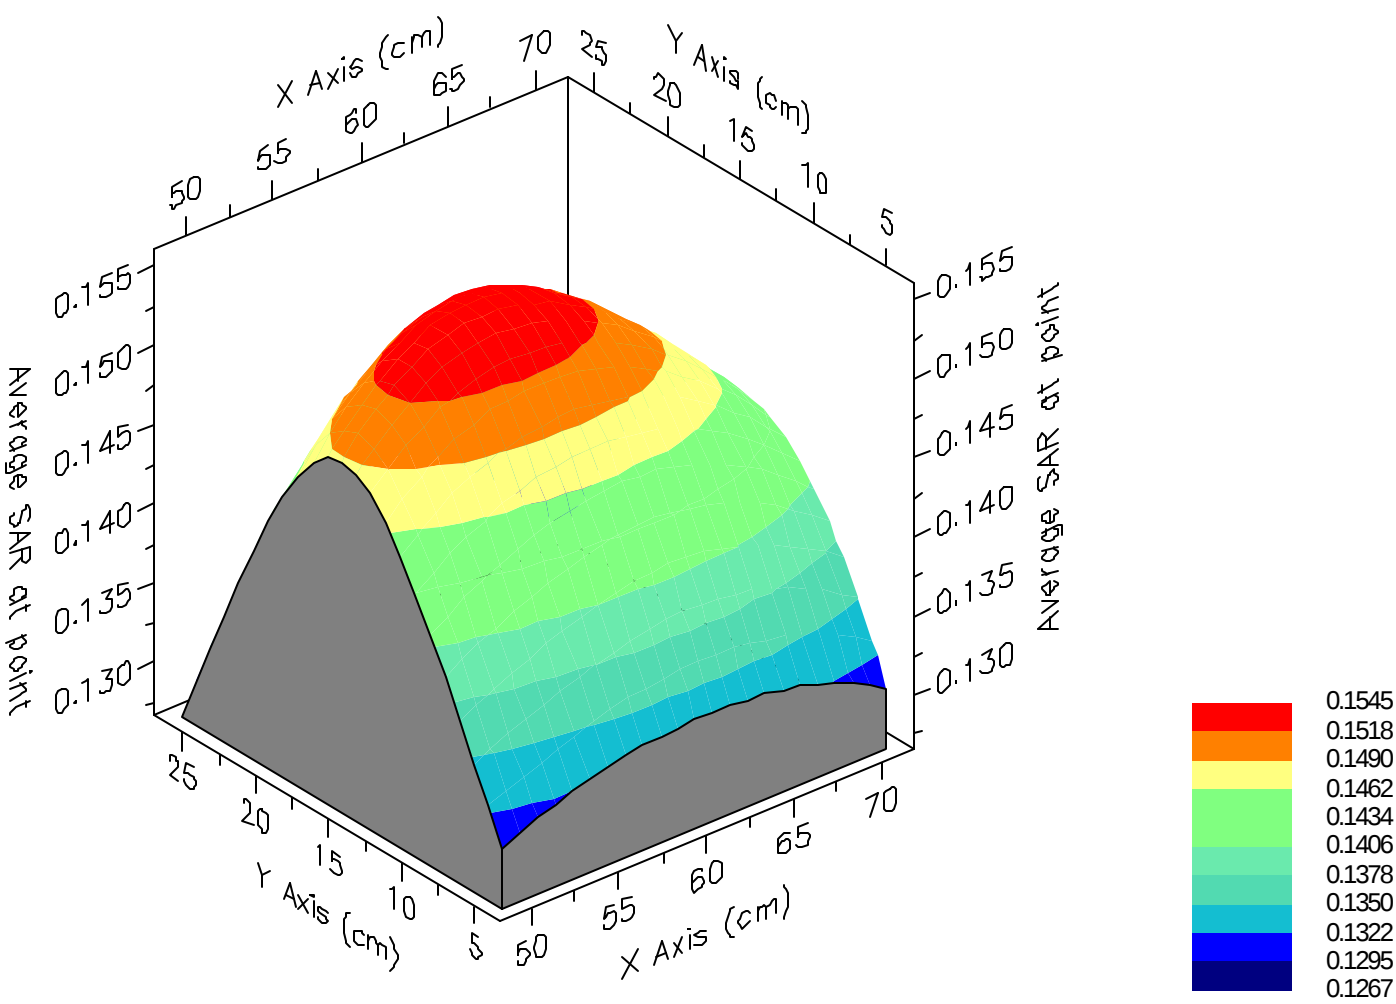



SAR Data Report 02112135

Start : 21-Nov-02 03:55:20 pm
End : 21-Nov-02 04:03:07 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 835.89 MHz
Transmit Pwr : 0.280 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM LEFT-3
Phantom Type : Left Ear
Tissue Type : Brain
Tissue Dielectric : 42.000
Tissue Conductivity : 0.910
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.700
Calibrated Conductivity : 0.890
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 5.800
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

CDMA Mode CH-363
Cheek
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=70.0 y=8.0 = 0.63 W/kg

Zoom Scan - Max Peak SAR Value at x=71.0 y=9.0 z=0.0 = 0.85 W/kg


Max 1g SAR at x=71.0 y=8.0 z=0.0 = 0.64 W/kg

Max 10g SAR at x=70.0 y=8.0 z=0.0 = 0.44 W/kg

SAR - Z Axis
at Hotspot x:71.0 y:9.0

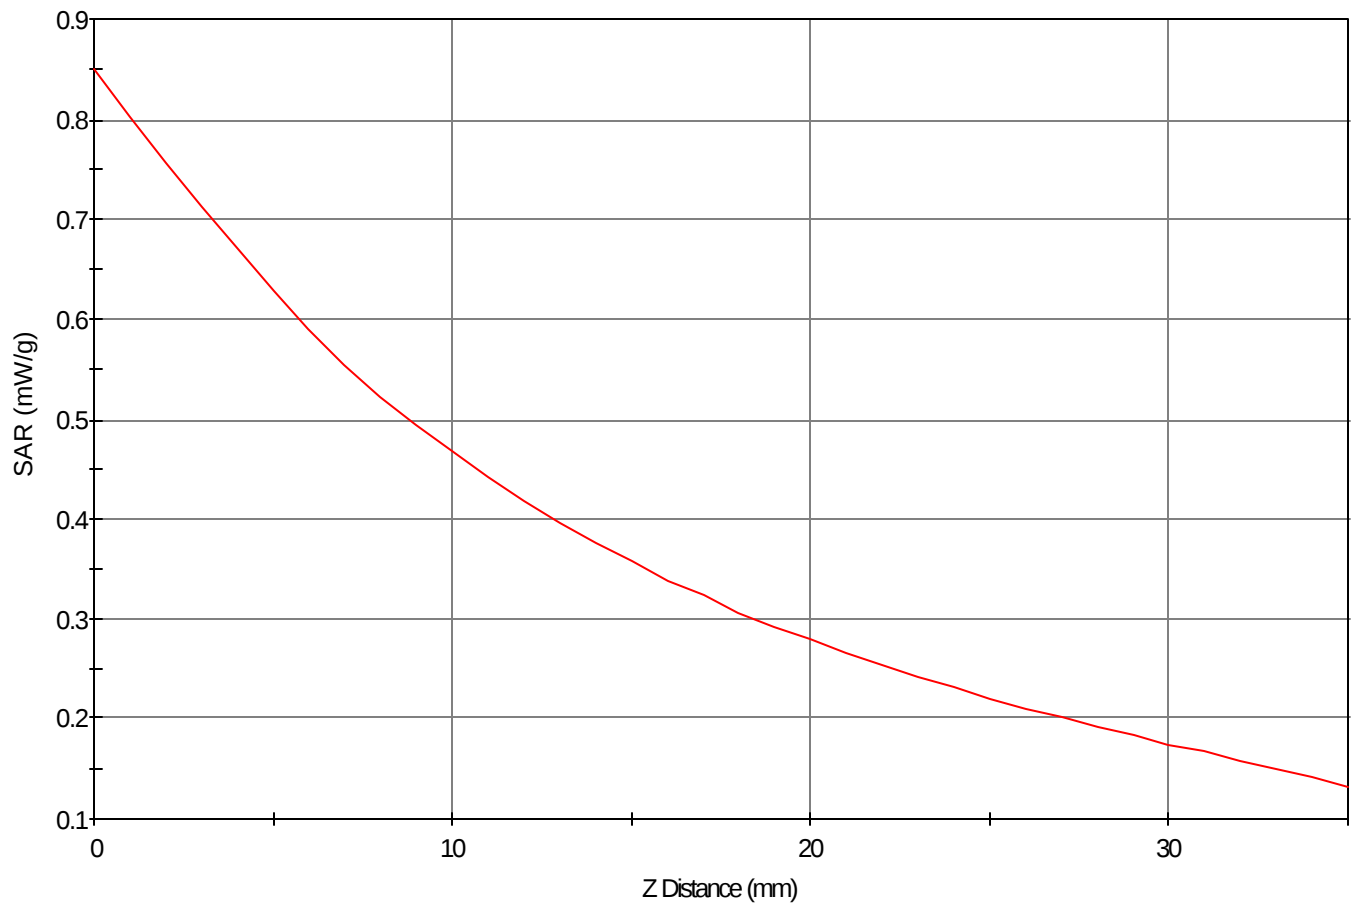

1g SAR Values

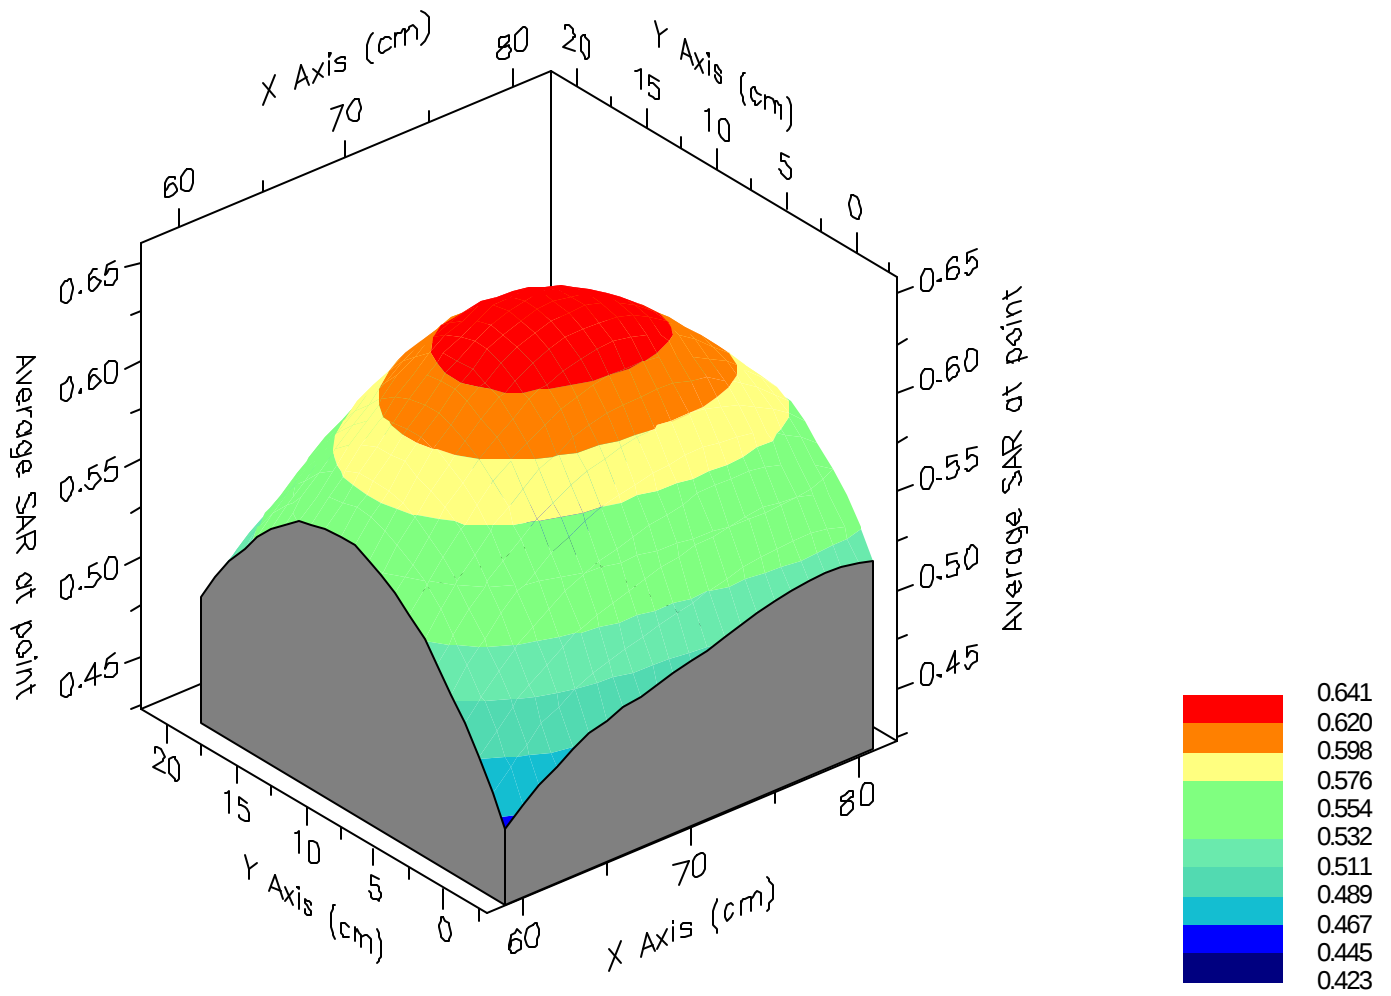



SAR Data Report 02112132

Start : 21-Nov-02 03:30:56 pm
End : 21-Nov-02 03:37:10 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 835.89 MHz
Transmit Pwr : 0.280 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM LEFT-3
Phantom Type : Left Ear
Tissue Type : Brain
Tissue Dielectric : 42.000
Tissue Conductivity : 0.910
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.700
Calibrated Conductivity : 0.890
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 5.800
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

CDMA Mode CH-363
Tilt
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=55.0 y=10.0 = 0.14 W/kg

Zoom Scan - Max Peak SAR Value at x=54.0 y=12.0 z=0.0 = 0.20 W/kg


Max 1g SAR at x=54.0 y=12.0 z=0.0 = 0.14 W/kg

Max 10g SAR at x=51.0 y=11.0 z=0.0 = 0.10 W/kg

SAR - Z Axis
at Hotspot x:54.0 y:12.0

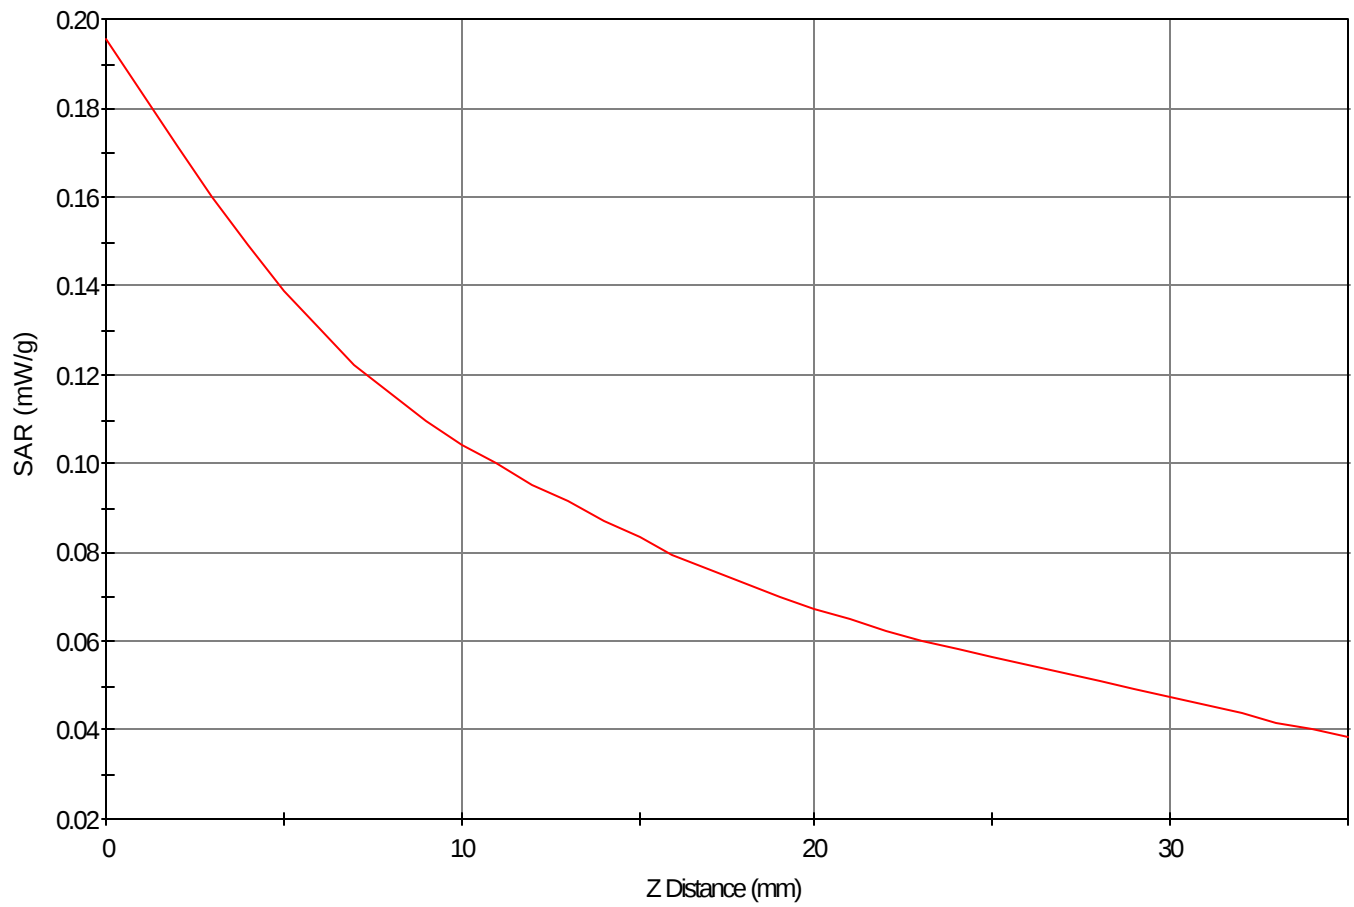

1g SAR Values

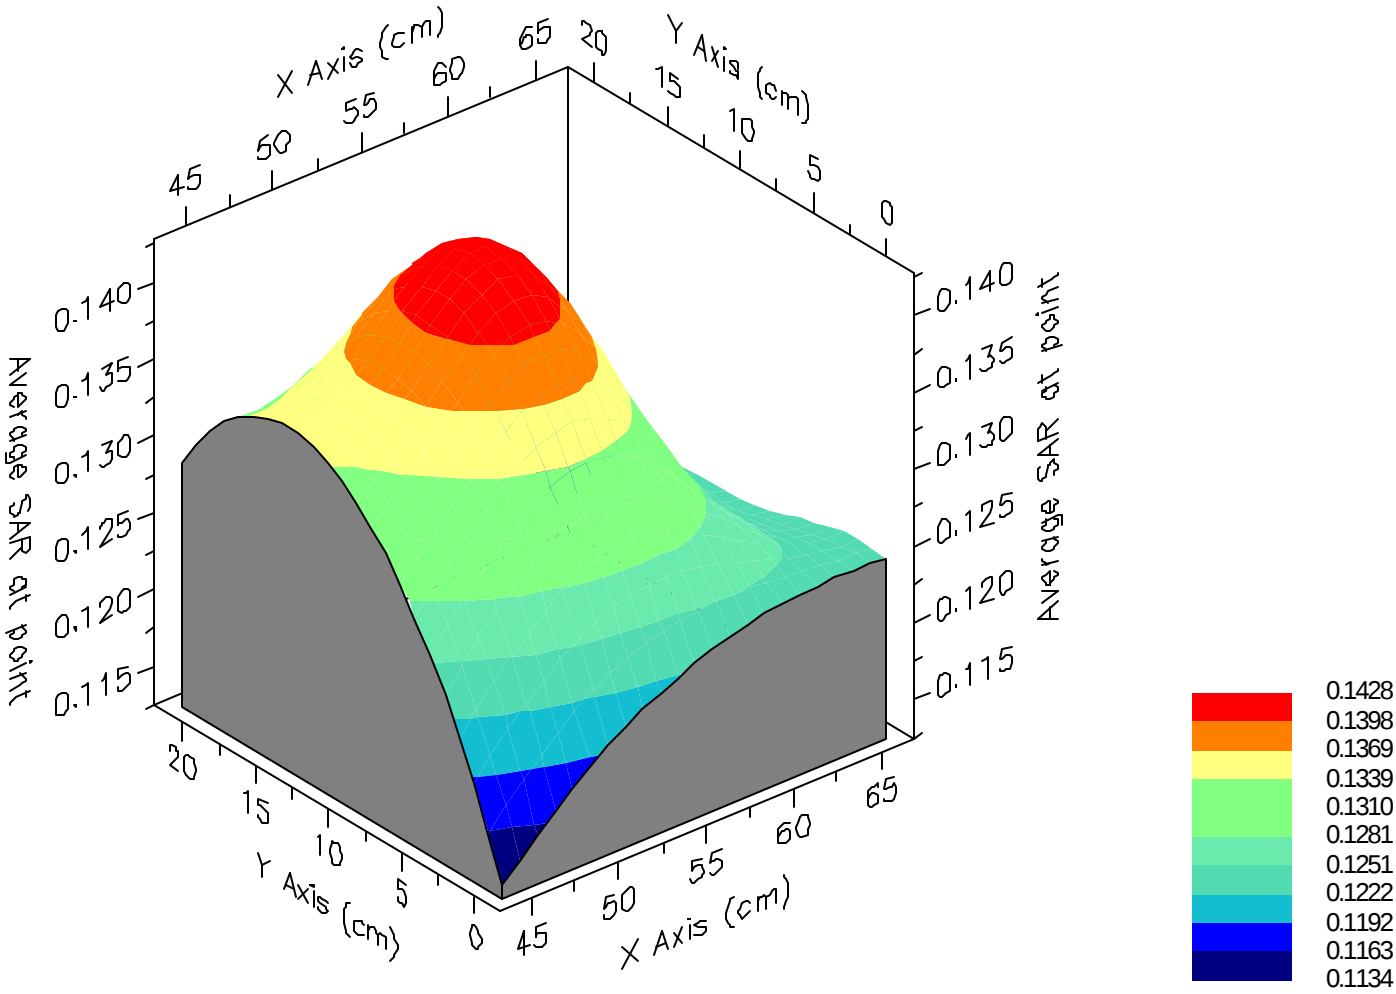



SAR Data Report 02112021

Start : 22-Nov-02 03:08:16 pm
End : 22-Nov-02 03:14:39 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 1851.25 MHz
Transmit Pwr : 0.225 W
Antenna Type : Helical
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM RIGHT-3
Phantom Type : Right Ear
Tissue Type : Brain
Tissue Dielectric : 40.400
Tissue Conductivity : 1.380
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 1900 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.200
Calibrated Conductivity : 1.410
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.700
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

PCS Mode CH-25
Cheek
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.0 'C


Area Scan - Max Peak SAR Value at x=76.0 y=8.0 = 1.34 W/kg

Zoom Scan - Max Peak SAR Value at x=75.0 y=2.0 z=0.0 = 2.27 W/kg


Max 1g SAR at x=75.0 y=6.0 z=0.0 = 1.41 W/kg

Max 10g SAR at x=76.0 y=8.0 z=0.0 = 0.83 W/kg

SAR - Z Axis
at Hotspot x:75.0 y:2.0

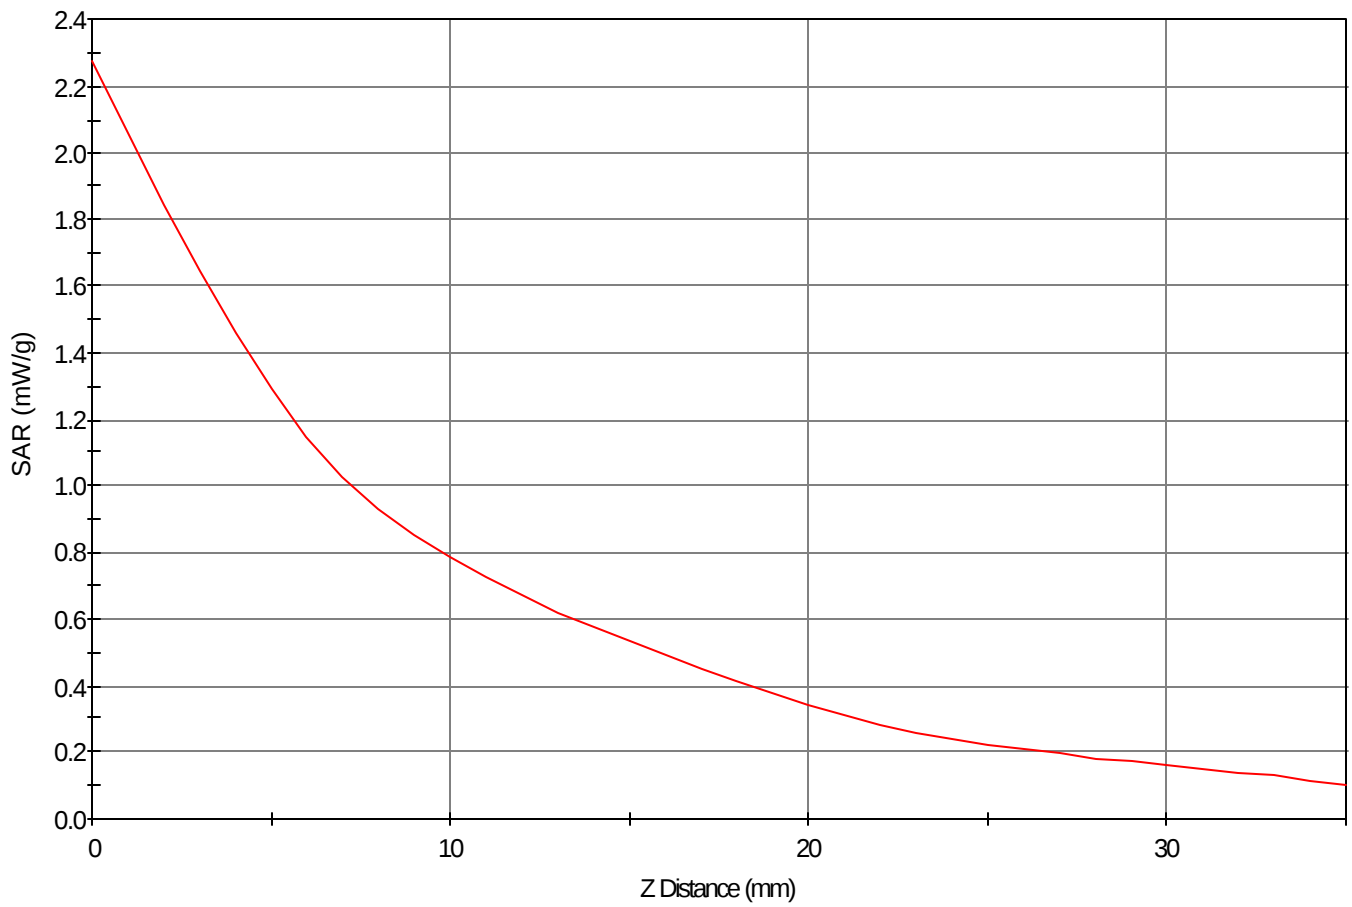

1g SAR Values

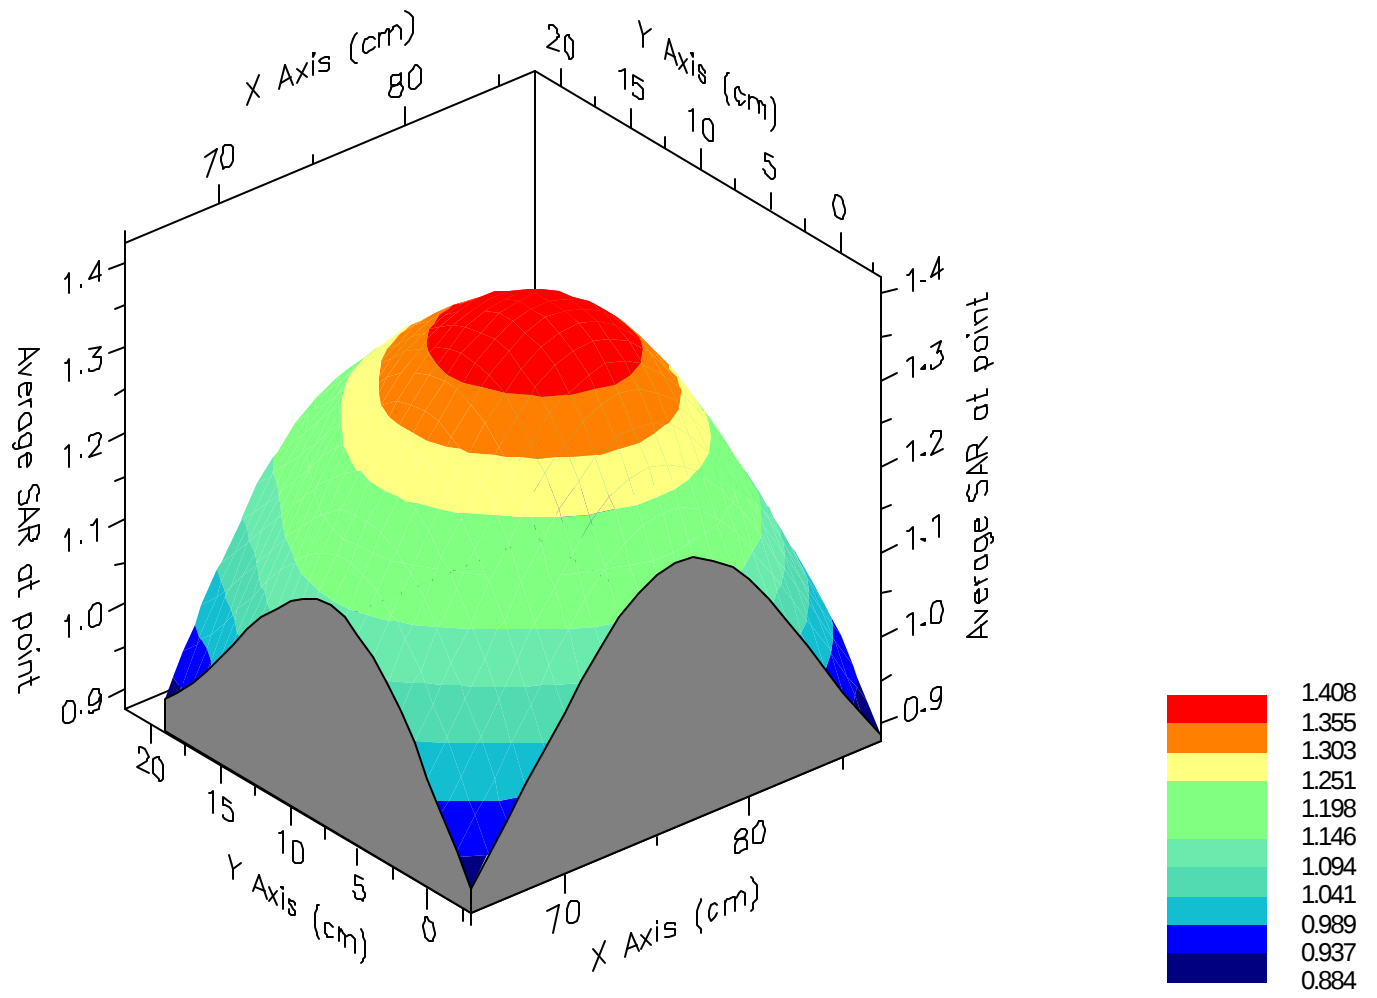



SAR Data Report 02112204

Start : 22-Nov-02 10:18:48 am
End : 22-Nov-02 10:25:02 am
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 1880.00 MHz
Transmit Pwr : 0.225 W
Antenna Type : Helical
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM RIGHT-3
Phantom Type : Right Ear
Tissue Type : Brain
Tissue Dielectric : 40.400
Tissue Conductivity : 1.380
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 1900 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.200
Calibrated Conductivity : 1.410
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.700
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

PCS Mode CH-600
Tilt
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=11.0 y=-3.0 = 0.08 W/kg

Zoom Scan - Max Peak SAR Value at x=11.0 y=-6.0 z=0.0 = 0.18 W/kg


Max 1g SAR at x=12.0 y=-5.0 z=0.0 = 0.09 W/kg

Max 10g SAR at x=15.0 y=-7.0 z=0.0 = 0.05 W/kg

SAR - Z Axis
at Hotspot x:11.0 y:-6.0

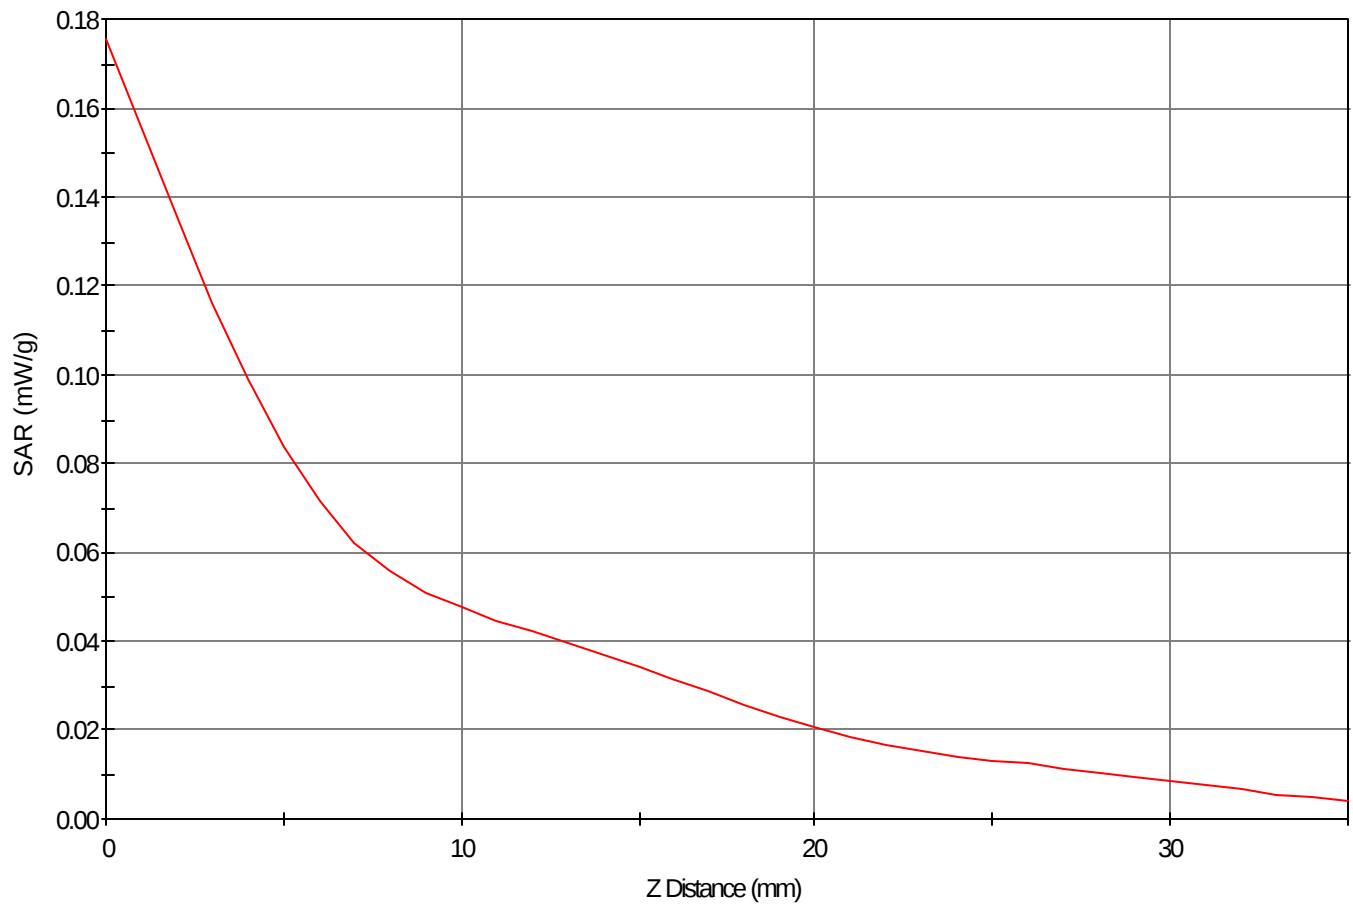

1g SAR Values

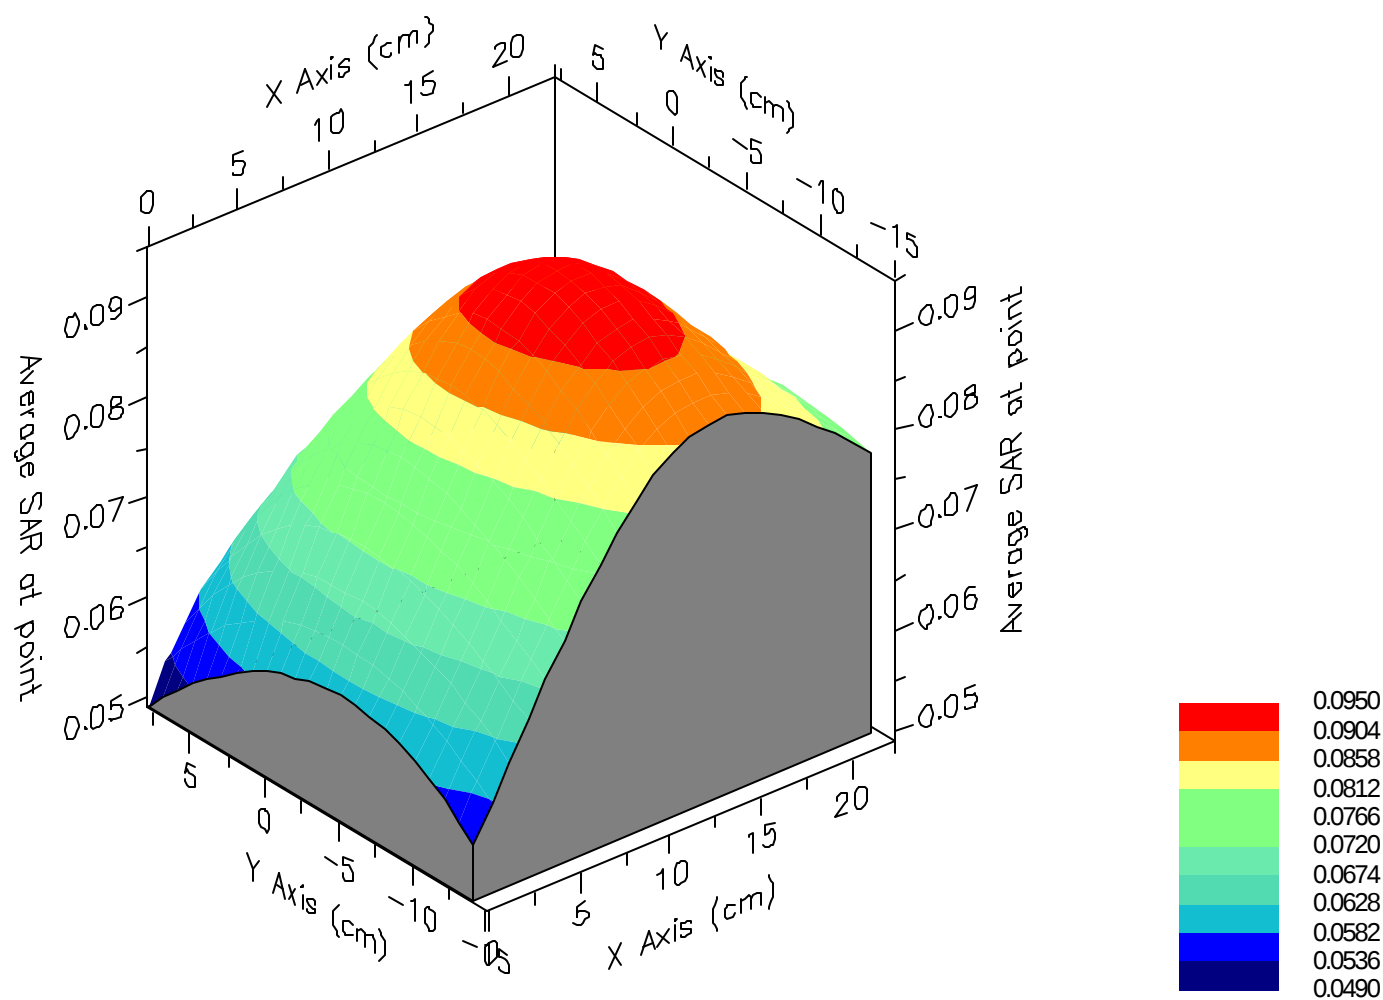



SAR Data Report 02112033

Start : 22-Nov-02 05:09:00 pm
End : 22-Nov-02 05:15:23 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 1851.25 MHz
Transmit Pwr : 0.225 W
Antenna Type : Helical
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM LEFT-3
Phantom Type : Left Ear
Tissue Type : Brain
Tissue Dielectric : 40.400
Tissue Conductivity : 1.380
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 1900 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.200
Calibrated Conductivity : 1.410
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.700
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

PCS Mode CH-25
Cheek
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.0 'C


Area Scan - Max Peak SAR Value at x=75.0 y=-10.0 = 1.39 W/kg

Zoom Scan - Max Peak SAR Value at x=69.0 y=-17.0 z=0.0 = 2.41 W/kg


Max 1g SAR at x=75.0 y=-5.0 z=0.0 = 1.45 W/kg

Max 10g SAR at x=72.0 y=-7.0 z=0.0 = 0.88 W/kg

SAR - Z Axis
at Hotspot x:69.0 y:-17.0

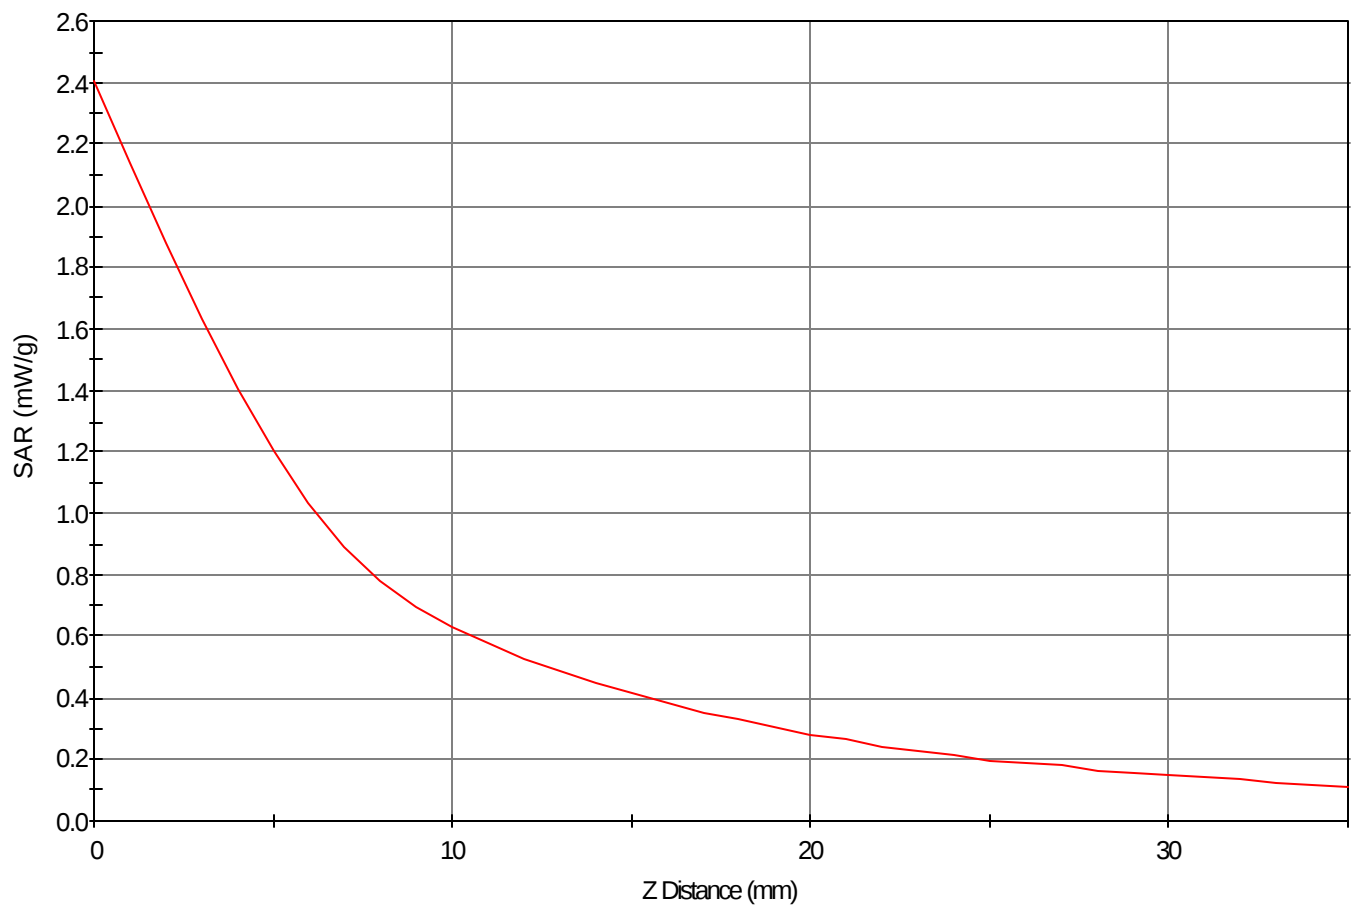

1g SAR Values

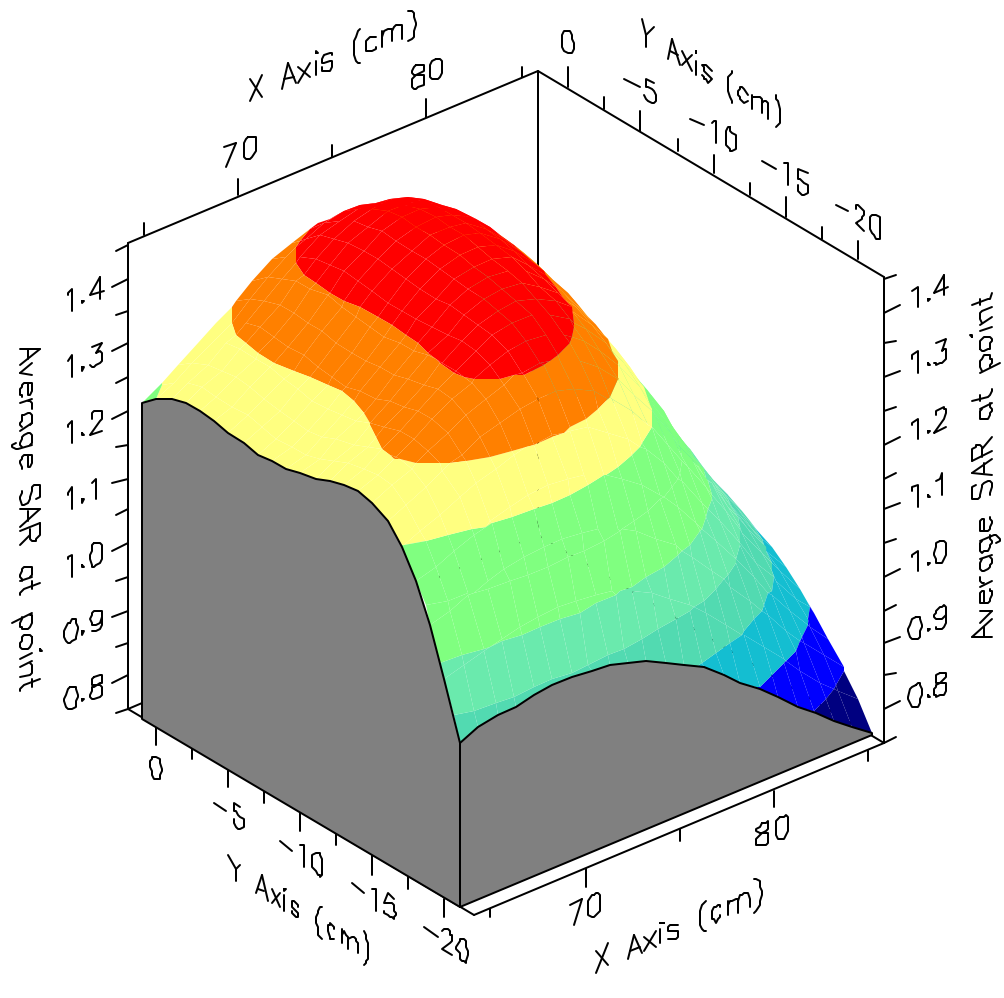



SAR Data Report 02112141

Start : 22-Nov-02 05:27:41 pm
End : 22-Nov-02 05:35:56 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 1880.00 MHz
Transmit Pwr : 0.225 W
Antenna Type : Helical
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM LEFT-3
Phantom Type : Left Ear
Tissue Type : Brain
Tissue Dielectric : 40.400
Tissue Conductivity : 1.380
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 1900 MHz
Tissue Type : Brain
Calibrated Dielectric : 40.200
Calibrated Conductivity : 1.410
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.700
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

PCS Mode CH-600
Tilt
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=58.0 y=16.0 = 0.13 W/kg

Zoom Scan - Max Peak SAR Value at x=74.0 y=25.0 z=0.0 = 0.25 W/kg


Max 1g SAR at x=64.0 y=5.0 z=0.0 = 0.11 W/kg

Max 10g SAR at x=63.0 y=11.0 z=0.0 = 0.09 W/kg

SAR - Z Axis
at Hotspot x:74.0 y:25.0

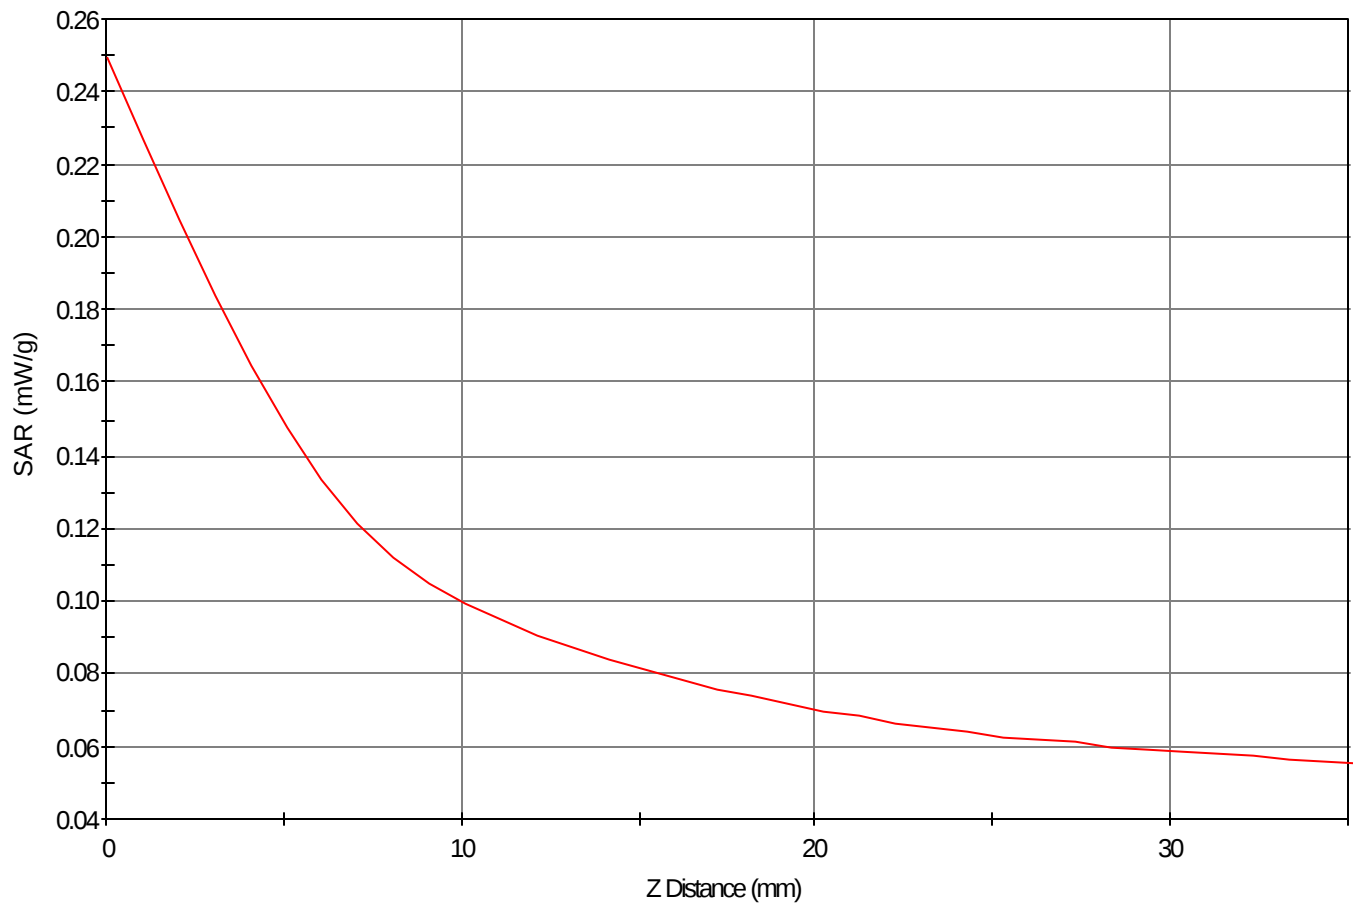

1g SAR Values

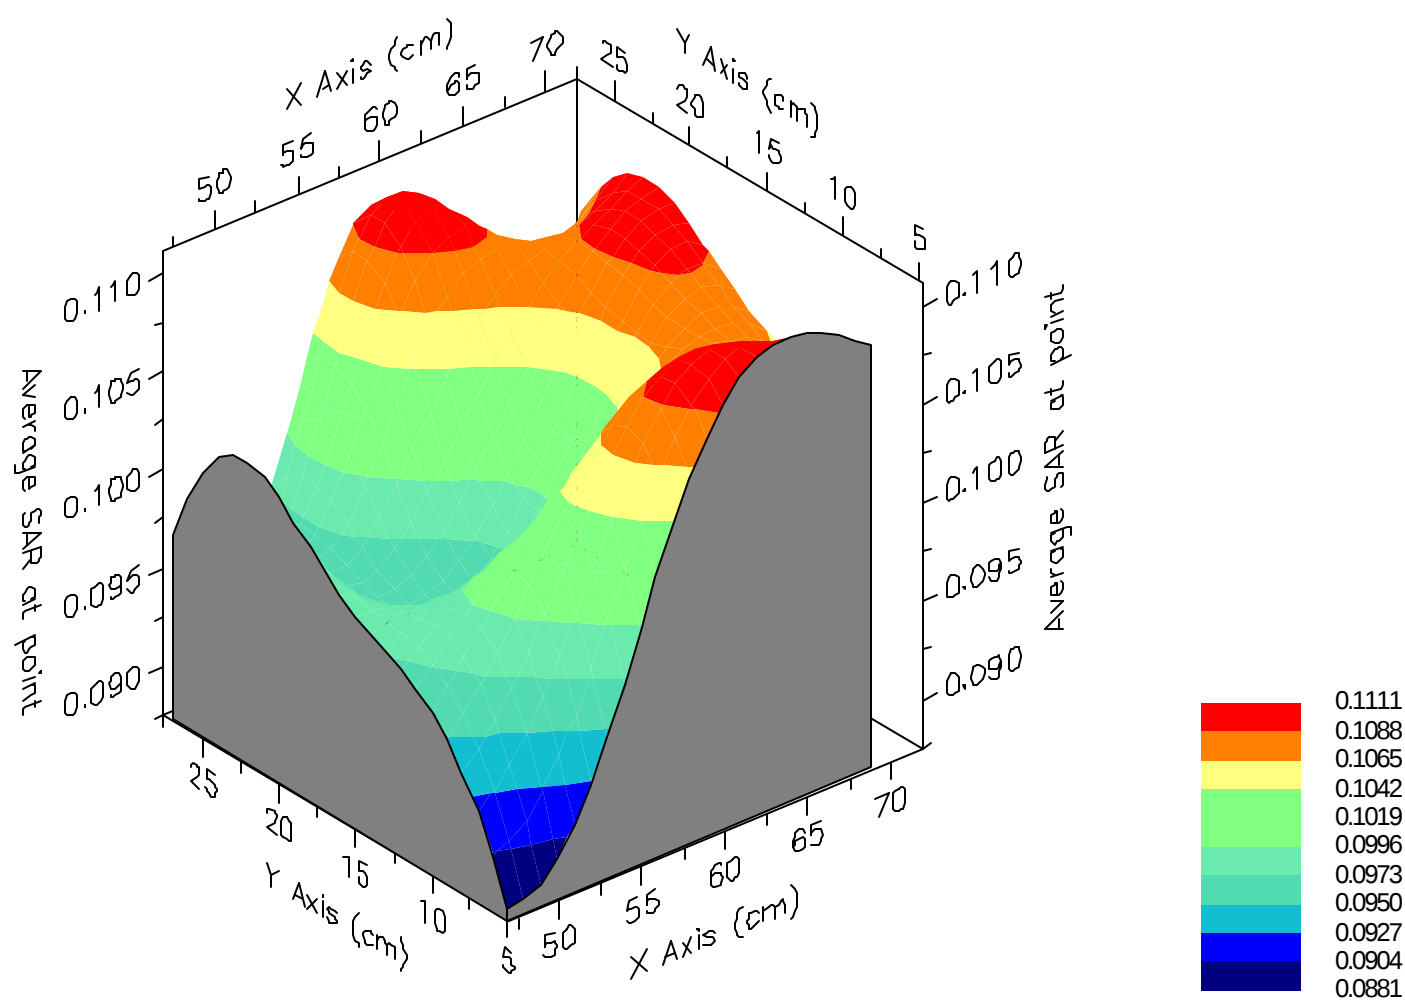



SAR Data Report 02112210

Start : 22-Nov-02 03:52:26 pm
End : 22-Nov-02 04:00:02 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 836.49 MHz
Transmit Pwr : 0.450 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM FLAT
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 54.000
Tissue Conductivity : 0.980
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Muscle
Calibrated Dielectric : 55.700
Calibrated Conductivity : 0.990
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.900
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383
Body
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=3.0 y=-9.0 = 0.39 W/kg

Zoom Scan - Max Peak SAR Value at x=3.0 y=-10.0 z=0.0 = 0.65 W/kg


Max 1g SAR at x=4.0 y=-9.0 z=0.0 = 0.43 W/kg


Max 10g SAR at x=4.0 y=-9.0 z=0.0 = 0.28 W/kg

SAR - Z Axis
at Hotspot x:3.0 y:-10.0

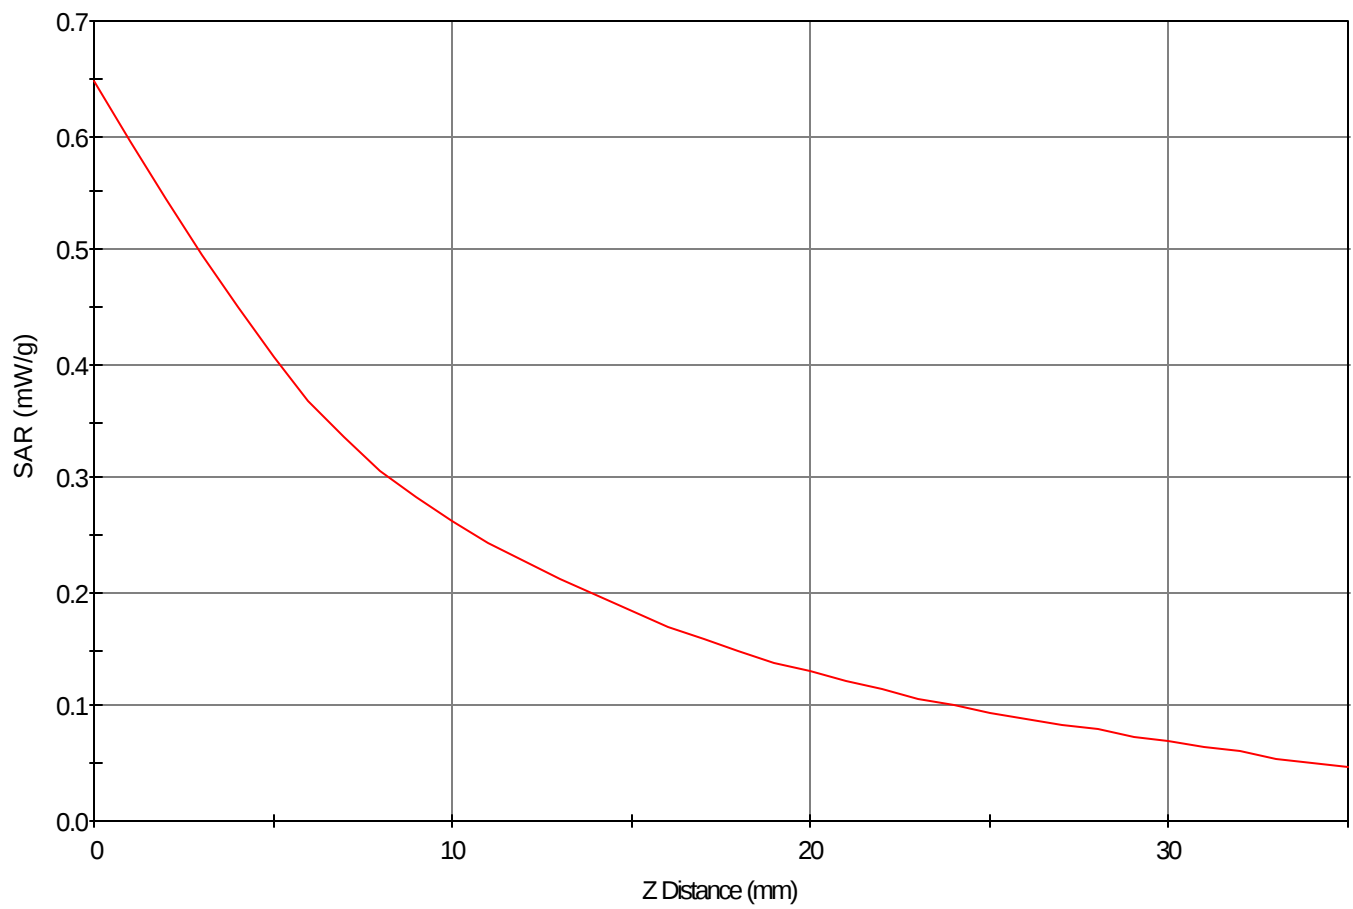

1g SAR Values

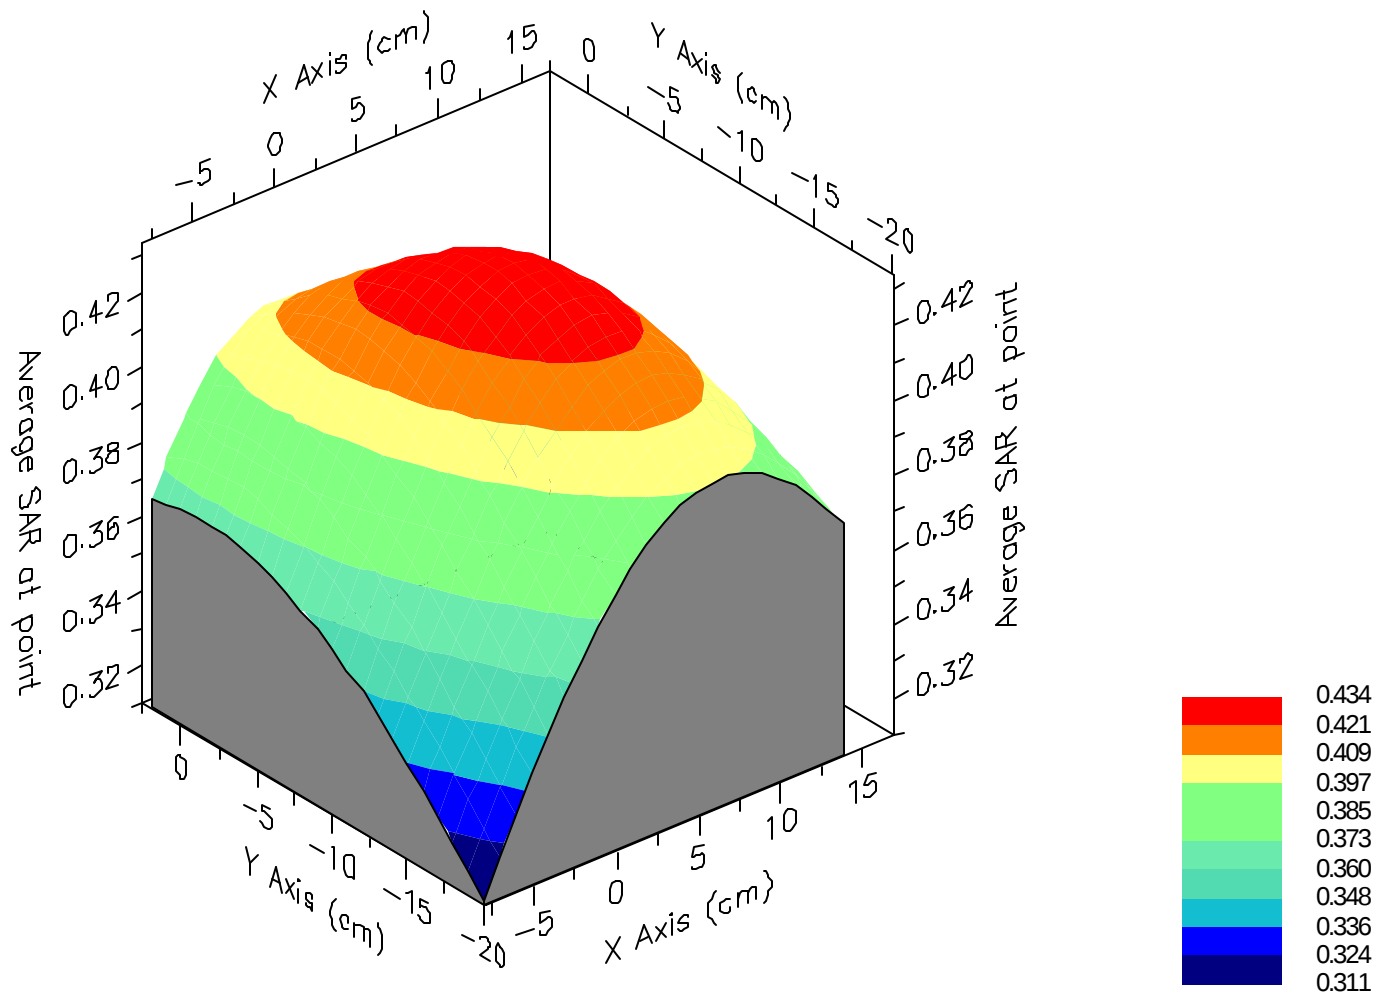

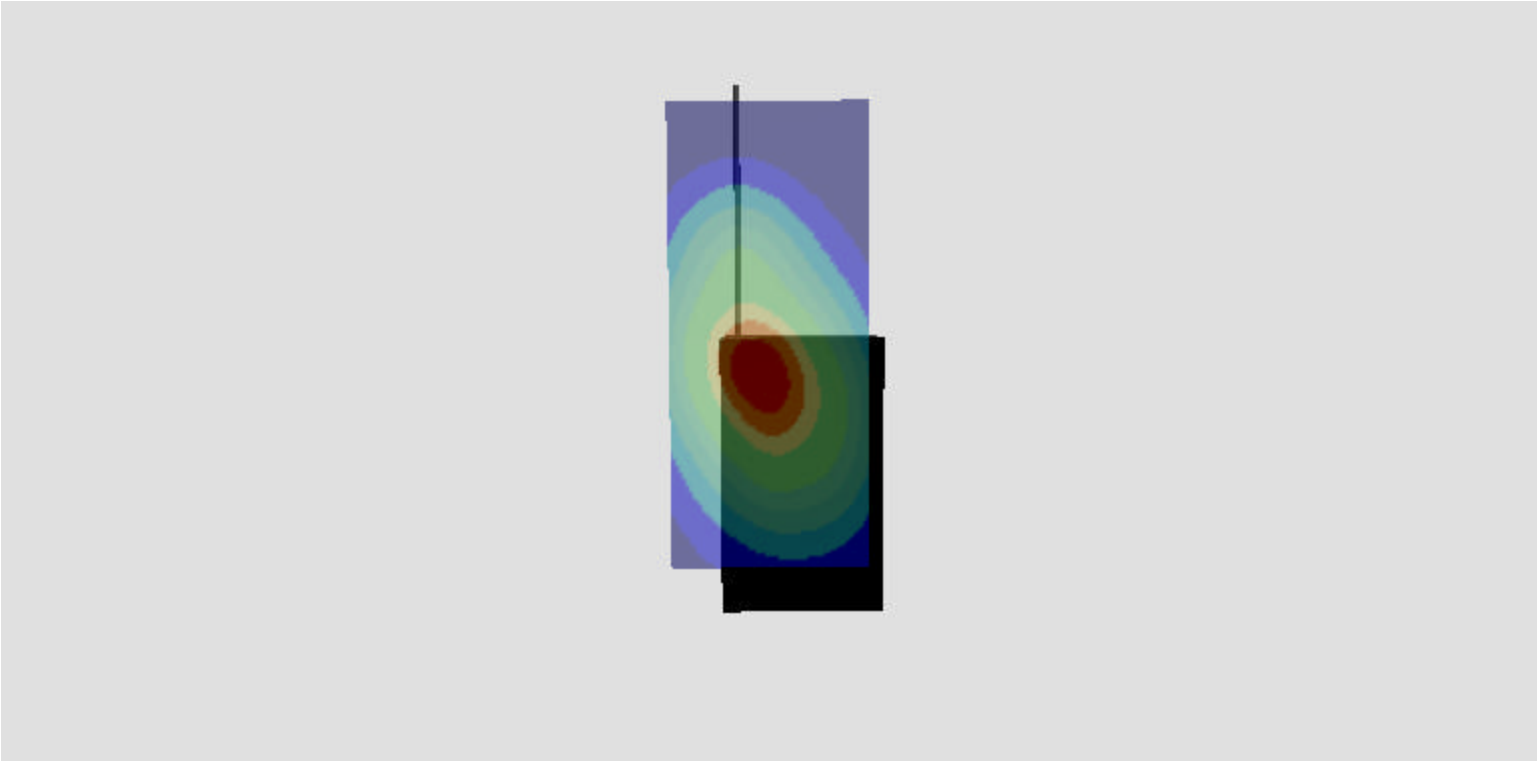

SAR Data Report 02112209

Start : 22-Nov-02 03:44:31 pm
End : 22-Nov-02 03:52:04 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 836.49 MHz
Transmit Pwr : 0.450 W
Antenna Type : Helical
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM FLAT
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 54.000
Tissue Conductivity : 0.980
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Muscle
Calibrated Dielectric : 55.700
Calibrated Conductivity : 0.990
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.900
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383
Body
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=3.0 y=-12.0 = 0.33 W/kg

Zoom Scan - Max Peak SAR Value at x=4.0 y=-11.0 z=0.0 = 0.61 W/kg


Max 1g SAR at x=5.0 y=-11.0 z=0.0 = 0.37 W/kg


Max 10g SAR at x=5.0 y=-13.0 z=0.0 = 0.23 W/kg

SAR - Z Axis
at Hotspot x:4.0 y:-11.0

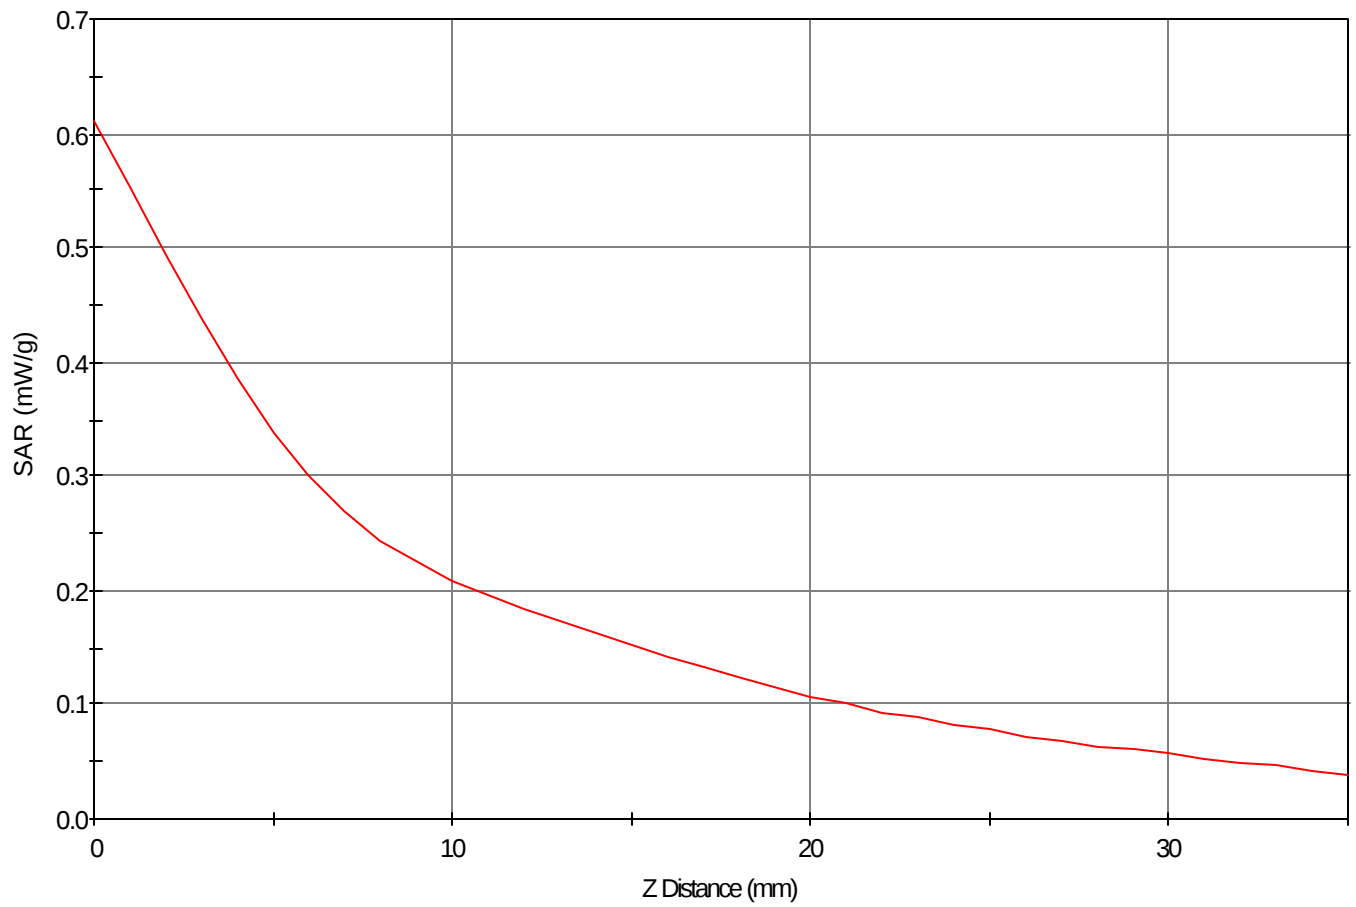

1g SAR Values

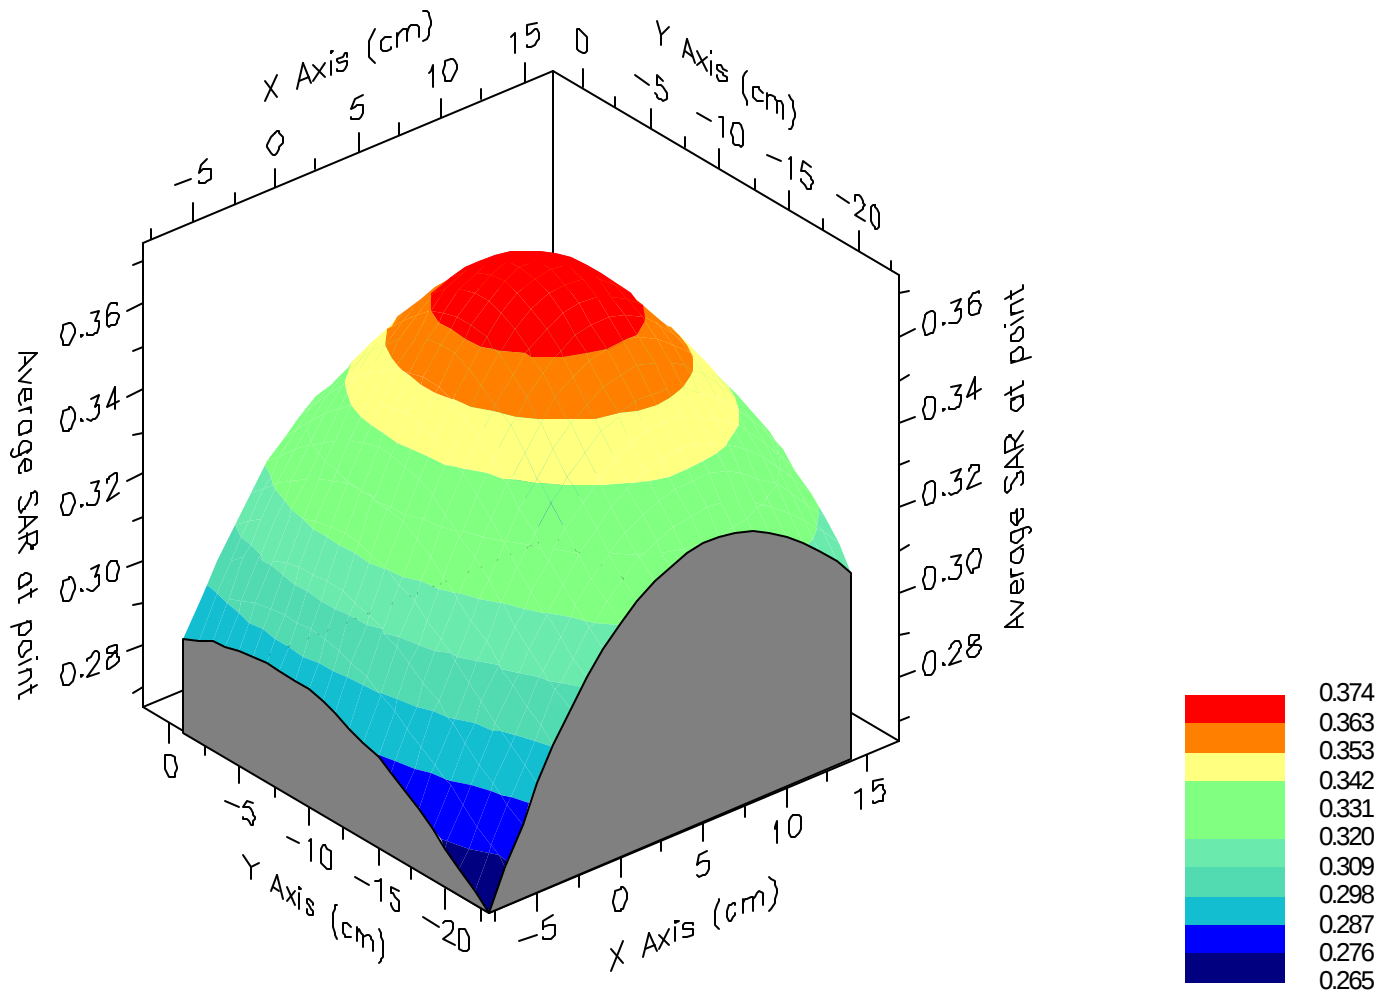

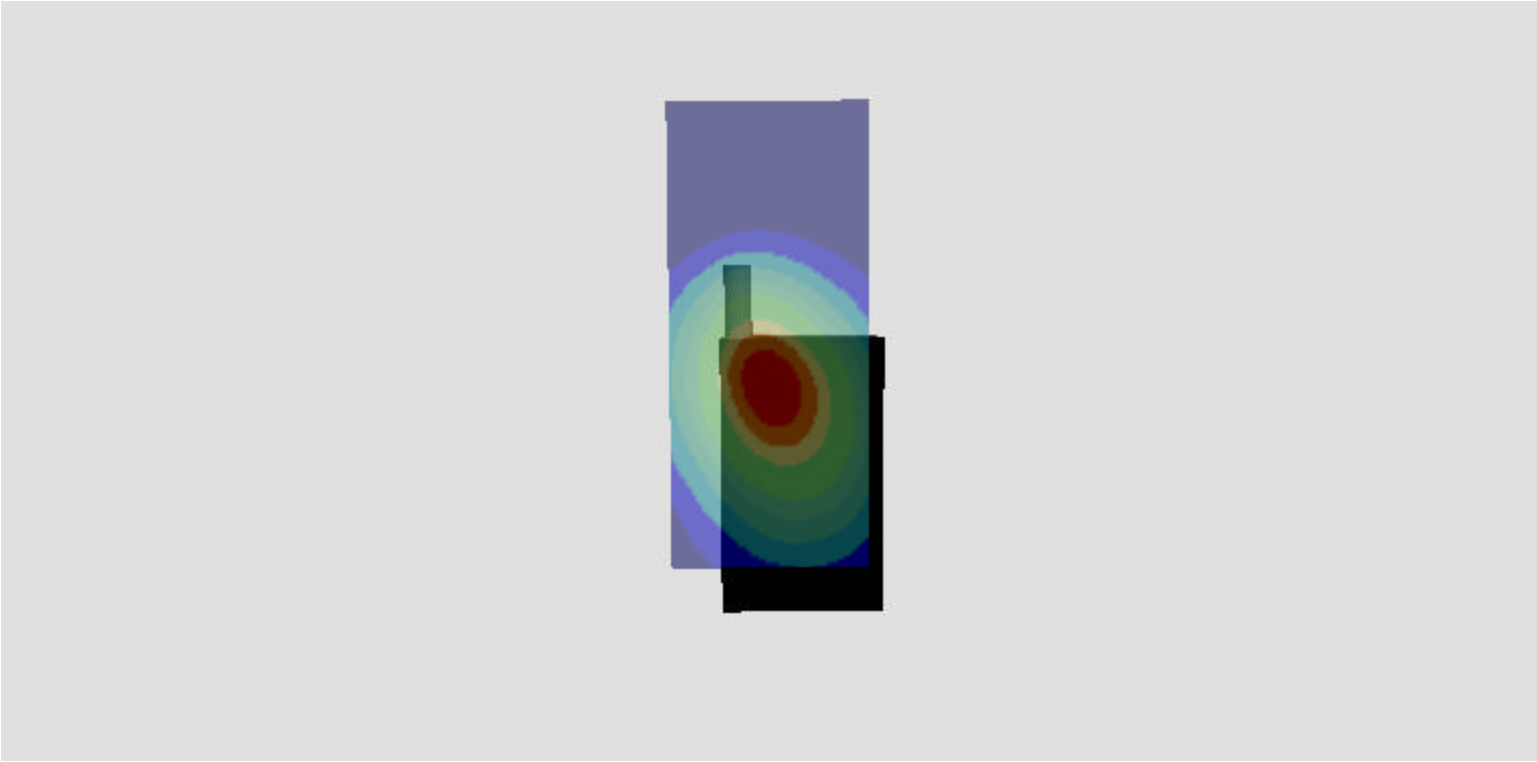

SAR Data Report 02112214

Start : 22-Nov-02 04:30:57 pm
End : 22-Nov-02 04:38:49 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 835.89 MHz
Transmit Pwr : 0.280 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM FLAT
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 54.000
Tissue Conductivity : 0.980
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Muscle
Calibrated Dielectric : 55.700
Calibrated Conductivity : 0.990
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.900
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

CDMA Mode CH-363
Body
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=8.0 y=-11.0 = 0.31 W/kg

Zoom Scan - Max Peak SAR Value at x=8.0 y=-2.0 z=0.0 = 0.71 W/kg


Max 1g SAR at x=8.0 y=-2.0 z=0.0 = 0.37 W/kg


Max 10g SAR at x=10.0 y=-10.0 z=0.0 = 0.21 W/kg

SAR - Z Axis
at Hotspot x:8.0 y:-2.0

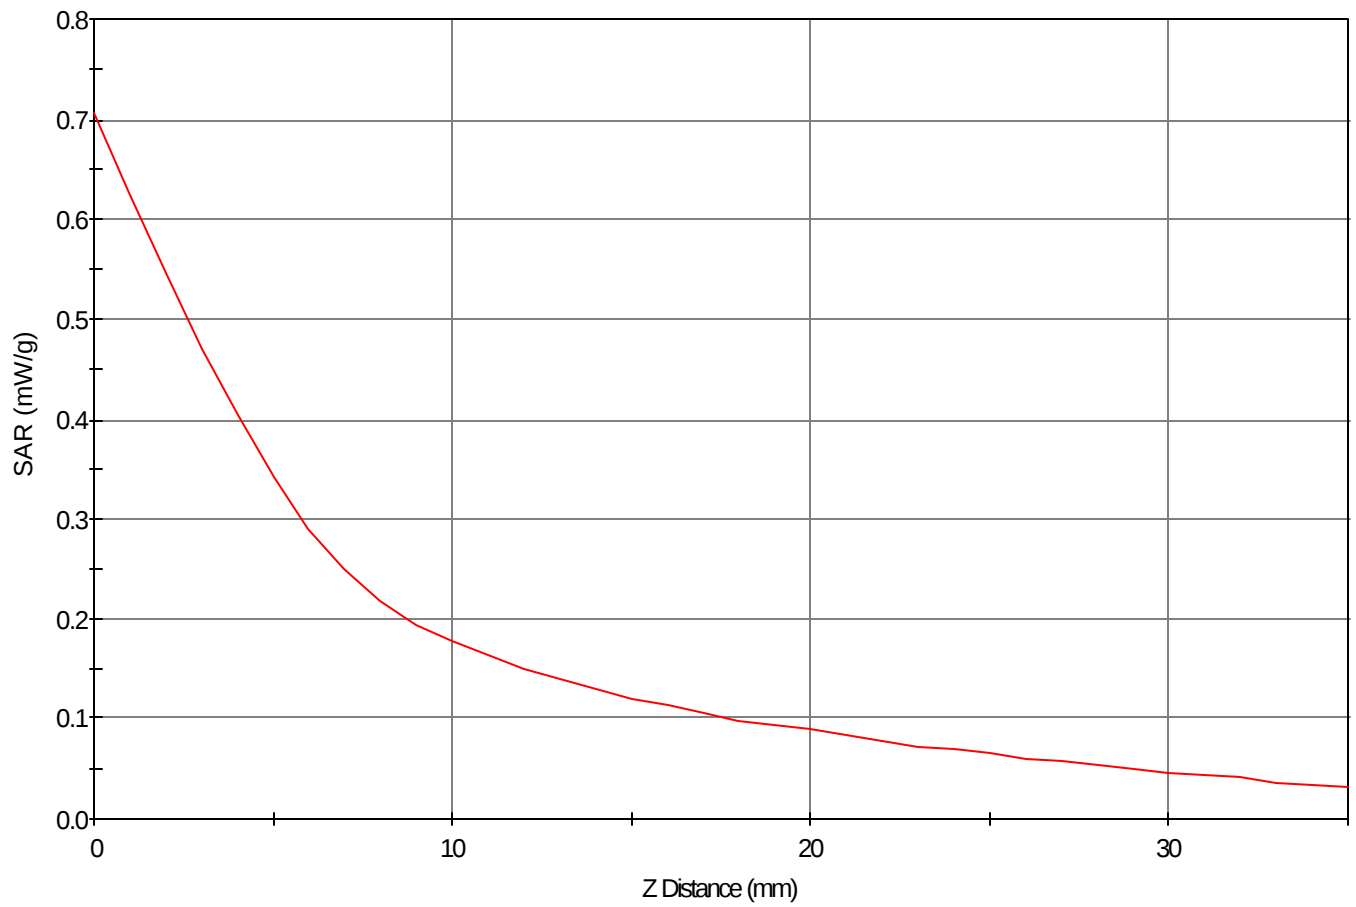

1g SAR Values

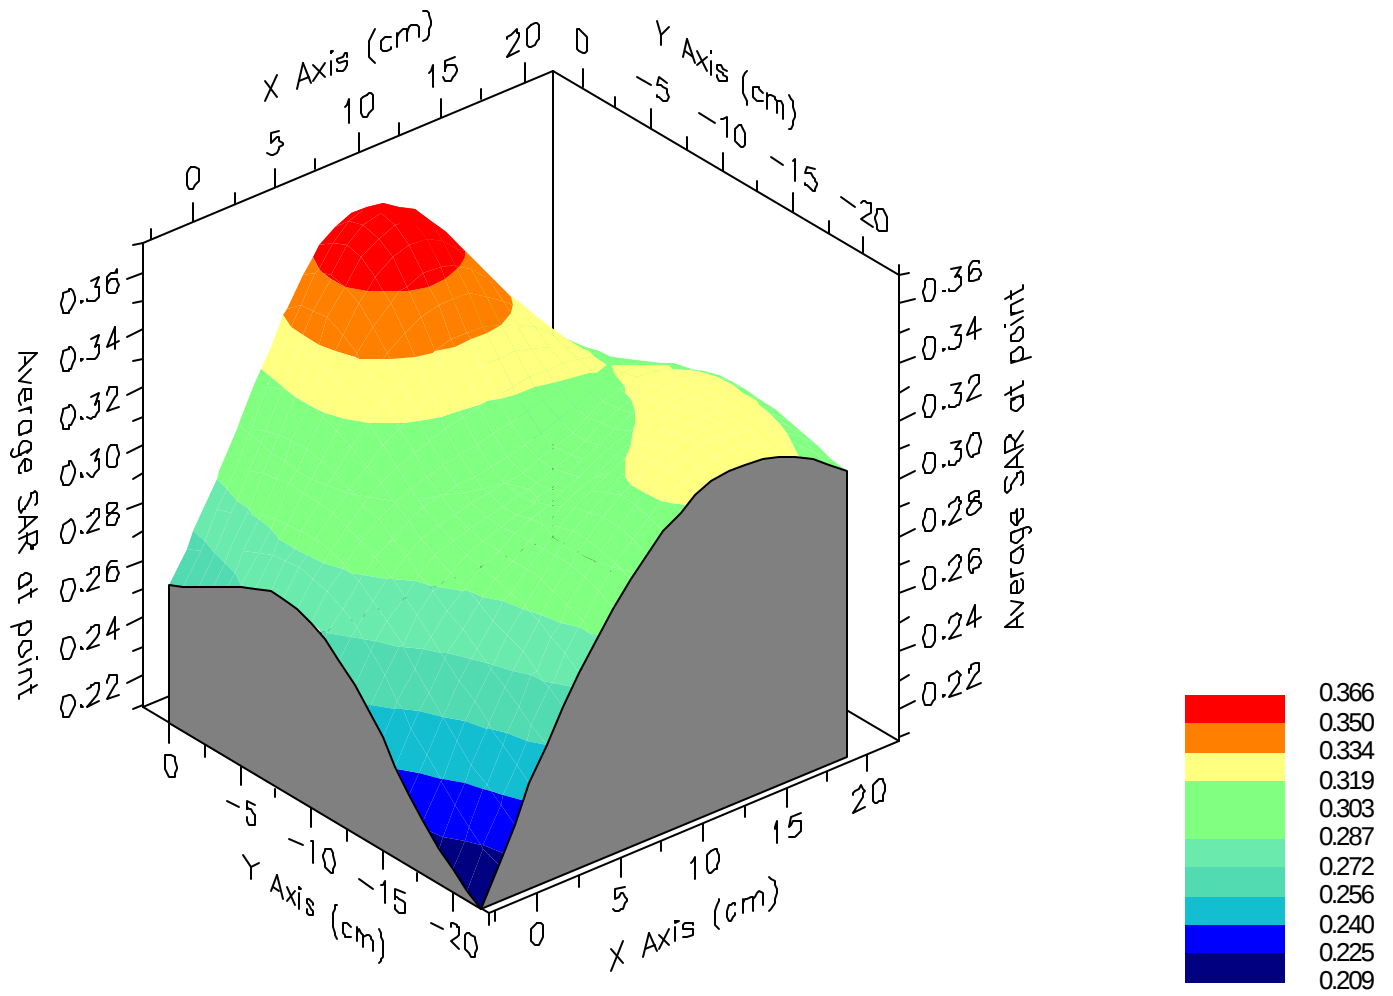

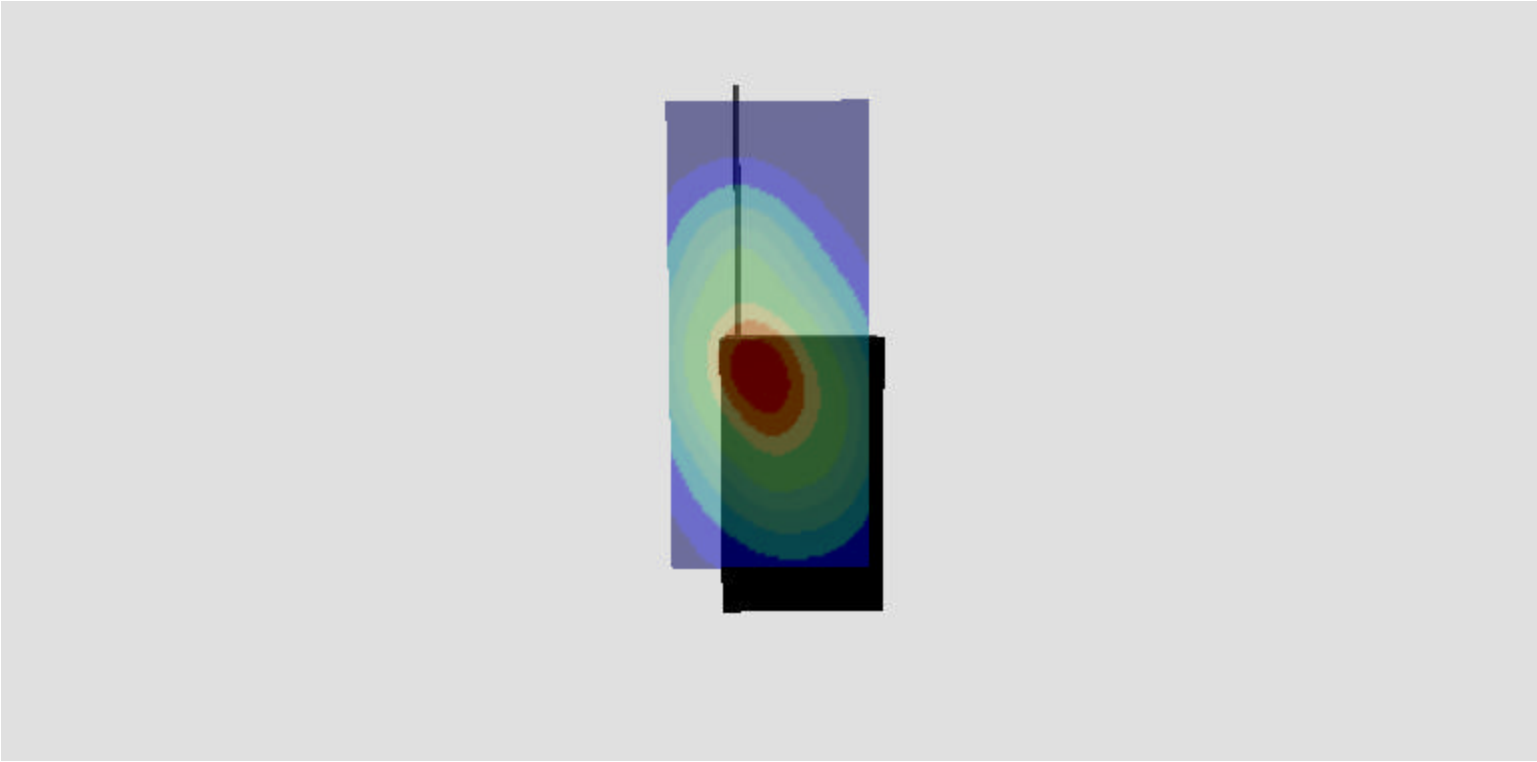

SAR Data Report 02112213

Start : 22-Nov-02 04:20:02 pm
End : 22-Nov-02 04:27:36 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 835.89 MHz
Transmit Pwr : 0.280 W
Antenna Type : Helical
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM FLAT
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 54.000
Tissue Conductivity : 0.980
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 835 MHz
Tissue Type : Muscle
Calibrated Dielectric : 55.700
Calibrated Conductivity : 0.990
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.900
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

CDMA Mode CH-363
Body
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=5.0 y=-12.0 = 0.22 W/kg

Zoom Scan - Max Peak SAR Value at x=21.0 y=4.0 z=0.0 = 0.38 W/kg


Max 1g SAR at x=16.0 y=-21.0 z=0.0 = 0.16 W/kg


Max 10g SAR at x=10.0 y=-14.0 z=0.0 = 0.07 W/kg

SAR - Z Axis
at Hotspot x:21.0 y:4.0

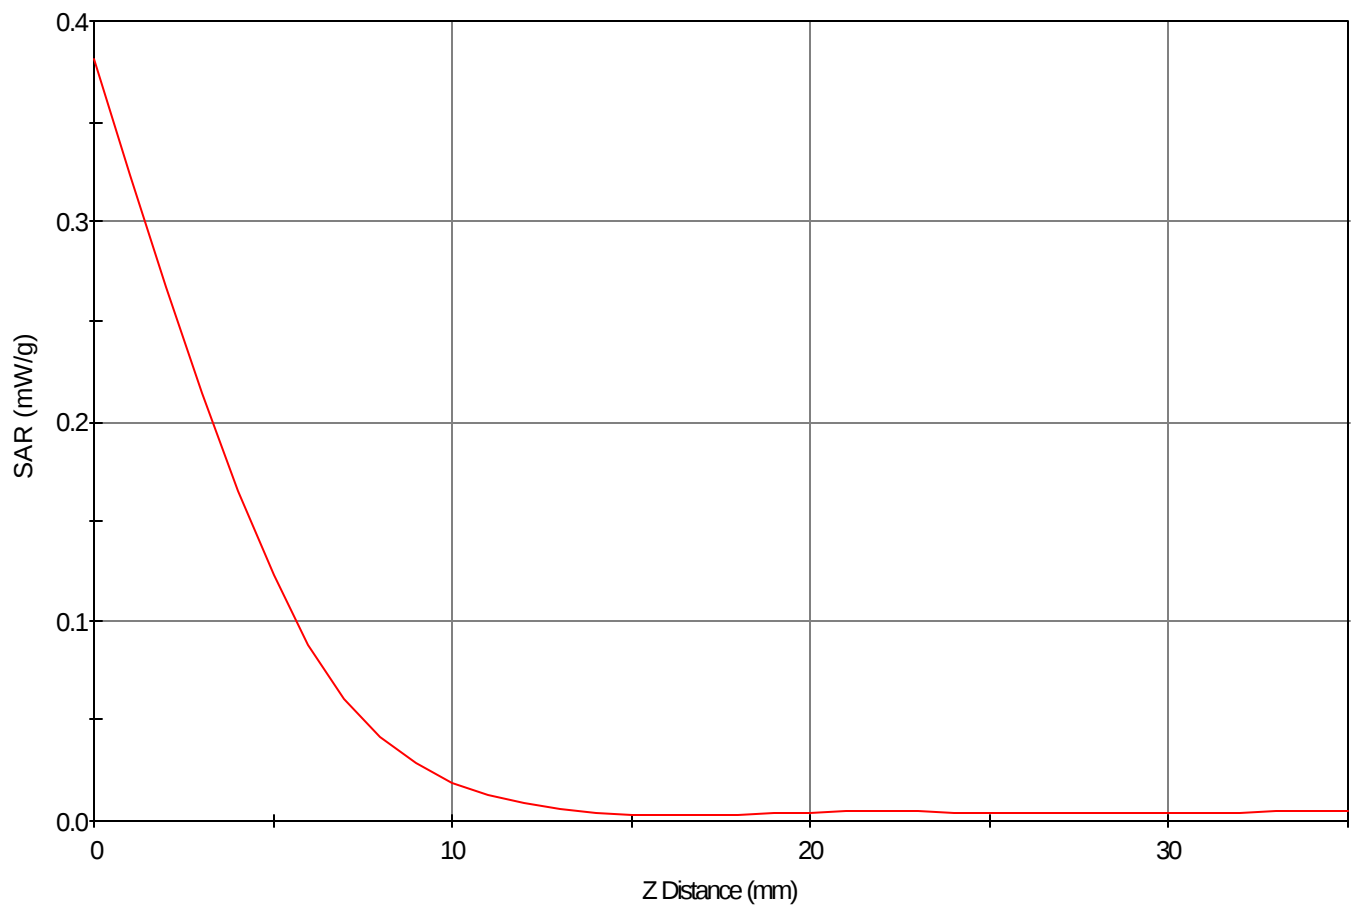

1g SAR Values

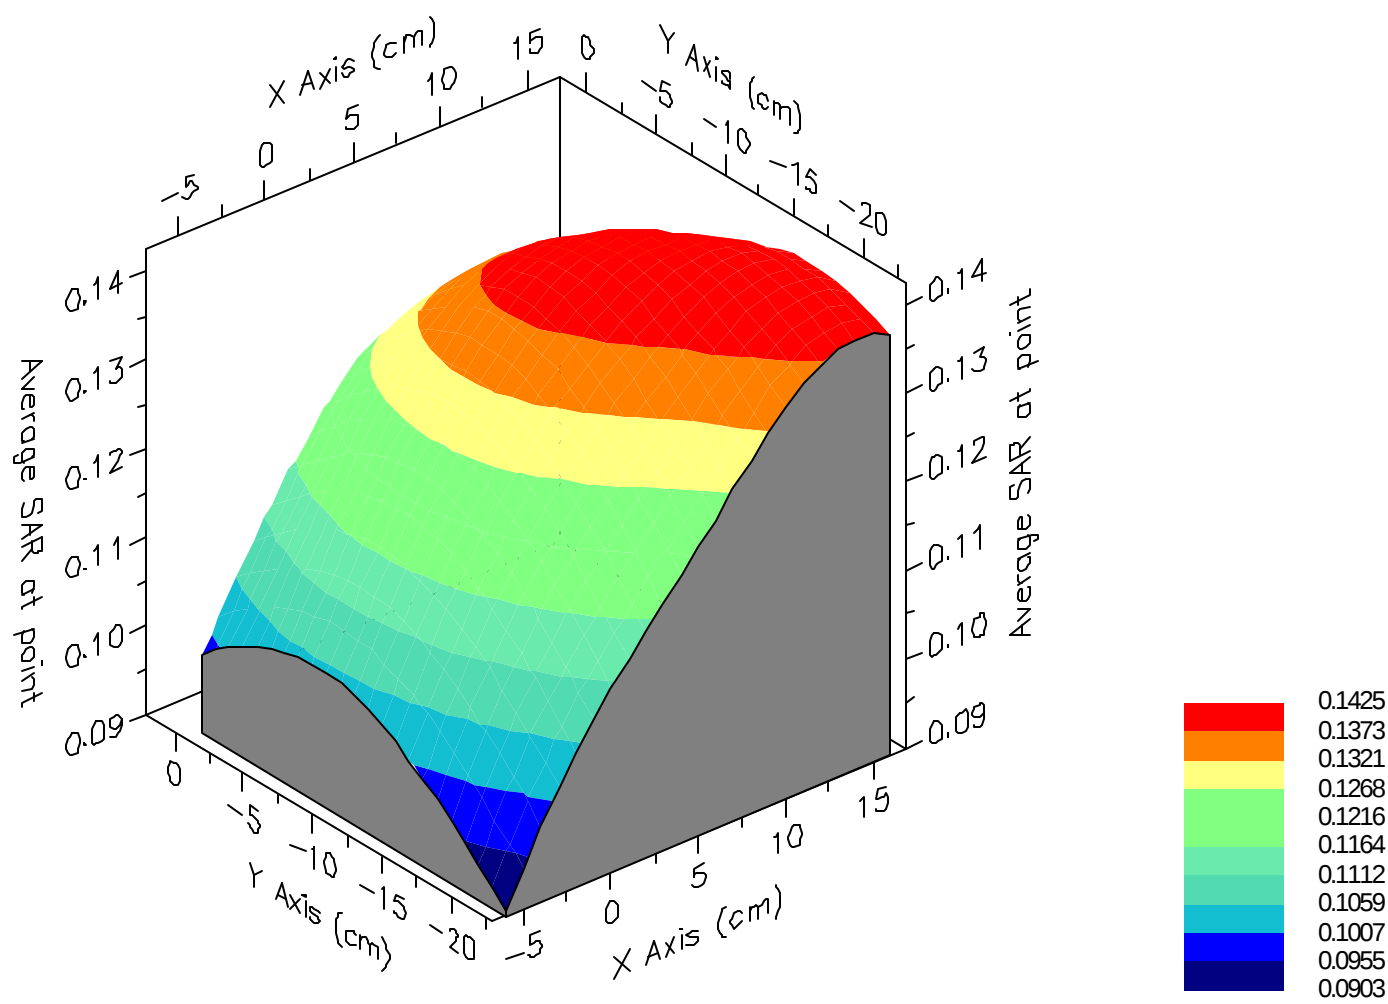

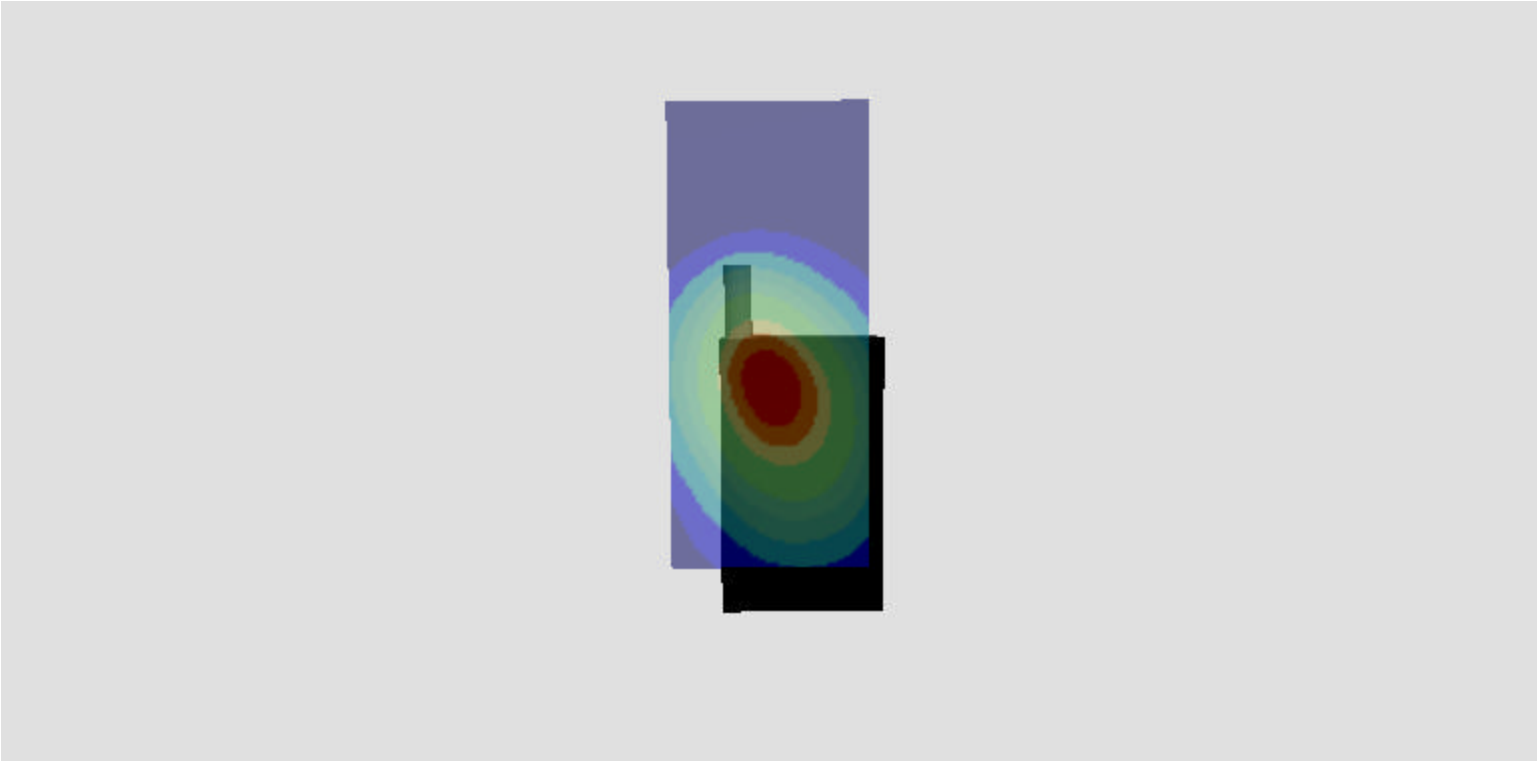

SAR Data Report 02112216

Start : 22-Nov-02 04:59:58 pm
End : 22-Nov-02 05:07:39 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 1851.25 MHz
Transmit Pwr : 0.225 W
Antenna Type : Helical
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM FLAT
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 54.800
Tissue Conductivity : 1.500
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 1900 MHz
Tissue Type : Muscle
Calibrated Dielectric : 53.900
Calibrated Conductivity : 1.480
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.500
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

PCS Mode CH-0025
Body
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=5.0 y=-13.0 = 0.99 W/kg

Zoom Scan - Max Peak SAR Value at x=5.0 y=-12.0 z=0.0 = 2.10 W/kg


Max 1g SAR at x=6.0 y=-12.0 z=0.0 = 1.18 W/kg


Max 10g SAR at x=6.0 y=-13.0 z=0.0 = 0.65 W/kg

SAR - Z Axis
at Hotspot x:5.0 y:-12.0

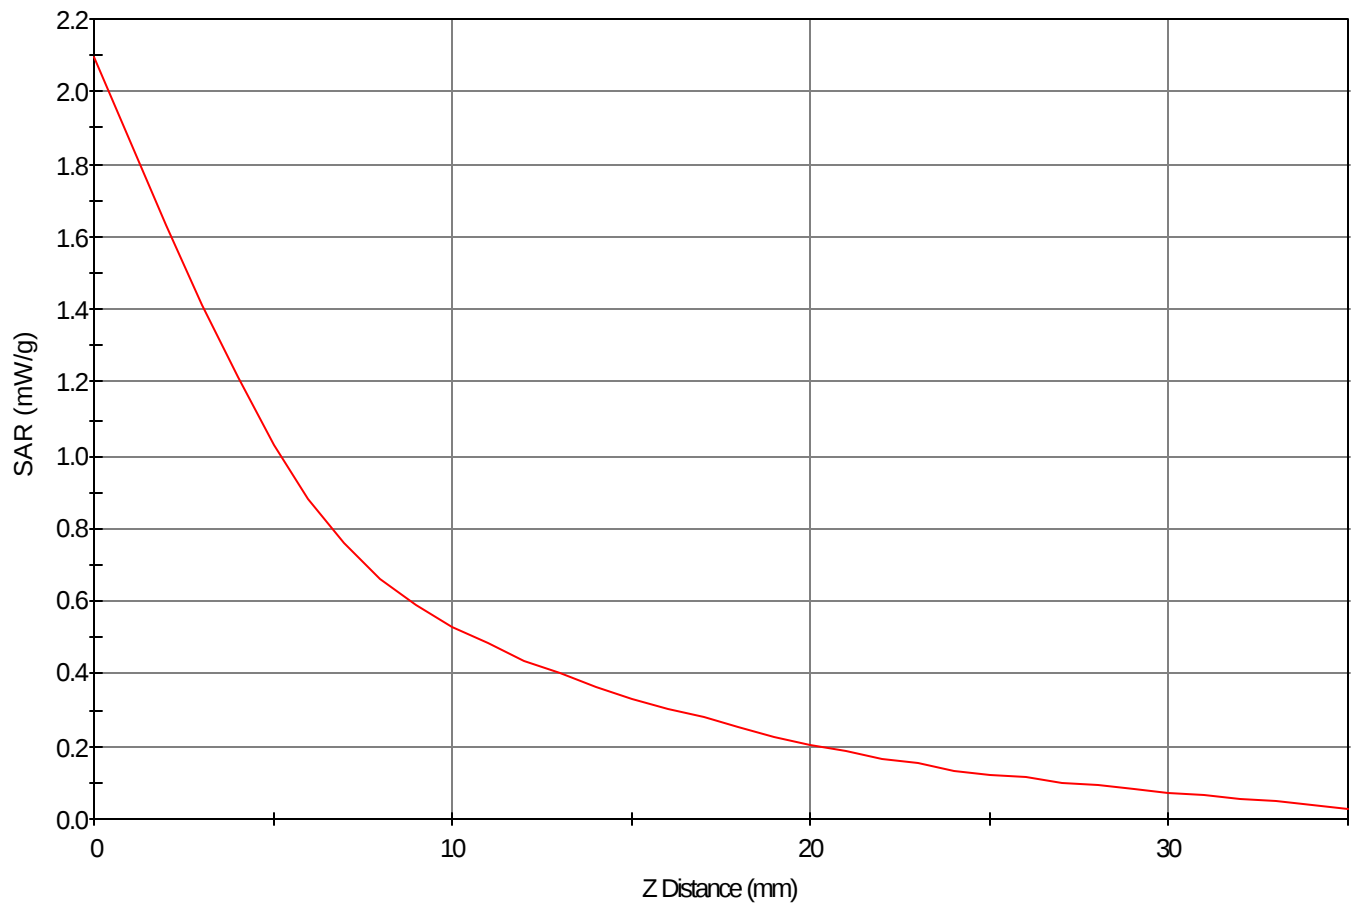

1g SAR Values

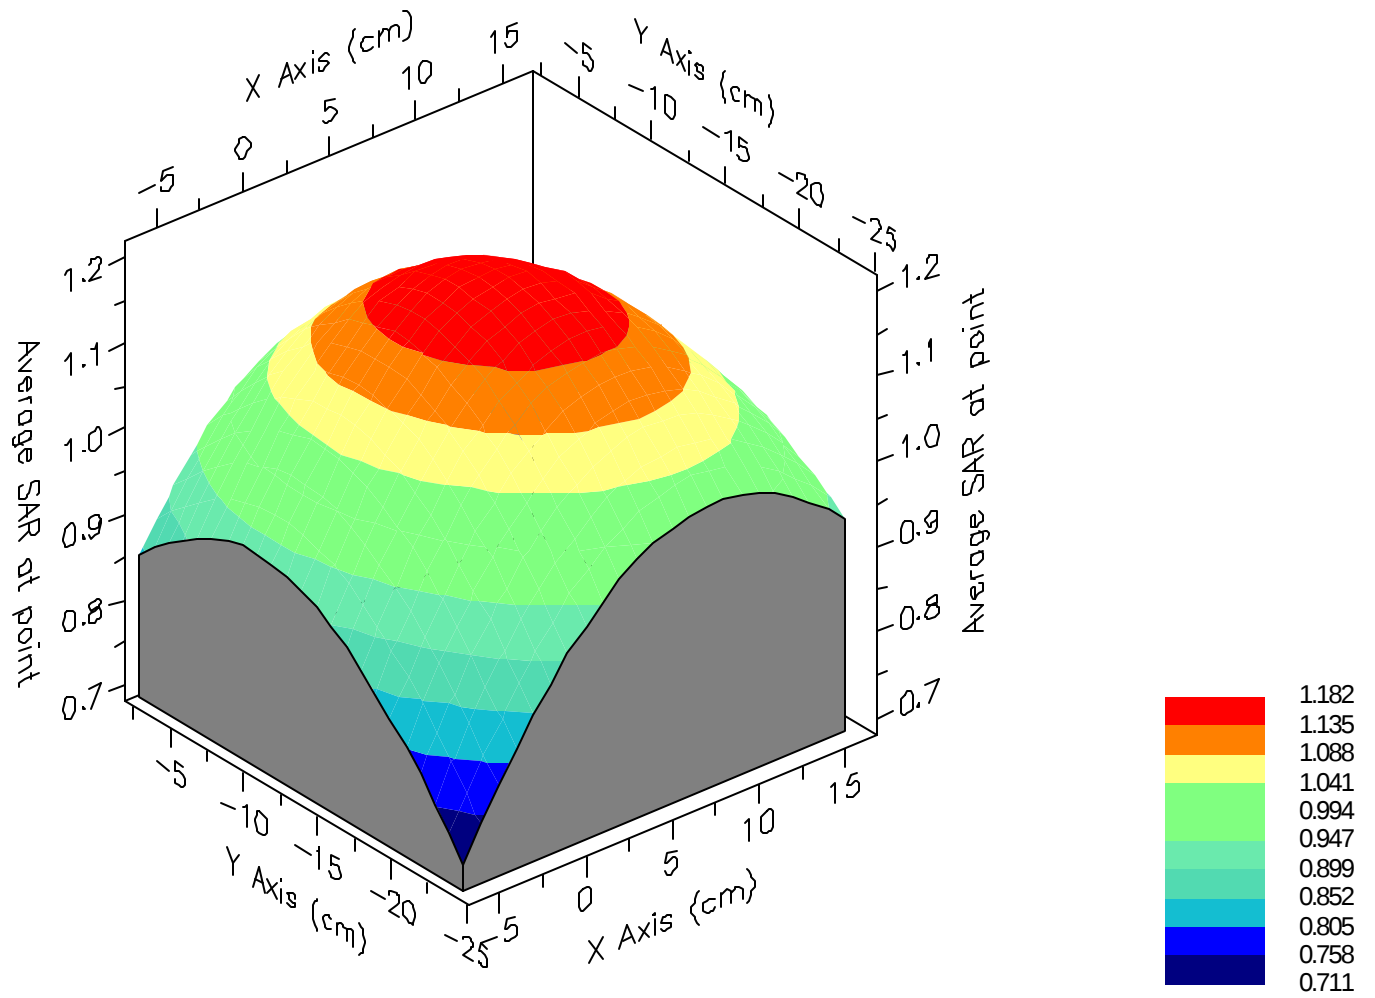

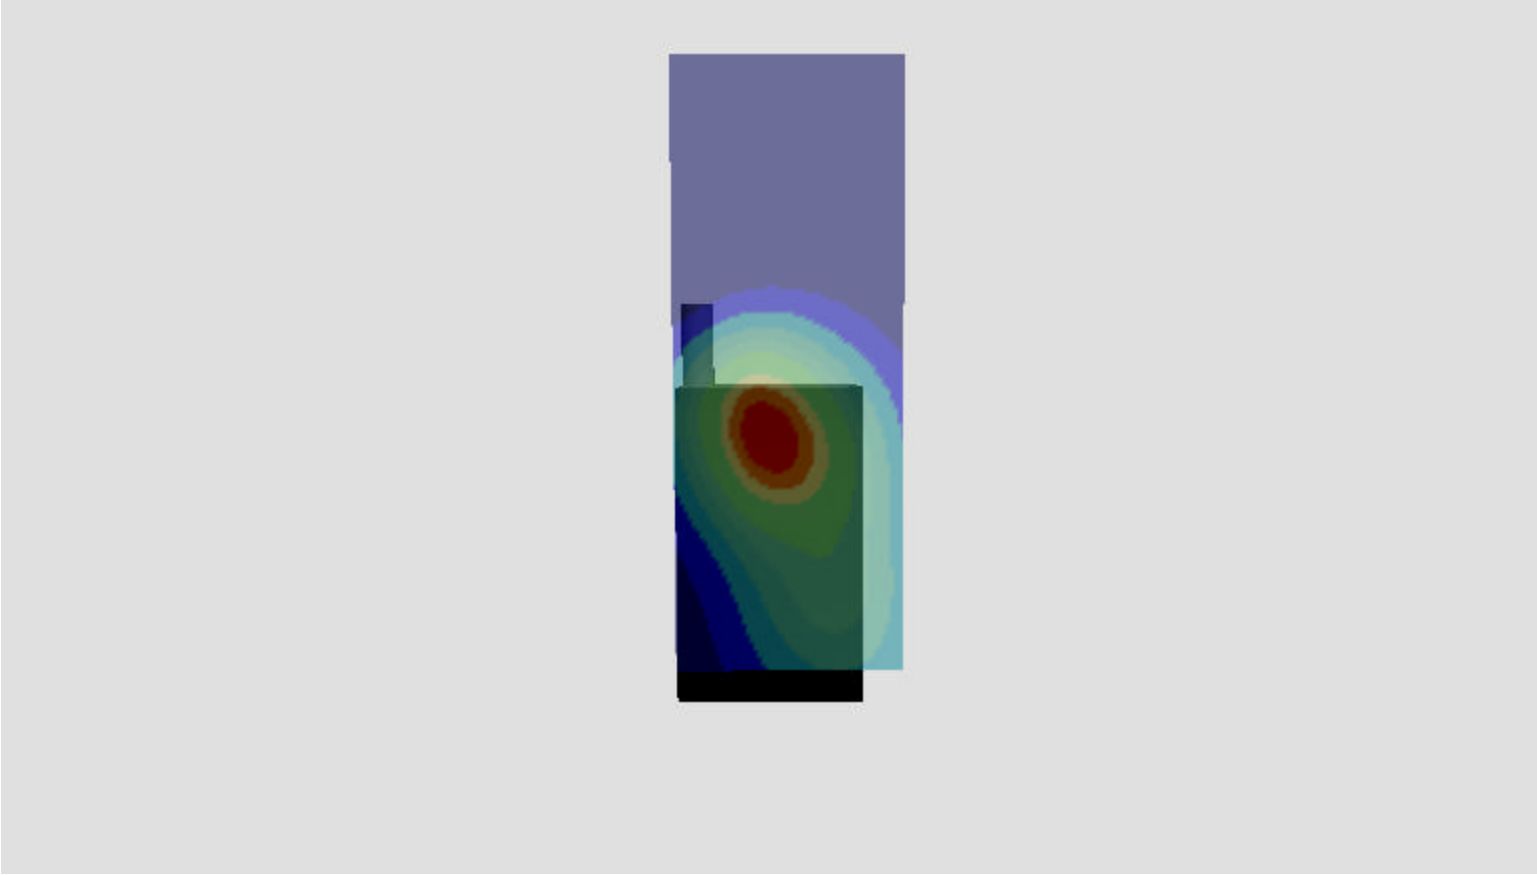

SAR Data Report 02112217

Start : 22-Nov-02 05:08:36 pm
End : 22-Nov-02 05:16:11 pm
Code Version : 4.08
Robot Version: 4.08

Product Data:

Type : SAMSUNG
Model Number : SPH-A505
Serial Number : F1BEA329
Frequency : 1851.25 MHz
Transmit Pwr : 0.225 W
Antenna Type : Helical
Antenna Posn. : Out

Measurement Data:

Phantom Name : SAM FLAT
Phantom Type : Uniphantom
Tissue Type : Muscle
Tissue Dielectric : 54.800
Tissue Conductivity : 1.500
Tissue Density : 1.000
Robot Name : CRS

Probe Data:

Probe Name : PCT002
Probe Type : E Fld Triangle
Frequency : 1900 MHz
Tissue Type : Muscle
Calibrated Dielectric : 53.900
Calibrated Conductivity : 1.480
Calibrated Density : 1.000
Probe Offset : 2.400 mm
Conversion Factor : 4.500
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec
Count: 1000 Samples
NIDAQ Gain: 5

Comments:

PCS Mode CH-0025
Body
CF=1; Amb. Temp= 22.2 'C; Liq. Temp=22.1 'C


Area Scan - Max Peak SAR Value at x=-4.0 y=31.0 = 0.24 W/kg

Zoom Scan - Max Peak SAR Value at x=-3.0 y=31.0 z=0.0 = 0.56 W/kg

Max 1g SAR at x=-2.0 y=31.0 z=0.0 = 0.30 W/kg

Max 10g SAR at x=-3.0 y=31.0 z=0.0 = 0.16 W/kg

SAR - Z Axis
at Hotspot x:-3.0 y:31.0

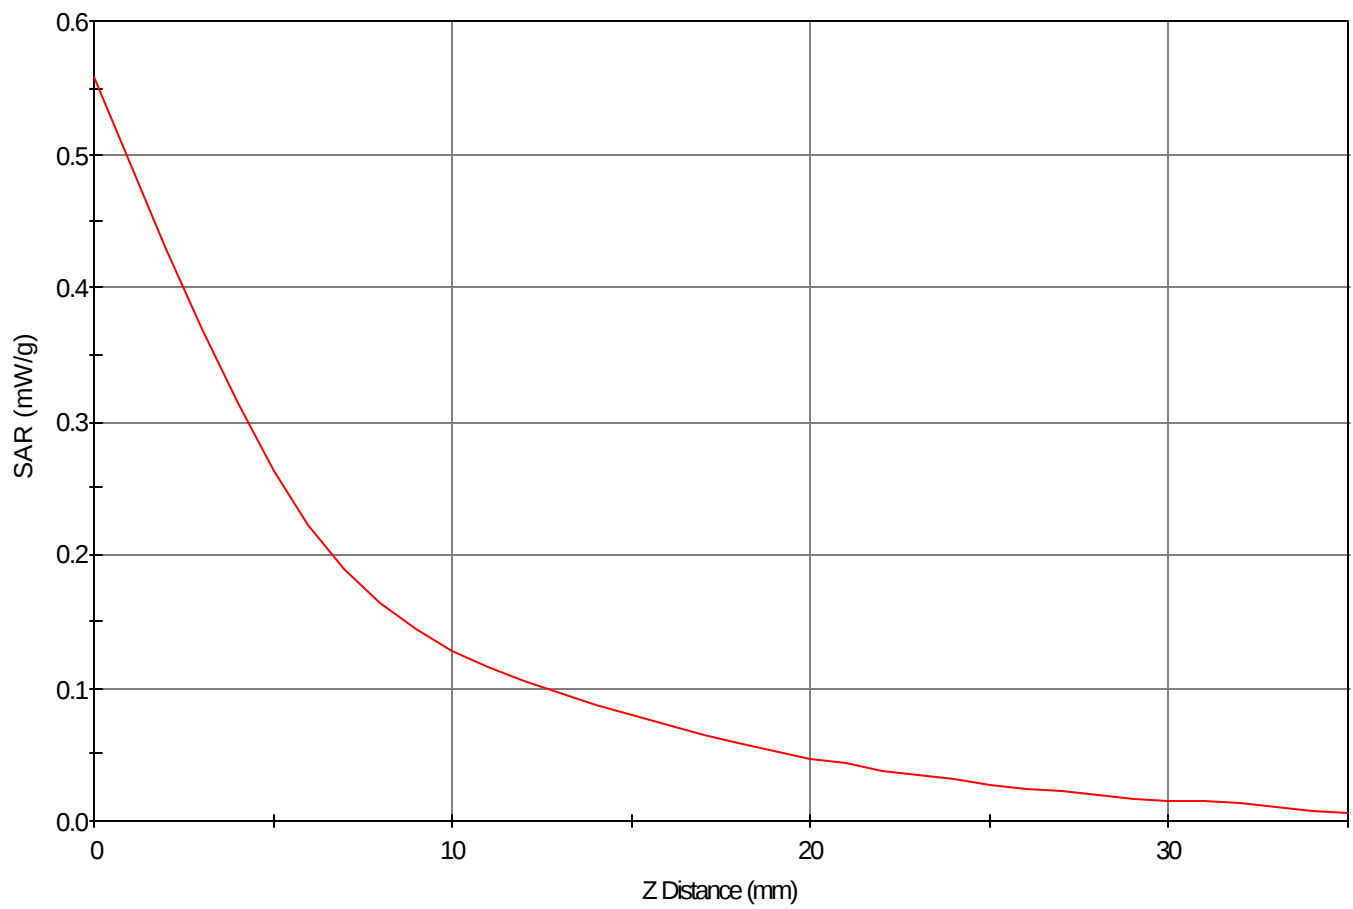

1g SAR Values

