



CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

APPLICANT NAME & ADDRESS:
SAMSUNG ELECTRONICS CO., LTD.
416 Maetan-3 Dong, Paldal-Ku
Suwon City Kyungki-Do 441-742, KOREA
Attn: Wallace Oh, Engineering Manager
Samsung Electronics America (QA Lab)

DATE & LOCATION OF TESTING:
Dates of Tests: April 8-12, 2002
Test Report S/N: 22/24.220408154.A3L
Test Site: PCTEST Lab, Columbia MD

FCC ID:	A3LSPHA520
APPLICANT:	SAMSUNG ELECTRONICS CO., LTD.
EUT Type:	Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)
Tx Frequency:	824.04 – 848.97 MHz (AMPS) / 824.70 – 848.31 MHz (CDMA) 1851.25 – 1908.75 MHz (PCS CDMA)
Rx Frequency:	869.04 – 893.97 MHz (AMPS) / 869.70 – 893.31 MHz (CDMA) 1931.25 – 1988.75 MHz (PCS CDMA)
Max. RF Output Power:	0.397 W ERP AMPS (25.983 dBm) / 26.5 dBm Conducted 0.274 W ERP CDMA (24.383 dBm) / 25.0 dBm Conducted 0.341 W EIRP PCS CDMA (25.331 dBm) / 25.0 dBm Conducted
Max. SAR Measurement:	1.220W/kg AMPS Head SAR; 1.110W/kg AMPS Body SAR; 0.849W/kg CDMA Head SAR; 0.508W/kg CDMA Body SAR; 0.601W/kg PCS CDMA Head SAR; 0.455W/kg PCS CDMA Body SAR
Trade Name/Model(s):	SPH-A520
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]
Application Type:	Certification
Test Device Serial No.:	<i>identical</i> prototype

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001) and IEEE Std. 1528-200X (Draft 6.4, July 2001).

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortañez
President



PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 1 of 32

12. SYSTEM VERIFICATION

Tissue Verification

Table 12.1 Simulated Tissue Verification [5]

MEASURED TISSUE PARAMETERS									
Date(s)	04/01/02	835MHz Brain		835MHz Muscle		1900MHz Brain		1900MHz Muscle	
Liquid Temperature (°C)	22.9	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		41.50	40.64	55.20	55.45	40.00	40.29	53.30	54.70
Conductivity: σ		0.900	0.935	0.970	0.940	1.400	1.420	1.520	1.470

Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835MHz and 1900MHz by using the system validation kit(s). (Graphic Plots Attached)

Table 12.2 System Validation [5]

SYSTEM DIPOLE VALIDATION TARGET & MEASURED				
System Validation Kit: D-835V2, S/N: 406	835MHz Brain	Targeted SAR _{1g} (mW/g) 2.375	Measured SAR _{1g} (mW/g) 2.33	Deviation (%) - 1.9
System Validation Kit: D-1900V2, S/N: 502	1900MHz Brain	Targeted SAR _{1g} (mW/g) 9.925	Measured SAR _{1g} (mW/g) 10.2	Deviation (%) + 2.7

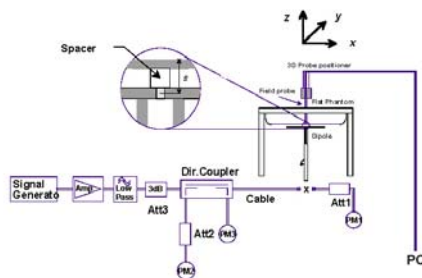


Figure 12.1 Dipole Validation Test Setup

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 16 of 32

13. SAR TEST DATA SUMMARY

See Measurement Result Data Pages

Procedures Used To Establish Test Signal

The handset was placed into simulated call mode (AMPS, Cellular CDMA & PCS CDMA modes) using manufacturers test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR [4]. When test modes are not available or inappropriate for testing a handset, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Conditions

The handset is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated.

EUT Handset Reference Points

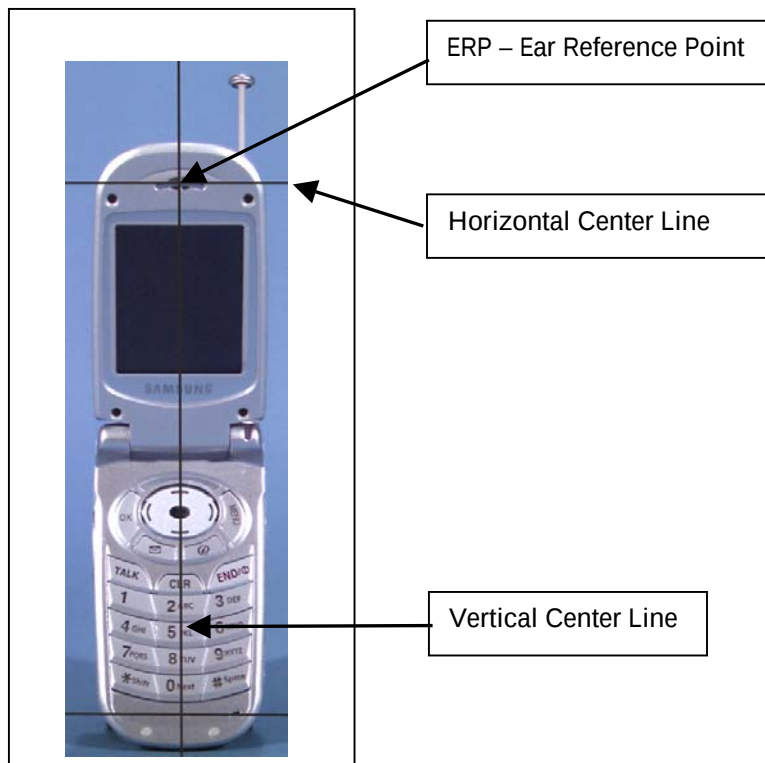


Figure 13.1 Handset Reference Points

PCTEST™ SAR REPORT	FCC CERTIFICATION  			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 17 of 32

SAR DATA SUMMARY

Mixture Type: 835MHz Brain

14.1 MEASUREMENT RESULTS (AMPS Right Head SAR – Touch)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.6	26.5	Standard	Cheek / Touch	In	0.881
824.04	0991	AMPS	26.6	26.5	Standard	Cheek / Touch	Out	0.650
836.49	0383	AMPS	26.6	26.5	Standard	Cheek / Touch	In	1.170
836.49	0383	AMPS	26.6	26.5	Standard	Cheek / Touch	Out	0.986
848.97	0799	AMPS	26.6	26.5	Standard	Cheek / Touch	In	1.200
848.97	0799	AMPS	26.6	26.5	Standard	Cheek / Touch	Out	1.220
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
4. SAR Measurement System
- | | | |
|---|------------------------------|--------------------------|
| ☒ DASY3 | ☐ IDX | ☐ |
|---|------------------------------|--------------------------|
- Phantom Configuration
- | | | |
|------------------------------------|---------------------------------------|--|
| ☐ Left Head | ☐ Flat Phantom | ☒ Right Head |
|------------------------------------|---------------------------------------|--|
5. SAR Configuration
- | | | |
|--|-------------------------------|-------------------------------|
| ☒ Head | ☐ Body | ☐ Hand |
|--|-------------------------------|-------------------------------|
6. Test Signal Call Mode
- | | |
|--|---|
| ☒ Manu. Test Codes | ☐ Base Station Simulator |
|--|---|
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15 cm.


Randy Ortanez
President



Figure 14.1 Right Head SAR Test Setup
-- Cheek / Touch Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 18 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.2 MEASUREMENT RESULTS (AMPS Right Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	In	0.186
824.04	0991	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	Out	0.139
836.49	0383	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	In	0.283
836.49	0383	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	Out	0.233
848.97	0799	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	In	0.296
848.97	0799	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	Out	0.273
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|--|---|--|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
| ☒ DASY3 | ☐ IDX | ☐ |
| ☐ Left Head | ☐ Flat Phantom | ☒ Right Head |
| ☒ Head | ☐ Body | ☐ Hand |
| ☒ Manu. Test Codes | ☐ Base Station Simulator | |
- SAR Measurement System
 - Phantom Configuration
 - SAR Configuration
 - Test Signal Call Mode
 - Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm.


Randy Ortanez
President



**Figure 14.2 Right Head SAR Test Setup
-- Ear / 15° Tilt Position --**

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 19 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.3 MEASUREMENT RESULTS (AMPS Left Head SAR - Touch)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.6	26.5	Standard	Cheek / Touch	In	0.712
824.04	0991	AMPS	26.6	26.5	Standard	Cheek / Touch	Out	0.584
836.49	0383	AMPS	26.6	26.5	Standard	Cheek / Touch	In	1.050
836.49	0383	AMPS	26.6	26.5	Standard	Cheek / Touch	Out	0.746
848.97	0799	AMPS	26.6	26.5	Standard	Cheek / Touch	In	1.080
848.97	0799	AMPS	26.6	26.5	Standard	Cheek / Touch	Out	1.010
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|--|---|-------------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
| ☒ DASY3 | ☐ IDX | ☐ |
| ☒ Left Head | ☐ Flat Phantom | ☐ Right Head |
| ☒ Head | ☐ Body | ☐ Hand |
| ☒ Manu. Test Codes | ☐ Base Station Simulator | |
- SAR Measurement System
 - Phantom Configuration
 - SAR Configuration
 - Test Signal Call Mode
 - Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm.


Randy Ortanez
President



Figure 14.3 Left Head SAR Test Setup
-- Cheek / Touch Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 20 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.4 MEASUREMENT RESULTS (AMPS Left Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	In	0.209
824.04	0991	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	Out	0.170
836.49	0383	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	In	0.289
836.49	0383	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	Out	0.215
848.97	0799	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	In	0.290
848.97	0799	AMPS	26.6	26.5	Standard	Ear / 15° Tilt	Out	0.270
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured
- | | | |
|--|---|-------------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
| ☒ DASY3 | ☐ IDX | ☐ |
| ☒ Left Head | ☐ Flat Phantom | ☐ Right Head |
| ☒ Head | ☐ Body | ☐ Hand |
| ☒ Manu. Test Codes | ☐ Base Station Simulator | |
- SAR Measurement System
 - Phantom Configuration
 - SAR Configuration
 - Test Signal Call Mode
 - Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm.


Randy Ortanez
President



Figure 14.4 Left Head SAR Test Setup
-- Ear / 15° Tilt Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.5 MEASUREMENT RESULTS (CELLULAR CDMA Right Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.70	1013	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.573
824.70	1013	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.427
836.49	0383	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.789
836.49	0383	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.581
848.31	0777	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.752
848.31	0777	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.849
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
4. SAR Measurement System
- | | | |
|---|------------------------------|--------------------------|
| ☒ DASY3 | ☐ IDX | ☐ |
|---|------------------------------|--------------------------|
- Phantom Configuration
- | | | |
|------------------------------------|---------------------------------------|--|
| ☐ Left Head | ☐ Flat Phantom | ☒ Right Head |
|------------------------------------|---------------------------------------|--|
5. SAR Configuration
- | | | |
|--|-------------------------------|-------------------------------|
| ☒ Head | ☐ Body | ☐ Hand |
|--|-------------------------------|-------------------------------|
6. Test Signal Call Mode
- | | |
|--|---|
| ☒ Manu. Test Codes | ☐ Base Station Simulator |
|--|---|
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15 cm.


Randy Ortanez
President



**Figure 14.5 Right Head SAR Test Setup
-- Ear / 15° Tilt Position --**

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 22 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Brain

14.6 MEASUREMENT RESULTS (PCS CDMA Right Head SAR – Touch)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
1851.25	0025	CDMA	25.1	25.0	Standard	Cheek / Touch	In	0.444
1851.25	0025	CDMA	25.1	25.0	Standard	Cheek / Touch	Out	0.425
1880.00	0600	CDMA	25.1	25.0	Standard	Cheek / Touch	In	0.375
1880.00	0600	CDMA	25.1	25.0	Standard	Cheek / Touch	Out	0.367
1908.75	1175	CDMA	25.1	25.0	Standard	Cheek / Touch	In	0.328
1908.75	1175	CDMA	25.1	25.0	Standard	Cheek / Touch	Out	0.320
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
4. SAR Measurement System
- | | | |
|---|------------------------------|--------------------------|
| ☒ DASY3 | ☐ IDX | ☐ |
|---|------------------------------|--------------------------|
- Phantom Configuration
- | | | |
|------------------------------------|---------------------------------------|--|
| ☐ Left Head | ☐ Flat Phantom | ☒ Right Head |
|------------------------------------|---------------------------------------|--|
5. SAR Configuration
- | | | |
|--|-------------------------------|-------------------------------|
| ☒ Head | ☐ Body | ☐ Hand |
|--|-------------------------------|-------------------------------|
6. Test Signal Call Mode
- | | |
|--|---|
| ☒ Manu. Test Codes | ☐ Base Station Simulator |
|--|---|
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15 cm.


Randy Ortanez
President



Figure 14.6 Right Head SAR Test Setup
-- Cheek / Touch Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 23 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Brain

14.7 MEASUREMENT RESULTS (PCS CDMA Right Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
1851.25	0025	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.178
1851.25	0025	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.171
1880.00	0600	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.145
1880.00	0600	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.139
1908.75	1175	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.113
1908.75	1175	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.108
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
4. SAR Measurement System
- | | | |
|---|------------------------------|--------------------------|
| ☒ DASY3 | ☐ IDX | ☐ |
|---|------------------------------|--------------------------|
- Phantom Configuration
- | | | |
|------------------------------------|---------------------------------------|--|
| ☐ Left Head | ☐ Flat Phantom | ☒ Right Head |
|------------------------------------|---------------------------------------|--|
5. SAR Configuration
- | | | |
|--|-------------------------------|-------------------------------|
| ☒ Head | ☐ Body | ☐ Hand |
|--|-------------------------------|-------------------------------|
6. Test Signal Call Mode
- | | |
|--|---|
| ☒ Manu. Test Codes | ☐ Base Station Simulator |
|--|---|
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15 cm.


Randy Ortanez
President



**Figure 14.7 Right Head SAR Test Setup
-- Ear / Tilt Position --**

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 24 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Brain

14.8 MEASUREMENT RESULTS (PCS CDMA Left Head SAR – Touch)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
1851.25	0025	CDMA	25.1	25.0	Standard	Cheek / Touch	In	0.596
1851.25	0025	CDMA	25.1	25.0	Standard	Cheek / Touch	Out	0.601
1880.00	0600	CDMA	25.1	25.0	Standard	Cheek / Touch	In	0.582
1880.00	0600	CDMA	25.1	25.0	Standard	Cheek / Touch	Out	0.582
1908.75	1175	CDMA	25.1	25.0	Standard	Cheek / Touch	In	0.348
1908.75	1175	CDMA	25.1	25.0	Standard	Cheek / Touch	Out	0.331
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
4. SAR Measurement System
- | | | |
|---|------------------------------|--------------------------|
| ☒ DASY3 | ☐ IDX | ☐ |
|---|------------------------------|--------------------------|
- Phantom Configuration
- | | | |
|---|---------------------------------------|-------------------------------------|
| ☒ Left Head | ☐ Flat Phantom | ☐ Right Head |
|---|---------------------------------------|-------------------------------------|
5. SAR Configuration
- | | | |
|--|-------------------------------|-------------------------------|
| ☒ Head | ☐ Body | ☐ Hand |
|--|-------------------------------|-------------------------------|
6. Test Signal Call Mode
- | | |
|--|---|
| ☒ Manu. Test Codes | ☐ Base Station Simulator |
|--|---|
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15 cm.


Randy Ortanez
President



Figure 14.8 Left Head SAR Test Setup
-- Cheek / Touch Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520

SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Brain

14.9 MEASUREMENT RESULTS (PCS CDMA Left Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
1851.25	0025	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.249
1851.25	0025	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.213
1880.00	0600	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.212
1880.00	0600	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.201
1908.75	1175	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	In	0.144
1908.75	1175	CDMA	25.1	25.0	Standard	Ear / 15° Tilt	Out	0.141
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

[‡]Power Measured

- SAR Measurement System

Phantom Configuration

- SAR Configuration

- Test Signal Call Mode

- Tissue parameters and temperatures are listed on the SAR plots.

- Liquid tissue depth is 15 cm.

☒ Conducted

☐ ERP

☐ EIRP

☒ DASY3

☐ IDX

☐

☒ Left Head

☐ Flat Phantom

☐ Right Head

☒ Head

☐ Body

☐ Hand

☒ Manu. Test Codes

☐ Base Station Simulator


Randy Ortanez
President



Figure 14.9 Left Head SAR Test Setup
-- Ear / Tilt Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 26 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Muscle

14.10 MEASUREMENT RESULTS (AMPS Body SAR w/o Holster)

FREQUENCY		Modulation	Begin / End POWER [‡]			Separation Distance (cm) ^{‡‡}	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.6	26.5	Standard	1.5 [w/o Holster]	In	0.797
824.04	0991	AMPS	26.6	26.5	Standard	1.5 [w/o Holster]	Out	0.813
836.49	0383	AMPS	26.6	26.5	Standard	1.5 [w/o Holster]	In	0.950
836.49	0383	AMPS	26.6	26.5	Standard	1.5 [w/o Holster]	Out	0.986
848.97	0799	AMPS	26.6	26.5	Standard	1.5 [w/o Holster]	In	1.110
848.97	0799	AMPS	26.6	26.5	Standard	1.5 [w/o Holster]	Out	0.999
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Muscle 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in atypical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured ☒ Conducted ☐ ERP ☐ EIRP
4. SAR Measurement System ☒ DASY3 ☐ IDX ☐
- Phantom Configuration ☐ Left Head ☒ Flat Phantom ☐ Right Head
5. SAR Configuration ☐ Head ☒ Body ☐ Hand
6. Test Signal Call Mode ☒ Manu. Test Codes ☐ Base Station Simulator
7. ^{‡‡}Test Configuration ☐ With Holster ☒ Without Holster
- Tissue parameters and temperatures are listed on the SAR plots.
 - Both sides of the phone were tested and the worst-case side is reported.
 - Liquid tissue depth is 15 cm.


Randy Ortanez
President



**Figure 14.10 Body SAR Test Setup
-- w/o Holster --**

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 27 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Muscle

14.11 MEASUREMENT RESULTS (CELLULAR CDMA Body SAR w/o Holster)

FREQUENCY		Modulation	Begin / End POWER [‡]			Separation Distance (cm) ^{‡‡}	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
848.31	0777	CDMA	25.1	25.0	Standard	1.5 [w/o Holster]	In	0.397
848.31	0777	CDMA	25.1	25.0	Standard	1.5 [w/o Holster]	Out	0.508
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Muscle 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in atypical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured ☒ Conducted ☐ ERP ☐ EIRP
4. SAR Measurement System ☒ DASY3 ☐ IDX ☐
- Phantom Configuration ☐ Left Head ☒ Flat Phantom ☐ Right Head
5. SAR Configuration ☐ Head ☒ Body ☐ Hand
6. Test Signal Call Mode ☒ Manu. Test Codes ☐ Base Station Simulator
7. ^{‡‡}Test Configuration ☐ With Holster ☒ Without Holster
- Tissue parameters and temperatures are listed on the SAR plots.
 - Both sides of the phone were tested and the worst-case side is reported.
 - Liquid tissue depth is 15 cm.


Randy Ortanez
President



**Figure 14.11 Body SAR Test Setup
-- w/o Holster --**

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 28 of 32

SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Muscle

14.12 MEASUREMENT RESULTS (PCS CDMA Body SAR w/o Holster)

FREQUENCY		Modulation	Begin / End POWER [†]			Separation Distance (cm) ^{††}	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
1851.25	0025	CDMA	25.1	25.0	Standard	1.5 [w/o Holster]	In	0.310
1851.25	0025	CDMA	25.1	25.0	Standard	1.5 [w/o Holster]	Out	0.455
1880.00	0600	CDMA	25.1	25.0	Standard	1.5 [w/o Holster]	In	0.305
1880.00	0600	CDMA	25.1	25.0	Standard	1.5 [w/o Holster]	Out	0.446
1908.75	1175	CDMA	25.1	25.0	Standard	1.5 [w/o Holster]	In	0.308
1908.75	1175	CDMA	25.1	25.0	Standard	1.5 [w/o Holster]	Out	0.439
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Muscle 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in atypical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [†]Power Measured ☒ Conducted ☐ ERP ☐ EIRP
4. SAR Measurement System ☒ DASY3 ☐ IDX ☐
- Phantom Configuration ☐ Left Head ☒ Flat Phantom ☐ Right Head
5. SAR Configuration ☐ Head ☒ Body ☐ Hand
6. Test Signal Call Mode ☒ Manu. Test Codes ☐ Base Station Simulator
7. ^{††}Test Configuration ☐ With Holster ☒ Without Holster
- Tissue parameters and temperatures are listed on the SAR plots.
 - Both sides of the phone were tested and the worst-case side is reported.
 - Liquid tissue depth is 15 cm.


Randy Ortanez
President



Figure 14.12 Body SAR Test Setup
-- w/o Holster --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 29 of 32

15. SAR TEST EQUIPMENT

Equipment Calibration

Table 15.1 Test Equipment Calibration

EQUIPMENT SPECIFICATIONS		
Type	Calibration Date	Serial Number
Stäubli Robot RX60L	February 2002	599131-01
Stäubli Robot Controller	February 2002	PCT592
Stäubli Teach Pendant (Joystick)	February 2002	3323-00161
Micron Computer, 450 MHz Pentium III, Windows NT	February 2002	PCT577
SPEAG EDC3	February 2002	321
SPEAG DAE3	February 2002	330
SPEAG E-Field Probe ET3DV6	February 2002	1560
SPEAG Dummy Probe	February 2002	PCT583
SPEAG SAM Twin Phantom V4.0	February 2002	PCT666
SPEAG Light Alignment Sensor	February 2002	205
SPEAG Validation Dipole D1900V2	February 2002	PCT613
Brain Equivalent Matter (835MHz)	April 2002	PCTBEM101
Brain Equivalent Matter (1900MHz)	April 2002	PCTBEM301
Muscle Equivalent Matter (835MHz)	April 2002	PCTMEM201
Muscle Equivalent Matter (1900MHz)	April 2002	PCTMEM401
Microwave Amp. Model: 5S1G4, (800MHz - 4.2GHz)	January 2002	22332
Gigatronics 8651A Power Meter	January 2002	1835299
HP-8648D (9kHz ~ 4GHz) Signal Generator	January 2002	PCT530
Amplifier Research 5S1G4 Power Amp	January 2002	PCT540
HP-8753E (30kHz ~ 3GHz) Network Analyzer	January 2002	PCT552
HP85070B Dielectric Probe Kit	January 2002	PCT501
Ambient Noise/Reflection, etc.	<12mW/kg/<3%of SAR	January 2002
		Anechoic Room PCT01

NOTE:

The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Validation measurement is performed by PCTEST Lab. before each test. The brain simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

PCTEST™ SAR REPORT	 FCC CERTIFICATION 			Reviewed by: Quality Manager
SAR Filename: SAR-220408154.A3L	Test Dates: April 8-12, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA520	Page 30 of 32

SAMSUNG FCC ID: A3LSPHA520 -- FM Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.94$ mho/m $\epsilon_r = 40.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 1.22 mW/g, SAR (10g): 0.781 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.5dBm; Right Head Phantom, Cheek/Touch position

Test Date -- 04/08/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

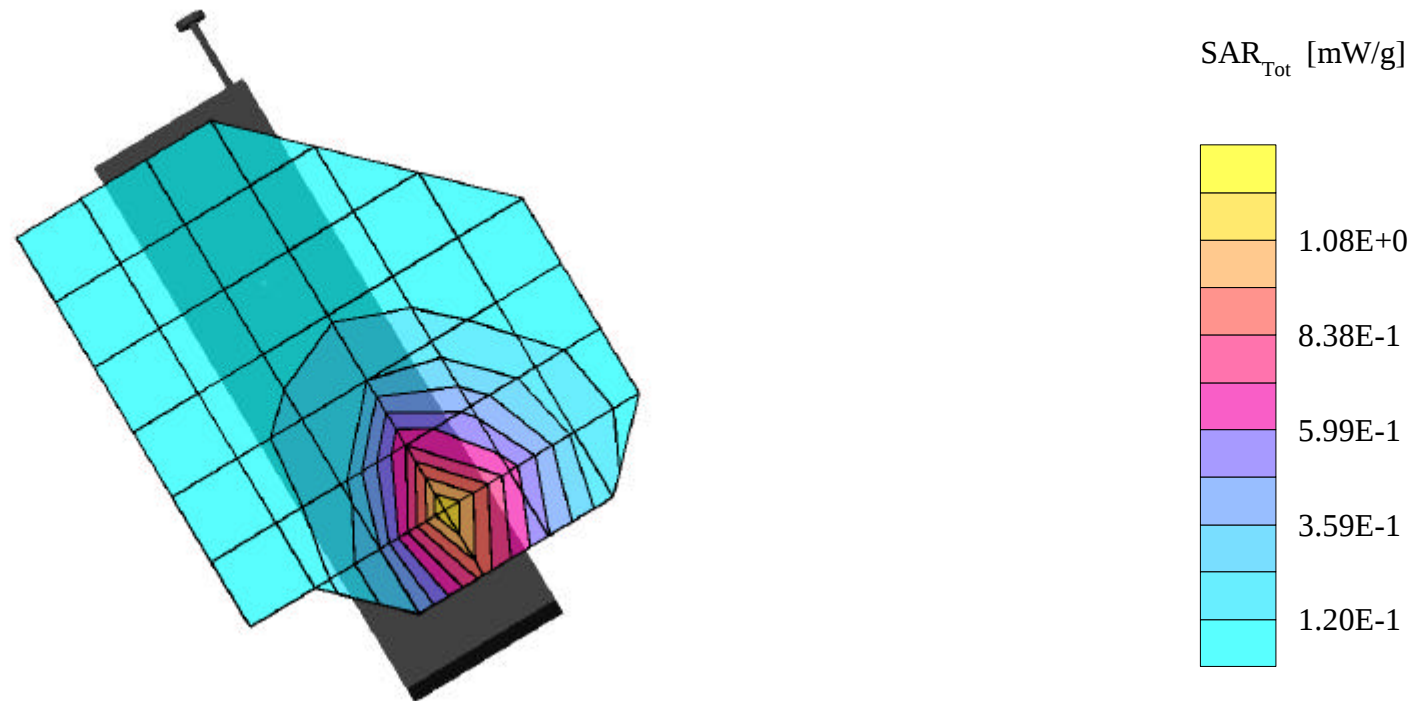

SAMSUNG FCC ID: A3LSPHA520 -- FM Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.94$ mho/m $\epsilon_r = 40.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.296 mW/g, SAR (10g): 0.212 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.5dBm; Right Head Phantom, Ear/15° Tilt position

Test Date -- 04/08/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

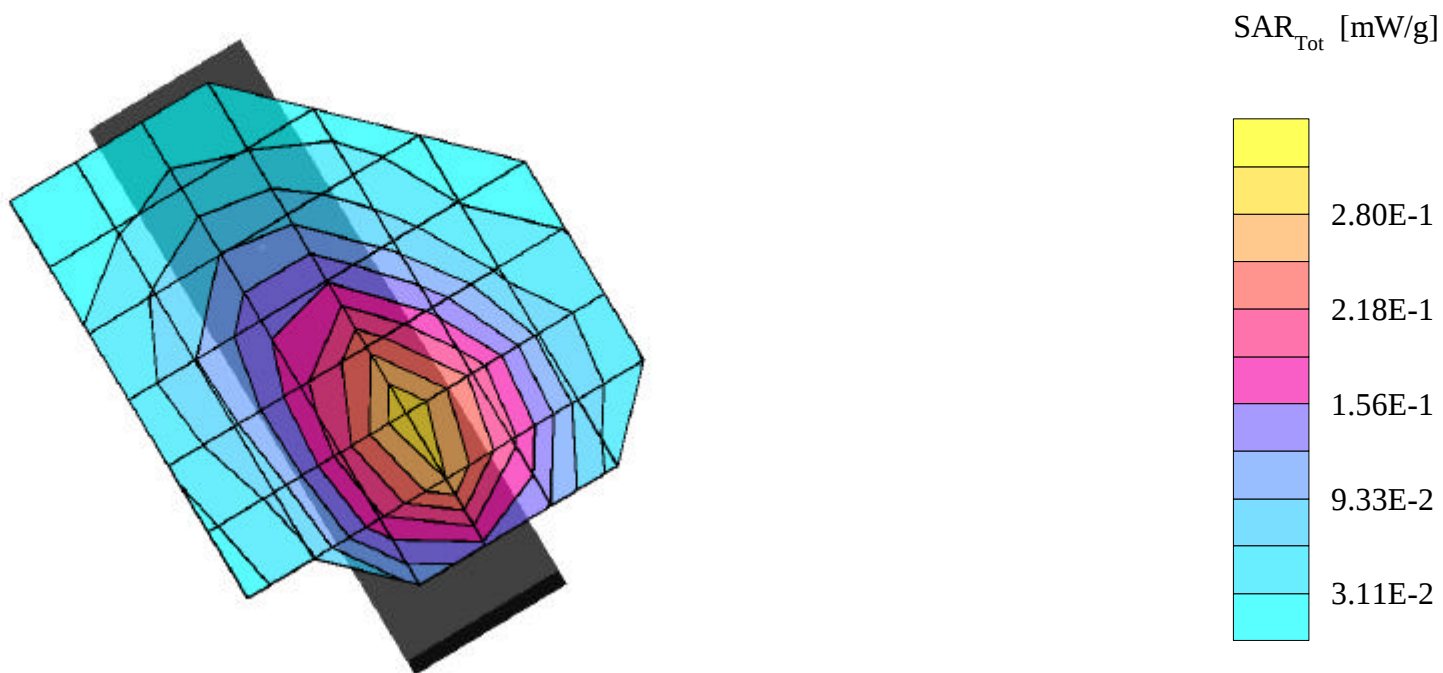

SAMSUNG FCC ID: A3LSPHA520 -- FM Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.94$ mho/m $\epsilon_r = 40.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.08 mW/g, SAR (10g): 0.710 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.5dBm; Left Head Phantom, Cheek/Touch position

Test Date -- 04/08/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

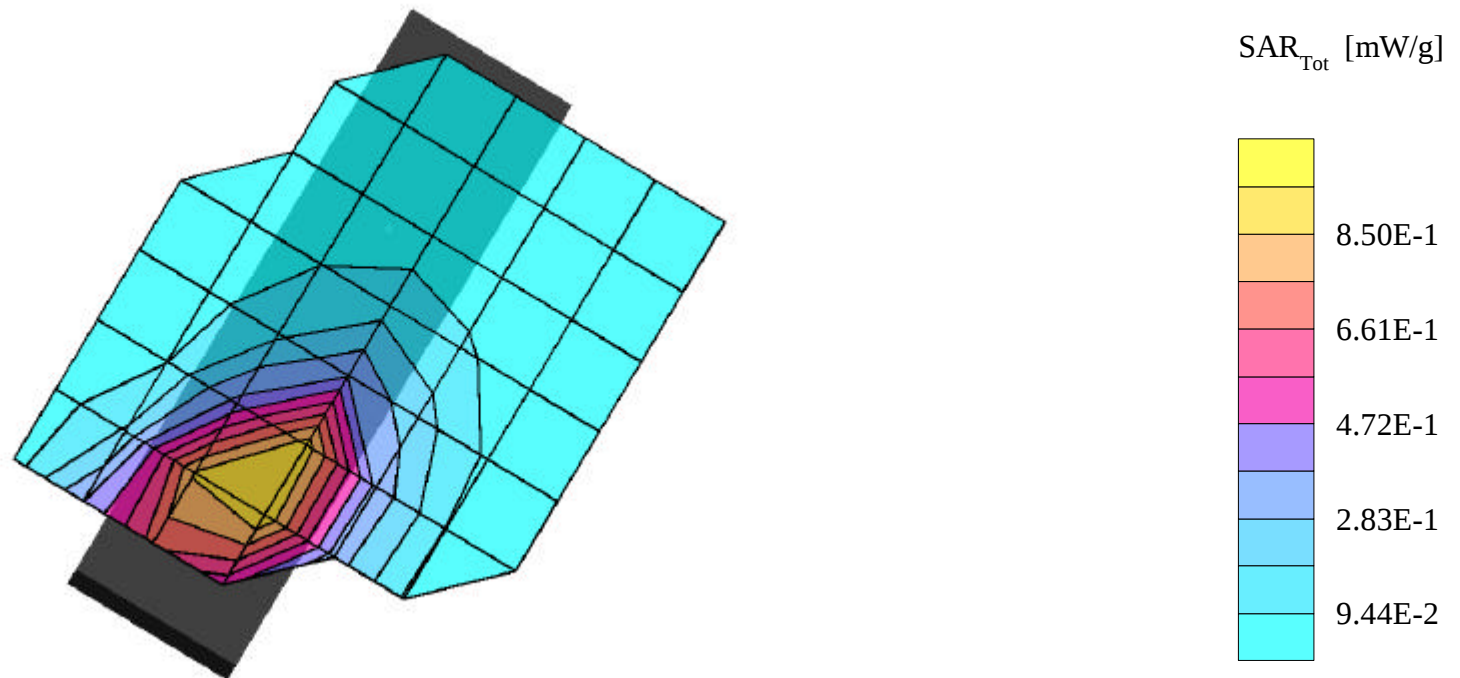

SAMSUNG FCC ID: A3LSPHA520 -- FM Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.94$ mho/m $\epsilon_r = 40.6$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.290 mW/g, SAR (10g): 0.204 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.5dBm; Left Head Phantom, Ear/15° Tilt position

Test Date -- 04/08/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

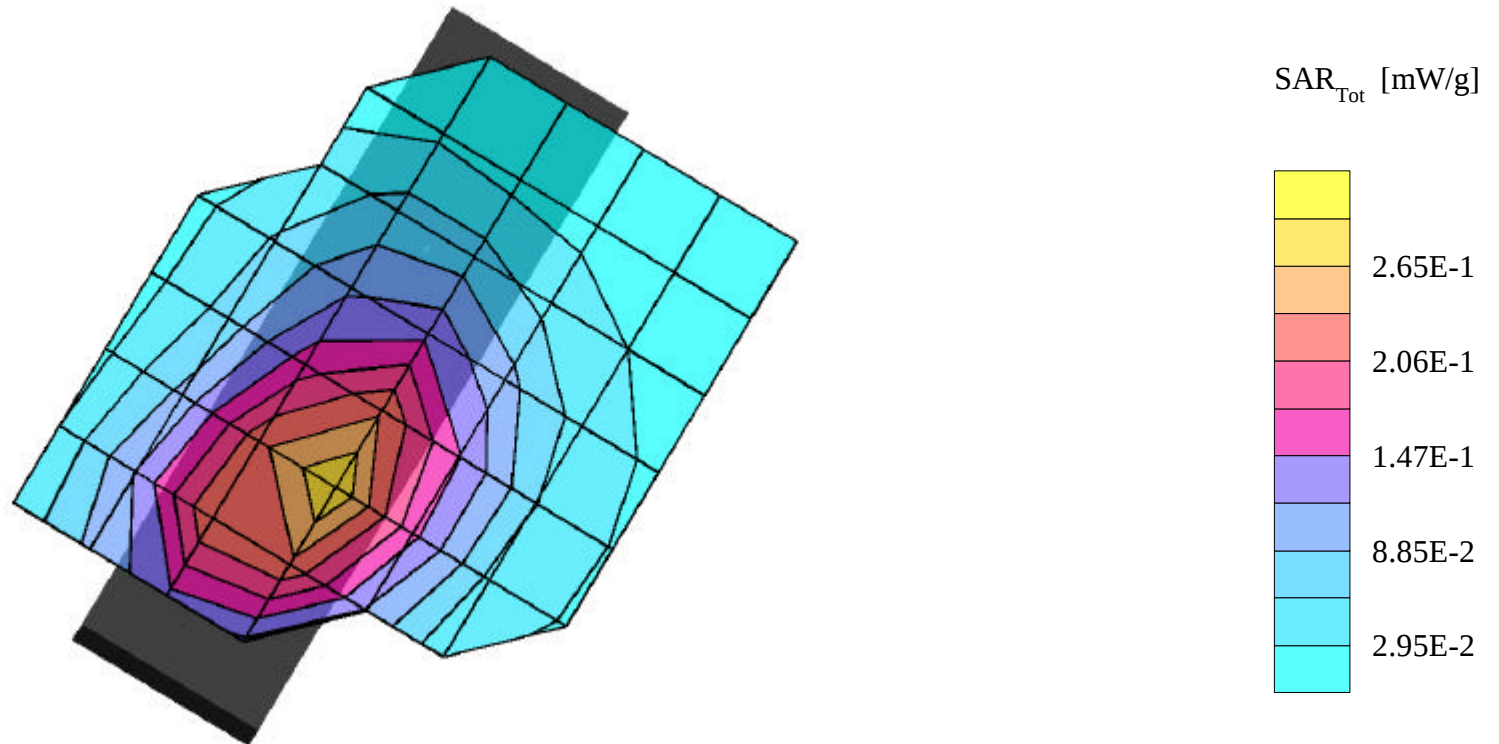

SAMSUNG FCC ID: A3LSPHA520 -- Cellular CDMA Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.94$ mho/m $\epsilon_r = 40.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.849 mW/g, SAR (10g): 0.551 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

Cellular CDMA Mode, Ch.0777 [848.31MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Right Head Phantom, Cheek/Touch position

Test Date -- 04/08/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

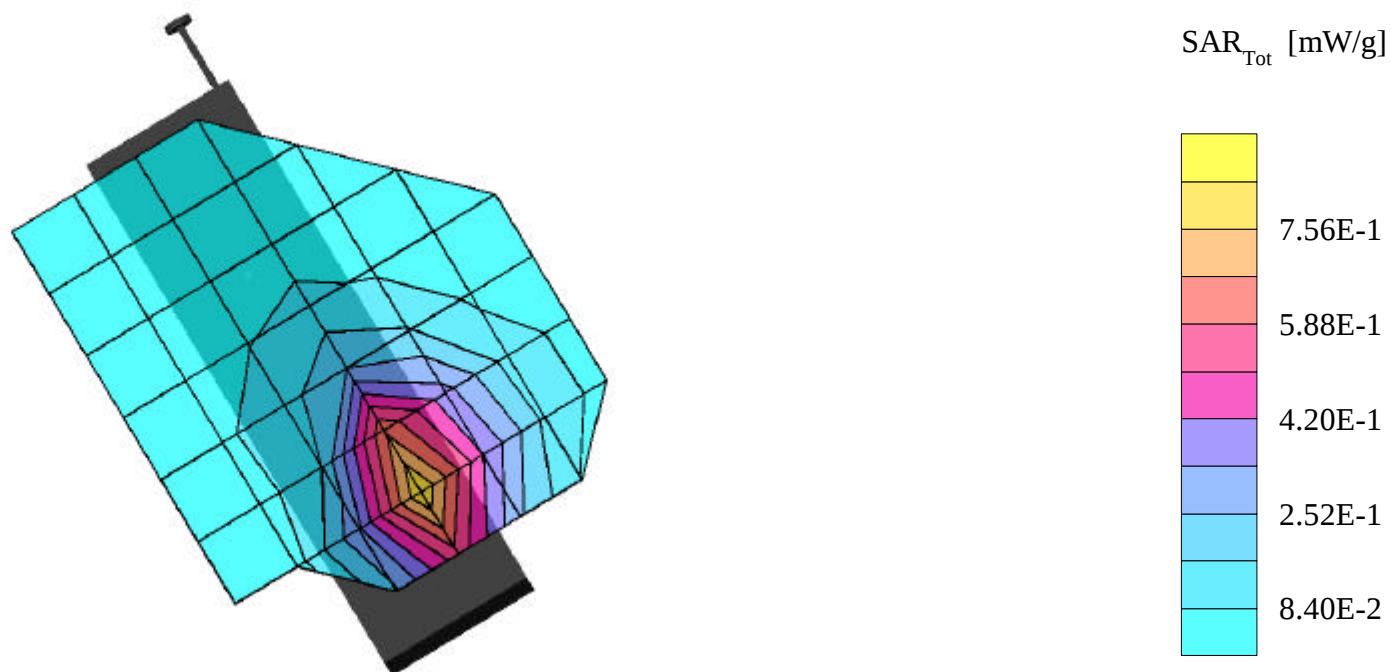

SAMSUNG FCC ID: A3LSPHA520 -- PCS CDMA Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1560; ConvF(5.16,5.16,5.16)

Med. Parameters 1900 MHz Brain: $\sigma = 1.42$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.444 mW/g, SAR (10g): 0.297 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 25.0dBm; Right Head Phantom, Cheek/Touch position

Test Date -- 04/09/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

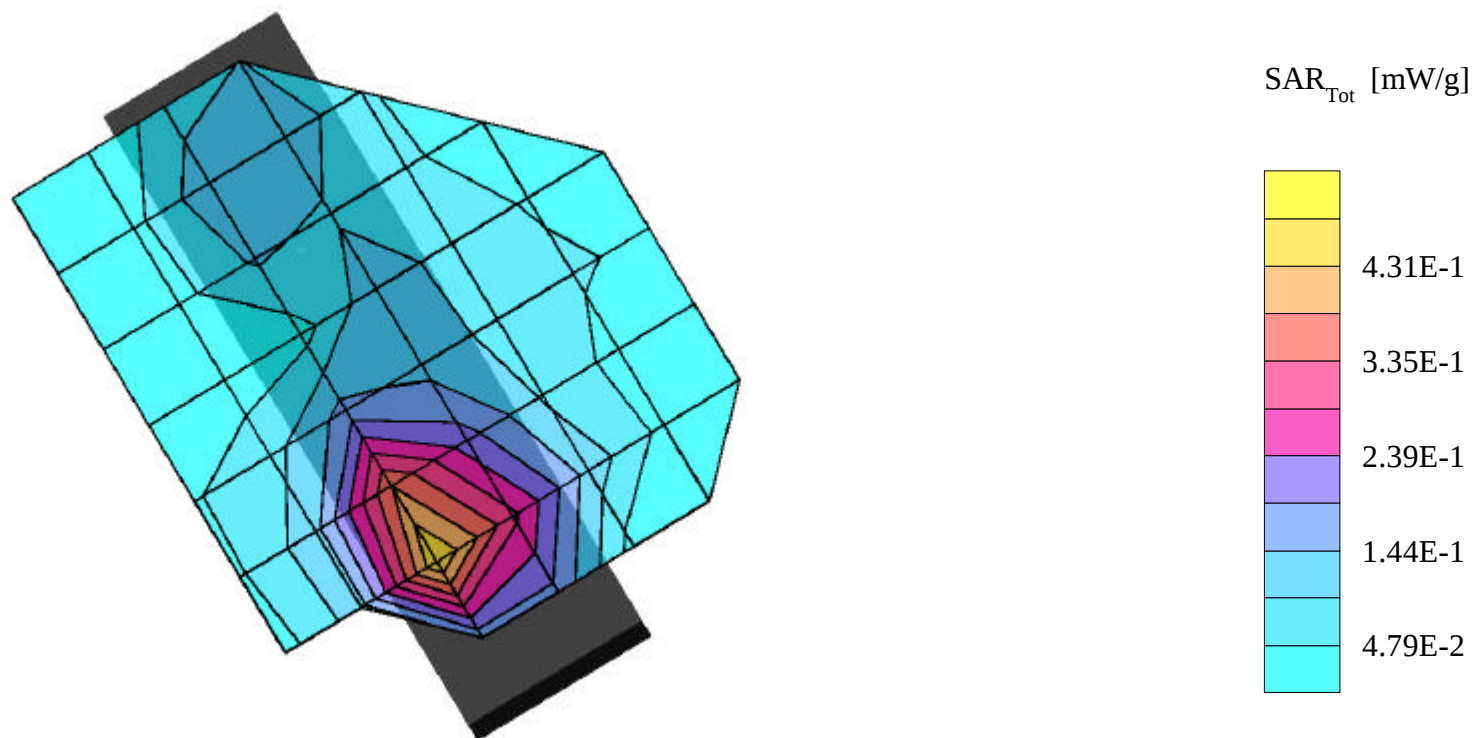

SAMSUNG FCC ID: A3LSPHA520 -- PCS CDMA Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1560; ConvF(5.16,5.16,5.16)

Med. Parameters 1900 MHz Brain: $\sigma = 1.42$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.178 mW/g, SAR (10g): 0.109 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 25.0dBm; Right Head Phantom, Ear/15° Tilt position

Test Date -- 04/09/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

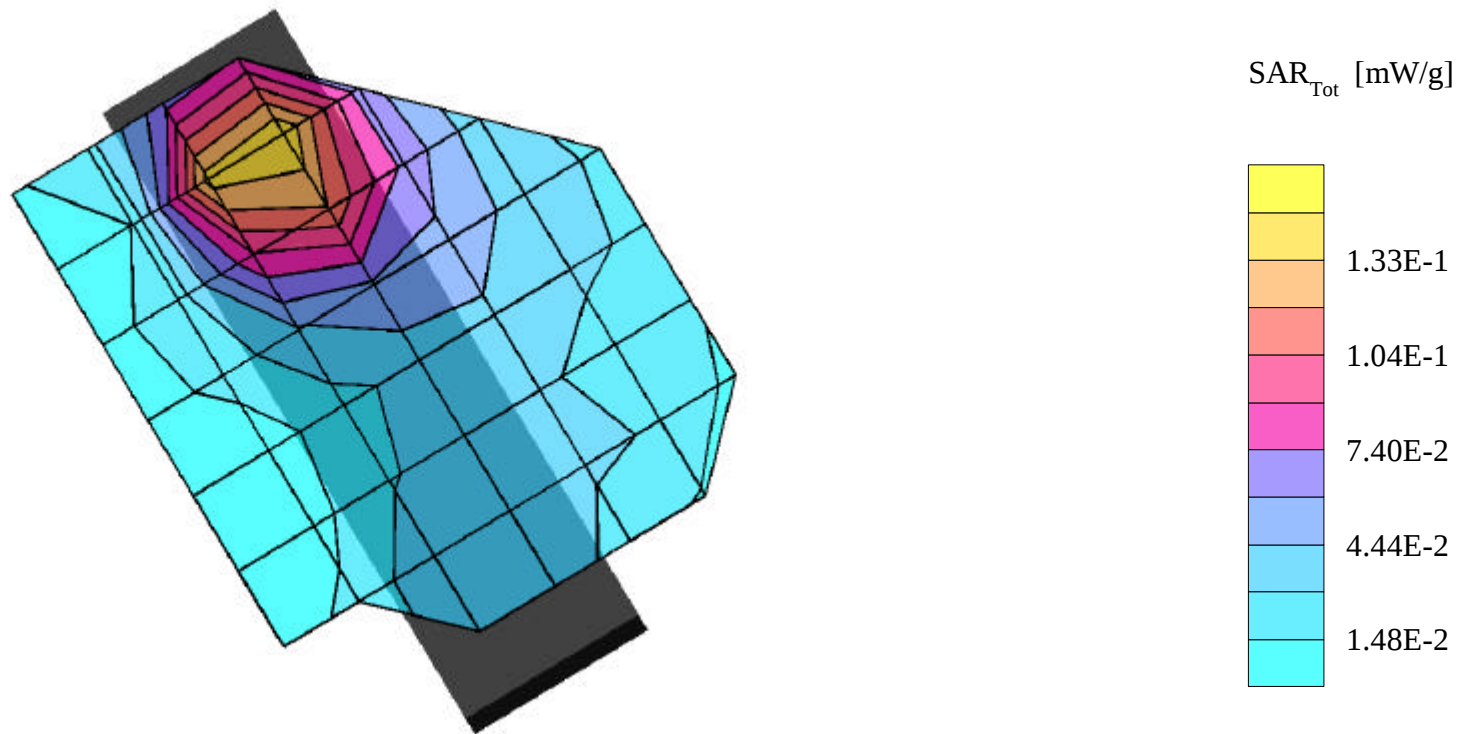

SAMSUNG FCC ID: A3LSPHA520 -- PCS CDMA Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1560; ConvF(5.16,5.16,5.16)

Med. Parameters 1900 MHz Brain: $\sigma = 1.42$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.601 mW/g, SAR (10g): 0.369 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 25.0dBm; Left Head Phantom, Cheek/Touch position

Test Date -- 04/09/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

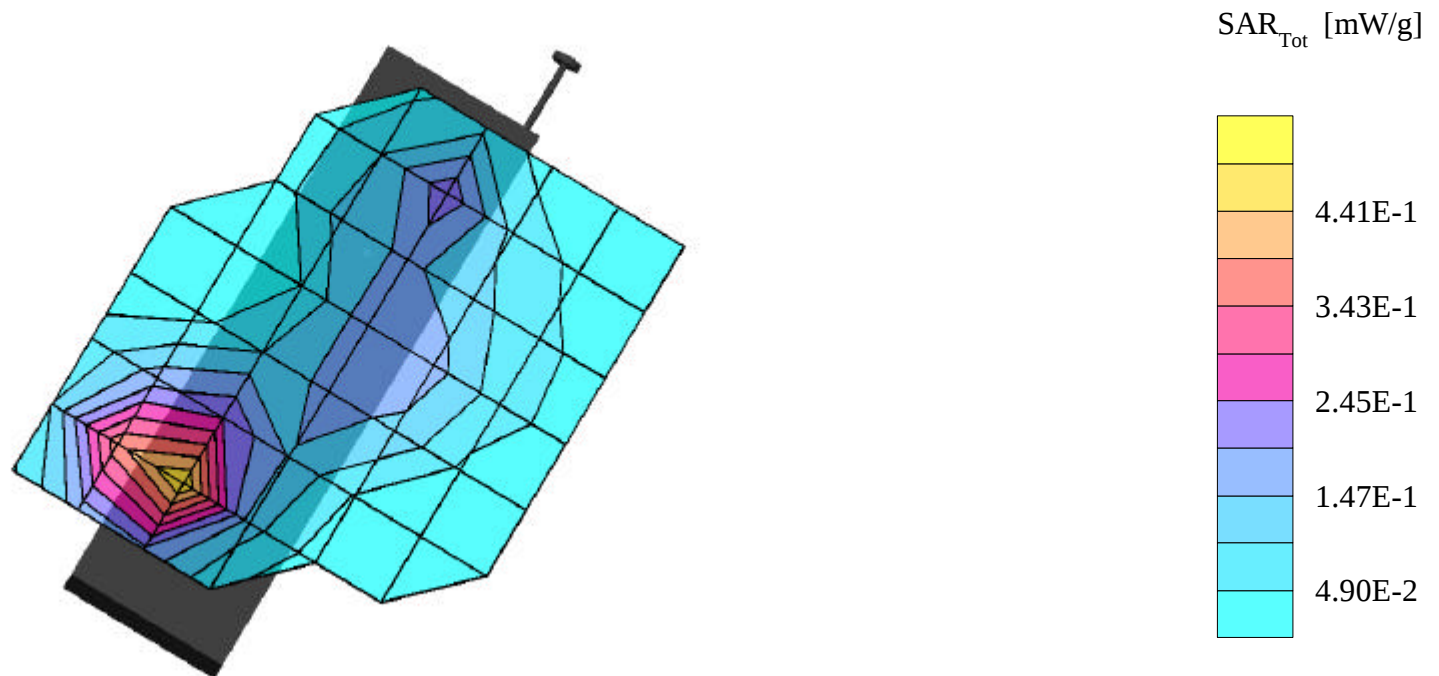

SAMSUNG FCC ID: A3LSPHA520 -- PCS CDMA Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1560; ConvF(5.16,5.16,5.16)

Med. Parameters 1900 MHz Brain: $\sigma = 1.42$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.249 mW/g, SAR (10g): 0.146 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = open; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 25.0dBm; Left Head Phantom, Ear/15° Tilt position

Test Date -- 04/09/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

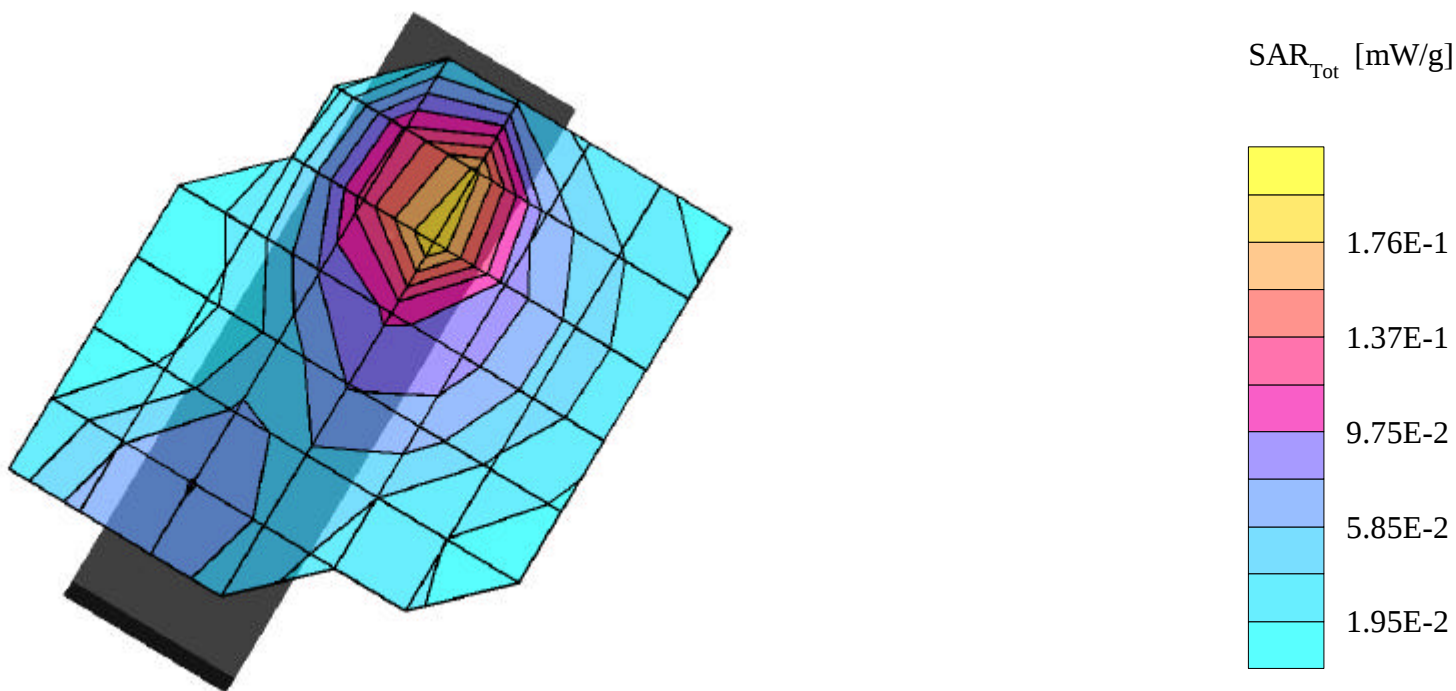

SAMSUNG FCC ID: A3LSPHA520 -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(6.52,6.52,6.52)

Med. Parameters 835 MHz Muscle: $\sigma = 0.94$ mho/m $\epsilon_r = 55.5$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.11 mW/g, SAR (10g): 0.742 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.5dBm; Spacing = 1.5cm from back of phone (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 04/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

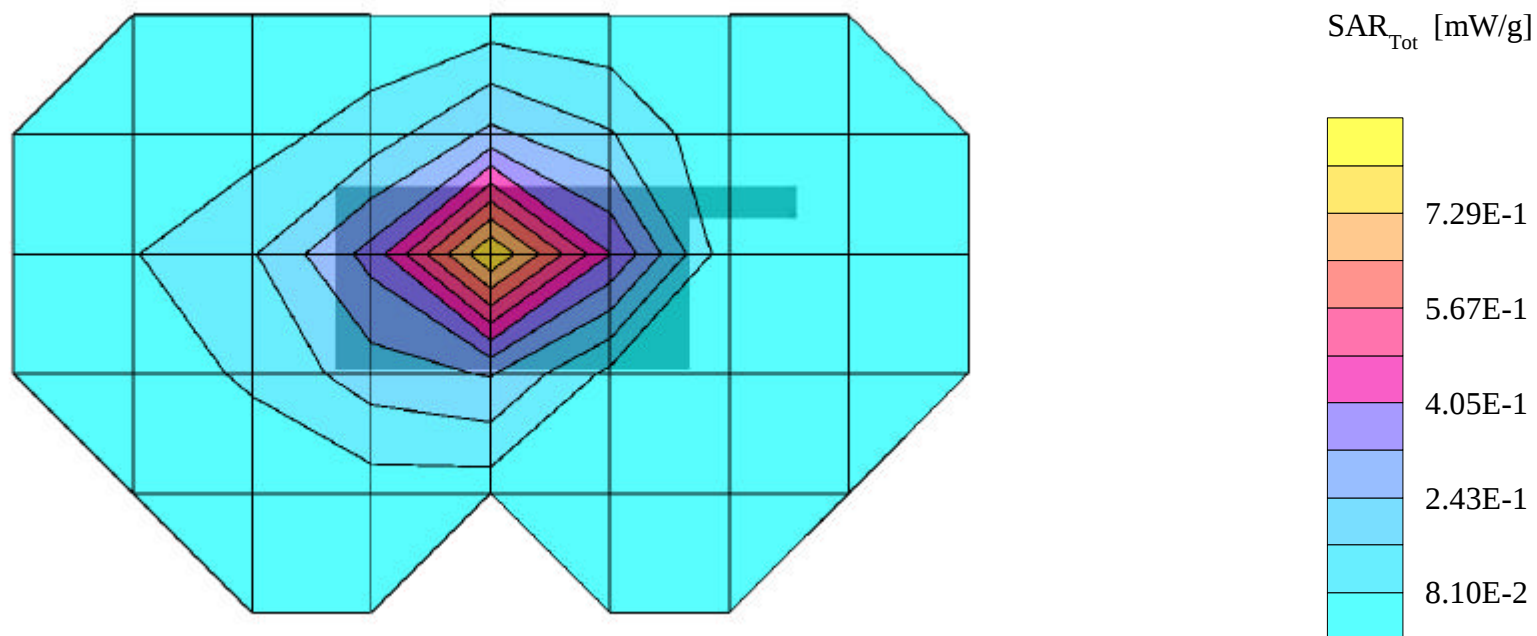

SAMSUNG FCC ID: A3LSPHA520 -- Cellular CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(6.52,6.52,6.52)

Med. Parameters 835 MHz Muscle: $\sigma = 0.94$ mho/m $\epsilon_r = 55.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.508 mW/g, SAR (10g): 0.357 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

Cellular CDMA Mode, Ch.0777 [848.31MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Spacing = 1.5cm from back of phone (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 04/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

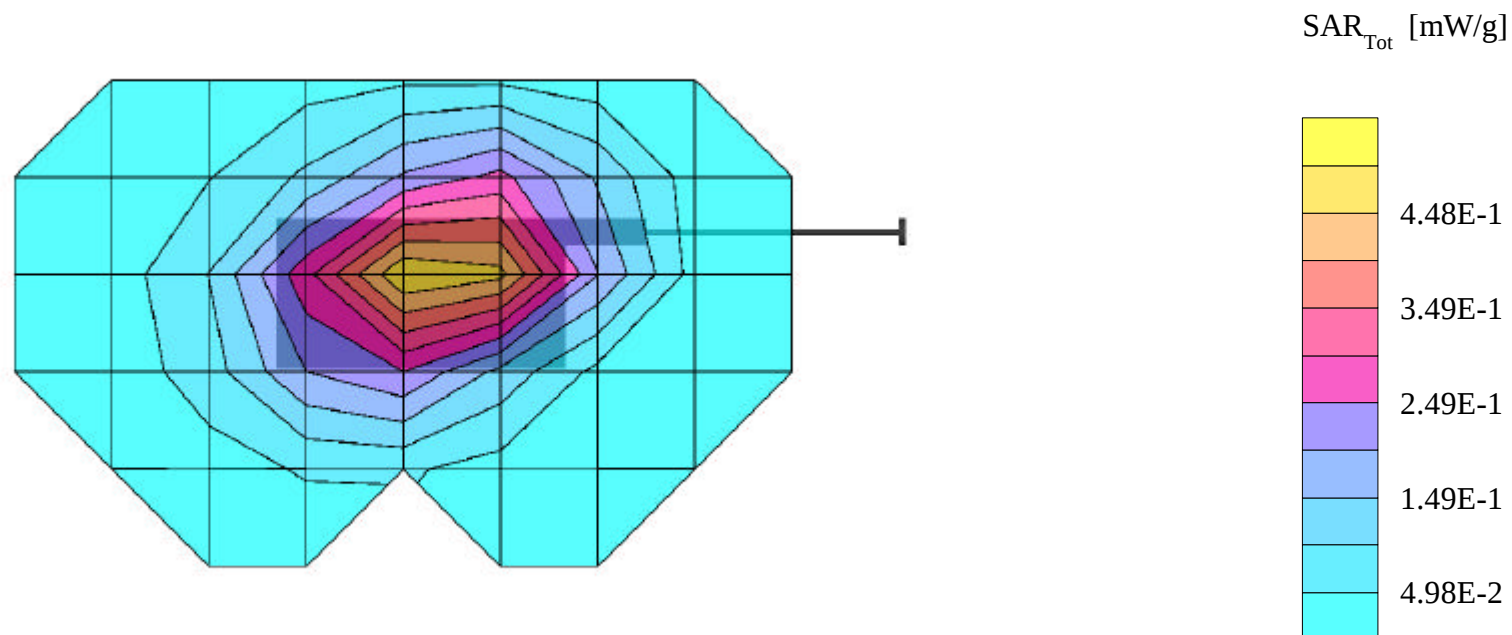

SAMSUNG FCC ID: A3LSPHA520 -- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.47$ mho/m $\epsilon_r = 54.7$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.455 mW/g, SAR (10g): 0.253 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.0°C

Conducted Power = 25.0dBm; Spacing = 1.5cm from back of phone (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 04/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

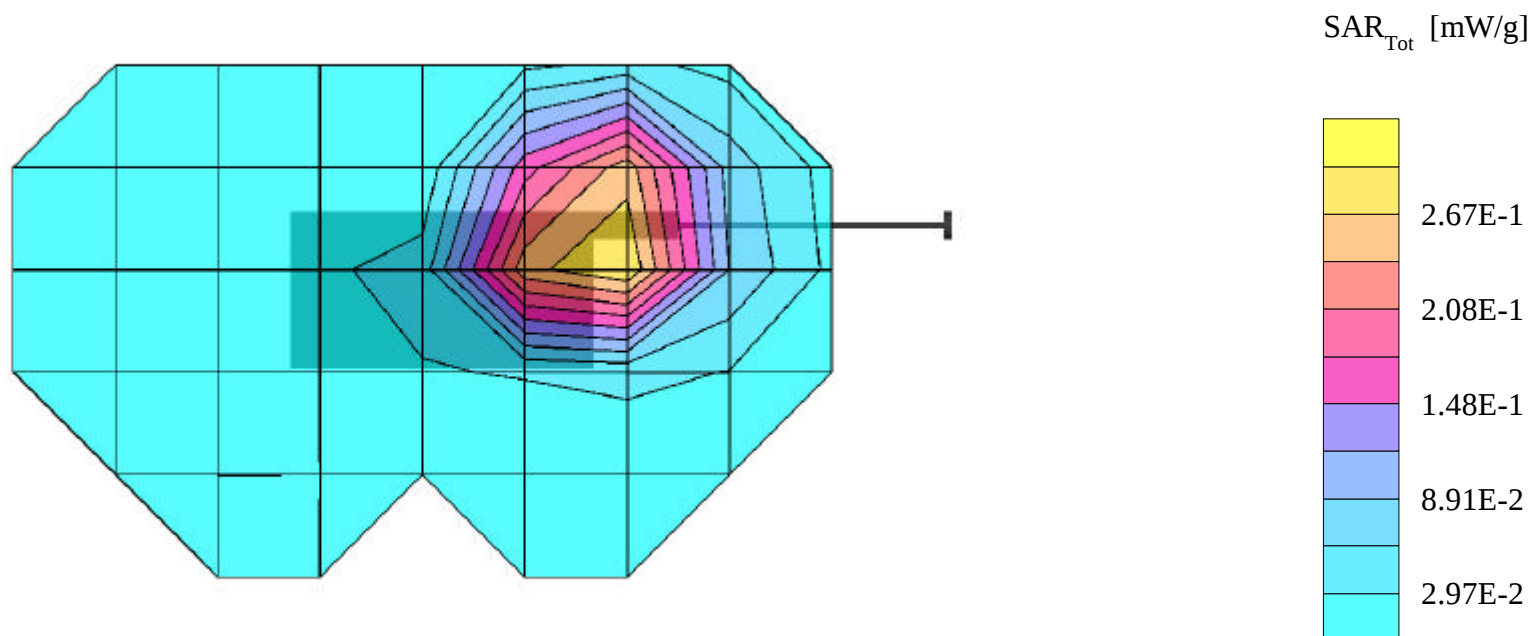

SAMSUNG FCC ID: A3LSPHA520 -- FM Head SAR

SAM Phantom; Right Hand Section; Probe: ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.94$ mho/m $\epsilon_r = 40.6$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 1.22 mW/g, SAR (10g): 0.781 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = open; Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.5dBm; Right Head Phantom, Cheek/Touch position

Test Date -- 04/08/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

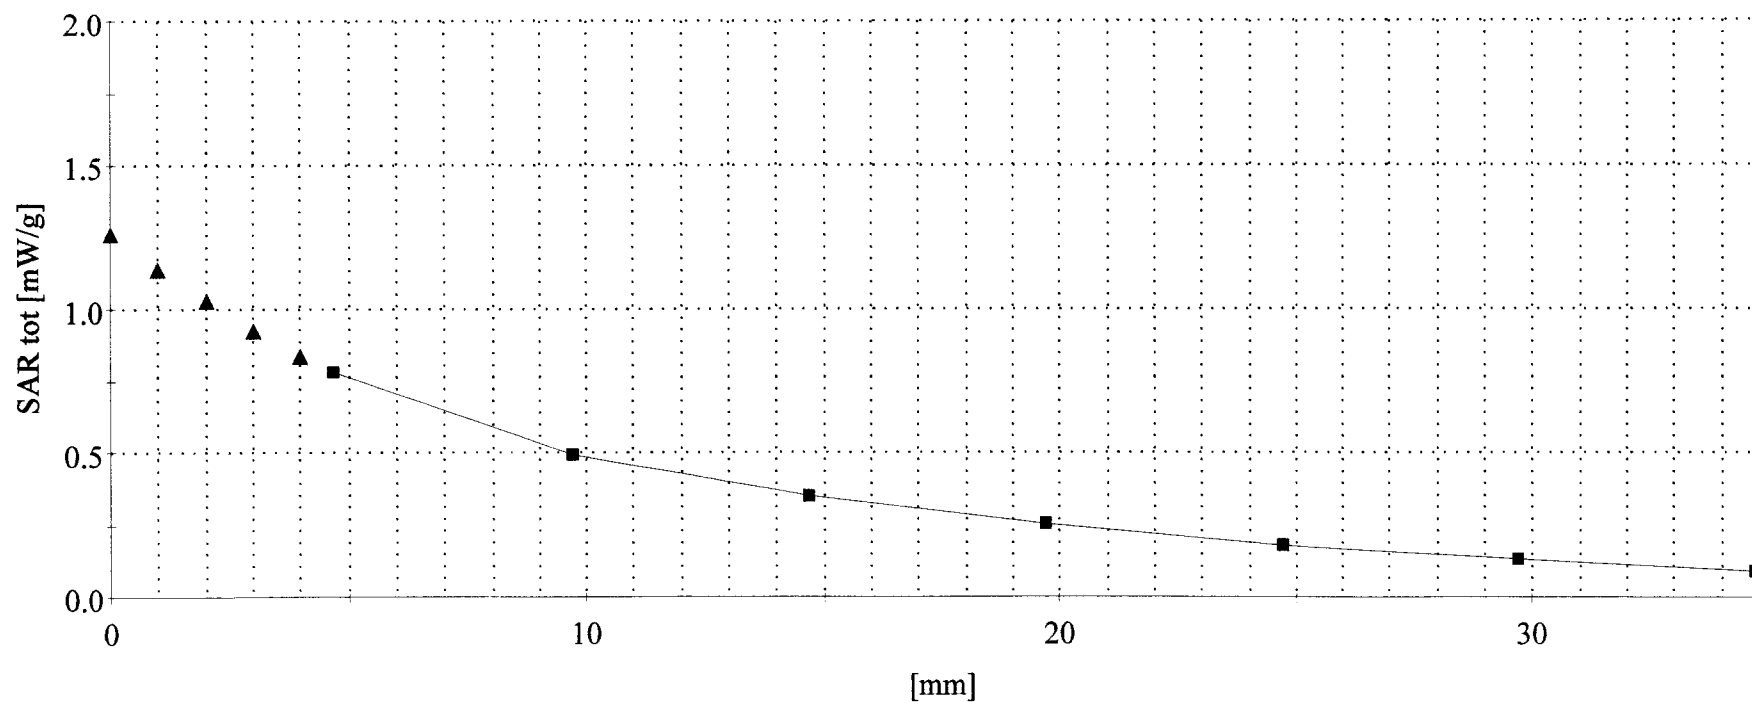

SAMSUNG FCC ID: A3LSPHA520 -- PCS CDMA Head SAR

SAM Phantom; Left Hand Section; Probe: ET3DV6 - SN1560; ConvF(5.16,5.16,5.16)

Med. Parameters 1900 MHz Brain: $\sigma = 1.42$ mho/m $\epsilon_r = 40.3$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.601 mW/g, SAR (10g): 0.369 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = open; Meas. Tissue Temp. = 22.1°C

Conducted Power = 25.0dBm; Left Head Phantom, Cheek/Touch position

Test Date -- 04/09/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

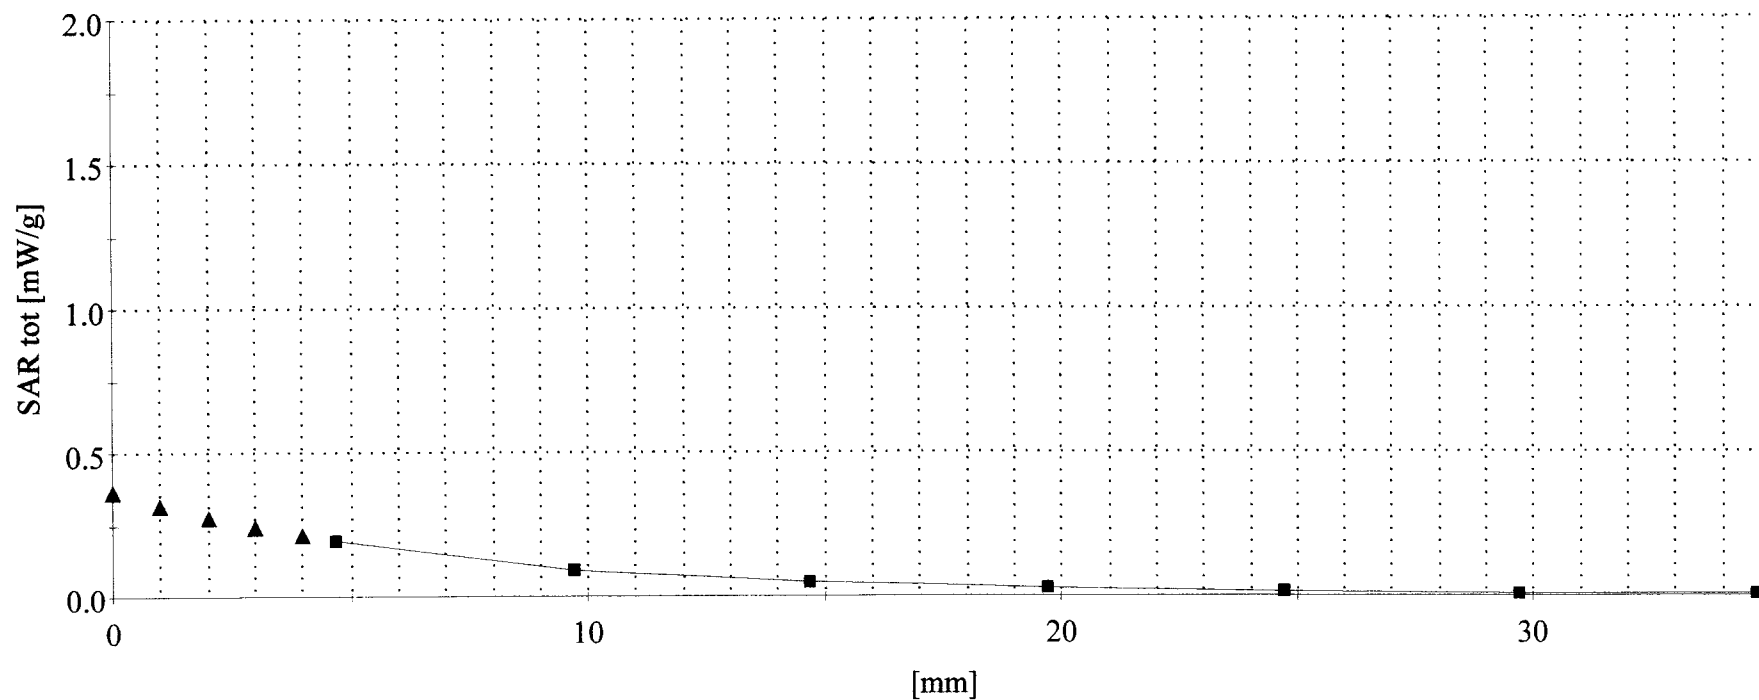

SAMSUNG FCC ID: A3LSPHA520 -- FM Body SAR

SAM Phantom; Flat Section; Probe: ET3DV6 - SN1560; ConvF(6.52,6.52,6.52)

Med. Parameters 835 MHz Muscle: $\sigma = 0.94$ mho/m $\epsilon_r = 55.5$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.11 mW/g, SAR (10g): 0.742 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

FM Mode, Ch.0799 [848.97MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.5dBm; Spacing = 1.5cm from back of phone (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 04/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

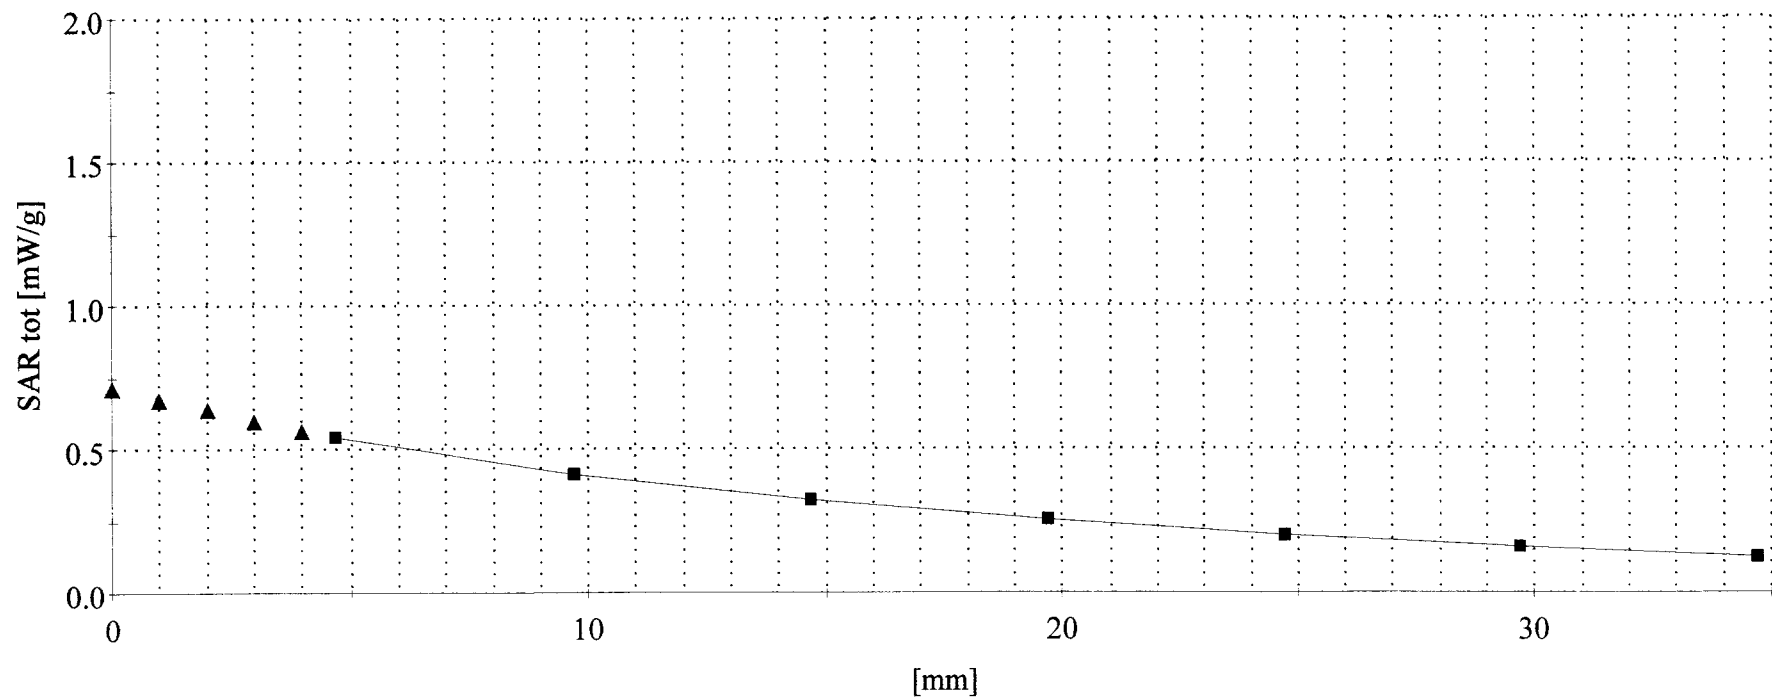

SAMSUNG FCC ID: A3LSPHA520 -- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe: ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.47$ mho/m $\epsilon_r = 54.7$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0

SAR (1g): 0.455 mW/g, SAR (10g): 0.253 mW/g

SAMSUNG TriMode Phone Model: SPH-A520

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.0°C

Conducted Power = 25.0dBm; Spacing = 1.5cm from back of phone (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 04/10/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

