

EMI TEST REPORT

Test report No. : EMC- FCC- 0064

Type of equipment : Digital Video Camcorder

Model No. : SCD39

FCC ID. : A3LTHETA

Applicant : SAMSUNG ELECTRONICS CO., LTD.

Test standards : FCC part 15 subpart B, Class B

Test Procedure and Items :

- AC Power Line Conducted Emissions Measurement: ANSI C63.4-1992
- Radiated Emissions Measurement : ANSI C63.4-1992

Test result : **Complied**

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of test: 2003. 3. 26

Issued date: 2003. 3. 26

Tested by :



Kim, Jung-Soo

Approved by:



Chung, Min-Seok

[Contents]

1. Client information	3
2. Laboratory information	4
3. Test system configuration.....	5
3.1 Operation Environment	5
3.2 Measurement Uncertainty	5
3.3 Sample calculation.....	6
4. Description of EUT	7
4.1 Product Description.....	7
4.2 Peripherals	7
4.3 Used cables.....	8
4.4 Operating conditions	8
4.5 EUT test configuration	9
5. Summary of test results.....	9
5.1 Modification to the E.U.T.....	9
5.2 Standards & results	9
6. Test results	10
6.1 Conducted emission	10
6.1.1 Measurement procedure.....	10
6.1.2 Used equipments	10
6.1.3 Measurement uncertainty	10
6.1.4 Test data	11
6.1.5. Result	11
6.2 Radiated emission.....	12
6.2.1 Measurement procedure.....	12
6.2.2 Used equipments	12
6.2.3 Measurement uncertainty	13
6.2.4 Test data	13
6.2.5. Result	13
7. Test Graph	14
Conducted emission test graph	

1. Client information

Applicant: SAMSUNG ELECTRONICS CO., LTD.
Address: 416, Maetan-3Dong, Paldal-Gu, Suwon City, Kyungki-Do,
Korea
Telephone number: 82-31-200-5922
Facsimile number: 82-31-200-5938
Contact person: Jei-Soon Kang / Manager

Manufacture: SAMSUNG ELECTRONICS CO., LTD.
Address: 416, Maetan-3Dong, Paldal-Gu, Suwon City, Kyungki-Do,
Korea
Telephone number: 82-31-200-5922
Facsimile number: 82-31-200-5938

2. Laboratory information

Address

EMC compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YOUNGIN-CITY, KYUNGGI-DO, KOREA


Telephone Number : 82 31 336 9919

Facsimile Number : 82 31 336 4767

FCC Filing No. : 793334

VCCI Registration No. : C-1713, R-1606

SITE MAP

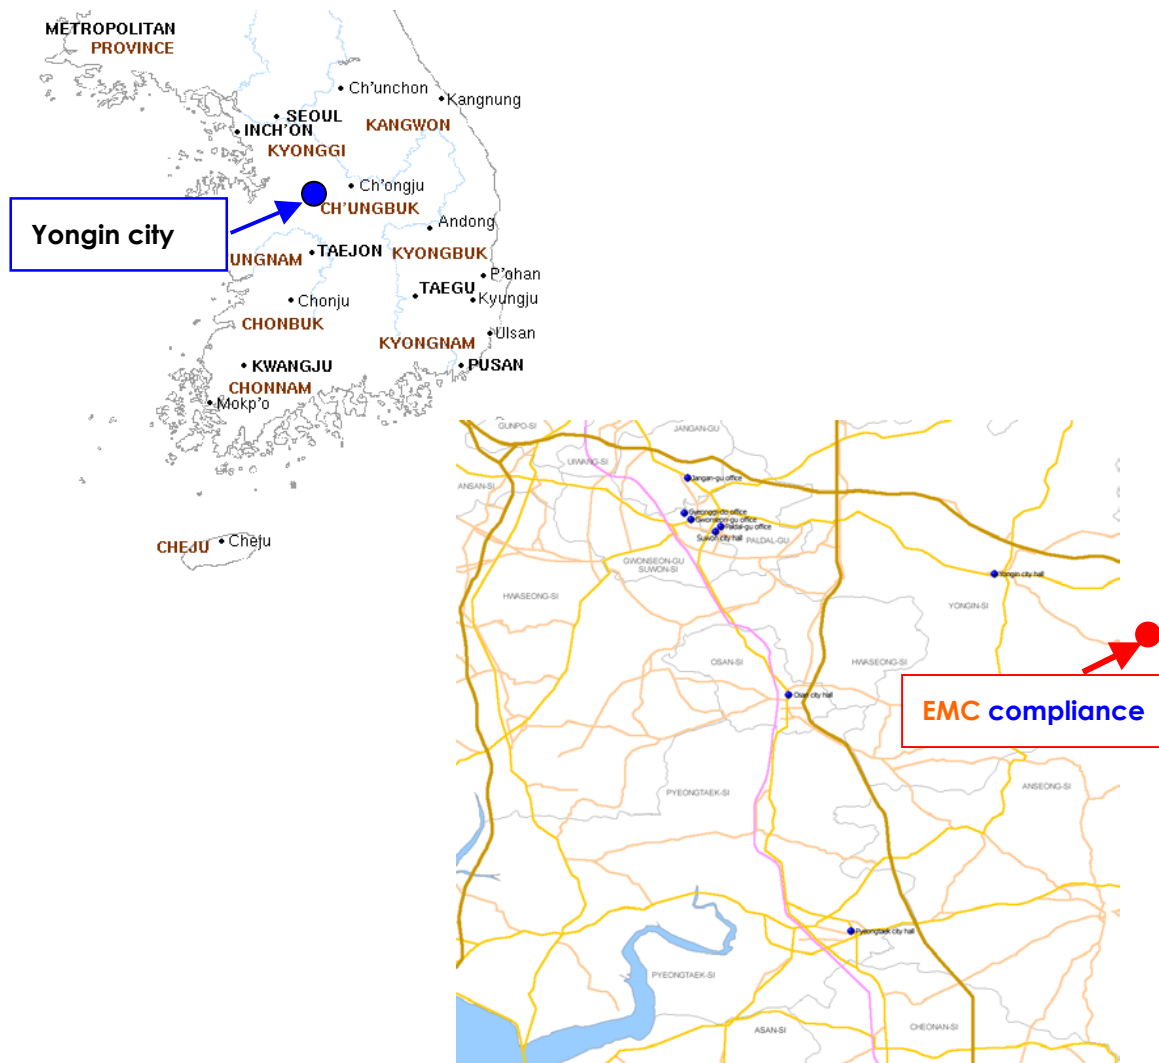

82-1, JEIL-RI, YANGJI-MYUN, YOUNGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

3. Test system configuration

3.1 Operation Environment

	Temperature	Humidity	Pressure
OATS :	10 °C	36 %	1014 hPa
Shielded room :	23 °C	32 %	1014 hPa

Test site

These testing were performed following locations;

Shielded room: Conducted emission,
OATS (10m) : Radiated emission

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMI. The factors contributing to uncertainties are test receiver, Cable Loss, antenna factor calibration, Antenna directivity, antenna factor Variation with height, antenna phase center variation, antenna Frequency interpolation, measurement distance variation, Site imperfection, mismatching, and system repeatability.

Based on NIS 80, 81, the measurement uncertainty level with a 95% confidence level was applied.

3.3 Sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss to the measured reading.

The sample calculation is as follows :

$$FS = MR + LF + CL$$

MR = Meter Reading
LF = LISN Factor
CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32\text{dBuV}$$

Radiated emission

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follows :

$$FS = MR + AF + CL + AT - AG$$

MR = Meter Reading
AF = Antenna Factor
CL = Cable Loss
AP = Antenna Pad
AG=Amplifier Gain

If MR is 30dB, AF 12dB, CL 5dB, AP 10dB, AG 35dB

The result (MR) is

$$30 + 12 + 5 + 10 - 35 = 22\text{dBuV/m}$$

4. Description of EUT

4.1 Product Description

Manufactured by:	SAMSUNG ELECTRONICS CO., LTD.
Address:	416, Maetan-3Dong, Paldal-Gu, Suwon City, Kyungki-Do, Korea
Type of equipment:	Digital Video Camcorder
Model:	SCD39
Serial number:	None
Video recording system:	2 rotary heads, helical scanning system
Audio recording system:	Rotary heads, PCM system
Image device:	CCD (Charge Coupled Device)
Power supply:	DC 8.4V, Lithium Ion Battery pack 7.4V (Power Supply (100V-240V) or Lithium Ion battery pack)

4.2 Peripherals

Description	Model / Part #	Serial Number	Manufacture
PC	EVO	6F28JYFZ7096	COMPAQ
MONITOR	77E	P225HVAT703886	SEC
PRINTER	EPSON STYLUS C60	DR5K014977	EPSON
KEYBOARD	KB-9963	B28AC0NGANB1A1	COMPAQ
MOUSE1	M-S34	F13490N5BI66KMD	COMPAQ
MOUSE2	OK-720	N/A	A4 Tech
MOUSE3	M-U48a	LNA14609670	SEC
MIC	N/A	N/A	N/A
Headset	C-322	N/A	LABTEC
Headphone	N/A	N/A	JESEN
CCTV MONITOR	HM2923KR	N/A	HiTRON

4.3 Used cables


EUT Port	Type	Shield (Y/N)	Length (m)	Connection point 1	Connection point 2
USB	USB	Y	1.3	EUT	Open cable
DV	IEEE1394	Y	1.5		PC
MIC	P-Jack	N	2.0		MIC
EARPHONE	P-Jack	N	2.0		Headphone
AV	DIN	Y	1.0		CCTV MONITOR
	DIN	Y	1.0		S-Video cable, Audio R/L cable
VGA	D-Sub	Y	1.8	PC	MONITOR
Printer	Parallel	Y	2.0		PRINTER
PS/2	PS/2	Y	1.8		KEYBOARD
PS/2	PS/2	Y	1.8		MOUSE1
Serial	Serial	Y	1.8		MOUSE2
USB	USB	Y	1.2		MOUSE3
EAR-MIC	P-Jack	N	2.0		Headset

4.4 Operating conditions

Operating :

1. Display through CCTV monitor and CRT monitor with playing.
 2. Display through CCTV monitor and CRT monitor with recording.
- The system was configured in typical fashion (as a customer would normally use it) for testing.

4.5 EUT test configuration

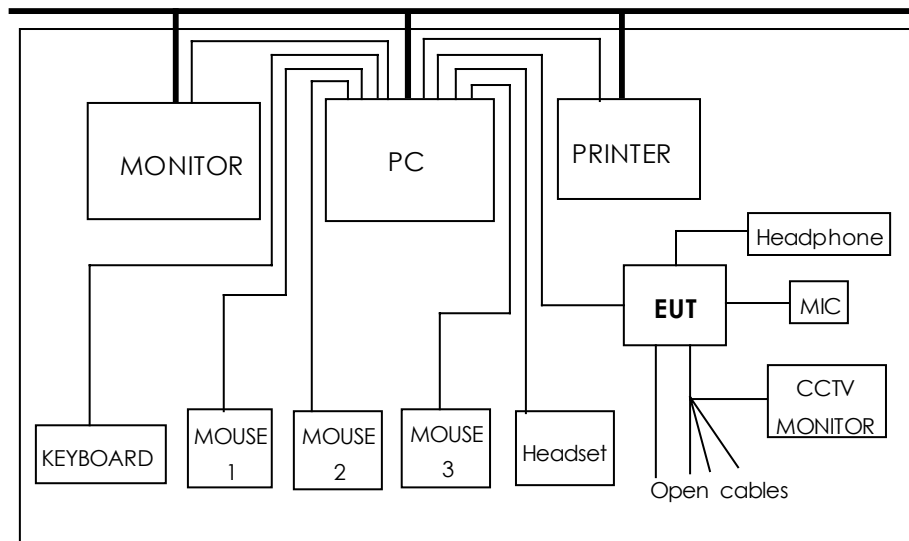

5. Summary of test results

5.1 Modification to the E.U.T.

None

5.2 Standards & results

FCC Part 15 Subpart B (Class B)

ANSI C63.4 – 1992

Test items	Test methods	Result
Conducted emission	ANSI C63.4-1992	Pass
Radiated emission	ANSI C63.4-1992	Pass

6. Test results

6.1 Conducted emission

6.1.1 Measurement procedure

Mains

The measurements were performed in a shielded room.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

The rear of tabletop was located 0.4m to the vertical conducted plane. All other surfaces of tabletop were at least 0.8m away from any other grounded conducting surface.

Cables were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Each EUT power lead, except ground (safety) lead, was individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral were measured.

6.1.2 Used equipments

Equipment	Model	Serial no.	Makers	Next Cal. date	Used
Test receiver	ESHS 10	843276/003	R&S	03.05.08	X
L.I.S.N.	L2-16A	0000J10705	PMM	04.04.03	X
	L3-32A	0120J20305	PMM	04.04.03	X
Test site	Shield room	-	-	-	X

6.1.3 Measurement uncertainty

Conducted emission measurement : ± 2.4 (K=2)

6.1.4 Test data

Frequency	Correction		Line	Quasi-peak			Average		
	Factor			Limit	Reading	Result	Limit	Reading	Result
[MHz]	LISN	Cable		[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
3.430	0.2	0.1	N	56.00	36.53	36.83	46.00	36.53	36.83
4.420	0.2	0.1	N		36.79	37.09		36.79	37.09
4.550	0.2	0.1	N		37.32	37.62		37.32	37.62
10.620	0.2	0.3	H	60.00	39.80	40.30	50.00	34.91	35.41
16.500	0.3	0.2	N		41.30	41.80		41.30	41.80
16.630	0.3	0.2	H		41.25	41.75		30.82	31.32
17.090	0.3	0.2	N		41.83	42.33		34.24	34.74
17.160	0.3	0.2	N		41.75	42.25		41.75	42.25

- Note. QP = Quasi-Peak, AV= Average
- <5 : mean less than 5 dB
- Loss = LISN Loss + Cable Loss
- Measurement time : 1 s

6.1.5. Result

Complied

6.2 Radiated emission

6.2.1 Measurement procedure

A pretest was performed at 3m distance in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

Cables were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Test receiver	ESVS10	827864/006	R&S	03.05.08	X
Spectrum	SA-9270A	01080005	LG Innotek	03.05.10	X
Biconnical antenna	SAS-540	560	A.H.System	03.04.04	X
Log-Periodic antenna	SAS-510-2	1035	A.H.System	03.04.04	X
Antenna Mast	A109	N/A	DEAIL	-	X
Turn Table	TS14	N/A	DEAIL	-	X
10m OATS	-	-	EMC Compliance	-	X

6.2.3 Measurement uncertainty

Radiated Emission measurement : (K=2)

30-300 MHz ; 3 m: ± 3.67 , 10 m: ± 4.4

300-1000 MHz ; 3 m: $+4.6/-2.92$, 10 m: $+2.94/-2.88$

6.2.4 Test data

Frequency	Reading	Pol.	Height	Angle	Correction		Limits	Result	Margin
					Factor				
[MHz]	[dBuV]		[m]		Antenna	Cable	[dBuV/m]	[dBuV/m]	[dB]
32.12	12.3	V	1.4	65	12.54	1.58	30.0	26.42	3.58
133.89	8.2	V	1.0	102	11.40	2.75		22.34	7.66
170.10	9.6	H	4.0	294	12.75	3.16		25.48	4.52
190.47	7.2	H	3.7	256	13.30	3.40		23.90	6.10
196.02	8.4	H	4.0	248	13.48	3.52		25.40	4.60
210.24	6.4	H	4.0	302	13.98	3.62		24.00	6.00
255.56	9.8	H	3.5	296	15.76	3.71	37.0	29.27	7.73
342.01	14.6	H	3.5	264	14.02	4.39		33.01	3.99
442.00	7.9	V	2.4	35	16.15	5.30		29.36	7.64
542.02	7.6	V	1.1	25	18.71	5.95		32.26	4.74
639.97	6.2	H	2.7	235	19.65	6.61		32.46	4.54
880.13	3.4	H	1.0	324	21.78	8.12		33.30	3.70

* Receiving Antenna Mode : *Horizontal, Vertical*

* 10 m OATS

* <5 : mean less than 5dB

* Note : Reading = Test Receiver meter,

* P= Polarization → POL H = Horizontal, POL V = Vertical


* Result = Field Strength (Antenna factor + Cable factor + Reading)

6.2.5. Result

Complied

7. Test Graph

Conducted Emission test graph

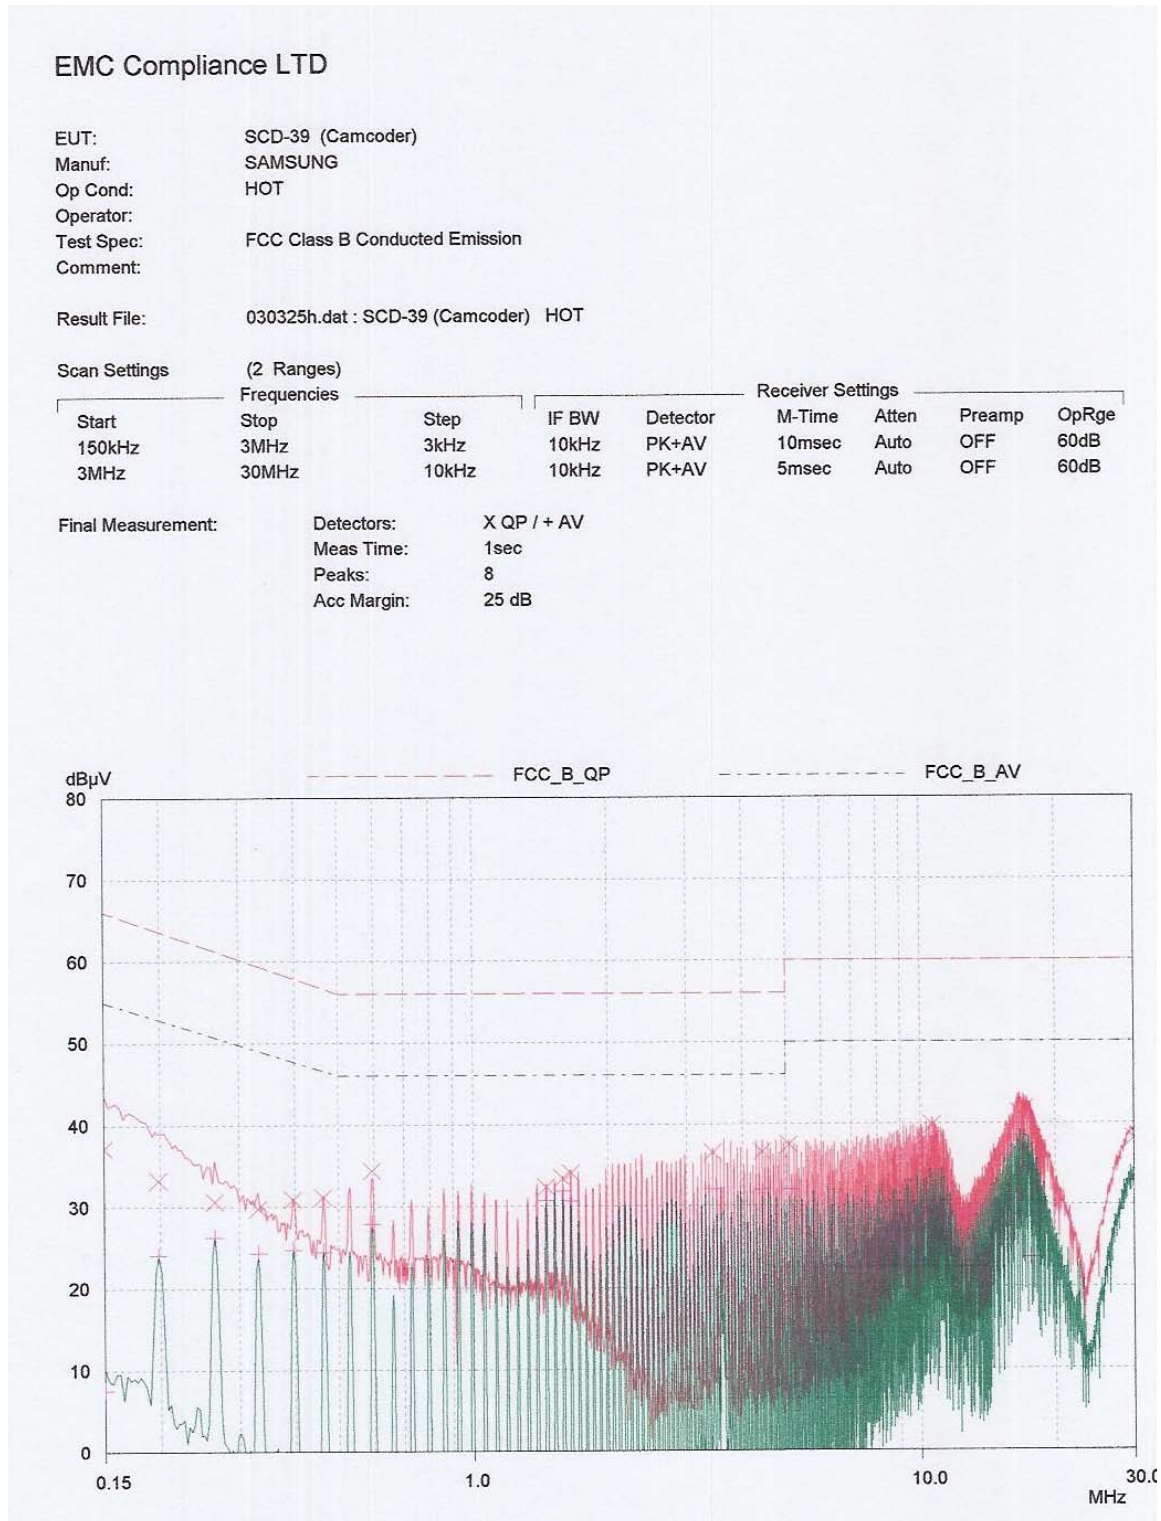

EMC Compliance LTD

EUT: SCD-39 (Camcorder)
Manuf: SAMSUNG
Op Cond: N
Operator:
Test Spec: FCC Class B Conducted Emission
Comment:

Result File: 030325n.dat : SCD-39 (Camcorder) N

Scan Settings (2 Ranges)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

