



Dates of Tests: December 06~13, 2010

Test Report S/N: LR5001110121

Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

A3LUM100

APPLICANT

Samsung Electronics Co., Ltd.

Equipment Class	:	Ultra Wideband Transmitter (UWB)
Manufacturing Description	:	Wireless USB mini-card module
Manufacturer	:	Samsung Electronics Co., Ltd.
Model name	:	UM100
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15 Subpart F ; ANSI C-63.4-2003
Frequency Range for BG1	:	3168MHz ~ 4752MHz
Frequency Range for BG3	:	6336MHz ~ 7920MHz
Frequency Range for BG6	:	7392MHz ~ 8976MHz
Max. Output Power	:	Max 86.67dBuV - Radiated
Data of issue	:	December 13, 2010

This test report is issued under the authority of:

The test was supervised by:



Kyung-Taek LEE, Technical Manager



Hyun-Chae You, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S	3
2. INFORMATION'S ABOUT TEST ITEM	4
3. TEST REPORT	6
3.1 SUMMARY OF TESTS	6
3.2 TECHNICAL CHARACTERISTICS TEST	7
3.2.1 AC CONDUCTED EMISSIONS	7
3.2.2 Operational limitations	8
3.2.3 UWB Bandwidth Measurement	9
3.2.4 Radiated Emissions Measurement	12
3.2.5 Radiated Emissions in GPS Bands Measurement	26
3.2.6 Peak Emissions within a 10MHz Bandwidth Measurement	33
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	35

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2011-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2011-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2012-05-14	IC filing

2. Information's about test item

2-1 Client & Manufacturer

Company name : Samsung Electronics Co.,Ltd.
Address : San #24 Nongseo-Dong, Giheung-Gu, Yongin-City,
Gyeonggi-Do 446-711 Korea
Tel / Fax : TEL +82-31-209-6546 FAX +82-31-209-3131

2-2 Equipment Under Test (EUT)

Trade name : Wireless USB mini-card module
FCC ID : A3LUM100
Model name : UM100
Serial number : Identical prototype
Date of receipt : December 06, 2010
EUT condition : Pre-production, not damaged
Antenna type : PCB Antenna
Frequency Range for BG1 : 3168MHz ~ 4752MHz
Frequency Range for BG3 : 6336MHz ~ 7920MHz
Frequency Range for BG6 : 7392MHz ~ 8976MHz
RF output power : Max 86.67dBuV - Radiated
Type of Modulation : MB-OFDM
Power Source : 3.3Vdc by Main system

2-3 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	PP17L	N/A	DELL

2-4 Description of Test modes

Band Group	MODE	SUB-BAND	Frequency (MHZ)
1	1	1	3432
	2	2	3960
	3	3	4488
	4	1,2,3	3432, 3960, 4488
3	5	1	6600
	6	2	7128
	7	3	7656
	8	1,2,3	6600, 7128, 7656
6	9	1	7656
	10	2	8184
	11	3	8712
	12	1,2,3	7656, 8184, 8712

NOTE: After pre-testing each mode, the combination mode (band group 1, 3, 6) was the worst situation and only the data was presented in the following sections
<Except for UWB Bandwidth Measurement and Peak Emission Measurement>.

EUT configure mode	Applicable to				Description
	RE<1G	RE≥1G	UB	PE	Frequency (MHZ)
4	√	√	√	√	3432, 3960, 4488 for BG1
8	√	√	√	√	6600, 7128, 7656 for BG3
12	√	√	√	√	7656, 8184, 8712 for BG6

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
 UB:UBW Bandwidth **PE**: Peak Emission

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.207	AC Conducted Emissions	EN 55022	Line Conducted	NA ^{note3}
15.519(a)	Operational Limitations	-	Radiated	C
15.519(b)	UWB Bandwidth	between 3100MHz to 10,600MHz		C
15.519(c)/ 15.209	Radiated Emissions	Refer to the 3.2.4		C
15.519(d)	Radiated Emissions in GPS Bands	19.44dBuV/m at 1M		C
15.519(e)	Peak Emissions within a 50MHz Bandwidth	90.77dBuV/m at 1M		C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: This device is only operated by DC

→ Antenna Requirement

The Samsung Electronics Co.,Ltd. FCC ID : A3LUM100 unit complies with the requirement of §15.203.
The antenna type is PCB antenna. refer to the external photo.

The sample was tested according to the following specification:
FCC Parts 15F ; ANSI C-63.4-2003

3.2 Technical Characteristics Test

3.2.1 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data:

Not Applicable (-This product is operated by DC)

Minimum Standard: FCC Part 15.207(a)/EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

3.2.2 Operational limitations

Measurement Data:

Operation Restriction	Informed the applicant	Not applicable	User Manual informed	Passed
■ 47 CFR FCC Part 15 Subpart F 15.519(a)				
UWB devices operating under the provisions of this section must be hand held, i.e., they are relatively small devices that are primarily hand held while being operated and do not employ a fixed infrastructure. [A transmitter that had been connected to portable device e.g. Laptop PC ...and be considered sufficient to demonstrate not a fixed infrastructure application.]	■			■
(1) The radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver				
A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting. [The applicant has been informed of this requirement and instruct the caution in user manual.]	■		■	■
(2) Outdoor mounted antennas				
The use of antennas mounted on outdoor structures, e.g., antennas mounted on the outside of a building or on a telephone pole, or any fixed outdoors infrastructure is prohibited. Antennas may be mounted only on the hand held UWB device. [The applicant has been informed of this requirement.]	■			■
(5) Indoors or Outdoors				
UWB devices operating under the provisions of this section may operate indoors or outdoors. [The applicant has been informed of this requirement.]	■			■

3.2.3 UWB Bandwidth Measurement

Test Procedure:

1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. The horn receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
3. For maximum emission amplitude, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading and was used to determine the frequency at which the highest radiated emission occurs, f_m . Next, the points that are 10dB or more below the highest radiated emission were observed in a search from f_m in both the lower and higher frequency direction in the measured frequency EIRP graph, they are denoted as f_L and f_H , respectively. The UWB bandwidth is the difference between f_L and f_H .
4. The individual UWB bandwidths were measured for each BAND_ID (nb) of the UWB spectrum. Both horizontal and vertical polarizations were taken into account to determine the full UWB BW on the maximized (in azimuth and elevation) signals.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 10 MHz

VBW = 10 MHz (VBW $\geq$ RBW)

Trace = max hold

Sweep = auto

Detector function = peak

Measurement Data:

Test mode	Frequency (MHz)	Test Results	
		limit	Result
4	3432, 3960, 4488	between 3100 MHz and 10,600 MHz	Complies
8	6600, 7128, 7656	between 3100 MHz and 10,600 MHz	Complies
12	7656, 8184, 8712	between 3100 MHz and 10,600 MHz	Complies


- See next pages for actual measured spectrum plots.

Minimum Standard:


Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth. The UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_m . Center frequency. The center frequency, f_c , equals $(f_H + f_L)/2$. Fractional bandwidth. The fractional bandwidth equals $2(f_H - f_L)/(f_H + f_L)$. The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

Measurement Data:


Test mode 4

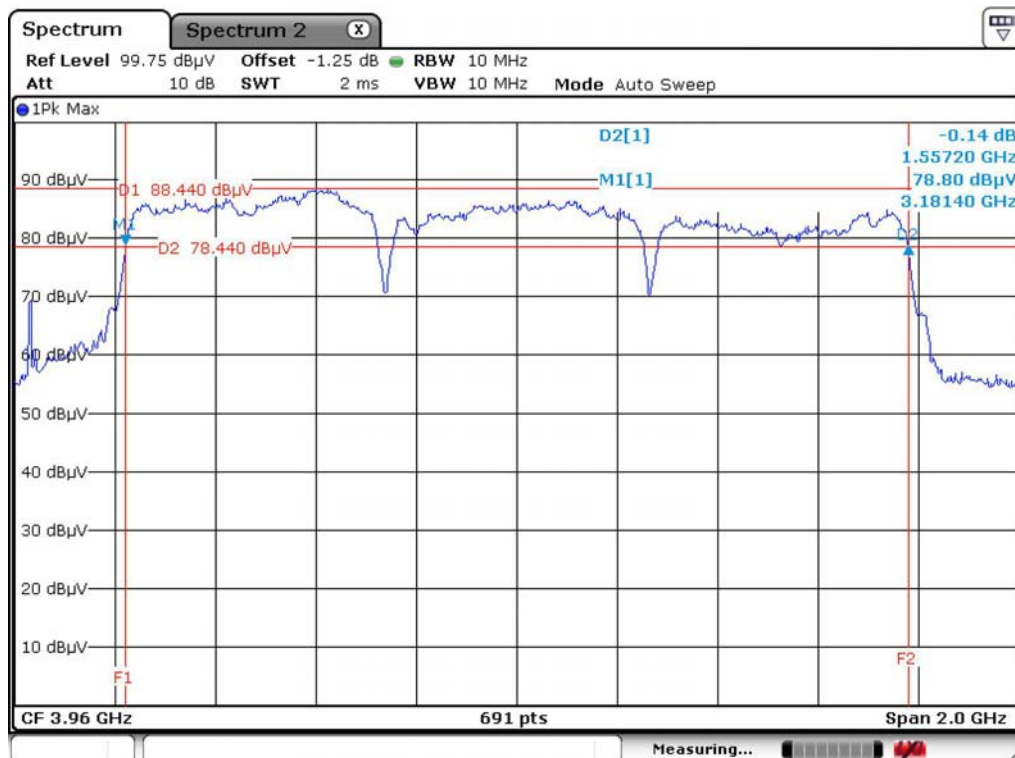

Test mode 8

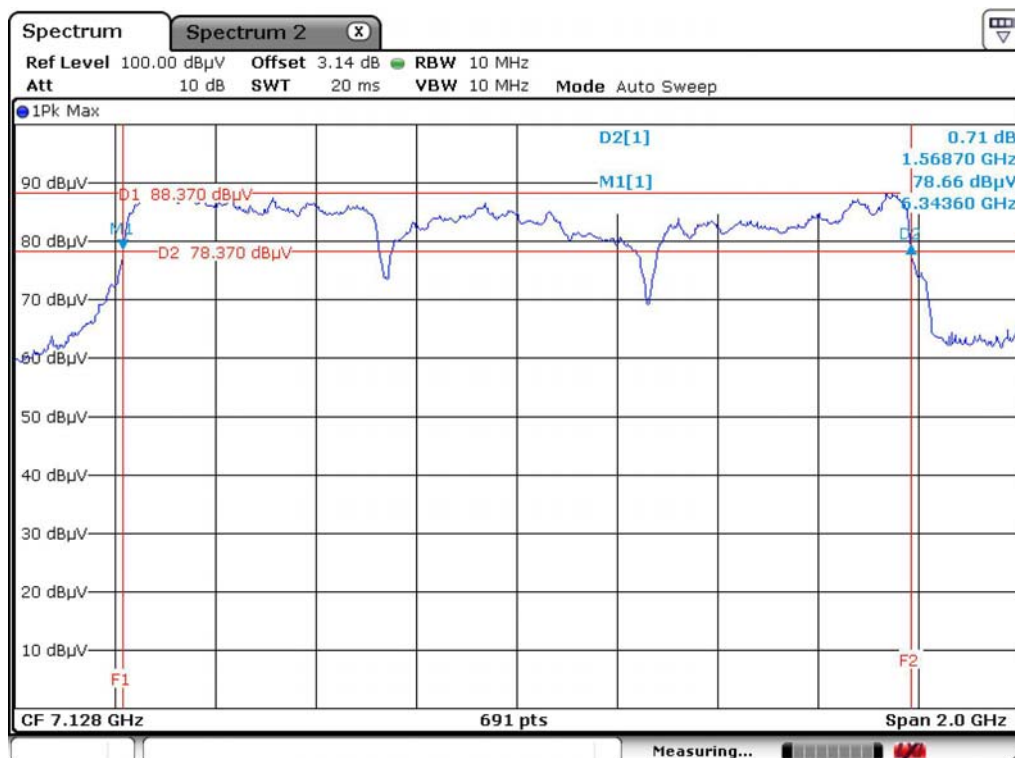

Test mode 12

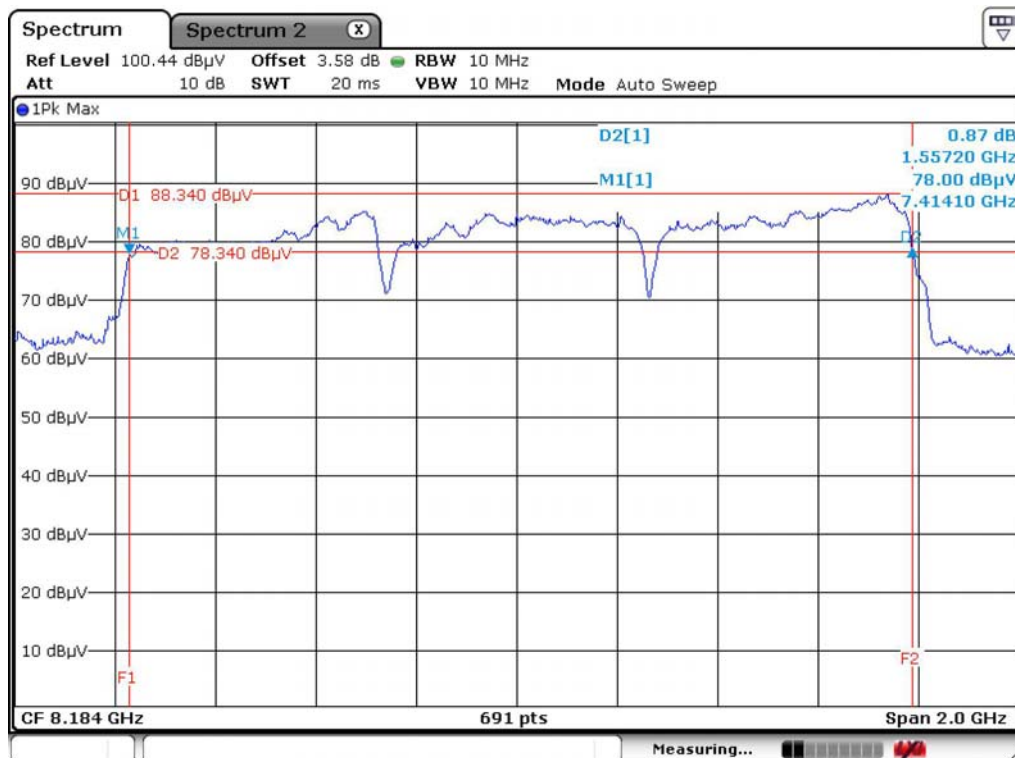

3.2.4 Radiated Emissions Measurement

Procedure:

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable for measured the frequency range below 960 MHz and antenna tower was placed below 1 meters far away from the turntable for measured the frequency range above 960 MHz
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. The measurements made over the frequency range from 9 kHz to 960 MHz were maximized using an EMI receiver with peak detector capabilities. Measurements of the radiated field from 9 kHz to 960 MHz were made with the measurement antenna located a distance of 3 meters from the EUT. If the emissions level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
6. Measurements above 960 MHz were maximized using a spectrum analyzer with RMS detector capabilities. A spectrum analyzer was used for the final measurements utilizing an RMS detector at the frequencies with the largest amplitudes. The prescribed RBW of 1 MHz and VBW of 3 MHz, and a1 msec averaging time were used for these measurements. Measurements of the radiated field at frequencies above 960 MHz were made with the measurement antenna located a distance of below 1 meter from the EUT.
7. The spectrum between 9 kHz and 960 MHz contained no intentional radiation and lies below the limits. The spectrum from 960MHz to18GHz contained intentional UWB signals between 3100 MHz and 10600 MHz and lie below the limits. No other emissions above 10600 MHz were detected. The maximum frequency tested was 40 GHz.
8. Per 47 CFR, Part 15, Subpart F, §15.521© (§15.209) all digital emissions from the transmitter not intended to be radiated from the antenna port meet the 15.209 subpart C limits.
9. Additional measurements in the 960 MHz to 40 GHz range were performed to determine the nature of all unintentional emissions in this span. Conducted antenna port measurement and terminated antenna port measurement were done in the 960 MHz to 8 GHz range show that all noise peaks have the same frequency and polarization and are determined to be emission from the digital circuit and are not radiated from the antenna.

The spectrum analyzer is set to:

frequency = 1000MHz ~ 10th carrier harmonic or 40GHz

RBW = 1MHz

Span = auto

VBW = 3MHz (VBW ≥ RBW)

Sweep = 1 msec averaging time were used for these

Detector function = RMS or Average

measurement frequencies

Minimum Standard:

The radiated emissions at or below 960 MHz from a device shall not exceed the emission levels in section 15.209(a) limit below.

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Freq. (MHz)	EIRP (dBm)	E- Field (dBμV/m) at 3m	E- Field (dBμV/m) at 1m
960-1610	-75.3	19.9	29.44
1610-1990	-63.3	31.9	41.44
1990-3100	-61.3	33.9	43.44
3100-10600	-41.3	53.9	63.44
10600 above	-61.3	33.9	43.44

Note 1: This may be converted to a peak field strength level at 3 meters using $E(\text{dB}\mu\text{V/m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$.

Note 2: Above 960MHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]}) (\text{dB})$; Limit line = specific limits (dBμV) + distance extrapolation factor [9.54 dB].

From 47 CFR Section 15.521(c): Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in Section 15.209 of this chapter, rather than the limits specified in this subpart, provided it can be clearly demonstrated that those emissions from the UWB device are due solely to emissions from digital circuitry contained within the transmitter and that the emissions are not intended to be radiated from the transmitter's antenna. Emissions from associated digital devices, as defined in Section 15.3(k) of this chapter, e.g., emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission, are subject to the limits contained in Subpart B of Part 15 of this chapter.

The radiated emissions from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

Freq. (MHz)	E- Field (dBμV/m) at 3m		E- Field (dBμV/m) at 1m	
	Quasi Peak			
216 ~ 960	46.00		54.54	
960 ~ 1000	54.00		63.54	
	Peak	Average	Peak	Average
Above 1000	74.00	54.00	83.54	63.54

Measurement Data: Test Data 4 is worst case (f<1GHz) for BG 1



243 Jubug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: CA750

TEST MODE: UWB_BG1 mode


Temp Humi : 4 / 35

Tested by: PARK.H.W

Data: 21

Level (dBuV/m)

Date: 2010-12-13

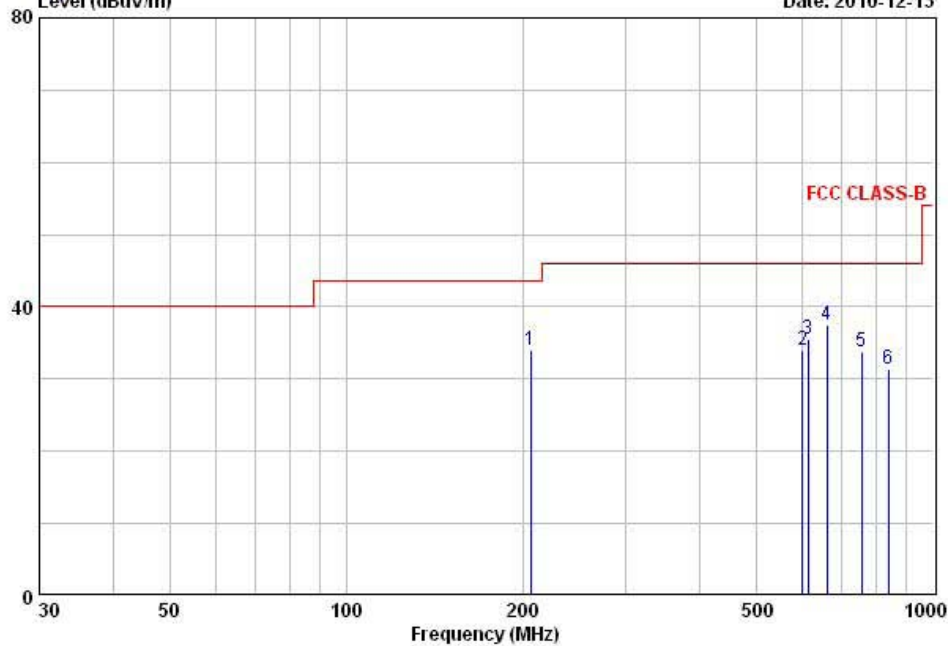

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 206.30	46.10	-12.18	33.92	43.50	9.58	100	132	VERTICAL
2 600.00	36.70	-2.65	34.05	46.00	11.95	108	172	HORIZONTAL
3 612.00	38.00	-2.44	35.56	46.00	10.44	124	159	HORIZONTAL
4 660.00	39.20	-1.64	37.56	46.00	8.44	132	165	HORIZONTAL
5 756.00	33.80	0.03	33.83	46.00	12.17	103	241	HORIZONTAL
6 840.00	30.30	1.10	31.40	46.00	14.60	100	117	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Measurement Data: Test Data 8 is worst case (f<1GHz) for BG 3



243 Jubug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: CA750

TEST MODE: UWB_BG3 mode


Temp Humi : 4 / 35

Tested by: PARK.H.W

Data: 22

Level (dBuV/m)

Date: 2010-12-13

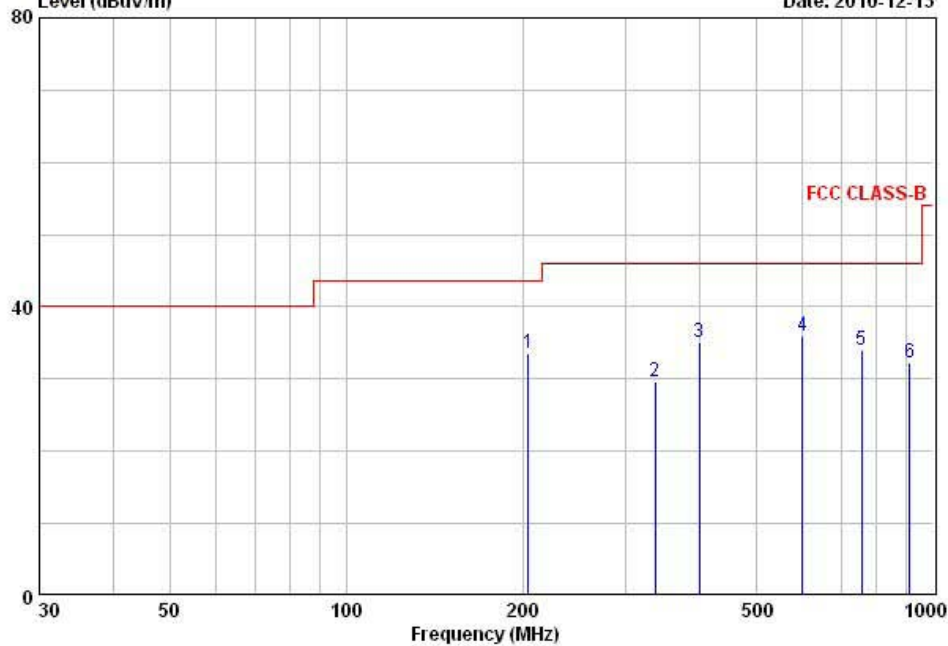

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	204.33	45.80	-12.28	33.52	43.50	9.98	100	126	VERTICAL
2	336.00	37.40	-7.81	29.59	46.00	16.41	123	169	VERTICAL
3	400.00	41.90	-6.73	35.17	46.00	10.83	149	28	VERTICAL
4	600.00	38.60	-2.65	35.95	46.00	10.05	100	79	VERTICAL
5	756.00	34.00	0.03	34.03	46.00	11.97	100	195	HORIZONTAL
6	912.00	30.50	1.72	32.22	46.00	13.78	100	135	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Measurement Data: Test Data 12 is worst case (f<1GHz) for BG 6



243 Jubug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: CA750

TEST MODE: UWB_BG6 mode


Temp Humi : 4 / 35

Tested by: PARK.H.W

Data: 23

Level (dBuV/m)

Date: 2010-12-13

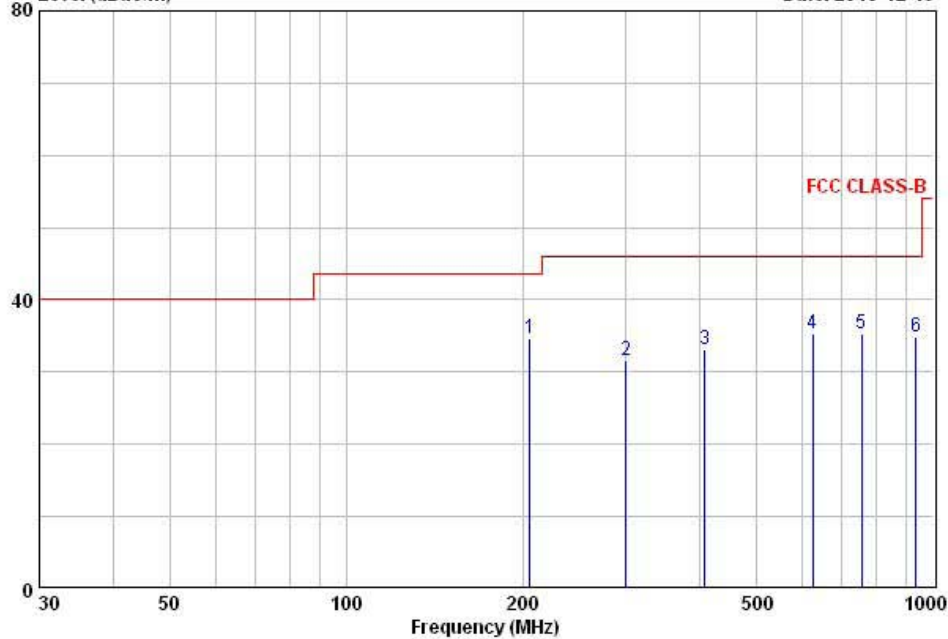

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	205.50	46.90	-12.22	34.68	43.50	8.82	100	137 VERTICAL
2	300.00	40.20	-8.51	31.69	46.00	14.31	100	198 VERTICAL
3	408.00	39.80	-6.60	33.20	46.00	12.80	137	17 VERTICAL
4	624.00	37.60	-2.23	35.37	46.00	10.63	100	154 VERTICAL
5	756.00	35.20	0.03	35.23	46.00	10.77	100	187 HORIZONTAL
6	936.00	32.80	2.09	34.89	46.00	11.11	100	167 HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Measurement Data: Test Data 4 is worst case ($f > 1\text{GHz}$) for BG 1

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
3432.00	52.58	-2.67	63.44	49.91	13.53
3960.00	53.25	-2.67	63.44	50.58	12.86
4488.00	53.34	-2.67	63.44	50.67	12.77
-	-	-	-	-	-

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
3432.00	63.00	-2.67	63.44	60.33	3.11
3960.00	62.58	-2.67	63.44	59.91	3.53
4488.00	62.76	-2.67	63.44	60.09	3.35
-	-	-	-	-	-

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain

Measurement Data: Test Data 8 is worst case ($f > 1\text{GHz}$) for BG 3

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
6600.00	49.52	1.56	63.44	51.08	12.36
7128.00	49.28	1.56	63.44	50.84	12.60
7656.00	49.34	1.56	63.44	50.90	12.54
-	-	-	-	-	-

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
6600.00	58.15	1.56	63.44	59.71	3.73
7128.00	58.88	1.56	63.44	60.44	3.00
7656.00	58.46	1.56	63.44	60.02	3.42
-	-	-	-	-	-

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain

Measurement Data: Test Data 12 is worst case (f>1GHz) for BG 6

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
7656.00	49.21	2.81	63.44	52.02	11.42
8184.00	48.75	2.81	63.44	51.56	11.88
8712.00	48.64	2.81	63.44	51.45	11.99
-	-	-	-	-	-

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
7656.00	57.50	2.81	63.44	60.31	3.13
8184.00	57.46	2.81	63.44	60.27	3.17
8712.00	57.51	2.81	63.44	60.32	3.12
-	-	-	-	-	-

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain

Measurement Data: Test Data 4 is worst case (f<1GHz) for digital circuitry for BG 1

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
984.00	54.34	-14.31	63.54	40.03	23.51

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
984.00	52.25	-14.31	63.54	37.94	25.60

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain
- Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Measurement Data: Test Data 8 is worst case (f<1GHz) for digital circuitry for BG 3

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
984.00	53.95	-14.31	63.54	39.64	23.90

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
984.00	52.28	-14.31	63.54	37.97	25.57

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain
- Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Measurement Data: Test Data 12 is worst case (f<1GHz) for digital circuitry for BG 6

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
984.00	54.58	-14.31	63.54	40.27	23.27

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M					
Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
984.00	53.55	-14.31	63.54	39.24	24.30

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain
- Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Measurement Data: Test Data 4 is worst case ($f > 1\text{GHz}$) for digital circuitry for BG 1

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M									
Frequency [MHz]	Reading [dBuV / m]		Correction Factor [dB / m]	Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	PK	AV		PK	AV	PK	AV	PK	AV
1608.54	70.34	60.25	-9.55	83.54	63.54	60.79	50.70	22.75	12.84
1656.30	65.56	54.87	-9.55	83.54	63.54	56.01	45.32	27.53	18.22
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M									
Frequency [MHz]	Reading [dBuV / m]		Correction Factor [dB / m]	Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	PK	AV		PK	AV	PK	AV	PK	AV
1608.54	65.21	55.87	-9.55	83.54	63.54	55.66	46.32	27.88	17.22
1656.30	60.58	50.94	-9.55	83.54	63.54	51.03	41.39	32.51	22.15
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain
- Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Measurement Data: Test Data 8 is worst case ($f > 1\text{GHz}$) for digital circuitry for BG 3

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M									
Frequency [MHz]	Reading [dBuV / m]		Correction Factor [dB / m]	Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	PK	AV		PK	AV	PK	AV	PK	AV
1608.54	69.58	60.34	-9.55	83.54	63.54	60.03	50.79	23.51	12.75
1656.30	65.25	55.34	-9.55	83.54	63.54	55.70	45.79	27.84	17.75
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M									
Frequency [MHz]	Reading [dBuV / m]		Correction Factor [dB / m]	Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	PK	AV		PK	AV	PK	AV	PK	AV
1608.54	65.52	55.21	-9.55	83.54	63.54	55.97	45.66	27.57	17.88
1656.30	59.55	50.25	-9.55	83.54	63.54	50.00	40.70	33.54	22.84
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain
- Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

Measurement Data: Test Data 12 is worst case ($f > 1\text{GHz}$) for digital circuitry for BG 6

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M									
Frequency [MHz]	Reading [dBuV / m]		Correction Factor [dB / m]	Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	PK	AV		PK	AV	PK	AV	PK	AV
1608.54	69.52	59.15	-9.55	83.54	63.54	59.97	49.60	23.57	13.94
1656.30	64.85	54.34	-9.55	83.54	63.54	55.30	44.79	28.24	18.75
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M									
Frequency [MHz]	Reading [dBuV / m]		Correction Factor [dB / m]	Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	PK	AV		PK	AV	PK	AV	PK	AV
1608.54	64.25	54.34	-9.55	83.54	63.54	54.70	44.79	28.84	18.75
1656.30	58.76	49.54	-9.55	83.54	63.54	49.21	39.99	34.33	23.55
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

NOTE.

- No other emissions were detected at a level greater than 20dB below limit.
- Correction Factor = Antenna + Cable - Amp. Gain
- Measurements made with 1 MHz RBW/3MHz VBW (RMS detector) at 1m distance. 1 msec averaging time were used for these frequencies per bin point measurements. Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209.

3.2.5 Radiated Emissions in GPS Bands Measurement

Procedure:

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Measurements frequencies were maximized using a spectrum analyzer with RMS detector capabilities. A spectrum analyzer was used for the final measurements utilizing an RMS detector at the frequencies with the largest amplitudes. The prescribed RBW of 10 kHz and VBW of 10 kHz, and a 1 msec averaging time were used for these measurements.
6. Per 47 CFR, Part 15, Subpart F, §15.521© (§15.209) all digital emissions from the transmitter not intended to be radiated from the antenna port meet the 15.209 subpart C limits.

The spectrum analyzer is set to:

frequency = 1164~1240MHz / 1559~1610MHz

RBW = 10KHz

Span = auto

VBW = 10KHz (VBW ≥ RBW)

Sweep = 1 msec averaging time were used for these

Detector function = RMS or Average

measurement frequencies

Minimum Standard:

In addition to the radiated emission limits specified in the table in paragraph 4.5.1 of this report, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz.


Freq. (MHz)	EIRP (dBm)	E- Field (dBμV/m) at 3m	E- Field (dBμV/m) at 1m
1164-1240	-85.3	9.9	19.44
1559-1610	-85.3	9.9	19.44

Note 1: This may be converted to a peak field strength level at 3 meters using $E(\text{dB}\mu\text{V}/\text{m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$.


Note 2: Above 960MHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB); Limit line = specific limits (dBμV) + distance extrapolation factor [9.54 dB].

Measurement Data: 1164-1240MHz for VERTICAL WORST CASE at 1M


Test mode 4 for Conducted antenna port emissions in GPS band

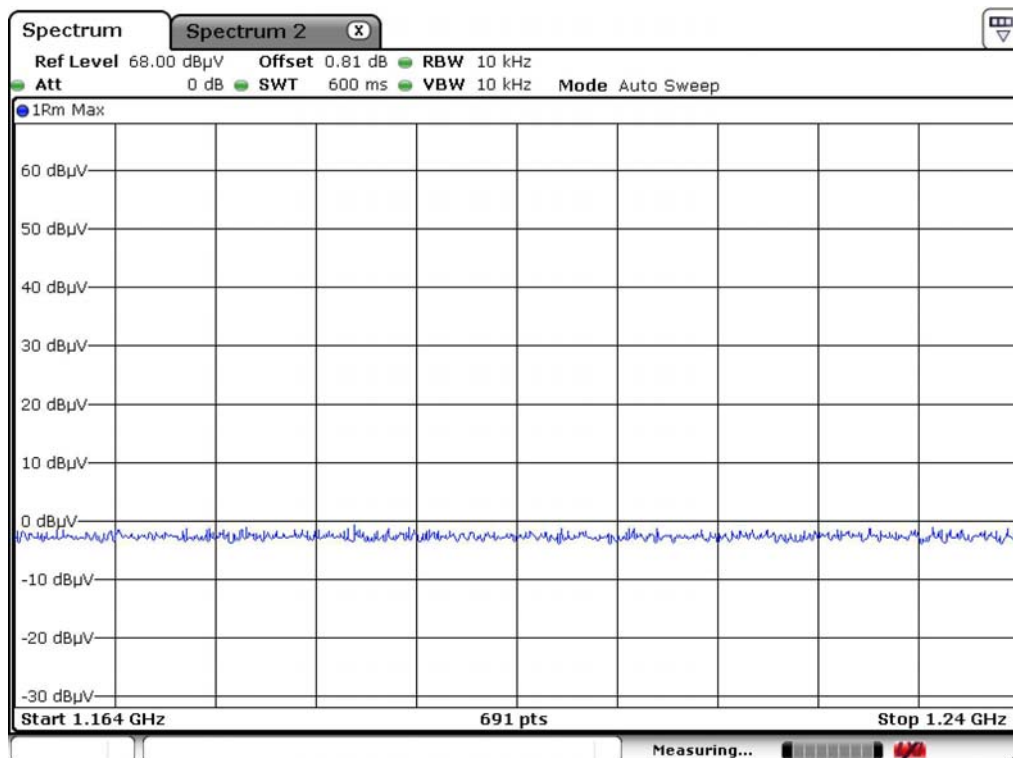


Test mode 4 for Terminated antenna port emissions in GPS band

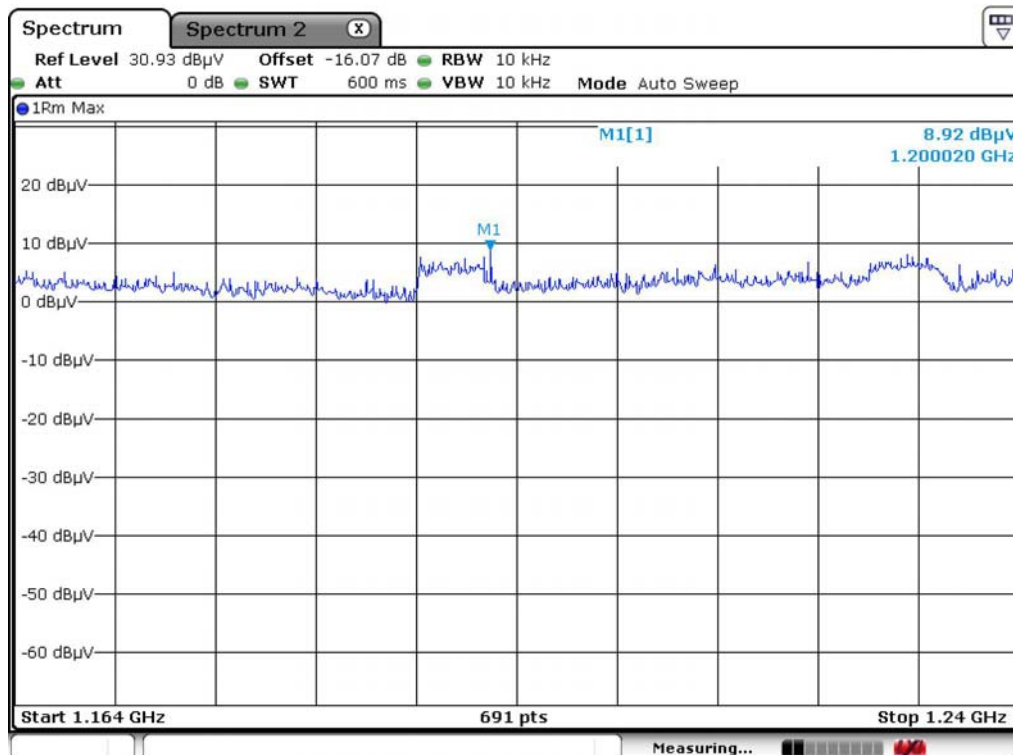


Test mode 8 for Conducted antenna port emissions in GPS band

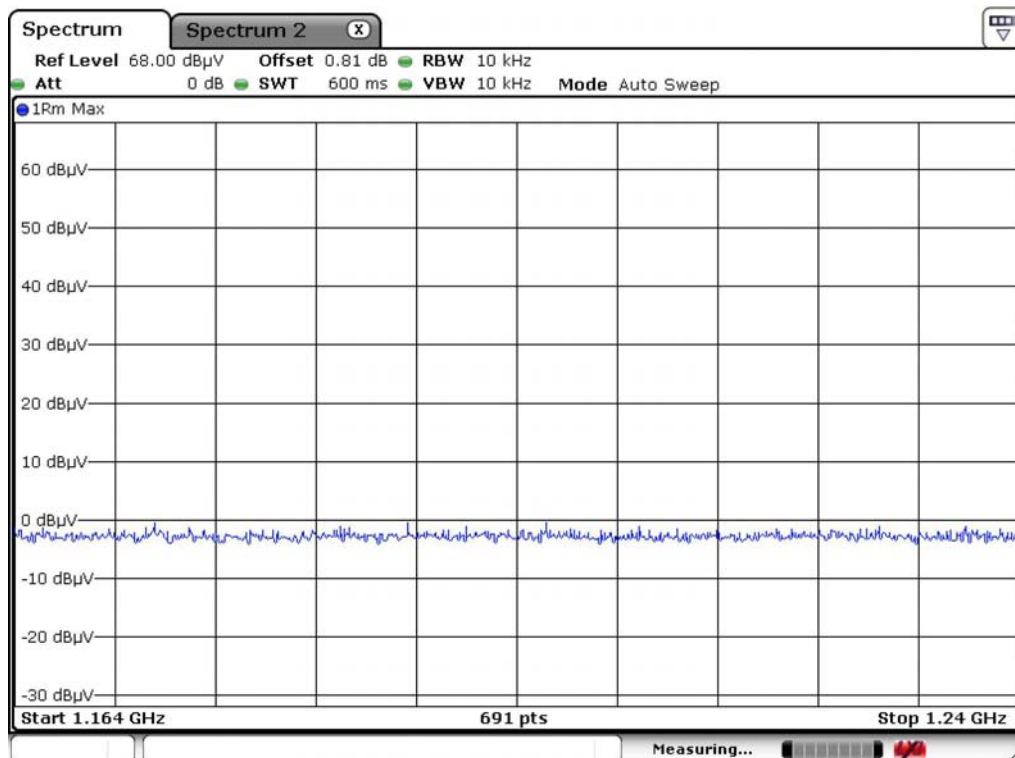


Test mode 8 for Terminated antenna port emissions in GPS band


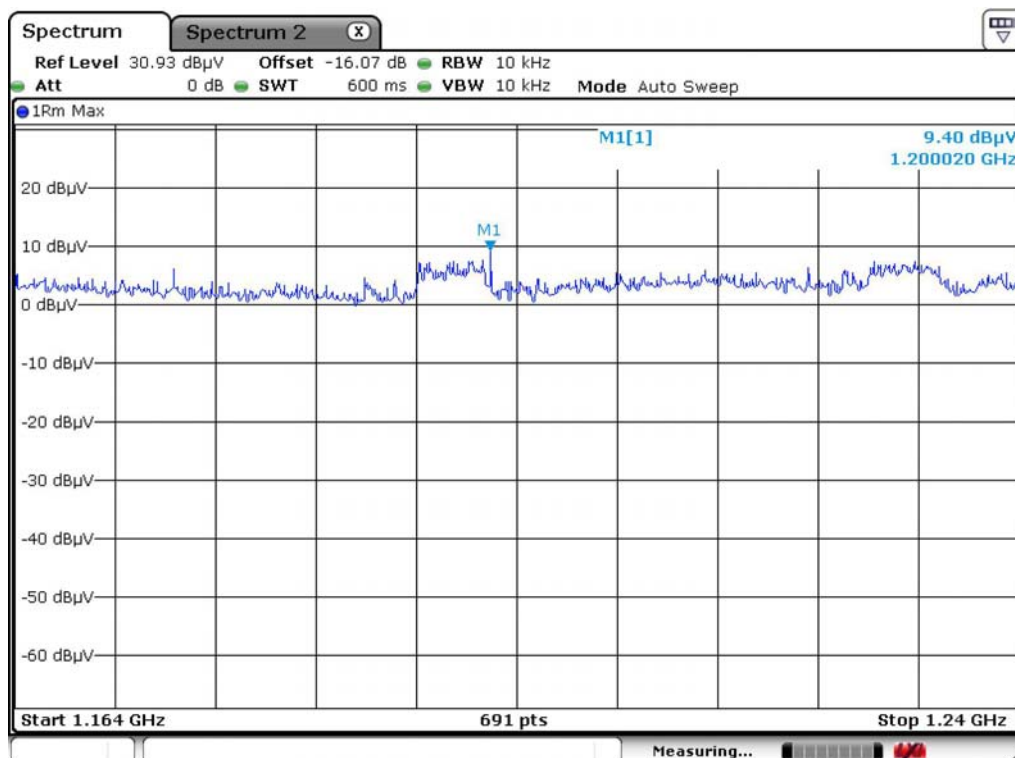


Test mode 12 for Conducted antenna port emissions in GPS band

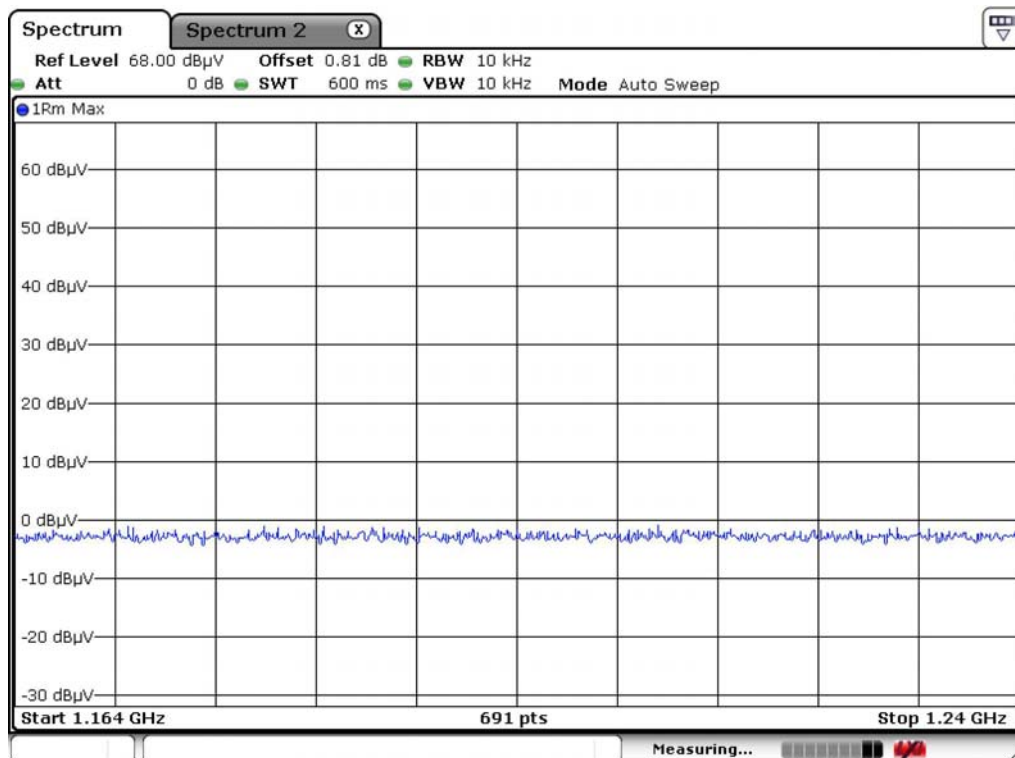


Test mode 12 for Terminated antenna port emissions in GPS band

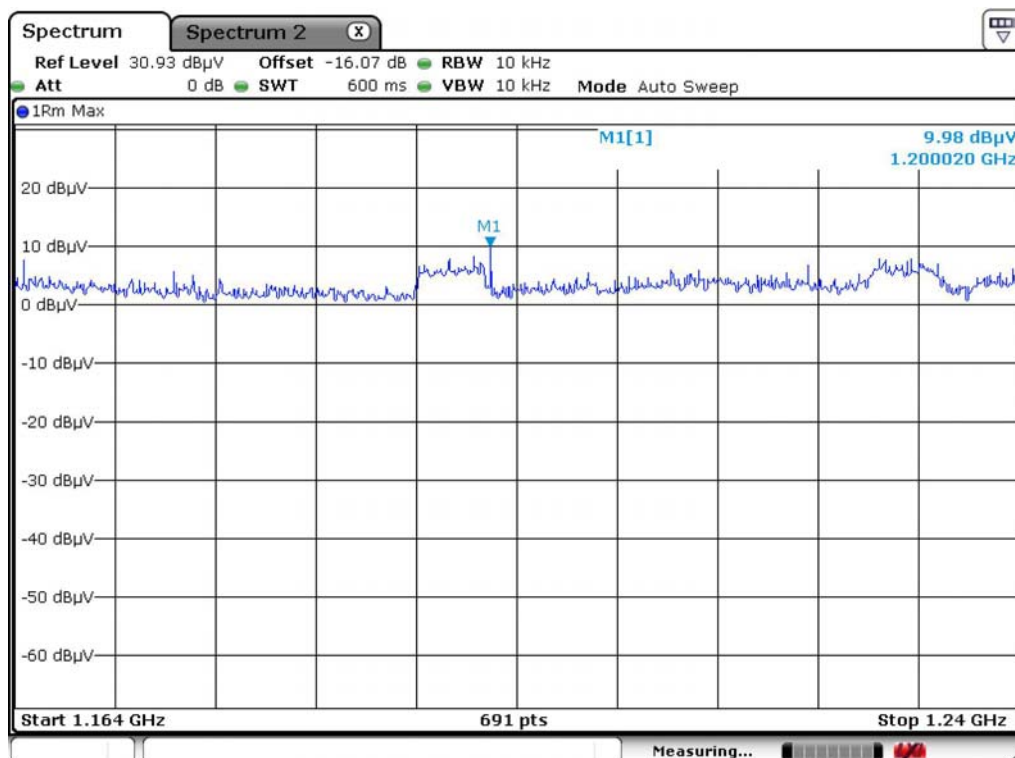


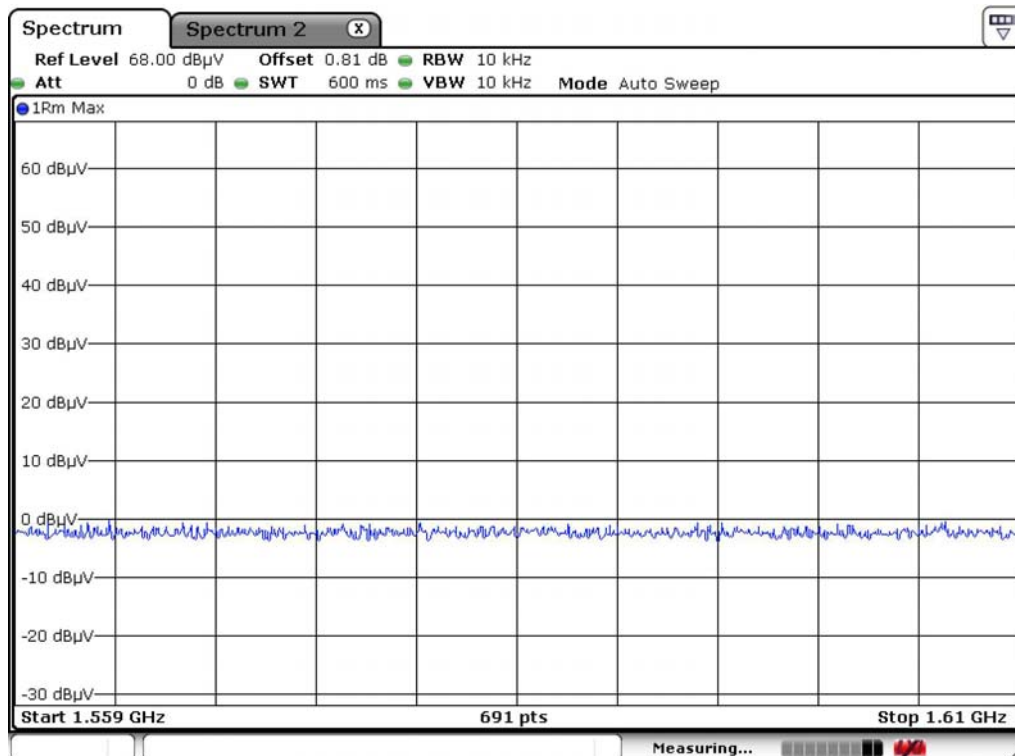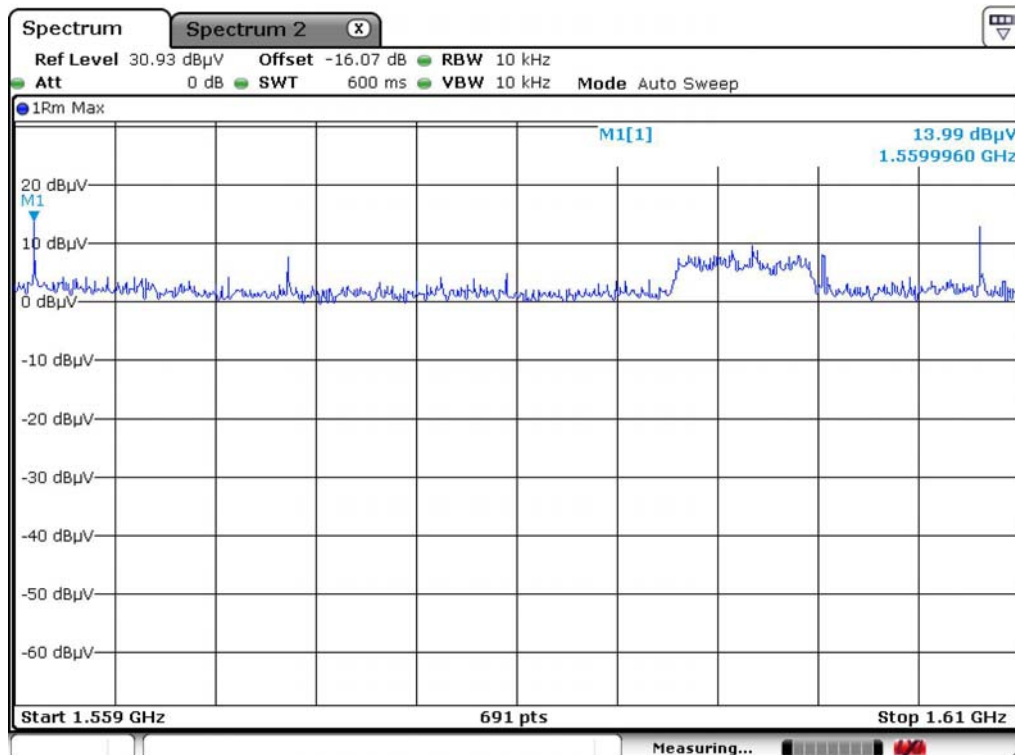Measurement Data: 1559-1610MHz for VERTICAL WORST CASE at 1M**Test mode 4 for Conducted antenna port emissions in GPS band****Test mode 4 for Terminated antenna port emissions in GPS band**


Test mode 8 for Conducted antenna port emissions in GPS band

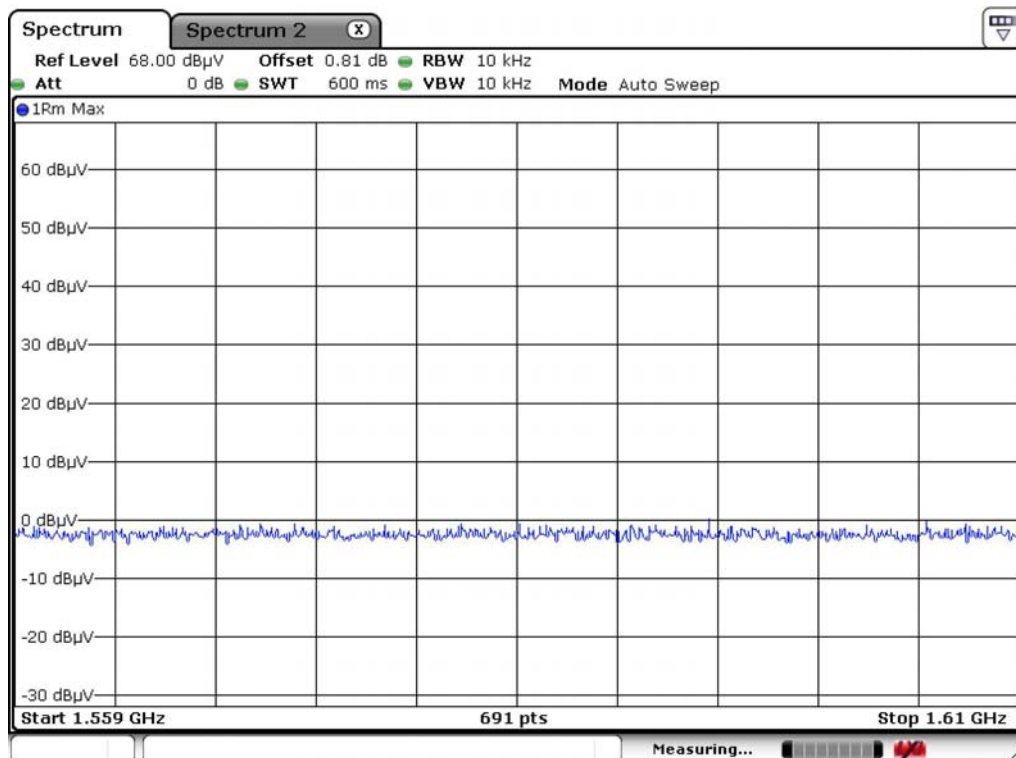


Test mode 8 for Terminated antenna port emissions in GPS band

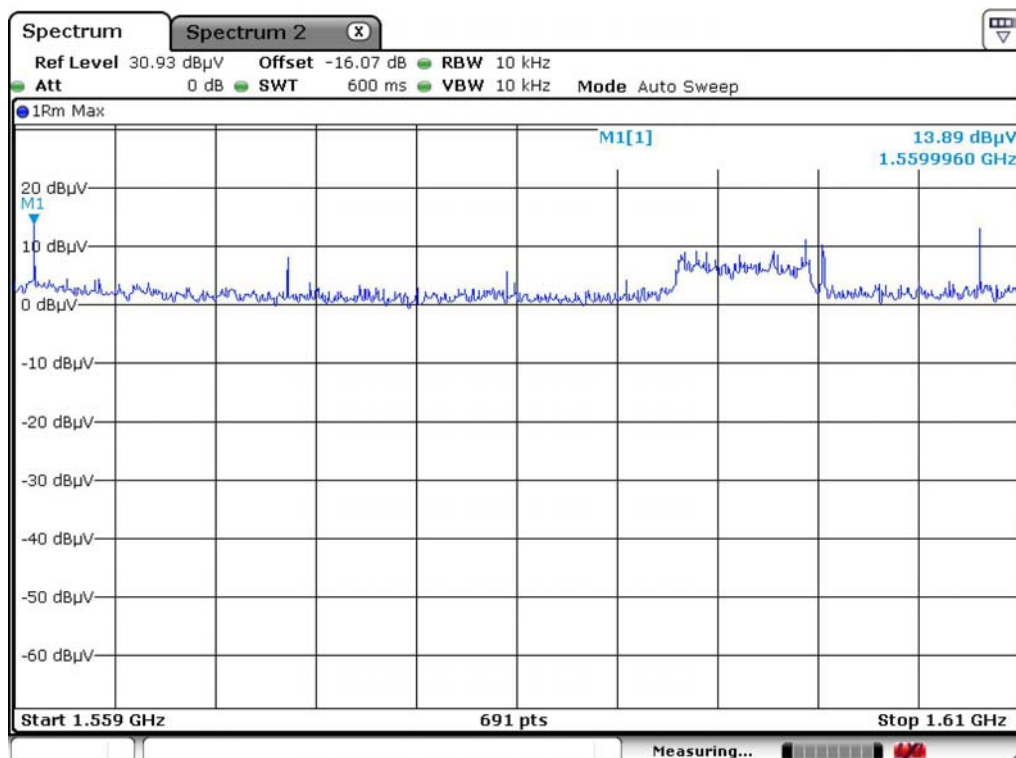

Test mode 12 for Conducted antenna port emissions in GPS band

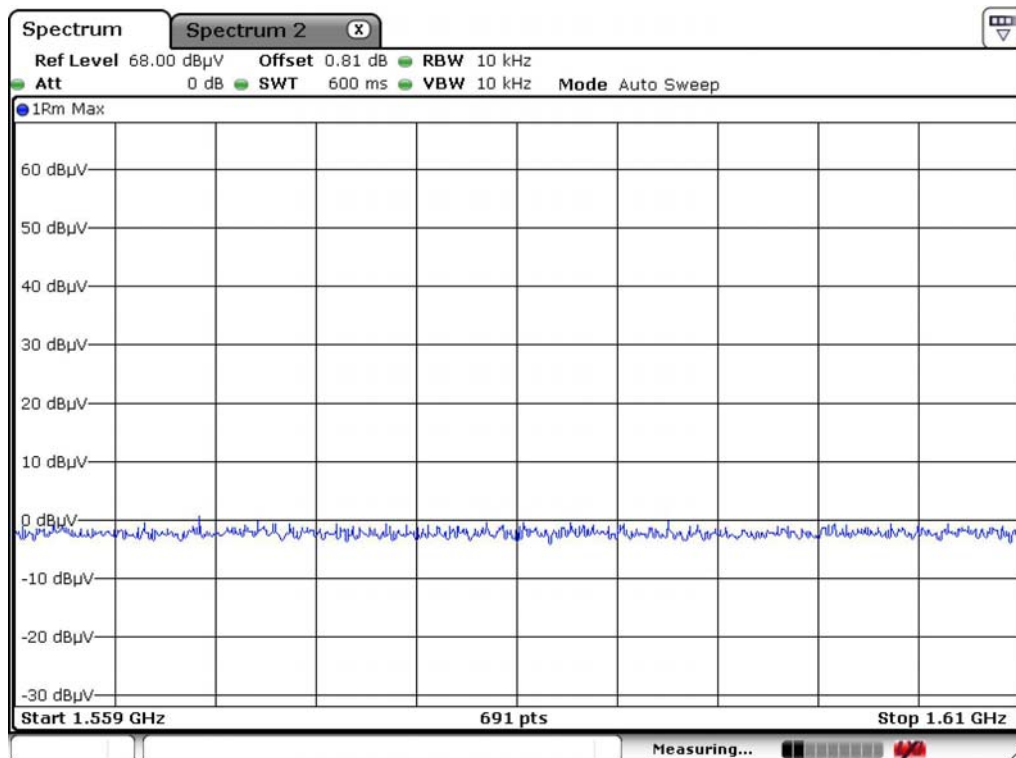

Test mode 12 for Terminated antenna port emissions in GPS band

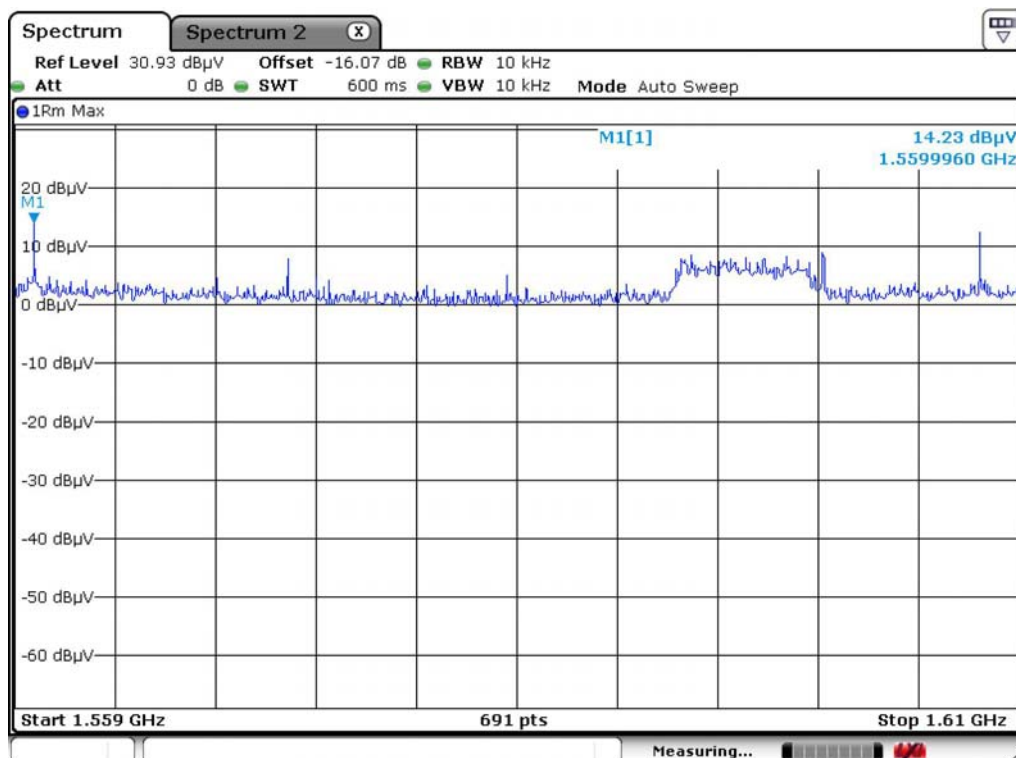

3.2.6 Peak Emissions within a 50MHz Bandwidth Measurement

Procedure:

1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1 meters far away from the turntable.
2. The horn receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
3. For maximum peak emission amplitude, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading and was used to determine the frequency at which the highest radiated emission occurs, f_M .
4. The individual UWB bandwidths were measured for each BAND_ID (nb) of the UWB spectrum. Both horizontal and vertical polarizations were taken into account to determine the full UWB BW on the maximized (in azimuth and elevation) signals.
5. A spectrum analyzer was used for the final measurement utilizing a peak detector at the frequency with the largest amplitude. The prescribed resolution bandwidth of 50 MHz was not supported by the spectrum analyzer. However, when a peak measurement is required, The resolution bandwidth for this measurement was set to 10 MHz, and the measurement was centered on the frequency at which the highest radiated emission occurred, f_M . The video bandwidth was 10 MHz.

The spectrum analyzer is set to:

RBW = 10 MHz

Span = 600 MHz

VBW = 10 MHz

Sweep = auto

Detector function = peak

Trace = max hold

Minimum Standard:

There is a limit on the peak level of the emissions contained within a 10 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, EIRP limit has to be adjusted by the resolution bandwidth ratio of $20\log(RBW/50)$ dB, where RBW is the resolution bandwidth used for the measurement expressed in MHz. In addition, This may be converted to a peak field strength level at 3 meters using $E(\text{dB}\mu\text{V}/\text{m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$. And Peak emission shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1m. Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB); Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB]

Peak EIRP limit dBm (RB / VB : 50MHz)	Peak EIRP limit dBm (RB / VB: 10MHz)	E- Field (dB μ V/m) at 3m (RB / VB: 10MHz)	E- Field (dB μ V/m) at 1m (RB / VB: 10MHz)
0	-13.97	81.23	90.77

Measurement Data:

ANTENNA POLARITY & TEST DISTANCE : VERTICAL AT 1M						
TEST MODE	Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
1	3432.00	88.25	-2.67	90.77	85.58	5.19
2	3960.00	88.06	-2.67	90.77	85.39	5.38
3	4488.00	88.02	-2.67	90.77	85.35	5.42
4	3432.00	88.31	-2.67	90.77	85.64	5.13
5	6600.00	84.15	1.56	90.77	85.71	5.06
6	7128.00	84.52	1.56	90.77	86.08	4.69
7	7656.00	83.15	2.81	90.77	85.96	4.81
8	7128.00	85.02	1.56	90.77	86.58	4.19
9	7656.00	82.34	2.81	90.77	85.15	5.62
10	8184.00	83.25	2.81	90.77	86.06	4.71
11	8712.00	82.00	3.89	90.77	85.89	4.88
12	8184.00	83.86	2.81	90.77	86.67	4.10

ANTENNA POLARITY & TEST DISTANCE : HORIZONTAL AT 1M						
TEST MODE	Frequency [MHz]	Reading [dBuV / m]	Correction Factor [dB / m]	Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
1	3432.00	79.25	-2.67	90.77	76.58	14.19
2	3960.00	79.06	-2.67	90.77	76.39	14.38
3	4488.00	79.11	-2.67	90.77	76.44	14.33
4	3432.00	79.58	-2.67	90.77	76.91	13.86
5	6600.00	75.11	1.56	90.77	76.67	14.10
6	7128.00	75.64	1.56	90.77	77.20	13.57
7	7656.00	74.05	2.81	90.77	76.86	13.91
8	7128.00	76.21	1.56	90.77	77.77	13.00
9	7656.00	73.38	2.81	90.77	76.19	14.58
10	8184.00	74.55	2.81	90.77	77.36	13.41
11	8712.00	73.25	3.89	90.77	77.14	13.63
12	8184.00	74.64	2.81	90.77	77.45	13.32

NOTE.

- Correction Factor = Antenna + Cable - Amp. Gain

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	FSV-30	100757	R&S	Feb-11
2	Spectrum Analyzer	8564E	3551A00410	HP	Oct-11
3	Spectrum Analyzer	8594E	3710A04074	HP	Oct-11
4	Signal Generator	8648C	3623A02597	HP	Mar-11
5	Signal Generator	83711B	US34490456	HP	Mar-11
6	Attenuator (3dB)	8491A	37822	HP	Oct-11
7	Attenuator (10dB)	8491A	63196	HP	Oct-11
8	EMI Test Receiver	ESCI7	100722	R&S	Jun-11
9	Horn Antenna(18 ~ 40GHz)	SAS-574	154	Schwarzbeck	Nov-12
10	Horn Antenna(18 ~ 40GHz)	SAS-574	155	Schwarzbeck	Nov-12
11	RF Amplifier	8447D	2949A02670	HP	Oct-11
12	RF Amplifier	8449B	3008A02126	HP	Mar-11
13	Test Receiver	ESHS10	828404/009	R&S	Mar-11
14	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Apr-11
15	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-11
16	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-11
17	Horn Antenna	3115	00055005	ETS LINDGREN	Mar-11
18	Horn Antenna	BBHA 9120D	9120D122	SCHWARZBECK	Dec-10
19	Dipole Antenna	VHA9103	2116	SCHWARZBECK	Nov-12
20	Dipole Antenna	VHA9103	2117	SCHWARZBECK	Nov-12
21	Dipole Antenna	VHA9105	2261	SCHWARZBECK	Nov-12
22	Dipole Antenna	VHA9105	2262	SCHWARZBECK	Nov-12
23	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Mar-11
24	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-
25	RF Switch	MP59B	6200414971	ANRITSU	-
26	Power Divider	11636A	6243	HP	Oct-11
27	DC Power Supply	6622A	3448A03079	HP	Oct-11
28	Frequency Counter	5342A	2826A12411	HP	Mar-11
29	Power Meter	EPM-441A	GB32481702	HP	Mar-11
30	Power Sensor	8481A	US41030291	HP	Oct-11
31	Audio Analyzer	8903B	3729A18901	HP	Oct-11
32	Modulation Analyzer	8901B	3749A05878	HP	Oct-11
33	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	Oct-11
34	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	Mar-11
35	Stop Watch	HS-3	601Q09R	CASIO	Mar-11
36	LISN	ENV216	100408	R&S	Oct-11
37	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	May-12