

Test of: Samsung Electronics
WEA303e / WEA303i

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: HCTA02-U2 Rev A





Test of Samsung Electronics WEA303e / WEA303i
to
To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: HCTA02-U2 Rev A

Note: this report contains data with regard to DFS testing Output Ports A1, A2, A3 and M1, M2 in the frequency bands 5,250 to 5,350 MHz and 5,470 to 5,725 MHz of the WLAN Access Point.

This report supersedes NONE

Applicant: Samsung Electronics Co., Ltd
129, Samsung-ro, Yeongtong-gu
Suwon-si, Gyeonggi-do
443-742, Republic of Korea

Product Function: WLAN Access Point transmitting voice
and data

Copy No: pdf Issue Date: 13th November 2013

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



TESTING CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 3 of 76

This page has been left intentionally blank



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 4 of 76

TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION	5
RECOGNITION	6
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References	10
2.2. Test and Uncertainty Procedures	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details	12
4. Dynamic Frequency Selection (DFS).....	14
4.1. Test Procedure and Setup	14
4.1.1. <i>Interference Threshold values, Master or Client incorporating In-Service Monitoring</i>	14
4.1.2. <i>DFS Response requirement values</i>	14
4.1.3. <i>Radar Test Waveforms</i>	15
4.1.4. <i>Frequency Hopping Radar Test Waveform</i>	18
4.1.5. <i>Radar Waveform Calibration</i>	18
4.1.6. <i>Weather Radar Band Edge Plots</i>	43
4.1.7. <i>Test Set Up:</i>	19
4.2. Dynamic Frequency Selection (DFS) Test Results	22
4.2.1. <i>UNII Detection Bandwidth:</i>	22
4.2.2. <i>Initial Channel Availability Check Time</i>	26
4.2.3. <i>Radar Burst at the Beginning of the Channel Availability Check Time:</i>	29
4.2.4. <i>Radar Burst at the End of the Channel Availability Check Time:</i>	32
4.2.5. <i>In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period</i>	35
4.2.6. <i>Statistical Performance Check</i>	40
5. PHOTOGRAPHS.....	73
5.1. Dynamic Frequency Selection Test Set-Up	73
6. TEST EQUIPMENT DETAILS.....	75

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 5 of 76

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



The American Association for Laboratory Accreditation

Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-LAF Communiqué dated 8 January 2009).

Presented this 14th day of April 2010.



President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2011

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 6 of 76

RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	Listing #: 4143A
Japan	VCCI	-	-	No. 2959
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 7 of 76

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system for a Telecommunications Certification Body (TCB) meeting FCC (U.S.), and IC (Canada) requirements.



Presented this 24th day of June 2010.

President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2011

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body

TCB Identifier – US0159

Industry Canada – Certification Body

CAB Identifier – US0159

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 8 of 76

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	9 th November 2013	
2 nd Draft	13 th November 2013	
Rev A	13 th November 2013	Initial Release

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 9 of 76

1. TEST RESULT CERTIFICATE

Applicant:	Samsung Electronics Co., Ltd 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do 443-742, Republic of Korea	Tested By:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California, 94566, USA
EUT:	WLAN Access Point	Telephone:	+1 925 462 0304
Model Tested:	WEA303e Antenna Ports A1, A2, A3 Antenna Ports M1, M2	Fax:	+1 925 462 0306
S/N:	Not Available		
Test Date(s):	9 th - 17 th September 2013	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERTIFICATE #2381.01

Graeme Grieve
Quality Manager MiCOM Labs,

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.407	2007	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	Industry Canada RSS-210	Issue 8 December 2010	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(iv)	Industry Canada RSS-Gen	Issue 3 December 2010	General Requirements and Information for the Certification of Radiocommunication Equipment
(v)	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vi)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vii)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(viii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(ix)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(x)	A2LA	9 th June 2009	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xi)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 11 of 76

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 12 of 76

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	This report is limited to DFS testing of the Samsung Electronics WEA303i/WEA303e covering the frequency ranges 5250 to 5350 MHz and 5470 to 5,725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	Samsung Electronics Co., Ltd 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do 443-742, Republic of Korea
Manufacturer:	SAMSUNG Electronics Co., Ltd. #244, 1 gongdan-ro, Gumi-si, Gyeongsangbuk-do, Korea
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton, California 94566 USA
Test report reference number:	HCTA02-U2a Rev A
Date EUT received:	9th September 2013
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	9th - 17th November 2013
No of Units Tested:	1
Type of Equipment:	802.11a/b/g/n Wireless Access Point, 3x3 Spatial Multiplexing MIMO configuration + 2x2 Monitoring Ports
Applicants Trade Name:	Samsung Electronics Co. Ltd
Model(s):	WEA303i and WEA303e
Location for use:	Indoor
Declared Frequency Range(s):	5150 - 5350 MHz 5470 - 5725 MHz
Type of Modulation:	Per 802.11 –CCK, BPSK, QPSK, DSSS, OFDM
Declared Nominal Average Output Power:	15.407 Report No. (WEA303i) : HCTR1311FR02 15.407 Report No. (WEA303e) : HCTR1311FR03
EUT Modes of Operation:	Legacy 802.11a/n, (802.11n HT-20, HT-40)
Transmit/Receive Operation:	Time Division Duplex
Antenna Ports Tested:	Ports A1, A2, A3 Ports M1, M2
Rated Input Voltage and Current:	12 Vdc, 2.0 A POE 48 Vdc
Operating Temperature Range:	Declared range 0 to +45°C
Equipment Dimensions:	External Antenna WEA303e - 174 x 174 x 34.1mm Integral Antenna WEA303i - 174 x 174 x 34.1mm SMA connector not included
Weight:	WEA303e: 0.65 kg WEA303i: 0.64 kg
Primary function of equipment:	Transmitting data and voice

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 13 of 76

Cont'd

Details	Description
Software Code Tested:	SW Version for Normal mode 1.2.17.R / Mon Feb 25 22:49:44 KST 2013
Software version for Test Image Code:	1.2.17.R / Tue Jul 2 19:12:46 KST 2013

NOTE: During the test program the client updated the Software Code several times with no traceable version release number available.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4. Dynamic Frequency Selection (DFS)

4.1. Test Procedure and Setup

FCC, Part 15 Subpart C §15.407(h)
FCC 06-96 Memorandum Opinion and Order
Industry Canada RSS-210 A9.4

4.1.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna	

4.1.2. DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the 99% power bandwidth See Note 3.

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.



4.1.3. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.




Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst_Count*. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst_Count*.
- 3) *Burst* 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts* 2 through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst* 1 is randomly generated (1 to 1,500,000 minus the total *Burst* 1 length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts* 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst* 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical representation of the Long Pulse radar Test Waveform.

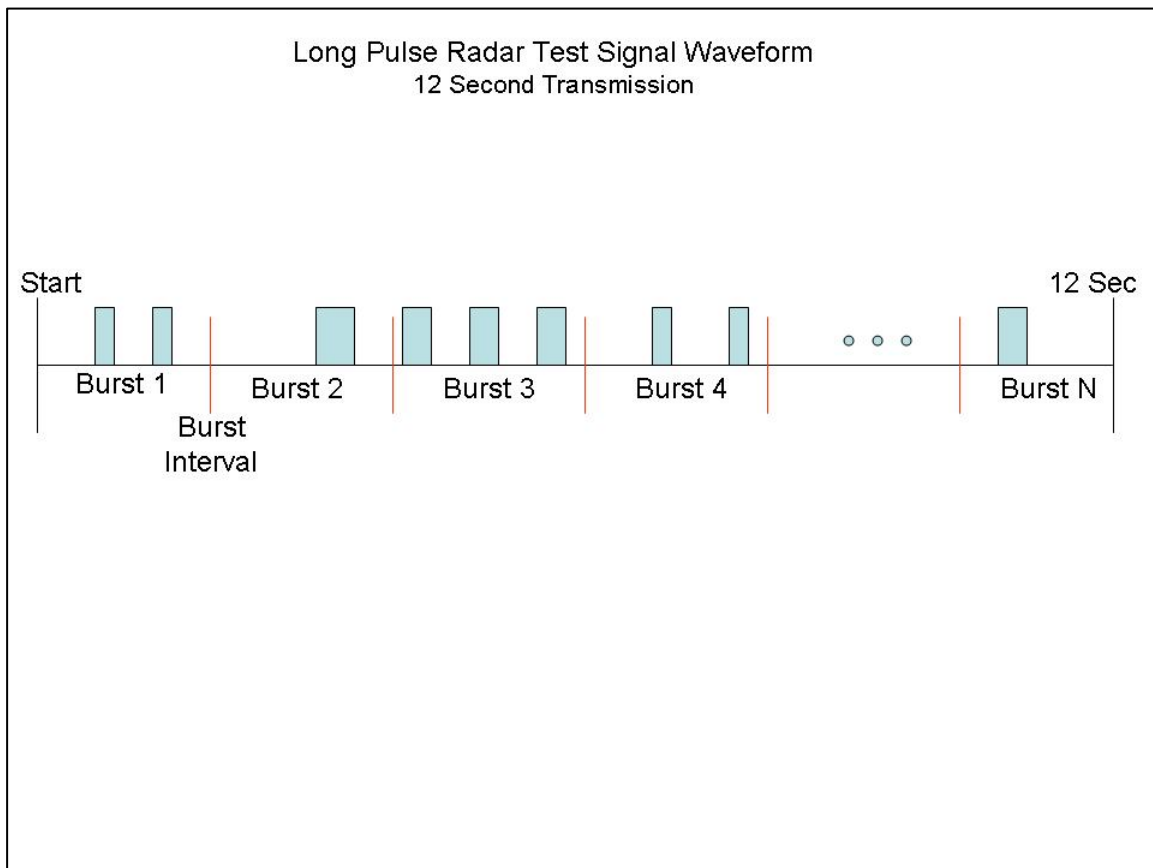

4.1.4. Frequency Hopping Radar Test Waveform

Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

4.1.5. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm (Ref Section 5.1). The 30dB amplifier gain was entered as an amplitude offset on the spectrum analyzer.

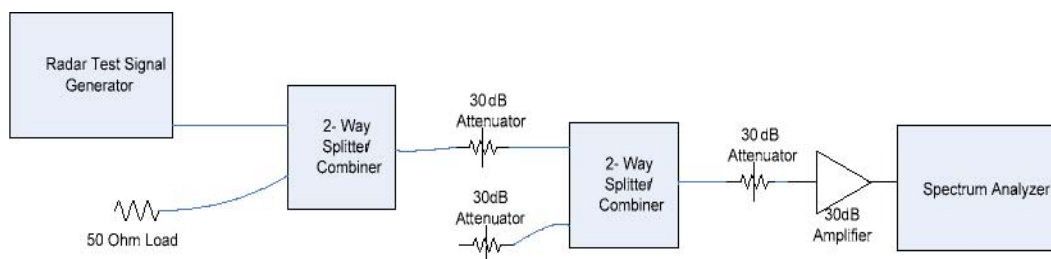


Conducted Calibration Setup


4.1.6. Test Set Up:

Block Diagram(s) of Test Setup

Setup for Conducted Measurements where the EUT is the Master with injection of Radar Test Waveforms at the Master.

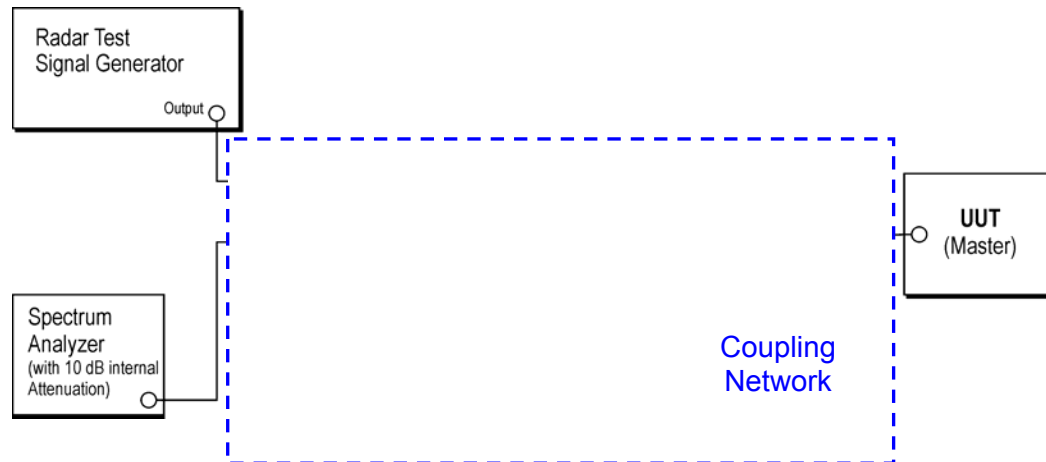

Support Equipment Configuration

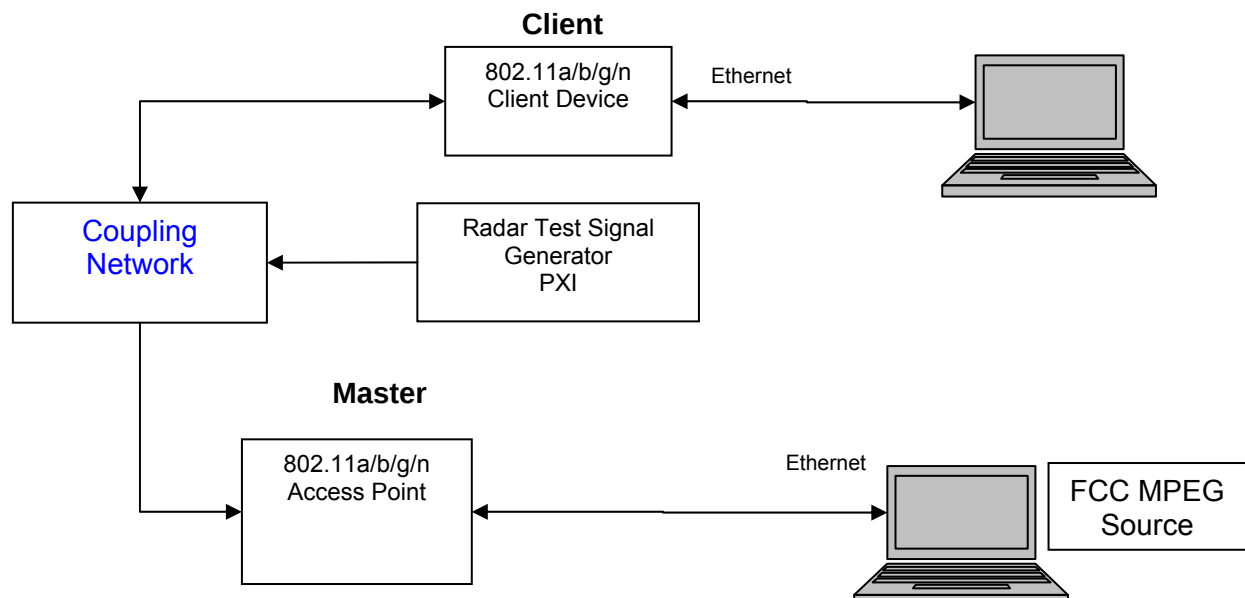



The EUT is a Master Device with radar detection.

Applicability of DFS Requirements Prior to Use of a Channel
(Ref Table 1 of FCC 06-96)

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>Uniform Spreading</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

Applicability of DFS requirements during normal operation
(Ref Table 2 of FCC 06-96)

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 21 of 76

For the frequency band 5,470 – 5,725 MHz, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm. The EUT was tested in HT-40 mode.

Declared minimum antenna gain: 5.0 dBi. ;

Radar receive signal level = -64 dBm + minimum antenna gain

$$= -64 + 5$$

Radar receive signal level = -59 dBm

Measurement Results - Dynamic Frequency Selection (DFS)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Master

Transmit Power: Maximum

Operational Details - Dynamic Frequency Selection (DFS)

Operational Modes: 802.11a & 802.11n HT40

Data Rates: 18mpbs 802.11a / 2MCS 802.11n

**Note* No video pixilation was observed during the video stream at these rates. Video frames per second were noted to be at 30fps.*

Video Streaming Method - Dynamic Frequency Selection (DFS)

Using the VideoLan player a video stream was setup on the master laptop with the destination being the client laptop. The video profile chosen for the video stream is "MPEG-2 + MPGA (TS)". On the client laptop the VideoLan player was setup to listen to an incoming video stream from the master device.

The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is used during this video stream.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 22 of 76

4.2. WEA303e: Ports A1, A2, A3 Test Results

4.2.1. UNII Detection Bandwidth:

All UNII channels for this device have identical channel bandwidths and DFS testing was completed on channel 5,500 MHz (802.11a) and 5510MHz (HT40).

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,500 MHz (802.11a) and 5,510 MHz (802.11n HT40) at a level of -61 dBm (Ref Section 5.1). The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power
Table of results are continued on the next page.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 23 of 76

EUT Frequency= 5,500 MHz 802.11a (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-20											%
-19											%
-18											%
-17											%
-16											%
-15											%
-14											%
-13											%
-12											%
-11	v	v	v	v	v	0	0				<90%
-10	v	v	v	v	0	v	v	v	v	v	90%
-9	v	v	v	v	v	v	v	v	v	v	100%
-8	v	v	v	v	v	v	0	v	v	v	90%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F ₀	v	v	v	v	v	v	v	v	v	v	100%
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	0	v	90%
+9	v	0	0								<90%
+10											%
+11											%
+12											%
+13											%
+14											%
+15											%
+16											%
+17											%

Detection Bandwidth = $F_H - F_L = 5508 - 5490 = 18$ MHz

EUT 99% Bandwidth = 17.788 MHz (ref. bandwidth channel 5500 MHz)

17.788 MHz *80% = 14.230MHz

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 24 of 76

EUT Frequency= 5,510 MHz 802.11n HT40 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-21											%
-20											%
-19											%
-18	v	v	v	0	0						<90%
-17	v	v	v	v	v	v	v	0	v	v	90%
-16	v	v	v	v	v	v	v	v	v	v	100%
-15	v	v	v	v	v	v	v	v	v	v	100%
-14	v	v	v	v	v	v	v	v	v	v	100%
-13	v	v	v	v	v	v	v	v	v	v	100%
-12	v	v	v	v	v	v	v	v	v	v	100%
-11	v	v	v	v	v	v	v	v	v	v	100%
-10	v	v	v	v	v	v	v	v	v	v	100%
-9	v	v	v	v	v	v	v	v	v	v	100%
-8	v	v	v	v	v	v	v	v	v	v	100%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F ₀	v	v	v	v	v	v	v	v	v	v	100%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 25 of 76

EUT Frequency= 5,510 MHz 802.11n HT40 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
F ₀	v	v	v	v	v	v	v	v	v	v	100%
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	v	v	100%
+9	v	v	v	v	v	v	v	v	v	v	100%
+10	v	v	v	v	v	v	v	v	v	v	100%
+11	v	v	v	v	v	v	v	v	v	v	100%
+12	v	v	v	v	v	v	v	v	v	v	100%
+13	v	v	v	v	v	v	v	v	v	v	100%
+14	v	v	v	v	v	v	v	v	v	v	100%
+15	v	v	v	v	v	v	v	v	v	v	100%
+16	v	v	v	v	v	v	v	v	v	v	100%
+17	v	v	v	v	v	v	v	v	v	v	100%
+18	v	v	v	v	v	v	v	v	v	v	100%
+19	v	v	v	v	v	v	v	v	v	v	100%
+20	v	v	v	v	v	v	v	v	v	v	100%
+21	v	0	0								<90%
Detection Bandwidth = F _H -F _L = 5530-5493 = 37 MHz											
EUT 99% Bandwidth = 36.593 MHz (ref. bandwidth channel 5510 MHz)											
36.593 MHz *80% = 29.274 MHz											

For each frequency step the minimum percentage detection is 90%



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 26 of 76

4.2.2. Initial Channel Availability Check Time

This test verifies that the EUT does not emit pulse, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.

The U-NII device is powered on and be instructed to operate at 5,500MHz 802.11a and 5,510MHz 802.11n HT40. At the same time the EUT is powered on, the spectrum analyzer is set for zero span with a 1 MHz resolution bandwidth at 5,500 & 5,510 MHz with a 260 second sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any pulse or data transmissions until at least 1 minute after the completion of the power-on cycle.


The first red marker line shown on the following plot denotes the instant when the EUT starts its power-up sequence i.e. T_0 (as defined within the FCC's MO&O 06-96 Normative Reference 2). The power-up reference T_0 is determined by the time it takes for the EUT to start "beaconing" i.e. initial beacon – 60 secs = end of power-up.

The Channel Availability Check Time commences at instant T_0 and will end no sooner than $T_0 + 60$ seconds.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 27 of 76

EUT power up and Initial Channel Availability Check Time
5,500MHz 802.11a Power On = 94.82 Seconds

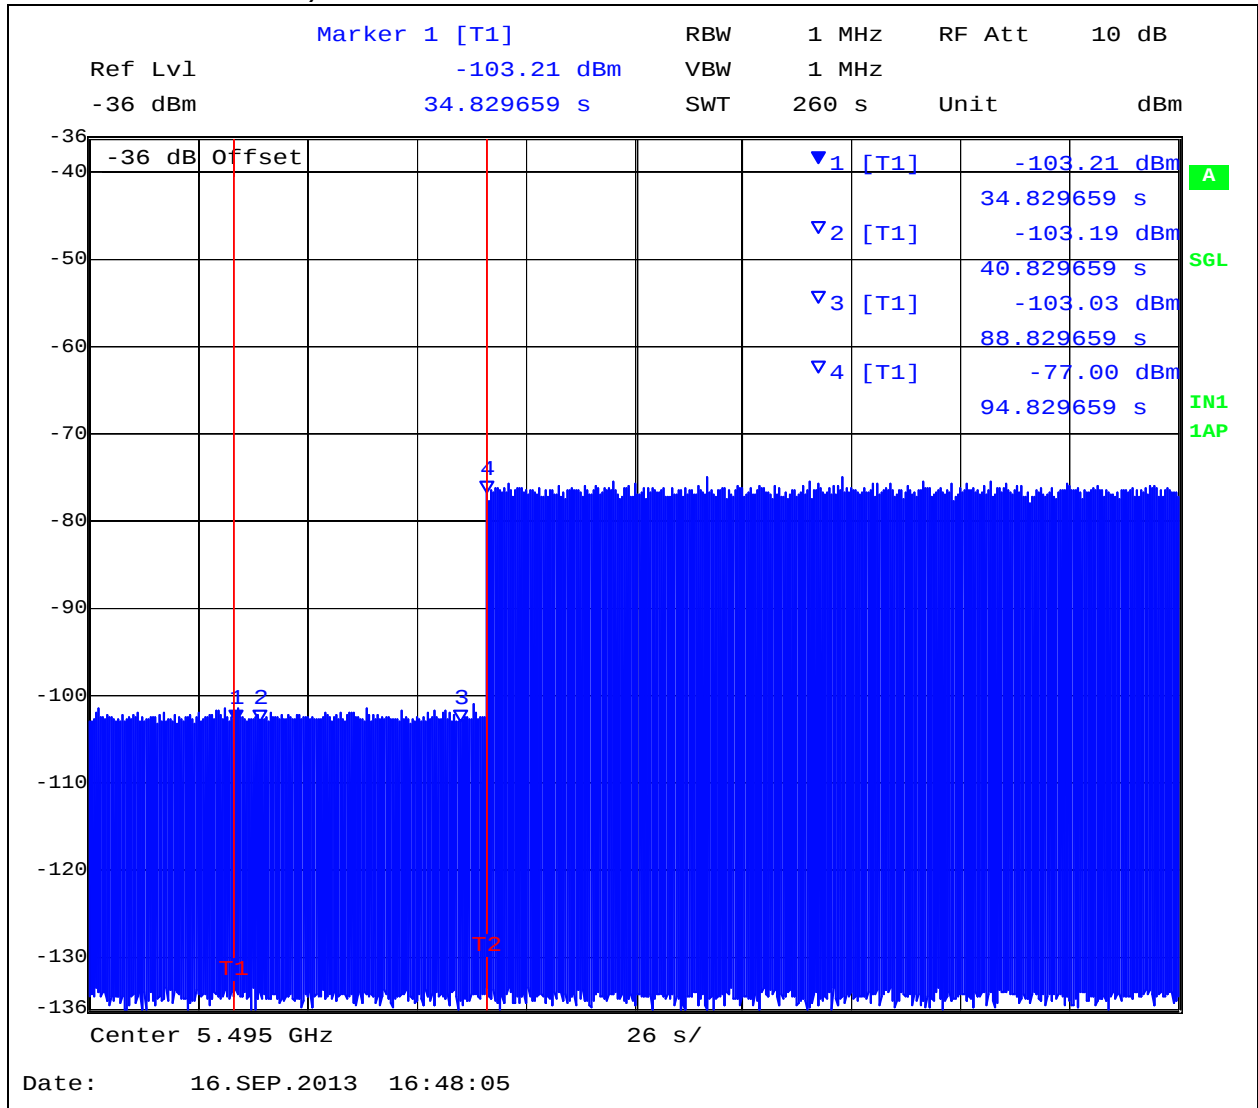


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 28 of 76

EUT power up and Initial Channel Availability Check Time
5,510MHz 802.11n HT40 Power On = 95.87 Seconds

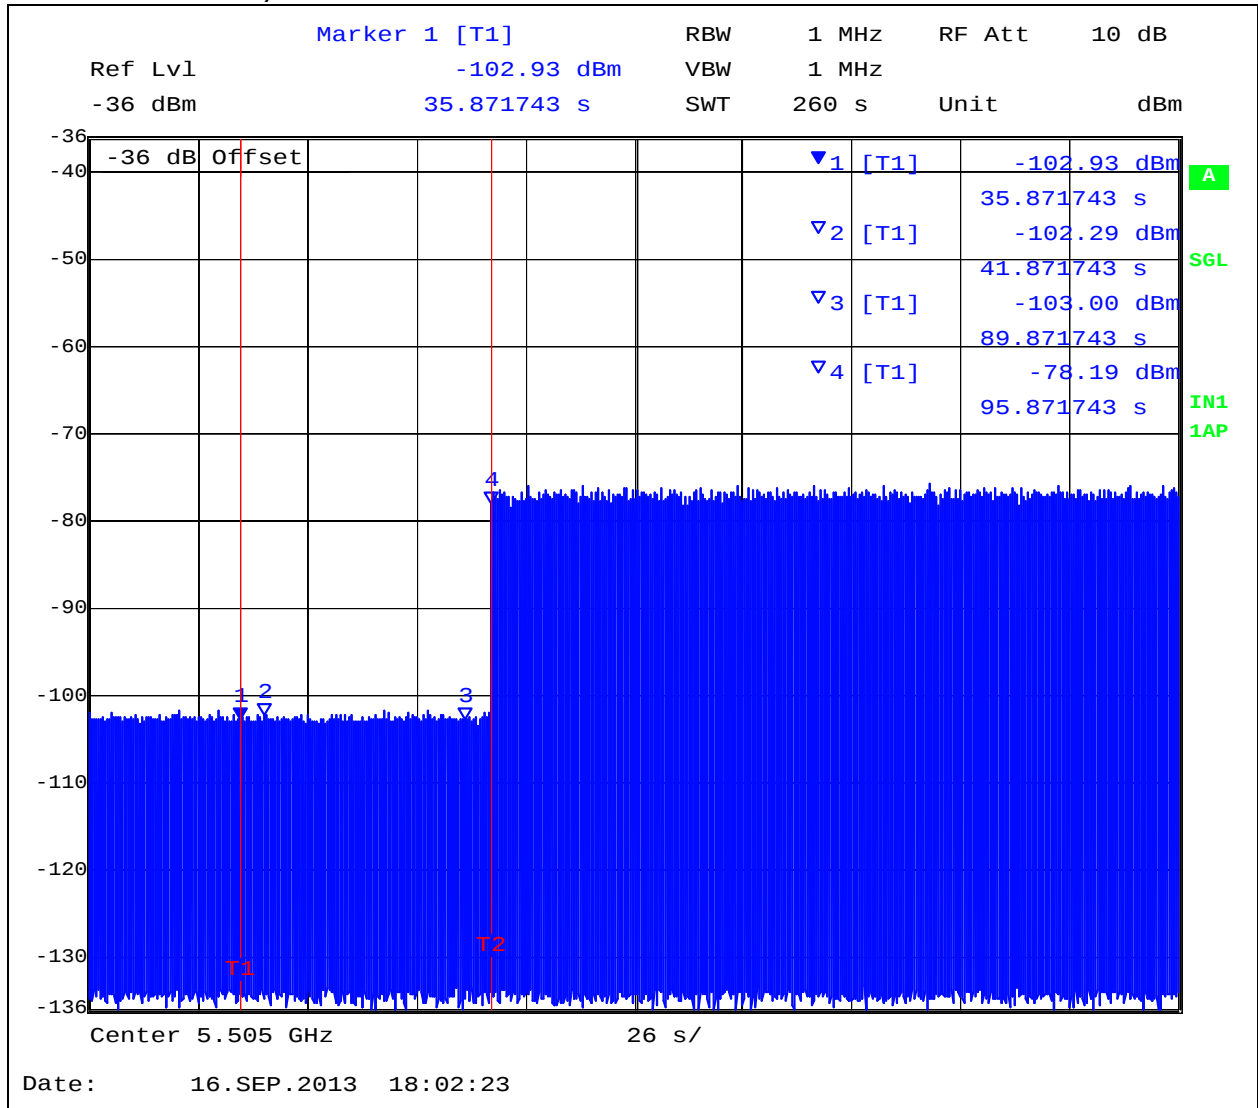

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 29 of 76

4.2.3. Radar Burst at the Beginning of the Channel Availability Check Time:

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold +6 dB (-62 dBm Ref Section 6.1.7) occurs at the beginning of the Channel Availability Check Time.


A single Burst of short pulse of radar Type 1 will commence within a 6 second window starting at T_0 (first red marker line on the following plot).

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a & 5,510MHz 802.11n HT40 will continue for 2.5 minutes after the radar burst has been generated.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 30 of 76

Channel Availability Check Time at the start T0 + 6 seconds Check Time
5,500MHz 802.11a

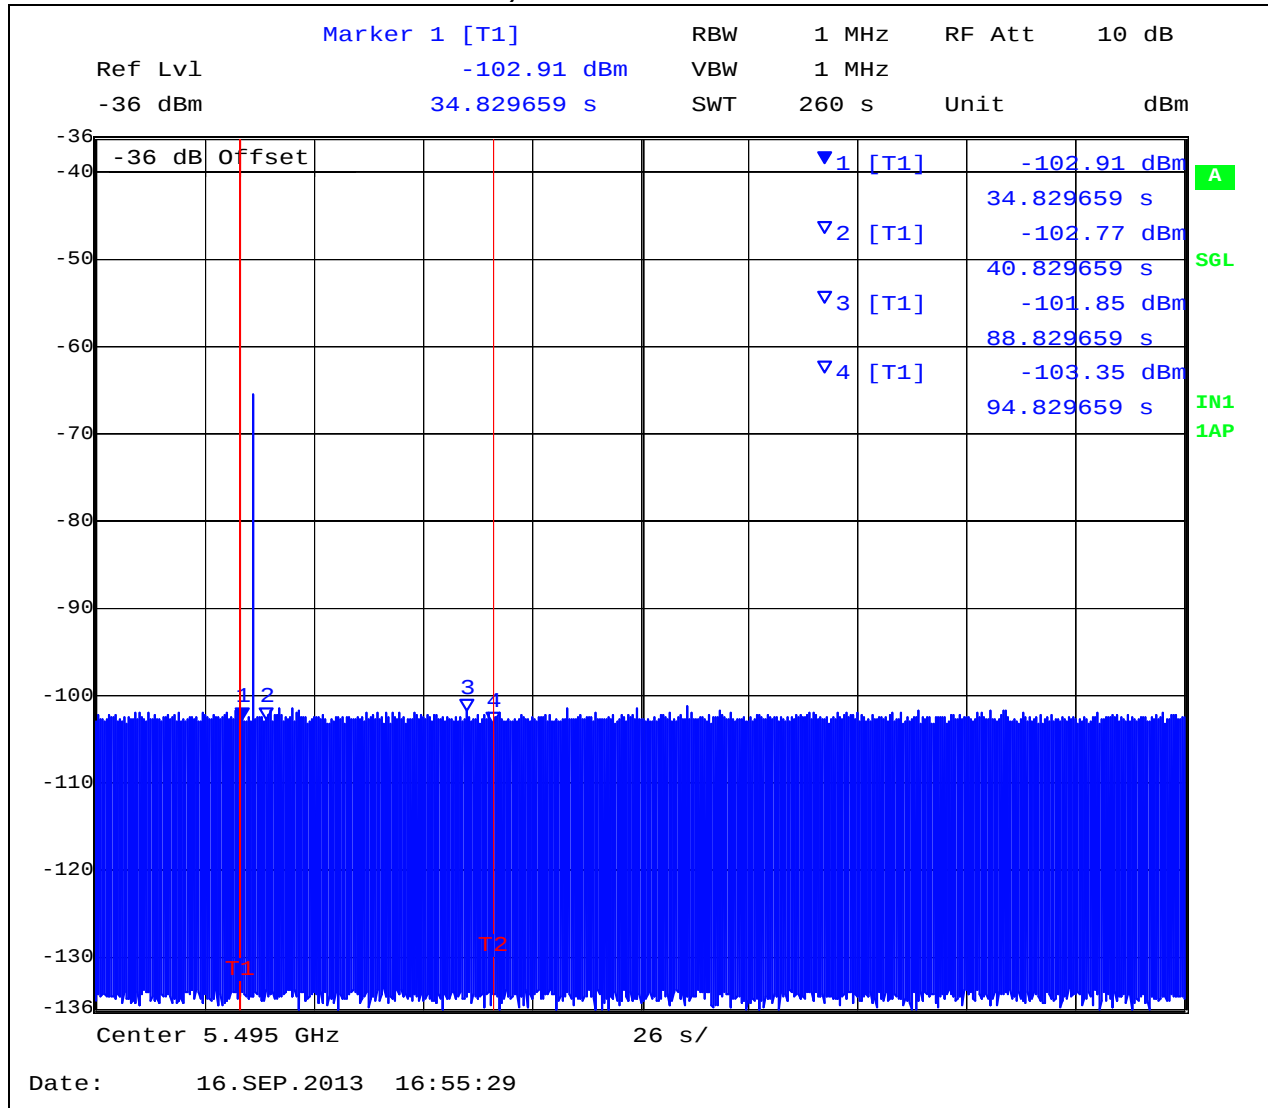


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 31 of 76

**Channel Availability Check Time at the start T0 + 6 seconds Check Time
5,510MHz 802.11n HT40**

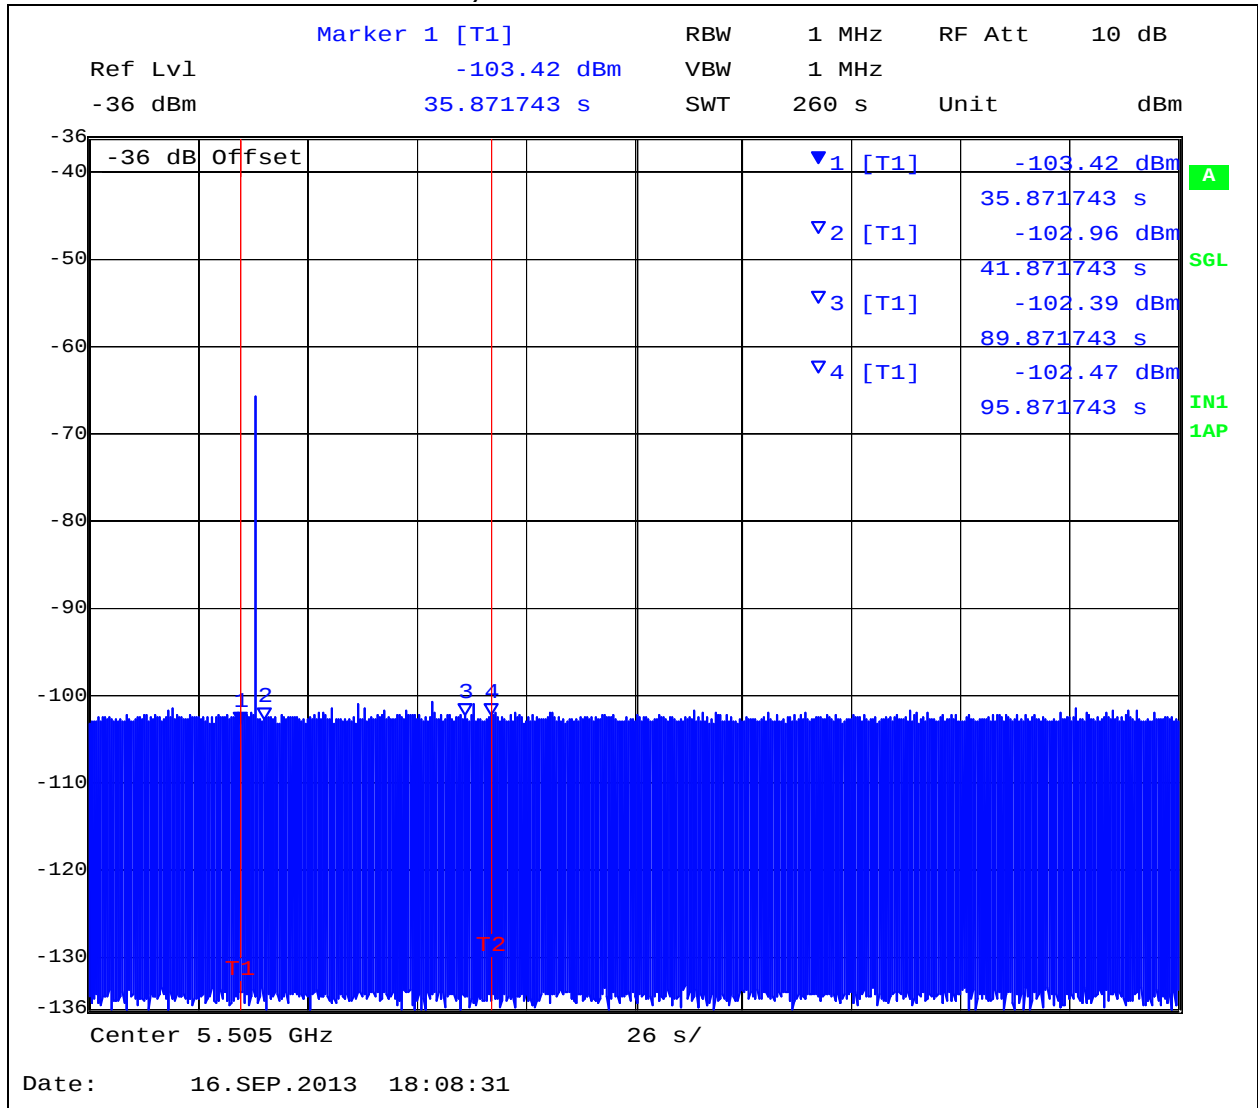

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 32 of 76

4.2.4. Radar Burst at the End of the Channel Availability Check Time:

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold occurs at the end of the Channel Availability Check Time.


A single Burst of short pulse of radar type 1 will commence within a 6 second window starting at $T_0 + 54$ seconds. The window will commence at marker 2 and end at the red frequency line T_2 .

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a & 5,510MHz 802.11n HT40 will continue for 2.5 minutes after the radar burst has been generated.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 33 of 76

**Channel Availability Check Time at T0 + 54 seconds Check Time
5,500MHz 802.11a**

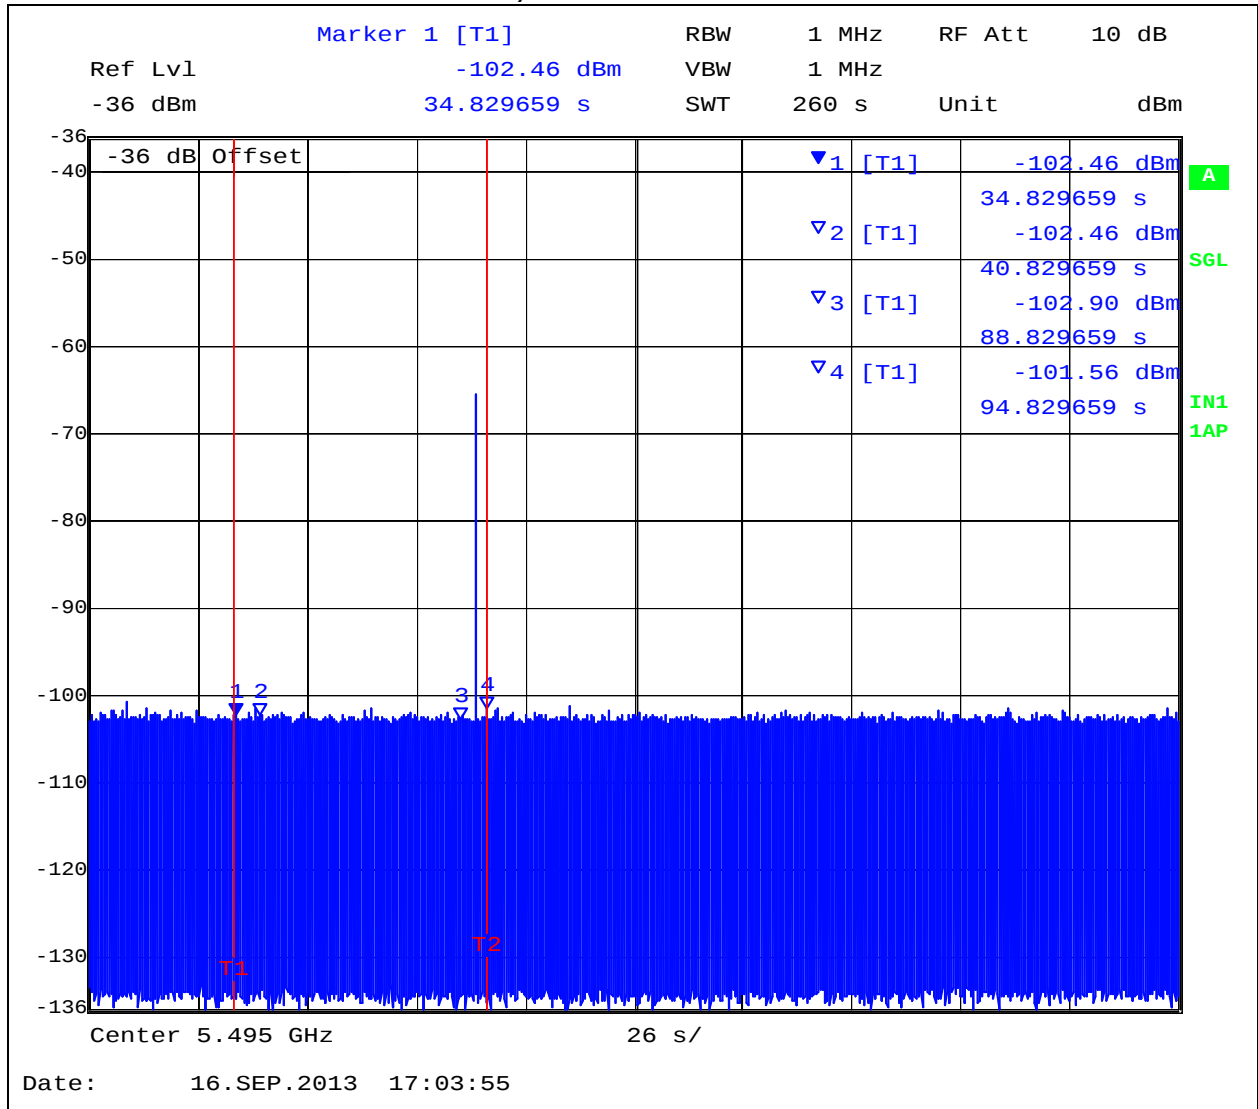


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 34 of 76

Channel Availability Check Time at T0 + 54 seconds Check Time
5,510MHz 802.11n HT40

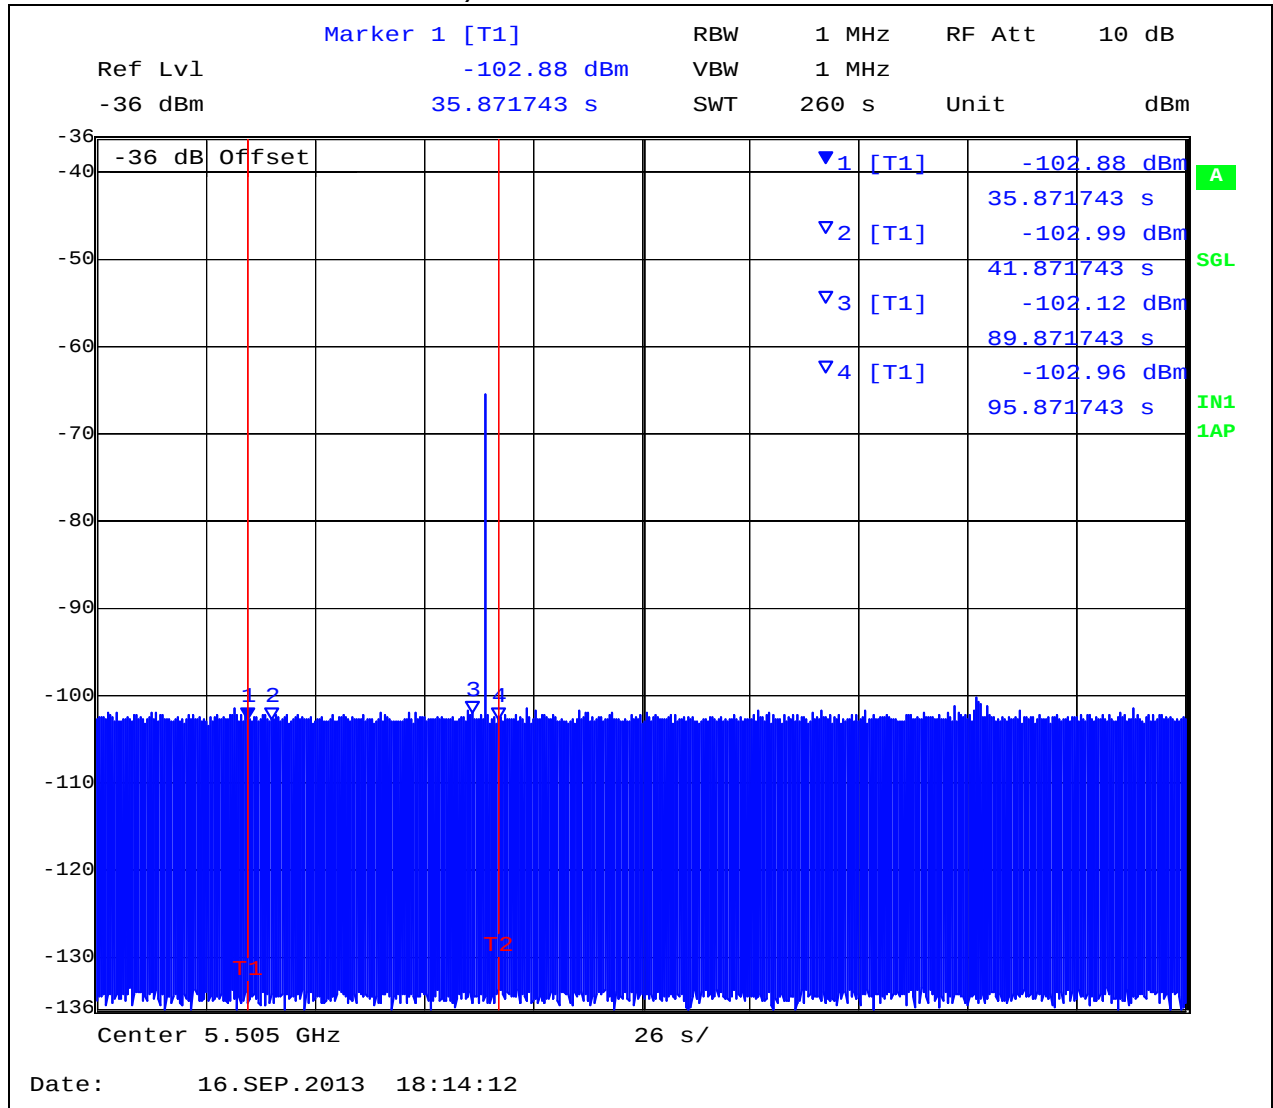

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4.2.4.1. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

FCC §15.407(h)(2)(iii)

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

Channel Closing Transmission Time - Measurement

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured, collecting nearly 250M samples of data, which included in excess of 600 ms of pre-trigger data. This Type 1 waveform had an integral marker built into its construction, marking the start of the radar waveform play, which directly triggered the PXI digitizer's data capture via the PXI backplane trigger bus.

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events with respect to T_0 (zero time indicating the start of the measurements sequence) starting the 612.1 ms pre-trigger period followed by the radar type 1 burst period.

Radar (Type 1) Pre-trigger period 612.1 ms

Type 1 burst period 25.70 ms

(The period of the 18 pulse burst includes [18 pulses * 1.428mS PRI] = 25.704 ms. Then add 1 μ s pulse width for the final pulse.)

Channel Closing Transmission Time starts immediately after the last radar pulse is transmitted i.e. 637.8 ms after the start of the trace capture period.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 36 of 76

Channel Closing Transmission Time 5,500 MHz (802.11a) = 0.484 mSecs (limit 260 mSecs)

Channel Move Time 5,500MHz (802.11a) = 0.5 Secs (limit 10 Secs)

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 0 to 2 seconds



From the plot above it can be seen that the transmission activity within the 200 mS window is 0.177 mS (see 200 mS Total). From the following plots which shows all additional activity within the remained of the 10 sec measurement window it can be determined that the aggregate transmission is 0.307 mS. This is less than the 60 mS limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 37 of 76

Channel Closing Transmission Time 5,510 MHz (802.11n HT40) = 0.609 mSecs (limit 260 mSecs)

Channel Move Time 5,510 MHz (802.11n HT40) = 0.7 Secs (limit 10 Secs)

**Channel Move Time, Channel Closing Transmission Time for Type 1 Radar
Captured by the Test System - 0 to 10 seconds**




From the plot above it can be seen that the transmission activity within the 200 mS window is 0.173 mS (see 200 mS Total). From the following plot which shows all additional activity within the remained of the 10 sec measurement window it can be determined that the aggregate transmission is 0.436 mS. This is less than the 60 mS limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

30 Minute Non-Occupancy Period

The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

30 Minute Non-Occupancy Period Type 1 Radar 5,500MHz 802.11a

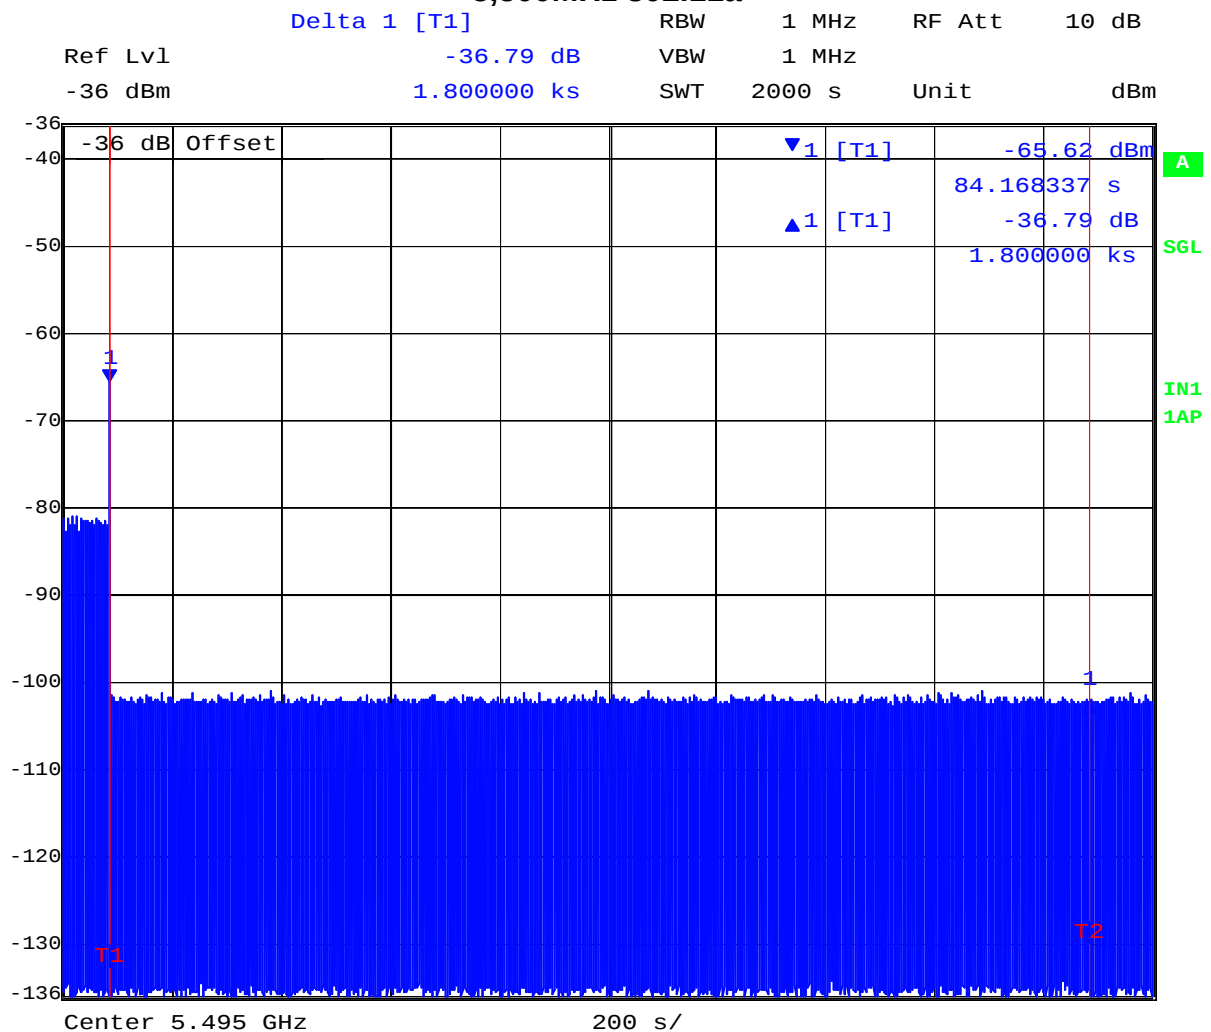

Date: 16.SEP.2013 16:29:01


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 39 of 76

30 Minute Non-Occupancy Period Type 1 Radar

5,510 MHz 802.11n HT40

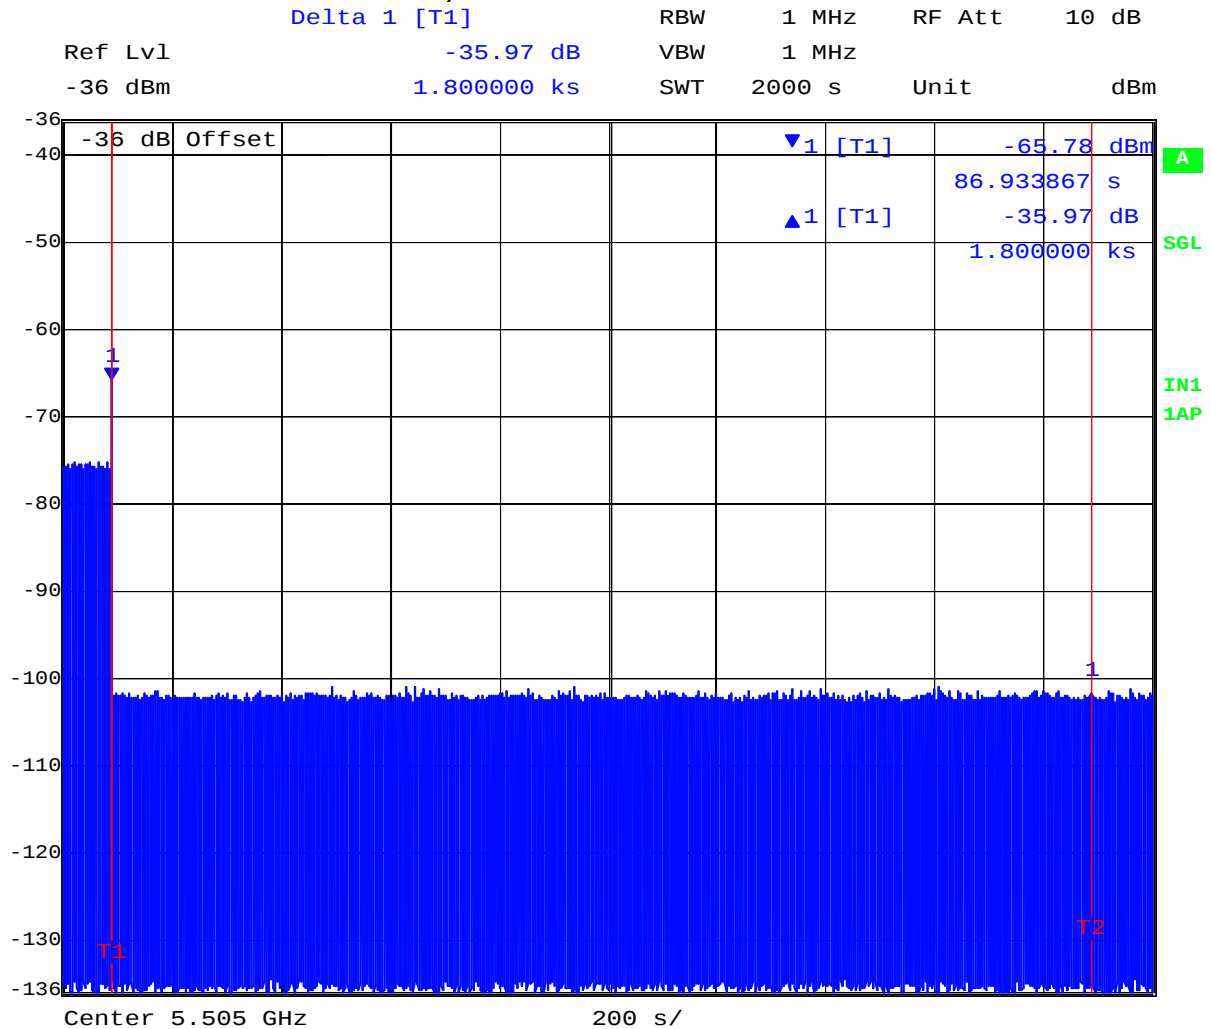

Date: 16.SEP.2013 17:48:37

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4.2.5. Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,500MHz 802.11a and 5,510MHz 802.11n HT40.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

$$\text{Total \# of detections} \div \text{Total \# of Trials} \times 100 = \text{Probability of Detection}$$

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 41 of 76

Port(s) : A1, A2, A3. **Radar Level :** - 57 dBm; **Offset :** 5 MHz.
Verification of Detection 5,500MHz 802.11a

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	0	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	0	√	√
11	√	√	√	√	√	√
12	√	√	√	√	√	√
13	√	√	√	√	0	√
14	√	√	√	√	0	√
15	√	√	√	√	0	√
16	√	√	√	√	√	√
17	√	√	√	√	0	√
18	√	√	√	√	√	√
19	√	√	√	√	√	√
20	√	√	0	√	√	√
21	√	√	√	√	√	√
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
Detection Percentage	100% (>60%)	100% (>60%)	96.6% (>60%)	96.6% (>60%)	83.3% (>80%)	100% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = 100\% + 100\% + 96.6\% + 96.6\% / 4 = 98.3\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 42 of 76

Port(s): A1, A2, A3. **Radar Level :** - 57 dBm; **Offset :** 5 MHz.

Verification of Detection 5,510MHz 802.11n HT40

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	0	√	√
4	√	√	√	√	√	√
5	√	√	0	√	√	√
6	√	√	√	√	√	√
7	√	√	√	0	√	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	√	√
12	√	√	√	√	√	√
13	√	√	√	√	√	√
14	√	√	0	√	√	√
15	√	√	√	√	√	√
16	√	√	√	√	√	√
17	√	√	0	√	0	√
18	√	√	√	√	√	√
19	√	√	√	√	0	√
20	√	√	√	√	√	√
21	√	√	√	√	√	√
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	0	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
Detection Percentage	100% (>60%)	100% (>60%)	90% (>60%)	90% (>60%)	93.3% (>80%)	100% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;


$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (100\% + 100\% + 90\% + 90\%) / 4 = 95\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 43 of 76


4.2.6. Weather Radar Band Edge Plots

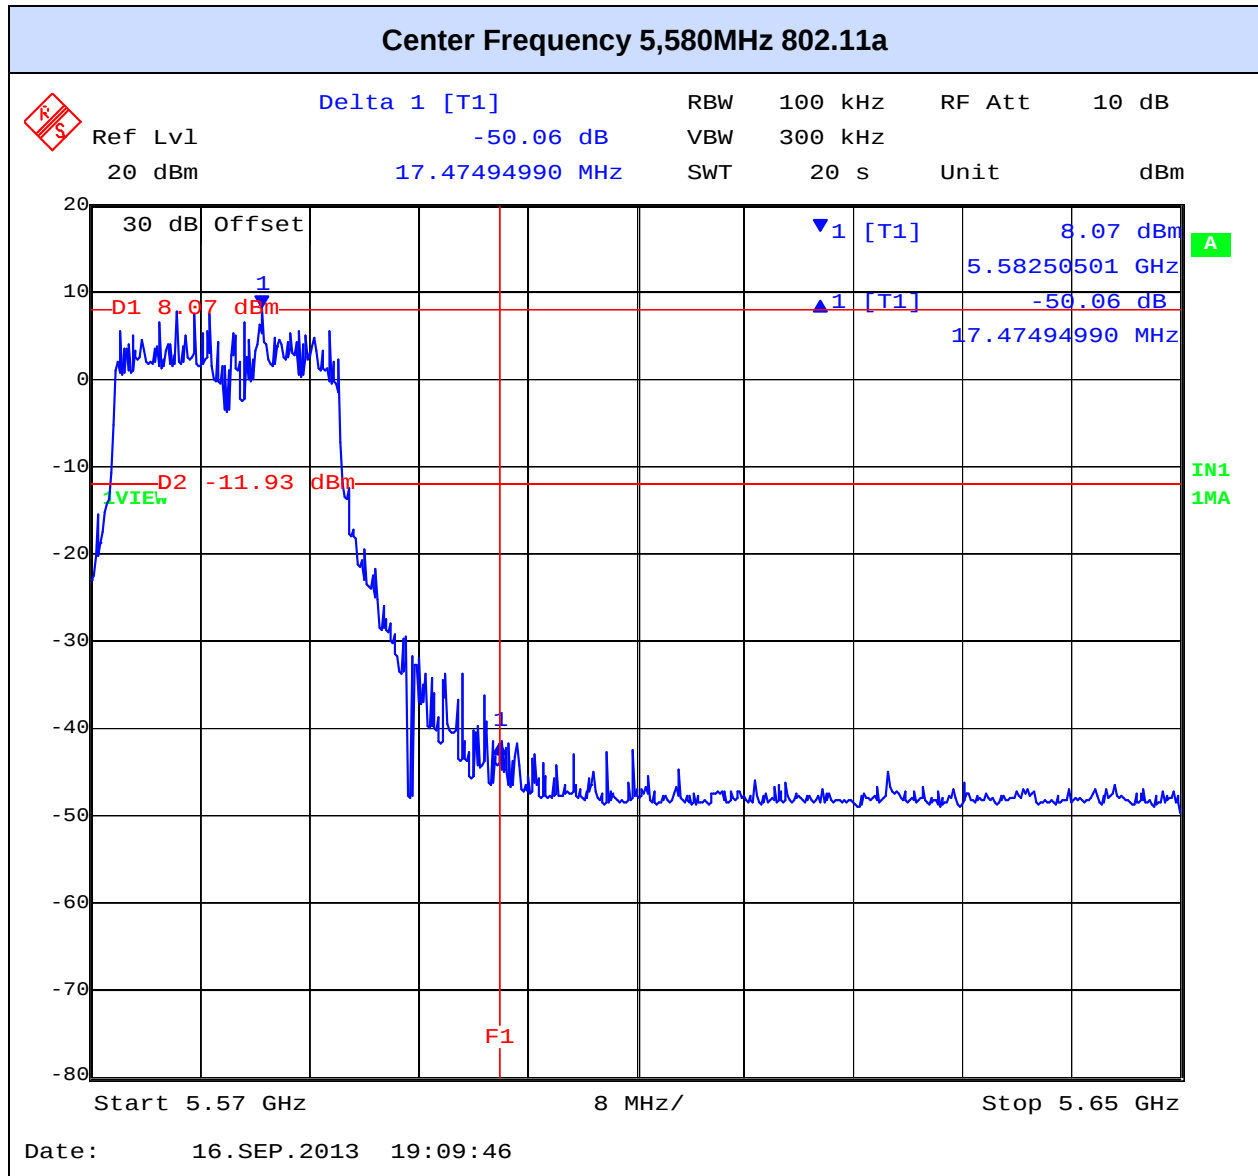

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 44 of 76

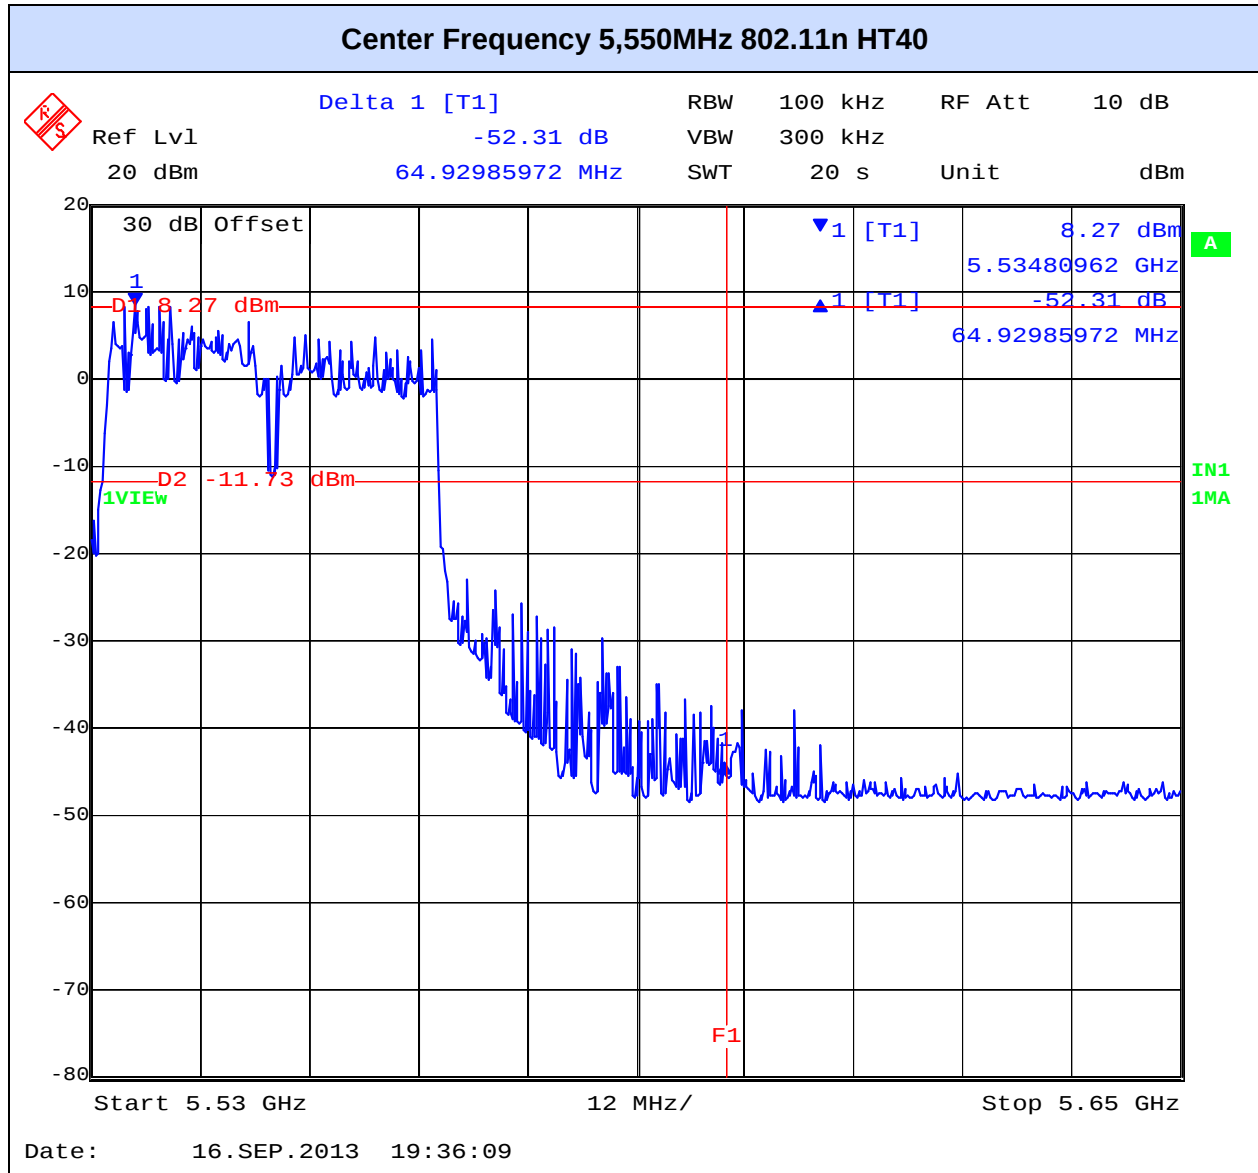

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 45 of 76

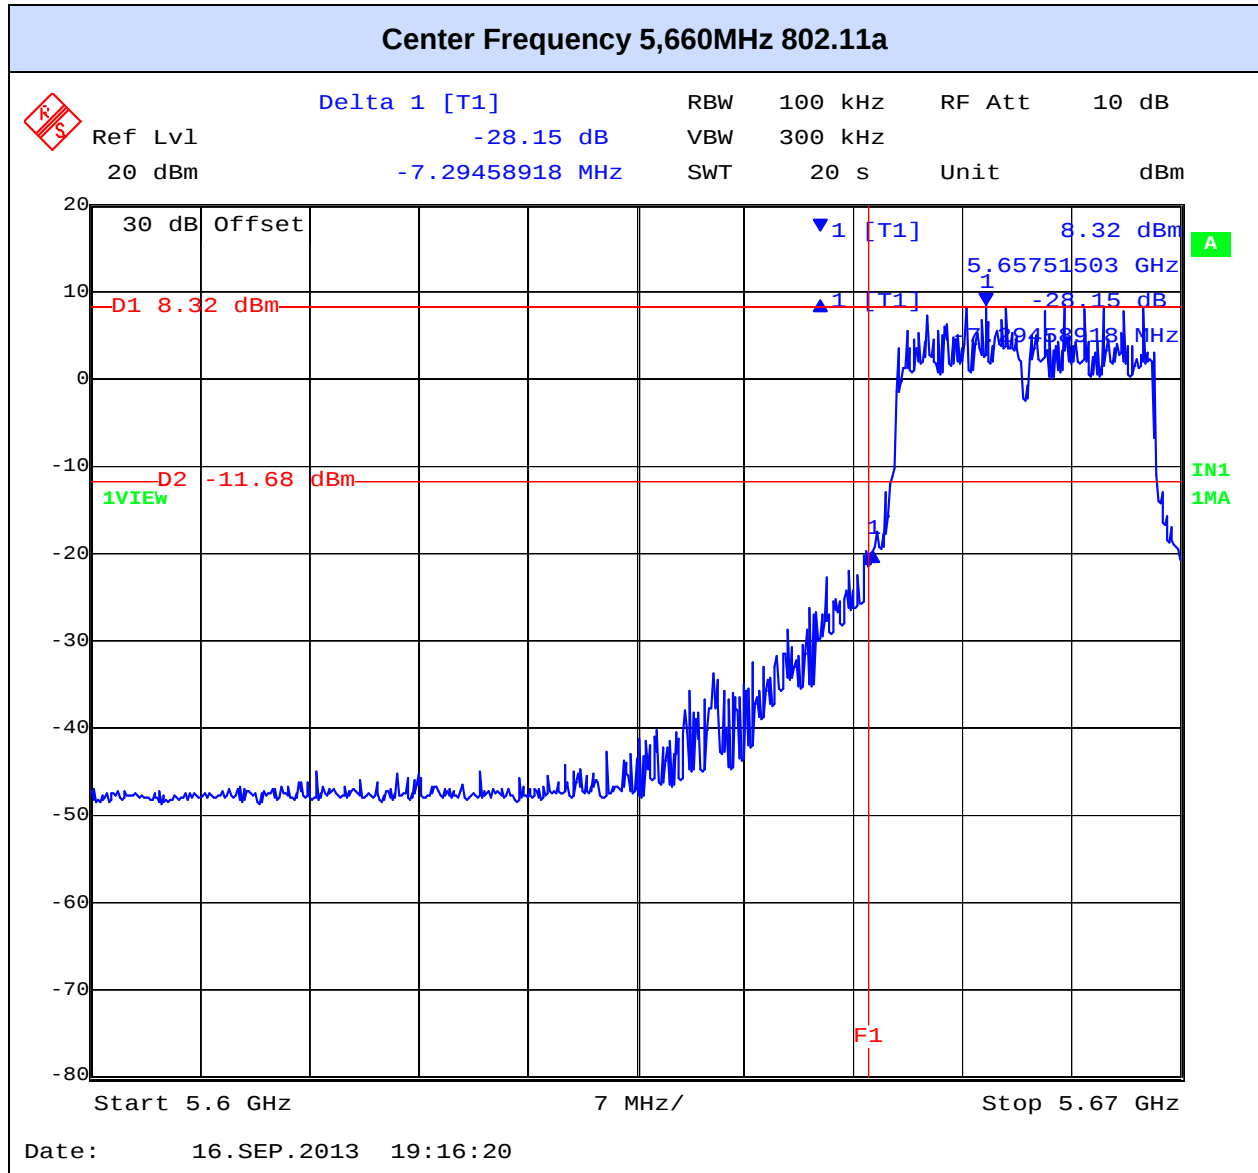

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 46 of 76

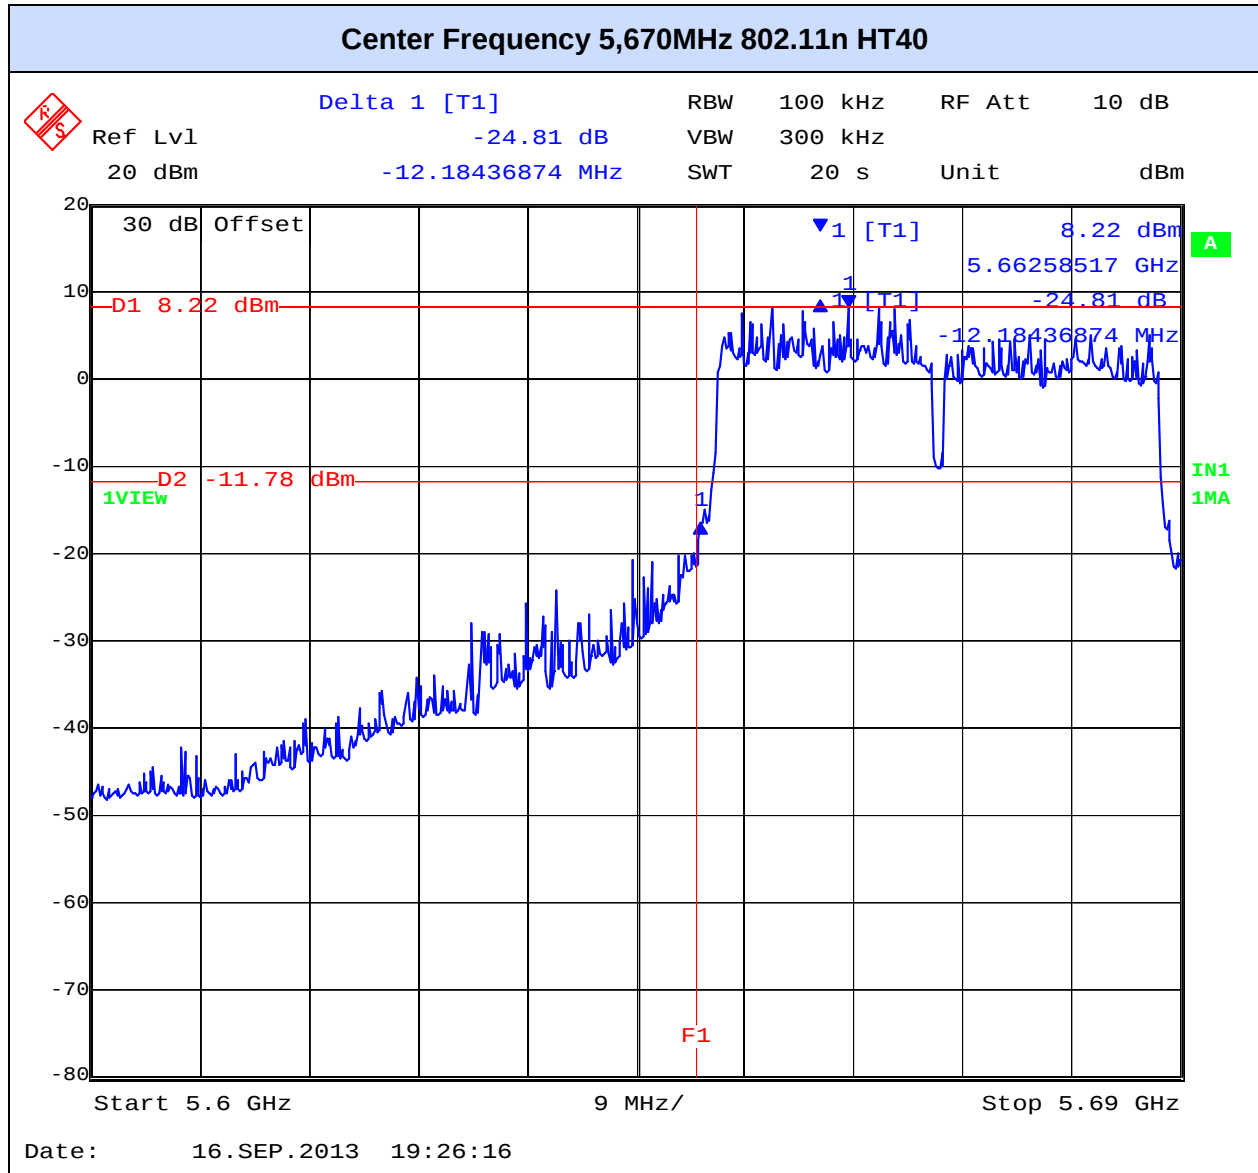

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4.3. WEA303e: Ports M1, M2 Test Results

4.3.1. UNII Detection Bandwidth:

All UNII channels for this device have identical channel bandwidths and DFS testing was completed on channel 5,500 MHz (802.11a) and 5510MHz (HT40).

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,500 MHz (802.11a) and 5,510 MHz (802.11n HT40) at a level of -61 dBm (Ref Section 5.1). The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power
Table of results are continued on the next page.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 48 of 76

EUT Frequency= 5,500 MHz 802.11a (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-20											%
-19											%
-18											%
-17											%
-16											%
-15											%
-14											%
-13											%
-12	0	0									<90%
-11	v	v	v	v	v	v	v	v	v	v	100%
-10	v	v	v	v	v	v	v	v	v	v	100%
-9	v	v	v	v	v	v	v	v	v	v	100%
-8	v	v	v	v	v	v	v	v	v	v	100%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F ₀	v	v	v	v	v	v	v	v	v	v	100%
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	v	v	100%
+9	v	v	v	v	v	v	v	v	v	v	100%
+10	v	v	v	v	v	v	v	v	v	v	100%
+11	v	v	v	v	v	v	v	v	v	v	100%
+12	0	0									<90%
+13											%
+14											%
+15											%
+16											%
+17											%

Detection Bandwidth = $F_H - F_L = 5511 - 5489 = 22.0$ MHz

EUT 99% Bandwidth = 17.904 MHz (ref. bandwidth channel 5500 MHz)

17.904 MHz *80% = 14.323 MHz

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 49 of 76

EUT Frequency= 5,510 MHz 802.11n HT40 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-21	0	0									<90%
-20	√	√	√	√	√	√	0	√	√	√	90%
-19	√	√	√	√	√	√	√	√	√	√	100%
-18	√	√	√	√	√	√	√	√	√	√	100%
-17	√	√	√	√	√	√	√	√	√	√	100%
-16	√	√	√	√	√	√	√	√	√	√	100%
-15	√	√	√	√	√	√	√	√	√	√	100%
-14	√	√	√	√	√	√	√	√	√	√	100%
-13	√	√	√	√	√	√	√	√	√	√	100%
-12	√	√	√	√	√	√	√	√	√	√	100%
-11	√	√	√	√	√	√	√	√	√	√	100%
-10	√	√	√	√	√	√	√	√	√	√	100%
-9	√	√	√	√	√	√	√	√	√	√	100%
-8	√	√	√	√	√	√	√	√	√	√	100%
-7	√	√	√	√	√	√	√	√	√	√	100%
-6	√	√	√	√	√	√	√	√	√	√	100%
-5	√	√	√	√	√	√	√	√	√	√	100%
-4	√	√	√	√	√	√	√	√	√	√	100%
-3	√	√	√	√	√	√	√	√	√	√	100%
-2	√	√	√	√	√	√	√	√	√	√	100%
-1	√	√	√	√	√	√	√	√	√	√	100%
F ₀	√	√	√	√	√	√	√	√	√	√	100%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 50 of 76

EUT Frequency= 5,510 MHz 802.11n HT40 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
F ₀	√	√	√	√	√	√	√	√	√	√	100%
+1	√	√	√	√	√	√	√	√	√	√	100%
+2	√	√	√	√	√	√	√	√	√	√	100%
+3	√	√	√	√	√	√	√	√	√	√	100%
+4	√	√	√	√	√	√	√	√	√	√	100%
+5	√	√	√	√	√	√	√	√	√	√	100%
+6	√	√	√	√	√	√	√	√	√	√	100%
+7	√	√	√	√	√	√	√	√	√	√	100%
+8	√	√	√	√	√	√	√	√	√	√	100%
+9	√	√	√	√	√	√	√	√	√	√	100%
+10	√	√	√	√	√	√	√	√	√	√	100%
+11	√	√	√	√	√	√	√	√	√	√	100%
+12	√	√	√	√	√	√	√	√	√	√	100%
+13	√	√	√	√	√	√	√	√	√	√	100%
+14	√	√	√	√	√	√	√	√	√	√	100%
+15	√	√	√	√	√	√	√	√	√	√	100%
+16	√	√	√	√	√	√	√	√	√	√	100%
+17	√	√	√	√	√	√	√	√	√	√	100%
+18	√	√	√	√	√	√	√	√	√	√	100%
+19	√	√	√	√	√	√	√	√	√	√	100%
+20	√	√	√	√	√	√	√	√	√	√	100%
+21	√	0	0								<90%
Detection Bandwidth = F _H -F _L = 5530-5490 = 40.0 MHz											
EUT 99% Bandwidth = 36.901 MHz (ref. bandwidth channel 5510 MHz)											
36.901 MHz *80% = 29.521 MHz											

For each frequency step the minimum percentage detection is 90%



4.3.2. Initial Channel Availability Check Time



This test verifies that the EUT does not emit pulse, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.

The U-NII device is powered on and be instructed to operate at 5,500MHz 802.11a and 5,510MHz 802.11n HT40. At the same time the EUT is powered on, the spectrum analyzer is set for zero span with a 1 MHz resolution bandwidth at 5,500 & 5,510 MHz with a 260 second sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any pulse or data transmissions until at least 1 minute after the completion of the power-on cycle.

The first red marker line shown on the following plot denotes the instant when the EUT starts its power-up sequence i.e. T_0 (as defined within the FCC's MO&O 06-96 Normative Reference 2). The power-up reference T_0 is determined by the time it takes for the EUT to start "beaconing" i.e. initial beacon – 60 secs = end of power-up.


The Channel Availability Check Time commences at instant T_0 and will end no sooner than $T_0 + 60$ seconds.

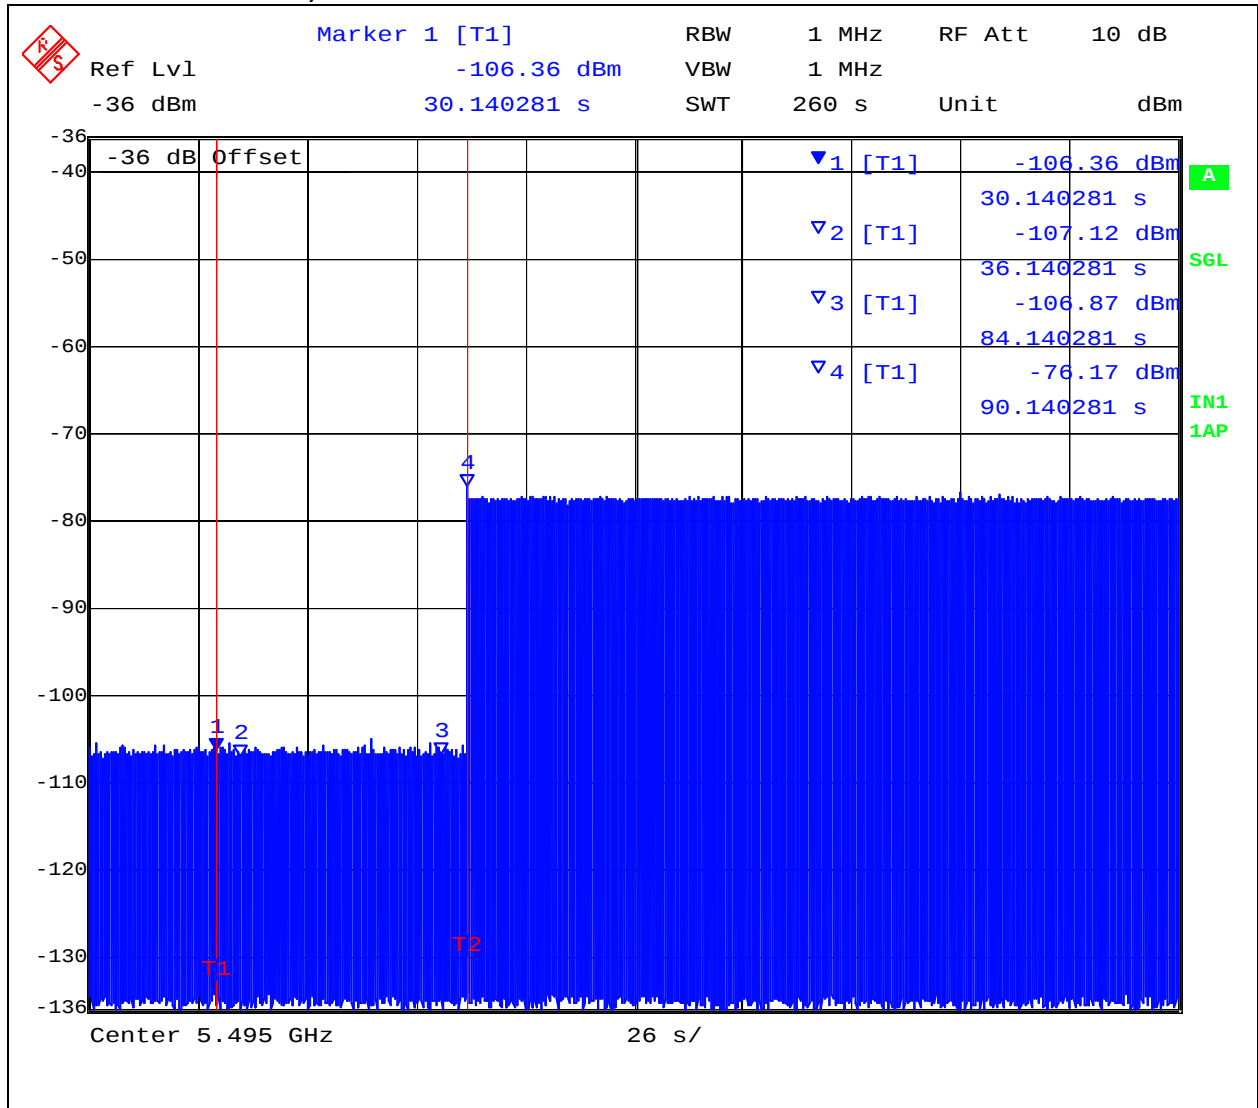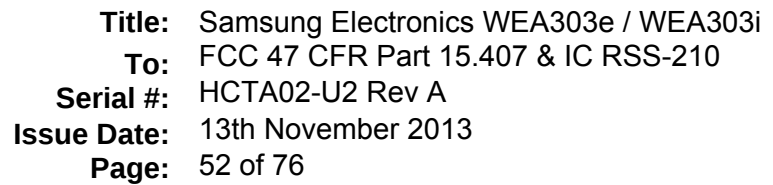



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 53 of 76

EUT power up and Initial Channel Availability Check Time
5,510MHz 802.11n HT40 Power On = 95.35 Seconds

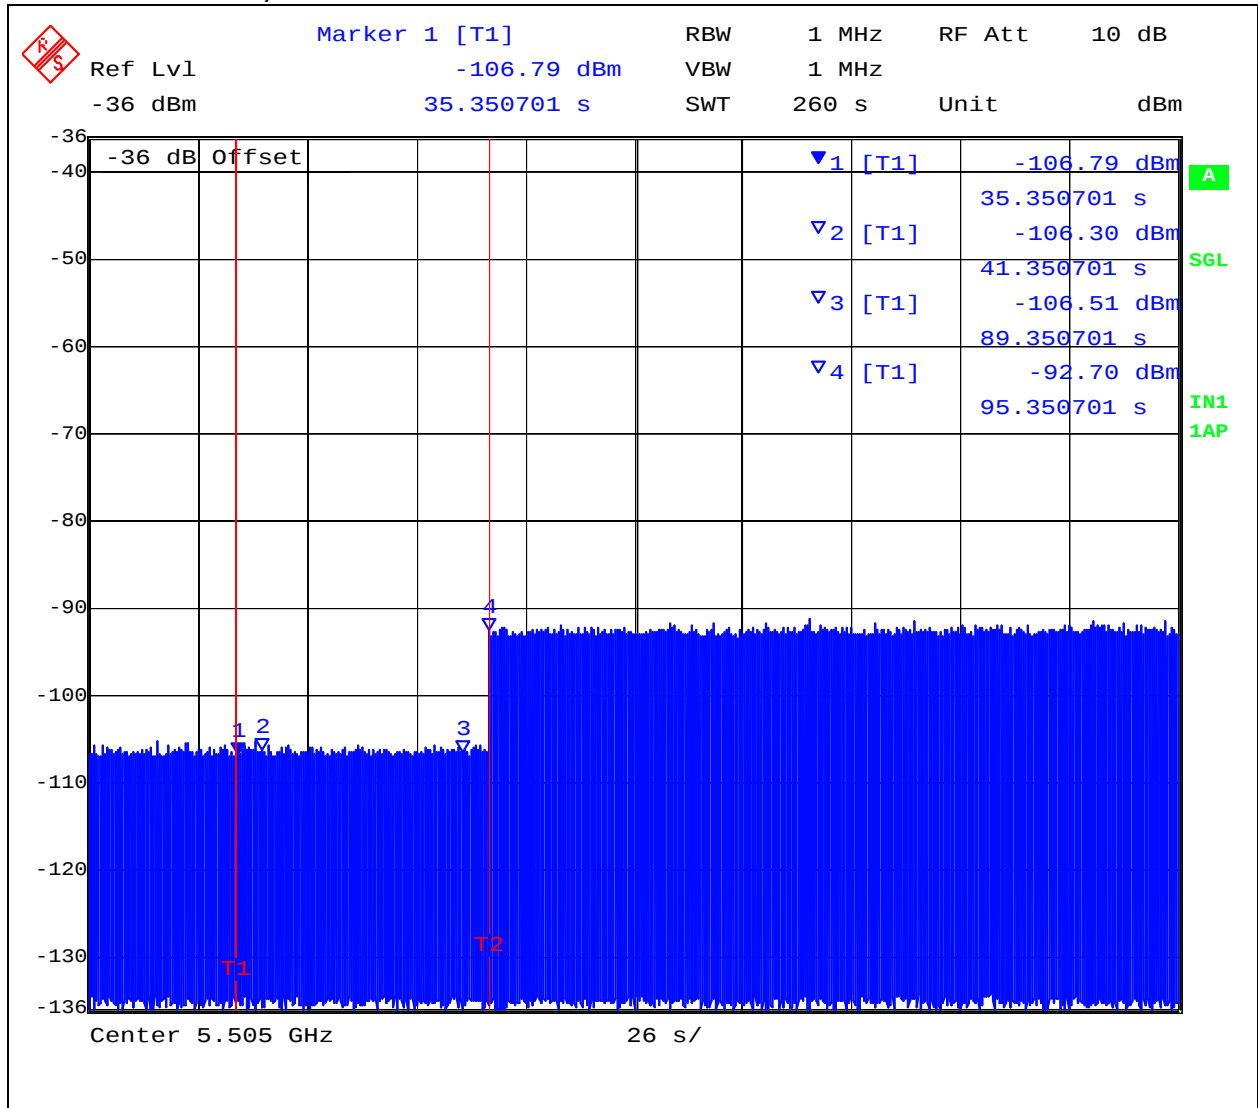

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 54 of 76

4.3.3. Radar Burst at the Beginning of the Channel Availability Check Time:

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold +6 dB (-62 dBm Ref Section 6.1.7) occurs at the beginning of the Channel Availability Check Time.

A single Burst of short pulse of radar Type 1 will commence within a 6 second window starting at T_0 (first red marker line on the following plot).

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a & 5,510MHz 802.11n HT40 will continue for 2.5 minutes after the radar burst has been generated.

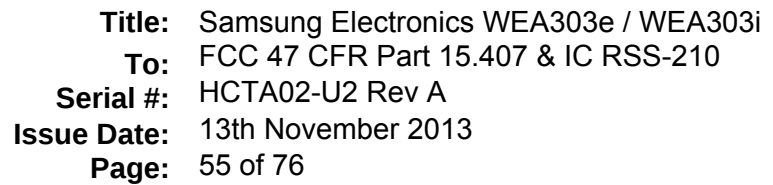

Marker 1 [T1] -106.92 dBm
 Ref Lvl -36 dBm
 30.140281 s

RBW 1 MHz
 VBW 1 MHz
 SWT 260 s

RF Att 10 dB
 Unit dBm

Marker	Power Level [dBm]
▼1 [T1]	-106.92 dBm
▼2 [T1]	-106.51 dBm
▼3 [T1]	-106.74 dBm
▼4 [T1]	-105.93 dBm


Center 5.495 GHz 26 s/

MiCOM Labs, 575 Boulder Court, Pleasanton, CA 94566 USA, Phone: 925.462.0304, Fax: 925.462.0306, www.micomlabs.com



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 56 of 76

**Channel Availability Check Time at the start T0 + 6 seconds Check Time
5,510MHz 802.11n HT40**

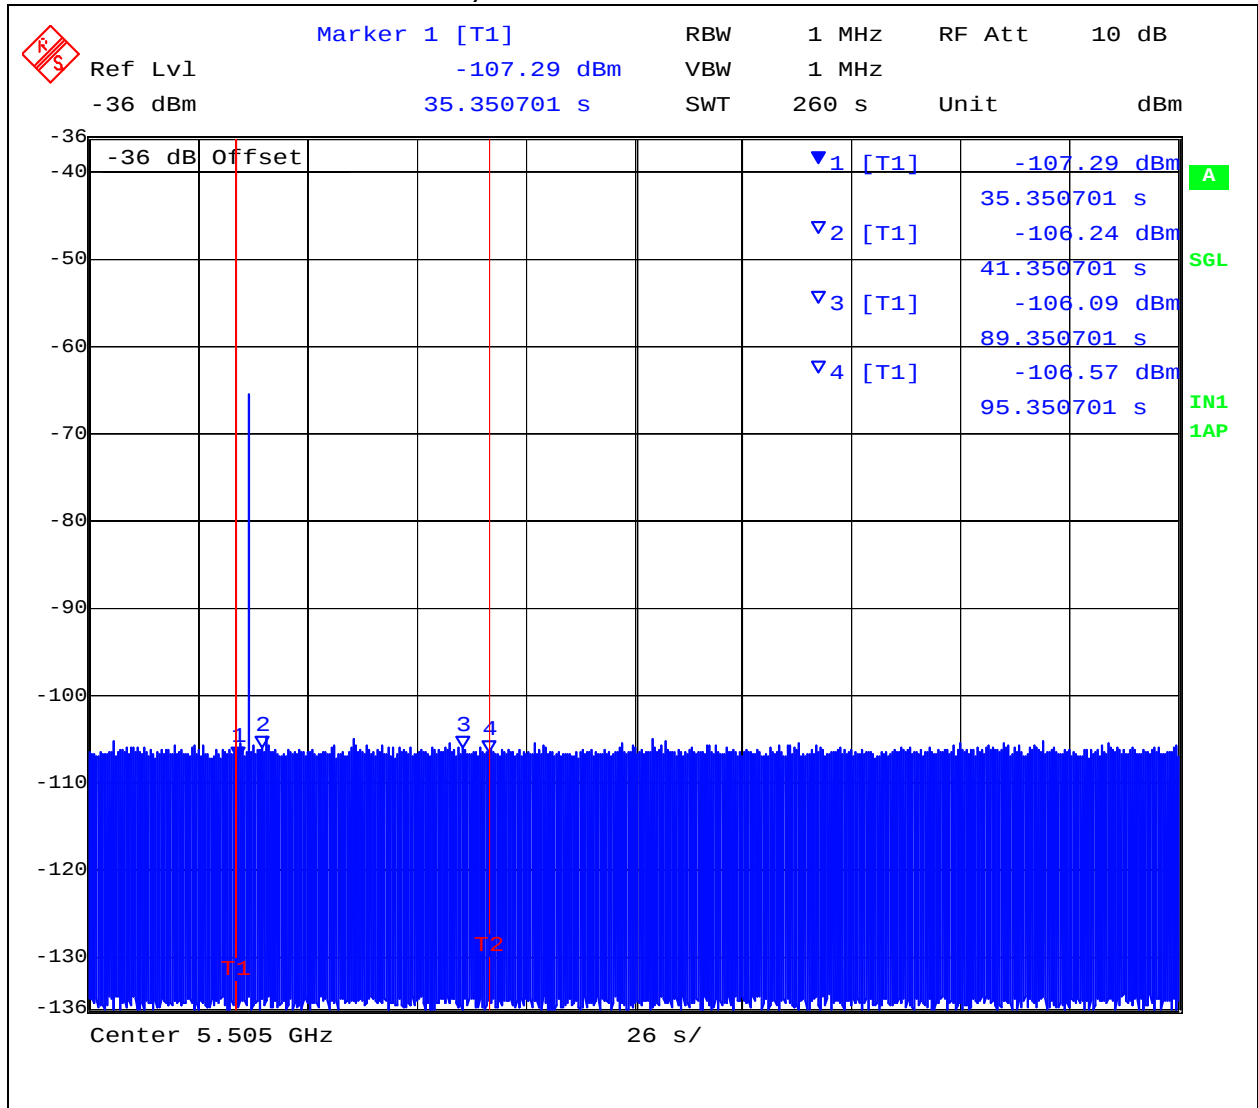

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4.3.4. Radar Burst at the End of the Channel Availability Check Time:

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold occurs at the end of the Channel Availability Check Time.


A single Burst of short pulse of radar type 1 will commence within a 6 second window starting at $T_0 + 54$ seconds. The window will commence at marker 2 and end at the red frequency line T_2 .

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a & 5,510MHz 802.11n HT40 will continue for 2.5 minutes after the radar burst has been generated.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 58 of 76

**Channel Availability Check Time at T0 + 54 seconds Check Time
5,500MHz 802.11a**

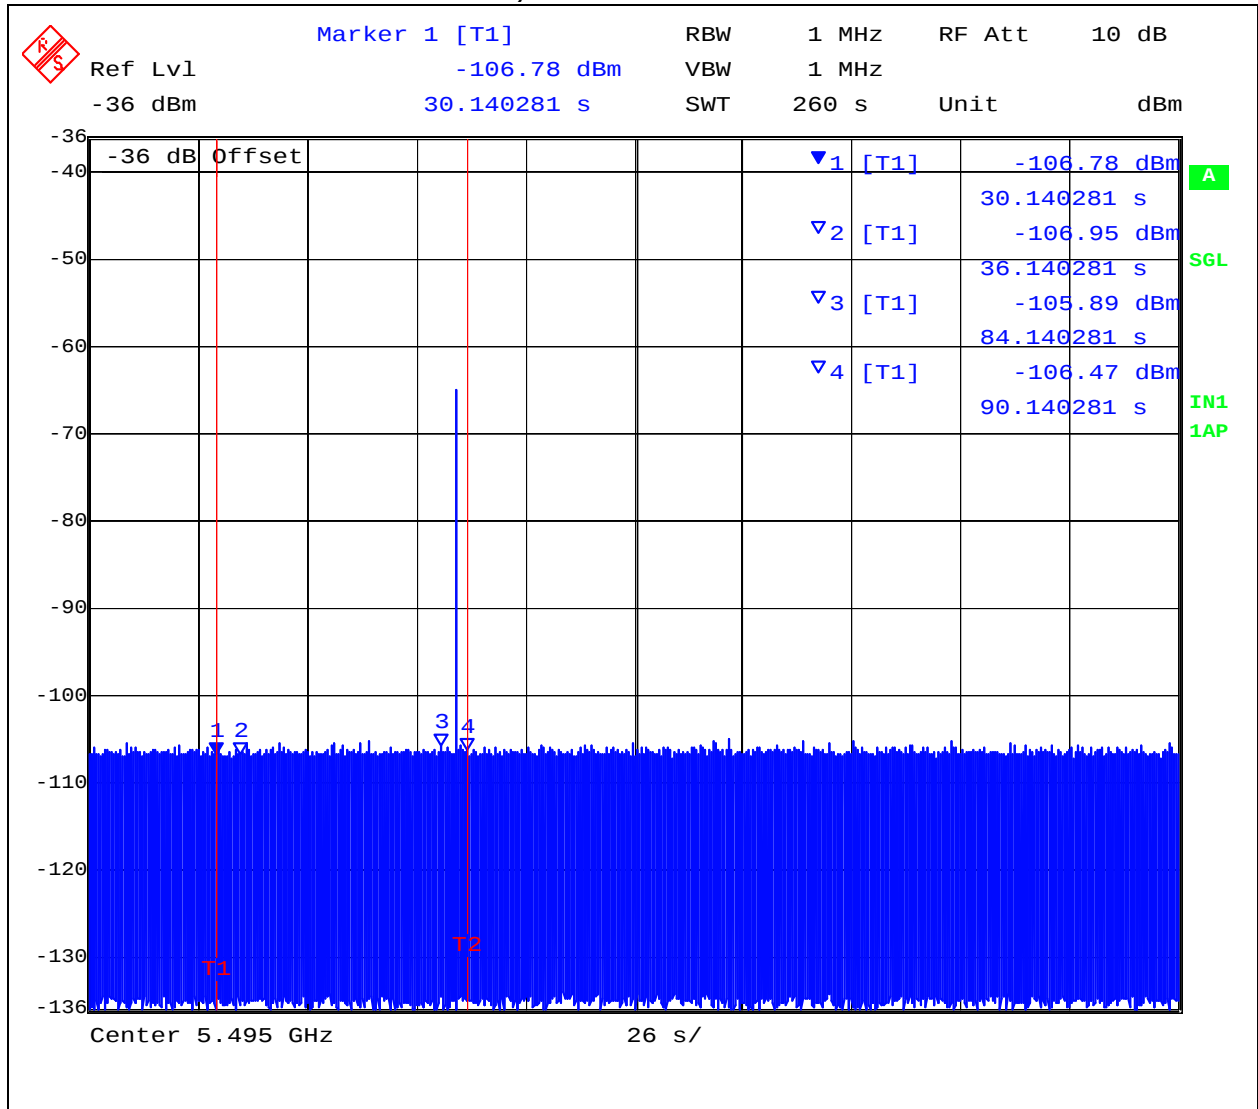


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 59 of 76

Channel Availability Check Time at T0 + 54 seconds Check Time
5,510MHz 802.11n HT40

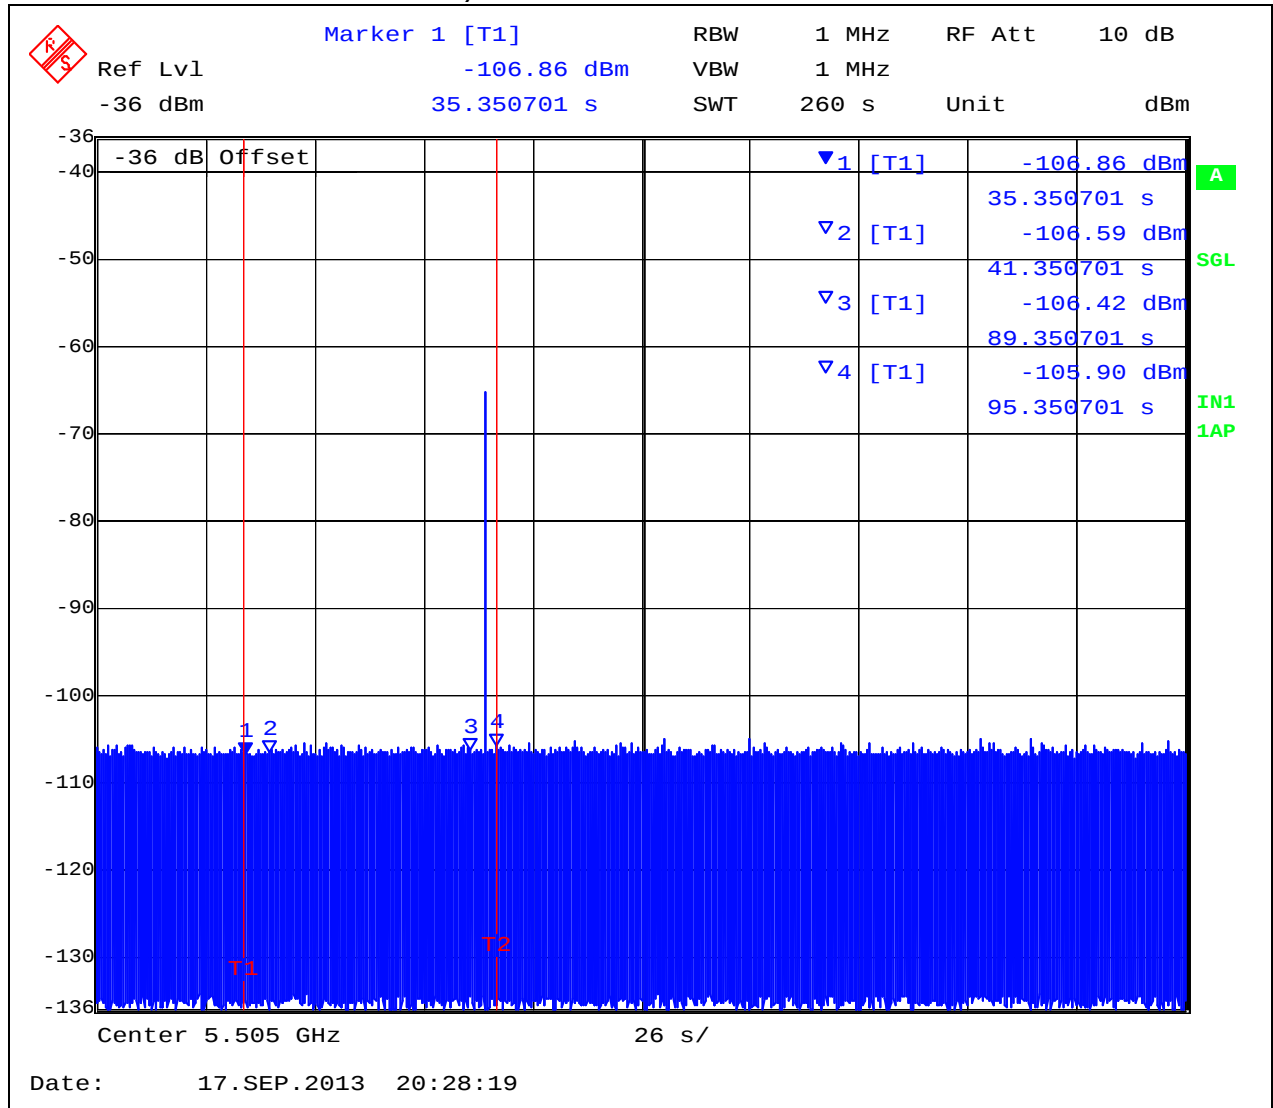

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4.3.4.1. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

FCC §15.407(h)(2)(iii)

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

Channel Closing Transmission Time - Measurement

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured, collecting nearly 250M samples of data, which included in excess of 600 ms of pre-trigger data. This Type 1 waveform had an integral marker built into its construction, marking the start of the radar waveform play, which directly triggered the PXI digitizer's data capture via the PXI backplane trigger bus.

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events with respect to T_0 (zero time indicating the start of the measurements sequence) starting the 612.1 ms pre-trigger period followed by the radar type 1 burst period.

Radar (Type 1) Pre-trigger period 612.1 ms

Type 1 burst period 25.70 ms

(The period of the 18 pulse burst includes [18 pulses * 1.428mS PRI] = 25.704 ms. Then add 1 μ s pulse width for the final pulse.)

Channel Closing Transmission Time starts immediately after the last radar pulse is transmitted i.e. 637.8 ms after the start of the trace capture period.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 61 of 76

Channel Closing Transmission Time 5,500 MHz (802.11a) = 25.199 mSecs (limit 260 mSecs)

Channel Move Time 5,500MHz (802.11a) = 1.2 Secs (limit 10 Secs)

Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 0 to 10 seconds



From the plot above it can be seen that the transmission activity within the 200 mS window is 6.063 mS (see 200 mS Total). From the following plots which shows all additional activity within the remained of the 10 sec measurement window it can be determined that the aggregate transmission is 19.136 mS. This is less than the 60 mS limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 62 of 76

Channel Closing Transmission Time 5,510 MHz (802.11n HT40) = 6.079 mSecs (limit 260 mSecs)

Channel Move Time 5,510 MHz (802.11n HT40) = 1.322 Secs (limit 10 Secs)

**Channel Move Time, Channel Closing Transmission Time for Type 1 Radar
Captured by the Test System - 0 to 10 seconds**



From the plot above it can be seen that the transmission activity within the 200 mS window is 0.923 mS (see 200 mS Total). From the following plots which shows all additional activity within the remained of the 10 sec measurement window it can be determined that the aggregate transmission is 5.156 mS. This is less than the 60 mS limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 63 of 76

30 Minute Non-Occupancy Period

The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

30 Minute Non-Occupancy Period Type 1 Radar 5,500MHz 802.11a

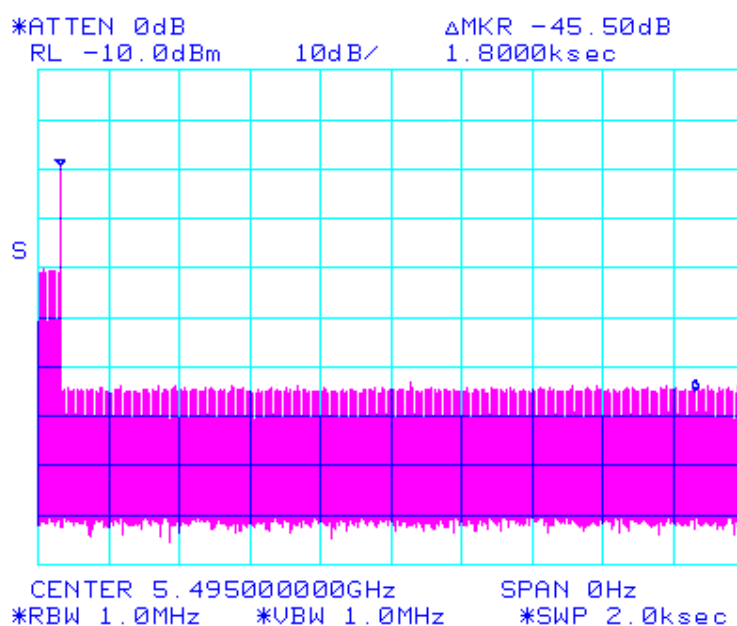


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 64 of 76

30 Minute Non-Occupancy Period Type 1 Radar
5,510 MHz 802.11n HT40

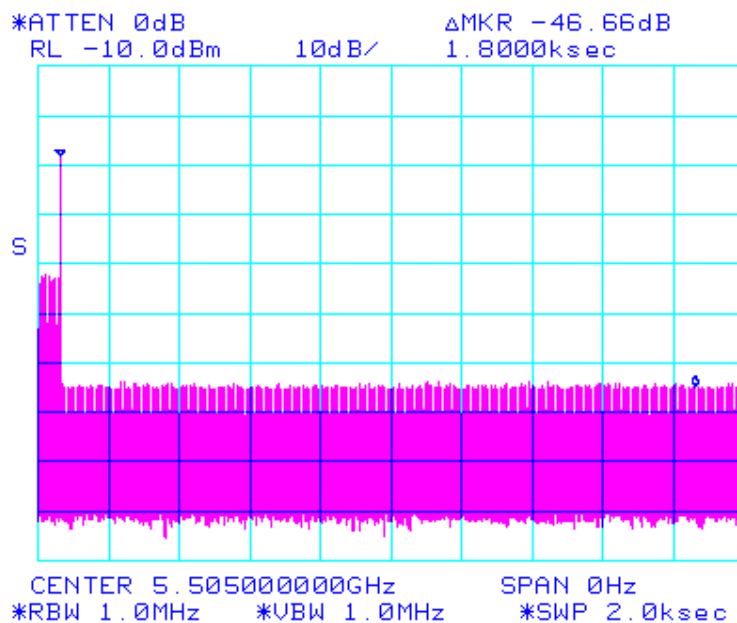

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 65 of 76

4.3.5. Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,500MHz 802.11a and 5,510MHz 802.11n HT40.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

$$\text{Total \# of detections} \div \text{Total \# of Trials} \times 100 = \text{Probability of Detection}$$

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 66 of 76

Port : M1,M2, **Radar Level :** - 57 dBm; **Off-set :** 5 MHz.

Verification of Detection 5,500MHz 802.11a

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	√	√
12	√	√	√	√	√	√
13	√	√	√	√	0	√
14	√	√	√	√	√	√
15	√	√	√	√	√	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	√	√
19	√	√	√	√	√	√
20	√	√	√	0	√	√
21	√	√	√	√	√	√
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
Detection Percentage	100% (>60%)	100% (>60%)	100% (>60%)	96.6% (>60%)	96.6% (>80%)√	100% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = 100\% + 100\% + 100\% + 96.6\% / 4 = 99.15\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 67 of 76

Port : M1,M2, **Radar Level :** - 57 dBm; **Off-set :** 5 MHz.

Verification of Detection 5,510MHz 802.11n HT40

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	0	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	√	√
12	√	√	√	√	√	√
13	√	√	√	√	√	√
14	√	√	√	0	√	√
15	√	√	√	√	√	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	√	√
19	√	√	√	√	√	√
20	√	√	√	√	√	√
21	√	√	√	√	√	√
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
Detection Percentage	100% (>60%)	100% (>60%)	100% (>60%)	96.6% (>60%)	96.6% (>80%)	100% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;


$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (100\% + 100\% + 100\% + 96.6\%) / 4 = 99.15\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 68 of 76


4.3.6. Weather Radar Band Edge Plots

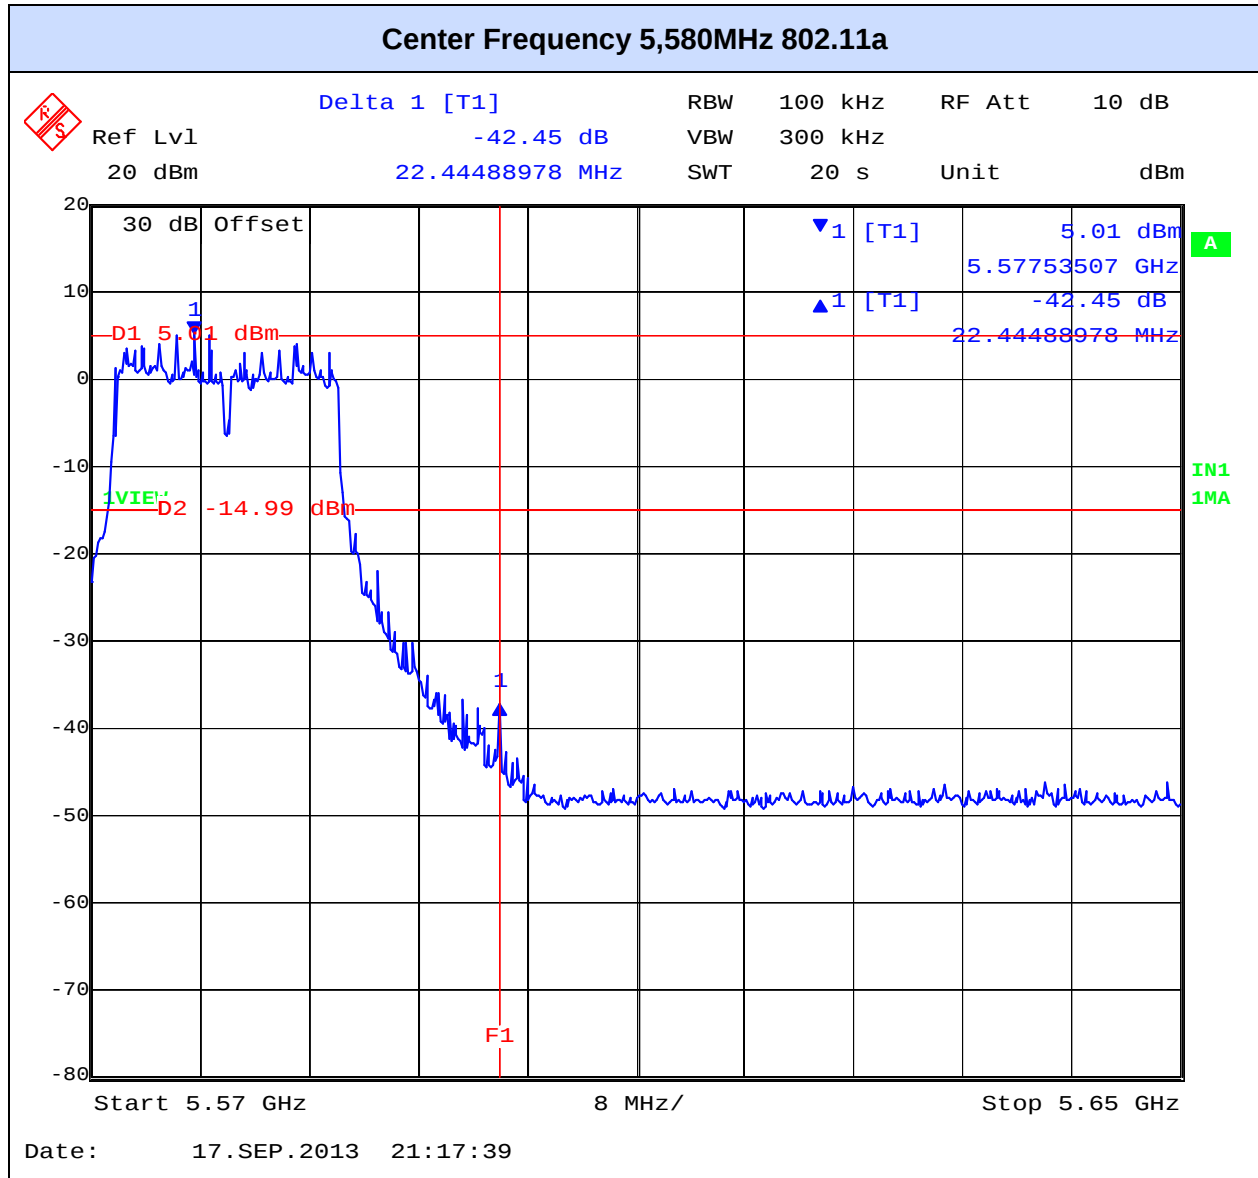

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 69 of 76

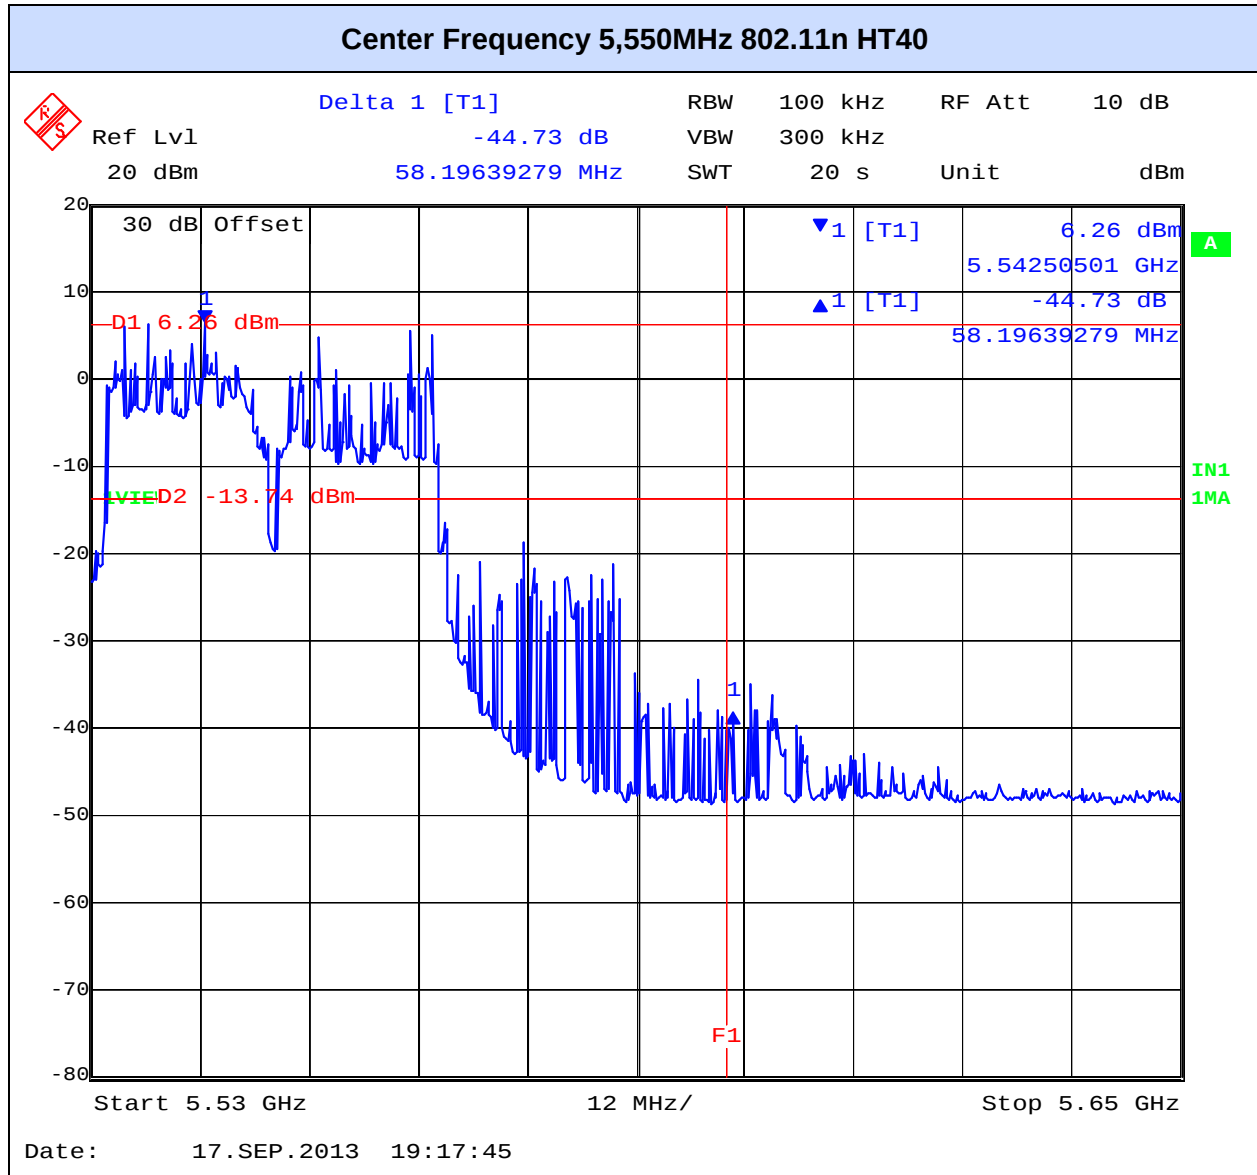

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 70 of 76

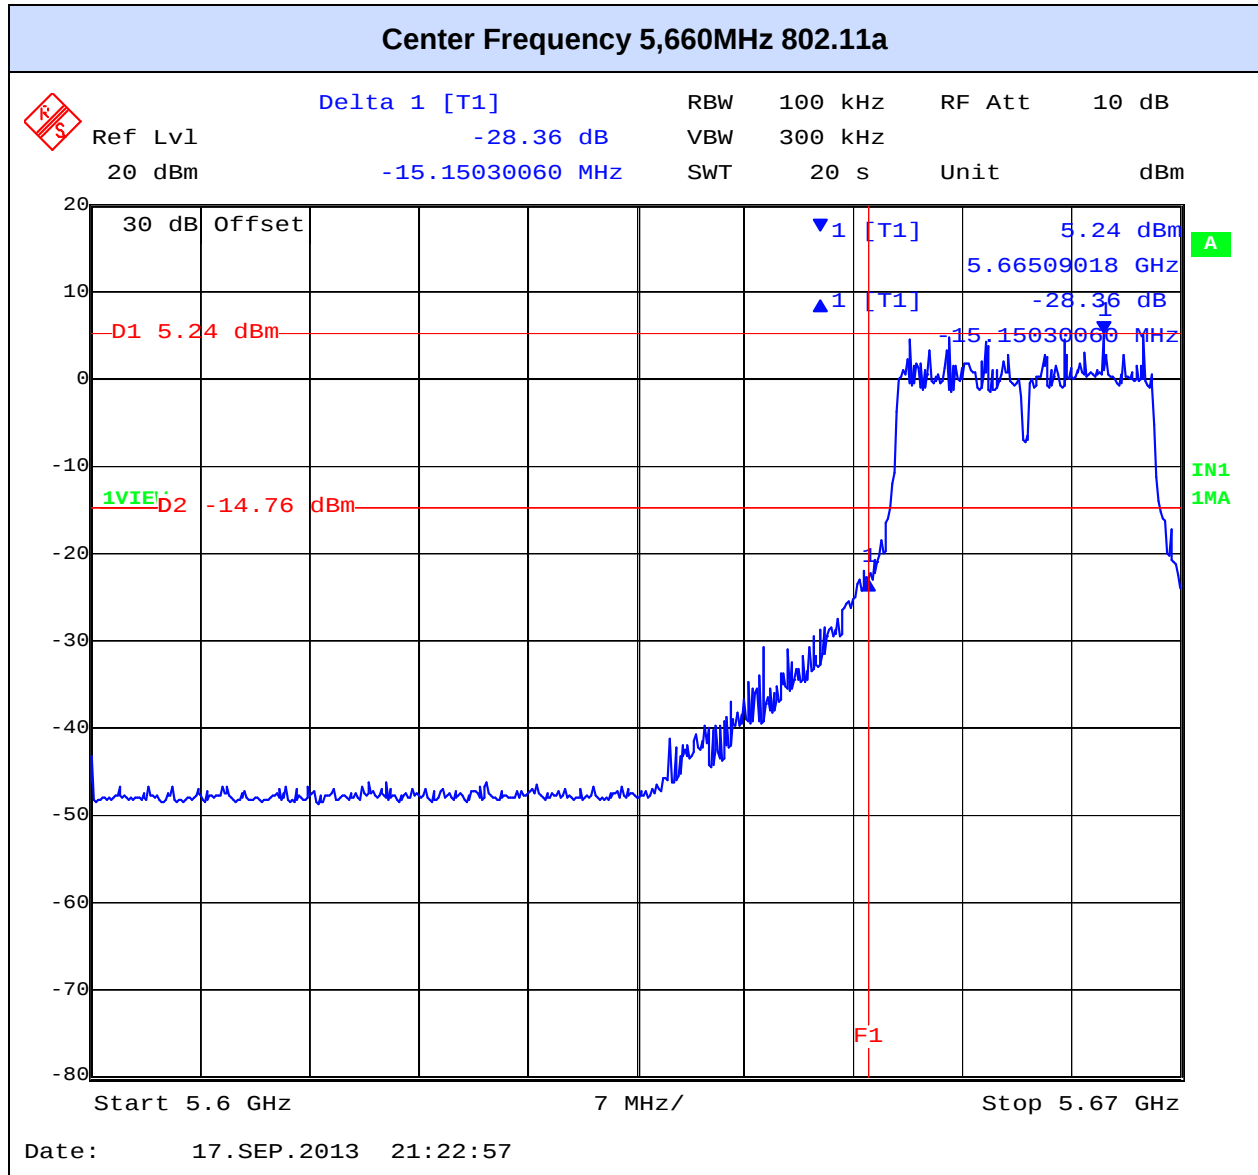

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 71 of 76

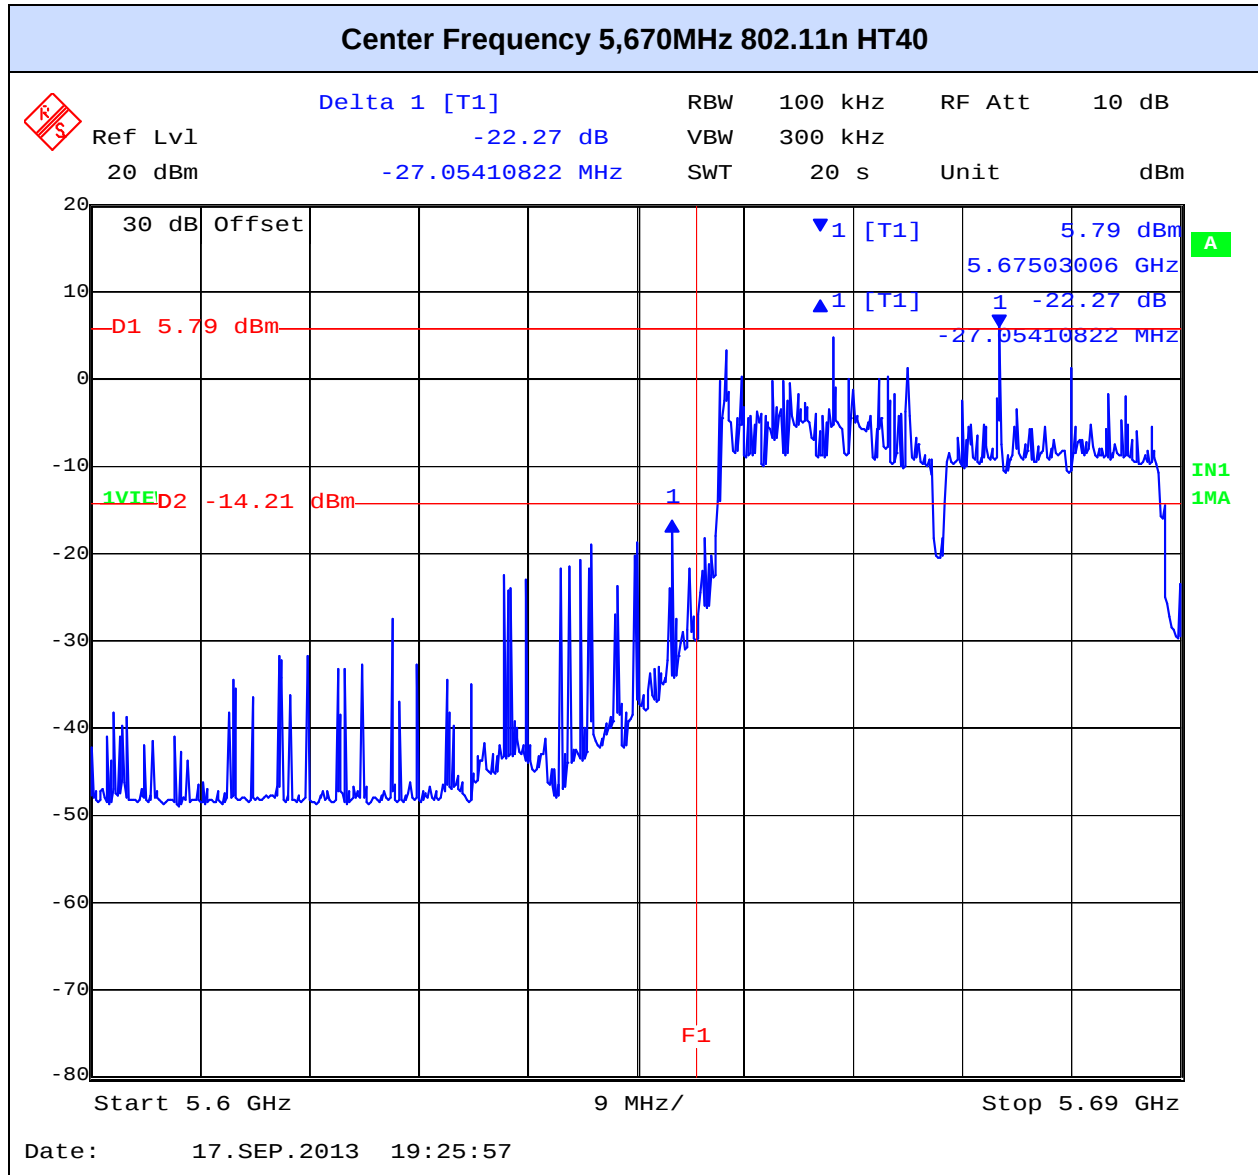

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 72 of 76

Measurement Uncertainty Time/Power

Measurement uncertainty	
- Time	4%
- Power	1.33dB

Traceability

Test Equipment Used

0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. PHOTOGRAPHS

5.1. Dynamic Frequency Selection Test Set-Up

General DFS Test Setup



DFS Test Equipment





Title: Samsung Electronics WEA303e / WEA303i
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: HCTA02-U2 Rev A
Issue Date: 13th November 2013
Page: 75 of 76

6. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787- 3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181- 3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com