



TEST REPORT

Report No. : CHTEW20010038

Report verification :



Project No. : SHT1912064301EW

FCC ID : AMW70002

Applicant's name : Uniden America Corporation

Address : 6225 N. State Highway 161, Suite 300, Irving, TX 75038, United States

Manufacturer..... : Auctus Technologies Co.,Ltd.

Address..... : 17F, Building 3, China Science and Technology Development Park, No. 009,Gaoxin Road,Nanshan Dist.Shenzhen, Guangdong, China

Test item description : MHS130 Handheld Marine Radio

Trade Mark..... : Uniden

Model/Type reference : MHS130

Listed Model(s)..... : -

Standard..... : FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 80

Date of receipt of test sample..... : Dec.24, 2019

Date of testing..... : Dec.24, 2019- Jan.02, 2020

Date of issue..... : Jan.03, 2020

Result : PASS

Compiled by
(position+printed name+signature) . : File administrators Echo Wei

Echo Wei

Supervised by
(position+printed name+signature) . : Project Engineer Gaosheng Pan

Gaosheng. Pan

Approved by
(position+printed name+signature) . : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name..... : Shenzhen Huatongwei International Inspection Co., Ltd.

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report revised information	3
<u>2</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3</u>	<u>SUMMARY</u>	<u>5</u>
3.1	Client Information	5
3.2	Product Description	5
3.3	Test frequency list	6
3.4	Operation mode	7
3.5	EUT configuration	7
<u>4</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
4.1	Address of the test laboratory	8
4.2	Test Facility	8
4.3	Environmental conditions	9
4.4	Statement of the measurement uncertainty	9
4.5	Equipments Used during the Test	10
<u>5</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
5.1	Conducted Carrier Output Power	11
5.2	99% Occupied Bandwidth & 26dB Bandwidth	12
5.3	Emission Mask	13
5.4	Modulation Limit	14
5.5	Audio Frequency Response	15
5.6.	Audio Low Pass Filter Response	17
5.7	Frequency stability VS Temperature	18
5.8	Frequency stability VS Voltage	20
5.9	Transmit Conducted Spurious Emission	22
5.10	Transmitter Radiated Spurious Emission	23
<u>6</u>	<u>APPENDIX</u>	<u>28</u>

1 TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 2](#): Frequency allocations and radio treaty matters; General rules and regulations

[FCC Rules Part 80](#): STATIONS IN THE MARITIME SERVICES

[ANSI C63.26-2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[ANSI/TIA-603-E\(2016\)](#): Land Mobile FM or PM Communications Equipment and Performance Standards

1.2. Report revised information

Revised No.	Date of issued	Description
N/A	2020-01-03	Original

2 TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Carrier Output Power	Part 80.215 Part 2.1046(a)	Pass	Linshuang Chen
99% Occupied Bandwidth & 26dB bandwidth	Part 80.205 Part 2.1049	Pass	Linshuang Chen
Emission Mask	Part 80.211(f) Part 2.1049	Pass	Linshuang Chen
Modulation Limit	Part 2.1047(b) Part 80.213	Pass	Linshuang Chen
Audio Frequency Response	Part 2.1047(a) Part 80.213(e)	Pass	Linshuang Chen
Audio Low Pass Filter Response	Part 95.575 Part 2.1047(a)	PASS	Linshuang Chen
Frequency Stability V.S. Temperature	Part 80.209 Part 2.1055	Pass	Linshuang Chen
Frequency Stability V.S. Voltage	Part 80.209 Part 2.1055	Pass	Linshuang Chen
Transmit Conducted Spurious Emission	Part 80.211(f)(3) Part 2.1051	Pass	Linshuang Chen
Transmit Radiated Spurious Emission	Part 80.211(f)(3) Part 2.1053	Pass	Linshuang Chen

3 SUMMARY

3.1 Client Information

Applicant:	Uniden America Corporation
Address:	6225 N. State Highway 161, Suite 300, Irving, TX 75038, United States
Manufacturer:	Auctus Technologies Co.,Ltd.
Address:	17F, Building 3, China Science and Technology Development Park, No. 009,Gaoxin Road,Nanshan Dist.Shenzhen, Guangdong, China

3.2 Product Description

Name of EUT:	MHS130 Handheld Marine Radio
Trade mark:	Uniden
Model/Type reference:	MHS130 S/N: TS1
Listed model(s):	-
Power supply:	DC 7.4V Lithium Battery DC 7.5V 5*AAA Size Battery
Li-ion Battery information	Model: BT130 1850mAh(13.69Wh)
Adapter information:	Model:JT-H120100 Input:100-240Va.c.,50/60Hz,0.5A Output:12Vd.c.,1000mA
Charger information:	Model:RSC130 Input: 12Vd.c.,1000mA
Hardware version:	V1.5
Software version:	V1.09

RF Specification

Support Frequency Range:	TX:156.025MHz~157.425MHz		
	RX:156.025MHz~162 MHz		
Rated Output Power:	Lithium Battery:		
	☒ High Power: 6W	☒ Mid Power: 2.5W	☒ Low Power: 1W
	5*AAA Size Battery:		
	☐ High Power: 6W	☒ Mid Power: 2.5W	☒ Low Power: 1W
Modulation Type:	Analog:	FM	
Channel Separation:	Analog:	☐ 12.5kHz	☒ 25kHz
Emission Designator: * ¹	Analog:	16K0G3E	
Antenna Type:	Omni-antenna		
Antenna Gain:	0 dBi		

Note:

(1) ^{*1} According to FCC Part 2.202 requirements, the Necessary Bandwidth is calculated as follows:

- For FM Voice Modulation

Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz

$B_n = 2M + 2DK = 2 \times 3 + 2 \times 5 \times 1 = 16 \text{ KHz}$

Emission designation: 16K0G3E

3.3 Test frequency list

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range over which EUT operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Frequency Bands (MHz)	Test Channel	Test Frequency (MHz)
156.025~157.425	CH _L	156.025
	CH _M	156.800
	CH _H	157.425

3.4 Operation mode

Test mode	Transmitting	Receiving	Power level			Analog Voice/FM
			High	Mid	Low	25kHz
TX-AWH	√		√			√
TX-AWM	√			√		√
TX-AWL	√				√	√

Note:

√: is operation mode.

Modulation Type	Description
UM	Un-modulation
AM2	Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
AM6	Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation, then increase the level from the audio generator by 20 dB
AM5	Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation.

Pre-scan above all test mode, found below test mode which it was worse case mode, so only show the test data for worse case mode on the test report.

Test item	Modulation Type	Test mode (Worse case mode)
Conducted Output Power	UM	TX-AWH, TX-AWM ,TX-AWL
99% Occupied Bandwidth & 26dB bandwidth	AM6	TX-AWH, TX-AWL
Emission Mask	AM5	TX-AWH, TX-AWL
Modulation Limit	AM6	TX-AWH
Audio Frequency Response	AM2	TX-AWH
Frequency Stability VS Temperature	UM	TX-AWH, TX-AWL
Frequency Stability VS Voltage	UM	TX-AWH, TX-AWL
Transmit Conducted Spurious Emission	AM5	TX-AWH
Transmit Radiated Spurious Emission	AM5	TX-AWH

3.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

●	Power Cable	Length (m) :	/
		Shield :	Unshielded
		Detachable :	Undetachable
○	Multimeter	Manufacturer :	/
		Model No. :	/

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235.

IC-Registration No.: 5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3 Environmental conditions

Atmospheric Contions	
Temperature:	21°C to 25°C
Relative Humidity:	20 % to 75 %.
Atmospheric Pressure:	860 mbar to 1060 mbar
Norminal Test Voltage:	$V_N = DC\ 7.40V$
Extrem Test Voltage @115% V_N :	$V_H = DC\ 8.51V$
Extrem Test Voltage @85% V_N :	$V_L = DC\ 6.29V$

4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability & Occupied Bandwidth	15Hz for <1GHz 70Hz for >1GHz	(1)
Conducted Output Power	0.51dB	(1)
ERP / EIRP / RSE	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Conducted Emission 9KHz-30MHz	3.02dB	(1)
Radiated Emission 30~1000MHz	4.90dB	(1)
Radiated Emission 1~18GHz	4.96dB	(1)
FM deviation	25 Hz	(1)
Audio level	0.62 dB	(1)
Low Pass Filter Response	0.76 dB	(1)
Modulation Limiting	0.42 %	(1)
Transient Frequency Behavior	6.8 %	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5 Equipments Used during the Test

● TS8613 Test system							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2019/10/26	2020/10/25
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2019/10/26	2020/10/25
●	RF Communication Test Set	HP	HTWE0038	8920A	3813A10206	2019/10/26	2020/10/25
●	Digital intercom communication tester	Aeroflex	HTWE0255	3920B	1001682041	2019/10/26	2020/10/25
●	Signal Generator	R&S	HTWE0191	SML02	100507	2019/10/26	2020/10/25
●	RF Control Unit	Tonscend	HTWE0294	JS0806-2	N/A	N/A	N/A
○	Filter-VHF	Microwave	HTWE0309	N26460M1	498702	N/A	N/A
●	Filter-UHF	Microwave	HTWE0311	N25155M2	498704	N/A	N/A
○	Power Divider	Microwave	HTWE0043	OPD1040-N-4	N/A	2019/05/24	2020/05/23
○	Attenuator	JFW	HTWE0292	50FH-030-100	N/A	2019/05/18	2020/05/17
○	Attenuator	JFW	HTWE0293	50-A-MFN-20	0322	2019/05/18	2020/05/17
●	Test software	HTW	N/A	Radio ATE	N/A	N/A	N/A

● Auxiliary Equipment							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Climate chamber	ESPEC	HTWE0254	GPL-2	N/A	2019/10/23	2020/10/22
●	DC Power Supply	Gwinstek	HTWE0274	SPS-2415	GER835793	N/A	N/A

● Radiated Spurious Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/11
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2018/04/04	2021/04/03
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2017/04/01	2020/03/31
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Preamplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	EMI Test Software	Audix	N/A	E3	N/A	N/A	N/A

5 TEST CONDITIONS AND RESULTS


5.1 Conducted Carrier Output Power

LIMIT

FCC Part 80.215, FCC Part 2.1046

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation.

TEST CONFIGURATION

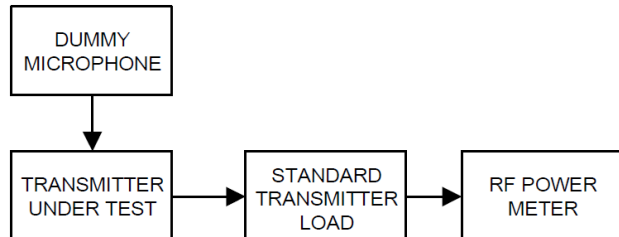

TEST PROCEDURE

- (1) Connect the equipment as illustrated
- (2) Correct for all losses in the RF path
- (3) Measure the transmitter output power
- (4) If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Please refer to appendix A on the section 8 appendix report

5.2 99% Occupied Bandwidth & 26dB Bandwidth

LIMIT


FCC Part 80.205, FCC Part 2.1049

Class of emission	Emission designator	Authorized bandwidth (kHz)
A1A	160HA1A	0.4
A1B ¹	160HA1B	0.4
A1D ¹²	16K0A1D	20.0
A2A	2K66A2A	2.8
A2B ¹	2K66A2B	2.8
A2D ¹²	16K0A2D	20.0
A3E	6K00A3E	8.0
A3N ²	2K66A3N	2.8
A3X ³	3K20A3X	25.0
F1B ⁴	280HF1B	0.3
F1B ⁵	300HF1B	0.5
F1B ⁶	16K0F1B	20.0
F1C	2K80F1C	3.0
F1D ¹²	16K0F1D	20.0
F2B ⁶	16K0F2B	20.0
F2C ⁷	16K0F2C	20.0
F2D ¹²	16K0F2D	20.0
F3C	2K80F3C	3.0
F3C ⁷	16K0F3C	20.0
F3E ⁸	16K0F3E	20.0

⁸ Applicable only when maximum frequency deviation is 5 kHz. See also paragraph (b) of this section.

TEST CONFIGURATION

Test setup for Analog:

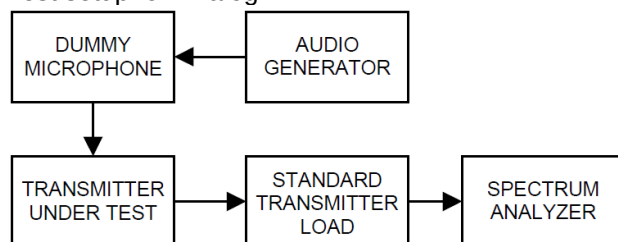

TEST PROCEDURE

- (1) Connect the equipment as illustrated
- (2) Spectrum set as follow:
 Centre frequency = the nominal EUT channel center frequency,
 The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient)
 RBW = 1% to 5% of the anticipated OBW, VBW $\geq 3 \times \text{RBW}$, Sweep = auto,
 Detector function = peak, Trace = max hold
- (3) Set 99% Occupied Bandwidth and 26dB Bandwidth
- (4) Measure and record the results in the test report.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

☒ Passed ☐ Not Applicable

Please refer to appendix B on the section 8 appendix report

5.3 Emission Mask


LIMIT

FCC Part 80.211(f), FCC Part 2.1049

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

TEST CONFIGURATION

Test setup for Analog:

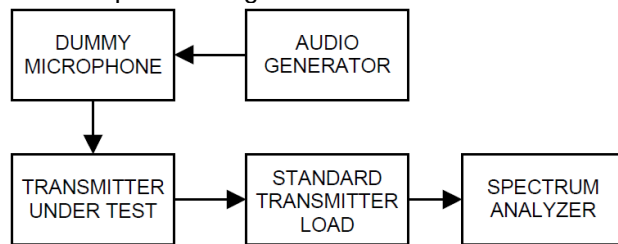

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Spectrum set as follow:
Centre frequency = fundamental frequency, span=120kHz for 12.5kHz channel spacing,
RBW=100Hz, VBW=1000Hz, Sweep = auto,
Detector function = peak, Trace = max hold
- 3) Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4
- 5) Measure and record the results in the test report.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

☒ Passed ☐ Not Applicable


Please refer to appendix C on the section 8 appendix report

5.4 Modulation Limit

LIMIT

FCC Part 80.213, FCC Part 2.1047(b)
5kHz for 25 KHz Channel Spacing System

TEST CONFIGURATION

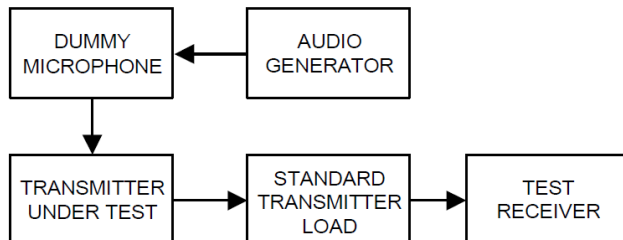

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 3) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to $\geq 15,000$ Hz. Turn the de-emphasis function off.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4 and vary the input level from -20 to $+20$ dB.
- 5) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level
- 6) Repeat step 4-5 with input frequency changing to 300Hz, 1004Hz, 1500Hz and 2500Hz in sequence.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

☒ Passed ☐ Not Applicable


Please refer to appendix D on the section 8 appendix report

5.5 Audio Frequency Response

LIMIT


FCC Part 80.213(e), FCC Part 2.1047(a):

Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

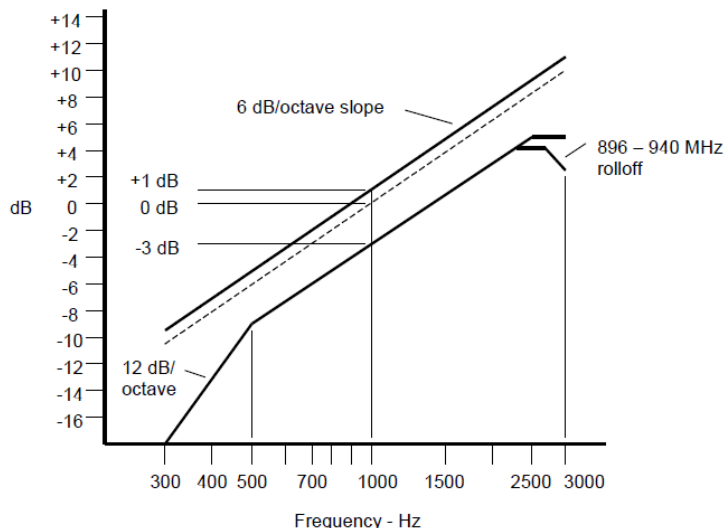

An additional 6 dB per octave attenuation is allowed from 2500 Hz to 3000 Hz in equipment operating in the 25 MHz to 869 MHz range.

TEST CONFIGURATION

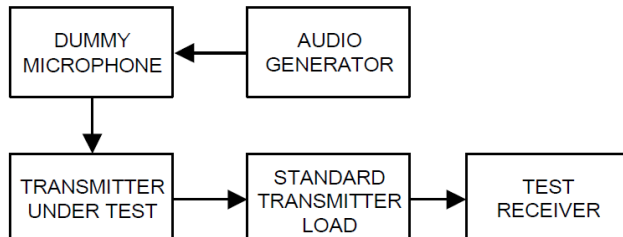

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for 50 Hz to 15,000 Hz. Turn the de-emphasis function off.
- 3) Set the DMM to measure rms voltage.
- 4) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 5) Apply Input Modulation Signal to EUT according to Section 3.4
- 6) Set the test receiver to measure rms deviation and record the deviation reading.
- 7) Record the DMM reading as V_{REF} .
- 8) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- 9) Vary the audio frequency generator output level until the deviation reading that was recorded in step 6) is obtained.
- 10) Record the DMM reading as V_{FREQ} .
- 11) Calculate the audio frequency response at the present frequency as:
audio frequency response = $20 \log_{10} (V_{FREQ}/V_{REF})$.
- 12) Repeat steps 8) through 11) for all the desired test frequencies

TEST MODE

Please reference to the section 3.4

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Please refer to appendix E on the section 8 appendix report


5.6. Audio Low Pass Filter Response

LIMIT


FCC Part 95.1775(e)(1)(2):

(e) Audio filter. Each GMRS transmitter type must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of §95.1779 (without filtering).

- (1) The filter must be between the modulation limiter and the modulated stage of the transmitter.
- (2) At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least 60 log (f/3) dB more than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB more than the attenuation at 1 kHz.

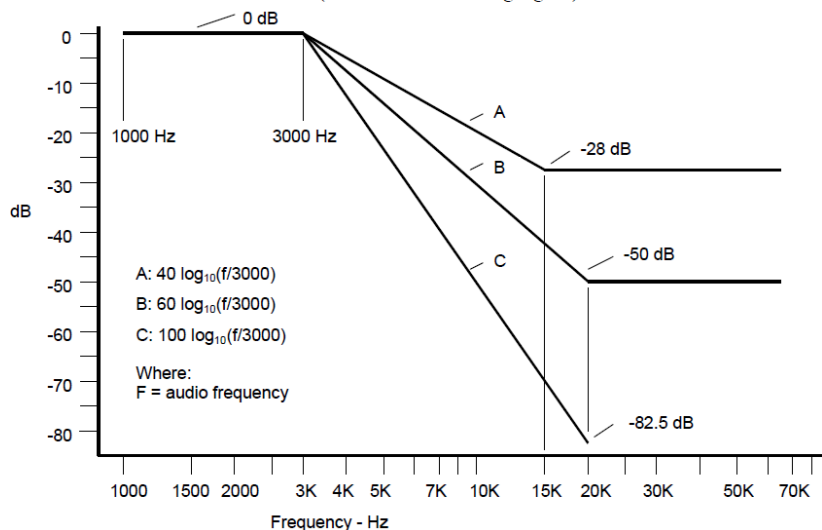

TEST CONFIGURATION

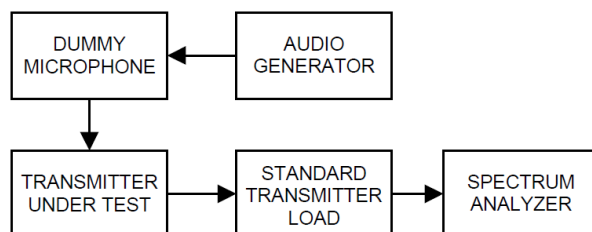

TEST PROCEDURE

- 1) Configure the EUT as shown in figure .
- 2) Apply a 1000 Hz tone from the audio signal generator and adjust the level per manufacturer's specifications. Record the dB level of the 1000 Hz tone as LEV_{REF} .
- 3) Set the audio signal generator to the desired test tone frequency between 3000 Hz and the upper low pass filter limit. Record the dB level at the test frequency as LEV_{FREQ} .
- 4) Calculate the audio frequency response at the test frequency as:
 low pass filter response = $LEV_{FREQ} - LEV_{REF}$

TEST MODE

Please reference to the section 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix F on the appendix report

5.7 Frequency stability VS Temperature


LIMIT

FCC Part 80.209, FCC Part 2.1055

Frequency bands and categories of stations	Tolerances ¹
(5) Band 156-162 MHz:	
(i) Coast stations:	
For carriers licensed to operate with a carrier power:	
Below 3 watts	10.
3 to 100 watts	5. ⁷
(ii) Ship stations	10. ⁴
(iii) Survival craft stations operating on 121.500 MHz	50.
(iv) EPIRBs:	
Operating on 121.500 and 243.000 MHz	50.
Operating on 156.750 and 156.800 MHz. ⁶	10.
(6) Band 216-220 MHz:	
(i) Coast stations:	
For all emissions	5.
(ii) Ship stations:	
For all emissions	5.
(7) Band 400-466 MHz:	
(i) EPIRBs operating on 406-406.1 MHz	5.
(ii) On-board stations	5.
(iii) Radiolocation and telecommand stations.	5.
(8) Band 1626.5-1646.5 MHz:	
(i) Ship earth stations	5.

⁷For transmitters operated at private coast stations with antenna heights less than 6 meters (20 feet) above ground and output power of 25 watts or less the frequency tolerance is 10 parts in 10^6 .

TEST CONFIGURATION

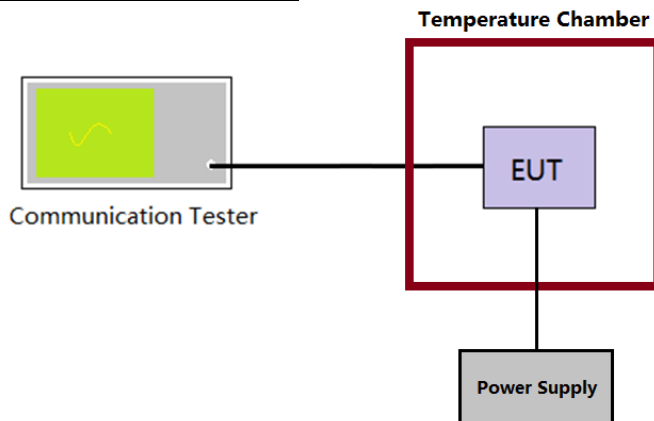

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber.
- 3) Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency as MCF_{MHz} .
- 4) Calculate the ppm frequency error by the following:

$$\text{ppm error} = (MCF_{\text{MHz}} / ACF_{\text{MHz}} - 1) * 10^6$$

where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Please refer to appendix G on the section 8 appendix report

5.8 Frequency stability VS Voltage


LIMIT

FCC Part 80.209, FCC Part 2.1055

Frequency bands and categories of stations	Tolerances ¹
(5) Band 156-162 MHz:	
(i) Coast stations:	
For carriers licensed to operate with a carrier power:	
Below 3 watts	10.
3 to 100 watts	5. ⁷
(ii) Ship stations	10. ⁴
(iii) Survival craft stations operating on 121.500 MHz	50.
(iv) EPIRBs:	
Operating on 121.500 and 243.000 MHz	50.
Operating on 156.750 and 156.800 MHz. ⁶	10.
(6) Band 216-220 MHz:	
(i) Coast stations:	
For all emissions	5.
(ii) Ship stations:	
For all emissions	5.
(7) Band 400-466 MHz:	
(i) EPIRBs operating on 406-406.1 MHz	5.
(ii) On-board stations	5.
(iii) Radiolocation and telecommand stations.	5.
(8) Band 1626.5-1646.5 MHz:	
(i) Ship earth stations	5.

⁷For transmitters operated at private coast stations with antenna heights less than 6 meters (20 feet) above ground and output power of 25 watts or less the frequency tolerance is 10 parts in 10⁶.

TEST CONFIGURATION

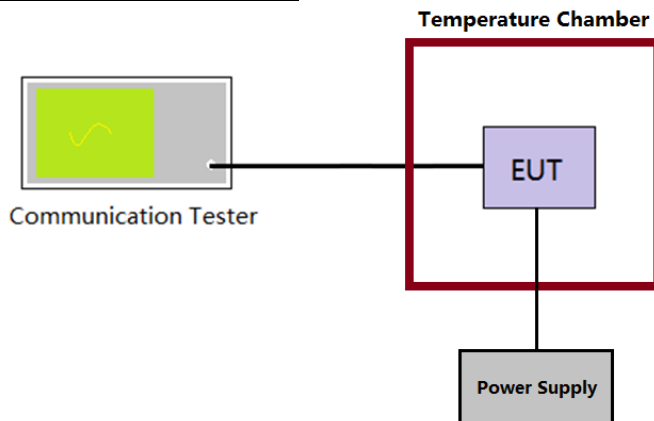

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber at 25°C
- 3) Record the carrier frequency of the transmitter as MCF_{MHz}
- 4) Calculate the ppm frequency error by the following:

$$ppm\ error = (MCF_{MHz} / ACF_{MHz} - 1) * 10^6$$

where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with varied $\pm 15\%$ of the nominal value measured at the input to the EUT

TEST MODE

Please reference to the section 3.4

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Please refer to appendix H on the section 8 appendix report

5.9 Transmit Conducted Spurious Emission

LIMIT

FCC Part 80.211(f)(3), FCC Part 2.1051

FCC Rules	Attenuation Limit (dBc)
§ 80.211(f)(3)	At least $43 + 10\log_{10}$ (mean power in watts) dB

$43 + 10 \log (P_{\text{watts}})$


Calculation: $\text{Limit (dBm)} = EL - 43 - 10\log_{10} (TP)$

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is P (dBm).

$\text{Limit (dBm)} = P \text{ (dBm)} - 43 - 10 \log (P_{\text{watts}}) = -13 \text{ dBm}$

TEST CONFIGURATION

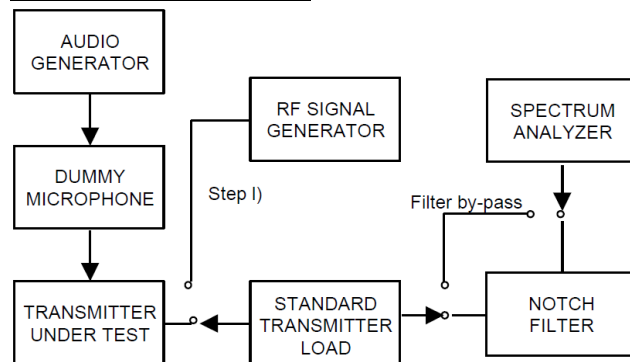

TEST PROCEDURE

1. Connect the equipment as illustrated, with the notch filter by-passed.
2. Apply Input Modulation Signal to EUT according to Section 3.4
3. Adjust the spectrum analyzer for the following settings:
Below 1GHz: RBW=100kHz, VBW=300kHz
Above 1GHz: RBW=1MHz, VBW=3MHz
Detector=Peak, Sweep time=Auto, Trace=Max hold
4. Scan frequency range up to 10th harmonic.
5. Record the frequencies and levels of spurious emissions

TEST MODE

Please reference to the section 3.4

TEST RESULTS

☒ Passed ☐ Not Applicable

Please refer to appendix I on the section 8 appendix report

5.10 Transmitter Radiated Spurious Emission

Radiated spurious emissions are emissions from the equipment when transmitting into a nonradiating load on a frequency or frequencies that are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

LIMIT

FCC Part 80.211(f)(3), FCC Part 2.1051

FCC Rules	Attenuation Limit (dBc)
§ 80.211(f)(3)	At least $43 + 10\log_{10}$ (mean power in watts) dB

$43 + 10 \log (P_{\text{watts}})$

Calculation: $\text{Limit (dBm)} = EL - 43 - 10\log_{10} (TP)$


Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is P (dBm).


$\text{Limit (dBm)} = P \text{ (dBm)} - 43 - 10 \log (P_{\text{watts}}) = -13 \text{ dBm}$


TEST CONFIGURATION

Below 1GHz:

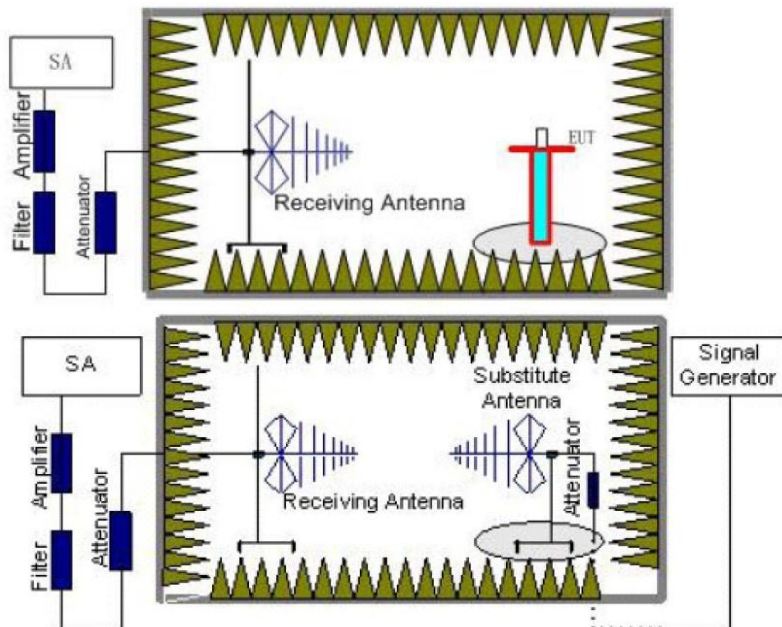

Above 1GHz:

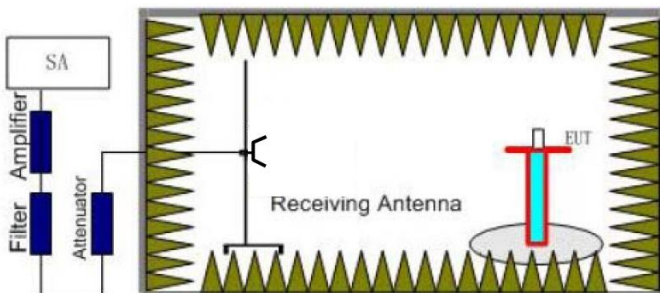

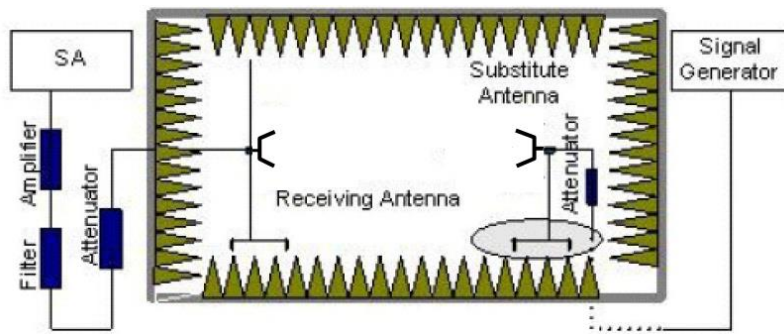

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
 If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

TEST MODE

Please reference to the section 3.4

TEST RESULTS


☒ **Passed** ☐ **Not Applicable**

TEST MODE	TX-AWH	Test Channel:	CH _L	Polarity:	Horizontal
-----------	--------	---------------	-----------------	-----------	------------

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Detector
1	40.6713	-77.76	3.83	-73.93	-20.00	53.93	Horizontal	PK
2	168.4848	-77.90	-1.60	-79.50	-20.00	59.50	Horizontal	PK
3	312.0628	-55.53	1.03	-54.50	-20.00	34.50	Horizontal	PK
4	468.1310	-78.69	3.98	-74.71	-20.00	54.71	Horizontal	PK
5	842.2340	-78.76	10.56	-68.20	-20.00	48.20	Horizontal	PK
6	1205.000	-70.43	4.63	-65.80	-20.00	45.80	Horizontal	PK

TEST MODE	TX-AWH	Test Channel:	CH _L	Polarity:	Vertical
-----------	--------	---------------	-----------------	-----------	----------

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Detector
1	90.2688	-77.88	4.49	-73.39	-20.00	53.39	Vertical	PK
2	312.0628	-45.66	1.61	-44.05	-20.00	24.05	Vertical	PK
3	468.1310	-75.32	3.69	-71.63	-20.00	51.63	Vertical	PK
4	780.1463	-76.47	8.53	-67.94	-20.00	47.94	Vertical	PK
5	936.0933	-77.16	9.42	-67.74	-20.00	47.74	Vertical	PK
6	1489.250	-71.74	6.32	-65.42	-20.00	45.42	Vertical	PK

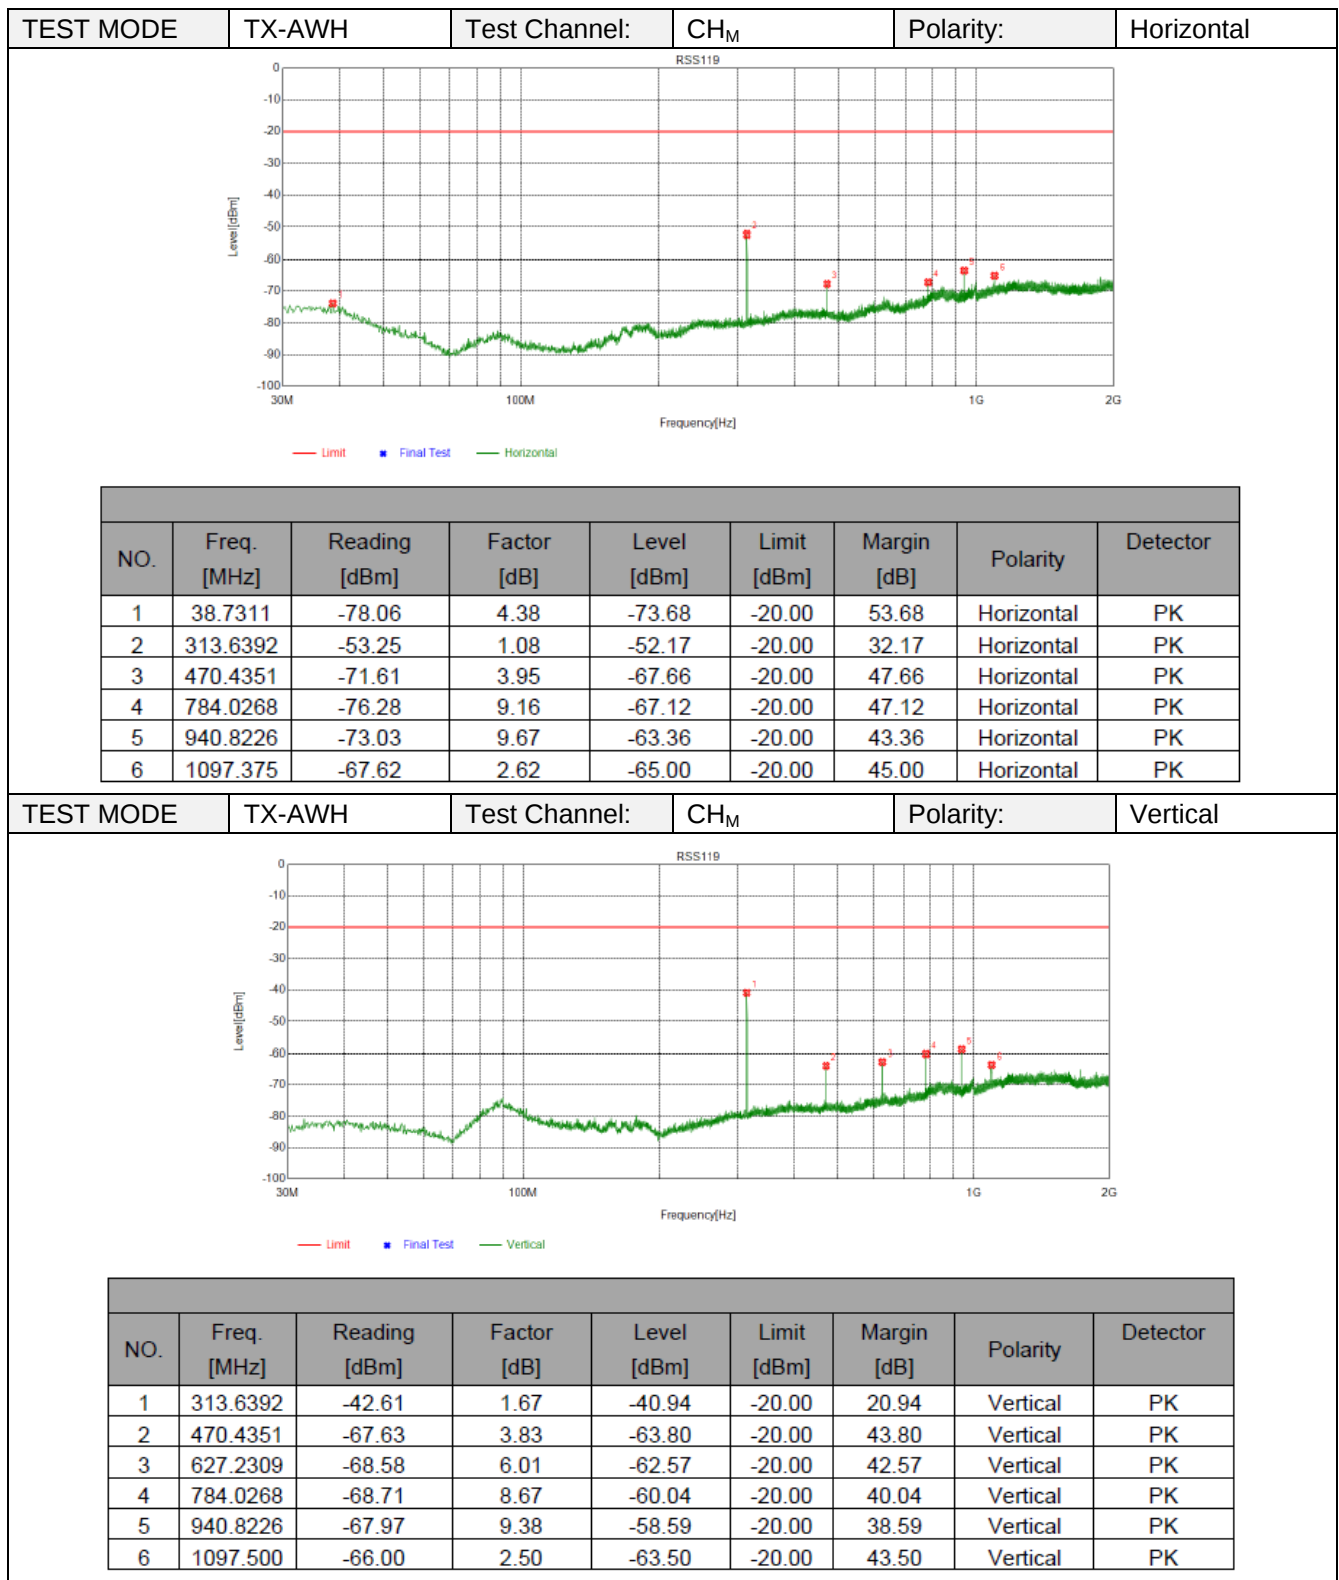

TEST MODE	TX-AWH	Test Channel:	CH _H	Polarity:	Horizontal
-----------	--------	---------------	-----------------	-----------	------------

Legend: — Limit ■ Final Test — Horizontal

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Detector
1	39.8225	-78.42	4.34	-74.08	-20.00	54.08	Horizontal	PK
2	314.8519	-57.23	1.11	-56.12	-20.00	36.12	Horizontal	PK
3	469.4649	-76.86	3.97	-72.89	-20.00	52.89	Horizontal	PK
4	743.5242	-77.69	7.37	-70.32	-20.00	50.32	Horizontal	PK
5	996.7258	-79.96	13.13	-66.83	-20.00	46.83	Horizontal	PK
6	1412.250	-72.61	5.61	-67.00	-20.00	47.00	Horizontal	PK

TEST MODE	TX-AWH	Test Channel:	CH _H	Polarity:	Vertical
-----------	--------	---------------	-----------------	-----------	----------

Legend: — Limit ■ Final Test — Vertical

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Detector
1	87.8435	-77.37	3.71	-73.66	-20.00	53.66	Vertical	PK
2	314.8519	-46.76	1.71	-45.05	-20.00	25.05	Vertical	PK
3	472.2540	-76.22	3.94	-72.28	-20.00	52.28	Vertical	PK
4	787.1796	-77.04	8.79	-68.25	-20.00	48.25	Vertical	PK
5	944.5818	-77.44	9.59	-67.85	-20.00	47.85	Vertical	PK
6	1402.250	-71.76	6.28	-65.48	-20.00	45.48	Vertical	PK

6 APPENDIX

**Appendix A:Maximum Transmitter Power**

Operation Mode	Modulation Type	Test Channel	Measured Power(dBm)	Measured Power(W)	Rated Power(W)	Percentage (%)	Limit(%)	Result
TX-AWH-1	FM	CH _L	37.3	5.42	6.00	-9.59	±20	PASS
TX-AWH-1	FM	CH _{M1}	37.3	5.37	6.00	-10.53	±20	PASS
TX-AWH-1	FM	CH _H	37.3	5.36	6.00	-10.67	±20	PASS
TX-AWM-1	FM	CH _L	34.3	2.68	2.50	7.17	±20	PASS
TX-AWM-1	FM	CH _{M1}	34.3	2.67	2.50	6.92	±20	PASS
TX-AWM-1	FM	CH _H	34.3	2.67	2.50	6.67	±20	PASS
TX-AWL-1	FM	CH _L	30.6	1.14	1.00	14.31	±20	PASS
TX-AWL-1	FM	CH _{M1}	30.6	1.15	1.00	14.56	±20	PASS
TX-AWL-1	FM	CH _H	30.6	1.15	1.00	14.81	±20	PASS
TX-AWH-2	FM	CH _L	33.7	2.34	2.50	-6.23	±20	PASS
TX-AWH-2	FM	CH _{M1}	33.7	2.34	2.50	-6.23	±20	PASS
TX-AWH-2	FM	CH _H	33.7	2.34	2.50	-6.23	±20	PASS
TX-AWL-2	FM	CH _L	29.7	1.14	1.00	14.31	±20	PASS
TX-AWL-2	FM	CH _{M1}	29.8	1.15	1.00	14.56	±20	PASS
TX-AWL-2	FM	CH _{M1}	29.7	1.15	1.00	14.56	±20	PASS

Note:

TX-ANH-1 Represents lithium battery EUT test value

TX-ANH-2 Represents 5*AAA size battery EUT test value

**Appendix B:Occupied Bandwidth**

Operation Mode	Modulation Type	Test Channel	Occupied Bandwidth		99% Limit(kHz)	Result
			99%(kHz)	26dB(kHz)		
TX-AWH	FM	CH _L	10.649	15.56	≤20	PASS
TX-AWH	FM	CH _{M1}	10.652	15.56	≤20	PASS
TX-AWH	FM	CH _H	10.649	15.56	≤20	PASS
TX-AWL	FM	CH _L	10.647	15.56	≤20	PASS
TX-AWL	FM	CH _{M1}	10.651	15.56	≤20	PASS
TX-AWL	FM	CH _H	10.655	15.56	≤20	PASS






Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-AWH	FM	CH _L	Agilent Spectrum Analyzer - Occupied BW Center Freq 156.025000 MHz Center Freq: 156.025000 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 40.83 dBm Span 50 kHz #Res BW 300 Hz #VBW 1 kHz Sweep 527.2 ms Occupied Bandwidth 10.649 kHz Total Power 37.9 dBm Transmit Freq Error -652 Hz OBW Power 99.00 % x dB Bandwidth 15.56 kHz x dB -26.00 dB Frequency Center Freq 156.025000 MHz CF Step 5.000 kHz Man Freq Offset 0 Hz Auto STATUS DC Coupled
TX-AWH	FM	CH _{M1}	Agilent Spectrum Analyzer - Occupied BW Center Freq 156.800000 MHz Center Freq: 156.800000 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 40.82 dBm Span 50 kHz #Res BW 300 Hz #VBW 1 kHz Sweep 527.2 ms Occupied Bandwidth 10.652 kHz Total Power 37.8 dBm Transmit Freq Error -657 Hz OBW Power 99.00 % x dB Bandwidth 15.56 kHz x dB -26.00 dB Frequency Center Freq 156.800000 MHz CF Step 5.000 kHz Man Freq Offset 0 Hz Auto STATUS DC Coupled
TX-AWH	FM	CH _H	Agilent Spectrum Analyzer - Occupied BW Center Freq 157.425000 MHz Center Freq: 157.425000 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 41.02 dBm Span 50 kHz #Res BW 300 Hz #VBW 1 kHz Sweep 527.2 ms Occupied Bandwidth 10.649 kHz Total Power 38.0 dBm Transmit Freq Error -655 Hz OBW Power 99.00 % x dB Bandwidth 15.56 kHz x dB -26.00 dB Frequency Center Freq 157.425000 MHz CF Step 5.000 kHz Man Freq Offset 0 Hz Auto STATUS DC Coupled



Appendix B:Occupied Bandwidth

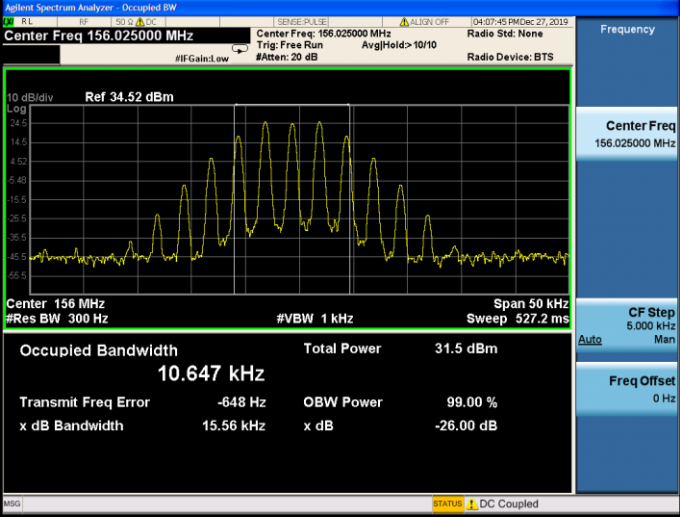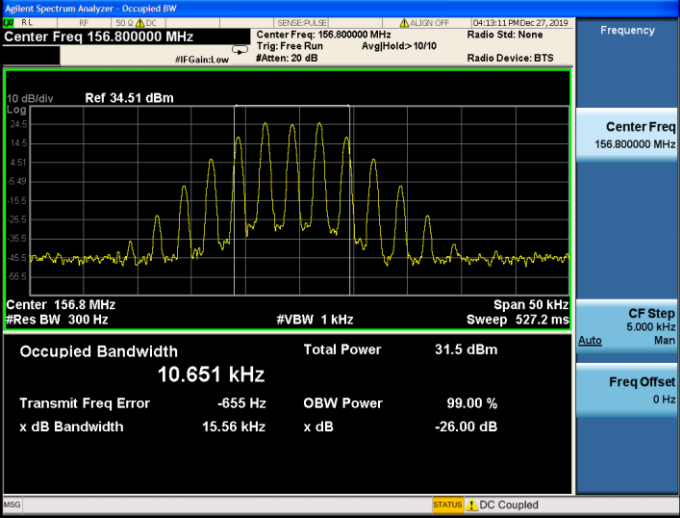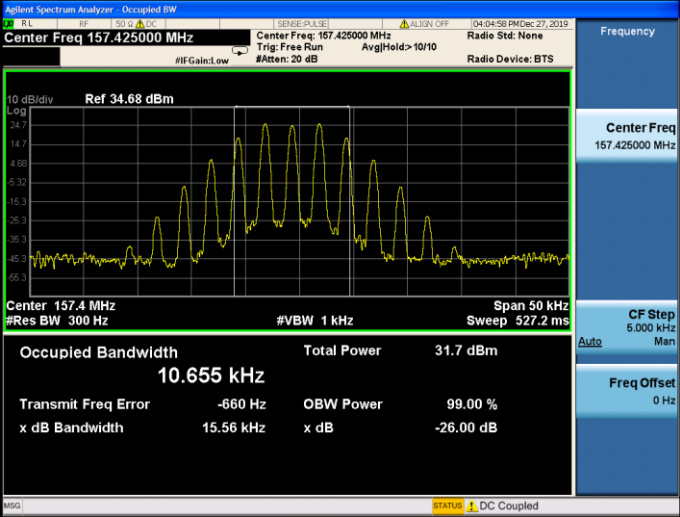Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-AWL	FM	CH _L	 Agilent Spectrum Analyzer - Occupied BW Center Freq 156.025000 MHz Center Freq: 156.025000 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 34.52 dBm Span 50 kHz Sweep 527.2 ms #Res BW 300 Hz #VBW 1 kHz Occupied Bandwidth 10.647 kHz Total Power 31.5 dBm Transmit Freq Error -648 Hz OBW Power 99.00 % x dB Bandwidth 15.56 kHz x dB -26.00 dB STATUS DC Coupled
TX-AWL	FM	CH _{M1}	 Agilent Spectrum Analyzer - Occupied BW Center Freq 156.800000 MHz Center Freq: 156.800000 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 34.51 dBm Span 50 kHz Sweep 527.2 ms #Res BW 300 Hz #VBW 1 kHz Occupied Bandwidth 10.651 kHz Total Power 31.5 dBm Transmit Freq Error -655 Hz OBW Power 99.00 % x dB Bandwidth 15.56 kHz x dB -26.00 dB STATUS DC Coupled
TX-AWL	FM	CH _H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 157.425000 MHz Center Freq: 157.425000 MHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref 34.68 dBm Span 50 kHz Sweep 527.2 ms #Res BW 300 Hz #VBW 1 kHz Occupied Bandwidth 10.655 kHz Total Power 31.7 dBm Transmit Freq Error -660 Hz OBW Power 99.00 % x dB Bandwidth 15.56 kHz x dB -26.00 dB STATUS DC Coupled



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																																						
TX-AWH	FM	CH _L	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 3.1 100 Hz 300 Hz Center Freq 156.025000 MHz Trig: Free Run IF Gain: Low #Atten: 40 dB Radio Std: None Radio Device: BTS 04/26/12 PM Dec 27, 2019 PASS Ref Offset 26 dB Ref 42.0 dBm 10 dB/div Log 32.0 22.0 12.0 2.00 18.0 8.00 38.0 40.0 Center 156 MHz Span 120 kHz Total Power Ref 36.59 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak ></th><th>dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>36.84</td><td>(-1.25)</td><td>-598.8</td><td>-10.56</td><td>(-48.64)</td><td>0.0</td><td>0.0</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-28.58</td><td>(40.17)</td><td>-11.98 k</td><td>-32.57</td><td>(-44.15)</td><td>10.96 k</td><td>10.96 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-35.18</td><td>(-36.76)</td><td>-21.09 k</td><td>-33.44</td><td>(-35.03)</td><td>24.75 k</td><td>24.75 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-40.96</td><td>(-27.96)</td><td>-54.18 k</td><td>-42.50</td><td>(-29.50)</td><td>52.21 k</td><td>52.21 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>-</td><td>(-)</td><td>-</td><td>-</td><td>(-)</td><td>-</td><td>-</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>-</td><td>(-)</td><td>-</td><td>-</td><td>(-)</td><td>-</td><td>-</td></tr></table> Frequency Center Freq 156.025000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz MSO File <MASK B.state> recalled (STATUS)	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak >	dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	10.00 kHz	300.0 Hz	36.84	(-1.25)	-598.8	-10.56	(-48.64)	0.0	0.0	10.00 kHz	20.00 kHz	300.0 Hz	-28.58	(40.17)	-11.98 k	-32.57	(-44.15)	10.96 k	10.96 k	20.00 kHz	50.00 kHz	300.0 Hz	-35.18	(-36.76)	-21.09 k	-33.44	(-35.03)	24.75 k	24.75 k	50.00 kHz	60.00 kHz	300.0 Hz	-40.96	(-27.96)	-54.18 k	-42.50	(-29.50)	52.21 k	52.21 k	8.000 MHz	12.50 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-	12.50 MHz	15.00 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak >	dBm	Upper ΔLim(dB)	Freq (Hz)																																																																
0.0 Hz	10.00 kHz	300.0 Hz	36.84	(-1.25)	-598.8	-10.56	(-48.64)	0.0	0.0																																																																
10.00 kHz	20.00 kHz	300.0 Hz	-28.58	(40.17)	-11.98 k	-32.57	(-44.15)	10.96 k	10.96 k																																																																
20.00 kHz	50.00 kHz	300.0 Hz	-35.18	(-36.76)	-21.09 k	-33.44	(-35.03)	24.75 k	24.75 k																																																																
50.00 kHz	60.00 kHz	300.0 Hz	-40.96	(-27.96)	-54.18 k	-42.50	(-29.50)	52.21 k	52.21 k																																																																
8.000 MHz	12.50 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-																																																																
12.50 MHz	15.00 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-																																																																
TX-AWH	FM	CH _L	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 3.1 100 Hz 300 Hz Center Freq 156.025000 MHz Trig: Free Run IF Gain: Low #Atten: 40 dB Radio Std: None Radio Device: BTS 04/27/01 PM Dec 27, 2019 PASS Ref Offset 26 dB Ref 42.0 dBm 10 dB/div Log 32.0 22.0 12.0 2.00 18.0 8.00 38.0 40.0 Center 156 MHz Span 120 kHz Total Power Ref 36.54 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak ></th><th>dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>31.80</td><td>(-6.29)</td><td>-3.114 k</td><td>31.80</td><td>(-6.28)</td><td>1.796 k</td><td>1.796 k</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-1.619</td><td>(-13.20)</td><td>-10.66 k</td><td>-17.84</td><td>(-29.42)</td><td>11.86 k</td><td>11.86 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-37.39</td><td>(-38.97)</td><td>-21.69 k</td><td>-38.70</td><td>(-40.28)</td><td>22.41 k</td><td>22.41 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-45.94</td><td>(-32.94)</td><td>-52.09 k</td><td>-44.94</td><td>(-31.94)</td><td>53.41 k</td><td>53.41 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>-</td><td>(-)</td><td>-</td><td>-</td><td>(-)</td><td>-</td><td>-</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>-</td><td>(-)</td><td>-</td><td>-</td><td>(-)</td><td>-</td><td>-</td></tr></table> Frequency Center Freq 156.025000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz MSO File <Temp.png> saved (STATUS)	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak >	dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	10.00 kHz	300.0 Hz	31.80	(-6.29)	-3.114 k	31.80	(-6.28)	1.796 k	1.796 k	10.00 kHz	20.00 kHz	300.0 Hz	-1.619	(-13.20)	-10.66 k	-17.84	(-29.42)	11.86 k	11.86 k	20.00 kHz	50.00 kHz	300.0 Hz	-37.39	(-38.97)	-21.69 k	-38.70	(-40.28)	22.41 k	22.41 k	50.00 kHz	60.00 kHz	300.0 Hz	-45.94	(-32.94)	-52.09 k	-44.94	(-31.94)	53.41 k	53.41 k	8.000 MHz	12.50 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-	12.50 MHz	15.00 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak >	dBm	Upper ΔLim(dB)	Freq (Hz)																																																																
0.0 Hz	10.00 kHz	300.0 Hz	31.80	(-6.29)	-3.114 k	31.80	(-6.28)	1.796 k	1.796 k																																																																
10.00 kHz	20.00 kHz	300.0 Hz	-1.619	(-13.20)	-10.66 k	-17.84	(-29.42)	11.86 k	11.86 k																																																																
20.00 kHz	50.00 kHz	300.0 Hz	-37.39	(-38.97)	-21.69 k	-38.70	(-40.28)	22.41 k	22.41 k																																																																
50.00 kHz	60.00 kHz	300.0 Hz	-45.94	(-32.94)	-52.09 k	-44.94	(-31.94)	53.41 k	53.41 k																																																																
8.000 MHz	12.50 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-																																																																
12.50 MHz	15.00 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-																																																																
TX-AWH	FM	CH _{M1}	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 3.1 100 Hz 300 Hz Center Freq 156.800000 MHz Trig: Free Run IF Gain: Low #Atten: 40 dB Radio Std: None Radio Device: BTS 04/22/30 PM Dec 27, 2019 PASS Ref Offset 26 dB Ref 42.0 dBm 10 dB/div Log 32.0 22.0 12.0 2.00 18.0 8.00 38.0 40.0 Center 156.8 MHz Span 120 kHz Total Power Ref 36.69 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak ></th><th>dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>36.93</td><td>(-1.21)</td><td>-598.8</td><td>-7.926</td><td>(-46.07)</td><td>59.88</td><td>59.88</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-30.64</td><td>(-42.29)</td><td>-11.56 k</td><td>-30.78</td><td>(-42.43)</td><td>14.74 k</td><td>14.74 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-33.06</td><td>(-34.70)</td><td>-20.67 k</td><td>-35.97</td><td>(-37.61)</td><td>25.47 k</td><td>25.47 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-43.23</td><td>(-30.23)</td><td>-50.35 k</td><td>-42.17</td><td>(-29.17)</td><td>50.47 k</td><td>50.47 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>-</td><td>(-)</td><td>-</td><td>-</td><td>(-)</td><td>-</td><td>-</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>-</td><td>(-)</td><td>-</td><td>-</td><td>(-)</td><td>-</td><td>-</td></tr></table> Frequency Center Freq 156.800000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz MSO File <MASK B.state> recalled (STATUS)	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak >	dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	10.00 kHz	300.0 Hz	36.93	(-1.21)	-598.8	-7.926	(-46.07)	59.88	59.88	10.00 kHz	20.00 kHz	300.0 Hz	-30.64	(-42.29)	-11.56 k	-30.78	(-42.43)	14.74 k	14.74 k	20.00 kHz	50.00 kHz	300.0 Hz	-33.06	(-34.70)	-20.67 k	-35.97	(-37.61)	25.47 k	25.47 k	50.00 kHz	60.00 kHz	300.0 Hz	-43.23	(-30.23)	-50.35 k	-42.17	(-29.17)	50.47 k	50.47 k	8.000 MHz	12.50 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-	12.50 MHz	15.00 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak >	dBm	Upper ΔLim(dB)	Freq (Hz)																																																																
0.0 Hz	10.00 kHz	300.0 Hz	36.93	(-1.21)	-598.8	-7.926	(-46.07)	59.88	59.88																																																																
10.00 kHz	20.00 kHz	300.0 Hz	-30.64	(-42.29)	-11.56 k	-30.78	(-42.43)	14.74 k	14.74 k																																																																
20.00 kHz	50.00 kHz	300.0 Hz	-33.06	(-34.70)	-20.67 k	-35.97	(-37.61)	25.47 k	25.47 k																																																																
50.00 kHz	60.00 kHz	300.0 Hz	-43.23	(-30.23)	-50.35 k	-42.17	(-29.17)	50.47 k	50.47 k																																																																
8.000 MHz	12.50 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-																																																																
12.50 MHz	15.00 MHz	1.000 MHz	-	(-)	-	-	(-)	-	-																																																																



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																															
TX-AWH	FM	CH _{M1}	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 Center Freq 156.800000 MHz Trig: Free Run Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 26 dB Ref 42.0 dBm IF Gain: Low #Atten: 40 dB Align: Off 04/23/19 PM 02:27, 2019 10 dB/div Log 32.0 22.0 12.0 2.00 18.0 8.00 38.0 48.0 Ref Mask Absolute Limit Spectrum Center 156.8 MHz Span 120 kHz Total Power Ref 36.63 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>31.87</td><td>(-6.27)</td><td>-3.114 k</td><td>31.89</td><td>(-6.26)</td><td>1.796 k</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-1.542</td><td>(-13.19)</td><td>-10.66 k</td><td>-17.71</td><td>(-29.36)</td><td>11.86 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-37.77</td><td>(-39.42)</td><td>-20.79 k</td><td>-39.13</td><td>(-40.76)</td><td>24.75 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-45.24</td><td>(-32.24)</td><td>-55.68 k</td><td>-45.71</td><td>(-32.71)</td><td>50.71 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> MSG File <Temp.png> saved STATUS Frequency Center Freq 156.800000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	31.87	(-6.27)	-3.114 k	31.89	(-6.26)	1.796 k	10.00 kHz	20.00 kHz	300.0 Hz	-1.542	(-13.19)	-10.66 k	-17.71	(-29.36)	11.86 k	20.00 kHz	50.00 kHz	300.0 Hz	-37.77	(-39.42)	-20.79 k	-39.13	(-40.76)	24.75 k	50.00 kHz	60.00 kHz	300.0 Hz	-45.24	(-32.24)	-55.68 k	-45.71	(-32.71)	50.71 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	31.87	(-6.27)	-3.114 k	31.89	(-6.26)	1.796 k																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-1.542	(-13.19)	-10.66 k	-17.71	(-29.36)	11.86 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-37.77	(-39.42)	-20.79 k	-39.13	(-40.76)	24.75 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-45.24	(-32.24)	-55.68 k	-45.71	(-32.71)	50.71 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-AWH	FM	CH _H	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 Center Freq 157.425000 MHz Trig: Free Run Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 26 dB Ref 42.0 dBm IF Gain: Low #Atten: 40 dB Align: Off 04/19/19 PM 02:27, 2019 10 dB/div Log 32.0 22.0 12.0 2.00 18.0 8.00 38.0 48.0 Ref Mask Absolute Limit Spectrum Center 157.4 MHz Span 120 kHz Total Power Ref 36.69 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>36.94</td><td>(-1.17)</td><td>-718.6</td><td>-10.82</td><td>(-48.93)</td><td>179.6</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-29.42</td><td>(-41.02)</td><td>-12.94 k</td><td>-29.02</td><td>(-40.62)</td><td>10.36 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-35.97</td><td>(-37.57)</td><td>-24.15 k</td><td>-35.87</td><td>(-37.47)</td><td>23.13 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-42.12</td><td>(-29.12)</td><td>-57.00 k</td><td>-41.80</td><td>(-28.80)</td><td>51.19 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> MSG File <MASK B state> recalled STATUS Frequency Center Freq 157.425000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	36.94	(-1.17)	-718.6	-10.82	(-48.93)	179.6	10.00 kHz	20.00 kHz	300.0 Hz	-29.42	(-41.02)	-12.94 k	-29.02	(-40.62)	10.36 k	20.00 kHz	50.00 kHz	300.0 Hz	-35.97	(-37.57)	-24.15 k	-35.87	(-37.47)	23.13 k	50.00 kHz	60.00 kHz	300.0 Hz	-42.12	(-29.12)	-57.00 k	-41.80	(-28.80)	51.19 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	36.94	(-1.17)	-718.6	-10.82	(-48.93)	179.6																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-29.42	(-41.02)	-12.94 k	-29.02	(-40.62)	10.36 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-35.97	(-37.57)	-24.15 k	-35.87	(-37.47)	23.13 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-42.12	(-29.12)	-57.00 k	-41.80	(-28.80)	51.19 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-AWH	FM	CH _H	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 Center Freq 157.425000 MHz Trig: Free Run Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 26 dB Ref 42.0 dBm IF Gain: Low #Atten: 40 dB Align: Off 04/19/19 PM 02:27, 2019 10 dB/div Log 32.0 22.0 12.0 2.00 18.0 8.00 38.0 48.0 Ref Mask Absolute Limit Spectrum Center 157.4 MHz Span 120 kHz Total Power Ref 36.64 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>31.89</td><td>(-6.22)</td><td>-3.174 k</td><td>31.89</td><td>(-6.22)</td><td>1.796 k</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-1.488</td><td>(-13.10)</td><td>-10.66 k</td><td>-17.58</td><td>(-29.19)</td><td>11.86 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-38.68</td><td>(-40.28)</td><td>-20.79 k</td><td>-39.02</td><td>(-40.63)</td><td>20.49 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-44.49</td><td>(-31.49)</td><td>-51.67 k</td><td>-46.26</td><td>(-33.26)</td><td>50.35 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> MSG File <Temp.png> saved STATUS Frequency Center Freq 157.425000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	31.89	(-6.22)	-3.174 k	31.89	(-6.22)	1.796 k	10.00 kHz	20.00 kHz	300.0 Hz	-1.488	(-13.10)	-10.66 k	-17.58	(-29.19)	11.86 k	20.00 kHz	50.00 kHz	300.0 Hz	-38.68	(-40.28)	-20.79 k	-39.02	(-40.63)	20.49 k	50.00 kHz	60.00 kHz	300.0 Hz	-44.49	(-31.49)	-51.67 k	-46.26	(-33.26)	50.35 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	31.89	(-6.22)	-3.174 k	31.89	(-6.22)	1.796 k																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-1.488	(-13.10)	-10.66 k	-17.58	(-29.19)	11.86 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-38.68	(-40.28)	-20.79 k	-39.02	(-40.63)	20.49 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-44.49	(-31.49)	-51.67 k	-46.26	(-33.26)	50.35 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																															
TX-AWL	FM	CH _L	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 156.025000 MHz Ref Offset 26 dB Ref 36.0 dBm 10 dB/div Log 26.0 16.0 6.00 4.00 34.0 54.0 Center 156 MHz Span 120 kHz Total Power Ref 30.47 dBm 0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>30.72</td><td>(-1.25)</td><td>-718.6</td><td>-16.98</td><td>(-48.95)</td><td>0.0</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-33.70</td><td>(-39.17)</td><td>-11.08 k</td><td>-36.73</td><td>(-42.20)</td><td>10.12 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-40.77</td><td>(-36.25)</td><td>-28.88 k</td><td>-41.66</td><td>(-37.14)</td><td>23.91 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-47.77</td><td>(-34.77)</td><td>-60.00 k</td><td>-47.62</td><td>(-34.02)</td><td>50.65 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 156.025000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz File <MASK B.state> recalled STATUS	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	30.72	(-1.25)	-718.6	-16.98	(-48.95)	0.0	10.00 kHz	20.00 kHz	300.0 Hz	-33.70	(-39.17)	-11.08 k	-36.73	(-42.20)	10.12 k	20.00 kHz	50.00 kHz	300.0 Hz	-40.77	(-36.25)	-28.88 k	-41.66	(-37.14)	23.91 k	50.00 kHz	60.00 kHz	300.0 Hz	-47.77	(-34.77)	-60.00 k	-47.62	(-34.02)	50.65 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	30.72	(-1.25)	-718.6	-16.98	(-48.95)	0.0																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-33.70	(-39.17)	-11.08 k	-36.73	(-42.20)	10.12 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-40.77	(-36.25)	-28.88 k	-41.66	(-37.14)	23.91 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-47.77	(-34.77)	-60.00 k	-47.62	(-34.02)	50.65 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-AWL	FM	CH _L	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 156.025000 MHz Ref Offset 26 dB Ref 36.0 dBm 10 dB/div Log 26.0 16.0 6.00 4.00 34.0 54.0 Center 156 MHz Span 120 kHz Total Power Ref 30.44 dBm 0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>25.70</td><td>(-6.27)</td><td>-3.114 k</td><td>25.71</td><td>(-6.27)</td><td>1.796 k</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-7.628</td><td>(-13.10)</td><td>-10.66 k</td><td>-23.72</td><td>(-29.20)</td><td>11.86 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-44.96</td><td>(-39.83)</td><td>-20.25 k</td><td>-45.11</td><td>(-40.58)</td><td>23.37 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-51.73</td><td>(-38.73)</td><td>-52.63 k</td><td>-51.50</td><td>(-38.50)</td><td>56.40 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 156.025000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz File <Temp.png> saved STATUS	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	25.70	(-6.27)	-3.114 k	25.71	(-6.27)	1.796 k	10.00 kHz	20.00 kHz	300.0 Hz	-7.628	(-13.10)	-10.66 k	-23.72	(-29.20)	11.86 k	20.00 kHz	50.00 kHz	300.0 Hz	-44.96	(-39.83)	-20.25 k	-45.11	(-40.58)	23.37 k	50.00 kHz	60.00 kHz	300.0 Hz	-51.73	(-38.73)	-52.63 k	-51.50	(-38.50)	56.40 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	25.70	(-6.27)	-3.114 k	25.71	(-6.27)	1.796 k																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-7.628	(-13.10)	-10.66 k	-23.72	(-29.20)	11.86 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-44.96	(-39.83)	-20.25 k	-45.11	(-40.58)	23.37 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-51.73	(-38.73)	-52.63 k	-51.50	(-38.50)	56.40 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-AWL	FM	CH _{M1}	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 156.800000 MHz Ref Offset 26 dB Ref 36.0 dBm 10 dB/div Log 26.0 16.0 6.00 4.00 34.0 54.0 Center 156.8 MHz Span 120 kHz Total Power Ref 30.48 dBm 0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>30.72</td><td>(-1.24)</td><td>-718.6</td><td>-13.05</td><td>(-45.01)</td><td>59.88</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-35.30</td><td>(-40.76)</td><td>-11.80 k</td><td>-39.52</td><td>(-44.97)</td><td>10.60 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-42.71</td><td>(-38.17)</td><td>-21.51 k</td><td>-42.42</td><td>(-37.87)</td><td>21.09 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-46.90</td><td>(-33.90)</td><td>-53.62 k</td><td>-47.38</td><td>(-34.38)</td><td>52.87 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 156.800000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz File <MASK B.state> recalled STATUS	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	30.72	(-1.24)	-718.6	-13.05	(-45.01)	59.88	10.00 kHz	20.00 kHz	300.0 Hz	-35.30	(-40.76)	-11.80 k	-39.52	(-44.97)	10.60 k	20.00 kHz	50.00 kHz	300.0 Hz	-42.71	(-38.17)	-21.51 k	-42.42	(-37.87)	21.09 k	50.00 kHz	60.00 kHz	300.0 Hz	-46.90	(-33.90)	-53.62 k	-47.38	(-34.38)	52.87 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	30.72	(-1.24)	-718.6	-13.05	(-45.01)	59.88																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-35.30	(-40.76)	-11.80 k	-39.52	(-44.97)	10.60 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-42.71	(-38.17)	-21.51 k	-42.42	(-37.87)	21.09 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-46.90	(-33.90)	-53.62 k	-47.38	(-34.38)	52.87 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																															
TX-AWL	FM	CH _{M1}	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 156.800000 MHz Trig: Free Run IF Gain: Low #Atten: 40 dB Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 26 dB Ref 36.0 dBm 10 dB/div Log 26.0 16.0 6.0 4.0 14.0 24.0 34.0 44.0 54.0 Center 156.8 MHz Span 120 kHz Total Power Ref 30.44 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>25.70</td><td>(-6.26)</td><td>-3.114 k</td><td>25.70</td><td>(-6.26)</td><td>1.796 k</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-7.700</td><td>(-13.16)</td><td>-10.66 k</td><td>-23.72</td><td>(-29.18)</td><td>11.86 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-44.94</td><td>(-40.40)</td><td>-20.91 k</td><td>-44.87</td><td>(-40.33)</td><td>21.57 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-51.56</td><td>(-38.56)</td><td>-57.18 k</td><td>-51.41</td><td>(-38.41)</td><td>55.26 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 156.800000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz File <Temp.png> saved STATUS	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	25.70	(-6.26)	-3.114 k	25.70	(-6.26)	1.796 k	10.00 kHz	20.00 kHz	300.0 Hz	-7.700	(-13.16)	-10.66 k	-23.72	(-29.18)	11.86 k	20.00 kHz	50.00 kHz	300.0 Hz	-44.94	(-40.40)	-20.91 k	-44.87	(-40.33)	21.57 k	50.00 kHz	60.00 kHz	300.0 Hz	-51.56	(-38.56)	-57.18 k	-51.41	(-38.41)	55.26 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	25.70	(-6.26)	-3.114 k	25.70	(-6.26)	1.796 k																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-7.700	(-13.16)	-10.66 k	-23.72	(-29.18)	11.86 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-44.94	(-40.40)	-20.91 k	-44.87	(-40.33)	21.57 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-51.56	(-38.56)	-57.18 k	-51.41	(-38.41)	55.26 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-AWL	FM	CH _H	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 157.425000 MHz Trig: Free Run IF Gain: Low #Atten: 40 dB Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 26 dB Ref 36.0 dBm 10 dB/div Log 26.0 16.0 6.0 4.0 14.0 24.0 34.0 44.0 54.0 Center 157.4 MHz Span 120 kHz Total Power Ref 30.51 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>30.76</td><td>(-1.16)</td><td>-718.6</td><td>-14.74</td><td>(-46.65)</td><td>179.6</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-36.82</td><td>(-42.24)</td><td>-14.38 k</td><td>-39.24</td><td>(-44.65)</td><td>10.90 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-40.98</td><td>(-36.39)</td><td>-20.85 k</td><td>-40.21</td><td>(-35.63)</td><td>20.73 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-49.01</td><td>(-36.01)</td><td>-50.47 k</td><td>-48.36</td><td>(-35.36)</td><td>52.57 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 157.425000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz File <MASK B.state> recalled STATUS	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	30.76	(-1.16)	-718.6	-14.74	(-46.65)	179.6	10.00 kHz	20.00 kHz	300.0 Hz	-36.82	(-42.24)	-14.38 k	-39.24	(-44.65)	10.90 k	20.00 kHz	50.00 kHz	300.0 Hz	-40.98	(-36.39)	-20.85 k	-40.21	(-35.63)	20.73 k	50.00 kHz	60.00 kHz	300.0 Hz	-49.01	(-36.01)	-50.47 k	-48.36	(-35.36)	52.57 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	30.76	(-1.16)	-718.6	-14.74	(-46.65)	179.6																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-36.82	(-42.24)	-14.38 k	-39.24	(-44.65)	10.90 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-40.98	(-36.39)	-20.85 k	-40.21	(-35.63)	20.73 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-49.01	(-36.01)	-50.47 k	-48.36	(-35.36)	52.57 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-AWL	FM	CH _H	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 157.425000 MHz Trig: Free Run IF Gain: Low #Atten: 40 dB Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 26 dB Ref 36.0 dBm 10 dB/div Log 26.0 16.0 6.0 4.0 14.0 24.0 34.0 44.0 54.0 Center 157.4 MHz Span 120 kHz Total Power Ref 30.48 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 kHz</td><td>10.00 kHz</td><td>300.0 Hz</td><td>25.74</td><td>(-6.17)</td><td>-3.174 k</td><td>25.74</td><td>(-6.17)</td><td>1.796 k</td></tr><tr><td>10.00 kHz</td><td>20.00 kHz</td><td>300.0 Hz</td><td>-7.640</td><td>(-13.05)</td><td>-10.66 k</td><td>-23.81</td><td>(-29.22)</td><td>11.86 k</td></tr><tr><td>20.00 kHz</td><td>50.00 kHz</td><td>300.0 Hz</td><td>-43.30</td><td>(-38.71)</td><td>-20.91 k</td><td>-44.85</td><td>(-40.26)</td><td>20.25 k</td></tr><tr><td>50.00 kHz</td><td>60.00 kHz</td><td>300.0 Hz</td><td>-50.34</td><td>(-37.34)</td><td>-56.76 k</td><td>-52.16</td><td>(-39.16)</td><td>53.05 k</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 157.425000 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz File <Temp.png> saved STATUS	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 kHz	10.00 kHz	300.0 Hz	25.74	(-6.17)	-3.174 k	25.74	(-6.17)	1.796 k	10.00 kHz	20.00 kHz	300.0 Hz	-7.640	(-13.05)	-10.66 k	-23.81	(-29.22)	11.86 k	20.00 kHz	50.00 kHz	300.0 Hz	-43.30	(-38.71)	-20.91 k	-44.85	(-40.26)	20.25 k	50.00 kHz	60.00 kHz	300.0 Hz	-50.34	(-37.34)	-56.76 k	-52.16	(-39.16)	53.05 k	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 kHz	10.00 kHz	300.0 Hz	25.74	(-6.17)	-3.174 k	25.74	(-6.17)	1.796 k																																																										
10.00 kHz	20.00 kHz	300.0 Hz	-7.640	(-13.05)	-10.66 k	-23.81	(-29.22)	11.86 k																																																										
20.00 kHz	50.00 kHz	300.0 Hz	-43.30	(-38.71)	-20.91 k	-44.85	(-40.26)	20.25 k																																																										
50.00 kHz	60.00 kHz	300.0 Hz	-50.34	(-37.34)	-56.76 k	-52.16	(-39.16)	53.05 k																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										


**Appendix D:Modulation Limit**

Operation Mode	Modulation Type	Test Channel	Modulation Level (dB)	Peak frequency deviation (kHz)				Limit (kHz)	Result
				300Hz	1004Hz	1500Hz	2500 Hz		
TX-AWH	FM	CH _{M2}	-20	0.116	0.347	0.521	0.857	5	PASS
TX-AWH	FM	CH _{M2}	-15	0.16	0.571	0.874	1.454	5	PASS
TX-AWH	FM	CH _{M2}	-10	0.252	0.986	1.525	2.539	5	PASS
TX-AWH	FM	CH _{M2}	-5	0.392	1.721	2.703	3.507	5	PASS
TX-AWH	FM	CH _{M2}	0	0.688	3.083	3.625	3.719	5	PASS
TX-AWH	FM	CH _{M2}	5	1.16	3.73	3.823	3.78	5	PASS
TX-AWH	FM	CH _{M2}	10	2.032	4.126	3.886	3.782	5	PASS
TX-AWH	FM	CH _{M2}	15	3.349	4.269	3.906	3.816	5	PASS
TX-AWH	FM	CH _{M2}	20	3.834	4.311	3.932	3.822	5	PASS



Appendix D:Modulation Limit

TEST PLOT RESULT

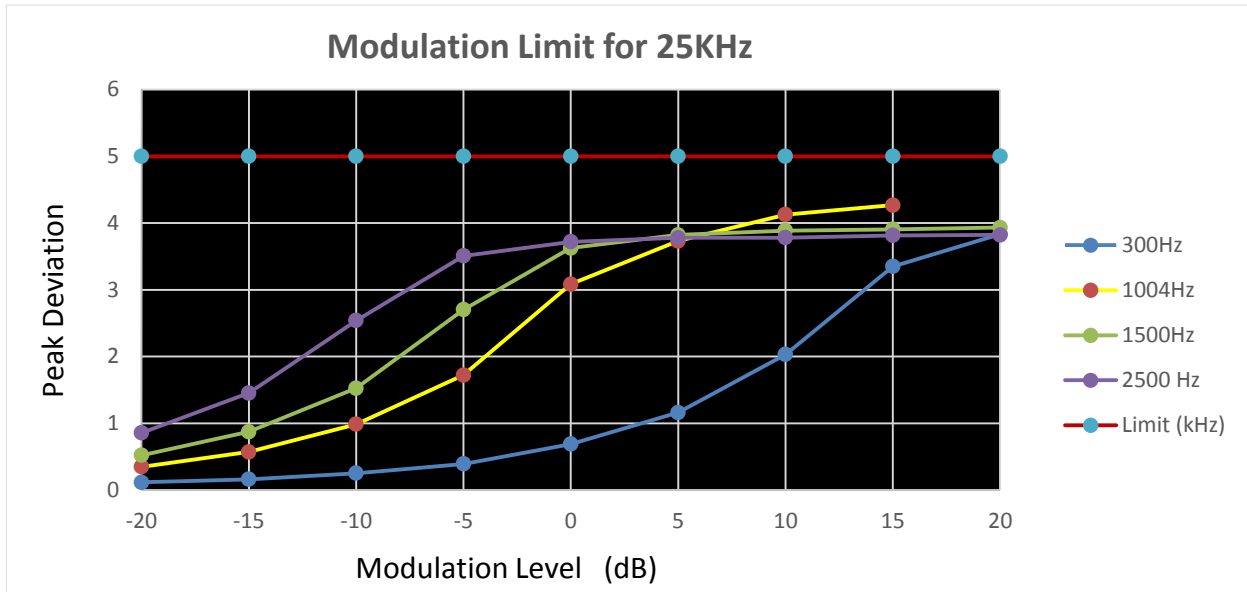


**Appendix E:Aduio Frequency Response**

Operation Mode	Modulation Type	Test Channel	Frequency (Hz)	Audio Frequency Response (dB)	Lower Limit	Upper Limit	Result
TX-AWH	FM	CH _{M2}	100	-35.16			PASS
TX-AWH	FM	CH _{M2}	200	-35.16			PASS
TX-AWH	FM	CH _{M2}	300	-13.30	-17.84	-9.42	PASS
TX-AWH	FM	CH _{M2}	400	-9.90	-12.86	-6.93	PASS
TX-AWH	FM	CH _{M2}	500	-7.03	-9.00	-5.00	PASS
TX-AWH	FM	CH _{M2}	600	-5.06	-7.42	-3.42	PASS
TX-AWH	FM	CH _{M2}	700	-3.55	-6.09	-2.09	PASS
TX-AWH	FM	CH _{M2}	800	-2.18	-4.93	-0.93	PASS
TX-AWH	FM	CH _{M2}	900	-0.99	-3.91	0.09	PASS
TX-AWH	FM	CH _{M2}	1000	0.05	-3.00	1.00	PASS
TX-AWH	FM	CH _{M2}	1200	1.85	-1.42	2.58	PASS
TX-AWH	FM	CH _{M2}	1400	3.34	-0.09	3.91	PASS
TX-AWH	FM	CH _{M2}	1600	4.60	1.07	5.07	PASS
TX-AWH	FM	CH _{M2}	1800	5.68	2.09	6.09	PASS
TX-AWH	FM	CH _{M2}	2000	6.64	3.00	7.00	PASS
TX-AWH	FM	CH _{M2}	2100	6.98	3.42	7.42	PASS
TX-AWH	FM	CH _{M2}	2200	7.22	3.83	7.83	PASS
TX-AWH	FM	CH _{M2}	2300	7.40	4.21	8.21	PASS
TX-AWH	FM	CH _{M2}	2400	7.54	4.58	8.58	PASS
TX-AWH	FM	CH _{M2}	2500	7.64	4.93	8.93	PASS
TX-AWH	FM	CH _{M2}	2600	7.73	4.59	9.27	PASS
TX-AWH	FM	CH _{M2}	2700	7.77	4.27	9.60	PASS
TX-AWH	FM	CH _{M2}	2800	7.76	3.95	9.91	PASS
TX-AWH	FM	CH _{M2}	2900	7.69	3.65	10.22	PASS
TX-AWH	FM	CH _{M2}	3000	7.54	3.35	10.51	PASS
TX-AWH	FM	CH _{M2}	3500	4.14			PASS
TX-AWH	FM	CH _{M2}	4000	-3.58			PASS
TX-AWH	FM	CH _{M2}	4500	-11.93			PASS
TX-AWH	FM	CH _{M2}	5000	-19.74			PASS



Appendix E:Aduio Frequency Response

TEST PLOT RESULT

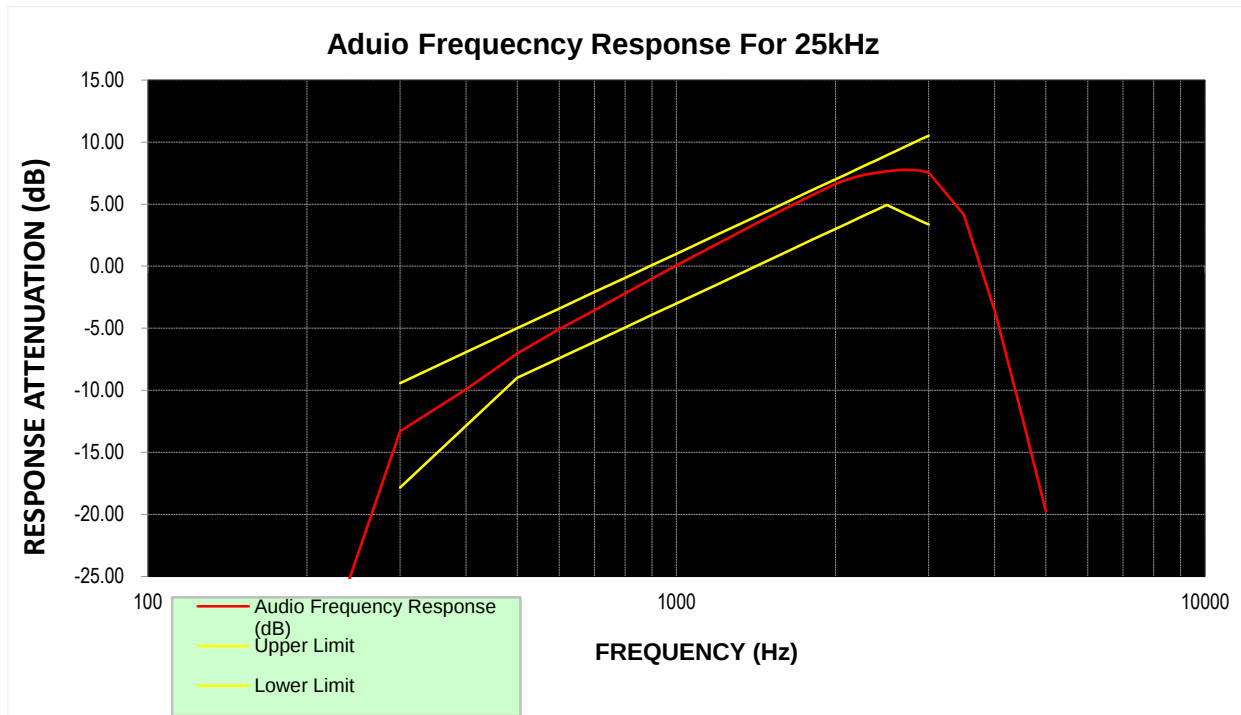

**Appendix F:Audio Low Pass Filter Response**

Operation Mode	Modulation Type	Test Channel	Frequency (KHz)	dB relative to 1 KHz	Limit	Result
TX-AWH	FM	CH _{M2}	1	-16.74	0.00	PASS
TX-AWH	FM	CH _{M2}	3	-27.23	0.00	PASS
TX-AWH	FM	CH _{M2}	4	-49.33	-7.50	PASS
TX-AWH	FM	CH _{M2}	5	-59.79	-13.30	PASS
TX-AWH	FM	CH _{M2}	6	-59.61	-18.10	PASS
TX-AWH	FM	CH _{M2}	8	-59.14	-25.60	PASS
TX-AWH	FM	CH _{M2}	10	-59.44	-31.40	PASS
TX-AWH	FM	CH _{M2}	15	-59.34	-41.90	PASS
TX-AWH	FM	CH _{M2}	20	-58.97	-50.00	PASS
TX-AWH	FM	CH _{M2}	30	-59.63	-50.00	PASS
TX-AWH	FM	CH _{M2}	40	-60.11	-50.00	PASS
TX-AWH	FM	CH _{M2}	50	-59.74	-50.00	PASS
TX-AWH	FM	CH _{M2}	60	-59.62	-50.00	PASS
TX-AWH	FM	CH _{M2}	70	-59.16	-50.00	PASS
TX-AWH	FM	CH _{M2}	80	-59.66	-50.00	PASS
TX-AWH	FM	CH _{M2}	90	-59.47	-50.00	PASS
TX-AWH	FM	CH _{M2}	100	-59.82	-50.00	PASS



Appendix F:Audio Low Pass Filter Response

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-AWH	FM	CH _{M2}	dB relative to 1 KHz 1 10 100 FREQUENCY (KHz) dB relative to 1 KHz

**Appendix G:Frequency Stability Test & Temperature**




Operation Mode	Modulation Type	Test Conditions		Frequency error (ppm)			Limit (ppm)	Result
		Voltage	Temperature	CH _L	CH _{M1}	CH _H		
TX-AWH	FM	V _N	-30	-4.165	-4.129	-4.301	±5.0	PASS
TX-AWH	FM	V _N	-20	-4.382	-4.198	-4.093	±5.0	PASS
TX-AWH	FM	V _N	-10	-4.092	-4.190	-4.356	±5.0	PASS
TX-AWH	FM	V _N	0	-4.028	-4.306	-4.313	±5.0	PASS
TX-AWH	FM	V _N	10	-4.185	-4.198	-4.018	±5.0	PASS
TX-AWH	FM	V _N	20	-4.024	-4.013	-3.982	±5.0	PASS
TX-AWH	FM	V _N	30	-4.378	-4.069	-4.066	±5.0	PASS
TX-AWH	FM	V _N	40	-4.290	-4.161	-4.277	±5.0	PASS
TX-AWH	FM	V _N	50	-4.117	-4.250	-4.273	±5.0	PASS
TX-AWL	FM	V _N	-30	-4.359	-4.205	-4.080	±5.0	PASS
TX-AWL	FM	V _N	-20	-4.254	-4.052	-4.016	±5.0	PASS
TX-AWL	FM	V _N	-10	-4.077	-4.072	-4.048	±5.0	PASS
TX-AWL	FM	V _N	0	-4.403	-4.140	-4.321	±5.0	PASS
TX-AWL	FM	V _N	10	-4.093	-4.337	-4.398	±5.0	PASS
TX-AWL	FM	V _N	20	-4.025	-4.016	-4.016	±5.0	PASS
TX-AWL	FM	V _N	30	-4.275	-4.418	-4.305	±5.0	PASS
TX-AWL	FM	V _N	40	-4.158	-4.185	-4.028	±5.0	PASS
TX-AWL	FM	V _N	50	-4.065	-4.321	-4.096	±5.0	PASS

**Appendix H:Frequency Stability Test & Voltage**

Operation Mode	Modulation Type	Test Conditions		Frequency error (ppm)			Limit (ppm)	Result
		Voltage	Temperature	CH _L	CH _{M1}	CH _H		
TX-AWH	FM	V _N	T _N	-4.024	-4.013	-3.982	±5.0	PASS
TX-AWH	FM	V _L	T _N	-4.068	-4.069	-4.022	±5.0	PASS
TX-AWH	FM	V _H	T _N	-4.261	-4.125	-4.201	±5.0	PASS
TX-AWL	FM	V _N	T _N	-4.025	-4.016	-4.016	±5.0	PASS
TX-AWL	FM	V _L	T _N	-4.029	-4.080	-4.056	±5.0	PASS
TX-AWL	FM	V _H	T _N	-4.122	-4.052	-4.108	±5.0	PASS



Appendix I:Spurious Emission On Antenna Port

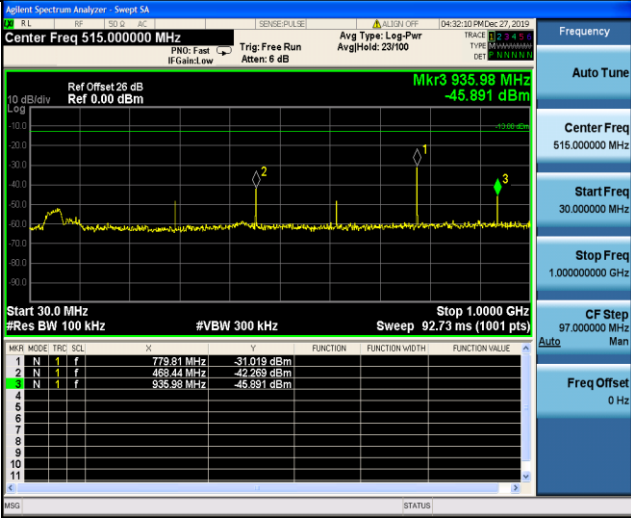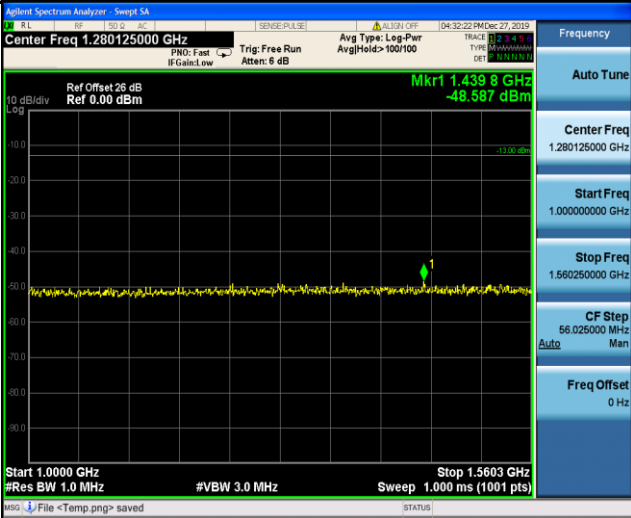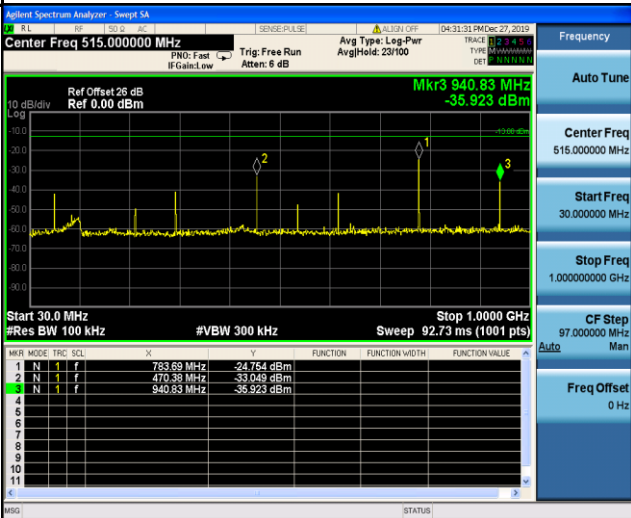Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-AWH	FM	CH _L	 30MHz~1GHz
TX-AWH	FM	CH _L	 1GHz~10th Harmonic
TX-AWH	FM	CH _{M1}	 30MHz~1GHz



Appendix I:Spurious Emission On Antenna Port

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-AWH	FM	CH _{M1}	Agilent Spectrum Analyzer - Swept SA Center Freq 1.284000000 GHz Ref Offset 26 dB Ref 0.00 dBm Mkr1 1.098 264 GHz -44.328 dBm Start 1.0000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 1.5680 GHz Sweep 1.000 ms (1001 pts) Frequency Auto Tune Center Freq 1.284000000 GHz Start Freq 1.000000000 GHz Stop Freq 1.568000000 GHz CF Step 56.800000 MHz Auto Man Freq Offset 0 Hz 1GHz~10th Harmonic
TX-AWH	FM	CH _H	Agilent Spectrum Analyzer - Swept SA Center Freq 515.000000 MHz Ref Offset 26 dB Ref 0.00 dBm Mkr3 944.71 MHz -32.346 dBm Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Stop 1.0000 GHz Sweep 92.73 ms (1001 pts) Frequency Auto Tune Center Freq 515.000000 MHz Start Freq 30.000000 MHz Stop Freq 1.000000000 GHz CF Step 97.000000 MHz Auto Man Freq Offset 0 Hz 30MHz~1GHz
TX-AWH	FM	CH _H	Agilent Spectrum Analyzer - Swept SA Center Freq 1.287125000 GHz Ref Offset 26 dB Ref 0.00 dBm Mkr1 1.102 8 GHz -41.835 dBm Start 1.0000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 1.5743 GHz Sweep 1.000 ms (1001 pts) Frequency Auto Tune Center Freq 1.287125000 GHz Start Freq 1.000000000 GHz Stop Freq 1.574250000 GHz CF Step 57.425000 MHz Auto Man Freq Offset 0 Hz 1GHz~10th Harmonic

-----End of Report-----