

EMC TEST REPORT

Test item : LED LCD TV monitor
Model No. : 42LT770H-UA
Order No. : 1207-01187
Date of receipt : 2012-07-16
Test duration : 2012-07-23 ~ 2012-07-24
Use of report : FCC CoC Marking
Date of Issue : 2012-07-24

Applicant : LG Electronics Inc.

19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Test laboratory : Digital EMC Co., Ltd.

683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : ANSI C 63.4:2003
FCC Part 15 Subpart B
(Type of Device : Class B Personal Computers
and Peripherals (JBP))

Test environment : Temperature : (25 ~ 26) °C,
Humidity : (47 ~ 50) % R.H.

Test result : ☒ Comply ☐ Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and
the use of this test report is inhibited other than its purpose.

This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:

Reviewed by:



Engineer
H.J.KIM



General Manager
C.H.LEE

PRESIDENT OF DIGITAL EMC CO., LTD.

CONTENTS

1. General Remarks	3
2. Test Laboratory	3
3. General Information of EUT	4
4. Test Summary	5
4.1 Applied standards and test results	5
4.2 Test environment and conditions	5
4.3 Test result Summary	5
5. Test Set-up and operation mode	6
5.1 Principle of Configuration Selection	6
5.2 Test Operation Mode	6
5.3 Support Equipment Used	6
6. Test Results : Emission	7
6.1 Conducted Disturbance	7
6.2 Radiated Disturbance	14
Appendix 1	34
List of Test and Measurement Instruments	34

1. General Remarks

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

<http://www.digitalemcc.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747	Test Facility list & NSA Data
	Canada	IC	5740A-1 5740A-2	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385 T-1442, G-338	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	ROK1124C	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

Model No.	42LT770H-UA
EUT Type	LED LCD TV monitor
Serial No	N/A
FCC ID	BEJ42LT770HUA
Type of Sample Tested	Pre-Production
High Frequency	650 MHz
Rating	AC 100-240 V, ~ 50/60 Hz
Supplied Power for Test	AC 120 V, 60 Hz
Applicant	LG Electronics Inc. 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea
Manufacturer	LG Electronics Inc. 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

RGB(PC), HDMI(PC) supported mode

Resolution	Horizontal Frequency (KHz)	Vertical Frequency (Hz)
640x350	31.46	70.09
720x400	31.46	70.08
640x480	31.46	59.94
800x600	37.87	60.31
1024x768	48.36	60.00
1280x768	47.77	59.87
1360x768	47.71	60.01
1280x1024	63.98	60.02
1600x1200	75.00	60.00
1920x1080 RGB-PC	66.58	59.93
1920x1080 HDMI-PC	67.50	60.00

4. Test Summary

4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2003	C
Radiated Disturbance	ANSI C63.4:2003	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

4.2 Test environment and conditions

Test Items	Test date (MM-DD)	Temp (°C)	Humidity (% R.H.)
Conducted Disturbance	07-23	25	47
Radiated Disturbance	07-23	26	50
	07-24	25	47

4.3 Test result Summary

(1) Conducted Emission (HDMI MODE)

Frequency [MHz]	Phase	Result [dB μ V]	Detector	Limit [dB μ V]	Margin [dB]
0.15006	L1	61.8	Quasi-Peak	66.0	4.2

(2) Radiated Emission (DSUB MODE)

Frequency [MHz]	Pol.	Result [dB(μ V/m)]	Detector	Limit [dB(μ V/m)]	Margin [dB]
479.245	V	42.3	Quasi-Peak	46.0	3.7

5. Test Set-up and operation mode

5.1 Principle of Configuration Selection

Emission : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

5.2 Test Operation Mode

- DSUB MODE – Resolution : 1920 X 1080 Resolution (Worst Case)
- HDMI MODE – Resolution : 1920 X 1080 Resolution (Worst Case)
- USB MODE

5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
PC	DCSCMF	G3RZKBX	DELL	POWER	1.8	Non-shield	Plastic	DOC
				HDMI	1.8	Shield		
				DSUB	1.8	Shield		
				USB	1.8	Shield		
				PS/2	1.8	Shield		
KEYBOARD	SKG-3000UB	TAKSB24503Y	MONITEREY INTERNATIONAL CORP	PS/2	1.8	Shield	Plastic	DOC
MOUSE	SML-510PB	TAKS903519Z	MONITEREY INTERNATIONAL CORP	PS/2	1.8	Shield	Plastic	DOC
CD/DVD PLAYER	DVP-NS92V	2000407	SONY EMCS	POWER AV	1.8 1.6	Non-shield Non-shield	Plastic	VER
USB MEMORY	Cruzer Slice	N/A	SANDISK	USB	-	-	-	DOC
PRINTER	SRP-770	SRP77008060035	BIXOLON	USB	1.8	Shield	Plastic	DOC

6. Test Results : Emission

6.1 Conducted Disturbance

6.1.1 Measurement Procedure

In the range of 0.15 MHz to 30 MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 0.4 m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2nd LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50
Note 1 The lower limit shall apply at the transition frequencies.				
Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Note) 1. Emission Level = Reading Value + Correction Factor.

2. Correction Factor = Cable Loss + Insertion Loss of LISN

3. Margin = Limit - Emission level

Test Result

< DSUB MODE >



Results of Conducted Emission



Digital EMC
Date : 2012-07-23

Model No. : 42LT770H-UA
Type :
Serial No. :
Test Condition : DSUB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

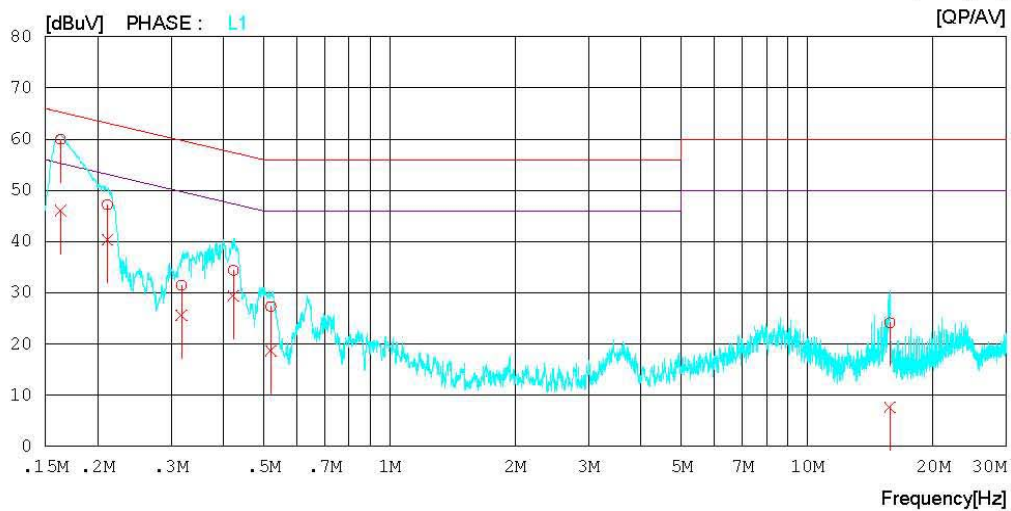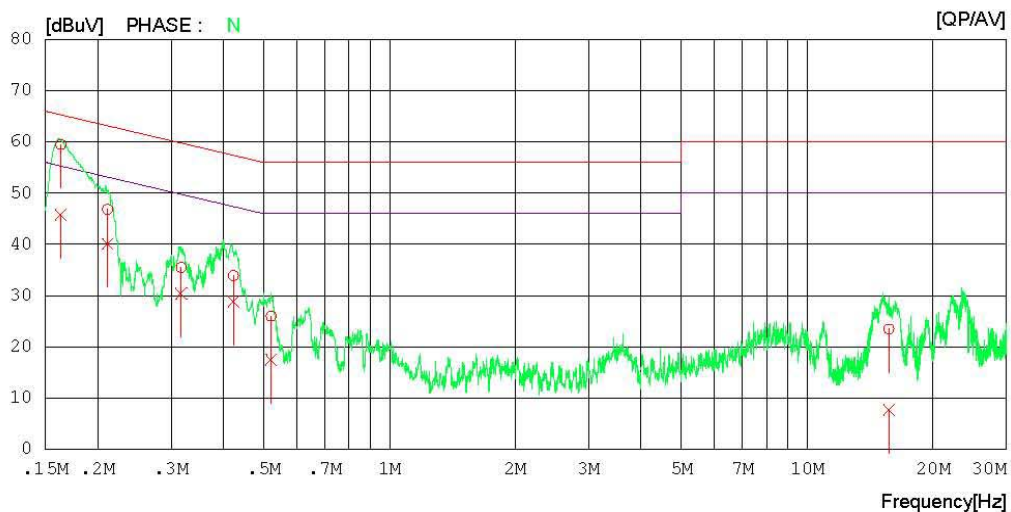

Results of Conducted Emission

Digital EMC
Date : 2012-07-23

Model No. : 42LT770H-UA
Type :
Serial No. :
Test Condition : DSUB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16338	59.2	45.5	0.3	59.5	45.8	65.3	55.3	5.8	9.5	N
2	0.21138	46.6	39.9	0.2	46.8	40.1	63.2	53.2	16.4	13.1	N
3	0.31736	35.3	30.2	0.2	35.5	30.4	59.8	49.8	24.3	19.4	N
4	0.42336	33.6	28.5	0.3	33.9	28.8	57.4	47.4	23.5	18.6	N
5	0.52071	25.8	17.3	0.2	26.0	17.5	56.0	46.0	30.0	28.5	N
6	15.69650	22.5	6.7	1.0	23.5	7.7	60.0	50.0	36.5	42.3	N
7	0.16326	59.7	45.7	0.3	60.0	46.0	65.3	55.3	5.3	9.3	L1
8	0.21115	47.0	40.2	0.2	47.2	40.4	63.2	53.2	16.0	12.8	L1
9	0.31765	31.3	25.4	0.2	31.5	25.6	59.8	49.8	28.3	24.2	L1
10	0.42284	34.1	29.1	0.3	34.4	29.4	57.4	47.4	23.0	18.0	L1
11	0.51978	27.2	18.5	0.2	27.4	18.7	56.0	46.0	28.6	27.3	L1
12	15.77300	23.2	6.6	1.0	24.2	7.6	60.0	50.0	35.8	42.4	L1

< HDMI MODE >



Results of Conducted Emission



Digital EMC
Date : 2012-07-24

Model No. : 42LT770H-UA
Type :
Serial No. :
Test Condition : HDMI

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

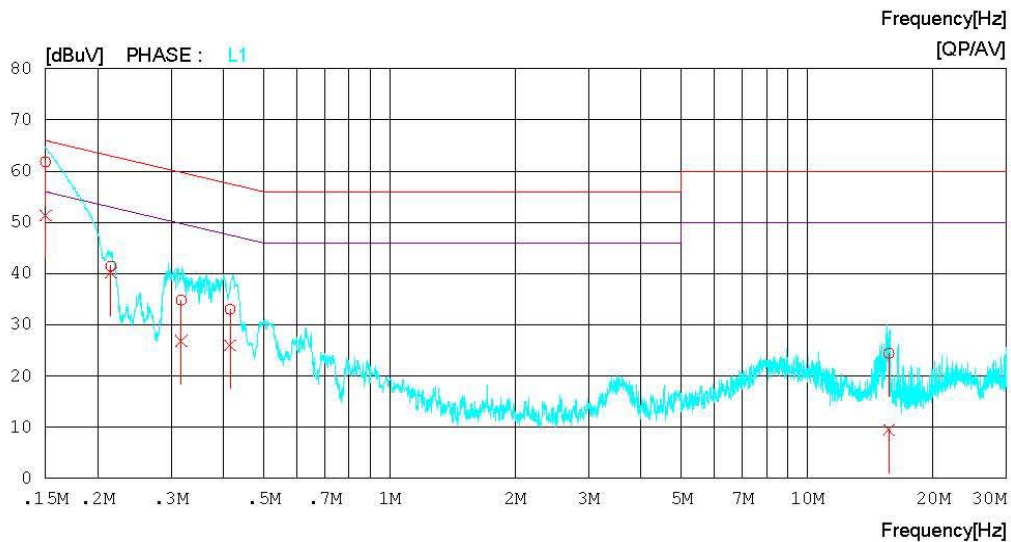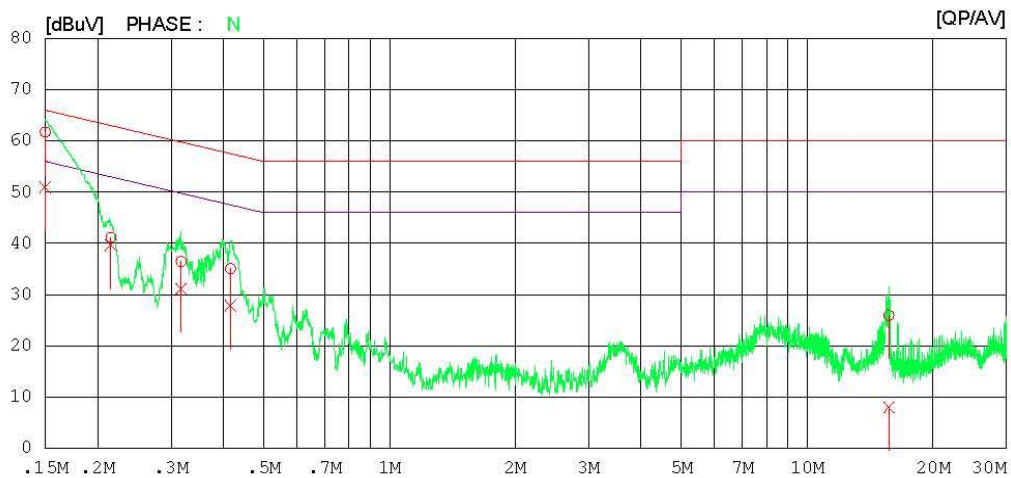

Results of Conducted Emission

Digital EMC
Date : 2012-07-24

Model No. : 42LT770H-UA
Type :
Serial No. :
Test Condition : HDMI

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15000	61.4	50.6	0.3	61.7	50.9	66.0	56.0	4.3	5.1	N
2	0.21521	40.9	39.4	0.2	41.1	39.6	63.0	53.0	21.9	13.4	N
3	0.31690	36.2	30.9	0.2	36.4	31.1	59.8	49.8	23.4	18.7	N
4	0.41633	34.8	27.6	0.3	35.1	27.9	57.5	47.5	22.4	19.6	N
5	15.70000	24.9	7.0	1.0	25.9	8.0	60.0	50.0	34.1	42.0	N
6	0.15006	61.5	51.1	0.3	61.8	51.4	66.0	56.0	4.2	4.6	L1
7	0.21521	41.3	39.9	0.2	41.5	40.1	63.0	53.0	21.5	12.9	L1
8	0.31730	34.6	26.7	0.2	34.8	26.9	59.8	49.8	25.0	22.9	L1
9	0.41523	32.7	25.7	0.3	33.0	26.0	57.5	47.5	24.5	21.5	L1
10	15.69750	23.5	8.5	1.0	24.5	9.5	60.0	50.0	35.5	40.5	L1

< USB MODE >



Results of Conducted Emission



Digital EMC
Date : 2012-07-23

Model No. : 42LT770H-UA
Type :
Serial No. :
Test Condition : USB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

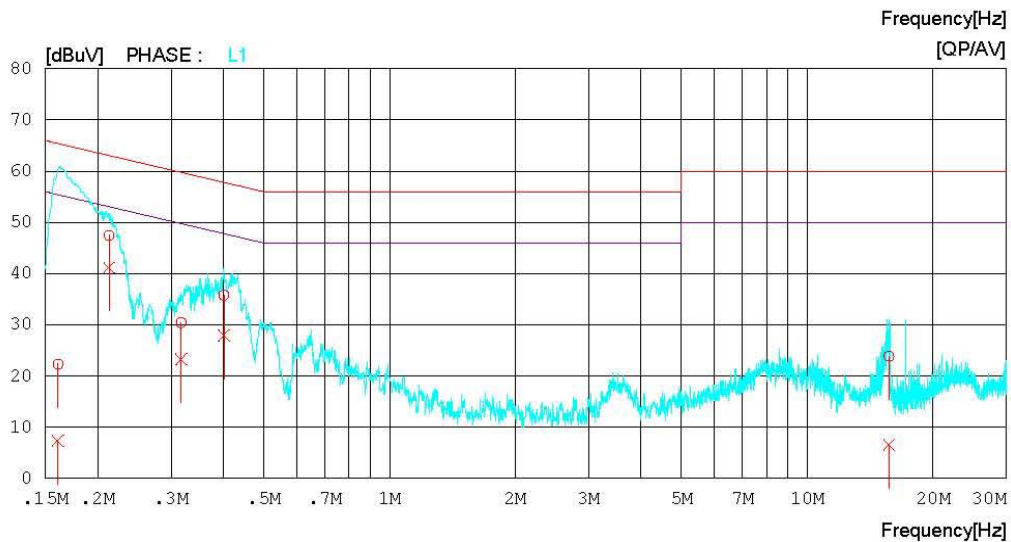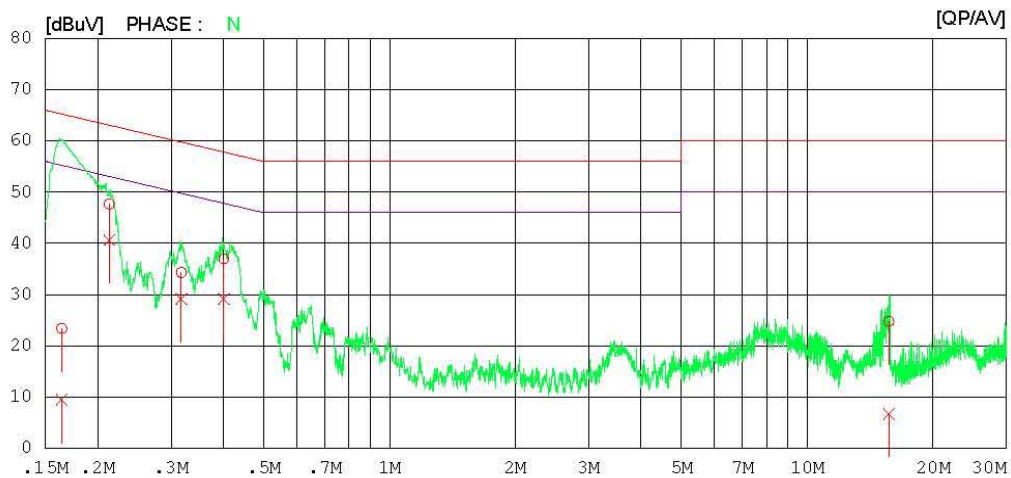

Results of Conducted Emission

Digital EMC
Date : 2012-07-23

Model No. : 42LT770H-UA
Type :
Serial No. :
Test Condition : USB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16423	23.1	9.2	0.3	23.4	9.5	65.2	55.2	41.8	45.7	N
2	0.21341	47.5	40.5	0.2	47.7	40.7	63.1	53.1	15.4	12.4	N
3	0.31744	34.1	28.9	0.2	34.3	29.1	59.8	49.8	25.5	20.7	N
4	0.40069	36.7	28.8	0.3	37.0	29.1	57.8	47.8	20.8	18.7	N
5	15.69850	23.8	5.7	1.0	24.8	6.7	60.0	50.0	35.2	43.3	N
6	0.16085	22.0	7.1	0.3	22.3	7.4	65.4	55.4	43.1	48.0	L1
7	0.21330	47.3	41.0	0.2	47.5	41.2	63.1	53.1	15.6	11.9	L1
8	0.31726	30.2	23.1	0.2	30.4	23.3	59.8	49.8	29.4	26.5	L1
9	0.40139	35.5	27.6	0.3	35.8	27.9	57.8	47.8	22.0	19.9	L1
10	15.69500	22.9	5.6	1.0	23.9	6.6	60.0	50.0	36.1	43.4	L1

6.2 Radiated Disturbance

6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 3 m or 10m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Rotate the EUT from (0 - 360)° and position the receiving antenna at heights from (1 - 4) m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1 GHz frequency range, Quasi-Peak detector with 120 kHz RBW was used.

Also Peak and Average detector with 1 MHz RBW were used for above 1 GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1 000
108 – 500	2 000
500 – 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

(1) Limit for Radiated Emission below 1 000MHz

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (3m distance)
	Quasi-peak (dBμV/m)	Quasi-peak (dBμV/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1 000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (10 m distance)
	Quasi-peak (dBμV/m)	Quasi-peak (dBμV/m)
30 to 230	40	30
230 to 1 000	47	37

(2) Limits for Radiated Emission above 1 000MHz at a measuring distance of 3 m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dBμV/m)	Average (dBμV/m)	Peak (dBμV/m)	Average (dBμV/m)
1 to 40	80	60	74	54

Note) 1. Emission Level = Reading Value + Correction Factor.

2. Correction Factor = Cable loss - Amp gain + Antenna Factor

3. Margin = Limit - Emission level

Test Result

< DSUB MODE_30 MHz ~ 1 GHz >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : DSUB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 26 °C 50 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

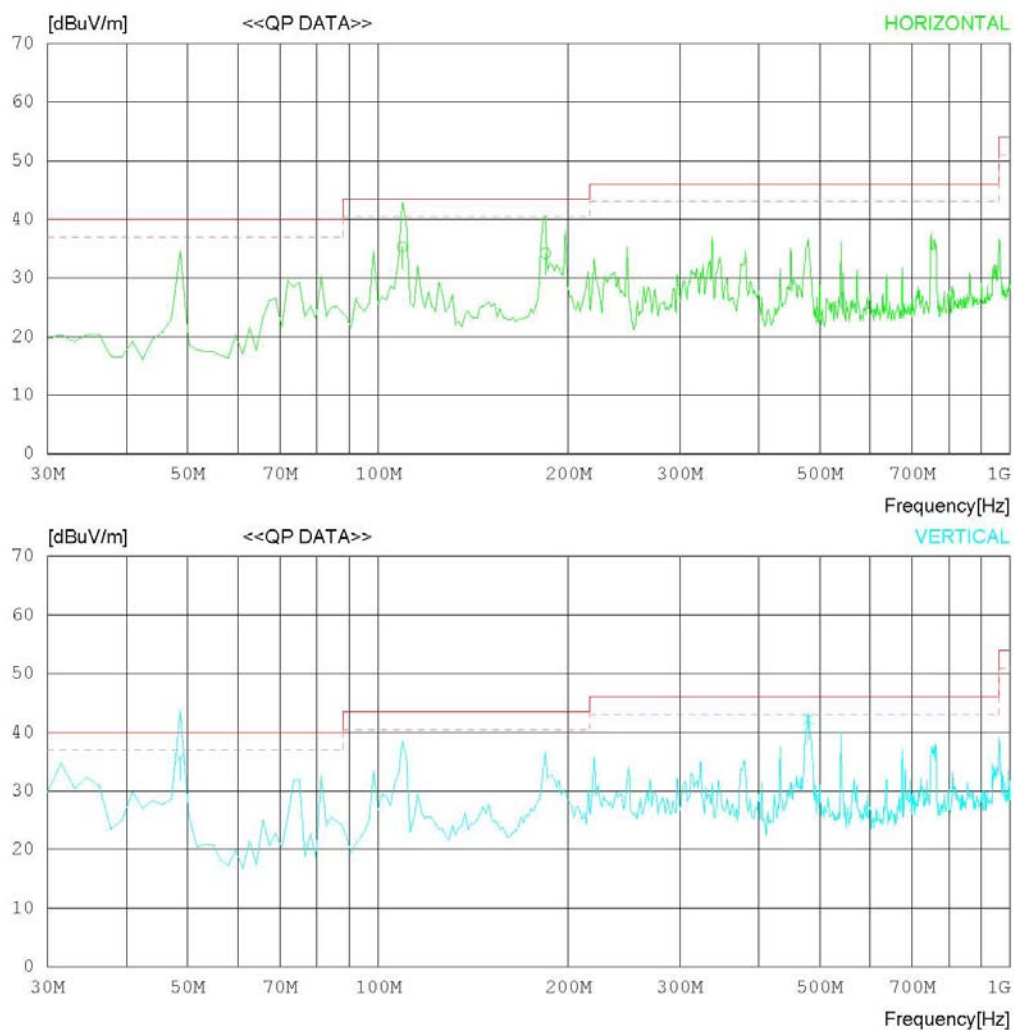

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 26 °C 50 % R.H
Test Condition : DSUB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	109.279	45.0	11.6	1.5	22.8	35.3	43.5	8.2	218	1
2	183.894	46.0	9.3	2.2	23.3	34.2	43.5	9.3	184	1
----- Vertical -----										
3	48.654	48.4	8.7	1.3	22.8	35.6	40.0	4.4	100	239
4	479.245	46.1	17.1	3.8	24.7	42.3	46.0	3.7	100	211

< DSUB MODE _ (1 ~ 6) GHz _ Peak >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : DSUB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

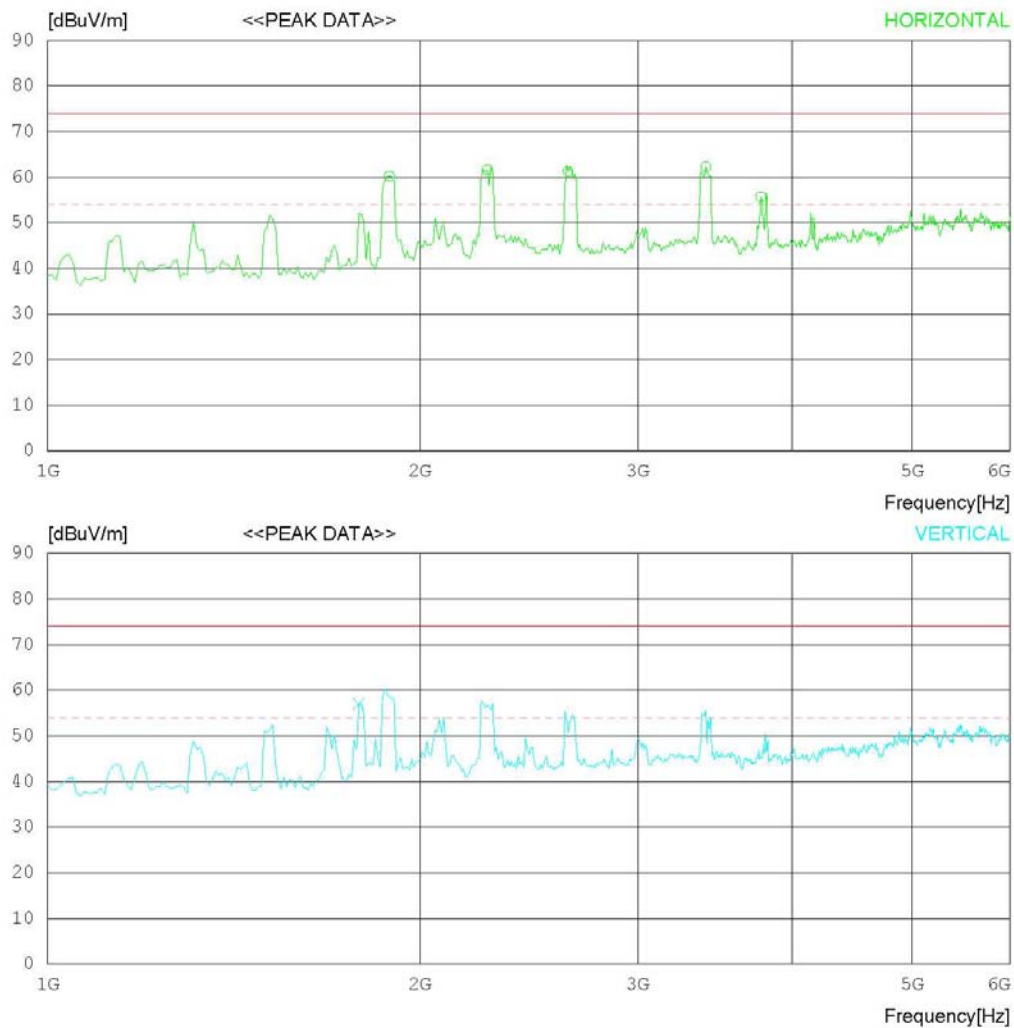

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 25 °C 47 % R.H
Test Condition : DSUB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1889.423	69.1	24.6	8.2	41.7	60.2	74.0	13.8	100	1
2	2266.029	68.3	26.1	9.0	41.8	61.6	74.0	12.4	100	234
3	2634.624	65.4	27.9	9.8	41.8	61.3	74.0	12.7	100	1
4	3403.866	63.9	28.9	11.5	42.0	62.3	74.0	11.7	100	1
5	3772.461	55.5	29.6	12.4	41.8	55.7	74.0	18.3	100	238
----- Vertical -----										
6	1785.256	66.2	24.6	8.0	41.8	57.0	74.0	17	100	358

< DSUB MODE _ (1 ~ 6) GHz _ Average >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : DSUB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

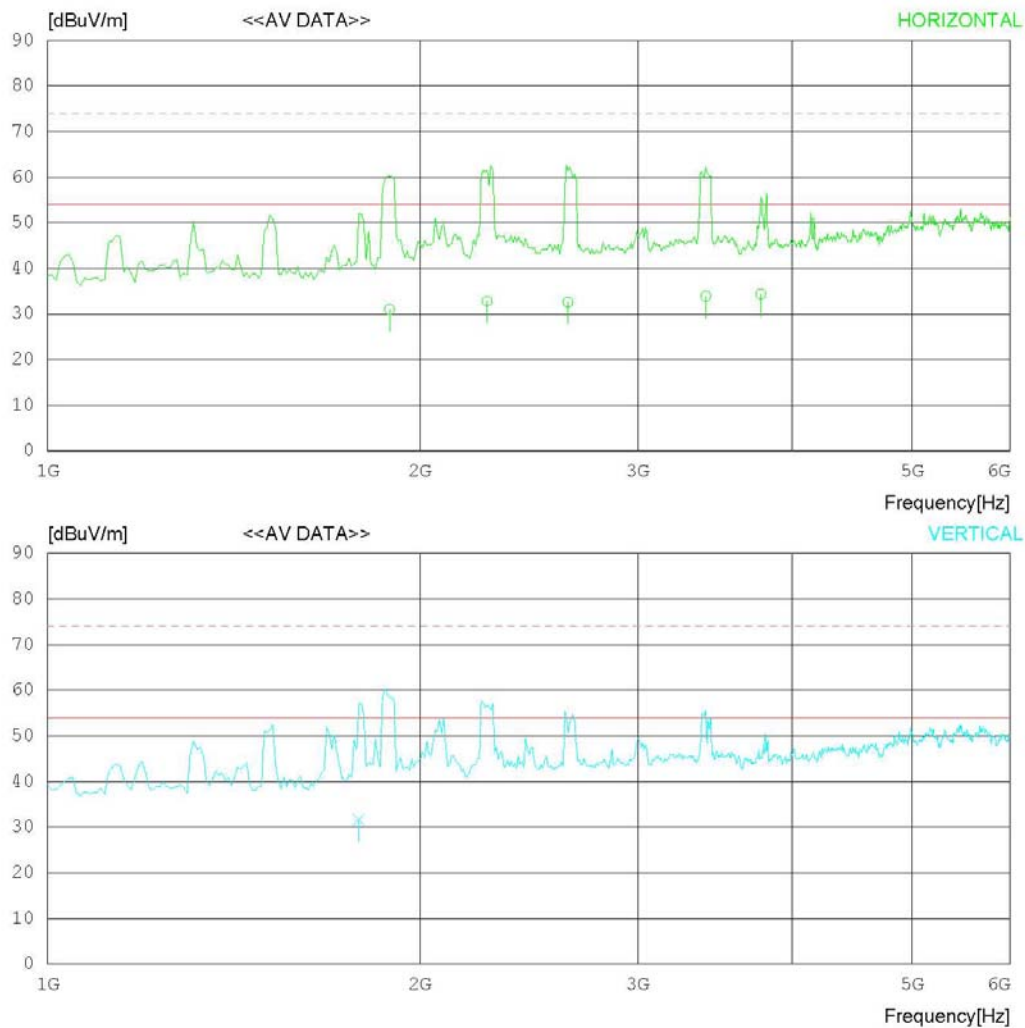

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 25 °C 47 % R.H
Test Condition : DSUB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1889.423	39.9	24.6	8.2	41.7	31.0	54.0	23.0	100	1
2	2266.029	39.5	26.1	9.0	41.8	32.8	54.0	21.2	100	234
3	2634.624	36.7	27.9	9.8	41.8	32.6	54.0	21.4	100	1
4	3403.866	35.5	28.9	11.5	42.0	33.9	54.0	20.1	100	1
5	3772.461	34.2	29.6	12.4	41.8	34.4	54.0	19.6	100	238
----- Vertical -----										
6	1785.256	40.8	24.6	8.0	41.8	31.6	54.0	22.4	100	358

< HDMI MODE_30 MHz ~ 1 GHz >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : HDMI

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 26 °C 50 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

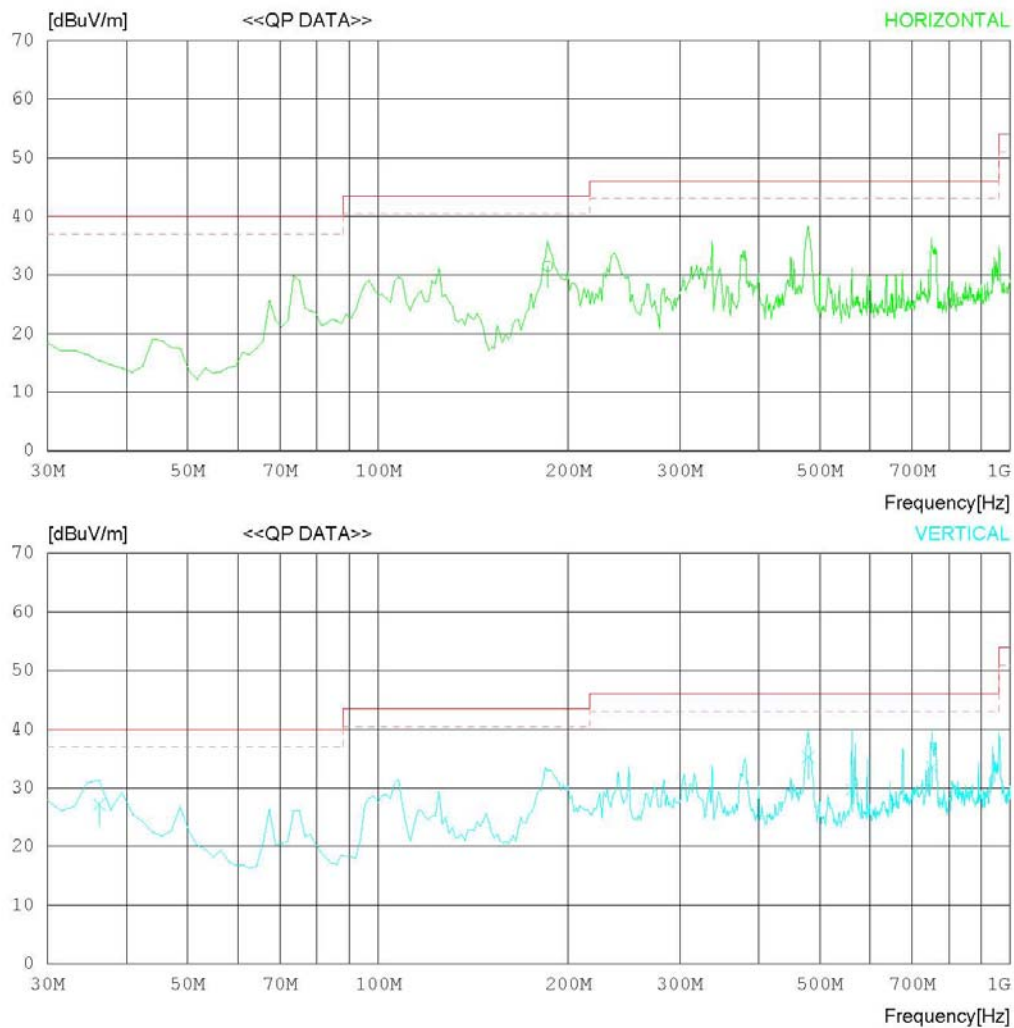

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 26 °C 50 % R.H
Test Condition : HDMI	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	185.449	43.3	9.3	2.2	23.3	31.5	43.5	12.0	213	167
----- Vertical -----										
2	36.218	33.8	15.4	1.1	23.1	27.2	40.0	12.8	100	220
3	479.245	39.1	17.1	3.8	24.7	35.3	46.0	10.7	100	213
4	561.633	32.4	18.2	3.9	24.8	29.7	46.0	16.3	100	1
5	752.837	33.5	19.5	4.6	24.0	33.6	46.0	12.4	100	1

< HDMI MODE _ (1 ~ 6) GHz _ Peak >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : HDMI

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

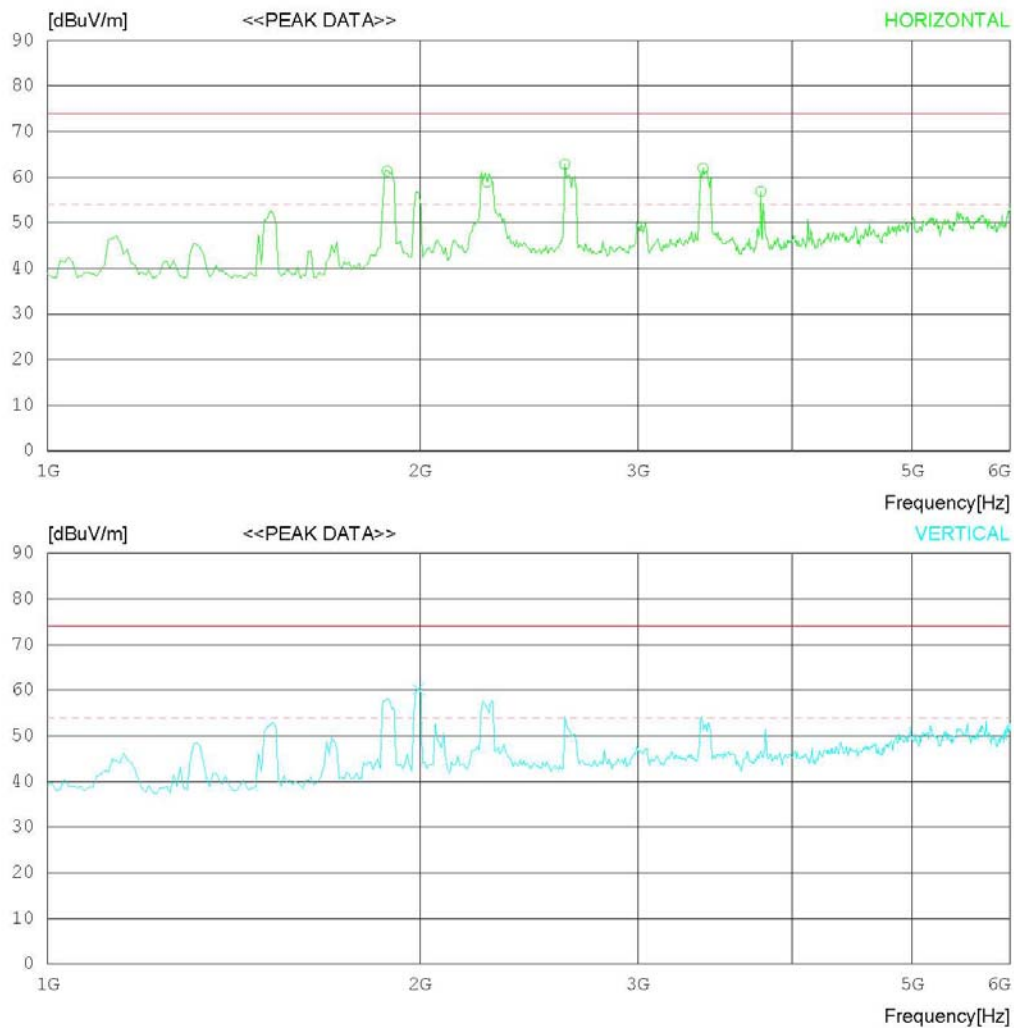

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 25 °C 47 % R.H
Test Condition : HDMI	Operator :
Memo :	

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1881.410	70.3	24.6	8.2	41.7	61.4	74.0	12.6	100	1
2	2266.029	65.6	26.1	9.0	41.8	58.9	74.0	15.1	100	1
3	2618.598	67.0	27.8	9.8	41.8	62.8	74.0	11.2	100	1
4	3387.840	63.6	28.9	11.4	41.9	62.0	74.0	12	100	221
5	3772.461	56.7	29.6	12.4	41.8	56.9	74.0	17.1	100	1
----- Vertical -----										
6	1993.589	68.9	24.6	8.4	41.7	60.2	74.0	13.8	100	358

< HDMI MODE _ (1 ~ 6) GHz _ Average >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : HDMI

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

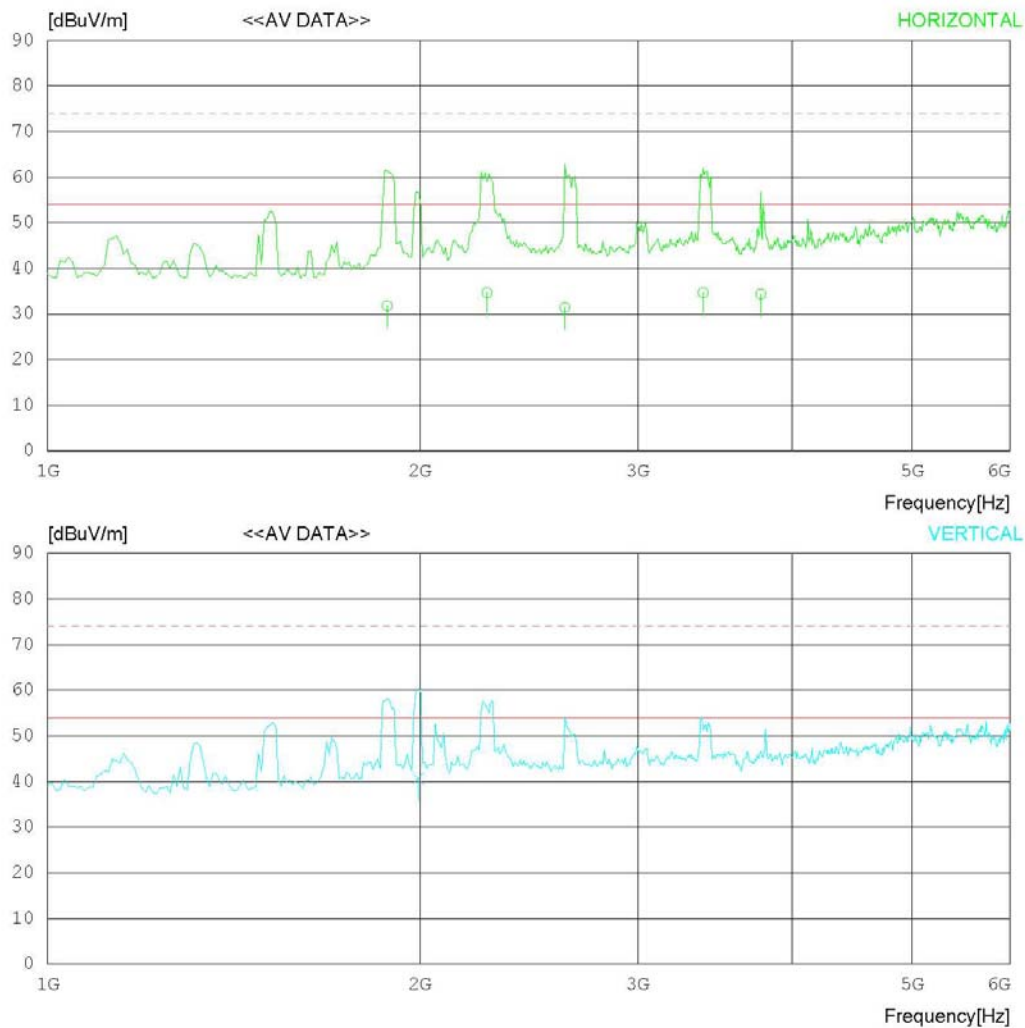

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 25 °C 47 % R.H
Test Condition : HDMI	Operator :
Memo :	

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1881.410	40.7	24.6	8.2	41.7	31.8	54.0	22.2	100	1
2	2266.029	41.4	26.1	9.0	41.8	34.7	54.0	19.3	100	1
3	2618.598	35.6	27.8	9.8	41.8	31.4	54.0	22.6	100	1
4	3387.840	36.3	28.9	11.4	41.9	34.7	54.0	19.3	100	221
5	3772.461	34.2	29.6	12.4	41.8	34.4	54.0	19.6	100	1
----- Vertical -----										
6	1993.589	49.3	24.6	8.4	41.7	40.6	54.0	13.4	100	358

< USB MODE_30 MHz ~ 1 GHz >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : USB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 26 °C 50 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

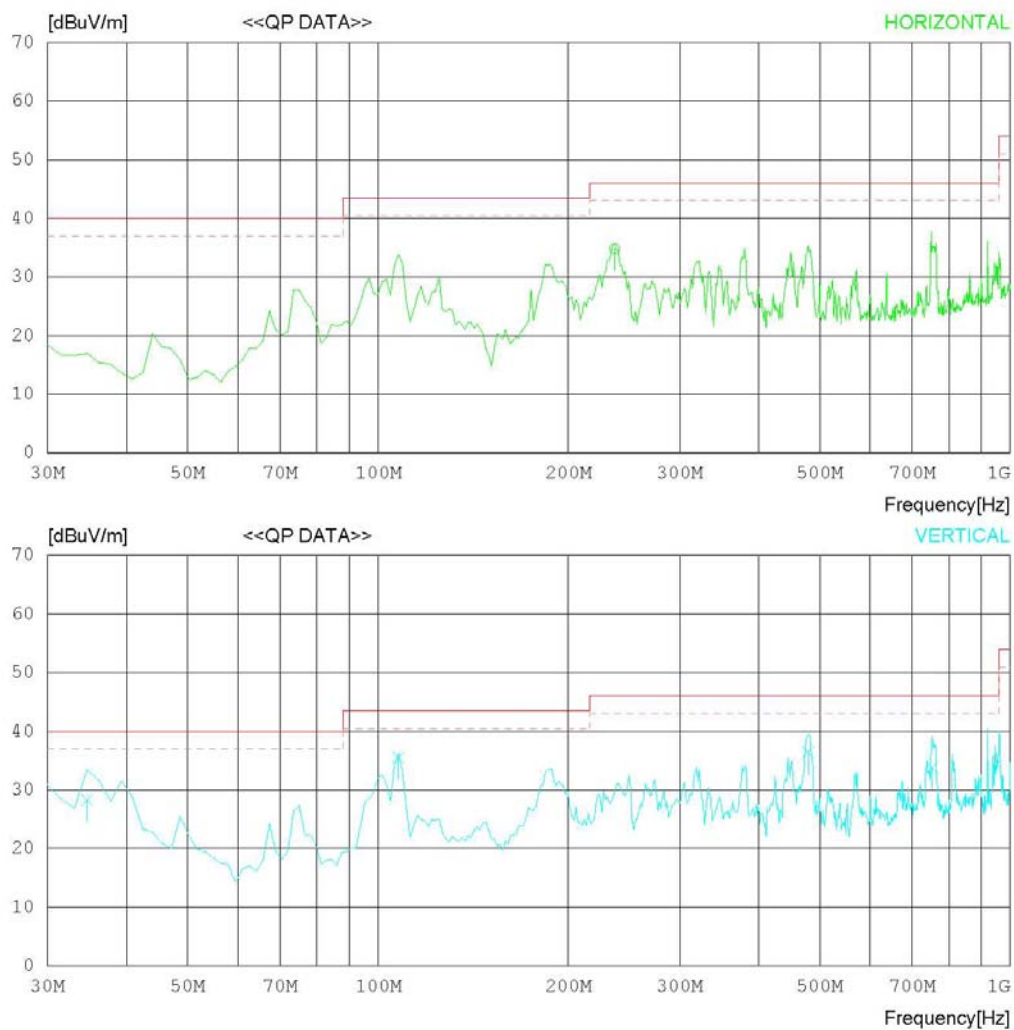

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 26 °C 50 % R.H
Test Condition : USB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	236.747	44.3	11.5	2.5	23.5	34.8	46.0	11.2	131	155
----- Vertical -----										
2	34.663	34.1	16.2	1.1	23.1	28.3	40.0	11.7	100	152
3	107.724	45.3	11.5	1.5	22.8	35.5	43.5	8.0	100	186
4	479.245	40.2	17.1	3.8	24.7	36.4	46.0	9.6	100	217
5	752.837	33.7	19.5	4.6	24.0	33.8	46.0	12.2	100	1

< USB MODE _ (1 ~ 6) GHz _ Peak >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : USB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

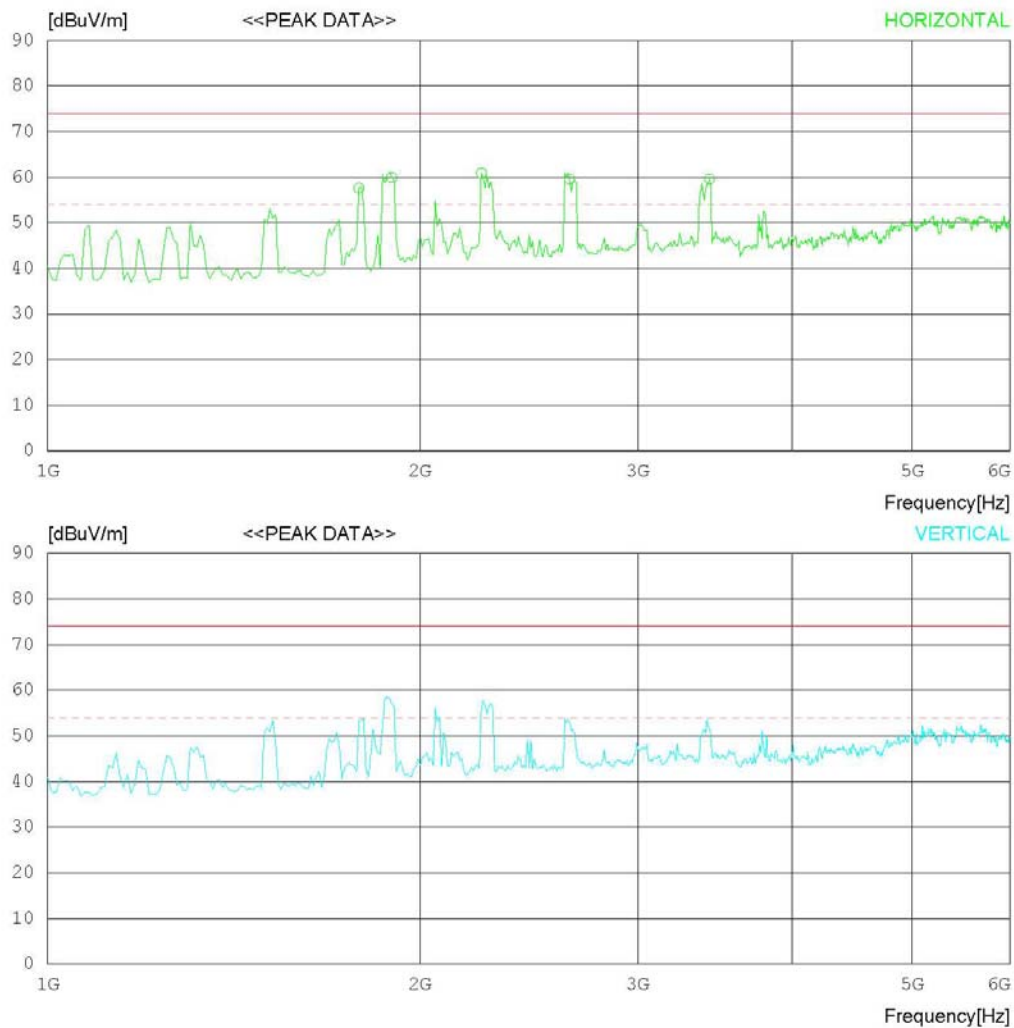

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 25 °C 47 % R.H
Test Condition : USB	Operator :
Memo :	

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1785.256	66.8	24.6	8.0	41.8	57.6	74.0	16.4	100	358
2	1897.436	68.7	24.6	8.3	41.7	59.9	74.0	14.1	100	358
3	2241.990	67.6	26.0	9.0	41.7	60.9	74.0	13.1	100	223
4	2642.637	63.7	27.9	9.8	41.8	59.6	74.0	14.4	100	358
5	3427.905	61.2	28.9	11.5	42.0	59.6	74.0	14.4	100	250

< USB MODE _ (1 ~ 6) GHz _ Average >

RADIATED EMISSION


Date : 2012-07-24

Model Name : 42LT770H-UA
Model No. :
Serial No. :
Test Condition : USB

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 25 °C 47 % R.H
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

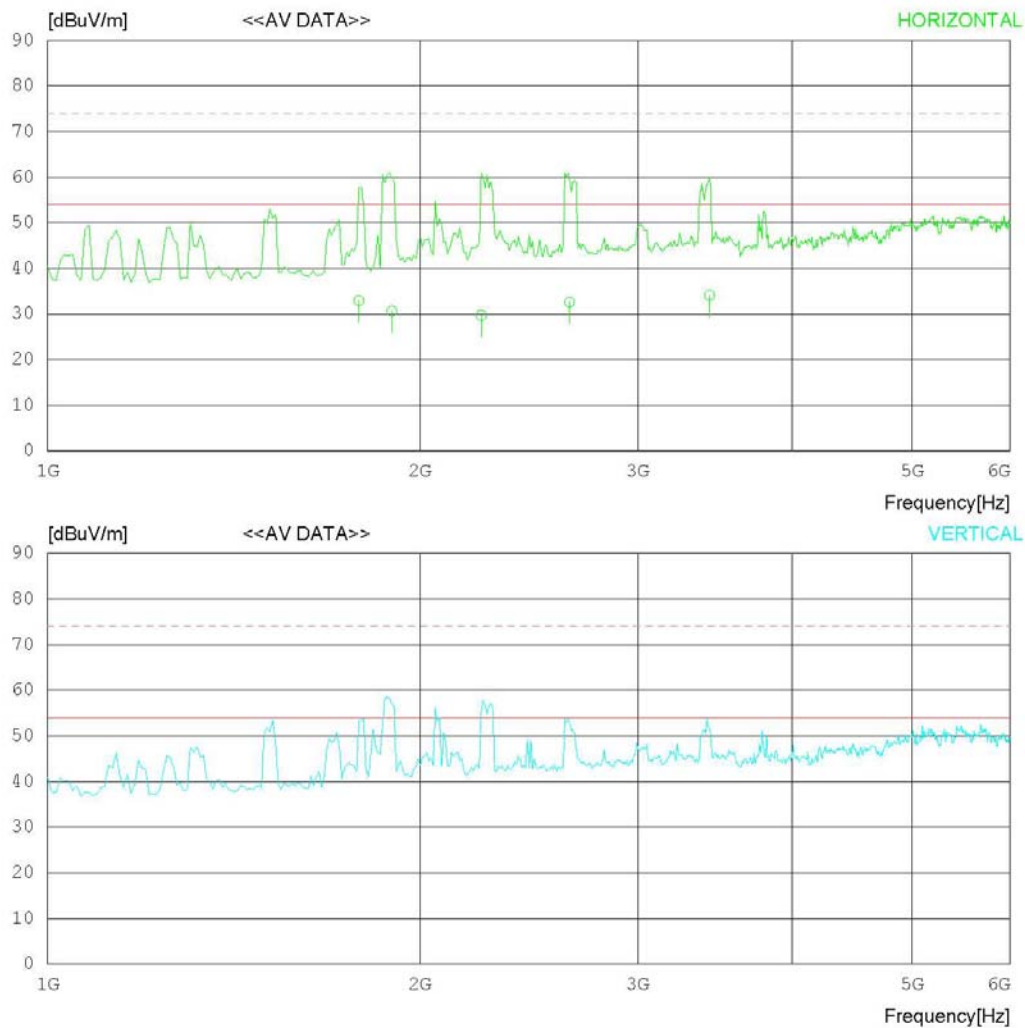

RADIATED EMISSION

Date : 2012-07-24

Model Name : 42LT770H-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 25 °C 47 % R.H
Test Condition : USB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1785.256	42.1	24.6	8.0	41.8	32.9	54.0	21.1	100	358
2	1897.436	39.5	24.6	8.3	41.7	30.7	54.0	23.3	100	358
3	2241.990	36.4	26.0	9.0	41.7	29.7	54.0	24.3	100	223
4	2642.637	36.7	27.9	9.8	41.8	32.6	54.0	21.4	100	358
5	3427.905	35.7	28.9	11.5	42.0	34.1	54.0	19.9	100	250

Appendix 1

List of Test and Measurement Instruments

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment is identified by the Test Laboratory.

1. Conducted Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
☐ SPECTRUM ANALYZER	8591E	H/P	3649A05889	2012.03.05	2013.03.05
☐ RFI/FIELD INTENSITY METER	KNM-2402	KYORITSU	4N-170-3	2012.07.02	2013.07.02
☐ LISN	KNW-407	KYORITSU	8-317-8	2012.01.09	2013.01.09
☐ LISN	PMM L2-16B	NARDA S.T.S. / PMM	000WX20305	2011.09.19	2012.09.19
☐ ATTENUATOR	CFA-10BPJ-10	TAMAGAWA ELECTRONICS	1760307E	N/A	N/A
☐ 50 OHM TERMINATOR	CT-01	TME	N/A	2012.01.09	2013.01.09
☒ EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2012.03.06	2013.03.06
☒ LISN	ESH2-Z5	ROHDE & SCHWARZ	828739/006	2011.09.30	2012.09.30
☒ LISN	LISN1600	TTI	197204	2012.07.02	2013.07.02
☒ 50 OHM TERMINATOR	CT-01	TME	N/A	2012.01.09	2013.01.09

2. Radiated Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
☒ EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100014	2012.01.09	2013.01.09
☒ BILOG ANTENNA	CBL6112D	SCHAFFNER	22609	2010.12.21	2012.12.21
☒ HORN ANTENNA	BBHA9120A	SCHWARZBECK	322	2012.05.15	2014.05.15
☒ AMPLIFIER	8447E	H/P	2945A02865	2012.01.09	2013.01.09
☒ AMPLIFIER	MLA-00108-B02-36	TSJ	1518831	2012.01.09	2013.01.09
☐ SPECTRUM ANALYZER	E4411B	AGILENT	US41062735	2012.07.11	2013.07.11
☐ AMPLIFIER	8447D	AGILENT	2443A03690	2012.07.01	2013.07.01
☐ BILOG ANTENNA	VULB9160	SCHAFFNER	3151	2010.08.25	2012.08.25
☐ EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2012.03.06	2013.03.06
☐ BICONICAL ANT.	VHA 9103	SCHWARZBECK	91032789	2010.11.29	2012.11.29
☐ LOG-PERIODIC ANT.	UHALP 9108A	SCHWARZBECK	590	2011.07.07	2013.07.07
☐ BICONICAL ANT.	VHA 9103	SCHWARZBECK	91031946	2010.12.21	2012.12.21
☐ LOG-PERIODIC ANT.	UHALP 9108-A1	SCHWARZBECK	1098	2010.11.29	2012.11.29
☐ AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2012.03.05	2013.03.05