

EMC TEST REPORT

Test item : LED LCD TV Monitor
Model No. : 47LM6700-UA
Order No. : 1112-01712
Date of receipt : 2011-12-08
Test duration : 2011-12-10 ~ 2011-12-12
Use of report : FCC Marking
Date of Issue : 2011-12-15

Applicant : LG Electronics Inc.

9-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Test laboratory : Digital EMC Co., Ltd.

683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : ANSI C 63.4:2003

FCC Part 15 Subpart B

(Type of Device : Class B Personal Computers and Peripherals
(JBP))

Test environment : Temperature (21 ~ 23) °C,
Humidity (35 ~ 38) % R.H.

Test result : ☒ Comply ☐ Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Assistant Manager
D.H EUN

Reviewed by:



General Manager
C.H.LEE

The above test report is the accredited test results by Korea Laboratory Accreditation Scheme,
which signed the ILAC-MRA.

PRESIDENT OF DIGITAL EMC CO., LTD.

CONTENTS

1. General Remarks	3
2. Test Laboratory	3
3. General Information of EUT	4
3.1 Product Information	4
4. Test Summary	5
4.1 Applied standards and test results	5
4.2 Test environment and conditions	5
4.3 Test result Summary	5
5. Test Set-up and operation mode	6
5.1 Principle of Configuration Selection	6
5.2 Test Operation Mode	6
5.3 Support Equipment Used	6
6. Test Results : Emission	7
6.1 Conducted Disturbance	7
6.2 Radiated Disturbance	14
Appendix 1.....	34
List of Test and Measurement Instruments	34

1. General Remarks

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

<http://www.digitalemc.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385 T-1442, G-338	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	ROK1028C	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

3.1 Product Information

Model No.	47LM6700-UA
EUT Type	LED LCD TV Monitor
Serial No	NONE
FCC ID	BEJ47LM6700UA
Type of Sample Tested	Pre-Production
High Frequency	756 MHz
Rating	AC100-240 V~, 50/60 Hz, 1.3 A, 130 W
Supplied Power for Test	AC120V, 60Hz
Applicant	LG Electronics Inc. 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea
Manufacturer	LG Electronics Inc. 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

□ Formats Supported

PC Input Mode	Resolution	Horizontal Frequency (KHz)	Vertical Frequency (Hz)
HDMI-PC / RGB-PC	640x350	31.468	70.09
	720x400	31.469	70.08
	640x480	31.469	59.94
	800x600	37.879	60.31
	1024x768	48.363	60.00
	1152x864	54.348	60.053
	1360x768	47.712	60.015
	1920x1080	67.5	60.00

4. Test Summary

4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2003	Comply
Radiated Disturbance	ANSI C63.4:2003	Comply

The data in this test report are traceable to the national or international standards.

4.2 Test environment and conditions

Test Items	Test date (MM-DD)	Temp (°C)	Humidity (% R.H.)	Pressure (hPa)
Conducted Disturbance	12-12	21	38	-
Radiated Disturbance	12-10	23	36	
	12-12	22	35	

4.3 Test result Summary

(1) Conducted Emission(DSUB + LAN MODE)

Frequency [MHz]	Result [dBμV]	Phase	Detector	Limit [dBμV]	Margin [dB]
1.25500	36.2	N	Average	46.0	9.8

(2) Radiated Emission(DSUB + LAN MODE)

Frequency [MHz]	Pol.	Reading [dBμV]	C.F. [dB/m]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
116.950	V	44.5	-9.8	34.7	43.5	8.8

Note) 1. Emission Level = Reading Value + Correction Factor.

2. Correction Factor = Cable loss - Amp gain + Antenna Factor

3. Margin = Limit - Emission level

5. Test Set-up and operation mode

5.1 Principle of Configuration Selection

Emission : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

5.2 Test Operation Mode

- DSUB+LAN MODE - Worst Case Resolution : 1920 x 1080 Resolution
- HDMI+LAN MODE - Worst Case Resolution : 1920 x 1080 Resolution
- USB MODE

5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
PC	VOSTRO430	9K77SBX	DELL	POWER	1.8	Non-shield	Plastic	DOC
				DSUB	1.5	Shield		
				HDMI	1.8	Shield		
				STEREO	1.6	Non-shield		
				USB	-	-		
				PS/2	1.6	Non-shield		
				PS/2	1.8	Non-shield		
				LAN	2.5	Non-shield		
KEYBOARD	SKG-210P	TAKSC12255P	MONITOEREY INTERNATIONAL CORP	PS/2	1.6	Non-shield	Plastic	DOC
MOUSE	SML-510PB	TAKS903519Z	MONITOEREY INTERNATIONAL CORP	PS/2	1.8	Non-shield	Plastic	DOC
USB MEMORY	POP-S2	N/A	MEMORIVE	USB	-	-	-	DOC

6. Test Results : Emission

6.1 Conducted Disturbance

6.1.1 Measurement Procedure

In the range of 0.15MHz to 30MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4:2003**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 0.4m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2nd LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50
Note 1 The lower limit shall apply at the transition frequencies.				
Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.				

Test Result

< DSUB + LAN MODE >



Results of Conducted Emission



Digital EMC
 Date : 2011-12-12

Model No. : 47LM6700-UA
 Type :
 Serial No. :
 Test Condition : DSUB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 21 °C 38 % R.H.
 Operator :

Memo :

LIMIT : CISPR22_B OP
 CISPR22_B AV

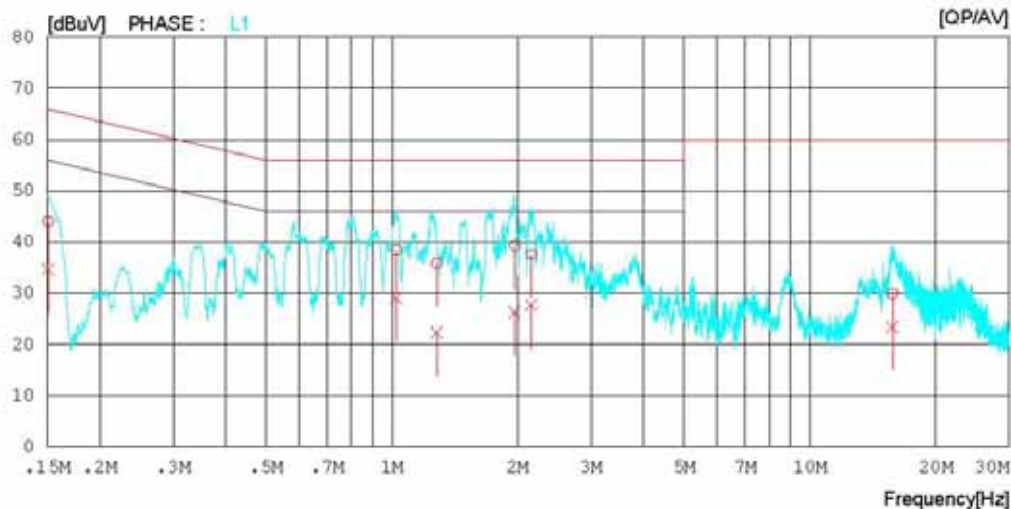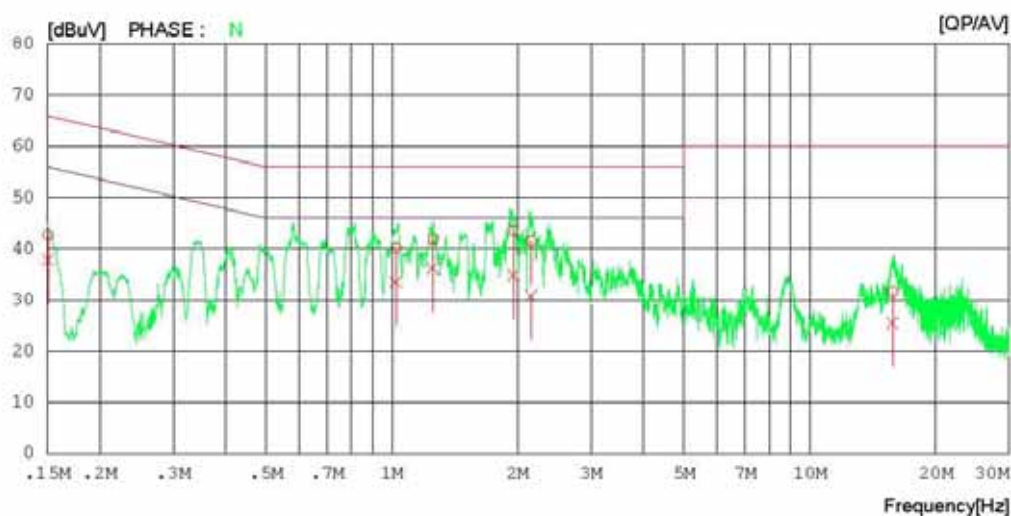

Results of Conducted Emission

Digital EMC
 Date : 2011-12-12

Model No. : 47LM6700-UA
 Type :
 Serial No. :
 Test Condition : DSUB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 21 °C 38 % R.H.
 Operator :

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15061	42.5	37.6	0.2	42.7	37.8	66.0	56.0	23.3	18.2	N
2	1.02400	39.9	33.3	0.2	40.1	33.5	56.0	46.0	15.9	12.5	N
3	1.25500	41.7	36.0	0.2	41.9	36.2	56.0	46.0	14.1	9.8	N
4	1.95300	43.4	34.6	0.2	43.6	34.8	56.0	46.0	12.4	11.2	N
5	2.15400	41.2	30.6	0.3	41.5	30.9	56.0	46.0	14.5	15.1	N
6	15.76700	30.6	24.5	1.0	31.6	25.5	60.0	50.0	28.4	24.5	N
7	0.15068	43.8	34.5	0.2	44.0	34.7	66.0	56.0	22.0	21.3	L1
8	1.02700	38.2	28.9	0.2	38.4	29.1	56.0	46.0	17.6	16.9	L1
9	1.28200	35.7	22.1	0.2	35.9	22.3	56.0	46.0	20.1	23.7	L1
10	1.96800	39.1	26.1	0.2	39.3	26.3	56.0	46.0	16.7	19.7	L1
11	2.15550	37.3	27.5	0.3	37.6	27.8	56.0	46.0	18.4	18.2	L1
12	15.77700	29.0	22.4	1.0	30.0	23.4	60.0	50.0	30.0	26.6	L1

< HDMI + LAN MODE >



Results of Conducted Emission



Digital EMC
 Date : 2011-12-12

Model No. : 47LM6700-UA
 Type :
 Serial No. :
 Test Condition : HDMI

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 21 °C 38 % R.H.
 Operator :

Memo :

LIMIT : CISPR22_B OP
 CISPR22_B AV

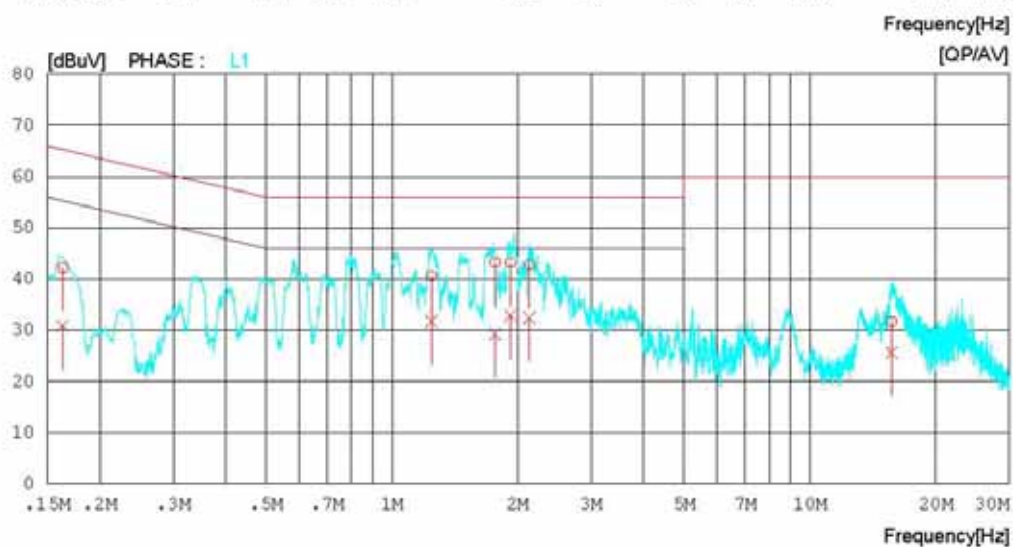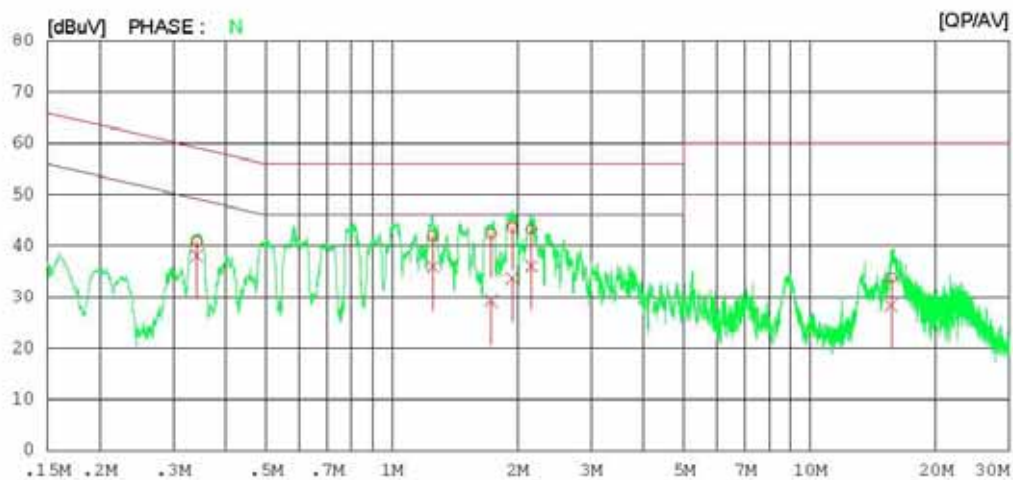

Results of Conducted Emission

Digital EMC
 Date : 2011-12-12

Model No. : 47LM6700-UA
 Type :
 Serial No. :
 Test Condition : HDMI

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 21 °C 38 % R.H.
 Operator :

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.34174	40.6	37.8	0.2	40.8	38.0	59.2	49.2	18.4	11.2	N
2	1.25400	41.7	35.7	0.2	41.9	35.9	56.0	46.0	14.1	10.1	N
3	1.72850	42.1	29.0	0.2	42.3	29.2	56.0	46.0	13.7	16.8	N
4	1.94150	43.5	33.5	0.2	43.7	33.7	56.0	46.0	12.3	12.3	N
5	2.15700	43.0	35.8	0.3	43.3	36.1	56.0	46.0	12.7	9.9	N
6	15.66650	32.8	27.4	1.0	33.8	28.4	60.0	50.0	26.2	21.6	N
7	0.16339	42.1	30.7	0.2	42.3	30.9	65.3	55.3	23.0	24.4	L1
8	1.24300	40.4	31.5	0.2	40.6	31.7	56.0	46.0	15.4	14.3	L1
9	1.76500	43.1	29.0	0.2	43.3	29.2	56.0	46.0	12.7	16.8	L1
10	1.92300	43.0	32.6	0.2	43.2	32.8	56.0	46.0	12.8	13.2	L1
11	2.13550	42.6	32.1	0.3	42.9	32.4	56.0	46.0	13.1	13.6	L1
12	15.70100	30.7	24.6	1.0	31.7	25.6	60.0	50.0	28.3	24.4	L1

< USB MODE >



Results of Conducted Emission



Digital EMC
 Date : 2011-12-12

Model No. : 47LM6700-UA
 Type :
 Serial No. :
 Test Condition : USB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 21 °C 38 % R.H.
 Operator :

Memo :

LIMIT : CISPR22_B OP
 CISPR22_B AV

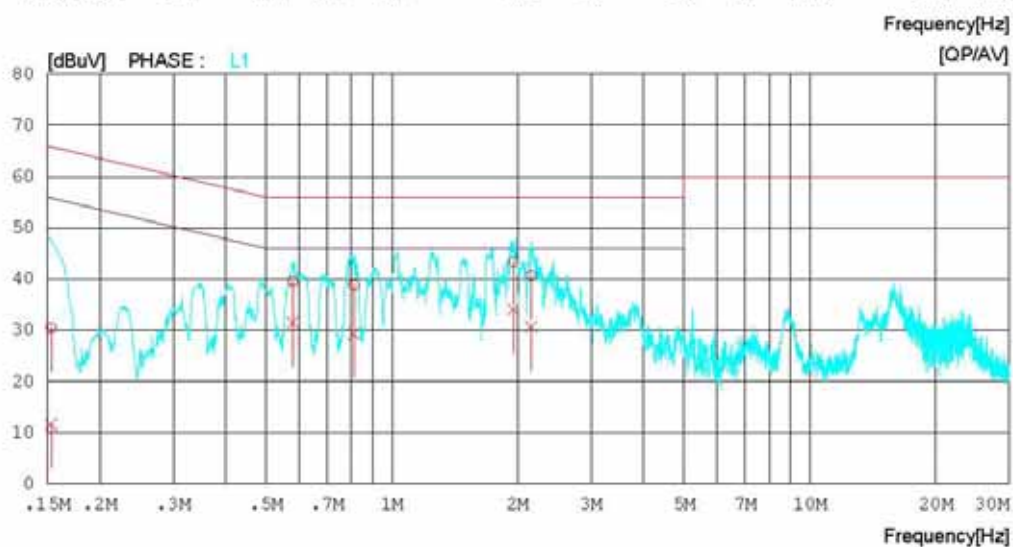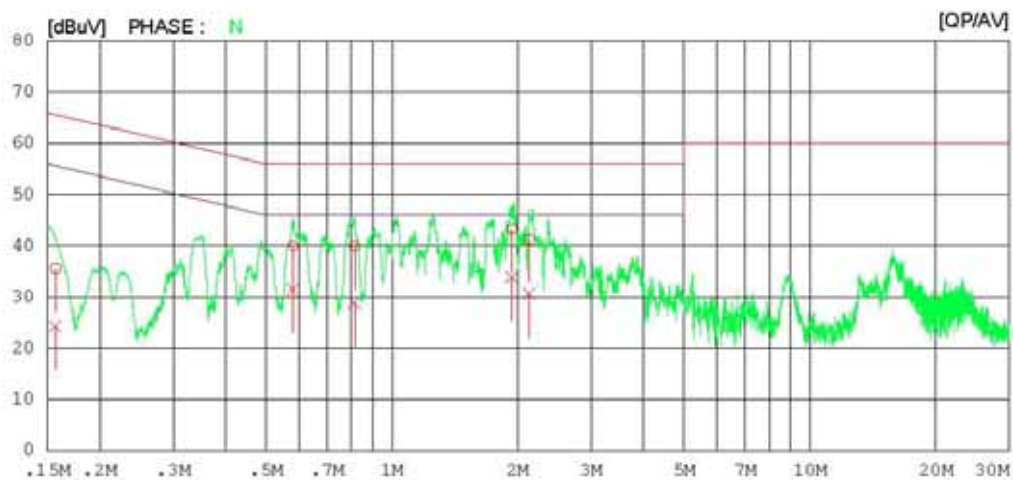

Results of Conducted Emission

Digital EMC
 Date : 2011-12-12

Model No. : 47LM6700-UA
 Type :
 Serial No. :
 Test Condition : USB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 21 °C 38 % R.H.
 Operator :

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15688	35.4	24.1	0.2	35.6	24.3	65.6	55.6	30.0	31.3	N
2	0.58048	39.9	31.3	0.1	40.0	31.4	56.0	46.0	16.0	14.6	N
3	0.81499	39.8	28.7	0.2	40.0	28.9	56.0	46.0	16.0	17.1	N
4	1.93600	43.1	33.7	0.2	43.3	33.9	56.0	46.0	12.7	12.1	N
5	2.13350	40.9	30.3	0.3	41.2	30.6	56.0	46.0	14.8	15.4	N
6	0.15319	30.3	11.5	0.2	30.5	11.7	65.8	55.8	35.3	44.1	L1
7	0.58029	39.6	31.4	0.1	39.7	31.5	56.0	46.0	16.3	14.5	L1
8	0.81231	38.7	29.1	0.2	38.9	29.3	56.0	46.0	17.1	16.7	L1
9	1.95400	43.2	33.9	0.2	43.4	34.1	56.0	46.0	12.6	11.9	L1
10	2.15300	40.4	30.4	0.3	40.7	30.7	56.0	46.0	15.3	15.3	L1

6.2 Radiated Disturbance

6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4:2003**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 3m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1GHz frequency range, Quasi-Peak detector with 120kHz RBW was used.

Also Peak and Average detector with 1MHz RBW were used for above 1GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

(1) Limit for Radiated Emission below 1000MHz

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (3m distance)
	Quasi-peak limits (dB μ V/m)	Quasi-peak limits (dB μ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1000	49.5	54
Note 1 The lower limit shall apply at the transition frequency. Note 2 Additional provisions may be required for cases where interference occurs. Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.		
30 to 230	40	30
230 to 1000	47	37

(2) Limits for Radiated Emission in the frequency range 1000 - 2000MHz at a measuring distance of 10m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	peak (dB μ V/m)	Average (dB μ V/m)	peak (dB μ V/m)	Average (dB μ V/m)
1 to 2	69.5	49.5	63.5	43.5

(3) Limits for Radiated Emission above 1000MHz at a measuring distance of 3m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	peak (dB μ V/m)	Average (dB μ V/m)	peak (dB μ V/m)	Average (dB μ V/m)
1 to 40	80	60	74	54

Test Result

< DSUB + LAN MODE_30 MHz ~ 1 GHz >

RADIATED EMISSION


Date : 2011-12-10

Model Name : 47LM6700-UA
 Model No. :
 Serial No. :
 Test Condition : DSUB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi : 23 °C 36 % R.H.
 Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

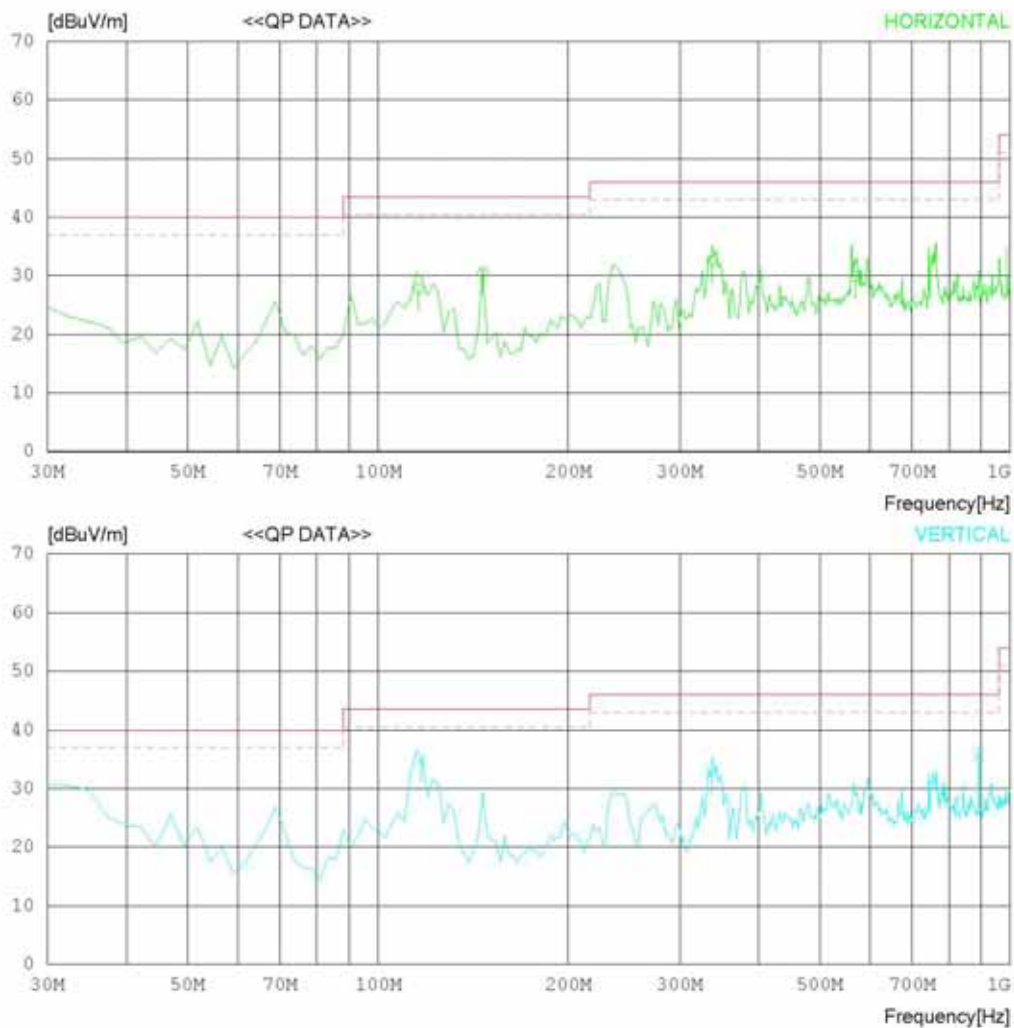

RADIATED EMISSION

Date : 2011-12-10

Model Name : 47LM6700-UA
 Model No. :
 Serial No. :
 Test Condition : DSUB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi : 23 °C 36 % R.H.
 Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	115.960	37.6	11.4	1.5	22.8	27.7	43.5	15.8	265	358
2	146.400	41.3	10.6	1.7	23.1	30.5	43.5	13.0	100	105
3	337.493	39.2	14.6	2.7	24.0	32.5	46.0	13.5	100	208
4	568.650	32.2	18.4	3.7	24.4	29.9	46.0	16.1	100	158
----- Vertical -----										
5	116.950	44.5	11.5	1.5	22.8	34.7	43.5	8.8	100	10
6	337.493	39.5	14.6	2.7	24.0	32.8	46.0	13.2	100	207
7	890.100	33.6	20.6	4.8	23.3	35.7	46.0	10.3	100	162

< DSUB + LAN MODE_1 GHz ~ 6 GHz_PEAK >

RADIATED EMISSION


Date : 2011-12-12

Model Name : 47LM6700-UA
 Model No. :
 Serial No. :
 Test Condition : DSUB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi : 22 °C 35 % R.H.
 Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

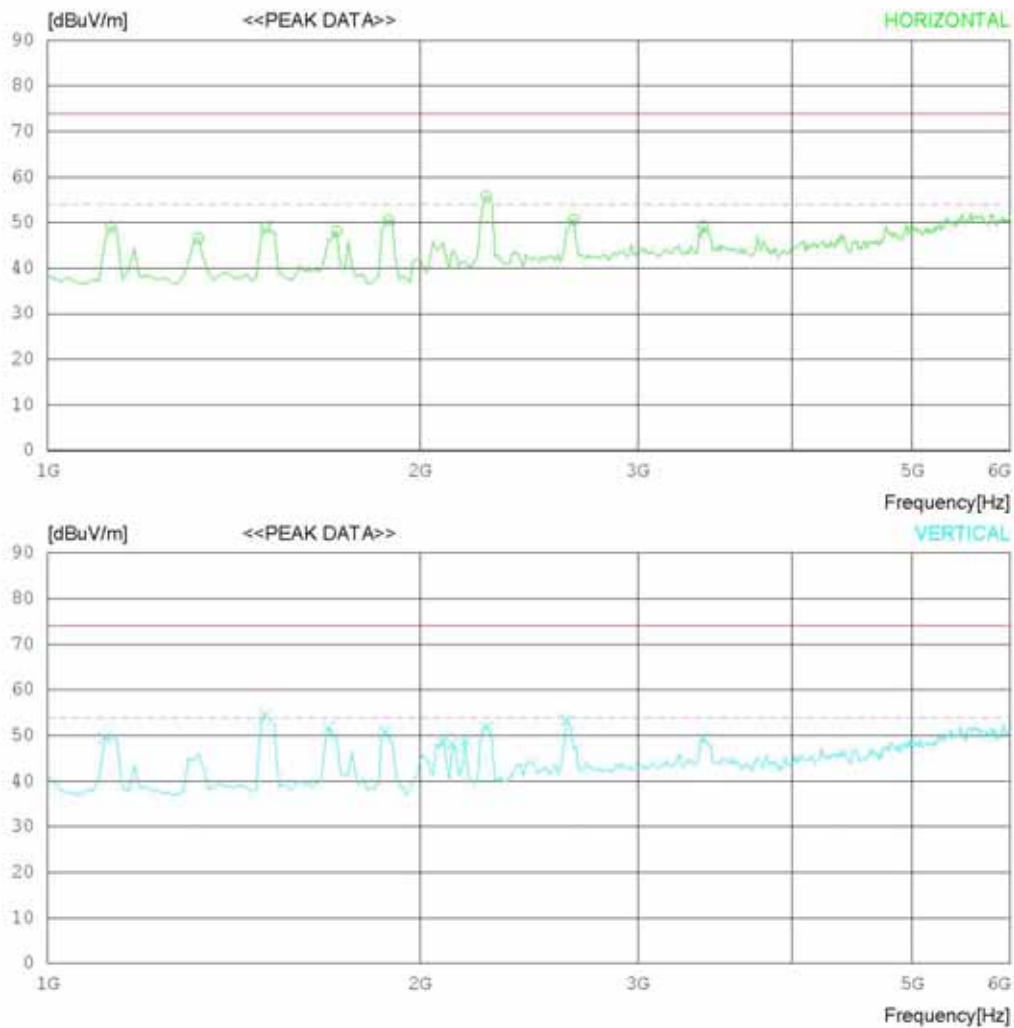

RADIATED EMISSION

Date : 2011-12-12

Model Name : 47LM6700-UA	Reference No. :
Model No. :	Power Supply : 120V 60Hz
Serial No. :	Temp/Humi : 22°C 35 % R.H.
Test Condition : DSUB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1125.000	61.8	24.0	5.1	41.8	49.1	74.0	24.9	100	358
2	1325.000	58.3	24.6	5.6	41.9	46.6	74.0	27.4	100	358
3	1500.000	59.7	25.1	6.0	41.9	48.9	74.0	25.1	100	358
4	1712.500	58.5	25.2	6.4	41.9	48.2	74.0	25.8	100	358
5	1887.500	60.6	25.2	6.8	42.0	50.6	74.0	23.4	100	358
6	2262.500	64.1	26.3	7.4	42.0	55.8	74.0	18.2	100	358
7	2662.500	56.9	27.8	8.1	42.1	50.7	74.0	23.3	100	219
8	3387.500	52.9	29.1	9.3	42.0	49.3	74.0	24.7	100	358
----- Vertical -----										
9	1112.500	62.2	24.0	5.1	41.8	49.5	74.0	24.5	100	181
10	1500.000	65.2	25.1	6.0	41.9	54.4	74.0	19.6	100	1
11	1687.500	62.1	25.2	6.3	41.9	51.7	74.0	22.3	100	207
12	1875.000	61.0	25.2	6.7	42.0	50.9	74.0	23.1	100	1
13	2087.500	58.1	25.6	7.1	42.0	48.8	74.0	25.2	100	162
14	2125.000	57.2	25.7	7.2	42.0	48.1	74.0	25.9	100	198
15	2175.000	57.7	25.9	7.3	42.0	48.9	74.0	25.1	100	356
16	2262.500	60.1	26.3	7.4	42.0	51.8	74.0	22.2	100	1
17	2625.000	59.9	27.7	8.0	42.1	53.5	74.0	20.5	100	1
18	3387.500	52.9	29.1	9.3	42.0	49.3	74.0	24.7	100	1

< DSUB + LAN MODE_1 GHz ~ 6 GHz_AV >

RADIATED EMISSION


Date : 2011-12-12

Model Name : 47LM6700-UA
 Model No. :
 Serial No. :
 Test Condition : DSUB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi : 22 °C 35 % R.H.
 Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

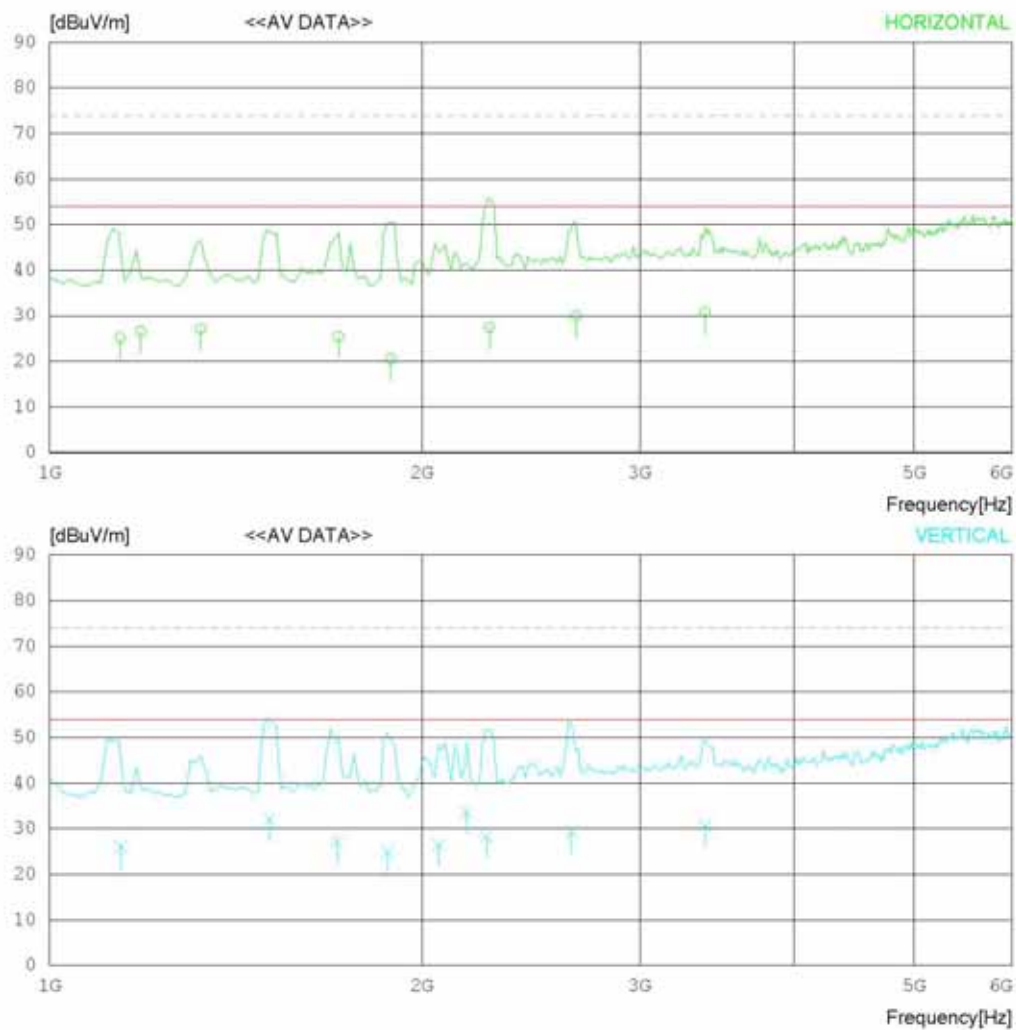

RADIATED EMISSION

Date : 2011-12-12

Model Name : 47LM6700-UA	Reference No. :
Model No. :	Power Supply : 120V 60Hz
Serial No. :	Temp/Humi : 22°C 35 % R.H.
Test Condition : DSUB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1140.000	37.9	24.0	5.1	41.8	25.2	54.0	28.8	100	358
2	1325.000	38.9	24.6	5.6	41.9	27.2	54.0	26.8	100	358
3	1185.000	39.0	24.2	5.2	41.8	26.6	54.0	27.4	100	156
4	1712.500	35.8	25.2	6.4	41.9	25.5	54.0	28.5	100	358
5	1887.000	30.6	25.2	6.8	42.0	20.6	54.0	33.4	100	358
6	2665.583	36.2	27.8	8.1	42.1	30.0	54.0	24.0	100	358
7	2267.884	35.8	26.3	7.4	42.0	27.5	54.0	26.5	100	219
8	3387.500	34.4	29.1	9.3	42.0	30.8	54.0	23.2	100	358
----- Vertical -----										
9	1142.000	38.6	24.1	5.1	41.8	26.0	54.0	28.0	100	181
10	1506.750	42.8	25.1	6.0	41.9	32.0	54.0	22.0	100	33
11	1708.000	37.6	25.2	6.4	41.9	27.3	54.0	26.7	100	207
12	1876.185	35.0	25.2	6.7	42.0	24.9	54.0	29.1	100	36
13	2063.500	35.9	25.5	7.1	42.0	26.5	54.0	27.5	100	162
14	2172.000	42.4	25.9	7.3	42.0	33.6	54.0	20.4	100	179
15	2256.450	36.6	26.3	7.4	42.0	28.3	54.0	25.7	100	36
16	2643.352	35.7	27.8	8.0	42.1	29.4	54.0	24.6	100	1
17	3387.500	34.2	29.1	9.3	42.0	30.6	54.0	23.4	100	1

< HDMI + LAN MODE_30 MHz ~ 1 GHz >

RADIATED EMISSION


Date : 2011-12-10

Model Name : 47LM6700-UA
 Model No.
 Serial No.
 Test Condition : HDMI

Reference No.
 Power Supply : 120V 60Hz
 Temp/Humi : 23 °C 36 % R.H.
 Operator

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

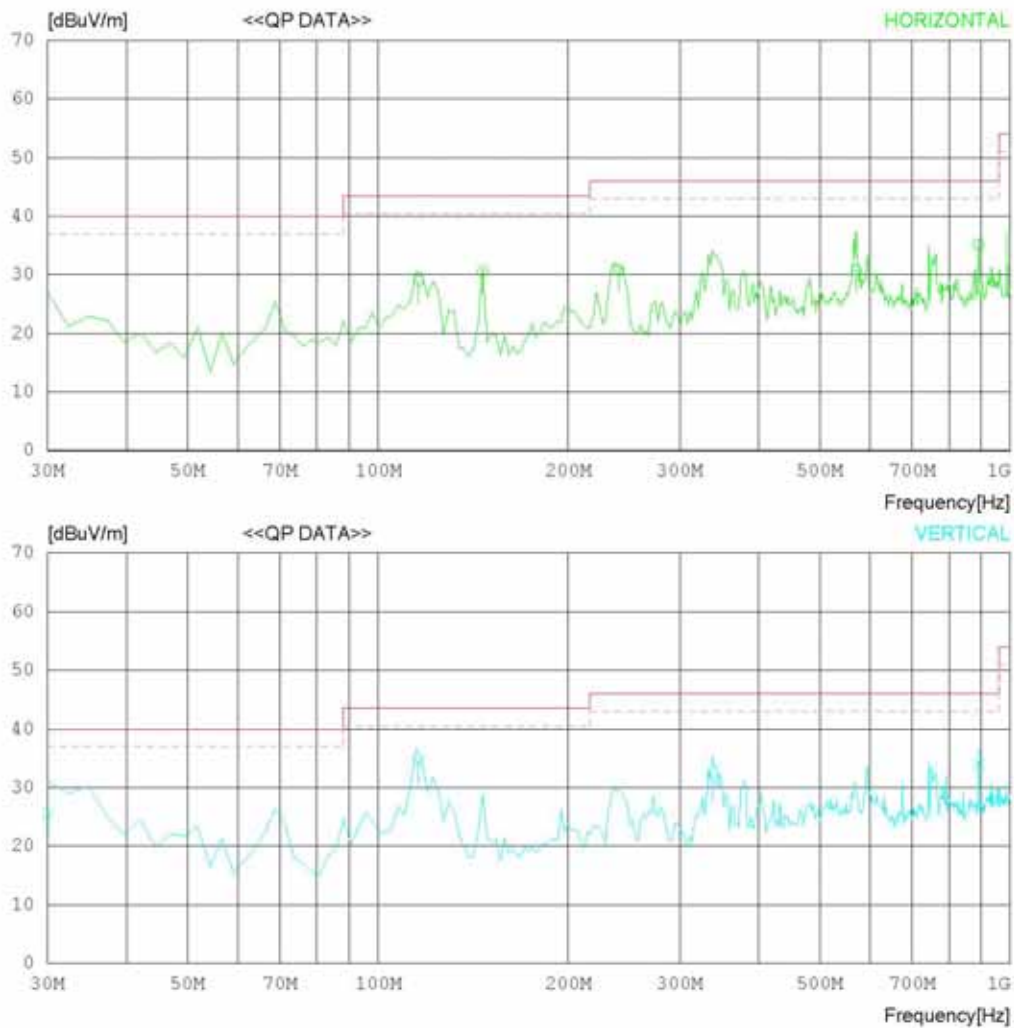

RADIATED EMISSION

Date : 2011-12-10

Model Name : 47LM6700-UA	Reference No. :
Model No. :	Power Supply : 120V 60Hz
Serial No. :	Temp/Humi : 23 °C 36 % R.H.
Test Condition : HDMI	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	115.960	38.9	11.4	1.5	22.8	29.0	43.5	14.5	100	358
2	146.400	41.4	10.6	1.7	23.1	30.6	43.5	12.9	199	358
3	240.000	39.8	12.4	2.3	23.5	31.0	46.0	15.0	100	1
4	570.774	33.1	18.4	3.7	24.4	30.8	46.0	15.2	100	1
5	890.872	33.1	20.6	4.8	23.3	35.2	46.0	10.8	199	136
----- Vertical -----										
6	30.100	30.0	17.4	0.8	22.6	25.6	40.0	14.4	100	358
7	115.990	44.2	11.4	1.5	22.8	34.3	43.5	9.2	100	358
8	337.975	37.9	14.7	2.7	24.0	31.3	46.0	14.7	100	358
9	890.872	31.9	20.6	4.8	23.3	34.0	46.0	12.0	100	164

< HDMI + LAN MODE_1 GHz ~ 6 GHz_PEAK >

RADIATED EMISSION


Date : 2011-12-12

Model Name : 47LM6700-UA
 Model No. :
 Serial No. :
 Test Condition : HDMI

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi : 22 °C 35 % R.H.
 Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

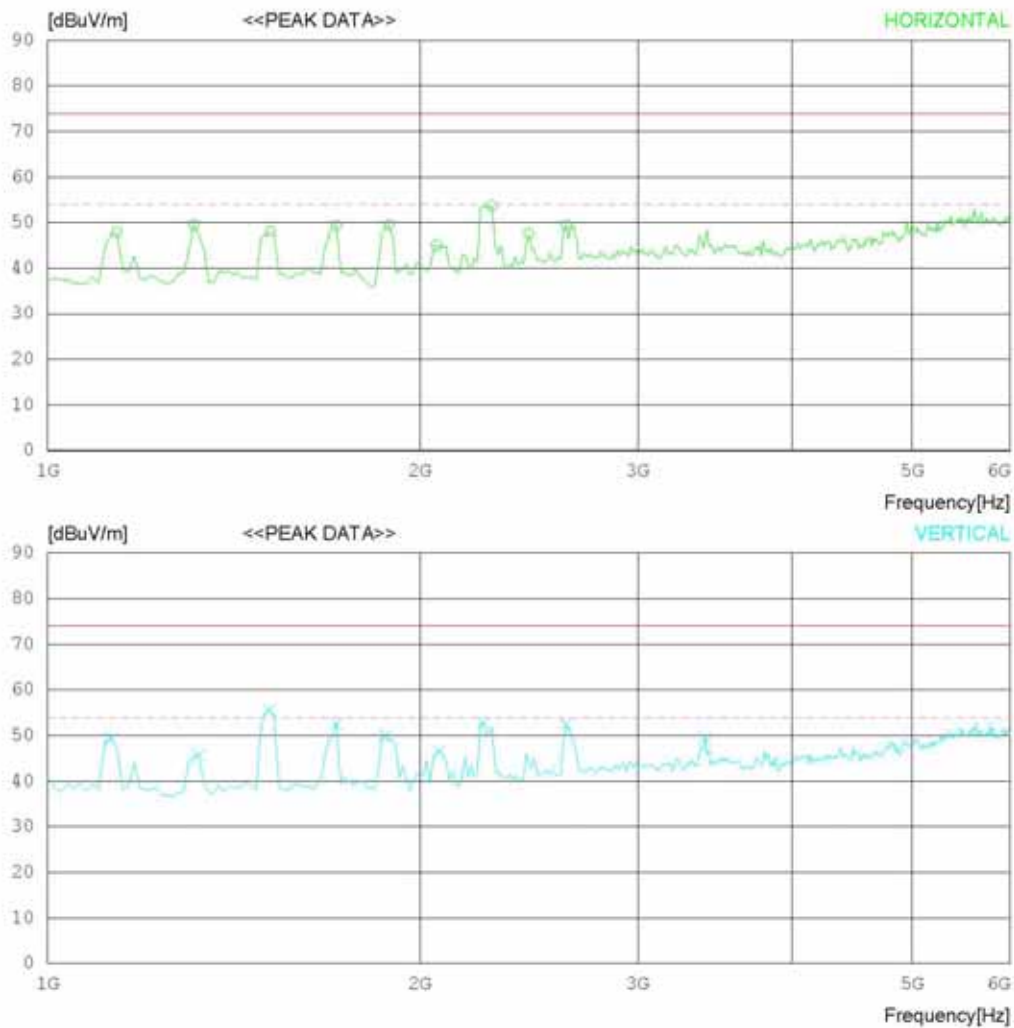

RADIATED EMISSION

Date : 2011-12-12

Model Name : 47LM6700-UA	Reference No. :
Model No. :	Power Supply : 120V 60Hz
Serial No. :	Temp/Humi : 22°C 35 % R.H.
Test Condition : HDMI	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1137.500	60.6	24.0	5.1	41.8	47.9	74.0	26.1	100	172
2	1312.500	61.4	24.6	5.5	41.9	49.6	74.0	24.4	100	154
3	1512.500	58.9	25.1	6.0	41.9	48.1	74.0	25.9	100	271
4	1712.500	59.7	25.2	6.4	41.9	49.4	74.0	24.6	100	358
5	1887.500	59.5	25.2	6.8	42.0	49.5	74.0	24.5	100	358
6	2062.500	54.4	25.5	7.1	42.0	45.0	74.0	29	100	358
7	2287.500	61.9	26.4	7.4	42.0	53.7	74.0	20.3	100	358
8	2450.000	54.7	27.1	7.7	42.0	47.5	74.0	26.5	100	212
9	2625.000	55.9	27.7	8.0	42.1	49.5	74.0	24.5	100	358
----- Vertical -----										
10	1125.000	62.1	24.0	5.1	41.8	49.4	74.0	24.6	100	1
11	1325.000	57.4	24.6	5.6	41.9	45.7	74.0	28.3	100	137
12	1512.500	66.4	25.1	6.0	41.9	55.6	74.0	18.4	100	1
13	1712.500	62.9	25.2	6.4	41.9	52.6	74.0	21.4	100	1
14	1875.000	60.1	25.2	6.7	42.0	50.0	74.0	24	100	1
15	2075.000	55.8	25.5	7.1	42.0	46.4	74.0	27.6	100	1
16	2250.000	61.0	26.3	7.4	42.0	52.7	74.0	21.3	100	1
17	2625.000	58.8	27.7	8.0	42.1	52.4	74.0	21.6	100	1
18	3400.000	53.1	29.1	9.3	42.0	49.5	74.0	24.5	100	204

< HDMI + LAN MODE_1 GHz ~ 6 GHz_AV >

RADIATED EMISSION


Date : 2011-12-12

Model Name : 47LM6700-UA
 Model No. :
 Serial No. :
 Test Condition : HDMI

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi : 22 °C 35 % R.H.
 Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

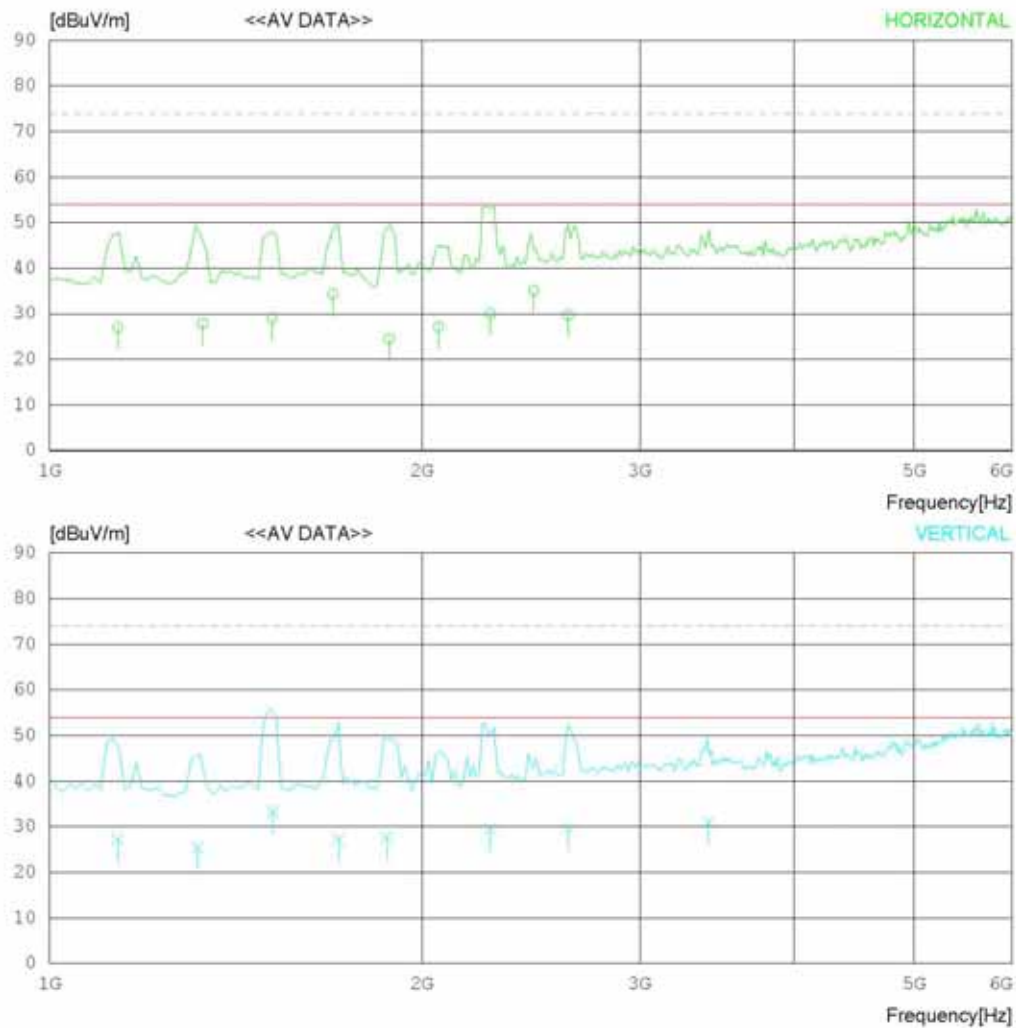

RADIATED EMISSION

Date : 2011-12-12

Model Name : 47LM6700-UA	Reference No. :
Model No. :	Power Supply : 120V 60Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : HDMI	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1135.500	39.7	24.0	5.1	41.8	27.0	54.0	27.0	100	172
2	1330.057	39.6	24.6	5.6	41.9	27.9	54.0	26.1	100	154
3	1512.500	39.8	25.1	6.0	41.9	29.0	54.0	25.0	100	271
4	1693.250	44.6	25.2	6.4	41.9	34.3	54.0	19.7	100	358
5	1881.695	34.4	25.2	6.8	42.0	24.4	54.0	29.6	100	296
6	2062.500	36.6	25.5	7.1	42.0	27.2	54.0	26.8	100	358
7	2272.750	38.2	26.4	7.4	42.0	30.0	54.0	24.0	100	358
8	2462.000	42.2	27.2	7.7	42.0	35.1	54.0	18.9	100	212
9	2625.000	36.1	27.7	8.0	42.1	29.7	54.0	24.3	100	358
----- Vertical -----										
10	1135.500	39.9	24.0	5.1	41.8	27.2	54.0	26.8	100	36
11	1317.000	37.2	24.6	5.5	41.9	25.4	54.0	28.6	100	137
12	1514.625	44.2	25.1	6.0	41.9	33.4	54.0	20.6	100	178
13	1712.500	37.6	25.2	6.4	41.9	27.3	54.0	26.7	100	133
14	1874.445	37.7	25.2	6.7	42.0	27.6	54.0	26.4	100	1
15	2272.750	37.7	26.4	7.4	42.0	29.5	54.0	24.5	100	1
16	2625.000	36.3	27.7	8.0	42.1	29.9	54.0	24.1	100	143
17	3408.000	34.6	29.1	9.3	42.0	31.0	54.0	23.0	100	204

< USB MODE_30 MHz ~ 1 GHz >

RADIATED EMISSION


Date : 2011-12-10

Model Name : 47LM6700-UA
 Model No.
 Serial No.
 Test Condition : USB

Reference No.
 Power Supply : 120V 60Hz
 Temp/Humi : 23 °C 36 % R.H.
 Operator

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

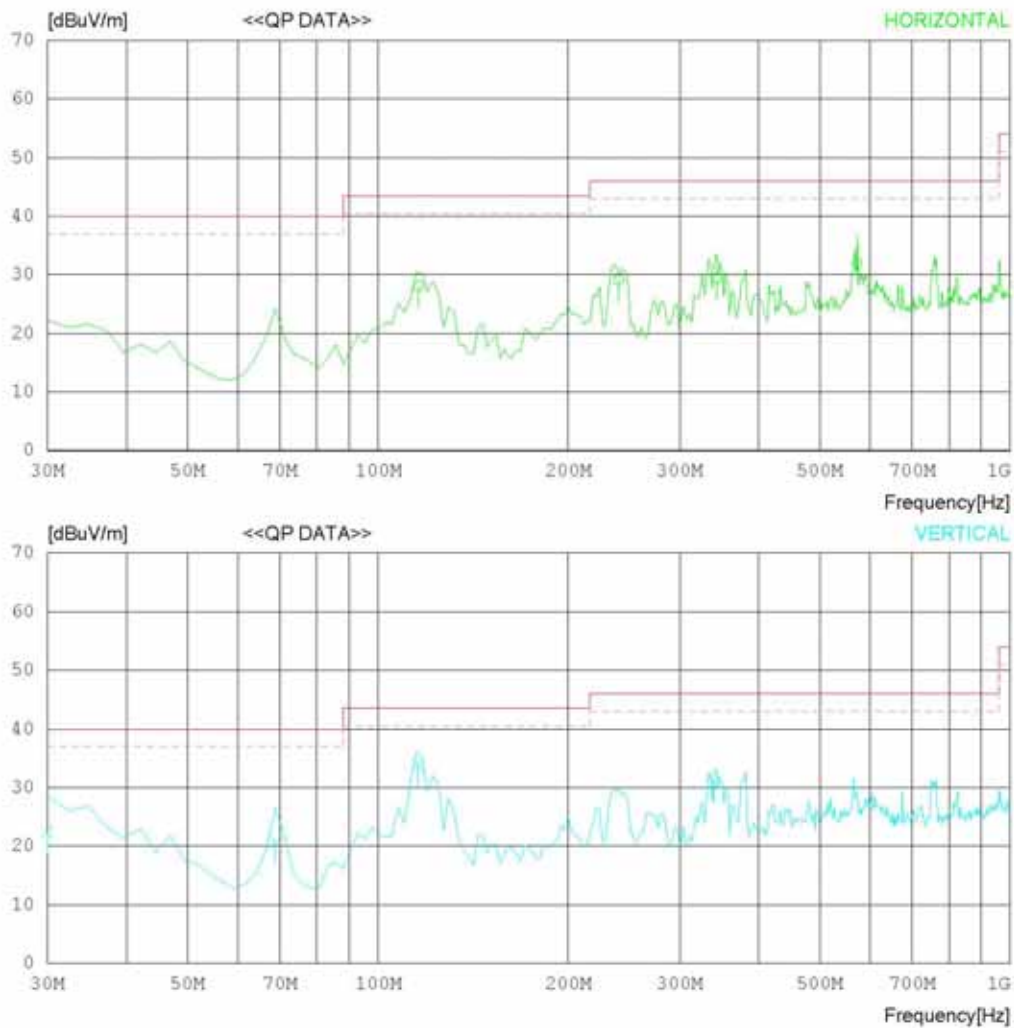

< USB MODE_30 MHz ~ 1 GHz >

RADIATED EMISSION

Date : 2011-12-10

Model Name	:	47LM6700-UA	Reference No.	:	
Model No.	:		Power Supply	:	120V 60Hz
Serial No.	:		Temp/Humi	:	23 °C 36 % R.H.
Test Condition	:	USB	Operator	:	

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	115.940	38.0	11.4	1.5	22.8	28.1	43.5	15.4	178	132
2	240.000	37.9	12.4	2.3	23.5	29.1	46.0	16.9	100	264
3	342.825	36.0	14.8	2.7	24.1	29.4	46.0	16.6	125	103
4	573.199	34.1	18.5	3.7	24.4	31.9	46.0	14.1	100	1
----- Vertical -----										
5	30.000	26.9	17.4	0.8	22.7	22.4	40.0	17.6	100	275
6	68.800	36.0	6.2	1.2	22.6	20.8	40.0	19.2	100	350
7	115.630	43.9	11.4	1.5	22.8	34.0	43.5	9.5	100	352
8	340.400	37.6	14.7	2.7	24.1	30.9	46.0	15.1	201	1

< USB MODE_1 GHz ~ 6 GHz_PEAK >

RADIATED EMISSION


Date : 2011-12-12

Model Name : 47LM6700-UA
 Model No. :
 Serial No. :
 Test Condition : USB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi : 22 °C 35 % R.H.
 Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

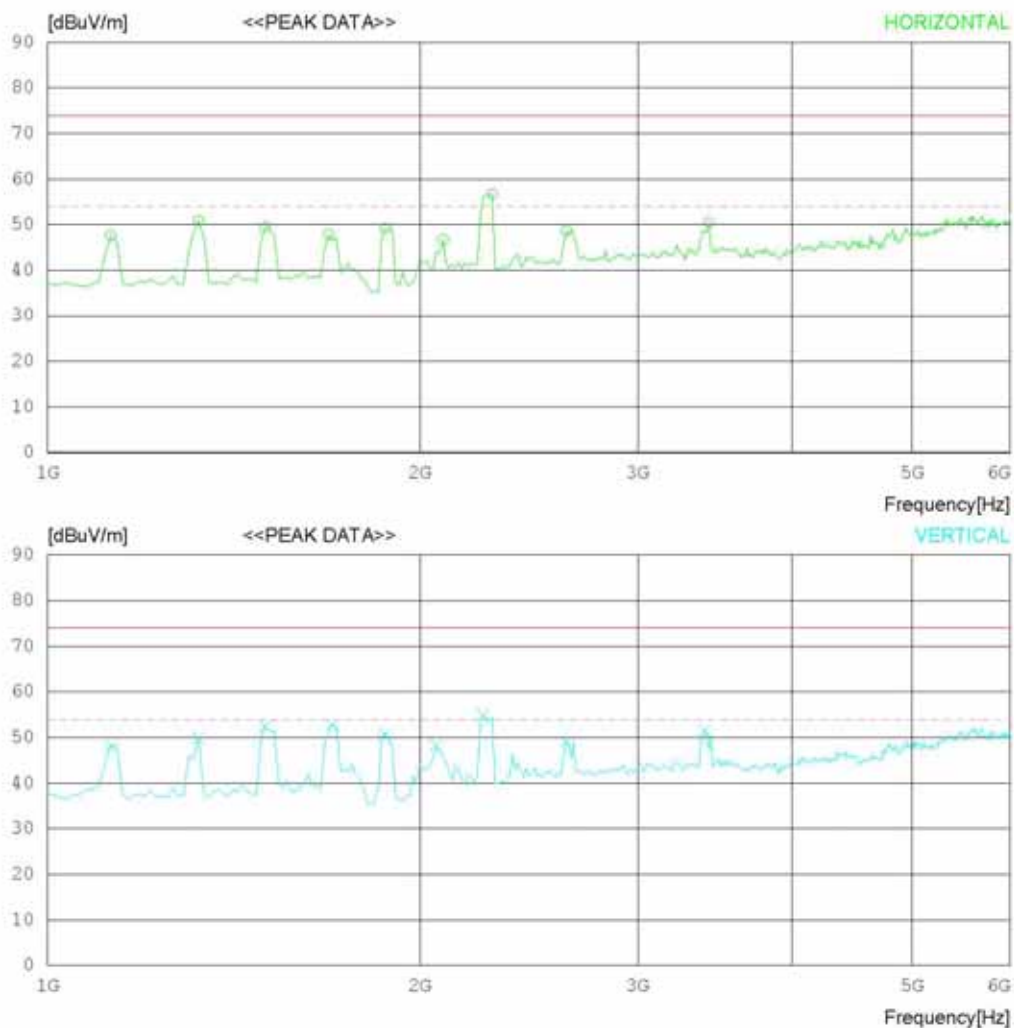

RADIATED EMISSION

Date : 2011-12-12

Model Name : 47LM6700-UA	Reference No. :
Model No. :	Power Supply : 120V 60Hz
Serial No. :	Temp/Humi : 22°C 35 % R.H.
Test Condition : USB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1125.000	60.3	24.0	5.1	41.8	47.6	74.0	26.4	100	189
2	1325.000	62.6	24.6	5.6	41.9	50.9	74.0	23.1	100	358
3	1500.000	60.3	25.1	6.0	41.9	49.5	74.0	24.5	100	279
4	1687.500	58.3	25.2	6.3	41.9	47.9	74.0	26.1	100	164
5	1875.000	59.3	25.2	6.7	42.0	49.2	74.0	24.8	100	358
6	2087.500	56.0	25.6	7.1	42.0	46.7	74.0	27.3	100	358
7	2287.500	64.9	26.4	7.4	42.0	56.7	74.0	17.3	100	138
8	2625.000	55.1	27.7	8.0	42.1	48.7	74.0	25.3	100	131
9	3425.000	54.1	29.1	9.3	42.0	50.5	74.0	23.5	100	186
----- Vertical -----										
10	1125.000	60.9	24.0	5.1	41.8	48.2	74.0	25.8	100	1
11	1325.000	61.5	24.6	5.6	41.9	49.8	74.0	24.2	100	181
12	1500.000	63.2	25.1	6.0	41.9	52.4	74.0	21.6	100	163
13	1700.000	63.0	25.2	6.4	41.9	52.7	74.0	21.3	100	1
14	1875.000	60.8	25.2	6.7	42.0	50.7	74.0	23.3	100	197
15	2062.500	57.7	25.5	7.1	42.0	48.3	74.0	25.7	100	1
16	2250.000	63.2	26.3	7.4	42.0	54.9	74.0	19.1	100	1
17	2625.000	55.4	27.7	8.0	42.1	49.0	74.0	25	100	144
18	3400.000	55.1	29.1	9.3	42.0	51.5	74.0	22.5	100	222

< USB MODE_1 GHz ~ 6 GHz_AV >

RADIATED EMISSION


Date : 2011-12-12

Model Name : 47LM6700-UA
 Model No. :
 Serial No. :
 Test Condition : USB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi : 22 °C 35 % R.H.
 Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

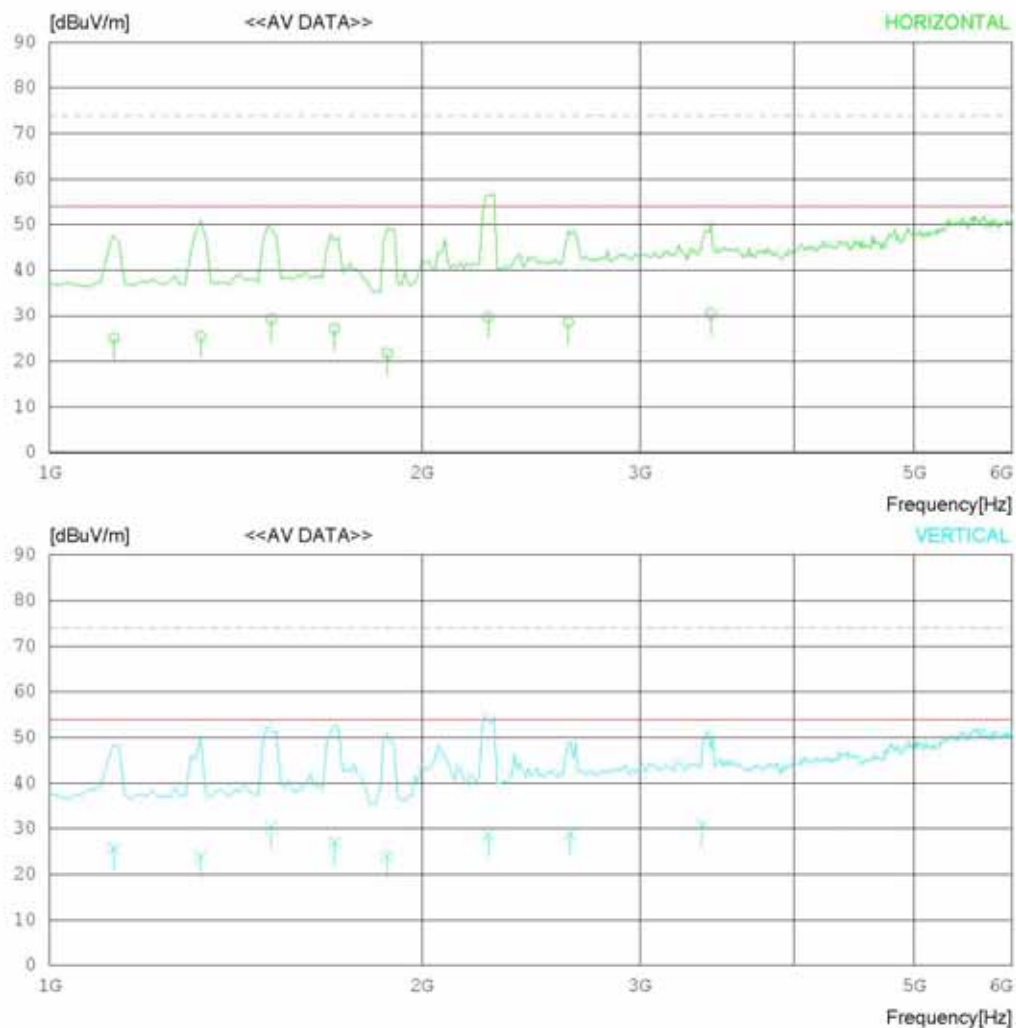

RADIATED EMISSION

Date : 2011-12-12

Model Name : 47LM6700-UA	Reference No. :
Model No. :	Power Supply : 120V 60Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : USB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1127.750	37.8	24.0	5.1	41.8	25.1	54.0	28.9	100	189
2	1325.750	37.2	24.6	5.6	41.9	25.5	54.0	28.5	100	358
3	1511.250	40.1	25.1	6.0	41.9	29.3	54.0	24.7	100	279
4	1698.750	37.5	25.2	6.4	41.9	27.2	54.0	26.8	100	164
5	1875.000	31.9	25.2	6.7	42.0	21.8	54.0	32.2	100	358
6	2261.917	38.0	26.3	7.4	42.0	29.7	54.0	24.3	100	138
7	2625.000	34.9	27.7	8.0	42.1	28.5	54.0	25.5	100	131
8	3425.000	34.1	29.1	9.3	42.0	30.5	54.0	23.5	100	186
----- Vertical -----										
9	1127.750	38.4	24.0	5.1	41.8	25.7	54.0	28.3	100	294
10	1325.000	35.6	24.6	5.6	41.9	23.9	54.0	30.1	100	181
11	1511.250	41.2	25.1	6.0	41.9	30.4	54.0	23.6	100	163
12	1700.000	37.2	25.2	6.4	41.9	26.9	54.0	27.1	100	1
13	1875.000	34.1	25.2	6.7	42.0	24.0	54.0	30.0	100	197
14	2261.917	36.9	26.3	7.4	42.0	28.6	54.0	25.4	100	1
15	2635.000	35.2	27.7	8.0	42.1	28.8	54.0	25.2	100	144
16	3371.737	34.5	29.1	9.3	42.0	30.9	54.0	23.1	100	222

Appendix 1

List of Test and Measurement Instruments

1. Conducted Disturbance

Name of Instrument	Model No.	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
☒ EMI Test Receiver	ESCI	100364	Rohde & Schwarz	2011.03.08	2012.03.08
☒ LISN	LISN1600	197204	TTI	2011.07.02	2012.07.02
☒ LISN(EUT)	ESH2-Z5	828739/006	R&S	2011.09.30	2012.09.30
☒ 50 ohm Terminator	CT-01	N/A	TME	2011.01.11	2012.01.11
☐ UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106760	R&S	2011.03.07	2012.03.07
☐ Spectrum Analyzer	8591E	3649A05889	H/P	2011.03.07	2012.03.07
☐ RFI/Field intensity Meter	KNM-2402	4N-170-3	KYORITSU	2011.07.02	2012.07.02
☐ LISN	KNW-407	8-317-8	KYORITSU	2011.01.11	2012.01.11
☐ LISN	KNW-242	8-654-15	KYORITSU	2011.07.02	2012.07.02
☐ 50 ohm Terminator	CT-01	N/A	TME	2011.01.11	2012.01.11
☐ ISN	T4A	24869	Teseq GmbH	2011.01.11	2012.01.11
☐ LISN(DC)	NNBM8125	8125-821	SCHWARZBECK	2011.07.01	2012.07.01

2. Radiated Disturbance

Name of Instrument	Model No.	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
☒ EMI Test Receiver	ESU	100014	Rohde & Schwarz	2011.01.20	2012.01.20
☒ Bilog Antenna	CBL6112B	2737	SCHAFFNER	2010.07.14	2012.07.14
☒ Horn Antenna	BBHA9120A	322	SCHWARZBECK	2010.04.13	2012.04.13
☒ Amplifier(22dB)	8447E	2945A02865	H/P	2011.01.11	2012.01.11
☒ Pre Amplifier	MLA-00108-B02-36	1518831	TSJ	2011.01.11	2012.01.11
☒ Controller	5905A	N/A	TOKIN	-	-
☒ ANT.master	N/A	N/A	TOKIN	-	-
☐ UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106760	R&S	2011.03.07	2012.03.07
☐ EMI Test Receiver	ESCI	100364	Rohde & Schwarz	2011.03.08	2012.03.08
☐ BICONICAL ANT.	VHA 9103	91031946	SCHWARZBECK	2010.12.21	2012.12.21
☐ LOG-PERIODIC ANT.	UHALP 9108A-A1	1098	SCHWARZBECK	2010.11.29	2012.11.29
☐ Pre Amplifier	MLA-100K01-B01-26	1252741	TSJ	2011.03.07	2012.03.07
☐ Position Controller	5901T	14173	TOKIN	-	-
☐ DRIVER	5902T2	14174	TOKIN	-	-
☐ Spectrum Analyzer	E4411B	US41062735	Agilent	2011.07.01	2012.07.01
☐ Amplifier (25dB)	8447D	2443A03690	Agilent	2011.07.01	2012.07.01
☐ Bilog Antenna	VULB9160	3151	SCHAFFNER	2010.08.25	2012.08.25
☐ Controller	5900	N/A	TOKIN	-	-