

FCC EVALUATION REPORT FOR CERTIFICATION

Applicant : LG Electronics Inc.

19-1, Cheongho-ri, Jinwi-myeon,

Pyeongteak-si, Gyeonggi-do, Korea.

Attn: Mr. Do-Hyung Kim, Chief research engineer

Date of Issue : January 7, 2011

Order Number: GETEC-C1-10-283

Test Report Number: GETEC-E3-10-164

Test Site: Gumi College EMC Center

FCC Registration Number: (100749, 443957)

FCC ID. : BEJ72LZ9700UA

Applicant : LG Electronics Inc.

Rule Part(s)	: FCC Part 15 Subpart B
Equipment Class	: Class B computing device peripheral (JBP)
EUT Type	: LED LCD TV/Monitor
Type of Authority	: Certification
Model Name	: 72LZ9700-UA
Trade Name	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,


Hyoung-Seop Kim, Associate Engineer
GUMI College EMC center


Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP	11
5.3 MEASUREMENT UNCERTAINTY.....	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED.....	12
5.6 TEST DATA FOR CONDUCTED EMISSION	12
6. RADIATED EMISSION	21
6.1 OPERATING ENVIRONMENT	21
6.2 TEST SET-UP	21
6.3 MEASUREMENT UNCERTAINTY.....	21
6.4 LIMIT	22
6.5 TEST EQUIPMENT USED.....	22
6.6 TEST DATA FOR RADIATED EMISSION.....	22
7. SAMPLE CALCULATIONS.....	27
7.1 EXAMPLE 1 :	27
7.2 EXAMPLE 2 :	27
8. RECOMMENDATION & CONCLUSION.....	28
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – ID SAMPLE LABEL & LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – TEST SET-UP PHOTOGRAPHS	
APPENDIX E – EXTERNAL PHOTOGRAPHS	
APPENDIX F – INTERNAL PHOTOGRAPHS	
APPENDIX G – USER’S MANUAL	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Manufacturer: LG Electronics Inc.

Manufacturer Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Contact Person: Mr. Do-Hyung Kim, Chief research engineer

Tel Number: +82-31-610-9623

- **FCC ID.** BEJ72LZ9700UA
- **EUT Type** LED LCD TV/Monitor
- **Model Name** 72LZ9700-UA
- **Trade Name** LG
- **Serial Number** Prototype
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** December 30, 2010 ~ January 5, 2011
- **Place of Test** **Gumi College EMC Center** (FCC Registration Number: 100749, 443957)
407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.
- **Test Report Number** GETEC-E3-10-164
- **Dates of Issue** January 7, 2011



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 72LZ9700-UA)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.

This test site is one of the highest point of Gumi 1 college at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2003)



GUMI COLLEGE EMC CENTER
407, Bugok-dong, Gumi-si,
Gyeongbuk 730-711, Korea.
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 72LZ9700-UA) FCC ID.: BEJ72LZ9700UA**

MODELS		72LZ9700 (72LZ9700-UA)
Dimensions (W x H x D)	With stand	1721.0 mm x 1126.0 mm x 410.0 mm
	Without stand	1721.0 mm x 1045,0 mm x 69.9 mm
Weight	With stand	77.7 kg
	Without stand	64.7 kg
Power requirement		AC 100 - 240V ~ 50 / 60 Hz
Television System		NTSC-M, ATSC, 64 & 256 QAM
Program Coverage		VHF 2-13, UHF 14-69, CATV 1-135, DTV 2-69, CADTV 1-135
External Antenna Impedance		75 ohm
Environment condition	Operating Temperature	0 - 40°C
	Operating Humidity	Less than 80%
	Storage Temperature	-20 - 60°C
	Storage Humidity	Less than 85%

- Maximum Frequency Range : 800 MHz



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
PC	Hewlett Packard	D530	S/N: CNG34800PY FCC ID.: DoC
Video card	ATI	ATI RV360(9600)	S/N: SN0402017176 FCC ID.: DoC
PS2 keyboard	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID.: AQ6-23K15
PS2 mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID.: JNZ211443
Joy stick	MICROSOFT	X05-92626	S/N: 9262600296169 FCC ID.: DoC
DVD player	LG Electronics Inc.	LC-954	S/N: 3850R-Z674K FCC ID.: DoC
USB memory stick	LG Electronics Inc.	UM5 2GB	S/N: 003RLRZN37758 FCC ID.: N/A
TV signal generator	FLUKE	54200	S/N: 831011 FCC ID.: DoC
Headset	PHILIPS	SBC HL 140	S/N: N/A FCC ID.: N/A
Wireless ready dongle	LG Electronics Inc.	N/A	S/N: N/A FCC ID.: N/A

See “Appendix D – Test Setup Photographs” for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -



3.2.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT	1.50 m unshielded
RGB(Analog) cable	Connected to the EUT and PC	1.80 m shielded with two ferrite cores
HDMI/DVI(Digital) cable	Connected to the EUT and PC	2.00 m shielded
RS-232C (control & service) cable	Connected to the EUT and PC	1.80 m shielded
Audio(RGB/DVI) cable	Connected to the EUT and PC	1.80 m shielded
Component cable	Connected to the EUT and DVD player	3.00 m shielded
AV cable	Connected to the EUT and DVD player	3.00 m shielded
Headset cable	Connected to the EUT and headset	1.20 m shielded
Antenna cable	Connected to the EUT and TV signal generator	10.00 m shielded
LAN cable	Connected to the EUT and Network	10.00 m unshielded
Wireless control cable	Connected to the EUT and wireless ready dongle	0.40 m shielded with a ferrite core

3.3 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120 V / 60 Hz
- Test Mode(s)

-. Monitor mode

Radiated emission: 1 920 × 1 080 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

Conducted emission: 1 920 × 1 080 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

1 024 × 768 / 60 Hz (RGB: Analog), 640 × 480 / 60 Hz (RGB: Analog)

◆ Operating test pattern

- . “H” character scrolling mode (Font size: 10)
- . Black background white character
- . Brightness and contrast was adjusted as maximum level
- . Continuous playback of 1 kHz audio file with winamp player
- . Settings and control the display via the network from a PC
- . USB memory stick was connected to the USB port

“The verification report for TV/AV mode would be issued by LG Electronics Inc.”



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

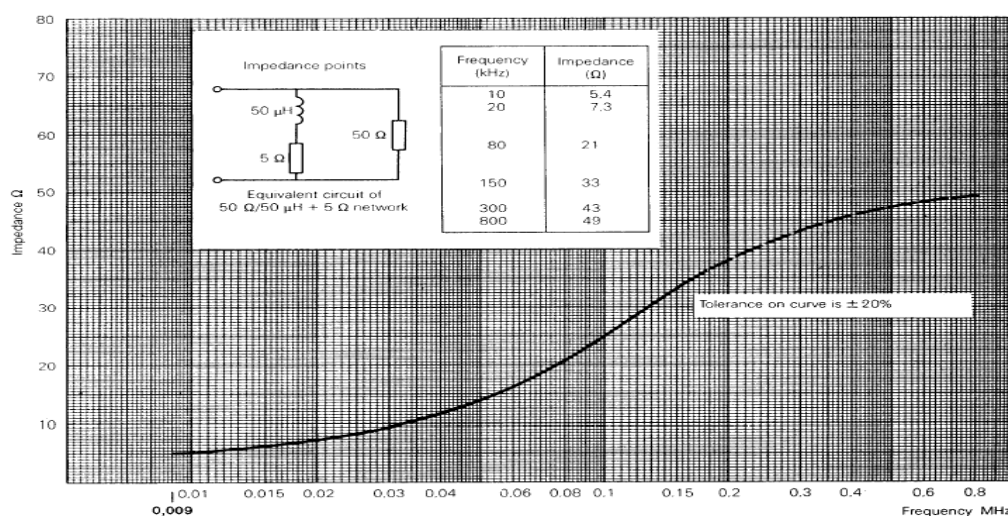


Fig 2. Impedance of LISN



4.3 Radiated Emission

Preliminary measurements were conducted 3 m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

Final measurements were made 3 m chamber (FCC registration No.: 443957) and/or 10 m OATS (FCC registration No.: 100749).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator



Fig 3. Dimensions of test site



5. Conducted Emission

5.1 Operating Environment

Temperature : 23
Relative Humidity : 40 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.71 dB	Confidence levels of 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	± 3.34 dB	Confidence levels of 95 % ($k = 2$)



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI Test Receiver	839809/003	12. 10. 2011
■ - ESH3-Z5	Rohde & Schwarz	LISN	838979/020	12. 10. 2011
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	12. 10. 2011
■ - ISN T8	TESEQ. GmbH	ISN	24568	11. 09. 2011


5.6 Test data for Conducted Emission

-. Test Date : January 4, 2010
-. Resolution Bandwidth : 9 kHz
-. Frequency Range : 0.15 MHz ~ 30 MHz



◆ Operating condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

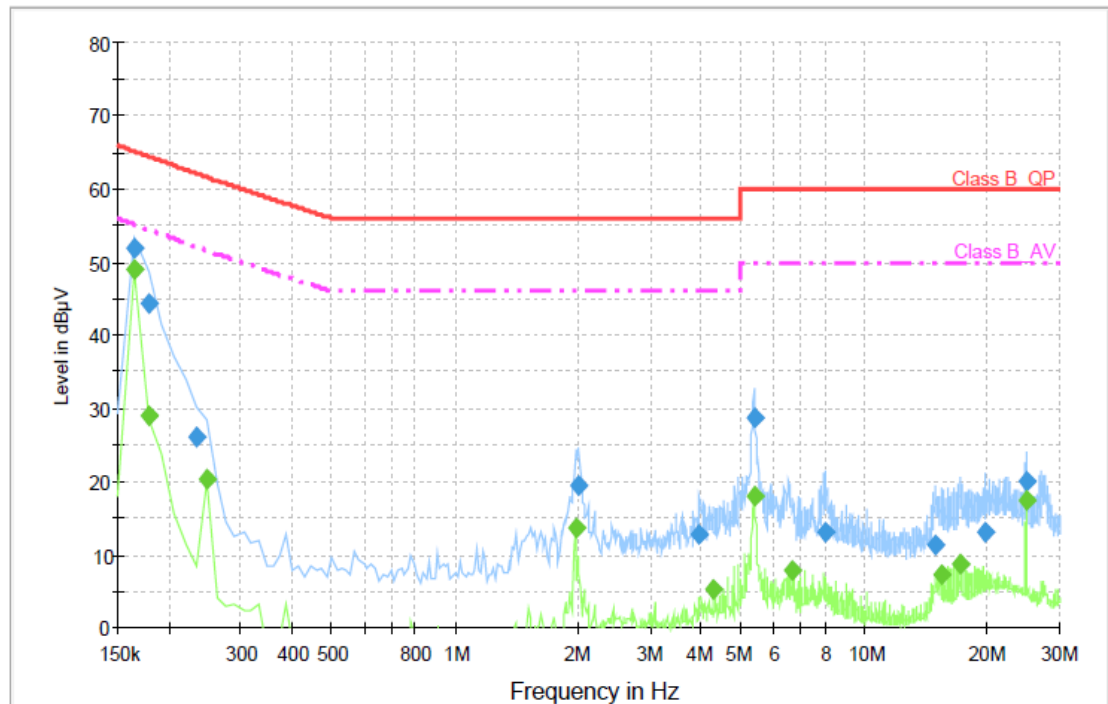

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	51.8	1000.000	9.000	GND	L1	10.1	13.4	65.2	
0.178000	44.3	1000.000	9.000	GND	L1	10.1	20.2	64.5	
0.234000	26.0	1000.000	9.000	GND	L1	10.1	36.1	62.1	
1.998000	19.4	1000.000	9.000	GND	L1	10.2	36.6	56.0	
3.958000	12.8	1000.000	9.000	GND	L1	10.3	43.2	56.0	
5.372000	28.7	1000.000	9.000	GND	L1	10.4	31.3	60.0	
8.046000	13.1	1000.000	9.000	GND	L1	10.5	46.9	60.0	
14.906000	11.4	1000.000	9.000	GND	L1	10.9	48.6	60.0	
19.638000	13.1	1000.000	9.000	GND	L1	11.2	46.9	60.0	
24.776000	20.1	1000.000	9.000	GND	L1	11.2	39.9	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	49.0	1000.000	9.000	GND	L1	10.1	6.2	55.2	
0.178000	28.9	1000.000	9.000	GND	L1	10.1	25.6	54.5	
0.248000	20.2	1000.000	9.000	GND	L1	10.1	31.4	51.6	
1.970000	13.6	1000.000	9.000	GND	L1	10.2	32.4	46.0	
4.266000	5.2	1000.000	9.000	GND	L1	10.3	40.8	46.0	
5.372000	18.1	1000.000	9.000	GND	L1	10.4	31.9	50.0	
6.646000	7.9	1000.000	9.000	GND	L1	10.4	42.1	50.0	
15.354000	7.2	1000.000	9.000	GND	L1	11.0	42.8	50.0	
17.132000	8.8	1000.000	9.000	GND	L1	11.1	41.2	50.0	
24.776000	17.3	1000.000	9.000	GND	L1	11.2	32.7	50.0	

< Fig 4. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

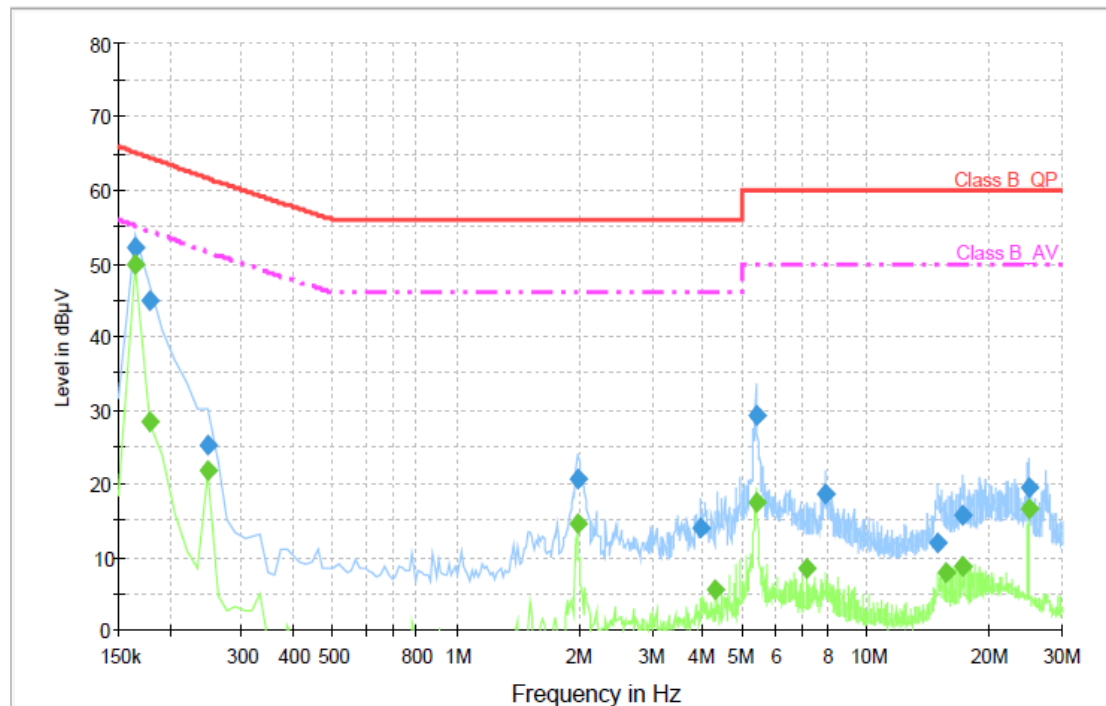

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	52.3	1000.000	9.000	GND	N	10.1	12.9	65.2	
0.178000	44.9	1000.000	9.000	GND	N	10.1	19.6	64.5	
0.248000	25.3	1000.000	9.000	GND	N	10.1	36.3	61.6	
1.970000	20.4	1000.000	9.000	GND	N	10.2	35.6	56.0	
3.930000	13.9	1000.000	9.000	GND	N	10.3	42.1	56.0	
5.372000	29.3	1000.000	9.000	GND	N	10.4	30.7	60.0	
7.934000	18.6	1000.000	9.000	GND	N	10.5	41.4	60.0	
14.892000	11.9	1000.000	9.000	GND	N	10.8	48.1	60.0	
17.132000	15.6	1000.000	9.000	GND	N	10.9	44.4	60.0	
24.776000	19.5	1000.000	9.000	GND	N	10.7	40.5	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	49.9	1000.000	9.000	GND	N	10.1	5.3	55.2	
0.178000	28.5	1000.000	9.000	GND	N	10.1	26.0	54.5	
0.248000	21.8	1000.000	9.000	GND	N	10.1	29.8	51.6	
1.970000	14.4	1000.000	9.000	GND	N	10.2	31.6	46.0	
4.266000	5.6	1000.000	9.000	GND	N	10.3	40.4	46.0	
5.372000	17.4	1000.000	9.000	GND	N	10.4	32.6	50.0	
7.122000	8.3	1000.000	9.000	GND	N	10.4	41.7	50.0	
15.676000	7.7	1000.000	9.000	GND	N	10.8	42.3	50.0	
17.132000	8.6	1000.000	9.000	GND	N	10.9	41.4	50.0	
24.776000	16.6	1000.000	9.000	GND	N	10.7	33.4	50.0	

< Fig 5. Conducted emission result (Neutral line) >



◆ Operating condition: 1 024 × 768 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

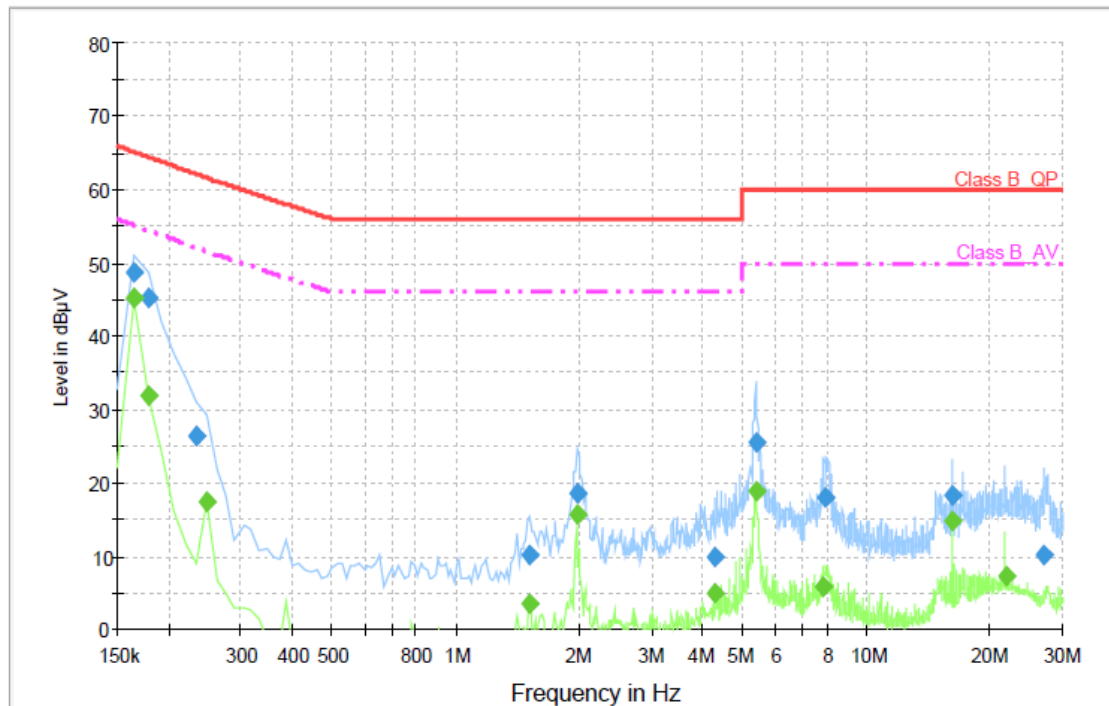

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	48.7	1000.000	9.000	GND	L1	10.1	16.5	65.2	
0.178000	45.4	1000.000	9.000	GND	L1	10.1	19.1	64.5	
0.234000	26.4	1000.000	9.000	GND	L1	10.1	35.7	62.1	
1.508000	10.1	1000.000	9.000	GND	L1	10.1	45.9	56.0	
1.984000	18.6	1000.000	9.000	GND	L1	10.2	37.4	56.0	
4.266000	9.9	1000.000	9.000	GND	L1	10.3	46.1	56.0	
5.386000	25.6	1000.000	9.000	GND	L1	10.4	34.4	60.0	
7.962000	17.9	1000.000	9.000	GND	L1	10.5	42.1	60.0	
16.236000	18.3	1000.000	9.000	GND	L1	11.0	41.7	60.0	
27.086000	10.3	1000.000	9.000	GND	L1	11.3	49.7	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	45.2	1000.000	9.000	GND	L1	10.1	10.0	55.2	
0.178000	31.8	1000.000	9.000	GND	L1	10.1	22.7	54.5	
0.248000	17.4	1000.000	9.000	GND	L1	10.1	34.2	51.6	
1.508000	3.5	1000.000	9.000	GND	L1	10.1	42.5	46.0	
1.970000	15.6	1000.000	9.000	GND	L1	10.2	30.4	46.0	
4.266000	4.9	1000.000	9.000	GND	L1	10.3	41.1	46.0	
5.386000	18.8	1000.000	9.000	GND	L1	10.4	31.2	50.0	
7.850000	5.8	1000.000	9.000	GND	L1	10.5	44.2	50.0	
16.236000	14.9	1000.000	9.000	GND	L1	11.0	35.1	50.0	
21.962000	7.2	1000.000	9.000	GND	L1	11.2	42.8	50.0	

< Fig 6. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

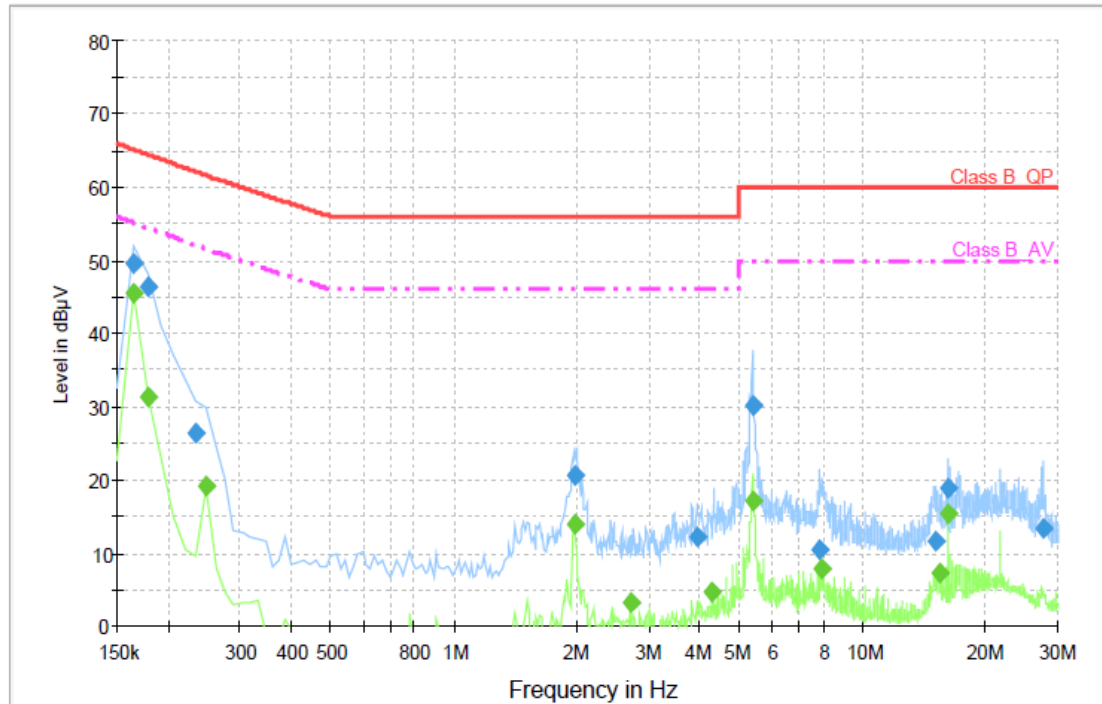

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	49.5	1000.000	9.000	GND	N	10.1	15.7	65.2	
0.178000	46.3	1000.000	9.000	GND	N	10.1	18.2	64.5	
0.234000	26.5	1000.000	9.000	GND	N	10.1	35.6	62.1	
1.970000	20.5	1000.000	9.000	GND	N	10.2	35.5	56.0	
3.930000	12.1	1000.000	9.000	GND	N	10.3	43.9	56.0	
5.372000	30.1	1000.000	9.000	GND	N	10.4	29.9	60.0	
7.836000	10.5	1000.000	9.000	GND	N	10.5	49.5	60.0	
14.990000	11.5	1000.000	9.000	GND	N	10.8	48.5	60.0	
16.236000	18.9	1000.000	9.000	GND	N	10.8	41.1	60.0	
27.674000	13.3	1000.000	9.000	GND	N	10.7	46.7	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	45.6	1000.000	9.000	GND	N	10.1	9.6	55.2	
0.178000	31.4	1000.000	9.000	GND	N	10.1	23.1	54.5	
0.248000	19.0	1000.000	9.000	GND	N	10.1	32.6	51.6	
1.970000	13.9	1000.000	9.000	GND	N	10.2	32.1	46.0	
2.698000	3.0	1000.000	9.000	GND	N	10.2	43.0	46.0	
4.266000	4.7	1000.000	9.000	GND	N	10.3	41.3	46.0	
5.372000	17.2	1000.000	9.000	GND	N	10.4	32.8	50.0	
7.934000	7.9	1000.000	9.000	GND	N	10.5	42.1	50.0	
15.354000	7.3	1000.000	9.000	GND	N	10.8	42.7	50.0	
16.236000	15.5	1000.000	9.000	GND	N	10.8	34.5	50.0	

< Fig 7. Conducted emission result (Neutral line) >



- ◆ Operating condition: 640 × 480 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

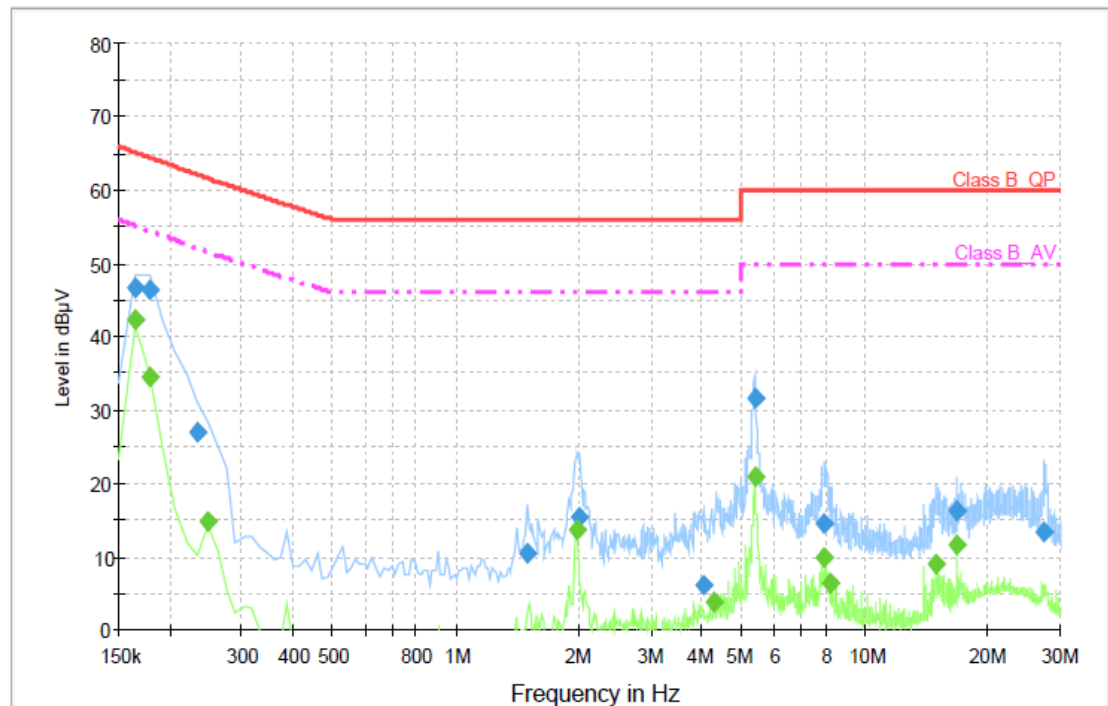

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	46.8	1000.000	9.000	GND	L1	10.1	18.4	65.2	
0.178000	46.5	1000.000	9.000	GND	L1	10.1	18.0	64.5	
0.234000	27.0	1000.000	9.000	GND	L1	10.1	35.1	62.1	
1.494000	10.6	1000.000	9.000	GND	L1	10.1	45.4	56.0	
2.012000	15.2	1000.000	9.000	GND	L1	10.2	40.8	56.0	
4.042000	6.1	1000.000	9.000	GND	L1	10.3	49.9	56.0	
5.372000	31.5	1000.000	9.000	GND	L1	10.4	28.5	60.0	
7.976000	14.5	1000.000	9.000	GND	L1	10.5	45.5	60.0	
16.754000	16.2	1000.000	9.000	GND	L1	11.0	43.8	60.0	
27.394000	13.4	1000.000	9.000	GND	L1	11.3	46.6	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	42.3	1000.000	9.000	GND	L1	10.1	12.9	55.2	
0.178000	34.5	1000.000	9.000	GND	L1	10.1	20.0	54.5	
0.248000	14.8	1000.000	9.000	GND	L1	10.1	36.8	51.6	
1.970000	13.6	1000.000	9.000	GND	L1	10.2	32.4	46.0	
4.266000	3.8	1000.000	9.000	GND	L1	10.3	42.2	46.0	
5.372000	20.9	1000.000	9.000	GND	L1	10.4	29.1	50.0	
7.934000	9.9	1000.000	9.000	GND	L1	10.5	40.1	50.0	
8.200000	6.5	1000.000	9.000	GND	L1	10.5	43.5	50.0	
14.836000	8.9	1000.000	9.000	GND	L1	10.9	41.1	50.0	
16.754000	11.7	1000.000	9.000	GND	L1	11.0	38.3	50.0	

< Fig 8. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

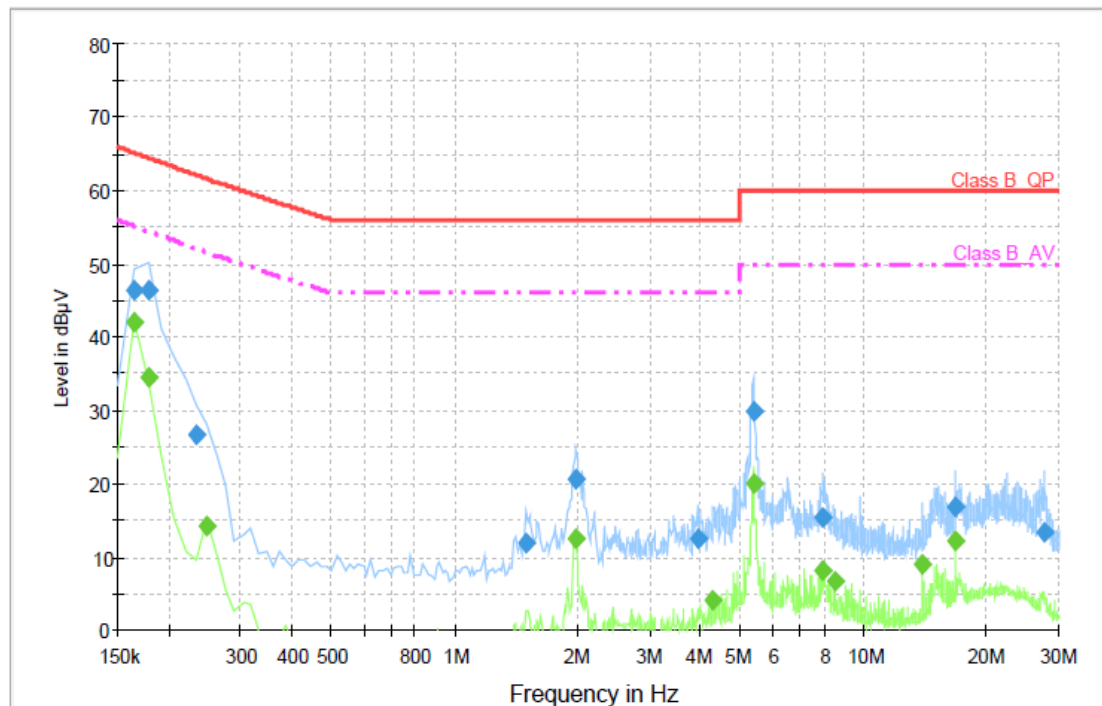

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	46.4	1000.000	9.000	GND	N	10.1	18.8	65.2	
0.178000	46.5	1000.000	9.000	GND	N	10.1	18.0	64.5	
0.234000	26.6	1000.000	9.000	GND	N	10.1	35.5	62.1	
1.494000	11.8	1000.000	9.000	GND	N	10.1	44.2	56.0	
1.984000	20.5	1000.000	9.000	GND	N	10.2	35.5	56.0	
3.916000	12.6	1000.000	9.000	GND	N	10.3	43.4	56.0	
5.372000	29.9	1000.000	9.000	GND	N	10.4	30.1	60.0	
7.948000	15.5	1000.000	9.000	GND	N	10.5	44.5	60.0	
16.754000	16.7	1000.000	9.000	GND	N	10.9	43.3	60.0	
27.506000	13.3	1000.000	9.000	GND	N	10.7	46.7	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	42.0	1000.000	9.000	GND	N	10.1	13.2	55.2	
0.178000	34.6	1000.000	9.000	GND	N	10.1	19.9	54.5	
0.248000	14.3	1000.000	9.000	GND	N	10.1	37.3	51.6	
1.984000	12.6	1000.000	9.000	GND	N	10.2	33.4	46.0	
4.266000	4.0	1000.000	9.000	GND	N	10.3	42.0	46.0	
5.372000	20.0	1000.000	9.000	GND	N	10.4	30.0	50.0	
7.934000	8.1	1000.000	9.000	GND	N	10.5	41.9	50.0	
8.536000	6.8	1000.000	9.000	GND	N	10.5	43.2	50.0	
13.954000	8.9	1000.000	9.000	GND	N	10.7	41.1	50.0	
16.754000	12.2	1000.000	9.000	GND	N	10.9	37.8	50.0	

< Fig 9. Conducted emission result (Neutral line) >



◆ Operating condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)

Voltage with 4-Line-LISN_L1

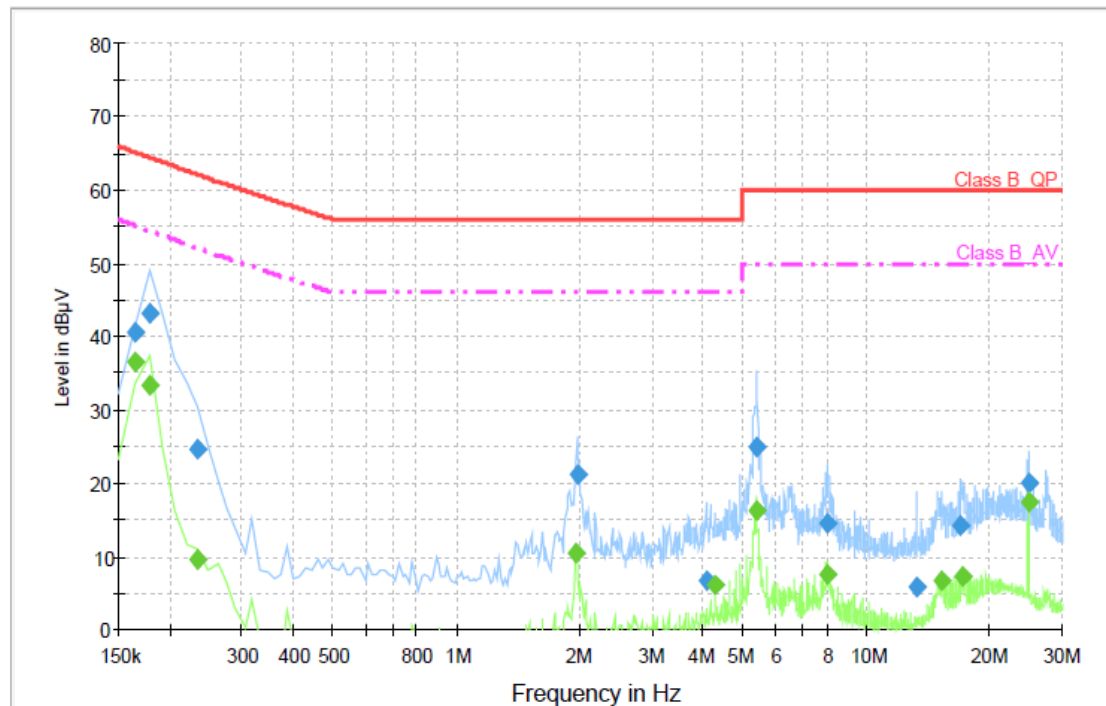

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.5	1000.000	9.000	GND	L1	10.1	24.7	65.2	
0.178000	43.2	1000.000	9.000	GND	L1	10.1	21.3	64.5	
0.234000	24.6	1000.000	9.000	GND	L1	10.1	37.5	62.1	
1.970000	21.2	1000.000	9.000	GND	L1	10.2	34.8	56.0	
4.056000	6.5	1000.000	9.000	GND	L1	10.3	49.5	56.0	
5.386000	24.8	1000.000	9.000	GND	L1	10.4	35.2	60.0	
8.032000	14.5	1000.000	9.000	GND	L1	10.5	45.5	60.0	
13.268000	5.7	1000.000	9.000	GND	L1	10.8	54.3	60.0	
17.006000	14.3	1000.000	9.000	GND	L1	11.1	45.7	60.0	
24.776000	20.1	1000.000	9.000	GND	L1	11.2	39.9	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	36.4	1000.000	9.000	GND	L1	10.1	18.8	55.2	
0.178000	33.3	1000.000	9.000	GND	L1	10.1	21.2	54.5	
0.234000	9.6	1000.000	9.000	GND	L1	10.1	42.5	52.1	
1.956000	10.3	1000.000	9.000	GND	L1	10.2	35.7	46.0	
4.266000	6.1	1000.000	9.000	GND	L1	10.3	39.9	46.0	
5.386000	16.3	1000.000	9.000	GND	L1	10.4	33.7	50.0	
8.046000	7.4	1000.000	9.000	GND	L1	10.5	42.6	50.0	
15.186000	6.8	1000.000	9.000	GND	L1	10.9	43.2	50.0	
17.076000	7.4	1000.000	9.000	GND	L1	11.1	42.6	50.0	
24.776000	17.3	1000.000	9.000	GND	L1	11.2	32.7	50.0	

< Fig 10. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

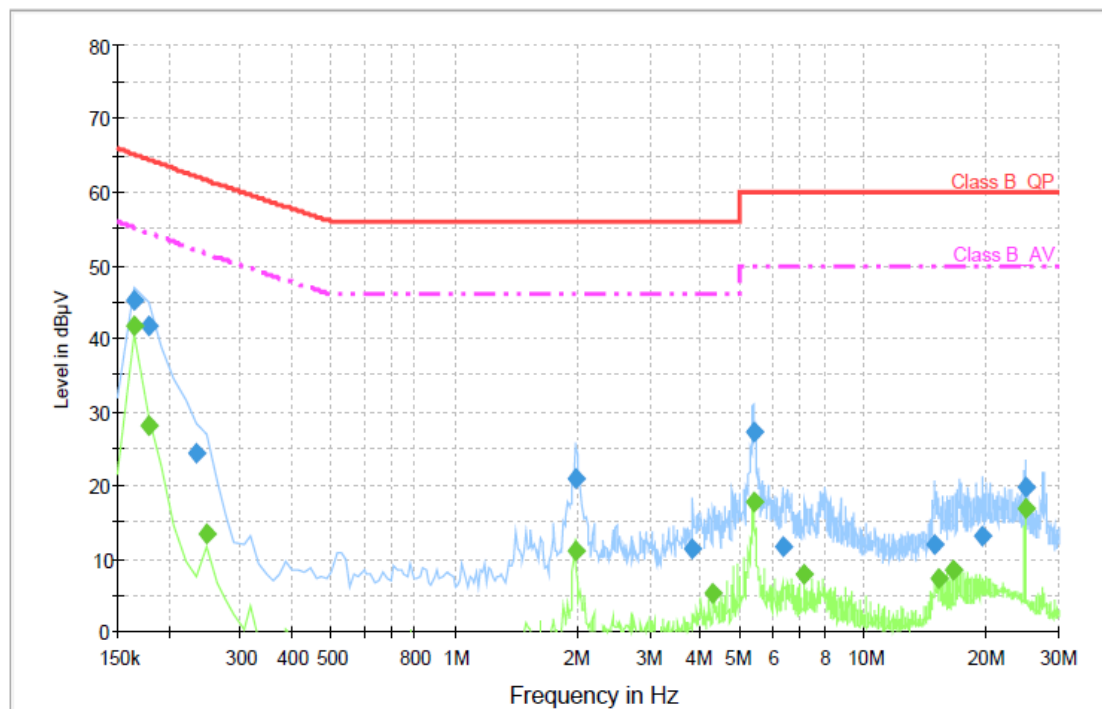

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	45.2	1000.000	9.000	GND	N	10.1	20.0	65.2	
0.178000	41.7	1000.000	9.000	GND	N	10.1	22.8	64.5	
0.234000	24.2	1000.000	9.000	GND	N	10.1	37.9	62.1	
1.970000	21.0	1000.000	9.000	GND	N	10.2	35.0	56.0	
3.818000	11.3	1000.000	9.000	GND	N	10.3	44.7	56.0	
5.372000	27.3	1000.000	9.000	GND	N	10.4	32.7	60.0	
6.324000	11.5	1000.000	9.000	GND	N	10.4	48.5	60.0	
14.892000	11.7	1000.000	9.000	GND	N	10.8	48.3	60.0	
19.568000	13.1	1000.000	9.000	GND	N	11.0	46.9	60.0	
24.776000	19.7	1000.000	9.000	GND	N	10.7	40.3	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	41.6	1000.000	9.000	GND	N	10.1	13.6	55.2	
0.178000	28.2	1000.000	9.000	GND	N	10.1	26.3	54.5	
0.248000	13.2	1000.000	9.000	GND	N	10.1	38.4	51.6	
1.970000	11.1	1000.000	9.000	GND	N	10.2	34.9	46.0	
4.266000	5.3	1000.000	9.000	GND	N	10.3	40.7	46.0	
5.386000	17.6	1000.000	9.000	GND	N	10.4	32.4	50.0	
7.122000	7.7	1000.000	9.000	GND	N	10.4	42.3	50.0	
15.186000	7.2	1000.000	9.000	GND	N	10.8	42.8	50.0	
16.474000	8.5	1000.000	9.000	GND	N	10.9	41.5	50.0	
24.776000	16.9	1000.000	9.000	GND	N	10.7	33.1	50.0	

< Fig 11. Conducted emission result (Neutral line) >



6. Radiated Emission

6.1 Operating Environment

Temperature : 26
Relative Humidity : 44 % R.H.

6.2 Test Set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 4.32 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 4.21 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.96 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.97 dB	Confidence levels of 95 % ($k = 2$)



6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0
> 1 000	54.0	No Specified limit

6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	12. 11. 2011
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3193	03. 15. 2012
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 22. 2011
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	11. 12. 2011

6.6 Test data for Radiated Emission

- Test Date : December 30, 2010 ~ January 5, 2011
- Resolution Bandwidth : 120 kHz/1 MHz
- Frequency Range : 30 MHz ~ 5 000 MHz
- Measurement Distance : 3 m
- Note : The highest frequency of the internal source of the EUT is between 500 MHz and 1 000 MHz (800 MHz). The measurement was made up to 5 000 MHz



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

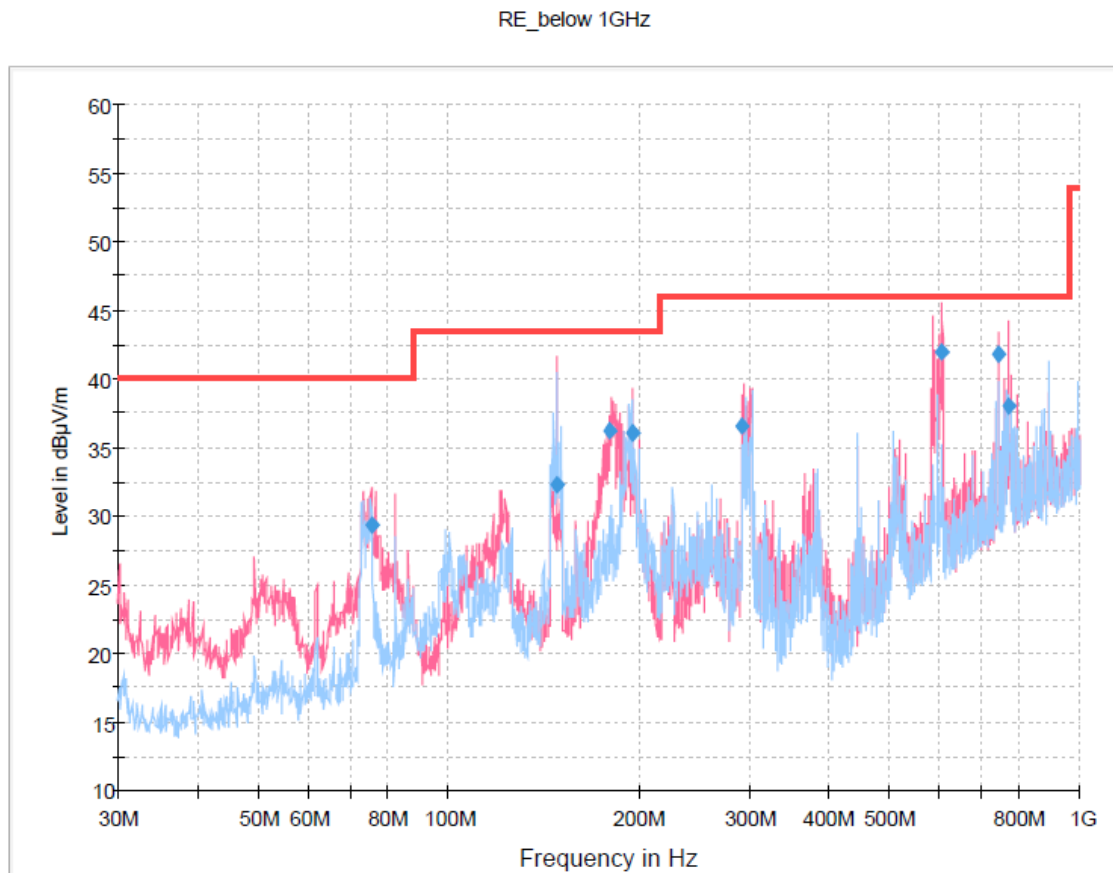


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
75.490000	29.4	1000.0	120.000	100.0	V	301.0	10.2	10.60	40.00
148.481250	32.3	1000.0	120.000	100.0	V	208.0	14.9	11.21	43.50
180.586250	36.3	1000.0	120.000	100.0	V	167.0	13.2	7.20	43.50
195.283750	36.0	1000.0	120.000	200.0	V	0.0	12.1	7.50	43.50
292.582500	36.5	1000.0	120.000	113.0	V	56.0	16.5	9.50	46.00
604.987500	41.9	1000.0	120.000	200.0	V	6.0	25.1	4.10	46.00
742.485000	41.8	1000.0	120.000	100.0	V	279.0	27.6	4.20	46.00
770.493750	38.1	1000.0	120.000	129.0	V	200.0	28.2	7.90	46.00

< Fig 12. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

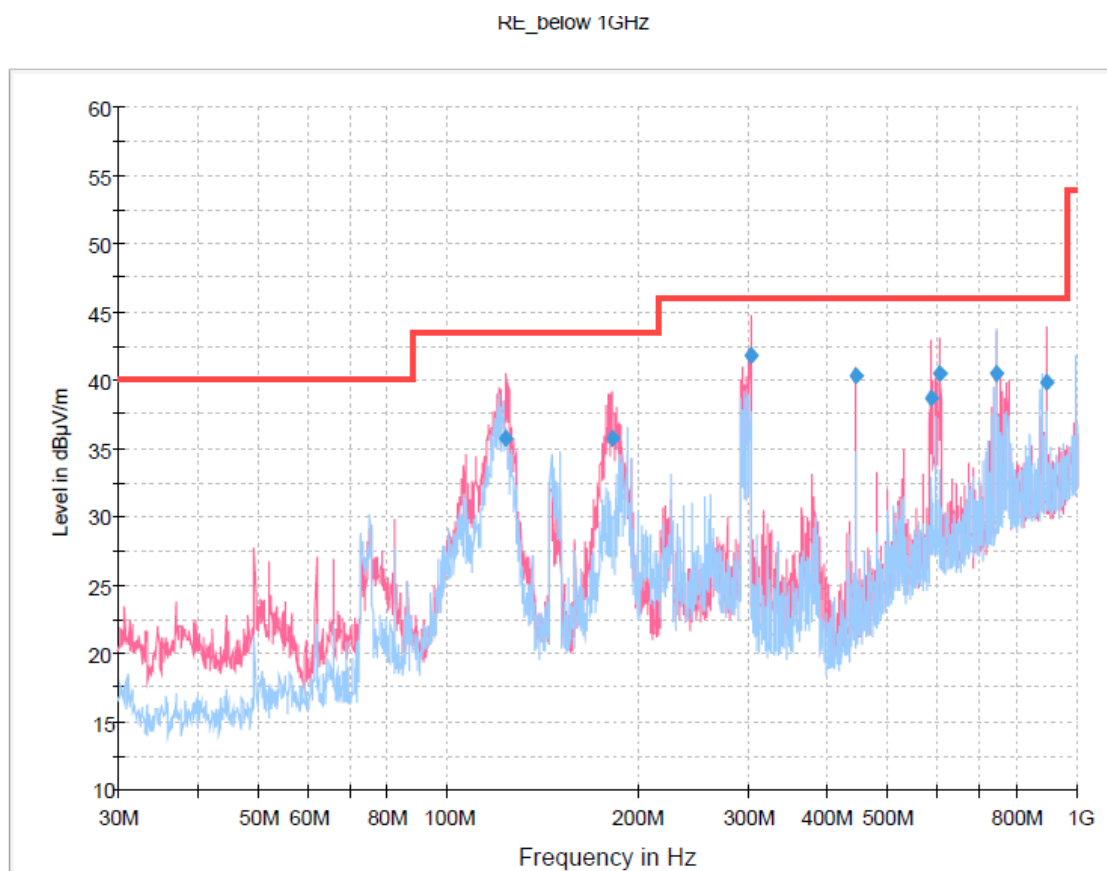

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
123.746250	35.8	1000.0	120.000	100.0	V	107.0	13.8	7.70	43.50
182.867500	35.8	1000.0	120.000	100.0	V	151.0	13.0	7.70	43.50
302.025000	41.8	1000.0	120.000	115.0	V	0.0	16.9	4.20	46.00
445.463750	40.3	1000.0	120.000	189.0	V	210.0	19.7	5.70	46.00
584.367500	38.7	1000.0	120.000	113.0	V	19.0	24.6	7.30	46.00
604.181250	40.6	1000.0	120.000	200.0	V	14.0	25.1	5.40	46.00
742.446250	40.5	1000.0	120.000	100.0	V	195.0	27.6	5.47	46.00
890.976250	39.9	1000.0	120.000	192.0	V	115.0	29.6	6.10	46.00

< Fig 13. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)
Green trace: Average detector, Blue trace: Peak detector

Radiated Emission_above 1 GHz

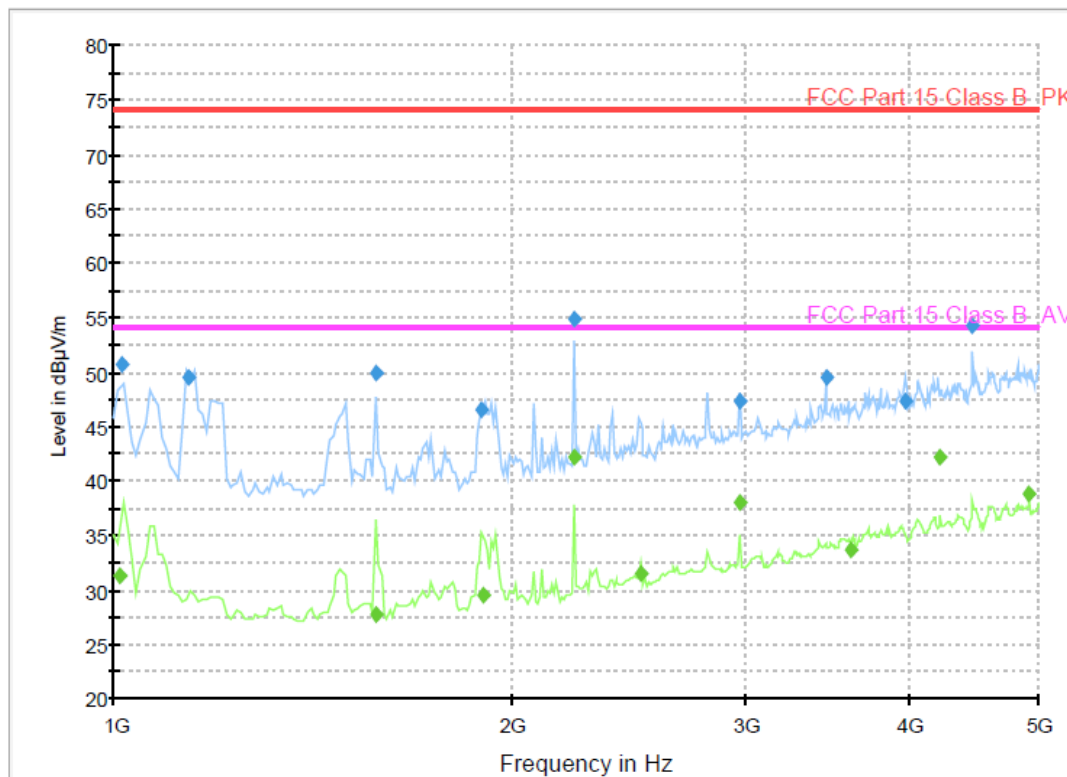

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1013.432064	50.8	100.0	1000.000	100.0	V	265.0	-14.4	23.2	74.0
1140.072545	49.5	100.0	1000.000	100.0	V	184.0	-13.9	24.5	74.0
1579.354309	49.9	100.0	1000.000	100.0	V	339.0	-12.7	24.1	74.0
1898.395591	46.6	100.0	1000.000	207.0	V	188.0	-12.1	27.4	74.0
2227.452906	54.9	100.0	1000.000	130.0	H	243.0	-10.6	19.1	74.0
2969.743888	47.3	100.0	1000.000	138.0	V	171.0	-7.5	26.7	74.0
3453.505812	49.6	100.0	1000.000	113.0	V	0.0	-5.7	24.4	74.0
3961.731864	47.4	100.0	1000.000	100.0	H	221.0	-3.5	26.6	74.0
4455.109820	54.2	100.0	1000.000	100.0	H	221.0	-2.4	19.8	74.0


Final Result 2

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1011.032064	31.3	100.0	1000.000	113.0	V	265.0	-14.4	22.7	54.0
1579.354309	27.7	100.0	1000.000	100.0	V	339.0	-12.7	26.3	54.0
1899.995591	29.6	100.0	1000.000	113.0	H	227.0	-12.1	24.4	54.0
2227.452906	42.2	100.0	1000.000	214.0	H	243.0	-10.6	11.8	54.0
2503.997996	31.5	100.0	1000.000	100.0	V	258.0	-9.4	22.5	54.0
2970.143888	38.0	100.0	1000.000	113.0	V	171.0	-7.5	16.0	54.0
3610.226453	33.7	100.0	1000.000	100.0	H	129.0	-5.0	20.3	54.0
4212.228858	42.2	100.0	1000.000	100.0	H	289.0	-2.9	11.8	54.0
4914.839679	38.9	100.0	1000.000	100.0	H	241.0	-1.3	15.1	54.0

< Fig 14. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)
Green trace: Average detector, Blue trace: Peak detector
Radiated Emission_above 1 GHz

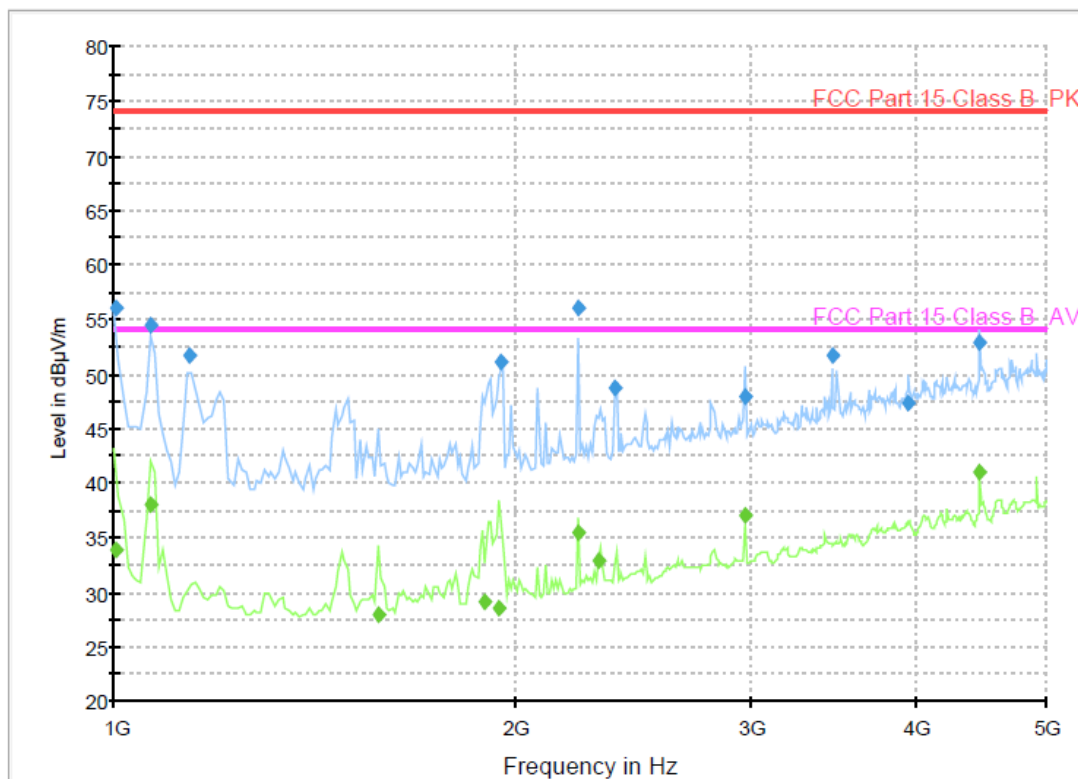

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1002.000000	56.0	100.0	1000.000	100.0	V	262.0	-14.4	18.0	74.0
1067.128257	54.5	100.0	1000.000	100.0	V	250.0	-14.2	19.5	74.0
1140.472545	51.6	100.0	1000.000	100.0	V	191.0	-13.9	22.4	74.0
1950.507816	51.2	100.0	1000.000	211.0	V	295.0	-11.9	22.8	74.0
2227.452906	56.1	100.0	1000.000	127.0	H	227.0	-10.6	17.9	74.0
2376.157515	48.8	100.0	1000.000	100.0	H	201.0	-9.9	25.2	74.0
2969.743888	47.9	100.0	1000.000	100.0	H	95.0	-7.5	26.1	74.0
3454.305812	51.6	100.0	1000.000	130.0	V	37.0	-5.7	22.4	74.0
3937.283768	47.4	100.0	1000.000	130.0	V	224.0	-3.6	26.6	74.0
4454.709820	52.9	100.0	1000.000	100.0	H	242.0	-2.4	21.1	74.0

Final Result 2

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1002.000000	33.8	100.0	1000.000	113.0	V	262.0	-14.4	20.2	54.0
1066.328257	38.1	100.0	1000.000	147.0	V	250.0	-14.2	15.9	54.0
1578.954309	28.0	100.0	1000.000	100.0	V	351.0	-12.7	26.0	54.0
1894.379559	29.1	100.0	1000.000	130.0	H	207.0	-12.1	24.9	54.0
1945.291784	28.5	100.0	1000.000	206.0	V	295.0	-11.9	25.5	54.0
2227.452906	35.5	100.0	1000.000	113.0	V	304.0	-10.6	18.5	54.0
2310.029259	33.0	100.0	1000.000	121.0	H	221.0	-10.2	21.0	54.0
2970.143888	37.0	100.0	1000.000	200.0	V	164.0	-7.5	17.0	54.0
4455.109820	40.9	100.0	1000.000	100.0	H	242.0	-2.4	13.1	54.0

< Fig 15. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



7. Sample Calculations

$$\begin{aligned}\text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)}\end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss = 5.8 dB	
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ – 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



8. Recommendation & Conclusion

The data collected shows that the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 72LZ9700-UA)** was complies with §15.107 and 15.109 of the FCC Rules.