

EC970M Test Report

Test Report No. : 4521-011029D

CERTIFICATE

Issued date : October 29, 2001
EUT : Video Cassette Recorder
Model No. : EC970M Serial No. : N / A
FCC ID No. : BEJ9QKE40220
Manufacture : LG ELECTRONICS INC. Trade name : LG
Applicant& Address : LG Electronics Inc,
20 Yoido-Dong Youngdungpo-Gu, Seoul, 150-721 Korea
Regulation : Subpart B of Part 15, 47 C.F.R; FCC Rules (Docket 87-389)
Procedure : MP-3 ; ANSI C63.4
Test Location : LG Electronics Digital-media Research Lab.
Measurement facility (3 & 10 m site)

I hereby certify that the measurements shown in Part II of this report were made in accordance with the procedures indicated and energy emitted by this equipment was found to be within the limits applicable.

I further certify that on the basis of the measurements, the equipment tested is capable of operation in accordance with the requirements set forth in Part 15 of the FCC rules & Regulations under normal use and maintenance.

LG Electronics Inc. hereby assumes responsibility for the certification of compliance to applicable FCC limits in every measurements.

ISSUED BY



Daehwan Kim

RESEARCH ENGINEER

REVIEWED BY



Taekwang LEE

TEAM LEADER

LG Electronics Inc.
Pyungtaek Research Lab. Standards Team

19-1, Cheongho-Ri, Jinwuy-Myun, Pyungtaek-Shi, Kyunggi-Do, 451-713, KOREA
Tel.: 82-031-610-5336, FAX: 82-031-610-5355

EC970M Test Report

Test Report No. : 4521-011029D

REPORT FOR A TV INTERFACE DEVICE

Scope – Measurement and determination of electromagnetic emission (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

RF MODULATOR

Manufacturer 1 : LG Innotek Co., Ltd.

Model No. : TADC-H202F

Manufacturer 2 : LG Innotek Co., Ltd.

Model No. : TADC-H302F

Manufacturer 3 : Sanyo Tuner Industries Co., Ltd.

Model No. : 115-V-D025AN

Manufacturer 4 : Sanyo Tuner Industries Co., Ltd.

Model No. : 115-V-D025AH

EC970M Test Report

Test Report No. : 4521-011029D

PART I

INTRODUCTION

1. GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST	
1.2 REGULATIONS APPLIED TO THE EUT	
1.3 MEASUREMENT PROCEDURE	
1.4 MEASUREMENT SITE	
2. TEST CONDITIONS	7
2.1 OPERATING CONDITION OF EUT	
2.2 STABILIZATION OF EUT OPERATING	
2.3 TEMPERATURE	
3. TEST SITE	7
3.1 OPEN AREA TEST SITE	
3.2 A SHIELDED ENCLOSURE	
4. MEASURING INSTRUMENTATIONS AND CALIBRATIONS	8
5. DESCRIPTION OF TEST CONDITION	8
5.1 POWER LINE CONDUCTED EMISSIONS	8
5.2 RADIATED EMISSIONS	9
5.3 OUTPUT SIGNAL MEASUREMENTS	10
5.3.1 OUTPUT SIGNAL LEVEL MEASUREMENTS	
5.3.2 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSION MEASUREMENTS	
5.4 TRANSFER SWITCH ISOLATION MEASUREMENTS	11
6. MEASURING INSTRUMENTS AND SET-UP	12
6.1 POWER LINE CONDUCTED EMISSIONS	12
6.2 RADIATED EMISSIONS	12
6.3 OUTPUT SIGNAL MEASUREMENTS	12
6.4 TRANSFER SWITCH ISOLATION MEASUREMENTS	13
6.5 VITS SIGNAL GENERATOR ; COMMONLY USED.	13

EC970M Test Report

Test Report No. : 4521-011029D

PART II TEST DATA

1. CONDUCTED EMISSIONS	15
2. RADIATED EMISSIONS	25
3. OUTPUT SIGNAL LEVEL MEASUREMENTS	27
4. OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSION MEASUREMENTS	29
5. TRANSFER SWITCH ISOLATION MEASUREMENTS	32
APPENDIX A PHOTOGRAPH OF TEST SET-UP	34
APPENDIX B LIST OF TEST EQUIPMENT	36
APPENDIX C LIST OF SUPPORT DEVICE & ACCESSORIES IN THE TEST	37
APPENDIX D LABELLING REQUIREMENTS	38

EC970M Test Report

Test Report No. : 4521-011029D

PART I

INTRODUCTION

EC970M Test Report

Test Report No. : 4521-011029D

1. GENERAL INFORMATION

1.1 DESCRIPTIONS OF EQUIPMENT UNDER TEST(EUT)

1.1.1	Manufacture	LG ELECTRONICS INC.; 19-1, CHEONGHO-RI JINWUY-MYUN,PYUNGTAEK-SHI,KYUNGGI-DO 451-713, KOREA
1.1.2	Applicant	LG ELECTRONICS INC.; 20, YOIDO-DONG YOUNGDUNGPO-GU, SEOUL, 150-721, KOREA
1.1.3	MODEL Name	EC970M
1.1.4	SERIAL NO	NOT ATTACHED
1.1.5	TRADE NAME	LG
1.1.6	FCC ID NO	BEJ9QKE40220
1.1.7	DESCRIPTIONS	
	a) Product Type	Video Cassette Recorder
	b) RF Output Channel	Channel 3 and 4
	c) RF IN/OUT Terminal Impedance	75 ohms (Unbalance F-type coaxial)
	d) Number of RF IN/OUT terminal	1EA at each
	e) Terminal for signal	Video/Audio in/out with RCA-type jacks
	f) Power Supply	AC 100 - 240V, 50/60Hz
1.1.8	Accessories connected to the EUT	
	a) Video Coaxial cable for RF-OUT terminal provided by manufacture	
	b) Video/Audio cables	

1.2 Regulations applied to the EUT .. FCC Part 15.115

1.3 Measurement Procedure ...MP-3 : ANSI C 63.4

1.4 Measurement site description

- Location of measurement facility
LG Electronics Inc : Pyungtaek plant
Digital-Media Standards Team
19-1, Cheongho-Ri,Jinwuy-Myun,Pyungtak - Shi, 451-713 Korea

Note;

The detailed description of measuring facility was found to be in compliance
With Federal Communications Commission requirements of 2.948 according to
ANSI C63.4 on June 29, 2000 (Registration No. ; 90759)

EC970M Test Report

Test Report No. : 4521-011029D

2. GENERAL TEST CONDITIONS

The test data contained in this report was obtained by use of the measurement method recommended in FCC Rules, 47 C.F.R. 15.31(a)(3), with equipment and at the test site filed by the Federal Communications Commission (FCC). The technical standard for a TV interface device are set forth in Subpart B of Part 15 of FCC Rules and regulation. The measurement for Radiated Emissions, Power line Conducted Emissions, Output signal levels, Output Terminal Conducted Spurious Emissions and Transfer Switch Isolation were performed in accordance with the procedures described in MP-3 and ANSI C63.4-1992.

2.1 OPERATING CONDITIONS OF THE EUT

According to the requirements in Subpart B of Part 15, the measurement is made at each function of the EUT being connected with appropriate cables and loads. The model, EC970M has either a video/audio output terminal in RCA-type plugs and antenna input terminal. Therefore, every measurement was investigated in the operation modes, 1)Playing VITS 1Vp-p recorded tape, 2) Recording 1 & 5 Vp-p VITS signal supplied through the video input terminal, 3) Recording NTSC TV signal supplied through the antenna input terminal at each Ch. 3 or/and 4 for each mode applicable.

2.2 STABILIZATION OF EUT OPERATION

The EUT was operated for sufficient minutes before testing to make it stabilized in a normal operating condition. The power supplied to the EUT was filtered to meet the requirements.

2.3 TEMPERATURE

Measurement procedure recommended by FCC requires the test to be performed at the site with ambient temperature within 10 to 40 degrees centigrade (50 to 104 F). The specification for operating temperature of EUT is from 5 to 35 degrees centigrade (41 to 95 F) as described in owner's manual. The measurement data in this report was obtained at the temperature in the range of 15 ~ 20 degrees centigrade.

3. TEST SITE

3.1 OPEN AREA TEST SITE

Measurement of radiated emissions from EUT was made at open area test site, a description of which has been submitted to the FCC pursuant to Part 15 of 47 C.F.R., 2.948.

3.2 A SHIELDED ENCLOSURE.

All other measurements, including power line conducted emissions, output signal levels, and transfer switch isolation, and transfer switch isolation were made in a shielded enclosure providing sufficient shielding effectiveness.

EC970M Test Report

Test Report No. : 4521-011029D

4. MEASURING INSTRUMENTATIONS AND CALIBRATIONS.

Measurements of output signal level, output terminal conducted spurious emissions, and transfer switch isolation (if applicable) were made with instruments calibrated according to the recommendation by manufacturer. Measurement of radiated emissions and power line conducted emissions were made with instruments conforming to American National Standard Specification, ANSI C63.4 (1992). The calibration of measuring instrument, including any accessories that may affect test results, was performed according to the recommendation by manufactures.

5. DESCRIPTION OF TEST CONDITION.

5.1 POWERLINE CONDUCTED EMISSION MEASUREMENT.

5.1.1 SHIELDED ENCLOSURE.

The measurement for power-line emissions from EUT was made in shielded enclosure which provides sufficient shielding effectiveness enough not to affect test results.

5.1.2 DETECTOR FUNCTION SELECTION AND BANDWIDTH.

During conducted emission measurement, a radio noise meter (ESH-3, Rohde & Schwarz) that has a CISPR quasi-peak detector with 9 KHz IF bandwidth of 6 dB was utilized.

5.1.3 FREQUENCY RANGE TO BE SCANNED.

For conducted emissions measurement, frequency range of 450 KHz to 30 MHz, included, was investigated.

5.1.4 UNIT OF MEASUREMENT.

Test results for conducted emissions are reported in micro-volts.

5.1.5 LINE IMPEDANCE STABILIZATION NETWORK

A LISN with characteristics that conform to the requirements of Part 15 of FCC Rules was used for the measurement of conducted power-line radio noise; (50 micro-henries /50 ohms). Chassis and earth-points for grounding of the LISN were earth-grounded.

5.1.6 TEST CONDITIONS AND CONFIGURATION OF THE EUT.

The EUT was configured and operated in all modes of operation so as to find the maximum emanation of emissions from EUT.

The EUT has designed to use the public AC lines with rated AC voltage as specified in Owner's Manual of EUT and filtered to meet the requirement. AC power was supplied to the EUT through LISN with characteristics described in 5.1.5 of part I of this report.

EC970M Test Report

Test Report No. : 4521-011029D

The EUT was placed on a 1m * 1.5m * 80cm high of wooden table which is placed on the earth-grounded conducting surface larger than 2 square-meter. The vertical conducting surface was located 40cm to the EUT. Length of the power lead in excess of 80 cm horizontally separating the EUT from LISN was folded back-and-forth form at the center of the power cord not exceeding 40 cm in length.

Each type of accessory provided by manufacturer or typically used and support equipment were connected to the EUT during measurement to the typical usage and applicable as nearly as practicable.

5.2 RADIATED EMISSIONS MEASUREMENT..

5.2.1 TEST SITE.

Preliminary measurements were performed in the anechoic chamber to determine the emissions characteristics of the EUT. Final measurements were made in outdoors as described at 3.1 of Part I in this report.

5. 2. 2 DETECTOR FUNCTION SELECTION AND BANDWIDTH.

In radiated emissions measurement, a field strength meter (ESVP, Rohde & Schwarz) that has a CISPR quasi-peak detector was used. The 6dB bandwidth of the detector of instrument is 120 KHz over frequency range of 30 to 1000 MHz. Emissions to be scanned above 1000 MHz may be detected in peak mode.

5. 2. 3 UNIT OF MEASUREMENT.

Test results of radiated emissions measurement are reported in micro-volts per meter at the specific distance. Using the unit of dBuV on the test instrument, the indication unit was converted to field strength unit of uV/m as following method;

$$F(\mu\text{V/m}) = 10^{(R+CL+AF)/20} \text{ (dBuV/m)}$$

here, F : Field Strength in uV/m

R : Meter Reading Level in dBuV,

CL : Cable Loss from antenna to meter in dB,

AF : Antenna Factor of receiving antenna in dB(/m)

EC970M Test Report

Test Report No. : 4521-011029D

5. 2. 4 ANTENNAS.

Measurements were made using calibrated half-wave tuned Bi-log antenna in range of 30 to 1000 MHz that are correctable to levels obtained with a tuned dipole antenna.

For emissions above 1000MHz, horn antenna may be used.

Measurements were also made for both horizontal and vertical polarization.

The horizontal distance between the receiving antenna and the closest periphery of the EUT was 3 meters as described in 8.2.3 of ANSI C63.4-1992.

5. 2. 5 FREQUENCY RANGE TO BE SCANNED.

For radiated emissions measurements, the spectrum in the range of 30 to 1000 MHz and above, if found, was investigated. The measurement for power-line emissions from EUT was made in shielded enclosure which provides

5. 2. 6 TEST CONDITIONS AND CONFIGURATION OF EUT.

The EUT was configured and operated in all modes of operation so as to find the maximum emanation of emissions from EUT.

The power was furnished with rated (normal) AC 120 volts, as specified in the Owner's Manual of EUT. The EUT was placed on the 80 Cm high of non-metallic table(1 *1.5 meter). The turn table containing the system was rotated and the antenna height was varied 1~4 m to find the maximum emanation of emissions from EUT.

Each type of accessory provided by manufacturer or typically used and support equipment were connected to the EUT during measurement to the typical usage and applicable as nearly as practicable.

5. 3 OUTPUT SIGNAL MEASUREMENT.

During measurements for output signal levels as the RF-out terminal, a spectrum analyzer was used with characteristics described at 4 and 9.3 of part I in this report.

5. 3. 1 OUTPUT SIGNAL LEVEL MEASUREMENT.

RF-out terminal of EUT is designed to feed modulated signals to a TV broadcast receiver via coaxial cable with 75 ohm of rated output impedance.

The output voltage of video carrier frequency at the RF-output terminal of the EUT was measured at each channel (CH. 3 & 4) connecting directly to a spectrum analyzer with 50 ohm input impedance via 75-to-50 ohm matching pad. Indicated voltage on screen of measuring instrument was converted to the voltage of 75 ohm system.

EC970M Test Report

Test Report No. : 4521-011029D

- Data conversion method.

$$V_{75}[\text{uV}] = 10^{\frac{(V_r + CF)}{20}} [\text{dBuV}]$$

here,: V_{75} : Voltage at the RF-out terminal of 75 ohm in uV

V_r : Voltage read at analyzer with 50 ohm input-impedance in dBuV

CF : Conversion Factor of the matching pad in dB.

5.3.2 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSION MEASUREMENT.

Any other spectrum at RF-output terminal appearing on frequencies removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was searched at each channel.

To clarify the emissions emanated from RF output terminal of the EUT, RF pre-amplifier was utilized. The gain of pre-amplifier at each frequency measured from EUT were obtained after sufficient warm-up for stabilization of gain.

- * Data conversion method.

$$V_{75}[\text{uV}] = 10^{\frac{(V_r + CF - PG + AT)}{20}} [\text{dBuV}]$$

Where, V_{75} : Voltage at the RF-out terminal of 75 ohm in uV,

V_r : Voltage read at analyzer with 50 ohm input-impedance in dBuV

CF : Conversion Factor of the matching pad in dB,.

PG : Gain of pre-amplifier in dB,

AT : Attenuation of attenuator in dB.

5. 4 TRANSFER SWITCH ISOLATION MEASUREMENT.

As a transfer switch was equipped with EUT as an antenna-in, measurement of isolation were made at RF-input terminal with rated input impedance.

The maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

To clarify the emissions emanated from RF output terminal of the EUT, RF pre-amplifier was utilized. The gain of pre-amplifier at each frequency measured from EUT were obtained after sufficient warm-up for stabilization of gain.

EC970M Test Report

Test Report No. : 4521-011029D

* DATA CONVERSION METHOD.

$$V_{75}[\text{uV}] = 10^{\frac{(V_r + CF - PG + AT)}{20}} [\text{dBuV}]$$

where, V_{75} : Voltage at the RF-out terminal of 75 ohm in uV

V_r : Voltage read at analyzer with 50 ohm input-impedance in dBuV

CF : Conversion Factor of the matching pad in dB,

PG : Gain of pre-amplifier in dB,

AT : Attenuation of attenuator in dB.

6. MEASURING INSTRUMENTS AND SET-UP.

6.1 POWERLINE CONDUCTED EMISSIONS.

6.1.1 Radio Noise Meter.

Rohde & Schwarz, Model ESH-3 { 9 KHz to 30 MHz }

Detector function : CISPR Quasi-Peak

IF Bandwidth : 9 KHz

6.1.2 Line Impedance Stabilization Network (LISN).

Kyoritsu, Model KNW-407

Impedance Characteristic : 50 uH / 50 ohm

6.2 RADIATED EMISSIONS.

6.2.1 Field Strength Meter.

Rohde & Schwarz, Model ESVP { 20 MHz to 1300 MHz }

ESMI { 20 Hz to 26.5 GHz }

Detector function : CISPR Quasi-Peak

IF Bandwidth : 120 KHz

6.2.2 Receiving Antennas.

a) Chase, Model CBL611A : Bilog antenna { 30 to 1000 MHz }

b) Schwarzbeck, Model BBA9102-B : Horn antenna { 1 GHz to 9.5 GHz }

6.3 OUTPUT SIGNAL MEASUREMENTS.

6.3.1 Spectrum Analyzer.

Hewlett-Packard, Model HP8568B

Span : 10 MHz

SWP : 20 msec.

RBW : 100 KHz

VBW : 300 KHz

EC970M Test Report

Test Report No. : 4521-011029D

6 . 3 . 2 RF Pre-amplifier.

Hewlett-Packard, Model HP8447F : 25 dB (typical gain)

6 . 3 . 3 Impedance matching pad.

Rohde & Schwarz, Model RAM : 7.5 dB loss , from 75 ohm to 50 ohm

6 . 3 . 4 Attenuator.

Rohde & Schwarz, Model DNF (N type) : 3 dB attenuation

6 . 4 TRANSFER SWITCH ISOLATION MEASUREMENTS.

6 . 4 . 1 Spectrum Analyzer.

Hewlett-Packard, Model HP8568B

Span : 1 MHz

SWP : 30 msec.

RBW : 10 KHz

VBW : 30 KHz

6 . 4 . 2 RF Pre-amplifier.

Hewlett-Packard, Model HP8447F : About 25 dB

6 . 4 . 3 Impedance matching pad.

Rohde & Schwarz, Model RAM : 7.5 dB loss , from 75 ohm to 50 ohm

6 . 4 . 4 Attenuator.

Rohde & Schwarz, Model DNF (N type) : 3 dB attenuation

6 . 5 VITS SIGNAL GENERATOR ; COMMONLY USED.

Anritsu, Model MG-318A : VTS 1 Vp-p, 5 Vp-p Generator.

[NOTE] 1) The list of instruments and accessories used the measurements are attached at the end of the report, Appendix A and B

2) In every test results, the margins against the limits are shown.

The margins are calculated as following;

$$\text{MARGIN[dB]} = 20\log(R/L)$$

where, R : Corrected Results, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m]

3) The tight limit is applied at the edge of two frequency band.

EC970M Test Report

Test Report No. : 4521-011029D

Part II

TEST DATA

EC970M Test Report

Test Report No. : 4521-011029D

1. POWER LINE CONDUCTED EMISSIONS (*15.107)

PRODUCT : Video Cassette Recorder
MODEL Name : EC970M
Modulator Maker : LG Innotek Co., Ltd. / Sanyo Tuner Industries Co., Ltd.
Modulator type : TADC-H202F / TADC-H302F / 115-V-D025AN / 115-V-D025AH
TEST DATE : Oct. 23th 2001

1.1) LG IT Modulator(TADC-H202F) Data;

<i>Frequency</i> <i>(MHz)</i>	<i>Reading</i> <i>[dBuV]</i>	<i>RF Voltage</i> <i>[uV]</i>	<i>Phase</i> <i>(A/B)</i>	<i>Limit</i> <i>[uV]</i>	<i>Margin [dB]</i> <i>Q-peak</i>
0.460	38.3	82.2	A	250.0	-9.7
0.571	36.5	66.8	A	250.0	-11.5
1.818	34.6	53.7	B	250.0	-13.4
2.542	33.4	46.8	B	250.0	-14.6
4.143	34.6	53.7	B	250.0	-13.4
18.120	41.9	124.5	A	250.0	-6.1

* Sample Calculation at 0.46MHz = $10^{(38.3/20)} = 82.2 \text{ uV}$

NOTES:

1. All modes of operation were investigated. The RF modulator was switched to Channel 3 or 4 and worst-case emissions are reported
2. All other emissions are non-significant.
3. Phase A = Hot Phase B = Neutral

1.2) LG IT Modulator(TADC-H302F) Data;

<i>Frequency</i> <i>(MHz)</i>	<i>Reading</i> <i>[dBuV]</i>	<i>RF Voltage</i> <i>[uV]</i>	<i>Phase</i> <i>(A/B)</i>	<i>Limit</i> <i>[uV]</i>	<i>Margin [dB]</i> <i>Q-peak</i>
0.480	36.9	70.0	A	250.0	-11.1
0.720	33.6	47.9	B	250.0	-14.4
1.920	34.5	53.1	B	250.0	-13.5
18.660	38.7	86.1	B	250.0	-9.3
28.630	39.3	92.3	B	250.0	-8.7

EC970M Test Report

Test Report No. : 4521-011029D

1.3) SANYO Modulator (115-V-D025AN) Data ;

<i>Frequency (MHz)</i>	<i>Reading [dBuV]</i>	<i>RF Voltage [uV]</i>	<i>Phase (A/B)</i>	<i>Limit [uV]</i>	<i>Margin [dB] Q-peak</i>
0.460	38.5	84.1	A	250.0	-9.5
0.513	37.5	75.0	B	250.0	-10.5
1.623	34.7	54.3	A	250.0	-13.3
2.366	33.7	48.4	B	250.0	-14.3
4.112	35.1	56.9	B	250.0	-12.9
18.120	36.9	70.0	A	250.0	-11.1


1.4) SANYO Modulator (115-V-D025AH) Data ;

<i>Frequency (MHz)</i>	<i>Reading [dBuV]</i>	<i>RF Voltage [uV]</i>	<i>Phase (A/B)</i>	<i>Limit [uV]</i>	<i>Margin [dB] Q-peak</i>
0.470	38.3	82.2	A	250.0	-9.7
0.960	32.6	42.7	B	250.0	-15.4
1.940	33.1	45.2	B	250.0	-14.9
18.670	38.7	86.1	A	250.0	-9.3
28.640	41.1	113.5	A	250.0	-6.9

EC970M Test Report


Test Report No. : 4521-011029D

1.5) LG IT Modulator(TADC-H202F) Data;

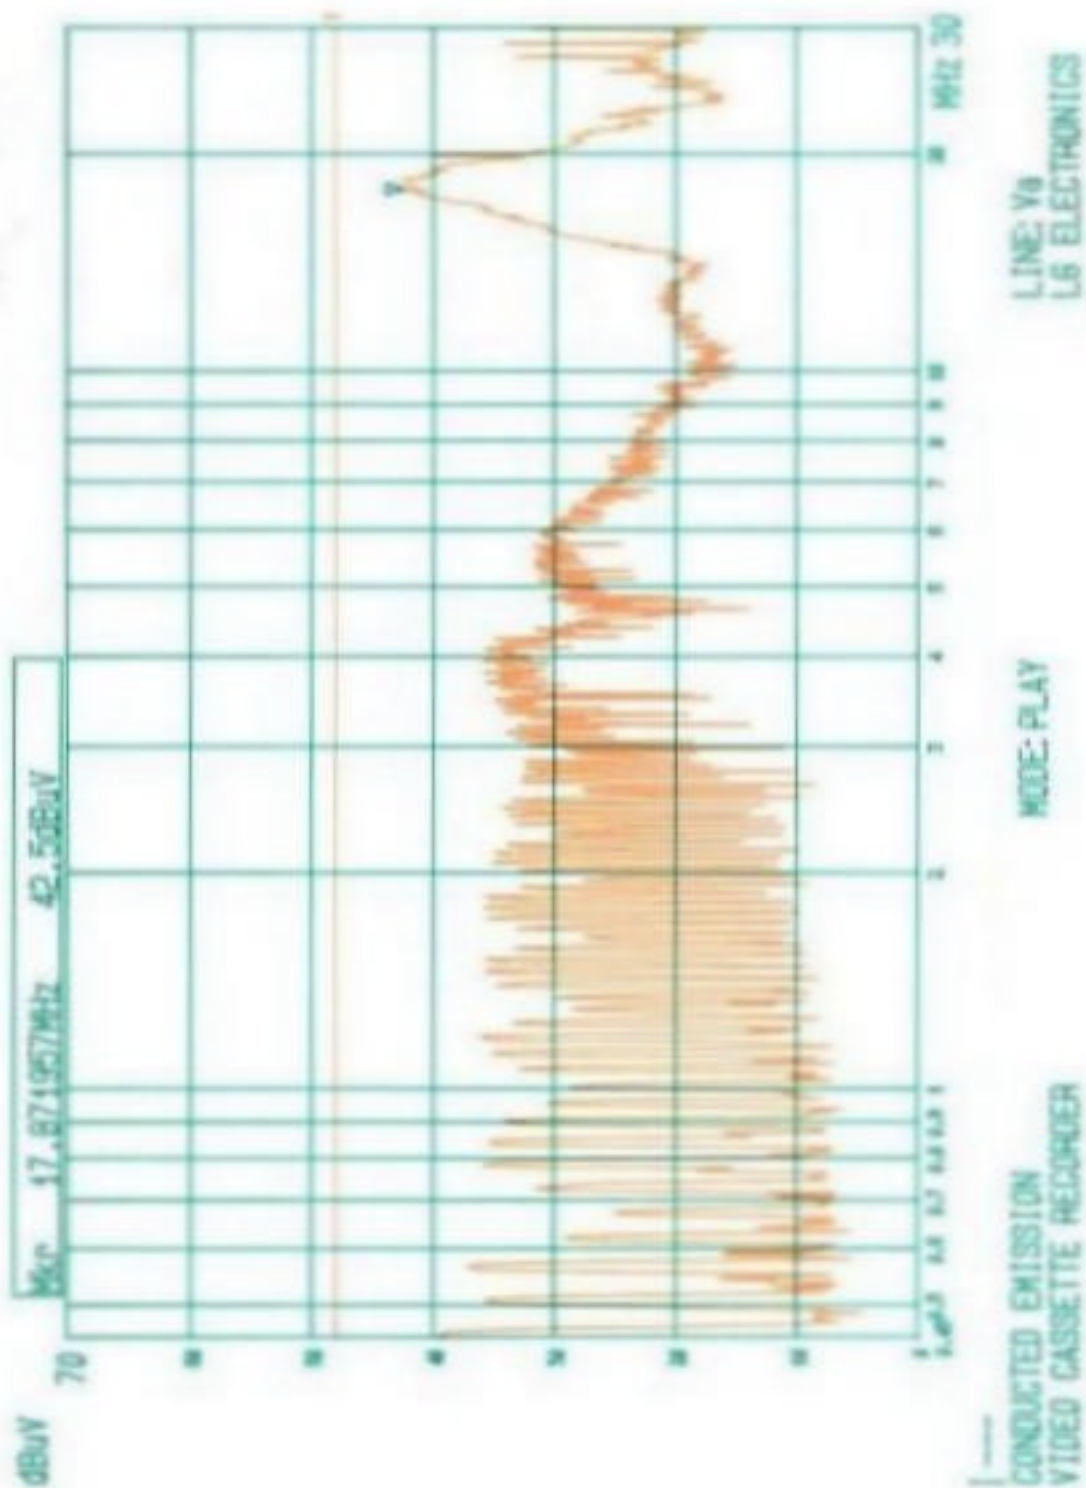

EC970M Test Report


Test Report No. : 4521-011029D

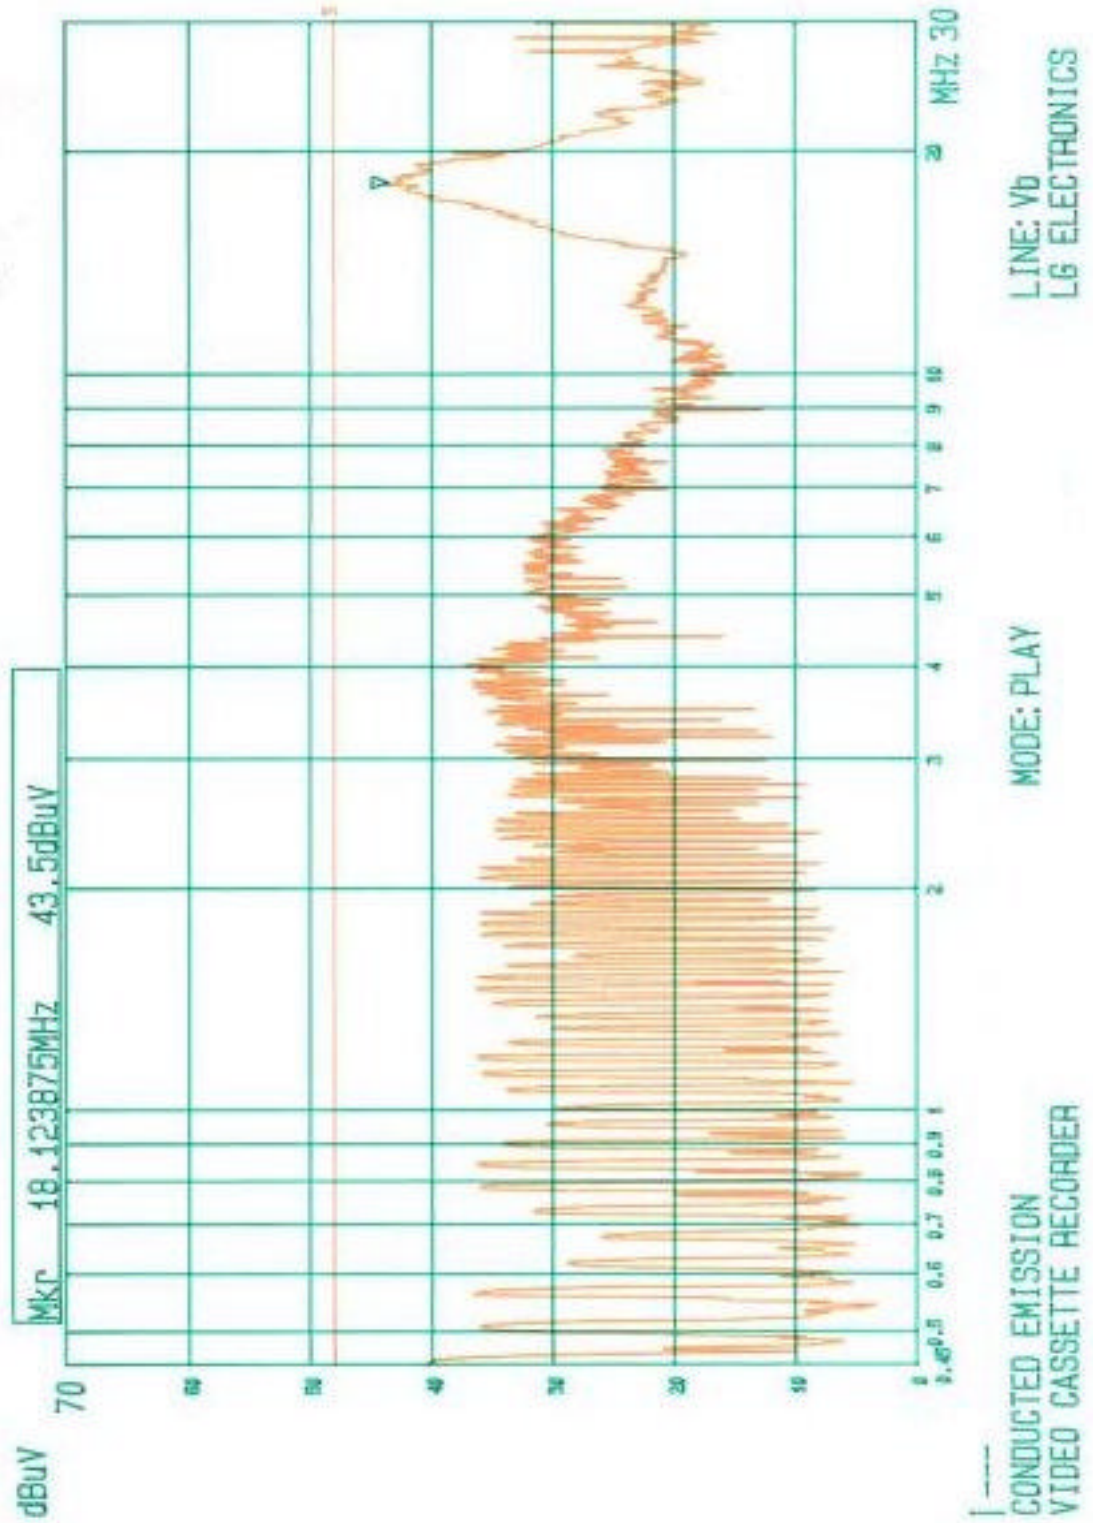

EC970M Test Report


Test Report No. : 4521-011029D

1.6) LG IT Modulator(TADC-H302F) Data;

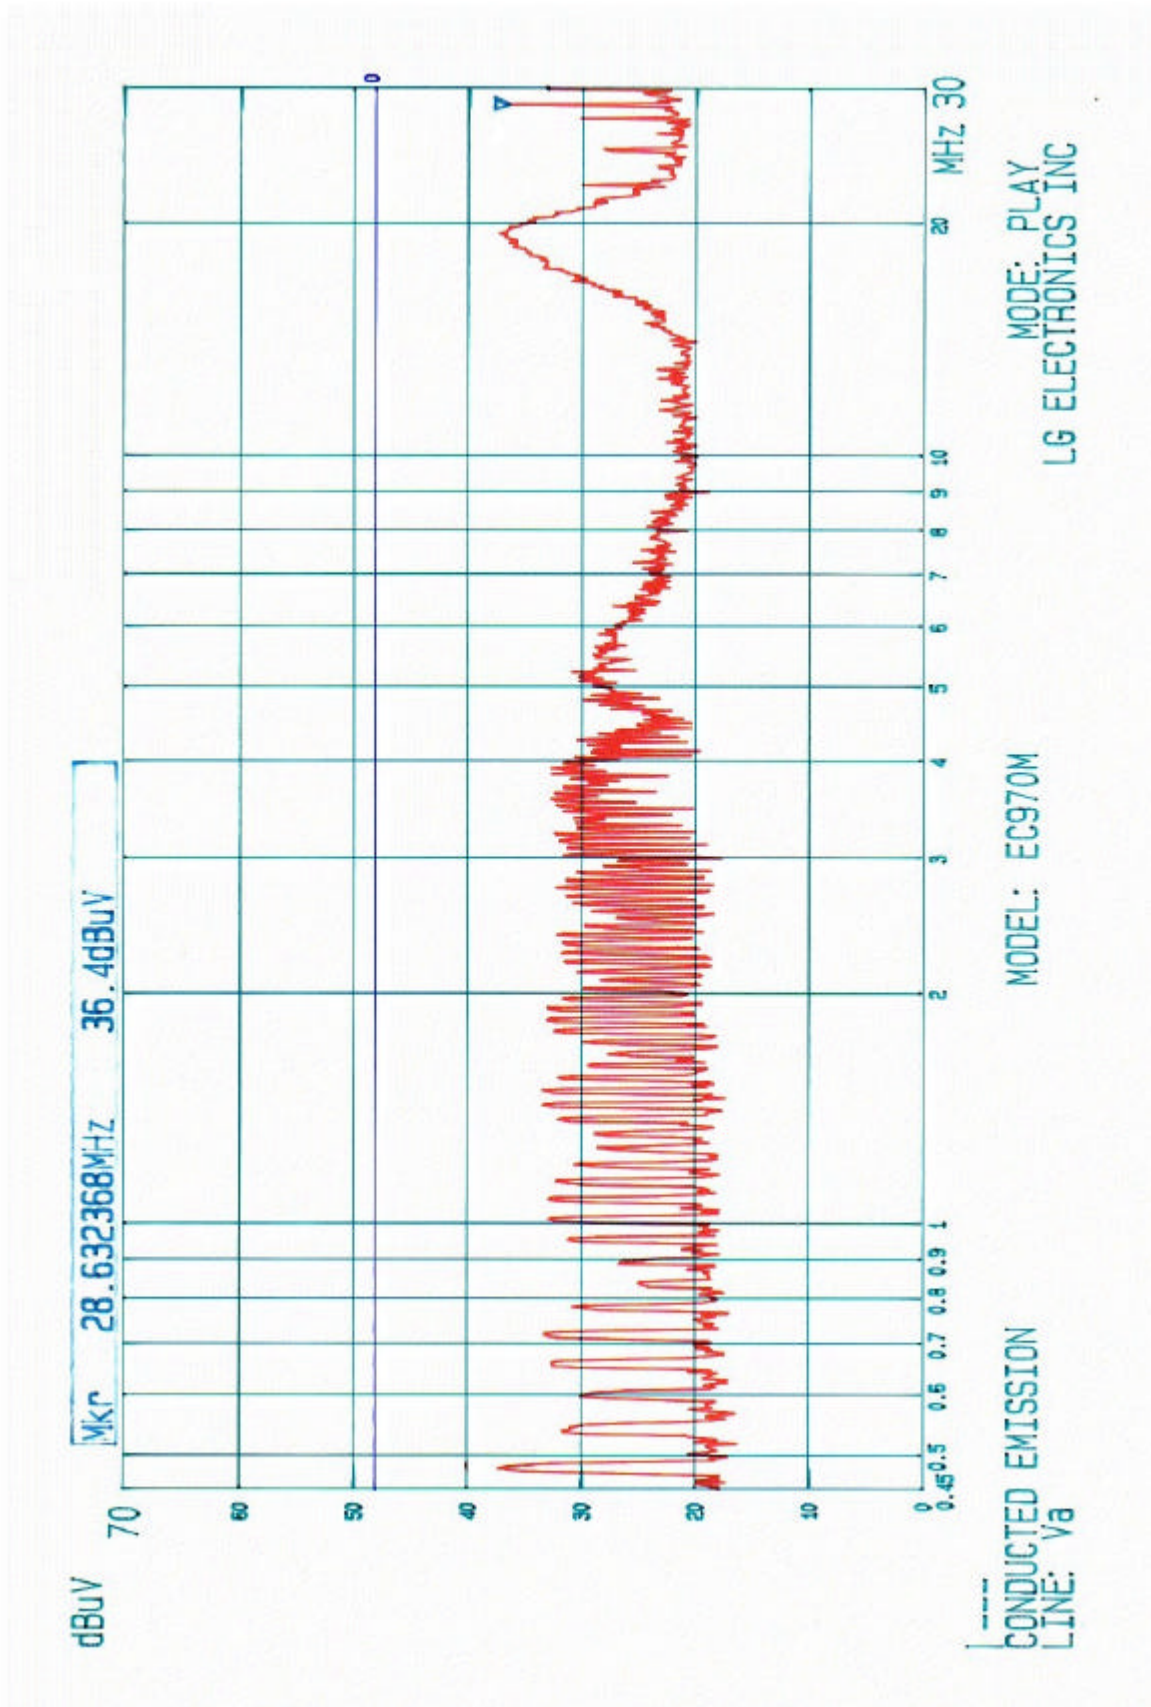

EC970M Test Report


Test Report No. : 4521-011029D

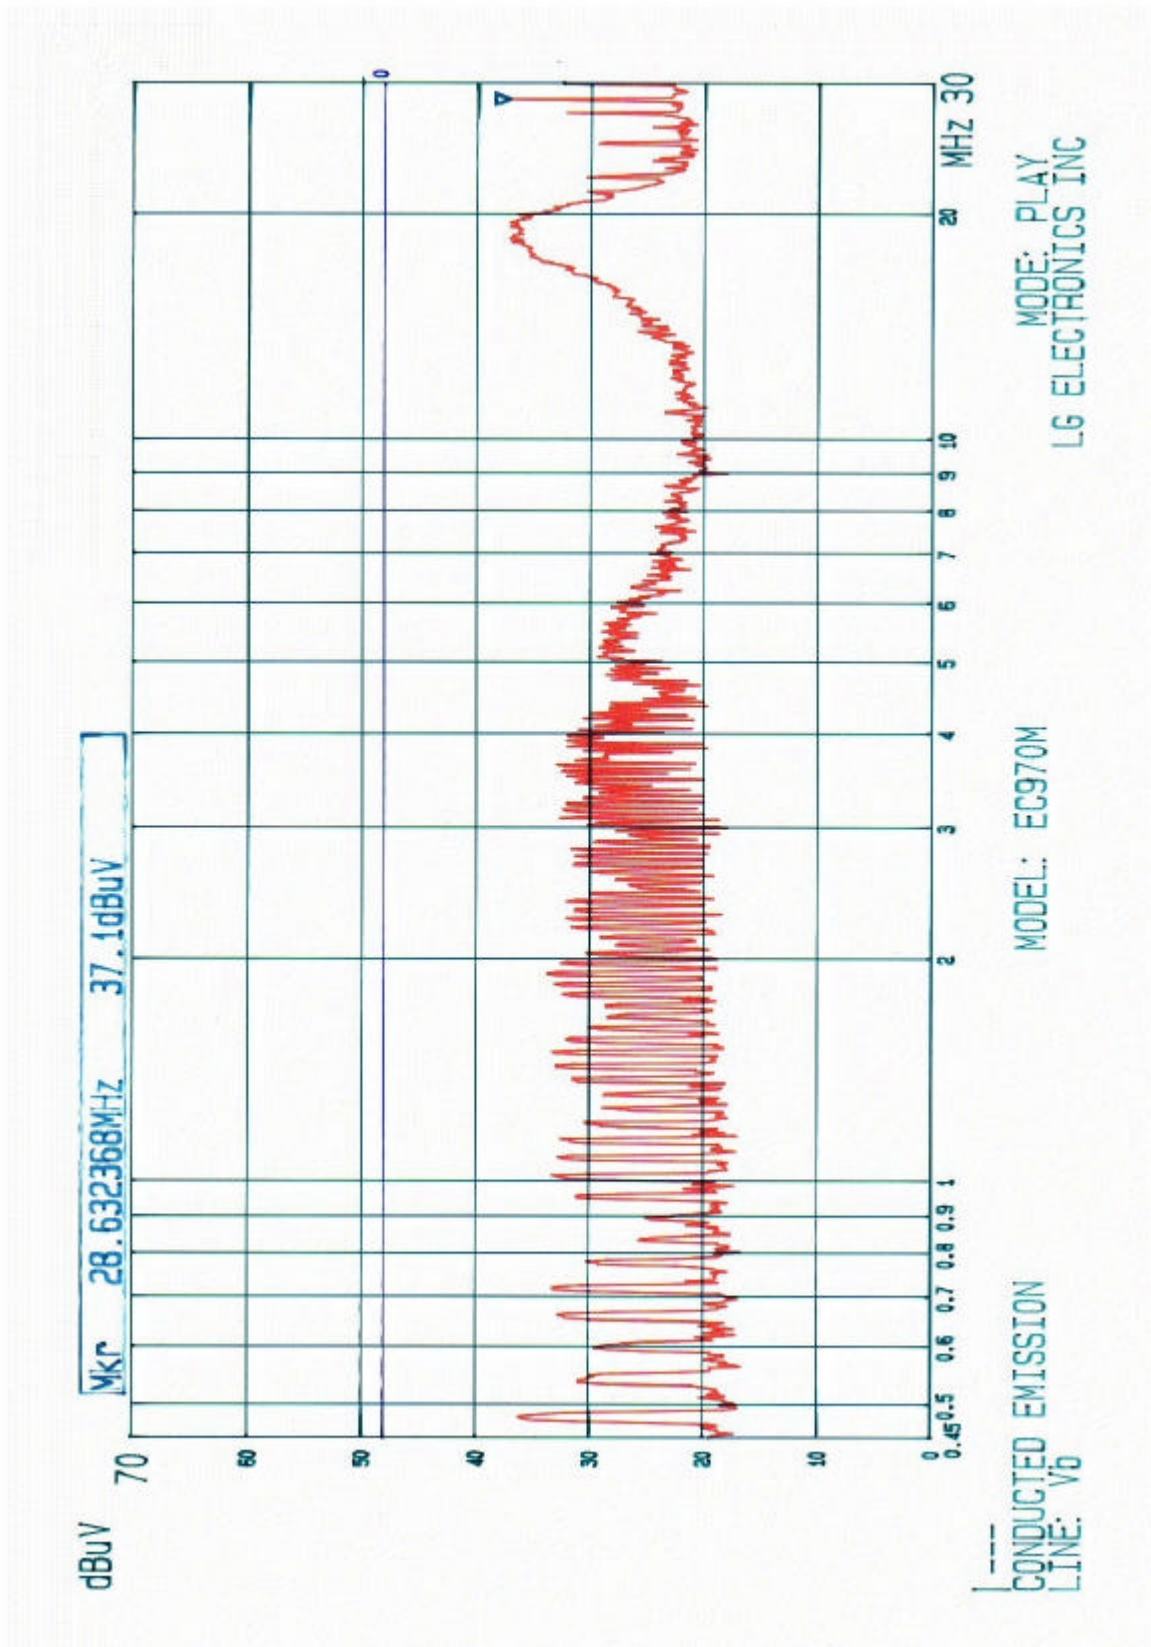

EC970M Test Report


Test Report No. : 4521-011029D

1.7) SANYO Modulator(115-V-D025AN) Data ;

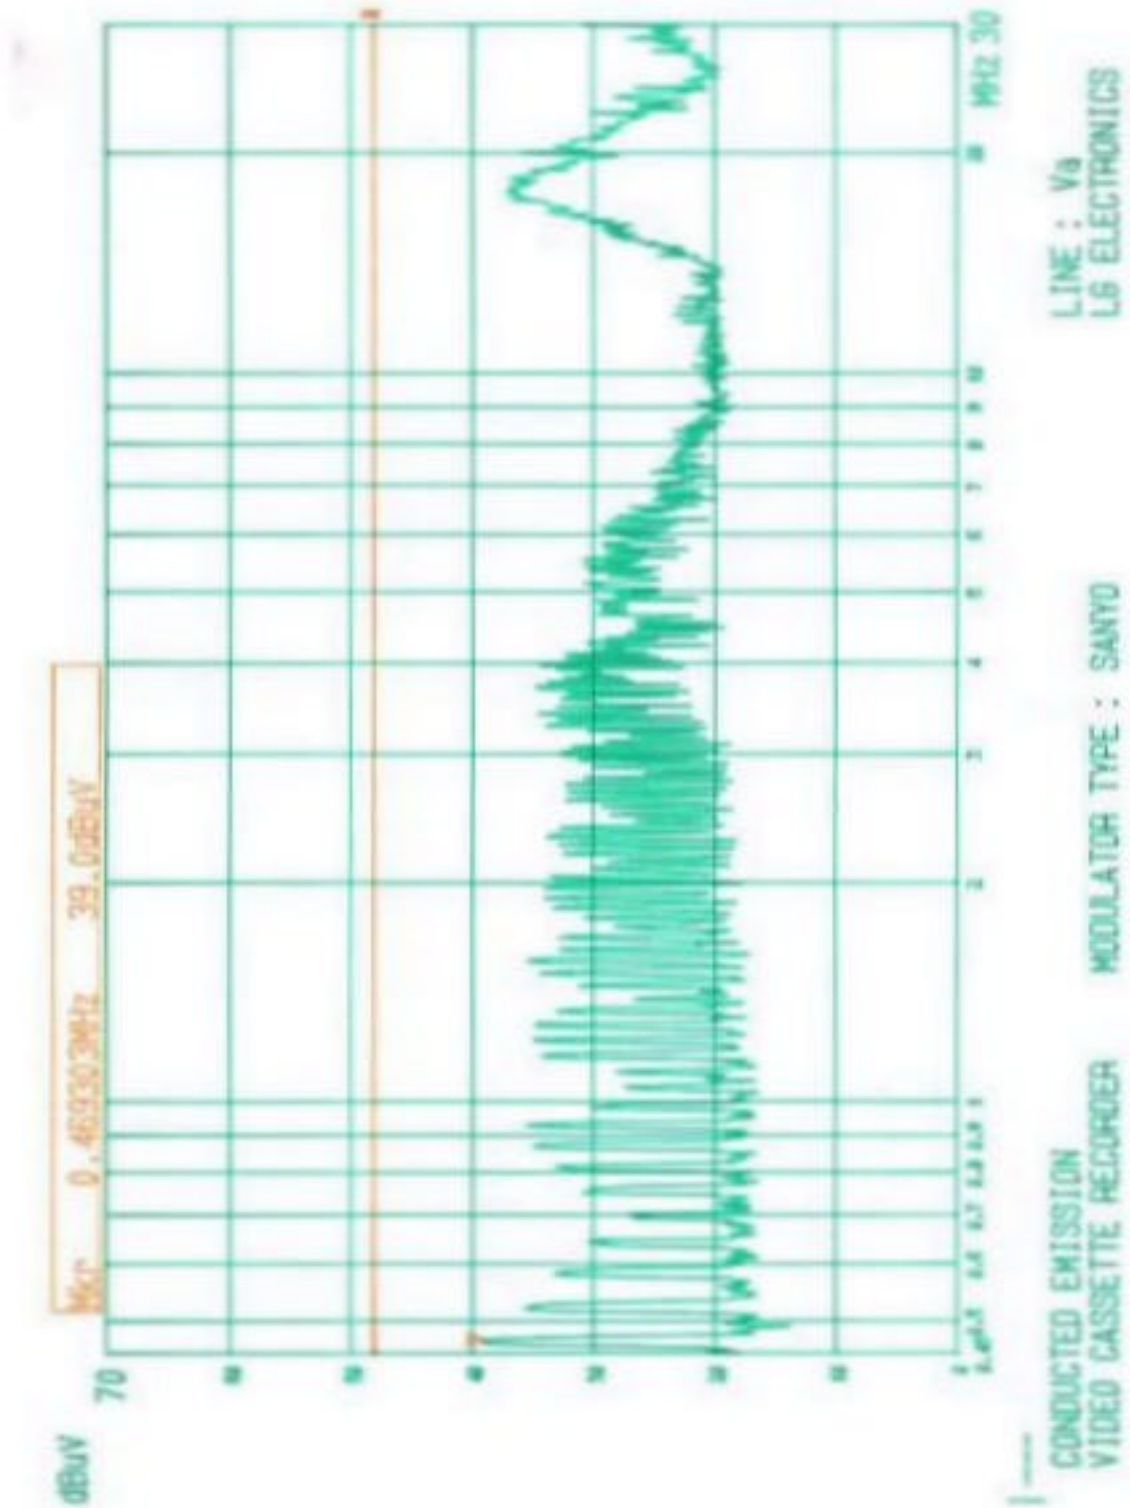

EC970M Test Report


Test Report No. : 4521-011029D

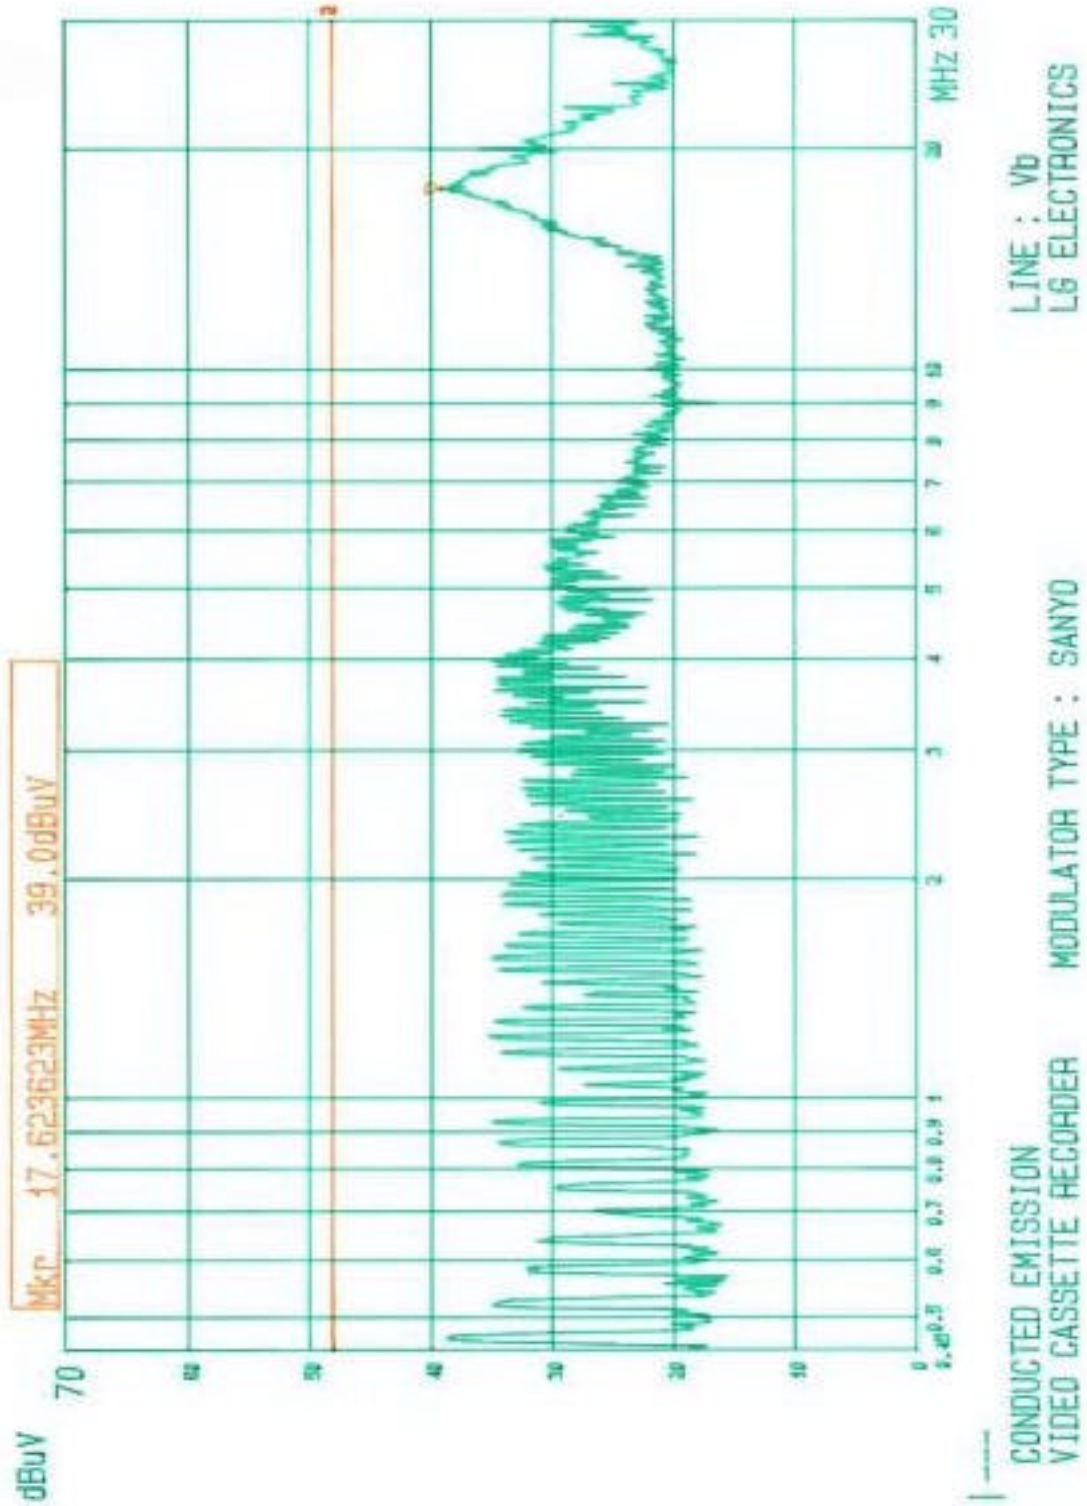

EC970M Test Report


Test Report No. : 4521-011029D

1.8) SANYO Modulator(115-V-D025AH) Data ;

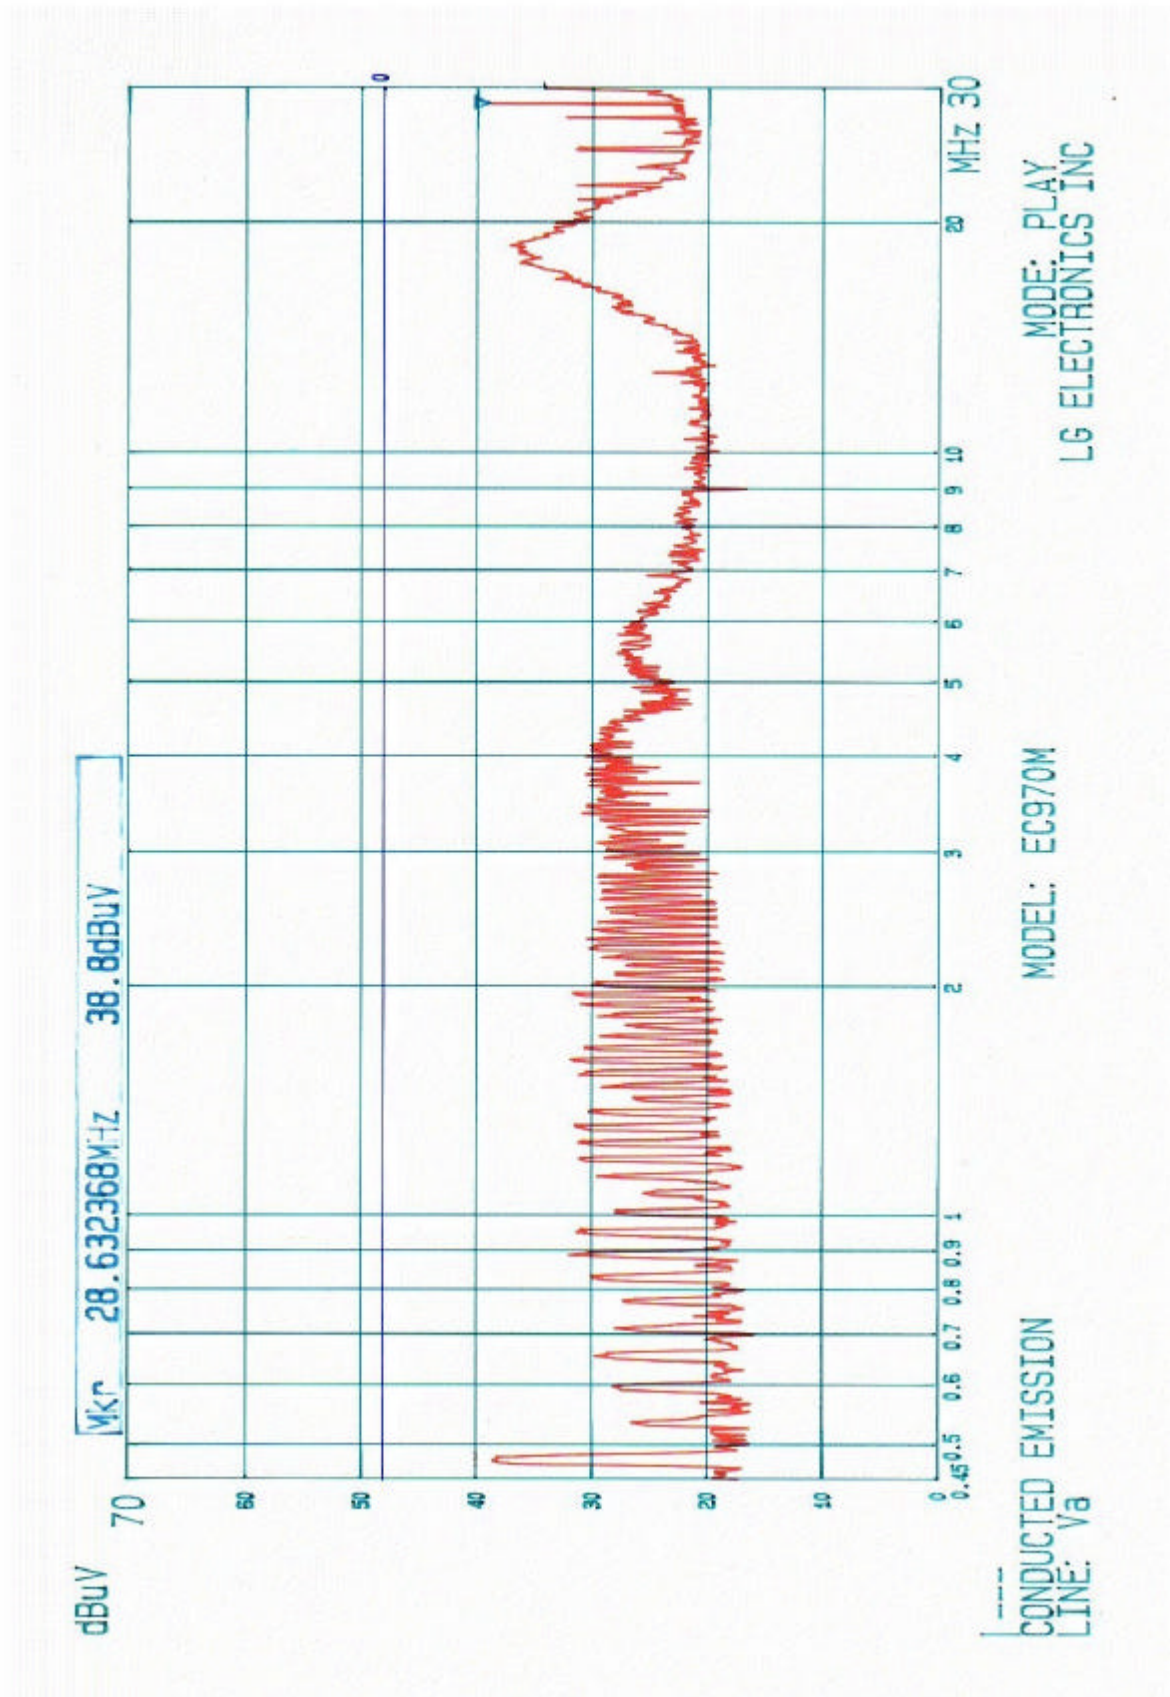

EC970M Test Report

Test Report No. : 4521-011029D

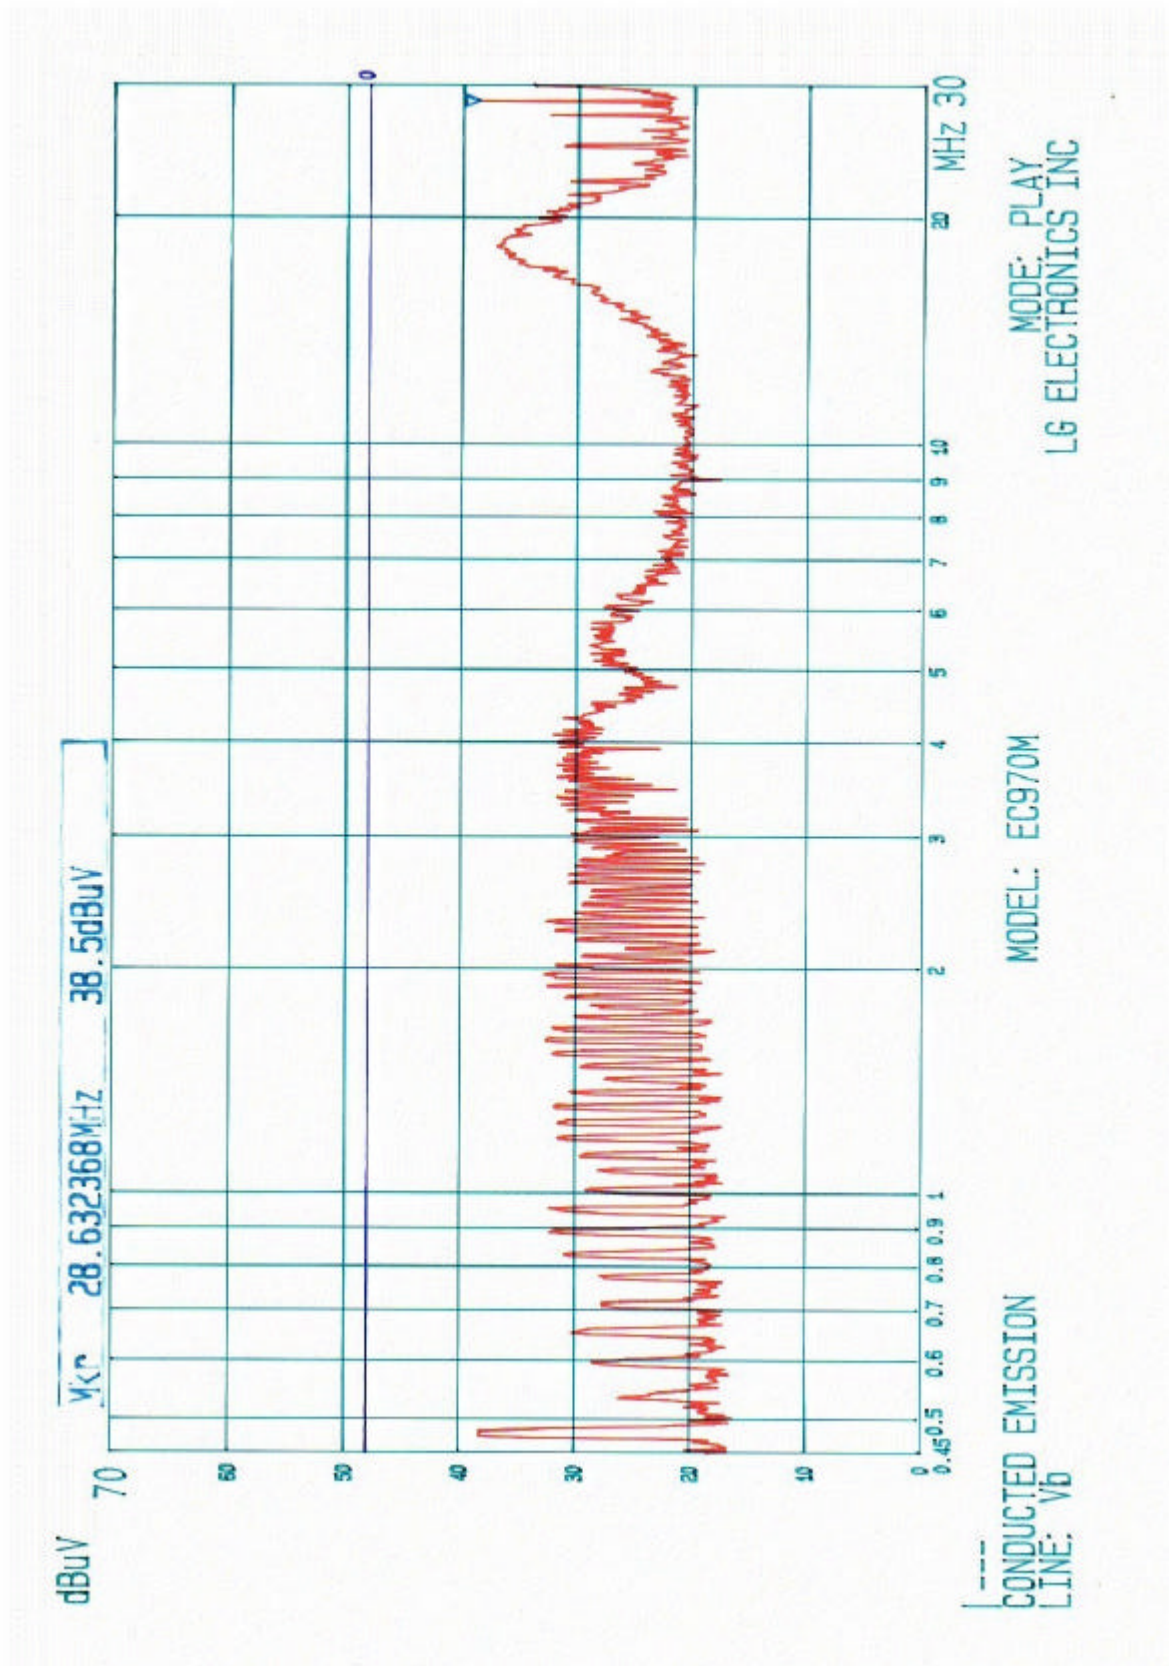

EC970M Test Report

Test Report No. : 4521-011029D

2.RADIATED EMISSIONS (*15.109)

PRODUCT : Video Cassette Recorder
MODEL Name : EC970M
Modulator Maker : LG Innotek Co., Ltd. / Sanyo Tuner Industries Co., Ltd.
Modulator type : TADC-H202F / TADC-H302F / 115-V-D025AN / 115-V-D025AH
TEST DATE : Oct. 24th, 2001

2.1) LG IT Modulator(TADC-H202F) Data ;

<i>FREQ.</i> <i>[MHz]</i>	<i>Reading</i> <i>[dBuV]</i>	<i>AF</i> <i>[dB/m]</i>	<i>CL</i> <i>[dB]</i>	<i>Pol.</i> <i>(Hor / Ver)</i>	<i>F/S</i> <i>[uV/m]</i>	<i>Limit</i> <i>[uV/m]</i>	<i>Margin</i> <i>[dB]</i>
37.6	20.8	13.2	0.95	Ver	55.9	100	-5.1
67.6	27.0	6.2	1.10	Hor	51.9	100	-5.7
82.8	24.2	7.1	1.39	Hor	43.1	100	-7.3
98.1	18.6	10.0	1.50	Ver	32.0	150	-13.4
135.9	15.3	11.9	1.74	Ver	28.0	150	-14.6
150.6	12.6	11.2	1.83	Hor	19.1	150	-17.9
181.2	13.7	9.0	2.05	Ver	17.3	150	-18.8
285.3	8.3	13.3	2.58	Ver	16.2	200	-21.8

[(20.8+13.2+0.95)/20]
* Sample Calculation at 37.6 MHz = 10 = 55.9 uV/m

NOTES:

1. All modes of operation were investigated. The RF modulator was switched to Channel 3 or 4 and worst-case emissions are reported.
2. All other emissions are non-significant.
3. AF = Antenna factor CL = Cable loss F/S = Field Strength

2.2) LG IT Modulator(TADC-H302F) Data ;

<i>FREQ.</i> <i>[MHz]</i>	<i>Reading</i> <i>[dBuV]</i>	<i>AF</i> <i>[dB/m]</i>	<i>CL</i> <i>[dB]</i>	<i>Pol.</i> <i>(Hor / Ver)</i>	<i>F/S</i> <i>[uV/m]</i>	<i>Limit</i> <i>[uV/m]</i>	<i>Margin</i> <i>[dB]</i>
40.1	17.31	12.9	0.99	Ver	36.3	100	-8.8
136.02	23.46	11.9	1.74	Ver	71.6	150	-6.4
150.34	23.27	11.2	1.83	Ver	65.3	150	-7.2
646.1	8.63	20.5	4.02	Ver	45.4	200	-12.9
959.5	6.04	24.6	4.86	Hor	59.6	200	-10.5

EC970M Test Report

Test Report No. : 4521-011029D

2.3) SANYO Modulator(115-V-D025AN) Data ;

<i>FREQ.</i> <i>[MHz]</i>	<i>Reading</i> <i>[dBuV]</i>	<i>AF</i> <i>[dB/m]</i>	<i>CL</i> <i>[dB]</i>	<i>Pol.</i> <i>(Hor / Ver)</i>	<i>F/S</i> <i>[uV/m]</i>	<i>Limit</i> <i>[uV/m]</i>	<i>Margin</i> <i>[dB]</i>
37.6	20.5	13.2	0.95	Ver	54.0	100	-5.3
67.0	27.0	6.2	1.23	Hor	52.7	100	-5.6
82.7	24.5	7.4	1.39	Hor	46.2	100	-6.7
97.7	19.0	9.9	1.49	Ver	33.1	150	-13.1
135.9	15.5	11.9	1.74	Ver	28.6	150	-14.4
150.1	12.3	11.2	1.83	Hor	18.5	150	-18.2
181.2	14.0	9	2.05	Ver	17.9	150	-18.5
285.0	8.2	13.3	2.58	Ver	16.0	200	-21.9

2.4) SANYO Modulator(115-V-D025AH) Data ;

<i>FREQ.</i> <i>[MHz]</i>	<i>Reading</i> <i>[dBuV]</i>	<i>AF</i> <i>[dB/m]</i>	<i>CL</i> <i>[dB]</i>	<i>Pol.</i> <i>(Hor / Ver)</i>	<i>F/S</i> <i>[uV/m]</i>	<i>Limit</i> <i>[uV/m]</i>	<i>Margin</i> <i>[dB]</i>
40.1	16.31	12.9	0.99	Ver	32.4	100	-9.8
136.02	22.86	11.9	1.74	Ver	66.8	150	-7.0
150.34	22.77	11.2	1.83	Ver	61.7	150	-7.7
646.1	8.87	20.5	4.02	Ver	46.7	200	-12.6
948.6	7.51	24.2	4.82	Ver	67.1	200	-9.5

EC970M Test Report

Test Report No. : 4521-011029D

3.OUTPUT TERMINAL SIGNAL LEVEL (*15.115)

PRODUCT : Video Cassette Recorder
MODEL Name : EC970M
Modulator Maker : LG Innotek Co., Ltd. / Sanyo Tuner Industries Co., Ltd.
Modulator type : TADC-H202F / TADC-H302F / 115-V-D025AN / 115-V-D025AH
TEST DATE : Oct. 25th 2001

3.1) LGIT Modulator(TADC-H202F) Data;

CH	Frequency (MHz)	Reading [dBuV]	M/P Loss (dB)	RF Voltage [uV]	Limit [uV]	Margin [dB] Q-peak
3 (Visual)	61.23	57.90	7.5	1862.09	3000	-4.1
3 (Aural)	65.80	45.10		426.58	671	-3.9
4 (Visual)	67.20	58.00	7.5	1883.65	3000	-4.0
4 (Aural)	71.80	44.80		412.10	671	-4.2

$$\begin{aligned} & \text{[}(57.9+7.5)/20\text{]} \\ * \text{ Sample Calculation at 61.23 MHz} &= 10 \qquad \qquad \qquad = 1862.09 \text{ uV} \end{aligned}$$

NOTES:

1. All modes of operation were investigated and worst-case emissions are reported.
2. Output Impedance of RF-Output Terminal : 75 ohm
3. MP = Impedance Matching Pad

3.2) LGIT Modulator(TADC-H302F) Data;

CH	Frequency (MHz)	Reading [dBuV]	M/P Loss (dB)	RF Voltage [uV]	Limit [uV]	Margin [dB] Q-peak
3 (Visual)	61.23	58.52	7.5	1999.86	3000	-3.5
3 (Aural)	65.78	45.30		436.52	671	-3.7
4 (Visual)	67.23	58.33	7.5	1956.59	3000	-3.7
4 (Aural)	71.76	45.20		431.52	671	-3.8

EC970M Test Report

Test Report No. : 4521-011029D

3.3) Sanyo Modulator (115-V-D025AN) Data;

CH	Frequency (MHz)	Reading [dBuV]	M/P Loss (dB)	RF Voltage [uV]	Limit [uV]	Margin [dB] Q-peak
3 (Visual)	61.23	59.60	7.5	2264.64	3000	-2.4
3 (Aural)	65.78	44.20		384.59	671	-4.8
4 (Visual)	67.23	59.00	7.5	2113.49	3000	-3.0
4 (Aural)	71.80	43.60		358.92	671	-5.4

3.4) Sanyo Modulator (115-V-D025AH) Data;

CH	Frequency (MHz)	Reading [dBuV]	M/P Loss (dB)	RF Voltage [uV]	Limit [uV]	Margin [dB] Q-peak
3 (Visual)	61.28	59.70	7.5	2290.87	3000	-2.3
3 (Aural)	65.83	45.12		427.56	671	-3.9
4 (Visual)	67.28	59.26	7.5	2177.71	3000	-2.8
4 (Aural)	71.81	44.96		419.76	671	-4.1

EC970M Test Report

Test Report No. : 4521-011029D

4. OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSIONS

PRODUCT : Video Cassette Recorder
 MODEL Name : EC970M
 Modulator Maker : LG Innotek Co., Ltd. / Sanyo Tuner Industries Co., Ltd.
 Modulator type : TADC-H202F / TADC-H302F / 115-V-D025AN / 115-V-D025AH
 TEST DATE : Oct. 25th 2000

4.1) LGIT Modulator(TADC-H202F) Data ;

CH	Frequency [MHz]	Reading [dBuV]	M/P Loss [dB]	PreAmp Gain [dB]	Attn. [dB]	Output Level [uV]	Limit [uV]	Margin [dB]
3	129.4	27.40	7.5	27.3	3.0	3.4	95	-29.0
	570.8	27.40		25.2		4.3		-26.9
	672.6	29.00		27.1		4.2		-27.2
	752.7	28.30		28.6		3.2		-29.4
	847.2	36.40		27.7		9.1		-20.4
	912.7	27.70		28.6		3.0		-30.0
4	425.8	26.70	7.5	27.7	3.0	3.0	95	-30.1
	444.2	27.50		27.7		3.3		-29.3
	461.7	28.90		25.6		4.9		-25.8
	546.5	28.10		29.2		3.0		-30.2
	704.2	27.60		27.7		3.3		-29.2
	847.2	32.80		27.7		6.0		-24.0

$$\text{* Sample Calculation at 129.4 MHz} = \frac{[(27.40+7.5-27.3+3.0)/20]}{10} = 3.4 \text{ uV}$$

NOTES:

1. Frequency range of 30 MHz to 1000 MHz removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was investigated at each channel.
2. All other emissions are not significant.

EC970M Test Report

Test Report No. : 4521-011029D

4.2) LGIT Modulator(TADC-H302F) Data ;

CH	Frequency [MHz]	Reading [dBuV]	M/P Loss [dB]	PreAmp Gain [dB]	Attn. [dB]	Output Level [uV]	Limit [uV]	Margin [dB]
3	255.5	34.33	7.5	26.3	3.0	8.4	95	-21.0
	371.9	33.15		27.0		6.8		-22.9
	478.6	35.66		28.3		7.8		-21.7
	815.7	45.96		27.4		28.4		-10.5
4	255.5	34.00	7.5	26.3	3.0	8.1	95	-21.4
	371.9	31.96		27.0		5.9		-24.1
	478.6	41.53		28.3		15.4		-15.8
	750.2	46.82		28.6		27.3		-10.8

4.3) Sanyo Modulator (115-V-D025AN) Data ;

CH	Frequency [MHz]	Reading [dBuV]	M/P Loss [dB]	PreAmp Gain [dB]	Attn. [dB]	Output Level [uV]	Limit [uV]	Margin [dB]
3	97.9	30.2	7.5	26.6	3.0	5.1	95	-25.5
	190.1	29.4		27.0		4.4		-26.7
	221.6	26.1		26.0		3.4		-29.0
	502.9	28.4		26.7		4.1		-27.4
	650.8	28.5		27.7		3.7		-28.3
	786.6	28.1		26.5		4.0		-27.5
4	141.6	28.2	7.5	25.5	3.0	4.6	95	-26.4
	207.0	30.8		24.6		6.8		-22.9
	240.5	25.7		27.0		2.9		-30.4
	580.5	28.0		27.1		3.7		-28.2
	898.1	28.3		26.5		4.1		-27.3
	963.6	29.0		27.2		4.1		-27.3

EC970M Test Report

Test Report No. : 4521-011029D

4.4) Sanyo Modulator (115-V-D025AH) Data ;

CH	Frequency [MHz]	Reading [dBuV]	M/P Loss [dB]	PreAmp Gain [dB]	Attn. [dB]	Output Level [uV]	Limit [uV]	Margin [dB]
3	216.7	31.9	7.5	25.4	3.0	7.0	95	-22.6
	415.6	35.0		25.6		9.9		-19.7
	532.0	39.7		28.5		12.1		-17.9
	721.1	34.7		26.0		9.1		-20.4
4	216.7	31.8	7.5	25.4	3.0	7.0	95	-22.6
	415.6	35.0		25.6		9.9		-19.7
	532.0	39.5		28.5		11.9		-18.0
	721.1	34.6		26.0		9.0		-20.4

EC970M Test Report

Test Report No. : 4521-011029D

5.TRANSFER SWITCH ISOLATION (*15.115)

PRODUCT : Video Cassette Recorder
MODEL Name : EC970M
Modulator Maker :LG Innotek Co., Ltd. / Sanyo Tuner Industries Co., Ltd.
Modulator type : TADC-H202F / TADC-H302F / 115-V-D025AN / 115-V-D025AH
TEST DATE : Oct. 25th 2001

5-1) LGIT Modulator(TADC-H202F) Data;

CH	Frequency (MHz)	Reading [dBuV]	M/P Loss [dB]	PreAmp Gain [dB]	Attn. [dB]	Output Level [uV]	Limit [uV]	Margin [dB]
3	61.25	16.22	7.5	27.5	3.0	0.91	3.0	-10.3
4	67.25	15.12	7.5	27.6	3.0	0.80	3.0	-11.5

NOTES:

1. The transfer switch is internal to the device and is access automatically.
2. The transfer isolation switch provides automatic selection of either antenna/TV or VCR.

* Sample Calculation at 61.25 MHz = 10 $\frac{[(16.22+7.5-27.5+3.0)/20]}{10}$ = 0.91 uV

5-2) LGIT Modulator(TADC-H302F) Data;

CH	Frequency (MHz)	Reading [dBuV]	M/P Loss [dB]	PreAmp Gain [dB]	Attn. [dB]	Output Level [uV]	Limit [uV]	Margin [dB]
3	61.26	18.82	7.5	27.5	3.0	1.23	3.0	-7.7
4	67.25	17.16	7.5	27.6	3.0	1.01	3.0	-9.5

EC970M Test Report

Test Report No. : 4521-011029D

5-3) Sanyo Modulator(115-V-D025AN) Data;

CH	Frequency (MHz)	Reading [dBuV]	M/P Loss [dB]	PreAmp Gain [dB]	Attn. [dB]	Output Level [uV]	Limit [uV]	Margin [dB]
3	61.25	16.73	7.5	27.5	3.0	0.97	3.0	-9.8
4	67.25	16.90	7.5	27.6	3.0	0.98	3.0	-9.7

5-4) Sanyo Modulator(115-V-D025AH) Data;

CH	Frequency (MHz)	Reading [dBuV]	M/P Loss [dB]	PreAmp Gain [dB]	Attn. [dB]	Output Level [uV]	Limit [uV]	Margin [dB]
3	61.25	23.70	7.5	27.5	3.0	2.16	3.0	-2.8
4	67.25	21.22	7.5	27.6	3.0	1.61	3.0	-5.4

EC970M Test Report

Test Report No. : 4521-011029D

Appendix A


Photograph of Test Set-up (Power line conducted emissions)



EC970M Test Report

Test Report No. : 4521-011029D

Photographs of Test Set-up (Radiated emissions)

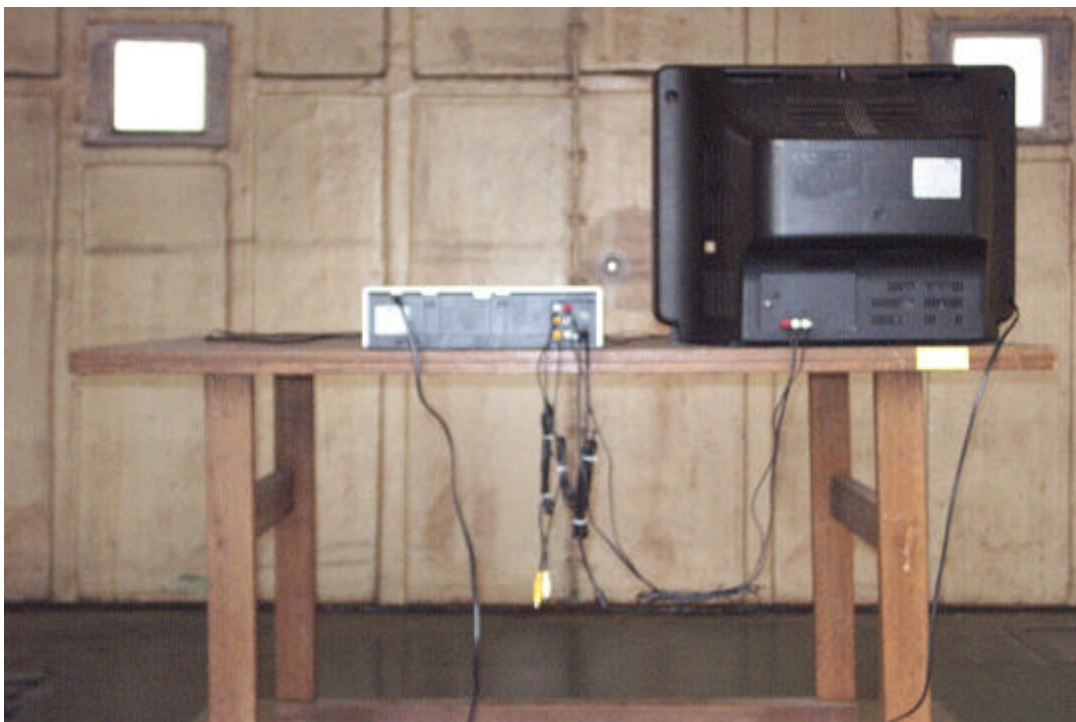

EC970M Test Report

Test Report No. : 4521-011029D

Appendix B

LIST OF TEST EQUIPMENT

Type	Model	Cal. Due Date	S / N
EMI measurement system	R&S, ESMI	09/04/02	846064/004
Test receiver	R&S,ESVP	07/05/02	860688/020
Test receiver	R&S,ESH-3	07/05/02	860950/013
Spectrum monitor	R&S,EZM	07/05/02	862304/008
Spectrum monitor	R&S,EZM	07/05/02	862304/006
Spectrum Analyzer	HP8568B	07/03/02	3107A01571
Quasi-peak Adaptor	HP85650A	07/03/02	3107A01237
RF Pre-selector	HP85685A	07/03/02	3107A01237
Pre-Amplifier	HP8447F(BNC-ty	07/03/02	2805A02879
Pre-Amplifier	HP8447F (N-type)	07/01/02	3113A05259
Pre-Amplifier	HP8447C (N-type)	07/03/02	1937A00732
RF Signal Generator	Fluk, 6060B	07/03/02	5655209
IRE STD. signal Generator	Shibasoku,VG 40A	03/05/02	M-56221002
TV CH. Signal Generator	Shibasoku,363US	03/05/02	M-14817005
TV CH. Signal Generator	Shibasoku,363VS	03/05/02	M-12762002
NTSC Pattern Generator	Leader, LCG-400	03/14/02	705008
VITS Generator	Anritsu, MG318A	10/03/02	M11122
VITS Generator	Anritsu, MG318A	02/23/02	M10478
Tuned Dipole Antenna	EMCO, 3121C	07/26/02	9160-620
Tuned Dipole Antenna	EMCO, 3121C	07/26/02	9160-621
VHF Dipole Antenna	S/B, VHA9103		N/A
UHF Dipole Antenna	S/B, UHA9105		N/A
Bilog Antenna	Chase,CBL611A	10/11/02	1838
Biconical Antenna	R&S, HUF-Z2	10/11/02	N/A
Biconical Antenna	S/B, BBA9106	07/21/02	N/A
Biconical Antenna	S/B, BBA9106	07/21/02	N/A
Log-periodic Antenna	S/B, UHAL9107	10/11/02	N/A
Log-periodic Antenna	S/B, UHAL9107	07/21/02	N/A
Log-periodic Antenna	EMCO, 3146	07/21/02	1583
Horn Antenna	S/B, BBA 9102-B	10/11/02	106
Laurel Antenna			N/A
IEC 106 Antenna	HFU2-Z4		N/A
Absorbing Clamp	R&S, MDS21	10/25/02	860846/004
Absorbing Clamp	R&S, MDS21	07/21/02	301116/072
Kyoritsu LISN	KNW-407	07/05/02	8-6555-4
Shibasoku LISN	563	07/03/02	55416001
R & S LISN	ESH3-Z5	07/03/02	862770/013
Schwarzbeck LISN	NSLK8126	07/05/02	8126259

EC970M Test Report

Test Report No. : 4521-011029D

Appendix C

List of Support Device and Accessories in the test

1. EUT :

Video Cassette Recorder

Model : EC970M

S / N : N/A

2. Accessories

1.5 m. unshielded RF coaxial cable supplied by manufacturer (1 EA)

1.5 m. unshielded RCA cable for Video/Audio

IEC-106 Antenna

3. TV Monitor

Model : CRN-6285

S/N : 30600720

4. VITS Signal Generator

Anritsu, Model MG-318A : VITS 1 Vp-p, 5 Vp-p Generator.

EC970M Test Report

Test Report No. : 4521-011029D

Appendix D

SAMPLE LABEL :

According to Labeling Requirements per * 2.295 & * 15.19



→ The Label shown shall be affixed
On the rear of the device.
See the attached photograph.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES.
OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:
1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND
2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING
INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

↓
The statement is molded on the bottom of the device.
See the attached photograph

EC970M Test Report

Test Report No. : 4521-011029D

Report of Measurements for TV Interface Device under FCC Part 15

Manufacture : LG Electronics Inc
19-1, Cheongho-Ri, Jinwuy-Myun
Pyungtaek city, Kyunggi-Do, 451-713, Korea

PRODUCT : Video Cassette Recorder
EUT Model Name : EC970M
Serial No : N/A

Description of the Modulator & Tuner unit ;

Tuner Maker : LG Innotek Co., Ltd. / Sanyo Tuner Industries Co., Ltd.

Tuner type : TADC-H202F / TADC-H302F / 115-V-D025AN / 115-V-D025AH

Frequency range tuned by the receiver : 54 ~ 806 MHz

This receiver meets FCC Regulations covering comparable systems of VHF and UHF TV tuning .

Measurement Procedure : EIA RS – 378 , MP – 2 , ANSI C 63.4

Date of Measurements : Oct. 23~25, 2001

Measurements Results : The results obtained from the measuring of this device
Are as shown in the attached sheets.
And comply with new rules adapted under Docket 87-389

1. Peak Picture Sensitivity : UHF – VHF < 8.0 dBuV
2. UHF Noise figure : Meet noise figure of 14 dB
3. Radiation of VHF/UHF Portion : Highest 40.9 dBuV/m at 601 MHz
4. Antenna Power conduction : Highest 45.0 dBuV at 1694 MHz



Daehwan Kim
Research engineer
Digital-media standards team

EC970M Test Report

Test Report No. : 4521-011029D

1. Peak Picture Sensitivity :

- | | |
|--|----------------|
| 1) LGIT Tuner (TADC-H202F) : Limit UHF-VHF < 8 dBuV | Result : O . K |
| 2) LGIT Tuner (TADC-H302F) : Limit UHF-VHF < 8 dBuV | Result : O . K |
| 3) Sanyo Tuner (115-V-D025AN) : Limit UHF-VHF < 8 dBuV | Result : O . K |
| 4) Sanyo Tuner (115-V-D025AH) : Limit UHF-VHF < 8 dBuV | Result : O . K |

2. UHF Noise Figure ;

2-1) LGIT Tuner (TADC-H202F) ;

Channels (UHF)	Reading (dB)	Matching Loss(dB)	Noise Figure (dB)	Limit (dB)
14	9.9	1.75	7.65	14.0
19	10.2		7.95	
28	10.8		8.55	
36	9.9		7.65	
44	9.7		7.45	
53	9.6		7.35	
61	9.6		7.35	
69	10.0		7.55	
4.0dB subtracted for power splitter, < 0.3 dB added for IF amp contribution				

2-2) LGIT Tuner (TADC-H302F) ;

Channels (UHF)	Reading (dB)	Matching Loss(dB)	Noise Figure (dB)	Limit (dB)
14	9.6	1.75	7.35	14.0
19	9.9		7.65	
28	10.0		7.75	
36	9.9		7.65	
44	10.0		7.75	
53	10.0		7.75	
61	9.9		7.65	
69	9.8		7.55	
4.0dB subtracted for power splitter, < 0.3 dB added for IF amp contribution				

EC970M Test Report

Test Report No. : 4521-011029D

2-3) Sanyo Tuner (115-V-D025AN) ;

Channels (UHF)	Reading (dB)	Matching Loss(dB)	Noise Figure (dB)	Limit (dB)
14	10.4	1.75	8.15	14.0
19	10.5		8.25	
28	10.6		8.35	
36	10.4		8.15	
44	10.4		8.15	
53	10.3		8.05	
61	10.2		7.95	
69	10.2		7.95	
4.0dB subtracted for power splitter, < 0.3 dB added for IF amp contribution				

2-4) Sanyo Tuner (115-V-D025AH) ;

Channels (UHF)	Reading (dB)	Matching Loss(dB)	Noise Figure (dB)	Limit (dB)
14	9.6	1.75	7.35	14.0
19	9.6		7.35	
28	9.6		7.35	
36	9.6		7.35	
44	9.9		7.65	
53	10.1		7.85	
61	9.9		7.65	
69	10.4		8.15	
4.0dB subtracted for power splitter, < 0.3 dB added for IF amp contribution				

EC970M Test Report

Test Report No. : 4521-011029D

3. Radiated Emission Measurements

3-1) LGIT Tuner(TADC-H202F) ;

Frequency to which tuned		Frequency of the emission (MHz)	Result at 3 m (dBuV/m)	Limit at 3 m (dBuV/m)
Channel	(MHz)			
2	55.25	101	<20	43.5
3	61.25	107	<20	43.5
4	67.25	113	<20	43.5
5	77.25	123	<20	43.5
6	83.25	129	<20	43.5
7	175.25	221	<30	46.0
8	181.25	227	<30	46.0
9	187.25	233	<30	46.0
10	193.25	239	<30	46.0
11	199.25	245	<30	46.0
12	205.25	251	<30	46.0
13	211.25	257	<30	46.0
14	471.25	517	23.0	46.0
		1034	<40	54.0
19	501.25	547	27.3	46.0
		1094	<40	54.0
28	555.25	601	33.4	46.0
		1202	<40	54.0
36	603.25	649	29.4	46.0
		1298	<40	54.0
44	651.25	697	31.7	46.0
		1394	<40	54.0
53	705.25	751	29.3	46.0
		1502	<40	54.0
61	753.25	799	30.8	46.0
		1598	<40	54.0
69	801.25	847	33.6	46.0
		1694	<40	54.0

EC970M Test Report

Test Report No. : 4521-011029D

3-2) LGIT Tuner(TADC-H302F) ;

Frequency to which tuned		Frequency of the emission (MHz)	Result at 3 m (dBuV/m)	Limit at 3 m (dBuV/m)
Channel	(MHz)			
2	55.25	101	<20	43.5
3	61.25	107	<20	43.5
4	67.25	113	<20	43.5
5	77.25	123	<20	43.5
6	83.25	129	<20	43.5
7	175.25	221	<30	46.0
8	181.25	227	<30	46.0
9	187.25	233	<30	46.0
10	193.25	239	<30	46.0
11	199.25	245	<30	46.0
12	205.25	251	<30	46.0
13	211.25	257	<30	46.0
14	471.25	517	29.6	46.0
		1034	<40	54.0
19	501.25	547	33.0	46.0
		1094	<40	54.0
28	555.25	601	34.5	46.0
		1202	<40	54.0
36	603.25	649	33.8	46.0
		1298	<40	54.0
44	651.25	697	34.1	46.0
		1394	<40	54.0
53	705.25	751	34.8	46.0
		1502	<40	54.0
61	753.25	799	33.4	46.0
		1598	<40	54.0
69	801.25	847	32.5	46.0
		1694	<40	54.0

EC970M Test Report

Test Report No. : 4521-011029D

3-3) Sanyo Tuner(115-V-D025AN) ;

Frequency to which tuned		Frequency of the emission (MHz)	Result at 3 m (dBuV/m)	Limit at 3 m (dBuV/m)
Channel	(MHz)			
2	55.25	101	<20	43.5
3	61.25	107	<20	43.5
4	67.25	113	<20	43.5
5	77.25	123	<20	43.5
6	83.25	129	<20	43.5
7	175.25	221	<30	46.0
8	181.25	227	<30	46.0
9	187.25	233	<30	46.0
10	193.25	239	<30	46.0
11	199.25	245	<30	46.0
12	205.25	251	<30	46.0
13	211.25	257	<30	46.0
14	471.25	517	35.0	46.0
		1034	<40	54.0
19	501.25	547	34.9	46.0
		1094	<40	54.0
28	555.25	601	40.9	46.0
		1202	<40	54.0
36	603.25	649	39.3	46.0
		1298	<40	54.0
44	651.25	697	36.6	46.0
		1394	<40	54.0
53	705.25	751	32.8	46.0
		1502	<40	54.0
61	753.25	799	35.8	46.0
		1598	<40	54.0
69	801.25	847	35.5	46.0
		1694	<40	54.0

EC970M Test Report

Test Report No. : 4521-011029D

3-4) Sanyo Tuner(115-V-D025AH) ;

Frequency to which tuned		Frequency of the emission (MHz)	Result at 3 m (dBuV/m)	Limit at 3 m (dBuV/m)
Channel	(MHz)			
2	55.25	101	<20	43.5
3	61.25	107	<20	43.5
4	67.25	113	<20	43.5
5	77.25	123	<20	43.5
6	83.25	129	<20	43.5
7	175.25	221	<30	46.0
8	181.25	227	<30	46.0
9	187.25	233	<30	46.0
10	193.25	239	<30	46.0
11	199.25	245	<30	46.0
12	205.25	251	<30	46.0
13	211.25	257	<30	46.0
14	471.25	517	27.5	46.0
		1034	<40	54.0
19	501.25	547	27.9	46.0
		1094	<40	54.0
28	555.25	601	27.1	46.0
		1202	<40	54.0
36	603.25	649	28.5	46.0
		1298	<40	54.0
44	651.25	697	33.8	46.0
		1394	<40	54.0
53	705.25	751	35.1	46.0
		1502	<40	54.0
61	753.25	799	33.1	46.0
		1598	<40	54.0
69	801.25	847	38.3	46.0
		1694	<40	54.0

EC970M Test Report

Test Report No. : 4521-011029D

4. Antenna Power Conduction Measurements

4-1) LGIT Tuner(TADC-H202F) ;

Frequency to which tuned		Frequency of the emission (MHz)	Result (dBuV)	Limit (dBuV)
Channel	(MHz)			
2	55.25	101	<35.0	51.8
3	61.25	107	<35.0	
4	67.25	113	<35.0	
5	77.25	123	<35.0	
6	83.25	129	<35.0	
7	175.25	221	<35.0	
8	181.25	227	<35.0	
9	187.25	233	<35.0	
10	193.25	239	<35.0	
11	199.25	245	<35.0	
12	205.25	251	<35.0	
13	211.25	257	<35.0	
14	471.25	517 1034	30.2 32.0	
19	501.25	547 1094	33.8 34.0	
28	555.25	601 1202	33.3 34.3	
36	603.25	649 1298	35.0 34.0	
44	651.25	697 1394	36.3 35.0	
53	705.25	751 1502	36.8 36.0	
61	753.25	799 1598	36.9 38.0	
69	801.25	847 1694	36.0 42.0	

EC970M Test Report

Test Report No. : 4521-011029D

4-2) LGIT Tuner(TADC-H302F) ;

Frequency to which tuned		Frequency of the emission (MHz)	Result (dBuV)	Limit (dBuV)
Channel	(MHz)			
2	55.25	101	<35.0	51.8
3	61.25	107	<35.0	
4	67.25	113	<35.0	
5	77.25	123	<35.0	
6	83.25	129	<35.0	
7	175.25	221	<35.0	
8	181.25	227	<35.0	
9	187.25	233	<35.0	
10	193.25	239	<35.0	
11	199.25	245	<35.0	
12	205.25	251	<35.0	
13	211.25	257	<35.0	
14	471.25	517 1034	33.3 33.7	
19	501.25	547 1094	33.4 34.2	
28	555.25	601 1202	38.3 34.2	
36	603.25	649 1298	34.7 34.3	
44	651.25	697 1394	34.3 33.9	
53	705.25	751 1502	34.6 37.7	
61	753.25	799 1598	34.3 37.0	
69	801.25	847 1694	33.8 38.7	

EC970M Test Report

Test Report No. : 4521-011029D

4-3) Sanyo Tuner(115-V-D025AN) ;

Frequency to which tuned		Frequency of the emission (MHz)	Result (dBuV)	Limit (dBuV)
Channel	(MHz)			
2	55.25	101	<35.0	51.8
3	61.25	107	<35.0	
4	67.25	113	<35.0	
5	77.25	123	<35.0	
6	83.25	129	<35.0	
7	175.25	221	<35.0	
8	181.25	227	<35.0	
9	187.25	233	<35.0	
10	193.25	239	<35.0	
11	199.25	245	<35.0	
12	205.25	251	<35.0	
13	211.25	257	<35.0	
14	471.25	517 1034	30.0 30.0	
19	501.25	547 1094	30.0 32.0	
28	555.25	601 1202	34.0 33.2	
36	603.25	649 1298	33.4 34.0	
44	651.25	697 1394	36.1 33.0	
53	705.25	751 1502	36.2 35.0	
61	753.25	799 1598	36.7 40.0	
69	801.25	847 1694	37.3 45.0	

EC970M Test Report

Test Report No. : 4521-011029D

4-4) Sanyo Tuner(115-V-D025AH) ;

Frequency to which tuned		Frequency of the emission (MHz)	Result (dBuV)	Limit (dBuV)
Channel	(MHz)			
2	55.25	101	<35.0	51.8
3	61.25	107	<35.0	
4	67.25	113	<35.0	
5	77.25	123	<35.0	
6	83.25	129	<35.0	
7	175.25	221	<35.0	
8	181.25	227	<35.0	
9	187.25	233	<35.0	
10	193.25	239	<35.0	
11	199.25	245	<35.0	
12	205.25	251	<35.0	
13	211.25	257	<35.0	
14	471.25	517 1034	34.1 33.6	
19	501.25	547 1094	33.5 34.0	
28	555.25	601 1202	34.0 32.5	
36	603.25	649 1298	33.8 34.9	
44	651.25	697 1394	33.0 34.3	
53	705.25	751 1502	34.0 35.8	
61	753.25	799 1598	35.2 36.1	
69	801.25	847 1694	33.3 36.8	