

LG Innotek Co., Ltd.

DOCUMENT NO : 제승 05(개A)EB-026
DATE : 2005.02.23
TO(CUSTOMER) : LG DAV
SUBJECT : 제품승인원 송부

We would like to request you to recognize above proposal.
Please send back 2 copy with your approval sign for us
after your examination and complete check,
Since we submit following information herewith.

CUST.MODEL NO : 6700NFNL08A

LGIT MODEL NO : TADS-H102F

1. RECORD OF REVISION
2. SPECIFICATION
3. CIRCUIT DIAGRAM
4. ASSEMBLY DRAWING
5. INSULATION MATERIAL PARTS LIST

YOUR VERY FAITHFULLY
TUNER DEVELOPMENT OF
HIGH FREQUENCY COMPONENTS
DIVISION

CUSTOM APPROVAL SECTION

A P P D	2005.02.23 Y.S RO
C H K D	2005.02.23 H.R Lee
D S G D	2005.02.23 H.D KIM

S P E C I F I C A T I O N

LG Innotek Co., Ltd.

A P P D.	C H K D.	D S G D.	MODEL NO	T A D S - H 1 0 2 F
2005.02.23 Y. S. Ro	2005.02.23 H.R. Lee	2005.02.23 H.D KIM		B C 4 0 5 7 8

S P E C I F I C A T I O N

I n d e x

Item no		Item						Page
1		Common						3p
1- 1		Application						3p
1- 2		Structure						3p
1- 3		Circuit						3p
2		General specifications						3p
2- 1		Applicable broadcasting system						3p
2- 2		Receiving system						3p
2- 3		Intermediate frequency						3p
2- 4		Receiving channel						3p
2- 5		Output channel of modulator						3p - 4p
2- 6		Input / output condition						4p
2- 7		Operating temperature range						4p
2- 8		Storage temperature range						4p
2- 9		Guarantee voltage for operation						4p
2-10		Maximum ratings						5p
2-11		Current consumption						5p
2-12		PLL data format						5p - 7p
2-13		Test condition						7p
2-14		Measuring instruments						8p
					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
								DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD				BC 40578(1/23)

3	Electrical characteristics	9p
3- 1	RF-modulator section	9p - 12p
3- 2	ANT SW section	13p - 14p
3- 3	Tuner section	15p - 17p
3- 4	IF section	17p - 19p
4	Environmental tests	20p
4 -1	Heat load test	20p
4- 2	Humidity load test	20p
4- 3	Cold test	20p
4- 4	Operating life test	20p
4- 5	High voltage test	20p
4- 6	Vibration test	20p
4- 7	Impact test	20p
5	Mechanical characteristics	21p
5- 1	Outline view assembly appearance	21p
5- 2	Appearance structure	22p
6	Others	22p
6- 1	Ant jack load test	22p
7	The Certificate of LAED-Free Part	22p
7- 1	Information	22p
7- 2	LEAD Free Schedule	22p
7- 3	LEAD Free Marking	22p
8	Test circuit	23p

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
SYMB	NO	APPD	CHKD	DSGD				DOCUMENT NO:
								BC 40578(2/23)

1. Common

1- 1. Application

This specification applies to TMI type (RF Front-End system) for TV, VCR, DVD

1- 2. Structure

Refer to the attached assembly drawing.

1- 3. Circuit

Refer to the attached circuit diagram.

2. General specifications.

2- 1. Applicable broadcasting system

NTSC M / US CH

2- 2. Receiving system

Upper Heterodyne

2- 3. Intermediate frequency

Picture intermediate frequency : 45.75 MHz

Sound intermediate frequency : 41.25 MHz

2- 4. Receiving channel

VHF LOW : 2 ~ B Ch

VHF HIGH : C ~ W+11 Ch

UHF : W+12 ~ 69 Ch

2- 5. Output channel of modulator

US 3 / 4 Ch

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
SYMB	NO	APPD	CHKD	DSGD				DOCUMENT NO:
								BC 40578(3/23)

	Terminal NO. 2
3 Ch	OPEN
4 Ch	GND

2- 6. Input / Output condition

ANT nominal impedance

ANT IN : 75Ω unbalance

ANT OUT : 75Ω unbalance

Video in impedance : 0.7kΩ ~ 1.3kΩ (typ. 1kΩ)

Audio in impedance : 10kΩ min.

Control impedance : 1kΩ min. (typ. 10kΩ)

Video out load : 10kΩ

Audio out load : 100kΩ

2- 7. Operating temperature range

Temperature: -10℃ ~ +60℃

(Normally Air Temperature)

Humidity : less than 65%RH

2- 8. Storage temperature range

Temperature : -10℃ ~ +70℃

(Normally Air Temperature)

Humidity : less than 70%RH

2-9. Guarantee voltage for operation

Terminal		Supply voltage			
		min.	typ.	max.	unit
+B		4.8	5.0	5.2	Vdc
TU		29.0	32.0	34.0	
CONTROL	VCR Mode	4.8	5.0	5.2	
	TV Mode	-	-	0.5	

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
								DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD				BC 40578(4/23)

2-10. Maximum ratings

Terminal	Supply voltage	Unit
+B	6.0	Vdc
TU	35.0	
CONTROL(MD:ON)	6.0	

(Note) Within “+B” supply voltage at SCL,SDA,terminal.

2-11. Current consumption

Terminal	Current consumption			
	min.	typ.	max.	unit
+B	–	170	200	mA
TU	–	1.5	5.0	
CONTROL(MD:ON)	–	47.0	173	μA

2-12. PLL characteristics of tuner section

2-12-1. I2C Write data format

	MSB							LSB	
Address byte	1	1	0	0	0	MA1	MA0	R/W=0	A
Divider byte 1	0	N14	N13	N12	N11	N10	N9	N8	A
Divider byte 2	N7	N6	N5	N4	N3	N2	N1	N0	A
Control byte	1	CP	T2	T1	T0	RSA	RSB	OS	A
BAND SW byte	X	X	X	X	BS4	BS3	BS2	BS1	A

MA1,MA2 Programmable address bits(see address selection table)

N14...N0 Programmable divider bits

$$N = N14 \times 2^{14} + N13 \times 2^{13} + \dots + N1 \times 2^1 + N0$$

CP Charge pump current set bit

60uA(CP=0) 280uA(CP=1)

T2,T1,T0 Test bits

Normal operation : T2=0,T1=1,T0=1

RSA,RSB Reference divider select bits(see ratio select bits table)

OS Tuning Amp. control bit

Tuning Voltage ON(OS=0)

Tuning Voltage OFF , High impedance(OS=1)

BS4...BS1 NPN band switch buffers control bits

BSn=0:OFF BSn=1:ON

X Don't care

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
SYMB	NO	APPD	CHKD	DSGD				DOCUMENT NO:
								BC 40578(5/23)

- Address Selection(I2C bus)

Voltage applied on AS input	MA1	MA0
0V to 0.1X+BC	0	0
Open or 0.2VX+B to 0.3X+B	0	1
0.4X+B to 0.6X+B	1	0
0.9X+B to +B	1	1

- Ratio select Bits

RSA	RSB	Reference divider
X	0	640
0	1	1024
1	1	512

2-12-2. I2C Read Data Format

	MSB							LSB	
Address byte(ADB)	1	1	0	0	0	MA1	MA0	R/W=1	A
Status byte(SB)	POR	FL	1	1	1	A2	A1	A0	A

A : Acknowledge

MA1,MA0 Programmable address bits(see address selection table)

POR Power On Reset Flag(Default=1)

POR set : Power ON

POR reset :End-of-Data transmission procedure

FL In-lock Flag

PLL lock(FL=1),PLL unlock(FL=0)


A2...A0 ADC digital data

2-12-3. Input Signal Level (SCL, SDA)

INPUT Signal level	MIN	MAX	Unit
High level	3.0	5.5	V
Low level	-	1.5	

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
								DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD				BC 40578(6/23)

2-12-4 I²C BUS Time

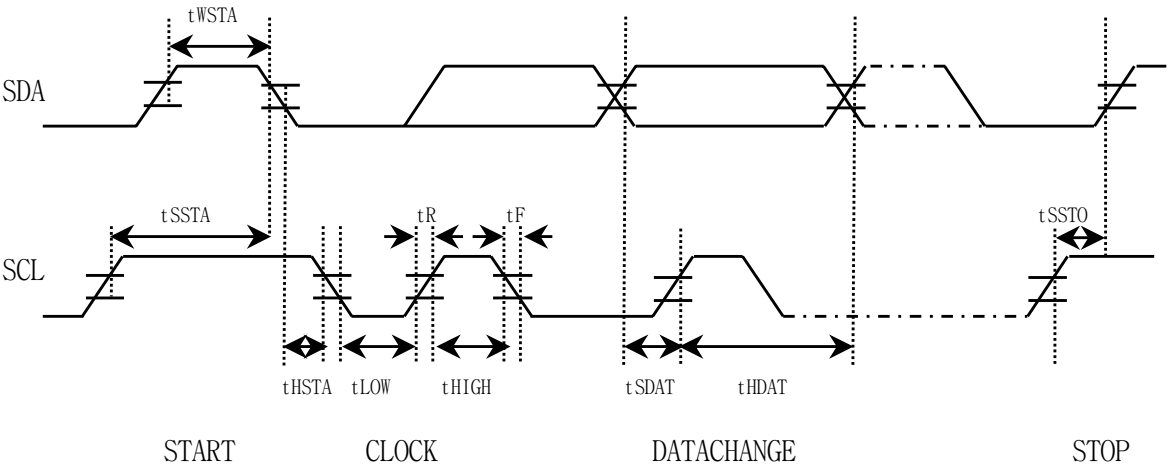

		MIN	TYP	MAX	단 위
fSCL	SCL clock frequency	0		400	kHz
tWSTA	Start waiting time	1300			nsec
tHSTA	Start hold time	600			"
tLOW	Low clock pulse width	1300			"
tHIGH	High clock pulse width	600			"
tSSTA	Start set-up time	600			"
tHDAT	Data hold time	1300			"
tSDAT	Data set-up time	600			"
tR	Rise time			300	"
tF	Fall time			300	"
tSSTO	Stop set-up time	600			"

2-13. Test condition

Terminal	Supply voltage	Unit	Remarks
+B	5 ± 0.1	Vdc	Ripple:10mVp-p max.
TU	32 ± 2	Vdc	
CONTROL	5 ± 0.1	Vdc	
Ambient temperature	25 ± 5	℃	
Relative humidity	65 ± 10	%RH	

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
								DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD				BC 40578(7/23)

2-14. Measuring instruments

2-14-1. RF-modulator section

Audio analyzer	: 8903B	HP
Television demodulator	: 5126A	NIHON TSUSHINKI
Spectrum analyzer	: 8568B	HP
Network analyzer	: 8753C	HP
TV pattern generator	: TSG120	TEKTRONIX
	3900N	NIHON TSUSHINKI
Video Measurement	: VM700A	TEKTRONIX

2-14-2. IF section

TV pattern generator	: TG-7/1	SHIBASOKU
	TG2000	TEKTRONIX
IF modulator	: RM54A	SHIBASOKU
	146F	EIDEN
RF converter	: RC51B	SHIBASOKU
	458C-X	EIDEN
Video Measurement	: VM700A	TEKTRONIX
Audio Analyzer	: 8903B	HP
	AM51A	SHIBASOKU

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
								DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD				BC 40578(8/23)

3. Electrical characteristics

The unit stated in $\text{dB}\mu\text{V}$ is defined the value at 75Ω terminal in this specification. ($0 \text{ dBm} = 109 \text{ dB}\mu\text{V}$)

3- 1. RF-modulator section

Item	Specification				Note
	min.	typ.	max.	unit	
3-1- 1. Video modulation	74	80	86	%	Input signal : 1.0Vp-p white Measure at the output of the standard demodulator.
3-1- 2. Video limit modulation	87	93	99	%	Input signal : 1.5Vp-p stair-steps or ramp. Measure at the output of the standard demodulator.
3-1- 3. V/S ratio	10:3.8	10:4.0	10:4.1	-	Input signal :1.0Vp-p white V : S = 10 : 4 Measure at the output of the standard demodulator.
3-1- 4. Video amplitude frequency characteristics	-3.0	-0.5	+3.0	dB	Measure range : 0.1MHz ~ 4.2MHz Based on 1MHz
3-1- 5. Differential Gain (DG)	-	2	7	%	Input signal : FCC Composite Chrominance : 20 IRE Luminance : 0 ~ 90 %
3-1- 6. Differential Phase (DP)	-	2	7	deg	Input signal : FCC Composite Chrominance : 20 IRE Luminance : 0 ~ 90 %
3-1- 7. Video S/N	45	47	-	dB	Measurement conditions. Measure at the out of the Standard demodulator. (5126A - NIHON TSUSHINKI) and Video Measurement (VM700A - TEKTRONIX) HPF : 100kHz, LPF : 4.2MHz SC TRAP : ON, WEIGHT : ON Input signals : Video : 100% white signal Audio : none Video band : 0.1MHz ~ 4.2MHz

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE: SPECIFICATION
								DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD				BC 40578(9/23)

Item	Specification				Note
	min.	typ.	max.	unit	
3-1- 8. Chroma beat (920kHz P.C.S. beat)	55	65	-	dB	Input signal : 0.4Vp-p 3.58MHz sine wave Use spectrum analyzer to measure the level of Fp + 0.92MHz The value is relative to the level of Fp without video modulation.
3-1- 9. Audio modulation (deviation)	32 (64)	40 (80)	48 (96)	kHz dev (%)	Input signal : 1.04Vp-p 1kHz sine wave (100 % modulation = ± 25kHz dev.)
3-1-10. Audio maximum modulation	150 (300)	220 (440)	-	kHz dev (%)	Input signal : 1kHz sine wave The input should be adjusted to the level just before the saturation of the modulation.
3-1-11. Audio amplitude frequency characteristics	-3	+0.2 -0.6	+3	dB	Input signal : 1.04Vp-p Measure range : 100Hz ~ 10kHz Based on 1kHz
3-1-12. Audio distortion	-	0.5	2.0	%	Input signals : Audio : 1.04Vp-p, 1kHz sine wave Video : 1Vp-p color bar De-emphasis is on.(75 μ sec)
3-1-13. Audio S/N	45	48	-	dB	Input signals : Audio : 1.04Vp-p, 1kHz sine wave Video : All black (sync. only) Use standard demodulator of inter-carrier system. De-emphasis is on. (75 μ sec)

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE: SPECIFICATION
								DOCUMENT NO: BC 40578(10/23)
SYMB	NO	APPD	CHKD	DSGD				

Item	Specification				Note
	min.	typ.	max.	unit	
3-1-14. Audio buzz	45	48	-	dB	Video input signal : 1Vp-p color bar Other conditions : same as item 3-1-13.
3-1-15. Video carrier output level	63	66.0	69	dB μ V	Video input signal : 1Vp-p 100% white signal.
3-1-16. P/S ratio (sound carrier level)	-12.5	-14.5	-17	dB	Audio input signal : none Other conditions : same as item 3-1-15.
3-1-17. Video carrier frequency	-150	-	+150	kHz	Video input signal : none
3-1-18. Sound carrier frequency	4493	4500	4507	kHz	Audio input signal : none The measurements are taken after 1 min. from the power on.
3-1-19. Out-band spurious	-	-	39.5	dB μ V	Video input signal : 1Vp-p color bar Measure range : 0 ~ 1GHz Except the range from Fp-4.6MHz to Fp+7.4MHz.
3-1-20. In-band spurious	60	-	-	dB	Input signals : Video : none Audio : none Measure range : Fp~Fp+4.5MHz.
3-1-21. Terminal leakage	-	-	54	dB μ V	Measure range : 0 ~ 1GHz except GND.

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE: SPECIFICATION
								DOCUMENT NO: BC 40578(11/23)
SYMB	NO	APPD	CHKD	DSGD				

3-1-22. Stability

3-1-22-1. Video carrier frequency rise up time.

The time to approach the set value $\pm 50\text{kHz}$: within 3 seconds

3-1-22-2. Audio carrier frequency rise up time.

The time to approach the set value $\pm 5\text{kHz}$: within 10 seconds

3-1-22-3. Video carrier frequency shift by supply voltage drift.

Within $\pm 10\text{kHz}$ by $\pm 0.3\text{V}$ shift of the supply voltage.

3-1-22-4. Audio carrier frequency shift by supply voltage drift.

Within $\pm 2\text{kHz}$ by $\pm 0.3\text{V}$ shift of the supply voltage.

3-1-23. Thermal Stability

3-1-23-1. Thermal stability of video modulation.

Within $\pm 8\%$ based on the temperature of 25°C .

※ Unless otherwise specified, thermal stability tests shall be performed under the following conditions.

Measurement temperature range : $-10^\circ\text{C} \sim 60^\circ\text{C}$

Humidity range : 45%RH ~85%RH

Test measurement order and time :

$25^\circ\text{C} \rightarrow -10^\circ\text{C} (2\text{H}) \rightarrow 10^\circ\text{C} (1\text{H}) \rightarrow 25^\circ\text{C} (1\text{H}) \rightarrow 45^\circ\text{C} (1\text{H}) \rightarrow 60^\circ\text{C} (2\text{H})$

3-1-23-2. Thermal stability of video carrier frequency.

Within $\pm 150\text{kHz}$ based on the temperature of 25°C .

3-1-23-3. Thermal stability of video carrier output level.

Within $\pm 4\text{dB}$ based on the temperature of 25°C .

3-1-23-4. Thermal stability of audio modulation.

Within $\pm 16\%$ on the temperature of 25°C .

3-1-23-5. Thermal stability of audio carrier frequency.

Within $\pm 20\text{kHz}$ on the temperature of 25°C .

3-1-23-6. Thermal stability of P/S ratio

Within $\pm 3.0\text{ dB}$ based on the temperature of 25°C , but the P/S ratio itself should not be less than 13 dB.

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
SYMB	NO	APPD	CHKD	DSGD				DOCUMENT NO:
								BC 40578 (12/23)

3- 2. ANT SW section

Unless otherwise specified, measurement range shall be 54MHz ~ 810MHz,
and unused RF terminals shall be terminated by rated impedance
Terminator.


Item					Specification				Note			
					min.	typ.	max.	unit				
3-2-1. Insertion loss					-	5	6	dB	ANT IN to ANT OUT mode : TV (at MD OFF)			
3-2-2. VSWR I					-	5.5	7		ANT IN Terminal mode : TV (at MD OFF) 54MHz ~ 810MHz			
3-2-3. VSWR II					-	2	4		ANT OUT terminal mode : TV (at MD OFF) 54MHz ~ 810MHz			
					-	2	3		mode : VCR (at MD ON) 61MHz ~ 72MHz			
3-2-4. Isolation					60	65	-	dB	Isolation from ANT OUT to ANT IN mode : VCR (at MD ON) 61MHz ~ 72MHz			
3-2-5. ANT IN leakage - MD - TU OSC					-	-	9.5	dB μ V	mode : VCR (at MD ON) RF-modulator section : none input signal			
					-	-	52	dB μ V	Tuner OSC leakage.			
3-2-6. 2nd Harmonics inter modulation					55	64	-	dB	f1/(f1+f2) ratio mode : TV (at MD OFF)			
									item	freq(MHz)	level(dB) μ V	
									f1	91.25	100	
									f2	103.25	100	
									Both f1 and f2 are not modulated.			
					A P P D.		C H K D.		D S G D.		MODEL NO: TADS-H102F	
											TITLE: SPECIFICATION	
				DOCUMENT NO: BC 40578(13/23)								
SYMB	NO	APPD	CHKD	DSGD								

Item					Specification				Note		
					min.	typ.	max.	unit			
3-2-7. Cross modulation					55	62	-	dB	Then take the smallest ratio from the sideband to f2 as cross modulation value.		
									item	freq(MHz)	level(dB) μV
									f1	91.25	105
									f2	193.25	80
									f1 is 40% AM modulated by 15.75KHz sine wave. f2 is not modulated.		
					A P P D.		C H K D.		D S G D.		MODEL NO: TADS-H102F
											TITLE:
											SPECIFICATION
											DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD							BC 40578(14/23)

3- 3. Tuner section

When the test characteristics, test point is IF output terminal.

Item					Specification				Note				
					min.	typ.	max.	unit					
3-3-1. IF Rejection									75Ω terminated				
					UHF		60	80			-	dB	ANT INPUT level 65dB μ V
					VHF	HIGH	60	80			-		
						LOW	45	60			-		
					UHF		40	60			-	dB	ANT INPUT level 95dB μ V
					VHF	HIGH	40	65			-		
						LOW	40	60			-		
3-3-2. Image Rejection									75Ω terminated				
					UHF		45	60			-	dB	ANT INPUT level 65dB μ V
					VHF	CATV	45	70			-		
						13 ~ 7	60	75			-		
						6 ~ 2	60	75			-		
					UHF		40	55			-	dB	ANT INPUT level 95dB μ V
					VHF	CATV	40	60			-		
						13 ~ 7	40	60			-		
						6 ~ 2	40	60			-		
					3-3-3. 920kHz Color Beat Rejection								
UHF	50	80	-	dB									
VHF	50	80	-										
					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F					
								TITLE: SPECIFICATION					
								DOCUMENT NO: BC 40578(15/23)					
SYMB	NO	APPD	CHKD	DSGD									

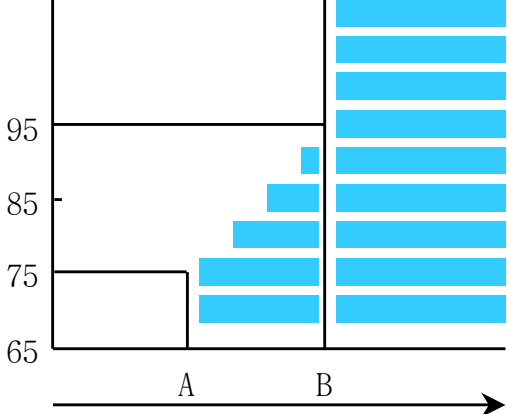Item					Specification				Note		
					min.	typ.	max.	unit			
3-3-4. CH 6 beat					45	60	-	dB	ANT INPUT level desire : 60dB μ V (75 Ω terminated) undesire : 54dB μ V (75 Ω terminated)		
3-3-5. CH A-5 beat					45	60	-	dB	ANT INPUT level desire : 60dB μ V (75 Ω terminated)		
3-3-6. CB rejection.					0.535 MHz ~ 30 MHz -7dBm min				desire : 55.25MHz ~ 83.25MHz (Ch.2 ~ Ch.6) -66dBm		
3-3-7. 1% Cross modulation					(dB μV) ↑ desire input signal  A B Un-desire signal (dBμV)						
					CH			A(dB μ V)		B(dB μ V)	
					UHF			64		84	
					VHF	W+11 ~ J		64		84	
						13 ~ 2		64		84	
					Cross modulation value should be within hantched area. ※ Tuner should be measured for 1% cross modulation with ± 2 channel undesired signal.						
3-3-8. +B shift					CH	min.	typ.	max.	unit.	note	
					UHF	-	-	250	kHz	+ B $\pm$ 10% PLL "ON"	
					VHF	-	-	250			
					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F			
								TITLE: SPECIFICATION			
								DOCUMENT NO: BC 40578(16/23)			
SYMB	NO	APPD	CHKD	DSGD							

3-3-9. Over range	CH	Vtu		min.	typ.	max.	unit.
	UHF	28.0 V		2.0	-	-	MHz
		0.5 V		2.0	-	-	
	VHF	28.0 V		2.0	-	-	
		0.5 V		2.0	-	-	
3-3-10. Noise Figure	CH	min.	typ.	max.	unit.		note
	UHF	-	9.0	14.0	dB		
	VHF HIGH	-	8.0	14.0			
	VHF LOW	-	8.0	14.0			
3-3-11. Power gain deviation	UHF	-	6	12	dB		
	VHF HIGH	-	6	12			
	VHF LOW	-	6	12			
3-3-12. Temperature shift	W+12 ~ 69	-	-	3000	kHz	25℃ ± 25℃	
	W+11 ~ J	-	-	3000			
	13 ~ 2	-	-	2000			

3-4. IF section

When the test electrical characteristics when there are no instruction.
fp input level is 70 dB μ V and p/s ratio is -7 dB.

Item		Specification				Note
		min.	typ.	max.	unit	
3-4-1. Video S/N	VHF	45	47	—	dB	A figure in parentheses is spec by LGIT measurement system
	UHF	45	47	—		50% white signal. 87.5% modulation. Sub-carrier trap : on HPF : 100 kHz, LPF : 4.2 MHz

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE: SPECIFICATION
								DOCUMENT NO: BC 40578(17/23)
SYMB	NO	APPD	CHKD	DSGD				

Item					Specification				Note		
					min.	typ.	max.	unit			
3-4-2. Noise limiting sensitivity						45	48	dB μ V	A figure in parentheses is spec by LGIT measurement System		
AIR											
CATV									50% white signal. 87.5% modulation. Sub-carrier trap : on HPF : 100kHz, LPF : 4.2MHz Video S/N=30dB		
UHF											
3-4-3. Video output level					0.8	1.0	1.2	Vp-p	Standard color bar:87.5% mod.		
3-4-4. SYNC ratio					25	28.6	30	%	Standard color bar:87.5% mod.		
Burst ratio					17	25	37				
3-4-5. Video amplitude frequency characteristics						-3	-1	+2	dB	Multi-burst : 87.5% mod. based on 0.5 MHz	
1.0 MHz											
2.0 MHz											
3.0 MHz											
3.58MHz											
3-4-6. Sin ² T pulse response					70	90	-	%	Sin ² T pulse & bar:87.5% mod.		
3-4-7. Differential Gain					-	5	10	%	5 stair-steps : 87.5% mod. Set modulation at the peak of 5'th chroma signal		
3-4-8. Differential Phase					-	5	10	deg	5 stair-steps : 87.5% mod. Set modulation at the peak of 5'th chroma signal		
3-4-9. Y/C delay time [US 13 CH.]					-100	0	+100	nsec	Sin ² T pulse & bar:87.5% mod.		
					A P P D.		C H K D.		D S G D.		MODEL NO: TADS-H102F
											TITLE:
											SPECIFICATION
											DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD							BC 40578(18/23)

Item	Specification				Note
	min.	typ.	max.	unit	
3-4-10. Audio output level	-7.7	-4.2	-1.2	dBm	1kHz / ± 25 kHz dev. standard color bar:87.5% mod.
3-4-11. Audio distortion	-	1	2	%	1kHz / ± 25 kHz dev. standard color bar:87.5% mod.
3-4-12. Audio frequency characteristics 50 Hz 10 kHz	-3 -3	0 0	+3 +3	dB	20Hz ~ 12kHz Based on 1kHz / ± 7.5 kHz dev. standard color bar:87.5% mod. PRE-EMP (75usec) : "ON"
3-4-13. Audio S/N	45	50	-	dB	1kHz / ± 25 kHz dev. standard color bar:87.5% mod. Use IHF filter.(A-Weight Filter)
3-4-14. SYNC buzz	-	50	100	mVp-p	standard color bar:87.5% mod. 400Hz/ ± 25 kHz dev. P/S=-17dB
3-4-15. AFT alignment accuracy [US 11 Ch.]	1.5	2.5	3.5	Vdc	Alignment center : 2.5V IF input level : 90dB μ V P/S=-7dB standard color bar:87.5% mod. (25°C $\pm$ 10°C & 0 ~ 45% Hum)
3-4-16. SIF Output Level	70	85		dB μ V	Video mod. : Color Bar 87.5% mod. RF INPUT Level = 70 dB μ V P/S = -6dB Measure peak of 4.5MHz carrier Level using Spectrum Analyzer and 1:10 Probe.

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE: SPECIFICATION
								DOCUMENT NO: BC 40578(19/23)
SYMB	NO	APPD	CHKD	DSGD				


4. ENVIRONMENTAL TESTS

(規格値는 初期値에 대하여 變化 範圍를 表示한다)


Item	Specification			Note
	TUNER	MODULATOR	IF	
4-1. Heat load test	OSC frequency (PLL : ON) UHF : $\pm 100\text{kHz}$ VHF : $\pm 100\text{kHz}$	Video modulation $\pm 8\%$ max Video carrier frequency $\pm 150\text{kHz}$ max Video carrier output level $\pm 4\text{dB}$ max Audio modulation $\pm 18\%$ max Audio carrier frequency $\pm 20\text{kHz}$ max P/S ratio $\pm 3\text{dB}$ max	Video S/N $\pm 6\text{dB}$ Video output $\pm 0.2\text{Vp-p}$ max Noise limiting sensitivity $\pm 6\text{dB}$ Audio output $\pm 30\%$ max	test condition 4-1-1
4-2. Humidity load test	same as in item 4-1			test condition 4-2-1
4-3. Cold test	same as in item 4-1			test condition 4-3-1
4-4. Operating life test	same as in item 4-1			test condition 4-4-1
4-5. High voltage test	same as in item 4-1			test condition 4-5-1
4-6. Vibration test	same as in item 4-1			test condition 4-6-1
4-7. Impact test	same as in item 4-1			test condition 4-7-1

					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE: SPECIFICATION
								DOCUMENT NO: BC 40578(20/23)
SYMB	NO	APPD	CHKD	DSGD				

Environmental test condition									
Item					Test condition				
4-1-1 Heat load teat					1. Initial value measure at standard test condition. 2. Leave samples in 70℃±2℃ for 96±5 hours, and in standard test condition for 30 minutes, then take measurements within 1 hour. 3. Supply voltage : standard ±10% 4. Supply voltage cycle : 1.5h on, 0.5h off				
4-2-1 Humidity load test					1. Leave samples in 40±5℃ for 24±2 hours, and in standard test condition for 30 minutes, then take measurements. 2. Leave samples in 40±5℃ 80 ~ 90% rh, for 96±5 hours, and in standard test condition for 30 minutes, then take measurements within 1 hour. 3. Supply voltage : standard +10% 4. Supply voltage cycle : 1.5h on, 0.5h off				
4-3-1 Cold test					1. Initial value measure at standard test condition. 2. Leave samples in -20℃±2℃ for 96±5 hours, and in standard test condition for 2 hours, then take measurements within 1 hour.				
4-4-1 Operating life test					1. Take measurements in standard test condition. 2. Leave samples for 1000 hours, then take measurements. 3. Supply voltage : standard				
4-5-1 High voltage test					Ant. IN : ±15kV, 10 times (150pF charged) series R=150Ω				
4-6-1 Vibration test					Vibration test fixture in used to vibrate the tuner with a total amplitude of 1mm and frequency ranging from 10 to 55hz, once per minute consecutively, for 40 minutes in each of three directions, x,y and z.				
4-7-1 Impact test					1. Impact acceleration : 50m/sec² 2. Impact time : 11msec 3. Impact time & direction : 3 times per each 6 sides				
5. Mechanical characteristics									
5-1 Outline view assembly appearance					No defects of wiring, soldering and assembling. No dirt, rust, corrosion or foreign material.				
					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F	
								TITLE: SPECIFICATION	
								DOCUMENT NO: BC 40578(21/23)	
SYMB	NO	APPD	CHKD	DSGD					

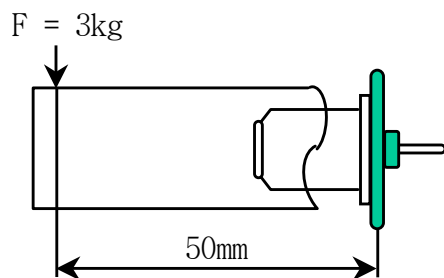Item					Test condition			
5-2 Appearance structure Dimension Mounting Weight					As assembly drawing. As assembly drawing. Approximately 60±5g			
6. Others					Crack, defection and shaking should not be existed with 15kg.cm banding moment after caulking.			
6-1. Ant jack Load Test								
								
7. The Certificate of LAED-Free Part					■ PHASE 1 : Component with LAED-free solder (Component with the heatproof nature of solder for LAED-free solder) ■ PHASE 2 : Applicable for Phase 1 & Component's electrode pin with LAED-free ■ PHASE 3 : Applicable for Phasel,2 & LAED-free Component (Overall part and raw material of Component with LEAD-free)			
7-1. Information								
7-2. LEAD Free Schedule								
7-3. LEAD Free Marking								
					■ PHASE 2 : October. 2004 - Start.			
					The method for the LEAD-free marking on the TUNER & minimum unit of packing box. ⇒ “ GREEN ” Color Label used.			
					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
								DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD				BC 40578(22/23)

7. TEST CIRCUIT






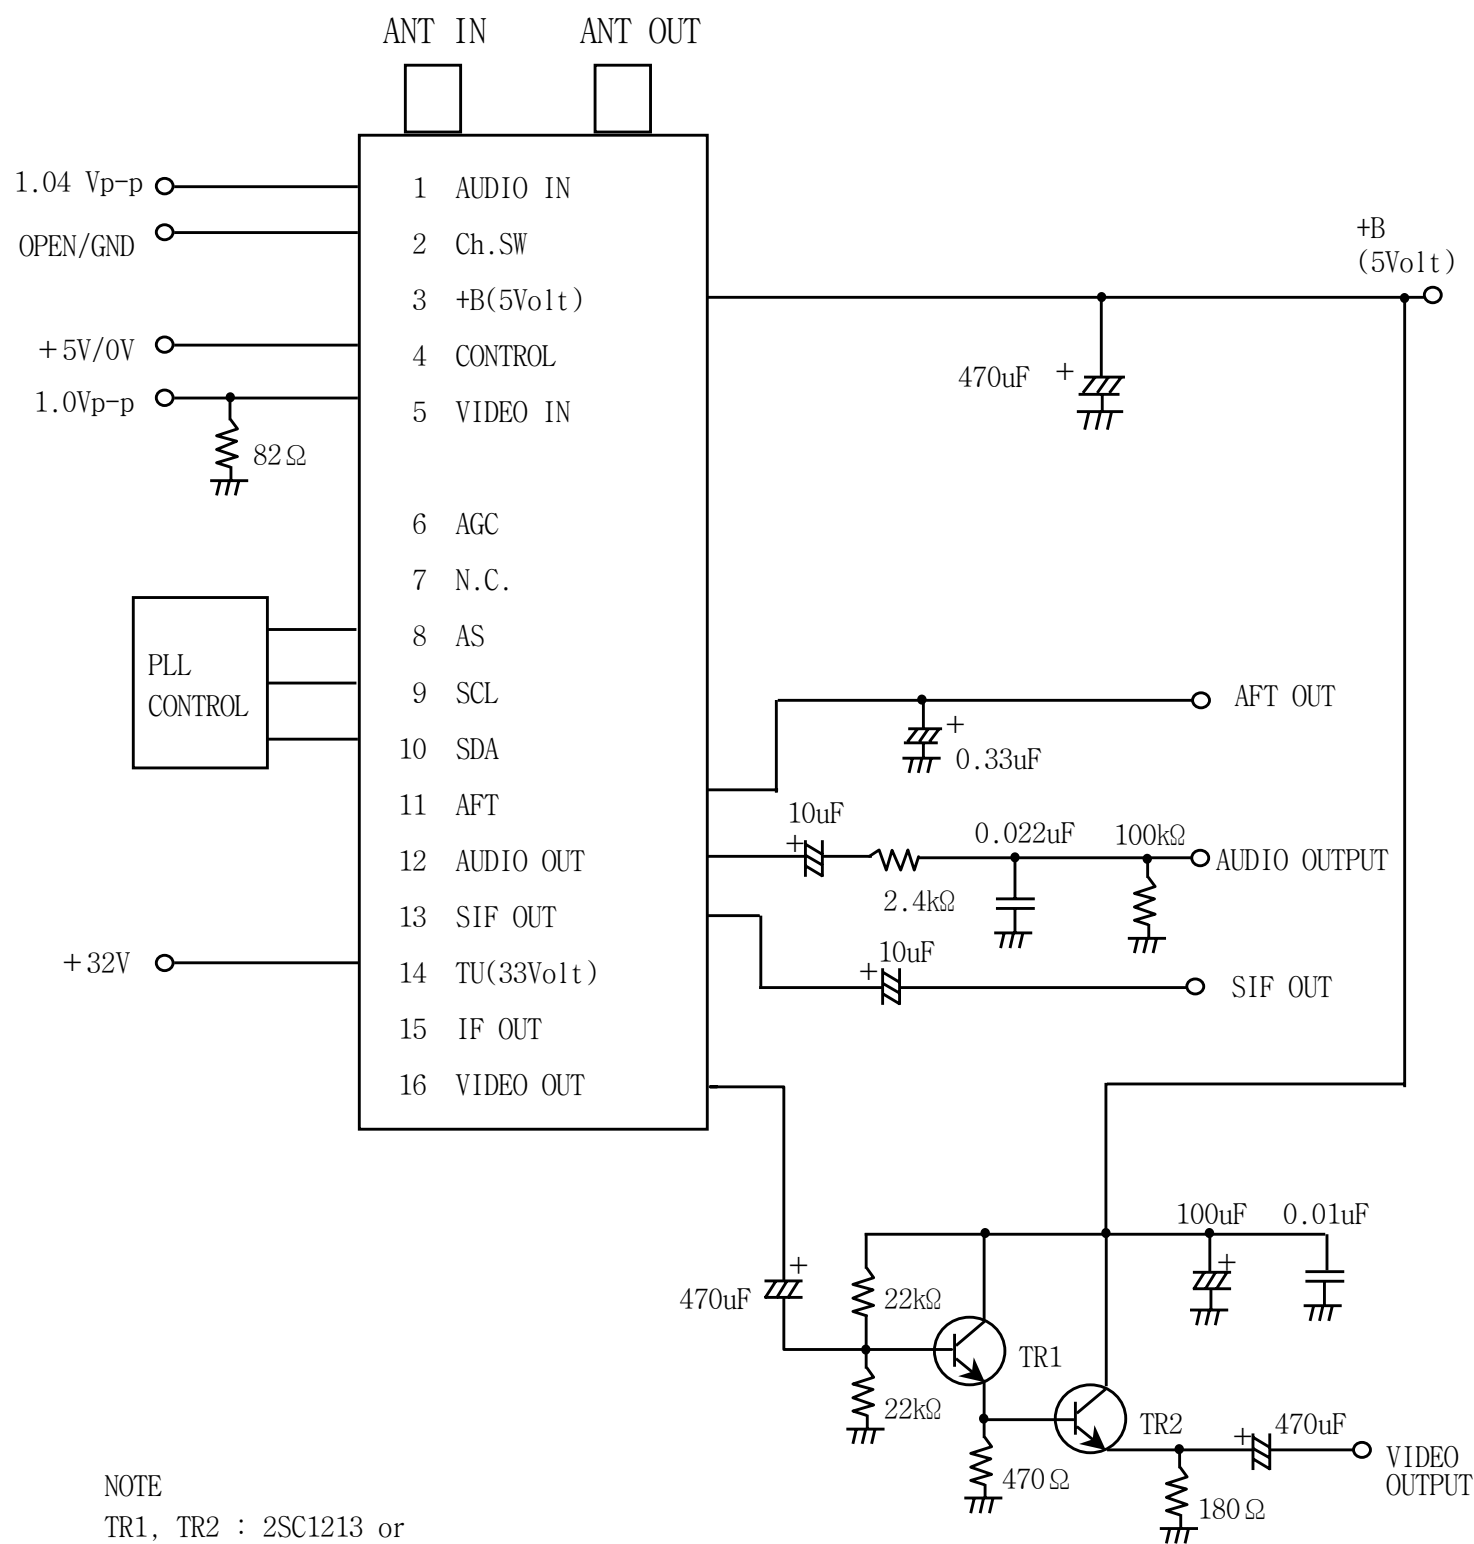


NOTE
TR1, TR2 : 2SC1213 or
EQUIVALENT


					A P P D.	C H K D.	D S G D.	MODEL NO: TADS-H102F
								TITLE:
								SPECIFICATION
								DOCUMENT NO:
SYMB	NO	APPD	CHKD	DSGD				BC 40578(23/23)

TERMINAL No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
TERMINAL NAME	A/I	CH/SW	+B	CTR	V/I	ACC	N.C	AS	SCL	SDA	AFT OUT	AUDIO OUT	SIF OUT	TU(33V)	N.C	VIDEO OUT


- NOTE
1. TOLERANCES ARE ±0.5 UNLESS OTHERWISE SPECIFIED.
 2. LOT NO. SHALL BE CONFORMED TO LGIT STANDARD SPECIFICATION.
 3. THE PITCH BETWEEN TERMINAL IS SPECIFIED AT THE ROOT.
 4. MATERIAL OF CHASSIS AND COVER IS TIN PLATE.
 5. AS LONG AS THE OUTER APPEARANCE DOESN'T AFFECT THE PERFORMANCE OF THE PRODUCT, IT CAN BE CHANGED WITHOUT PRIOR NOTICE.
 6. DIMENSION OF P.C.B FOR 3 IN 1, MD MOUNTING.(REFERENCE ONLY)
(VIEWED FROM COPPER PATTERN)

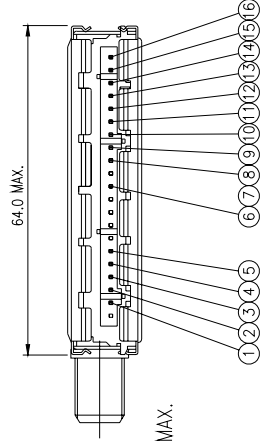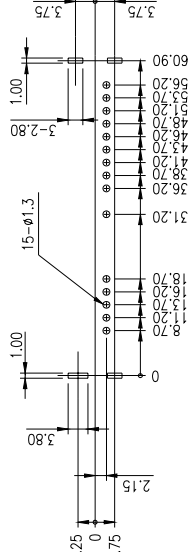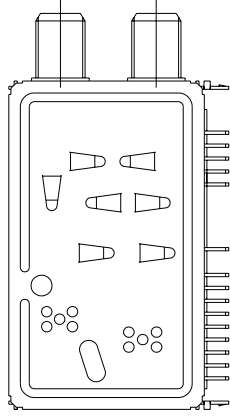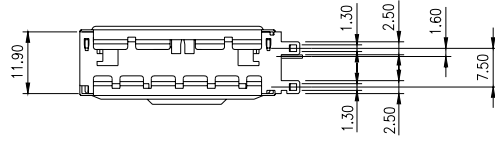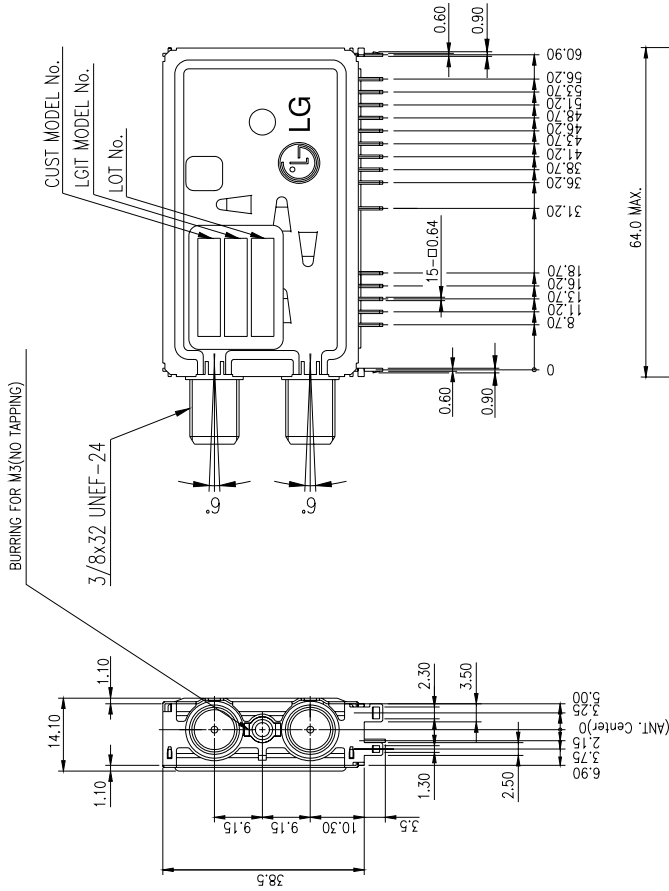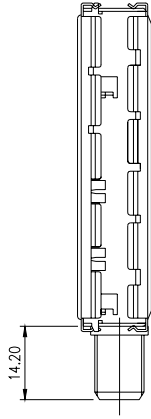

7. THE LENGTH OF SCREW FROM MOUNTING FACE IS 4mm MAX.



PART NO.	NAME	MATERIAL	SPEC.	UNIT	SCALE	FINISH
				mm	1 : 1	
				DSGD.	DRAW.	TADS-H102F
				'05.02.22		TITLE
				Lee		OUTLINE DRAWING
				Kap		DOCUMENT NO.
				Soul		TE30922
ZONE	SYMB	DATE OR NO.	APPD	CHKD	DSGD	

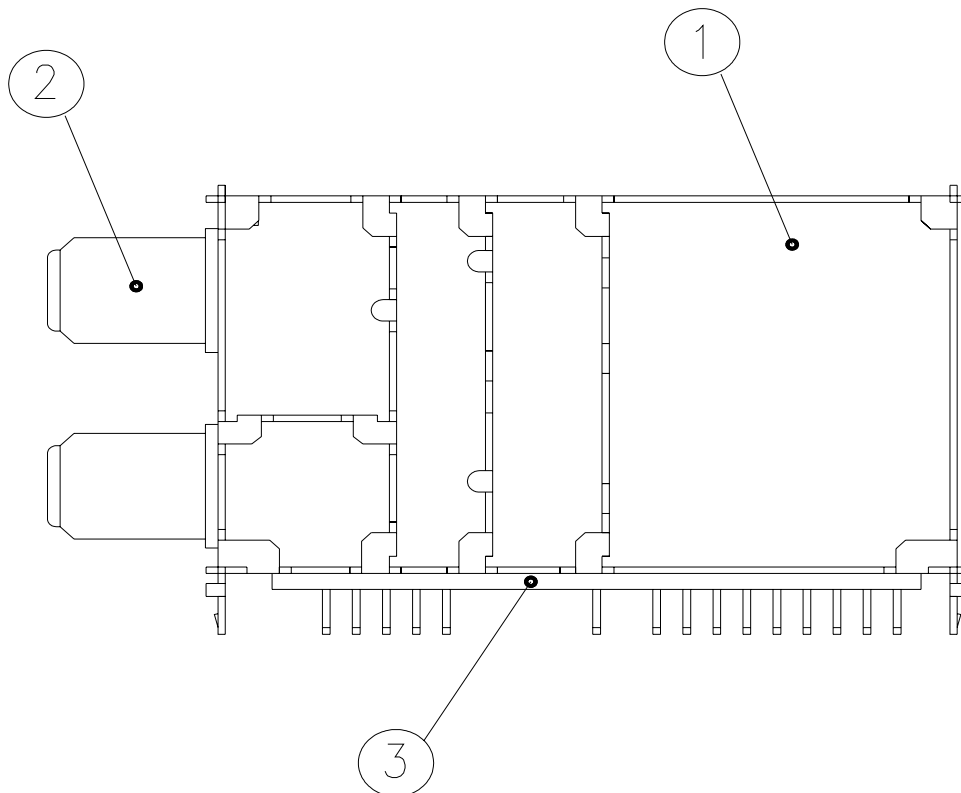

					 LG Innotek CO., Ltd.			
					APPD. '04.11.18 Kim Byoung Yong	CHKD. /	DSGD. '04.11.18 Lee Kap Soul	NOTE TADS-TYPE
								TITLE INSULATION MATERIAL LIST
								DOCUMENT NO. BN40053(1/11)
SYMB	NO	APPD	CHKD	DSGD				

INSULATING MATERIALS TABLE

(2 / 11)

[illegible]

(NOTE)

THE MATERIALS MARKED *IN CATEGORY NUMBER ARE CURRENT USE		
AND OTHERS CAN BE USED IN THE FUTURE.		

													(3 / 11)
NO	DESCRIPTION	BASE MATERIALS								PRINTED WIRING BOARD			NOTE
		GENERIC I.D	MANUFACTURER	CAT. NO. OR GRADE	FLAME CLASS	HWI PLC	HAI PLC	CTI PLC	UL FILE NO	UL MARK	MANUFACTURER	FLAME CLASS	
1	PRINTED WIRING	PHENOLIC	HITACHI	MCL-437F	94V-0	300+	200+	-	E80148	▲SYH-294V-0	SANYOH CO.,LTD	94V-0	
	BOARD	RESIN OF	CHEMICAL								(E52553)		
		COPPER CLAD	CO., LTD							▲CMK-77X	CMK CORP CO.,LTD	94V-0	
		LAMINATES									(E41363)		
										P10A ▲ OR	GOLDSTAR		
										GSEP-2110A▲	TELECOMMUNICATION		
											CO.,LTD		
											(E71042)		
										 KC-15 ▲	KOREA CIRCUIT		
											CO.,LTD		
											(E55991)		
										 H.C.140HI ▲	PT.HITACHI	94V-0	
											CHEMICAL INDONESIA		
											(E41480)		
			MATSUSHITA	R-8700	94V-0	120+	200+	500	E81336		GRAND CIRCUIT INDUSTRY	94V-0	
			ELECTRIC								SDN BHD		
			WORK LTD								(E162032)		
										 H.C.140MA▲	PT.HITACHI	94V-0	
											CHEMICAL INDONESIA		
											(E41480)		

													(4 / 11)
NO	DESCRIPTION	BASE MATERIALS								PRINTED WIRING BOARD			NOTE
		GENERIC I.D	MANUFACTURER	CAT. NO. OR GRADE	FLAME CLASS	HWI PLC	HAI PLC	CTI PLC	UL FILE NO	UL MARK	MANUFACTURER	FLAME CLASS	
			OAK INDUSTRIES	*DS-1107(A)	94V-0	256	200+	-	E39283	▲SH-4456	SAM HAN ELECTRIC		
			KOREA LTD								CO.		
											(E94013)		
										▲GSEP-2112	GOLDSTAR		
											TELECOMMUNICATION		
											CO.,LTD		
											(E71042)		
										 KC-15 ▲	KOREA CIRCUIT		
											CO.,LTD		
											(E55991)		
										▲  5-V0	SEONG MIN	94V-0	
											ELECTRONICS CO.,LTD		
											(E172689)		
										 H.C.140DS▲	PT.HITACHI	94V-0	
											CHEMICAL INDONESIA		
											(E41480)		
				OAK-FR2-1	94V-0	300+	200+	-	E39283	▲GSEP-2108	GOLDSTAR		
											TELECOMMUNICATION		
											CO.,LTD		
											(E71042)		
										▲SH-4458	SAM HAN ELECTRIC		
											CO.		
											(E94013)		

										(5 / 11)			
NO	DESCRIPTION	BASE MATERIALS								PRINTED WIRING BOARD			NOTE
		GENERIC I.D	MANUFACTURER	CAT. NO. OR GRADE	FLAME CLASS	HWI PLC	HAI PLC	CTI PLC	UL FILE NO	UL MARK	MANUFACTURER	FLAME CLASS	
		PAPER EPOXY	HITACHI	MCL-E-47	94V-0	300+	200+	600+	E80148	▲ ⚡ A1	SANYOH CO., LTD	94V-1	
		RESIN LAMINATES	CHEMICAL								(E52553)		
			CO.,LTD										
										▲ CMK-9Y	CMK CORP CO., LTD	94V-1	
											(E41363)		
										▲ GSEP-2113	GOLDSTAR		
											TELECOMMUNICATION		
											CO., LTD		
											(E71042)		
										▲ SHI	SAM HAN		
											ELECTRIC CO.,LTD		
											(E94013)		
										Ⓚ KS-9	KOREA CIRCUIT		
											CO., LTD		
											(E55991)		
										ㄹ H.C.I 7B▲	PT.HITACHI	94V-0	
											CHEMICAL INDONESIA		
											(E41480)		

LG 이노텍(주)

BASE MATERIALS										PRINTED WIRING BOARD			NOTE
NO	DESCRIPTION	GENERIC I.D	MANUFACTURER	CAT. NO. OR GRADE	FLAME CLASS	HWI PLC	HAI PLC	CTI PLC	UL FILE NO	UL MARK	MANUFACTURER	FLAME CLASS	
	PRINTED WIRING	GLASSFIBER	MATSUSHITA	R-1781	94V-0	120+	200+	500	E81336	▲C KX	CMK CORP	94V-0	
	BOARD	REINFORCED EPOXY	ELECTRIC								(E41363)		
		RESIN COPPER	WORK LTD										
		CLAD LAMINATES								▲E 2S	NIPPON ELEC	94V-0	
											CO., LTD		
											(E41166)		
										⌘ T0 ▲	SANYOH	94V-0	
											CO., LTD		
											(E52553)		
										E4A▲ OR	GOLD STAR	94V-0	
										GSEP-2304A▲	TELECOMMUNI-		
											CATION CO., LTD		
											(E71042)		
										㉮ 5 ▲	LIANG DAR	94V-0	
											TECHNOLOGY		
											CO.,LTD		
											(E166132)		
										㉮ H.C.I 113▲	PT.HITACHI	94V-0	
											CHEMICAL INDONESIA		
											(E41480)		

(7 / 11)													
NO	DESCRIPTION	BASE MATERIALS								PRINTED WIRING BOARD			NOTE
		GENERIC I.D	MANUFACTURER	CAT. NO. OR GRADE	FLAME CLASS	HWI PLC	HAI PLC	CTI PLC	UL FILE NO	UL MARK	MANUFACTURER	FLAME CLASS	
		GLASSFIBER	MATSUSHITA	R-1781	94V-0	120+	200+	500	E81336	SH.S9 94V-0 ▲	SAM HAN	94V-0	
		REINFORCED EPOXY	ELECTRIC								ELECTRIC CO.,LTD		
		RESIN COPPER	WORK LTD								(E94013)		
		CLAD LAMINATES											
										▲ (S.M) 5-V0	SEONG MIN	94V-0	
											ELECTRONICS CO.,LTD		
											(E172689)		
			HITACHI	MCL-E-637	94V-0	300+	200+	600+	E80148	89▲ 0R	HITACHI CHEM.	94V-0	
			CHEMICAL							MCL-E-637▲	CO., LTD		
			CO., LTD							(FAC.ID:KCH)	(E41480)		
										KS-7B ▲	KOREA CIRCUIT	94V-0	
											CO., LTD		
											(E55991)		
										KA KS-7B ▲	KCA ELECTRONICS, INC	94V-0	
											(E55991)		
										H.C.I 89A▲	PT.HITACHI	94V-0	
											CHEMICAL INDONESIA		
											(E41480)		

LG 이노텍(주)

										(8 / 11)			
NO	DESCRIPTION	BASE MATERIALS								PRINTED WIRING BOARD			NOTE
		GENERIC I.D	MANUFACTURER	CAT. NO. OR GRADE	FLAME CLASS	HWI PLC	HAI PLC	CTI PLC	UL FILE NO	UL MARK	MANUFACTURER	FLAME CLASS	
		EPOXY RESIN OF	DOOSAN	OAK-910	94V-0	300	23	-	E37002	GSEP-2304A▲	GOLD STAR	94V-0	
		COPPER CLAD	ELECTRO-								TELECOMMUNI-		
		LAMINATED SHEETS	MATERIALS								CATION CO., LTD		
			CO., LTD								(E71042)		
										KS-7A ▲	KOREA CIRCUIT	94V-0	
											CO., LTD		
											(E55991)		
				OAK-FR-400	94V-0	300	15	-	E39283	▲GSEP-2302	GOLD STAR	94V-0	
											TELECOMMUNI-		
											CATION CO., LTD		
											(E71042)		
				*DS-7209	94V-0	300	23	-	E37002	GSEP-2304A ▲	GOLD STAR	94V-0	
											TELECOMMUNI-		
											CATION CO., LTD		
											(E71042)		
										KS-7A ▲	KOREA CIRCUIT	94V-0	
											CO., LTD		
											(E55991)		
										▲SM5-V0	SEONG MIN	94V-0	
											ELECTRONICS CO.,LTD		
											(E172689)		
										H.C.I 55DS▲	PT.HITACHI	94V-0	
											CHEMICAL INDONESIA		
											(E41480)		

LG 이노텍(주)

											(9 / 11)		
NO	DESCRIPTION	BASE MATERIALS								PRINTED WIRING BOARD			NOTE
		GENERIC I.D	MANUFACTURER	CAT. NO. OR GRADE	FLAME CLASS	HWI PLC	HAI PLC	CTI PLC	UL FILE NO	UL MARK	MANUFACTURER	FLAME CLASS	
		EPOXY RESIN OF	DOOSAN	*DS-7209						SH S1▲ or	SAM HAN	94V-0	
		COPPER CLAD	ELECTRO-							SH-1692▲	ELECTRONICS CO.,LTD		
		LAMINATED SHEETS	MATERIALS								(E94013)		
			CO., LTD										
										 125X▲	SAEHAN ELECTRONICS	94V-0	
											CO., LTD		
											(E91463)		
										CJ4-V-0 ▲ or	CHEONG Ju ELECTRONICS	94V-0	
											CO., LTD		
											(E104487)		
										 55▲	Wonil Circuit	94V-0	
											CO., LTD		
											(E119680)		
										GCI 3AV0 ▲ SZ	GRAND CIRCUIT INDUSTRY	94V-0	
											SDN BHD		
											(E162032)		
		GLASSFIBER	NIKKAN	L-6514C2	94V-0	300+	200+	220	E46785	▲ C. 111XR	CMK CORP	94V-0	
		REINFORCED EPOXY	INDUSTRIES								(E41363)		
		RESIN COPPER	CO., LTD										
		CLAD LAMINATES								 H.C.I 58NI▲	PT.HITACHI	94V-0	
											CHEMICAL INDONESIA		
											(E41480)		

LG 이노텍 (주)

[illegible]

(11 / 11)													
NO	DESCRIPTION	BASE MATERIALS								PRINTED WIRING BOARD			NOTE
		GENERIC I.D	MANUFACTURER	CAT. NO. OR GRADE	FLAME CLASS	HWI PLC	HA1 PLC	CT1 PLC	UL FILE NO	UL MARK	MANUFACTURER	FLAME CLASS	
3	COMPOUND	POLYPHENYLENE	DAINIPPON	*FZ1140	94V-0	3	4	-	E53829				
	TERMINAL	SULFIDE	INK & CHEMICALS										
			INC										
		POLYAMIDE NYLON	E I DUPONT DE	*HTNFR51G35L	94V-0	-	-	-	E41938				
		RESIN	NEMOURS &										
			CO., INC.										
		POLYAMIDE NYLON	HYOSUNG T&C	2413GW	94V-0	-	-	-	E78648(M)				
		RESIN	CO., LTD PP DIV										
		POLYAMIDE NYLON	E I DUPONT DE	*70G33HS1L	HB	4	0	-	E41938				
		RESIN	NEMOURS &										
			CO., INC.										
		POLYAMIDE NYLON	MITSUMI	*E430N(T5)	94V-0	-	-	-	E52579(M)				
		RESIN	CHEMICALS, INS.										

LG 이노텍(주)