

S P E C I F I C A T I O N

T M B L O C K
(S P L I T T E R + T U N E R + P I F)

NTSC M / USA

T C M N 0 6 8 2 P A 2 6 C

WRITTEN	CHECKED	APPROVED
		

SAMSUNG ELECTRO-MECHANICS CO.,LTD.

- 314, METAN 3 DONG, YEONGTONG KU SUWON, KYUNGKI-DO, KOREA
TEL : (82)(31) 210-6026, 3214
FAX : (82)(31) 210-6380, 6385
- WELL GROW INDUSTRIAL ESTATES 935 T BANGSAMAK A.
BANGPAKONG CHACHOENGSAO 24130, THAILAND
TEL : (66)(38) 570-191~6
FAX : (66)(38) 570-258, 311
- 27, HEINIU, CHENG-ROAD, TIANJIN, CHINA 300210
TEL : (86)(22)2830-1307~9
FAX : (86)(22)2830-7436

RECORD OF SPECIFICATION REVISION		
DATE	REF. ITEM OR PAGE NO.	SUMMARY

NTSC 3in1 TM Block**TCMN0682PA26C***** INDEX****1. General**

- 1-1. Features
- 1-2. Applied Standards
- 1-3. Applied Safety Standards
- 1-4. Receiving Channels
- 1-5. Intermediate frequency
- 1-6. Input,Output Condition
- 1-7. Output Channel Of Modulation

2. Terminal names and functions**3. Main Meterials****4. Limiting Values under Operation Condition**

- 3-1. Current condition
- 3-2. Supply voltage condition

5. Environmental Conditions**6. Description of TUNER PLL Block**

- 6-1. Address setting
- 6-2. Read mode
- 6-3. Write mode

7. Test Diagram**8. RF Section**

- 8-1. Video characteristics
- 8-2. Audio characteristics
- 8-3. Output characteristics
- 8-4. Antenna characteristics

9. Tuner section

- 8-1. Rejection & gain
- 8-2. Tuning margin & Cross modulation

10. IF section

- 9-1. PIF characteristics
- 9-2. AFT characteristics
- 9-3. Audio characteristics

11. Reliability test

- 10-1. Environmental Test
- 10-2. Regulation
- 10-3. Antenna electrostatic surge test

12. Mechanical Characteristics

NTSC 3in1 TM Block**TCMN0682PA26C****1. General****1-1. Features**

- * NTSC M / USA standard TV Systems Broadcast reception
- * Full Frequency range from channel 2CH(55.25MHz) to 69CH(801.25MHz)
- * Upper Heterodyne Receiving System
- * Frequency synthesized Tuning system
- * Programmable PLL step size (31.25 / 50 kHz / 62.5kHz)
- * IIC-bus control of tuning, Address selection

1-2. Applied Regulation

FCC

1-3. Applied Safety Standards

IEC

1-4. Receiving Channels

Band	Channel	Freq
VHF low	CH.2~CH.B	55.25~127.25MHz
VHF high	CH.C~CH.W+11	133.25~361.25MHz
UHF	CH.W+12~CH.69	367.25~801.25MHz

1-5. Intermediate Frequency

SYSTEM	M
Picture Carrier	45.75
Color Carrier	42.17
Sound Carrier	41.25

1-6. Input,output condition

- * ANT in nominal impedance : 75Ω
- * ANT out nominal impedance : 75Ω

1-7. Output Channel Of Modulation

- * 3 CH. : OPEN (61.25MHz)
- * 4 CH. : GND (67.25MHz) By controlled PIN NO.2 (CH)

NTSC 3in1 TM Block**TCMN0682PA26C****2. Terminal names and functions**

ITEM	PIN NO.	TERMINAL	FUNCTION	REMARK
RF MOD		F-CON	RF Signal Input Terminal	75Ω
	1	A I	AUDIO INPUT	
	2	C H	CHANNEL CONTROL (OPEN:3CH, GND:4CH)	
	3	B +	POWER SUPPLY TERMINAL	5V DC
	4	CONTROL	VIDEO /TV CONTROL TERMINAL	
	5	V I	VIDEO SIGNAL INPUT	
TUNER / PIF SECTION	6	RF AGC	RF AGC Voltage out (TEST POINT)	TP
	7	N.C	NO CONNECTION	
	8	SAS	PLL Address selection	
	9	SCL	PLL Clock Supply Terminal for Tuner	
	10	SDA	PLL Data Supply Terminal for Tuner	
	11	AFT	AFT Output Terminal	
	12	AUDIO	AUDIO Output Terminal	
	13	SIF	SIF OUT	
	14	VT	Tuning Voltage	33V
	15	IF OUT	IF (TEST POINT)	TP
	16	VIDEO OUT	Video Signal Output	1Vp-p

3. Main Meterials

ITEM	FUNCTION		Q'TY	NAME OF SEMICONDUCTOR	REMARK
R F SECTION	I C		1	TA1372FNG	
	S/W TRANSISTOR		2	BF799W or EQUIVALENT DEVICE	
	S/W DIODE		1	KDS114E	
TUNER SECTION	MOPLL IC		1	SN761678	
	VVC DIODE		11	KDV214EA,KDV269E	
	RF AMP		1	BG3130R	
PIF SECTION	I C		1	LA75676VA	
	FILTER	SAW-FILTER	1	SF5232	
		C - TRAP	1	TPS4.5MB or XT4.5MB	
		C - FILTER	1	SFSH4.5MDB or LT4.5MH	

NTSC 3in1 TM Block**TCMN0682PA26C****4. Limiting Values under Operation Conditions****4-1. Current Condition**

Item	Standard Supply Voltage(V)		Current Consumption(mA)			Remark
			Min.	Typ.	Max.	
MOD control	CON B+	5V DC	-	0.047	0.173	
TUNER + IF	B+	5V DC	-	190	220	
	VT	33V DC	-	2.5	5	

4-2. Supply Voltage Condition

Item	Standard Supply Voltage(V)		Available supply voltage(V)			Remark
			MIN.	TYP.	MAX.	
TUNER + IF	B+		4.8	5.0	5.2	
	VT		32	33	34	
	AGC		-	-	-	
	AFT		-	-	-	

5. Environmental Conditions

Item		Temperature & Humidity			Remark
		MIN.	TYP.	MAX.	
Testing Ambient Condition	Temperature	20	25	30	℃
	Humidity	55	65	75	%
Operating Condition	Temperature	-10	-	60	℃
	Humidity	-	-	85	%
Storage Condition	Temperature	-20	-	70	℃
	Humidity	-	-	90	%

NTSC 3in1 TM Block**TCMN0682PA26C****6. Description of TUNER PLL Block**

The PLL on this IC supports the IIC bus control format.

The control formats are as shown in the table below.

ref.) SAS(Address selection), SCL(Serial Clock), SDA(Serial Data I/O)

6-1. Address setting

The response address can be changed according to the SAS pin voltage, so that multiple PLL can exist within one system.

SAS pin voltage	MA1	MA0
0 to 0.1Vcc	0	0
ALWAYS VALID	0	1
0.4Vcc to 0.6Vcc	1	0
0.9Vcc to Vcc	1	1

6-2. Read mode : Slave Transmitter

Mode	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	
Address byte	1	1	0	0	0	MA1	MA0	R/W=1	A
status byte	POR	FL	1	1	1	A2	A1	A0	A

* ADC status bit

Voltage at ADC	A2	A1	A0	DEC
(0~0.15)*Vcc	0	0	0	0
(0.15~0.3)*Vcc	0	0	1	1
(0.3~0.45)*Vcc	0	1	0	2
(0.45~0.6)*Vcc	0	1	1	3
(0.6~1)*Vcc	1	0	0	4

* Description of symbols used in Read mode table


SYMBOL	DESCRIPTION	DEFAULT
A	Acknowledge	
MA1,MA0	Address setting bits	
X	Don't care : May be a logic 0 or logic 1	
POR	Power - ON Reset	
FL	Lock detection signal	

NTSC 3in1 TM Block**TCMN0682PA26C****6-3. Write mode : Slave Receiver**

MODE	MSB								LSB	
	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0		
Address byte	1	1	0	0	0	MA1	MA0	R/W=0		A
Divider byte1	0	N14	N13	N12	N11	N10	N9	N8		A
Divider byte2	N7	N6	N5	N4	N3	N2	N1	N0		A
Control byte	1	CP	T2	T1	T0	RSA	RSB	OS		A
Band SW byte	P8	P7	P6	P5	BS4	BS3	BS2	BS1		A

* Description of symbols used in Write mode table

SYMBOL	DESCRIPTION	DEFAULT		
A	Acknowledge			
MA1,MA0	Address set bits			
N14 to N0	Programmable counter set bit			
CP	Charge pump current set bit(output current) CP= 0 = ± 60μA(Typ.) CP= 1 = ± 280μA(Typ.)			
OS	Tuning amplifier control bits OS=0 ; Normal operation ; Tuning voltage 'ON' OS=1 ; Tuning voltage is 'OFF'(High impedance)	OS = 0		
T2,T1,T0	Test bits Normal mode : T2~T0 = 0	Tn = 0		
RSA, RSB	Reference divider ratio selection bits			
	RSA	RSB	Reference Divider	
	0	1	1024	
	1	1	512	
	X	0	640	
BS4 ~ BS1	Band switch ports control bits BSn = 0 : off , 1 = on Band selection by BS1,2,4 (x : don't care)			
		BS1	BS2	BS4
	VHF-LOW	1	0	0
	VHF-HIGH	0	1	0
	UHF	0	0	1
X	Don't care : May be a logic 0 or logic 1			
P8...P5	NPN OPEN COLLECTOR PORT CONTROL BITS			Pn=0
POR	Power - ON Reset			
FL	Lock detection signal			

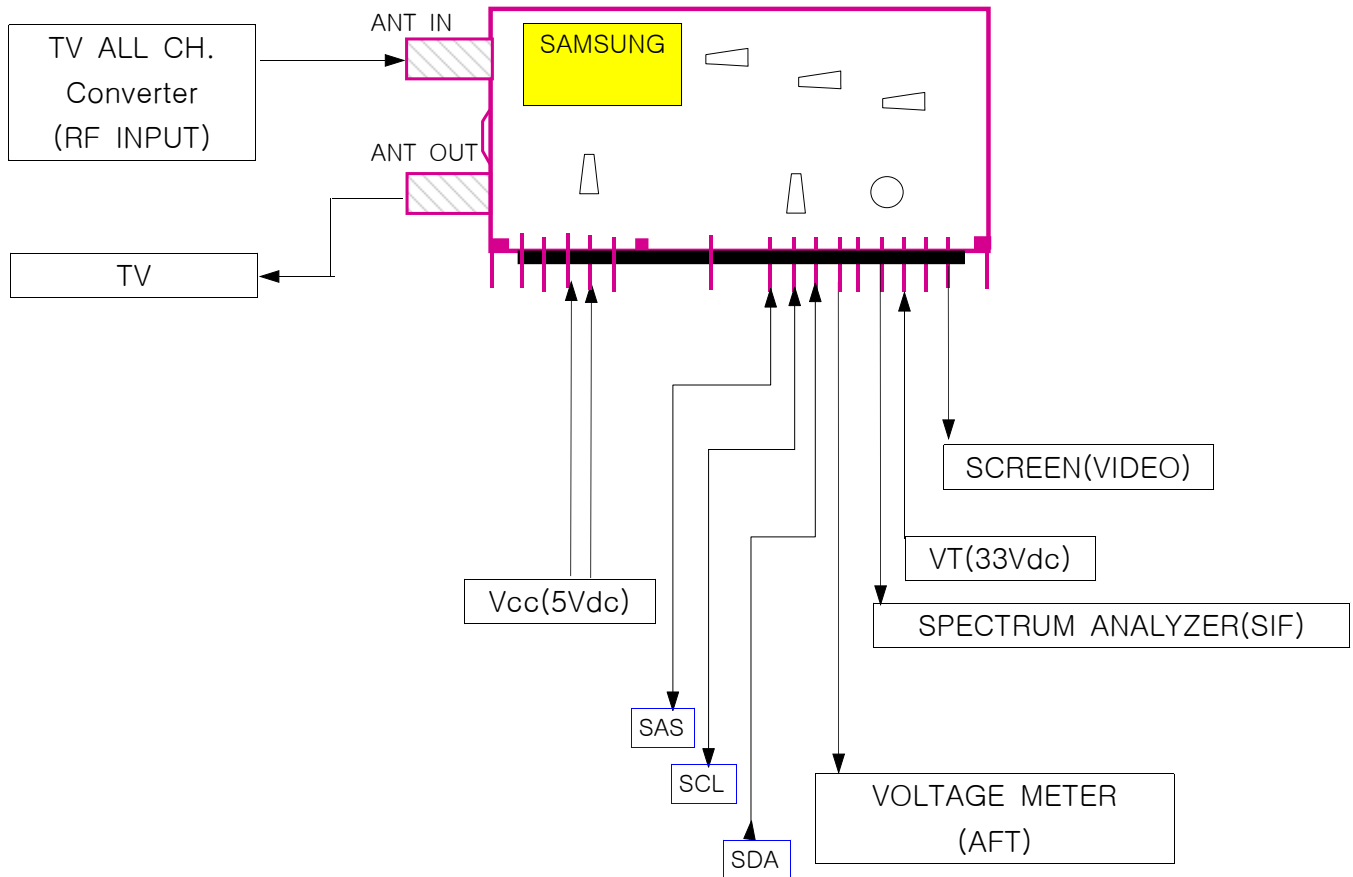NTSC 3in1 TM Block**TCMN0682PA26C****7. TEST Diagram**

* The front-end characteristics are measured according to the test diagram

NTSC 3in1 TM Block**TCMN0682PA26C****8. RF SECTION PERFORMANCE****8-1.VIDEO CHARACTERISTICS**

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Video Modulation	72	80	88	%	Input signal:1Vp-p white stair step or ramp
Video Limiter Modulation	87	93	99	%	Input signal:1.5Vp-p stair step or ramp
V/S Ratio	10:3.8	10:4	10:4.1		Input signal:1Vp-p white V:S = 10:4
Video Amplitude Frequency Characteristics	-2.5	-0.5	+2.0	dB	Measure range:0.1MHz~4.2MHz Based on 1MHz Audio input signal:None
Differential Gain(DG)	-7	+2	+7	%	Input signal:1.0Vp-p stair step Video Mod. : 80% Luminance :10~90%
Differential Phase(DP)	-7	+1.5	+7	deg	Input signal:1.0Vp-p stair step Video Mod. : 80% Luminance :10~90%
Video S/N	45	47	-	dB	Measurement Conditions -Standard De-modulator. -S/N Meter H.P.F:100KHz, L.P.F:4.2MHz SC trap:ON, Weight:OFF *Input signal Video:100% White signal Audio:None Video band:0.1~4.2MHz
Chroma Beat	58	65		dB	Input signal Video:0.4Vp-p,3.58MHz, Sine wave Audio:None

NTSC 3in1 TM Block**TCMN0682PA26C****8-2. AUDIO CHARACTERISTICS**

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Audio Modulation	64	80	96	%	Input signal:1.04Vp-p Sine wave 1KHz (100% Mod.=±25KHzp-p dev.)
Audio Maximum Modulation	128	160	192		Input signal : 1KHz, Sine wave
Audio Amplitude Frequency Characteristics	-3	+0.2 -0.6	+3	dB	Input signal:1.04Vp-p Sine wave Measure range:50Hz~10KHz Based on 1KHz
Audio Distortion		0.3	2.0	%	Input signal: 1.04Vp-p, 1KHz De-emphasis :0N(75usec)
Audio S/N	48	-	-	dB	Video input signal :Black burst Reference audio input signal :1.04Vp-p, 1KHz, Sine wave

NTSC 3in1 TM Block**TCMN0682PA26C****8-3. OUTPUT CHARACTERISTICS**

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Video Carrier	-80	Fp	+80	KHz	Video input signal:None
Sound Carrier	-7	Fs	+7	KHz	Audio input signal:None
Out-band spurious	30	-		dB	FCC Standard Procedure Measure range:0~1GHz
In-band spurious	60	-	-	dB	Input signal Video:None Audio:None Measure range:Fp ~ +4.5MHz
Video Carrier Output Level	63	66	69	dB μ V	
P/S Ratio	13	16	19	dB	Audio input signal:None

8-4. ANTENNA CHARACTERISTICS

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Insertion Loss	-	-	6.0	dB	ANT IN to ANT OUT Mode:TV (at MOD. OFF)
VSWR			4.5		ANT IN Terminal Mode:TV (at MOD. OFF) 54~810MHz
VSWR			3		ANT OUT Terminal Mode:TV (at MOD. OFF) 54~810MHz Mode:VCR(at MOD. ON) 61~ 72MHz
Isolation	60	-	-	dB	Isolation from ANT OUT to ANT IN:Mode-VCR(at MOD. ON) 61~72MHz
ANT. IN Leakage		6	9.5	dB μ V	Mode:VCR (at MOD. ON) 0~1GHz ANTENNA-OUT 75 Ω Loaded Applied for FCC
		36	46	dB μ V	Mode : TV (at MOD. off) Measure range : 0.03 ~ 1 GHz


NTSC 3in1 TM Block**TCMN0682PA26C****9. Tuner Section Performance****9-1. Rejection characteristics & gain**

Parameter		Specification			Unit	Remark
		Min.	Typ.	Max.		
Power Gain	UHF	28	34		dB	
	VHF High	29	34			
	Low	29	33			
IF Rejection	UHF	60	90	-	dB	
	VHF High	60	90	-		
	Low	55	80	-		
Image Rejection	UHF	45	60	-	dB	
	VHF High	50	70	-		
	Low	50	75	-		
CB Rejection		0.535MHz ~ 30MHz -7dBm MIN.			dB	Desire : CH2 ~ CH6 -66dBms/i = 40dB
CH A-5 BEAT		50			dB	ANT INPUT Desired signal:60dBuV
CH6 BEAT		50			dB	ANT INPUT Desired signal:60dBuV Undesired signal:54dBuV

NTSC 3in1 TM Block**TCMN0682PA26C****9-2. Tuning margin and cross modulation**

Parameter	Band	OSC Freq.	Specification			Unit	Remark
			Min.	Typ.	Max.		
Margin Frequency	VHF LOW	High end	+2	-	-	MHz	
		Low end	+2	-	-		
	VHF HIGH	High end	+1	-	-		
		Low end	+1	-	-		
	UHF	High end	+1	-	-		
		Low end	+1	-	-		

1% Cross Modulation

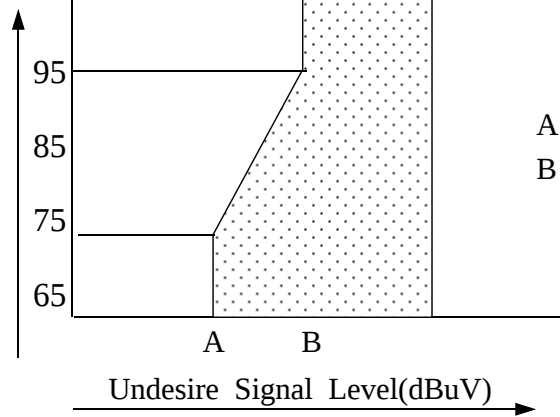Desire Input
Level(dBuV)

CH.	A(dBuV)	B(dBuV)
UHF	≥ 65	≥ 84
VHF	≥ 65	≥ 84

Cross modulation value should be within hatched area.

※ Tuner should be measured for 1% cross modulation with ± 2 channel undesired signal.

NTSC 3in1 TM Block**TCMN0682PA26C****10. IF Section performance**

When the test electrical characteristics when there are no instruction,
Fp input level is 70dBuV and P/S ratio is -7dB.

10-1. PIF characteristics

Parameter		Specification			Unit	Remark
		Min.	Typ.	Max.		
Video Output Level		0.8	1.0	1.2	Vp-p	Standard color bar : 87.5% Mod.
Sync Ratio		23.6	28	33.6	%	Standard color bar : 87.5% mod.
Video S/N		43	45		dBrms	Input level : 70dBuV HPF : 100KHz, LPF : 4.2MHz SC trap : ON 100% white signal 87.5% mod.
Luminance Sensitivity			45	50	dBuV	HPF : 100KHz, LPF : 4.2MHz SC trap : ON 100% white signal 87.5% mod. RF level at Video S/N = 30dB
Chroma Distortion	DP		5	+10	Deg	10 stair step : 87.5% mod.
	DG		5	+10	%	
Chroma S/N	AM	49	52		dB	100% Chroma Signal (RED) HPF : 100Hz, LPF : 0.5MHz SC trap : OFF
	PM	48	51			
Burst Level		150	250	400	mVp-p	Standard color bar
Y/C Delay		-200	-50	+100	nSec	Input Sin ² 2T Pulse & Bar. Use VM700A(Tektronix)
Video Frequency Response						Multi-burst Signal : 87.5%mod. 0.5MHz standard
	1.0MHz	-3.0	-1.0	+2.0	dB	
	2.0MHz	-3.0	-1.0	+2.0		
	3.0MHz	-4.0	-1.0	+2.5		
	3.58MHz	-4.0	-2.0	+2.0		

NTSC 3in1 TM Block**TCMN0682PA26C**


9-2. AFT characteristics

Parameter	Specification			Unit	Remark
	Min.	Typ.	Max.		
AFT Alignment	-50	0	+50	KHz	Center voltage : 2.5V RF input level : 70dBuV P/S = -7dB Standard color bar : 87.5% mod. Testing channel : 11CH[199.25MHz]

9-3. SIF characteristics

Parameter	Specification			Unit	Remark
	Min	Typ	Max		
SIF output level	70	77	-	dBuV	1KHz without FM Modulation Standard color bar : 87.5% De-emphasis ON

「 Figure A 」

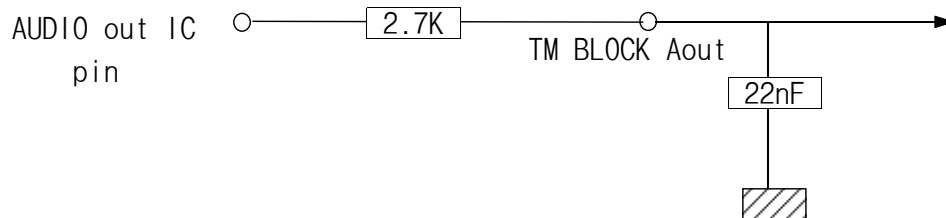

[De-emphasis circuits for Test (Audio)

NTSC 3in1 TM Block

TCMN0682PA26C

11. Reliability test

11-1. Environmental Test

ITEM	SPECIFICATION		TEST CONDITION
	TUNER	IF	
Heat Load Test	OSC frequency UHF:±2.0MHz VHF:±2.5MHz	*VIDEO S/N ± 6dB *VIDEO OUTPUT LEVEL ± 0.2Vp-p *NOISE LIMIT SENSITIVITY ± 6dB *AUDIO OUTPUT LEVEL ± 30% MAX	1.Initial value measure at standard test condition. 2.Leave samples in 70℃±2℃ for 96±5 hours, and in standard test condition for 30 minutes,then take measurements within 1 hour. 3.Supply voltage : Standard ± 10% 4.Supply voltage cycle : 1.5H ON,0.5H OFF
Humidity Load Time			1.Leave samples in 40℃±5℃ for 24±2 hours,and in standard test condition for 30 minutes,then take measurements 2.Leave samples in 40℃±2℃ for 96±5% RH hours, for 96 ± 5 hours, and in standard test condition for 30minutes then take measurement within 1 hour. 3.Supply voltage : Standard ± 10% 4.Supply voltage cycle : 1.5H ON, 0.5H OFF
Cold Test			1.Initial value measure at standard test condition. 2.Leave samples in -20℃±2℃ for 96±5 hours,and in standard test condition for 2 hours,then take measurements within 1 hour.
Vibration Test			1.Vibration test fixture is used to vibrate the tuner with a total amplitude of 1mm and frequency ranging from 10 to 55Hz,once per minute consecutively,for 40minutes in each of three directions X,Y and Z.
Operating Life Test			1.Take measurements in standard test condition. 2.Leave samples for 1000 hours, then take measurements. 3.Supply voltage : Standard
Impact Test			1.Impact acceleration : 50 m/s ² 2.Impact time : 11msec 3.Impact direction : 6 sides per each direction

NTSC 3in1 TM Block**TCMN0682PA26C****11-2. Antenna electrostatic surge test**




Test condition : Applied 15KV standard pulse 3 times at ANT and IF
terminal.(330ohm and 15pF series connect)

Specification : There shall be no trouble on the practical operation.


12. Regulation

* FCC

NO	NAME
1	AUDIO IN
2	CH.SW
3	+B
4	CONTROL
5	VIDEO IN
6	N.C(RF AGC)
7	N.C
8	SAS
9	CLOCK
10	DATA
11	AFT OUT
12	AUDIO OUT
13	SIF OUT
14	BT
15	N.C
16	VIDEO OUT

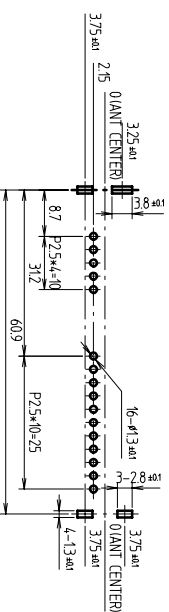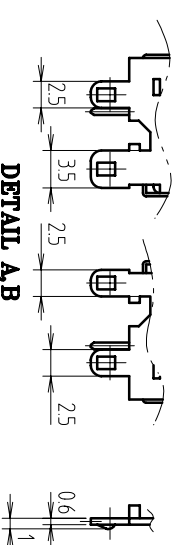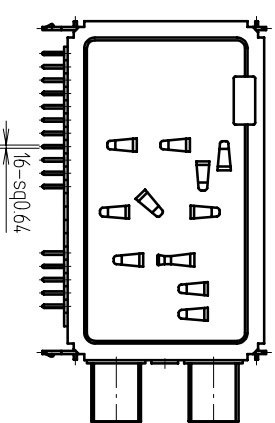

Rev.	DATE	WRITTEN BY	CHECKED BY	REVISION RECORD				REMARK
UNIT	$\frac{m}{m}$	DRAW	DESIGNED	CHECKED	APPROVED			
SCALE	$\frac{1}{1}$	CAD	S.C.M	S.C.M	J.B.H			
TOLERANCE	± 0.5	2005.03.24						
		File name	TCMN0682PA26*			NO.	TCMN0682PA26*	
ELECTRO-MECHANICS			3RD ANGLE PROJECTION					
		PART NAME		OUTDRAWING				
		MODEL NAME		TM-BLOCK				
		SEMCO P/N		26Series				

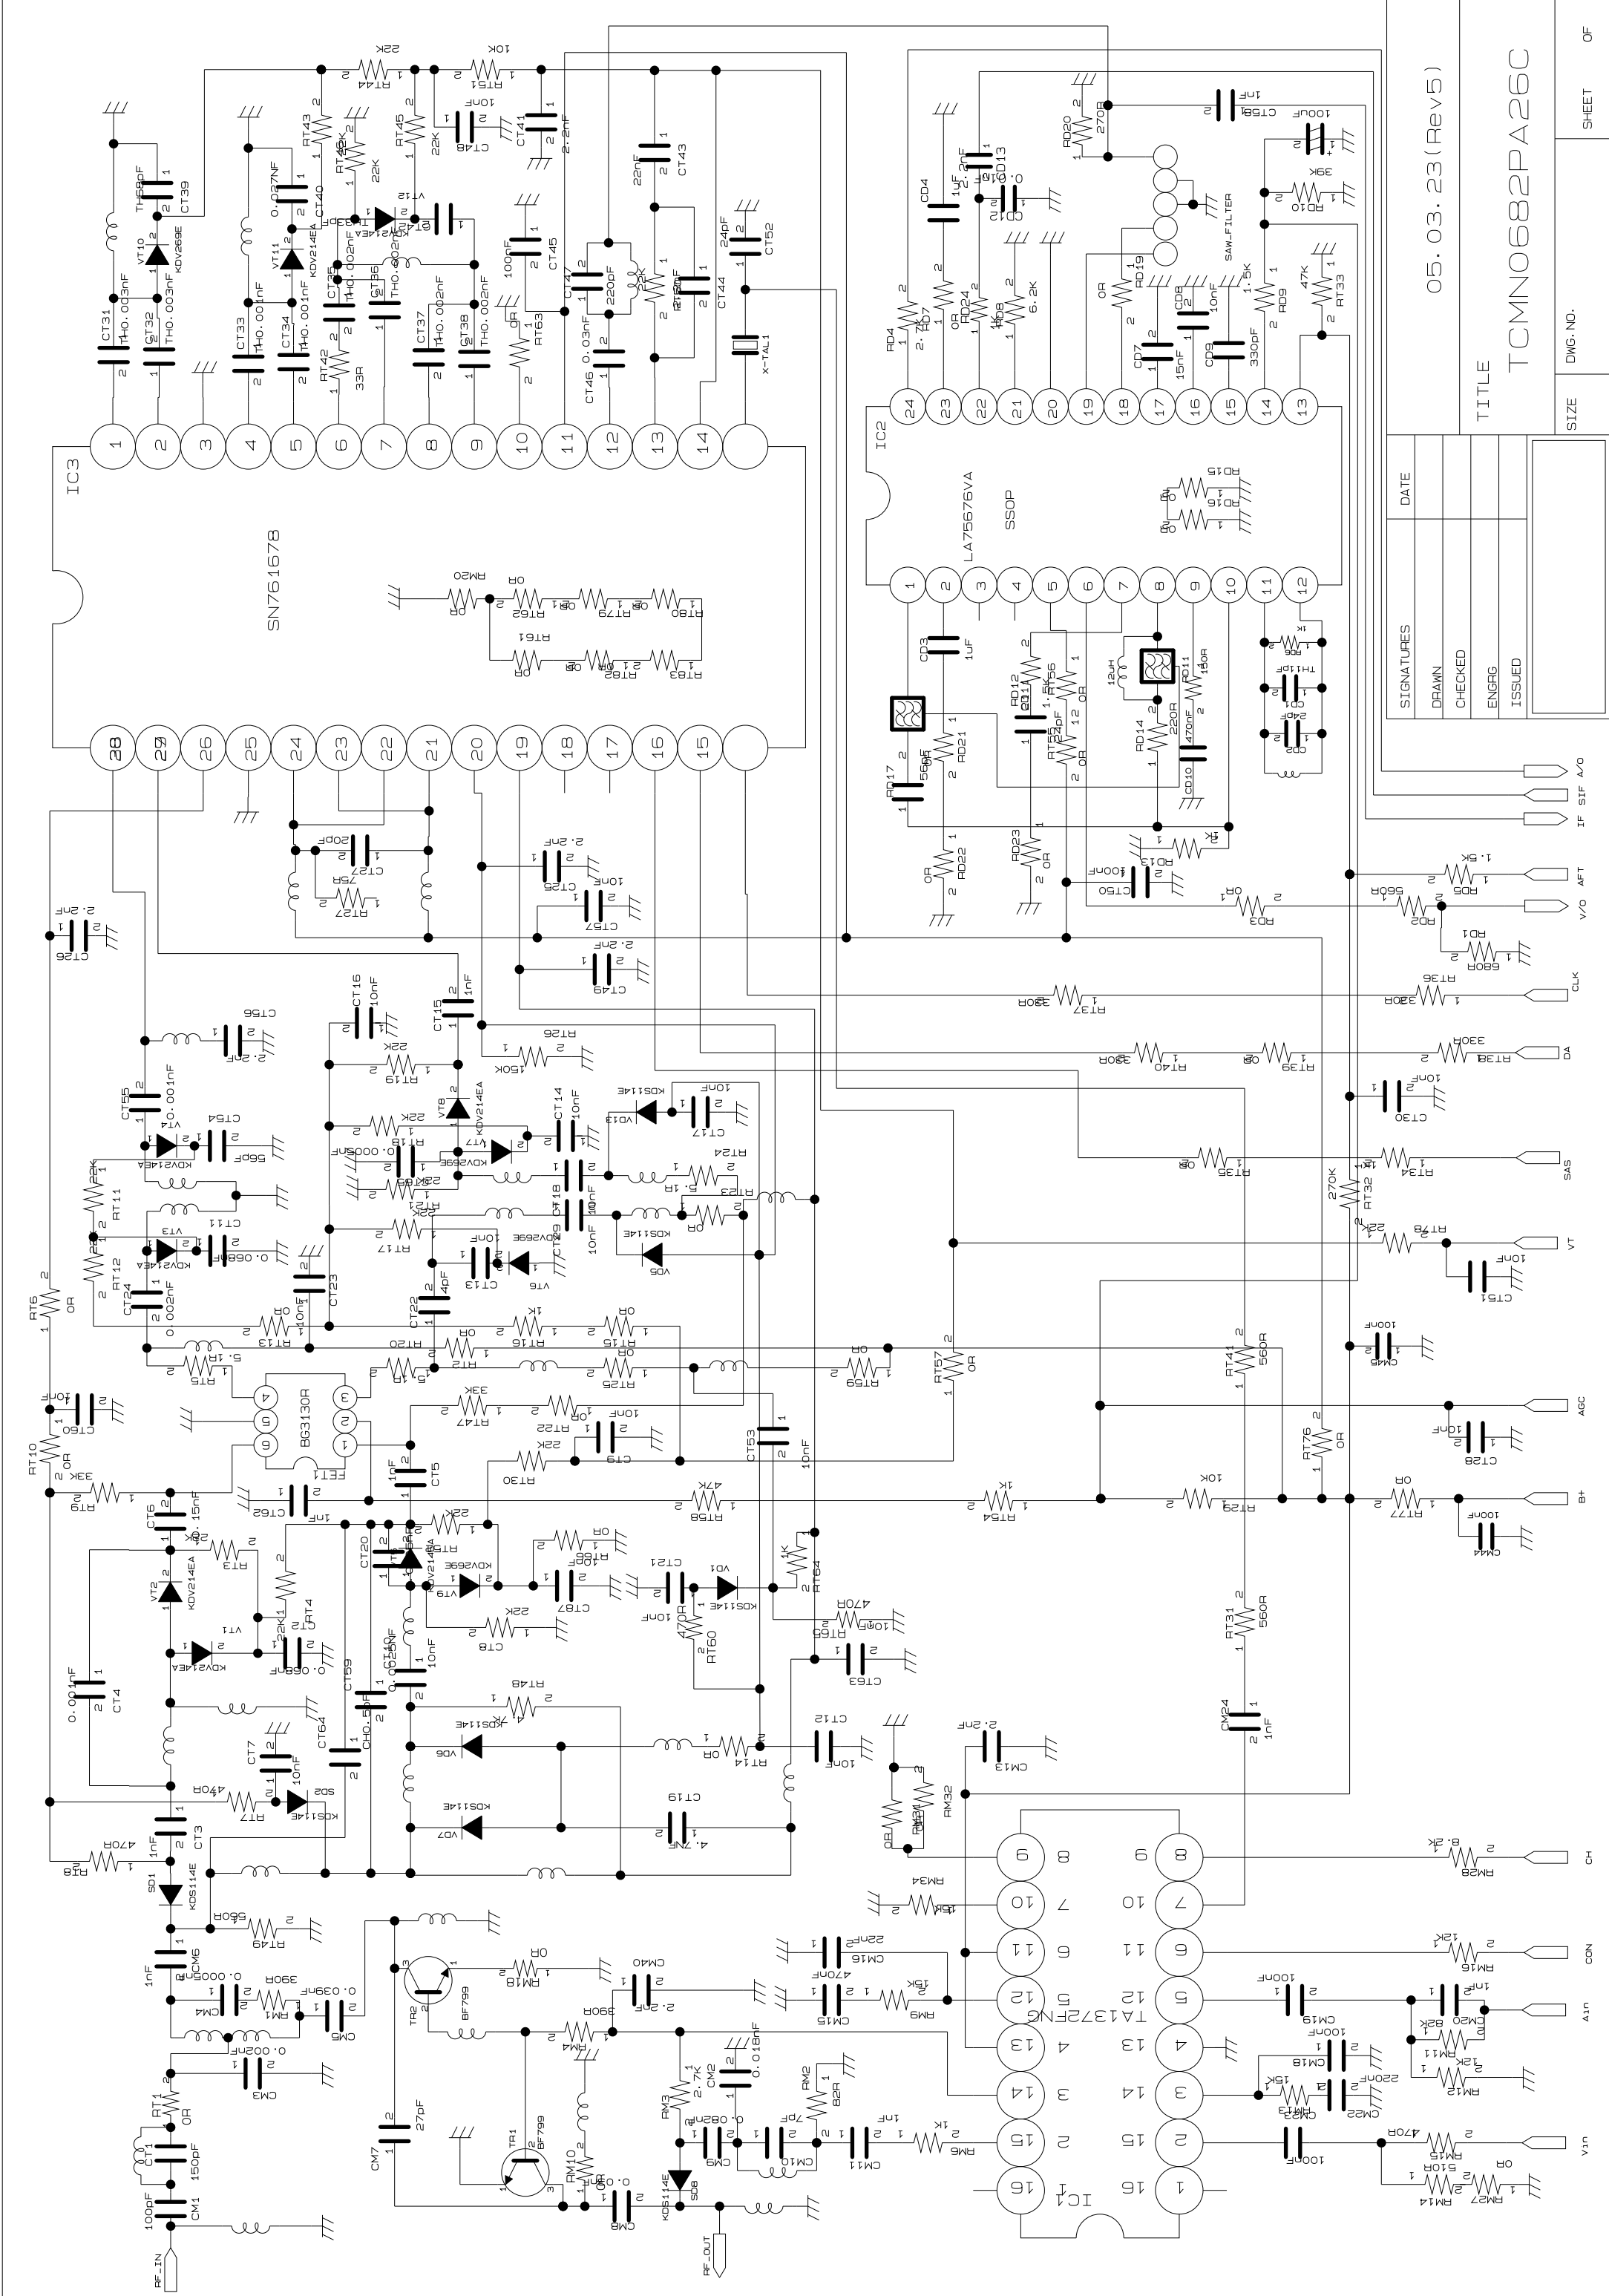

SIGNATURES		DATE	05. 03. 23 (Rev5)		TITLE	TCMNO682PA26C
DRAWN						
CHECKED						
ENGRG						
ISSUED						
			SIZE	DWG. NO.	SHEET	OF