



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION

105-1, JANGAM-RI, MAJANG-MYEON, ICHEON-SI, KYOUNGKI-DO, REPUBLIC OF KOREA
TEL: +82 31 645 6300 FAX: +82 31 645 6401 www.hct.co.kr

EMI CERTIFICATION REPORT

Applicant:

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu, Seoul
153-023, Korea

Date of Issue: May 18, 2011

Test Report No.: HCTE1104FE62-1

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJA360K

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
Equipment Type : Cellular/PCS GSM/GPRS/EDGE and Cellular WCDMA HSDPA
Phone with Bluetooth
Trade Name : LG Electronics Inc
Model(s) : LG-A360k
Additional Model(s) : A360k, A360K, A355f, A355F, LG-A360K, LG-A355f, LG-A355F,
LGA360k, LGA360K, LGA355f, LGA355F
Port / Connector(s) : USB Data Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Report prepared by
: Doo Hwan Ryu
Test Engineer of EMC Team

Approved by
: Sang Jun Lee
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

TEST REPORT REVISION HISTORY

Test Report NO.	Issued Data	Description
HCTE1104FE62	April 28, 2011	Initial release.
HCTE1104FE62-1	May 18, 2011	Amend to meet the minimum requirement: Pursuant to section 10.1.8.2 of ANSI C63.4, a minimum of 6 radiated emissions data points must be measured in section 4.2 of the 15B Certification test report.

TABLE OF CONTENTS

	PAGE
*Test Report Revision History	
1. GENERAL INFORMATION	
1.1 Product description	4
1.2 Related submittal(s)/Grant(s)	4
1.3 Tested system details	5
1.4 Cable description	6
1.5 Noise suppression parts on cable. (I/O cable)	6
1.6 Test methodology	7
1.7 Test facility	7
1.8 Frequency Range of Radiated Measurements	7
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	8
3. PRELIMINARY TEST	
3.1 Conducted Emission test	9
3.2 Radiated Emission test	9
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	10
4.2 Radiated Emission test	15
5. FIELD STRENGTH CALCULATION	16
6. TEST EQUIPMENT	17
7. CONCLUSION	18

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test (E.U.T) is **Cellular/PCS GSM/GPRS/EDGE and Cellular WCDMA HSDPA Phone with Bluetooth, Model: LG-A360k** manufactured by **LG Electronics Inc.** Its basic purpose is used for communications.

Model (s)	LG-A360k
Additional Model (s)	A360k, A360K, A355f, A355F, LG-A360K, LG-A355f, LG-A355F, LGA360k, LGA360K, LGA355f, LGA355F
FCC ID	BEJA360K
E.U.T Type	Cellular/PCS GSM/GPRS/EDGE and Cellular WCDMA HSDPA Phone with with Bluetooth
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number	FCC ID / DoC	Connected To
Cellular/PCS GSM/ GPRS/EDGE and Cellular WCDMA HSDPA Phone with with Bluetooth	LG	LG-A360k	BEJA360K	Notebook PC
Notebook PC	LG	X140-02	DoC	E.U.T Notebook PC adaptor
Notebook PC adaptor	DELTA (JIANG SU)	ADP-40PH AD	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
SD card (4 GB)	HC	-	-	E.U.T
USB cable	KSD	SGDY0018501	-	E.U.T Notebook PC
Headset	SSI	SGEY0003744	-	E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
Cellular/PCS GSM/GPRS/EDGE and Cellular WCDMA HSDPA Phone with Bluetooth	Headset jack	-	N	(D)1.2
	USB data	Y	Y	(P,D)0.8
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM/GPRS/EDGE and Cellular WCDMA HSDPA Phone with Bluetooth	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The 10 m semi anechoic chamber used to collect the test is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si Kyoungki-Do, 467-811, Republic of Korea.

Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4. Detailed description of test facilities was submitted to the Commission and accepted dated Sep. 03, 2010 (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

- Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor.
Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.
- Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

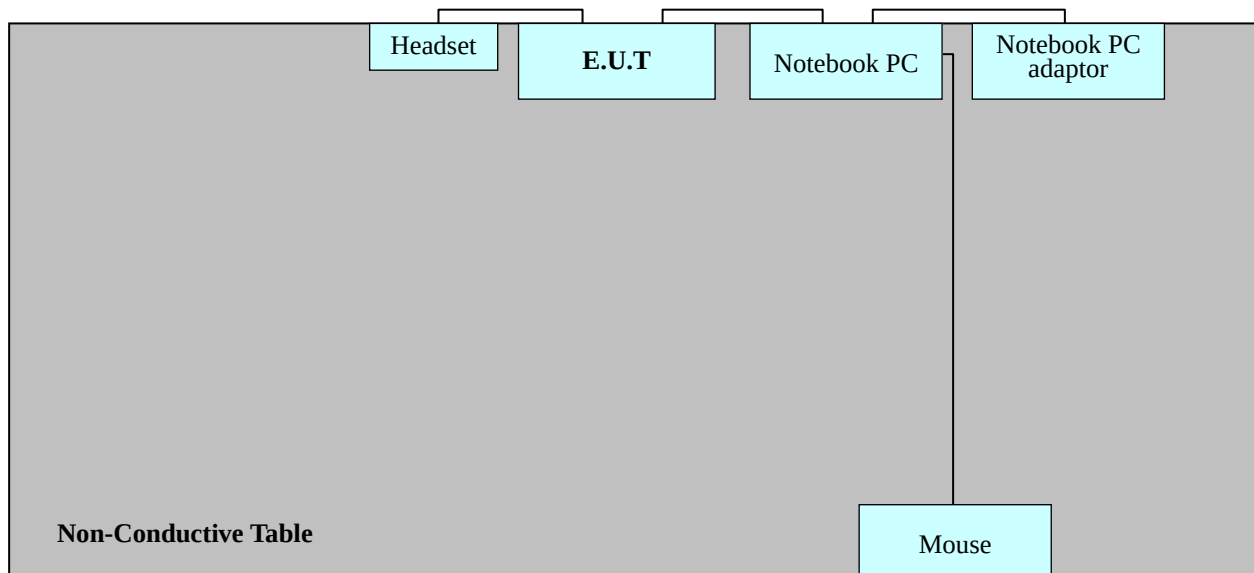

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode	The Worst Operating Condition
Data Communication	○

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode	The Worst Operating Condition
Data Communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 23.1 °C
Humidity level	: 45.3 %
Test date	: April 28, 2011

※ **NOTE:** Refer to page 10 to page 13 for details.


HCT

EMC

EUT: LG-A360K
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DH-RYU
Test Specification: FCC PART 15 CLASS B
Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

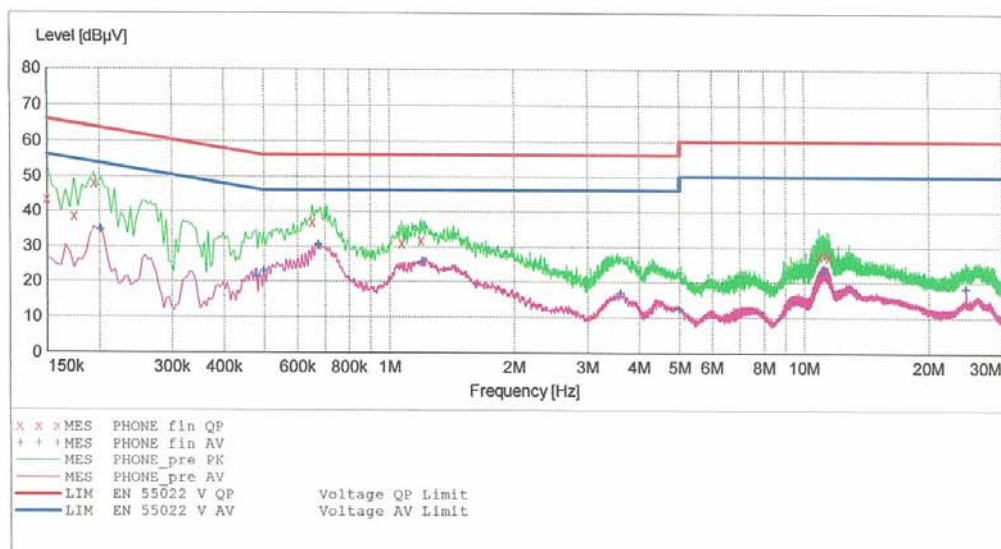

MEASUREMENT RESULT: "PHONE_fin QP"

4/28/2011 4:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150010	43.40	10.1	66	22.6	---	---
0.174010	38.60	10.1	65	26.2	---	---
0.194010	48.00	10.1	64	15.9	---	---
0.652000	36.90	10.1	56	19.1	---	---
1.072000	31.00	10.1	56	25.0	---	---
1.192000	31.70	10.1	56	24.3	---	---
10.856000	27.50	11.0	60	32.5	---	---
11.336000	28.10	11.0	60	31.9	---	---
11.472000	27.20	11.1	60	32.8	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

4/28/2011 4:31PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.202010	34.40	10.1	54	19.2	---	---
0.478010	21.40	10.1	46	25.0	---	---
0.498010	22.80	10.1	46	23.2	---	---
0.676000	30.40	10.1	46	15.6	---	---
1.200000	25.70	10.1	46	20.3	---	---
3.608000	16.80	10.4	46	29.2	---	---
5.000000	12.20	10.5	46	33.8	---	---
11.160000	23.10	11.0	50	26.9	---	---
24.580000	18.20	12.1	50	31.8	---	---


HCT

EMC

EUT: LG-A360K
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DH-RYU
Test Specification: FCC PART 15 CLASS B
Comment: N

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

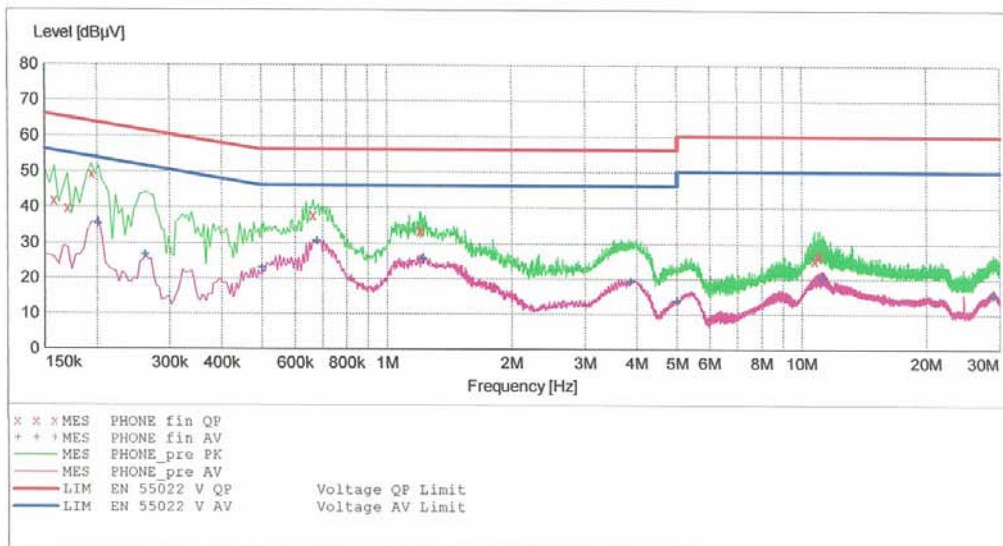

MEASUREMENT RESULT: "PHONE_fin QP"

4/28/2011 4:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.158010	41.80	10.3	66	23.8	---	---
0.170010	39.60	10.3	65	25.4	---	---
0.194010	49.20	10.3	64	14.7	---	---
0.664000	37.70	10.4	56	18.3	---	---
1.200000	33.30	10.4	56	22.7	---	---
1.208000	33.80	10.4	56	22.2	---	---
10.740000	25.40	11.1	60	34.6	---	---
10.948000	26.30	11.1	60	33.7	---	---
11.080000	26.90	11.1	60	33.1	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

4/28/2011 4:28PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.202010	35.10	10.3	54	18.4	---	---
0.262010	26.70	10.3	51	24.7	---	---
0.500000	23.00	10.3	46	23.0	---	---
0.680000	30.60	10.4	46	15.4	---	---
1.224000	25.70	10.4	46	20.3	---	---
3.868000	19.40	10.6	46	26.6	---	---
5.000000	13.70	10.7	46	32.3	---	---
11.236000	20.20	11.1	50	29.8	---	---
28.972000	15.20	11.9	50	34.8	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit Apply to : FCC PART 15 Subpart B Class B

For measurement below 1 GHz

-Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

For measurement above 1 GHz

-Setting : Peak mode: Detector- Peak(RBW: 1 MHz / VBW: 1 MHz)
Average mode: Detector- Peak (RBW: 1 MHz / VBW: 10 Hz)

Temperature : 23.8 °C

Humidity Level : 45.8 %

Test Date : April 27, 2011

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
50.1	7.7	13.6	0.9	V	22.2	40.0	17.8
129.2	16.2	11.5	1.4	V	29.1	43.5	14.4
344.9	14.3	14.1	2.3	H	30.7	46.0	15.3
377.9	11.4	14.9	2.5	H	28.8	46.0	17.2
720.3	7.3	21.1	3.6	H	32.0	46.0	14.0
755.9	7.2	22.0	3.8	H	33.0	46.0	13.0

※ NOTE:

1. Measurement above 1 GHz performed from 1 GHz to the 5th harmonic of highest fundamental frequency. The highest fundamental frequency is GSM 1 900 center frequency.
2. For measurement above 1 GHz, noise level is more than 14 dB below the limit, specified in FCC Part 15.35.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Serial Number</u>	<u>Next CAL Date</u>
-------------	---------------------	---------------------	----------------------	----------------------

Conducted Emission

☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	2011.05.28
☒ LISN	Rohde & Schwarz	ESH3-Z5	100282	2012.02.01
☐ LISN	Rohde & Schwarz	ENV216	100073	2012.04.01
☒ Attenuator	Rohde & Schwarz	ESH3-Z2	375.8810.352	2011.10.25

Radiated Emission

☐ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	2011.10.29
☒ EMI Test Receiver	Rohde & Schwarz	ESU26	100241	2011.09.01
☒ Trilog Antenna	Schwarzbeck	VULB9168	255	2011.05.28
☒ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	-
☒ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	-
☒ Communication Antenna	Schwarzbeck	USLP9142	9142-248	-
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	-	2012.04.13
☐ RF-Amplifier	MITEQ	AMF-6D-0010 1800-35.20P.PS	-	2011.05.20
☐ Base Station	Rohde & Schwarz	CMU 200	1100000802	2012.02.16

7. CONCLUSION

The data collected shows that the **EUT Type: Cellular/PCS GSM/GPRS/EDGE and Cellular WCDMA HSDPA Phone with Bluetooth, Model: LG-A360k, FCC ID: BEJA360K** complies with §15.107 and §15.109 of the FCC rules.