



PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road • Columbia, MD 21045 • U.S.A.

TEL (410) 290-6652 • FAX (410) 290-6654

www.pctestlab.com



CERTIFICATE OF COMPLIANCE FCC Part 22 Certification

LG Electronics Inc.
Communication Terminal Research Lab
459-9, Kasan-dong, Keumchun-ku
Seoul 153-023, Korea
Attn: Harris Ahn, Principal Engineer

Dates of Tests: March 26-29, 2001
Test Report S/N: 22.210326174.BEJ
Test Site: PCTEST Lab, Columbia MD USA

FCC ID

BEJDM150

APPLICANT

LG ELECTRONICS INC.

Classification:	Non-Broadcast Transmitter held to ear (TNE)
FCC Rule Part(s):	§22(H), §22.901(d), §2
EUT Type:	Dual-Mode Cellular Phone (AMPS/CDMA)
Trade Name/Model(s):	LGE LG-DM150
Tx Frequency Range:	824.04 ~ 848.97MHz (AMPS) / 824.70 ~ 848.31 MHz (CDMA)
Rx Frequency Range:	869.04 ~ 893.31MHz (AMPS) / 869.70 ~ 893.31 MHz (CDMA)
Max. RF Output Power:	0.474W ERP AMPS (26.754 dBm) / 0.371W ERP CDMA (25.678 dBm)
Max. SAR Measurement:	1.320 mW/g (1g) AMPS Head SAR; 1.250 mW/g (1g) CDMA Head SAR; 0.673 mW/g (1g) AMPS Body SAR; 0.580 mW/g (1g) CDMA Body SAR
Frequency Tolerance:	0.00025% (2.5 ppm)
Emission Designators:	40K0F8W, 40K0F1D, 1M25F9W

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President & Chief Engineer




2 1 0 3 2 6 1 7 4 . B E J

TABLE OF CONTENTS

ATTACHMENT A:	COVER LETTER(S)	
ATTACHMENT B:	ATTESTATION STATEMENT(S)	
ATTACHMENT C:	TEST REPORT	
1.1	SCOPE	1
2.1	INTRODUCTION	2
3.1	INSERTS PER §2.1033(d)	3
4.1	DESCRIPTION OF TESTS	4-6
5.1	EFFECTIVE RADIATED POWER OUTPUT	7-8
6.1	RADIATED MEASUREMENTS	9-14
7.1	FREQUENCY STABILITY	15-18
8.1	PLOTS OF EMISSIONS	19
9.1	LIST OF TEST EQUIPMENT	20
10.1	SAMPLE CALCULATIONS	21
11.1	CONCLUSION	22
ATTACHMENT D:	TEST PLOTS	
ATTACHMENT E:	FCC ID LABEL & LOCATION	
ATTACHMENT F:	TEST SETUP PHOTOGRAPHS	
ATTACHMENT G:	EXTERNAL PHOTOGRAPHS	
ATTACHMENT H:	INTERNAL PHOTOGRAPHS	
ATTACHMENT I:	BLOCK DIAGRAM(S)	
ATTACHMENT J:	CIRCUIT DIAGRAMS & DESCRIPTION	
ATTACHMENT K:	PARTS LIST/TUNE UP PROCEDURE	
ATTACHMENT L:	OPERATIONAL DESCRIPTION	
ATTACHMENT M:	USER'S MANUAL	
ATTACHMENT N:	SAR MEASUREMENT REPORT	
ATTACHMENT O:	SAR TEST DATA	
ATTACHMENT P:	SAR TEST SETUP PHOTOGRAPHS	
ATTACHMENT Q:	DIPOLE VALIDATION(S)	
ATTACHMENT R:	PROBE CALIBRATION	

MEASUREMENT REPORT



1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033 General Information

Applicant:	LG ELECTRONICS INC.
Address:	459-9, Kasan-dong, Keumchun-ku Seoul 153-023, Korea
Attention:	Harris Ahn, Principal Engineer Communication Terminal Research Lab

- FCC ID: **BEJDM150**
- Trade Name(s): **LGE**
- Model(s): **LG-DM150**
- Quantity: Quantity production is planned
- Emission Designator: 40K0F8W, 40K0F1D, 1M25F9W
- Tx Freq. Range: 824.04 – 848.97 MHz (AMPS) / 824.70 ~ 848.31 (CDMA)
- Rx Freq. Range: 869.04 – 893.31 MHz (AMPS) / 869.70 ~ 893.31 (CDMA)
- Equipment Class: Non-Broadcast Transmitter Held to Ear (TNE)
- Equipment Type: Dual-Mode Cellular Phone
- Modulation(s): AMPS / CDMA
- Frequency Tolerance: $\pm 0.00025\%$ (2.5 ppm)
- Max. RF Output Power: 0.474W ERP AMPS (26.754 dBm) / 0.371W ERP CDMA (25.678dBm)
- Max. SAR Measurement: 1.320 mW/g (1g) AMPS Head SAR; 1.250 mW/g (1g) CDMA Head SAR;
0.673 mW/g (1g) AMPS Body SAR; 0.580 mW/g (1g) CDMA Body SAR
- Antenna Type: Base Helical Retractable
[GALTRONICS Part No.: 02-4128-46-950]
- FCC Rule Part(s): §22(H), §22.901(d), §2
- Battery Pack: 3.7 VDC
- Dates of Tests: March 26-29, 2001
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.



2.1 INTRODUCTION

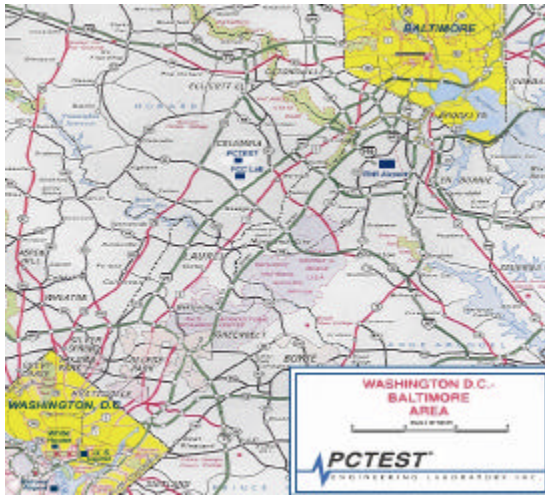


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

PCTEST Engineering

facility in New Concept Business Park, Guilford
trial Park, Columbia, Maryland. The site address is 6660 B

highest points in the Columbia area with an elevation of 390 feet
e

FCC laboratory, and the ambient signal and ambient signal strength

no FM or TV transmitters within 15 miles of the site
description of the measurement facility was found to be in

C63.4 on October 19, 1992.

Measurement Procedure

The radiated and spurious measurements were made outdoors at a 3-meter test range (see Figure2). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

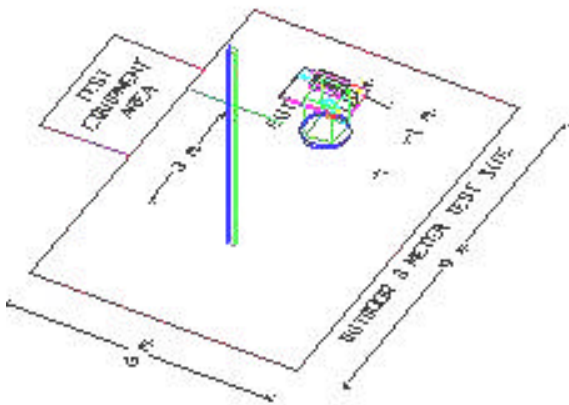


Figure 2. 3-meter Outdoor Test Site

3.1 INSERTS PER §2.1033(d)

§2.1033(d) Function of Active Devices (Confidential)

The Function of active devices are shown in Attachment L.

§2.1033(d) Block/Circuit Diagrams & Description (Confidential)

The circuit diagrams & description are shown in Attachment J, and the block diagrams are shown in Attachment I.

§2.1033(d) Operating Instructions

The instruction manual is shown in Attachment M.

§2.1033(d) Parts List & Tune-Up Procedure (Confidential)

The parts list & tune-up procedure are shown in Attachment K.

§2.1033(d) Description of Freq. Stabilization Circuit (Confidential)

The description of frequency stabilization circuit is shown in Attachment L.

§2.1033(d) Description for Suppression of Spurious Radiation, for Limiting Modulation, and Harmonic Suppression Circuits (Confidential)

The description of suppression stabilization circuits are shown in Attachment L.

ESTS

The frequency response of the audio modulating circuit over the frequency range 100 5000 Hz is measured. The audio signal generator is connected to the audi input is adjusted to obtain 50% modulation at 1kHz and this point is taken as the 0dB reference. With the input held constant and below the limit at all frequencies, the audio signal generator is va

4.3 §22.915(d) Audio Low Pass Filter Frequency Response

The response in dB relative to 1kHz is measured using the HP8901 a Modulation Analyzer. For the frequency response of the audio low pass filter, the audio input is connected at the input to the modulation limiter and the are shown herein.

The audio signal generator is response is measured for each of the three modulating frequencies (300Hz, 1000 Hz, and 3000Hz), and the input voltage is varied from 30% modulation (3.6kHz deviation) to at least 20dB higher than the saturation

SAT, and wide-

Note: ST, SAT, & Wide-Band data were internally generated by the EUT.

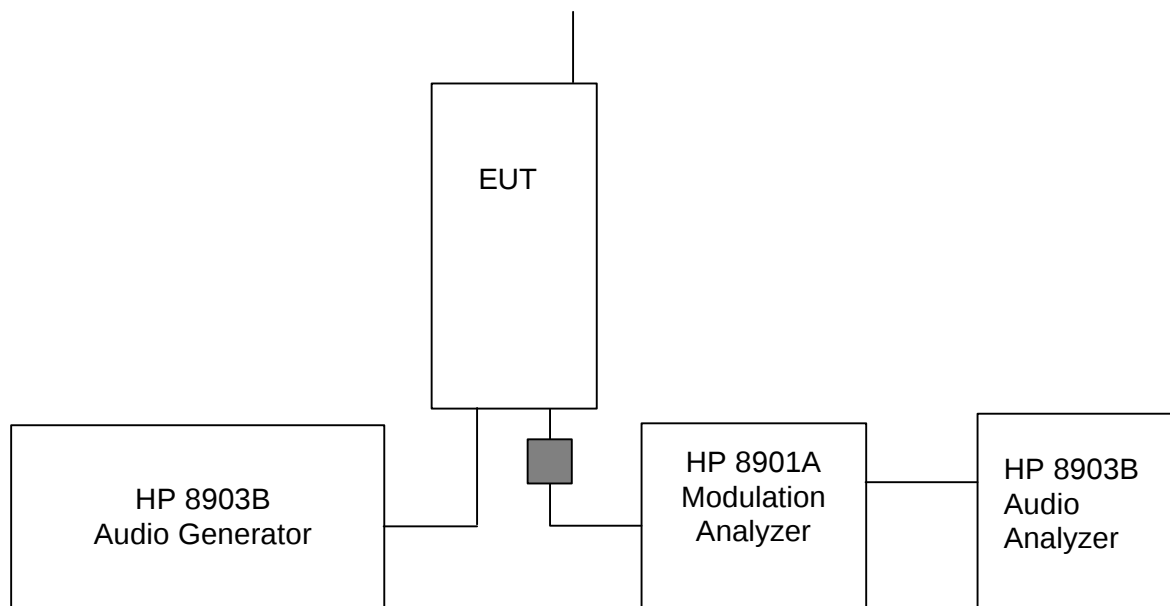


Fig. 3. Transmitter Audio Frequency & Tone Modulation Test Setup.

4.1 DESCRIPTION OF TESTS (CONTINUED)

4.4 §2.1049(c) Occupied Bandwidth

The audio signal generator is adjusted to 1kHz. The output level is set to +/- 6kHz deviation. With the level constant, the freq. is set to 2,500Hz. Then the audio signal level is increased by 16dB. The occupied bandwidth data is obtained for the SAT (Supervisory Audio Tone), ST (Signaling Tone), WBD (Wideband Data), and DTMF (Dual Tone Multi Frequencies). The results are shown on the attached graphs.

Specified Limits:

- (a) On any frequency removed from the assigned carrier frequency by more than 20kHz, up to and including 45kHz, the sideband is at least 26dB below the carrier.
- (b) On any frequency removed from the assigned carrier frequency by more than 45kHz, up to and including 90kHz, the sideband is at least 45dB below the carrier.
- (c) On any frequency removed from the assigned carrier frequency by more than 90kHz, up to the first multiple of the carrier frequency, the sideband is at least 60dB below the carrier of $40 + \log_{10}$ (mean power output in Watts) dB, whichever is the smaller attenuation.

4.5 §2.1051 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10 GHz. The transmitter is modulated with a 2500Hz tone at a level of 16dB greater than that required to provide 50% modulation.

At the input terminals of the spectrum analyzer, an isolator (RF circulator with one port terminated with 50 ohms) and an 870 MHz to 890 MHz bandpass filter is connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The rejection of the bandpass filter to signals in the 825 – 845 MHz range is adequate to limit the transmit energy from the test transceiver which appears to a level which will allow the analyzer to measure signals less than – 90dBm. Calibration of the test receiver is performed in the 870 – 890 MHz range to insure accuracy to allow variation in the passband filter insertion loss to be calibrated.

4.7 §2.1053 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emissions above 1 GHz is measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

4.1 DESCRIPTION OF TESTS (CONTINUED)

4.8 §2.995 Frequency Stability/Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification – The minimum frequency stability shall be +/- 0.00025% at any time during normal operation.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at 30°C (usually 14-16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements is made at 10°C interval up to room temperature. At least a period of one and one half hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency were made at 10 intervals starting at 30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE: The EUT is tested down to the battery endpoint.

5.1 Test Data

5.2 Effective Radiated Power Output

A. POWER: **Low (Analog Mode)**

Freq. Tuned (MHz)	LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)
824.04	-33.343	H	0.00622	7.930
836.49	-33.378	H	0.00640	8.051
848.97	-33.601	H	0.00630	7.984

A. POWER: **High (Analog Mode)**

Freq. Tuned (MHz)	LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)	BATTERY
824.04	-14.946	H	0.42927	26.327	Standard
836.49	-14.675	H	0.47358	26.754	Standard
848.97	-14.891	H	0.46708	26.694	Standard

NOTES:

ERP Measurements by Substitution Method:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This ERP level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

5.1 Test Data (Continued)

5.3 Effective Radiated Power Output

B. POWER: **High (CDMA Mode)**

Freq. Tuned (MHz)	LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)	BATTERY
824.70	-15.912	H	0.34431	25.370	Standard
835.89	-15.743	H	0.37057	25.678	Standard
848.31	-16.051	H	0.35692	25.526	Standard

NOTES:

ERP Measurements by Substitution Method:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This ERP level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

6.1 Test Data

6.2 Radiated Measurements

Field Strength of SPURIOUS Radiation (CDMA)

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013 (Low)
 MEASURED OUTPUT POWER: 25.678 dBm = 0.370 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 38.68$ dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ($\mu\text{V}/\text{m}$)	ERP (dBm)	(dBc)
1649.40	-92.14	34.5	V	293.8	-48.02	73.70
2474.10	-96.68	38.8	V	285.8	-48.26	73.94
3298.80	-107.89	42.5	V	120.4	-55.77	81.45
4123.50	-117.61	46.1	V	59.5	-61.89	87.57
4948.20	< -130	48.0	V			

NOTES:

- The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
- The spectrum was checked from 25 MHz up to the 10th harmonic.
- All emissions not listed were found to be more than 20dB below the limit.
- < -130dBm is below the floor of the spectrum analyzer.
- The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
- The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\begin{aligned} \text{ERP (dBm)} &= 10 \log_{10} \left(\left(\frac{r(\text{mV/m})}{1 \times 10^6} \right)^2 / 49.2 / 1 \times 10^{-3} \right) \\ \text{ERP (dBm)} &= 10 \log_{10} \left[(3 \times \text{FS} / 1 \times 10^6)^2 / (49.2) \times 1000 \right] \\ \text{ERP (Watts)} &= \{(3 \times \text{FS}) / 1 \times 10^6\}^2 / 49.2 \end{aligned}$$

6.1 Test Data (Continued)

6.3 Radiated Measurements

Field Strength of SPURIOUS Radiation (CDMA)

OPERATING FREQUENCY: 835.89 MHz
 CHANNEL: 363 (Middle)
 MEASURED OUTPUT POWER: 25.678 dBm = 0.370 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 38.68$ dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ($\mu V/m$)	ERP (dBm)	(dBc)
1671.78	-89.93	34.5	V	378.9	-45.81	71.49
2507.67	-96.47	38.8	V	292.9	-48.04	73.72
3343.56	-105.78	42.5	V	153.5	-53.66	79.34
4179.45	-116.36	46.1	V	68.7	-60.64	86.32
5015.34	< -130	48.0	V			

NOTES:

- The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
- The spectrum was checked from 25 MHz up to the 10th harmonic.
- All emissions not listed were found to be more than 20dB below the limit.
- < -130dBm is below the floor of the spectrum analyzer.
- The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
- The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} \left(\left(\frac{r(mV/m)}{1 \times 10^6} \right)^2 / 49.2 / 1 \times 10^{-3} \right)$$

$$\text{ERP (dBm)} = 10 \log_{10} \left[(3 \times \text{FS} / 1 \times 10^6)^2 / (49.2) \times 1000 \right]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS}) / 1 \times 10^6\}^2 / 49.2$$

6.1 Test Data (Continued)

6.4 Radiated Measurements

Field Strength of SPURIOUS Radiation (CDMA)

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777 (High)
 MEASURED OUTPUT POWER: 25.678 dBm = 0.370 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 38.68$ dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S (μ V/m)	ERP (dBm)	(dBc)
1696.62	-90.97	34.5	V	336.1	-46.85	72.53
2544.93	-95.34	38.8	V	333.4	-46.92	72.60
3393.24	-109.34	42.5	V	101.9	-57.22	82.90
4241.55	-116.87	46.1	V	64.8	-61.14	86.82
5089.86	< -130	48.0	V			

NOTES:

- The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
- The spectrum was checked from 25 MHz up to the 10th harmonic.
- All emissions not listed were found to be more than 20dB below the limit.
- < -130dBm is below the floor of the spectrum analyzer.
- The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
- The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\begin{aligned} \text{ERP (dBm)} &= 10 \log_{10} \left(\left(\frac{r(\text{mV/m})}{1 \times 10^6} \right)^2 / 49.2 / 1 \times 10^{-3} \right) \\ \text{ERP (dBm)} &= 10 \log_{10} \left[(3 \times \text{FS} / 1 \times 10^6)^2 / (49.2) \times 1000 \right] \\ \text{ERP (Watts)} &= \{(3 \times \text{FS}) / 1 \times 10^6\}^2 / 49.2 \end{aligned}$$

6.1 Test Data (Continued)

6.5 Radiated Measurements

Field Strength of SPURIOUS Radiation (Analog)

OPERATING FREQUENCY: 824.04 MHz
 CHANNEL: 991 (Low)
 MEASURED OUTPUT POWER: 26.754 dBm = 0.47 W
 MODULATION SIGNAL: ST (Signalling Tone)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.76 dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S (μ V/m)	ERP (dBm)	(dBc)
1648.08	-88.85	34.5	V	429.0	-44.73	71.48
2472.12	-96.03	38.8	V	308.0	-47.61	74.36
3296.16	-106.45	42.5	V	142.1	-54.33	81.08
4120.20	-123.23	46.1	V	31.1	-67.51	94.27
4944.24	< -130	48.0	V			

NOTES:

- The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
- The spectrum was checked from 25 MHz up to the 10th harmonic.
- All emissions not listed were found to be more than 20dB below the limit.
- < -130dBm is below the floor of the spectrum analyzer.
- The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
- The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} \left(\left(\frac{r(\text{mV/m})}{1 \times 10^6} \right)^2 / 49.2 / 1 \times 10^{-3} \right)$$

$$\text{ERP (dBm)} = 10 \log_{10} \left[(3 \times \text{FS} / 1 \times 10^6)^2 / (49.2) \times 1000 \right]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS}) / 1 \times 10^6\}^2 / 49.2$$

6.1 Test Data (Continued)

6.6 Radiated Measurements

Field Strength of SPURIOUS Radiation (Analog)

OPERATING FREQUENCY: 836.49 MHz
 CHANNEL: 383 (Middle)
 MEASURED OUTPUT POWER: 26.754 dBm = 0.47 W
 MODULATION SIGNAL: ST (Signalling Tone)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.76 dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ($\mu V/m$)	ERP (dBm)	(dBc)
1672.98	-89.45	34.5	V	400.4	-45.33	72.08
2509.47	-95.43	39.0	V	337.7	-46.81	73.56
3345.96	-108.47	42.7	V	115.2	-56.15	82.90
4182.45	-124.23	46.2	V	28.1	-68.41	95.16
5018.94	< -130	48.5	V			

NOTES:

- The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
- The spectrum was checked from 25 MHz up to the 10th harmonic.
- All emissions not listed were found to be more than 20dB below the limit.
- < -130dBm is below the floor of the spectrum analyzer.
- The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
- The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} \left(\left(\frac{r(\text{mV/m})}{1 \times 10^6} \right)^2 / 49.2 / 1 \times 10^{-3} \right)$$

$$\text{ERP (dBm)} = 10 \log_{10} \left[(3 \times \text{FS} / 1 \times 10^6)^2 / (49.2) \times 1000 \right]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS}) / 1 \times 10^6\}^2 / 49.2$$

6.1 Test Data (Continued)

6.7 Radiated Measurements

Field Strength of SPURIOUS Radiation (Analog)

OPERATING FREQUENCY: 848.97 MHz
 CHANNEL: 799 (High)
 MEASURED OUTPUT POWER: 26.754 dBm = 0.47 W
 MODULATION SIGNAL: ST (Signalling Tone)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) = 39.76$ dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S (μ V/m)	ERP (dBm)	(dBc)
1697.94	-86.34	34.9	V	599.8	-41.82	68.57
2546.91	-95.78	39.2	V	331.9	-46.96	73.71
3395.88	-109.88	42.9	V	100.3	-57.35	84.11
4244.85	-122.42	46.1	V	34.2	-66.70	93.45
5093.82	< -130	48.4	V			

NOTES:

- The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
- The spectrum was checked from 25 MHz up to the 10th harmonic.
- All emissions not listed were found to be more than 20dB below the limit.
- < -130dBm is below the floor of the spectrum analyzer.
- The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
- The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\begin{aligned} \text{ERP (dBm)} &= 10 \log_{10} \left(\left(\frac{r(\text{mV/m})}{1 \times 10^6} \right)^2 / 49.2 / 1 \times 10^{-3} \right) \\ \text{ERP (dBm)} &= 10 \log_{10} \left[(3 \times \text{FS} / 1 \times 10^6)^2 / (49.2) \times 1000 \right] \\ \text{ERP (Watts)} &= \{(3 \times \text{FS}) / 1 \times 10^6\}^2 / 49.2 \end{aligned}$$

7.1 Test Data


7.2 FREQUENCY STABILITY

OPERATING FREQUENCY: 835,890,008 Hz
 CHANNEL: 363
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	835,890,008	0.000000
100 %		- 30	835,889,908	0.000012
100 %		- 20	835,889,774	0.000028
100 %		- 10	835,889,866	0.000017
100 %		0	835,889,966	0.000005
100 %		+ 10	835,890,005	0.000000
100 %		+ 20	835,890,008	0.000000
100 %		+ 25	835,890,108	-0.000012
100 %		+ 30	835,890,184	-0.000021
100 %		+ 40	835,890,234	-0.000027
100 %		+ 50	835,890,158	-0.000018
100 %		+ 60	835,890,125	-0.000014
85 %	3.15	+ 20	835,890,008	0.000000
115 %	4.26	+ 20	835,890,008	0.000000
BATT. ENDPOINT	2.76	+ 20	835,890,008	0.000000

7.1 Test Data (Continued)

7.3 FREQUENCY STABILITY

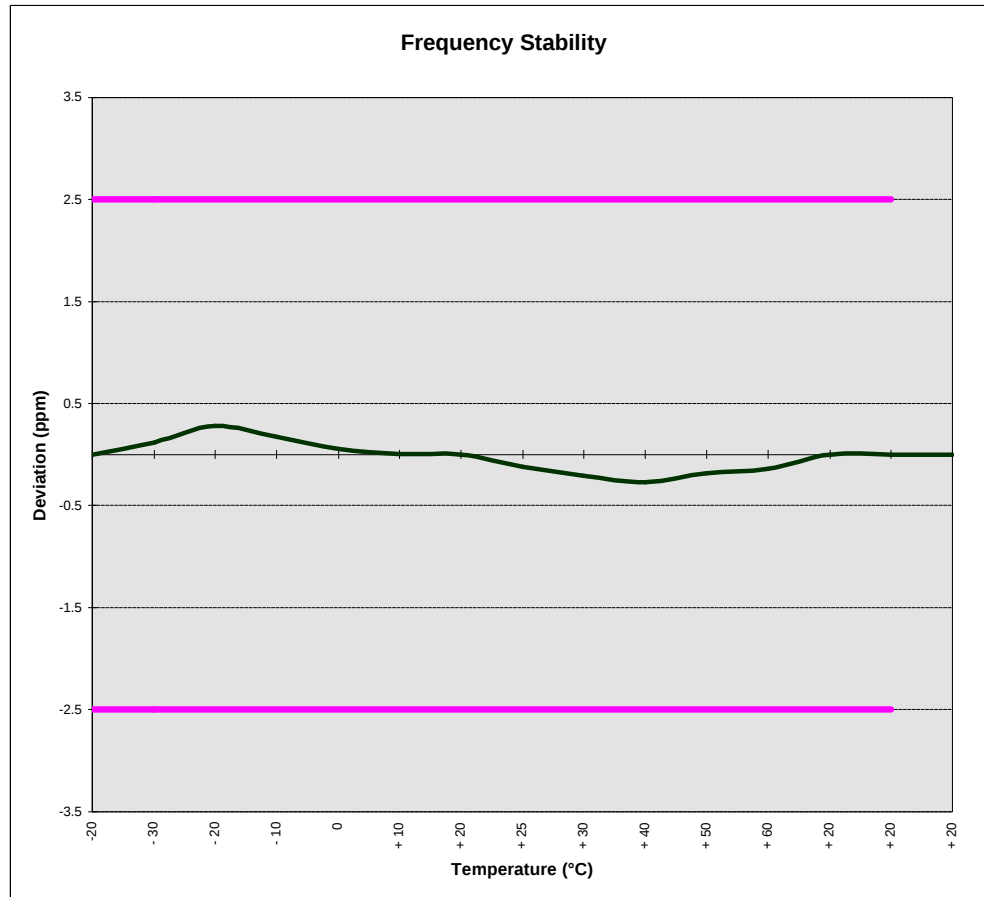

7.1 Test Data (Continued)


7.4 FREQUENCY STABILITY (AMPS)

OPERATING FREQUENCY: 836,490,007 Hz
 CHANNEL: 383
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	836,490,007	0.000000
100 %		- 30	836,490,317	-0.000037
100 %		- 20	836,490,358	-0.000042
100 %		- 10	836,490,434	-0.000051
100 %		0	836,490,224	-0.000026
100 %		+ 10	836,490,174	-0.000020
100 %		+ 20	836,490,007	0.000000
100 %		+ 25	836,489,932	0.000009
100 %		+ 30	836,489,890	0.000014
100 %		+ 40	836,489,764	0.000029
100 %		+ 50	836,489,672	0.000040
100 %		+ 60	836,489,798	0.000025
85 %	3.15	+ 20	836,490,007	0.000000
115 %	4.26	+ 20	836,490,007	0.000000
BATT. ENDPOINT	2.78	+ 20	836,490,007	0.000000

7.1 Test Data (Continued)

7.5 FREQUENCY STABILITY (AMPS)

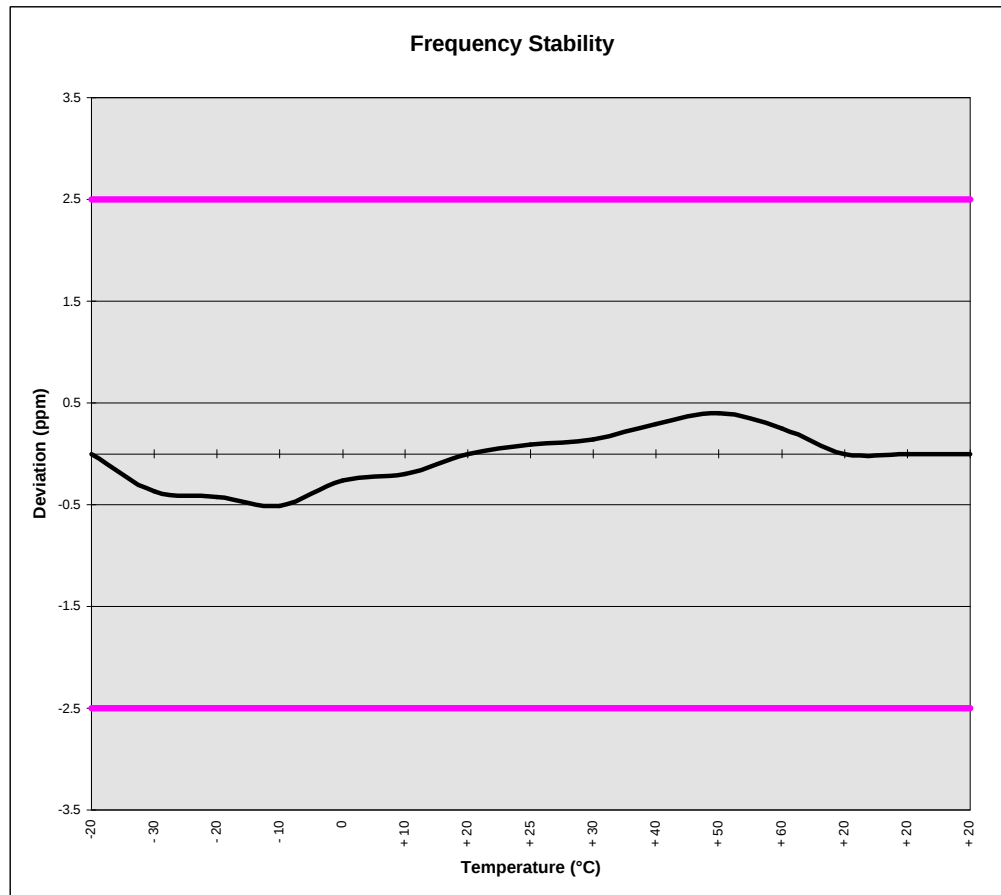

8.1 PLOT(S) OF EMISSIONS

SEE ATTACHMENT D

9.1 TEST EQUIPMENT

Type	Model	Cal. Due Date	S/N
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	08/15/01	3638A08713
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/02	2542A11898
Spectrum Analyzer/Tracking Gen.	HP 8591A (100Hz-1.8GHz)	08/10/01	3144A02458
Signal Generator*	HP 8640B (500Hz-1GHz)	06/03/01	2232A19558
Signal Generator*	HP 8640B (500Hz-1GHz)	06/03/01	1851A09816
Signal Generator*	Rohde & Schwarz (0.1-1000MHz)	09/11/01	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/02	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/02	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/01	0608-03241
Quasi-Peak Adapter	HP 85650A	08/15/01	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/02	0194-04082
Gigatronics Universal Power Meter	8657A		1835256
Gigatronics Power Sensor	80701A (0.05-18GHz)		1833460
Signal Generator	HP 8648D (9kHz-4GHz)		3613A00315
Amplifier Research	5S1G4 (5W, 800MHz-4.2GHz)		22322
Network Analyzer	HP 8753E (30kHz-3GHz)		JP38020182
Audio Analyzer	HP 8903B		3011A09025
Modulation Analyzer	HP 8901A		2432A03467
Power Meter	HP 437B		3125U24437
Power Sensor	HP 8482H (30μW-3W)		2237A02084
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)		3531A00115
Broadband Amplifier (2)	HP 8447D		1145A00470, 1937A03348
Broadband Amplifier	HP 8447F		2443A03784
Horn Antenna	EMCO Model 3115 (1-18GHz)		9704-5182
Horn Antenna	EMCO Model 3115 (1-18GHz)		9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design 1295, 1332, 0355		
Log-Spiral Antenna (3)	Ailtech/Eaton 93490-1		0608, 1103, 1104
Roberts Dipoles	Compliance Design (1 set)		
Ailtech Dipoles	DM-105A (1 set)		33448-111
EMCO LISN (6)	3816/2		1079
Microwave Preamplifier 40dB Gain	HP 83017A (0.5-26.5GHz)		3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)		
Ailtech/Eaton Receiver	NM37/57A-SL		0792-03271
Spectrum Analyzer	HP 8594A		3051A00187
Spectrum Analyzer (2)	HP 8591A		3034A01395, 3108A02053
Microwave Survey Meter	Holaday Model 1501 (2.450GHz)		80931
Digital Thermometer	Extech Instruments 421305		426966
Attenuator	HP 8495A (0-70dB) DC-4GHz		
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)		
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)
Environmental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285

* Calibration traceable to the National Institute of Standards and Technology (NIST).

10.1 SAMPLE CALCULATIONS

A. ERP Calculation

$$\text{Level } \mu\text{V/m @ 3 meters} = \text{Log}_{10}^{-1} \frac{(\text{dBm} + 107 + \text{AFCL})}{20}$$

$$\text{Log}_{10}^{-1} \frac{(-14 + 107 + 31.7)}{20}$$

$$1717908.4 \mu\text{V/m @ 3 meters}$$

Sample Calculation (relative to a dipole)

$$\text{ERP (dBm)} = 10 \text{Log}_{10} (((r(\mu\text{V/m})1 \times 10^6)^2 / 49.2 / 1 \times 10^{-3}))$$

$$\text{ERP (dBm)} = 10 \text{Log}_{10} (((3(1717908.4)1 \times 10^6)^2 / 49.2 / 1 \times 10^{-3}))$$

$$\text{ERP (dBm)} = 28.95$$

B. Emission Designator per §2.201

CDMA Sample

2M + 2DK

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Emission Designator = 1M25F9W

11.1 CONCLUSION

The data collected shows that the **LGE Dual-Mode Cellular Phone FCC ID: BEJDM150** complies with all the requirements of Parts 2 and 22 of the FCC rules.

PCTEST Engineering Lab., Inc.

SUBJECT: Modulation Characteristics
FCC Part 22


Test Report No.: 22.210326174.BEJ
Test Date: 03.28.2001

EUT: LGE Dual-Mode Cellular Phone (AMPS/CDMA)

Model: LG-DM150

FCC ID: BEJDM150

REFERENCE: 1 kHz = 0 dB

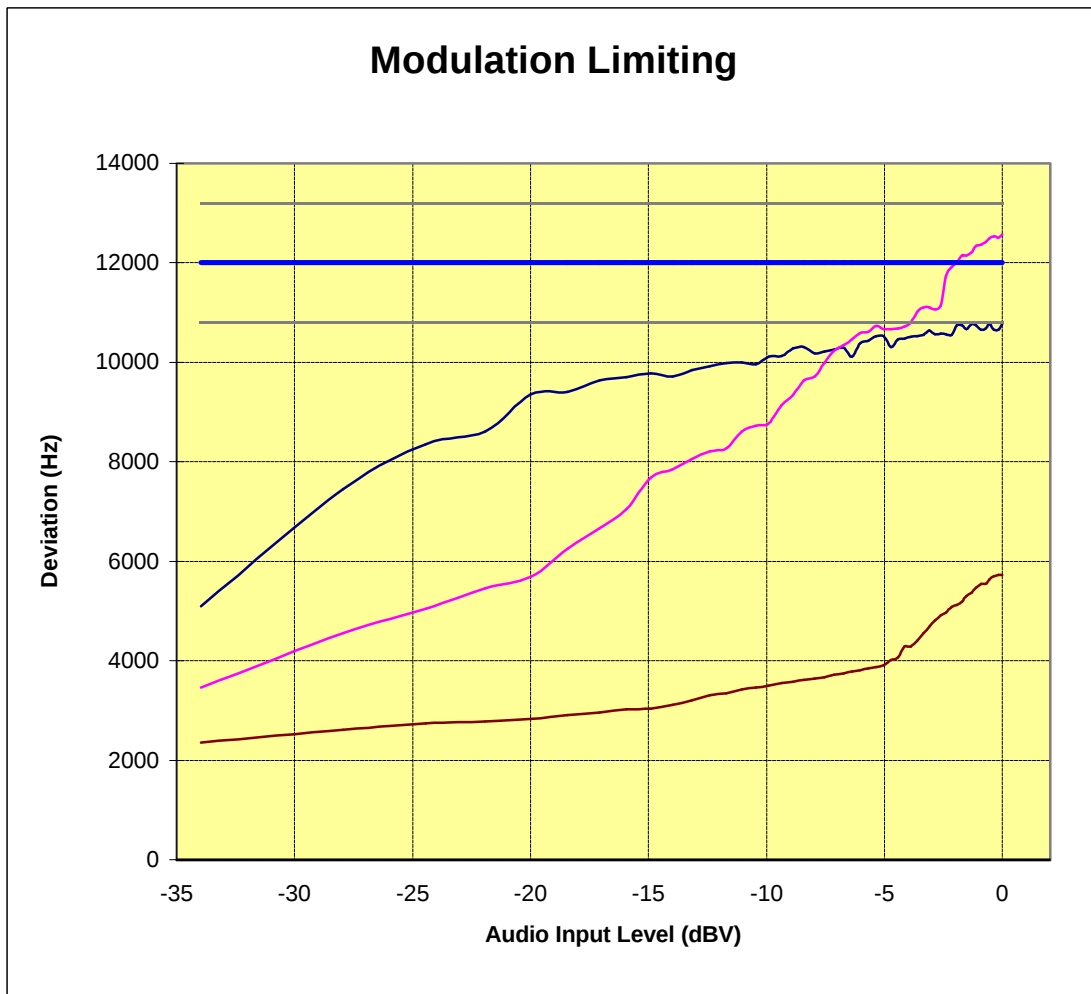


PCTEST Engineering Lab., Inc.

SUBJECT: Modulation Characteristics
FCC Part 22

Test Report No.: 22.210326174.BEJ
Test Date: 03.28.2001

EUT: LGE Dual-Mode Cellular Phone (AMPS/CDMA)
Model: LG-DM150
FCC ID: BEJDM150

REFERENCE: 1 kHz = 0 dB

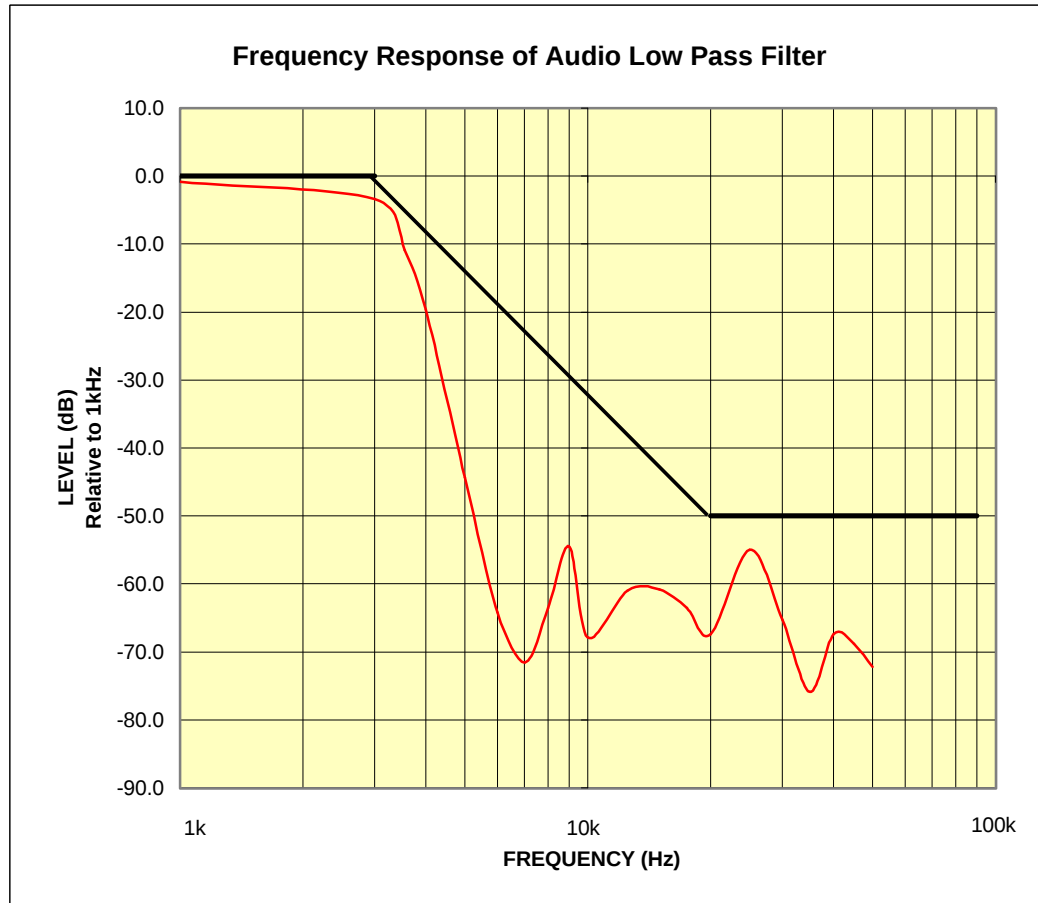

PCTEST Engineering Lab., Inc.

SUBJECT: Modulation Characteristics
FCC Part 22

Test Report No.: 22.210326174.BEJ
Test Date: 03.28.2001

EUT: LGE Dual-Mode Cellular Phone (AMPS/CDMA)
Model: LG-DM150
FCC ID: BEJDM150

REFERENCE: 1 kHz = 0 dB

