



FCC TEST REPORT

According to

47 CFR, Part 2, Part 15 and CISPR PUB. 22

Applicant	: LG Electronics USA
Address	: 1000 Sylvan Avenue Englewood Cliffs New Jersey United States
Manufacturer	: LG Electronics Nanjing Display Co., Ltd.
Address	: No.346,Yaoxin Road Economic & Technical Development Zone Nanjing China
Equipment	: LCD Monitor
Model No.	: E2340SV
FCC ID	: BEJE2340SV
Trade Name	: LG

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **CerpPASS Technology Corp.** the test report shall not be reproduced except in full.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



Table of Contents

1. Summary of Test Procedure and Test Result	5
2. Test Configuration of Equipment under Test.....	6
2.1. Feature of Equipment under Test	6
2.2. Test Manner.....	6
2.3. Description of Test System	7
2.4. Connection Diagram of Test System	7
2.5. General Information of Test	8
2.6. Measurement Uncertainty	8
3. Test of Conducted Emission	9
3.1. Test Limit	9
3.2. Test Procedures.....	9
3.3. Typical test Setup	10
3.4. Measurement equipment.....	10
3.5. Test Result and Data	11
4. Test of Radiated Emission	12
4.1. Test Limit	12
4.2. Test Procedures.....	13
4.3. Typical test Setup	13
4.4. Measurement equipment.....	14
4.5. Test Result and Data	15

Document history

[illegible]



FCC TEST REPORT

According to

47 CFR, Part 2, Part 15 and CISPR PUB. 22

Applicant	: LG Electronics USA
Address	: 1000 Sylvan Avenue Englewood Cliffs New Jersey United States
Manufacturer	: LG Electronics Nanjing Display Co., Ltd.
Address	: No.346,Yaoxin Road Economic & Technical Development Zone Nanjing China
Equipment	: LCD Monitor
Model No.	: E2340SV
FCC ID	: BEJE2340SV
Trade Name	: LG

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 – 2003** and the energy emitted by this equipment was **passed** **CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission class B limits. Testing was carried out on Mar 08, 2010 at **CerpPASS Technology Corp.**

Documented By:

Approved By:

Cathy Chen/ Administration

John Wang/ Technical director



1. Summary of Test Procedure and Test Result

Test Item	Normative References	Test Result
Conducted Emission	ANSI C63.4-2003 FCC Part 15 Subpart B	PASS
Radiated Emission	ANSI C63.4-2003 FCC Part 15 Subpart B	PASS



2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

LCD Monitor	Model No:	E2340SV
Adapter #1	Manufacturer:	LG
	Model No:	FSP036-DGAA1
	Input:	100-240V~, 1.3A(1,3A), 50-60Hz
	Output:	12.0V(12,0V)  3.0A(3,0A) MAX
DC Cable	Non-Shielded, 1.5m, with one ferrite core bonded	
Adapter #2	Manufacturer:	LG
	Model No:	LCAP07F
	Input:	100-240V~, 50-60Hz, 1.0A(1,0A) Max
	Output:	12V  3.0A(3,0A)
DC Cable	Non-Shielded, 1.5m, with one ferrite core bonded	
VGA Cable	Shielded, 1.8m, with two ferrite cores bonded	
VGA Cable	Shielded, 1.8m	
Power Supply Cable	Non-Shielded, 1.8m	
Note : The VGA Cable are alternative on selling.		

2.2. Test Manner


Test Software	
a	During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
b	The complete test system included the Printer, PC, USB Mouse, USB Keyboard and EUT for EMI test.
c	During the test, setup up the EUT and all system, turn on the power of all Equipments, run the EMC test software "H", set the contrast control to maximum, set the brightness control to maximum, use white letters on a black background to represent all colors, make the EUT at the test mode and it is normal operation, and then test.
The pre-test modes	
	Test Mode 1: Full system (VGA mode 1920*1080@60Hz) with Adapter #1
	Test Mode 2: Full system (VGA mode 1024*768@75Hz) with Adapter #1
	Test Mode 3: Full system (VGA mode 720*400@70Hz) with Adapter #1
	Test Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2
	Test Mode 5: Full system (VGA mode 1024*768@75Hz) with Adapter #2
	Test Mode 6: Full system (VGA mode 720*400@70Hz) with Adapter #2
Select the worst case of the pre-test modes as the final test mode	
	Test Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2



2.3. Description of Test System

No	Device	Manufacturer	Model No.	Description
1	PC	Dell	DCTA	N/A
2	USB Mouse	DELL	G0K02XYK	N/A
3	USB Keyboard	DELL	SK-8115	N/A
4	Printer	Epson	EX3	N/A

2.4. Connection Diagram of Test System

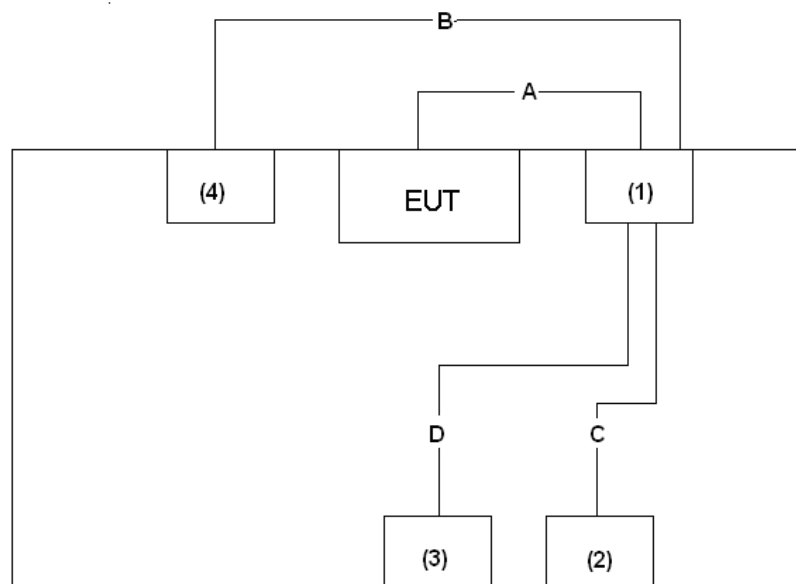

No	Cable	Quantity	Description
A	VGA Cable	1	Shielded, 1.8m
B	Parallel Cable	1	Shielded, 1.8m
C	USB Cable	1	Shielded, 1.5m
D	USB Cable	1	Shielded, 1.8m, with one ferrite core bonded



2.5. General Information of Test

Test Site :	CerpPASS Technology Corp.
Performed Location :	No.66, Tangzhuang Road, Suzhou Industrial Park, Jiangsu, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572
VCCI Registration Number :	T-343 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test
Test in Compliance with :	ANSI C63.4-2003 FCC Part 15 Subpart B
Frequency Range Investigated :	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 1,000 MHz Radiation: from 1GHz to 18GHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 3 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

Laboratory accreditation



2.6. Measurement Uncertainty

Conducted Emission		
The measurement uncertainty is evaluated as ± 2.71 dB.		
Radiated Emission		
(30MHz -1000MHz)	Horizontal	The measurement uncertainty is evaluated as ± 3.89 dB.
	Vertical	The measurement uncertainty is evaluated as ± 3.59 dB.
(1G-18GHz)	Horizontal	The measurement uncertainty is evaluated as ± 2.31 dB.
	Vertical	The measurement uncertainty is evaluated as ± 2.15 dB.



3. Test of Conducted Emission

3.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

3.2. Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



3.3. Typical test Setup

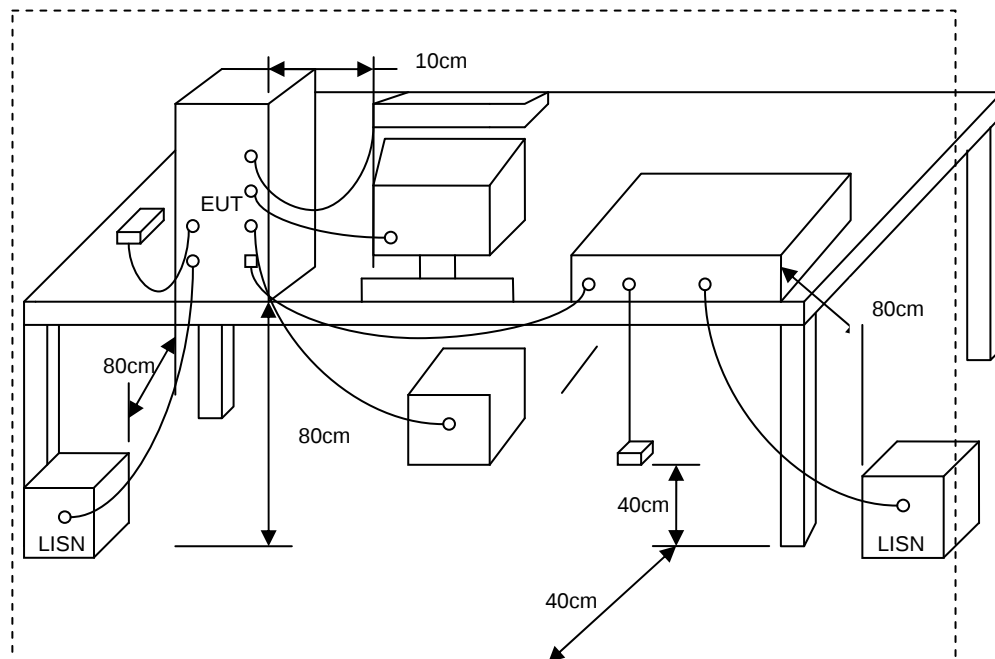


3.4. Measurement equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2009.09.08
Test Receiver	R&S	ESCI	100565	2010.01.15
AMN	R&S	ESH2-Z5	100182	2009.06.23
Two-Line V-Network	R&S	ENV216	100325	2009.06.23
ISN	FCC	FCC-TLISN-T2-02	20379	2009.06.23
ISN	FCC	FCC-TLISN-T4-02	20380	2009.06.23
ISN	FCC	FCC-TLISN-T8-02	20381	2009.06.23
Attenuator	R&S	ESH3-Z2	100529	2010.01.11
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2009.10.19



3.5. Test Result and Data

Test Mode :	Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2		
AC Power :	AC 120V/60Hz	Phase :	L&N
EUT :	LCD Monitor	Model No.:	E2340SV
Temperature :	20°C	Humidity :	43%
Pressur(mbar) :	1002	Date :	2010/03/04

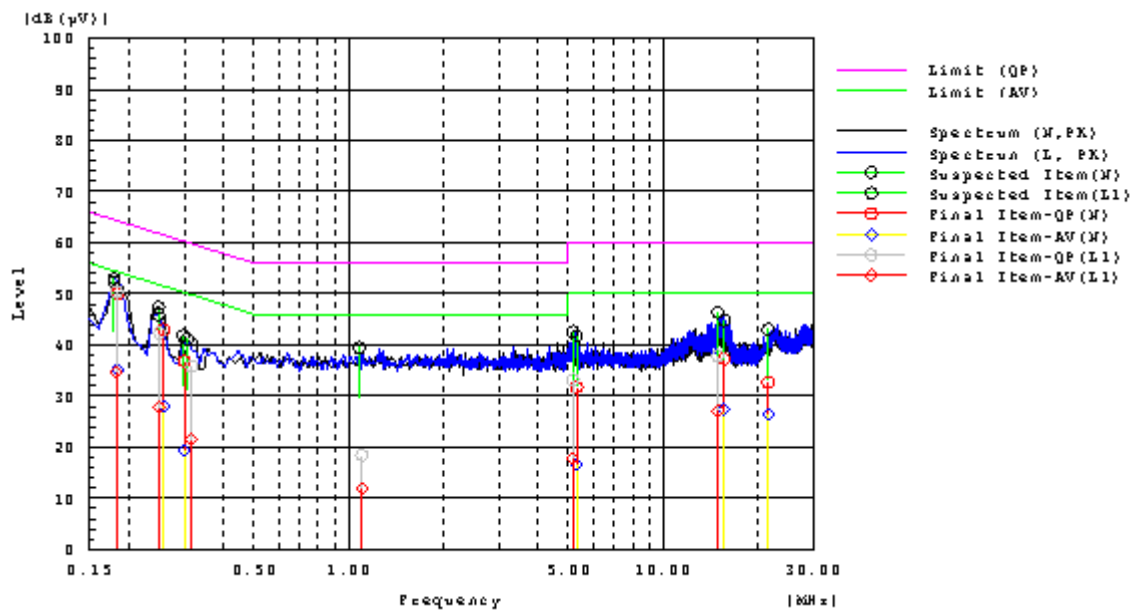

Frequency MHz	Line Phase	Reading dB(uV) QP	Reading dB(uV) AV	Factor dB	Level dB(uV) QP	Level dB(uV) AV	Limit dB(uV) QP	Limit dB(uV) AV	Margin dB QP	Margin dB AV	Pass/Fail
0.18308	L1	30.9	15.2	19.5	50.4	34.7	64.3	54.3	13.9	19.6	Pass
0.25001	L1	22.9	8.3	19.5	42.4	27.8	61.8	51.8	19.4	24.0	Pass
0.31645	L1	16.2	2.0	19.6	35.8	21.6	59.8	49.8	24.0	28.2	Pass
1.10079	L1	-1.1	-7.6	19.5	18.4	11.9	56.0	46.0	37.6	34.1	Pass
5.1611	L1	13.4	-1.9	19.8	33.2	17.9	60.0	50.0	26.8	32.1	Pass
14.9127	L1	17.6	7.0	20.2	37.8	27.2	60.0	50.0	22.2	22.8	Pass
0.18395	N	30.4	15.4	19.7	50.1	35.1	64.3	54.3	14.2	19.2	Pass
0.25806	N	23.2	8.3	19.8	43.0	28.1	61.5	51.5	18.5	23.4	Pass
15.6133	N	17.0	7.1	20.3	37.3	27.4	60.0	50.0	22.7	22.6	Pass
5.3028	N	12.0	-3.1	19.8	31.8	16.7	60.0	50.0	28.2	33.3	Pass
21.5544	N	12.1	5.9	20.6	32.7	26.5	60.0	50.0	27.3	23.5	Pass
0.29977	N	17.0	-0.5	19.8	36.8	19.3	60.2	50.2	23.4	30.9	Pass

Note: Measurement Level = Reading Level + Correct Factor

Test engineer:



4. Test of Radiated Emission

4.1. Test Limit

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-2003. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 3.2. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (m)	Level (dBuV/m)	Level (dBuV/m)
30 - 88	3	40(QP)	N/A
88 - 216	3	43(QP)	N/A
216-960	3	46(QP)	N/A
960-1000	3	54(QP)	N/A
1000-18000	3	74(PK)	54(AV)

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37





4.2. Test Procedures

- The EUT was placed on a Rota table top 0.8 meter above ground.
- The EUT and its simulators are placed on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters or 1 meter.
- The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.
- Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.
- Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120KHz and the frequency range from 1GHz to 18GHz using a receiver bandwidth of 1MHz.

4.3. Typical test Setup

Below 1GHz Test Setup

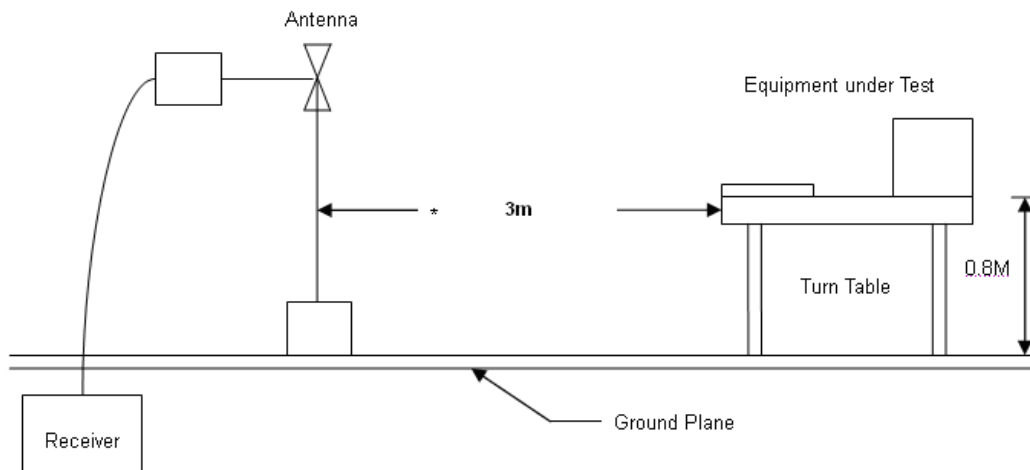

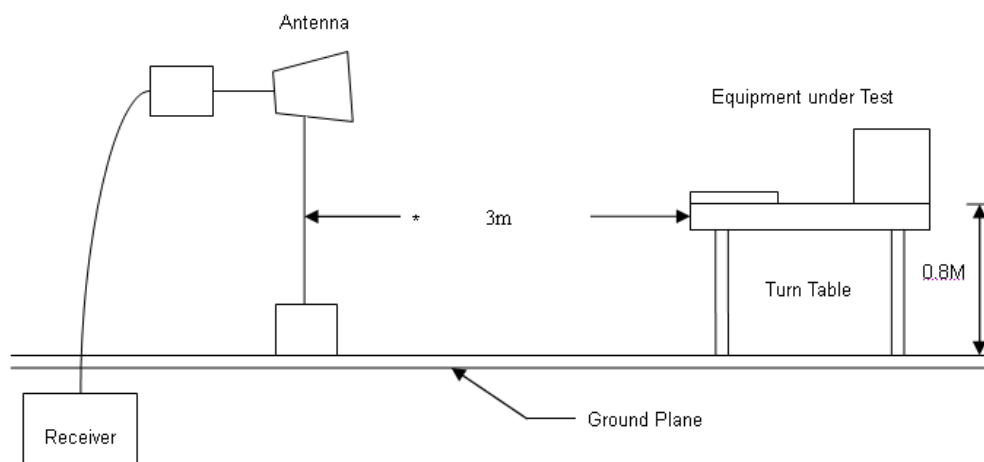**Above 1GHz Test Setup****4.4. Measurement equipment**


Instrument	Model No.	Manufacturer	Serial No.	Calibration Date
EMI Test Receiver	R&S	ESCI	100564	2009.06.23
H64 Amplifier	HP	8447F	3113A05582	2009.12.01
Preamplifier	Agilent	8449B	ED-HE-EMI-077	2010.02.10
Ultra Broadband Antenna	R&S	HL562	100362	2009.11.25
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2009.11.10
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-001	2009.10.19



4.5. Test Result and Data

Under 1G

Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/03/07 - 19:02
Limit : CISPR22_B_03M_QP	Margin : 6
EUT : LCD Monitor	Probe : (30-1000MHz) - HORIZONTAL
Power : AC120V/60Hz	Note : Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2

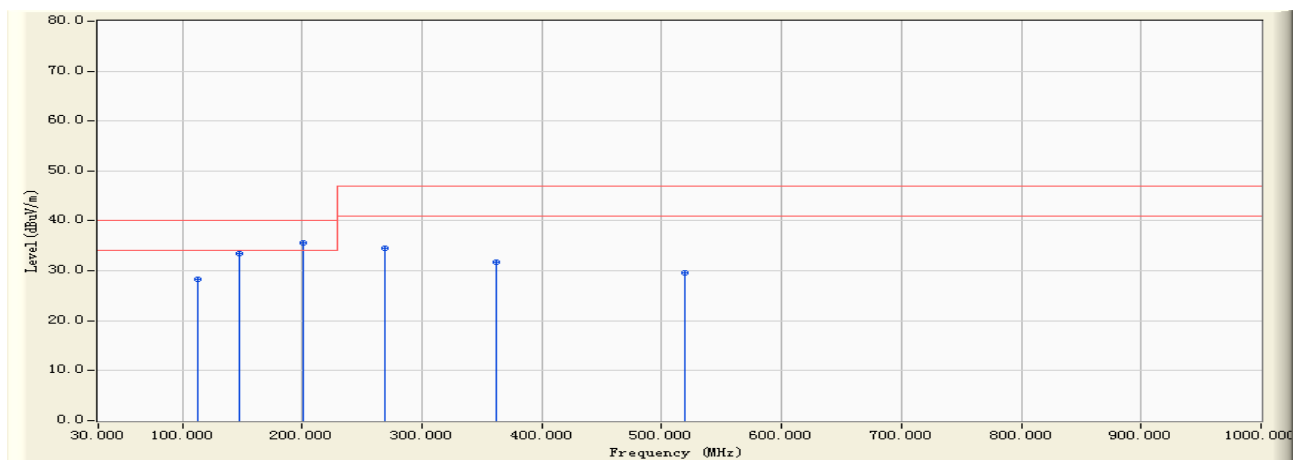


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1		112.420	-16.472	44.720	28.247	-11.753	40.000	QUASIPeAK	400.000	254.500
2		148.210	-17.876	51.390	33.513	-6.487	40.000	QUASIPeAK	400.000	205.400
3	*	201.320	-17.652	53.220	35.568	-4.432	40.000	QUASIPeAK	245.700	112.400
4		268.560	-14.055	48.560	34.505	-12.495	47.000	QUASIPeAK	250.000	210.600
5		361.750	-11.488	43.150	31.662	-15.338	47.000	QUASIPeAK	244.800	180.000
6		519.000	-8.488	38.070	29.582	-17.418	47.000	QUASIPeAK	100.000	141.200

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/03/07 - 19:02
Limit : CISPR22_B_03M_QP	Margin : 6
EUT : LCD Monitor	Probe : (30-1000MHz) - VERTICAL
Power : AC120V/60Hz	Note : Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2

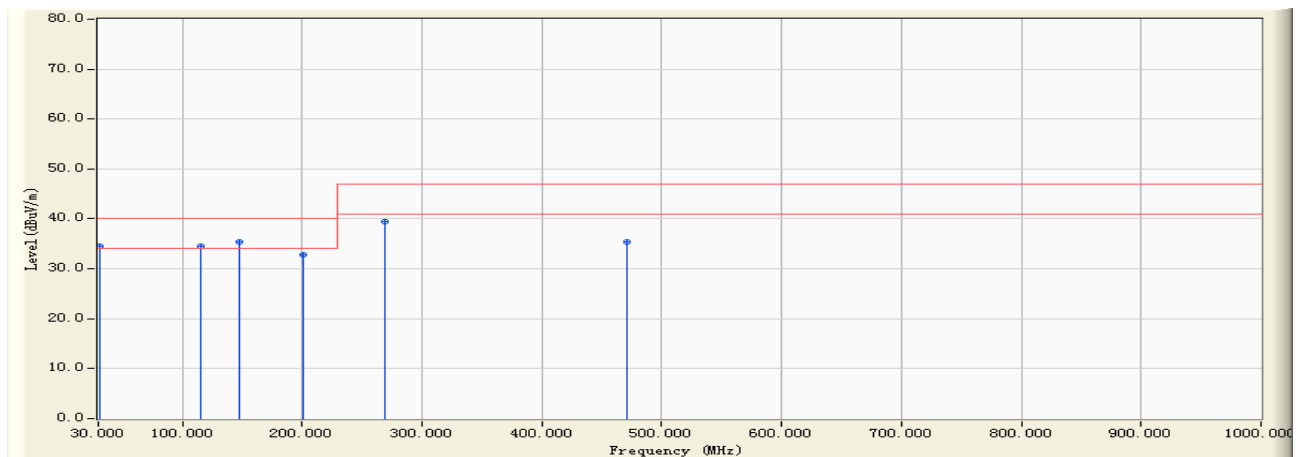

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1		31.040	-8.260	42.710	34.450	-5.550	40.000	QUASIPeAK	100.000	155.300
2		115.830	-16.262	50.840	34.578	-5.422	40.000	QUASIPeAK	100.000	35.800
3	*	148.215	-17.877	53.280	35.403	-4.597	40.000	QUASIPeAK	100.000	75.400
4		200.350	-17.679	50.460	32.781	-7.219	40.000	QUASIPeAK	100.000	53.400
5		268.640	-14.051	53.480	39.429	-7.571	47.000	QUASIPeAK	100.000	198.400
6		471.580	-9.314	44.740	35.426	-11.574	47.000	QUASIPeAK	100.000	175.400


Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Above 1G:

Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/03/08 - 12:59
Limit : FCC_15_03M_PK	Margin : 6
EUT : LCD Monitor	Probe : (1-18GHz) - HORIZONTAL
Power : AC120V/60Hz	Note : Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2

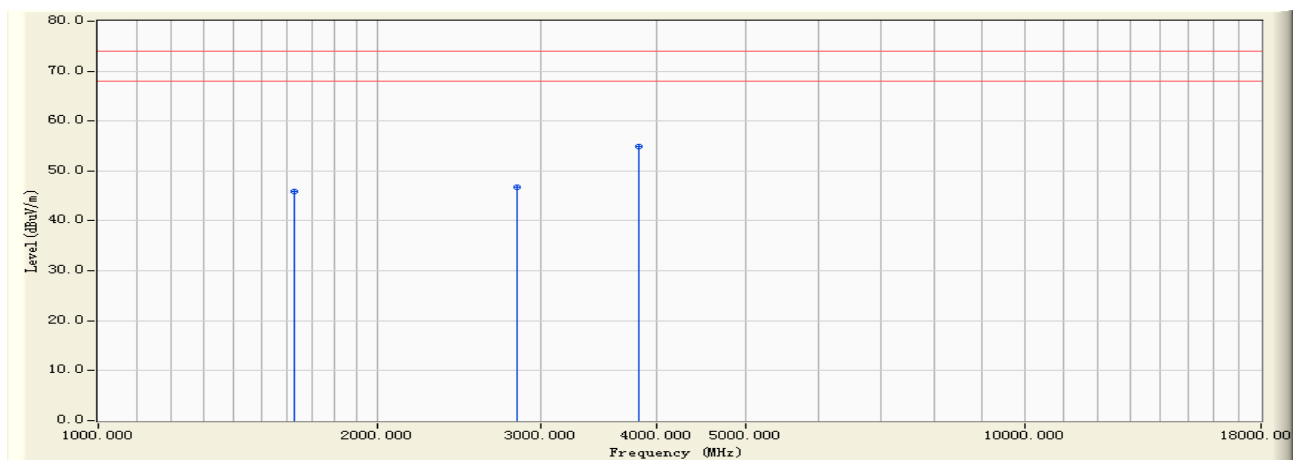


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1		1630.140	-4.183	50.130	45.947	-28.053	74.000	PEAK	200.600	180.300
2		2828.080	0.550	46.110	46.660	-27.340	74.000	PEAK	200.000	320.600
3	*	3830.120	3.802	51.030	54.832	-19.168	74.000	PEAK	200.000	335.600

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/03/08 - 12:59
Limit : FCC_15_03M_AV	Margin : 6
EUT : LCD Monitor	Probe : (1-18GHz) - HORIZONTAL
Power : AC120V/60Hz	Note : Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2

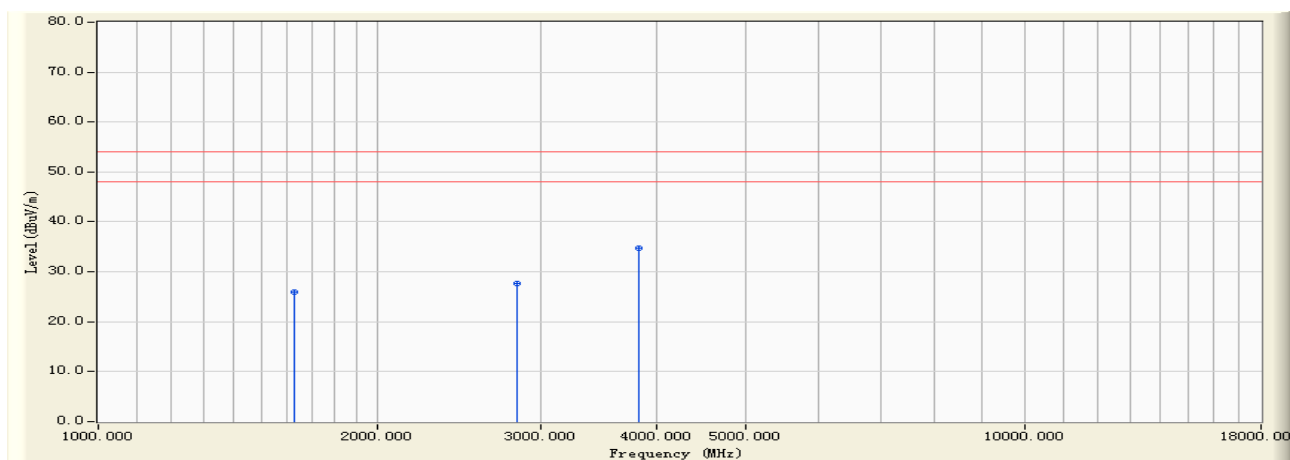


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1		1630.140	-4.183	30.160	25.977	-28.023	54.000	AVERAGE	200.600	180.300
2		2828.080	0.550	27.140	27.690	-26.310	54.000	AVERAGE	200.000	320.600
3	*	3830.120	3.802	31.021	34.823	-19.177	54.000	AVERAGE	200.000	355.600

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/03/08 - 13:01
Limit : FCC_15_03M_PK	Margin : 6
EUT : LCD Monitor	Probe : (1-18GHz) - VERTICAL
Power : AC120V/60Hz	Note : Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2

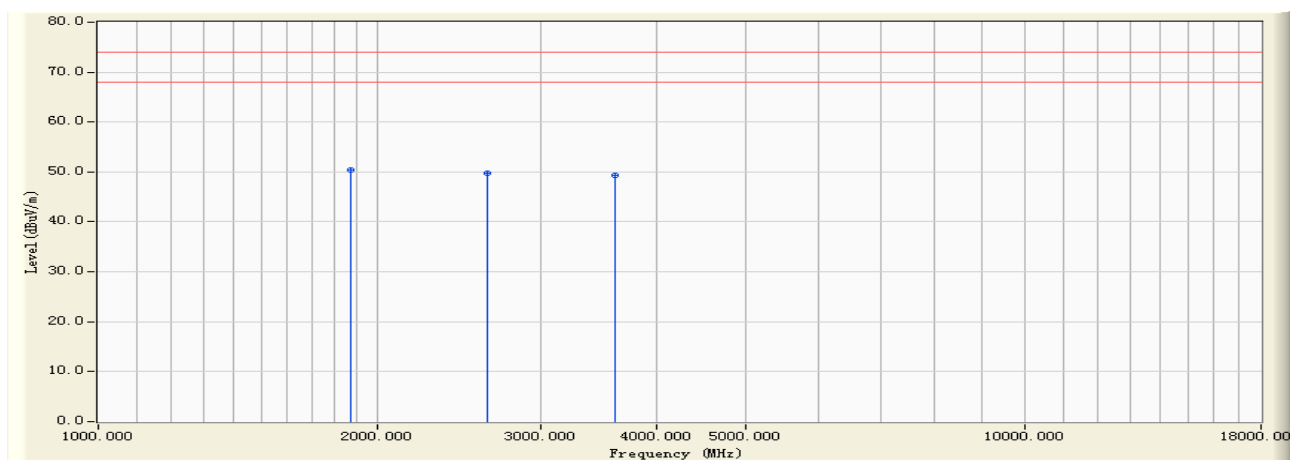


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	*	1875.060	-3.614	54.010	50.396	-23.604	74.000	PEAK	100.000	300.700
2		2635.080	0.721	49.130	49.850	-24.150	74.000	PEAK	120.600	289.600
3		3617.320	3.131	46.150	49.281	-24.719	74.000	PEAK	100.000	256.300

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Fred	
Site : EMC Lab AC 102	Time : 2010/03/08 - 13:01
Limit : FCC_15_03M_AV	Margin : 6
EUT : LCD Monitor	Probe : (1-18GHz) - VERTICAL
Power : AC120V/60Hz	Note : Mode 4: Full system (VGA mode 1920*1080@60Hz) with Adapter #2

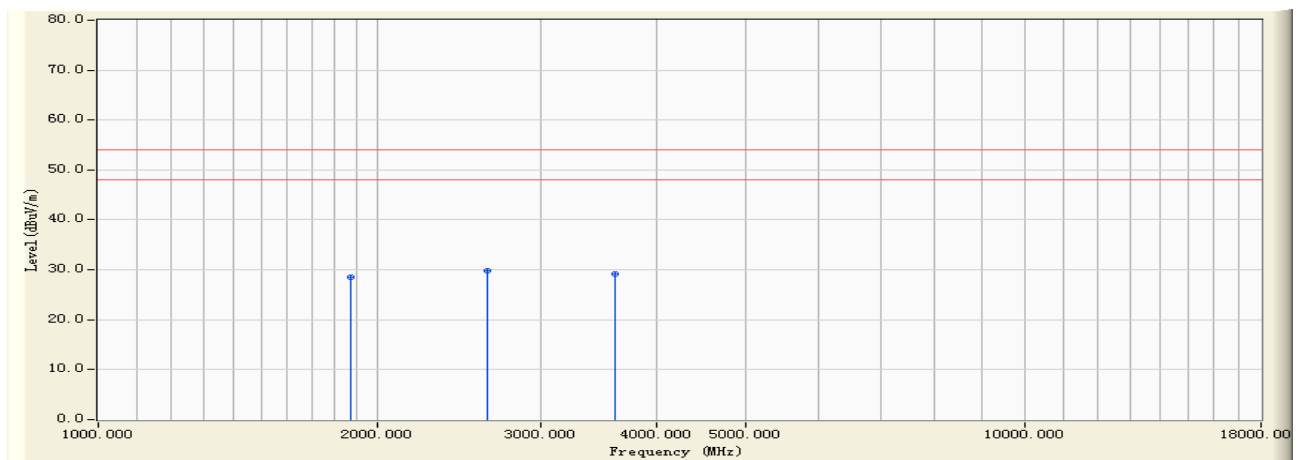

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1		1875.060	-3.614	32.050	28.436	-25.564	54.000	AVERAGE	100.000	300.700
2	*	2635.080	0.721	29.140	29.860	-24.140	54.000	AVERAGE	120.600	289.600
3		3617.320	3.131	26.080	29.211	-24.789	54.000	AVERAGE	100.000	256.300

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Test engineer: Fred Guo