



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL: +82 31 639 8539 FAX: +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

LG Electronics Inc.

**60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea**

Date of Issue: October 06, 2009

Test Report No.: HCTE0910FE03

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJGR700

Classification / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B
Equipment Type : Cellular/PCS GSM/ WCDMA/ EDGE Phone with Bluetooth
Trade Name / Model(s) : LG Electronics Inc. / GR700
Port / Connector(s) : DC In Port / USB Data Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See test report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

Report prepared by
: Gyeong Seon Kim
Test Engineer of EMC Tech. Part

Approved by
: Nam Wook Kang
Manager of EMC Tech. Part

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	3
1.1 Product description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested system details.....	4
1.4 Cable description.....	4
1.5 Noise suppression parts on cable. (I/O cable)	4
1.6 Test methodology.....	5
1.7 Test facility.....	5
1.8 Frequency range of radiated measurements	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 Configuration of tested system.....	6
3. PRELIMINARY TEST.....	7
3.1 Conducted Emission test.....	7
3.2 Radiated Emission test.....	7
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY.....	8
4.1 Conducted Emission test.....	8
4.2 Radiated Emission test.....	13
5. FIELD STRENGTH CALCULATION.....	14
6. TEST EQUIPMENT.....	15
7. CONCLUSION.....	16

ATTACHMENT : TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

The LG Electronics Inc. Model: GR700, Cellular/PCS GSM/ WCDMA/ EDGE Phone with Bluetooth.

It's basic purpose is used for communications. It transmits from GSM 850 (824.20 MHz to 848.80 MHz), GSM 1 900 (1 850.20 MHz to 1 909.80 MHz), WCDMA 850 (826.40 MHz to 846.60 MHz), WCDMA 1 900 (1 852.60 MHz to 1 907.40 MHz) and receives from GSM 850 (869.20 MHz to 893.80 MHz), GSM 1 900 (1 930.20 MHz to 1 989.80 MHz), WCDMA 850 (871.40 MHz to 891.60 MHz), WCDMA 1 900 (1 932.60 MHz to 1 987.40 MHz).

Model	GR700
FCC ID	BEJGR700
E.U.T Type	Cellular/PCS GSM/ WCDMA/ EDGE Phone with Bluetooth
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.60 MHz to 1 907.40 MHz (WCDMA 1 900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.60 MHz to 1 987.40 MHz (WCDMA 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number /Part Number	FCC ID / DoC	Connected to
Cellular/PCS GSM/WCDMA/ EDGE Phone with Bluetooth	LG	GR700	BEJGR700	Notebook PC
Travel adaptor	DONGDO	STA-U34WD	-	E.U.T
Notebook PC	DELL	E5500	DoC	E.U.T, TA
Notebook PC adaptor	DELL	DA90PE1-00	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
USB cable	-	-	-	E.U.T Notebook PC

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
Cellular/PCS GSM/WCDMA/ EDGE Phone with Bluetooth	DC in	Y	-	(P)1.4
	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM/WCDMA/ EDGE Phone with Bluetooth	DC in	N	-	Y	E.U.T end
	USB data	N	-	Y	Both end
Notebook PC	USB (Mouse)	Y	Notebook PC end	Y	Notebook PC end

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Icheon-si, Kyoungki-do, 467-701, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the commission and accepted dated June 10, 2009. (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN, all other peripheral equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]

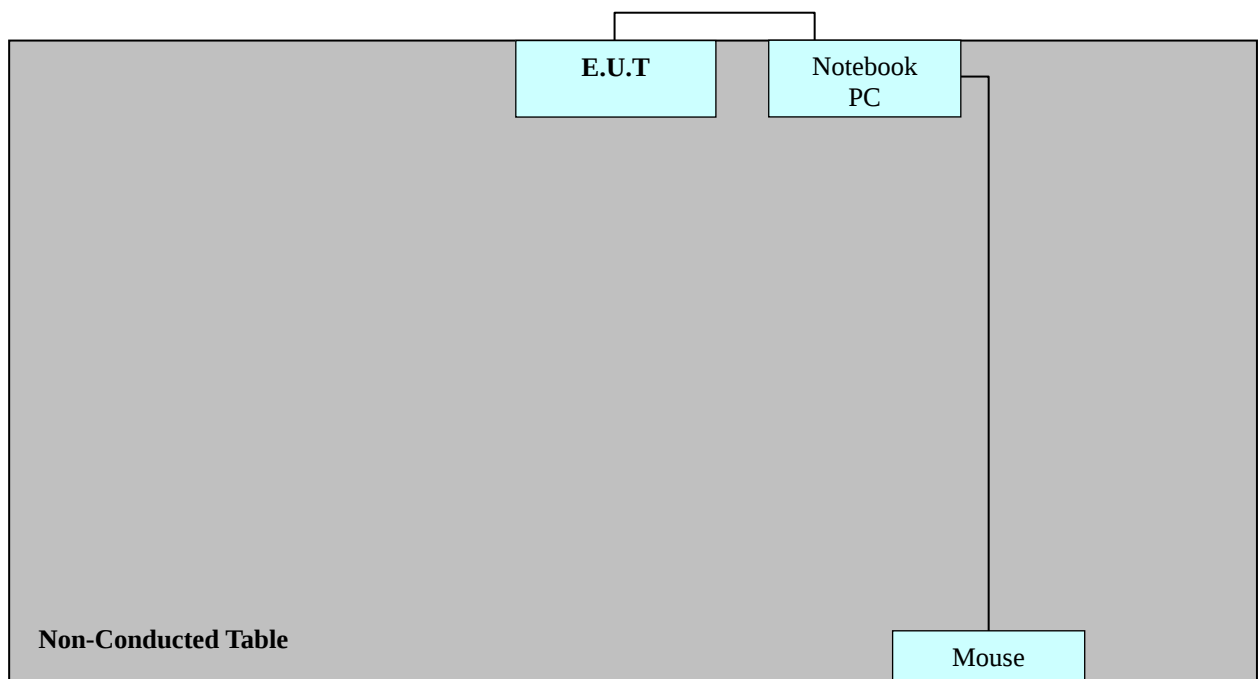

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

During preliminary tests, the following operating mode was investigated

Operation Mode	The Worst Operating Condition
GSM Idle (850, 1 900)	
WCDMA Idle (850, 1 900)	
Camera	
MP3	
Data Communication	○

3. 2 Radiated Emission Test

During preliminary test, the following operation mode was investigated

Operation Mode	The Worst Operating Condition
GSM Idle (850, 1 900)	
WCDMA Idle (850, 1 900)	
Camera	
MP3	
Data Communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 10.5 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 22.3 °C
Humidity level	: 34.5 %
Test date	: September 30, 2009

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
0.2221	52.2	HOT	Quasi-Peak	63.0	10.5
14.6000	31.5	HOT	Average	50.0	18.5
0.2541	48.7	NEUTRAL	Quasi-Peak	62.0	12.9
14.3840	31.6	NEUTRAL	Average	50.0	18.4


HCT

EMC

EUT: GR700
Manufacturer: LG Electronics
Operating Condition: DATA LINK MODE
Test Site: SHIELD ROOM
Operator: GS-KIM
Test Specification: CISPR22 CLASS B
Comment: H

SCAN TABLE: "EN 55022 Voltage"

Short Description:		EN 55022 Voltage					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				

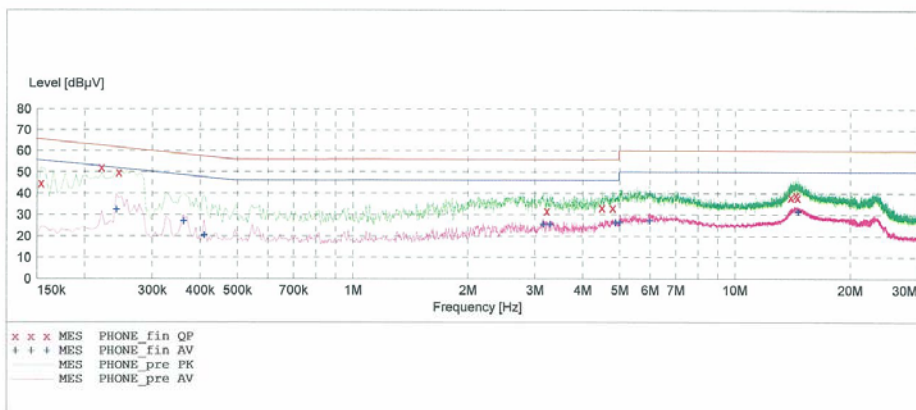

MEASUREMENT RESULT: "PHONE_fin OP"

9/30/2009 8:32PM							
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE	
0.154100	44.80	10.0	66	21.0	1	---	
0.222100	52.20	10.1	63	10.5	1	---	
0.246100	49.90	10.1	62	12.0	1	---	
3.232000	31.90	10.4	56	24.1	1	---	
4.504000	33.30	10.5	56	22.7	1	---	
4.804000	33.20	10.5	56	22.8	1	---	
14.004000	38.30	11.7	60	21.7	1	---	
14.440000	39.40	11.8	60	20.6	1	---	
14.600000	38.20	11.8	60	21.8	1	---	

MEASUREMENT RESULT: "PHONE_fin AV"

9/30/2009 8:32PM							
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE	
0.242100	32.50	10.1	52	19.5	1	---	
0.362100	27.10	10.1	49	21.6	1	---	

MEASUREMENT RESULT: "PHONE_fin AV"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.410100	20.60	10.1	48	27.0	1	---
3.156000	25.50	10.4	46	20.5	1	---
3.292000	25.40	10.4	46	20.6	1	---
4.884000	26.30	10.5	46	19.7	1	---
5.000000	26.40	10.5	46	19.6	1	---
5.984000	27.30	10.7	50	22.7	1	---
14.600000	31.50	11.8	50	18.5	1	---


HCT

EMC

EUT: GR700
Manufacturer: LG Electronics
Operating Condition: DATA LINK MODE
Test Site: SHIELD ROOM
Operator: GS-KIM
Test Specification: CISPR22 CLASS B
Comment: N

SCAN TABLE: "EN 55022 Voltage"

Short Description:		EN 55022 Voltage					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
			Average				

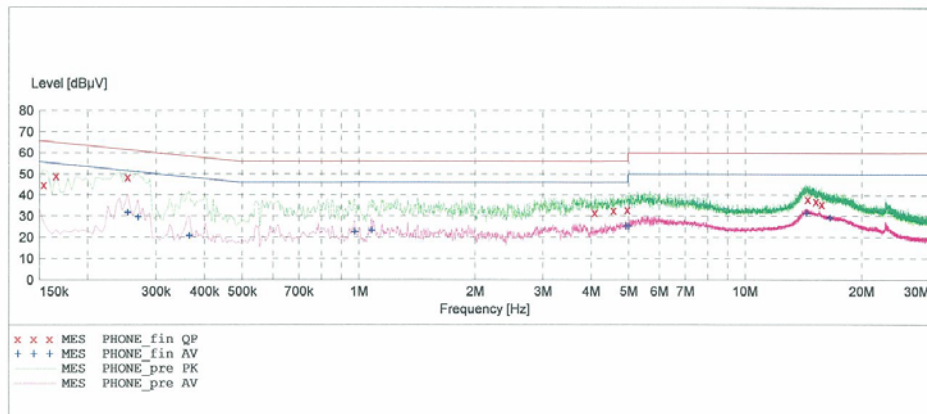

MEASUREMENT RESULT: "PHONE_fin QP"

9/30/2009 8:37PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.154100	45.10	10.0	66	20.7	1	---
0.166100	49.40	10.0	65	15.7	1	---
0.254100	48.70	10.1	62	12.9	1	---
4.096000	31.90	10.5	56	24.1	1	---
4.584000	32.90	10.5	56	23.1	1	---
4.972000	33.20	10.5	56	22.8	1	---
14.504000	38.40	11.8	60	21.6	1	---
15.244000	37.20	11.9	60	22.8	1	---
15.772000	35.90	11.9	60	24.1	1	---

MEASUREMENT RESULT: "PHONE_fin AV"

9/30/2009 8:37PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.254100	32.00	10.1	52	19.6	1	---
0.270100	29.70	10.1	51	21.4	1	---

MEASUREMENT RESULT: "PHONE_fin AV"

(continued)

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.366100	20.90	10.1	49	27.7	1	---
0.976000	22.80	10.1	46	23.2	1	---
1.080000	23.50	10.1	46	22.5	1	---
4.928000	25.40	10.5	46	20.6	1	---
5.000000	25.40	10.5	46	20.6	1	---
14.384000	31.60	11.8	50	18.4	1	---
16.548000	29.40	12.0	50	20.6	1	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to	: FCC PART 15 Subpart B
Result	: Passed by 15.6 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak (6 dB Bandwidth: 120 kHz)
Temperature	: 25.3 °C
Humidity level	: 41.5 %
Test date	: September 30, 2009

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
155.8	8.1	12.7	1.4	V	22.2	43.5	21.3
228.8	16.8	10.8	1.6	V	29.2	46.0	16.8
482.5	11.0	17.0	2.4	V	30.4	46.0	15.6
553.3	4.7	18.4	2.6	V	25.7	46.0	20.3

Note)

For measurement over 1 GHz, noise level was more than 10 dB below the limit.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Next CAL Date</u>
EMI Test Receiver	Rohde & Schwarz	ESI40	2009.10.31
EMI Test Receiver	Rohde & Schwarz	ESCI	2010.06.02
LISN	Rohde & Schwarz	ESH3-Z5	2010.02.06
LISN	Rohde & Schwarz	ENV216	2010.04.01
Attenuator	Rohde & Schwarz	ESH3-Z2	2009.10.30
Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
Communication Antenna	TDK	LPDA-0802	-
Antenna Position Tower	HD	240/520/00	-
Base Station	Rohde & Schwarz	CMU 200	2010.02.17
Horn Antenna	Schwarzbeck	BBHA 9120D	2010.03.26
RF-Amplifier	MITEQ	AMF-6D-00101800-35.20PPS	2010.04.25
Bluetooth Base Station	TESCOM	TC-3000A	2010.01.09

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Model: GR700, Cellular/PCS GSM /WCDMA/EDGE Phone with Bluetooth. FCC ID: BEJGR700** complies with §15.107 and §15.109 of the FCC rules.