

SAR TEST REPORT

Specific Absorption Rate

Test Report No : MCCL-3-10-091

Product : Cellular / PCS GSM / EDGE / WCDMA Phone
with Bluetooth & WLAN

Model Name(s) : JS750, LG-JS750 , JS750g, LG-JS750g

Manufacturer : LG Electronics, Inc.

Applicant : LG Electronics, Inc.

Application Type : Certification

Device Category : Licensed Portable Transmitter Held to Ear (PCE)

Standards : § 2.1093; FCC/OET Bulletin 65 Supplement C
[July 2001]

Date of Sample Receipt : April 26, 2010

Date of Issue : June 10, 2010

Test Device Serial No. : Pre-Production Sample [S/N: #1]

Test Result : PASS

SUMMARY

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI / IEEE C95.1(2005) and had been tested in accordance with the measurement procedures specified in FCC/OET bulletin 65 Supplement C (2001) , ANSI / IEEE 1528 – Dec. 2003 and in applicable Industry Canada Radio Standards specifications (RSS)

※ The test results in this test report apply only to sample(s) tested.



Issued under the authority of
E. S. Park / Technical Manager
MCCL



Prepared by
H. S. Shim / Test Engineer
MCCL



Prepared by
H. S. Shim / Test Engineer
MCCL

TABLE OF CONTENTS

1. TEST RESULT SUMMARY	3
2. DESCRIPTION OF THE DEVICE UNDER TEST.....	4
2.1 Antenna Description.....	4
2.2 Device Description.....	4
3. INTRODUCTION.....	5
4. SAR MEASUREMENT SYSTEM	6
4.1 SAR Measurement Setup.....	6
4.2 DASY4 E-Field Probe System.....	7
4.3 Phantom.....	9
4.4 Brain & Muscle Simulating Mixture Characterization	10
4.5 Device Holder for Transmitters.....	11
4.6 Validation Dipole	11
5. SAR MEASUREMENT PROCEDURE.....	12
6. DEFINITION OF REFERENCE POINT.....	13
6.1 EAR Reference Point.....	13
6.2 Handset Reference Points.....	14
7. TEST CONFIGURATION POSITIONS.....	15
7.1 Positioning for Cheek/Touch.....	15
7.2 Positioning for Ear / 15° Tilt.....	16
7.3 Body Holster /Belt Clip Configuration.....	17
8. MEASUREMENT UNCERTAINTY.....	18
9. ANSI/IEEE C95.1-2005 RF EXPOSURE LIMITS	19
10. SYSTEM VERIFICATION.....	21
11. SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas	23
12. 3G MEASUREMENT PROCEDURES	24
12.1 Procedures Used To Establish Test Signal.....	24
12.2 SAR Measurement Conditions for UMTS.....	24
13. RF CONDUCTED POWER	26
14 MEASUREMENT RESULTS	31
15. TEST EQUIPMENT	36
16. REFERENCES.....	37
APPENDIX A: Validation Test Data.....	38
APPENDIX B: SAR Test Data.....	51
APPENDIX C: Calibration Certificates.....	103

1. TEST RESULT SUMMARY

Model Name(s) : JS750, LG-JS750, JS750g, LG-JS750g

Date of Test : May 06 ~ June 02, 2010

Date of Issue : June 10, 2010

Address of Test Site : 60-39, Kasan-Dong, Kumchon-Gu, Seoul 153-801, Korea.

Responsible Test Engineer : Eui-Soon Park

Test Engineer : Hyun-seop Shim

EUT Type : Cellular / PCS GSM / EDGE / WCDMA Phone with Bluetooth & WLAN

Tx Frequency : 824.20 ~ 848.80 MHz (GSM850)
1850.20 ~ 1909.80 MHz (PCS1900)
826.40 ~ 846.60 MHz (WCDMA FDD V)
1852.40 ~ 1907.60 MHz (WCDMA FDD II)

Rx Frequency : 869.20 ~ 893.80 MHz (GSM850)
1930.20 ~ 1989.80 MHz (PCS1900)
871.40 ~ 891.60 MHz (WCDMA FDD V)
1932.40 ~ 1987.60 MHz (WCDMA FDD II)

Transmit Output Power : GSM850: 33.0dBm
PCS1900: 30.0 dBm
WCDMA: All Up Bit (23.0 dBm)

Maximum Results Found During SAR Evaluation

1. Head Configuration

ANSI / IEEE C95.1(2005) - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg averaged over 1 gram	
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End				
1880.0	9400	WCDMA	23.11	23.08	Standard	Left Touch	Fixed	0.526

2. Body Worn Configuration

ANSI / IEEE C95.1(2005) - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg averaged over 1 gram		
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Slide	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End					
836.6	190	GPRS 835[2TX]	31.60	31.59	Standard	20mm [Rear]	Up	Fixed	0.701

3. Measurement Uncertainty

Combine Standard Uncertainty	10.9
Extended Standard Uncertainty	21.8 (k=2% CONFIDENCE LEVEL)

2. DESCRIPTION OF THE DEVICE UNDER TEST

The FCC rules for evaluating portable devices for RF exposure compliance are contained in 47 CFR §2.1093. For purposes of RF exposure evaluation, a portable device is defined as a transmitting device designed to be used with any part of its radiating structure in direct contact with the user's body or within 1.5 centimeters of the body of a user or bystanders under normal operating conditions. This category of devices would include hand-held cellular and PCS telephones that incorporate the radiating antenna into the hand-piece and wireless transmitters that are carried next to the body. Portable devices are evaluated with respect to SAR limits for RF exposure. The applicable SAR limit for portable transmitters used by consumers is 1.6 watts/kg, which is averaged over any one gram of tissue defined as a tissue volume in the shape of a cube.

2.1 Antenna Description

Type :	Fixed
Location :	The inside of the device
Configuration :	Intenna Type Antenna

2.2 Device Description

Manufacturer :	LG Electronics, Inc.
FCC ID :	BEJJS750
Trade Name :	LG
Model Name :	JS750, LG-JS750, JS750g, LG-JS750g
Serial No :	Pre-Production Sample [S/N: #1]
EUT Type :	Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN
Mode(s) of Operation :	GSM 850 / PCS 1900 / WCDMA(FDD II) / WCDMA(FDD V)
Transmit Output Power :	GSM 850 : Level 5 (33.0 dBm) PCS 1900 : Level 0 (30.0 dBm) WCDMA : All Up Bit (23.0 dBm)
Mode(s) of Operation :	GSM / WCDMA
Modulation Mode(s) :	GSM / WCDMA
Duty Cycle :	8.3 (GSM) / 4.15 (GPRS) / 2.77 (GPRS) / 2.075 (GPRS) / 1 (WCDMA)
Transmitting Frequency Range :	824.20 ~ 848.80 MHz (GSM850) 1850.20 ~ 1909.80 MHz (PCS1900) 826.40 ~ 846.60 MHz (WCDMA FDD V) 1852.40 ~ 1907.60 MHz (WCDMA FDD II)
Battery Type :	Standard

3. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable device.[1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) For localized specific absorption rate (SAR) in IEEE/ANSI C95.1-2005 Standard for safety Levels with Respect to Human Exposure to Radio Frequency Electronic Fields, 3 kHz to 300 GHz. (c) 1992 by the institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in IEEE/ANSI C95.3-2005 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (ICNIRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields,” ICNIRP Report No. 86 (c) ICNIRP, 1986, Bethesda, MD20814.[6] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). it is also defined as the rate of rf energy absorption per unit mass at a point in an absorbing body. (see Fig. 2.1.)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

Where:

- σ = conductivity of the tissue-simulant material (S/m)
- ρ = mass density of the tissue-simulant material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

4. SAR MEASUREMENT SYSTEM

An SAR measurement system usually consists of a small diameter isotropic electric field probe, a multiple axis probe positioning system, a test device holder, one or more phantom models, the field probe instrumentation, a computer and other electronic equipment for controlling the probe and making the measurements. Other supporting equipment, such as a network analyzer, power meters and RF signal generators, are also required to measure the dielectric parameters of the simulated tissue media and to verify the measurement accuracy of the SAR system.

4.1 SAR Measurement Setup

Robotic System

Measurement are performed using the DASY4 dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG(SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, Pentium IV computer, near-field probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 4.1)

System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The pc consists of the Intel Pentium IV 2.4 GHz computer with Windows 2000 system and SAR measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

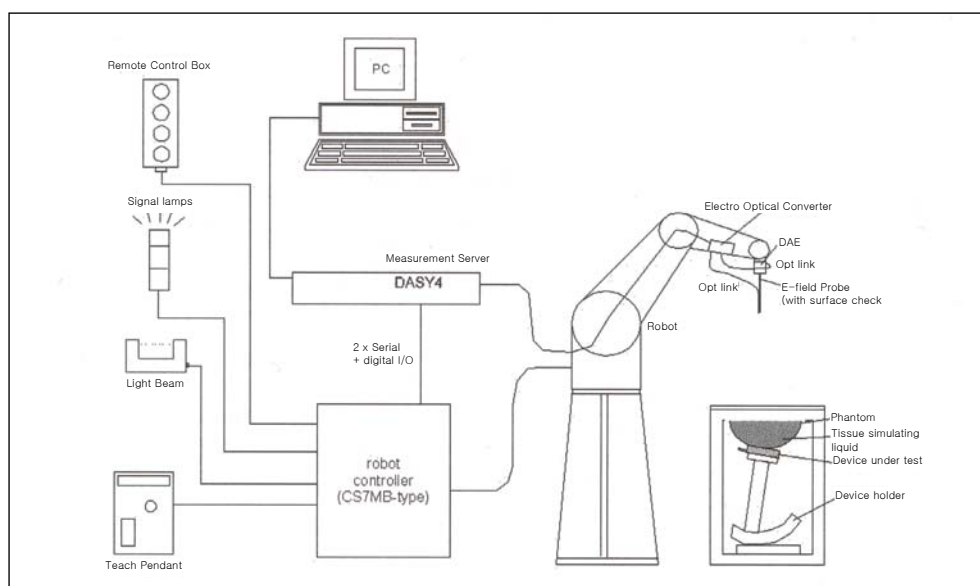


Figure 4.1 SAR Measurement System Setup

System Electronics

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical Downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

4.2 DASY4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration [7] (see Fig. 4.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box in the robot arm and provides an automatic detection transmitter, the other half to a synchronized receiver. As the probe approach the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches coupling is zero. The distance of the coupling maximum to the surface is probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

Probe Specifications

Construction:	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration:	Basic Broad Band Calibration: in air: 10-3000 MHz Conversion Factors (CF) for HSL 900 and HSL 1800 Additional CF for other liquids and frequencies upon request
Frequency:	10 MHz to 3 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity:	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range:	5 μ W/g to > 100mW/g; Linearity: ± 0.2 dB
Optical Surface	± 0.2 mm repeatability in air and clear liquids over
Detection:	diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetric measurements up to 2.5GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms




Figure 4.2 Isotropic
E-Field Probe

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in [8] with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [9] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. 4.3), and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe. (see Fig. 4.4)

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

Δt = exposure time (30 seconds),
 C = heat capacity of tissue (brain or muscle),
 ΔT = temperature increase due to RF exposure.
 SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.
 Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

Where:

σ = simulated tissue conductivity,
 ρ = Tissue density (1.25 g/cm³ for brain tissue)




Figure 4.3 E-Field and Temperature measurements at 900MHz [7]

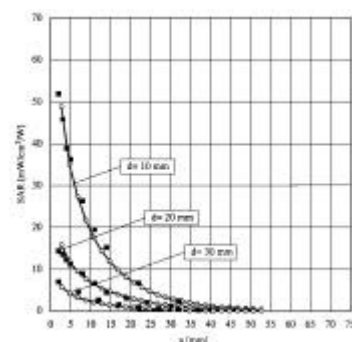


Figure 4.4 E-Field and Temperature measurements at 1.9GHz [7]

4.3 Phantom

The SAM Twin Phantom V4.0 is constructed of the fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 4.5)



Figure 4.5 SAM Twin Phantom

Phantom Specification

Construction:	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.
Shell Thickness:	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling:	Volume Approx. 25 liters
Dimensions:	Height: adjustable feet; Length: 1000 mm; Width: 500 mm

4.4 Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose(HEC) gelling agent and saline solution (see Table 4.1). Preservation with a bacteriacide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissue simulation liquids are according to the data by C. Gabriel and G. Hartagrove [13]. (see Table 4.2)

INGREDIENTS (% by weight)	900MHz	1800MHz	1900MHz	2450MHz
De-ionized water	40.92	52.64	54.90	45.00
DGBE	-	47.00	44.94	55.00
SUGAR	56.50	-	-	-
SALT	1.48	0.36	0.18	-
BACTERIACIDE	0.10	-	-	-
HEC	1.00	-	-	-
Dielectric Constant Target	41.50	40.00	40.00	39.20
Conductivity (S/m) Target	0.97	1.40	1.40	1.80

Table. 4.1 Composition of the Tissue Equivalent Matter

4.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (see Fig. 4.6) enables the rotation of the accurately, and repeatably be positioned according to the IEC, IEEE, CENELEC, FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

*Note : A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [12]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure. 4.6 Device Holder

4.6 Validation Dipole

The reference dipole should have a return loss better than -20 dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.

Validation Dipole Specifications

Construction:	Symmetrical dipole with $1/4$ balun. Enables measurement of feedpoint impedance with NWA. Matched for use near flat phantoms filled with head simulating solutions. Includes distance holder and tripod adaptor.
Calibration:	Calibrated SAR value for specified position and input power at the flat phantom in simulating solution
Frequency:	835 MHz, 1900 MHz
Return Loss:	> 20 dB at specified validation position
Power Capability:	> 100 W ($f < 1$ GHz); > 40 W ($f > 1$ GHz)
Dimensions:	D835V2: dipole length: 161 mm; overall height: 330 mm D1900V2: dipole length: 68 mm; overall height: 300 mm

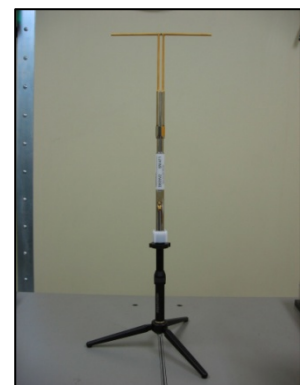


Figure 4.7 Validation Dipole

5. SAR MEASUREMENT PROCEDURE

The evaluation was performed using the following procedure:

- 1) The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.
- 2) The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm x 15mm.
- 3) Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32mm x 32mm x 34mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - a. The data at the surface was extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- 4) The SAR reference value, at the same location as procedure #1, was re-measured. If the value changed by more than 5%, the evaluation is repeated.

6. DEFINITION OF REFERENCE POINT

6.1 EAR Reference Point

Figure 6.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.2. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Fig. 6.3). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

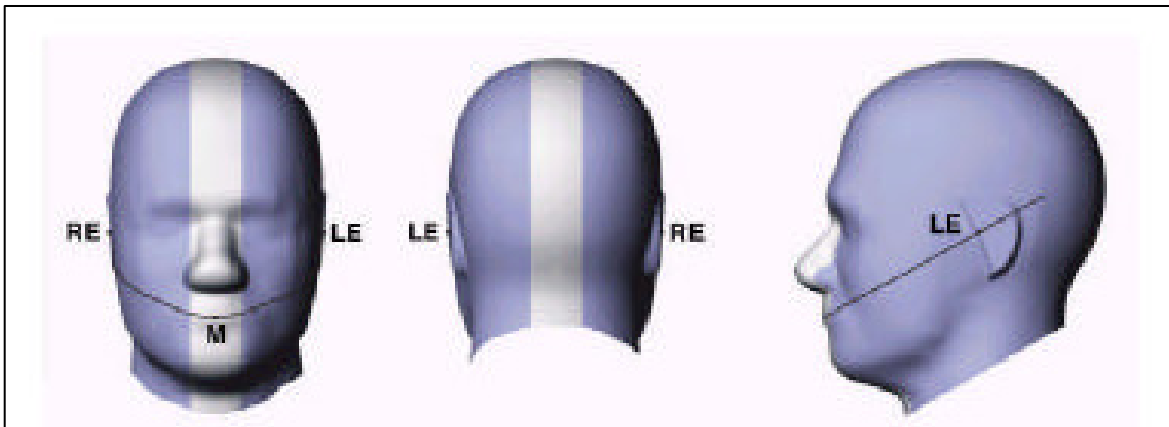


Figure 6.1 Front, back and side view of SAM Twin Phantom

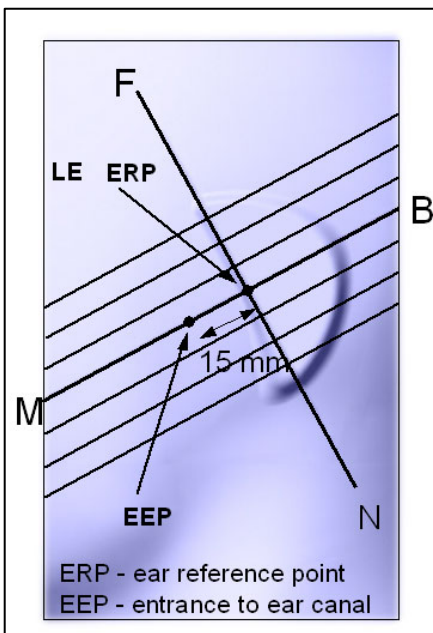


Figure 6.2 Close-Up, side view of ERP

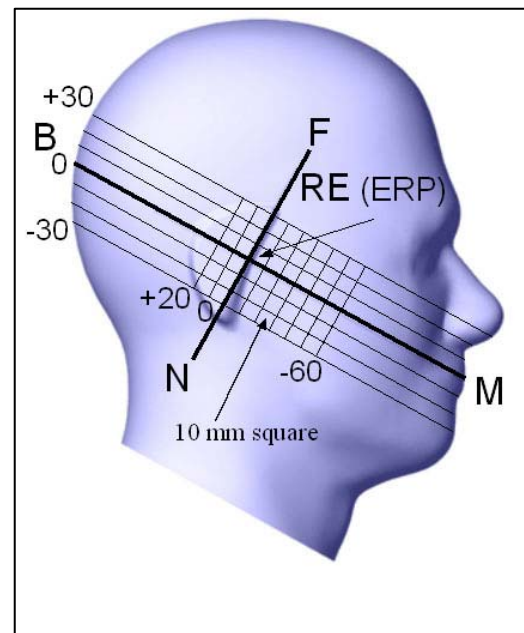


Figure 6.3 Side view of the phantom showing relevant markings

6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 6.4). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

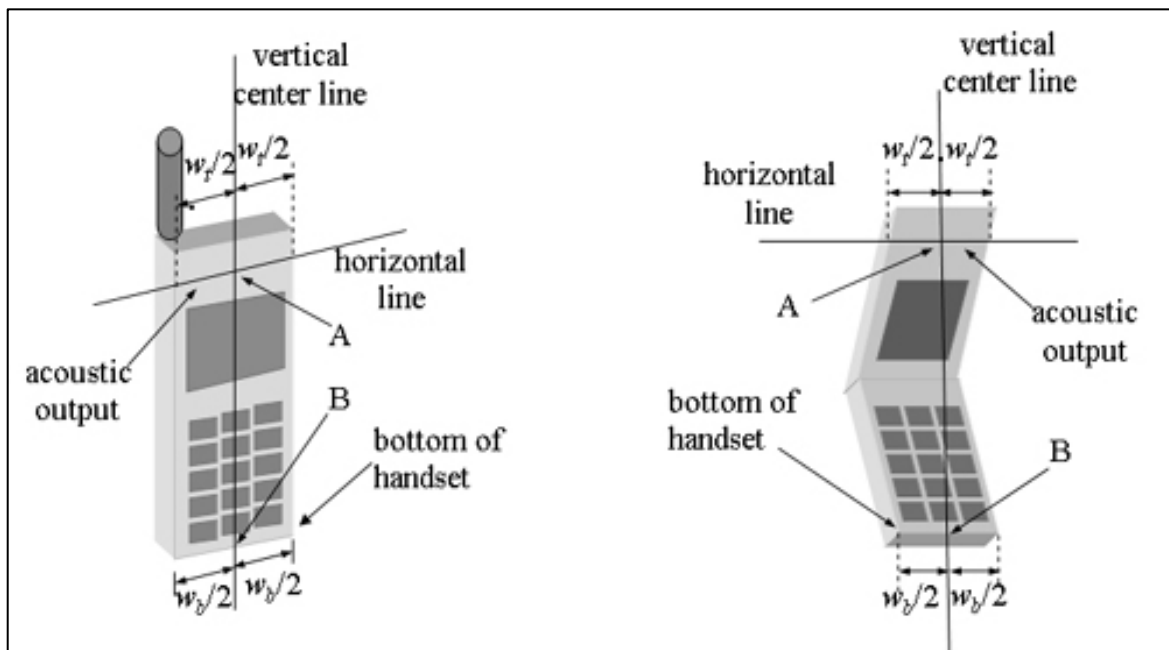


Figure 6.4 Handset Vertical Center & Horizontal Line Reference Points

7. TEST CONFIGURATION POSITIONS

7.1 Positioning for Cheek/Touch

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover. (If the phone can also be used with the cover closed, both configurations must be tested.)
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Fig. 6.4), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Fig. 6.4). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Fig. 6.4), especially for clamshell handsets, handsets with lip pieces, and other irregularly-shaped handsets.
- 3) Position the handset close to the surface of the phantom touch that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Fig. 7.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.
- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the pinna (cheek). (see Fig. 7.1) The physical angles of rotation should be noted.

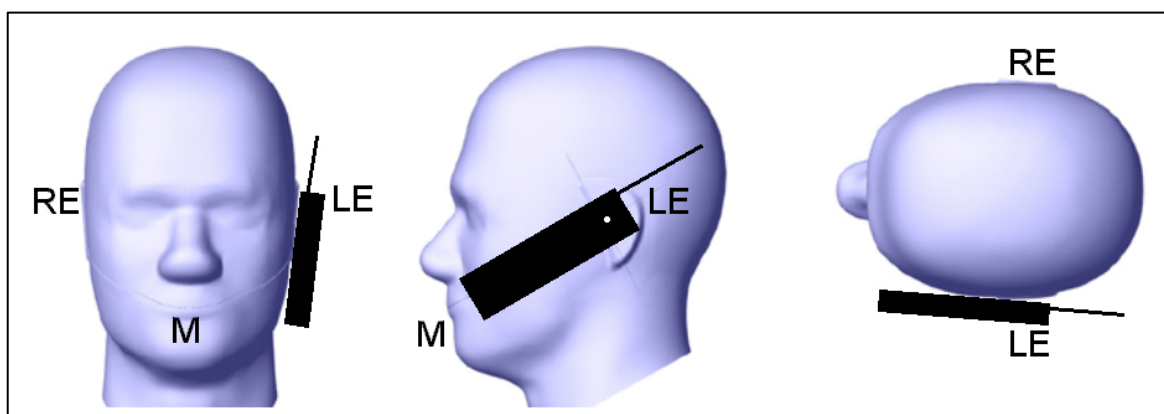


Figure 7.1 Front, Side and Top View of Cheek/Touch Position

7.2 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek/Touch Position”:

- 1) While maintaining the orientation of the phone retract the phone parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
- 2) Rotate the phone around the horizontal line by 15 degree.
- 3) While maintaining the orientation of the phone, move the phone parallel to the reference plane until any part of the phone touches the head. (In this position, point A will be located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the phone shall be reduced. The tilted position is obtained if any part of the phone is in contact of the ear as well as a second part of the phone is contact with the head. (see Fig. 7.2)

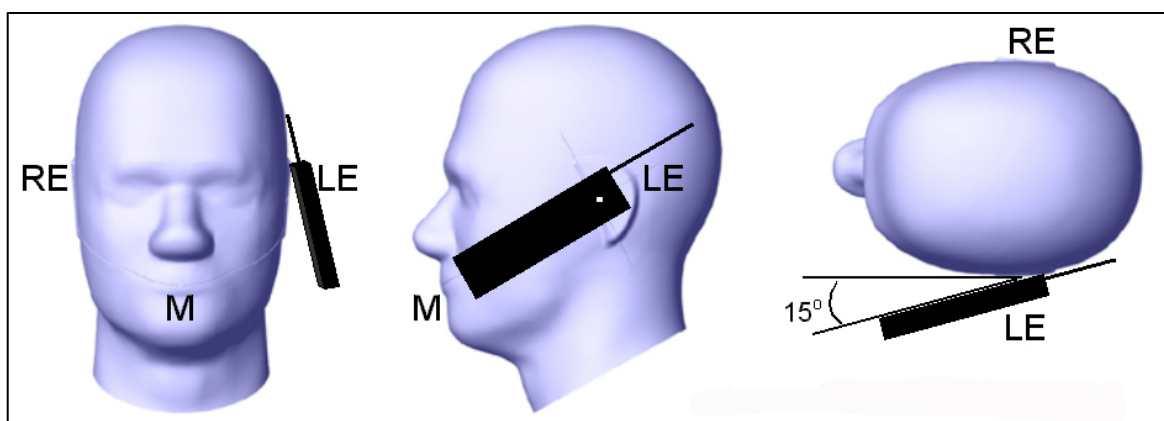


Figure 7.2 Front, Side and Top View of Ear/15 Tilt Position

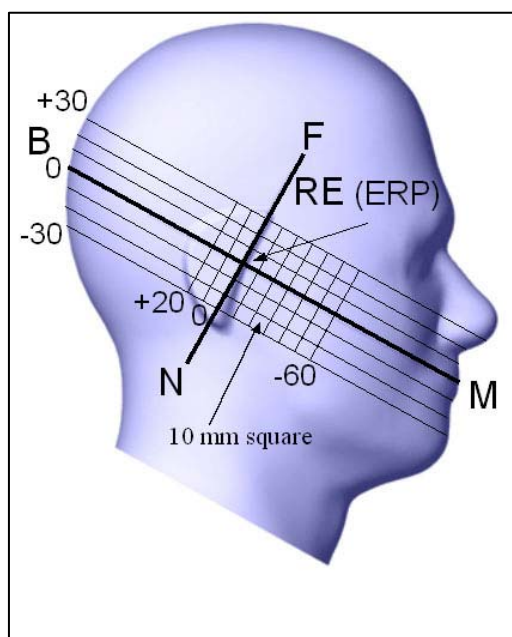


Figure 7.3 Side view of the phantom showing relevant markings

7.3 Body Holster /Belt Clip Configurations

Body-worn operation configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. (see Fig. 7.4) A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all case SAR measurements are performed to investigate the worst case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.



Figure 7.4 Body Holster Configuration

8. MEASUREMENT UNCERTAINTY

$$U(y) = \text{root} \left[(C_1^2 U_{pc}^2 / d_1) + (U_{al}^2) + (U_{hi}^2) + (C_4^2 U_{be}^2) + (C_5^2 U_{li}^2) + (C_6^2 U_{dl}^2) + (C_7^2 U_{re}^2 / d_7) + (C_8^2 U_{rt}^2) + (C_9^2 U_{it}^2) + (C_{10}^2 U_{ac}^2) \right. \\ \left. + (C_{11}^2 U_{pm}^2) + (C_{12}^2 U_{pp}^2) + (C_{13}^2 U_{ei}^2) + (C_{14}^2 U_{pu}^2) + (C_{15}^2 U_{\alpha}^2) + (C_{16}^2 U_{lc}^2 / d_{16}) + (C_{17}^2 U_{lp}^2) + (C_{18}^2 U_{lp}^2 / d_{18}) \right]$$

	Description	Unc.	Prob. Dist.	Divider(d)	Ci (1g)	Std. Unc. (1g)	Veff
Measure. Equipment	U(pc) Probe Calibration	± 5.9%	Normal	1	1	± 5.9%	∞
	U(al) Axial Isotropy	± 4.7%	Rectan.	Root 3	0.7	± 1.9%	∞
	U(hi) Hemispherical Isotropy	± 9.6%	Rectan.	Root 3	0.7	± 3.9%	∞
	U(be) Boundary Effect	± 1.0%	Rectan.	Root 3	1	± 0.6%	∞
	U(li) Linearity	± 4.7%	Rectan.	Root 3	1	± 2.7%	∞
	U(dl) Detection Limits	± 1.0%	Rectan.	Root 3	1	± 0.6%	∞
	U(re) Readout Electronics	± 0.3%	Normal	1	1	± 0.3%	∞
	U(rt) Response Time	± 0.8%	Rectan.	Root 3	1	± 0.5%	∞
	U(it) Integration Time	± 2.6%	Rectan.	Root 3	1	± 1.5%	∞
	U(an) RF Ambient Conditions-Noise	± 3.0%	Rectan.	Root 3	1	± 1.7%	∞
	U(ar) RF Ambient Conditions-Reflection	± 3.0%	Rectan.	Root 3	1	± 1.7%	∞
	U(pm) Probe Positioner Mechanical	± 0.4%	Rectan.	Root 3	1	± 0.2%	∞
	U(pp) Probe Positioning w/ Phantom	± 2.9%	Rectan.	Root 3	1	± 1.7%	∞
	U(ei) Extrapolation and Integration	± 1.0%	Rectan.	Root 3	1	± 0.6%	∞
Test Sample	U(dp) Device Positioning	± 2.8%	Normal	1	1	± 2.8%	35
	U(dh) Device Holder Uncertainty	± 3.6%	Normal	1	1	± 3.6%	5
	U(op) Drift of Output Power	± 5.0%	Rectan.	Root 3	1	± 2.9%	∞
Physical Parameter	U(pu) Phantom Uncertainty	± 4.0%	Rectan.	Root 3	1	± 2.3%	∞
	U(ct) Liquid Conductivity (Target)	± 5.0%	Rectan.	Root 3	0.64	± 1.8%	∞
	U(lc) Liquid Conductivity (Measurement)	± 2.5%	Normal	1	0.64	± 1.6%	∞
	U(lp) Liquid Permittivity (Target)	± 5.0%	Rectan.	Root 3	0.6	± 1.7%	∞
	U(lp) Liquid Permittivity (Measurement)	± 2.5%	Normal	1	0.6	± 1.5%	∞
Uc(y) Combined	± 10.9 %						
Expanded	± 21.8 % (k =2)						

Table 8.1 Worst-Case uncertainty budget for DASY4 assessed according to IEC 62209-1.
The budget is valid for the frequency range 300MHz-3GHz and represents a worst-case analysis.

9. ANSI/IEEE C95.1 –2005 RF EXPOSURE LIMITS

Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)
SPATIAL PEAK SAR¹ Brain	1.60	8.00
SPATIAL PEAK SAR² Whole Body	0.08	0.40
SPATIAL PEAK SAR³ Hands, Feet, Ankles, Wrists	4.00	20.00

Table 9.1 Safety Limits for Partial Body Exposure [2]

NOTE:

- 1 The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2 The Spatial Average value of the SAR averaged over the whole body.
- 3 The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube)

10. SYSTEM VERIFICATION

Tissue Verification

MEASURED TISSUE PARAMETERS								
Tissue	835MHz Brain		835MHz Brain		1900MHz Brain		1900MHz Brain	
Date	05/31/2010		06/01/2010		05/29/2010		06/01/2010	
Liquid Temp (°C)	21.8		21.8		21.8		21.8	
Liquid Depth (mm)	150 ± 1		150 ± 1		150 ± 1		150 ± 1	
Parameters	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ	41.5	42.8	41.5	41.3	40.0	39.7	40.0	40.6
Conductivity: σ	0.90	0.899	0.90	0.894	1.40	1.44	1.40	1.38
Deviation (%)	ϵ : +3.13 σ : -0.11		ϵ : -0.48 σ : -0.66		ϵ : -0.75 σ : +2.85		ϵ : +1.50 σ : -1.42	

Table 10.1 Simulated Tissue Verification

MEASURED TISSUE PARAMETERS								
Tissue	835MHz Body		835MHz Body		1900MHz Body		1900MHz Body	
Date	05/31/2010		06/01/2010		05/29/2010		06/01/2010	
Liquid Temp (°C)	21.8		21.8		21.8		21.8	
Liquid Depth (mm)	150 ± 1		150 ± 1		150 ± 1		150 ± 1	
Parameters	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ	55.0	55.9	55.0	55.0	53.3	52.8	53.3	53.6
Conductivity: σ	0.97	0.98	0.97	0.96	1.52	1.57	1.52	1.52
Deviation (%)	ϵ : +1.63 σ : +1.03		ϵ : +0.00 σ : -1.03		ϵ : -0.93 σ : +3.28		ϵ : +0.56 σ : +0.00	

Table 10.2 Simulated Tissue Verification

MEASURED TISSUE PARAMETERS		
Tissue	2450MHz Body	
Date	06/02/2010	
Liquid Temp (°C)	21.8	
Liquid Depth (mm)	150 ± 1	
Parameters	Target	Measured
Dielectric Constant: ϵ	52.7	51.2
Conductivity: σ	1.95	2.02
Deviation (%)	ϵ : -2.84 σ : +3.35	

Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835MHz, 1900MHz, 2450MHz by using the system validation kit(s). (Graphic Plots Attached)

SYSTEM DIPOLE VALIDATION TARGET & MEASURED						
Tissue	System Validation Kit	Date	Liquid Temp (°C)	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation (%)
835MHz Brain	D835V2, S/N: 468	05/31/2010	21.8	9.62	10.2	+5.68
835MHz Brain	D835V2, S/N: 468	06/01/2010	21.8	9.62	10.1	+4.75
1900MHz Brain	D1900V2, S/N: 5d057	05/29/2010	21.8	39.8	41.2	+3.51
1900MHz Brain	D1900V2, S/N: 5d057	06/01/2010	21.8	39.8	41.6	+4.52
2450MHz Body	D2450V2, S/N: 836	06/02/2010	21.8	50.3	52.4	+4.17

Table 10.3 System Validation



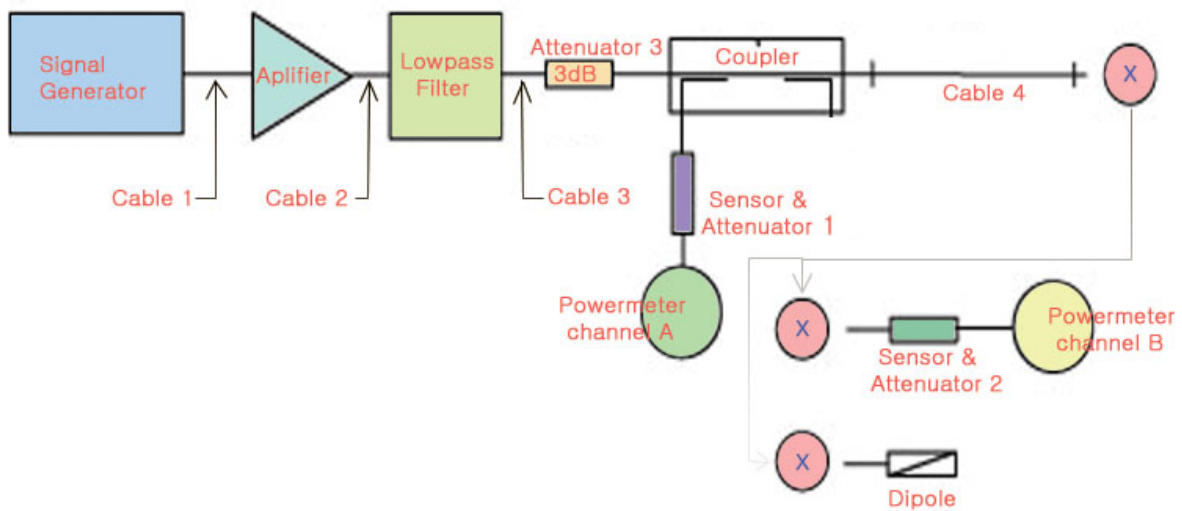


Figure 10.1 Dipole Validation Test Setup

835 MHz Liquid Depth

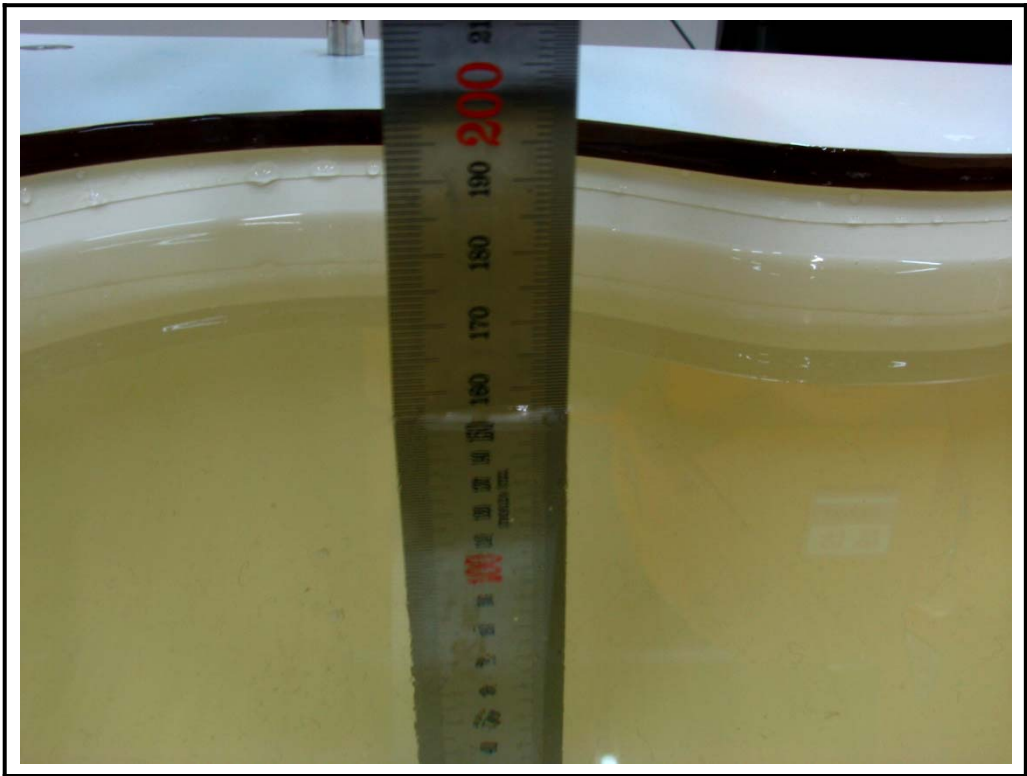

1900 / 2450 MHz Liquid Depth

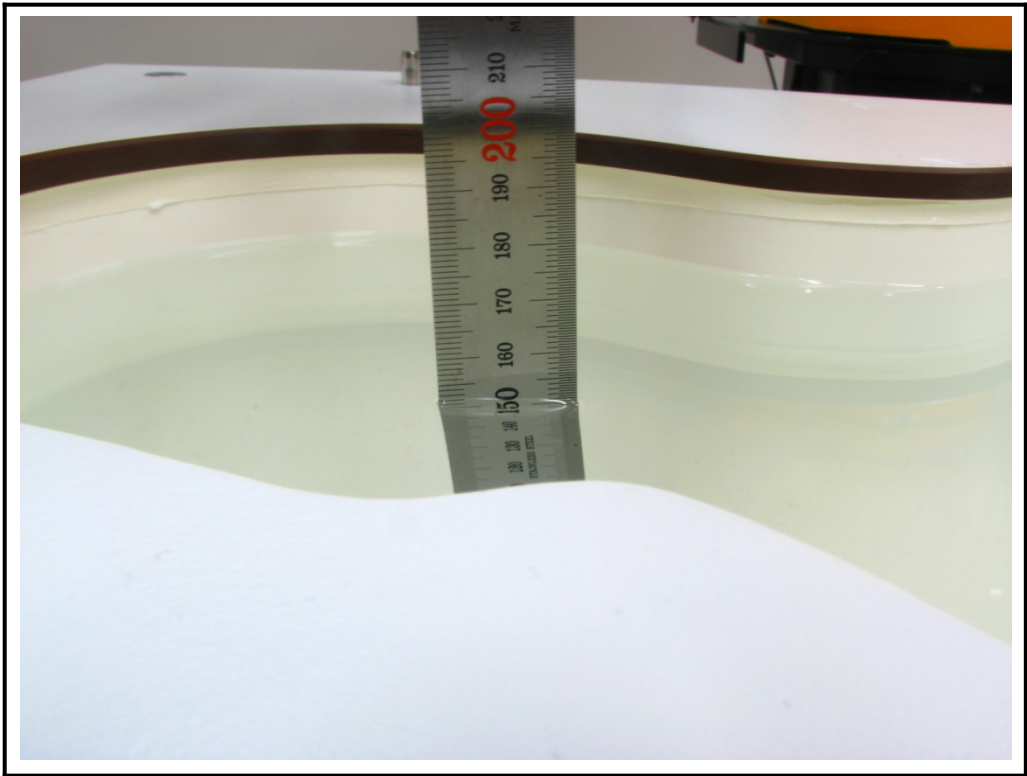

11. SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas

11.1 SAR Evaluation Considerations

These procedures were followed according to FCC "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", February 2008. The procedures are applicable to phones with built-in unlicensed transmitters, such as 802.11 a/b/g and Bluetooth devices.

	2.45	5.15 - 5.35	5.47 - 5.85	GHz
P_{Ref}	12	6	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table.				

Table. 11.1 Output Power Thresholds for Unlicensed Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<u>SAR not required:</u> <u>Unlicensed only</u> - when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas <u>Licensed & Unlicensed</u> - when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas - when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 <u>SAR required:</u> <u>Licensed & Unlicensed</u> antenna pairs with SAR to peak location separation ratio ≥ 0.3 ; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition <u>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</u>
Unlicensed Transmitters	<u>When there is no simultaneous transmission –</u> - output ≤ 60 f: SAR not required - output > 60 f: stand-alone SAR required <u>When there is simultaneous transmission –</u> <u>Stand-alone SAR not required when</u> - output $\leq 2 \cdot P_{Ref}$ and antenna is ≥ 5.0 cm from other antennas - output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas - output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <u>Otherwise stand-alone SAR is required</u> <u>When stand-alone SAR is required</u> - test SAR on highest output channel for each wireless mode and exposure condition - if SAR for highest output channel is $> 50\%$ of SAR limit, evaluate all channels according to normal procedures	
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u> - when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues - position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Table. 11.2 SAR Evaluation Requirements for Cellphones with Multiple Transmitters

FCC ID: BEJJS750

BT Max RF Output Power : 8.63 dBm(7.29 mW)

Antenna separation distance between Main and BT: 9.8 cm

Because the conducted output power level of the BT transmitter is less than P_{Ref} , and the BT antenna is more than 2.5 cm from the Main antenna, neither simultaneous SAR nor stand-alone BT SAR are required for the EUT. Based on the output power and antenna separation distance, a stand-alone WLAN SAR test is required. The summation of Main and WLAN is $(0.701 + 0.041) = 0.742 < 1.6$ mW/g. Therefore simultaneous SAR evaluation is not required.

12. 3G MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power

12.1 Procedures Used To Establish Test Signal

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

12.2 SAR Measurement Conditions for UMTS

Body SAR is not required for handsets with HSDPA capabilities when the maximum average output of each RF channel with HSDPA active is less than $\frac{1}{4}$ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is Measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

12.2.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3 GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all "1s"

12.2.2 Head SAR Measurement

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than $\frac{1}{4}$ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that results in the highest SAR for that RF channel in 12.2 RMC.

12.2.3 Body SAR Measurement

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

12.2.4 Handsets with Release 5 HSDPA

Body SAR is not required for handsets with HSDPA capabilities when the maximum average output of each RF channel with HSDPA active is less than $\frac{1}{4}$ dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is Measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.

Sub-Test 1 Setup for Release 5 HSDPA

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

12.2.5 Handsets with Release 6 HSPA (HSDPA/HSUPA)

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.1 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurement should be used to test for head exposure.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

13. RF CONDUCTED POWER

Power measurements were performed using a base station simulator under digital average power

13.1 Procedures Used To Establish Test Signal

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR. SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

Average Output Power Measurement for FCC ID: BEJJS750

Band	Channel	Voice	GPRS Data			
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)	GPRS 4 TX Slot (dBm)
GSM 850	128	32.76	32.78	31.67	29.15	28.10
	190	32.69	32.71	31.60	29.07	28.04
	251	32.59	32.61	31.52	28.97	27.96
GSM 1900	512	29.69	29.19	28.64	27.09	26.12
	661	29.83	29.34	28.79	27.25	26.27
	810	29.96	29.50	28.96	27.40	26.42

13.1 GSM Conducted Output Powers

Band	Channel	EDGE Data			
		EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)	EDGE 4 TX Slot (dBm)
GSM 850	128	26.36	25.35	25.34	25.28
	190	26.29	25.30	25.27	25.22
	251	26.21	25.22	25.18	25.14
GSM 1900	512	25.28	24.26	24.24	24.22
	661	25.43	24.41	24.39	24.36
	810	25.58	24.58	24.54	24.51

13.2 GSM EDGE Conducted Output Powers

Average Output Power Measurement for FCC ID: BEJJS750

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			MPR
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	23.02	23.03	22.96	-
99	WCDMA	12.2 kbps AMR	23.01	23.01	22.95	-
5	HSDPA	Subtest 1	22.91	22.86	22.89	0
5		Subtest 2	22.85	22.84	22.85	0
5		Subtest 3	22.52	22.53	22.41	-0.5
5		Subtest 4	22.49	22.51	22.48	-0.5
6	HSUPA	Subtest 1	22.76	22.81	22.53	0
6		Subtest 2	20.85	20.76	20.48	-2
6		Subtest 3	21.97	21.91	21.76	-1
6		Subtest 4	21.39	21.39	21.22	-2
6		Subtest 5	22.72	21.82	22.57	0

13.3 WCDMA Conducted Output Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	PCS Band [dBm]			MPR
			9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.98	23.11	22.92	-
99	WCDMA	12.2 kbps AMR	22.98	23.11	22.92	-
5	HSDPA	Subtest 1	22.96	23.06	22.92	0
5		Subtest 2	22.99	23.04	22.93	0
5		Subtest 3	22.91	22.98	22.89	-0.5
5		Subtest 4	22.45	22.57	22.45	-0.5
6	HSUPA	Subtest 1	22.41	22.51	22.41	0
6		Subtest 2	22.64	22.74	22.58	-2
6		Subtest 3	20.74	20.77	20.40	-1
6		Subtest 4	21.86	21.97	21.76	-2
6		Subtest 5	21.39	21.32	21.25	0

13.4 WCDMA Conducted Output Powers

Average Output Power Measurement for FCC ID: BEJJS750

802.11b Mode		Rate (Mbps)	Measured Power (dBm)
Frequency [MHz]	Channel No.		
2412	1	1Mbps	16.86
		2Mbps	16.78
		5.5Mbps	16.97
		11Mbps	16.89
2437	6	1Mbps	16.88
		2Mbps	16.81
		5.5Mbps	16.94
		11Mbps	16.92
2462	11	1Mbps	16.85
		2Mbps	16.78
		5.5Mbps	16.95
		11Mbps	16.83

12.4 IEEE 802.11b Average output power

Average Output Power Measurement for FCC ID: BEJJS750

802.11g Mode		Rate (Mbps)	Measured Power (dBm)
Frequency [MHz]	Channel No.		
2412	1	6Mbps	13.92
		9Mbps	13.91
		12Mbps	13.89
		18Mbps	14.01
		24Mbps	13.80
		36Mbps	13.79
		48Mbps	13.88
		54Mbps	13.86
2437	6	6Mbps	13.85
		9Mbps	13.88
		12Mbps	13.95
		18Mbps	13.84
		24Mbps	13.86
		36Mbps	13.87
		48Mbps	13.85
		54Mbps	13.84
2462	11	6Mbps	13.89
		9Mbps	13.74
		12Mbps	13.81
		18Mbps	13.81
		24Mbps	13.73
		36Mbps	13.72
		48Mbps	13.71
		54Mbps	13.81

12.5 IEEE 802.11g Average output power

Average Output Power Measurement for FCC ID: BEJJS750

802.11n Mode		Rate (Mbps)	Measured Power (dBm)
Frequency [MHz]	Channel No.		
2422	3	6.5Mbps	12.58
		13Mbps	12.55
		19.5Mbps	12.51
		26Mbps	12.50
		24Mbps	12.54
		39Mbps	12.34
		52Mbps	12.44
		58.5Mbps	12.35
		65Mbps	12.32
2437	6	6.5Mbps	12.49
		13Mbps	12.43
		19.5Mbps	12.50
		26Mbps	12.48
		24Mbps	12.41
		39Mbps	12.38
		52Mbps	12.39
		58.5Mbps	12.38
		65Mbps	12.33
2452	9	6.5Mbps	12.40
		13Mbps	12.49
		19.5Mbps	12.51
		26Mbps	12.50
		24Mbps	12.47
		39Mbps	12.46

12.6 IEEE 802.11n Average output power

14. MEASUREMENT RESULTS (Continued)

Measurement Results

ANSI / IEEE C95.1- 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg averaged over 1 gram		
MEASUREMENT RESULTS (Head SAR)								
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End				
836.6	190	GSM 850	32.69	32.68	Standard	Right Touch	Fixed	0.441
836.6	190	GSM 850	32.69	32.67	Standard	Right Tilt	Fixed	0.395
836.6	190	GSM 850	32.69	32.65	Standard	Left Touch	Fixed	0.462
836.6	190	GSM 850	32.69	32.94	Standard	Left Tilt	Fixed	0.341
1880.0	661	PCS 1900	29.83	29.82	Standard	Right Touch	Fixed	0.256
1880.0	661	PCS 1900	29.83	29.81	Standard	Right Tilt	Fixed	0.265
1880.0	661	PCS 1900	29.83	29.79	Standard	Left Touch	Fixed	0.263
1880.0	661	PCS 1900	29.83	29.81	Standard	Left Tilt	Fixed	0.312

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



Eui - Soon Park
E. S. Park / Technical Manager
MCCL

14. MEASUREMENT RESULTS (Continued)

Measurement Results

ANSI / IEEE C95.1- 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Brain 1.6 W/kg averaged over 1 gram		
MEASUREMENT RESULTS (Head SAR)									
Frequency		Cube	Mod.	Conducted Power (dBm)		Battery	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.			Start	End				
836.4	4182	cube0	WCDMA	23.03	23.02	Standard	Right Touch	Fixed	0.428
836.4	4182	cube0	WCDMA	23.03	23.01	Standard	Right Tilt	Fixed	0.382
836.4	4182	cube0	WCDMA	23.03	23.00	Standard	Left Touch	Fixed	0.408
836.4	4182	cube0	WCDMA	23.03	23.01	Standard	Left Tilt	Fixed	0.349
1880.0	9400	cube0	WCDMA	23.11	23.10	Standard	Right Touch	Fixed	0.404
1880.0	9400	cube0	WCDMA	23.11	23.09	Standard	Right Tilt	Fixed	0.464
1880.0	9400	cube0	WCDMA	23.11	23.08	Standard	Left Touch	Fixed	0.526
1880.0	9400	cube1	WCDMA	23.11	23.08	Standard	Left Touch	Fixed	0.467
1880.0	9400	cube0	WCDMA	23.11	23.09	Standard	Left Tilt	Fixed	0.507

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
6. WCDMA Mode was tested under RMC 12.2 kbps and HSDPA Inactive.



Eui - Soon Park
E. S. Park / Technical Manager
MCCL

14. MEASUREMENT RESULTS (Continued)

Measurement Results

ANSI / IEEE C95.1- 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Muscle 1.6 W/kg averaged over 1 gram			
MEASUREMENT RESULTS (Body SAR)									
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Slide	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End					
836.6	190	GPRS 850[4TX]	28.04	28.03	Standard	20mm [Front]	Down	Fixed	0.431
836.6	190	GPRS 850[4TX]	28.04	28.02	Standard	20mm [Front]	Up	Fixed	0.308
836.6	190	GPRS 850[4TX]	28.04	28.01	Standard	20mm [Rear]	Down	Fixed	0.648
836.6	190	GPRS 850[3TX]	29.07	29.06	Standard	20mm [Rear]	Down	Fixed	0.681
836.6	190	GPRS 850[2TX]	31.60	31.59	Standard	20mm [Rear]	Down	Fixed	0.701
836.6	190	GPRS 850[1TX]	32.71	32.70	Standard	20mm [Rear]	Down	Fixed	0.461
1880.0	661	GPRS 1900[4TX]	26.27	26.26	Standard	20mm [Front]	Down	Fixed	0.207
1880.0	661	GPRS 1900[4TX]	26.27	26.25	Standard	20mm [Front]	Up	Fixed	0.271
1880.0	661	GPRS 1900[4TX]	26.27	26.24	Standard	20mm [Rear]	Up	Fixed	0.455
1880.0	661	GPRS 1900[3TX]	27.25	27.24	Standard	20mm [Rear]	Up	Fixed	0.499
1880.0	661	GPRS 1900[2TX]	28.79	28.78	Standard	20mm [Rear]	Up	Fixed	0.568
1880.0	661	GPRS 1900[1TX]	29.34	29.33	Standard	20mm [Rear]	Up	Fixed	0.218
1880.0	661	EDGE 1900[4TX]	26.27	26.24	Standard	20mm [Rear]	Up	Fixed	0.470

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
6. GPRS Multi-slot Class (12) : 4 TX slots tested



Eui - Soon Park
E. S. Park / Technical Manager
MCCL

14. MEASUREMENT RESULTS (Continued)

Measurement Results

ANSI / IEEE C95.1- 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Muscle 1.6 W/kg averaged over 1 gram		
MEASUREMENT RESULTS (Body SAR)									
Frequency		Mod.	Conducted Power (dBm)		Battery	Device Test Position	Slider Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End					
836.4	4182	WCDMA	23.03	23.02	Standard	20mm [Front]	Down	Fixed	0.330
836.4	4182	WCDMA	23.03	23.01	Standard	20mm [Front]	Up	Fixed	0.257
836.4	4182	WCDMA	23.03	23.00	Standard	20mm [Rear]	Down	Fixed	0.533
1880.0	9400	WCDMA	23.11	23.10	Standard	20mm [Front]	Down	Fixed	0.211
1880.0	9400	WCDMA	23.11	23.09	Standard	20mm [Front]	Up	Fixed	0.215
1880.0	9400	WCDMA	23.11	23.08	Standard	20mm [Rear]	Up	Fixed	0.382

1. The test data reported are the worst-case SAR value with the position set in a typical configuration.
Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001],
if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
6. WCDMA Mode was tested under RMC 12.2 kbps and HSDPA Inactive.



Eui - Soon Park
E. S. Park / Technical Manager
MCCL

14. MEASUREMENT RESULTS

Measurement Results

ANSI / IEEE C95.1- 2005 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Muscle 1.6 W/kg averaged over 1 gram			
MEASUREMENT RESULTS (Body SAR)										
Frequency		Mod.	Conducted Power (dBm)		Data Rate	Battery	Device Test Position	Slider Position	Antenna Position	SAR (W/kg)
MHz	Ch.		Start	End						
2437	06	IEEE 802.11 b	16.97	16.96	1 Mbps	Standard	20mm [Front]	Down	Fixed	0.027
2437	06	IEEE 802.11 b	16.97	16.95	1 Mbps	Standard	20mm [Front]	Up	Fixed	0.031
2437	06	IEEE 802.11 b	16.97	16.94	1 Mbps	Standard	20mm [Rear]	Up	Fixed	0.041
2412	01	IEEE 802.11 b	16.86	16.85	1 Mbps	Standard	20mm [Rear]	Up	Fixed	0.041
2462	11	IEEE 802.11 b	16.89	16.88	1 Mbps	Standard	20mm [Rear]	Up	Fixed	0.029

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings. Standard batteries are the only options.
4. Tissue parameters and temperatures are listed on the SAR plots.
5. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C [July 2001], if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).



Eui - Soon Park
E. S. Park / Technical Manager
MCCL

15. TEST EQUIPMENT

Equipment List and Calibration Lab No.1

Name of Equipment	Manufacturer	Model Type	Serial Number	Cal. Due date
Robot	Stäubli	RX90BL	5L74A1	N/A
SAM Twin Phantom	SPEAG	V4.0	TP-1066	N/A
SAM Twin Phantom	SPEAG	V4.0	TP-1244	N/A
DAE	SPEAG	DAE3	362	04/30/11
E-Field Probe	SPEAG	ES3DV3	3066	02/24/11
Validation Dipole 835MHz	SPEAG	D835V2	468	04/29/12
Validation Dipole 1900MHz	SPEAG	D1900V2	5d057	04/20/12
Validation Dipole 2450MHz	SPEAG	D2450V2	836	02/08/12
S-Parameter Network Analyzer	Agilent	8753ES	MY4002948	06/22/10
Dielectric Probe Kit	Agilent	85070D	US01440173	N/A
Signal Generator	Agilent	E4421B	MY41000199	03/03/11
High Power RF Amplifier	EM Power	BBS3Q7ECK	1014	03/03/11
Dual Direction Coupler	Agilent	778D-012	19309	06/22/10
EPM-Series Power Meter	Agilent	E4419B	GB39290585	04/12/11
Power Sensor	Agilent	8481A	MY41092711	04/07/11
Power Sensor	Agilent	8481A	MY41092718	04/07/11
Attenuator	Agilent	8491A	59049	03/03/11
Low Pass Filter 1.5 GHz	Dymstec	LA-15N	–	N/A
Low Pass Filter 3.0 GHz	Dymstec	LA-30N	–	N/A
Thermometer/Hygrometer	SATO	SK-L200TH	8440587	06/26/11
Wireless Communication Test	Agilent	E5515C	GB44051999	03/02/11

Table 14.1 Test Equipment List and Calibration

NOTE:

The E-field probe was calibrated by SPEAG, by waveguide technique procedure. Dipole Validation measurement is performed by LG Electronics. before each test. The brain simulating material is calibrated by LG Electronics using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

16. REFERENCES

- [1] Product standard to demonstrate the compliance of mobile phone with the basic restriction related to human exposure electromagnetic(300MHz – 3GHz), CENELEC EN 50360, July 2001.
- [2] Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phone(300MHz – 3GHz), CENELEC EN 50361, July 2001.
- [3] Council Recommendations 1999/519/EC on the limitations of exposure of the general public to electromagnetic fields (300MHz – 3GHz) annex II
- [4] International Commission on Non-Ionising Radiation Protection (1998), Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic field (up to 300 GHz). Health Physical 74, 494-522.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528 - 2003, Draft Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

APPENDIX A: Validation Test Data

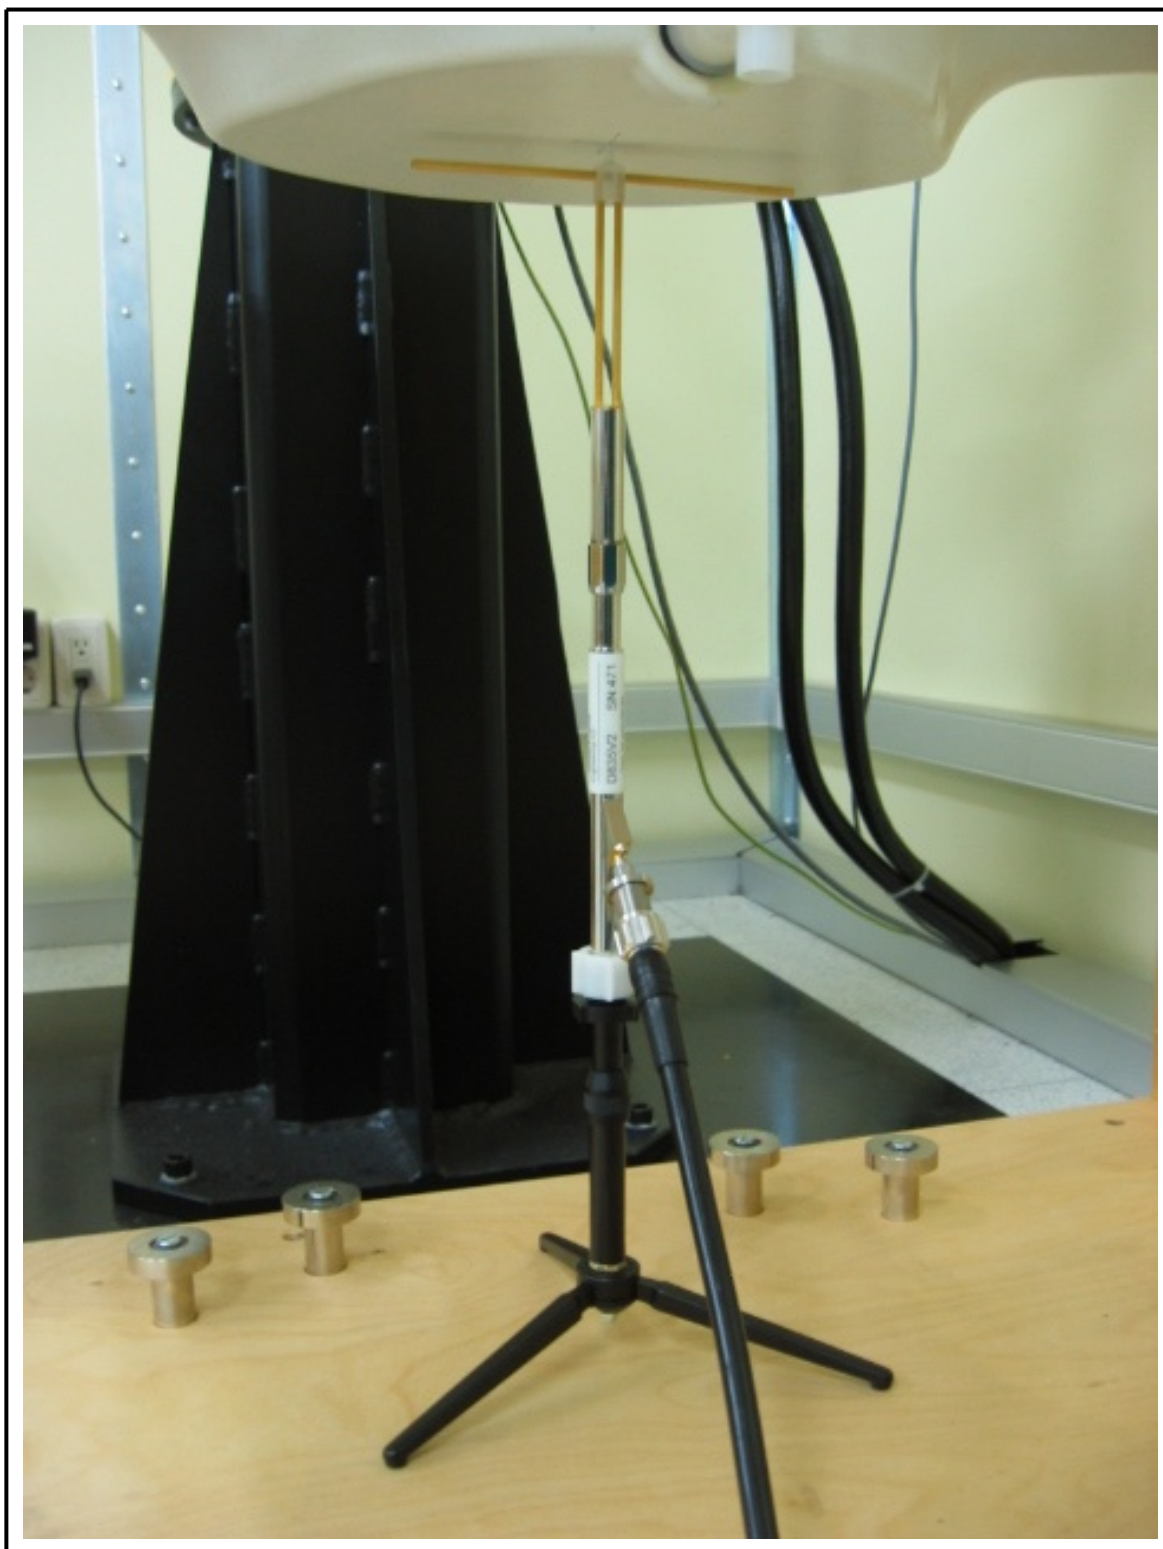


Figure 1 835 MHz Dipole Validation Test Setup



Figure 2 1900 MHz Dipole Validation Test Setup



Figure 3 2450 MHz Dipole Validation Test Setup

LG Electronics Inc.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 468

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 42.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835 MHz Dipole Validation

Validation/Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 3.01 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.6 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.67 mW/g

Maximum value of SAR (measured) = 2.99 mW/g

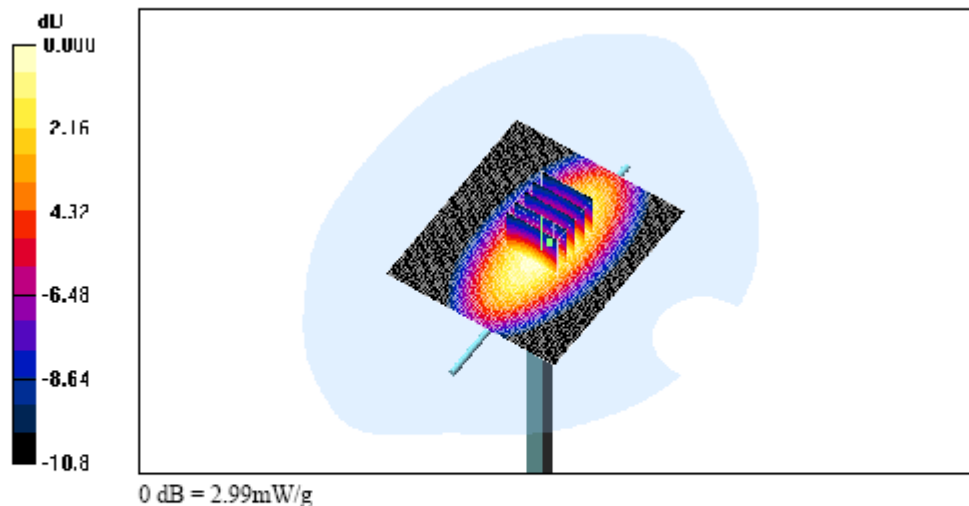

LG Electronics Inc.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 468

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.894 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835 MHz Dipole Validation

Validation/Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 3.01 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.3 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 3.83 W/kg

SAR(1 g) = 2.54 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.97 mW/g

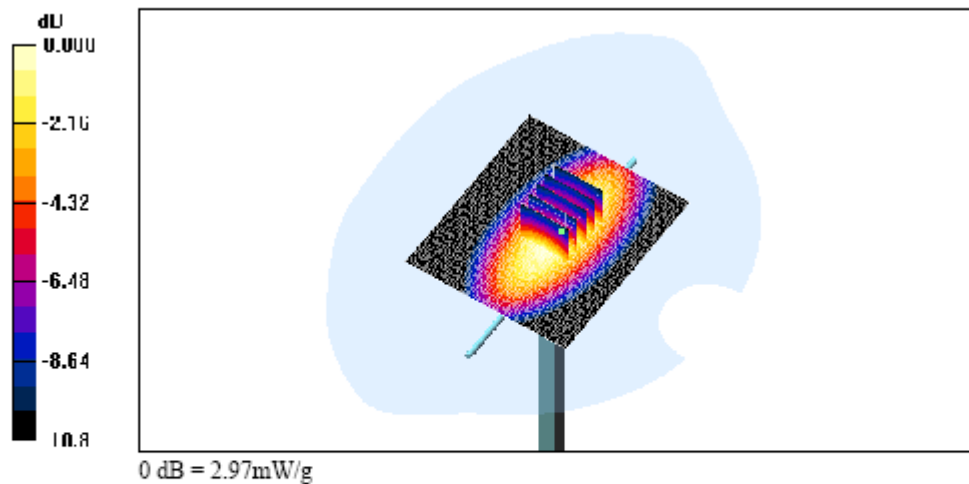

LG Electronics Inc.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d057

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900 MHz Dipole Validation

Validation/Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 13.7 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 93.9 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.29 mW/g

Maximum value of SAR (measured) = 12.8 mW/g

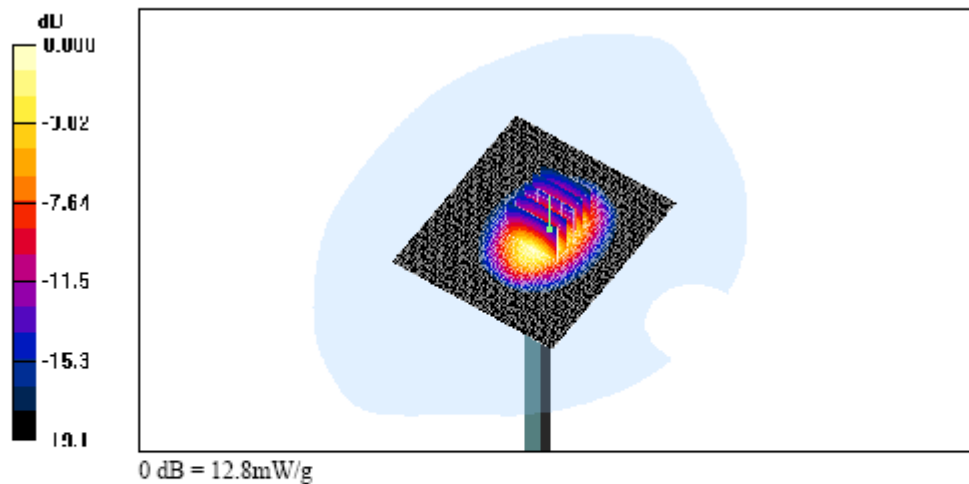

LG Electronics Inc.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d057

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900 MHz Dipole Validation

Validation/Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 13.8 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 96.1 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.5 mW/g

Maximum value of SAR (measured) = 13.0 mW/g

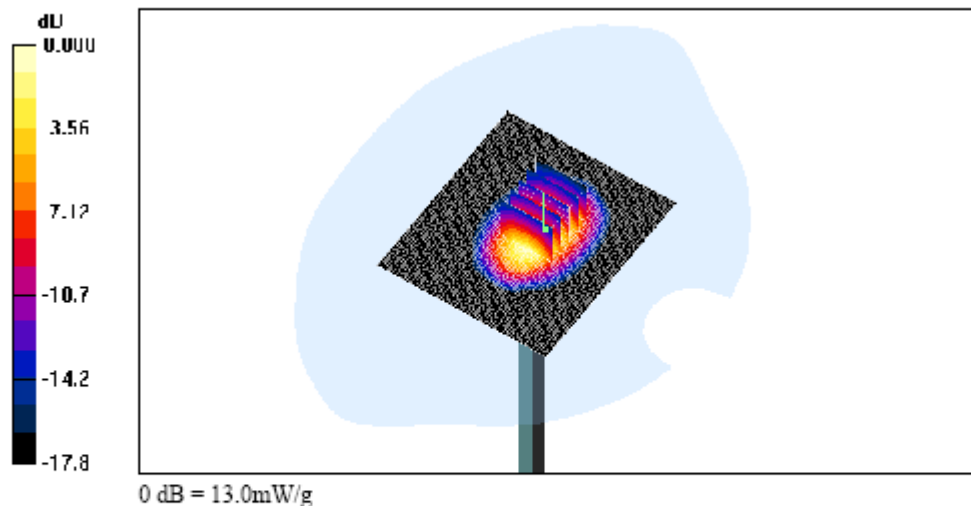

LG Electronics Inc.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:836

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.02 \text{ mho/m}$; $\epsilon_r = 51.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 06/02/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(3.9, 3.9, 3.9); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450 MHz Dipole Validation

Validation/Area Scan (71x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 17.7 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 93.8 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 26.4 W/kg

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.18 mW/g

Maximum value of SAR (measured) = 16.7 mW/g

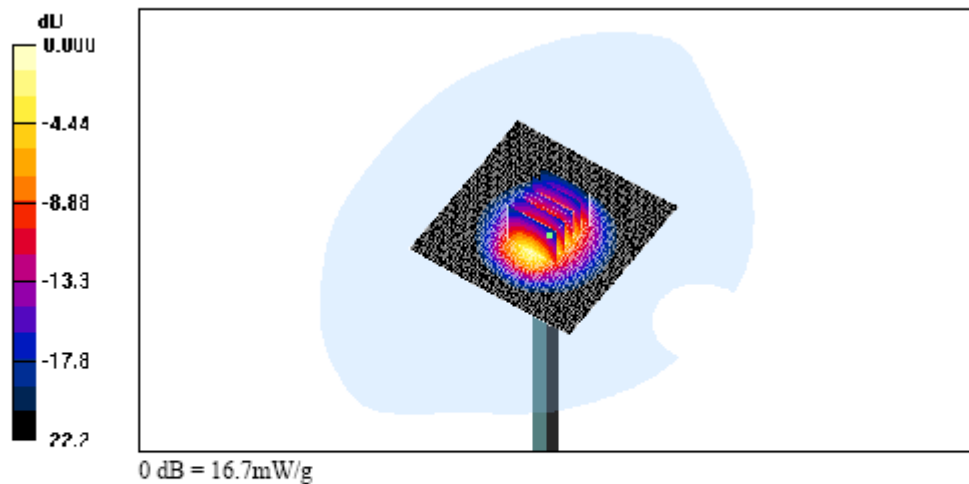

LG Electronics Inc.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 468

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 42.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835 MHz Dipole Validation

Validation/Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 3.01 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.6 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.67 mW/g

Maximum value of SAR (measured) = 2.99 mW/g

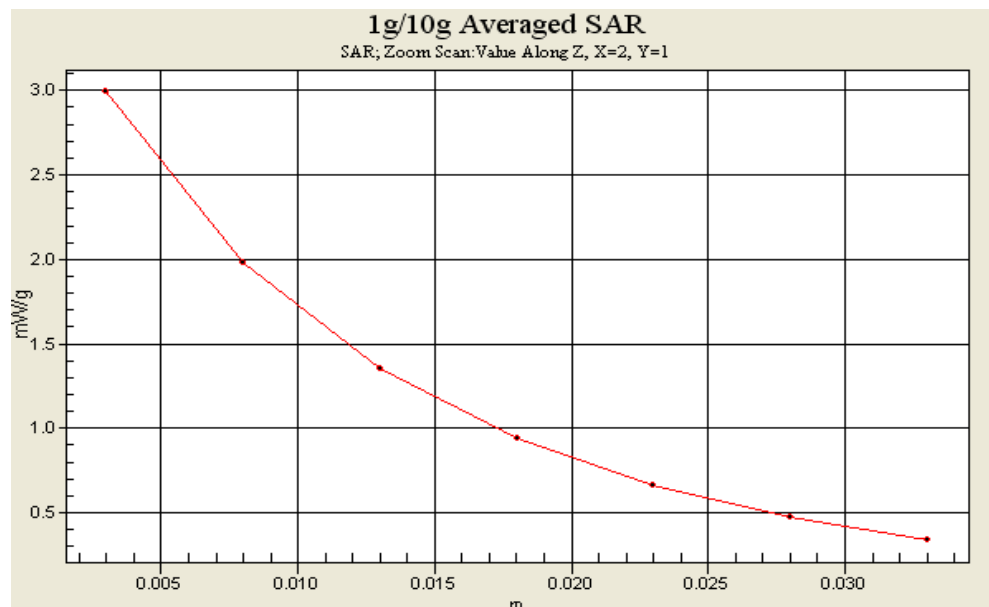

LG Electronics Inc.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 468

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.894 \text{ mho/m}$; $\epsilon_r = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

835 MHz Dipole Validation

Validation/Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 3.01 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.3 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 3.83 W/kg

SAR(1 g) = 2.54 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.97 mW/g

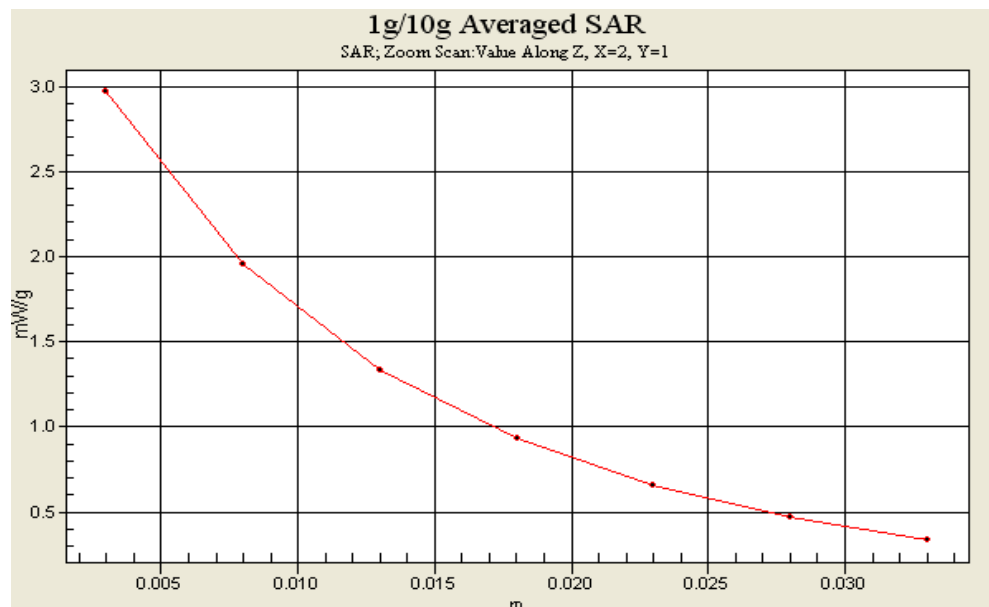

LG Electronics Inc.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d057

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900 MHz Dipole Validation

Validation/Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.7 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 93.9 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.29 mW/g

Maximum value of SAR (measured) = 12.8 mW/g

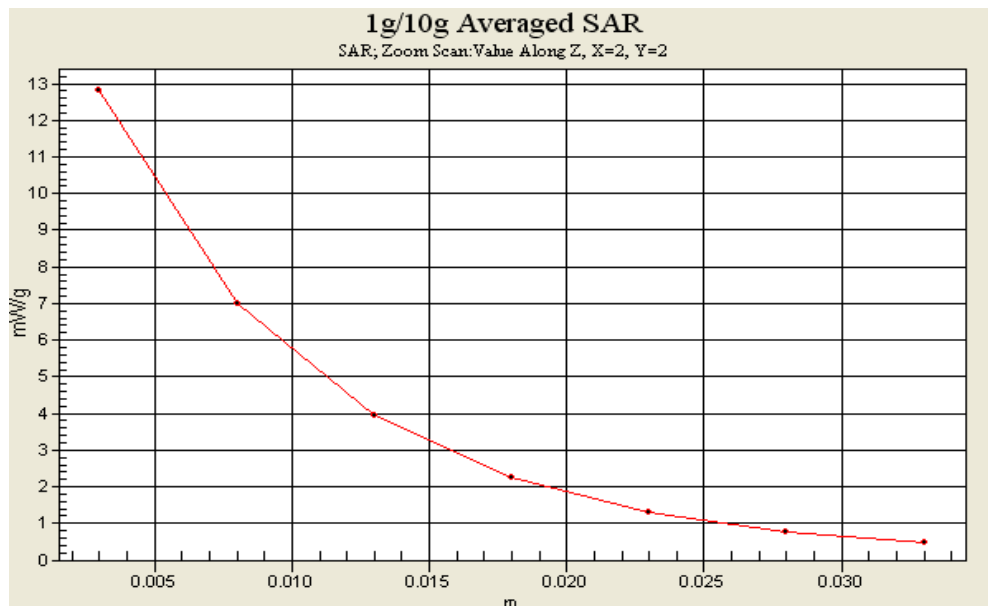

LG Electronics Inc.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d057

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

1900 MHz Dipole Validation

Validation/Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.8 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 96.1 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.5 mW/g

Maximum value of SAR (measured) = 13.0 mW/g

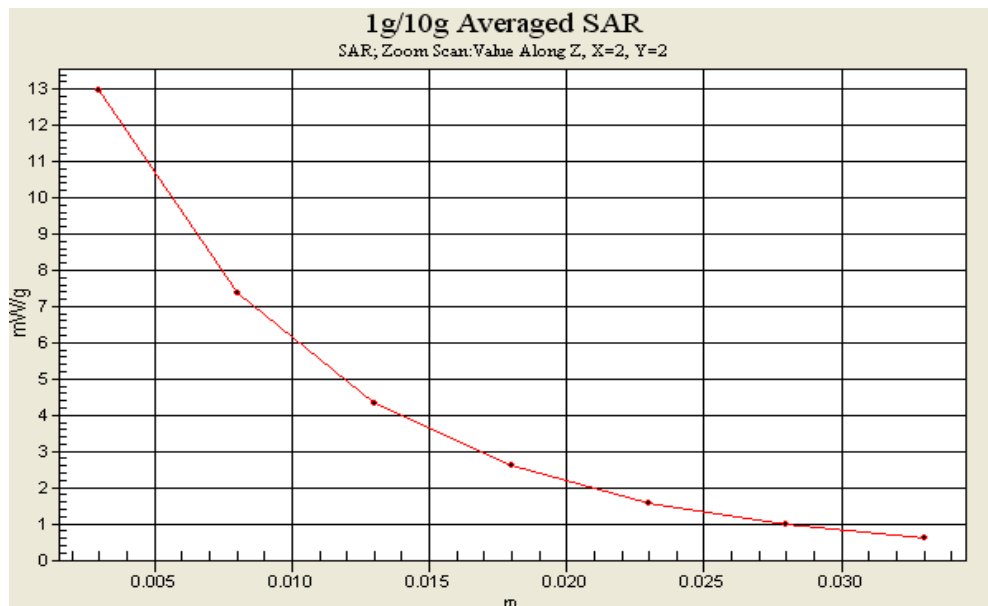

LG Electronics Inc.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 836

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.02 \text{ mho/m}$; $\epsilon_r = 51.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 06/02/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(3.9, 3.9, 3.9); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

2450 MHz Dipole Validation

Validation/Area Scan (71x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 17.7 mW/g


Validation/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 93.8 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 26.4 W/kg

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.18 mW/g

Maximum value of SAR (measured) = 16.7 mW/g

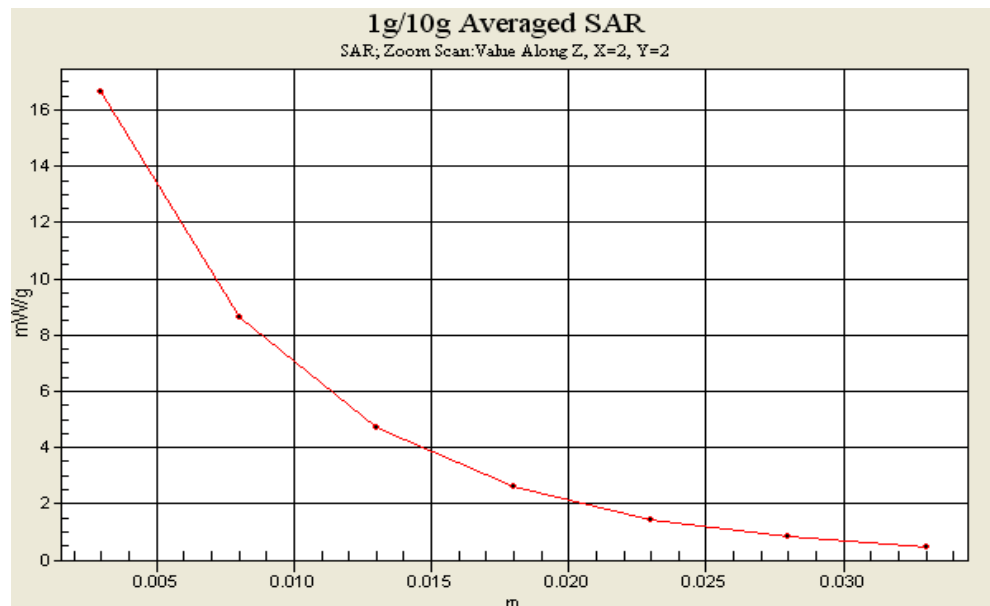

APPENDIX B: SAR Test Data

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 42.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Touch, CH190, Fixed Ant, Standard Battery

GSM850/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.509 mW/g


GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.4 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.441 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.479 mW/g

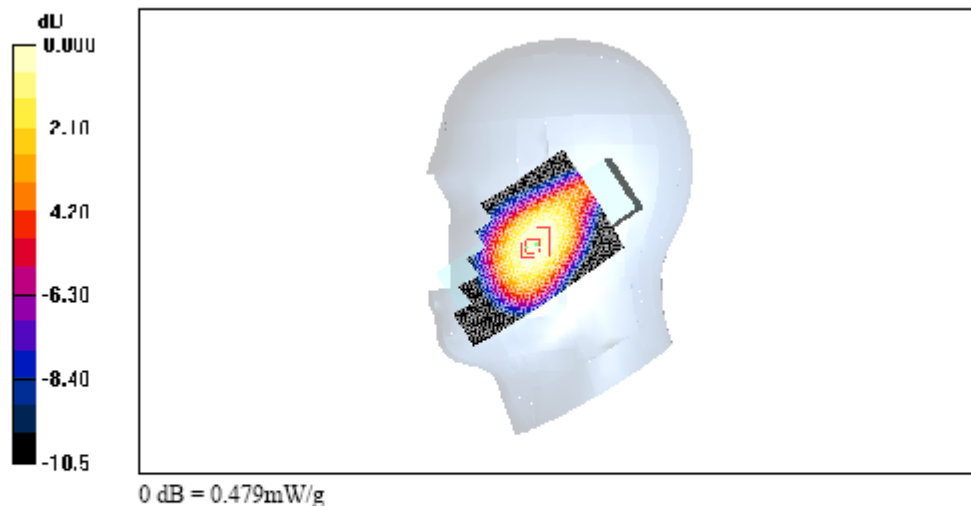

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 42.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Tilt, CH190, Fixed Ant, Standard Battery

GSM850/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.434 mW/g


GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.9 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.432 mW/g

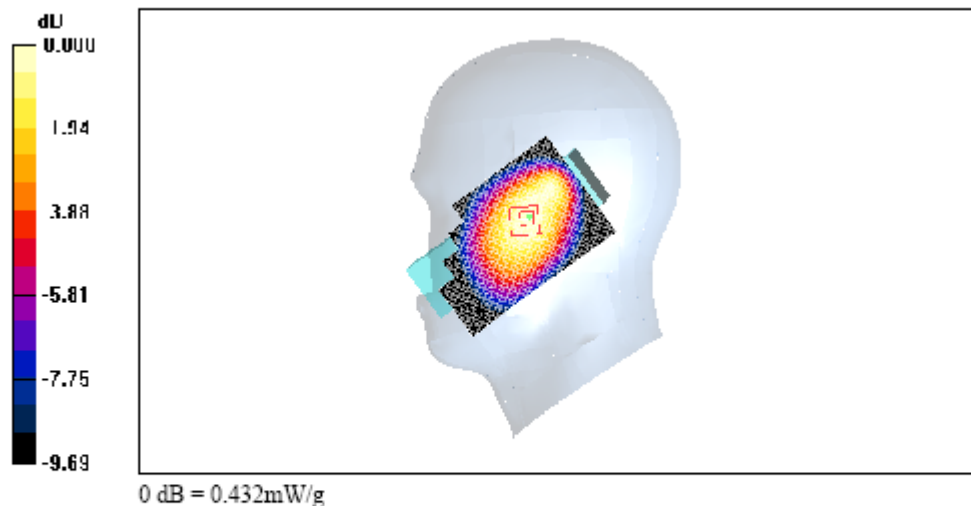

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 42.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Touch, CH190, Fixed Ant, Standard Battery

GSM850/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.520 mW/g


GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.0 V/m; Power Drift = -0.209 dB

Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.342 mW/g

Maximum value of SAR (measured) = 0.503 mW/g

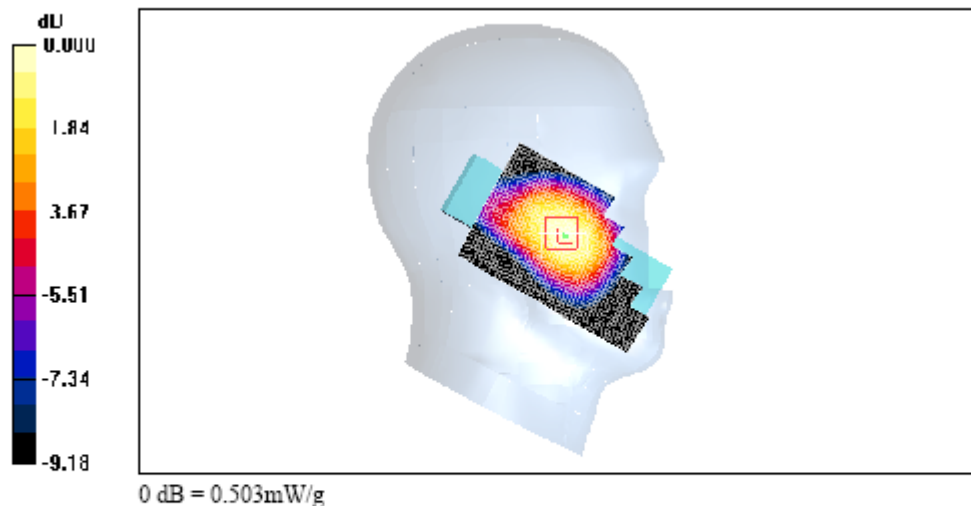

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 42.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Tilt, CH190, Fixed Ant, Standard Battery

GSM850/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.376 mW/g


GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.7 V/m; Power Drift = -0.151 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 0.377 mW/g

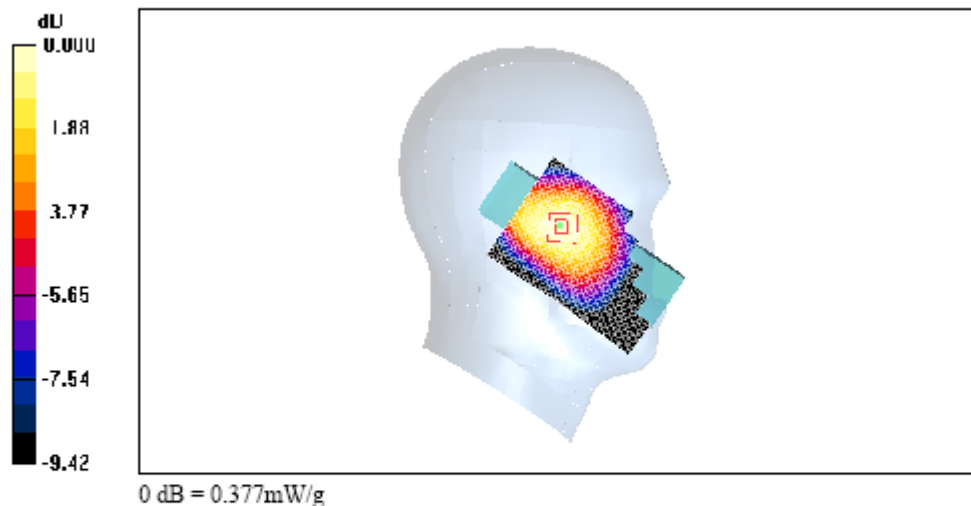

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section


Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30
Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Touch, CH661, Fixed Ant, Standard Battery

PCS1900/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.287 mW/g

PCS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 6.80 V/m; Power Drift = -0.079 dB
Peak SAR (extrapolated) = 0.339 W/kg
SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.173 mW/g
Maximum value of SAR (measured) = 0.291 mW/g

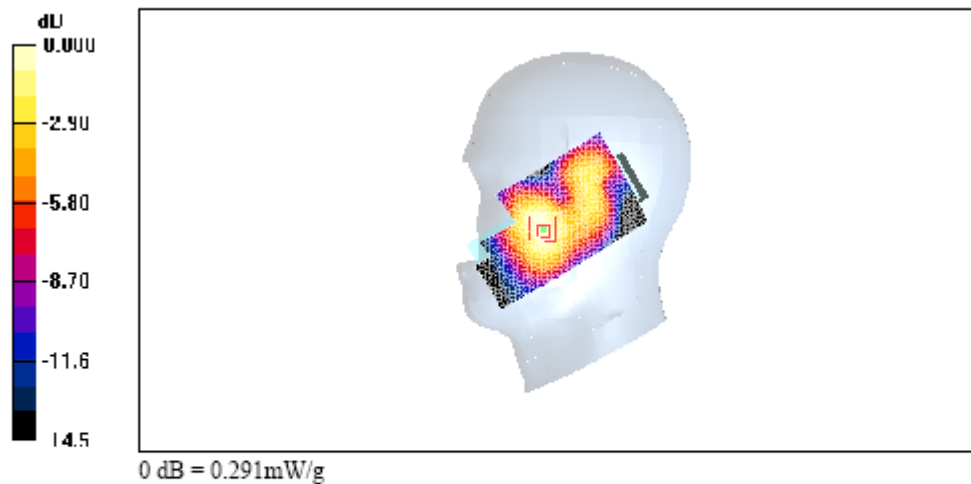

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section


Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30
Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Tilt, CH661, Fixed Ant, Standard Battery

PCS1900/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.311 mW/g

PCS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.4 V/m; Power Drift = 0.178 dB
Peak SAR (extrapolated) = 0.403 W/kg
SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.158 mW/g
Maximum value of SAR (measured) = 0.305 mW/g

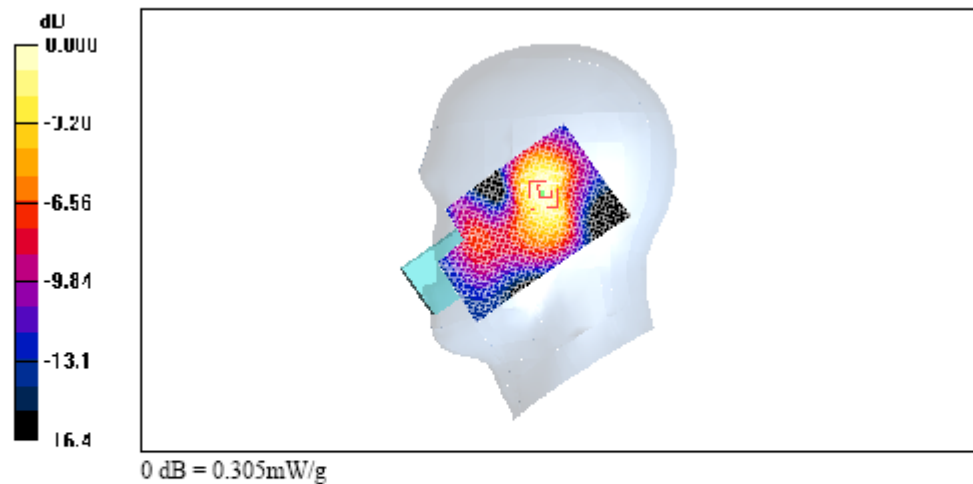

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Touch, CH661, Fixed Ant, Standard Battery

PCS1900/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.349 mW/g


PCS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.2 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

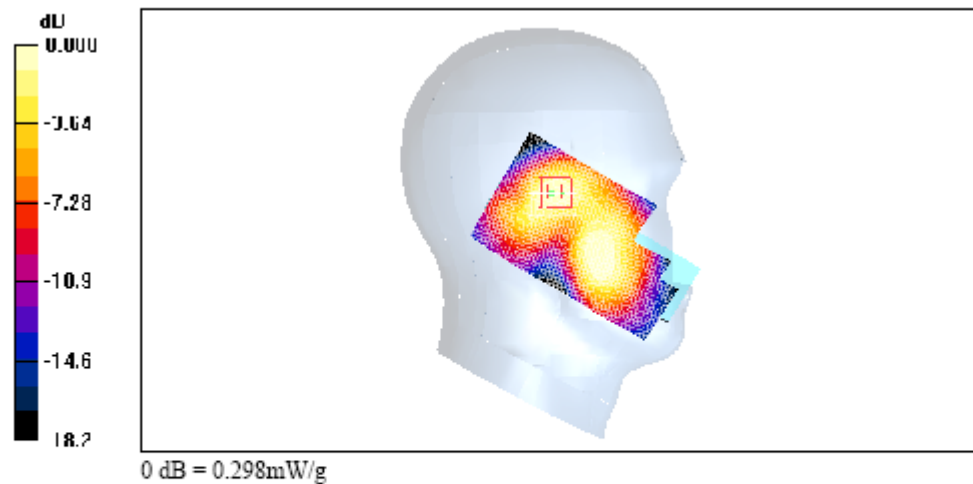

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30
Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Tilt, CH661, Fixed Ant, Standard Battery

PCS1900/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.381 mW/g

PCS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.0 V/m; Power Drift = -0.251 dB
Peak SAR (extrapolated) = 0.432 W/kg
SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.196 mW/g
Maximum value of SAR (measured) = 0.363 mW/g

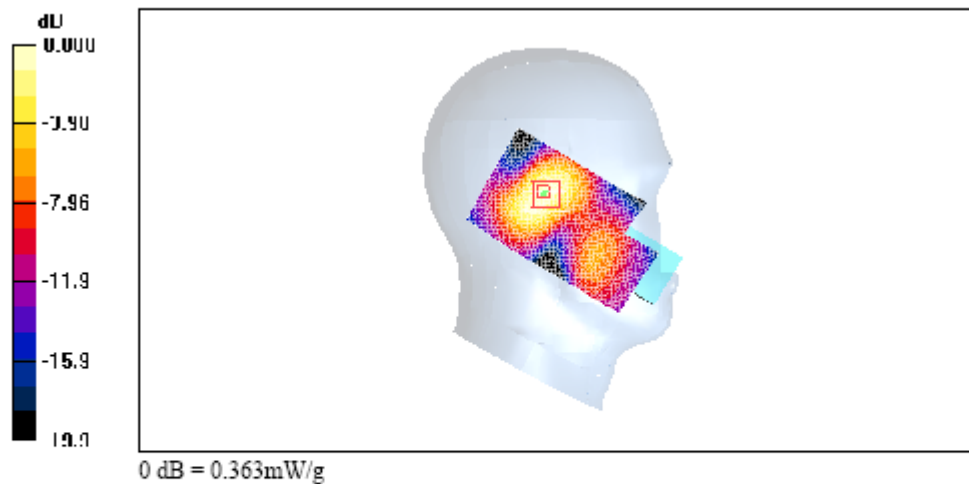

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Touch, CH4182, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.488 mW/g

WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.5 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.320 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.463 mW/g

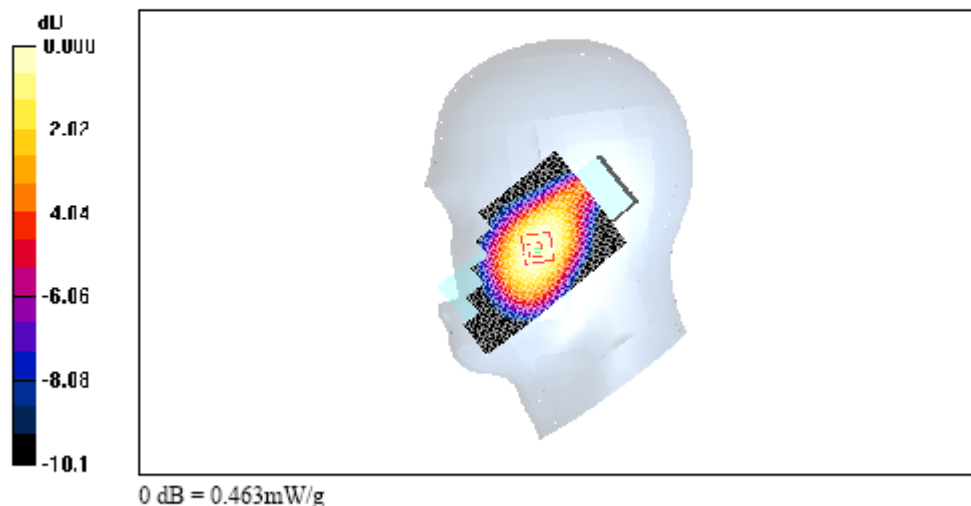

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Tilt, CH4182, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.416 mW/g

WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.3 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.278 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.424 mW/g

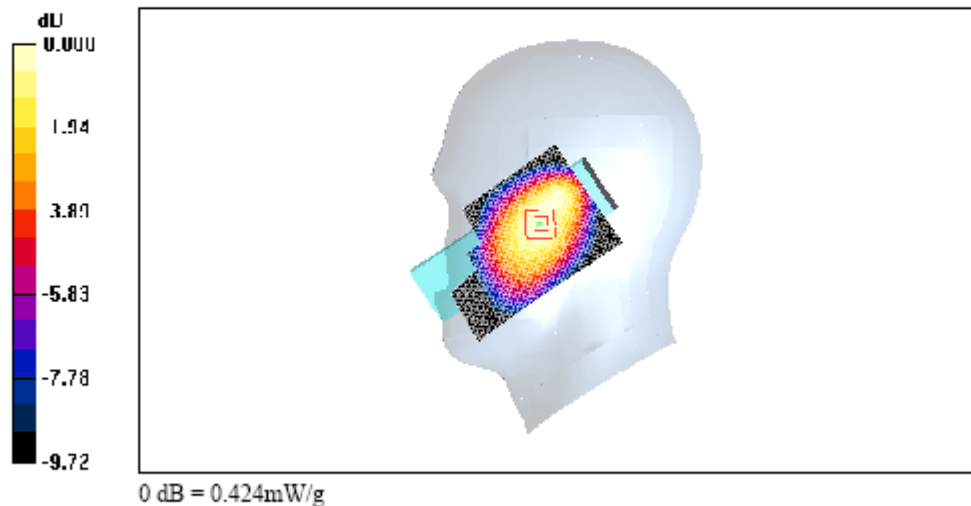

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Touch, CH4182, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.460 mW/g

WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.4 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.304 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.449 mW/g

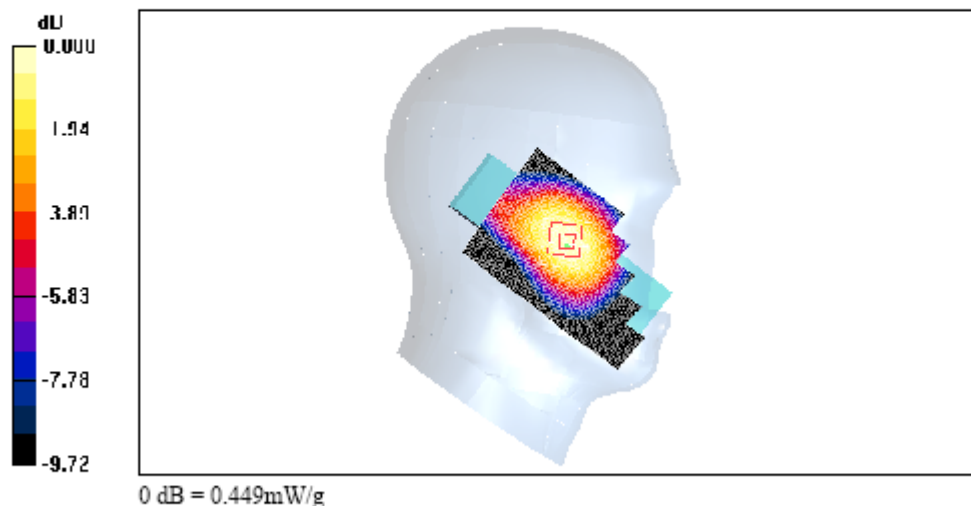

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.68, 5.68, 5.68); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Tilt, CH4182, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.382 mW/g

WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.261 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.387 mW/g

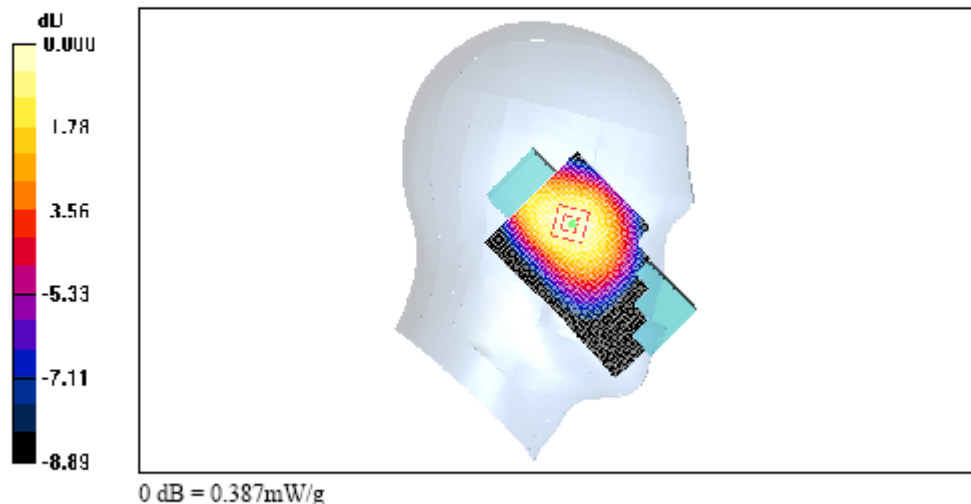

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Touch, CH9400, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.462 mW/g


WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.58 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.463 mW/g

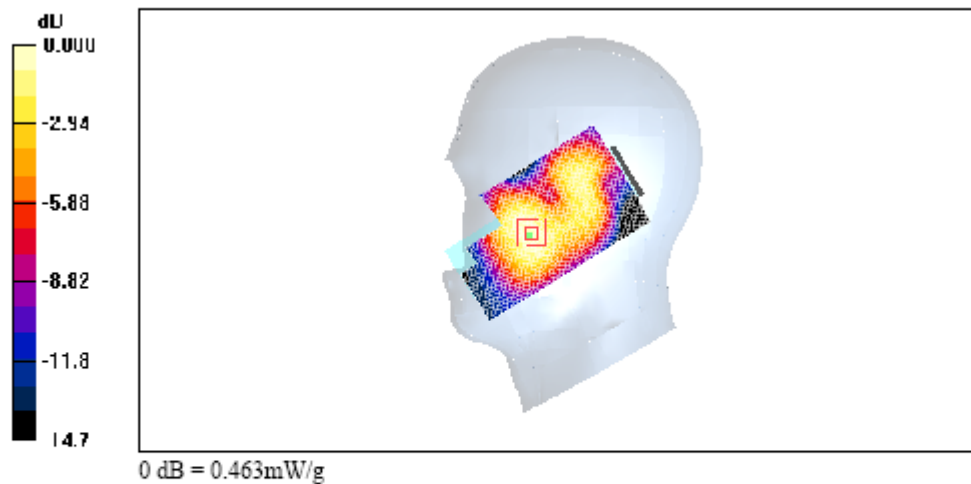

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Head Tilt, CH9400, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.543 mW/g


WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.1 V/m; Power Drift = 0.170 dB

Peak SAR (extrapolated) = 0.710 W/kg

SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.541 mW/g

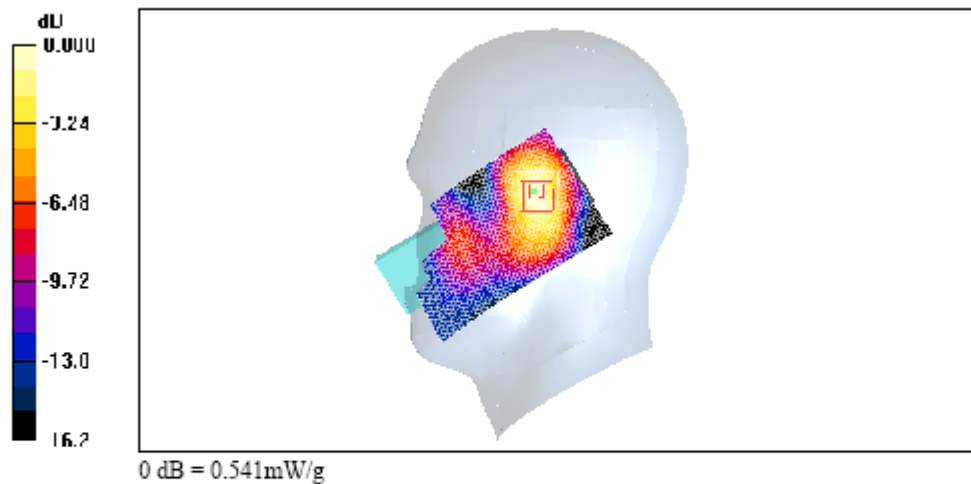

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Touch, CH9400, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.644 mW/g


WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.7 V/m; Power Drift = 0.341 dB

Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.526 mW/g; SAR(10 g) = 0.334 mW/g

Maximum value of SAR (measured) = 0.612 mW/g

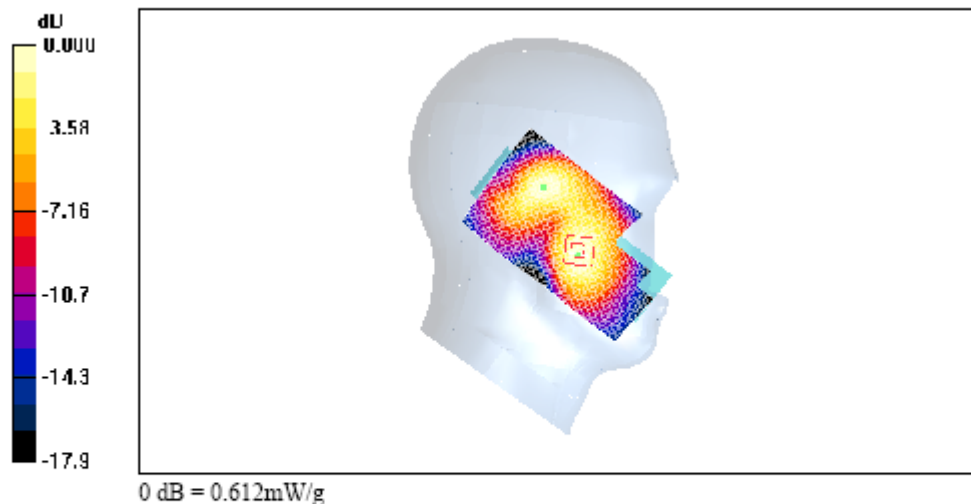

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Touch, CH9400, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.644 mW/g


WCDMA/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.7 V/m; Power Drift = 0.341 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.309 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

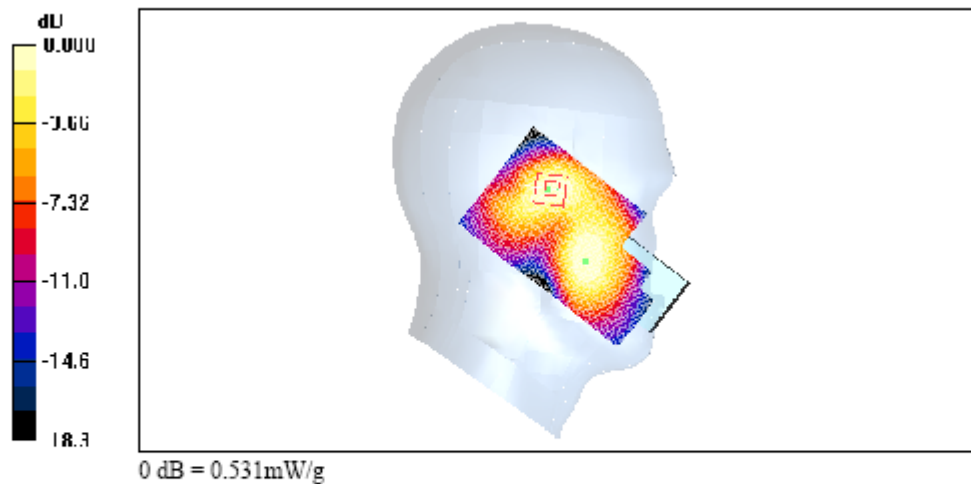

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.66, 4.66, 4.66); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 835MHz; Type: SAM; Serial: TP-1066

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left Head Tilt, CH9400, Fixed Ant, Standard Battery

WCDMA/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.611 mW/g


WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.0 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

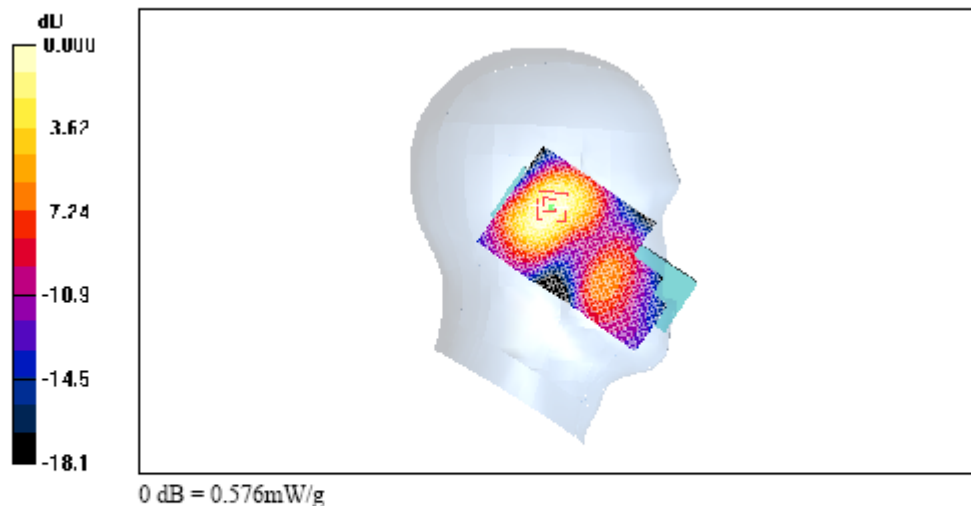

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.963 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.55, 5.55, 5.55); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30
Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH190, Front, Slider Down, 4TX, Fixed Ant, Standard Battery

GPRS850/Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.472 mW/g

GPRS850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.4 V/m; Power Drift = 0.030 dB
Peak SAR (extrapolated) = 0.546 W/kg
SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.324 mW/g
Maximum value of SAR (measured) = 0.473 mW/g

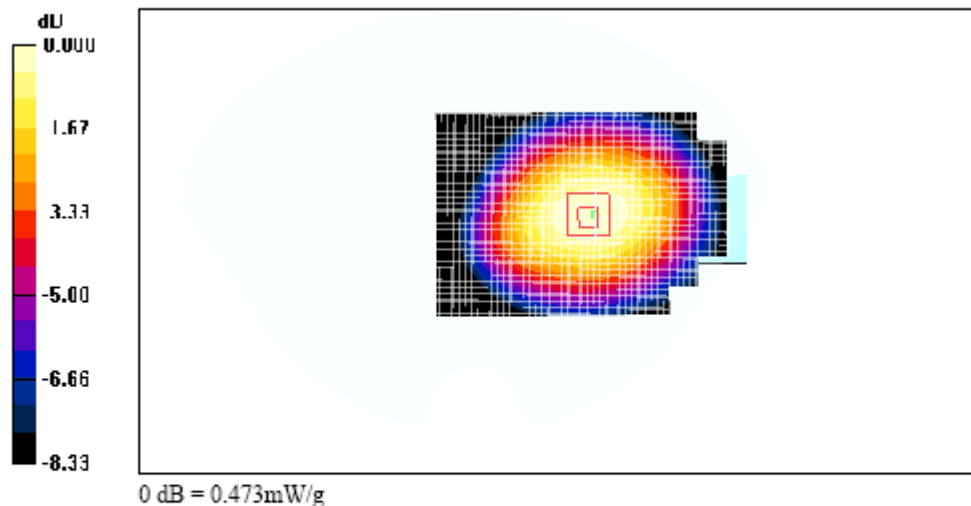

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.963 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.55, 5.55, 5.55); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30
Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH190, Front, Slider Up, 4TX, Fixed Ant, Standard Battery

GPRS850/Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.346 mW/g

GPRS850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.19 V/m; Power Drift = -0.015 dB
Peak SAR (extrapolated) = 0.412 W/kg
SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.227 mW/g
Maximum value of SAR (measured) = 0.342 mW/g

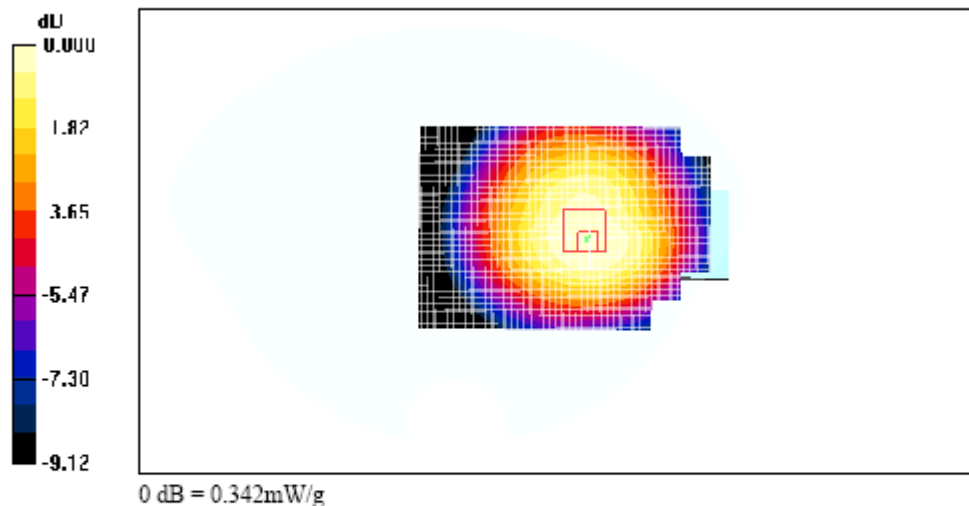

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.963 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.55, 5.55, 5.55); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30
Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH190, Rear, Slider Down, 4TX, Fixed Ant, Standard Battery

GPRS850/Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.729 mW/g

GPRS850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.4 V/m; Power Drift = 0.077 dB
Peak SAR (extrapolated) = 0.840 W/kg
SAR(1 g) = 0.648 mW/g; SAR(10 g) = 0.476 mW/g
Maximum value of SAR (measured) = 0.722 mW/g

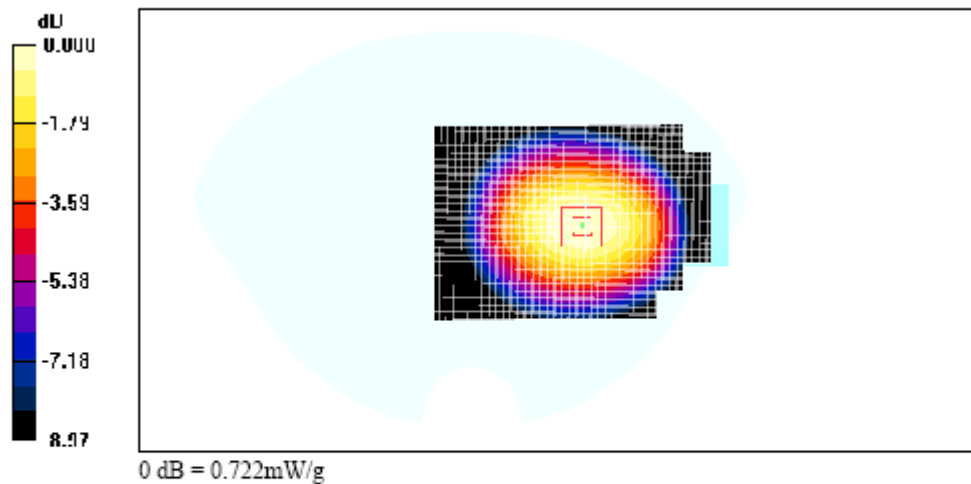

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2.77
Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.963 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.55, 5.55, 5.55); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30
Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH190, Rear, Slider Down, 3TX, Fixed Ant, Standard Battery

GPRS850/Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.762 mW/g

GPRS850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.9 V/m; Power Drift = -0.023 dB
Peak SAR (extrapolated) = 0.883 W/kg
SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.503 mW/g
Maximum value of SAR (measured) = 0.751 mW/g

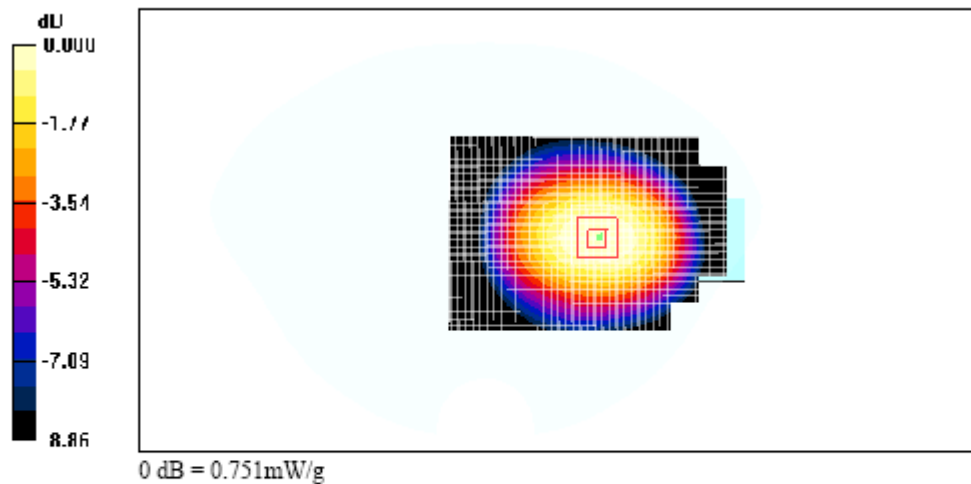

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.963 \text{ mho/m}$; $\epsilon_r = 55.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section


Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.55, 5.55, 5.55); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30
Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH190, Rear, Slider Down, 2TX, Fixed Ant, Standard Battery

GPRS850/Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.787 mW/g

GPRS850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.9 V/m; Power Drift = -0.023 dB
Peak SAR (extrapolated) = 0.917 W/kg
SAR(1 g) = 0.701 mW/g; SAR(10 g) = 0.515 mW/g
Maximum value of SAR (measured) = 0.775 mW/g

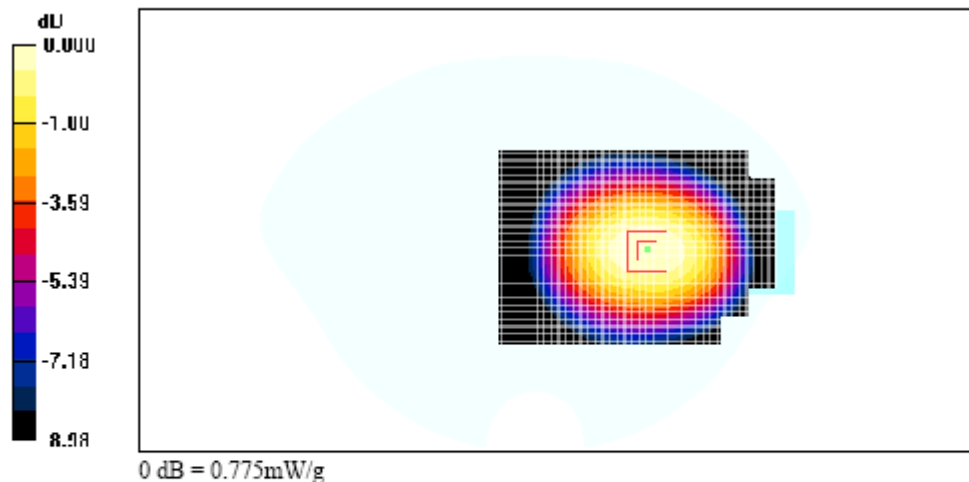

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.963$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: 05/31/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.55, 5.55, 5.55); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH190, Rear, Slider Down, 1TX, Fixed Ant, Standard Battery

GPRS850/Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.517 mW/g


GPRS850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.92 V/m; Power Drift = 0.181 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.338 mW/g

Maximum value of SAR (measured) = 0.509 mW/g

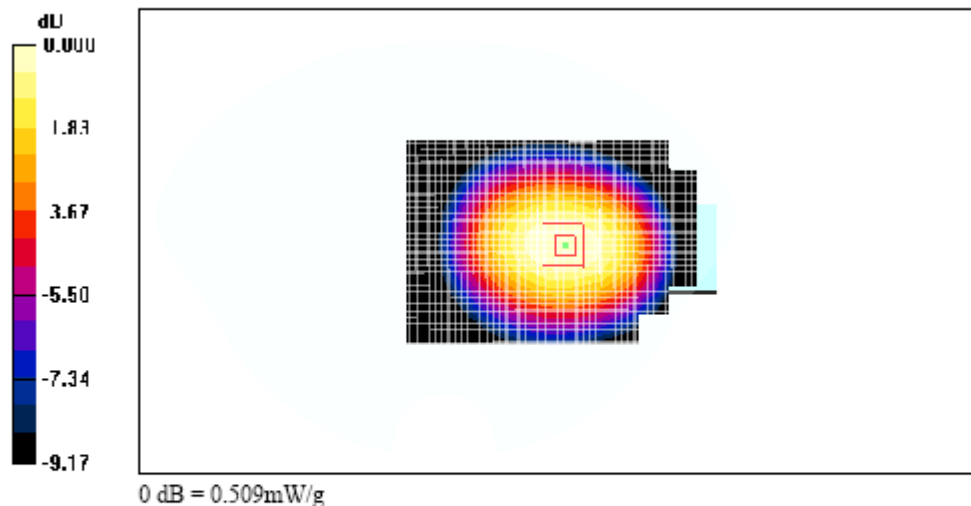

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C


Probe: ES3DV3 - SN3066; ConvF(4.2, 4.2, 4.2); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH661, Front, Slider Down, 4TX, Fixed Ant, Standard Battery

GPRS1900/Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.239 mW/g

GPRS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.88 V/m; Power Drift = -0.189 dB
Peak SAR (extrapolated) = 0.285 W/kg
SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.140 mW/g
Maximum value of SAR (measured) = 0.236 mW/g

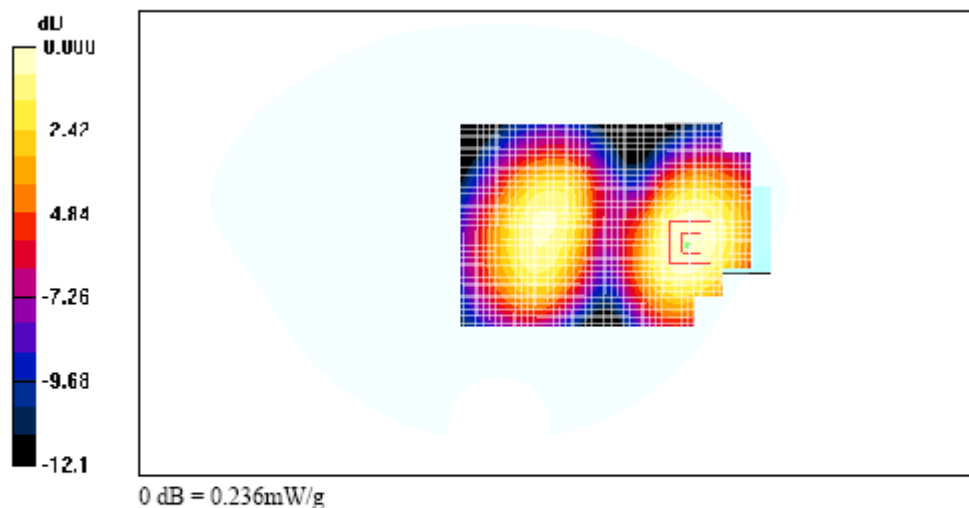

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C


Probe: ES3DV3 - SN3066; ConvF(4.2, 4.2, 4.2); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH661, Front, Slider Up, 4TX, Fixed Ant, Standard Battery

GPRS1900/Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.313 mW/g

GPRS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.6 V/m; Power Drift = -0.094 dB
Peak SAR (extrapolated) = 0.380 W/kg
SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.184 mW/g
Maximum value of SAR (measured) = 0.312 mW/g

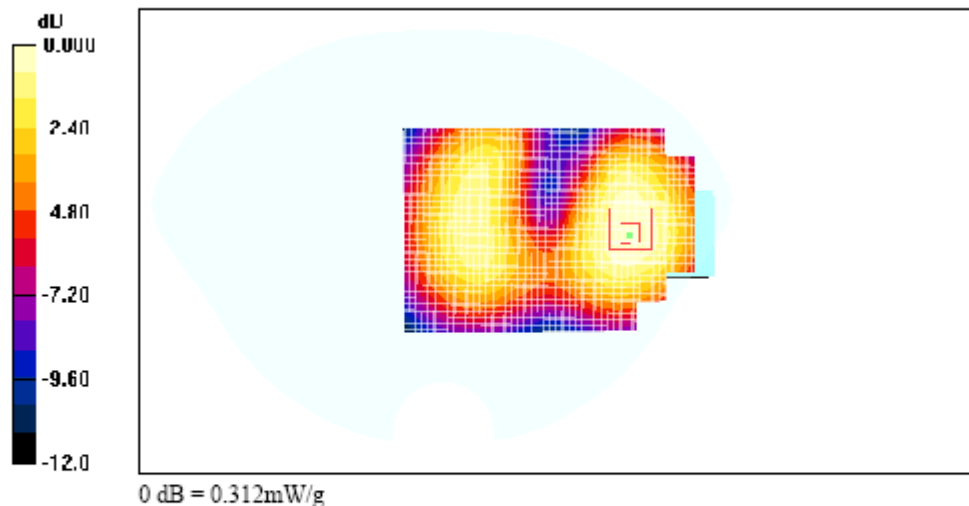

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C


Probe: ES3DV3 - SN3066; ConvF(4.2, 4.2, 4.2); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH661, Rear, Slider Up, 4TX, Fixed Ant, Standard Battery

GPRS1900/Area Scan (81x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.542 mW/g

GPRS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.1 V/m; Power Drift = 0.065 dB
Peak SAR (extrapolated) = 0.658 W/kg
SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.298 mW/g
Maximum value of SAR (measured) = 0.524 mW/g

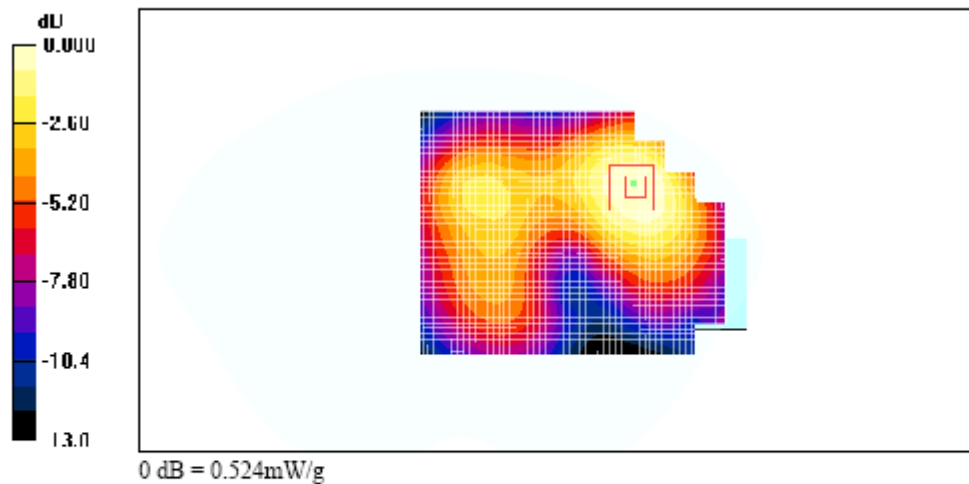

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.2, 4.2, 4.2); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH661, Rear, Slider Up, 3TX, Fixed Ant, Standard Battery

GPRS1900/Area Scan (81x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.598 mW/g


GPRS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.1 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.574 mW/g

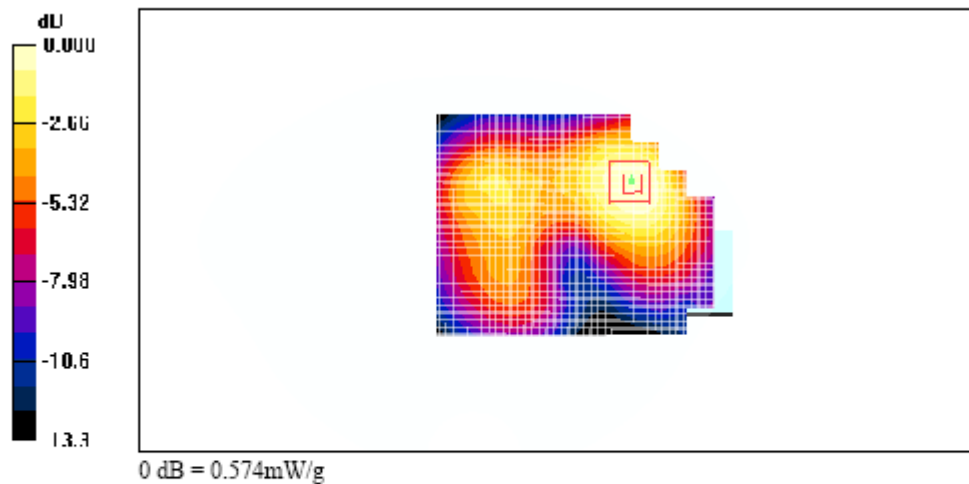

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C


Probe: ES3DV3 - SN3066; ConvF(4.2, 4.2, 4.2); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH661, Rear, Slider Up, 2TX, Fixed Ant, Standard Battery

GPRS1900/Area Scan (81x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.681 mW/g

GPRS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.2 V/m; Power Drift = -0.058 dB
Peak SAR (extrapolated) = 0.835 W/kg
SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.368 mW/g
Maximum value of SAR (measured) = 0.654 mW/g

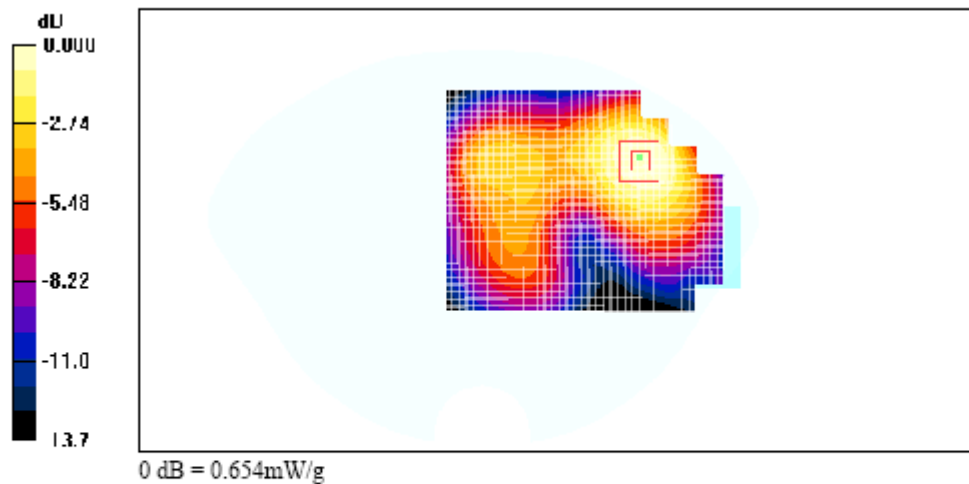

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(4.2, 4.2, 4.2); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH661, Rear, Slider Up, 1TX, Fixed Ant, Standard Battery

GPRS1900/Area Scan (81x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.251 mW/g


GPRS1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.42 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

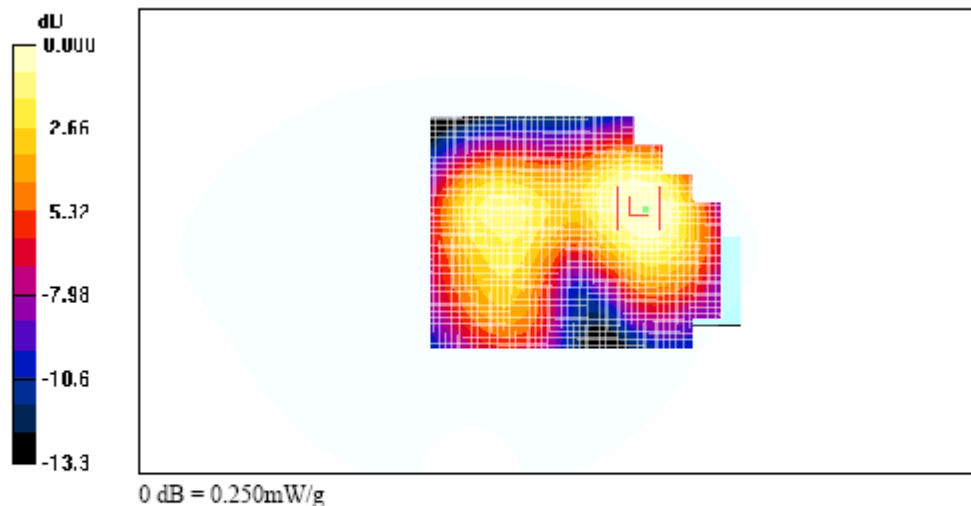

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.075
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: 05/29/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C


Probe: ES3DV3 - SN3066; ConvF(4.2, 4.2, 4.2); Calibrated: 2010-02-24
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH661, Rear, Slider Up, 4TX, EDGE, Fixed Ant, Standard Battery

EDGE1900/Area Scan (81x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.547 mW/g

EDGE1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.1 V/m; Power Drift = -0.068 dB
Peak SAR (extrapolated) = 0.662 W/kg
SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.312 mW/g
Maximum value of SAR (measured) = 0.534 mW/g

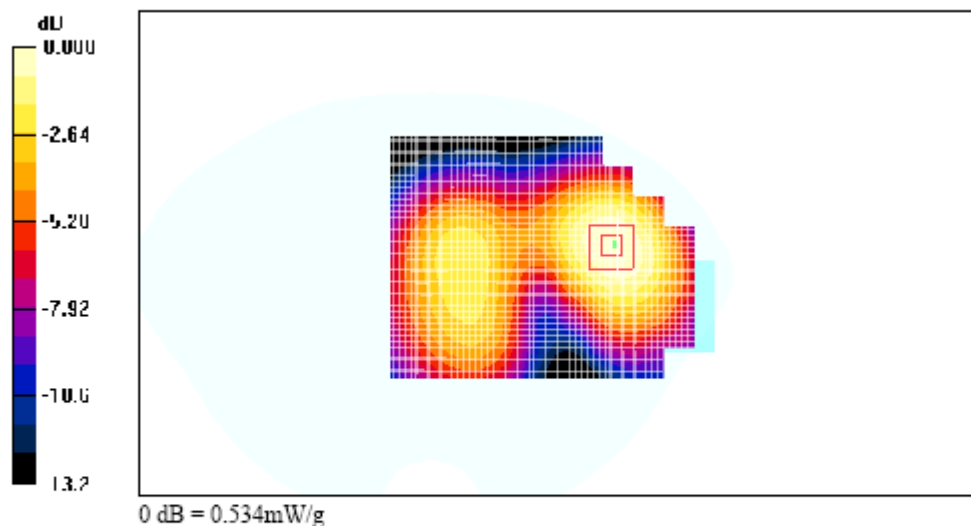

LG Electronics Inc.

DUT: JS750; Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth&WLAN; Serial: #1

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Test Date: 06/01/2010; Ambient Temp: 22.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3066; ConvF(5.55, 5.55, 5.55); Calibrated: 2010-02-24

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn362; Calibrated: 2010-04-30

Phantom: SAM with CRP 1800MHz; Type: SAM; Serial: TP-1244

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Flat Touch ,CH4182, Front, Slider Down, Fixed Ant, Standard Battery

WCDMA/Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.360 mW/g

WCDMA/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.248 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.364 mW/g

