

|                                                                                   |                                                                                                                          |                                                                                                                                                                                                                                                                                                                                            |                                                         |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
|  | <b>ESTECH Co., Ltd.</b><br>Rm. 1015, World Venture Center II,<br>426-5 Gasan-dong, Guncheon-gu,<br>Seoul, 158-803, Korea |     | <b>Electromagnetic<br/>Interference<br/>Test Report</b> |
|                                                                                   |                                                                                                                          |                                                                                                                                                                                                                                                                                                                                            |                                                         |

## Test Report for FCC

|                                          |                                                                                |                                                      |                                             |                     |    |
|------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------|---------------------------------------------|---------------------|----|
| Report Number                            |                                                                                | ESTF150710-004                                       |                                             |                     |    |
| Applicant                                | Company name                                                                   | LG Electronics Inc.                                  |                                             |                     |    |
|                                          | Address                                                                        | 60-39, Gasan-dong, Gumchon-gu, Seoul, 153-023, Korea |                                             |                     |    |
|                                          | Telephone                                                                      | 82-2-2033-3847                                       |                                             |                     |    |
| Product                                  | Product name                                                                   | GSM Phone with Bluetooth                             |                                             |                     |    |
|                                          | Model No.                                                                      | KM500d                                               | Manufacturer                                | LG Electronics Inc. |    |
|                                          | Serial No.                                                                     | NONE                                                 | Country of origin                           | KOREA               |    |
| Test date                                | 2007-10-06 ~ 2007-10-06                                                        |                                                      | Date of issue                               | 12-Oct-07           |    |
| Testing location                         | ESTECH. Co., Ltd.<br>97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea |                                                      |                                             |                     |    |
| Standard                                 | FCC PART 15 2006 , ANSI C 63.4 2003                                            |                                                      |                                             |                     |    |
| Test item                                | <input checked="" type="checkbox"/> Conducted Emission                         | <input type="checkbox"/> Class A                     | <input checked="" type="checkbox"/> Class B | Test result         | OK |
|                                          | <input checked="" type="checkbox"/> Radiated Emission                          | <input type="checkbox"/> Class A                     | <input checked="" type="checkbox"/> Class B | Test result         | OK |
| Measurement facility registration number |                                                                                | 94696                                                |                                             |                     |    |
| Tested by                                | Engineer J. H. Kim (Signature)                                                 |                                                      |                                             |                     |    |
| Reviewed by                              | Engineering Manager J.M.Yang (Signature)                                       |                                                      |                                             |                     |    |
| Abbreviation                             | OK, Pass = Passed, Fail = Failed, N/A = not applicable                         |                                                      |                                             |                     |    |

\* Note

- Basic Model : KM500d
- Additional Models : KM500c
- Basic Model and Addition Models are same product,only model name is different.
- This test report is not permitted to copy partly without our permission
- This test result is dependent on only equipment to be used
- This test result based on a single evaluation of one sample of the above mentioned

## Contents

|                                            |    |
|--------------------------------------------|----|
| 1. Laboratory Information .....            | 3  |
| 2. Description of EUT .....                | 4  |
| 3. Test Standards .....                    | 5  |
| 4. Measurement condition .....             | 6  |
| 5. Measurement of radiated emission .....  | 8  |
| 5.1 Measurement equipment .....            | 8  |
| 5.2 Environmental conditions .....         | 8  |
| 5.3 Test data .....                        | 9  |
| 6. Measurement of conducted emission ..... | 10 |
| 6.1 Measurement equipment .....            | 10 |
| 6.2 Environmental conditions .....         | 10 |
| 6.3 Test data .....                        | 11 |

### Appendix 1. Spectral diagram

## 1. Laboratory Information

### 1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

### 1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea  
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea  
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

### 1.3 Official Qualification(s)

MIC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

## 2. Description of EUT

### 2.1 Summary of Equipment Under Test

Product name : GSM Phone with Bluetooth  
Model Number : KM500d  
Serial Number : NONE  
Manufacturer : LG Electronics Inc.  
Country of origin : KOREA  
Rating : Supplied from Note PC  
Receipt Date : 2-Oct-07

### 3. Test Standards

#### Test Standard : FCC PART 15 (2006)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

#### Test Method : ANSI C 63.4 (2003)


This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

## 4. Measurement Condition

### 4.1 EUT Operation.

- \* The EUT was in the following operation mode during all testing
- \* The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission.
- \* Connect the EUT to Note PC. Osillator frequency:26MHz
- \* Install sync program to Note PC.
- \* Transferred "H" character data between the phone and note pc during the test.
- \* The supporting equipments used in the part 15B testing were approved under Doc.

### 4.2 Configuration and Peripherals

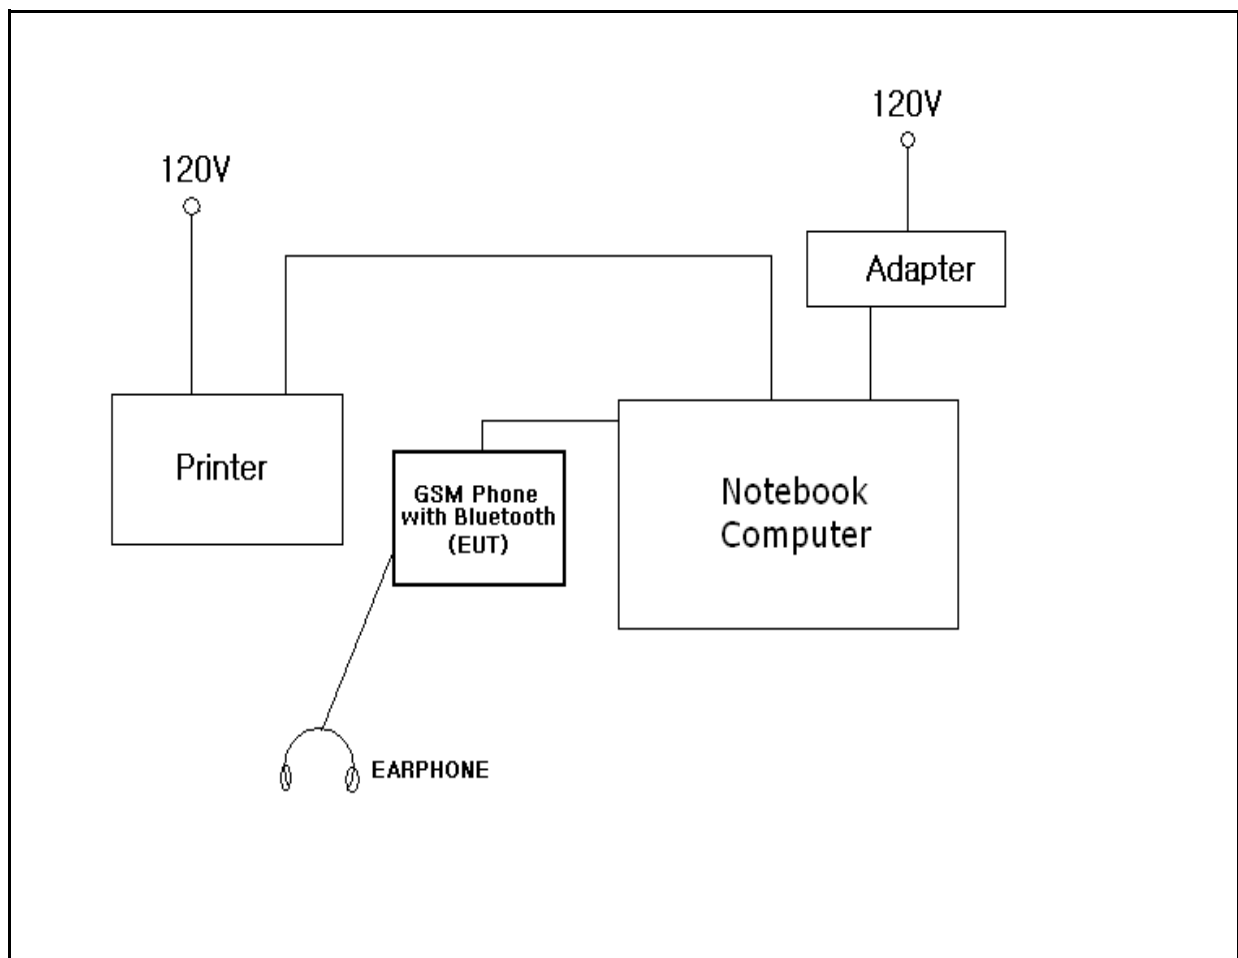

### 4.3 EUT and Support equipment

| Equipment Name           | Model Name | S/N         | Manufacturer                   | Remark (FCC ID) |
|--------------------------|------------|-------------|--------------------------------|-----------------|
| GSM Phone with Bluetooth | KM500d     | NONE        | LG Electronics Inc.            | EUT             |
| Notebook Computer        | H5TNN-105C | CNU7261VY5  | Hewlett-Packard                |                 |
| Adapter                  | PPP009L    | 381090-001  | Dongguang Lite Power 2nd Plant |                 |
| Printer                  | LQ-570     | B1021095782 | Sambo Computer Inc.            |                 |
|                          |            |             |                                |                 |
|                          |            |             |                                |                 |
|                          |            |             |                                |                 |

### 4.4 Cable Connecting

| Start Equipment          |             | End Equipment     |          | Cable Standard |          | Remark |
|--------------------------|-------------|-------------------|----------|----------------|----------|--------|
| Name                     | I/O port    | Name              | I/O port | Length         | Shielded |        |
| GSM Phone with Bluetooth | USB         | Notebook Computer | USB      | 2              | Yes      |        |
| GSM Phone with Bluetooth | SPEAKER OUT | EARPHONE          | —        | 2              | No       |        |
| Notebook Computer        | Power       | Adapter           | —        | 2              | No       |        |
| Notebook Computer        | Parallel    | Printer           | Parallel | 2              | Yes      |        |
|                          |             |                   |          |                |          |        |
|                          |             |                   |          |                |          |        |

## 5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2006) & ANSI C 63.4 (2003). The test setup was made according to FCC Part 15 (2006) & ANSI C 63.4 (2003) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

### 5.1 Measurement equipments

| Equipment Name        | Type        | Manufacturer    | Serial No. | Next Calibration date |
|-----------------------|-------------|-----------------|------------|-----------------------|
| TEST Receiver         | ESPC        | Rohde & Schwarz | 84596/021  | 2008. 9. 21           |
| Spectrum Analyzer     | R3261C      | ADVANTEST       | 61720116   | 2008. 4. 20           |
| LogBicon Antenna      | VULB 9160   | Schwarzbeck     | 3142       | 2008. 5. 07           |
| Amplifier             | 8447F       | HP              | 2805A02972 | 2008. 6. 26           |
| Spectrum Analyzer     | 8563E       | HP              | 3623A05297 | 2008. 5. 06           |
| PREAMPLIFIER          | 8449B       | HP              | 3008A00581 | 2008. 5. 06           |
| Horn Antenna          | BBHA 9120 D | Schwarzbeck     | 469        | 2008. 3. 31           |
| Turn Table            | 2087        | EMCO            | 2129       | –                     |
| Antenna Mast          | 2070-01     | EMCO            | 9702-203   | –                     |
| ANT Mast Controller   | 2090        | EMCO            | 1535       | –                     |
| Turn Table Controller | 2090        | EMCO            | 1535       | –                     |

### 5.2 Environmental Condition

Test Place : Open site(3m)  
 Temperature (°C) : 26 °C  
 Humidity (%) : 40 %

## 5.3 Test data

Test Date : 12-Oct-07

Measurement Distance : 3 m

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V)                                                                                                                                                                                                                                                                                                                                      | Position<br>(V/H) | Height<br>(m) | Correction Factor  |               | Result Value            |                          |                |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------|--------------------|---------------|-------------------------|--------------------------|----------------|
|                    |                                                                                                                                                                                                                                                                                                                                                              |                   |               | Ant Factor<br>(dB) | Cable<br>(dB) | Limit<br>(dB $\mu$ V/m) | Result<br>(dB $\mu$ V/m) | Margin<br>(dB) |
| 62.14              | 14.60                                                                                                                                                                                                                                                                                                                                                        | V                 | 1.0           | 11.20              | 1.2           | 40.0                    | 27.04                    | -12.96         |
| 110.26             | 15.70                                                                                                                                                                                                                                                                                                                                                        | V                 | 1.0           | 10.28              | 1.6           | 43.5                    | 27.61                    | -15.89         |
| 144.06             | 14.30                                                                                                                                                                                                                                                                                                                                                        | H                 | 2.0           | 12.76              | 1.8           | 43.5                    | 28.89                    | -14.61         |
| 170.24             | 14.60                                                                                                                                                                                                                                                                                                                                                        | V                 | 1.0           | 12.06              | 2.0           | 43.5                    | 28.67                    | -14.83         |
| 201.14             | 14.40                                                                                                                                                                                                                                                                                                                                                        | H                 | 1.3           | 9.65               | 2.2           | 43.5                    | 26.29                    | -17.21         |
| 211.29             | 12.70                                                                                                                                                                                                                                                                                                                                                        | H                 | 1.4           | 10.04              | 2.3           | 43.5                    | 25.05                    | -18.45         |
| 256.51             | 14.40                                                                                                                                                                                                                                                                                                                                                        | H                 | 1.1           | 11.73              | 2.6           | 46.0                    | 28.78                    | -17.22         |
| 314.79             | 12.50                                                                                                                                                                                                                                                                                                                                                        | H                 | 1.1           | 13.44              | 3.1           | 46.0                    | 29.01                    | -16.99         |
| 357.94             | 13.80                                                                                                                                                                                                                                                                                                                                                        | H                 | 1.0           | 14.40              | 3.4           | 46.0                    | 31.57                    | -14.43         |
| 443.85             | 17.20                                                                                                                                                                                                                                                                                                                                                        | H                 | 1.0           | 16.48              | 3.9           | 46.0                    | 37.56                    | -8.44          |
| 472.56             | 12.40                                                                                                                                                                                                                                                                                                                                                        | H                 | 1.0           | 16.91              | 4.1           | 46.0                    | 33.36                    | -12.64         |
| 600.21             | 9.30                                                                                                                                                                                                                                                                                                                                                         | H                 | 1.0           | 19.69              | 4.7           | 46.0                    | 33.72                    | -12.28         |
| 700.36             | 6.10                                                                                                                                                                                                                                                                                                                                                         | H                 | 1.0           | 20.58              | 5.3           | 46.0                    | 31.95                    | -14.05         |
|                    |                                                                                                                                                                                                                                                                                                                                                              |                   |               |                    |               |                         |                          |                |
|                    |                                                                                                                                                                                                                                                                                                                                                              |                   |               |                    |               |                         |                          |                |
|                    |                                                                                                                                                                                                                                                                                                                                                              |                   |               |                    |               |                         |                          |                |
|                    |                                                                                                                                                                                                                                                                                                                                                              |                   |               |                    |               |                         |                          |                |
| Remark             | H : Horizontal, V : Vertical<br>*Checked in all 3 axis and the maximum measured data were reported.<br>*CL = Cable Loss-Amplifier Gain(In case of above1000Mhz)<br>*CL = Cable Loss(In case of below1000Mhz)<br>*The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120KHz for Quasi-peak detection at frequency below 1GHz. |                   |               |                    |               |                         |                          |                |

## 6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 to 30 MHz was measured in accordance to FCC Part 15 (2006) & ANSI C 63.4 (2003). The test setup was made according to FCC Part 15 (2006) & ANSI C 63.4 (2003) in a shielded Room. The EUT was placed on a non-conductive table at least 80 above the ground plan. A grounded vertical reference plane was positioned in a distance of 40cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0m.. The test receiver with Quasi Peak detector complies with CISPR 16.

### 6.1 Measurement equipments

| Equipment Name | Type      | Manufacturer    | Serial No. | Next Calibration date |
|----------------|-----------|-----------------|------------|-----------------------|
| LISN           | ESH3-Z5   | Schwarzbeck     | 838979/010 | 2008. 2. 28           |
| LISN           | NNLA8120A | Schwarzbeck     | 8120161    | 2008. 2. 28           |
| TEST Receiver  | ESPI7     | Rohde & Schwarz | 100185     | 2008. 8. 27           |
| Pulse Limiter  | ESH3Z2    | Rohde & Schwarz | NONE       | —                     |

### 6.2 Environmental Condition


Test Place : Shielded Room  
 Temperature (°C) : 23 °C  
 Humidity (%) : 48 %

## 6.3 Test data

Test Date : 6-Oct-07

| Frequency<br>(MHz) | Correction Factor              |               | Line<br>(H/N) | Quasi-peak Value      |                         |                        | Average Value         |                         |                |
|--------------------|--------------------------------|---------------|---------------|-----------------------|-------------------------|------------------------|-----------------------|-------------------------|----------------|
|                    | Lisn<br>(dB)                   | Cable<br>(dB) |               | Limit<br>(dB $\mu$ V) | Reading<br>(dB $\mu$ V) | Result<br>(dB $\mu$ V) | Limit<br>(dB $\mu$ V) | Reading<br>(dB $\mu$ V) | Result<br>(dB) |
| 0.17               | 0.15                           | 0.0           | N             | 64.96                 | 39.87                   | 40.06                  | 54.96                 | 29.41                   | 29.60          |
| 0.18               | 0.14                           | 0.0           | H             | 64.49                 | 45.17                   | 45.36                  | 54.49                 | —                       | —              |
| 0.20               | 0.12                           | 0.1           | N             | 63.61                 | 44.48                   | 44.65                  | 53.61                 | 30.17                   | 30.34          |
| 0.24               | 0.12                           | 0.1           | N             | 62.10                 | 37.92                   | 38.10                  | 52.10                 | 31.25                   | 31.43          |
| 0.26               | 0.13                           | 0.1           | N             | 61.43                 | 39.05                   | 39.23                  | 51.43                 | 28.02                   | 28.20          |
| 0.30               | 0.13                           | 0.1           | N             | 60.24                 | 35.43                   | 35.62                  | 50.24                 | 26.87                   | 27.06          |
| 0.48               | 0.15                           | 0.1           | N             | 56.34                 | 35.93                   | 36.17                  | 46.34                 | 27.63                   | 27.87          |
| 0.53               | 0.15                           | 0.1           | N             | 56.00                 | 35.18                   | 35.43                  | 46.00                 | 27.25                   | 27.50          |
| 0.57               | 0.15                           | 0.1           | N             | 56.00                 | 35.35                   | 35.61                  | 46.00                 | 25.70                   | 25.96          |
| 0.60               | 0.16                           | 0.1           | H             | 56.00                 | 32.42                   | 32.69                  | 46.00                 | 23.14                   | 23.41          |
| 0.70               | 0.16                           | 0.1           | N             | 56.00                 | 34.25                   | 34.54                  | 46.00                 | 33.00                   | 33.29          |
| 0.78               | 0.18                           | 0.1           | H             | 56.00                 | 33.40                   | 33.72                  | 46.00                 | —                       | —              |
| 1.00               | 0.25                           | 0.2           | H             | 56.00                 | 33.20                   | 33.61                  | 46.00                 | —                       | —              |
| 2.79               | 0.31                           | 0.3           | N             | 56.00                 | 32.85                   | 33.48                  | 46.00                 | 22.10                   | 22.73          |
| 5.40               | 0.40                           | 0.5           | N             | 60.00                 | 24.83                   | 25.73                  | 50.00                 | 17.31                   | 18.21          |
| 5.81               | 0.41                           | 0.5           | H             | 60.00                 | 24.02                   | 24.96                  | 50.00                 | 17.50                   | 18.44          |
| 22.83              | 0.93                           | 1.2           | N             | 60.00                 | 30.58                   | 32.75                  | 50.00                 | —                       | —              |
| 23.10              | 0.93                           | 1.2           | H             | 60.00                 | 28.50                   | 30.68                  | 50.00                 | 23.99                   | 26.17          |
| 23.10              | 0.93                           | 1.2           | N             | 60.00                 | 30.77                   | 32.95                  | 50.00                 | —                       | —              |
| 27.13              | 0.94                           | 1.4           | N             | 60.00                 | 28.95                   | 31.27                  | 50.00                 | 25.69                   | 28.01          |
|                    |                                |               |               |                       |                         |                        |                       |                         |                |
| Remark             | H : Hot Line, N : Neutral Line |               |               |                       |                         |                        |                       |                         |                |

# Appendix 1. Spectral diagram

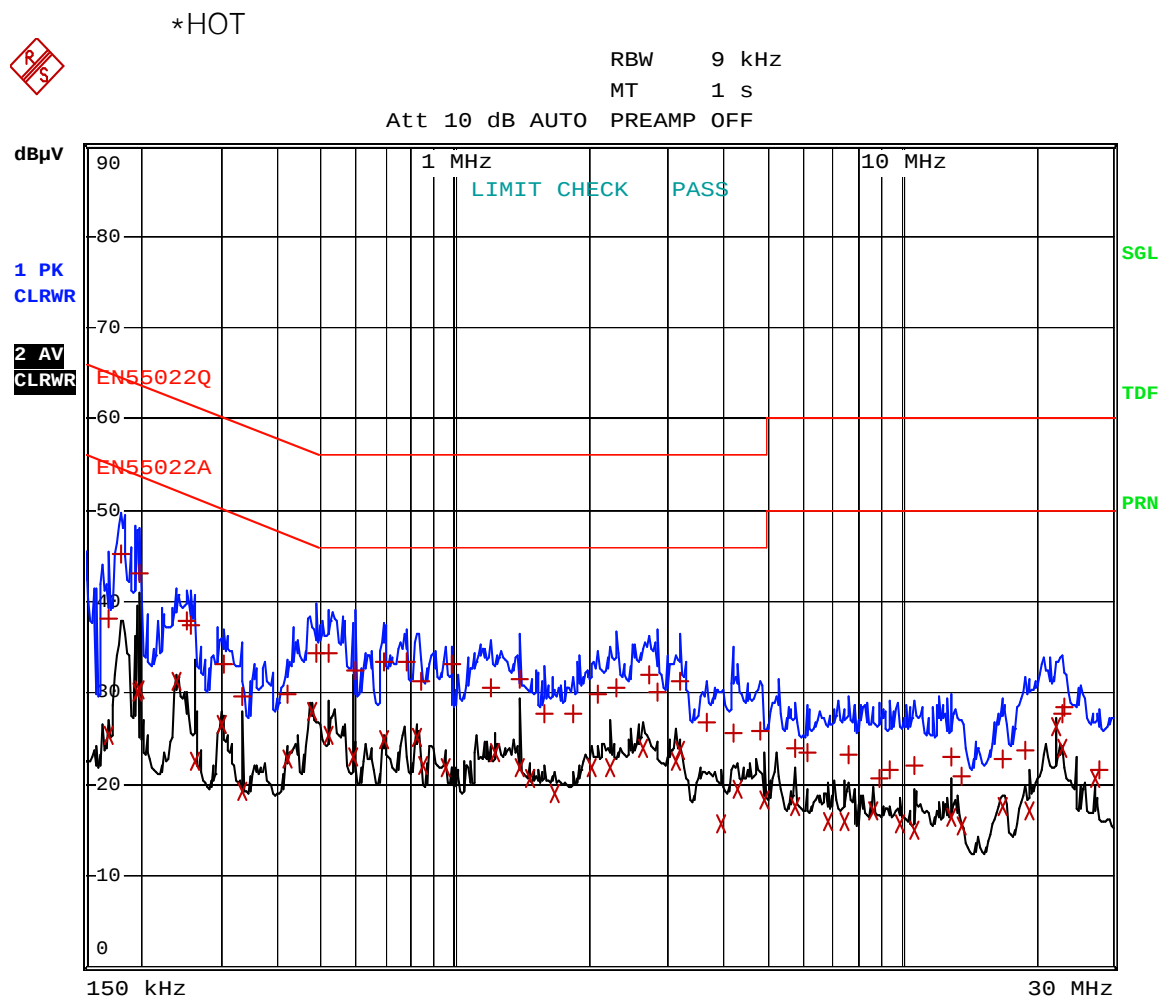


Comment: KM500d H0T  
Date: 6.OCT.2007 14:04:49



\*NEUTRAL

RBW 9 kHz  
MT 1 s

Att 10 dB AUTO PREAMP OFF

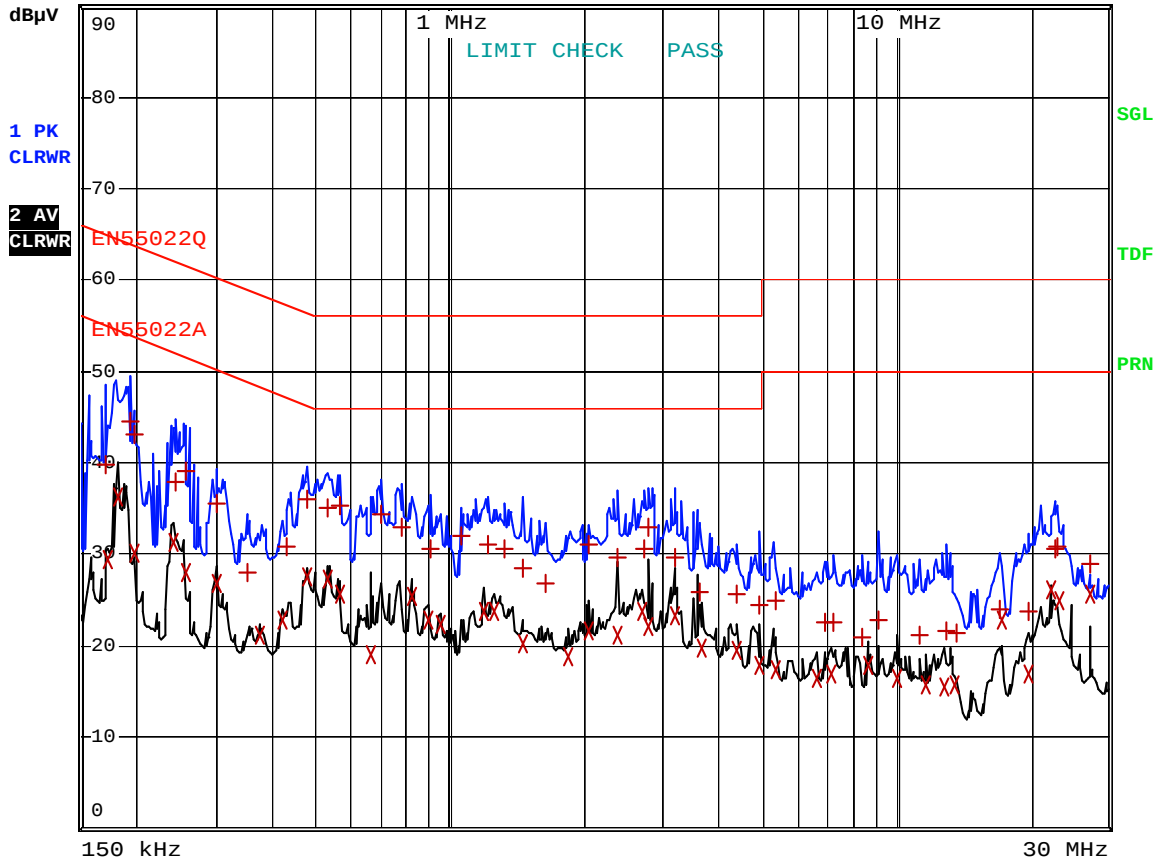

Comment: KM500d NEUTRAL  
Date: 6.OCT.2007 14:10:00