

FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : LG Electronics Inc. - DID DIVISION
642, Jinpyoung-dong, Gumi-city,
Gyeongsangbuk-do, Korea
Attn : Mr. Yeong Hur, EMC & SAFETY Manager

Date of Issue : March 30, 2004
Test Report No. : GETEC-E3-04-011
Test Site : Gumi College EMC Center

FCC ID

BEJL23LW

APPLICANT

LG Electronics Inc.

Rule Part(s) : FCC Part 15 Subpart B / ICES-003
Equipment Class : Class B computing device peripheral
EUT Type : 23" LCD TV/Monitor
Model No. : L23LW
Trade name : LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Jea-Woon Choi, EMC engineer
GUMI College EMC center



Tae-Sig Park, Technical manager
GUMI College EMC center

CONTENTS

1. SCOPE.....	2
2. INTRODUCTION	2
3. TEST CONDITIONS & EUT INFORMATION.....	2
3.1 DESCRIPTION OF EUT.....	2
3.2 SUPPORT EQUIPMENT USED	2
4. DESCRIPTION OF TESTS.....	2
4.1 CONDUCTED EMISSION	2
4.2 RADIATED EMISSION	2
5. CONDUCTED EMISSION.....	2
5.1 OPERATING ENVIRONMENT	2
5.2 TEST SET-UP.....	2
5.3 MEASUREMENT UNCERTAINTY	2
5.4 LIMIT	2
5.5 TEST EQUIPMENT USED	2
5.6 TEST DATA FOR CONDUCTED EMISSION	2
6. RADIATED EMISSION	2
6.1 OPERATING ENVIRONMENT	2
6.2 TEST SET-UP.....	2
6.3 MEASUREMENT UNCERTAINTY	2
6.4 LIMIT	2
6.5 TEST EQUIPMENT USED	2
6.6 TEST DATA FOR RADIATED EMISSION	2
7. ANTENNA POWER CONDUCTION	2
7.1 OPERATING ENVIRONMENT	2
7.2 TEST SET-UP.....	2
7.3 TEST EQUIPMENT USED	2
7.4 TEST DATA FOR ANTENNA POWER CONDUCTION	2
8. NOISE FIGURE	2
8.1 OPERATING ENVIRONMENT	2
8.2 TEST SET-UP.....	2
8.3 TEST EQUIPMENT USED	2
8.4 TEST DATA FOR NOISE FIGURE	2
9. SAMPLE CALCULATIONS.....	2
10. RECOMMENDATION & CONCLUSION.....	2

APPENDIX A – ATTESTATION STATEMENT
APPENDIX B – PLOTS OF CONDUCTED EMISSIONS
APPENDIX C – ID SAMPLE LABEL & LOCATION
APPENDIX D – BLOCK DIAGRAM
APPENDIX E – TEST SET-UP PHOTOGRAPHS
APPENDIX F – EXTERNAL PHOTOGRAPHS
APPENDIX G –INTERNAL PHOTOGRAPHS (I)
APPENDIX H –INTERNAL PHOTOGRAPHS (II)
APPENDIX I – USER’S MANUAL

1. Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

Responsible Party: LG Electronics Inc.

Contact Person: Mr. Yeong Hur, EMC & SAFETY Manager
Product Engineering Dept., Safety & EMC Team
Digital Information Display Division

Manufacturer: 642, Jinpyoung-dong, Gumi-city, Gyeongsangbuk-do, Korea
Tel No.: +82-54-470-2933

- **FCC ID** BEJL23LW
- **Equipment Class** Class B computing device peripheral
- **EUT Type** 23" LCD TV/Monitor
- **Model No.** L23LW
- **Trade Name** LG
- **Rule Part(s)** FCC Part 15 Subpart B / ICES-003
- **Test Procedure(s)** ANSI C63.4 (1992) / Canada standard ICES-003
- **Dates of Test** March 22 ~ 26, 2004
- **Place of Test** Gumi College EMC Center
- **Test Report No.** GETEC-E3-04-011


2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-1992) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. 23" LCD TV/Monitor (Model No.: L23LW)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-Si, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992

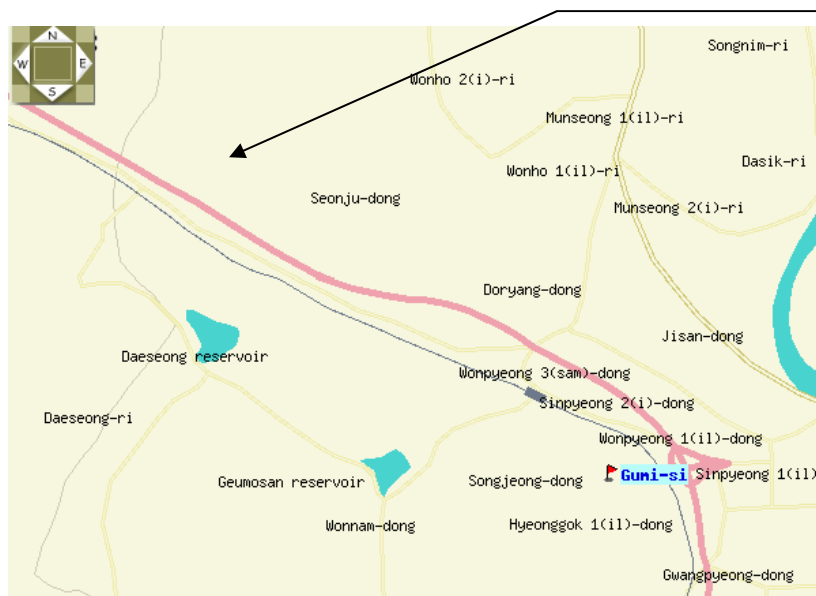

GUMI COLLEGE EMC CENTER

407, Bugok-Dong, Gumi-Si,
Gyeongsangbuk-Do 730-711, Korea

Tel: +82-54-440-1195

Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.

3. Test Conditions & EUT Information

3.1 Description of EUT

The Equipment Under Test (EUT) is the **LG Electronics Inc. 23" LCD TV/Monitor (Model No.: L23LW)**
FCC ID : BEJL23LW

Maximum Resolution(s)	1280×1024 Non-interlaced @ 60Hz (Analog) 1280×1024 Non-interlaced @ 60Hz (Digital)
Frequency Range(s)	H-Sync: 30kHz – 64kHz V-Sync: 60Hz – 75Hz
Test pattern	PC Mode: Scrolling “H”s, Winamp player TV Mode: Color bar pattern DVD Mode: DVD playing
Power supply	AC 100-240V, 50/60Hz, 1.5A
Port(s)/Input connector(s)	15-Pin D-sub type connector DVI-D type connector
Cable(s)	1.8m Video cable (D-sub) with ferrite on both ends Connected to the EUT and PC 1.8m Video cable (DVI-D) with ferrite on both ends Connected to the EUT and PC 1.8m Power cable Connected to the AC/DC adapter 1.5m S-VHS cable Connected to the EUT and DVD player 1.5m PC sound input cable Connected to the EUT and PC 2.9m AV1 input cable Connected to the EUT and DVD player 2.9m AV2 input cable Open 2.85m Head phone cable Connected to the EUT 0.65m Telescopic ANT cable Connected to the EUT 2.9m HDTV input cable Open 2.9m Sound input cable Open 1.8m Display out cable Connected to the EUT and Monitor

3.2 Support Equipment used

PC	COMPAQ PD1075 S/N: 7041JC8F0245 FCC ID: DoC	Connected to the EUT and Peripheral equipments
Video card	ATI Radeon VE S/N: 6001833 FCC ID: DoC	Connected to the EUT
Printer	H.P Deskjet 970cxi S/N: MYPB01F1FG FCC ID: DoC	Connected to the parallel Port of PC
Joystick	Microsoft X05-92626 S/N: 9262600296169 FCC ID: DoC	Connected to the USB port of PC
Serial Mouse	Microsoft 61402 S/N: 00696998 FCC ID: C3KKS3	Connected to the serial port of PC
Key-board	COMPAQ 166516-AD6 S/N: B13BBOR39I006D FCC ID: AQ6-23K15	Connected to the PS/2 port of PC
DVD Player	Pioneer DV-525 S/N: UEYD0R390LL FCC ID: DoC	Connected to the EUT

See “Appendix E – Test Setup Photographs” for actual system test set-up

4. Description of tests

4.1 Conducted Emission

The Line conducted emission test facility is inside a $4 \times 8 \times 2.5$ meter shielded enclosure.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table, which is 0.8 meters in height and 0.4 meters away from the vertical wall of the shielded enclosure.

The EUT was powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150kHz to 30MHz with 20msec sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9KHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 – 40 centi-meters.

PC: The worst operating condition of the test sample was found out by varying operating mode.

And, the test of 5 modes (1280*1024/60Hz(Analog), 1280*1024/60Hz(Digital), 1024*768/75Hz(Analog), 800*600/75Hz(Analog), 640*480/75Hz(Analog))

TV: Displaying the color bar pattern by the TV signal generator, the EUT was measured the local oscillator for each channel.

DVD: Displaying live images by DVD player, the EUT was masured.

All configurations were noted in the test report and the photographs were attached.

Each EME reported was calibrated using the R/S signal generator

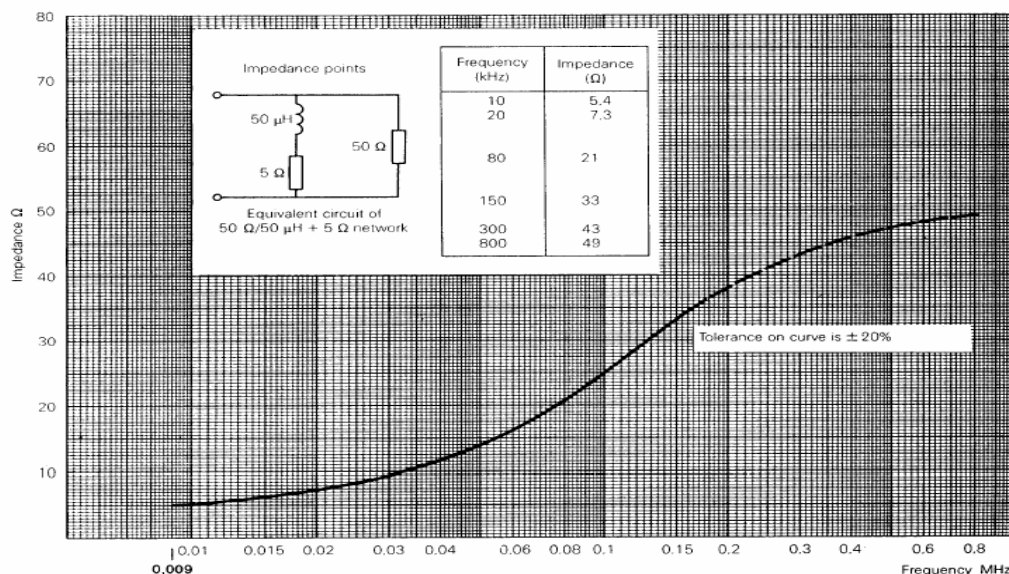


Fig 2. Impedance of LISN

4.2 Radiated Emission

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using biconical log antenna (Schwarzbeck, VLB9160). Above 1GHz, horn antenna (Schwarzbeck, BBHA9120D) was used.

Final measurements were made outdoors at 3m-test range using biconical antenna (R&S, HK116) and log-periodic antenna (R&S, HL223).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. (ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling "H" pattern to the EUT and / or support equipment and powering the monitor from mounted outlet box, if applicable; and changing the polarity of the antenna whichever determined the worst case emission.

PC: Each emission was maximized by varying the mode of operation or resolution; clock or data exchange speed; scrolling "H" pattern to the EUT and / or support equipment and powering the monitor from mounted outlet box, applicable; which ever determined the worst case emission. The worst-case test 2 modes (1280*1024/60Hz(Analog), 1280*1024/60Hz(Digital))

TV: Displaying the color bar pattern by the TV signal generator, the EUT was measured the local oscillator for each channel.

DVD: Displaying live images by DVD player, the EUT was masured.

All configurations were noted in the test report and the photographs were attached.

Each EME reported was calibrated using the R/S signal generator

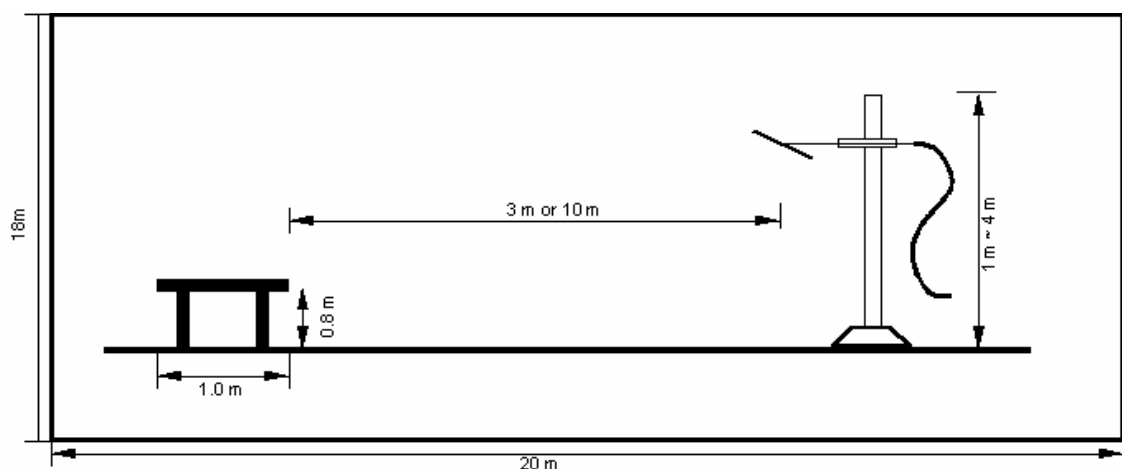


Fig 3. Dimensions of Open Site Test Area

5. Conducted emission

5.1 Operating environment

Temperature : 21 °C
Relative humidity : 47 %

5.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall and 0.8m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, was filtered.

5.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (±dB)	
		Power Port	Communication port
Receiver specification	Rectangular	1.00	1.00
LISN coupling specification	Rectangular	1.50	
ISN coupling specification	Rectangular		1.50
Mismatch	U-shaped		
LISN VRC : $\Gamma_{l=}$ 0.20		0.05	0.05
ISN VRC : $\Gamma_{l=}$ 0.20		-0.05	-0.05
ATT VRC(IN) : $\Gamma_{g=}$ 0.03			
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$			
Mismatch	U-shaped		
Receiver VRC : $\Gamma_{l=}$ 0.09		0.09	0.09
ATT VRC : $\Gamma_{g=}$ 0.11		-0.09	-0.09
Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$			
System repeatability	Std Deviation	0.09	0.09
Cable and input attenuator calibration	Normal (k=2)	0.50	0.50
Repeatability of EUT			
Combined standard uncertainty $U_c(y)$	Normal	1.16 -1.16	1.16 -1.16
Extended uncertainty U	Normal (k=2)	2.32 -2.32	2.32 -2.32

5.4 Limit

RFI Conducted	CISPR 22 Class B Limits dB (μV/m)	
Freq. Range	CISPR 22 Quasi-Peak	CISPR 22 Average
150kHz – 0.5MHz	66 – 56*	56 – 46*
0.5MHz – 5MHz	56	46
5MHz – 30MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 17. 2003
■ - ESH3-Z5	Rohde & Schwarz	Artificial mains network	838979/020	12. 17. 2003
■ - ESH2-Z5	Rohde & Schwarz	Artificial mains network	829991/009	12. 17. 2003

All test equipment used is calibrated on a regular basis.

5.6 Test data for conducted emission

- Test Date : March 29, 2004
- Test pattern : Scrolling "H"s
- Resolution bandwidth : 9kHz
- Frequency range : 0.15MHz ~ 30MHz
- AC Power Source : AC 120V, 60Hz

■. Test resolution mode: 1280*1024/60Hz (Analog)

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.15	N	49.35	66.00	16.65	36.65	56.00	19.35
0.185	H	45.00	64.26	19.25	43.10	54.26	11.15
0.21	H	41.26	63.21	21.94	42.86	53.21	10.34
0.315	H	42.95	59.84	16.89	43.65	49.84	6.19
0.395	H	37.69	57.96	20.27	38.19	47.96	9.77
0.44	H	41.17	57.06	15.90	41.87	47.06	5.20
0.625	H	38.37	56.00	17.63	39.27	46.00	6.73
2.195	H	39.03	56.00	16.97	39.53	46.00	6.47
2.865	H	37.86	56.00	18.14	38.36	46.00	7.64
3.66	H	34.60	56.00	21.40	35.10	46.00	10.90
4.635	H	32.73	56.00	23.27	32.93	46.00	13.07
12.805	N	39.97	60.00	20.03	35.57	50.00	14.43
13.595	N	45.80	60.00	14.20	38.90	50.00	11.10

Note : "H": Hot Line, "N": Neutral line.

■. Test resolution mode: 1280*1024/60Hz (Digital)

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.185	H	45.00	64.26	19.25	42.90	54.26	11.35
0.25	H	40.20	61.76	21.56	40.00	51.76	11.76
0.315	H	42.85	59.84	16.99	43.65	49.84	6.19
0.44	H	41.27	57.06	15.80	37.97	47.06	9.10
0.625	H	38.47	56.00	17.53	39.27	46.00	6.73
1.525	H	34.61	56.00	21.39	33.51	46.00	12.49
2.195	H	38.93	56.00	17.07	39.53	46.00	6.47
2.745	H	37.96	56.00	18.074	38.36	46.00	7.64
2.99	H	36.27	56.00	19.73	36.97	46.00	9.03
4.88	H	32.97	56.00	23.03	29.97	46.00	16.03
12.135	N	40.12	60.00	19.88	36.72	50.00	13.28
13.99	N	45.24	60.00	14.76	40.54	50.00	9.46

Note : "H": Hot Line, "N": Neutral line.

■. Test resolution mode: 1024*768/75Hz (Analog)

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.185	H	45.00	64.26	19.25	43.00	54.26	11.25
0.25	H	40.30	61.76	21.46	40.10	51.76	11.66
0.315	H	42.85	59.84	16.99	43.65	49.84	6.19
0.395	H	37.69	57.96	20.27	38.29	47.96	9.67
0.5	H	40.37	56.00	15.63	41.07	46.00	4.93
0.625	H	38.37	56.00	17.63	39.27	46.00	6.73
0.915	H	33.98	56.00	22.02	33.28	46.00	12.72
1.405	H	32.80	56.00	23.20	33.50	46.00	12.50
2.315	H	38.54	56.00	17.46	39.54	46.00	6.46
2.745	H	38.06	56.00	17.94	38.36	46.00	7.64
2.99	H	36.17	56.00	19.83	36.97	46.00	9.03
3.66	H	34.60	56.00	21.40	35.10	46.00	10.90
13.6	N	46.50	60.00	13.50	41.00	50.00	9.00

Note : “H”: Hot Line, “N”: Neutral line.

■. Test resolution mode: 800*600/75Hz (Analog)

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.185	H	45.00	64.26	19.25	42.90	54.26	11.35
0.25	H	40.30	61.76	21.46	40.10	51.76	11.66
0.31	H	42.64	59.97	17.33	43.64	49.97	6.33
0.5	H	40.37	56.00	15.63	41.07	46.00	4.93
0.69	H	36.57	56.00	19.43	37.37	46.00	8.63
1.4	H	32.80	56.00	23.20	33.40	46.00	12.60
1.89	H	33.82	56.00	22.18	34.32	46.00	11.68
2.195	H	38.93	56.00	17.07	39.53	46.00	6.47
2.745	H	38.06	56.00	17.94	38.36	46.00	7.64
2.99	H	36.27	56.00	19.73	36.97	46.00	9.03
3.66	H	34.50	56.00	21.50	35.10	46.00	10.90
12.14	H	39.02	60.00	20.98	38.62	50.00	11.38
13.485	N	44.69	60.00	15.31	38.79	50.00	11.21

Note : “H”: Hot Line, “N”: Neutral line.

■. Test resolution mode: 640*480/75Hz (Analog)

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.19	H	43.70	64.04	20.34	43.70	54.04	10.24
0.25	H	40.50	61.76	21.26	40.70	51.76	11.06
0.31	H	43.14	59.97	16.83	44.14	49.97	5.83
0.395	H	37.89	57.96	20.07	38.79	47.96	9.17
0.5	H	40.77	56.00	15.23	41.57	46.00	4.43
0.69	H	36.27	56.00	19.73	36.97	46.00	9.03
1.89	H	33.82	56.00	22.18	34.22	46.00	11.78
2.32	H	37.84	56.00	18.16	39.54	46.00	6.46
2.745	H	37.36	56.00	18.64	38.36	46.00	7.64
12.135	N	40.52	56.00	19.48	37.12	50.00	12.88
13.8	N	45.22	60.00	14.78	38.72	50.00	11.28

Note : “H”: Hot Line, “N”: Neutral line.

5.6.2 TV Mode

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.21	H	43.36	63.21	19.84	42.06	53.21	11.14
0.315	H	41.85	59.84	17.99	42.65	49.84	7.19
0.439	H	41.56	57.08	16.52	41.36	47.08	5.72
0.565	H	37.77	56.00	18.23	38.57	46.00	7.43
0.69	H	36.37	56.00	19.63	36.47	46.00	9.53
1.16	H	34.49	56.00	21.51	33.79	46.00	12.21
1.885	H	35.42	56.00	20.58	35.22	46.00	10.78
2.19	H	38.93	56.00	17.07	38.93	46.00	7.07
2.86	H	37.36	56.00	18.64	37.76	46.00	8.24
3.65	H	34.30	56.00	21.70	34.70	46.00	11.30
12.5	N	38.45	60.00	21.55	38.05	50.00	11.95

5.6.3 DVD Mode

Frequency (MHz)	Line	Quasi-Peak (dBuV)		Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	limits		Emission level	limits	
0.185	H	43.70	64.26	20.55	41.80	24.26	12.45
0.21	H	41.56	63.21	21.64	42.26	53.21	10.94
0.315	H	42.15	59.84	17.69	43.05	49.84	6.79
0.405	H	39.10	57.75	18.65	38.00	47.75	9.75
0.565	H	38.37	56.00	17.63	38.87	46.00	7.13
0.69	H	36.07	56.00	19.93	36.87	46.00	9.13
1.035	H	34.79	56.00	21.21	33.89	46.00	12.11
2.07	H	38.52	56.00	17.48	38.22	46.00	7.78
2.74	H	38.26	56.00	17.74	38.06	46.00	7.94
3.655	H	36.20	56.00	19.80	35.60	46.00	10.40
12.695	N	38.87	60.00	21.13	37.97	50.00	12.03
13.155	N	42.96	60.00	17.04	37.66	50.00	12.34

6. Radiated emission

6.1 Operating environment

Temperature : 31 °C
Relative humidity : 25 %

6.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber and found frequency for open area test site.

The formal radiated emission was measured at 10m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	1.00	1.00	1.00	1.00
Receiver specification	Rectangular	1.00	1.00	1.00	1.00
Antenna directivity	Rectangular	0.50	0.00	3.00	0.50
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	2.83	-2.94	-1.96	-2.96
Mismatch Receiver VRC : $\Gamma_l = 0.09$ Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp) Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$	U-shaped	0.33 -0.35	0.33 -0.35	0.33 -0.18	0.33 -0.18
System repeatability	Std Deviation	0.07	0.05	0.06	0.10
Cable loss calibration	Normal (k=2)	0.20	0.20	0.20	0.20
Combined standard uncertainty $U_c(y)$	Normal	1.88 -1.88	1.90 -1.90	2.33 -2.32	1.94 -1.93
Extended uncertainty U	Normal (k=2)	3.77 -3.77	3.80 -3.80	4.65 -4.63	3.87 -3.85

6.4 Limit

Frequency (MHz)	FCC Limit @ 3m. Quasi-Peak dB (μV/m)	FCC Limit @ 10m. Quasi-Peak dB (μV/m)	CISPR Limit @ 10m. Quasi-Peak dB (μV/m)
30 – 88	40.0	29.5	30.0
88 – 216	43.5	33.0	30.0
216 – 230	46.0	35.6	30.0
230 – 960	46.0	35.6	37.0
960 – 1000	54.0	43.5	37.0
> 1000	54.0	43.5	No Specified limit
*Limit extrapolated 20dB / decade			

6.5 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2003
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 17. 2003
■ - HK116	Rohde & Schwarz	Biconical antenna	826861/018	11. 21. 2003
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 21. 2003
■ - BBHA9120D	Schwarzbeck	Horn antenna	207	11. 21. 2003
■ - 8449B	Agilent	Microwave preamplifier	3008A01828	NCR
■ - HD100	HD GmbH	Position Controller	100/692/01	NCR
■ - DS415S	HD GmbH	Turntable	415/657/01	NCR
■ - MA240	HD GmbH	Antenna Master	240/565/01	NCR

6.6 Test data for radiated emission


- Test Date : March 23, 2004
- Test pattern : Scrolling "H"s
- Resolution bandwidth : 120kHz / 1MHz
- Frequency range : 30MHz ~ 2000MHz
- AC Power Source : AC 120V, 60Hz

6.6.1 PC Mode

◆ Test resolution: 1280*1024/60Hz (Analog)

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
30.73	13.2	V	12.75	1.24	27.2	40.0	12.8
79.53	22.7	H	7.83	1.66	32.2	40.0	7.8
119.31	22	V	9.51	2.50	34.0	43.5	9.5
126.74	22.4	V	10.42	2.63	35.4	43.5	8.1
159.08	16.1	V	12.16	3.10	31.4	43.5	12.1
198.85	14.1	H	13.50	2.99	30.6	43.5	12.9
477.23	14.9	V	17.50	4.99	37.4	46.0	8.6
543.76	12.2	H	18.10	5.53	35.8	46.0	10.2
556.77	11.7	H	18.17	5.68	35.5	46.0	10.5
636.31	10.1	V	19.01	6.37	35.5	46.0	10.5
859.67	9.6	H	21.66	5.58	36.8	46.0	9.2
879.54	9.4	H	22.10	5.45	37.0	46.0	9.0

Note: "H": Horizontal, "V": Vertical

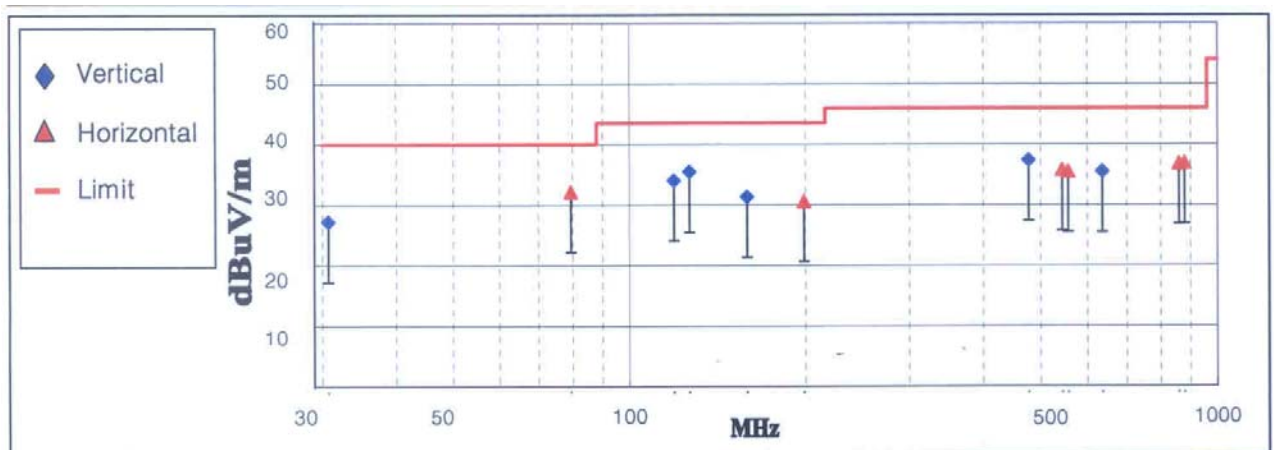


< Fig 4. Radiated emission result >

♦ Test resolution: 1280*1024/60Hz (Digital)

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
36.65	18.7	V	11.51	1.29	31.5	40.0	8.5
66.61	21.2	V	7.80	1.39	30.4	40.0	9.6
119.3	22.9	V	9.51	2.49	34.9	43.5	8.6
126.87	19.9	V	10.42	2.63	33.0	43.5	10.5
135.94	18.5	H	10.78	2.79	32.1	43.5	11.4
198.85	15.2	H	13.50	2.99	31.7	43.5	11.8
477.23	12.1	V	17.50	4.99	34.6	46.0	11.4
543.76	10.1	H	18.10	5.53	33.7	46.0	12.3
874.57	9.7	V	21.99	5.48	37.2	46.0	8.8
879.53	9.7	H	22.10	5.45	37.3	46.0	8.7
636.31	9.6	V	19.01	6.37	35.0	46.0	11.0
972.55	9.6	H	22.66	5.96	38.2	54.0	15.8

Note: "H": Horizontal, "V": Vertical

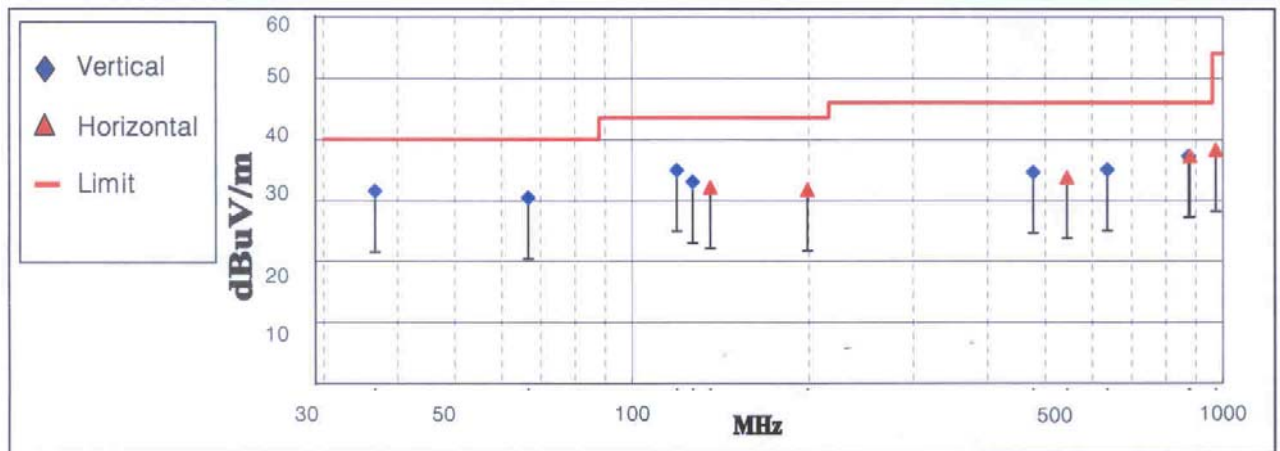

< Fig 5. Radiated emission result >

6.6.2 TV Mode

- ◆ Radiated Emission due to the local oscillator
Fundamental frequency

Band	Ch. NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
VHF	2	55.25	1	101.0	-	43.5	<<
	3	61.25	1	107.0	-	43.5	<<
	4	67.25	1	113.0	-	43.5	<<
	5	77.25	1	123.0	-	43.5	<<
	6	83.25	1	129.0	-	43.5	<<
	7	175.25	1	221.0	-	46.0	<<
	8	181.25	1	227.0	-	46.0	<<
	9	187.25	1	233.0	-	46.0	<<
	10	193.25	1	239.0	-	46.0	<<
	11	199.25	1	245.0	-	46.0	<<
	12	205.25	1	251.0	-	46.0	<<
	13	211.25	1	257.0	19.14	46.0	26.86
UHF	14	471.25	1	517.0	-	46.0	<<
	19	501.25	1	547.0	-	46.0	<<
	24	531.25	1	577.0	-	46.0	<<
	29	561.25	1	607.0	-	46.0	<<
	34	591.25	1	637.0	-	46.0	<<
	39	621.25	1	667.0	-	46.0	<<
	44	651.25	1	697.0	-	46.0	<<
	49	681.25	1	727.0	-	46.0	<<
	54	711.25	1	757.0	-	46.0	<<
	59	741.25	1	787.0	-	46.0	<<
	64	771.25	1	817.0	-	46.0	<<
	69	801.25	1	847.0	-	46.0	<<

“<<<”: The margin is more than 30dB

◆ Radiated Emission due to the local oscillator

Harmonic frequency

Channel NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
ALL CHANNEL		-	-	-	-	<<

“<<”: The margin is more than 30dB


◆ Radiated Emission due to the other source than local oscillator

Channel NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
3	55.25	--	79.74	30.44	40.0	9.56
			99.18	28.93	40.0	11.07
			119.34	33.5	43.5	10
			159.06	33.93	43.5	9.57
			477.23	39.29	46.0	6.71
			636.31	40.6	46.0	5.4
			874.92	37.71	46.0	8.29
			952.88	36.75	46.0	9.25

6.6.3 DVD Mode

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
39.6	15.5	V	10.92	1.80	28.2	40.0	11.8
79.76	21.7	H	7.83	2.40	31.9	40.0	8.1
81.1	20	V	7.91	2.42	30.3	40.0	9.7
119.32	22.7	H	9.51	2.89	35.1	43.5	8.4
159.08	17.7	H	12.16	3.49	33.3	43.5	10.2
198.85	14.7	H	13.50	3.88	32.1	43.5	11.4
477.24	13.3	V	17.50	6.48	37.3	46.0	8.7
513.67	9.7	V	17.94	6.71	34.4	46.0	11.6
594.76	10.4	V	18.37	7.36	36.1	46.0	9.9
636.3	10.6	H	19.01	7.49	37.1	46.0	8.9
747.18	9.8	V	20.20	8.18	38.2	46.0	7.8
873.34	9.5	H	21.96	8.94	40.4	46.0	5.6

Note: "H": Horizontal, "V": Vertical

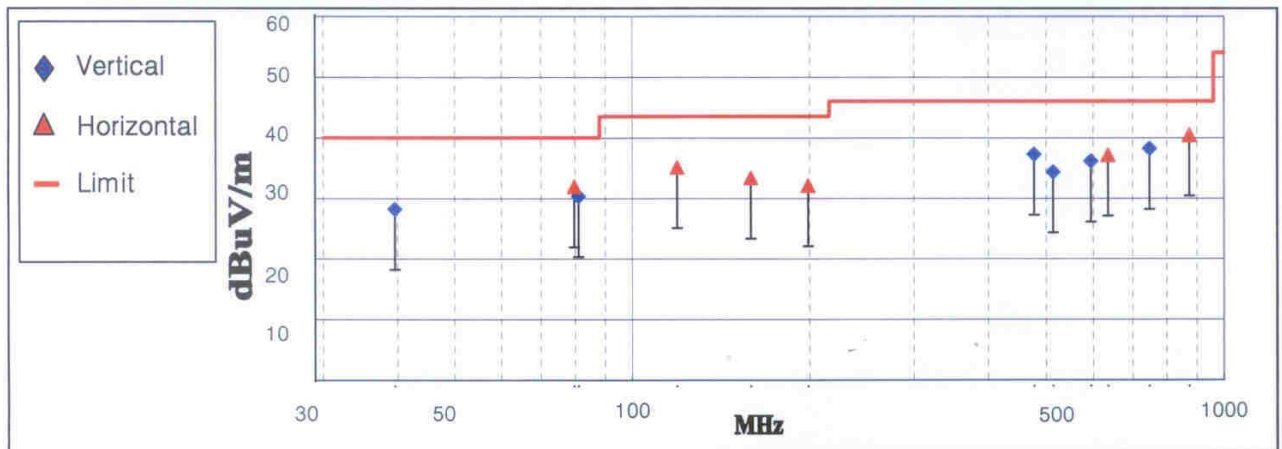

< Fig 6. Radiated emission result >

7. Antenna power conduction

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 31 %

7.2 Test set-up

The Antenna power conduction measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2003
■ - 11852B	Hewlettpackard	MIN LOSS PAD	03313	NCR

7.4 Test data for Antenna power conduction

- Test Date : March 26, 2004
- Resolution bandwidth : 120kHz
- Frequency range : 30MHz ~ 2000MHz

◆ Antenna power conduction due to the local oscillator
Fundamental frequency

Band	Ch. NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
VHF	2	55.25	1	101.0	-	50.0	<<
	3	61.25	1	107.0	-	50.0	<<
	4	67.25	1	113.0	-	50.0	<<
	5	77.25	1	123.0	-	50.0	<<
	6	83.25	1	129.0	-	50.0	<<
	7	175.25	1	221.0	-	50.0	<<
	8	181.25	1	227.0	-	50.0	<<
	9	187.25	1	233.0	-	50.0	<<
	10	193.25	1	239.0	-	50.0	<<
	11	199.25	1	245.0	-	50.0	<<
	12	205.25	1	251.0	-	50.0	<<
	13	211.25	1	257.0	-	50.0	<<
UHF	14	471.25	1	517.0	-	50.0	<<
	19	501.25	1	547.0	-	50.0	<<
	24	531.25	1	577.0	-	50.0	<<
	29	561.25	1	607.0	23.8	50.0	26.2
	34	591.25	1	637.0	-	50.0	<<
	39	621.25	1	667.0	-	50.0	<<
	44	651.25	1	697.0	-	50.0	<<
	49	681.25	1	727.0	28.7	50.0	21.27
	54	711.25	1	757.0	-	50.0	<<
	59	741.25	1	787.0	-	50.0	<<
	64	771.25	1	817.0	-	50.0	<<
	74	831.25	1	877.0	-	50.0	<<
	79	861.25	1	907.0	-	50.0	<<

“<<”: The margin is more than 30dB

♦ Antenna power conduction due to the local oscillator

Harmonic frequency

Band	Ch. NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
VHF	2	55.25	12	1212.0	23.7	50.0	26.3
	3	61.25	12	1284.0	31.0	50.0	19.0
	4	67.25	12	1356.0	29.5	50.0	20.6
	5	77.25	10	1230.0	28.3	50.0	21.7
	6	83.25	10	1290.0	32.1	50.0	17.9
	7	175.25	6	1326.0	34.3	50.0	15.7
	8	181.25	6	1362.0	30.6	50.0	19.4
	9	187.25	6	1398.0	29.2	50.0	20.8
	10	193.25	6	1434.0	30.9	50.0	19.1
	11	199.25	3	735.0	23.6	50.0	26.5
	12	205.25	5	1255.0	24.8	50.0	25.2
	13	211.25	6	1542.0	26.4	50.0	23.6
UHF	14	471.25	2	1034.0	23.3	50.0	26.7
	24	531.25	2	1154.0	26.9	50.0	23.1
	29	561.25	2	1214.0	42.9	50.0	7.1
	31	573.25	2	1238.0	28.0	50.0	22.0
	32	579.25	2	1250.0	30.6	50.0	19.4
	33	585.25	2	1262.0	31.5	50.0	18.5
	34	591.25	2	1274.0	32.4	50.0	17.6
	39	621.25	2	1334.0	35.8	50.0	14.2
	44	651.25	2	1394.0	37.4	50.0	12.6
	54	711.25	2	1514.0	26.0	50.0	24.0
	59	741.25	2	1574.0	31.4	50.0	18.6
	64	771.25	2	1634.0	28.4	50.0	21.7
	69	801.25	2	1694.0	31.4	50.0	18.6

CABLE CHANNEL

Antenna power conduction due to the local oscillator

Ch. NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
1	73.25	1	119.0	-	50.0	<<
14	121.25	1	167.0	-	50.0	<<
24	223.25	1	269.0	-	50.0	<<
34	283.25	1	329.0	-	50.0	<<
44	343.25	1	389.0	-	50.0	<<
50	279.25	1	425.0	-	50.0	<<
51	385.25	1	431.0	-	50.0	<<
55	409.25	1	455.0	-	50.0	<<
56	415.25	1	461.0	-	50.0	<<
57	421.25	1	467.0	-	50.0	<<
58	427.25	1	473.0	-	50.0	<<
59	433.25	1	479.0	-	50.0	<<
60	439.25	1	485.0	-	50.0	<<
64	463.25	1	509.0	-	50.0	<<
74	523.25	1	569.0	-	50.0	<<
84	583.25	1	629.0	-	50.0	<<
94	643.25	1	689.0	-	50.0	<<
105	679.25	1	725.0	28.1	50.0	21.9
115	739.25	1	785.0	-	50.0	<<
125	799.25	1	845.0	-	50.0	<<


Harmonic Frequency

Ch. NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
1	73.25	10	1190.0	23.2	50.0	26.8
14	121.25	8	1336.0	31.3	50.0	18.7
24	223.25	5	1345.0	26.5	50.0	23.5
34	283.25	4	1316.0	35.9	50.0	14.1
44	343.25	2	778.0	23.3	50.0	26.7
50	279.25	4	1700.0	32.0	50.0	18.0
51	385.25	4	1724.0	32.5	50.0	17.5
55	409.25	4	1820.0	36.1	50.0	13.9
56	415.25	4	1844.0	38.9	50.0	11.1
57	421.25	4	1868.0	42.0	50.0	8.0
58	427.25	4	1892.0	43.1	50.0	6.9
59	433.25	4	1916.0	44.1	50.0	6.0
60	439.25	4	1940.0	43.6	50.0	6.5
64	463.25	2	1018.0	24.4	50.0	25.7
74	523.25	3	1707.0	26.5	50.0	23.5
84	583.25	3	1887.0	32.1	50.0	17.9
94	643.25	2	1378.0	38.4	50.0	11.6
115	739.25	2	1570.0	31.1	50.0	18.9
125	799.25	2	1690.0	31.1	50.0	18.9

♦ Antenna power conduction due to other source than the local oscillator

Channel NO.	Ch. Frequency (MHz)	Harmonics	Measuring Frequency(MHz)	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
2	-	-	716.93	22.46	50.0	27.54
2	-	-	748.51	23.35	50.0	26.65

“<<” : The margin is more than 30dB

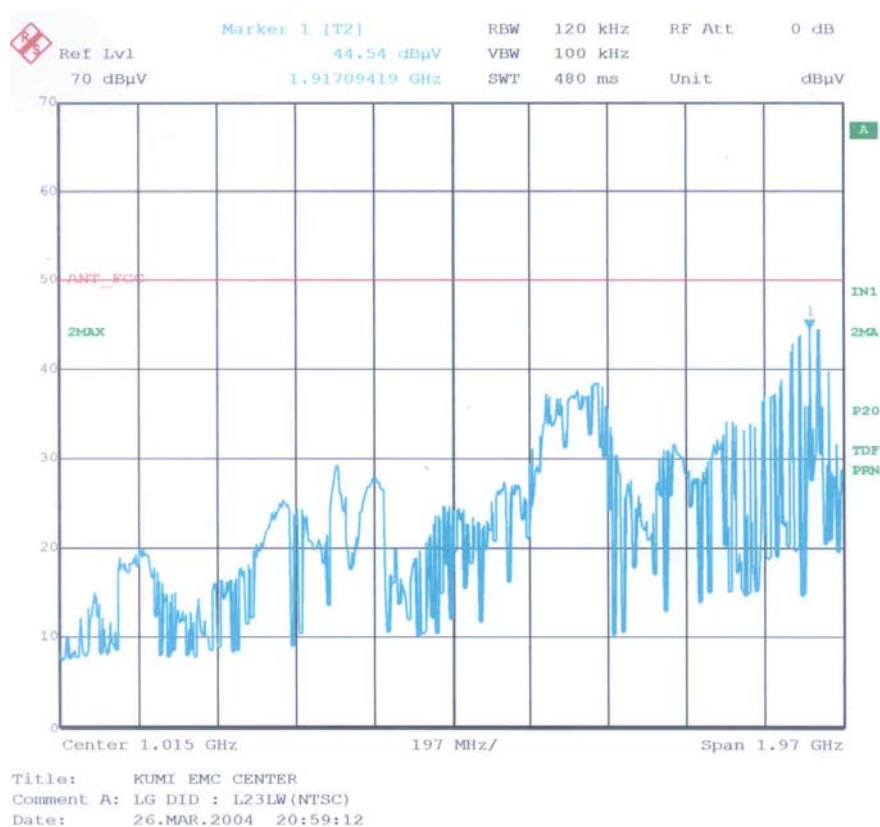

< Fig 7. Antenna power conduction result >

8. Noise Figure

8.1 Operating environment

Temperature : 22 °C
Relative humidity : 32 %

8.2 Test set-up

The Noise Figure measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Calibrated Date
■ - N8973A	Hewlettpackard	Noise Figure Analyzer	GB42151318	12. 17. 2003
■ - N4000A	Hewlettpackard	Noise Source	US41120227	NCR
■ - 11852B	Hewlettpackard	MIN LOSS PAD	03313	NCR
■ - 11852B	Hewlettpackard	MIN LOSS PAD	03309	NCR

8.4 Test data for Noise Figure

- Test Date : March 27, 2004
 - Test Channel : 2 ~ 69CH

VHF				UHF			
Ch. No.	Ch. Freq. (MHz)	Noise Figure (dB)	Limit (dB)	Ch. No.	Ch. Freq. (MHz)	Noise Figure (dB)	Limit (dB)
2	55.25	6.6	10.0	35	597.25	8.5	12.0
3	61.25	6.7	10.0	36	603.25	8.8	12.0
4	67.25	6.6	10.0	37	609.25	8.8	12.0
5	73.25	6.5	10.0	38	615.25	8.7	12.0
6	79.25	6.7	10.0	39	621.25	8.6	12.0
7	85.25	6.8	10.0	40	627.25	8.3	12.0
8	91.25	6.8	10.0	41	633.25	8.1	12.0
9	97.25	6.8	10.0	42	639.25	8.1	12.0
10	103.25	6.9	10.0	43	645.25	8.0	12.0
11	109.25	6.6	10.0	44	651.25	8.3	12.0
12	115.25	6.7	10.0	45	657.25	8.2	12.0
13	211.25	7.1	10.0	46	663.25	8.2	12.0
UHF				47	669.25	8.2	12.0
Ch.No.	Ch. Freq (MHz)	Noise Figure (dB)	Limit (dB)	48	675.25	8.3	12.0
14	471.25	7.4	12.0	49	681.25	8.4	12.0
15	477.25	7.4	12.0	50	687.25	8.4	12.0
16	483.25	7.2	12.0	51	693.25	8.5	12.0
17	489.25	7.4	12.0	52	699.25	8.5	12.0
18	495.25	7.3	12.0	53	705.25	8.6	12.0
19	501.25	7.0	12.0	54	711.25	8.6	12.0
20	507.25	7.1	12.0	55	717.25	8.6	12.0
21	513.25	7.6	12.0	56	723.25	8.5	12.0
22	519.25	7.7	12.0	57	729.25	8.7	12.0
23	525.25	7.8	12.0	58	735.25	8.7	12.0
24	531.25	7.9	12.0	59	741.25	8.8	12.0
25	537.25	7.8	12.0	60	747.25	8.9	12.0
26	543.25	7.9	12.0	61	753.25	9.0	12.0
27	549.25	7.8	12.0	62	759.25	9.0	12.0
28	555.25	8.1	12.0	63	765.25	8.9	12.0
29	561.25	8.1	12.0	64	771.25	9.0	12.0
30	567.25	8.1	12.0	65	777.25	8.9	12.0
31	573.25	8.2	12.0	66	783.25	9.0	12.0
32	579.25	8.3	12.0	67	789.25	9.1	12.0
33	585.25	8.3	12.0	68	795.25	9.1	12.0
34	591.25	8.4	12.0	69	801.25	9.2	12.0

Cable channel				Cable channel			
Ch. No.	Ch. Freq.(MHz)	Noise Figure(dB)	Limit(dB)	Ch. No.	Ch. Freq.(MHz)	Noise Figure(dB)	Limit(dB)
1	73.25	8.1	10.0	56	415.25	7.8	10.0
14	121.25	8.0	10.0	57	421.25	8.0	10.0
15	127.25	8.0	10.0	58	427.25	7.9	10.0
16	133.25	7.9	10.0	59	433.25	7.8	10.0
17	139.25	7.8	10.0	60	439.25	7.4	10.0
18	145.25	8.0	10.0	61	445.25	7.1	10.0
19	151.25	7.9	10.0	62	451.25	7.0	10.0
20	157.25	7.8	10.0	63	457.25	7.4	10.0
21	163.25	8.1	10.0	64	463.25	7.2	10.0
22	169.25	8.2	10.0	65	469.25	7.6	10.0
23	217.25	8.2	10.0	66	475.25	7.7	10.0
24	223.25	8.2	10.0	67	481.25	7.6	12.0
25	229.25	8.3	10.0	68	487.25	7.5	12.0
26	235.25	7.7	10.0	69	493.25	7.3	12.0
27	241.25	7.6	10.0	70	499.25	7.3	12.0
28	247.25	6.9	10.0	71	505.25	7.3	12.0
29	253.25	7.1	10.0	72	511.25	7.3	12.0
30	259.25	7.4	10.0	73	517.25	7.4	12.0
31	265.25	7.4	10.0	74	523.25	7.3	12.0
32	271.25	7.2	10.0	75	529.25	7.4	12.0
33	277.25	7.3	10.0	76	535.25	7.2	12.0
34	283.25	7.2	10.0	77	541.25	7.2	12.0
35	289.25	7.1	10.0	78	547.25	7.1	12.0
36	295.25	7.1	10.0	79	553.25	7.4	12.0
37	301.25	7.0	10.0	80	559.25	7.7	12.0
38	307.25	6.9	10.0	81	565.25	7.7	12.0
39	313.25	6.7	10.0	82	571.25	7.6	12.0
40	319.25	6.6	10.0	83	577.25	7.4	12.0
41	325.25	6.1	10.0	84	583.25	6.9	12.0
42	331.25	6.7	10.0	85	589.25	7.1	12.0
43	337.25	6.6	10.0	86	595.25	7.0	12.0
44	343.25	6.8	10.0	87	601.25	7.4	12.0
45	349.25	7.6	10.0	88	607.25	7.4	12.0
46	355.25	7.7	10.0	89	613.25	7.5	12.0
47	361.25	7.6	10.0	90	619.25	7.2	12.0
48	367.25	7.5	10.0	91	625.25	7.4	12.0
49	373.25	7.4	10.0	92	631.25	7.4	12.0
50	379.25	7.6	10.0	93	637.25	7.7	12.0
51	385.25	7.7	10.0	94	643.25	7.7	12.0
52	391.25	7.5	10.0	95	91.25	8.0	12.0
53	397.25	7.0	10.0	96	97.25	8.0	12.0
54	403.25	7.1	10.0	97	103.25	8.1	12.0
55	409.25	7.3	10.0	98	109.25	7.7	12.0

Cable channel				Cable channel			
Ch. No.	Ch. Freq.(MHz)	Noise Figure(dB)	Limit(dB)	Ch. No.	Ch. Freq.(MHz)	Noise Figure(dB)	Limit(dB)
99	115.25	7.1	12.0	113	727.25	7.8	12.0
100	649.25	6.7	12.0	114	733.25	7.0	12.0
101	655.25	6.6	12.0	115	739.25	7.1	12.0
102	661.25	6.5	12.0	116	745.25	7.3	12.0
103	667.25	6.4	12.0	117	751.25	7.2	12.0
104	673.25	6.2	12.0	118	757.25	7.2	12.0
105	679.25	6.3	12.0	119	763.25	7.2	12.0
106	683.25	6.76.7	12.0	120	769.25	7.1	12.0
107	691.25	6.9	12.0	121	770.25	7.0	12.0
108	697.25	7.4	12.0	122	771.25	6.7	12.0
109	703.25	7.5	12.0	123	772.25	6.6	12.0
110	709.25	7.7	12.0	124	773.25	7.4	12.0
111	715.25	7.9	12.0	125	799.25	7.6	12.0
112	727.25	7.8	12.0				

9. Sample calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

9.1 Example 1 :

■ 20.3 MHz

Class B Limit	=	250 μV	=	48 $\text{dB}\mu\text{V}$
Reading	=	- 67.8 dBm (Calibrated level)		
Convert to $\text{dB}\mu\text{V}$	=	- 67.8 $\text{dBm} + 107$	=	39.2 $\text{dB}\mu\text{V}$
$10^{(39.2\text{dB}\mu\text{V}/20)}$	=	91.2 $\text{dB}\mu\text{V}$		
Margin	=	39.2 – 48	=	-8.8
	=	8.8 dB below Limit		

9.2 Example 2 :

■ 66.7 MHz

Class B Limit	=	100 $\mu\text{V}/\text{m}$	=	40.0 $\text{dB}\mu\text{V}/\text{m}$
Reading	=	- 76.0 dBm (Calibrated level)		
Convert to $\text{dB}\mu\text{V}/\text{m}$	=	- 76.0 $\text{dBm} + 107$	=	31.0 $\text{dB}\mu\text{V}/\text{m}$
Antenna Factor + Cable Loss	=	5.8 dB		
Total	=	36.8 $\text{dB}\mu\text{V}/\text{m}$		
Margin	=	36.8 – 40.0	=	-3.2
	=	3.2 dB below Limit		

10. Recommendation & conclusion

The data collected shows that the **LG Electronics Inc. 23" LCD Monitor FCC ID: BEJL23LW (Model No.: L23LW)** was complies with §15.107, §15.109, §15.111, and §15.117 of the FCC Rules.