



FCC EVALUATION REPORT FOR CERTIFICATION

Applicant : LG Electronics Inc.

19-1, Cheongho-ri, Jinwi-myeon,

Pyeongteak-si, Gyeonggi-do, Korea.

Attn: Mr. Myoung-Kyu Lee, Chief research engineer

Date of Issue : August 9, 2010

Order Number: GETEC-C1-10-160

Test Report Number: GETEC-E3-10-084

Test Site: Gumi College EMC Center

FCC Registration Number: (100749, 443957)

FCC ID.: BEJM3704CJ

Applicant: LG Electronics Inc.

Rule Part(s)	: FCC Part 15 Subpart B
Equipment Class	: Class B computing device peripheral (JBP)
EUT Type	: LCD Monitor
Type of Authority	: Certification
Model Name	: M3704CJ
Trade Name	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,

Hyoung-Seop Kim, Associate Engineer
GUMI College EMC center

Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP	11
5.3 MEASUREMENT UNCERTAINTY.....	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED.....	12
5.6 TEST DATA FOR CONDUCTED EMISSION	12
6. RADIATED EMISSION	23
6.1 OPERATING ENVIRONMENT	23
6.2 TEST SET-UP	23
6.3 MEASUREMENT UNCERTAINTY.....	23
6.4 LIMIT	24
6.5 TEST EQUIPMENT USED.....	24
6.6 TEST DATA FOR RADIATED EMISSION.....	24
7. SAMPLE CALCULATIONS.....	31
7.1 EXAMPLE 1 :	31
7.2 EXAMPLE 2 :	31
8. RECOMMENDATION & CONCLUSION.....	32
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – ID SAMPLE LABEL & LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – TEST SET-UP PHOTOGRAPHS	
APPENDIX E – EXTERNAL PHOTOGRAPHS	
APPENDIX F – INTERNAL PHOTOGRAPHS	
APPENDIX G – USER’S MANUAL	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Manufacturer: LG Electronics Inc.

Manufacturer Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Contact Person: Mr. Myoung-Kyu Lee, Chief research engineer

Tel Number: +82-31-610-9623

- **FCC ID.** BEJM3704CJ
- **EUT Type** LCD Monitor
- **Model Name** M3704CJ
- **Trade Name** LG
- **Serial Number** Prototype
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** July 19 ~ 20, 2010
- **Place of Test** **Gumi College EMC Center** (FCC Registration Number: 100749, 443957)
407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.
- **Test Report Number** GETEC-E3-10-084
- **Dates of Issue** August 9, 2010



2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. LCD Monitor (Model Name: M3704CJ)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.

This test site is one of the highest point of Gumi 1 college at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2003)



GUMI COLLEGE EMC CENTER
407, Bugok-dong, Gumi-si,
Gyeongbuk 730-711, Korea.
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc. LCD Monitor (Model Name: M3704CJ) FCC ID.: BEJM3704CJ**

LCD Panel	94.0 cm (37 inch) TFT (Thin Film Transistor) LCD (Liquid Crystal Display) Panel Visible diagonal size : 106.73 cm 0.4845 mm x 0.4845 mm X RGB (Pixel Pitch)	
Power	Rated Voltage	AC 100-240 V~ 50 / 60 Hz
	Power Consumption	On Mode : W Typ. Sleep Mode : ≤ 1 W (RGB) / 2 W (HDMI/DVI) (If LAN OFF is selected) Off Mode : ≤ 0.5 W
Dimensions & Weight		
	Width x Height x Depth [1] 99.56 cm (39.2 inch) x 58.76 cm (23.1 inch) x 11.37 cm (4.5 inch) [2] 99.56 cm (39.2 inch) x 67.41cm (26.5 inch) x 29.30 cm (11.5 inch) [3] 99.56 cm (39.2 inch) x 58.76 cm (23.1 inch) x 12.6 cm (4.9 inch) [4] 99.56 cm (39.2 inch) x 67.41cm (26.5 inch) x 29.30 cm (11.5 inch)	
	Net [1] 18.93 kg (41.73 lb) [2] 22.2 kg (48.94 lb) [3] 19.67 kg (43.36 lb) [4] 22.93 kg (50.55 lb)	
Video Signal	Max. Resolution	RGB : 1920 x 1080 @ 60 Hz HDMI/DVI : 1920 x 1080 @ 60 Hz - It may not be supported depending on the OS or video card type.
	Recommended Resolution	RGB : 1920 x 1080 @ 60 Hz HDMI/DVI : 1920 x 1080 @ 60 Hz - It may not be supported depending on the OS or video card type.
	Horizontal Frequency	RGB : 30 kHz to 83 kHz HDMI/DVI : 30 kHz to 83 kHz
	Vertical Frequency	RGB : 56 Hz to 75 Hz HDMI/DVI : 56 Hz to 60 Hz
	Synchronization Type	Composite/Separate/Digital
Input Connector	15-pin D-Sub type, HDMI/DVI(digital) Composite Video, Component, RS-232C, LAN	

- Maximum Frequency Range : 400 MHz

EUT Type: LCD Monitor

FCC ID.: BEJM3704CJ



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
PC	Hewlett Packard	D530	S/N: CNG34800PY FCC ID.: DoC
Video card	ATI	ATI RV360(9600)	S/N: SN0402017176 FCC ID.: DoC
PS2 Key board	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID.: AQ6-23K15
PS2 mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID.: JNZ211443
Joy stick	MICROSOFT	X05-92626	S/N: 9262600296169 FCC ID.: DoC
Printer	Hewlett Packard	970CXI	S/N: MY9B01F1FG FCC ID.: DoC
DVD player	LG Electronics Inc.	LC-954	S/N: 3850R-Z674K FCC ID.: DoC
Monitor	DIBOSS	LT-15S5MF	S/N: D060403100019-C FCC ID.: DoC
USB memory stick	LG Electronics Inc.	UM5 2GB	S/N: 003RLRZN37758 FCC ID.: N/A
Speaker	LG Electronics Inc.	SP-0000K	S/N: N/A FCC ID.: N/A

See “Appendix D – Test Setup Photographs” for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None	-	-	S/N: - FCC ID.: -



3.2.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the EUT	1.80 m unshielded
RS-232C in cable	Connected to the EUT and EUT(RS-232C out)	1.80 m shielded
RGB(Analog) in cable	Connected to the EUT and PC	1.80 m shielded with two ferrite cores
RGB(Analog) out cable	Connected to the EUT and monitor	1.80 m shielded with two ferrite cores
HDMI/DVI in cable	Connected to the EUT and PC	2.00 m shielded
Audio(RGB/DVI) in cable	Connected to the EUT and PC	1.80 m shielded with a ferrite core
Component in cable	Connected to the EUT and DVD player	2.00 m shielded
Component sound in cable	Connected to the EUT and DVD player	3.00 m shielded
AV in cable	Connected to the EUT and DVD player	3.00 m shielded
AV out cable	Connected to the EUT and monitor	3.00 m shielded
LAN cable	Connected to the EUT and network	10.00 m unshielded
Speaker cable	Connected to the EUT and speaker	0.30 m unshielded

3.3 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120 V / 60 Hz
- Test Mode(s)
 - . Monitor mode (RGB: 1 920 × 1 080 / 60 Hz, HDMI/DVI: 1 920 × 1 080 / 60 Hz)
 - ◆ Operating test pattern
 - . “H” character scrolling mode (Font size: 10)
 - . Black background white character
 - . Brightness and contrast was adjusted as maximum level
 - . Continuous playback of 1 kHz audio file with winamp player
 - . Operated DDC function with the eZ manager software
 - * [DDC is a communication channel over which the monitor automatically informs the host system \(PC\) about its capabilities](#)
 - . USB memory stick play mode
 - ◆ Operating test pattern
 - . Continuous playback mode with video files



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

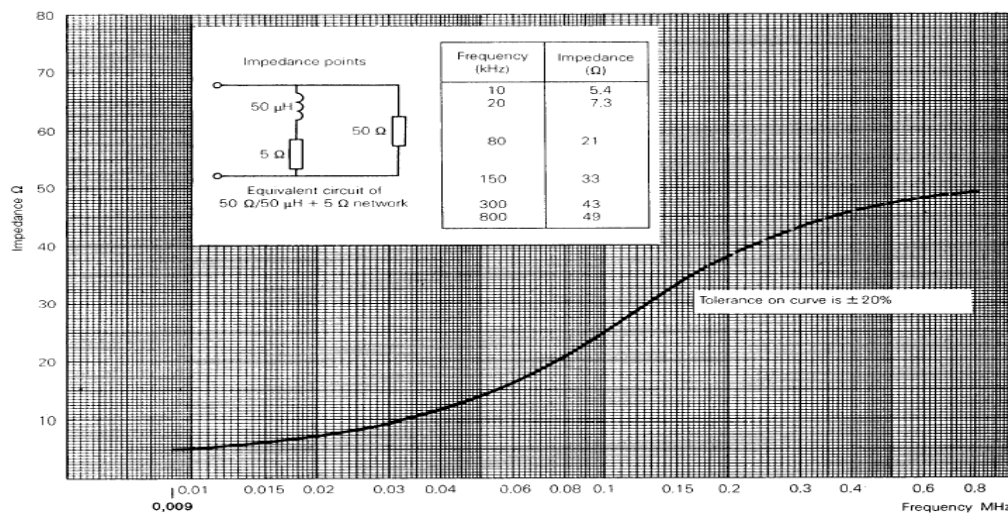


Fig 2. Impedance of LISN



4.3 Radiated Emission

Preliminary measurements were conducted 3 m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

Final measurements were made 3 m chamber (FCC registration No.: 443957) and/or 10 m OATS (FCC registration No.: 100749).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator



Fig 3. Dimensions of test site.



5. Conducted Emission

5.1 Operating Environment

Temperature : 27 °C
Relative Humidity : 49 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.69 dB	Confidence levels of 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	± 4.16 dB	Confidence levels of 95 % ($k = 2$)



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI Test Receiver	839809/003	12. 10. 2010
■ - ESH3-Z5	Rohde & Schwarz	LISN	838979/020	12. 10. 2010
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	12. 10. 2010
■ - ISN T8	TESEQ. GmbH	Impedance Network	24568	10. 16. 2010


5.6 Test data for Conducted Emission

-. Test Date : July 20, 2010
-. Resolution Bandwidth : 9 kHz
-. Frequency Range : 0.15 MHz ~ 30 MHz



◆ Operating condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

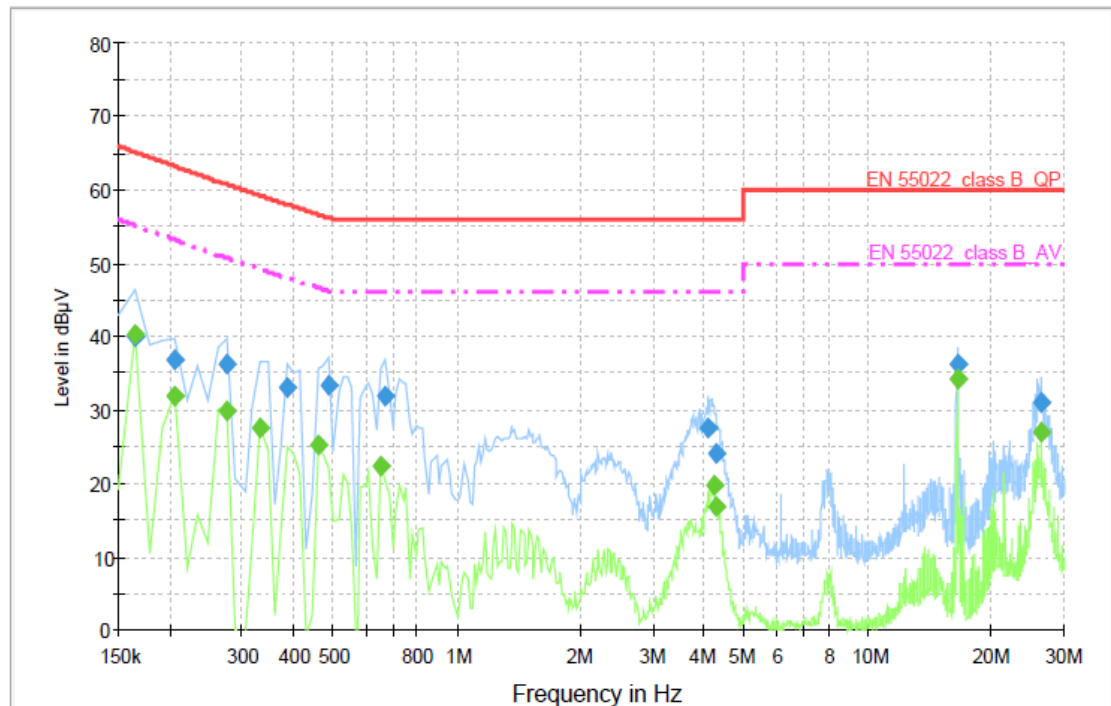

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	39.9	1000.000	9.000	GND	L1	10.0	25.3	65.2	
0.206000	36.7	1000.000	9.000	GND	L1	10.0	26.5	63.2	
0.276000	36.3	1000.000	9.000	GND	L1	10.0	24.4	60.7	
0.388000	33.1	1000.000	9.000	GND	L1	10.0	24.9	58.0	
0.486000	33.3	1000.000	9.000	GND	L1	10.0	22.9	56.2	
0.668000	32.0	1000.000	9.000	GND	L1	10.0	24.0	56.0	
4.070000	27.6	1000.000	9.000	GND	L1	10.2	28.4	56.0	
4.294000	23.9	1000.000	9.000	GND	L1	10.2	32.1	56.0	
16.474000	36.2	1000.000	9.000	GND	L1	10.8	23.8	60.0	
26.526000	31.0	1000.000	9.000	GND	L1	11.3	29.0	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.4	1000.000	9.000	GND	L1	10.0	14.8	55.2	
0.206000	32.0	1000.000	9.000	GND	L1	10.0	21.2	53.2	
0.276000	29.9	1000.000	9.000	GND	L1	10.0	20.8	50.7	
0.332000	27.6	1000.000	9.000	GND	L1	10.0	21.6	49.2	
0.458000	25.2	1000.000	9.000	GND	L1	10.0	21.5	46.7	
0.654000	22.3	1000.000	9.000	GND	L1	10.0	23.7	46.0	
4.210000	19.7	1000.000	9.000	GND	L1	10.2	26.3	46.0	
4.294000	16.8	1000.000	9.000	GND	L1	10.2	29.2	46.0	
16.474000	34.1	1000.000	9.000	GND	L1	10.8	15.9	50.0	
26.526000	27.0	1000.000	9.000	GND	L1	11.3	23.0	50.0	

< Fig 4. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

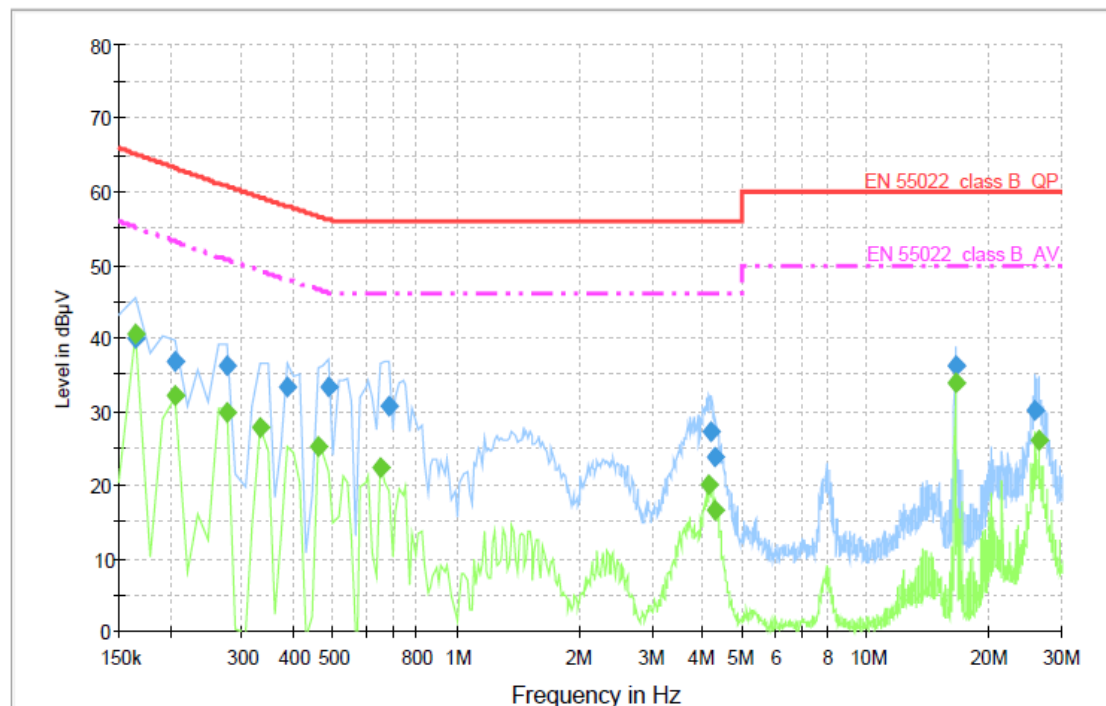

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.0	1000.000	9.000	GND	N	10.0	25.2	65.2	
0.206000	36.9	1000.000	9.000	GND	N	10.0	26.3	63.2	
0.276000	36.3	1000.000	9.000	GND	N	10.0	24.4	60.7	
0.388000	33.4	1000.000	9.000	GND	N	10.0	24.6	58.0	
0.486000	33.3	1000.000	9.000	GND	N	10.0	22.9	56.2	
0.682000	30.8	1000.000	9.000	GND	N	10.0	25.2	56.0	
4.196000	27.4	1000.000	9.000	GND	N	10.2	28.6	56.0	
4.294000	23.8	1000.000	9.000	GND	N	10.2	32.2	56.0	
16.474000	36.1	1000.000	9.000	GND	N	10.6	23.9	60.0	
25.924000	30.2	1000.000	9.000	GND	N	10.8	29.8	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.5	1000.000	9.000	GND	N	10.0	14.7	55.2	
0.206000	32.1	1000.000	9.000	GND	N	10.0	21.1	53.2	
0.276000	30.0	1000.000	9.000	GND	N	10.0	20.7	50.7	
0.332000	27.7	1000.000	9.000	GND	N	10.0	21.5	49.2	
0.458000	25.2	1000.000	9.000	GND	N	10.0	21.5	46.7	
0.654000	22.3	1000.000	9.000	GND	N	10.0	23.7	46.0	
4.140000	19.9	1000.000	9.000	GND	N	10.2	26.1	46.0	
4.294000	16.6	1000.000	9.000	GND	N	10.2	29.4	46.0	
16.474000	34.0	1000.000	9.000	GND	N	10.6	16.0	50.0	
26.526000	26.2	1000.000	9.000	GND	N	10.8	23.8	50.0	

< Fig 5. Conducted emission result (Neutral line) >



◆ Operating condition: 1 024 × 768 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

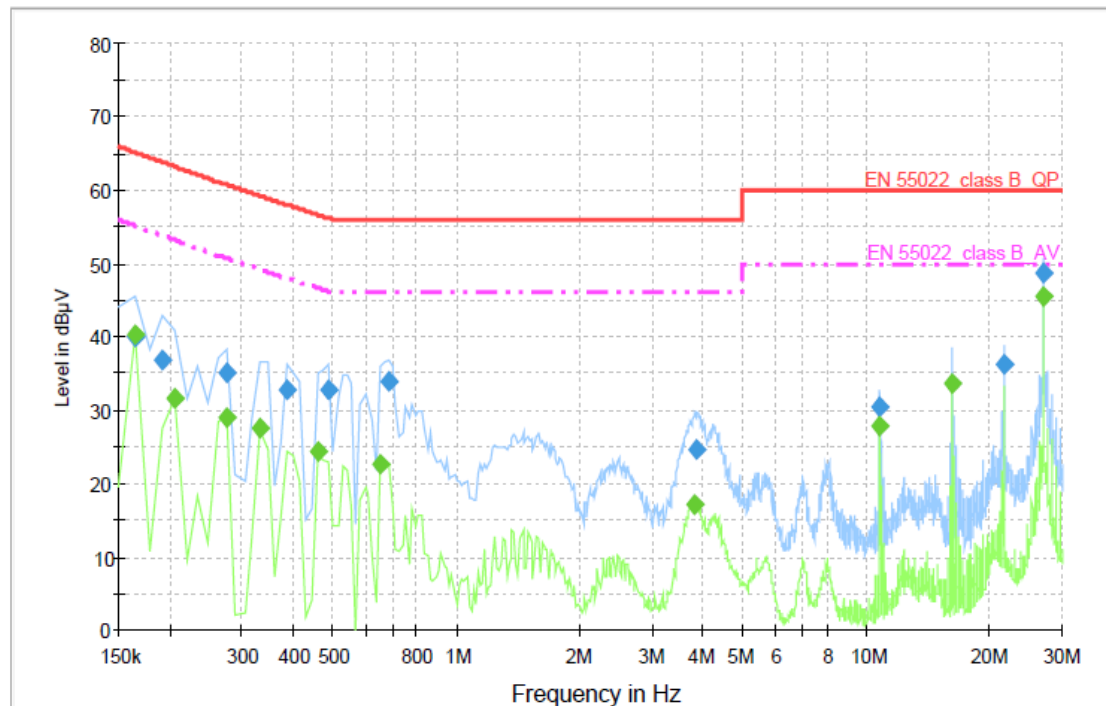

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	39.9	1000.000	9.000	GND	L1	10.0	25.3	65.2	
0.192000	36.8	1000.000	9.000	GND	L1	10.0	27.0	63.8	
0.276000	35.1	1000.000	9.000	GND	L1	10.0	25.6	60.7	
0.388000	32.7	1000.000	9.000	GND	L1	10.0	25.3	58.0	
0.486000	32.6	1000.000	9.000	GND	L1	10.0	23.6	56.2	
0.682000	34.0	1000.000	9.000	GND	L1	10.0	22.0	56.0	
3.846000	24.5	1000.000	9.000	GND	L1	10.2	31.5	56.0	
10.804000	30.4	1000.000	9.000	GND	L1	10.4	29.6	60.0	
21.598000	36.2	1000.000	9.000	GND	L1	11.1	23.8	60.0	
27.002000	48.6	1000.000	9.000	GND	L1	11.3	11.4	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.3	1000.000	9.000	GND	L1	10.0	14.9	55.2	
0.206000	31.7	1000.000	9.000	GND	L1	10.0	21.5	53.2	
0.276000	29.1	1000.000	9.000	GND	L1	10.0	21.6	50.7	
0.332000	27.6	1000.000	9.000	GND	L1	10.0	21.6	49.2	
0.458000	24.5	1000.000	9.000	GND	L1	10.0	22.2	46.7	
0.654000	22.5	1000.000	9.000	GND	L1	10.0	23.5	46.0	
3.818000	17.2	1000.000	9.000	GND	L1	10.2	28.8	46.0	
10.804000	27.9	1000.000	9.000	GND	L1	10.4	22.1	50.0	
16.194000	33.6	1000.000	9.000	GND	L1	10.8	16.4	50.0	
27.002000	45.6	1000.000	9.000	GND	L1	11.3	4.4	50.0	

< Fig 6. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

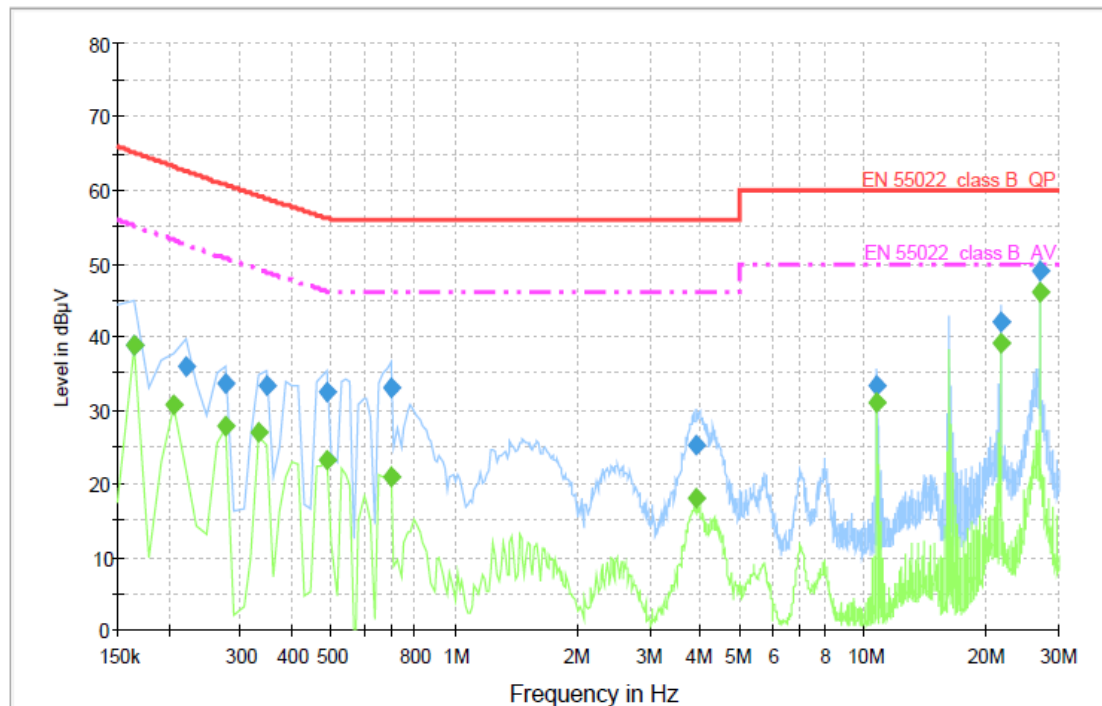

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	38.8	1000.000	9.000	GND	N	10.0	26.4	65.2	
0.220000	36.0	1000.000	9.000	GND	N	10.0	26.6	62.6	
0.276000	33.7	1000.000	9.000	GND	N	10.0	27.0	60.7	
0.346000	33.2	1000.000	9.000	GND	N	10.0	25.7	58.9	
0.486000	32.5	1000.000	9.000	GND	N	10.0	23.7	56.2	
0.696000	33.1	1000.000	9.000	GND	N	10.0	22.9	56.0	
3.888000	25.3	1000.000	9.000	GND	N	10.2	30.7	56.0	
10.804000	33.4	1000.000	9.000	GND	N	10.4	26.6	60.0	
21.598000	41.9	1000.000	9.000	GND	N	10.8	18.1	60.0	
27.002000	48.9	1000.000	9.000	GND	N	10.8	11.1	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	38.9	1000.000	9.000	GND	N	10.0	16.3	55.2	
0.206000	30.7	1000.000	9.000	GND	N	10.0	22.5	53.2	
0.276000	27.9	1000.000	9.000	GND	N	10.0	22.8	50.7	
0.332000	26.9	1000.000	9.000	GND	N	10.0	22.3	49.2	
0.486000	23.2	1000.000	9.000	GND	N	10.0	23.0	46.2	
0.696000	20.8	1000.000	9.000	GND	N	10.0	25.2	46.0	
3.902000	17.8	1000.000	9.000	GND	N	10.2	28.2	46.0	
10.804000	31.0	1000.000	9.000	GND	N	10.4	19.0	50.0	
21.598000	39.0	1000.000	9.000	GND	N	10.8	11.0	50.0	
27.002000	46.0	1000.000	9.000	GND	N	10.8	4.0	50.0	

< Fig 7. Conducted emission result (Neutral line) >



◆ Operating condition: 640 × 480 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

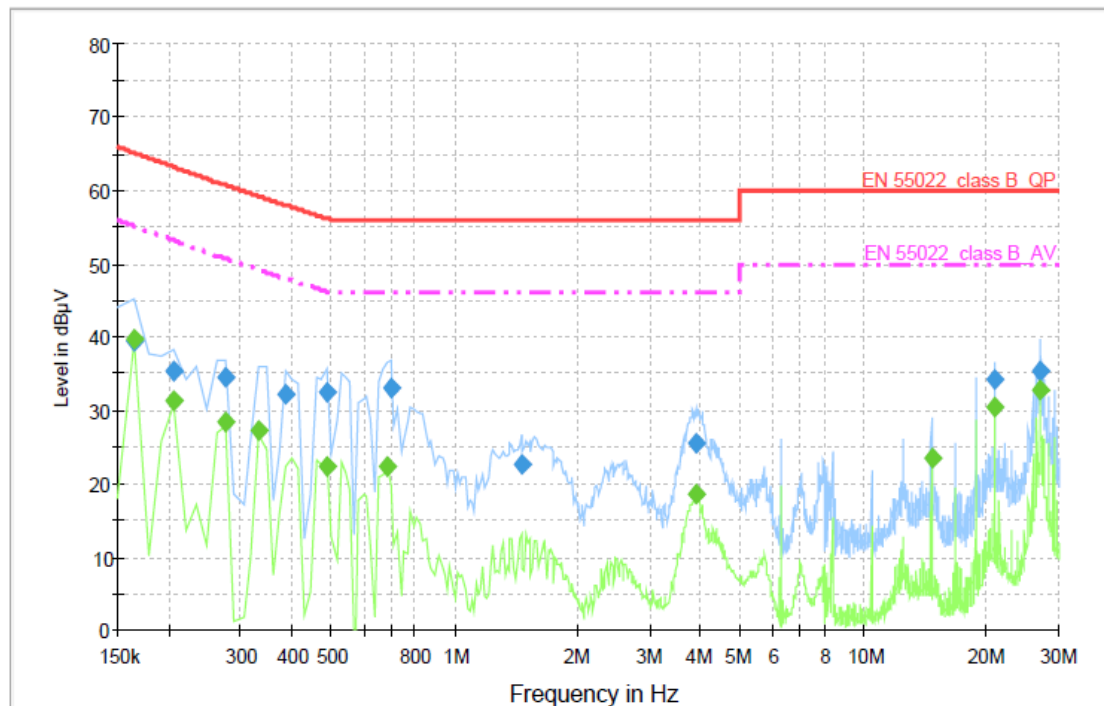

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	39.5	1000.000	9.000	GND	L1	10.0	25.7	65.2	
0.206000	35.5	1000.000	9.000	GND	L1	10.0	27.7	63.2	
0.276000	34.4	1000.000	9.000	GND	L1	10.0	26.3	60.7	
0.388000	32.0	1000.000	9.000	GND	L1	10.0	26.0	58.0	
0.486000	32.3	1000.000	9.000	GND	L1	10.0	23.9	56.2	
0.696000	33.2	1000.000	9.000	GND	L1	10.0	22.8	56.0	
1.452000	22.7	1000.000	9.000	GND	L1	10.1	33.3	56.0	
3.874000	25.6	1000.000	9.000	GND	L1	10.2	30.4	56.0	
20.870000	34.1	1000.000	9.000	GND	L1	11.1	25.9	60.0	
27.142000	35.5	1000.000	9.000	GND	L1	11.3	24.5	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	39.8	1000.000	9.000	GND	L1	10.0	15.4	55.2	
0.206000	31.3	1000.000	9.000	GND	L1	10.0	21.9	53.2	
0.276000	28.3	1000.000	9.000	GND	L1	10.0	22.4	50.7	
0.332000	27.1	1000.000	9.000	GND	L1	10.0	22.1	49.2	
0.486000	22.4	1000.000	9.000	GND	L1	10.0	23.8	46.2	
0.682000	22.3	1000.000	9.000	GND	L1	10.0	23.7	46.0	
3.888000	18.6	1000.000	9.000	GND	L1	10.2	27.4	46.0	
14.640000	23.4	1000.000	9.000	GND	L1	10.7	26.6	50.0	
20.870000	30.5	1000.000	9.000	GND	L1	11.1	19.5	50.0	
27.142000	32.8	1000.000	9.000	GND	L1	11.3	17.2	50.0	

< Fig 8. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

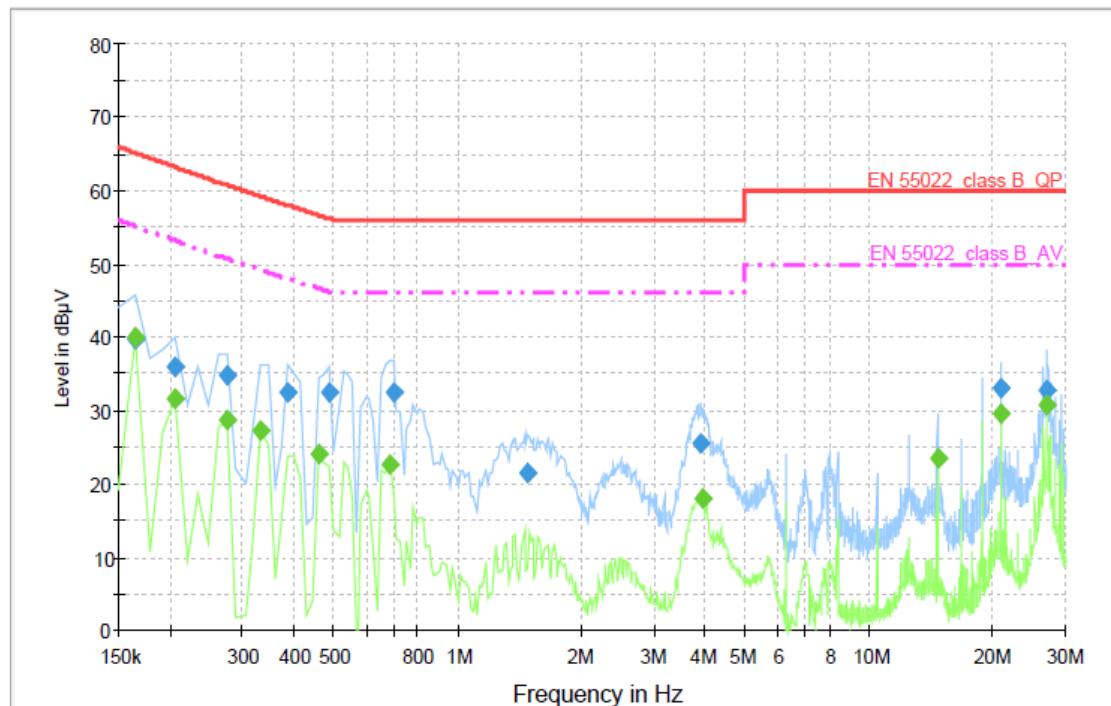

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	39.8	1000.000	9.000	GND	N	10.0	25.4	65.2	
0.206000	36.0	1000.000	9.000	GND	N	10.0	27.2	63.2	
0.276000	34.7	1000.000	9.000	GND	N	10.0	26.0	60.7	
0.388000	32.4	1000.000	9.000	GND	N	10.0	25.6	58.0	
0.486000	32.4	1000.000	9.000	GND	N	10.0	23.8	56.2	
0.696000	32.6	1000.000	9.000	GND	N	10.0	23.4	56.0	
1.480000	21.5	1000.000	9.000	GND	N	10.1	34.5	56.0	
3.888000	25.5	1000.000	9.000	GND	N	10.2	30.5	56.0	
20.870000	32.9	1000.000	9.000	GND	N	10.8	27.1	60.0	
27.142000	32.8	1000.000	9.000	GND	N	10.8	27.2	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.1	1000.000	9.000	GND	N	10.0	15.1	55.2	
0.206000	31.6	1000.000	9.000	GND	N	10.0	21.6	53.2	
0.276000	28.8	1000.000	9.000	GND	N	10.0	21.9	50.7	
0.332000	27.3	1000.000	9.000	GND	N	10.0	21.9	49.2	
0.458000	23.9	1000.000	9.000	GND	N	10.0	22.8	46.7	
0.682000	22.6	1000.000	9.000	GND	N	10.0	23.4	46.0	
3.944000	17.9	1000.000	9.000	GND	N	10.2	28.1	46.0	
14.640000	23.3	1000.000	9.000	GND	N	10.6	26.7	50.0	
20.870000	29.4	1000.000	9.000	GND	N	10.8	20.6	50.0	
27.142000	30.8	1000.000	9.000	GND	N	10.8	19.2	50.0	

< Fig 9. Conducted emission result (Neutral line) >



◆ Operating condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)

Voltage with 4-Line-LISN_L1

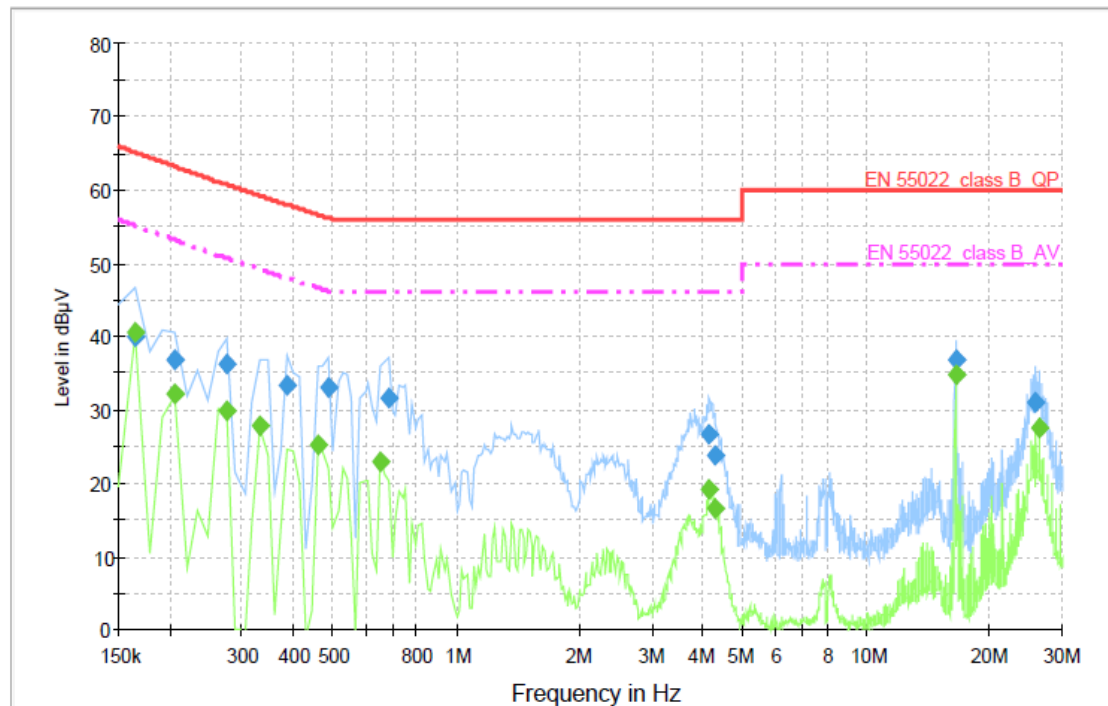

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.1	1000.000	9.000	GND	L1	10.0	25.2	65.2	
0.206000	36.9	1000.000	9.000	GND	L1	10.0	26.3	63.2	
0.276000	36.2	1000.000	9.000	GND	L1	10.0	24.5	60.7	
0.388000	33.5	1000.000	9.000	GND	L1	10.0	24.5	58.0	
0.486000	33.2	1000.000	9.000	GND	L1	10.0	23.0	56.2	
0.682000	31.6	1000.000	9.000	GND	L1	10.0	24.4	56.0	
4.140000	26.6	1000.000	9.000	GND	L1	10.2	29.4	56.0	
4.294000	23.7	1000.000	9.000	GND	L1	10.2	32.3	56.0	
16.474000	36.8	1000.000	9.000	GND	L1	10.8	23.2	60.0	
25.924000	31.1	1000.000	9.000	GND	L1	11.3	28.9	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.5	1000.000	9.000	GND	L1	10.0	14.7	55.2	
0.206000	32.0	1000.000	9.000	GND	L1	10.0	21.2	53.2	
0.276000	30.0	1000.000	9.000	GND	L1	10.0	20.7	50.7	
0.332000	27.9	1000.000	9.000	GND	L1	10.0	21.3	49.2	
0.458000	25.2	1000.000	9.000	GND	L1	10.0	21.5	46.7	
0.654000	22.9	1000.000	9.000	GND	L1	10.0	23.1	46.0	
4.140000	19.3	1000.000	9.000	GND	L1	10.2	26.7	46.0	
4.294000	16.5	1000.000	9.000	GND	L1	10.2	29.5	46.0	
16.474000	34.7	1000.000	9.000	GND	L1	10.8	15.3	50.0	
26.526000	27.6	1000.000	9.000	GND	L1	11.3	22.4	50.0	

< Fig 10. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

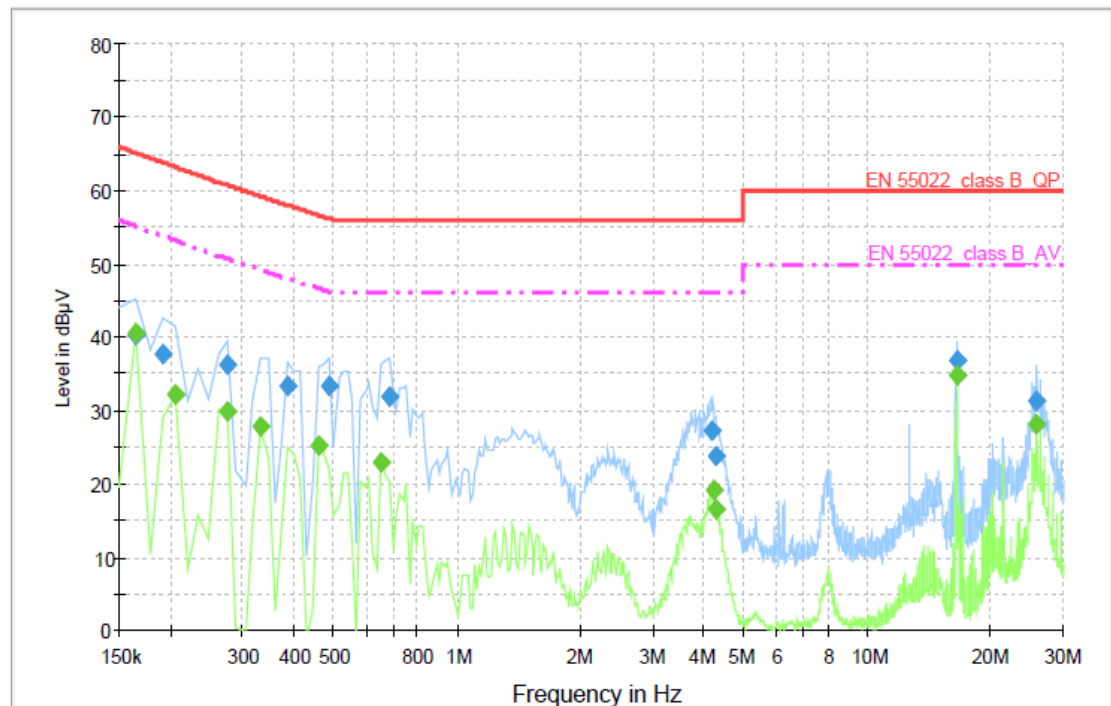

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.2	1000.000	9.000	GND	N	10.0	25.0	65.2	
0.192000	37.8	1000.000	9.000	GND	N	10.0	26.0	63.8	
0.276000	36.3	1000.000	9.000	GND	N	10.0	24.4	60.7	
0.388000	33.4	1000.000	9.000	GND	N	10.0	24.6	58.0	
0.486000	33.2	1000.000	9.000	GND	N	10.0	23.0	56.2	
0.682000	31.9	1000.000	9.000	GND	N	10.0	24.1	56.0	
4.196000	27.3	1000.000	9.000	GND	N	10.2	28.7	56.0	
4.294000	23.7	1000.000	9.000	GND	N	10.2	32.3	56.0	
16.474000	36.8	1000.000	9.000	GND	N	10.6	23.2	60.0	
25.924000	31.4	1000.000	9.000	GND	N	10.8	28.6	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.5	1000.000	9.000	GND	N	10.0	14.7	55.2	
0.206000	32.1	1000.000	9.000	GND	N	10.0	21.1	53.2	
0.276000	30.0	1000.000	9.000	GND	N	10.0	20.7	50.7	
0.332000	27.9	1000.000	9.000	GND	N	10.0	21.3	49.2	
0.458000	25.3	1000.000	9.000	GND	N	10.0	21.4	46.7	
0.654000	22.9	1000.000	9.000	GND	N	10.0	23.1	46.0	
4.210000	19.2	1000.000	9.000	GND	N	10.2	26.8	46.0	
4.294000	16.4	1000.000	9.000	GND	N	10.2	29.6	46.0	
16.474000	34.7	1000.000	9.000	GND	N	10.6	15.3	50.0	
25.924000	28.0	1000.000	9.000	GND	N	10.8	22.0	50.0	

< Fig 11. Conducted emission result (Neutral line) >



◆ Operating condition: USB memory stick play mode

Voltage with 4-Line-LISN_L1

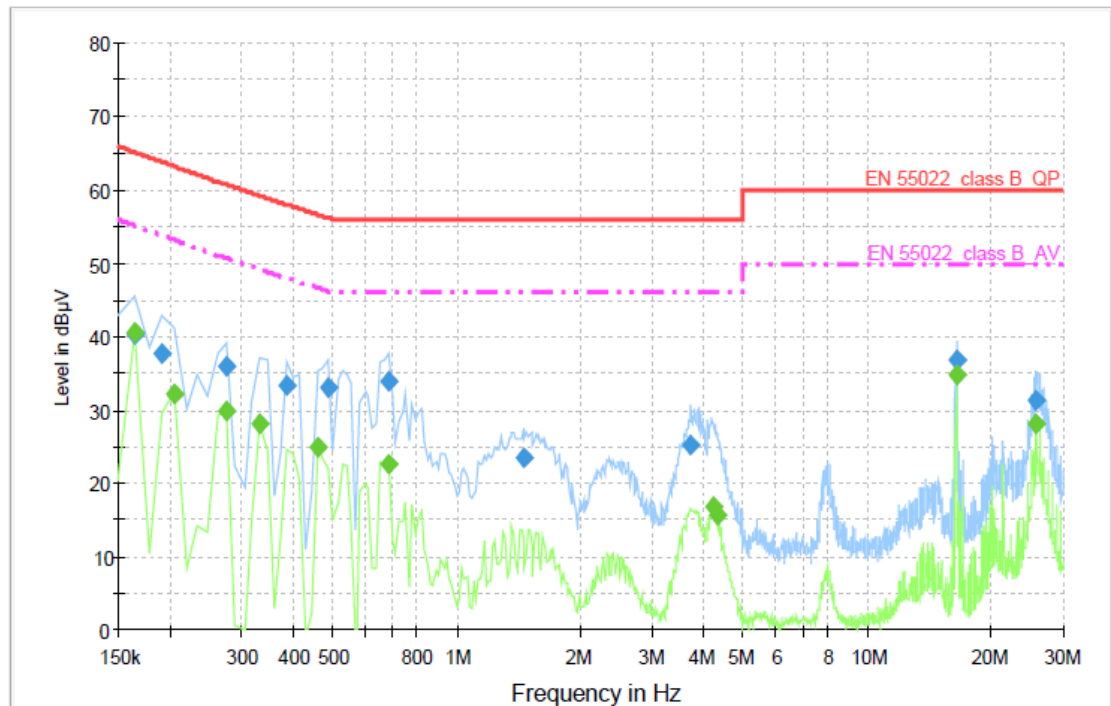

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.2	1000.000	9.000	GND	L1	10.0	25.0	65.2	
0.192000	37.8	1000.000	9.000	GND	L1	10.0	26.0	63.8	
0.276000	36.0	1000.000	9.000	GND	L1	10.0	24.7	60.7	
0.388000	33.5	1000.000	9.000	GND	L1	10.0	24.5	58.0	
0.486000	32.9	1000.000	9.000	GND	L1	10.0	23.3	56.2	
0.682000	34.0	1000.000	9.000	GND	L1	10.0	22.0	56.0	
1.452000	23.6	1000.000	9.000	GND	L1	10.1	32.4	56.0	
3.734000	25.3	1000.000	9.000	GND	L1	10.2	30.7	56.0	
16.474000	36.8	1000.000	9.000	GND	L1	10.8	23.2	60.0	
25.924000	31.4	1000.000	9.000	GND	L1	11.3	28.6	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.5	1000.000	9.000	GND	L1	10.0	14.7	55.2	
0.206000	32.1	1000.000	9.000	GND	L1	10.0	21.1	53.2	
0.276000	29.7	1000.000	9.000	GND	L1	10.0	21.0	50.7	
0.332000	28.1	1000.000	9.000	GND	L1	10.0	21.1	49.2	
0.458000	24.9	1000.000	9.000	GND	L1	10.0	21.8	46.7	
0.682000	22.7	1000.000	9.000	GND	L1	10.0	23.3	46.0	
4.210000	16.9	1000.000	9.000	GND	L1	10.2	29.1	46.0	
4.336000	15.5	1000.000	9.000	GND	L1	10.2	30.5	46.0	
16.474000	34.8	1000.000	9.000	GND	L1	10.8	15.2	50.0	
25.924000	28.3	1000.000	9.000	GND	L1	11.3	21.7	50.0	

< Fig 12. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

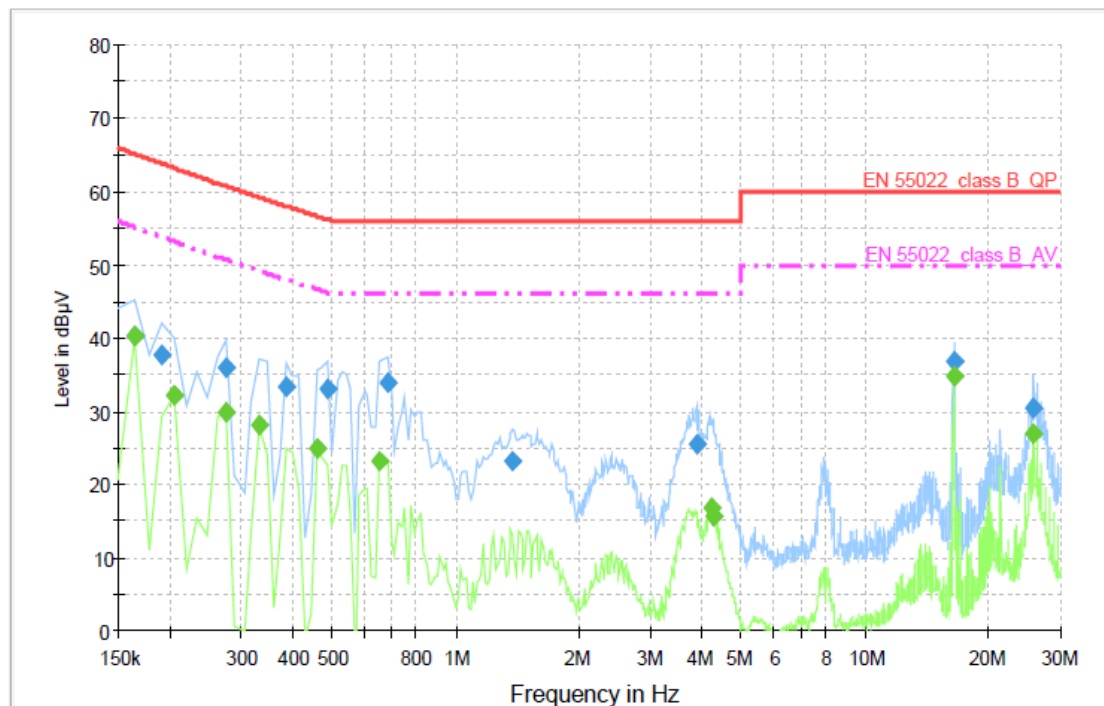

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.2	1000.000	9.000	GND	N	10.0	25.0	65.2	
0.192000	37.8	1000.000	9.000	GND	N	10.0	26.0	63.8	
0.276000	36.0	1000.000	9.000	GND	N	10.0	24.7	60.7	
0.388000	33.4	1000.000	9.000	GND	N	10.0	24.6	58.0	
0.486000	33.0	1000.000	9.000	GND	N	10.0	23.2	56.2	
0.682000	34.0	1000.000	9.000	GND	N	10.0	22.0	56.0	
1.382000	23.3	1000.000	9.000	GND	N	10.1	32.7	56.0	
3.874000	25.6	1000.000	9.000	GND	N	10.2	30.4	56.0	
16.474000	36.8	1000.000	9.000	GND	N	10.6	23.2	60.0	
25.924000	30.4	1000.000	9.000	GND	N	10.8	29.6	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.164000	40.2	1000.000	9.000	GND	N	10.0	15.0	55.2	
0.206000	32.1	1000.000	9.000	GND	N	10.0	21.1	53.2	
0.276000	29.8	1000.000	9.000	GND	N	10.0	20.9	50.7	
0.332000	28.1	1000.000	9.000	GND	N	10.0	21.1	49.2	
0.458000	25.0	1000.000	9.000	GND	N	10.0	21.7	46.7	
0.654000	23.3	1000.000	9.000	GND	N	10.0	22.7	46.0	
4.210000	16.7	1000.000	9.000	GND	N	10.2	29.3	46.0	
4.294000	15.6	1000.000	9.000	GND	N	10.2	30.4	46.0	
16.474000	34.7	1000.000	9.000	GND	N	10.6	15.3	50.0	
25.924000	26.9	1000.000	9.000	GND	N	10.8	23.1	50.0	

< Fig 13. Conducted emission result (Neutral line) >



6. Radiated Emission

6.1 Operating Environment

Temperature : 26 °C
Relative Humidity : 42 % R.H.

6.2 Test Set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 4.32 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 4.21 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.96 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.97 dB	Confidence levels of 95 % ($k = 2$)



6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0
> 1 000	54.0	No Specified limit

6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	12. 11. 2010
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3193	03. 15. 2012
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 22. 2011
■ - MCU066	matur GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	matur GmbH	Turntable	1390307	N/A
■ - AM 4.0	matur GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	11. 12. 2010

6.6 Test data for Radiated Emission

- Test Date : July 19, 2010
- Resolution Bandwidth : 120 kHz/1 MHz
- Frequency Range : 30 MHz ~ 2 000 MHz
- Measurement Distance : 3 m
- Note : The highest frequency of the internal source of the EUT is between 108 MHz and 500 MHz (400 MHz). The measurement was made up to 2 000 MHz



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

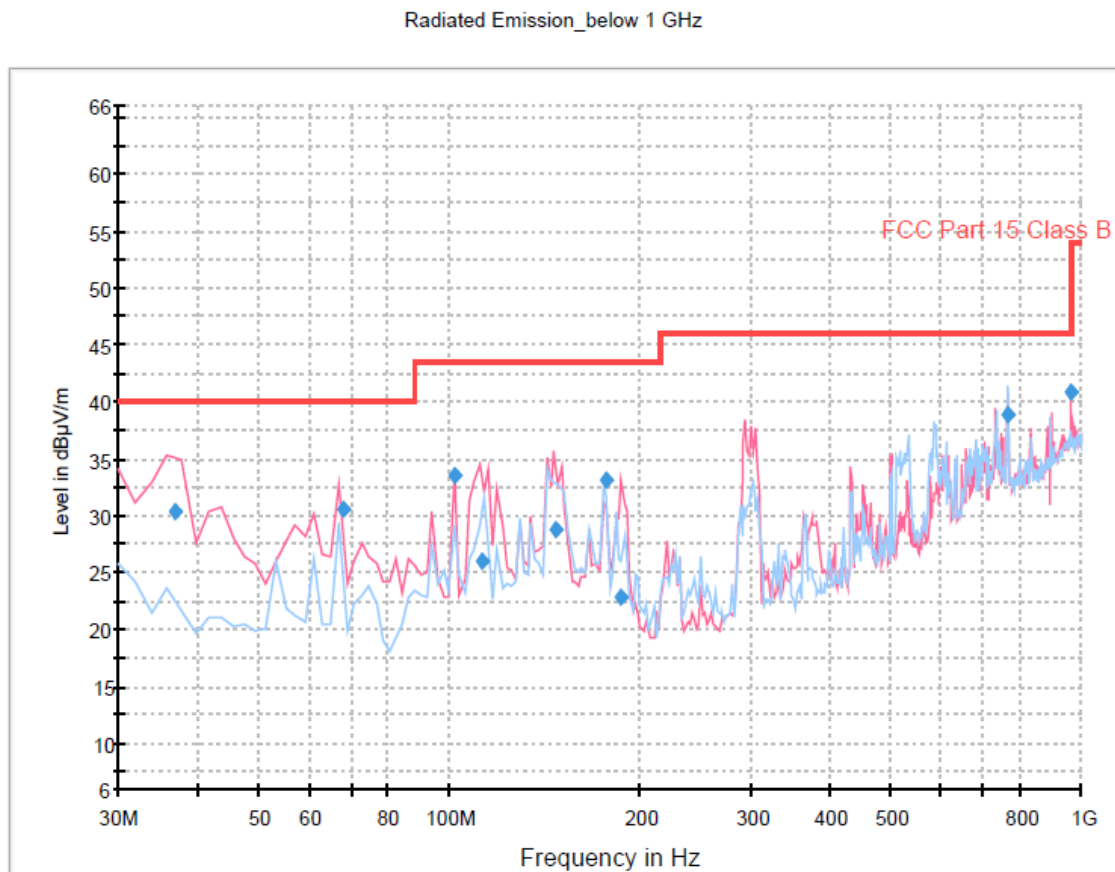


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
36.811663	30.3	1000.0	120.000	100.0	V	295.0	12.9	9.7	40.0
68.153868	30.6	1000.0	120.000	100.0	V	77.0	11.9	9.4	40.0
102.183848	33.4	1000.0	120.000	100.0	V	268.0	11.4	10.1	43.5
112.863287	26.1	1000.0	120.000	100.0	V	356.0	12.5	17.4	43.5
147.333267	28.7	1000.0	120.000	100.0	V	6.0	14.8	14.8	43.5
177.131583	33.2	1000.0	120.000	138.0	H	173.0	14.2	10.3	43.5
187.114910	22.9	1000.0	120.000	114.0	V	94.0	13.2	20.6	43.5
766.353467	38.8	1000.0	120.000	182.0	H	208.0	27.7	7.2	46.0
960.062244	40.9	1000.0	120.000	100.0	V	207.0	31.0	5.1	46.0

< Fig 14. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

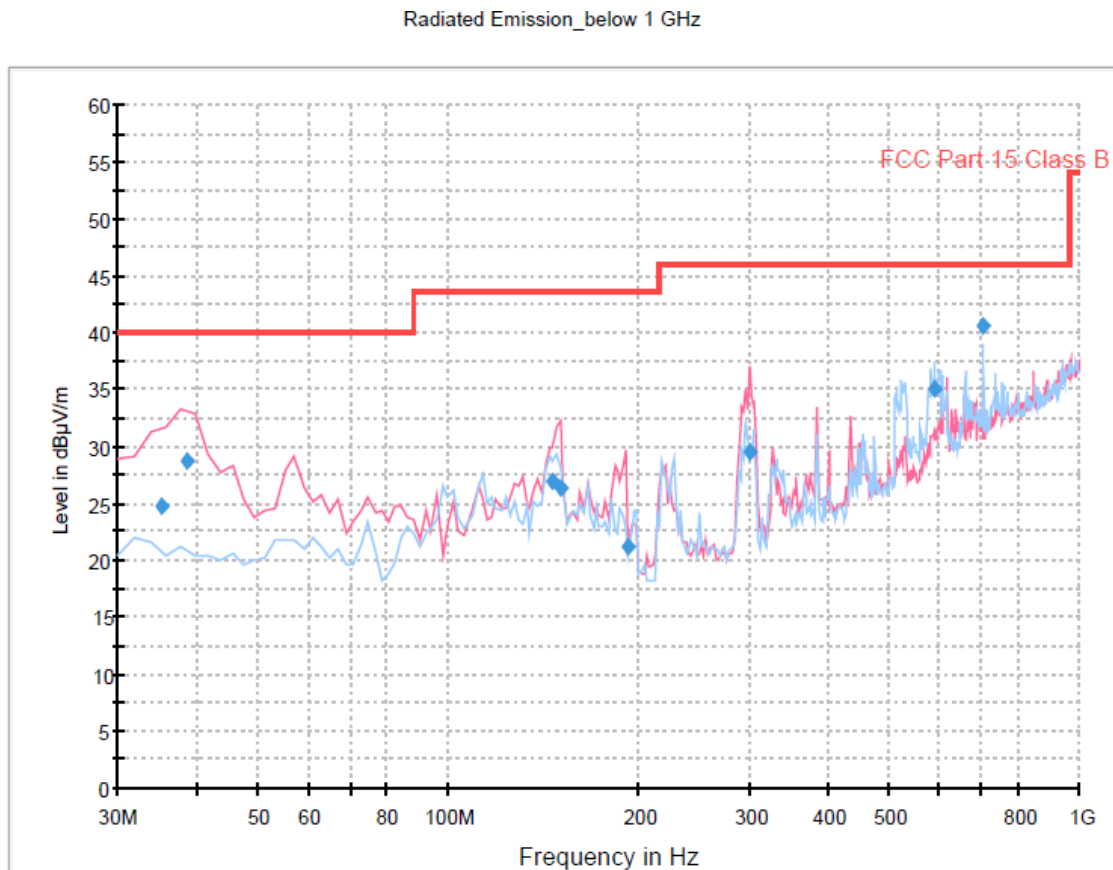


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
35.107776	24.8	1000.0	120.000	100.0	V	33.0	12.8	15.2	40.0
38.595551	28.7	1000.0	120.000	100.0	V	0.0	13.0	11.3	40.0
145.989379	26.9	1000.0	120.000	100.0	V	0.0	14.8	16.6	43.5
151.141042	26.4	1000.0	120.000	100.0	V	0.0	14.9	17.1	43.5
192.122685	21.2	1000.0	120.000	100.0	V	244.0	12.6	22.3	43.5
300.100401	29.4	1000.0	120.000	200.0	V	7.0	16.3	16.6	46.0
588.899679	35.0	1000.0	120.000	100.0	H	164.0	24.2	11.0	46.0
702.005170	40.7	1000.0	120.000	167.0	H	129.0	26.2	5.3	46.0

< Fig 15. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: USB memory stick play mode
Red trace: Vertical polarization, Blue trace: Horizontal polarization

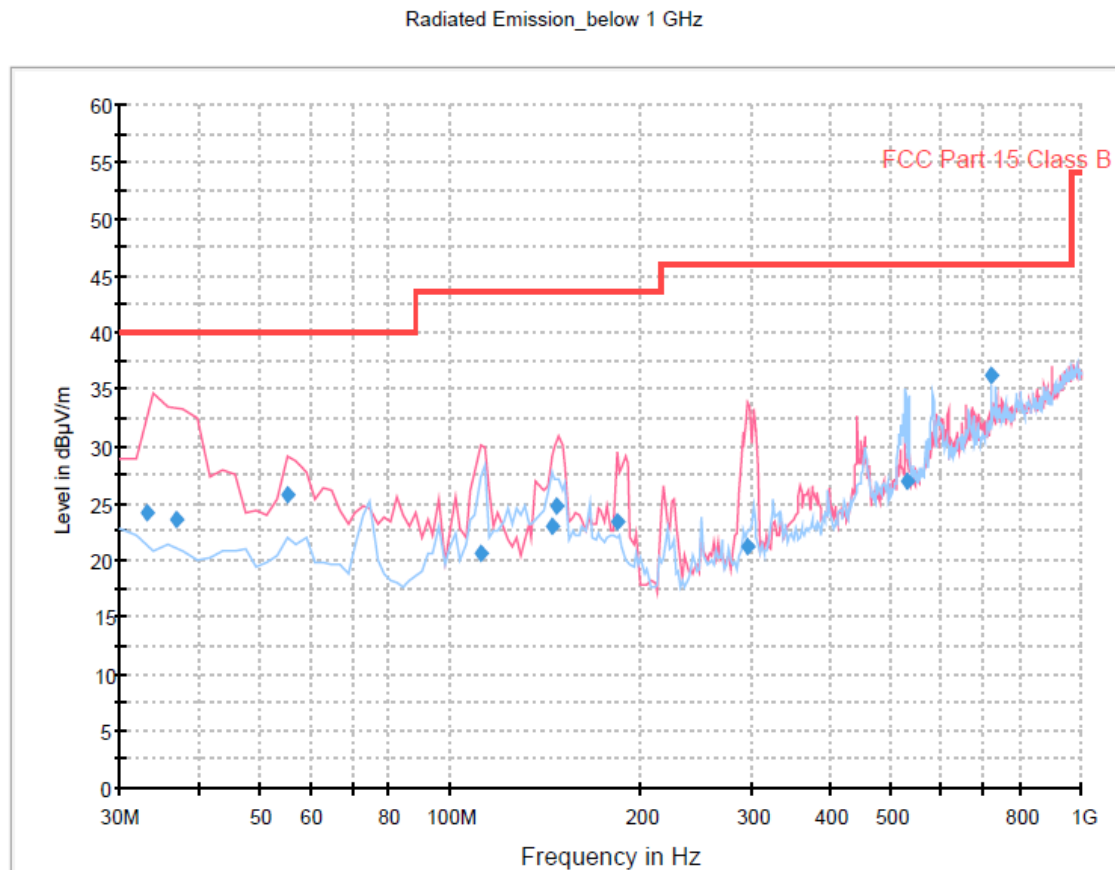


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
33.187776	24.2	1000.0	120.000	100.0	V	205.0	12.9	15.8	40.0
36.891663	23.5	1000.0	120.000	131.0	V	205.0	12.9	16.5	40.0
55.290541	25.8	1000.0	120.000	122.0	V	288.0	13.5	14.2	40.0
112.223287	20.6	1000.0	120.000	100.0	V	357.0	12.4	22.9	43.5
145.589379	23.0	1000.0	120.000	100.0	V	315.0	14.8	20.5	43.5
147.157154	24.8	1000.0	120.000	114.0	V	350.0	14.8	18.7	43.5
184.147134	23.3	1000.0	120.000	100.0	V	130.0	13.6	20.2	43.5
297.012625	21.2	1000.0	120.000	200.0	V	0.0	16.2	24.8	46.0
529.135271	27.0	1000.0	120.000	121.0	H	192.0	22.1	19.0	46.0
720.020160	36.2	1000.0	120.000	100.0	H	200.0	26.7	9.8	46.0

< Fig 16. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)
Green trace: Average detector, Blue trace: Peak detector

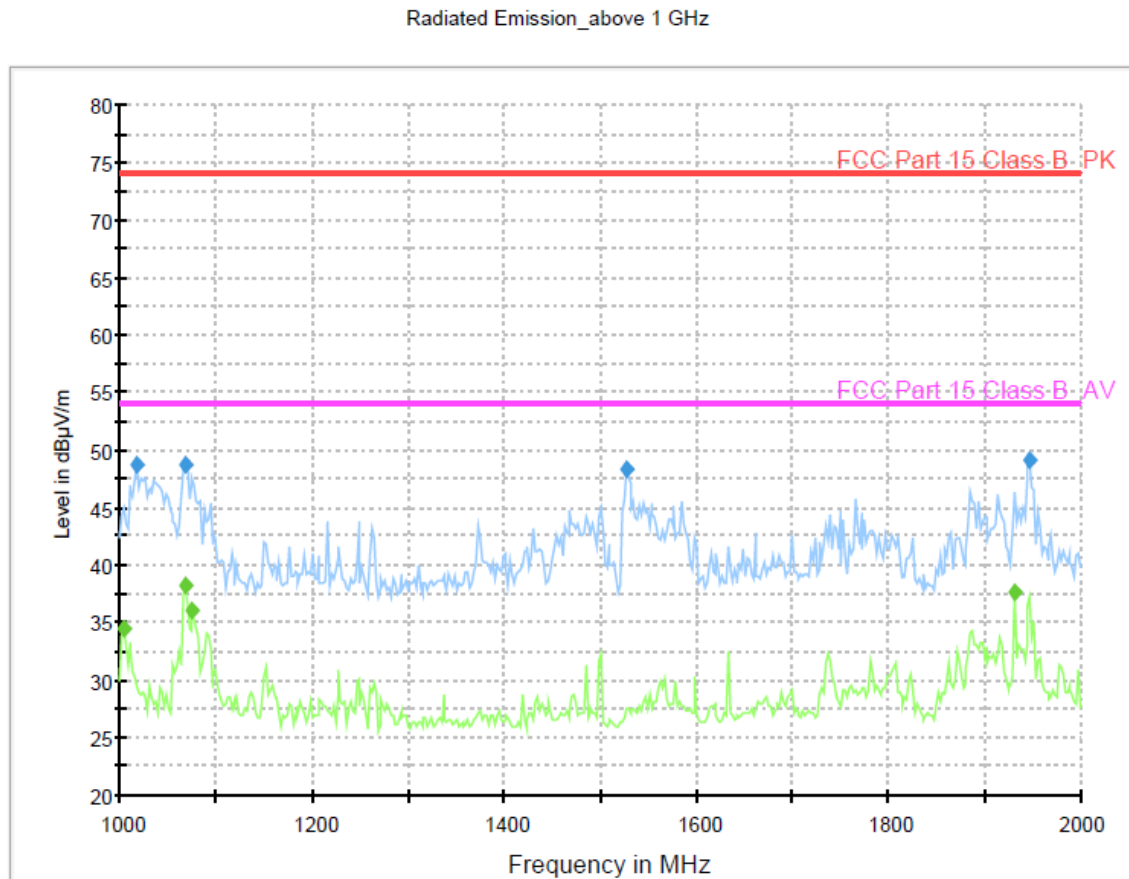

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
1018.036072	48.7	200.0	H	214.0	-15.8	25.3	74.0	
1068.136273	48.7	100.0	V	0.0	-15.5	25.3	74.0	
1527.054108	48.2	150.0	H	241.0	-14.1	25.8	74.0	
1947.895792	49.2	150.0	H	79.0	-12.9	24.8	74.0	


Final Result 2

Frequency (MHz)	Average-MaxHold (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
1004.008016	34.4	100.0	V	339.0	-15.9	19.6	54.0	
1068.136273	38.3	100.0	V	0.0	-15.5	15.7	54.0	
1076.152305	36.0	250.0	V	336.0	-15.5	18.0	54.0	
1931.863727	37.6	100.0	H	138.0	-13.0	16.4	54.0	

< Fig 17. Radiated emission result (1 000 MHz ~ 2 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)
Green trace: Average detector, Blue trace: Peak detector

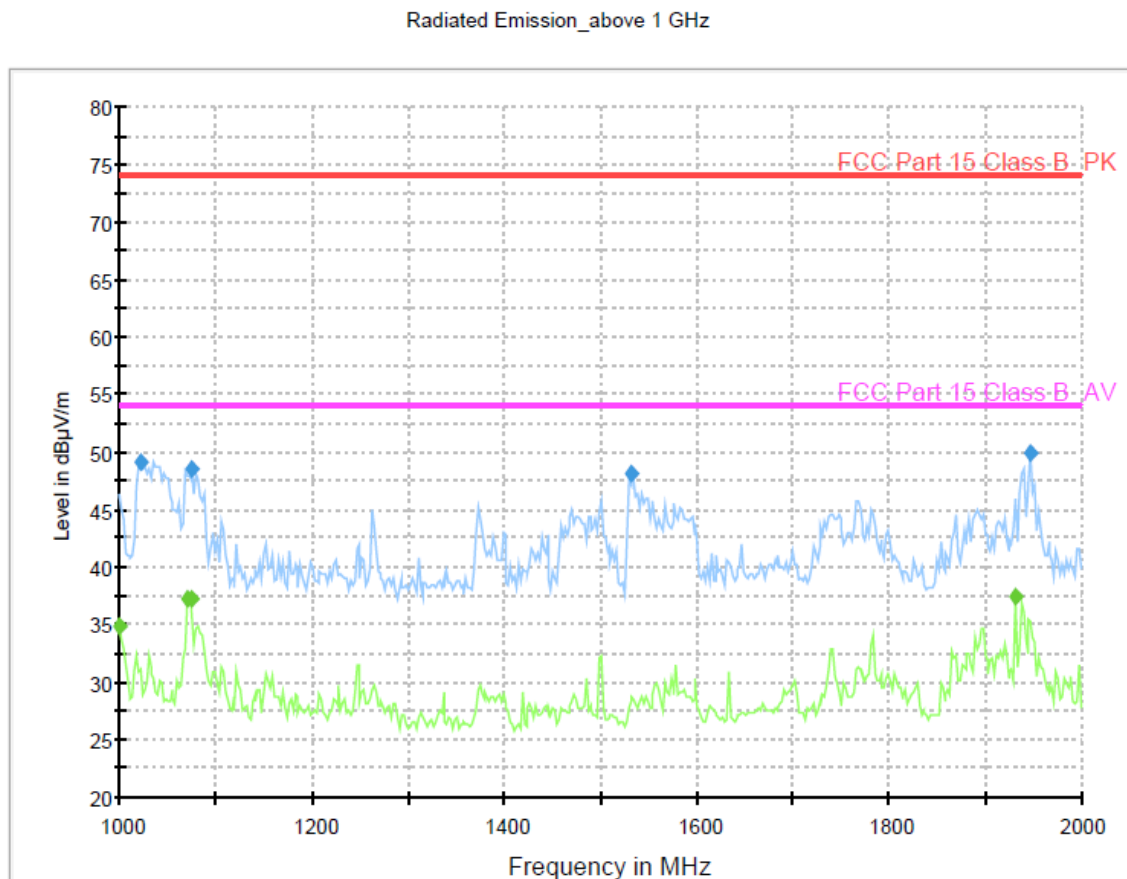

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
1022.044088	49.2	200.0	H	206.0	-15.8	24.8	74.0	
1076.152305	48.6	150.0	V	4.0	-15.5	25.4	74.0	
1533.066132	48.2	150.0	H	244.0	-14.1	25.8	74.0	
1947.895792	49.9	250.0	V	19.0	-12.9	24.1	74.0	


Final Result 2

Frequency (MHz)	Average-MaxHold (dBμV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
1000.000000	34.9	200.0	V	339.0	-15.9	19.1	54.0	
1070.140281	37.3	200.0	V	37.0	-15.5	16.7	54.0	
1074.148297	37.2	150.0	V	4.0	-15.5	16.8	54.0	
1931.863727	37.5	100.0	H	139.0	-13.0	16.5	54.0	

< Fig 18. Radiated emission result (1 000 MHz ~ 2 000 MHz) >



- ◆ Operating Condition: USB memory stick play mode
Green trace: Average detector, Blue trace: Peak detector

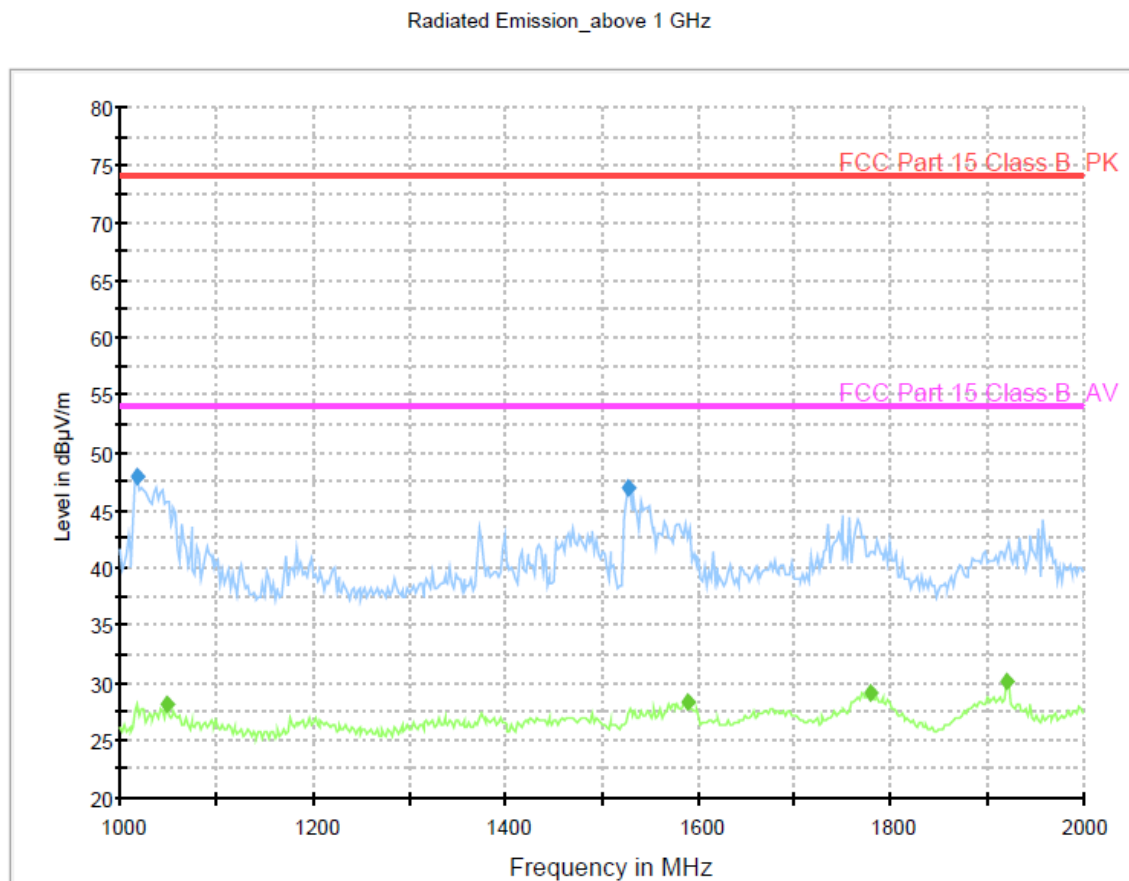

Final Result 1

Frequency (MHz)	MaxPeak-MaxHold (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
1018.036072	47.9	150.0	H	224.0	-15.8	26.1	74.0	
1527.054108	46.8	150.0	H	231.0	-14.1	27.2	74.0	

Final Result 2

Frequency (MHz)	Average-MaxHold (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
1048.096192	28.1	150.0	V	180.0	-15.6	25.9	54.0	
1589.178357	28.2	200.0	V	193.0	-13.7	25.8	54.0	
1779.559118	29.1	150.0	H	244.0	-13.2	24.9	54.0	
1919.839679	30.1	150.0	V	180.0	-13.0	23.9	54.0	

< Fig 19. Radiated emission result (1 000 MHz ~ 2 000 MHz) >



7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss = 5.8 dB	
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ – 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



8. Recommendation & Conclusion

The data collected shows that the **LG Electronics Inc. LCD Monitor (Model Name: M3704CJ)** was complies with §15.107 and 15.109 of the FCC Rules.