



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Test Report

Report Number	ESTR0509-013			
Applicant	Company Name	LG Electronics Inc.		
	Address	459-9, Kasan-dong, Keumchun-ku, Seoul 153-023, Korea		
	Telephone	82-2-850-3860		
Product	Product Name	Single-Band PCS GSM Phone		
	Model No.	M4300, M4410	Manufacturer	LG Electronics Inc.
	Serial No.	NONE	Country of origin	Korea
	Date of Issue	2005-09-21	Date of Test	2005-08-24 ~ 2005-09-21
Testing Lab.	ESTECH. Co., Ltd			
Standard	FCC PART 24 Subpart E			
Tested by	S.R. Kim/ Engineer (Signature) 			
Approved by	Jay Kim/ Engineering Manager (Signature) 			
* Note - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned				

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Table of Contents

ATTACHMENT: TEST RESULT CERTIFICATION-----	1
1. INTRODUCTION-----	3
2. DESCRIPTION OF EUT-----	4
3. DESCRIPTION OF TEST-----	5
 4. TEST DATA	
4.1 EQUIVALENT ISOTROPIC RADIATED POWER (E.I.R.P.)-----	7
4.2 OCCUPIED BANDWIDTH-----	9
4.3 FIELD STRENGTH OF SPURIOUS RADIATION-----	11
4.4 SPURIOUS EMISSION AT ANTENNA TERMINAL-----	14
4.5 FREQUENCY STABILITY-----	16
 5. TEST PLOTS	
5.1 PLOTS OF EMISSIONS-----	17
5.1.1 PLOTS OF EMISSION (GSM): BAND EDGE-----	19
5.1.2 PLOTS OF EMISSION (GSM): OUT OF BAND-----	20



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

1. INSTRUCTION

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and tested in accordance with the measurement procedures as indicated in this report ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab., assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name: ESTECH Co. Ltd.

Head Office: Rm. 1015, World Venture Center II, 426-5, Gansan-dong, Geumcheon-gu, Seoul, 153-803, Korea (**Safety & SAR & Telecom. Test Lab**)

EMC Test Lab.: 58-1, Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea
97-1, Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

2. INTRODUCTION

2.1 Summary of Equipment Under Test

- **FCC ID :** **BEJM4300**

- **Freq. Range :** **Tx : 1850.20 ~ 1909.80 MHz**
 Rx : 1930.20 ~ 1989.80 MHz

- **Power Rating :** **3.7VDC(3.2 ~ 4.3VDC)**

- **EUT Type :** **Single-Band PCS GSM Phone**

- **Modulation(s) :** **GSM**



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

3. DESCRIPTION OF THE DEVICE UNDER TEST

3.1 RF Power Output

The EUT was placed on a wooden turn table 3 meters from the receive antenna. The receive antenna height and turn table rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For reading 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

3.5 Occupied Bandwidth

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% of the Emission bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

3.6 Spurious and Harmonic Emission at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10GHz. Set the RES BW to 1% of the emission bandwidth to show compliance with the -13dBm, limit, in the 1MHz bands immediately outside and adjacent to the top and bottom edges of the frequency block.

For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10xfo of the fundamental carrier for all frequency block. A display line was placed at -13dBm to show compliance for spurious, and harmonics.

3.7 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emission are measured outdoors at our 3 meters test range. The equipment under test is placed on a wooden turntable 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer (or receiver). A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

3. DESCRIPTION OF TEST(CONTINUE)

3.8 Frequency stability (Temperature Variation)

The frequency stability of the transmitter is measured by:

a) Temperature: The temperature is varied from -30 °C to +60 °C using an environmental chamber.

b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

※ The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 2.5 ppm of the center frequency.

Time Period and Procedure

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (22 °C to 25 °C to provide a reference.)
2. The equipment is subjected to an overnight “soak” at -30 °C without any power applied.
3. After the overnight “soak” at -30 °C (usually 14 – 16hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting -30 °C up to +50 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.



4. TEST DATA

4.1 EQUIVALENT ISOTROPIC RADIATED POWER (E.I.R.P.)

MEASUREMENT INSTRUMENTS

EQUIPMENT	MANUFACTURE	MODEL NO.
Receiver	Rohde & Schwarz	ESP17
Signal Generator	HP	83620B
Power Meter	HP	EPM-442A
Wireless Communications Test Set	Agilent	E5515C
Pre Amplifier	SONOMA INSTRUMENT	310N
Horn Antenna	SCHWARZBECK	BBHA 9120 D
Horn Antenna	SCHWARZBECK	BBHA 9120 D

*TEST RESULT

- Company Name: LG Electronics Inc.
- EUT Description: Single-Band PCS GSM Phone

GSM

	Ch No.	Freq (MHz)	Peak Power Meter(dBm)	Peak Power EIRP(dBm)
Low Ch.	512	1850.20	30.02	28.46
Mid Ch	661	1880.00	29.72	26.28
High Ch	810	1909.80	29.80	27.45

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204

4. TEST DATA(CONTINUED)

FREQ (MHz)	Receiver Reading (dBuV)	Correction Factor (dB)		Peak Value (dBm)		Limit (dBm)	POL (H/V)
		Antenna gain(dBi)	CL (dB)	SG Reading	Result		
1850.20	99.00	10.40	4.30	22.36	28.46	33	V
1880.00	98.17	10.40	4.43	20.31	26.28	33	V
1909.80	97.17	10.40	4.50	21.55	27.45	33	V

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204

4. TEST DATA(CONTINUED)

4.2 OCCUPIED BANDWIDTH


* MEASUREMENT INSTRUMENTS

EQUIPMENT	MANUFACTURE	MODEL NO.
Spectrum Analyzer	Agilent	E4407B
Dual Directional Coupler	HP	778D
Wireless Communications Test Set	Agilent	E5515C

Test Result:

Channel	Frequency(MHz)	26dB BW(kHz)
512	1850.20	304.52
661	1880.00	303.31
810	1909.80	302.52

26dB BANDWIDTH (CH 512)

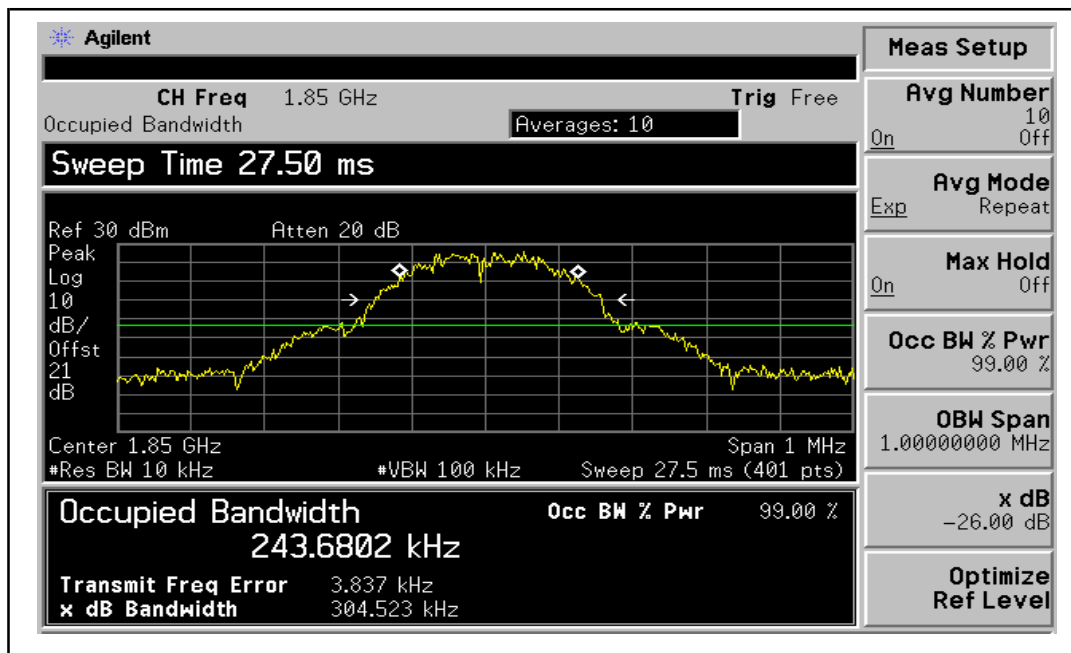


**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea


TEL: 82-2-867-3201
FAX: 82-2-867-3204

4. TEST DATA(CONTINUED)

26dB BANDWIDTH (CH 661)

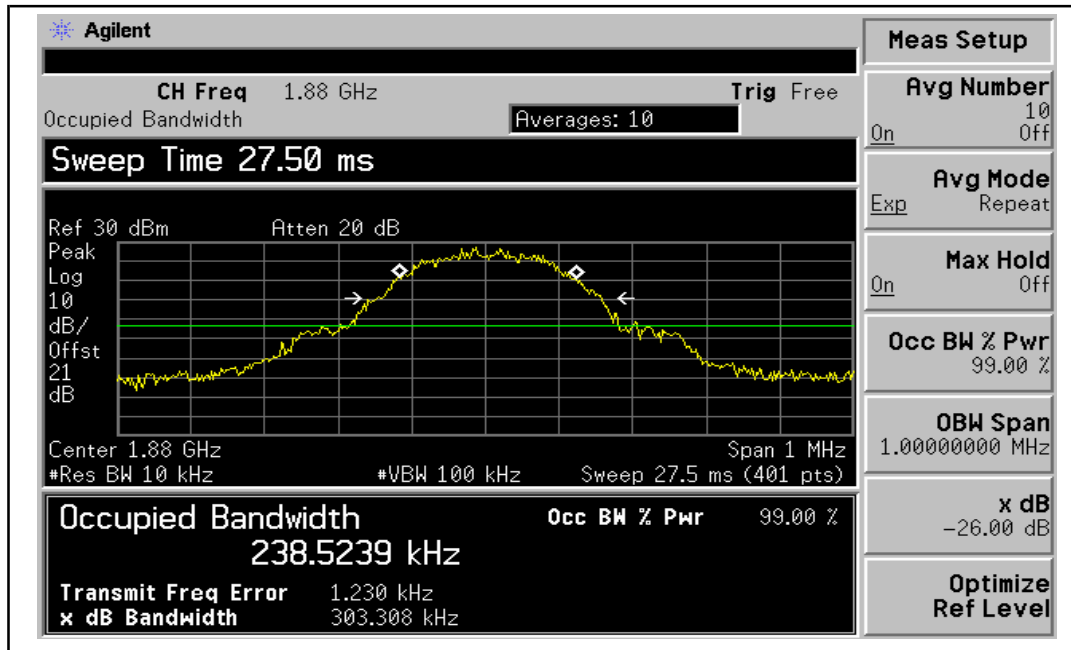

26dB BANDWIDTH (CH 810)

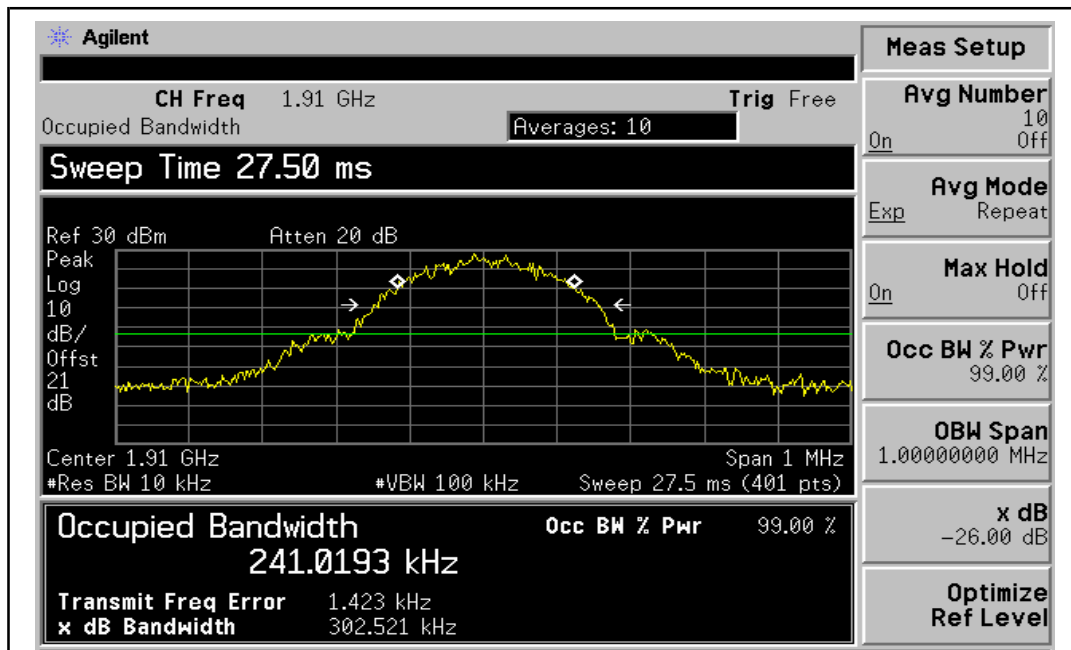



4. TEST DATA(CONTINUE)

4.3 FIELD STRENGTH OF SPURIOUS RADIATION

a) MEASUREMENT INSTRUMENTS

EQUIPMENT	MANUFACTURE	MODEL NO.
Receiver	Rohde & Schwarz	ESP17
Signal Generator	HP	83620B
Pre Amplifier	SONOMA INSTRUMENT	310N
Wireless Communications Test Set	Agilent	E5515C
Horn Antenna	SCHWARZBECK	BBHA 9120 D
Horn Antenna	SCHWARZBECK	BBHA 9120 D

b) MEASUREMENT PROCEDURE

The EUT was placed on a wooden turn table 3 meters from the receive antenna. The receive antenna height and turn table rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading (or receiver). This spurious level is recorded.

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204

4. TEST DATA(CONTINUED)

GSM (CH 512)

FREQ (MHz)	Receiver Reading (dBuV)	Correction Factor (dB)		Peak Value (dBm)		Limit (dBm)	POL (H/V)
		Antenna gain(dBd)	CL (dB)	SG Reading	Result		
3700.40	65.00	12.69	5.44	-45.71	-38.46	-13.0	V
5550.60	57.33	13.12	6.42	-49.42	-42.72	-13.0	V

GSM (CH 661)

FREQ (MHz)	Receiver Reading (dBuV)	Correction Factor (dB)		Peak Value (dBm)		Limit (dBm)	POL (H/V)
		Antenna gain(dBd)	CL (dB)	SG Reading	Result		
3760.00	66.33	12.72	5.44	-42.30	-35.02	-13.0	V
5640.00	59.33	13.13	6.42	-46.00	-39.29	-13.0	V

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

4. TEST DATA(CONTINUED)

GSM (CH 810)

FREQ (MHz)	Receiver Reading (dBuV)	Correction Factor (dB)		Peak Value (dBm)		Limit (dBm)	POL (H/V)
		Antenna gain(dBd)	CL (dB)	SG Reading	Result		
3819.60	60.67	12.77	5.44	-47.87	-40.54	-13.0	V
5729.40	52.00	13.11	6.42	-51.76	-45.07	-13.0	V



4. TEST DATA(CONTINUED)

4.4 SPURIOUS EMISSION AT ANTENNA TERMINAL

a) MEASUREMENT INSTRUMENTS

EQUIPMENT	MANUFACTURE	MODEL NO.
Spectrum Analyzer	Agilent	E4407B
Wireless Communications Test Set	Agilent	E5515C
Dual Directional Coupler	HP	778D

b) MEASUREMENT PROCEDURE

The EUT's RF output connector (made solely for the purpose of the test) is connected to the spectrum analyzer, and set as close as possible to the bottom of the block edge and one set as close as possible to the top of the block edge. Set the RES BW to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the top and bottom edges of the frequency block.

For the Out-of-Band measurements a 1MHz RES BW was used to scan from 15MHz to 10 x fo the fundamental carrier for all frequency block. A display line was placed at -13dBm to show compliance for spurious, and harmonics.

*TEST RESULT

- EUT Description: Single-Band PCS GSM Phone

GSM(Spurious Emission: Block Edge)

Freq (MHz)	Channel	Measurement Value (dBm)	Limit(dBm)	Margin (dB)
1850.20	512	-23.50	-13.00	-10.50
1909.80	810	-24.04	-13.00	-11.04



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

4. TEST DATA(CONTINUED)

GSM (Spurious Emission: Out of Band)

Freq (MHz)	Channel	Measurement Value (dBm)	Limit(dBm)	Margin (dB)
1850.20	512	-26.57	-13.00	-13.57
1880.00	661	-26.90	-13.00	-13.90
1909.80	810	-26.19	-13.00	-13.19

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204

4. TEST DATA(CONTINUED)

4.5 FREQUENCY STABILITY (GSM)

OPERATING FREQUENCY: 1,880,000,000 Hz
CHANNEL: 661
REFERENCE VOLTAGE: 3.70 VDC
DEVIATION LIMIT $\pm$ 0.00025 % or 2.5ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ (Hz)	Deviation (%)
100	3.70	+20 °C (Ref)	1,880,000,002	0.000000
100		-30	1,879,999,958	0.000002
100		-20	1,879,999,960	0.000002
100		-10	1,879,999,967	0.000002
100		0	1,879,999,954	0.000003
100		+10	1,879,999,972	0.000002
100		+20	1,880,000,002	0.000000
100		+25	1,879,999,970	0.000002
100		+30	1,879,999,962	0.000002
100		+40	1,879,999,970	0.000002
100		+50	1,879,999,962	0.000002
100		+60	1,879,999,978	0.000001
85	3.15	+20	1,879,999,982	0.000001
115	4.26	+20	1,879,999,974	0.000001
BATT ENDPOINT	3.00	+20	1,879,999,968	0.000002

**ESTECH Co., Ltd.**


Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204


5. TEST PLOTS

5.1.1 PLOTS OF EMISSION (GSM): BAND EDGE

Ch 512

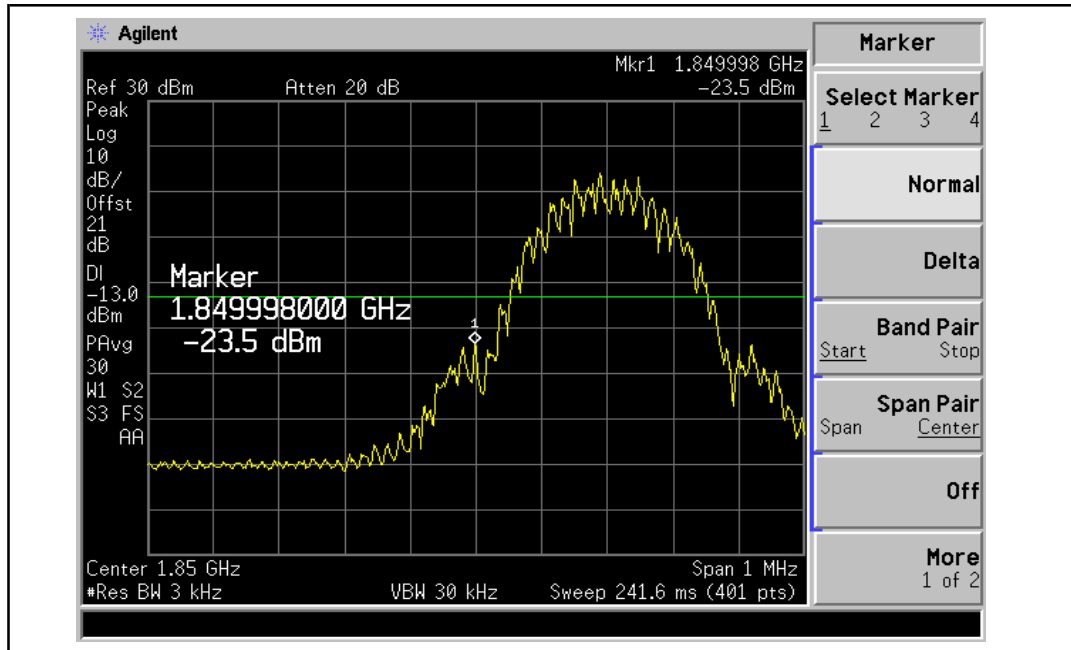

Ch 810

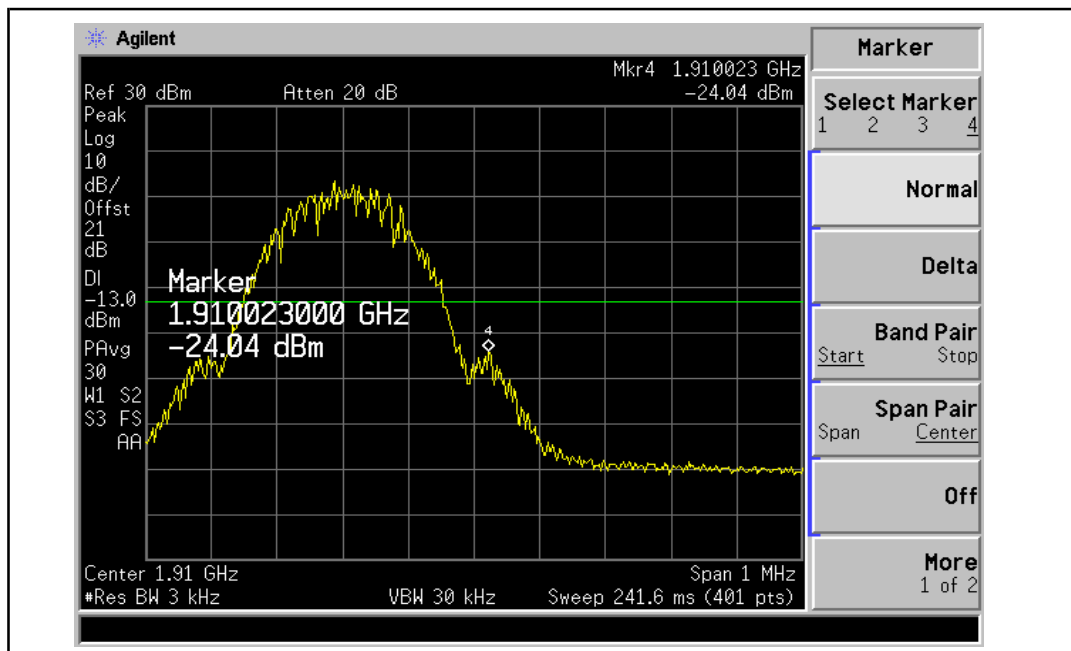



ESTECH Co., Ltd.



Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

5. TEST PLOTS (CONTINUED)

5.1.2 PLOTS OF EMISSION (GSM): OUT OF BAND



Ch 512

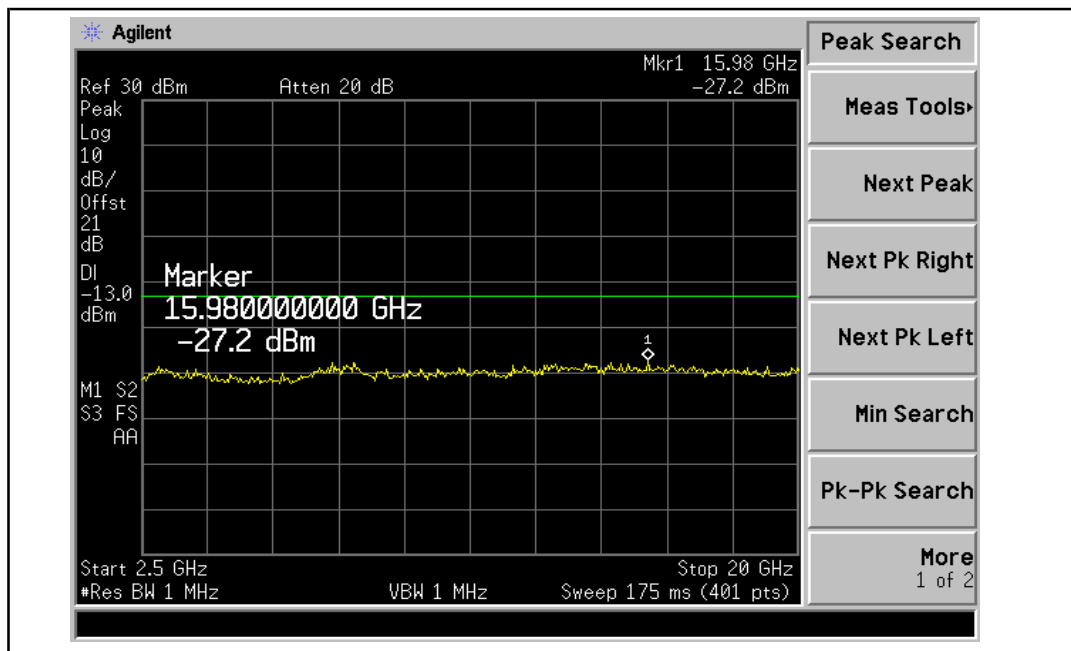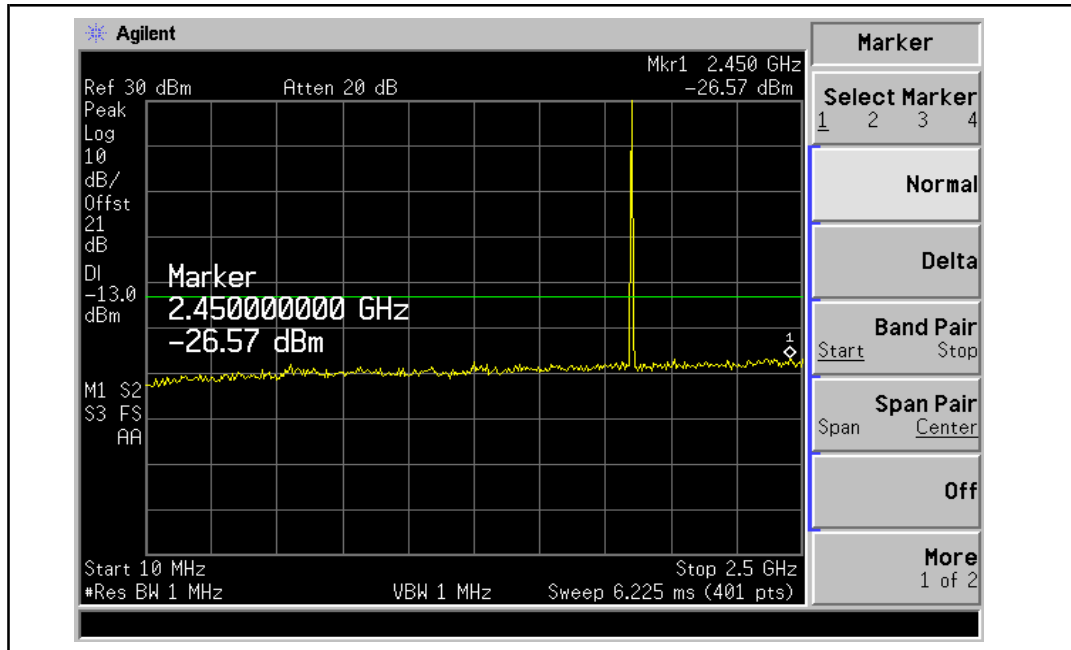

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II, TEL: 82-2-867-3201
426-5, Gasan-dong, Geumcheon-gu, FAX: 82-2-867-3204
Seoul, 153-803, Korea

5. TEST PLOTS (CONTINUED)

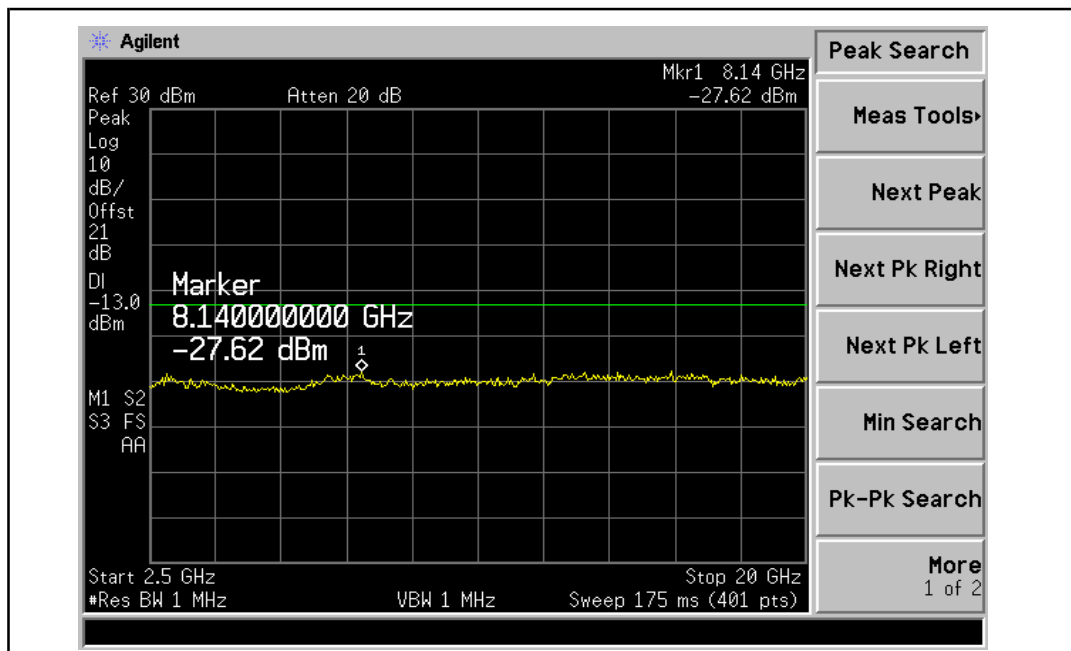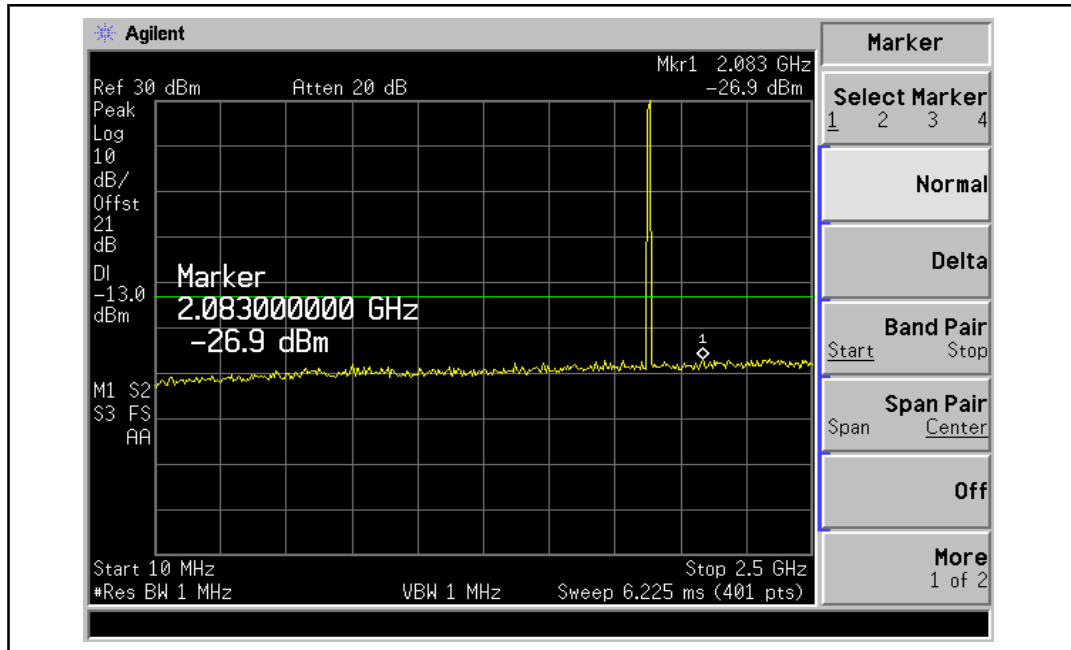Ch 661

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II, TEL: 82-2-867-3201
426-5, Gasan-dong, Geumcheon-gu, FAX: 82-2-867-3204
Seoul, 153-803, Korea

5. TEST PLOTS (CONTINUED)

Ch 810

