



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

SAR Compliance Test Report

APPLICANT NAME & ADDRESS :

LG Electronics Inc.
459-9, Kasan-dong, Keumchun-ku,
Seoul 153-023, Korea

DATA & LOCATION OF TESTING

Dates of testing : 2006 2/14 ~ 2/24
Test Site : ESTECH Co., Ltd. Korea

Test Device :

Models : MG100, MG100a, MG100c, MG100d

FCC ID : BEJMG100

TYPE : GSM Phone (Prototype)

Test report no :

ESTSAR0602-007

Number of page :

25

Contact person :

Bong Hyo, Han

Responsible test Engineer :

K.H.Kang

Testing has been
Carried out in
Accordance with :

IEEE P1528-200X Draft 6.4
Recommended Practice for Determining the Peak Spatial-Average Specific
Absorption Rate(SAR) in the Human Body Due to Wireless Communications
Device : Experimental Techniques

Applicant Type :

Certification

FCC CLASSIFICATION :

Licensed Non-Broadcast Transmitter Held to Ear (TNE)
Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s)

§2.1093; FCC/OET Bulletin 65 Supplement C (July 2001)

Test results :

The Tested device complies with the requirements in respect of all
parameters subject to the test. The test results and statements relate only
to the items tested. The test report shall not be reproduced receipt in full,
without written approval of the laboratory.

Date and Signatures : 2006/2/24

Report Prepared By : Engineer/ K.H.Kang

(Signature)

Manager Engineer/ Jay Kim

(Signature)

Test report no : ESTSAR0602-007

FCC ID : BEJMG100

Web : www. estech. co. kr

Page 1 of 25



Table of Contents

1. SUMMARY FOR SAR TET REPORT	3
1.1 Head Configuration	3
1.2 Body Worn Configuration	3
1.3 Measurement Uncertainty	3
2. INTRODUCTION	4
3. DESCRIPTION OF THE DEVICE UNDER TEST	5
3.1 Antenna Description	5
3.2 Device Description	5
3.3 Battery Option	5
4. TEST CONDITIONS	6
4.1 Ambient Conditions	6
4.2 RF Characteristics of The Test Site	6
4.3 Test Signal, Frequencies, And Output Power	6
5. DESCRIPTION OF THE TEST EQUIPMENT	7
5.1 Test System Specifications	7
5.2 SAR Measurement Setup	7
5.3 DASY 4 E-Field Probe System	8
5.4 Phantom & Equivalent Tissues	10
6. DESCRIPTION OF THE TEST PROCEDURE	12
6.1 Definition of Reference Point	12
6.2 Test Configuration Positions	13
6.3 Scan Procedures	16
6.4 SAR Averaging Methods	16
7. MEASUREMENT UNCERTAINTY	17
8. SYSTEM VERIFICATION	18
8.1 Tissue Verification	18
8.2 Test System Validation	18
9. RESULTS	19
10. REFERENCES	25
APPENDIX A : Validation Test Data of Tissue	
APPENDIX B : Validation Test Data	
APPENDIX C : SAR Test Data	
APPENDIX D : Calibration Certificates	



1. SUMMARY FOR TEST REPORT

FCC ID	BEJMG100
Date of test	2006/2/14 ~ 2006/2/24
Responsible test engineer	Jay Kim
Measurement performed by	K.H.Kang
EUT Type	GSM Phone (Prototype)
Tx Frequency	824.2 ~ 848.8MHz(GSM850), 1850.2 ~ 1909.8 MHz(PCS1900)
Rx Frequency	869.2 ~ 893.8MHz(GSM850), 1930.2 ~ 1989.8 MHz(PCS1900)
Max. RF Output Power	GSM (33 dBm) PCS (30 dBm)

Maximum Results Found During SAR Evaluation

1.1 Head Configuration

Max. SAR Measurement

FREQUENCY		Modulation	Conducted Power(dBm)		Device test position	Antenna position	SAR (W/kg)
MHz	Ch		dBm	Battery			
836.6	190	GSM	33	Standard	Left Touch	—	0.926
1880.0	661	GSM	30	Standard	Left Tilt	—	0.772

1.2 Body Worn Configuration

Max. SAR Measurement

FREQUENCY		Modulation	Conducted Power(dBm)		Separation test position	Antenna position	SAR (W/kg)
MHz	Ch		dBm	Battery			
824.2	128	GSM	33	Standard	1.5cm [w/o Holster]	—	0.88
1850.2	512	GSM	30	Standard	1.5cm [w/o Holster]	—	0.526

1.3 Measurement Uncertainty

Combine Standard Uncertainty	± 10.81 (k=1)
Extended Standard Uncertainty	± 21.62 (k=2, 95% CONFIDENCE LEVEL)



2. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable device.[1]

The safety limits used for the environmental evaluation measurements are the criteria published by the based on American National Standards Institute (ANSI) For localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for safety Levels with Respect to Human Exposure to Radio Frequency Electronic Fields, 3 kHz to 300 GHz. (c) 1992 by the institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields,” NCRP Report No. 86 (c) NCRP, 1986, Bethesda, MD 20814.[6] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). it is also defined as the rate of rf energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1.).

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

Where:

σ = conductivity of the tissue-simulant material (S/m)

E = mass density of the tissue-simulant material (kg/m³)

ρ = Total RMS electric field strength (V/m)

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204

3. DESCRIPTION OF THE DEVICE UNDER TEST

The FCC rules for evaluating portable devices for RF exposure compliance are contained in 47 CFR §2.1093. For purposes of RF exposure evaluation, a portable device is defined as a transmitting device designed to be used with any part of its radiating structure in direct contact with the user's body or within 20 centimeters of the body of a user or bystanders under normal operating conditions. This category of devices would include hand-held cellular and PCS telephones that incorporate the radiating antenna into the hand-piece and wireless transmitters that are carried next to the body. Portable devices are evaluated with respect to SAR limits for RF exposure. The applicable SAR limit for portable transmitters used by consumers is 1.6 watts/kg, which is averaged over any one gram of tissue defined as a tissue volume in the shape of a cube.

2.1 Antenna Description

Type	Internal Antenna
Location	the top of the device
Radiator Material	Copper

2.2 Device Description

FCC ID	FCC ID : BEJMG100
Serial numbers	511KPPB235992-IND-P40
Exposure environment	Uncontrolled exposure
Device category	Portable device
Mode(s) of Operation	GSM / GPRS
Modulation Mode(s)	GSM
Duty Cycle	8.3
Transmitting	824.2 ~ 848.8MHz(GSM850), 1850.2 ~ 1909.8 MHz(PCS1900)
Frequency Range(s)	
test signal method	☒ Base station simulator ☐ Internal test code

2.3 Battery Options

There is only one battery option available for tested device,



4. TEST CONDITIONS

4.1 Ambient Conditions

Ambient Temperature (°C)	22
Tissue simulating liquid temperature (°C)	22
Humidity (%)	47

4.2 RF Characteristics of The Test Site

Tests were performed in a fully enclosed RF Shielded environment

4.3 Test Signal, Frequencies, And Output Power

The handset was placed into simulated call mode (850MHz GSM, 1900MHz PCS modes) using manufacturers test codes.

In all operation bands the measurements were performed on lowest, middle and highest channels.

The phone was set to maximum power level during the all tests and at the beginning of the each test the battery was fully charged.

DASY4 system measures power drift during SAR testing by comparing e-field in the same location at the beginning and at the end of measurement. These records were used to monitor stability of power output.

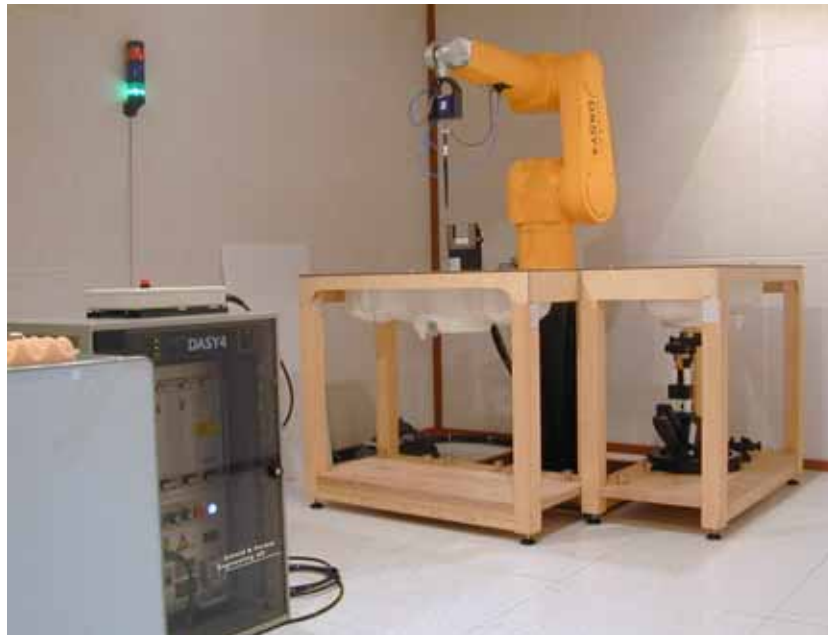


Fig. 4.1 SAR Measurement System



5. DESCRIPTION OF THE TEST EQUIPMENT

An SAR measurement system usually consists of a small diameter isotropic electric field probe, a multiple axis probe positioning system, a test device holder, one or more phantom models, the field probe instrumentation, a computer and other electronic equipment for controlling the probe and making the measurements. Other supporting equipment, such as a network analyzer, power meters and RF signal generators, are also required to measure the dielectric parameters of the simulated tissue media and to verify the measurement accuracy of the SAR system.

5.1 Test System Specifications

Test Equipment	Model	Serial Number	Cal. date
DAE	DAE3	551	2004-04-28
E-Field Probe	ET3DV6	1750	2006-01-24
Dipole validation kit	D1900V2	5d058	2005-01-27
Network analyzer	8753ES	NONE	2005-10-17
Signal generator	E4421B	GB40052295	2005-03-03
RF Power meter	EPM-442A	GB37170412	2005-10-05
Power Sensor	8481A	3318A90368	2005-10-05
RF Power meter	E4418A	GB38272722	2005-03-03
Power Sensor	8481A	3318A96478	2005-03-03
Dielectric Probe	85070D	US01440154	-

5.2 SAR Measurement Setup

Measurement are performed using the DASY4 dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG(SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium IV computer, near-field probe, probe alignment sensor, and the SAM twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field(EMF) (see Fig. 5.1) A cell controller system contains the power supply, robot controller, teach pendant(Joystick), and a remote control used to drive the robot motors. The pc consists of the Intel Pentium IV 2.4 GHz computer with Windows2000 system and SAR measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc.

5. DESCRIPTION OF THE TEST EQUIPMENT(continued)

Is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

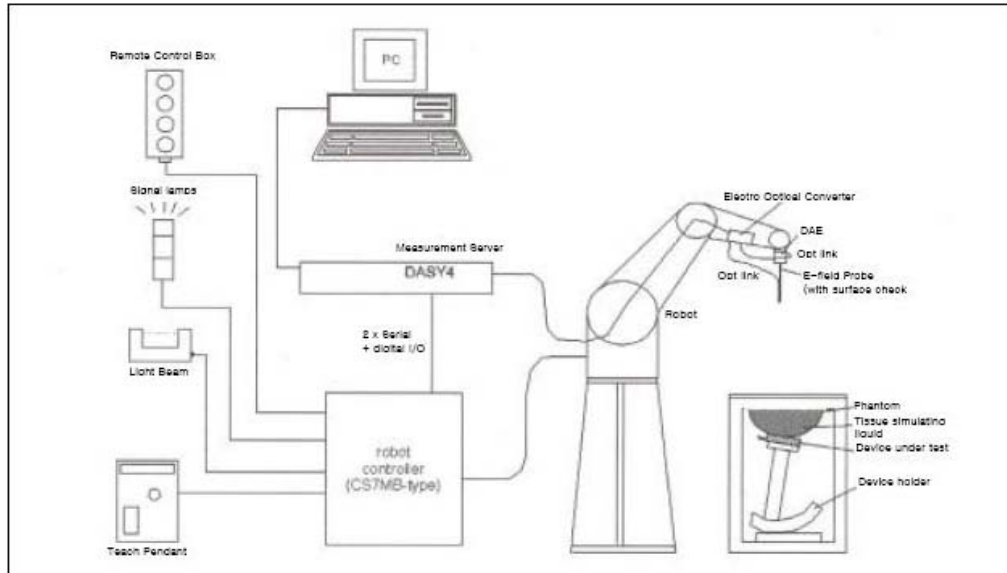


Fig. 5.1 SAR Measurement System Setup

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gainswitching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [7].

5.3 DASY4 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration [7] (see Fig.5.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box in the robot arm and provides an automatic detection transmitter, the other half to a synchronized receiver.



5. DESCRIPTION OF THE TEST EQUIPMENT(continued)

As the probe approach the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches coupling is zero. The distance of the coupling maximum to the surface is probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Table. 5.2). The approach is stopped at reaching the maximum.

 Isotropic E-Field Probe	Isotropic E-Field Probe for Dosimetric Measurements	
	Construction	Symmetrical design with triangular core Interleafed sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycol)
	Calibration	In air from 10 MHz to 3 GHz In brain and muscle simulating tissue at frequencies of 450 MHz, 900 MHz and 1.8 GHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request
	Frequency	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
	Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.3 dB in brain tissue (rotation normal to probe axis)
	Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
	Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm Distance from probe tip to dipole centers: 2.7 mm

Fig. 5.2 Probe Specifications



5. DESCRIPTION OF THE TEST EQUIPMENT(continued)

5.4 Phantom & Equivalent Tissues

SAM Phantom

The SAM Twin Phantom V4.0 is constructed of the fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Head & Muscle simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose(HEC) gelling agent and saline solution (see Table 5.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been specified in P1528 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations The mixture characterizations used for the brain and muscle tissue simulation liquids are according to the data by C. Gabriel and G. Hartagrove [13]. (see Fig. 5.3)

Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.8
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.9	55.2	0.97
900	41.5	0.97	55	1.05
915	41.5	0.98	55	1.06
1450	40.5	1.2	54	1.3
1610	40.3	1.29	53.8	1.4
1800-2000	40	1.4	53.3	1.52
2450	39.2	1.8	52.7	1.95
3000	38.5	2.4	52	2.73
5800	35.3	5.27	48.2	6

Fig.5.3 Head and body tissue parameters by the IEEE SCC-34/SC-2 in P1528

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204**5. DESCRIPTION OF THE TEST EQUIPMENT(continued)**

835MHz			1900MHz		
	Head	Body		Head	Body
Sugar	47.31%	34.31%	DGBE(diethylene Glycol buty Ether)	44.91%	29.96%
Deionized water	51.07%	65.45%	Deionized water	54.88%	69.91%
Salt	1.15%	0.62%	Salt	0.21%	0.13%
HEC (hydroxyethyl cellulose)	0.24%				
Preventol	0.24%	0.10%			
ϵ	$41.0 \pm 5\%$	$55.2 \pm 5\%$	ϵ	$40.0 \pm 5\%$	$53.3 \pm 5\%$
σ	$0.89 \pm 10\%$	$0.97 \pm 10\%$	σ	$1.45 \pm 10\%$	$1.52 \pm 10\%$

Fig. 5.4 Composition of the Tissue Equivalent Matter**Device Holder for Transmitters**

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the accurately, and repeatably be positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

Note : A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [12]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



6. DESCRIPTION OF THE TEST PROCEDURE

6.1 Definition of Reference Point

EAR Reference point

The point “M” is the reference point for the center of the mouth, “ERP” is the ear reference point. The ERP are 15mm posterior to the entrance to the ear canal(EEC) along the B-M line (Back-Mouth), as shown is figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the ERP is called the Reference Pivoting Line (see Figure 6.1) B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

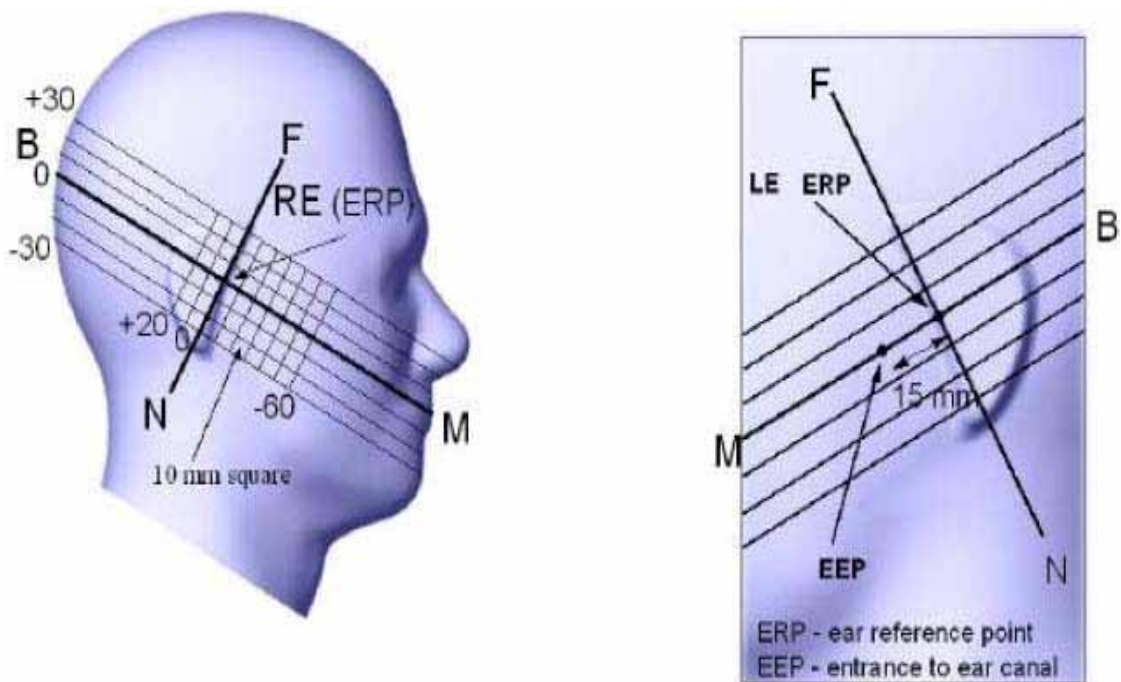


Figure 6.1 Close-up side view of ERP

Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (see Fig. 6.2). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

6. DESCRIPTION OF THE TEST PROCEDURE(continued)

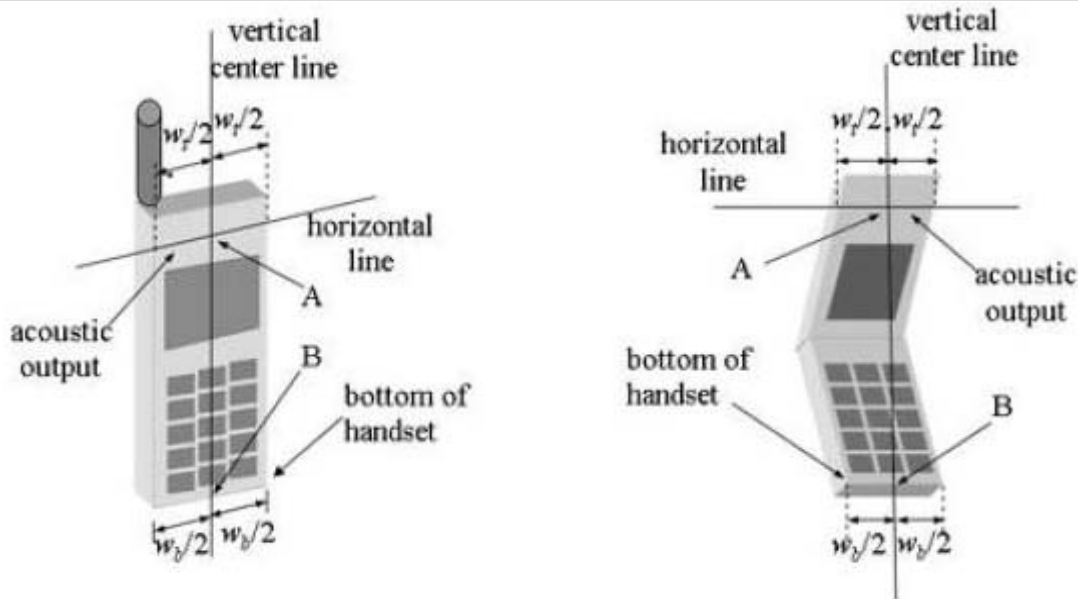


Figure 6.2 Handset Vertical Center & Horizontal Line Reference Points

6.2 Test Configuration Positions

Positioning for Cheek/Touch

- 1) Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover. (If the phone can also be used with the cover closed, both configurations must be tested.)
- 2) Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Figures 6.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2), especially for clamshell handsets, handsets with lip pieces, and other irregularly-shaped handsets.
- 3) Position the handset close to the surface of the phantom touch that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.3), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

6. DESCRIPTION OF THE TEST PROCEDURE(continued)

- 4) Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear.
- 5) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 6) Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF.
- 7) While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point

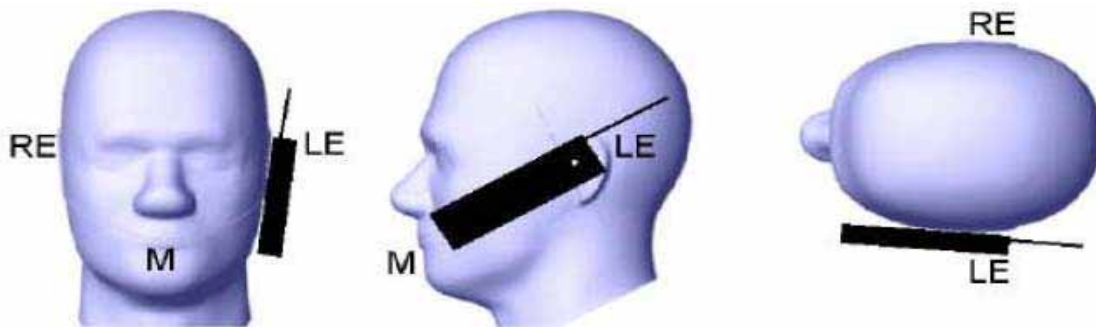


Figure 6.3 "Cheek" or "Touch" Position.

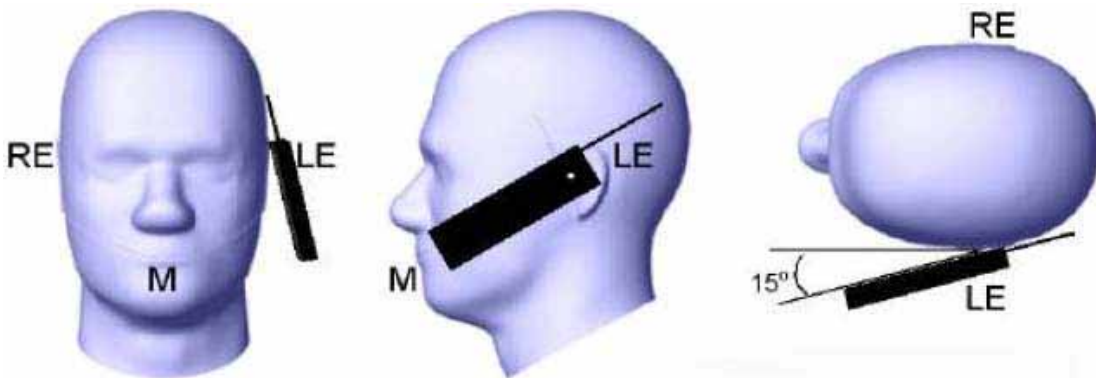


Figure 6.4 "Tilted" Position.



6. DESCRIPTION OF THE TEST PROCEDURE(continued)

Positioning for Ear / 15° Tilted

- 1) Repeat steps 1 to 7 of 6.2(Positioning for Cheek/Touch) to place the device in the “cheek position.”
- 2) While maintaining the orientation of the phone retract the phone parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
- 3) Rotate the phone around the horizontal line by 15 degree.
- 4) While maintaining the orientation of the phone, move the phone parallel to the reference plane until any part of the phone touches the head. (In this position, point A will be located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the phone shall be reduced. The tilted position is obtained if any part of the phone is in contact of the ear as well as a second part of the phone is contact with the head.

Body Holder / Belt Clip Configurations

Body-worn operation configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied of available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration. In all case SAR measurements are performed to investigate the worst case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

In order for users to be aware of the body-worn operation requirements for meeting RF exposure compliance, operation instructing instructions and cautions statements are included in the user's manual.



6. DESCRIPTION OF THE TEST PROCEDURE(continued)

6.3 Scan Procedures

First coarse scans are used for quick determination of the field distribution. Nest cube scan, 7x7x7 points; spacing between each point 5x5x5 mm, is performed around the highest E-field value to determine the averaged SAR-distribution over 1g.

6.4 SAR Averaging Methods

The maximum SAR value is averaged over its volume using interpolation and extrapolation.

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a Knot" condition [W.Gander, Computermathematik, p. 141-150](x, y and z directions) [Numerical Recipes in C, Second Edition, p 123].

The extrapolation is based on least square algorithm [W.Gander, Computermathematik, p. 168-180]. Through the points in the first 30 mm in all z-axis, polynomials of order four are calculated. This polynomial is then used to evaluate the points between the surface and the probe tip. The points calculated from the surface, have a distance of 1mm from one another.



7. MEASUREMENT UNCERTAINTY

According to CENELEC [17], typical worst-case uncertainty of field measurements is 5 dB.

For well-defined modulation characteristics the uncertainty can be reduced to 3 dB.

ERROR Description	Uncertainty	Probability	Divisor	ci 1	Standard unc.	vi or
	value ±%	Distribution		1g	(1g)	Veff
MEASUREMENT SYSTEM						
Probe Calibration	± 11.7 %	normal	1	1	± 4.8 %	∞
Axial Isotropy	± 4.7	rectangular	√3	(1-cp) ^{1/2}	± 1.9%	∞
Hemispherical Isotropy	± 9.6	rectangular	√3	(cp) ^{1/2}	± 3.9%	∞
Boundary Effects	± 1.0	rectangular	√3	1	± 0.6%	∞
Linearity	± 4.7	rectangular	√3	1	± 2.7%	∞
System Detection Limits	± 1.0	rectangular	√3	1	± 0.6%	∞
Readout Electronics	± 1.0	normal	1	1	± 1.0%	∞
Response time	± 0.8	rectangular	√3	1	± 0.5%	∞
Integration time	± 2.6	rectangular	√3	1	± 1.5%	∞
RF Amnient Conditions	± 3.0	rectangular	√3	1	± 1.7%	∞
Probe Positioner Mechanical Tolerance	± 0.4	rectangular	√3	1	± 0.2%	∞
Probe Positioning with respect to Phantom Shell	± 2.9	rectangular	√3	1	± 1.7%	∞
Extrapolation, Interpolation and Integration Algorithms for Max. SAR Evaluation	± 1.0	rectangular	√3	1	± 0.6%	∞
Test Sample Related						
Test Sample Positioning	± 2.9	normal	1	1	± 2.97%	145
Device Holder Uncertainty	± 3.6	normal	0.84	1	± 3.69%	5
Output Power Validation – SAR drift measurement	± 5.0	rectangular	√3	1	± 2.9%	∞
Phantom and Tissue Parameters						
Phantom Uncertainty (shape and thickness tolerances)	± 4.0	rectangular	√3	1	± 2.3%	∞
Liquid conductivity Target – tolerance	± 5.0	rectangular	√3	0.64	± 1.8%	∞
Liquid Conductivity – measurement uncertainty	± 2.5	normal	1	0.64	± 1.6%	∞
Liquid permittivity Target – tolerance	± 5.0	rectangular	√3	0.6	± 1.7%	∞
Liquid Permittivity – measurement uncertainty	± 2.5	normal	1	0.6	± 1.5%	∞
Combined Standard Uncertainty					±11.32 %	330
Coverage Factor for 95%				K = 2		
Expanded Standard Uncertainty					± 22.64 %	



8. SYSTEM VERIFICATION

Tissue Verification

Table 8.1 Simulated Tissue Verification [5]

MEASURED TISSUE PARAMETERS										
Liquid Temperature (°C)		22		Liquid Depth(mm)		150				
Date	2006-2-23	2006-2-23		2006-2-22		2006-2-22				
Tissue	1900MHz Brain	1900MHz Muscle		835MHz Brain		835MHz Muscle				
	Target	Measured	Target	Measured	Target	Measured	Target	Measured		
Dielectric Constant: ϵ	40	39.5	53.3	51.6	41.5	40.3	55.2	53.2		
Conductivity: σ	1.45	1.4	1.52	1.52	0.9	0.9	0.97	0.956		
Deviation (%)	ϵ : -1.25%		ϵ : -3.19%		ϵ : -2.89%		ϵ : -3.62%			
	σ : -3.45%		σ : 0.00%		σ : 0.00%		σ : -1.44%			

Test System Validation

- Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835MHz,1900MHz (Graphic Plots Attached)
- The results are nominalized to 1W input power

Table 8.2 System Validation [5]

SYSTEM DIPOLE VALIDATION TARGET & MEASURED						
Tissue	System Validation Kit:	Forward Power (mW)	Targeted SAR1g (mW/g)	Measured SAR1g (mW/g)	Deviation (%)	Test Date
1900MHz Brain	D1900V2(S/N :5d058)	1.0	39.2	39.92	-1.84%	2006-2-23
835MHz Brain	D835V2(S/N :475)	1.0	9.5	9.48	0.21%	2006-2-22

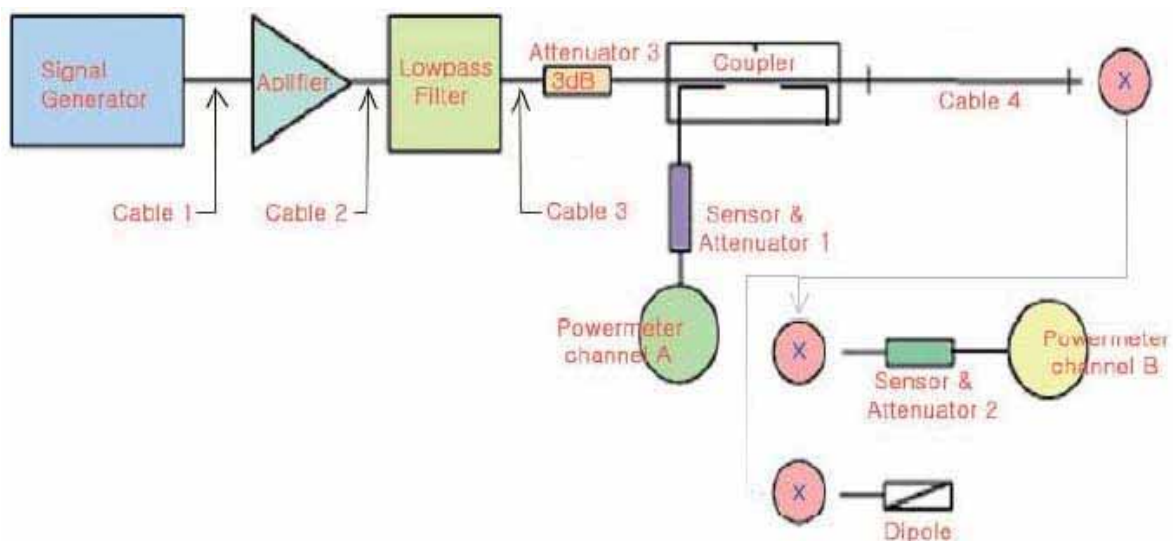


Figure 12.1 Dipole Validation Test Setup

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204

9. RESULTS(continued)

Ambient TEMPERATURE (C) : 22.0Relative HUMIDITY (%) : 47Mixture Type : 835MHz BrainDielectric Constant : 40.3Conductivity: 0.9

Measurement Results (GSM Head SAR-Touch)

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Brain 1.6 W/kg (mW/g) averaged over 1 gram
---	--

MEASUREMENT RESULTS (GSM Left Head SAR – Touch)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
824.20	128	GSM	33.00	33.04	Standard	Cheek Touch	–	0.816
836.60	190	GSM	33.00	32.87	Standard	Cheek Touch	–	0.926
848.80	251	GSM	33.00	32.95	Standard	Cheek Touch	–	0.716

MEASUREMENT RESULTS (GSM Right Head SAR – Touch)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
824.20	128	GSM	33.00	33.16	Standard	Cheek Touch	–	0.784
836.60	190	GSM	33.00	33.08	Standard	Cheek Touch	–	0.915
848.80	251	GSM	33.00	33.00	Standard	Cheek Touch	–	0.657

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.

2. All modes of operation were investigated and the worst-case are reported.

3. Battery Type : Standard

Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.

4. Power Measured : Conducted

5. SAR Measurement System : SPEAG

6. SAR Configuration : Head

Engineer K.H.Kang

(Signature)

Test report no : ESTSAR0602-007

FCC ID : BEJMG100

Web : www. estech. co. kr

Page 19 of 25



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

9. RESULTS(continued)

Ambient TEMPERATURE (C) : 22.0

Relative HUMIDITY (%) : 47

Mixture Type : 835MHz Brain

Dielectric Constant : 40.3

Conductivity: 0.9

Measurement Results (GSM Head SAR-Tilt)

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Brain 1.6 W/kg (mW/g) averaged over 1 gram
---	--

MEASUREMENT RESULTS (GSM Left Head SAR – Tilt)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
836.60	190	GSM	33.00	32.88	Standard	Tilt	–	0.581

MEASUREMENT RESULTS (GSM Right Head SAR – Tilt)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
836.60	190	GSM	33.00	32.85	Standard	Tilt	–	0.57

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : Standard
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : Conducted
5. SAR Measurement System : SPEAG
6. SAR Configuration : Head

Engineer K.H.Kang

(Signature)

Test report no : ESTSAR0602-007

FCC ID : BEJMG100

Web : www.estech.co.kr

Page 20 of 25



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

9. RESULTS(continued)

Ambient TEMPERATURE (C) : 22

Relative HUMIDITY (%) : 48

Mixture Type : 835MHz Body

Dielectric Constant : 53.2

Conductivity: 0.956

Measurement Results (GSM BODY SAR without Holster)

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Body 1.6 W/kg (mW/g) averaged over 1 gram
---	---

MEASUREMENT RESULTS (GSM Body SAR Without Holster)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
824.20	128	GSM	33.00	32.95	Standard	1.5[w/o Holster]	—	0.880
836.60	190	GSM	33.00	33.16	Standard	1.5[w/o Holster]	—	0.729
848.80	251	GSM	33.00	32.94	Standard	1.5[w/o Holster]	—	0.542

MEASUREMENT RESULTS (GSM Body SAR Without Holster – GPRS)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
824.20	128	GSM	33.00	32.89	Standard	1.5[w/o Holster]	—	0.751

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : Standard
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : Conducted
5. SAR Measurement System : SPEAG
6. SAR Configuration : Body, GPRS mode

Engineer K.H.Kang

(Signature)

Test report no : ESTSAR0602-007

FCC ID : BEJMG100

Web : www.estech.co.kr

Page 21 of 25

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204**9. RESULTS(continued)**Ambient TEMPERATURE (C) : **23.0**Relative HUMIDITY (%) : **47**Mixture Type : **1900MHz Brain**Dielectric Constant : **39.5**Conductivity: **1.4****Measurement Results (PCS Head SAR-Touch)**

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Brain 1.6 W/kg (mW/g) averaged over 1 gram
---	--

MEASUREMENT RESULTS (PCS Left Head SAR – Touch)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1880.00	661	GSM	30.00	30.05	Standard	Cheek Touch	–	0.675

MEASUREMENT RESULTS (PCS Right Head SAR – Touch)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1880.00	661	GSM	30.00	30.02	Standard	Cheek Touch	–	0.417

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : **Standard**
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : **Conducted**
5. SAR Measurement System : **SPEAG**
6. SAR Configuration : **Head**

Engineer K.H.Kang

(Signature)

Test report no : ESTSAR0602-007

FCC ID : BEJMG100

Web : www.estech.co.kr

Page 22 of 25

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204**9. RESULTS(continued)**Ambient TEMPERATURE (C) : **23.0**Relative HUMIDITY (%) : **47**Mixture Type : **1900MHz Brain**Dielectric Constant : **39.5**Conductivity: **1.4****Measurement Results (PCS Head SAR-Tilt)**

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Brain 1.6 W/kg (mW/g) averaged over 1 gram
---	--

MEASUREMENT RESULTS (PCS Left Head SAR – Tilt)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1850.20	512	GSM	30.00	29.99	Standard	Cheek Touch	–	0.539
1880.00	661	GSM	30.00	30.00	Standard	Cheek Touch	–	0.772
1909.80	810	GSM	30.00	30.05	Standard	Cheek Touch	–	0.630

MEASUREMENT RESULTS (PCS Right Head SAR – Tilt)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1850.20	512	GSM	30.00	29.99	Standard	Cheek Touch	–	0.464
1880.00	661	GSM	30.00	30.00	Standard	Cheek Touch	–	0.619
1909.80	810	GSM	30.00	30.06	Standard	Cheek Touch	–	0.479

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.

2. All modes of operation were investigated and the worst-case are reported.

3. Battery Type : **Standard**

Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.

4. Power Measured : **Conducted**

5. SAR Measurement System : **SPEAG**

6. SAR Configuration : **Head**

Engineer K.H.Kang

(Signature) 

Test report no : ESTSAR0602-007

FCC ID : BEJMG100

Web : www. estech. co. kr

Page 23 of 25

**ESTECH Co., Ltd.**Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, KoreaTEL: 82-2-867-3201
FAX: 82-2-867-3204**9. RESULTS(continued)**Ambient TEMPERATURE (C) : **23**Relative HUMIDITY (%) : **47**Mixture Type : **1900MHz Body**Dielectric Constant : **51.6**Conductivity: **1.52****Measurement Results (PCS BODY SAR without Holster)**

ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	Body 1.6 W/kg (mW/g) averaged over 1 gram
---	---

MEASUREMENT RESULTS (PCS Body SAR Without Holster)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1850.20	512	GSM	30.00	30.01	Standard	1.5[w/o Holster]	—	0.526
1880.00	661	GSM	30.00	30.11	Standard	1.5[w/o Holster]	—	0.516
1909.80	810	GSM	30.00	30.00	Standard	1.5[w/o Holster]	—	0.422

MEASUREMENT RESULTS (PCS Body SAR Without Holster – GPRS)								
Frequency		Moudulation	Conducted Power(dBm)		battery	Device Test position	Antenna Position	SAR (W/kg)
MHz	Ch.		Begin	End				
1850.20	512	GSM	30.00	30.03	Standard	1.5[w/o Holster]	—	0.465

NOTES:

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration.
2. All modes of operation were investigated and the worst-case are reported.
3. Battery Type : **Standard**
Radiated measurements indicate that the Extended-life battery produces lower ERP and EIRP, therefore the Standard-life battery is used in SAR testing.
4. Power Measured : **Conducted**
5. SAR Measurement System : **SPEAG**
6. SAR Configuration : **Body, GPRS mode**

Engineer K.H.Kang

(Signature) 



10. REFERENCE

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 – 1991, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Aug. 1992
- [3] ANSI/IEEE C95.3 – 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.
- [4] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [5] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [6] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [7] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [8] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [9] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [10] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [11] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [12] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [13] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [14] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [15] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to RadioFrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [16] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [17] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [18] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

APPENDIX A : Validation Test Data of Tissue




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- GSM850 Head Tissue

Title
SubTitle

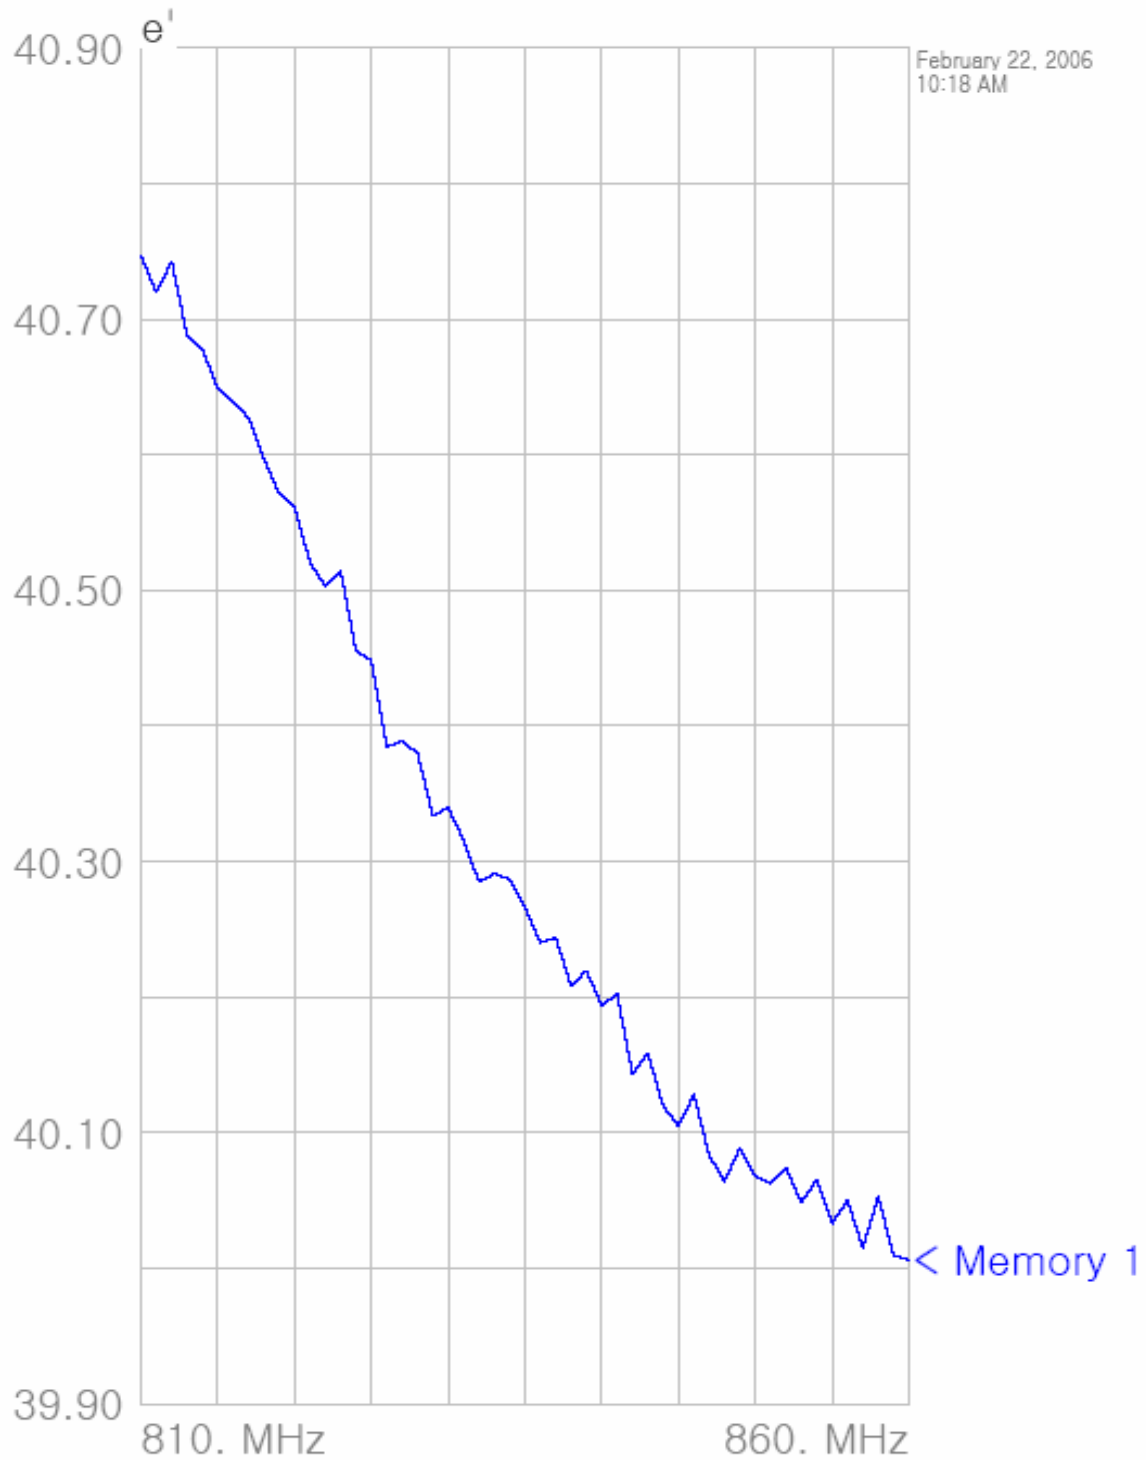




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

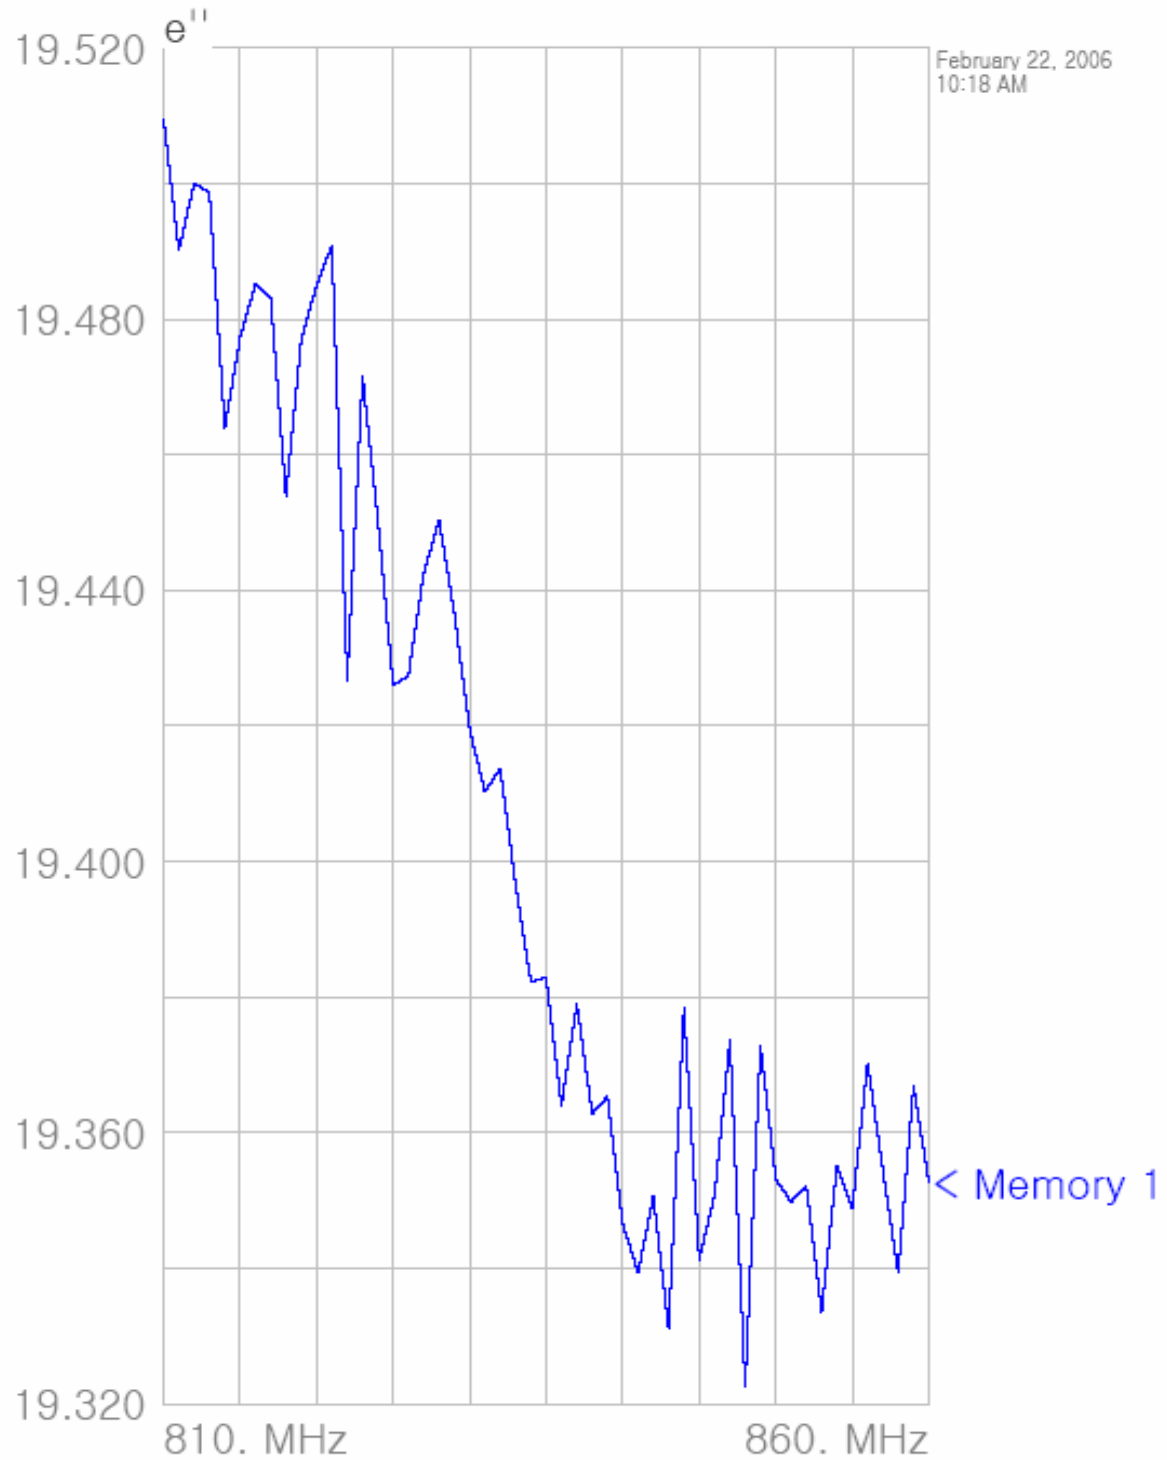



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title

SubTitle

February 22, 2006 18:18 AM

Frequency	e'	e''
810.000000 MHz	40.7472	19.5096
811.000000 MHz	40.7196	19.4901
812.000000 MHz	40.7429	19.5001
813.000000 MHz	40.6880	19.4987
814.000000 MHz	40.6779	19.4640
815.000000 MHz	40.6486	19.4773
816.000000 MHz	40.6393	19.4852
817.000000 MHz	40.6274	19.4832
818.000000 MHz	40.5976	19.4539
819.000000 MHz	40.5712	19.4771
820.000000 MHz	40.5621	19.4850
821.000000 MHz	40.5206	19.4909
822.000000 MHz	40.5029	19.4267
823.000000 MHz	40.5145	19.4716
824.000000 MHz	40.4553	19.4505
825.000000 MHz	40.4484	19.4260
826.000000 MHz	40.3849	19.4274
827.000000 MHz	40.3887	19.4425
828.000000 MHz	40.3900	19.4504
829.000000 MHz	40.3338	19.4366
830.000000 MHz	40.3396	19.4195
831.000000 MHz	40.3159	19.4103
832.000000 MHz	40.2851	19.4137
833.000000 MHz	40.2909	19.3966
834.000000 MHz	40.2869	19.3822
835.000000 MHz	40.2661	19.3829
836.000000 MHz	40.2400	19.3640
837.000000 MHz	40.2440	19.3790
838.000000 MHz	40.2083	19.3628
839.000000 MHz	40.2195	19.3653
840.000000 MHz	40.1936	19.3466
841.000000 MHz	40.2022	19.3394
842.000000 MHz	40.1429	19.3506
843.000000 MHz	40.1586	19.3311
844.000000 MHz	40.1197	19.3784
845.000000 MHz	40.1047	19.3413
846.000000 MHz	40.1283	19.3508
847.000000 MHz	40.0830	19.3738
848.000000 MHz	40.0641	19.3224
849.000000 MHz	40.0887	19.3729
850.000000 MHz	40.0681	19.3531
851.000000 MHz	40.0625	19.3498
852.000000 MHz	40.0739	19.3521
853.000000 MHz	40.0486	19.3336
854.000000 MHz	40.0653	19.3551
855.000000 MHz	40.0332	19.3489
856.000000 MHz	40.0499	19.3703
857.000000 MHz	40.0152	19.3545
858.000000 MHz	40.0527	19.3393
859.000000 MHz	40.0096	19.3669
860.000000 MHz	40.0063	19.3527




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

– GSM850 Body Tissue

Title
SubTitle

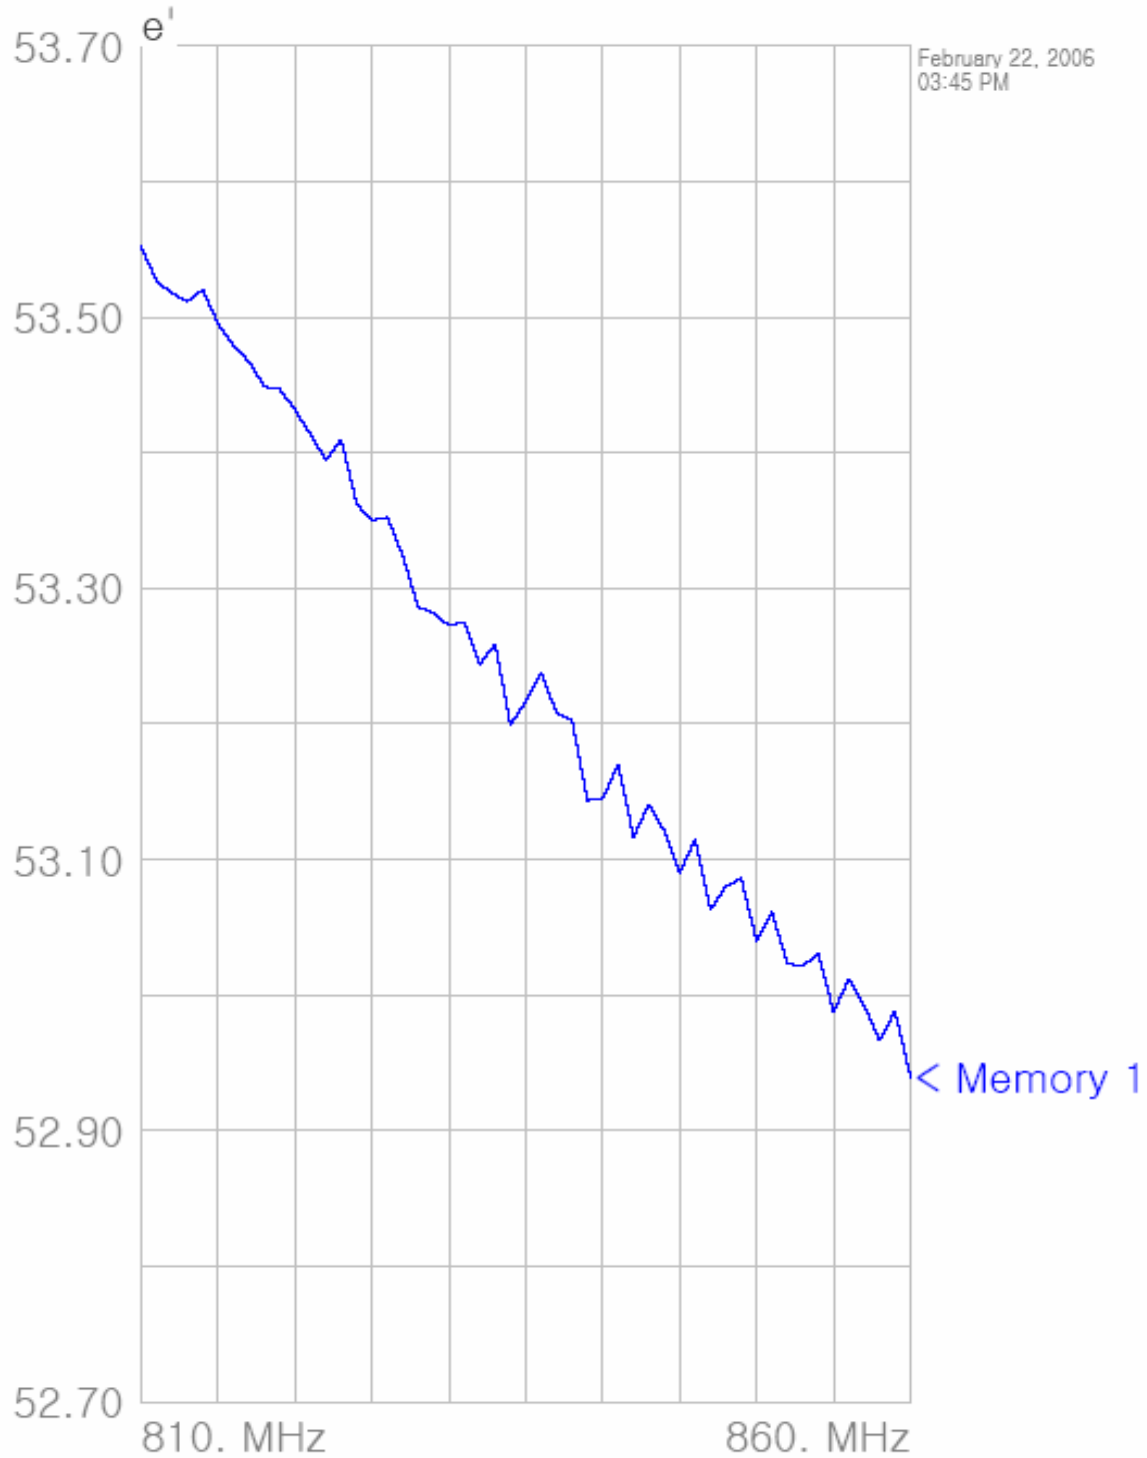




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

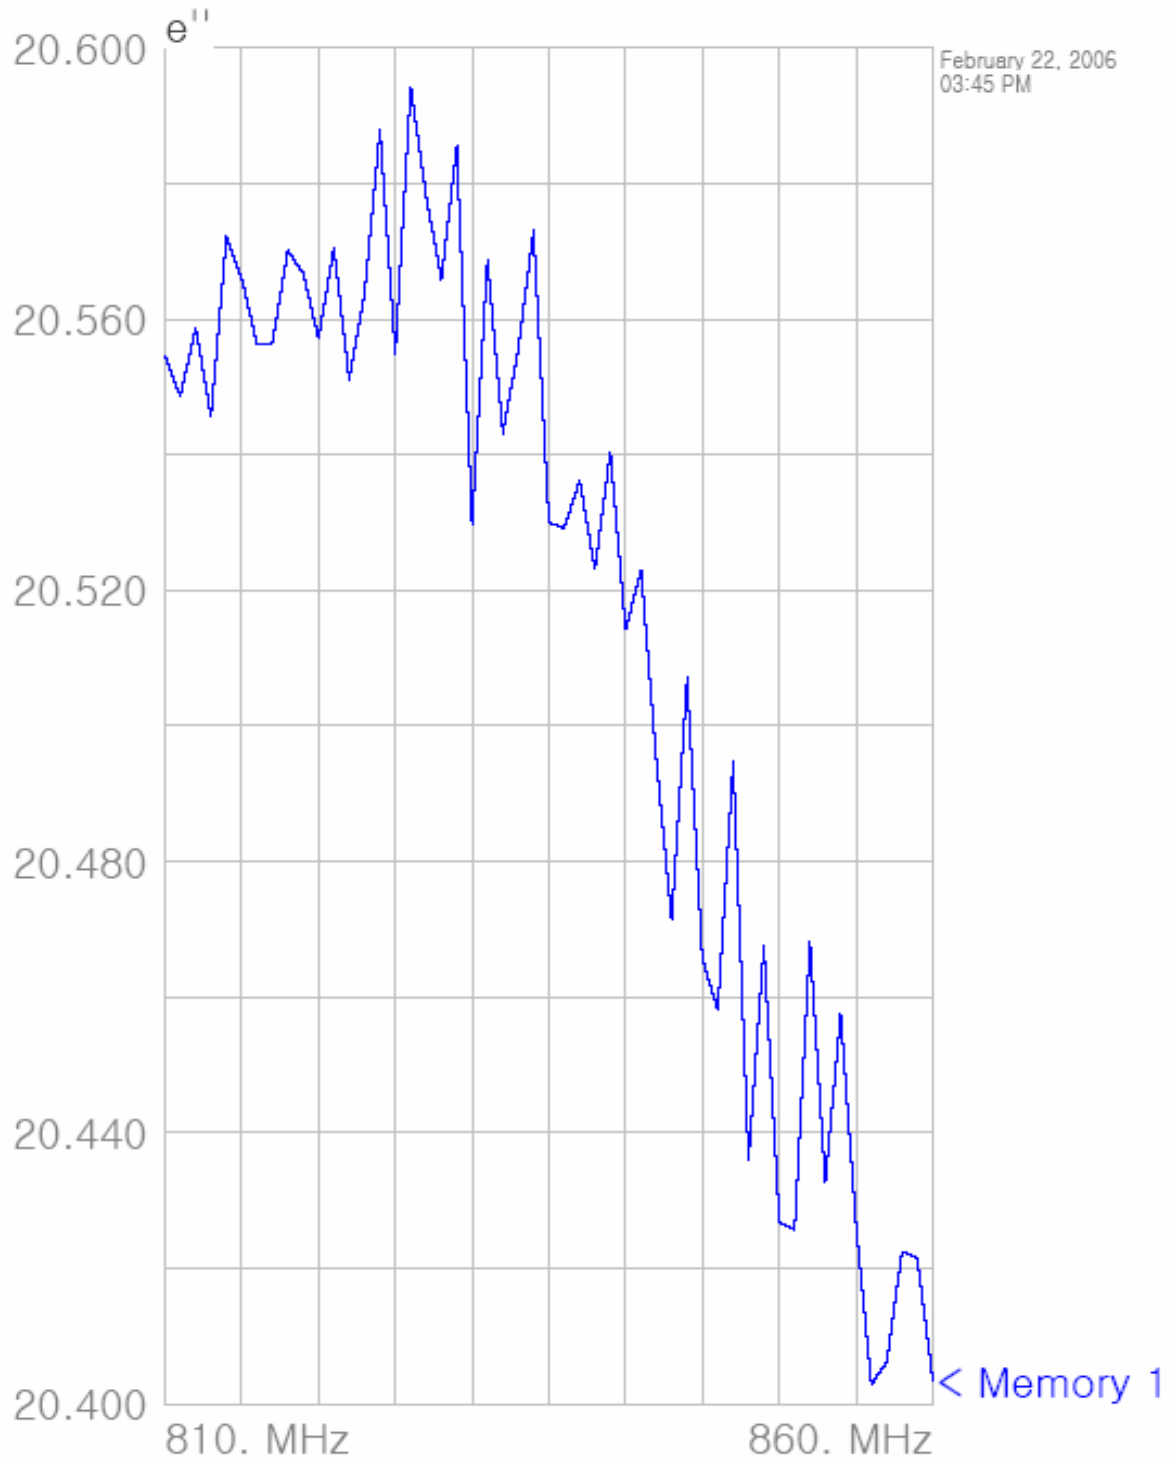

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

February 02, 2005 02:46 PM

Frequency	e'	e''
810.000000 MHz	53.5521	20.5547
811.000000 MHz	53.5263	20.5486
812.000000 MHz	53.5176	20.5588
813.000000 MHz	53.5119	20.5456
814.000000 MHz	53.5203	20.5722
815.000000 MHz	53.4947	20.5660
816.000000 MHz	53.4792	20.5563
817.000000 MHz	53.4672	20.5565
818.000000 MHz	53.4489	20.5701
819.000000 MHz	53.4469	20.5668
820.000000 MHz	53.4316	20.5571
821.000000 MHz	53.4135	20.5706
822.000000 MHz	53.3947	20.5511
823.000000 MHz	53.4097	20.5639
824.000000 MHz	53.3623	20.5879
825.000000 MHz	53.3500	20.5550
826.000000 MHz	53.3525	20.5943
827.000000 MHz	53.3242	20.5783
828.000000 MHz	53.2862	20.5659
829.000000 MHz	53.2819	20.5855
830.000000 MHz	53.2725	20.5297
831.000000 MHz	53.2753	20.5688
832.000000 MHz	53.2438	20.5431
833.000000 MHz	53.2590	20.5556
834.000000 MHz	53.1993	20.5731
835.000000 MHz	53.2165	20.5300
836.000000 MHz	53.2381	20.5292
837.000000 MHz	53.2077	20.5362
838.000000 MHz	53.2028	20.5231
839.000000 MHz	53.1436	20.5405
840.000000 MHz	53.1450	20.5142
841.000000 MHz	53.1701	20.5230
842.000000 MHz	53.1164	20.4949
843.000000 MHz	53.1407	20.4713
844.000000 MHz	53.1212	20.5071
845.000000 MHz	53.0900	20.4656
846.000000 MHz	53.1147	20.4581
847.000000 MHz	53.0632	20.4947
848.000000 MHz	53.0799	20.4359
849.000000 MHz	53.0864	20.4675
850.000000 MHz	53.0394	20.4268
851.000000 MHz	53.0610	20.4257
852.000000 MHz	53.0231	20.4682
853.000000 MHz	53.0212	20.4326
854.000000 MHz	53.0309	20.4575
855.000000 MHz	52.9877	20.4264
856.000000 MHz	53.0119	20.4028
857.000000 MHz	52.9922	20.4062
858.000000 MHz	52.9666	20.4225
859.000000 MHz	52.9883	20.4214
860.000000 MHz	52.9395	20.4034




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

– PCS1900 Head Tissue

Title
SubTitle

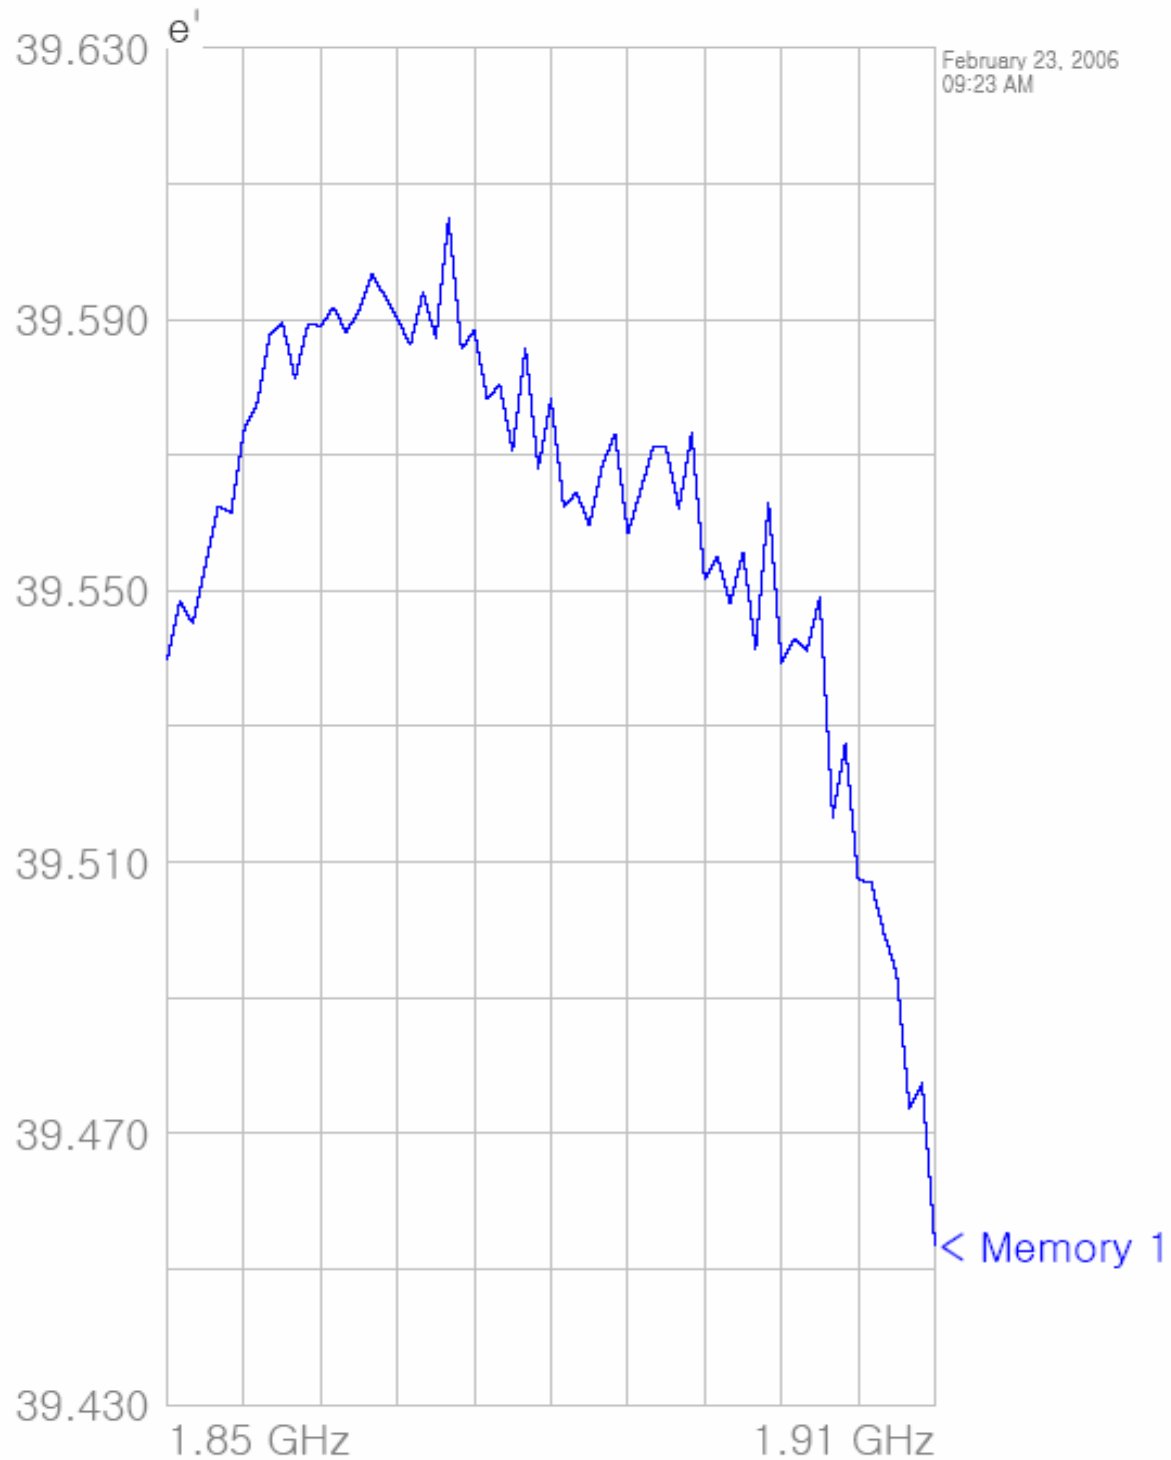




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

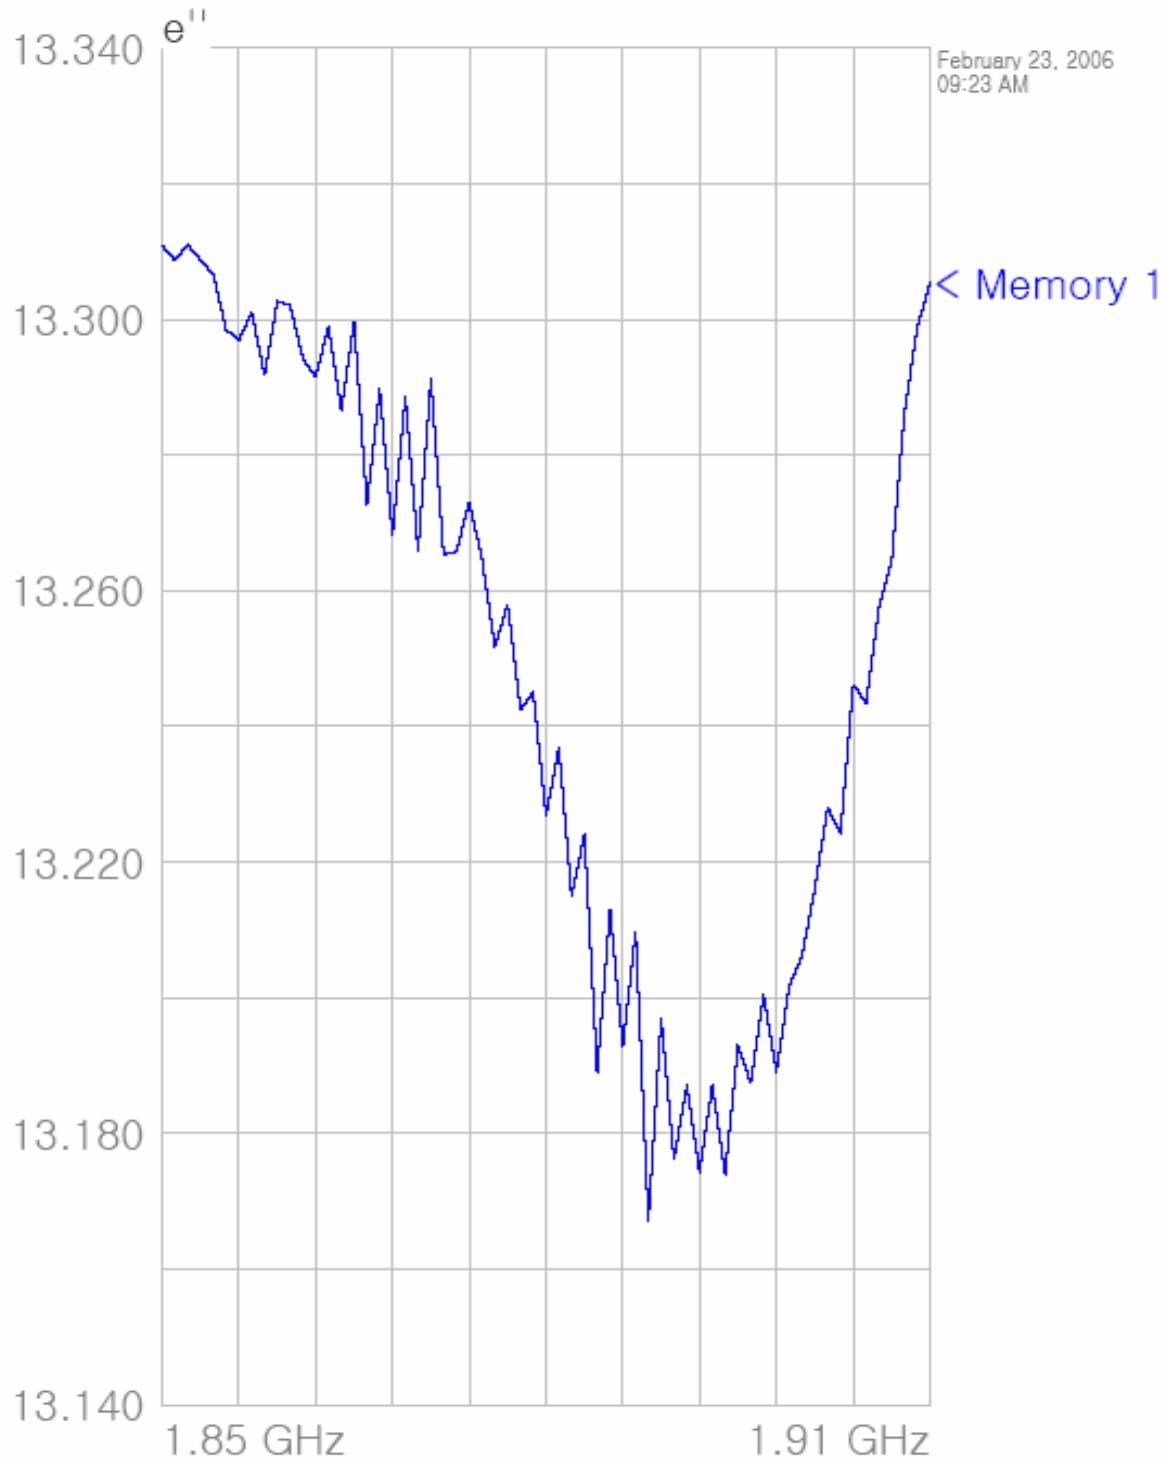

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

February 23, 2006 09:23 AM

Frequency	e'	e''
1.850000000 GHz	39.5399	13.3109
1.851000000 GHz	39.5486	13.3087
1.852000000 GHz	39.5452	13.3110
1.853000000 GHz	39.5538	13.3088
1.854000000 GHz	39.5625	13.3066
1.855000000 GHz	39.5615	13.2985
1.856000000 GHz	39.5737	13.2970
1.857000000 GHz	39.5773	13.3010
1.858000000 GHz	39.5876	13.2918
1.859000000 GHz	39.5896	13.3027
1.860000000 GHz	39.5813	13.3021
1.861000000 GHz	39.5894	13.2942
1.862000000 GHz	39.5890	13.2916
1.863000000 GHz	39.5918	13.2990
1.864000000 GHz	39.5881	13.2866
1.865000000 GHz	39.5914	13.2996
1.866000000 GHz	39.5966	13.2726
1.867000000 GHz	39.5935	13.2897
1.868000000 GHz	39.5901	13.2681
1.869000000 GHz	39.5862	13.2886
1.870000000 GHz	39.5940	13.2659
1.871000000 GHz	39.5873	13.2912
1.872000000 GHz	39.6050	13.2653
1.873000000 GHz	39.5856	13.2658
1.874000000 GHz	39.5884	13.2731
1.875000000 GHz	39.5784	13.2647
1.876000000 GHz	39.5803	13.2517
1.877000000 GHz	39.5706	13.2580
1.878000000 GHz	39.5859	13.2425
1.879000000 GHz	39.5680	13.2451
1.880000000 GHz	39.5784	13.2267
1.881000000 GHz	39.5624	13.2370
1.882000000 GHz	39.5645	13.2150
1.883000000 GHz	39.5597	13.2241
1.884000000 GHz	39.5684	13.1890
1.885000000 GHz	39.5731	13.2130
1.886000000 GHz	39.5585	13.1927
1.887000000 GHz	39.5647	13.2098
1.888000000 GHz	39.5714	13.1670
1.889000000 GHz	39.5711	13.1971
1.890000000 GHz	39.5621	13.1762
1.891000000 GHz	39.5733	13.1871
1.892000000 GHz	39.5516	13.1743
1.893000000 GHz	39.5551	13.1871
1.894000000 GHz	39.5481	13.1740
1.895000000 GHz	39.5557	13.1930
1.896000000 GHz	39.5415	13.1874
1.897000000 GHz	39.5631	13.2004
1.898000000 GHz	39.5394	13.1891
1.899000000 GHz	39.5430	13.2018
1.900000000 GHz	39.5412	13.2061
1.901000000 GHz	39.5490	13.2161
1.902000000 GHz	39.5166	13.2281
1.903000000 GHz	39.5274	13.2242
1.904000000 GHz	39.5073	13.2462
1.905000000 GHz	39.5071	13.2435
1.906000000 GHz	39.4996	13.2574
1.907000000 GHz	39.4937	13.2643
1.908000000 GHz	39.4737	13.2862
1.909000000 GHz	39.4774	13.2988
1.910000000 GHz	39.4535	13.3054




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

– PCS1900 Body Tissue

Title
SubTitle

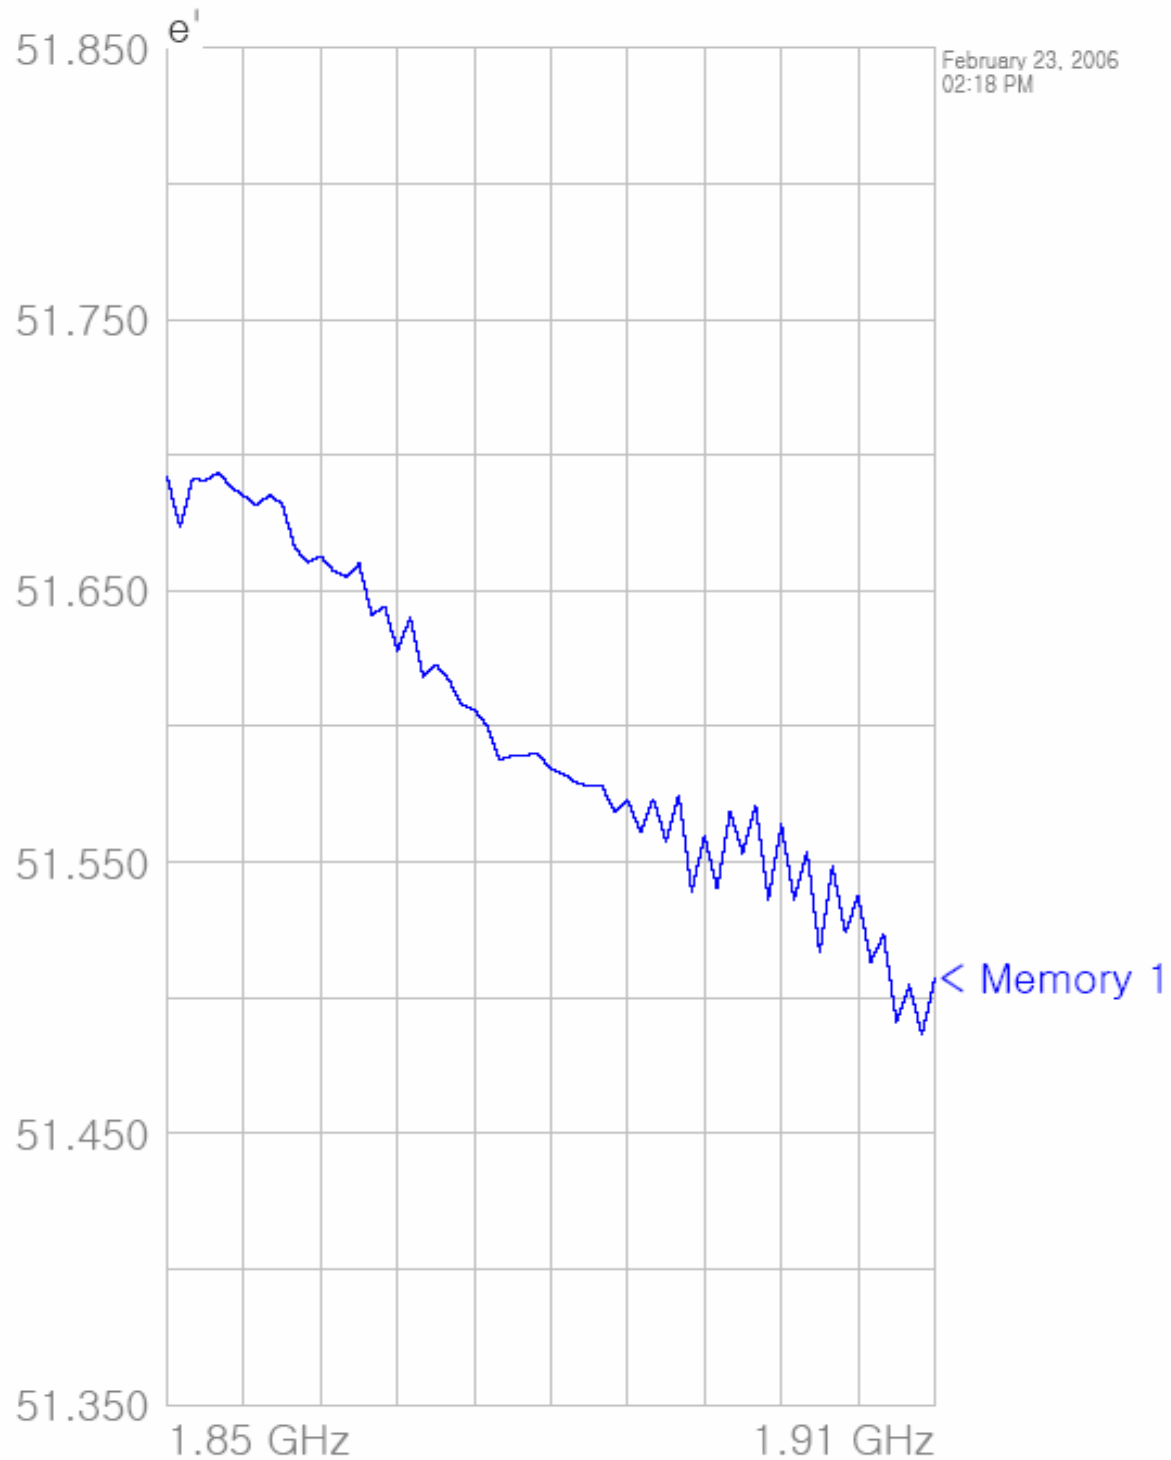




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

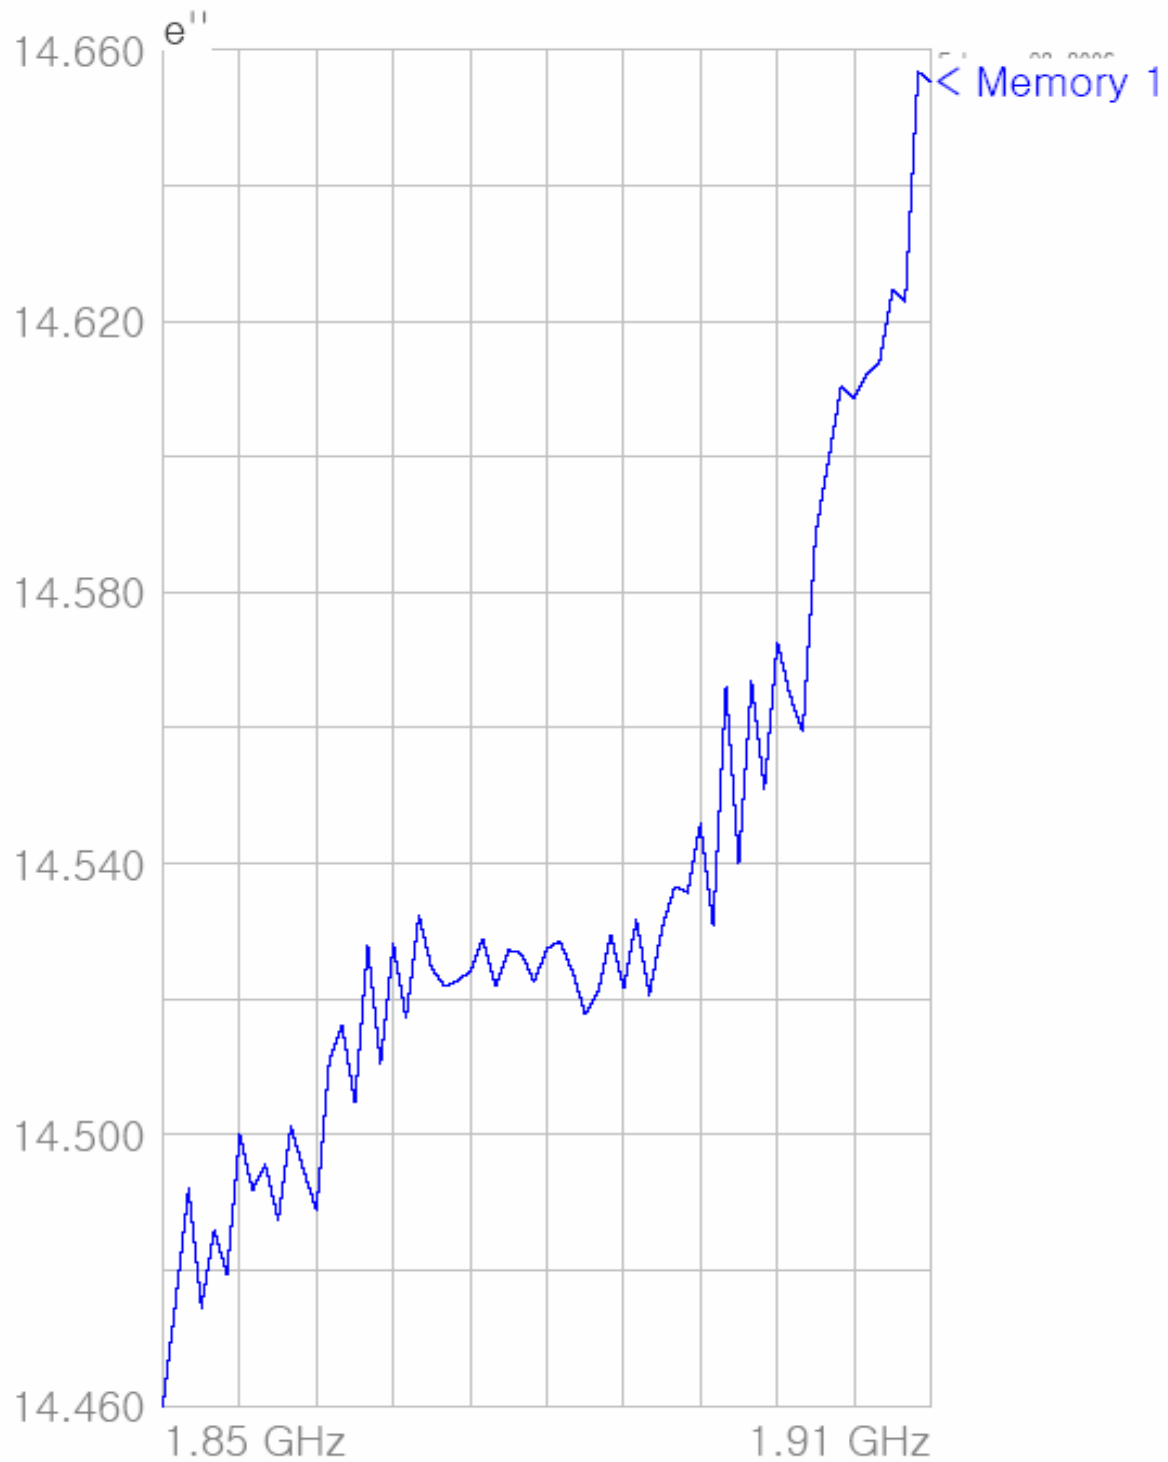

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Title
SubTitle

February 03, 2006 02:18 PM

Frequency	e'	e''
1.850000000 GHz	51.6919	14.4600
1.851000000 GHz	51.6734	14.4756
1.852000000 GHz	51.6913	14.4920
1.853000000 GHz	51.6906	14.4745
1.854000000 GHz	51.6936	14.4859
1.855000000 GHz	51.6883	14.4795
1.856000000 GHz	51.6849	14.5000
1.857000000 GHz	51.6816	14.4918
1.858000000 GHz	51.6852	14.4956
1.859000000 GHz	51.6819	14.4874
1.860000000 GHz	51.6657	14.5012
1.861000000 GHz	51.6604	14.4947
1.862000000 GHz	51.6628	14.4888
1.863000000 GHz	51.6574	14.5110
1.864000000 GHz	51.6552	14.5162
1.865000000 GHz	51.6599	14.5047
1.866000000 GHz	51.6411	14.5279
1.867000000 GHz	51.6443	14.5105
1.868000000 GHz	51.6279	14.5281
1.869000000 GHz	51.6402	14.5171
1.870000000 GHz	51.6183	14.5323
1.871000000 GHz	51.6228	14.5245
1.872000000 GHz	51.6174	14.5219
1.873000000 GHz	51.6080	14.5227
1.874000000 GHz	51.6061	14.5240
1.875000000 GHz	51.6003	14.5289
1.876000000 GHz	51.5876	14.5219
1.877000000 GHz	51.5893	14.5272
1.878000000 GHz	51.5895	14.5268
1.879000000 GHz	51.5900	14.5225
1.880000000 GHz	51.5842	14.5274
1.881000000 GHz	51.5824	14.5286
1.882000000 GHz	51.5792	14.5241
1.883000000 GHz	51.5779	14.5178
1.884000000 GHz	51.5779	14.5211
1.885000000 GHz	51.5682	14.5295
1.886000000 GHz	51.5727	14.5216
1.887000000 GHz	51.5610	14.5317
1.888000000 GHz	51.5733	14.5206
1.889000000 GHz	51.5578	14.5304
1.890000000 GHz	51.5748	14.5366
1.891000000 GHz	51.5392	14.5357
1.892000000 GHz	51.5596	14.5459
1.893000000 GHz	51.5401	14.5308
1.894000000 GHz	51.5685	14.5661
1.895000000 GHz	51.5534	14.5400
1.896000000 GHz	51.5710	14.5669
1.897000000 GHz	51.5364	14.5509
1.898000000 GHz	51.5638	14.5727
1.899000000 GHz	51.5363	14.5648
1.900000000 GHz	51.5540	14.5595
1.901000000 GHz	51.5168	14.5887
1.902000000 GHz	51.5486	14.5994
1.903000000 GHz	51.5239	14.6105
1.904000000 GHz	51.5376	14.6087
1.905000000 GHz	51.5133	14.6123
1.906000000 GHz	51.5231	14.6140
1.907000000 GHz	51.4909	14.6246
1.908000000 GHz	51.5046	14.6228
1.909000000 GHz	51.4862	14.6568
1.910000000 GHz	51.5074	14.6554



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

APPENDIX B : Validation Test Data




ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Dipole Validation

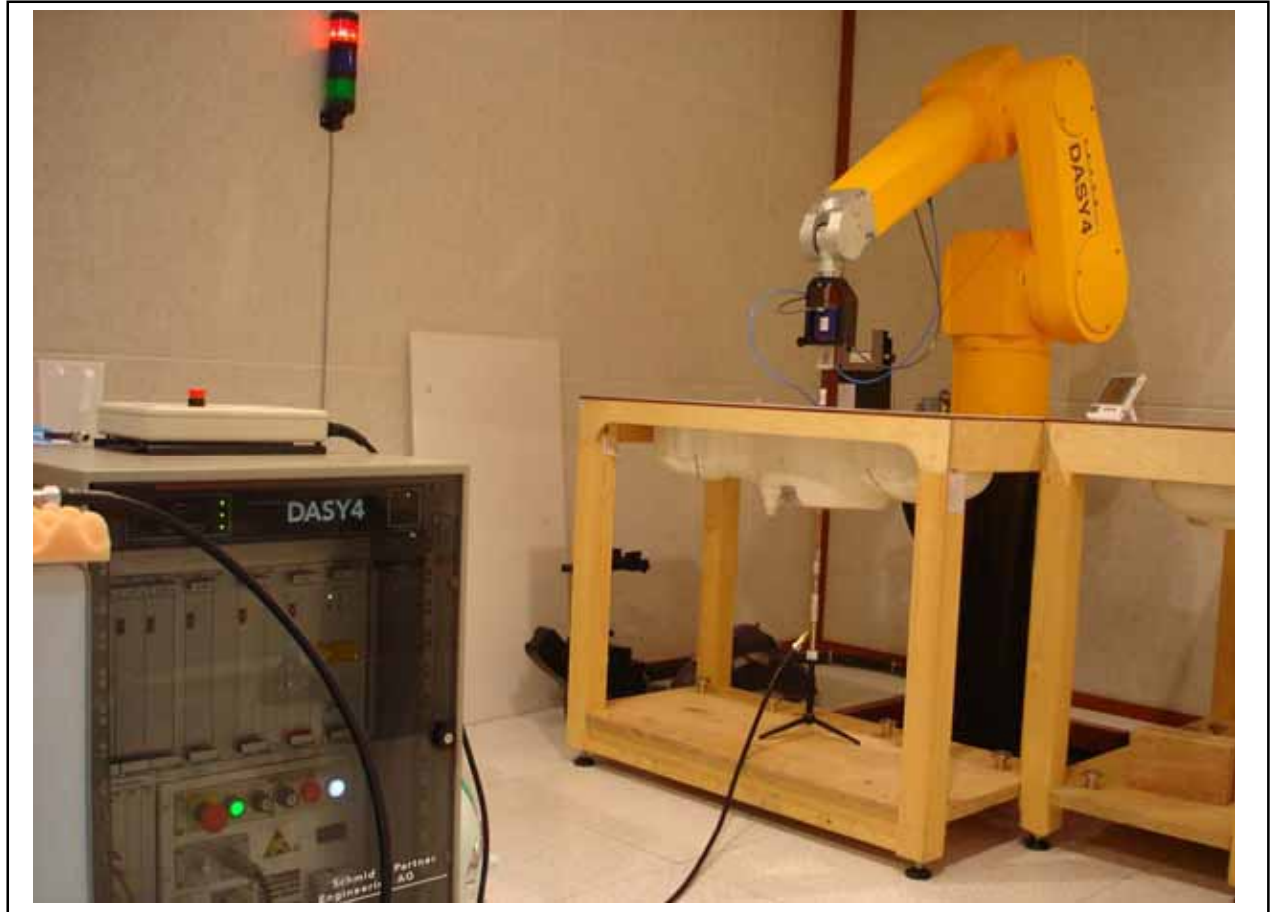



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- GSM850 Validation

Date/Time: 02/22/06 10:56:21

Test Laboratory: ESTECH

validation0222

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:xxx

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 49%

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 54.5 V/m; Power Drift = 0.004 dB

Maximum value of SAR (interpolated) = 2.56 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.5 V/m; Power Drift = 0.004 dB

Maximum value of SAR (measured) = 2.56 mW/g

Peak SAR (extrapolated) = 3.52 W/kg

SAR(1 g) = 2.37 mW/g

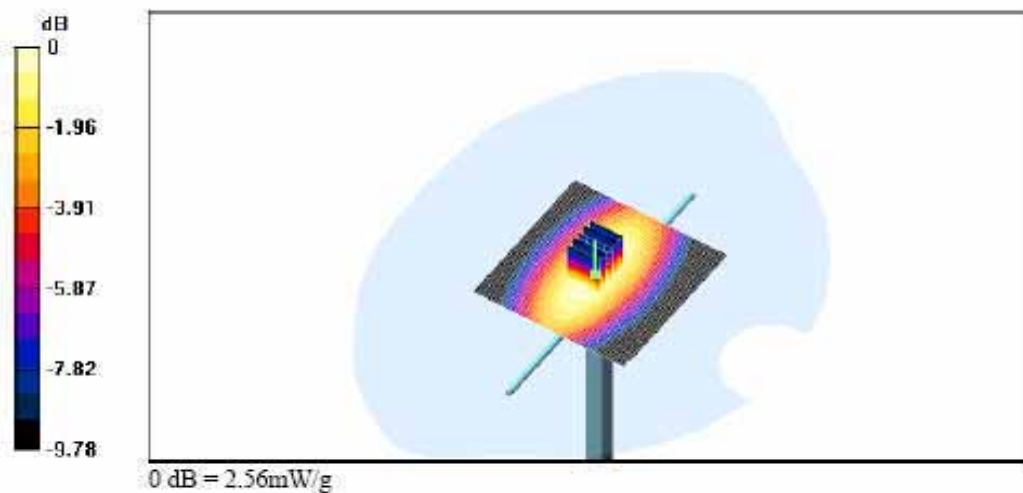



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- PCS1900 Validation

Date/Time: 02/23/06 10:10:00

Test Laboratory: ESTECH

validation0223

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:xxx

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 47%

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 92.4 V/m; Power Drift = -0.008 dB

Maximum value of SAR (interpolated) = 11.8 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.4 V/m; Power Drift = -0.008 dB

Maximum value of SAR (measured) = 11.1 mW/g

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 9.98 mW/g

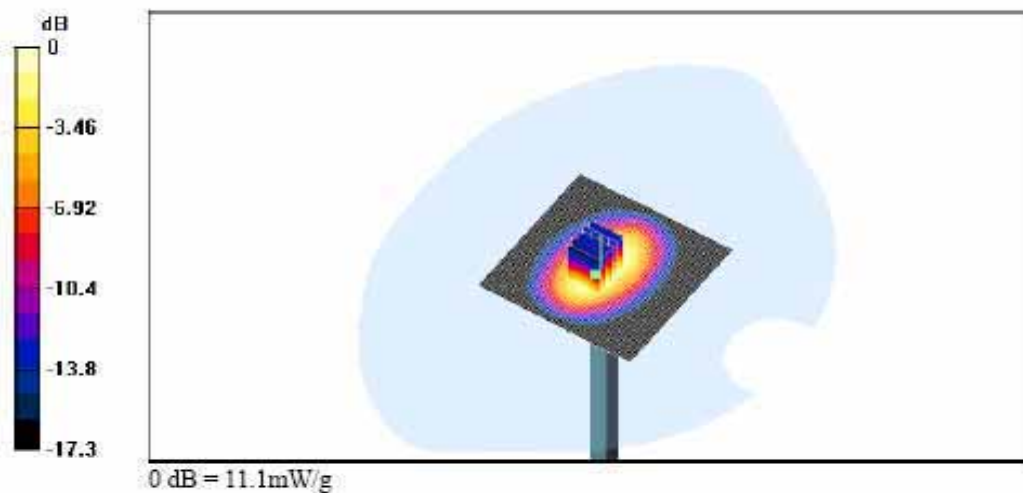



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

APPENDIX C : SAR Test Data

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

- GSM850

Date/Time: 02/22/06 13:58:45

Test Laboratory: ESTECH

CH128 LEFT TOUCH

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 29.6 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.876 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.6 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.885 mW/g

Peak SAR (extrapolated) = 1.4 W/kg

SAR(1 g) = 0.816 mW/g

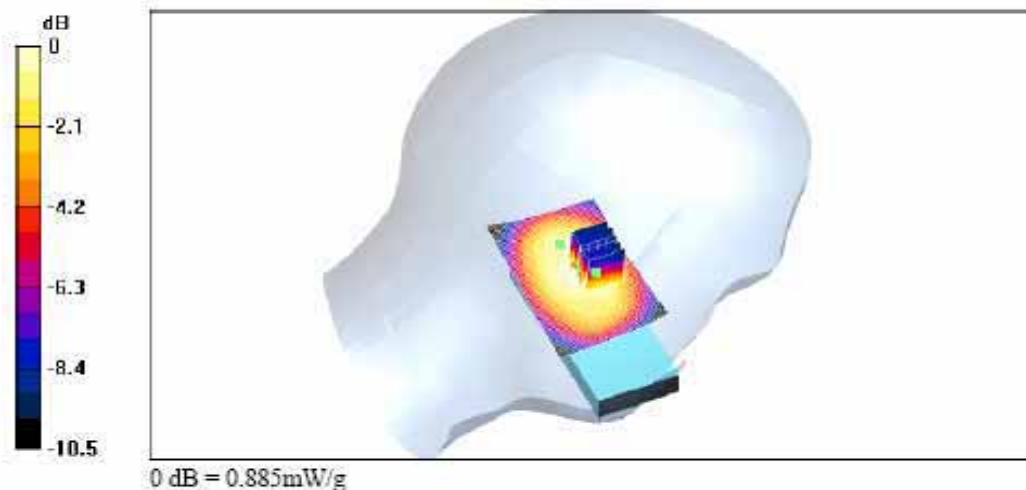

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 11:35:56

Test Laboratory: ESTECH

CH190 LEFT TOUCH

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX


Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$
kg/m³
Phantom section: Left Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 47%

/Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 30.7 V/m; Power Drift = -0.1 dB
Maximum value of SAR (interpolated) = 0.993 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 30.7 V/m; Power Drift = -0.1 dB
Maximum value of SAR (measured) = 0.988 mW/g
Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 0.926 mW/g

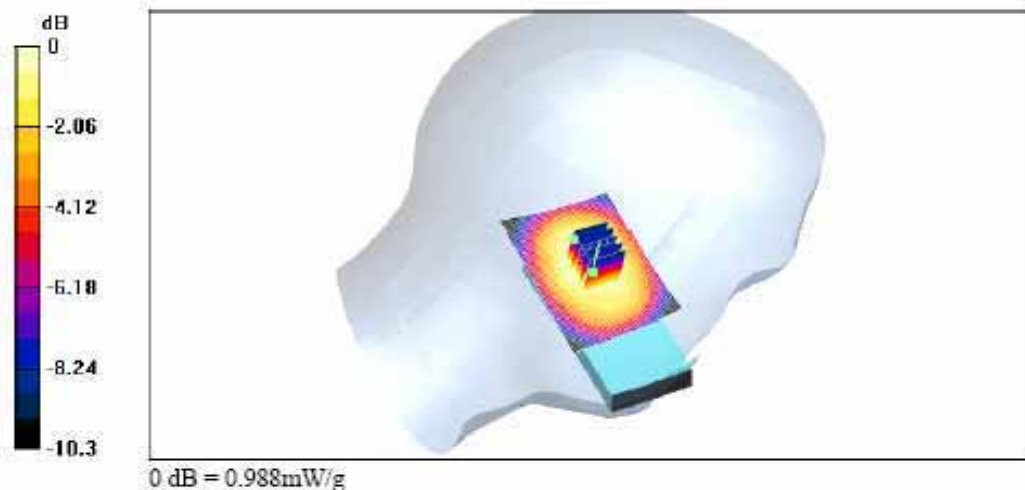



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 14:46:46

Test Laboratory: ESTECH

CH251 LEFT TOUCH

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX


Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$
kg/m³
Phantom section: Left Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 26.5 V/m; Power Drift = -0.0 dB
Maximum value of SAR (interpolated) = 0.772 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 26.5 V/m; Power Drift = -0.0 dB
Maximum value of SAR (measured) = 0.778 mW/g
Peak SAR (extrapolated) = 1.3 W/kg
SAR(1 g) = 0.716 mW/g

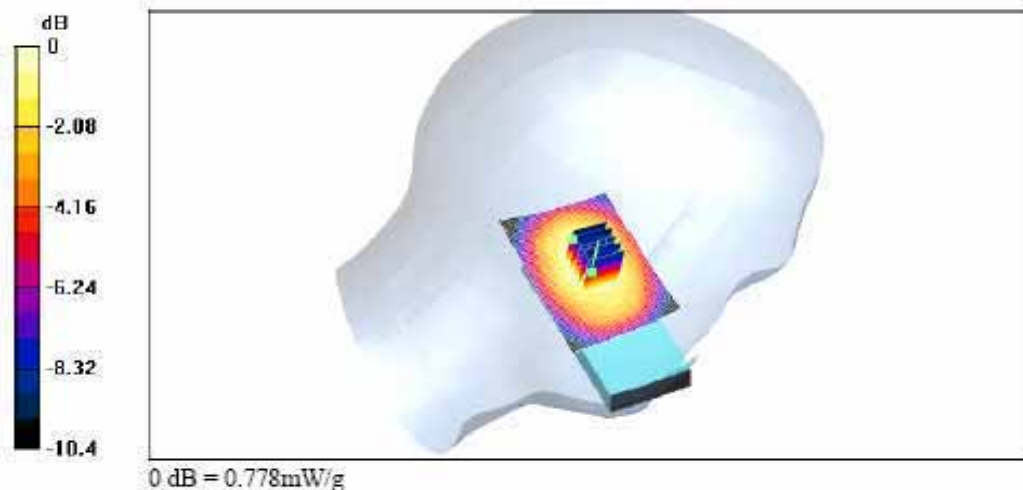

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 14:21:06

Test Laboratory: ESTECH

CH128 RIGHT TOUCH

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 27.4 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.855 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.4 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.861 mW/g

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.784 mW/g

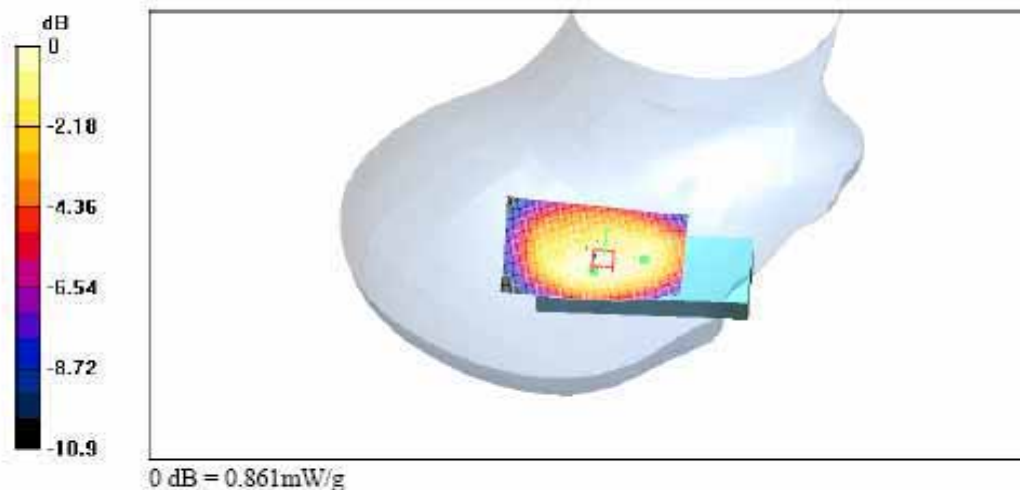

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 11:59:56

Test Laboratory: ESTECH

CH190 RIGHT TOUCH

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 29.1 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 1 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.1 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.994 mW/g

Peak SAR (extrapolated) = 1.7 W/kg

SAR(1 g) = 0.915 mW/g

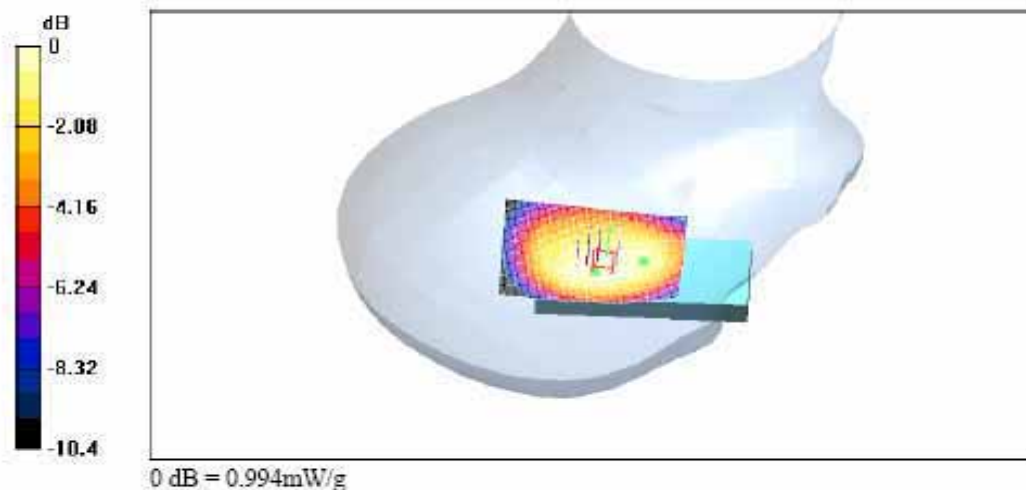



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 15:02:48

Test Laboratory: ESTECH

CH251 RIGHT TOUCH

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.914$ mho/m; $\epsilon_r = 40.1$; $\rho = 1000$

kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 24.5 V/m; Power Drift = -0.001 dB

Maximum value of SAR (interpolated) = 0.714 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.001 dB

Maximum value of SAR (measured) = 0.728 mW/g

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.657 mW/g

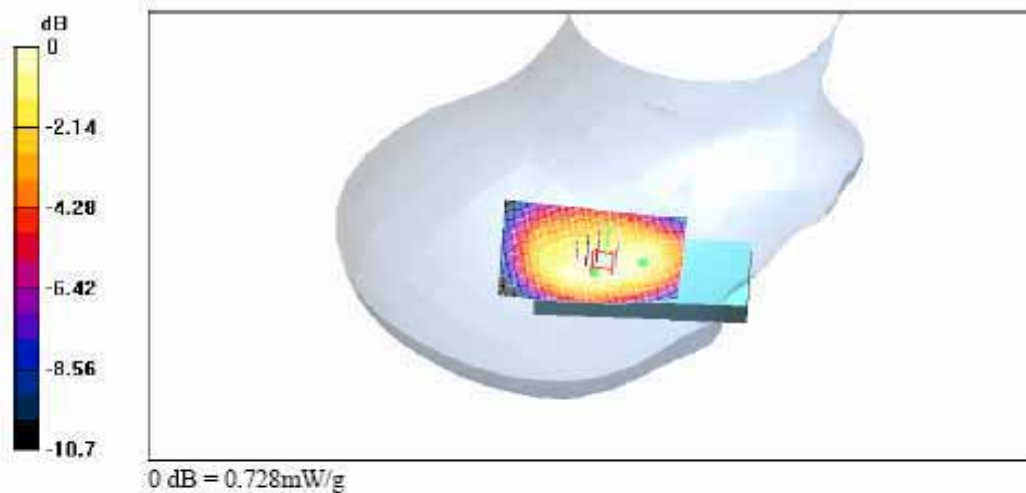

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 12:17:07

Test Laboratory: ESTECH

CH190 LEFT TILT

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 27.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.699 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.620 mW/g

Peak SAR (extrapolated) = 0.949 W/kg

SAR(1 g) = 0.581 mW/g

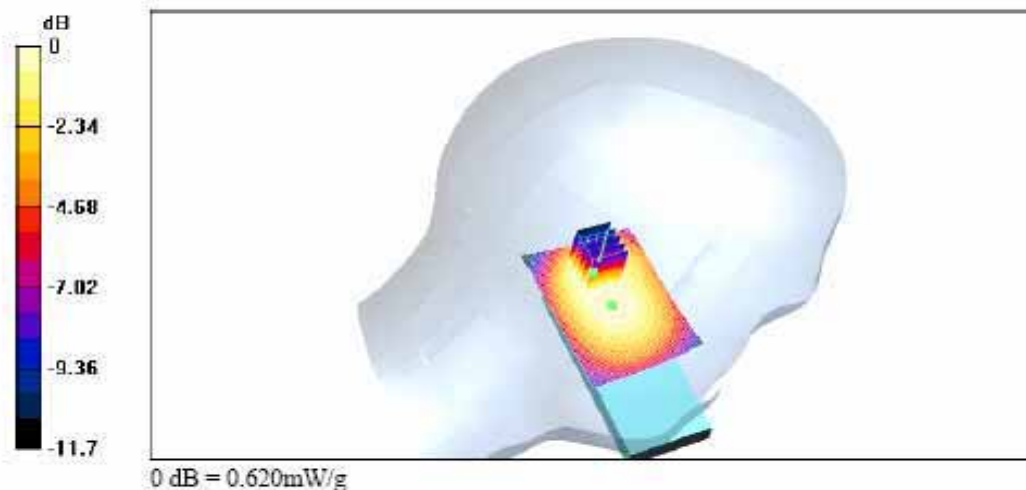

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 12:45:29

Test Laboratory: ESTECH

CH190 RIGHT TILT

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 21 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 26.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.629 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.2 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.607 mW/g

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.570 mW/g

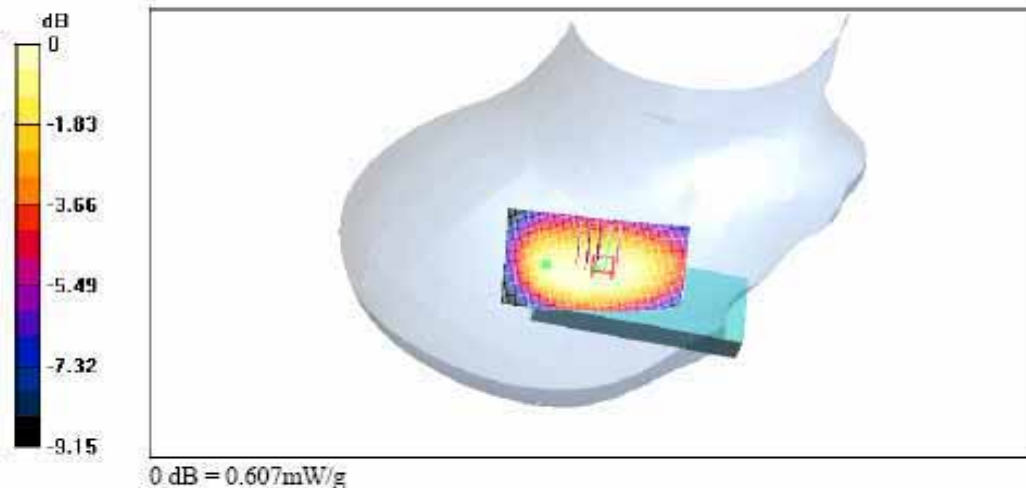

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 11:35:56

Test Laboratory: ESTECH

CH190 LEFT TOUCH-ZSCAN

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$


kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.57, 6.57, 6.57); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 47%

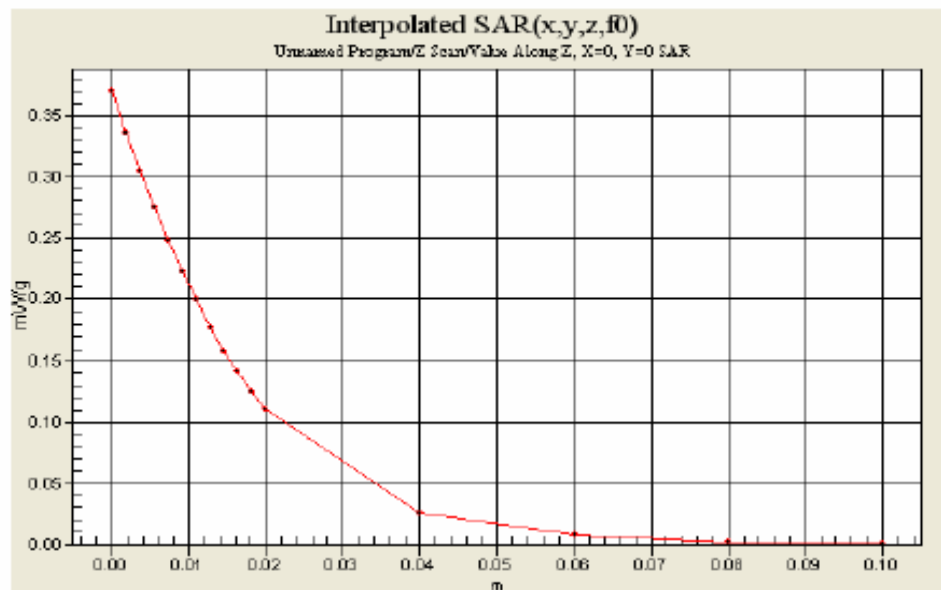



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 16:23:50

Test Laboratory: ESTECH

CH128 BODY

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 25.5 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.948 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.5 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.929 mW/g

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.880 mW/g

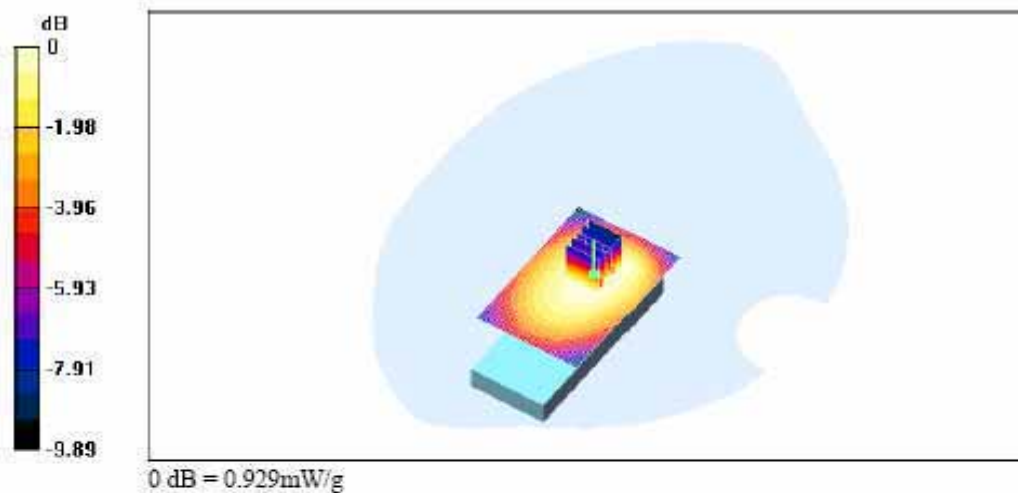



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 16:00:45

Test Laboratory: ESTECH

CH190 BODY

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.956$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 22.6 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.774 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.6 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.775 mW/g

Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.729 mW/g

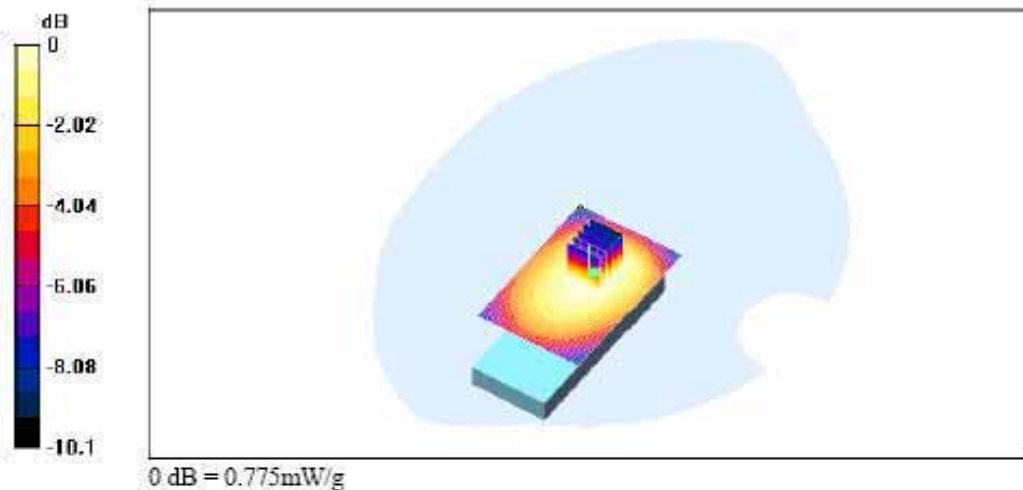



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 16:47:00

Test Laboratory: ESTECH

CH251 BODY

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.966$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 49%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 19.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.577 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.576 mW/g

Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.542 mW/g

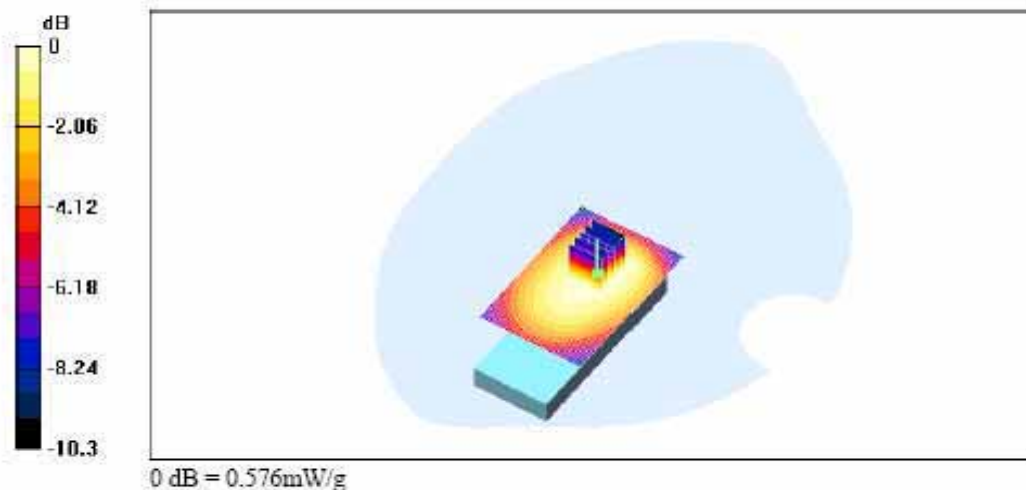

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 16:23:50

Test Laboratory: ESTECH

CH128 BODY-ZSCAN

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$


kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 48%

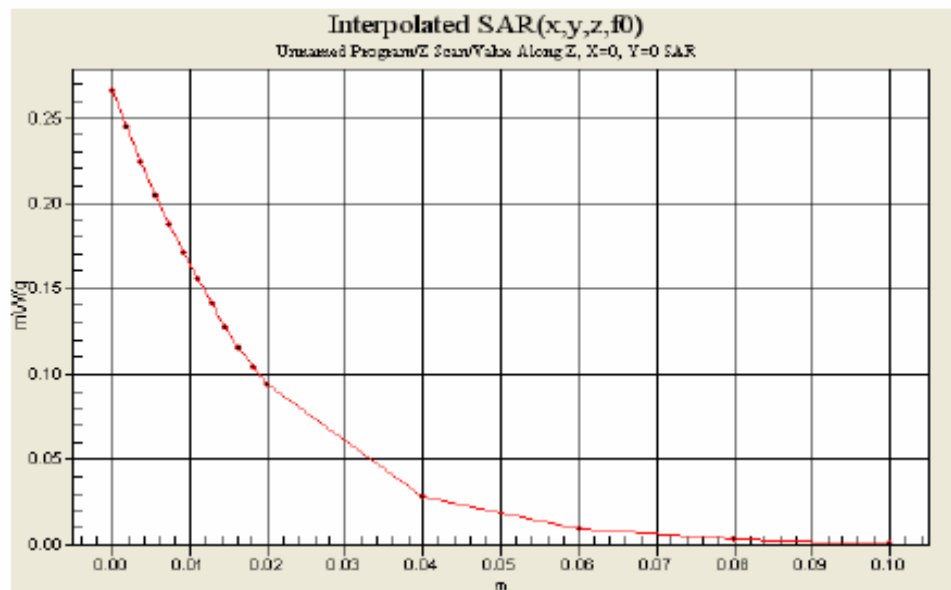

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/22/06 17:11:59

Test Laboratory: ESTECH

CH128 BODY-GPRS

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(6.17, 6.17, 6.17); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM 835MHz; Type: SAM 835MHz; Serial: TP-1262
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22°C, Humidity : 49%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 24.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.806 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.796 mW/g

Peak SAR (extrapolated) = 1 W/kg

SAR(1 g) = 0.751 mW/g

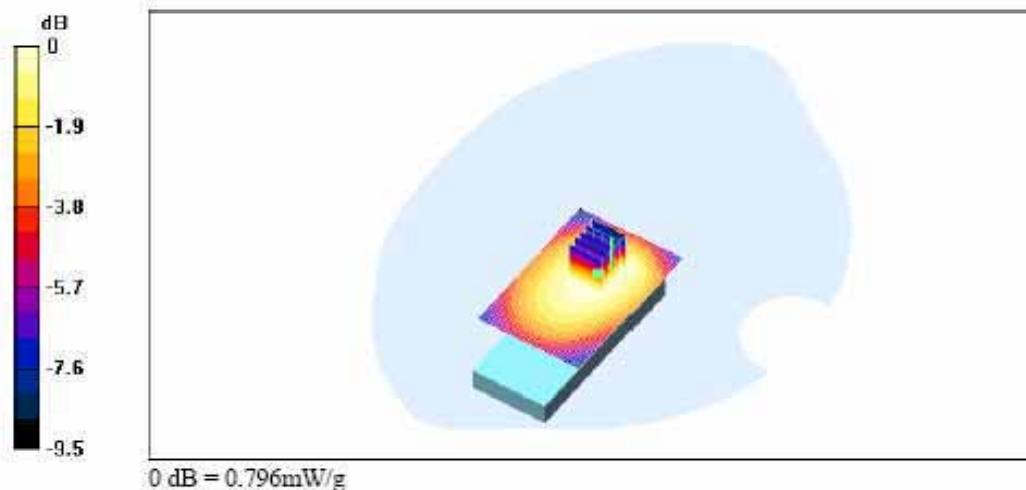

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

-PCS1900

Date/Time: 02/23/06 10:54:47

Test Laboratory: ESTECH

CH661 LEFT TOUCH

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 18 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.774 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.739 mW/g

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.675 mW/g

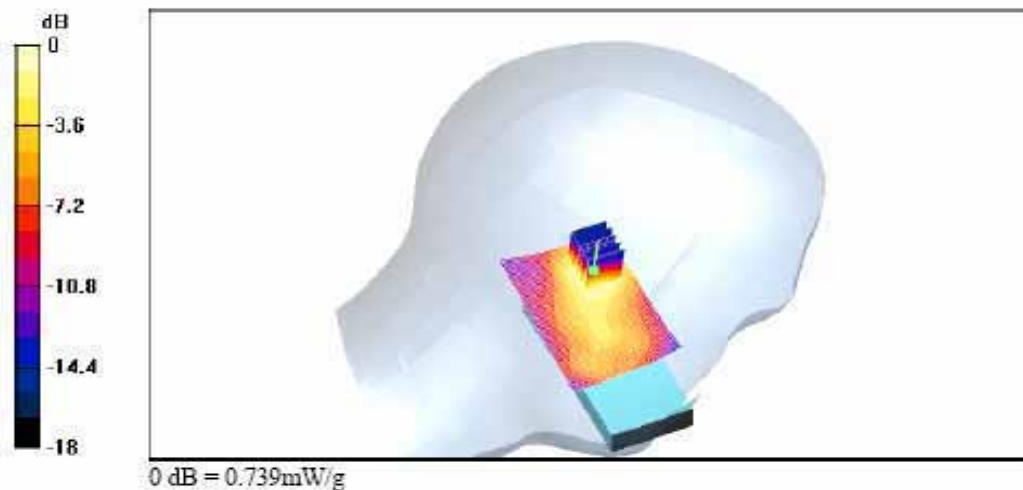



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/23/06 11:21:37

Test Laboratory: ESTECH

CH661 RIGHT TOUCH

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 16.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 0.449 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 0.457 mW/g

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.417 mW/g

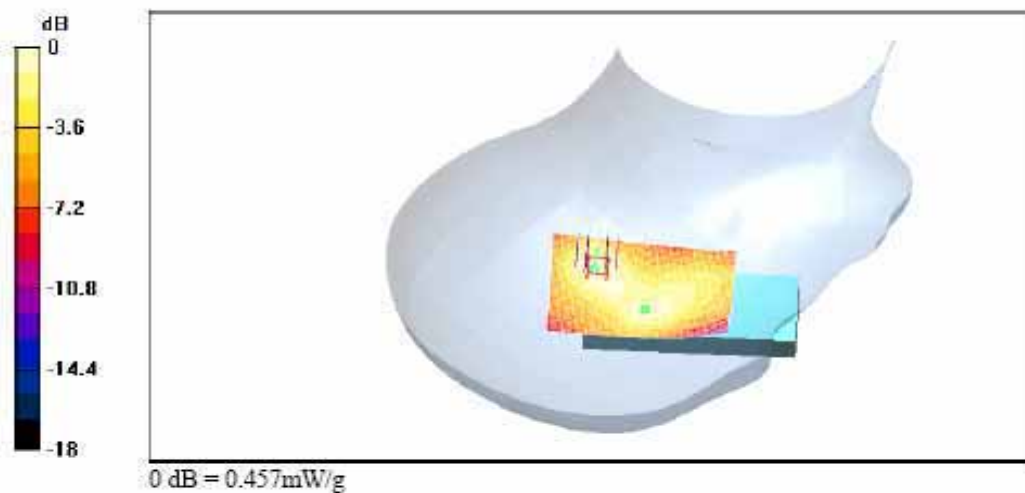



ESTECH Co., Ltd.

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/23/06 12:44:21

Test Laboratory: ESTECH

CH512 LEFT TILT

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX


Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$
kg/m³
Phantom section: Left Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 17.4 V/m; Power Drift = -0.009 dB
Maximum value of SAR (interpolated) = 0.631 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 17.4 V/m; Power Drift = -0.009 dB
Maximum value of SAR (measured) = 0.597 mW/g
Peak SAR (extrapolated) = 1.1 W/kg
SAR(1 g) = 0.539 mW/g

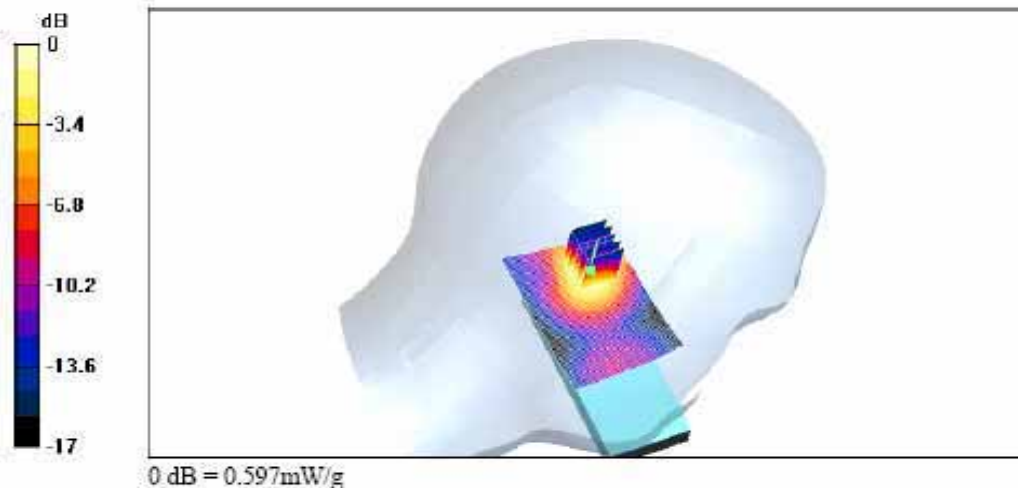

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/23/06 11:43:28

Test Laboratory: ESTECH

CH661 LEFT TILT

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 22 °C, Humidity : 48%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 20.6 V/m; Power Drift = 0.005 dB

Maximum value of SAR (interpolated) = 0.903 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = 0.005 dB

Maximum value of SAR (measured) = 0.846 mW/g

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.772 mW/g

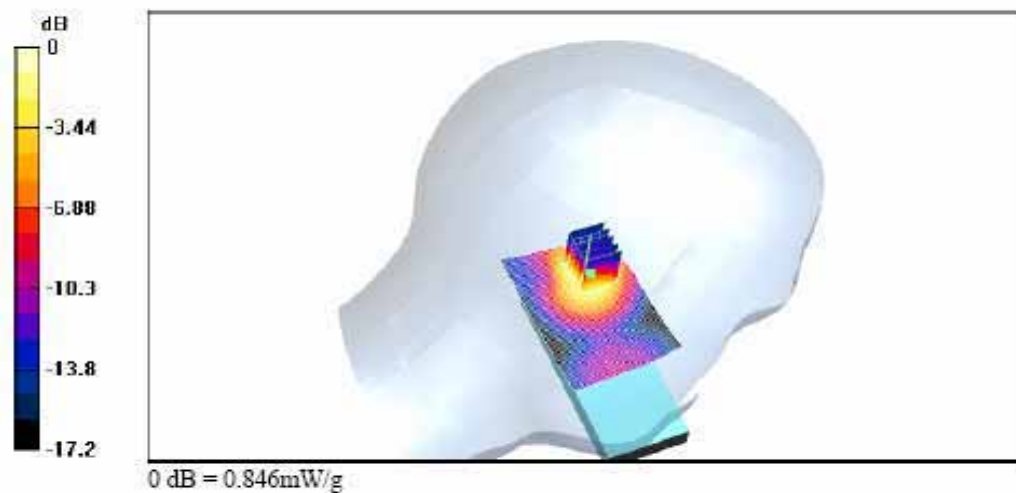

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/23/06 13:28:20

Test Laboratory: ESTECH

CH810 LEFT TILT

DUT: MG100,MG100c,MG100d; **Type:** BAR TYPE; **Serial:** XXXX


Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$
kg/m³
Phantom section: Left Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 18.6 V/m; Power Drift = 0.0 dB
Maximum value of SAR (interpolated) = 0.730 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.6 V/m; Power Drift = 0.0 dB
Maximum value of SAR (measured) = 0.703 mW/g
Peak SAR (extrapolated) = 1.3 W/kg
SAR(1 g) = 0.630 mW/g

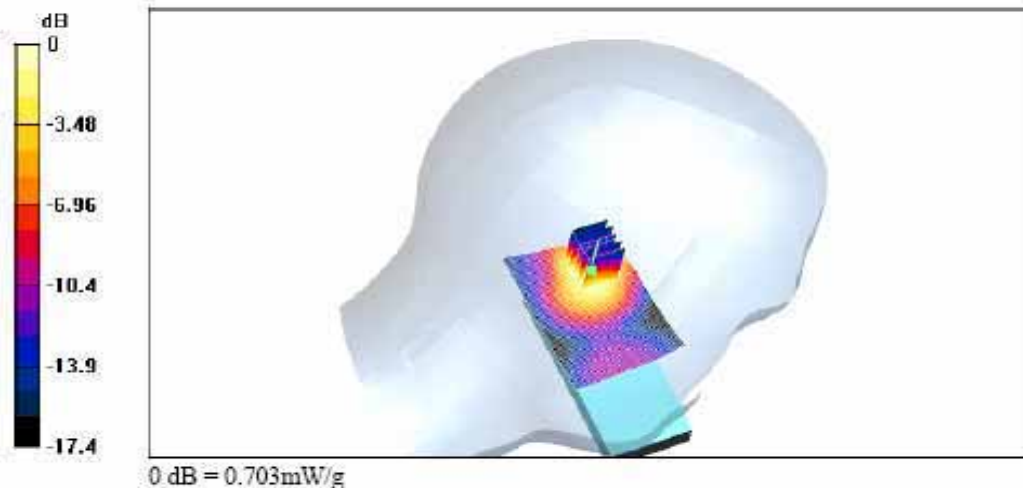

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/23/06 13:05:45

Test Laboratory: ESTECH

CH512 RIGHT TILT

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$

kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 18.2 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 0.535 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 0.504 mW/g

Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.464 mW/g

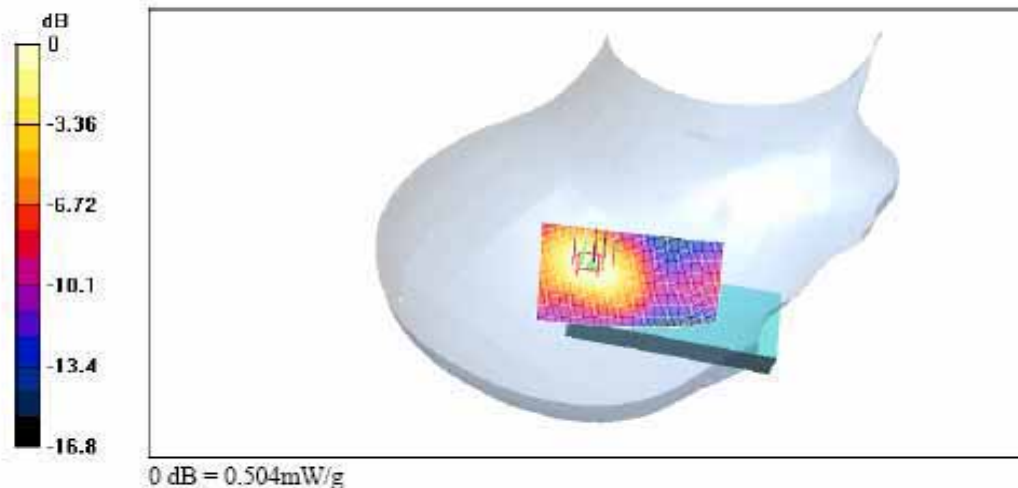

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/23/06 12:02:39

Test Laboratory: ESTECH

CH661 RIGHT TILT

DUT: MG100, MG100c, MG100d; Type: BAR TYPE; Serial: XXXX

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800MHz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 20.8 V/m; Power Drift = 0.001 dB

Maximum value of SAR (interpolated) = 0.705 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.8 V/m; Power Drift = 0.001 dB

Maximum value of SAR (measured) = 0.673 mW/g

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.619 mW/g

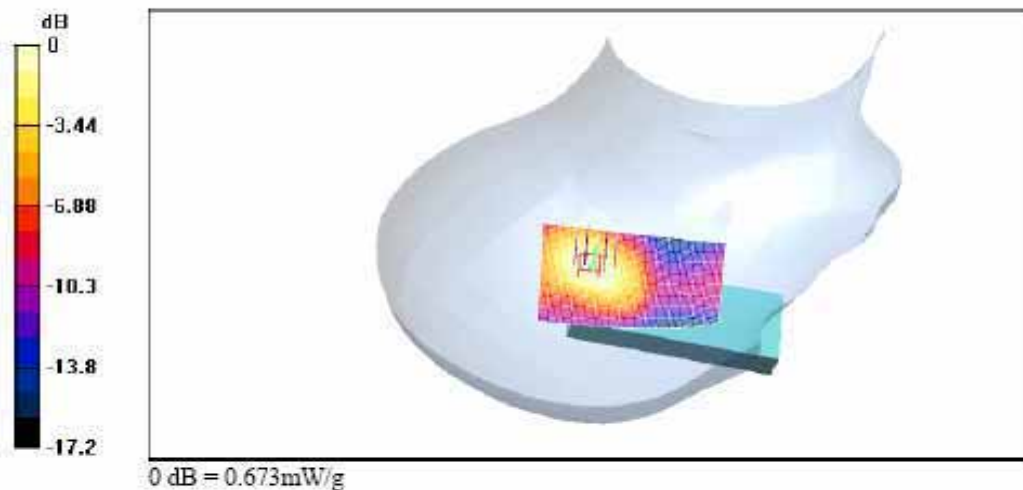

**ESTECH Co., Ltd.**

Rm.1015, World Venture Center II,
426-5, Gasan-dong, Geumcheon-gu,
Seoul, 153-803, Korea

TEL: 82-2-867-3201
FAX: 82-2-867-3204

Date/Time: 02/23/06 13:49:34

Test Laboratory: ESTECH

CH810 RIGHT TILT

DUT: MG100, MG100c, MG100d; **Type:** BAR TYPE; **Serial:** XXXX

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$
kg/m³
Phantom section: Right Section
Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1750; ConvF(5.14, 5.14, 5.14); Calibrated: 2006-01-24
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn551; Calibrated: 2004-04-28
- Phantom: SAM MIC 1800Mhz; Type: SAM MIC 1800MHz; Serial: TP-1263
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112
- Temperature : 23 °C, Humidity : 47%

Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 18.1 V/m; Power Drift = 0.1 dB
Maximum value of SAR (interpolated) = 0.544 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.1 V/m; Power Drift = 0.1 dB
Maximum value of SAR (measured) = 0.523 mW/g
Peak SAR (extrapolated) = 0.927 W/kg
SAR(1 g) = 0.479 mW/g

