

TEST REPORT

Korea EMC Laboratory Co., Ltd.

390 Bora-dong, Giheung-gu, Yongin-si, Gyeonggi-do,
Republic of Korea (446-904)

Tel : 82-31-286-5881 Fax : 82-31-286-2661

www.koreaemc.com

Report Ref. No:

KEL11-F07056

Page (1) / Total (37)

**1. Client**

- Name : LG Electronics USA
- Address : 1000 SYLVAN AVENUE ENGLEWOOD CLIFFS,
NEW JERSEY 07632 USA
- Date of Receipt : July 15, 2011

2. Use of Report : -

3. Name of Product / Model : WLAN UNIT / MR50001WF.GMSEEUS

4. FCC ID : BEJMR50001WFUS

5. Manufacturer and country of origin : LG Electronics Inc. / KOREA

6. Date of Test : July 19, 2011 – September 09, 2011

7. Applied Standard : FCC Part 15, Subpart C(Section 15.247_DTS)
ANSI C63.4

8. Testing Location : ☒ In Laboratory ☐ In Chamber ☐ On Site Test

9. Test Results : ☒ Pass ☐ Fail

Affirmation	Tested by	Technical Manager
	Name : Sang-Hoon Lee (Signature)	Name : Su-Gil Moon (Signature)

October 11, 2011

Korea EMC Laboratory Co., Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Korea EMC Laboratory Co., Ltd.

Korea EMC Laboratory Co., Ltd.390 Bora-dong, Giheung-gu, Yongin-si, Gyeonggi-do,
Republic of Korea (446-904)

Tel : 82-31-286-5881 Fax : 82-31-286-2661

www.koreaemc.com

Report Ref. No:

KEL11-F07056

Page (2) / Total (37)

**0. REPORT REVISION HISTORY**


Date	Revision	Page No
October 11, 2011	Issued	All

This report shall not be reproduced except in full, without the written approval of Korea EMC Laboratory Co., Ltd. This document may be altered or revised by Korea EMC Laboratory Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Korea EMC Laboratory Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

0. REPORT REVISION HISTORY	2
1. TEST LABORATORY	5
1.1 General	5
1.2 Certificate of designated testing laboratory	5
2. DESCRIPTION OF THE EQUIPMENT UNDER TEST	6
2.1 Characteristic	6
2.2 Applied standard	6
2.3 Submitted documents	6
2.4 Channel chart	7
3. TEST CONDITIONS	8
3.1 Description of test configuration	8
3.2 List of peripherals	8
3.3 Uncertainty	8
3.4 Environment condition	8
4. SUMMARY OF TEST RESULTS	9
5. TEST AND RESULTS	10
5.1 AC Power conducted emission	10
5.1.1 Test procedures	10
5.1.2 Limits of AC power conducted emission	10
5.1.3 Test instruments	10
5.1.4 Test results	11-12
5.2 Out of band emission & Band edge	13
5.2.1 Test procedures	13
5.2.2 Limits of out of band emission	13
5.2.3 Test instruments	14
5.2.4 Test results	14-25
5.3 Minimum 6 dB bandwidth	26
5.3.1 Test procedures	26
5.3.2 Limit of minimum 6 dB bandwidth	26
5.3.3 Test instruments	26
5.3.4 Test results	26-30
5.4 Maximum peak out power	31
5.4.1 Test procedures	31
5.4.2 Limit of maximum peak out power	31
5.4.3 Test instruments	31
5.4.4 Test results	31

5.5 Peak power spectral density	32
5.5.1 Test procedures	32
5.5.2 Limit of peak power spectral density	32
5.5.3 Test instruments	32
5.5.4 Test results	32-36
5.6 Antenna requirement	37
5.6.1 Regulation	37
5.6.2 Antenna connected construction	37
5.7 RF exposure	37

Korea EMC Laboratory Co., Ltd. 390 Bora-dong, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea (446-904) Tel : 82-31-286-5881 Fax : 82-31-286-2661 www.koreaemc.com	Report Ref. No: KEL11-F07056 Page (5) / Total (37)	 KEL Korea EMC Laboratory
---	--	---

1. Test Laboratory

General

Name of Test Laboratory	Korea EMC Laboratory Co., Ltd.
President	Won-Hyang Oh
Address	390 Bora-dong, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea (446-904)
TEL	+82-31-286-5881
FAX	+82-31-286-2661
e-mail	webmaster@koreaemc.com

Certificate of Designated Testing Laboratory

Area and Category	Regulation	Registration & Certification No.	Mark.
Radio Research Agency EMI(Radiated & Conducted emission) EMS(Radiated Immunity) Safety Radio Communication Part	Regulation of KCC No. 2011-12 (2011.02.18)	KR0002	
Korea Laboratory Accreditation Scheme (KOLAS) EMI(Radiated & Conducted emission) EMS(Radiated Immunity) Safety Road Vehicle component test(EMC) Military EMC(MIL-STD-461E)	KS Q ISO/IEC 17025:2006	No. 154	
FCC Part 15 & 18 EMI(Radiated & Conducted emission)	ANSI 63.4:2003	90751 (KR0002)	
VCCI EMI(Radiated & Conducted emission)	VCCI	C-2314 R-2139 R-2140	
UL Korea Ltd. Safety	Star Alliance Program	-	
European Conformity EMC & Safety	2004/108/EC 2006/95/EC	-	
TUV SUD Certification after Recognition of Agent's Testing EMC	ISO/IEC 17025:2005	ROK1006C	 Product Service

2. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual

2.1 Characteristics

Product name	WLAN UNIT
Model no.	MR50001WF.GMSEESU
FCC ID	MR50001WFUS
Operation frequency	802.11 b/g : 2412 MHz – 2462 MHz
RF power	802.11 b/g : 16.57 dBm(45.39 mW)
Spread spectrum method	802.11 b/g : DSSS, OFDM
Modulation type	802.11 b : CCK, DQPSK, DBPSK 802.11 g : 64QAM, 16QAM, QPSK, BPSK
Data rate	802.11 b : 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11 g : 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps
Number of channel	802.11 b/g : 11 Channel
Antenna type / Max. gain	802.11 b/g : Dipole Antenna / 2.5 dBi
Power source	DC 5.0 V
Size	115 mm X 105 mm X 50 mm
Interface ports	-
Accessory	-

2.2 Applied standard

- FCC part 15, subpart C(15.247_DTS)
- ANSI C63.4

Note : It has been verified to comply with requirements of FCC part 15, subpart B, Class B(DoC). The test report has been issued separately(KEL11-F07118)

2.3 Submitted documents

- Block diagram
- Schematic diagram
- Antenna specification
- Part list(B.O.M)
- User manual

2.4 Channel chart

802.11 b/g(11 Channel)

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

▪ Measurement Channel

802.11 b/g : Low(2412 MHz), Middle(2437 MHz), High(2462 MHz)

▪ Test rate : 802.11 b/g(11, 54 Mbps)

3. TEST CONDITIONS

3.1 Description of test configuration

The EUT has been tested as an independent unit with other necessary accessories or support unit. The following support units or accessories were used to form a representative test configuration during the tests.

3.2 List of peripherals

Type	Model no.	Serial no.	Manufacturer
EUT(WLAN Unit)	MR50001WF	-	LG Electronics Inc.
Adapter	ANY0510A-2	-	Wendeng Netron Tech Electronics Co., Ltd.

3.3 Uncertainty

Measurement	Frequency	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	1.5
Radiated Emission	30 MHz ~ 1 GHz	4.4
	1 GHz ~ 40 GHz	4.1

3.4 Environment condition

Measurement	Temperature	Humidity	Atmospheric pressure
Conducted Emission	22 ± 4 °C	30 – 60 % R.H.	101.5 kPa
Radiated Emission	20 ± 4 °C	30 – 60 % R.H.	101.4 kPa

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor if $k=2$.

4. SUMMARY OF TEST RESULTS

Section	Test Type	Limit	Remark	Result
15.207	▪ AC Power conducted emission	Table 15.207	Meet the requirement	Pass
15.209, 15.247	▪ Out of band emissions & Band edge	–	Meet the requirement	Pass
15.247(a)(2)	▪ Minimum 6 dB bandwidth	Min. 500 kHz	Meet the requirement	Pass
15.247(b)(1)	▪ Maximum peak out power	WLAN : 1 W	Meet the requirement	Pass
15.247(d)	▪ Peak power spectral density	> 8 dBm	Meet the requirement	Pass
15.203, 15.247(b)(3)	▪ Antenna requirement (MPE Calculations)	–	Meet the requirement	Pass

5. TEST AND RESULTS

5.1 AC Power conducted emission

5.1.1 Test procedures

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5 m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω / 50 μ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI Test Receiver, to the input power source
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements
5. The measuring level is calculated by adding the Correction Factor, Cable Loss.
The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Correction Factor + Cable Factor

5.1.2 Limits of AC power conducted emission

Frequency of emission(MHz)	Conducted limit(dBuV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency

5.1.3 Test instruments

Description	Manufacturer	Model no.	Serial no.	Due cal.	Use
Test receiver	Rohde&Schwarz	ESCS30	10054	2012.10.04	☒
Two line V- Network	Rohde&Schwarz	ESH3-Z5	560685/005	2012.10.04	☒
LISN (for peripheral)	Kyoritsu	KNW-407	8-883-14	2012.10.04	☐


5.1.4 Test results

1. Data


Worst case 802.11 b : Frequency – 2437 MHz									
Frequency [MHz]	Correction factor		Line (H/N)	Quasi-peak			Average		
	LISN [dB]	Cable [dB]		Limit (dBuV)	Reading (dBuV)	Result (dBuV)	Limit (dBuV)	Reading (dBuV)	Result (dBuV)
0.166	0.09	0.00	N	65.1	32.62	32.71	55.1	16.91	17.00
0.353	0.09	0.00	H	58.8	41.06	41.15	48.8	31.08	31.17
0.487	0.09	0.00	H	56.2	29.54	29.63	46.2	20.87	20.86
1.200	0.10	0.00	H	56.0	33.86	33.96	46.0	24.50	24.60
1.507	0.12	0.00	H	56.0	31.90	32.02	46.0	23.43	23.55
2.282	0.14	0.05	H	56.0	31.64	31.83	46.0	22.93	23.12
6.549	0.38	0.23	H	56.0	21.80	22.41	46.0	15.39	16.00

2. Graph

802.11 b : Frequency – 2437 MHz(H)

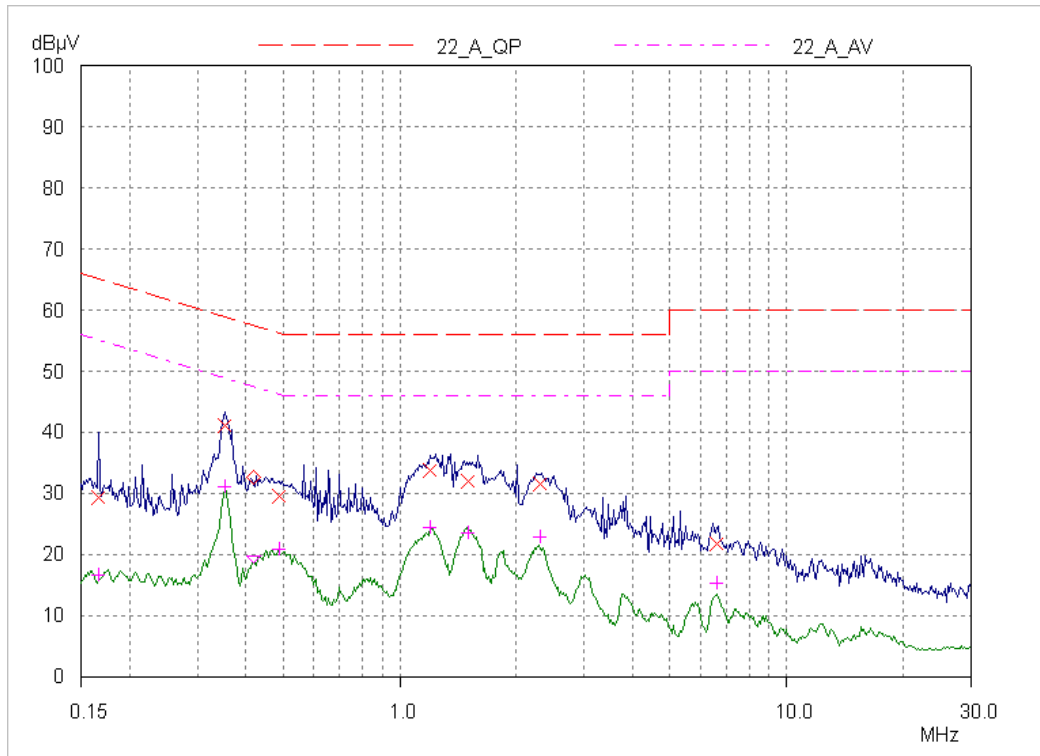

802.11 b : Frequency – 2437 MHz(N)

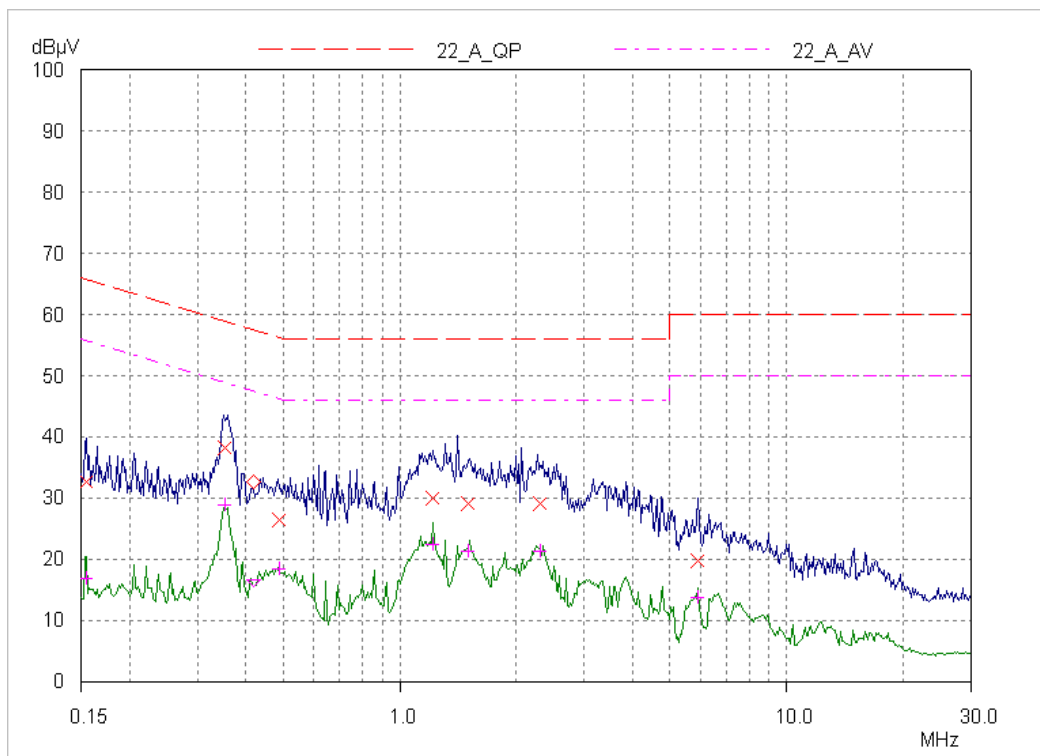

5.2 Out of band emissions & Band edge

5.2.1 Test procedures

1) Spurious RF conducted emissions :

The Out of Band emission was measured with a spectrum analyzer connected to the antenna port. At RBW = 100 kHz, VBW = 300 kHz, spurious emission in the frequency range 30 MHz – 25 GHz which was out to 2400 – 2483.5 MHz was lower 20 dB than radio frequency power.

2) Spurious Radiated emissions :

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8 m height, 1 × 1.5 m non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1000 MHz using the Bi-Log antenna, and from 1000 MHz to 18000 MHz using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 × 4 m at the test Site.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
7. The field strength is calculated by adding the Antenna Factor, Cable factor, & preamplifier.
The basic equation with a sample calculation is as follow :
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

5.2.2 Limits of out of band emission & band edge

According to 15.209(a), for an intentional device, the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 m shall not exceed the following values :

Frequency(MHz)	Field strength(uV/m @ 3 m)	Field strength(dBuV/m @ 3 m)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Note : For frequency above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation

5.2.3 Test instruments

Description	Manufacturer	Model no.	Serial no.	Due cal.	Use
Spectrum Analyzer	Rohde&Schwarz	ESU40	100027	2012.07.17	☒
Horn Antenna	AH Systems	SAS-571	500	2012.03.21	☒
Bi-Log Antenna	VULB9160	Schwarzbeck	3049	2011.12.18	☒
Pre Amplifier	8447E	HP	2434A02093	2012.01.10	☒
Pre Amplifier	87405-60021	AGILENT	10004	2012.01.04	☒
Test Receiver / Spectrum Analyzer	Rohde&Schwarz	ESCI	100561	2012.07.17	☒
Attenuator	AGILENT	8491A	51517	2012.10.04	☒

5.2.4 Test results

1) Out of band emissions & Band edge(Conducted)

1. Data



802.11 b			
Frequency[MHz]	Result[dBc]	Limit[dBc]	Margin[dB]
2412	39.70	20	19.70
2437	44.12	20	24.12
2462	43.60	20	23.60

802.11 g			
Frequency[MHz]	Result[dBc]	Limit[dBc]	Margin[dB]
2412	28.29	20	8.29
2437	40.73	20	20.73
2462	40.81	20	20.81


2. Graph

802.11 b



Lowest Channel(operating at 2412 MHz)

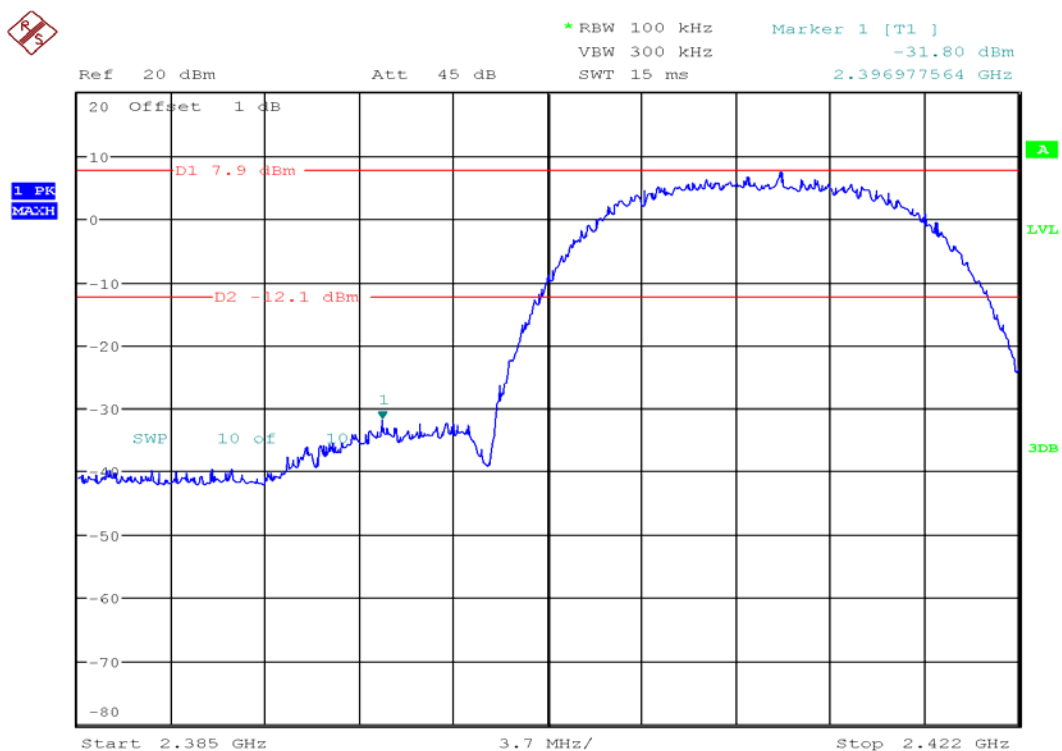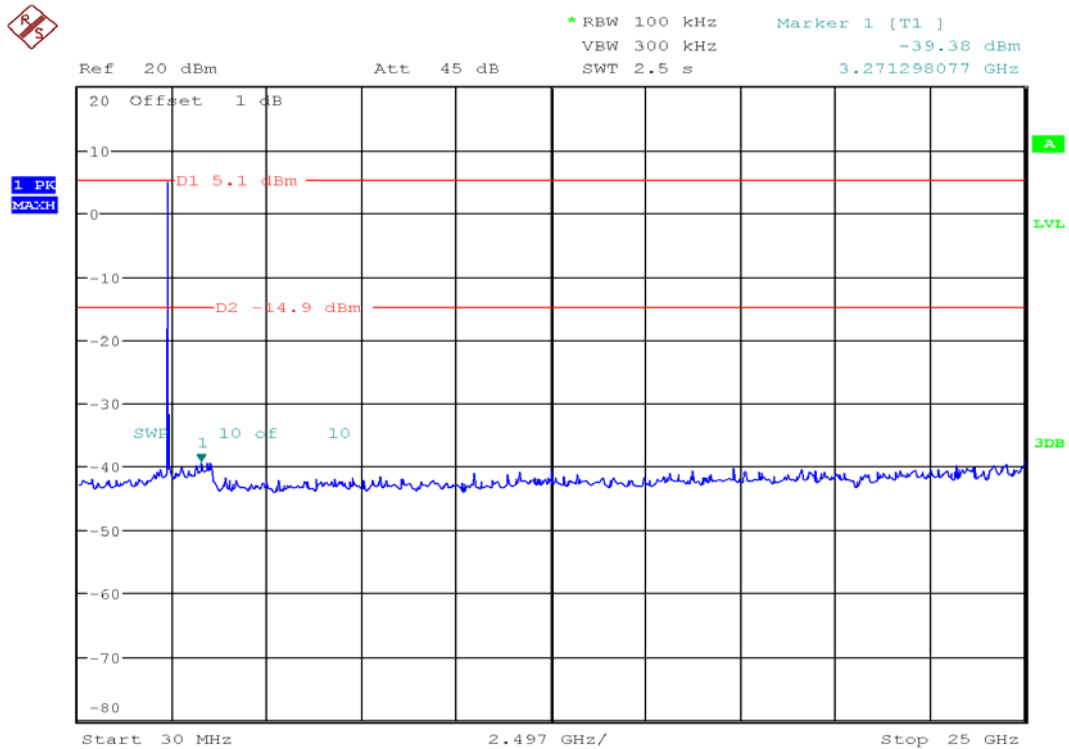

Middle Channel(operating at 2437 MHz)


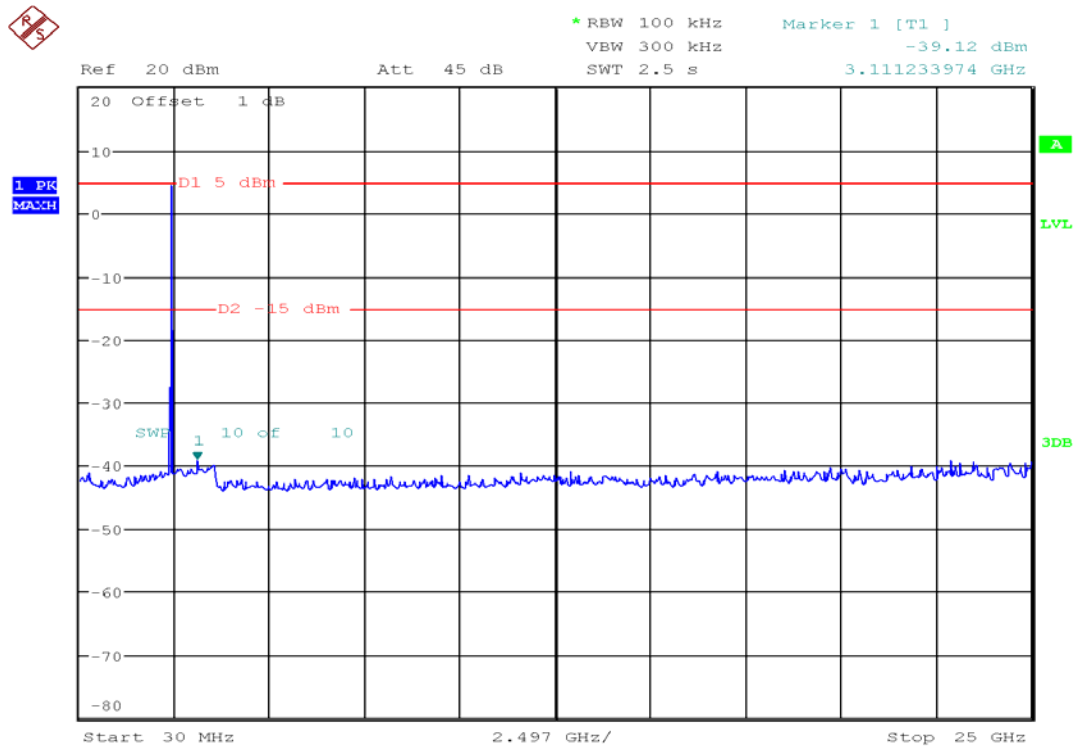


Highest Channel(operating at 2462 MHz)

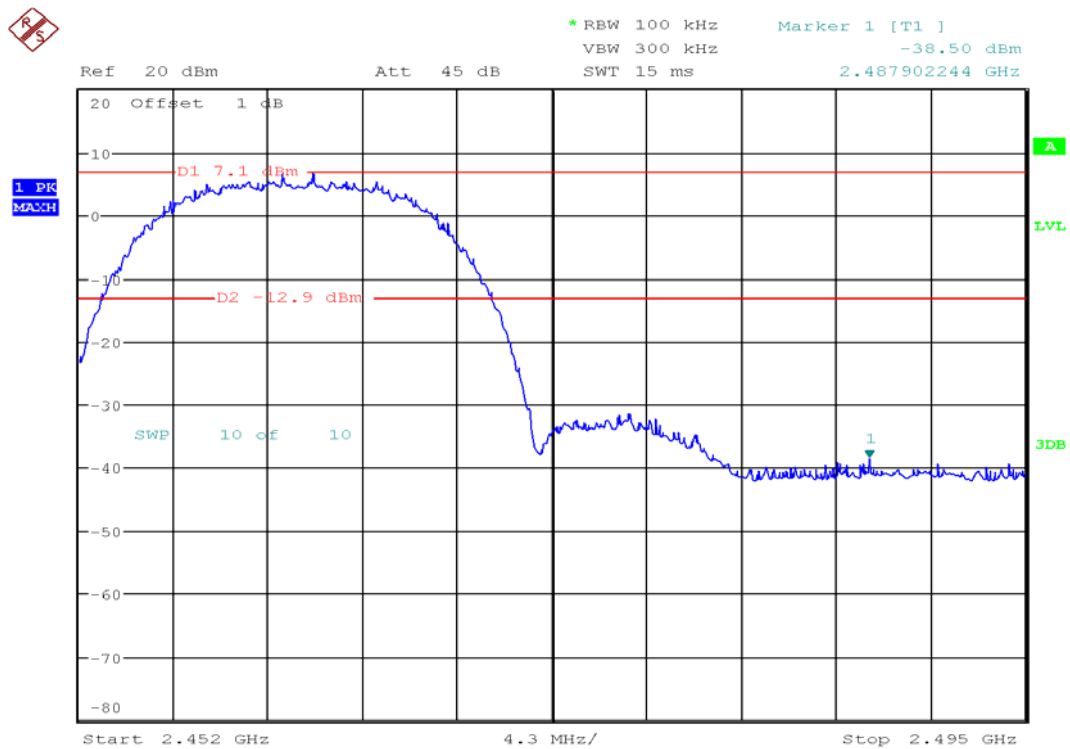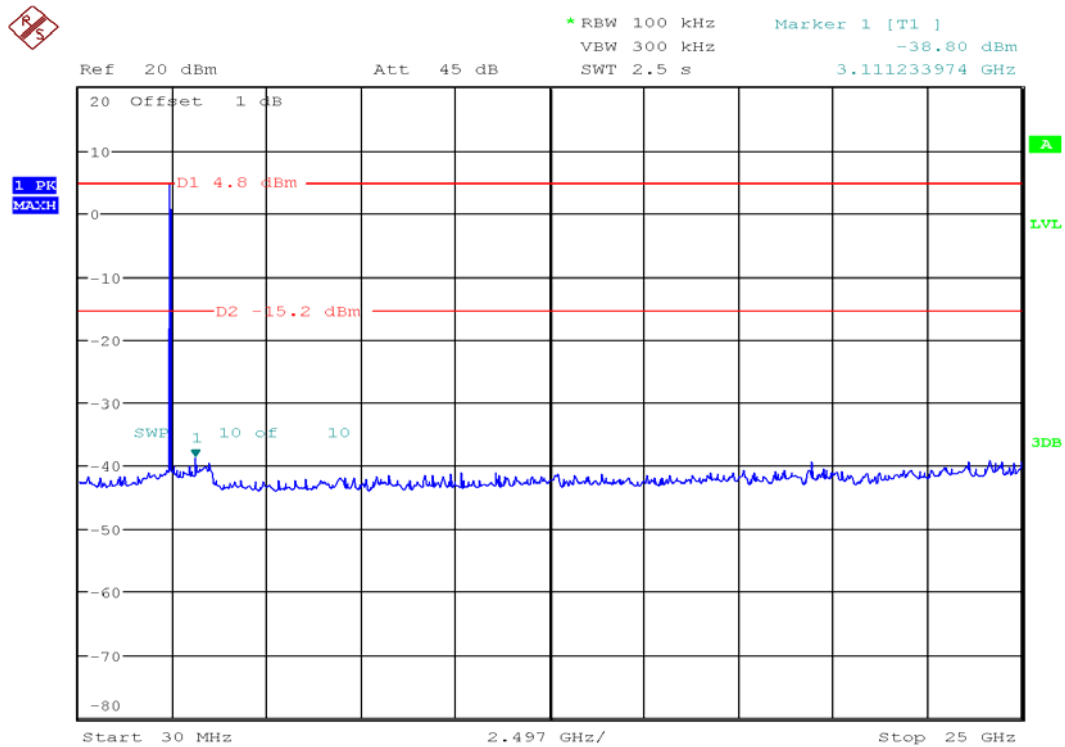


802.11 g



Lowest Channel(operating at 2412 MHz)

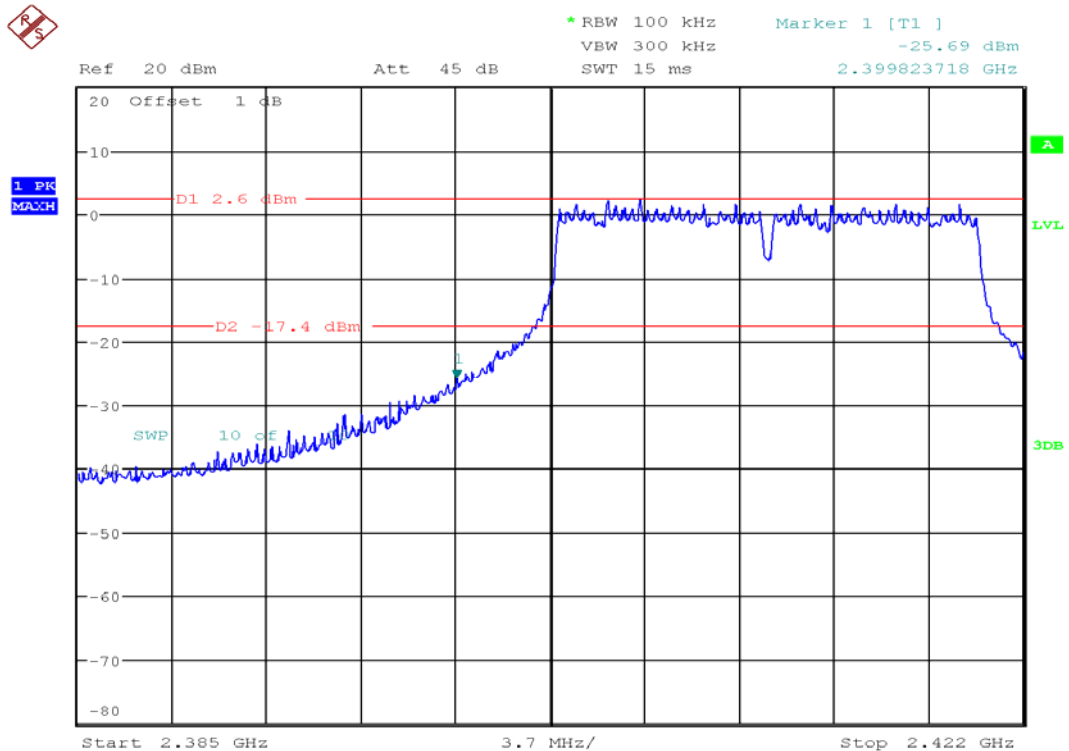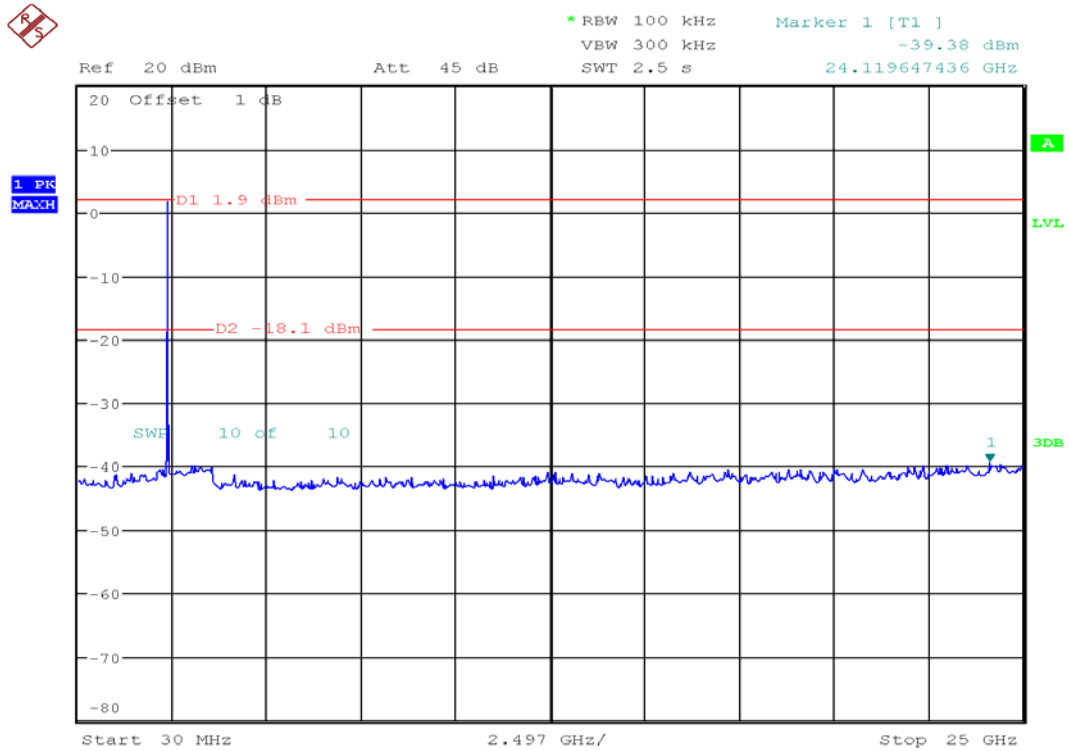

Middle Channel(operating at 2437 MHz)

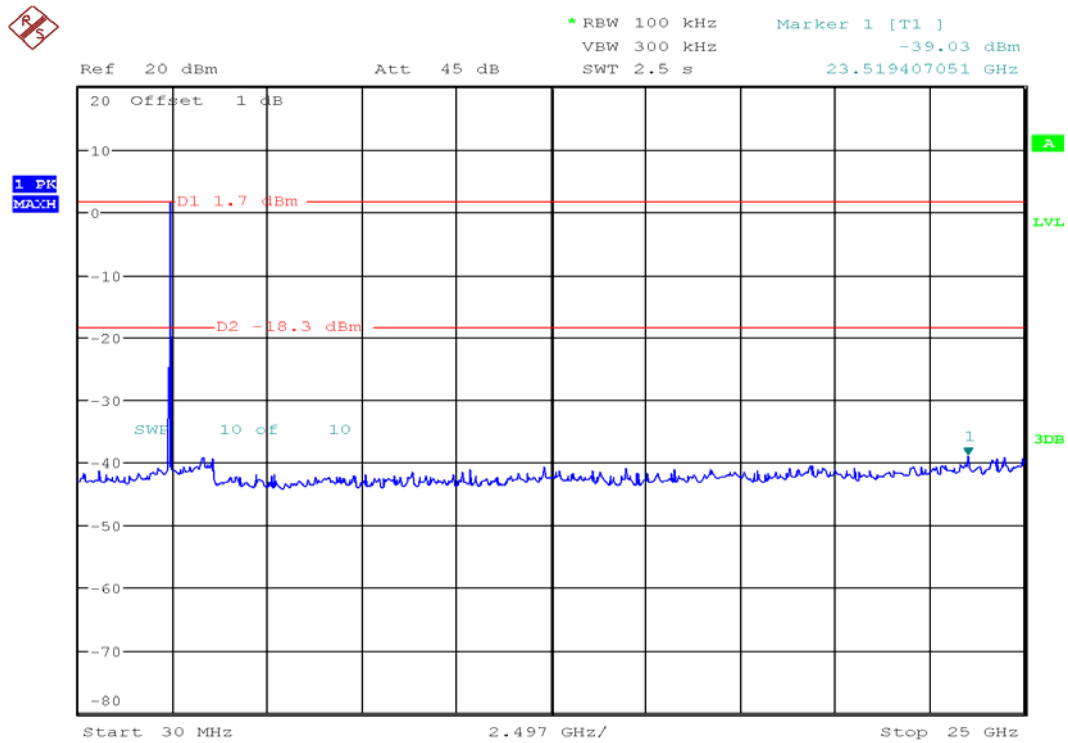

Highest Channel(operating at 2462 MHz)

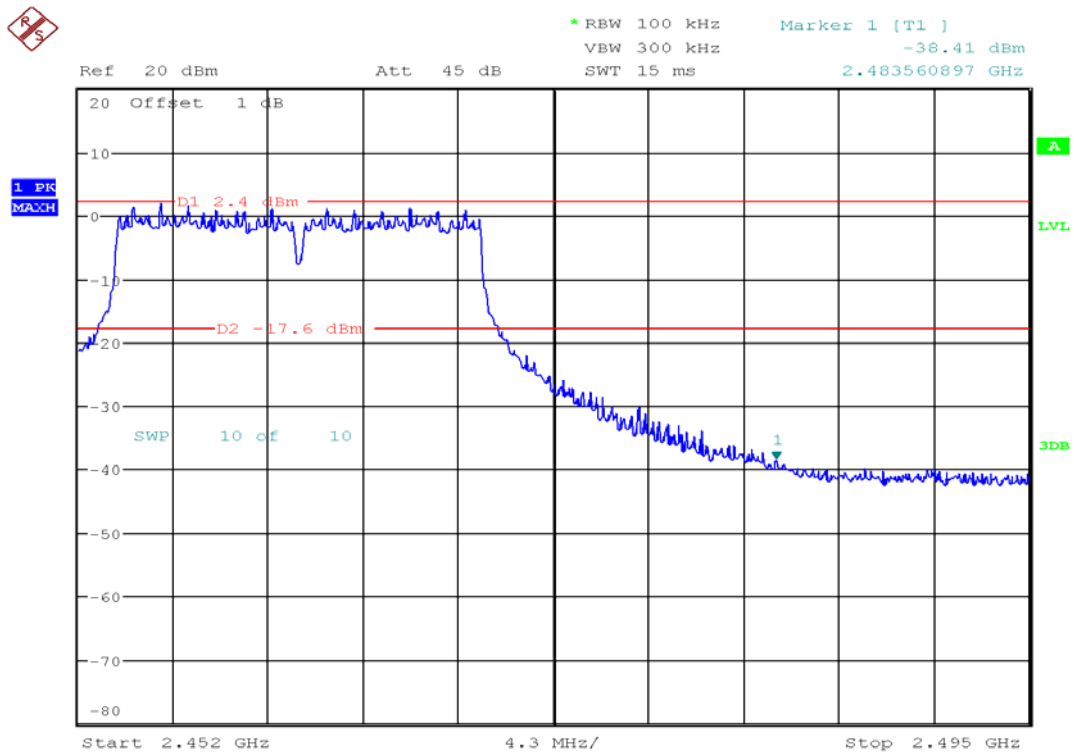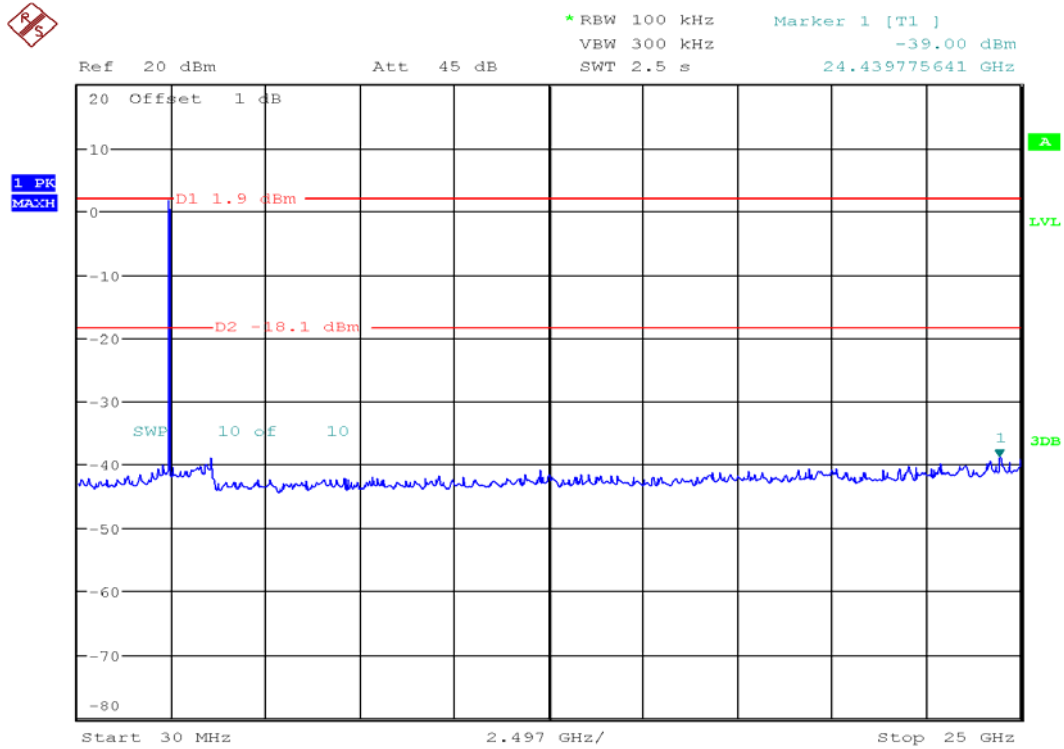

2) Out of band emissions & Band edge(Radiated)



1. Above 1000 MHz

802.11 b : Frequency – 2412 MHz(above 1000 MHz)								
Frequency [MHz]	Reading [dBuV]	Pol. [H/V]	Height [m]	Correction Factor		Result Value		
				Ant. Factor [dB]	Cable+Amp. [dB]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
Average data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 10 Hz)								
2319.74*	34.9	V	1.3	30.1	25.0	54.0	40.0	14.0
2412	50.6	H	1.3	30.2	25.0	-	55.8	-
4824	36.2	H	1.1	34.5	23.5	54.0	47.2	6.8
Peak data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 3 MHz)								
2347.94*	48.1	V	1.3	30.1	25.0	74.0	53.2	20.8
2412	83.8	H	1.3	30.2	25.0	-	89.0	-
4824	41.4	H	1.1	34.5	23.5	74.0	52.4	21.6

802.11 b : Frequency – 2437 MHz(above 1000 MHz)								
Frequency [MHz]	Reading [dBuV]	Pol. [H/V]	Height [m]	Correction Factor		Result Value		
				Ant. Factor [dB]	Cable+Amp. [dB]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
Average data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 10 Hz)								
2437	50.5	H	1.3	30.2	24.8	-	55.9	-
4874	38.8	H	1.1	34.6	23.5	54.0	49.9	4.1
Peak data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 3 MHz)								
2437	89.1	H	1.3	30.2	24.8	-	94.5	-
4874	44.5	H	1.1	34.6	23.5	74.0	55.6	18.4

802.11 b : Frequency – 2462 MHz(above 1000 MHz)								
Frequency [MHz]	Reading [dBuV]	Pol. [H/V]	Height [m]	Correction Factor		Result Value		
				Ant. Factor [dB]	Cable+Amp. [dB]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
Average data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 10 Hz)								
2462	50.8	H	1.2	30.3	24.8	-	56.3	-
2491.75*	31.5	V	1.2	30.4	24.8	54.0	37.1	16.9
4924	36.1	H	1.1	34.7	23.5	54.0	47.3	6.7
Peak data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 3 MHz)								
2462	91.7	H	1.2	30.3	24.8	-	97.2	-
2484.53*	45.2	V	1.2	30.4	24.8	74.0	50.8	23.2
4924	43.3	H	1.1	34.7	23.5	74.0	54.5	19.5

Note : * Restricted band

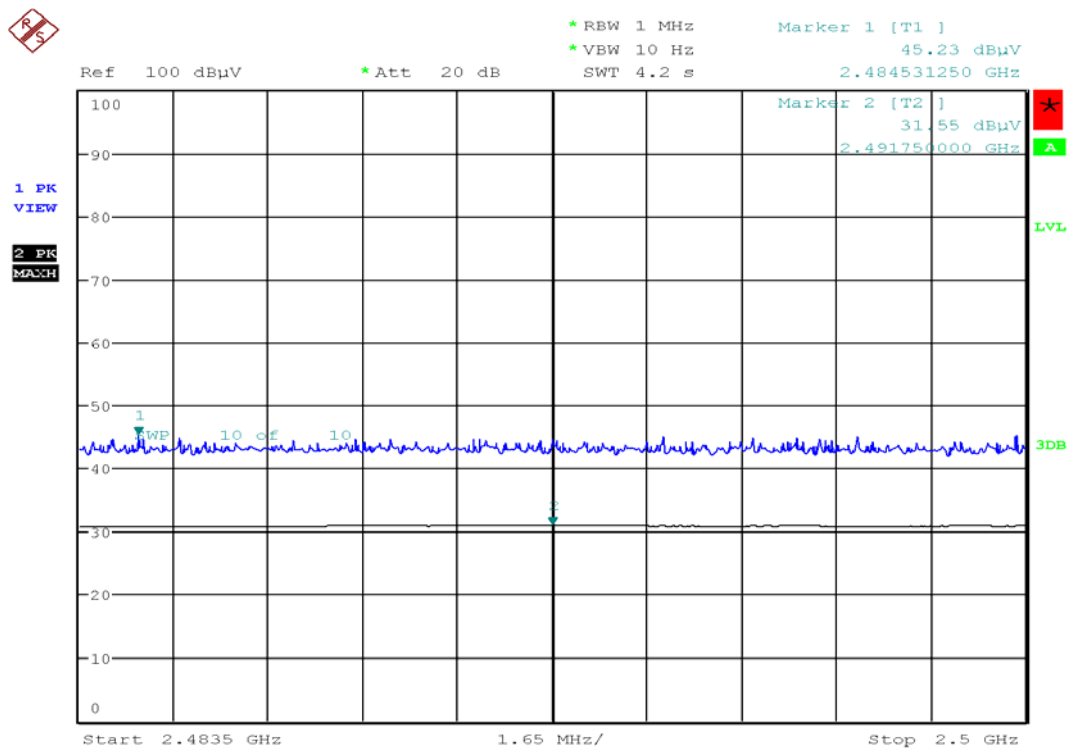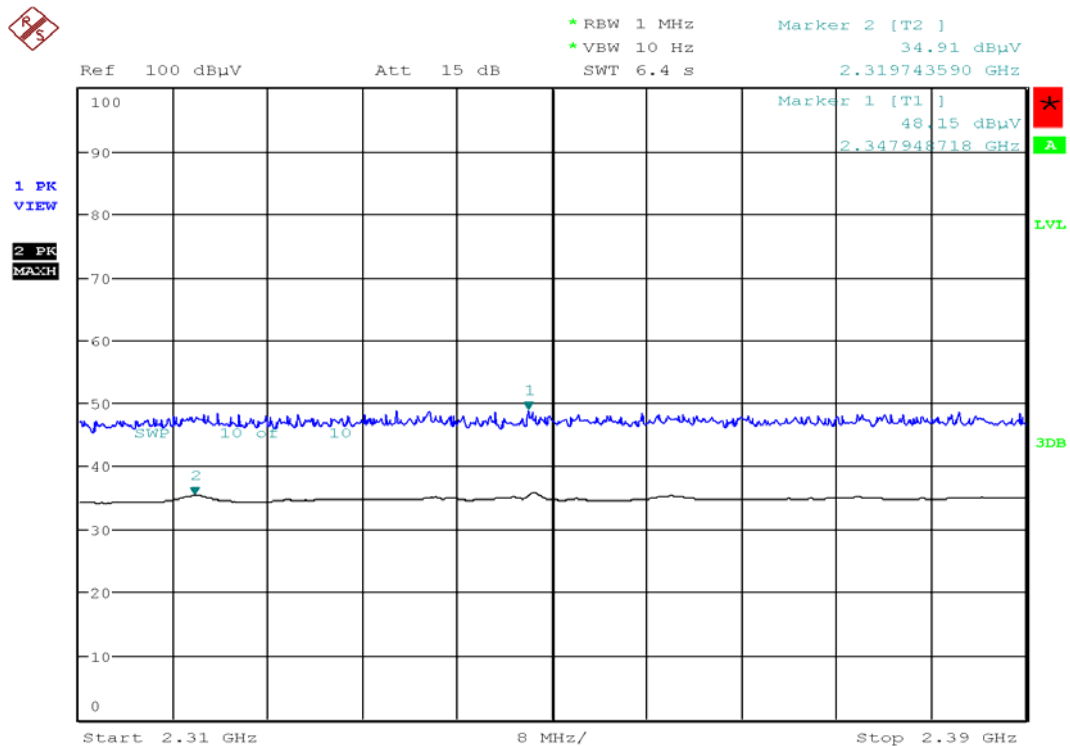

Korea EMC Laboratory Co., Ltd.390 Bora-dong, Giheung-gu, Yongin-si, Gyeonggi-do,
Republic of Korea (446-904)

Tel : 82-31-286-5881 Fax : 82-31-286-2661

www.koreaemc.com

Report Ref. No:

KEL11-F07056

Page (23) / Total (37)

**802.11 g : Frequency – 2412 MHz(above 1000 MHz)**

Frequency [MHz]	Reading [dBuV]	Pol. [H/V]	Height [m]	Correction Factor		Result Value		
				Ant. Factor [dB]	Cable+Amp. [dB]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
Average data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 10 Hz)								
2390.00*	41.3	V	1.3	30.1	25.0	54.0	46.4	7.6
2412	50.2	H	1.3	30.2	25.0	-	55.4	-
4824	28.1	H	1.1	34.5	23.5	54.0	39.1	14.9
Peak data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 3 MHz)								
2387.05*	55.8	V	1.3	30.1	25.0	74.0	60.9	13.1
2412	67.0	H	1.3	30.2	25.0	-	72.2	-
4824	39.8	H	1.1	34.5	23.5	74.0	50.8	23.2



802.11 g : Frequency – 2437 MHz(above 1000 MHz)

Frequency [MHz]	Reading [dBuV]	Pol. [H/V]	Height [m]	Correction Factor		Result Value		
				Ant. Factor [dB]	Cable+Amp. [dB]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
Average data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 10 Hz)								
2437	47.4	H	1.3	30.2	24.8	-	52.8	-
4874	27.2	H	1.1	34.6	23.5	54.0	38.3	15.7
Peak data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 3 MHz)								
2437	66.5	H	1.3	30.2	24.8	-	71.9	-
4874	39.3	H	1.1	34.6	23.5	74.0	50.4	23.6

802.11 g : Frequency – 2462 MHz(above 1000 MHz)

Frequency [MHz]	Reading [dBuV]	Pol. [H/V]	Height [m]	Correction Factor		Result Value		
				Ant. Factor [dB]	Cable+Amp. [dB]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
Average data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 10 Hz)								
2462	46.1	H	1.2	30.3	24.8	-	51.6	-
2483.50*	36.1	V	1.2	30.4	24.8	54.0	41.7	12.3
4924	29.7	H	1.1	34.7	23.5	54.0	40.9	13.1
Peak data, emissions above 1000 MHz(RBW = 1 MHz, VBW = 3 MHz)								
2462	64.6	H	1.2	30.3	24.8	-	70.1	-
2483.76*	59.2	V	1.2	30.4	24.8	74.0	64.8	9.2
4924	39.7	H	1.1	34.7	23.5	74.0	50.9	23.1

Note : * Restricted band

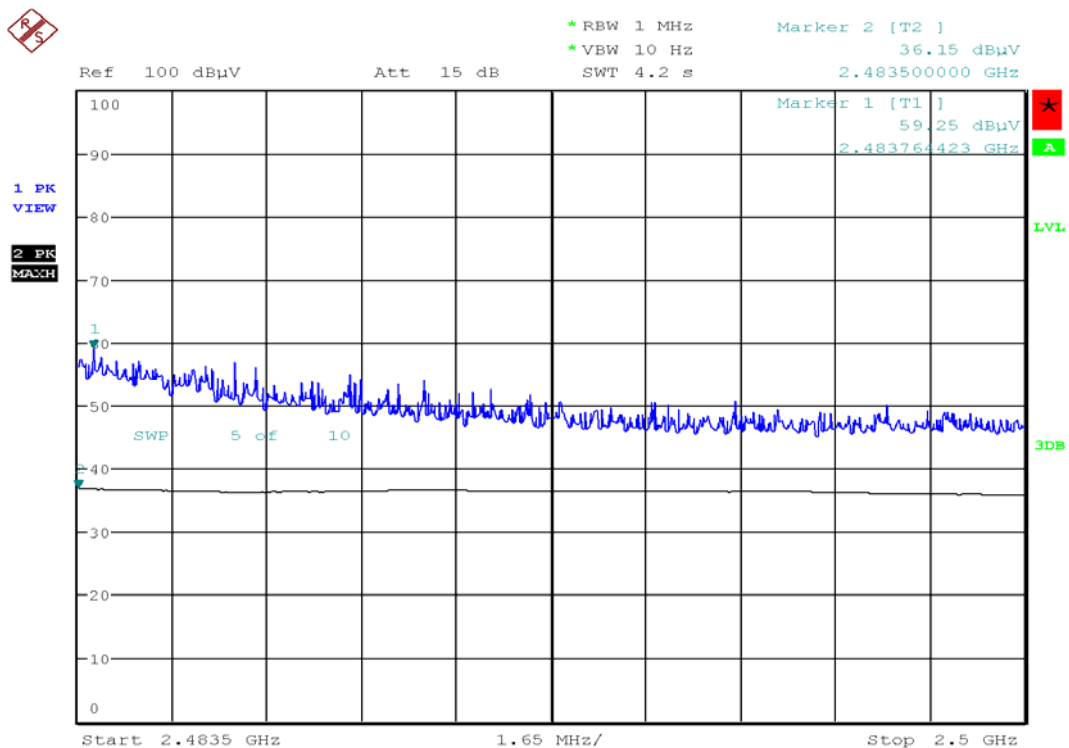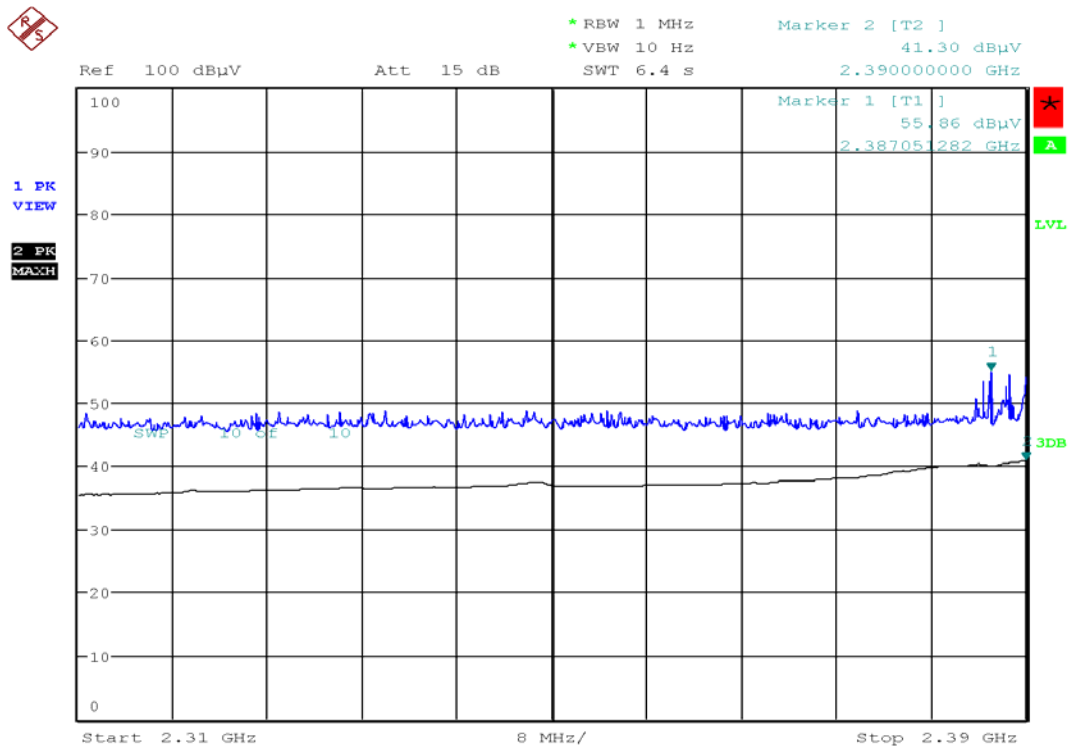

Korea EMC Laboratory Co., Ltd.390 Bora-dong, Giheung-gu, Yongin-si, Gyeonggi-do,
Republic of Korea (446-904)

Tel : 82-31-286-5881 Fax : 82-31-286-2661

www.koreaemc.com

Report Ref. No:

KEL11-F07056

Page (25) / Total (37)



2. Below 1000 MHz

Worst case – 802.11 b : Below 1000 MHz								
Frequency [MHz]	Reading [dBuV]	Pol. [H/V]	Height [m]	Correction Factor		Result Value		
				Ant. Factor [dB]	Cable+Amp. [dB]	Limit [dBuV/m]	Result [dBuV/m]	Margin [dB]
46.16	38.1	V	1.0	12.0	18.6	40.0	31.5	8.5
67.18	40.3	V	2.3	10.2	18.8	43.5	31.7	11.8
75.26	41.1	V	2.1	8.9	18.7	46.0	31.3	14.7
270.88	39.7	H	1.4	11.6	19.0	46.0	32.3	13.7
327.46	35.3	H	1.4	13.2	17.6	46.0	30.9	15.1
451.95	32.6	H	1.2	16.3	16.8	46.0	32.1	13.9
633.01	34.5	V	1.5	19.3	14.4	46.0	39.4	6.6

5.3 Minimum 6 dB bandwidth

5.3.1 Test procedures

1. The transmitter out was connected to the Spectrum analyzer through a cable.
2. The bandwidth of the fundamental frequency was measured by Spectrum analyzer with RBW=100 kHz, VBW=300 kHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

5.3.2 Limit of minimum 6 dB bandwidth

The minimum of 6 dB bandwidth measurement is 0.5 MHz.

5.3.3 Test instruments

Description	Manufacturer	Model no.	Serial no.	Due cal.	Use
Spectrum analyzer	Rohde&Schwarz	FSQ40	200062	2012.10.04	☒

5.3.4 Test Results


1. Data

802.11 b			
Frequency[MHz]	6 dB bandwidth[MHz]	Minimum limit[MHz]	Result
2412	12.01	0.5	Pass
2437	11.95	0.5	Pass
2462	11.98	0.5	Pass


802.11 g			
Frequency[MHz]	6 dB bandwidth[MHz]	Minimum limit[MHz]	Result
2412	16.50	0.5	Pass
2437	16.50	0.5	Pass
2462	16.50	0.5	Pass

2. Graph


802.11 b(at 2412 MHz)


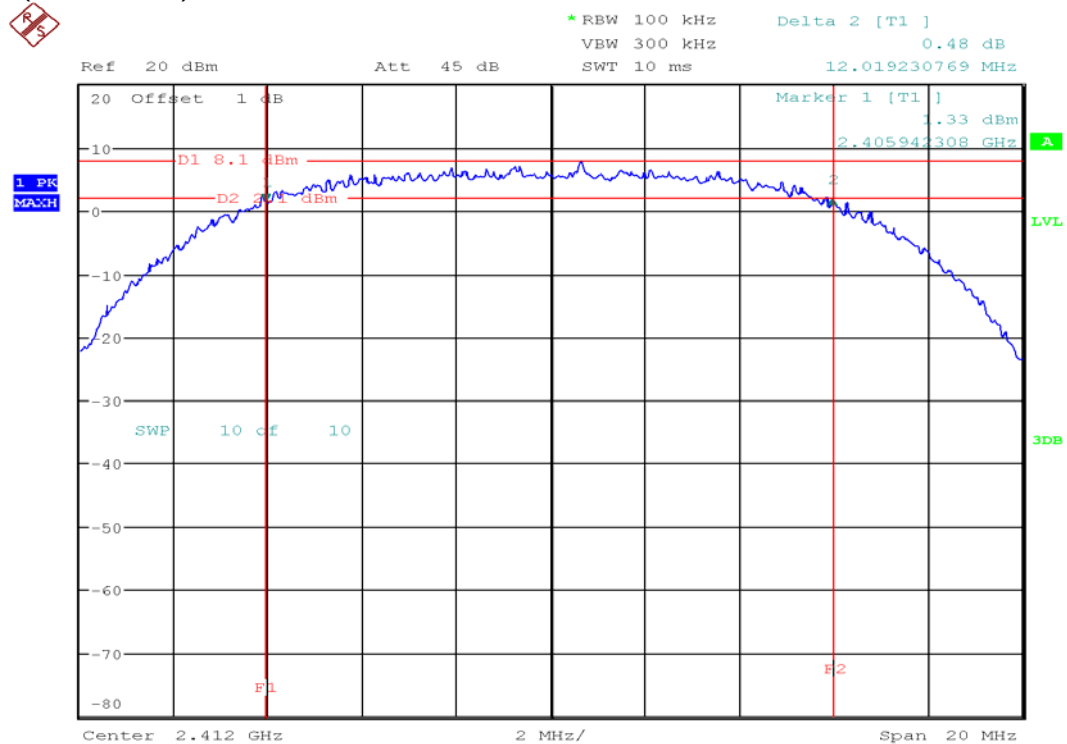


802.11 b(at 2437 MHz)

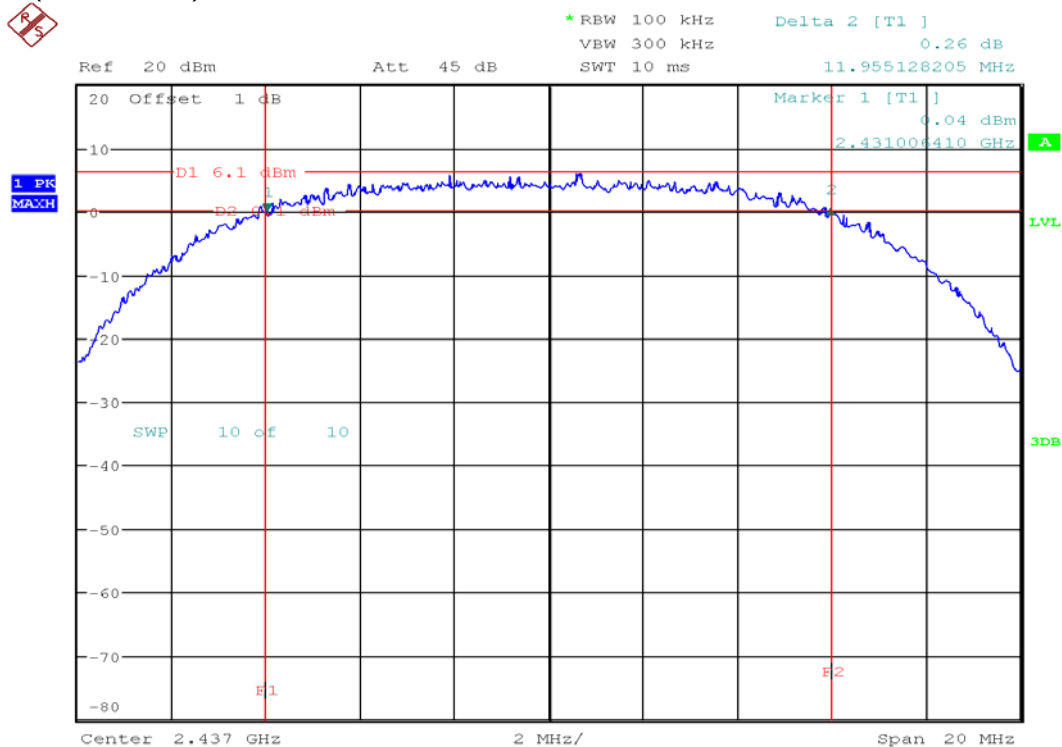


802.11 b(at 2462 MHz)

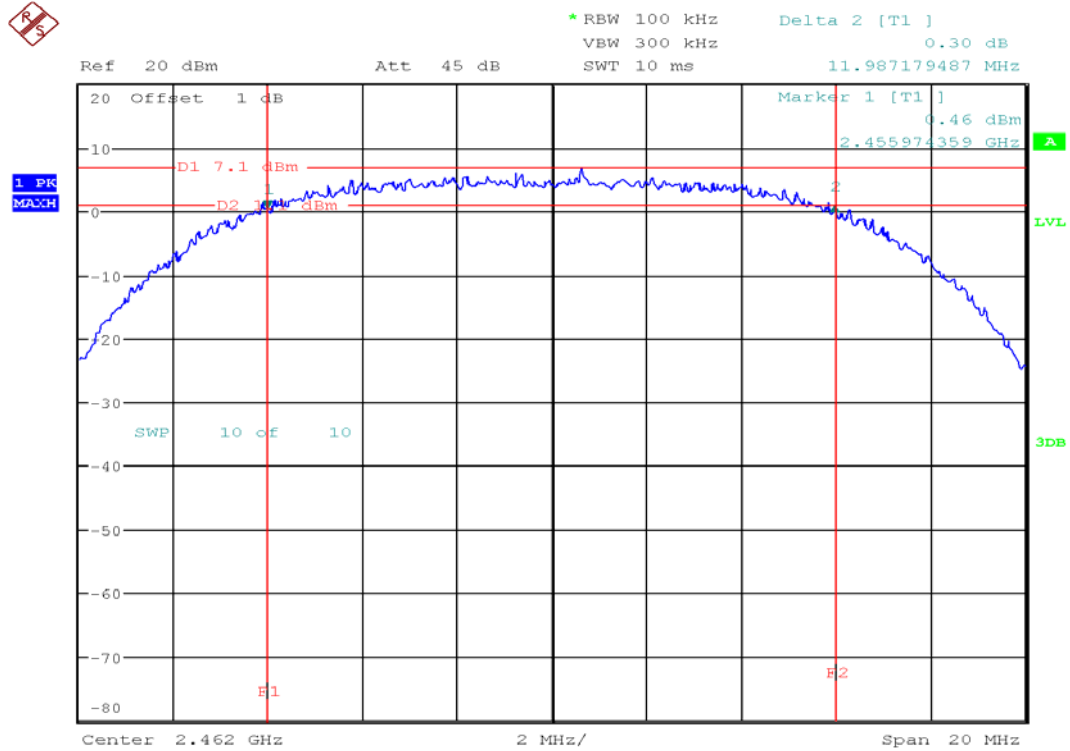

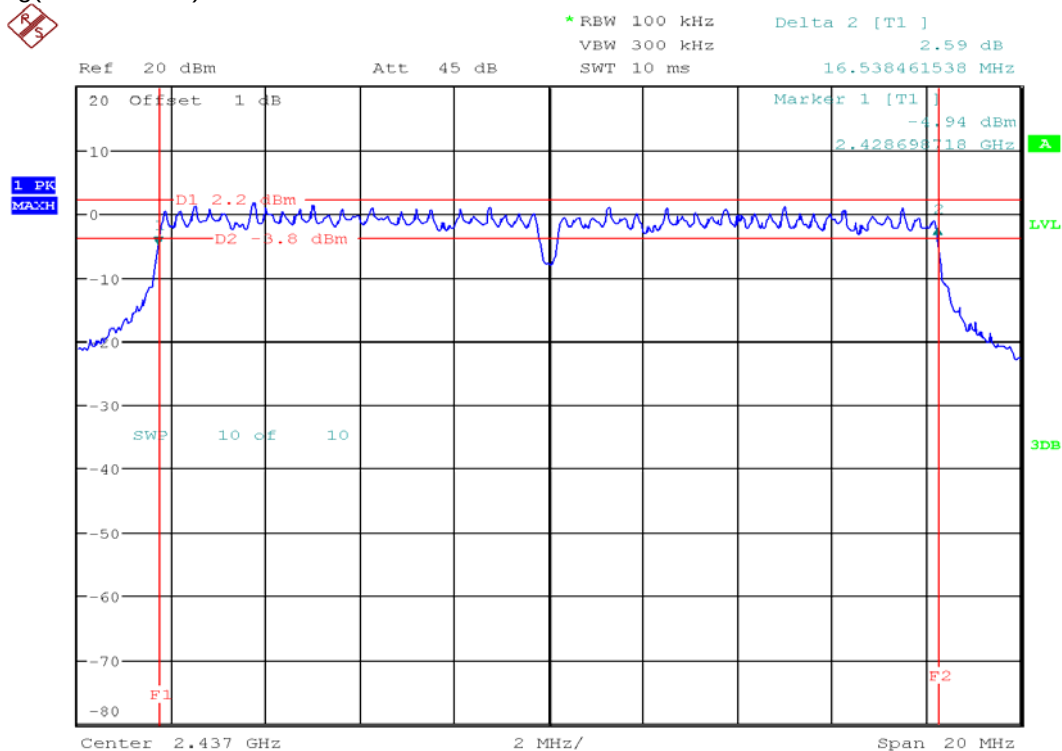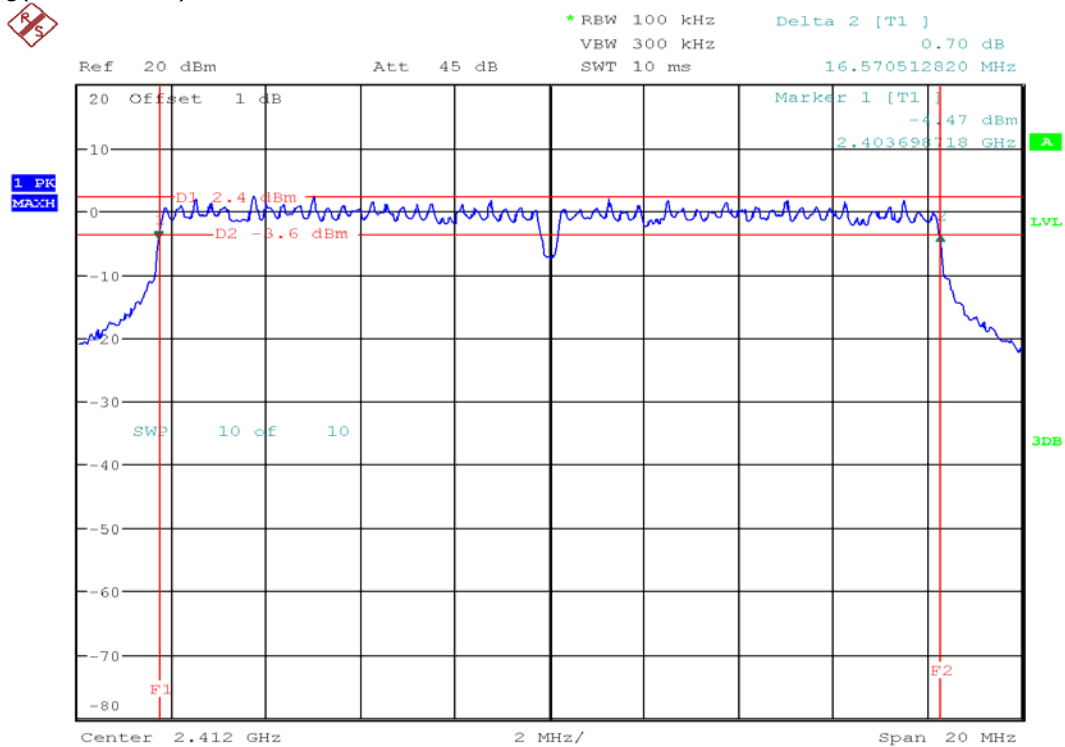

802.11 g(at 2462 MHz)

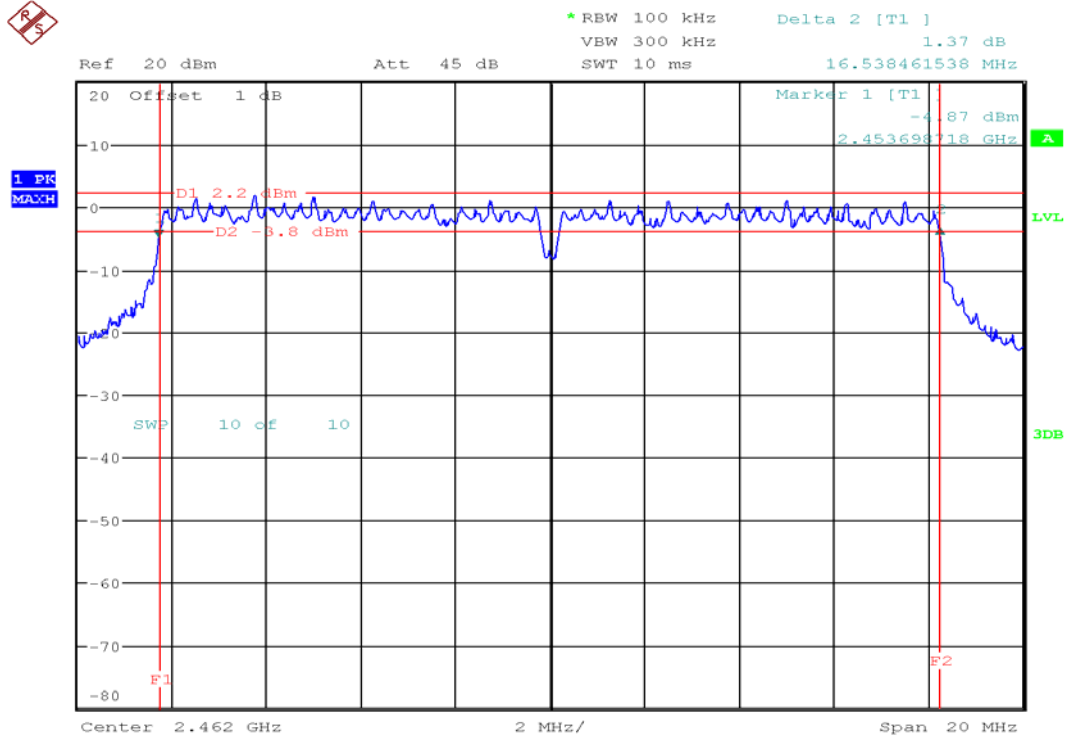

5.4 Maximum peak out power

5.4.1 Test procedures

1. A power sensor was used on the output port of the EUT.
2. A power meter was used to read the response of the power sensor.
3. Record the power level

5.4.2 Limit of maximum peak out power

The maximum out peak power = 30 dBm

5.4.3 Test instruments

Description	Manufacturer	Model no.	Serial no.	Due cal.	Use
Spectrum analyzer	Rohde&Schwarz	FSQ40	200062	2012.10.04	☒
Power sensor	AGILENT	N1921A	MY45200258	2012.10.04	☒
Power meter	AGILENT	N1911A	MY45101189	2012.10.04	☒

5.4.4 Test Results

802.11 b				
Frequency [MHz]	Out power [dBm]	Out power [mW]	Out power limit [dBm]	Result
2412	16.57	45.3	30	Pass
2437	16.45	44.1	30	Pass
2462	16.15	41.2	30	Pass

802.11 g				
Frequency [MHz]	Out power [dBm]	Out power [mW]	Out power limit [dBm]	Result
2412	13.77	23.8	30	Pass
2437	13.36	21.6	30	Pass
2462	13.04	20.1	30	Pass

5.5 Peak power spectral density(PSD)

5.5.1 Test procedures

1. The transmitter out was connected to the Spectrum analyzer through a cable.
2. The bandwidth of the fundamental frequency was measured with the Spectrum analyzer using
RBW = 3 kHz and VBW = 30 kHz, set sweep time = span / 3 kHz.
3. The power spectral density was measured and recorded.

5.5.2 Limit of maximum peak out power

The maximum of power spectral density measurement is 8 dBm.

5.5.3 Test instruments

Description	Manufacturer	Model no.	Serial no.	Due cal.	Use
Spectrum analyzer	Rohde&Schwarz	FSQ40	200062	2012.10.04	☒

5.5.4 Test Results


1. Data

802.11 b			
Frequency[MHz]	PSD level[dBm]	Maximum limit[dBm]	Result
2412	-5.72	8	Pass
2437	-6.83	8	Pass
2462	-6.38	8	Pass


802.11 g			
Frequency[MHz]	PSD level[dBm]	Maximum limit[dBm]	Result
2412	-12.21	8	Pass
2437	-12.76	8	Pass
2462	-12.85	8	Pass

2. Graph


802.11 b(at 2412 MHz)

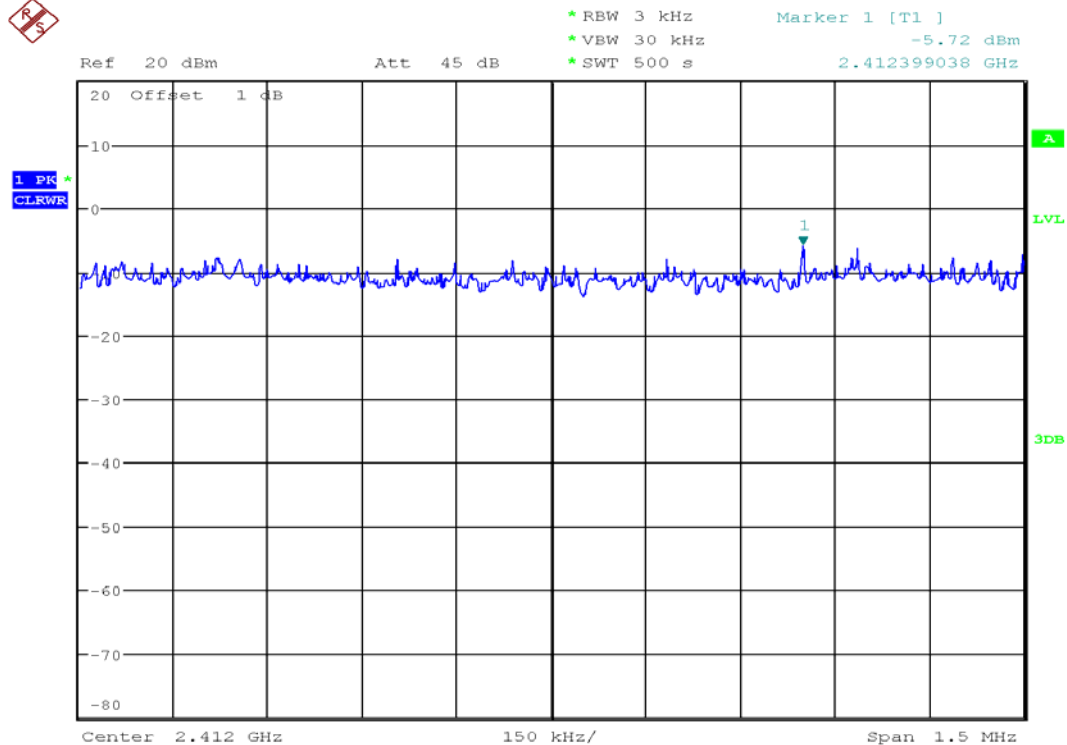


802.11 b(at 2437 MHz)

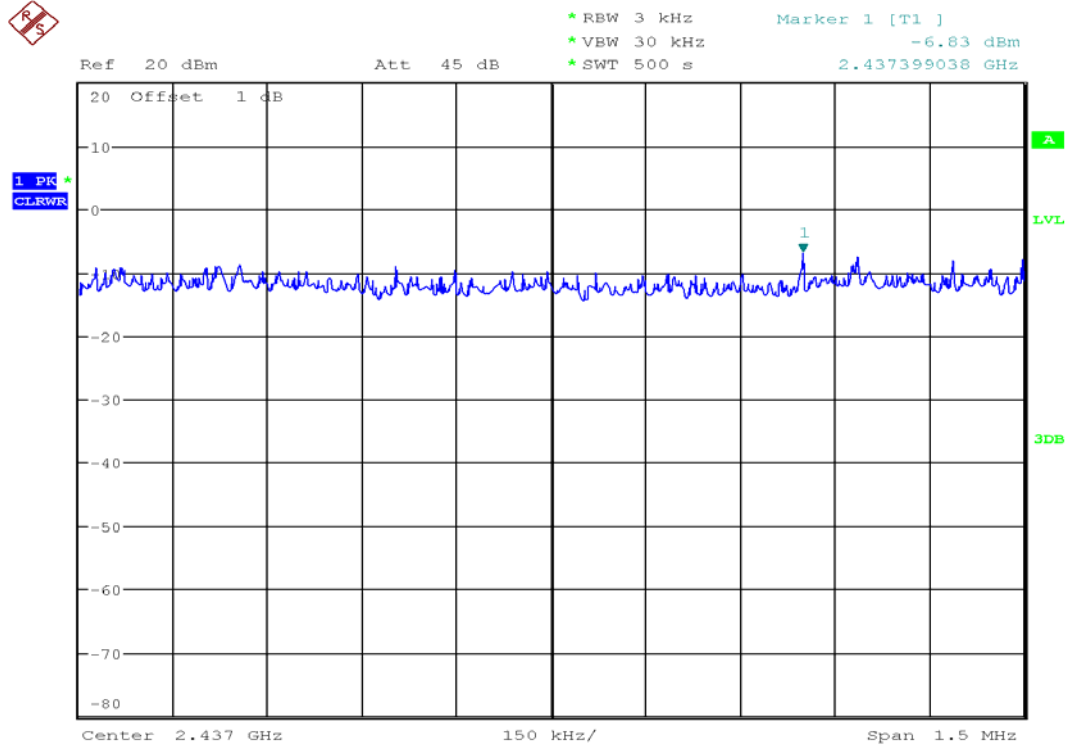


802.11 b(at 2462 MHz)

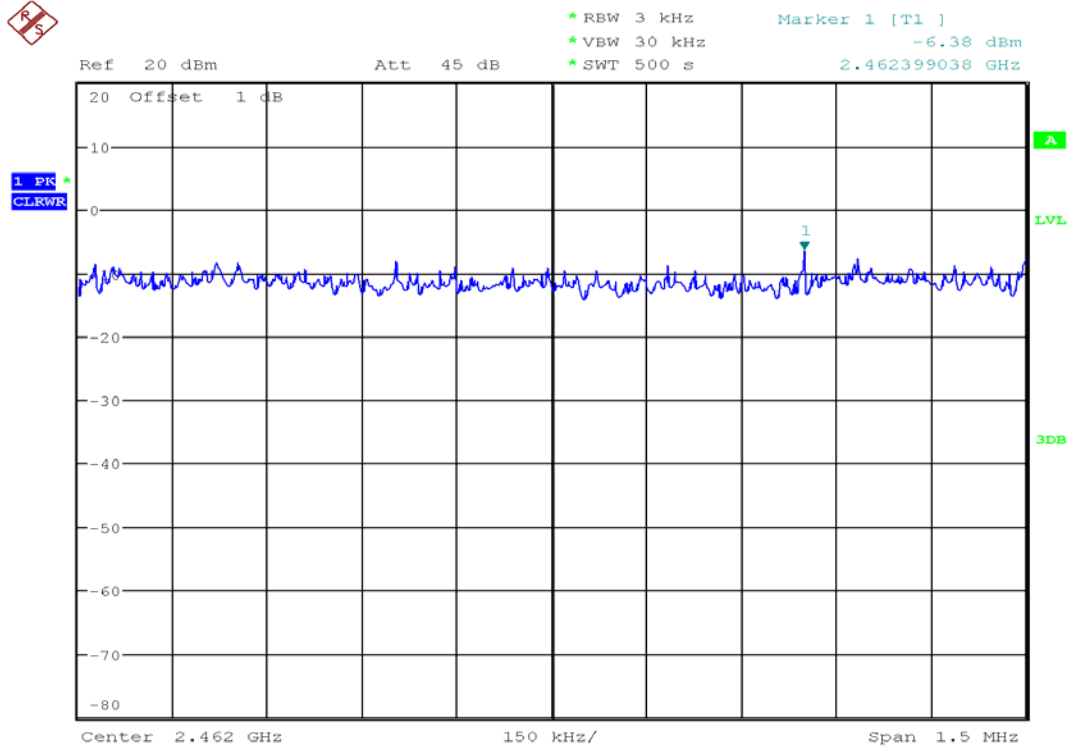


802.11 g(at 2412 MHz)

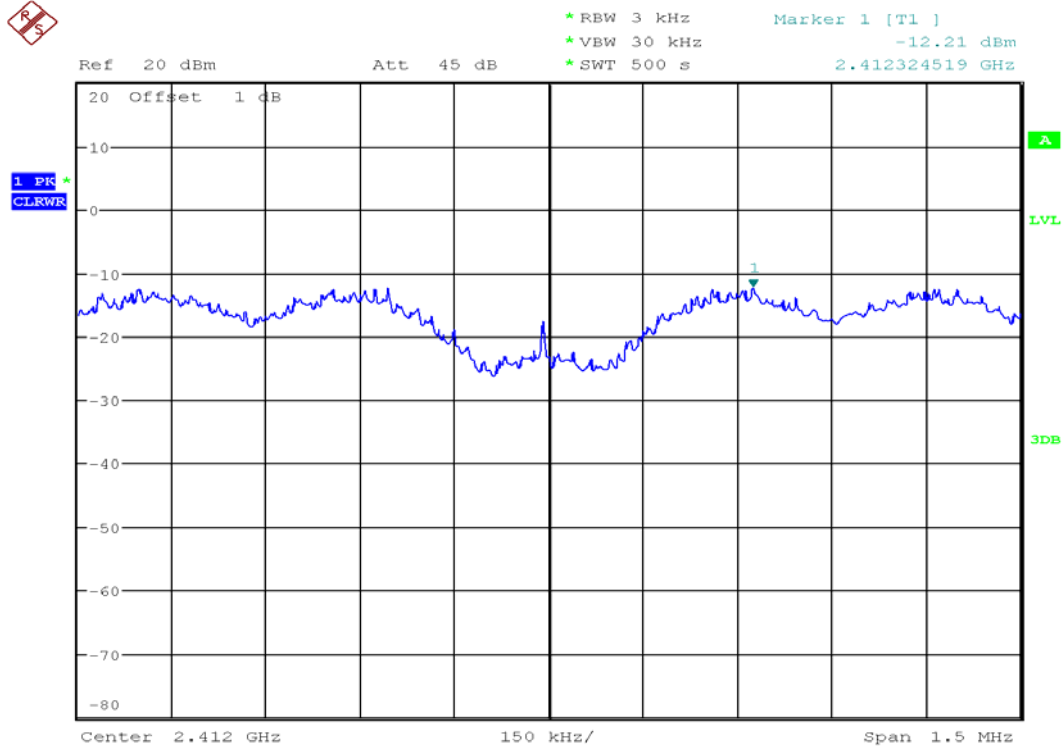

802.11 g(at 2437 MHz)

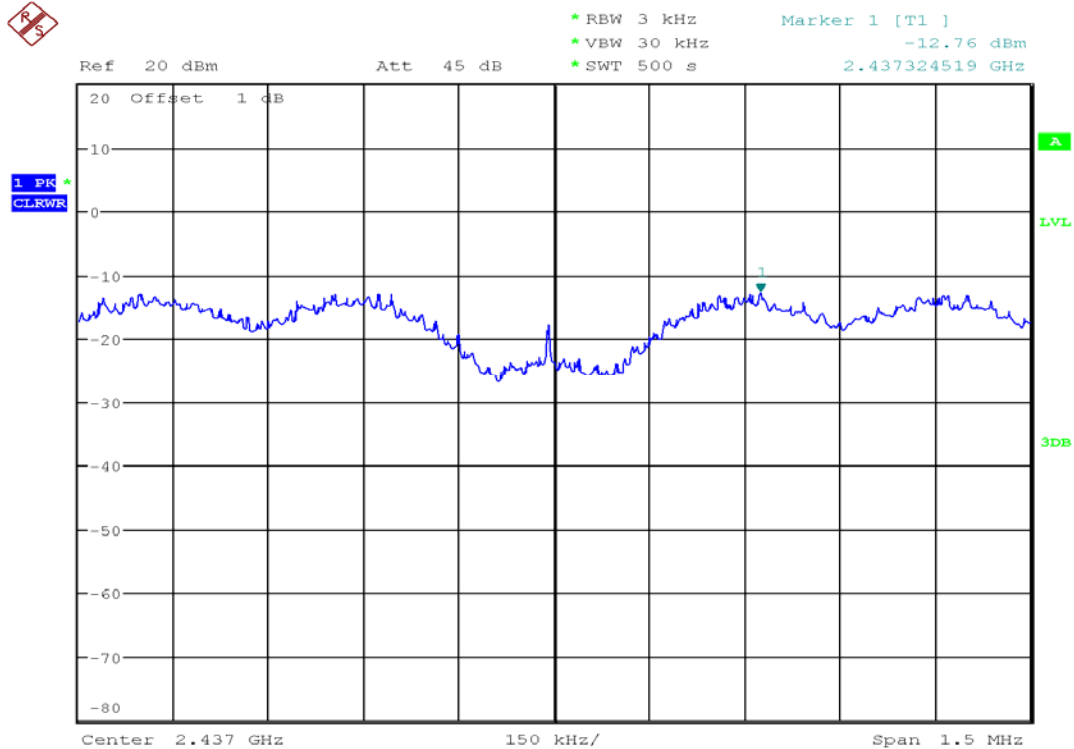

802.11 g(at 2462 MHz)

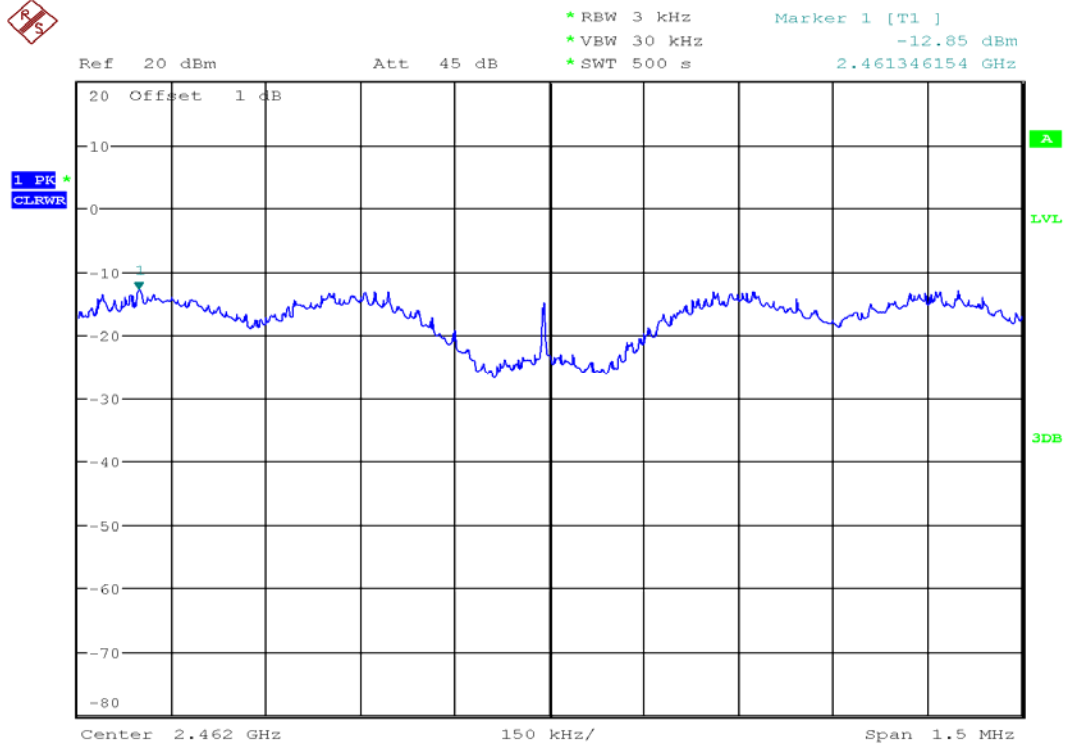

5.6 Antenna requirement

5.6.1 Regulation

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.24

5.6.2 Antenna connected construction

The antenna types used in this product are Dipole antenna.

802.11 b/g : Dipole antenna(gain : 2.5 dBi)

5.7 RF exposure

FCC Part 1.1310, Table 1 limits the power density for uncontrolled exposure. The power density, $P_d(\text{mW}/\text{cm}^2)$ calculated from the maximum EIRP, $P_t(\text{mW})$ and the distance, $d(\text{m})$, between the transmitting antenna and the closest person, can be calculated using:

802.11 b			
Pout Conducted (dBm)	Pout Conducted (mW)	Maximum Antenna Gain (dBi)	Pout EIRP(mW)
16.57	45.39	2.5	80.72

802.11 g			
Pout Conducted (dBm)	Pout Conducted (mW)	Maximum Antenna Gain (dBi)	Pout EIRP(mW)
13.77	23.82	2.5	42.36

The RF exposure calculation using an EIRP of 80.72 mW gives a minimum separation distance of 2.53 cm(see below). The user's manual requires a minimum separation of more than 10 cm.

Frequency (MHz)	MPE Limit (mW/cm^2)	EIRP (dBm)	EIRP (mW)	Distance where $P_d = \text{Limit}(\text{cm})$
2412 – 2462 MHz	1.00	19.07	80.72	2.6