


Appendix 2. Photographs of EUT in side PCB



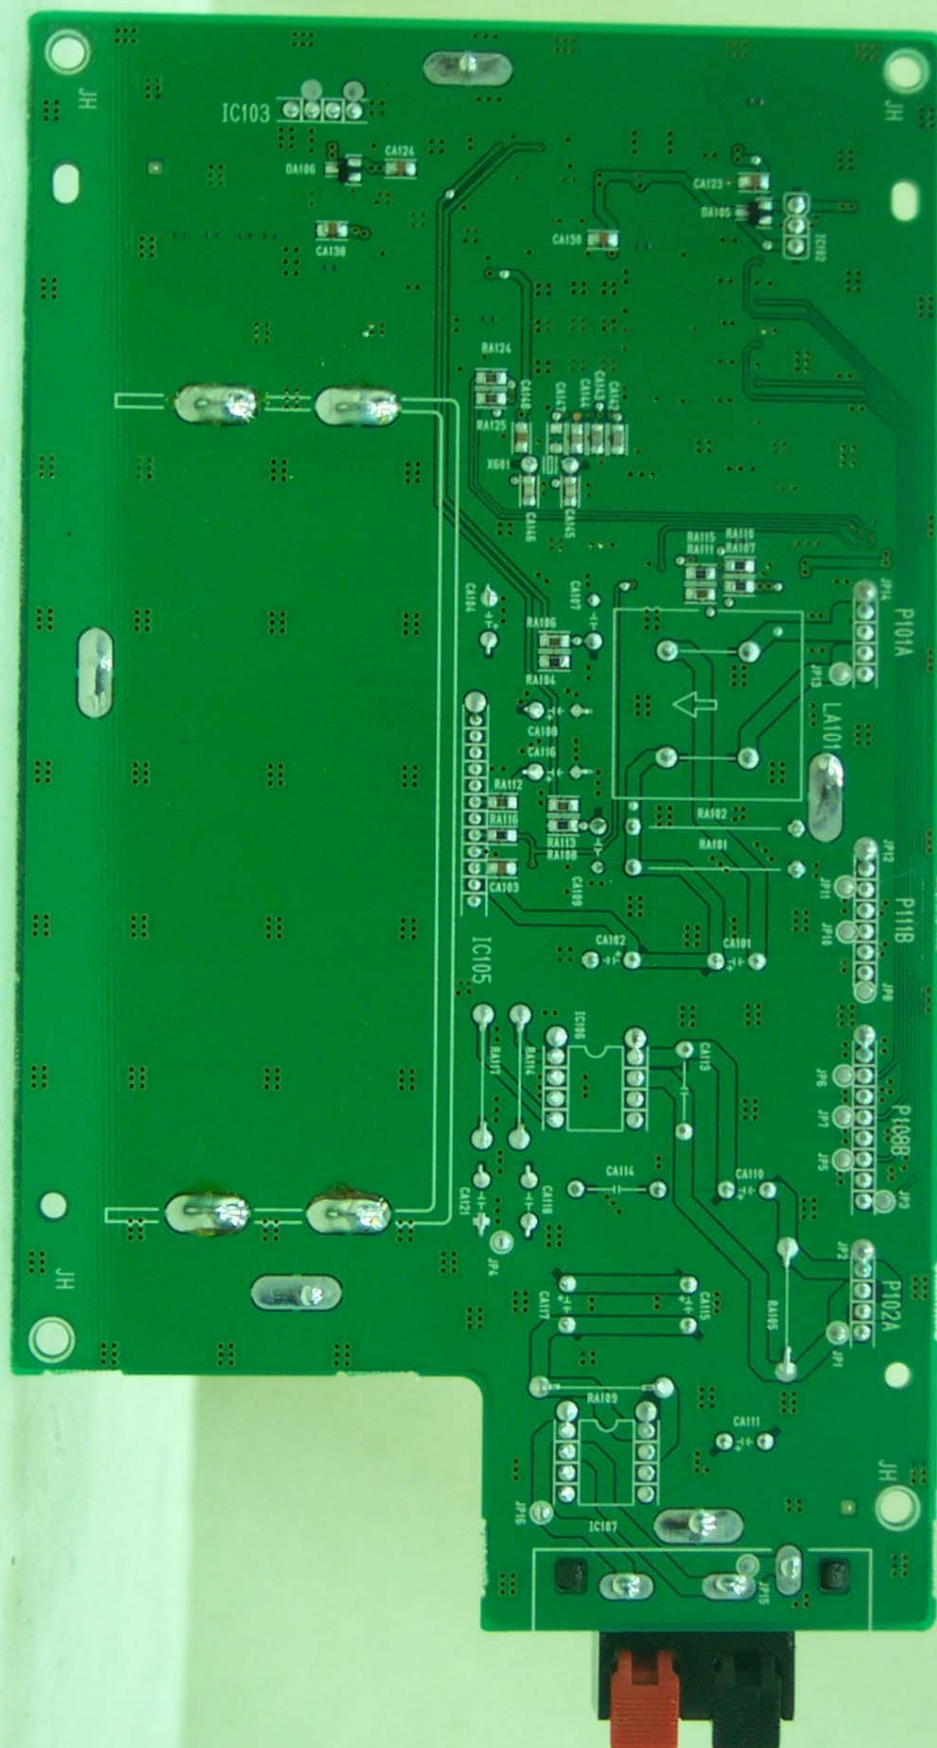

DC/DC CONVERTER

SER.NO

DGD525A297M

PIN1:280Vsetup
PIN3:15Vf1
PIN4:FG1
PIN6:110VAC
PIN7:15Vf2
PIN8:FG2
PIN10:(-)W


PIN1:1.15Vf3
PIN2:5.1NC
PIN12:Vse


PART NO:6871QPH006A

INPUT(VS) = -/+ 3AMAX	OUTPUT(VS) = DC 180V = -/+ 0.30A MAX
OUTPUT +15VDC = -/+ 100mA	OUTPUT(VSC) = DC 110V = -/+ 50mA MAX
OUTPUT +15VDC = -/+ 50mA	OUTPUT(-V) = DC 50V = -/+ 50mA MAX

CAUTION
For Continued protection against risk of fire
replace only with same type and rating of fuse

DAE GIL Engineering 020309 DGSP500W REV.A3

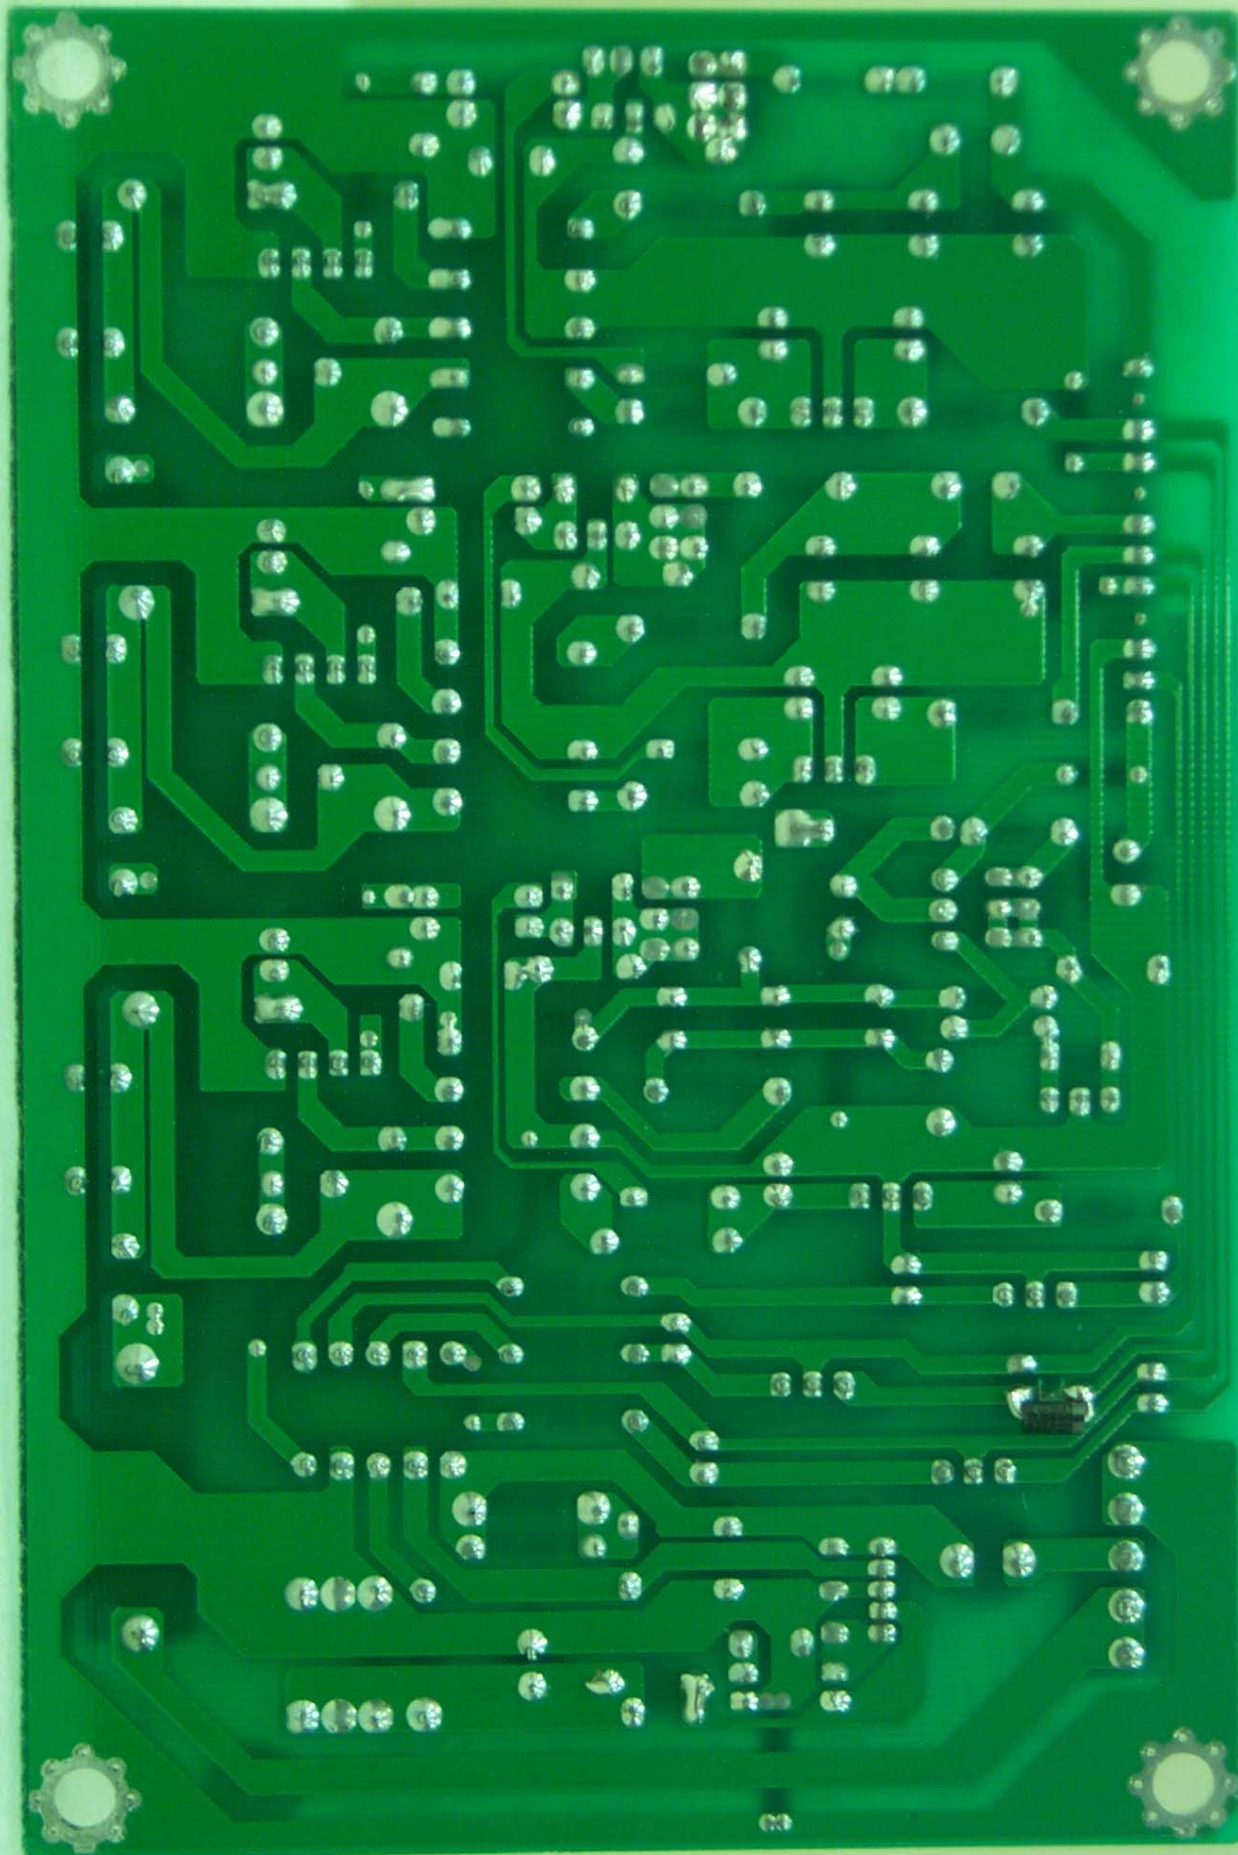

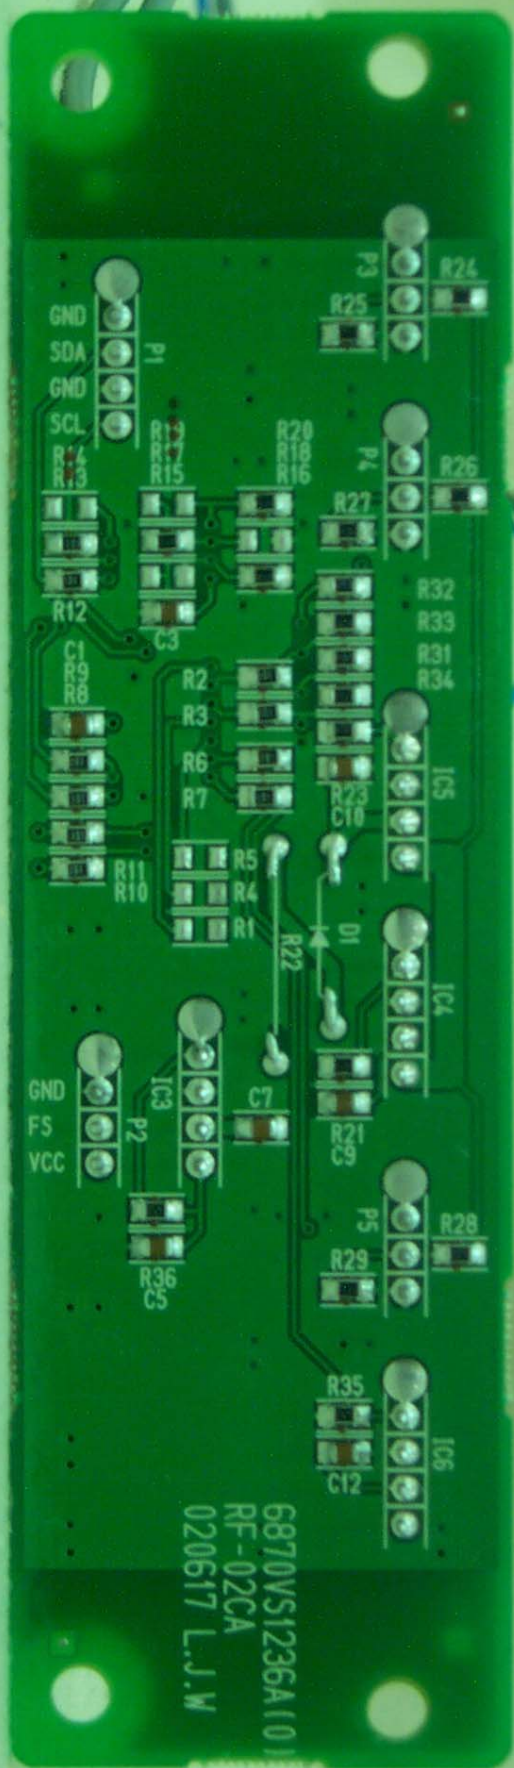



P107C

P102B

P105C

02 33

P106C

6

RF02CA
FIX BOARD
K.M.K.



