

Compliance Test Report for FCC

Report Number		ESTF150209-002			
Applicant	Company name	LG Electronics USA			
	Address	6133 N River Rd Suite 1100 Rosemont, IL60018 USA			
	Telephone	847-692-4630			
Product	Product name	50" Plasma Monitor			
	Model No.	MU-50PZ41V, P50W28A	Manufacturer	LG Electronics Inc.	
	Serial No.	NONE	Country of origin	KOREA	
Test date	2002-09-12 ~ 2002-09-13		Date of issue	2002-09-16	
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea				
Standard	FCC PART 15 2001 , ANSI C 63.4 2001				
Test item	☒ Conducted Emission	☐ Class A	☒ Class B	Test result	OK
	☒ Radiated Emission	☐ Class A	☒ Class B	Test result	OK
Measurement facility registration number		94696			
Tested by	Senior Engineer J.M. Yang		(Signature)		
Reviewed by	Director T.K. Lee		(Signature)		
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable				
* Note - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned - MU-50PZ41V, P50W28A are same product. Only model name is different					

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Measurement equipment	8
5.2 Environmental conditions	8
5.3 Test data	9
6. Measurement of conducted emission	10
6.1 Measurement equipment	10
6.2 Environmental conditions	10
6.3 Test data	11
7. Photographs of test setup	12
8. Photographs of EUT	14

Appendix 1. Spectral diagram

Appendix 2. Photographs of EUT in side PCB

Appendix 3. Block diagram of EUT

Appendix 4. Circuit Diagram

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : 3 rd Fl., Chungdam Bldg., 119-1 Chungdam-dong Kangnam-gu , Seoul, Korea
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

Branch Office : USA-ESTECH INC.
21801 Stevens Creek Blvd. Suite 2A Cupertino, CA95014

1.3 Official Qualification(s)

MIC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

2. Description of EUT

2.1 Summary of Equipment Under Test

Product : 50" Plasma Monitor

Model Number : MU-50PZ41V, P50W28A

Serial Number : NONE

Manufacturer : LG Electronics Inc.

Country of origin : KOREA

Rating : 120V, 60Hz

Receipt Date : 2002-09-10

2.2 General descriptions of EUT

The PDP which is the display device of this product is composed of 0.9 to 2.2 million cells and a few cell defects can occur in the manufacture of the PDP. Several colored dots visible on the screen would be acceptable, in line with other PDP manufacturers and would not mean that the PDP is faulty. We hope you will understand that the product which corresponds to this standard is regarded as acceptable. It means that it could not be changed or refunded. We promise that we'll do our best to develop our technology to minimize the cell defects.

- Width/Height/Depth : 1223/734/105mm
- Resolution : 1280*720 (Dot)

3. Test Standards

Test Standard : FCC PART 15 (2001)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2001)


This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

4. Measurement Condition

4.1 EUT Operation.

- * The EUT was in the following operation mode during all testing
- * The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission
- * Using self test program, and "H" Character Read/Write

4.2 Configuration and Peripherals

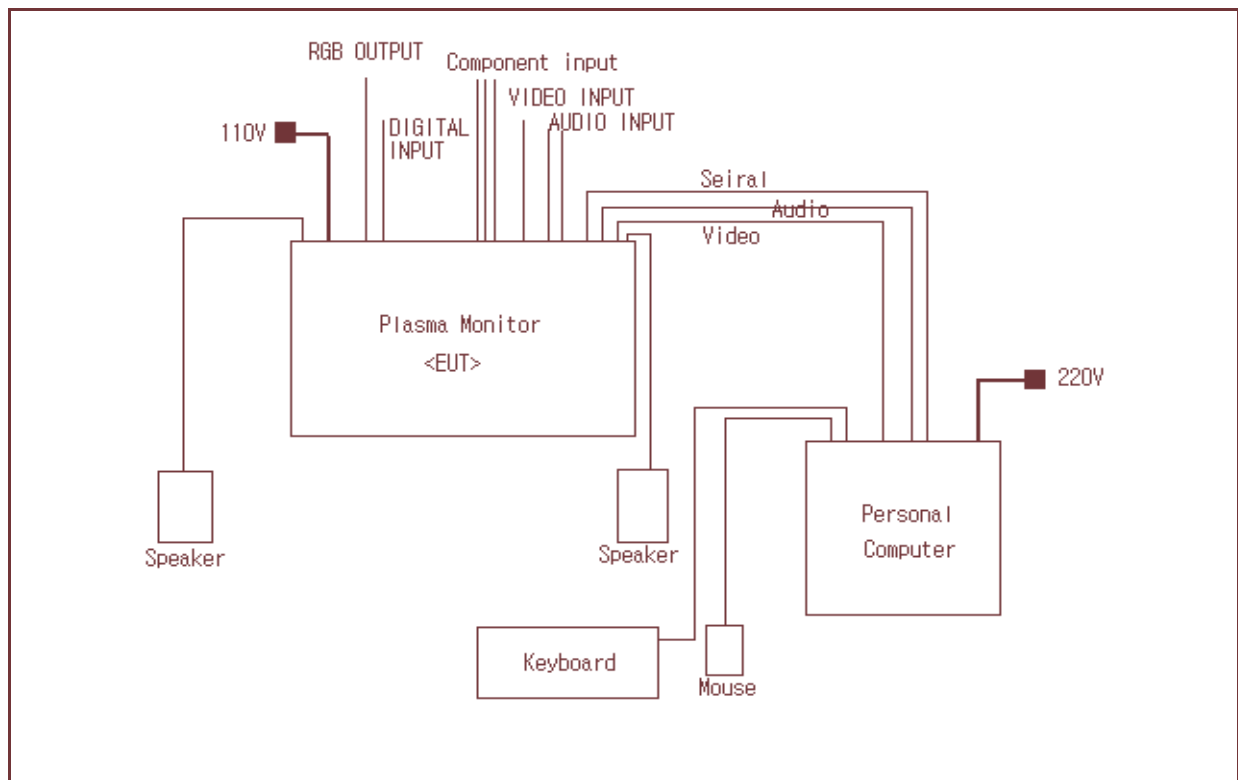

4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
50" Plasma Monitor	MU-50PZ41V, P50W28A	NONE	LG Electronics Inc.	EUT
Speaker	NONE	NONE	LG Electronics Inc.	—
Personal Computer	DCP(OptiPlex GX115)	NONE	Dell Computer	—
Keyboard	SDL2500	06038295	Samsung Electro-Mechanics Ltd.	—
Mouse	PN X05-51692	3872A463	Microsoft Corporation	—

4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
50" Plasma Monitor	RGB INPUT	Personal Computer	Video	1.0	Shielded	—
50" Plasma Monitor	RS 232C	Personal Computer	Serial	2.0	Shielded	—
50" Plasma Monitor	Audio Input	Personal Computer	Audio Output	2.0	Shielded	—
50" Plasma Monitor	Audio Input	—	—	2.0	Shielded	—
50" Plasma Monitor	Audio Input	—	—	2.0	Shielded	—
50" Plasma Monitor	Vdieo Input	—	—	2.0	Shielded	—
50" Plasma Monitor	Component Input	—	—	2.0	Shielded	—
50" Plasma Monitor	EXTERNAL Speaker	Speaker	—	4.0	Shielded	—
50" Plasma Monitor	RGB OUTPUT	—	—	4.0	Shielded	—
50" Plasma Monitor	DIGITAL INPUT	—	—	4.0	Shielded	—
Personal Computer	PS/2 MOUSE	Mouse	PS/2 MOUSE	2.0	Un-Shielded	—
Personal Computer	PS/2 KEYBOARD	Keyboard	PS/2 KEYBOARD	2.0	Un-Shielded	—

5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2001) & ANSI C 63.4 (2001). The test setup was made according to FCC Part 15 (2001) & ANSI C 63.4 (2001) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test set-up.

5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
Receiver	ESPC	Rohde & Schwarz	845296/021	2003.6.21
LogBicon Antenna	VULB 9160	S/B	3107	2003.6.7
Turn Table	2087	EMCO	2129	–
Antenna Mast	2070-01	EMCO	9702-203	–
Amplifier	310N	Sonoma Instrument	185817	2002.11.13
ANT Mast Controller	2090	EMCO	1535	–
Turn Table Controller	2090	EMCO	1535	–

5.2 Environmental Condition

Test Place : Open site(3m)
 Temperature (°C) : 24 °C
 Humidity (%) : 52 %

5.3 Test data

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB μ V/m)
41.85	18.50	V	1.0	12.72	1.0	40.0	32.22	-7.78
80.64	19.20	H	4.0	8.76	1.3	40.0	29.29	-10.71
110.40	12.70	H	2.9	11.11	1.6	43.5	25.41	-18.09
118.80	13.70	H	2.9	11.91	1.7	43.5	27.29	-16.21
132.28	23.90	V	1.0	12.80	1.7	43.5	38.43	-5.07
208.01	15.10	V	1.0	10.53	2.2	43.5	27.87	-15.63
223.90	21.50	V	1.0	10.95	2.3	43.5	34.76	-8.74
240.01	14.20	H	1.3	11.71	2.4	46.0	28.31	-17.69
255.90	16.60	V	1.4	12.04	2.4	46.0	31.06	-14.94
300.00	17.10	H	1.0	13.19	2.7	46.0	32.99	-13.01
339.20	11.80	V	1.6	14.07	2.8	46.0	28.70	-17.30
398.70	13.60	H	1.0	15.29	3.1	46.0	32.03	-13.97
443.80	9.20	H	1.0	16.27	3.3	46.0	28.77	-17.23
501.10	19.10	V	1.0	17.07	3.6	46.0	39.72	-6.28
529.70	12.80	V	1.9	17.50	3.6	46.0	33.90	-12.10
664.30	14.40	H	1.0	19.78	4.2	46.0	38.33	-7.67
700.00	11.40	H	1.0	20.14	4.3	46.0	35.82	-10.18
800.00	12.40	V	1.5	21.76	4.7	46.0	38.86	-7.14
930.30	8.40	V	1.6	23.16	5.0	46.0	36.54	-9.46
42.15	22.00	V	1.0	12.73	1.0	40.0	35.73	-4.27
Remark	H : Horizontal, V : Vertical							

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.45 to 30 MHz was measured in accordance to FCC Part 15 (2001) & ANSI C 63.4 (2001). The test setup was made according to FCC Part 15 (2001) & ANSI C 63.4 (2001) in a shielded. The EUT was placed on a non-conductive table at least 80 above the ground plan. A grounded vertical reference plane was positioned in a distance of 40cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0m.. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	ESH3-Z5	Rohde & Schwarz	838979/010	2003. 2. 1
LISN	NNLA8120A	Schwarzbeck	NONE	2003. 2. 1
TEST Receive	ESPC	Rohde & Schwarz	845296/021	2003.6.21
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	2003.7.4

6.2 Environmental Condition

Test Place : Shield Room
 Temperature (°C) : 21 °C
 Humidity (%) : 58 %

6.3 Test data

Frequency (MHz)	Reading (dB μ V)	Line (H/N)	Correction Factor		Limit (dB μ V)	Result (dB μ V)	Margin (dB μ V)
			Lisn (dB)	Cable (dB)			
0.18	58.72	H	0.07	0.0	64.41	58.81	-5.60
0.19	53.63	H	0.07	0.0	64.21	53.72	-10.49
0.36	48.53	H	0.07	0.1	58.65	48.73	-9.92
0.25	42.82	H	0.07	0.1	61.63	42.96	-18.67
0.27	40.81	N	0.07	0.1	61.10	40.96	-20.14
0.35	38.68	N	0.07	0.1	58.98	38.87	-20.11
0.55	45.84	N	0.07	0.2	56.00	46.11	-9.89
0.73	43.34	N	0.09	0.2	56.00	43.63	-12.37
0.91	37.24	N	0.09	0.2	56.00	37.53	-18.47
1.09	36.28	N	0.09	0.2	56.00	36.58	-19.42
2.91	34.74	H	0.15	0.3	56.00	35.19	-20.81
1.45	32.80	N	0.10	0.2	56.00	33.14	-22.86
13.64	29.23	N	0.54	0.7	60.00	30.52	-29.48
12.80	29.12	N	0.50	0.7	60.00	30.33	-29.67
9.23	27.40	H	0.41	0.5	60.00	28.36	-31.64
18.91	22.24	N	0.68	0.8	60.00	23.72	-36.28
8.32	16.85	H	0.38	0.5	60.00	17.72	-42.28
5.63	15.17	H	0.26	0.3	60.00	15.77	-44.23
Remark	H : Hot Line, N : Neutral Line						

12 Sep 2002 14:08

ESTECH

HOT


EUT: MU-50PZ41V,P50W28A
Manuf: LG Electronics Inc
Op Cond: 110V
Operator: J.M Yang
Test Spec: CLASS B
Comment:

File: 097300_h.dat : LG Electronics USA

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
150kHz	30MHz	0.8%	10kHz	PK+AV	20msec	Auto	60dB

Final Measurement: X QP / + AV
Meas Time: 1sec
Subranges: 25
Acc Margin: 60 dB

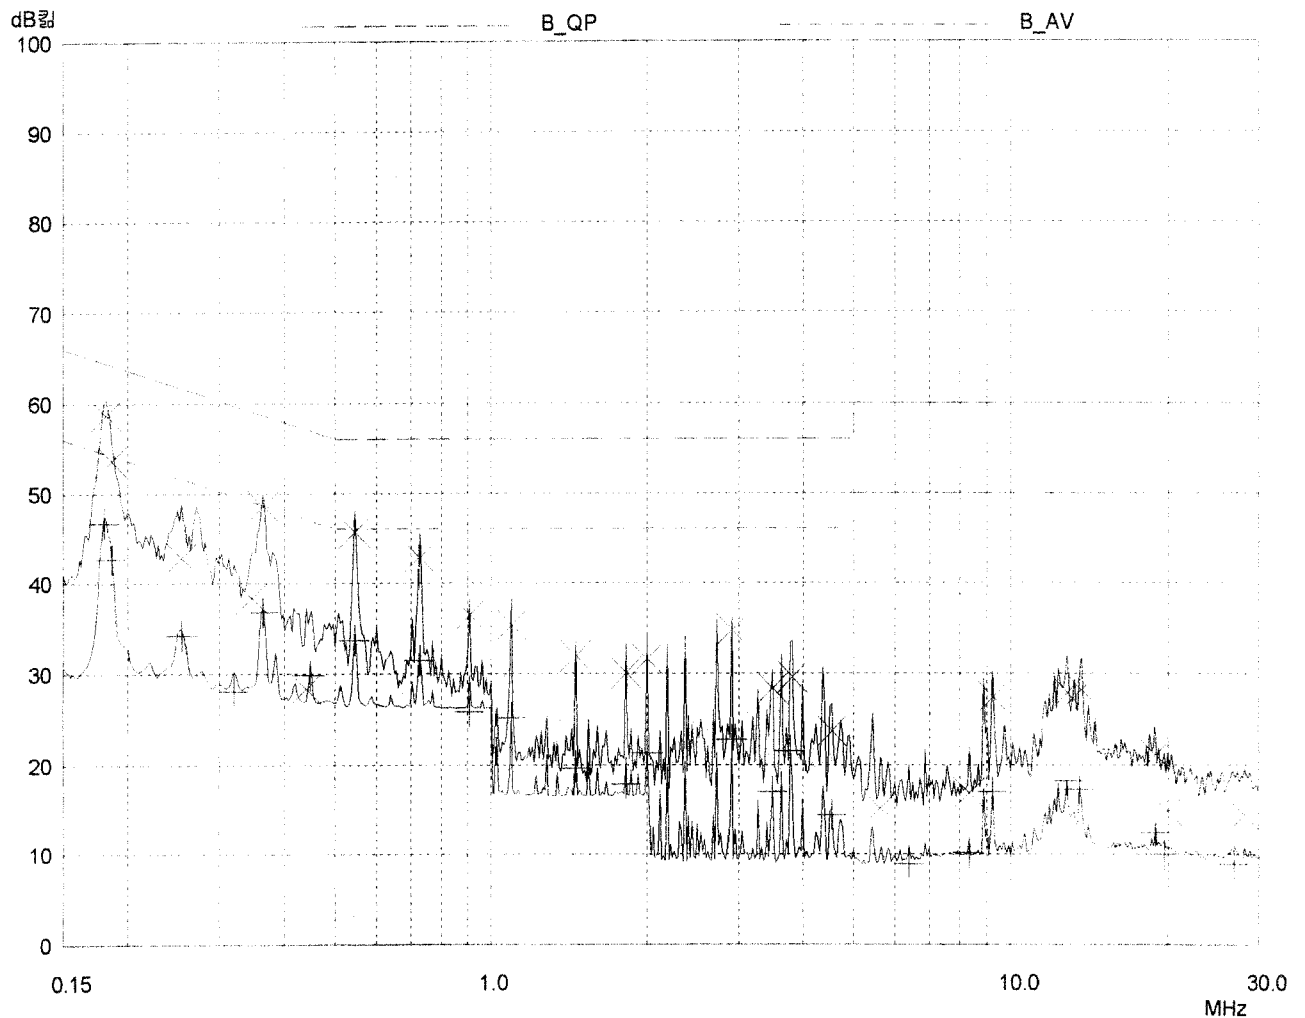

12 Sep 2002 14:21

ESTECH NEUTRAL

EUT: MU-50PZ41V,P50W28A
Manuf: LG Electronics Inc
Op Cond: 110V
Operator: J.M Yang
Test Spec: CLASS B
Comment:

File: 097300_n.dat : LG Electronics USA

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
150kHz	30MHz	0.8%	10kHz	PK+AV	20msec	Auto	60dB

Final Measurement: X QP / + AV
Meas Time: 1sec
Subranges: 25
Acc Margin: 60 dB

