

## ***FCC EVALUATION REPORT FOR CERTIFICATION***

**Manufacturer : LG Electronics Inc.****642, Jinpyung-Dong, Gumi-Si,****Gyeongsangbuk-Do, 730-360, Korea****Attn : Mr. Woo-Hyun Oh, Chief research engineer****Date of Issue : May 19, 2003****Test Report S/N : GETEC-E3-03-017****Test Site : Gumi College EMC Center****FCC ID****BEJMU50PZ90V****APPLICANT****LG Electronics Inc.**


**Rule Part(s) : FCC Part 15 Subpart B**  
**Equipment Class : Class B computing device peripheral**  
**EUT Type : 50" Plasma Monitor**  
**Model No. : MU-50PZ90V**  
**Trade name : LG**

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Tested by,****Reviewed by,**

**Jea-Woon Choi, EMC engineer  
GUMI College EMC center**



**Tae-Sig Park, Technical manager  
GUMI College EMC center**

## CONTENTS

|                                                       |           |
|-------------------------------------------------------|-----------|
| <b>1. SCOPE .....</b>                                 | <b>3</b>  |
| <b>2. INTRODUCTION.....</b>                           | <b>4</b>  |
| <b>3. TEST CONDITIONS &amp; EUT INFORMATION .....</b> | <b>5</b>  |
| 3.1 DESCRIPTION OF EUT .....                          | 5         |
| 3.2 SUPPORT EQUIPMENT USED.....                       | 6         |
| <b>4. DESCRIPTION OF TESTS.....</b>                   | <b>7</b>  |
| 4.1 CONDUCTED EMISSION .....                          | 7         |
| 4.2 RADIATED EMISSIONS.....                           | 8         |
| <b>5. CONDUCTED EMISSION.....</b>                     | <b>9</b>  |
| 5.1 OPERATING ENVIRONMENT .....                       | 9         |
| 5.2 TEST SET-UP .....                                 | 9         |
| 5.3 MEASUREMENT UNCERTAINTY .....                     | 9         |
| 5.4 LIMIT.....                                        | 10        |
| 5.5 TEST EQUIPMENT USED .....                         | 10        |
| 5.6 TEST DATA FOR POWER LINE CONDUCTED EMISSION.....  | 11        |
| <b>6. RADIATED EMISSION.....</b>                      | <b>14</b> |
| 6.1 OPERATING ENVIRONMENT .....                       | 14        |
| 6.2 TEST SET-UP .....                                 | 14        |
| 6.3 MEASUREMENT UNCERTAINTY .....                     | 14        |
| 6.4 LIMIT.....                                        | 15        |
| 6.5 TEST EQUIPMENT USED .....                         | 15        |
| 6.6 TEST DATA FOR RADIATED EMISSION.....              | 16        |
| <b>7. SAMPLE CALCULATIONS .....</b>                   | <b>18</b> |
| 7.1 EXAMPLE 1 : .....                                 | 18        |
| 7.2 EXAMPLE 2 : .....                                 | 18        |
| <b>8. RECOMMENDATION &amp; CONCLUSION .....</b>       | <b>19</b> |
| <b>APPENDIX A – ATTESTATION STATEMENT</b>             |           |
| <b>APPENDIX B – PLOTS OF CONDUCTED EMISSIONS</b>      |           |
| <b>APPENDIX C – ID SAMPLE LABEL &amp; LOCATION</b>    |           |
| <b>APPENDIX D – BLOCK DIAGRAM</b>                     |           |
| <b>APPENDIX E – TEST SET-UP PHOTOGRAPHS</b>           |           |
| <b>APPENDIX F – EXTERNAL PHOTOGRAPHS</b>              |           |
| <b>APPENDIX G –INTERNAL PHOTOGRAPHS</b>               |           |
| <b>APPENDIX H – USER’S MANUAL</b>                     |           |

## 1. Scope

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.*

**Responsible Party:** LG Electronics Inc.

**Contact Person:** Mr. Woo-Hyun Oh, Chief research engineer

**Product Testing & Compliance Center**

**Manufacturer:** 642, Jinpyoung-dong, Gumi-city, Gyeongsangbuk-do, Korea  
Tel No.: +82-54-470-2933

- **FCC ID** BEJMU50PZ90V
- **EUT Type** 50" Plasma Monitor
- **Model No.** MU-50PZ90V
- **Trade Name** LG
- **Rule Part(s)** FCC Part 15 Subpart B
- **Test Procedure(s)** ANSI C63.4 (1992)
- **Standard(s)** EN55022:1998 (CISPR22:1997)
- **Dates of Test** May 13 ~ 14, 2003
- **Place of Test** Gumi College EMC Center
- **Test Report No.** GETEC-E3-03-017


## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-1992) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. 50" Plasma Monitor (Model No.: MU-50PZ90V)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-City, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992

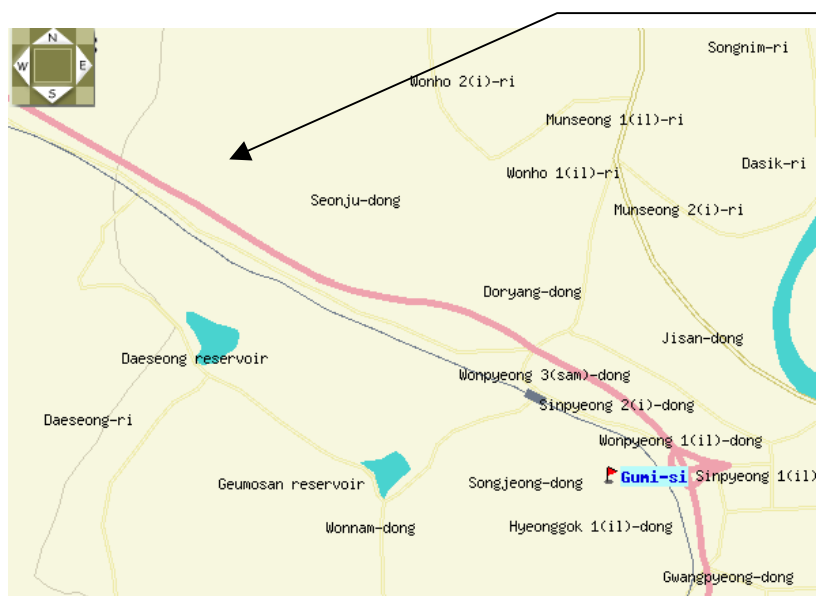

### GUMI COLLEGE EMC CENTER

407, Bugok-Dong, Gumi-City,  
Gyeongsangbuk-Do 730-711, Korea

Tel: +82-54-440-1195

Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.

### 3. Test Conditions & EUT Information

#### 3.1 Description of EUT

The Equipment Under Test (EUT) is the **LG Electronics Inc. 50" Plasma Monitor (Model No.: MU-50PZ90V)**  
**FCC ID : BEJMU50PZ90V**

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Maximum Resolution(s)</b>        | 1280×1024 Non-interlaced @ 60Hz (Analog)<br>1280×1024 Non-interlaced @ 60Hz (Digital)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Frequency Range(s)</b>           | H-Sync: 30kHz – 77.5kHz<br>V-Sync: 56Hz – 85Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Test pattern</b>                 | Scrolling "H"s<br>Winamp player                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Power supply</b>                 | AC 120V 60Hz 6A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Port(s) / Input connector(s)</b> | 15-Pin D-sub type connector<br>DVI type connector                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Cable(s)</b>                     | 6.8m Video cable (D-sub) with ferrite on both ends<br>Connected to the EUT and PC<br>1.9m Video cable (DVI-D) with ferrite on both ends<br>Connected to the EUT and PC<br>1.5m Video cable (D-sub) with ferrite on both ends<br>Open<br>1.8m Power cable<br>Connected to the EUT<br>2.9m Component cable<br>Connected to the EUT and DVD<br>1.5m Component sound input cable<br>Open<br>2.9m External cable<br>Open<br>1.5m S-VHS cable<br>Open<br>2m RS-232C cable<br>Open<br>4.6m Speaker cable<br>Connected to the EUT and Speaker<br>2m PC sound input cable<br>Connected to the EUT and PC |
| <b>Dimensions</b>                   | 122.3×73.4×10.5cm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Weight</b>                       | 45Kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

**3.2 Support Equipment used**

|                       |                                                               |                                                   |
|-----------------------|---------------------------------------------------------------|---------------------------------------------------|
| <b>PC</b>             | COMPAQ PD1075<br>S/N: 7041JC8F0245<br>FCC ID: DoC             | Connected to the EUT and<br>Peripheral equipments |
| <b>Video card</b>     | ATI Radeon VE<br>S/N: 6001833<br>FCC ID: DoC                  | Connected to the EUT                              |
| <b>Printer</b>        | H.P Deskjet 970cxi<br>S/N: MY9B01F1FG<br>FCC ID: DoC          | Connected to the parallel<br>port of PC           |
| <b>Serial Mouse</b>   | Microsoft 61402<br>S/N: 00696998<br>FCC ID: C3KKS3            | Connected to the serial<br>port of PC             |
| <b>PS/2 Key-board</b> | COMPAQ 166516-AD6<br>S/N: B13BBOR39I006D<br>FCC ID: AQ6-23K15 | Connected to the PS/2<br>port of PC               |
| <b>Joystick</b>       | Microsoft X05-92626<br>S/N: 9262600296169<br>FCC ID: DoC      | Connected to the USB<br>port of PC                |
| <b>DVD Player</b>     | Pioneer DV-525<br>S/N: UEYD0R390LL<br>FCC ID: DoC             | Connected to the EUT                              |

*See “Appendix D – Test Setup Photographs” for actual system test set-up*

## 4. Description of tests

### 4.1 Conducted Emission

The Line conducted emission test facility is inside a  $4 \times 8 \times 2.5$  meter shielded enclosure.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table, which is 0.8 meters in height and 0.4 meters away from the vertical wall of the shielded enclosure.

The EUT was powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150kHz to 30MHz with 20msec sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9KHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 – 40 centi-meters.

The worst operating condition of the test sample was found out by varying operating mode.

And, the test 5 modes (1280\*1024/60Hz (Analog), 1280\*1024/60Hz (Digital), 1024\*768/75Hz (Analog), 800\*600/75Hz(Analog), 640\*480/75Hz(Analog)) and configuration were noted in the test report and the photographs were attached.

Each EME reported was calibrated using the R/S signal generator

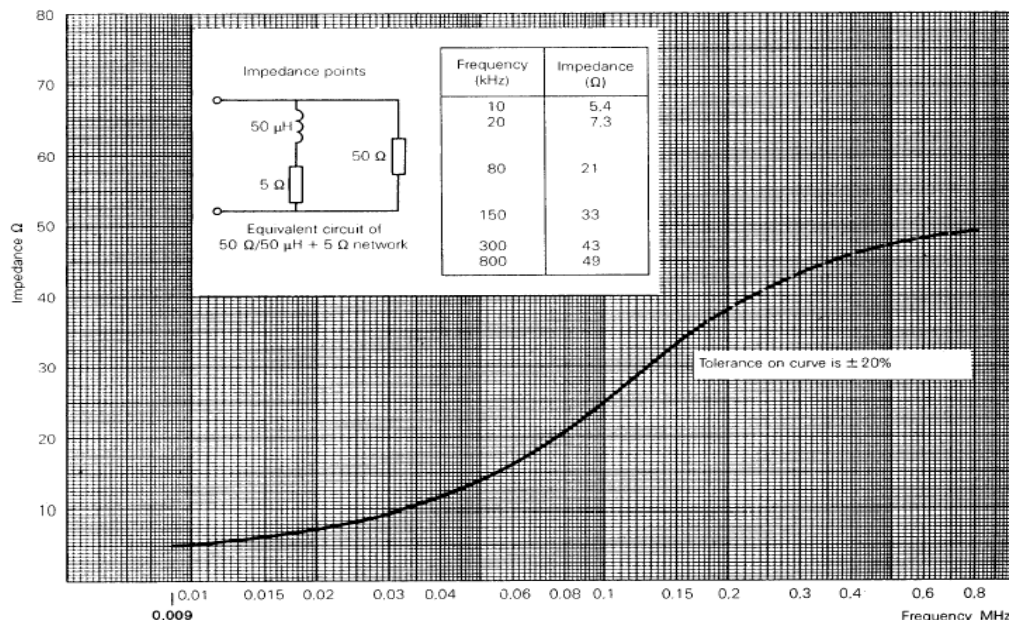


Fig 2. Impedance of LISN

#### 4.2 Radiated Emissions

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using bicornical log antenna (Schwarzbeck, VLB9160). Above 1GHz, horn antenna (Schwarzbeck, BBHA9120D) was used.

Final measurements were made outdoors at 10m-test range using bicornical antenna (R&S, HK116), log-periodic antenna (R&S, HL223) and horn antenna (Schwarzbeck, BBHA9120D)

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. (ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling "H" pattern to the EUT and / or support equipment and powering the monitor from mounted outlet box, if applicable; and changing the polarity of the antenna whichever determined the worst case emission.

The worst-case test 2 modes (1280\*1024/60Hz(Analog), 1280\*1024/60Hz(Digital)) and configuration were noted in the test report and the photographs were attached.

Each EME reported was calibrated using the R/S signal generator

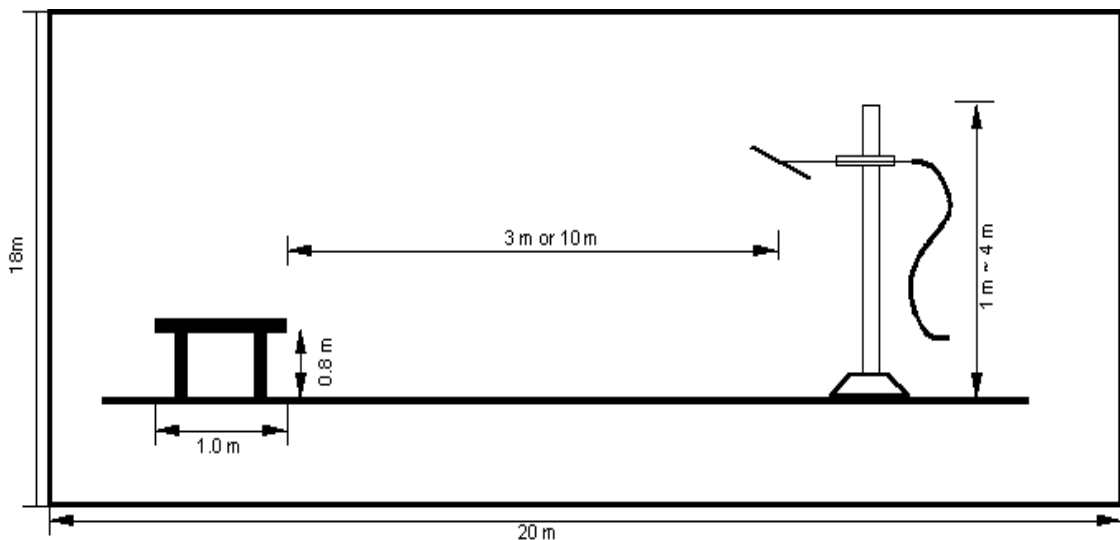


Fig 3. Dimensions of Open Site Test Area

## 5. Conducted Emission

### 5.1 Operating environment

Temperature : 23 °C  
Relative humidity : 63 %

### 5.2 Test set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8m heights above the floor, 0.4m from the reference ground plane (GRP) wall and 0.8m from AMN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, was filtered.

### 5.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

| Contribution                                         | Probability<br>Distribution | Uncertainty (±dB) |                    |
|------------------------------------------------------|-----------------------------|-------------------|--------------------|
|                                                      |                             | Power Port        | Communication port |
| Receiver specification                               | Rectangular                 | 1.00              | 1.00               |
| LISN coupling specification                          | Rectangular                 | 1.50              |                    |
| ISN coupling specification                           | Rectangular                 |                   | 1.50               |
| Mismatch                                             |                             |                   |                    |
| LISN VRC : $\Gamma_{l=}$ 0.20                        | U-shaped                    | 0.05              | 0.05               |
| ISN VRC : $\Gamma_{l=}$ 0.20                         |                             | -0.05             | -0.05              |
| ATT VRC(IN) : $\Gamma_{g=}$ 0.03                     |                             |                   |                    |
| Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$ |                             |                   |                    |
| Mismatch                                             |                             |                   |                    |
| Receiver VRC : $\Gamma_{l=}$ 0.09                    | U-shaped                    | 0.09              | 0.09               |
| ATT VRC : $\Gamma_{g=}$ 0.11                         |                             | -0.09             | -0.09              |
| Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$ |                             |                   |                    |
| System repeatability                                 | Std Deviation               | 0.09              | 0.09               |
| Cable and input attenuator calibration               | Normal (k=2)                | 0.50              | 0.50               |
| Repeatability of EUT                                 |                             |                   |                    |
| Combined standard uncertainty $U_c(y)$               | Normal                      | 1.16              | 1.16               |
|                                                      |                             | -1.16             | -1.16              |
| Extended uncertainty U                               | Normal (k=2)                | 2.32              | 2.32               |
|                                                      |                             | -2.32             | -2.32              |

**5.4 Limit**

| RFI Conducted                                               | CISPR 22 Class B<br>Limits dB (μV/m) |                     |
|-------------------------------------------------------------|--------------------------------------|---------------------|
| Freq. Range                                                 | CISPR 22<br>Quasi-Peak               | CISPR 22<br>Average |
| 150kHz – 0.5MHz                                             | 66 – 56*                             | 56 – 46*            |
| 0.5MHz – 5MHz                                               | 56                                   | 46                  |
| 5MHz – 30MHz                                                | 60                                   | 50                  |
| *Limits decreases linearly with the logarithm of frequency. |                                      |                     |

**5.5 Test equipment used**

| Model Number | Manufacturer    | Description              | Serial Number | Calibrated Date |
|--------------|-----------------|--------------------------|---------------|-----------------|
| ■ - ESCS30   | Rohde & Schwarz | EMI test receiver        | 839809/003    | 12. 12. 2002    |
| ■ - ESH3-Z5  | Rohde & Schwarz | Artificial mains network | 838979/020    | 12. 11. 2002    |
| ■ - ESH2-Z5  | Rohde & Schwarz | Artificial mains network | 829991/009    | 12. 11. 2002    |

**5.6 Test data for power line conducted emission**

- Test Date : May 14, 2003
- Resolution bandwidth : 9kHz
- Frequency range : 0.15MHz ~ 30MHz

## ■. Test resolution: 1280\*1024/60Hz (Analog)

| Frequency<br>(MHz) | Line | Quasi-Peak (dBuV) |        | Margin<br>(dB) | Average (dBuV) |        | Margin<br>(dB) |
|--------------------|------|-------------------|--------|----------------|----------------|--------|----------------|
|                    |      | Emission level    | limits |                | Emission level | limits |                |
| 0.195              | H    | 54.58             | 63.82  | 9.24           | 42.48          | 53.82  | 11.34          |
| 0.96               | H    | 45.98             | 56.00  | 10.02          | 28.98          | 46.00  | 17.02          |
| 1.345              | H    | 50.39             | 56.00  | 5.61           | 32.99          | 46.00  | 13.01          |
| 1.73               | H    | 46.20             | 56.00  | 9.80           | 28.00          | 46.00  | 18.00          |
| 2.115              | H    | 46.71             | 56.00  | 9.29           | 27.71          | 46.00  | 18.29          |
| 2.5                | H    | 43.94             | 56.00  | 12.07          | 26.54          | 46.00  | 19.47          |
| 3.27               | H    | 43.78             | 56.00  | 12.22          | 27.48          | 46.00  | 18.52          |
| 12.61              | N    | 43.71             | 60.00  | 16.29          | 28.01          | 50.00  | 21.99          |
| 14.07              | N    | 49.61             | 60.00  | 10.39          | 33.91          | 50.00  | 16.09          |
| 17.07              | N    | 45.01             | 60.00  | 14.99          | 28.51          | 50.00  | 21.49          |

Note : "H": Hot Line, "N": Neutral line.

## ■. Test resolution: 1280\*1024/60Hz (Digital)

| Frequency<br>(MHz) | Line | Quasi-Peak (dBuV) |        | Margin<br>(dB) | Average (dBuV) |        | Margin<br>(dB) |
|--------------------|------|-------------------|--------|----------------|----------------|--------|----------------|
|                    |      | Emission level    | limits |                | Emission level | limits |                |
| 0.195              | N    | 55.49             | 63.82  | 8.33           | 45.59          | 53.82  | 8.23           |
| 0.96               | N    | 46.34             | 56.00  | 9.66           | 33.14          | 46.00  | 12.86          |
| 1.345              | N    | 50.75             | 56.00  | 5.25           | 20.05          | 46.00  | 25.95          |
| 1.73               | N    | 44.93             | 56.00  | 11.07          | 30.83          | 46.00  | 15.17          |
| 2.115              | N    | 45.48             | 56.00  | 10.52          | 30.58          | 46.00  | 15.42          |
| 3.27               | H    | 43.88             | 56.00  | 12.12          | 27.48          | 46.00  | 18.52          |
| 4                  | H    | 44.39             | 56.00  | 11.61          | 23.99          | 46.00  | 22.01          |
| 12.8               | H    | 44.49             | 60.00  | 15.51          | 27.09          | 50.00  | 22.91          |
| 15.54              | N    | 47.98             | 60.00  | 12.02          | 32.08          | 50.00  | 17.92          |
| 15.92              | N    | 45.82             | 60.00  | 14.18          | 29.92          | 50.00  | 20.08          |

Note : "H": Hot Line, "N": Neutral line.

## ■. Test resolution: 1024\*768/75Hz (Analog)

| Frequency<br>(MHz) | Line | Quasi-Peak (dBuV) |        | Margin<br>(dB) | Average (dBuV)    |        | Margin<br>(dB) |
|--------------------|------|-------------------|--------|----------------|-------------------|--------|----------------|
|                    |      | Emission<br>level | limits |                | Emission<br>level | limits |                |
| 0.195              | H    | 53.88             | 63.82  | 5.44           | 44.48             | 53.82  | 9.34           |
| 0.575              | H    | 42.30             | 56.00  | 13.70          | 25.50             | 46.00  | 20.50          |
| 0.96               | N    | 49.44             | 56.00  | 6.56           | 30.24             | 46.00  | 15.76          |
| 1.345              | N    | 48.65             | 56.00  | 7.35           | 29.95             | 46.00  | 16.05          |
| 1.73               | N    | 49.03             | 56.00  | 6.97           | 29.33             | 46.00  | 16.67          |
| 2.5                | N    | 44.08             | 56.00  | 11.93          | 25.38             | 46.00  | 20.63          |
| 3.655              | N    | 42.94             | 56.00  | 13.06          | 24.24             | 46.00  | 21.76          |
| 4                  | H    | 44.19             | 56.00  | 11.81          | 21.79             | 46.00  | 24.21          |
| 23.88              | H    | 40.87             | 60.00  | 19.13          | 35.27             | 50.00  | 14.73          |

Note : “H”: Hot Line, “N”: Neutral line.

## ■. Test resolution: 800\*600/75Hz (Analog)

| Frequency<br>(MHz) | Line | Quasi-Peak (dBuV) |        | Margin<br>(dB) | Average (dBuV)    |        | Margin<br>(dB) |
|--------------------|------|-------------------|--------|----------------|-------------------|--------|----------------|
|                    |      | Emission<br>level | limits |                | Emission<br>level | limits |                |
| 0.195              | N    | 58.99             | 63.82  | 4.83           | 45.79             | 53.82  | 8.03           |
| 0.575              | H    | 42.50             | 56.00  | 13.50          | 25.60             | 46.00  | 20.40          |
| 0.96               | N    | 51.04             | 56.00  | 4.96           | 31.84             | 46.00  | 14.16          |
| 1.345              | N    | 49.35             | 56.00  | 6.65           | 30.55             | 46.00  | 15.45          |
| 1.73               | N    | 49.13             | 56.00  | 6.87           | 29.63             | 46.00  | 16.37          |
| 2.5                | N    | 43.88             | 56.00  | 12.13          | 25.18             | 46.00  | 20.83          |
| 3.655              | N    | 42.84             | 56.00  | 13.16          | 24.04             | 46.00  | 21.96          |
| 4                  | H    | 44.49             | 56.00  | 11.51          | 21.79             | 46.00  | 24.21          |

Note : “H”: Hot Line, “N”: Neutral line.

■. Test resolution: 640\*480/75Hz (Analog)

| Frequency<br>(MHz) | Line | Quasi-Peak (dBUV) |        | Margin<br>(dB) | Average (dBUV)    |        | Margin<br>(dB) |
|--------------------|------|-------------------|--------|----------------|-------------------|--------|----------------|
|                    |      | Emission<br>level | limits |                | Emission<br>level | limits |                |
| 0.19               | H    | 59.19             | 64.04  | 4.85           | 44.69             | 54.04  | 9.35           |
| 0.575              | H    | 43.70             | 56.00  | 12.30          | 26.40             | 46.00  | 19.60          |
| 0.96               | H    | 51.98             | 56.00  | 4.02           | 32.78             | 46.00  | 13.22          |
| 1.345              | N    | 50.55             | 56.00  | 5.45           | 31.75             | 46.00  | 14.25          |
| 1.73               | H    | 50.70             | 56.00  | 5.30           | 31.10             | 46.00  | 14.90          |
| 2.5                | N    | 45.28             | 56.00  | 10.73          | 26.58             | 46.00  | 19.43          |
| 3.655              | N    | 44.44             | 56.00  | 11.56          | 25.64             | 46.00  | 20.36          |
| 4                  | H    | 44.89             | 56.00  | 11.11          | 22.79             | 46.00  | 23.21          |

Note : “H”: Hot Line, “N”: Neutral line.

## 6. Radiated Emission

### 6.1 Operating environment

Temperature : 17°C  
Relative humidity : 54 %

### 6.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber and found frequency for open area test site.

The formal radiated emission was measured at 10m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 6.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

| Contribution                                         | Probability Distribution | Uncertainty (dB) |       |                   |       |
|------------------------------------------------------|--------------------------|------------------|-------|-------------------|-------|
|                                                      |                          | Biconical Ant.   |       | Log-periodic Ant. |       |
|                                                      |                          | 3m               | 10m   | 3m                | 10m   |
| Ambient signal                                       |                          |                  |       |                   |       |
| Antenna factor calibration                           | Normal (k=2)             | 1.00             | 1.00  | 1.00              | 1.00  |
| Receiver specification                               | Rectangular              | 1.00             | 1.00  | 1.00              | 1.00  |
| Antenna directivity                                  | Rectangular              | 0.50             | 0.00  | 3.00              | 0.50  |
| Antenna phase center variation                       | Rectangular              | 0.00             | 0.00  | 1.00              | 0.20  |
| Antenna factor frequency interpolation               | Rectangular              | 0.25             | 0.25  | 0.25              | 0.25  |
| Measure distance variation                           | Rectangular              | 0.60             | 0.40  | 0.60              | 0.40  |
| Site imperfections                                   | Rectangular              | 2.83             | -2.94 | -1.96             | -2.96 |
| Mismatch                                             |                          |                  |       |                   |       |
| Receiver VRC : $\Gamma_l = 0.09$                     | U-shaped                 | 0.33             | 0.33  | 0.33              | 0.33  |
| Antenna VRC : $\Gamma_g = 0.43$ (Bi) 0.23 (Lp)       |                          | -0.35            | -0.35 | -0.18             | -0.18 |
| Uncertainty limits $20\log(1 \pm \Gamma_l \Gamma_g)$ |                          |                  |       |                   |       |
| System repeatability                                 | Std Deviation            | 0.07             | 0.05  | 0.06              | 0.10  |
| Cable loss calibration                               | Normal (k=2)             | 0.20             | 0.20  | 0.20              | 0.20  |
| Combined standard uncertainty $U_c(y)$               | Normal                   | 1.88             | 1.90  | 2.33              | 1.94  |
|                                                      |                          | -1.88            | -1.90 | -2.32             | -1.93 |
| Extended uncertainty U                               | Normal (k=2)             | 3.77             | 3.80  | 4.65              | 3.87  |
|                                                      |                          | -3.77            | -3.80 | -4.63             | -3.85 |

## 6.4 Limit

| Frequency<br>(MHz)                | FCC Limit @ 3m.<br>Quasi-Peak dB (μV/m) | FCC Limit @ 10m.*<br>Quasi-Peak dB (μV/m) | CISPR Limit @ 10m.<br>Quasi-Peak dB (μV/m) |
|-----------------------------------|-----------------------------------------|-------------------------------------------|--------------------------------------------|
| 30 – 88                           | 40.0                                    | 29.5                                      | 30.0                                       |
| 88 – 216                          | 43.5                                    | 33.0                                      | 30.0                                       |
| 216 – 230                         | 46.0                                    | 35.6                                      | 30.0                                       |
| 230 – 960                         | 46.0                                    | 35.6                                      | 37.0                                       |
| 960 – 1000                        | 54.0                                    | 43.5                                      | 37.0                                       |
| > 1000                            | 54.0                                    | 43.5                                      | 43.5                                       |
| *Limit extrapolated 20dB / decade |                                         |                                           |                                            |

## 6.5 Test equipment used

| Model Number  | Manufacturer    | Description            | Serial Number | Calibrated Date |
|---------------|-----------------|------------------------|---------------|-----------------|
| ■ - ESI       | Rohde & Schwarz | EMI test receiver      | 830482/010    | 12. 12. 2002    |
| ■ - ESCS30    | Rohde & Schwarz | EMI test receiver      | 839809/003    | 12. 12. 2002    |
| ■ - HK116     | Rohde & Schwarz | Biconical antenna      | 836239/007    | 12. 18. 2002    |
| ■ - HL223     | Rohde & Schwarz | Log-periodic antenna   | 835998/004    | 12. 20. 2002    |
| ■ - BBHA9120D | Schwarzbeck     | Horn antenna           | 207           | 02. 27. 2002    |
| ■ - 8449B     | Agilent         | Microwave preamplifier | 3008A01828    | 10. 21. 2002    |
| ■ - HD100     | HD GmbH         | Position Controller    | 100/692/01    | NCR             |
| ■ - DS415S    | HD GmbH         | Turntable              | 415/657/01    | NCR             |
| ■ - MA240     | HD GmbH         | Antenna Master         | 240/565/01    | NCR             |

## 6.6 Test data for radiated emission

- Test Date : May 14, 2003
- Test resolution : 1280\*1024/60Hz
- Resolution bandwidth : 120kHz / 1MHz
- Frequency range : 30MHz ~ 2000MHz


■. Test resolution: 1280\*1024/60Hz (Analog)

| Frequency (MHz) | Reading (dBuV) | Ant. Pol. (H/V) | Ant. Factor(dB/m) | Cable Loss | Emission Level(dBuV/m) | Limits (dBuV/m) | Margin (dB) |
|-----------------|----------------|-----------------|-------------------|------------|------------------------|-----------------|-------------|
| 63              | 5.2            | V               | 7.90              | 2.25       | 15.3                   | 30.0            | 14.7        |
| 144.02          | 1.1            | H               | 11.91             | 3.24       | 16.3                   | 30.0            | 13.7        |
| 162             | 2.4            | H               | 12.50             | 3.42       | 18.3                   | 30.0            | 11.7        |
| 171             | 1.2            | H               | 12.88             | 3.51       | 17.6                   | 30.0            | 12.4        |
| 232.78          | 0.6            | V               | 15.18             | 4.06       | 19.8                   | 37.0            | 17.2        |
| 240.04          | 0.7            | V               | 15.41             | 4.12       | 20.2                   | 37.0            | 16.8        |
| 492.76          | 5.5            | H               | 16.97             | 6.14       | 28.6                   | 37.0            | 8.4         |
| 652.52          | 0.9            | H               | 19.62             | 7.02       | 27.5                   | 37.0            | 9.5         |
| 779.99          | 1.4            | H               | 20.47             | 7.78       | 29.6                   | 37.0            | 7.4         |
| 816.1           | 2.1            | H               | 21.09             | 8.00       | 31.2                   | 37.0            | 5.8         |
| 859.97          | 0.8            | V               | 21.90             | 8.26       | 31.0                   | 37.0            | 6.0         |
| 870.03          | 0.4            | V               | 22.01             | 8.32       | 30.7                   | 37.0            | 6.3         |
| Above 1GHz      | --             | --              | --                | --         | --                     | --              | <<          |

Note: "H": Horizontal, "V": Vertical, "<<": More than 20dB margin

30MHz ~ 1000MHz: Quasi-peak detector mode

Above 1GHz: Average detector mode

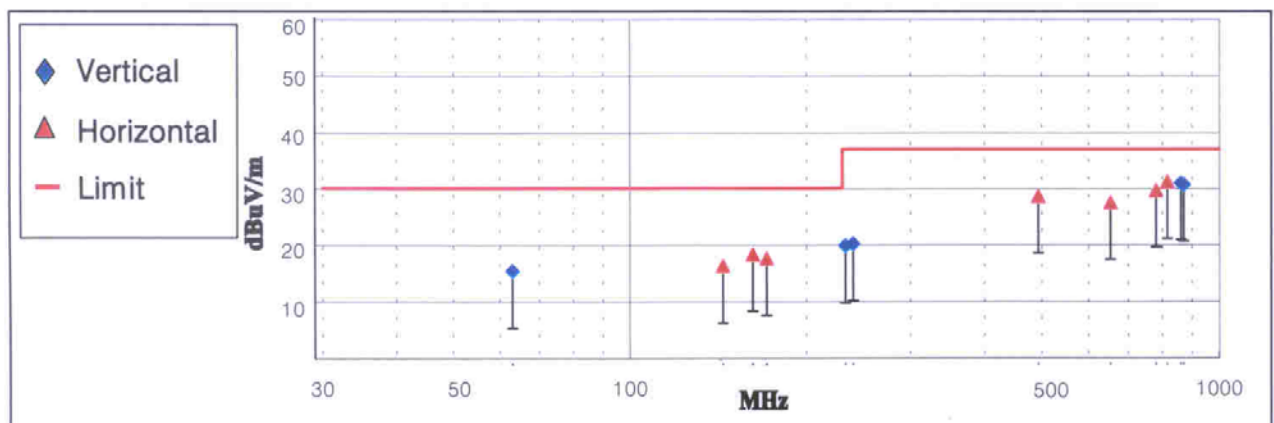

< Fig 6-1. Radiated emission result >


■. Test resolution: 1280\*1024/60Hz (Digital)

| Frequency (MHz) | Reading (dBuV) | Ant. Pol. (H/V) | Ant. Factor(dB/m) | Cable Loss | Emission Level(dBuV/m) | Limits (dBuV/m) | Margin (dB) |
|-----------------|----------------|-----------------|-------------------|------------|------------------------|-----------------|-------------|
| 10.99           | 9.3            | V               | 10.39             | 1.82       | 21.5                   | 30.0            | 8.5         |
| 49.31           | 9.1            | V               | 7.49              | 1.99       | 18.6                   | 30.0            | 11.4        |
| 62.15           | 8.2            | V               | 7.93              | 2.23       | 18.4                   | 30.0            | 11.6        |
| 103.75          | 7.1            | H               | 9.74              | 2.86       | 19.7                   | 30.0            | 10.3        |
| 117.43          | 0.6            | H               | 10.76             | 3.06       | 14.4                   | 30.0            | 15.6        |
| 217.51          | 0.4            | H               | 14.66             | 3.94       | 19.0                   | 30.0            | 11.0        |
| 404.76          | 2.4            | H               | 15.61             | 5.44       | 23.4                   | 37.0            | 13.6        |
| 543.77          | 0.7            | V               | 17.69             | 6.42       | 24.8                   | 37.0            | 12.2        |
| 640.21          | 1.3            | H               | 19.53             | 6.94       | 27.8                   | 37.0            | 9.2         |
| 799.99          | 1.1            | V               | 20.94             | 7.90       | 29.9                   | 37.0            | 7.1         |
| 816.1           | 0.7            | V               | 21.09             | 8.00       | 29.8                   | 37.0            | 7.2         |
| 864.11          | 0.2            | V               | 21.95             | 8.28       | 30.4                   | 37.0            | 6.6         |
| Above 1GHz      | --             | --              | --                | --         | --                     | --              | <<          |

Note: "H": Horizontal, "V": Vertical, "<<": More than 20dB margin

30MHz ~ 1000MHz: Quasi-peak detector mode

Above 1GHz: Average detector mode

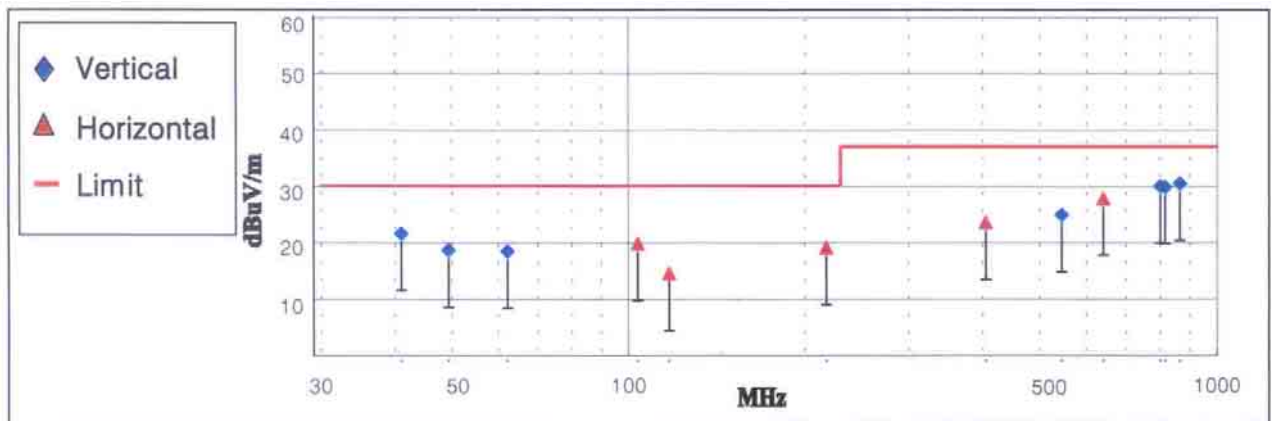

< Fig 6-2. Radiated emission result >

## 7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

### 7.1 Example 1 :

#### ■ 20.3 MHz

|                                      |   |                              |   |                       |
|--------------------------------------|---|------------------------------|---|-----------------------|
| Class B Limit                        | = | 250 $\mu\text{V}$            | = | 48 dB $\mu\text{V}$   |
| Reading                              | = | - 67.8 dBm(Calibrated level) |   |                       |
| Convert to dB $\mu\text{V}$          | = | - 67.8 dBm + 107             | = | 39.2 dB $\mu\text{V}$ |
| $10^{(39.2\text{dB}\mu\text{V}/20)}$ | = | 91.2 dB $\mu\text{V}$        |   |                       |
| Margin                               | = | 39.2 – 48                    | = | -8.8                  |
|                                      | = | 8.8 dB below Limit           |   |                       |

### 7.2 Example 2 :

#### ■ 66.7 MHz

|                                      |   |                                |   |                                |
|--------------------------------------|---|--------------------------------|---|--------------------------------|
| Class B Limit                        | = | 100 $\mu\text{V}/\text{m}$     | = | 40.0 dB $\mu\text{V}/\text{m}$ |
| Reading                              | = | - 76.0 dBm(Calibrated level)   |   |                                |
| Convert to dB $\mu\text{V}/\text{m}$ | = | - 76.0 dBm + 107               | = | 31.0 dB $\mu\text{V}/\text{m}$ |
| Antenna Factor + Cable Loss          | = | 5.8 dB                         |   |                                |
| Total                                | = | 36.8 dB $\mu\text{V}/\text{m}$ |   |                                |
| Margin                               | = | 36.8 – 40.0                    | = | -3.2                           |
|                                      | = | 3.2 dB below Limit             |   |                                |

## 8. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

**LG Electronics Inc. 50" Plasma Monitor (Model No.: MU-50PZ90V)** was complies with §15.107 and 15.109 of the FCC Rules.

The highest emission observed was at 0.96MHz for conducted emission with a margin of 4.02dB (640\*480/75Hz, Analog), at 816.1MHz for radiated emissions with a margin of 5.8dB (1280\*1024/60Hz, Analog).