



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8539 FAX : +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

Applicant:

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu, Seoul
153-023, Korea

Date of Issue: February 14, 2011

Test Report No.: HCTE1102FE04-1

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJP925

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B

Equipment Type : Cellular/PCS GSM/ WCDMA/ EDGE Phone with Bluetooth & WLAN

Model Name : P925, LG-P925

Manufacture : LG Electronics Inc.

Port / Connector(s) : USB Data Port / Headset Port / HDMI Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Report prepared by
: Doo- Hwan Ryu
Test Engineer of EMC Tech. Part

Approved by
: Sang-Jun Lee
Manager of EMC Tech. Part

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	
1.1 Product description	3
1.2 Related submittal(s)/Grant(s)	3
1.3 Tested system details	4
1.4 Cable description	5
1.5 Noise suppression parts on cable. (I/O cable)	5
1.6 Test methodology	6
1.7 Test facility	6
1.8 Frequency Range of Radiated Measurements	6
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	7
3. PRELIMINARY TEST	
3.1 Conducted Emission test	8
3.2 Radiated Emission test	8
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	9
4.2 Radiated Emission test	14
5. FIELD STRENGTH CALCULATION	15
6. TEST EQUIPMENT	16
7. CONCLUSION	17

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test (E.U.T) is **Cellular/PCS GSM/WCDMA/EDGE Phone with Bluetooth& WLAN, Model: P925, LG-P925** manufactured by **LG Electronics Inc.**

Its basic purpose is used for communications.

Model (s)	P925, LG-P925
FCC ID	BEJP925
E.U.T Type	Cellular/PCS GSM/WCDMA/EDGE Phone with Bluetooth&WLAN
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.4 MHz to 1 907.6 MHz (WCDMA 1 900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.4 MHz to 1 987.6 MHz (WCDMA 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Serial Number	FCC ID / DoC	Connected To
Cellular/PCS GSM/ WCDMA/EDGE Phone with Bluetooth &WLAN	LG Electronics Inc	P925	BEJP925	Notebook PC TA TV monitor
Notebook PC	SAMSUNG	NT-R519 ZLA693AS900033M	DoC	E.U.T
Notebook PC adaptor	DELTA (JIANG SU)	ADP-60ZH D AD-6019R DA44-00242A	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible 3902B008	DoC	Notebook PC
TV monitor	LG Electronics Inc	W2261VP-PF 912NDDM0C242	-	E.U.T
USB cable	-	-	-	E.U.T, TA
HDMI cable	-	-	-	E.U.T, TV monitor
Headset	-	-	-	E.U.T
SD card (4 GB)	HC	-	-	E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
Cellular/PCS GSM/WCDMA/EDGE Phone with Bluetooth & WLAN	Headset jack	-	N	(D)1.2
	USB data	Y	Y	(P,D)1.2
	HDMI	N	Y	(D)2.0
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM/WCDMA/EDGE Phone with Bluetooth & WLAN	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
	HDMI	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The 10 m semi anechoic chamber used to collect the radiated data is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si, Kyongki-Do, South Korea, and the conducted measurement facility used to measure the conducted data are located at San 136-1, Ami-Ri Bubal-Eup, Icheon-Si, Kyongki-Do, 467-701, South Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facilities was submitted to the Commission and accepted dated Sep. 03, 2010 (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

- Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor.
Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.
- Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

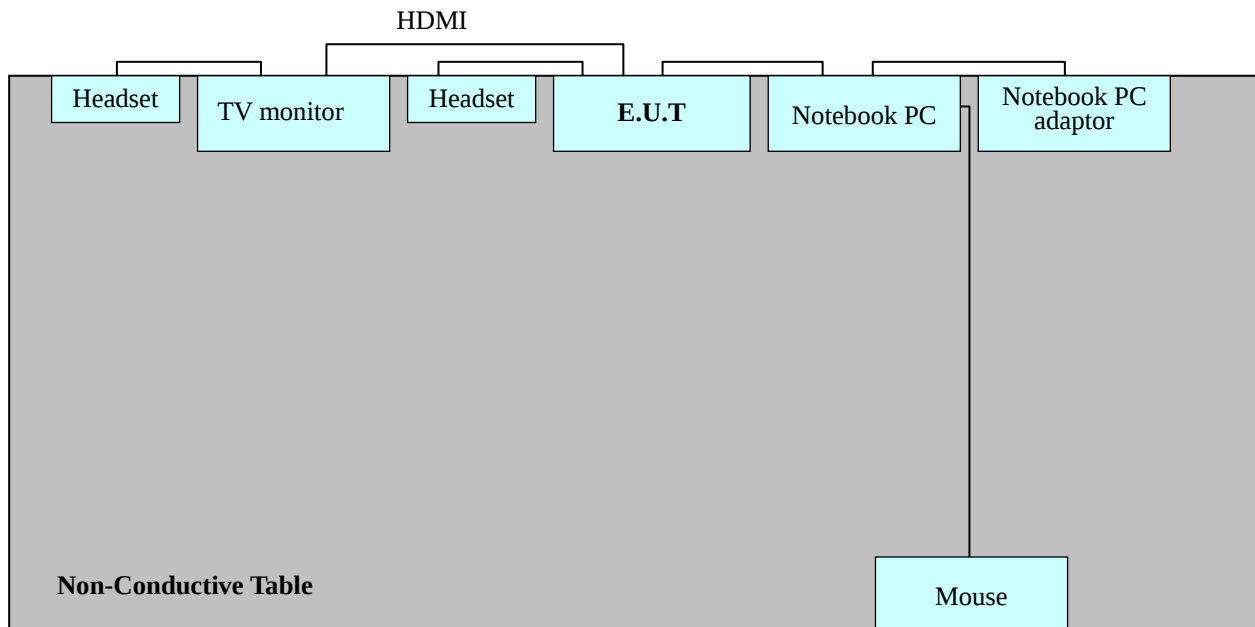

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- Test E.U.T with Data Communication mode, after connecting all peripheral devices.

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	○

3. 2 Radiated Emission Test

- Test E.U.T with Data Communication mode, after connecting all peripheral devices.

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 23.7 °C
Humidity level	: 44.58 %
Test date	: January 20, 2011

※ **NOTE:** Refer to page 10 to page 13 for details.


HCT

EMC

EUT: P925
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DH-RYU
Test Specification: CISPR22 CLASS B
Comment: H

SCAN TABLE: "CISPR22 CLASS B"

Short Description:			CISPR 22 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

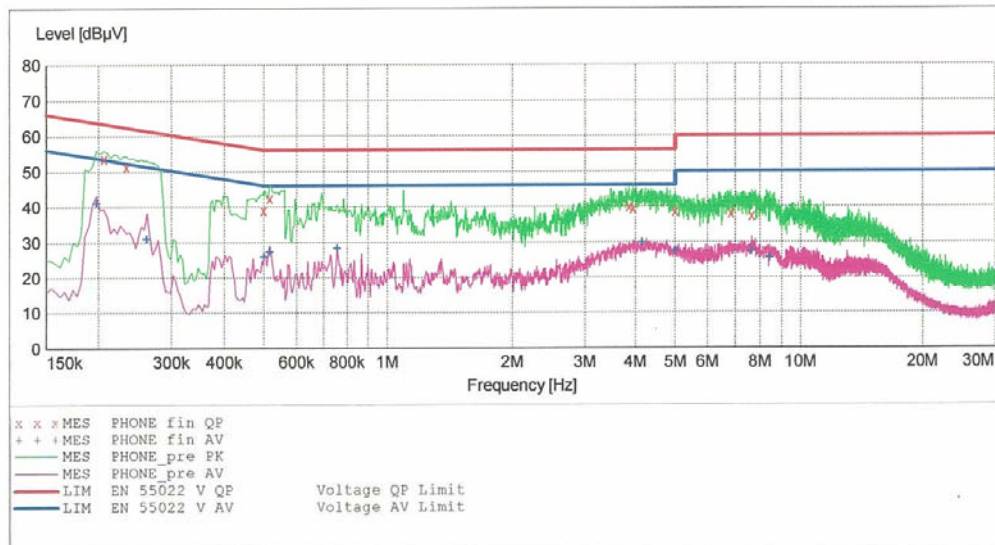

MEASUREMENT RESULT: "PHONE_fin QP"

1/20/2011 2:09PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.206010	53.70	10.1	63	9.7	---	---
0.234010	51.40	10.1	62	11.0	---	---
0.498010	39.10	10.1	56	17.0	---	---
0.516000	42.60	10.1	56	13.4	---	---
3.860000	40.10	10.4	56	15.9	---	---
3.952000	39.40	10.4	56	16.6	---	---
5.000000	38.70	10.5	56	17.3	---	---
6.836000	38.20	10.6	60	21.8	---	---
7.664000	37.30	10.7	60	22.7	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

1/20/2011 2:09PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.198010	41.10	10.1	54	12.6	---	---
0.262010	31.00	10.1	51	20.4	---	---
0.500000	26.00	10.1	46	20.0	---	---
0.516000	27.30	10.1	46	18.7	---	---
0.756000	28.40	10.1	46	17.6	---	---
4.160000	29.80	10.4	46	16.2	---	---
5.000000	27.50	10.5	46	18.5	---	---
7.664000	27.40	10.7	50	22.6	---	---
8.440000	25.40	10.7	50	24.6	---	---


HCT

EMC

EUT: P925
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DH-RYU
Test Specification: CISPR22 CLASS B
Comment: N

SCAN TABLE: "CISPR22 CLASS B"

Short Description:				CISPR 22 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

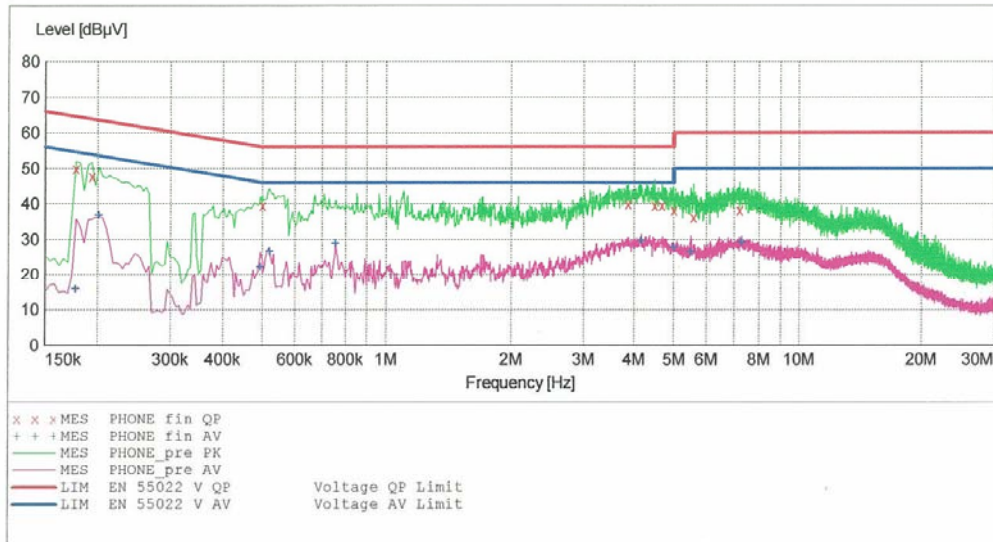

MEASUREMENT RESULT: "PHONE_fin QP"

1/20/2011 2:05PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.178010	49.90	10.1	65	14.7	---	---
0.194010	47.70	10.1	64	16.2	---	---
0.500000	39.60	10.1	56	16.4	---	---
3.864000	39.90	10.4	56	16.1	---	---
4.492000	39.50	10.5	56	16.5	---	---
4.684000	39.50	10.5	56	16.5	---	---
5.000000	38.30	10.5	56	17.7	---	---
5.584000	36.30	10.5	60	23.7	---	---
7.216000	38.30	10.6	60	21.7	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

1/20/2011 2:05PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.178010	15.90	10.1	55	38.7	---	---
0.202010	36.80	10.1	54	16.7	---	---
0.494010	22.30	10.1	46	23.8	---	---
0.520000	26.60	10.1	46	19.4	---	---
0.756000	29.00	10.1	46	17.0	---	---
4.176000	29.60	10.4	46	16.4	---	---
5.000000	27.90	10.5	46	18.1	---	---
5.516000	26.50	10.5	50	23.5	---	---
7.284000	29.20	10.6	50	20.8	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to : FCC PART 15 Subpart B
 Operating condition : Data Communication mode
 Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Temperature : 17.0 °C
 Humidity level : 31.5 %
 Test date : January 26, 2011

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
50.3	11.6	12.4	0.9	V	24.9	40.0	15.1
79.1	21.1	8.2	1.3	V	30.6	40.0	9.4
160.7	12.1	13.3	1.6	H	27.0	43.5	16.5
258.7	9.6	11.8	2.1	H	23.5	46.0	22.5
380.6	9.3	14.9	2.5	V	26.7	46.0	19.3
480.7	3.7	17.2	2.9	H	23.8	46.0	22.2

※ **NOTE:**

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. For measurement above 1 GHz, noise level is more than 10 dB below the limit, specified in FCC Part 15.35

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Serial Number</u>	<u>Next CAL Date</u>
-------------	---------------------	---------------------	----------------------	----------------------

Conducted Emission

☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100033	2011.02.19
☒ LISN	Rohde & Schwarz	ESH3-Z5	100282	2012.02.01
☐ LISN	Rohde & Schwarz	ENV216	3560.6550.02	2011.04.06
☒ Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.52	2011.10.25

Radiated Emission

☐ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	2011.10.29
☒ EMI Test Receiver	Rohde & Schwarz	ESU26	100241	2011.09.01
☒ Trilog Antenna	Schwarzbeck	VULB9160	3301	2012.09.13
☒ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	-
☒ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	-
☒ Communication Antenna	Schwarzbeck	USLP9142	9142-248	-
☐ RF-Amplifier	MITEQ	AMF-6D-0010 1800-35.20P.PS	-	2011.05.20
☐ Base Station	Rohde & Schwarz	CMU 200	1100000802	2011.02.17

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Cellular/PCS GSM/WCDMA/EDGE Phone with Bluetooth&WLAN, Model: P925, LG-P925, FCC ID: BEJP925** complies with §15.107 and §15.109 of the FCC rules.