

Application for FCC Certificate
On Behalf of
LG Electronics U.S.A., Inc.

LCD Monitor

Model No.: W2043SEV

Serial No.: E2010060701

FCC ID : BEJW2043SEV

Prepared For : LG Electronics U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs,
NJ 07632, United States

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500
Fax: +86-21-64955491

Report No. : ACI-F10077
Date of Test : Jun 08, 2010
Date of Report : Jun 17, 2010

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS.....	4
1.1 Description of Standards and Results.....	4
2 GENERAL INFORMATION.....	5
2.1 Description of Equipment Under Test.....	5
2.2 Peripherals.....	6
2.3 Description of Test Facility	7
2.4 Measurement Uncertainty	7
3 CONDUCTED EMISSION TEST	8
3.1 Test Equipment.....	8
3.2 Block Diagram of Test Setup	8
3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)].....	9
3.4 Test Configuration.....	9
3.5 Operating Condition of EUT	10
3.6 Test Procedures	10
3.7 Test Results	11
4 RADIATED EMISSION TEST	15
4.1 Test Equipment.....	15
4.2 Block Diagram of Test Setup	15
4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)].....	16
4.4 Test Configuration.....	16
4.5 Operating Condition of EUT	17
4.6 Test Procedures	17
4.7 Test Results	18
5 DEVIATION TO TEST SPECIFICATIONS	22
6 DEBUG DESCRIPTION	23

TEST REPORT FOR FCC CERTIFICATE

Applicant : LG Electronics U.S.A., Inc.
Manufacturer : LG Electronics Nanjing Display Co., Ltd.
EUT Description : LCD Monitor
(A) Model No. : W2043SEV
(B) Serial No. : E2010060701
(C) Power Supply : 120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 2009
AND ANSI C63.4-2003*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B (Class B) and ICES-003, Issue 4 February 2004 (CISPR 22:2002) limits both radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report shows that the EUT (M/N: W2043SEV; S/N: E2010060701) which was tested in 3m anechoic chamber Jun 08, 2010 is technically compliance with the FCC official limits also.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report contains data that are not covered by the NVLAP accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jun 08, 2010 Date of Report : Jun 17, 2010

Producer : Kathy Wang
KATHY WANG / Assistant

Review : Dio Yang
DIO YANG / Deputy Assistant Manager

AUDIX[®] For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Signatory : Sammy Chen
Authorized Signature EMC SAMMY CHEN / Assistant Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description of Test Item	Standard	Limits	Results
EMISSION			
Conducted Disturbance at the Mains Terminal	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2009 AND ANSI C63.4-2003	15.107(a) Class B	Pass
Radiated Disturbance	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2009 AND ANSI C63.4-2003	15.109(a) Class B	Pass

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description	:	LCD Monitor
Type of EUT	:	☒ Production ☐ Pre-product ☐ Pro-type
Model No.	:	W2043SEV
Serial No.	:	E2010060701
Real Power	:	24.30W
Applicant	:	LG Electronics U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs, NJ 07632, United States
Manufacturer	:	LG Electronics Nanjing Display Co., Ltd. No.346, Yao Xin Road, Economic & Technical Development Zone, Nanjing, China
LCD Panel	:	Manufacturer : LG Display M/N : LM200WD1 (TL) (D1)
Max Resolution	:	1600*900@60Hz
D-Sub Cable #1	:	Shielded, Detachable, 1.85m, with two cores on cable
D-Sub Cable #2	:	Shielded, Detachable, 1.85m, with two cores in connector
Power Cord	:	Unshielded, Detachable, 1.80m
Note	:	After evaluation, the D-Sub cable#1 was used in the test for they will cause the maximum emission.

Remark:

The EUT is a LCD Monitor which input/output ports as follows:

(1) One D-Sub Port

: Connected with PC

(2) One Power Port

: Connected with AC Power

2.2 Peripherals

2.2.1 PC

Manufacturer : HP
Model Number : dx7200MT
Serial Number : CNG622017W
Power Cord : Unshielded, Detachable, 1.8m
Certificate : FCC DoC; CE/EMC; VCCI; C-Tick; UL
BSMI (R33001) 3C (A000111)
MIC (E-A011-04-2659(B))

2.2.2 Printer

Manufacturer : HP
Model Number : C3990A
Serial Number : JPZX020487
Data Cable : Shielded, Detachable, 1.5m
Certificate : GS, CE/EMC, C-Tick, FCC DoC

2.2.3 Keyboard

Manufacturer : Microsoft
Model Number : RT2300
Serial Number : 7668200662248
Data Cable : Shielded, Undetachable, 1.8m
Certificate : CE/EMC, FCC DoC, VCCI, MIC, C-Tick,
BSMI

2.2.4 Mouse

Manufacturer : Microsoft
Model Number : RT2300
Serial Number : 6965712071551
Data Cable : Shielded, Undetachable, 1.85m.
Certificate : FCC DoC, VCCI, CE/EMC, MIC, GS

2.2.5 Modem

Manufacturer : TP-LINK
Model Number : TM-EC5658V
Serial Number : 07123301053
Data Cable : Shielded, Detachable, 1.8m
Certificate : FCC DoC, CE/EMC, CCC

2.3 Description of Test Facility

Site Description (Semi-Anechoic Chamber) : Sept. 17, 1998 file on
Apr 29, 2009 Renewed
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

NVLAP Lab Code : 200371-0

2.4 Measurement Uncertainty

Conducted Emission Expanded Uncertainty: U = 1.26 dB
Radiated Emission Expanded Uncertainty : U = 3.02 dB

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCI	100841	Oct 15, 2009	Oct 15, 2010
2.	Artificial Mains Network (AMN)	R&S	ESH2-Z5	843890/011	Apr 02, 2010	Apr 02, 2011
3.	Line Impedance Stabilization Network (LISN)	Kyoritsu	KNW-407	8-1280-4	Apr 02, 2010	Apr 02, 2011
4.	50 Ω Coaxial Switch	Anritsu	MP59B	6200426389	Mar 19, 2010	Sep 19, 2011
5.	50 Ω Terminator	Anritsu	BNC	001	Apr 02, 2010	Apr 02, 2011
6.	Software	Audix	E3	SET00200 9804M592	--	--


3.2 Block Diagram of Test Setup

3.2.1 EUT & Peripherals

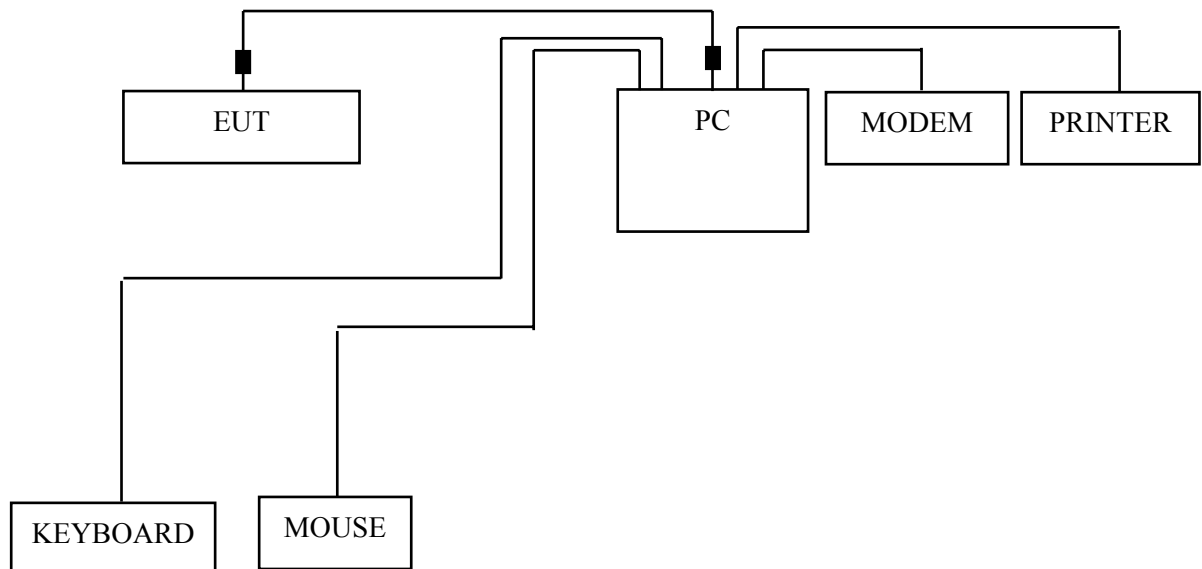

■ : Ferrite core

3.2.2 Conducted Disturbance Test Setup

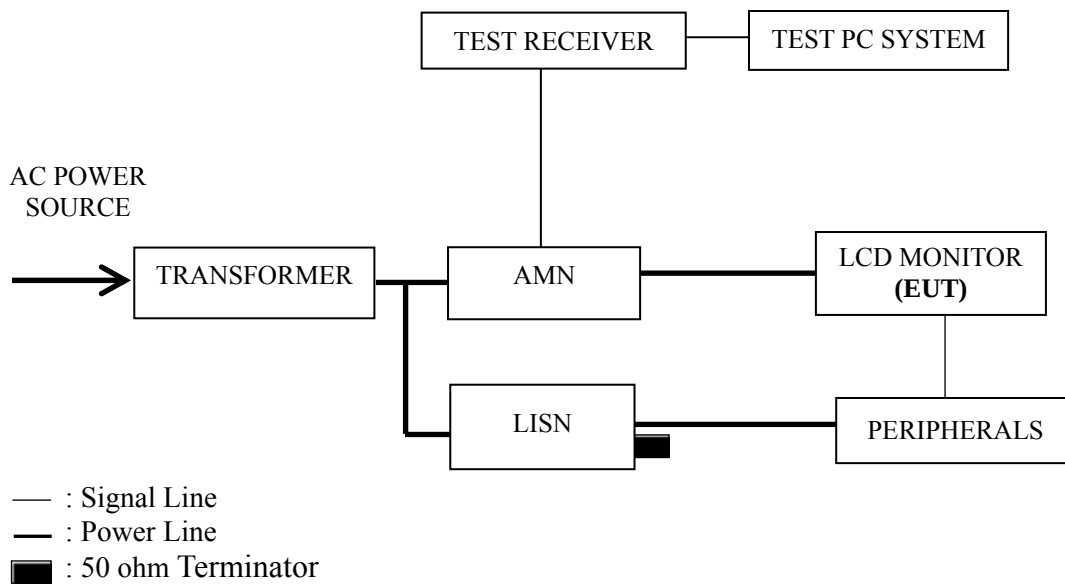

3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)]

Frequency Range (MHz)	Limits dB (μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50
NOTE 1 – The lower limit shall apply at the transition frequencies. NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz		

3.4 Test Configuration

The EUT (listed in Sec.2.1) and the peripherals (listed in Sec 2.2) were installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT and peripherals as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipments and the EUT.

3.5.3 Set the contrast & brightness of EUT to maximum.

3.5.4 PC system ran the self-test program “EMC Test” by windows XP and sent “H” characters to EUT through graphic card, the EUT’s screen displayed and filled with “H” pattern by its resolution (Via D-Sub Input).

3.5.5 Repeat above procedure from 3.5.3 to 3.5.4 for difference test mode.

3.5.6 The other peripherals devices were driven and operated during the test.

3.5.7 The test modes are as follows:

Test Mode
D-Sub 640*480@60Hz
D-Sub 1024*768@60Hz
D-Sub 1600*900@60Hz

3.6 Test Procedures

The EUT and peripherals were connected to the power mains through an Artificial Mains Network (AMN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line (Line & Neutral) were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to ANSI C63.4:2003 during conducted emission test.

The bandwidth of R&S Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7.

3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

Test Mode	Data Page
D-Sub 640*480@60Hz	P12
D-Sub 1024*768@60Hz	P13
D-Sub 1600*900@60Hz	P14

NOTE 1 – The **bold test mode** listed above means the worst test mode.

NOTE 2 – Factor = Cable Loss + AMN Factor.

NOTE 3 – Emission Level = Meter Reading + Factor.

NOTE 4 – “QP” means “Quasi-Peak” values, “AV” means “Average” values.

NOTE 5 – The worst case is for D-Sub 1600*900@60Hz test mode. The worst emission is detected at 0.192 MHz (Quasi-Peak Value) with corrected signal level of 51.67 dB (μV) (limit is 63.93 dB (μV)), when the Line the EUT is connected to AMN.

EUT : LCD Monitor Temperature : 22°C

Model No. : W2043SEV Humidity : 48%RH

Serial No. : E2010060701 Date of Test : Jun 08, 2010

Test Mode : D-Sub 640*480@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.192	50.79	0.28	51.07	63.93	12.86	QP
	0.256	41.60	0.33	41.93	61.56	19.63	
	0.322	34.74	0.39	35.13	59.66	24.53	
	1.269	27.64	0.51	28.15	56.00	27.85	
	7.606	31.87	0.70	32.57	60.00	27.43	
	26.139	35.62	1.11	36.73	60.00	23.27	
	0.192	40.03	0.28	40.31	53.93	13.62	AV
	0.256	31.94	0.33	32.27	51.56	19.29	
	0.322	26.71	0.39	27.10	49.66	22.56	
	1.269	20.51	0.51	21.02	46.00	24.98	
	7.606	17.40	0.70	18.10	50.00	31.90	
	26.139	25.16	1.11	26.27	50.00	23.73	
Neutral	0.192	50.96	0.26	51.22	63.93	12.71	QP
	0.259	40.76	0.31	41.07	61.47	20.40	
	0.320	36.97	0.36	37.33	59.71	22.38	
	3.276	31.65	0.60	32.25	56.00	23.75	
	7.606	32.41	0.71	33.12	60.00	26.88	
	26.418	37.74	1.04	38.78	60.00	21.22	
	0.192	40.59	0.26	40.85	53.93	13.08	AV
	0.259	30.29	0.31	30.60	51.47	20.87	
	0.320	29.62	0.36	29.98	49.71	19.73	
	3.276	28.58	0.60	29.18	46.00	16.82	
	7.606	17.90	0.71	18.61	50.00	31.39	
	26.418	26.94	1.04	27.98	50.00	22.02	

TEST ENGINEER: TED ZHU

EUT : LCD Monitor Temperature : 22°C

Model No. : W2043SEV Humidity : 48%RH

Serial No. : E2010060701 Date of Test : Jun 08, 2010

Test Mode : D-Sub 1024*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.192	51.19	0.28	51.47	63.93	12.46	QP
	0.259	40.98	0.33	41.31	61.47	20.16	
	0.320	36.36	0.39	36.75	59.71	22.96	
	4.549	29.20	0.63	29.83	56.00	26.17	
	7.606	33.21	0.70	33.91	60.00	26.09	
	26.418	37.11	1.11	38.22	60.00	21.78	
	0.192	40.52	0.28	40.80	53.93	13.13	AV
	0.259	31.24	0.33	31.57	51.47	19.90	
	0.320	27.78	0.39	28.17	49.71	21.54	
	4.549	24.06	0.63	24.69	46.00	21.31	
	7.606	18.48	0.70	19.18	50.00	30.82	
	26.418	24.36	1.11	25.47	50.00	24.53	
Neutral	0.192	51.16	0.26	51.42	63.93	12.51	QP
	0.252	40.03	0.31	40.34	61.69	21.35	
	0.320	37.03	0.36	37.39	59.71	22.32	
	4.549	30.23	0.64	30.87	56.00	25.13	
	7.606	34.42	0.71	35.13	60.00	24.87	
	26.558	37.93	1.04	38.97	60.00	21.03	
	0.192	40.72	0.26	40.98	53.93	12.95	AV
	0.252	24.92	0.31	25.23	51.69	26.46	
	0.320	29.62	0.36	29.98	49.71	19.73	
	4.549	24.88	0.64	25.52	46.00	20.48	
	7.606	17.99	0.71	18.70	50.00	31.30	
	26.558	26.60	1.04	27.64	50.00	22.36	

TEST ENGINEER: TED ZHU

EUT : LCD Monitor Temperature : 22°C

Model No. : W2043SEV Humidity : 48%RH

Serial No. : E2010060701 Date of Test : Jun 08, 2010

Test Mode : D-Sub 1600*900@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.192	51.39	0.28	51.67	63.93	12.26	QP
	0.253	39.54	0.33	39.87	61.64	21.77	
	0.320	35.64	0.39	36.03	59.71	23.68	
	4.549	30.88	0.63	31.51	56.00	24.49	
	7.606	33.56	0.70	34.26	60.00	25.74	
	26.139	37.35	1.11	38.46	60.00	21.54	
	0.192	40.86	0.28	41.14	53.93	12.79	AV
	0.253	29.64	0.33	29.97	51.64	21.67	
	0.320	28.08	0.39	28.47	49.71	21.24	
	4.549	26.41	0.63	27.04	46.00	18.96	
	7.606	18.39	0.70	19.09	50.00	30.91	
	26.139	23.92	1.11	25.03	50.00	24.97	
Neutral	0.190	50.71	0.26	50.97	64.02	13.05	QP
	0.253	41.12	0.31	41.43	61.64	20.21	
	0.320	37.71	0.36	38.07	59.71	21.64	
	1.269	31.84	0.51	32.35	56.00	23.65	
	7.329	33.84	0.71	34.55	60.00	25.45	
	26.418	37.72	1.04	38.76	60.00	21.24	
	0.190	40.37	0.26	40.63	54.02	13.39	AV
	0.253	29.73	0.31	30.04	51.64	21.60	
	0.320	30.10	0.36	30.46	49.71	19.25	
	1.269	20.77	0.51	21.28	46.00	24.72	
	7.329	18.86	0.71	19.57	50.00	30.43	
	26.418	26.48	1.04	27.52	50.00	22.48	

TEST ENGINEER: TED ZHU

4 RADIATED EMISSION TEST


4.1 Test Equipment

The following test equipments are used during the radiated emission test in a semi-anechoic chamber:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESVS10	844594/001	Mar 07, 2010	Mar 07, 2011
2.	Preamplifier	Agilent	8447D	2944A10548	Mar 19, 2010	Sep 19, 2010
3.	Preamplifier	HP	8449B	3008A00864	Apr 29, 2010	Apr 29, 2011
4.	Bi-log Antenna	TESEQ	CBL6112D	23192	Dec 01, 2009	Dec 01, 2010
5.	Spectrum	Agilent	E7405A	MY45106600	May 19, 2010	May 19, 2011
6.	Software	Audix	E3	SET00200 9912M295-2	--	--


4.2 Block Diagram of Test Setup

4.2.1 EUT and Peripherals

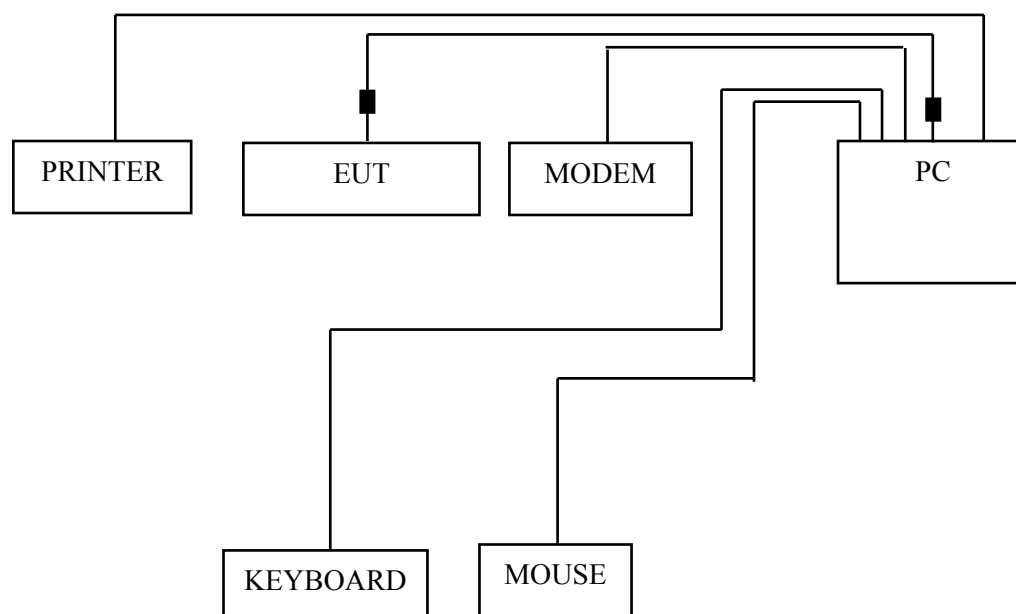

■ : Ferrite core

4.2.2 Radiated emission test setup

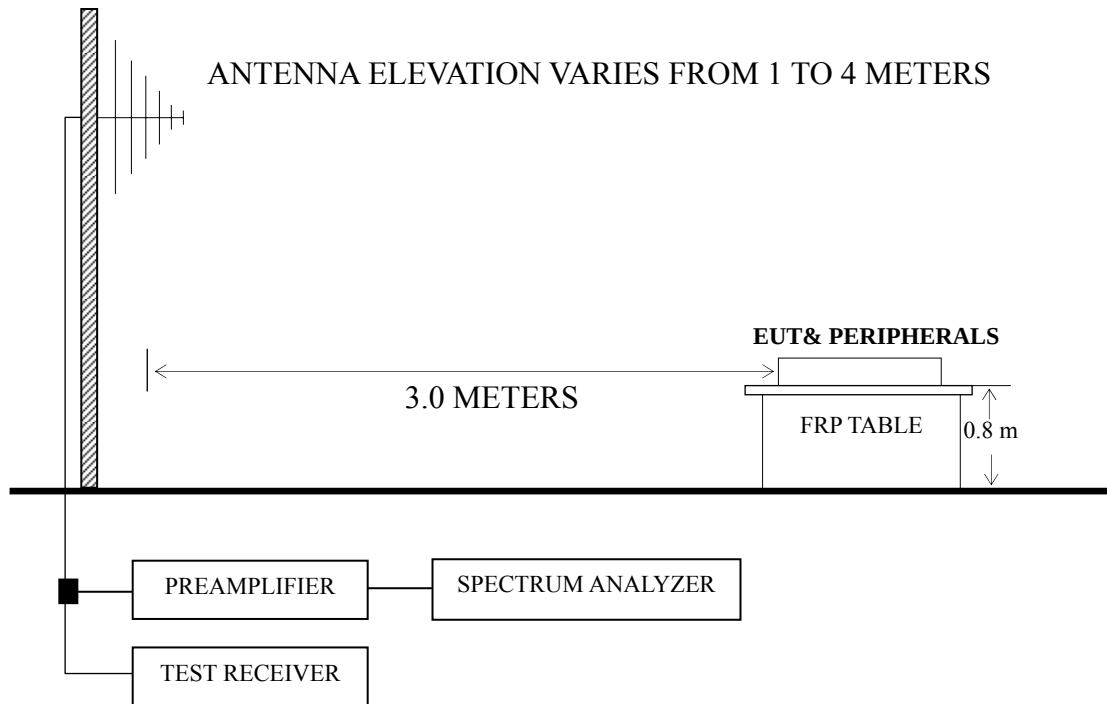

■ : 50 ohm Coaxial Switch

4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)]

Frequency (MHz)	Distance (m)	Field strength limits	
		($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB ($\mu\text{V/m}$) = 20 log Emission Level ($\mu\text{V/m}$)

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.

NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT.

4.4 Test Configuration

The configuration of the EUT and peripherals are same as those used in conducted emission test.

Please refer to Sec.3.4.

4.5 Operating Condition of EUT

Same as conducted emission test which is listed in Sec.3.5, except for the test setup replaced by Sec.4.2.

4.6 Test Procedures

The EUT and peripherals were placed on a FRP turntable that is 0.8 meter above ground. The FRP turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.4:2003 requirements during radiated emission test.

The I.F. bandwidth of Test Receiver R&S ESVS10 was set at 120 kHz below 1GHz and The Spectrum Agilent E7405A was set at 1MHz above 1GHz.

The frequency range from 30 MHz to 1000MHz was checked for all test modes.

The frequency range from 1 GHz to 2 GHz was checked for D-Sub 1600*900@60Hz mode.

The test modes were done on radiated disturbance test and all the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Test Mode	Data Page
D-Sub 640*480@60Hz	P19
D-Sub 1024*768@60Hz	P20
D-Sub 1600*900@60Hz	P21

NOTE 1 – **The bold test mode** listed above means the worst test mode.

NOTE 2 – Emission Level = Antenna Factor + Cable Loss + Meter Reading.($< 1\text{GHz}$)

NOTE 3 – Emission Level = Antenna Factor + Cable Loss – Preamp Factor + Meter Reading.($> 1\text{GHz}$)

NOTE 4 – The emission levels that are 20dB below the official limit are not reported.

NOTE 5 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 6 – The worst case is for D-Sub 1600*900@60Hz test mode. The worst emission at horizontal polarization was detected at 31.940 MHz with corrected signal level of 18.25 dB ($\mu\text{V/m}$) (limit is 40.00dB ($\mu\text{V/m}$)), when the antenna was 1.00 m height and the turntable was at 45° . The worst emission at vertical polarization was detected at 159.980MHz with corrected signal level of 48.94 dB ($\mu\text{V/m}$) (limit is 40.00 dB ($\mu\text{V/m}$)), when the antenna was 1.00 m height and the turntable was at 135° .

EUT : LCD Monitor Temperature : 22°C

Model No. : W2043SEV Humidity : 60%RH

Serial No. : E2010060701 Date of Test : Jun 08, 2010

Test Mode : D-Sub 640*480@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.940	37.01	18.49	0.65	17.87	40.00	2.99
	159.980	33.57	10.50	1.28	21.79	40.00	6.43
	213.330	30.16	11.30	1.49	17.37	40.00	9.84
	429.640	32.52	16.92	2.13	13.47	47.00	14.48
	528.580	37.95	18.27	2.32	17.36	47.00	9.05
	977.690	35.44	22.27	4.01	9.16	47.00	11.56
Vertical	31.940	22.92	18.49	0.65	3.78	40.00	17.08
	164.830	32.55	10.35	1.31	20.89	40.00	7.45
	182.290	31.67	9.99	1.38	20.30	40.00	8.33
	221.090	31.21	11.71	1.52	17.98	40.00	8.79
	429.640	28.17	16.92	2.13	9.12	47.00	18.83
	740.040	33.58	20.10	2.78	10.70	47.00	13.42

TEST ENGINEER: RAVEN JIN

EUT : LCD Monitor Temperature : 22°C

Model No. : W2043SEV Humidity : 60%RH

Serial No. : E2010060701 Date of Test : Jun 08, 2010

Test Mode : D-Sub 1024*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.940	22.31	18.49	0.65	3.17	40.00	17.69
	150.280	34.57	11.25	1.24	22.08	40.00	5.43
	201.690	30.73	10.78	1.45	18.50	40.00	9.27
	429.640	28.59	16.92	2.13	9.54	47.00	18.41
	698.330	31.24	19.69	2.67	8.88	47.00	15.76
	749.740	33.61	20.20	2.80	10.61	47.00	13.39
Vertical	31.940	36.73	18.49	0.65	17.59	40.00	3.27
	150.280	34.29	11.25	1.24	21.80	40.00	5.71
	201.690	32.04	10.78	1.45	19.81	40.00	7.96
	460.680	34.95	17.38	2.18	15.39	47.00	12.05
	512.090	39.51	18.06	2.29	19.16	47.00	7.49
	717.730	34.00	19.88	2.72	11.40	47.00	13.00

TEST ENGINEER: RAVEN JIN

EUT : LCD Monitor Temperature : 22°C

Model No. : W2043SEV Humidity : 60%RH

Serial No. : E2010060701 Date of Test : Jun 08, 2010

Test Mode : D-Sub 1600*900@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	31.940	37.39	18.49	0.65	--	18.25	40.00	2.61	QP
	36.790	32.04	15.80	0.69	--	15.55	40.00	7.96	
	53.280	30.75	8.14	0.80	--	21.81	40.00	9.25	
	162.890	33.84	10.42	1.30	--	22.12	40.00	6.16	
	211.390	26.82	11.22	1.49	--	14.11	40.00	13.18	
	521.790	39.34	18.18	2.30	--	18.86	47.00	7.66	
	1125.000	50.38	23.27	4.50	37.16	40.99	74.00	33.01	PK
	1231.000	48.27	23.94	4.52	36.94	39.79	74.00	34.21	
	1334.000	48.45	24.78	4.53	36.71	41.05	74.00	32.95	
	1497.000	48.59	25.80	4.55	36.30	42.64	74.00	31.36	
	1600.000	49.26	26.40	4.56	36.10	44.12	74.00	29.88	
	1796.000	47.24	26.88	4.58	35.81	42.89	74.00	31.11	
Vertical	159.980	33.22	10.50	1.28	--	48.94	40.00	6.78	QP
	221.090	30.74	11.71	1.52	--	44.49	40.00	9.26	
	255.040	28.02	13.01	1.62	--	40.26	47.00	18.98	
	429.640	27.86	16.92	2.13	--	36.52	47.00	19.14	
	533.430	28.49	18.33	2.32	--	36.04	47.00	18.51	
	746.830	36.53	20.17	2.80	--	41.48	47.00	10.47	
	1046.000	49.01	22.72	4.49	37.31	38.91	74.00	35.09	PK
	1125.000	49.98	23.27	4.50	37.16	40.59	74.00	33.41	
	1333.000	47.06	24.74	4.53	36.71	39.62	74.00	34.38	
	1468.000	49.75	25.60	4.55	36.36	43.54	74.00	30.46	
	1600.000	52.05	26.40	4.56	36.10	46.91	74.00	27.09	
	1795.000	43.80	26.88	4.58	35.81	39.45	74.00	34.55	

TEST ENGINEER: RAVEN JIN

5 DEVIATION TO TEST SPECIFICATIONS

None.


6 DEBUG DESCRIPTION

The following components are used during the countermeasure procedures:

Name	M/N	Specifications (mm)	Manufacturer	Location
aluminium foil	T-308	50*30	DAEHUNG SUBSIDIARY MATERIALS.	See Internal Photo Figure 11

Note: We had required the applicant and manufacturer that all electrical and mechanical devices employed for spurious radiation suppression, including any modifications made during certification testing, must be incorporated in each unit marked

TEST ENGINEER:



(RAVEN JIN)