

FCC SAR Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 5136
FCC ID : IHDT56UC1
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Standard	5
4. Equipment Under Test (EUT)	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. RF Exposure Limits.....	10
5.1 Uncontrolled Environment.....	10
5.2 Controlled Environment.....	10
6. Specific Absorption Rate (SAR).....	11
6.1 Introduction	11
6.2 SAR Definition.....	11
7. System Description and Setup	12
8. Measurement Procedures	13
8.1 Spatial Peak SAR Evaluation.....	13
8.2 Power Reference Measurement.....	14
8.3 Area Scan	14
8.4 Zoom Scan.....	15
8.5 Volume Scan Procedures.....	15
8.6 Power Drift Monitoring.....	15
9. Test Equipment List	16
10. System Verification	17
10.1 Tissue Verification	17
10.2 System Performance Check Results.....	18
11. RF Exposure Positions	19
11.1 Ear and handset reference point	19
11.2 Definition of the cheek position.....	20
11.3 Definition of the tilt position.....	21
11.4 Body Worn Accessory	21
11.5 Wireless Router.....	22
11.6 Extremity Exposure Configurations	22
12. Conducted RF Output Power (Unit: dBm).....	23
13. Antenna Location	41
14. SAR Test Results	42
14.1 Head SAR	43
14.2 Hotspot SAR	45
14.3 Extremity SAR.....	48
14.4 Body Worn Accessory SAR.....	49
14.5 Repeated SAR Measurement	50
15. Simultaneous Transmission Analysis	51
15.1 Head Exposure Conditions	52
15.2 Hotspot Exposure Conditions.....	54
15.3 Body-Worn Accessory Exposure Conditions	56
16. Uncertainty Assessment	57
17. References.....	59
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. WWAN and BT/WiFi Reference Report.	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA541573-04A	Rev. 01	Initial issue of report	Jun. 03, 2015

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility, LLC, Mobile Cellular Phone, 5136**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 15mm)	Wireless Router (Separation 10mm)	Extremity (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
PCE	GSM850	0.37	0.94	0.47	1.06	1.59
	GSM1900	0.25	0.34	0.96		
	WCDMA Band V	0.35	1.10	0.72	1.52	
	WCDMA Band IV	0.21	0.38	1.09		
	WCDMA Band II	0.35	0.51	1.31	3.50	
	CDMA 2000 BC10	0.33	0.70	1.24	1.50	
	CDMA 2000 BC0	0.34	1.07	0.91	1.64	
	CDMA 2000 BC1	0.29	0.38	1.06		
	LTE Band 12	0.29	0.80	1.36	2.07	
	LTE Band 17	0.37	0.88	0.83	2.44	
	LTE Band 13	0.49	1.36	1.11	1.82	
	LTE Band 5	0.36	1.18	1.22	2.17	
	LTE Band 26	0.47	1.43	1.36	2.30	
	LTE Band 4	0.34	0.51	1.17		
	LTE Band 2	0.38	0.48	1.28	3.01	
	LTE Band 25	0.27	0.40	1.11		
	LTE Band 7	0.62	0.47	1.19		
	LTE Band 38	0.23	0.14	0.40		
	LTE Band 41	0.29	0.17	0.48		
DTS	2.4GHz WLAN	0.79	0.09	0.30		1.59
NII	5.2GHz WLAN			0.14		1.57
	5.3GHz WLAN	0.99	0.08			
	5.5GHz WLAN	0.56	0.09			
	5.8GHz WLAN	0.59	0.10	0.07		
DSS	Bluetooth	0.06	0.00	0.02		1.43
Date of Testing:		2015/05/11 ~ 2015/05/30				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for partial-body, 4.0 W/kg for Extremity) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

Manufacturer	
Company Name	Motorola Mobility, LLC
Address	222 W Merchandise Mart Plaza, Suite 1800, Chicago, IL 60654, United States

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r01
- FCC KDB 941225 D06 Hotspot Mode SAR v02

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	5136
FCC ID	IHDT56UC1
IMEI Code	990006250091013
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	• GSM/GPRS/EGPRS • RMC/AMR 12.2Kbps • HSDPA • HSUPA • DC-HSDPA • CDMA2000 : 1xRTT/1xEv-Do(Rel.0)/1xEv-Do(Rev.A) • LTE: QPSK, 16QAM • 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 • Bluetooth v3.0 with EDR , Bluetooth v4.0 with LE • NFC:ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 802.11 40MHz bandwidth is not supported in 2.4GHz WLAN. - This report only assessed WCDMA B5, CDMA BC10 / BC0, BC1 and LTE B13 / B5 / B26 / B25 / B38, other cellular frequency band and BT/WiFi evaluation which refer to the Sporton FCC SAR Report, FCC ID: IHDT56UC2, Report No: FA541573A or Appendix D, and these SAR results also used perform simultaneous transmission analysis. - While operating in body-adjacent exposure configurations during a mobile hotspot session, reduced power limits are enforced on the GSM850, WCDMA B5, CDMA BC0 and LTE B13 / B17 / B5 / B26 transmitter. More detailed information which can be referred to "operational description". - This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the GSM/GPRS/EDGE, WCDMA, and LTE modes. Please refer to Exhibit 12 for additional information. - This device 2.4GHz / 5.2GHz / 5.8GHz WLAN supports Hotspot operation and WiFi Direct (Group Client / Group Owner), and 5.3GHz / 5.5GHz WLAN supports WiFi Direct (Group Client).	

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03																																																					
FCC ID	IHDT56UC1																																																				
Equipment Name	Mobile Cellular Phone																																																				
Operating Frequency Range of each LTE transmission band	LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 05: 824.7 MHz ~ 848.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 04: 1710.7 MHz ~ 1754.3 MHz LTE Band 02: 1850.7 MHz ~ 1909.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 07: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz																																																				
Channel Bandwidth	LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																				
uplink modulations used	QPSK, and 16QAM																																																				
LTE Voice / Data requirements	Voice and Data																																																				
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																					
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																														
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																				
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																				
Power reduction applied to satisfy SAR compliance	Yes, When operating in hotspot mode that LTE B13 / B17 / B5 / B26 power reduction applied to satisfy SAR compliance.																																																				
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations as below page and the detail power verification please referred to page38.																																																				
LTE Carrier Aggregation Additional Information	This device does not support full CA features on 3GPP Release 10. Is supports a maximum of 2 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																				



Inter-Band Combinations																																			
PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC		
B2	B4	B4	B2	B2	B5	B5	B2	B2	B12	B12	B2	B2	B13	B13	B2	B2	B17	B17	B2	B4	B5	B5	B4	B4	B12	B12	B4	B4	B13	B13	B4	B4	B17		
20M+20M		20M+20M		20M+10M		10M+20M		20M+10M		10M+20M		20M+10M		10M+20M		10M+10M		10M+10M		20M+10M		10M+20M		20M+10M		10M+20M		20M+10M		10M+20M		10M+10M			
20M+15M		20M+15M		20M+5M		10M+15M		20M+5M		10M+15M		15M+10M		10M+15M		10M+5M		10M+5M		20M+5M		10M+15M		20M+5M		10M+15M		15M+10M		10M+15M		10M+5M			
20M+10M		20M+10M		15M+10M		10M+10M		20M+3M		10M+10M		10M+5M		10M+10M		5M+10M		5M+10M		15M+10M		10M+10M		20M+3M		10M+10M		10M+10M		10M+10M		5M+10M			
20M+5M		20M+5M		15M+5M		10M+5M		15M+10M		10M+5M		5M+5M		10M+5M		5M+5M		5M+5M		15M+5M		10M+5M		15M+10M		10M+5M		5M+10M		10M+5M		5M+5M			
15M+20M		15M+20M		10M+10M		5M+20M		15M+5M		5M+20M												10M+10M		5M+20M		15M+5M		10M+3M							
15M+15M		15M+15M		10M+5M		5M+15M		15M+3M		5M+15M												10M+5M		5M+15M		15M+3M		10M+1.4M							
15M+10M		15M+10M		5M+10M		5M+10M		10M+10M		5M+10M												5M+10M		10M+10M		5M+20M									
15M+5M		15M+5M		5M+5M		5M+5M		10M+5M		5M+5M												5M+5M		10M+5M		5M+15M									
10M+20M		10M+20M								10M+3M												3M+20M		10M+3M		5M+10M									
10M+15M		10M+15M								5M+10M		3M+15M		5M+10M		5M+5M																			
10M+10M		10M+10M								5M+5M		3M+10M		5M+5M		5M+3M																			
10M+5M		10M+5M								5M+3M		3M+5M		5M+3M		5M+1.4M																			
5M+20M		5M+20M								3M+10M		3M+20M																							
5M+15M		5M+15M								3M+5M		3M+15M																							
5M+10M		5M+10M								3M+3M		3M+10M																							
5M+5M		5M+5M								1.4M+10M		3M+5M																							
3M+20M		3M+20M								1.4M+5M		3M+3M																							
3M+15M		3M+15M								1.4M+3M		3M+1.4M																							
3M+10M		3M+10M																																	
3M+5M		3M+5M																																	
1.4M+20M		1.4M+20M																																	
1.4M+15M		1.4M+15M																																	
1.4M+10M		1.4M+10M																																	
1.4M+5M		1.4M+5M																																	

Intra-Band Combinations							
contiguous		Non contiguous		Non contiguous		contiguous	
PCC	SCC	PCC	SCC	PCC	SCC	PCC	SCC
B2	B2	B2	B2	B4	B4	B41	B41
20M+20M		20M+20M		20M+20M		20M+20M	
20M+15M		20M+15M		20M+15M		20M+15M	
20M+10M		20M+10M		20M+10M		20M+10M	
20M+5M		20M+5M		20M+5M		20M+5M	
15M+20M		15M+20M		15M+20M		15M+20M	
15M+15M		15M+15M		15M+15M		15M+15M	
15M+10M		15M+10M		15M+10M		10M+20M	
10M+20M		15M+5M		15M+5M		5M+20M	
10M+15M		10M+20M		10M+20M			
5M+20M		10M+15M		10M+15M			
		10M+10M		10M+10M			
		10M+5M		10M+5M			
		5M+20M		5M+20M			
		5M+15M		5M+15M			
		5M+10M		5M+10M			
		5M+5M		5M+5M			



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2590	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

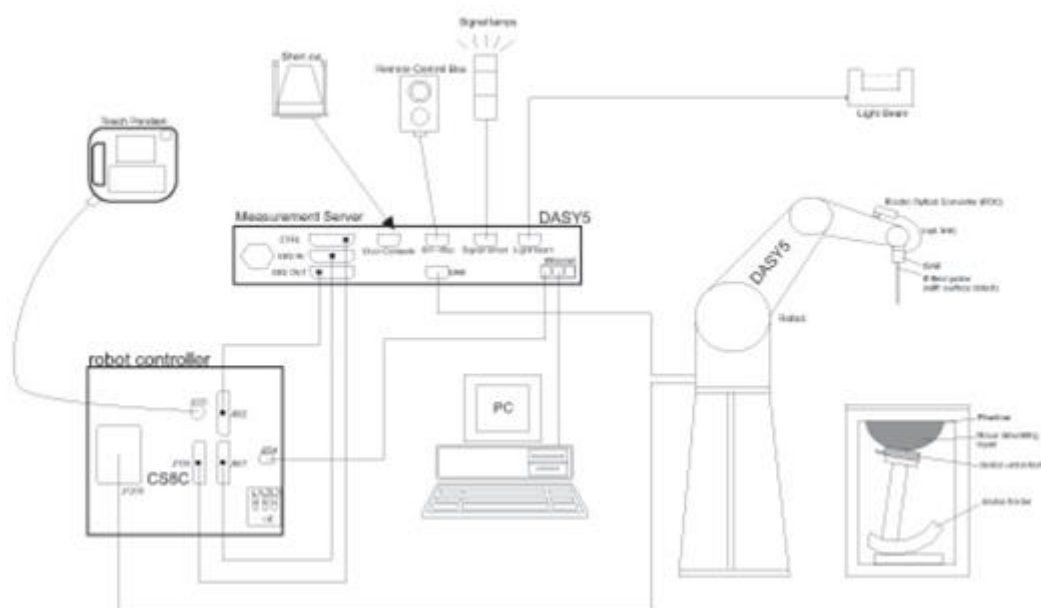

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Nov. 19, 2014	Nov. 18, 2015
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 20, 2015	Mar. 19, 2016
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 24, 2015	Mar. 23, 2016
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 19, 2014	Nov. 18, 2015
SPEAG	Data Acquisition Electronics	DAE4	1388	Sep. 24, 2014	Sep. 23, 2015
SPEAG	Data Acquisition Electronics	DAE3	577	Oct. 06, 2014	Oct. 05, 2015
SPEAG	Data Acquisition Electronics	DAE4	1279	Jul. 23, 2014	Jul. 22, 2015
SPEAG	Data Acquisition Electronics	DAE4	916	Dec. 29, 2014	Dec. 28, 2015
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 13, 2014	Nov. 12, 2015
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 26, 2014	Sep. 25, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Sep. 29, 2014	Sep. 28, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 21, 2014	Nov. 20, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 21, 2014	Nov. 20, 2015
Wisewind	Thermometer	ETP-101	TM560	Oct. 21, 2014	Oct. 20, 2015
WonDer	Thermometer	WD-5015	TM685	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	HTC-1	TM642	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	HTC-1	TM281	Oct. 21, 2014	Oct. 20, 2015
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 21, 2014	Oct. 20, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 06, 2015	Feb. 05, 2016
R&S	Radio communication Tester	CMW500	113998	Sep. 30, 2014	Sep. 29, 2015
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Agilent	Signal Generator	N5181A	MY50145381	Dec. 11, 2014	Dec. 10, 2015
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 11, 2015	Feb. 10, 2016
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 18, 2014	Nov. 17, 2015
Anritsu	Power Meter	ML2495A	1349001	Dec. 03, 2014	Dec. 02, 2015
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2014	Dec. 02, 2015
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 10, 2014	Jul. 09, 2015
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results-1>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.4	0.893	41.008	0.89	41.90	0.34	-2.13	±5	2015/5/21
750	MSL	22.4	0.968	57.868	0.96	55.50	0.83	4.27	±5	2015/5/30
835	HSL	22.2	0.911	42.410	0.90	41.50	1.22	2.19	±5	2015/5/20
835	HSL	22.4	0.903	42.036	0.90	41.50	0.33	1.29	±5	2015/5/21
835	MSL	22.5	0.954	52.753	0.97	55.20	-1.65	-4.43	±5	2015/5/21
835	MSL	22.2	0.963	54.498	0.97	55.20	-0.72	-1.27	±5	2015/5/23
835	MSL	22.5	0.967	54.182	0.97	55.20	-0.31	-1.84	±5	2015/5/27
835	MSL	22.3	0.969	54.446	0.97	55.20	-0.10	-1.37	±5	2015/5/29
1900	HSL	22.4	1.419	38.626	1.40	40.00	1.36	-3.44	±5	2015/5/12
1900	HSL	22.4	1.403	39.423	1.40	40.00	0.21	-1.44	±5	2015/5/14
1900	MSL	22.5	1.541	53.910	1.52	53.30	1.38	1.14	±5	2015/5/21
1900	MSL	22.5	1.540	54.388	1.52	53.30	1.32	2.04	±5	2015/5/23
2600	HSL	22.4	2.032	37.833	1.96	39.00	3.67	-2.99	±5	2015/5/11
2600	MSL	22.5	2.209	51.123	2.16	52.50	2.27	-2.62	±5	2015/5/23

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<System Verification for 1g SAR Results>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2015/5/21	750	HSL	250	D750V3-1099	EX3DV4 - SN3954	DAE4 Sn1279	2.08	8.06	8.32	3.23
2015/5/30	750	MSL	250	D750V3-1099	EX3DV4 - SN3931	DAE3 Sn577	2.01	8.56	8.04	-6.07
2015/5/20	835	HSL	250	D835V2-499	EX3DV4 - SN3954	DAE3 Sn577	2.38	9.20	9.52	3.48
2015/5/21	835	HSL	250	D835V2-499	EX3DV4 - SN3954	DAE4 Sn1279	2.36	9.20	9.44	2.61
2015/5/21	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn916	2.30	9.30	9.20	-1.08
2015/5/23	835	MSL	250	D835V2-499	EX3DV4 - SN3955	DAE4 Sn1399	2.41	9.30	9.64	3.66
2015/5/27	835	MSL	250	D835V2-499	EX3DV4 - SN3931	DAE3 Sn577	2.43	9.30	9.72	4.52
2015/5/29	835	MSL	250	D835V2-499	EX3DV4 - SN3931	DAE3 Sn577	2.32	9.30	9.28	-0.22
2015/5/12	1900	HSL	250	D1900V2-5d041	EX3DV4 - SN3697	DAE4 Sn1388	9.97	40.00	39.88	-0.30
2015/5/14	1900	HSL	250	D1900V2-5d041	EX3DV4 - SN3931	DAE3 Sn577	9.72	40.00	38.88	-2.80
2015/5/21	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn916	9.81	39.80	39.24	-1.41
2015/5/23	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3955	DAE4 Sn1399	9.76	39.80	39.04	-1.91
2015/5/11	2600	HSL	250	D2600V2-1070	EX3DV4 - SN3931	DAE3 Sn577	14.40	56.90	57.60	1.23
2015/5/23	2600	MSL	250	D2600V2-1070	EX3DV4 - SN3955	DAE4 Sn1399	13.80	55.30	55.20	-0.18

<System Verification for 10g SAR Results>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2015/5/30	750	MSL	250	D750V3-1099	EX3DV4 - SN3931	DAE3 Sn577	1.36	5.68	5.44	-4.23
2015/5/23	835	MSL	250	D835V2-499	EX3DV4 - SN3955	DAE4 Sn1399	1.60	6.12	6.40	4.58
2015/5/27	835	MSL	250	D835V2-499	EX3DV4 - SN3931	DAE3 Sn577	1.64	6.12	6.56	7.19
2015/5/29	835	MSL	250	D835V2-499	EX3DV4 - SN3931	DAE3 Sn577	1.54	6.12	6.16	0.65

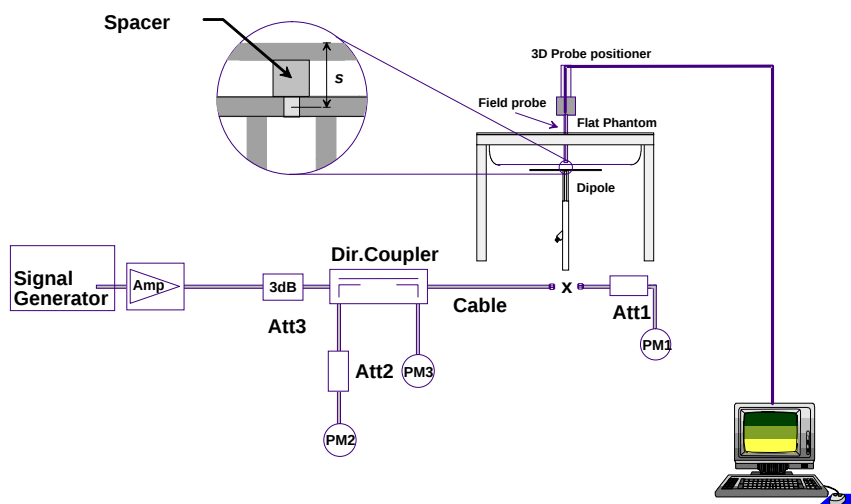


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2. The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

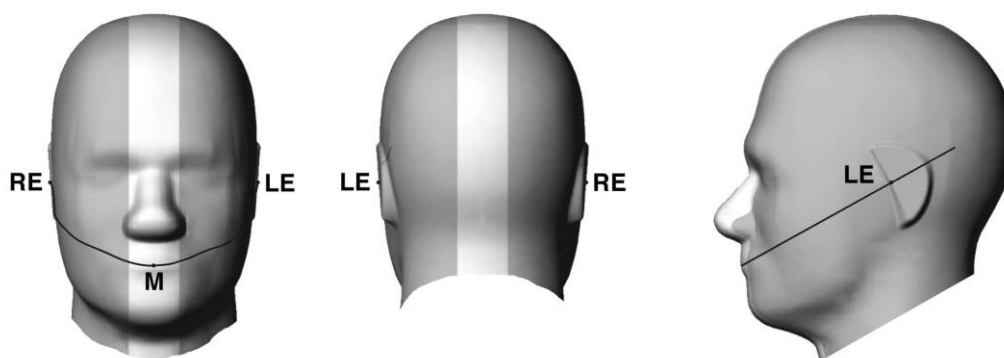


Fig 9.1.1 Front, back, and side views of SAM twin phantom

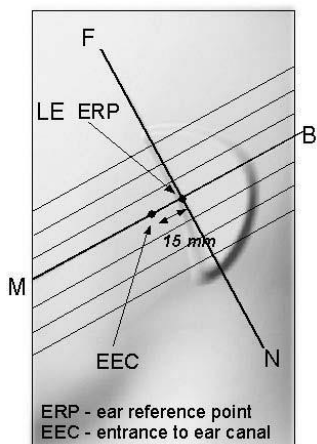


Fig 9.1.2 Close-up side view of phantom showing the ear region.

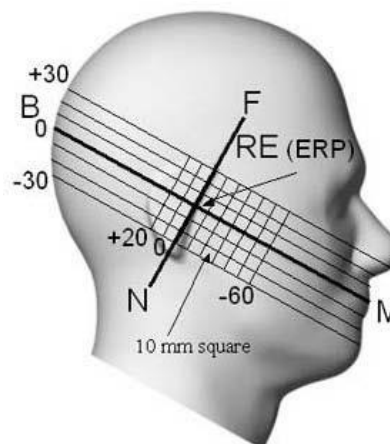


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

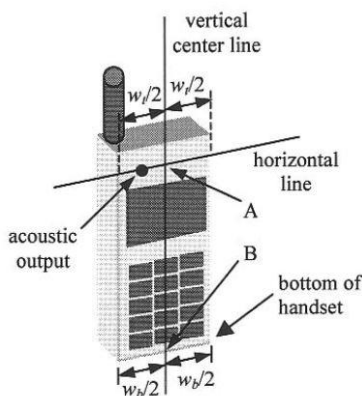


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

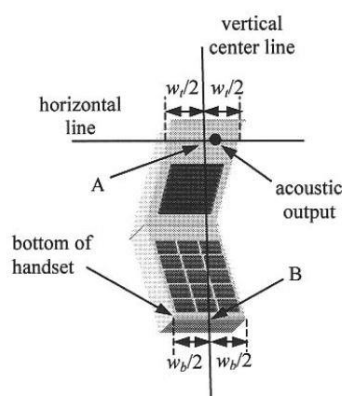


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”






Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

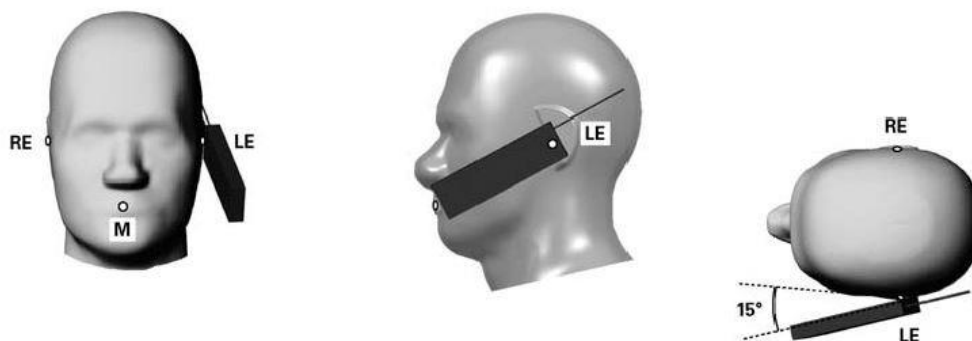


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

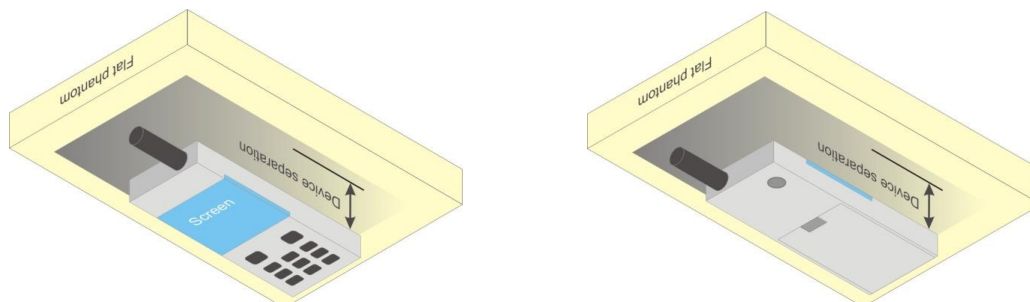


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06 v02 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR exclusion thresholds found in KDB Publication 447498 D01v05 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless mode and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. The normal tablet procedures in KDB 616217 are required when the over diagonal dimension of the device is $> 20.0 \text{ cm}$. Hotspot mode SAR is not required when normal tablet procedures are applied. Extremity 10-g SAR is also not required for the front (top) surface of large form factor full size tablets. The more conservative tablet SAR results can be used to support the 10-g extremity SAR for phablet mode. The simultaneous transmission operating configurations applicable to voice and data transmissions for both phone and mini-tablet modes must be taken into consideration separately for 1-g and 10-g SAR to determine the simultaneous transmission SAR test exclusion and measurement requirements for the relevant wireless mode and exposure conditions

12. Conducted RF Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

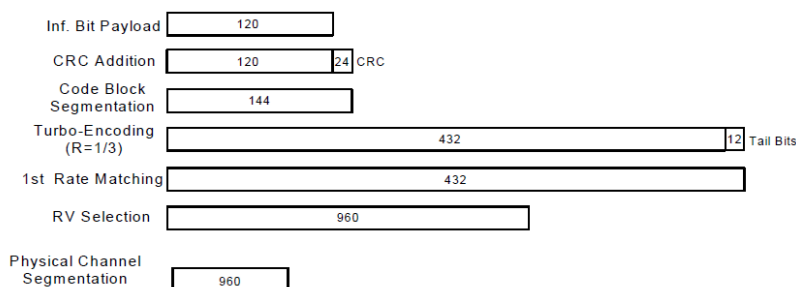
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA V			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
Rx Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.59	22.60	22.72	24.00
3GPP Rel 99	RMC 12.2Kbps	22.60	22.62	22.74	24.00
3GPP Rel 6	HSDPA Subtest-1	21.64	21.61	21.54	23.00
3GPP Rel 6	HSDPA Subtest-2	21.56	21.65	21.63	23.00
3GPP Rel 6	HSDPA Subtest-3	21.05	21.25	21.16	22.50
3GPP Rel 6	HSDPA Subtest-4	21.02	21.12	21.10	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.62	21.60	21.52	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.53	21.64	21.61	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.04	21.22	21.13	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.00	21.11	21.08	22.50
3GPP Rel 6	HSUPA Subtest-1	21.44	21.52	21.54	23.00
3GPP Rel 6	HSUPA Subtest-2	20.75	20.80	20.90	21.00
3GPP Rel 6	HSUPA Subtest-3	20.64	20.70	20.78	22.00
3GPP Rel 6	HSUPA Subtest-4	20.84	20.93	20.97	21.00
3GPP Rel 6	HSUPA Subtest-5	21.74	21.77	21.83	23.00

<CDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

Band	CDMA2000 BC10			Tune-up Limit (dBm)	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)
	476	580	676		1013	384	777		25	600	1175	
TX Channel	476	580	676		1013	384	777		25	600	1175	
Frequency (MHz)	817.9	820.5	822.9		824.7	836.52	848.31		1851.25	1880	1908.75	
1xRTT RC1 SO55	23.63	23.74	23.47	24.00	23.82	23.81	23.97	24.00	23.40	23.33	22.87	24.00
1xRTT RC3 SO55	23.61	23.69	23.41	24.00	23.79	23.84	23.93	24.00	23.43	23.32	22.88	24.00
1xRTT RC3 SO32(+ F-SCH)	23.60	23.75	23.40	24.00	23.84	23.91	23.92	24.00	23.36	23.28	22.91	24.00
1xRTT RC3 SO32(+SCH)	23.57	23.73	23.47	24.00	23.81	23.86	23.98	24.00	23.42	23.30	22.90	24.00
1xEVDO RTAP 153.6kbps	23.66	23.77	23.49	24.00	23.84	23.91	24.00	24.00	23.46	23.33	22.97	24.00
1xEVDO RETAP 4096Bits	23.64	23.66	23.48	24.00	23.77	23.86	23.90	24.00	23.44	23.27	22.90	24.00

<LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	22.24			24	0
10	QPSK	1	24	22.20				
10	QPSK	1	49	22.01				
10	QPSK	25	0	21.14			23	1
10	QPSK	25	12	21.15				
10	QPSK	25	24	21.13				
10	QPSK	50	0	21.19				
10	16QAM	1	0	21.32			23	1
10	16QAM	1	24	21.33				
10	16QAM	1	49	21.26				
10	16QAM	25	0	20.09			22	2
10	16QAM	25	12	20.11				
10	16QAM	25	24	20.11				
10	16QAM	50	0	20.09				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.00	22.06	22.22	24	0
5	QPSK	1	12	22.10	22.01	22.16		
5	QPSK	1	24	22.19	22.06	22.17		
5	QPSK	12	0	21.22	21.03	21.17	23	1
5	QPSK	12	6	21.22	21.07	21.23		
5	QPSK	12	11	21.12	21.06	21.27		
5	QPSK	25	0	21.22	21.14	21.14		
5	16QAM	1	0	21.17	21.30	21.50	23	1
5	16QAM	1	12	21.54	21.42	21.63		
5	16QAM	1	24	21.42	21.36	21.47		
5	16QAM	12	0	20.08	20.05	20.13	22	2
5	16QAM	12	6	20.14	20.12	20.12		
5	16QAM	12	11	20.11	20.01	20.14		
5	16QAM	25	0	20.23	20.08	20.16		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.41	22.36	22.40	24	0
10	QPSK	1	24	22.35	22.34	22.36		
10	QPSK	1	49	22.10	22.21	22.18		
10	QPSK	25	0	21.38	21.32	21.30	23	1
10	QPSK	25	12	21.37	21.30	21.25		
10	QPSK	25	24	21.30	21.22	21.27		
10	QPSK	50	0	21.28	21.24	21.25		
10	16QAM	1	0	21.76	21.70	21.75	23	1
10	16QAM	1	24	21.69	21.65	21.73		
10	16QAM	1	49	21.43	21.60	21.47		
10	16QAM	25	0	20.28	20.27	20.28	22	2
10	16QAM	25	12	20.40	20.28	20.28		
10	16QAM	25	24	20.28	20.23	20.28		
10	16QAM	50	0	20.30	20.22	20.33		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.31	22.32	22.35	24	0
5	QPSK	1	12	22.25	22.33	22.26		
5	QPSK	1	24	22.06	22.15	22.10		
5	QPSK	12	0	21.38	21.23	21.20	23	1
5	QPSK	12	6	21.32	21.24	21.24		
5	QPSK	12	11	21.27	21.18	21.17		
5	QPSK	25	0	21.19	21.16	21.15		
5	16QAM	1	0	21.74	21.62	21.75	23	1
5	16QAM	1	12	21.64	21.56	21.68		
5	16QAM	1	24	21.39	21.50	21.46		
5	16QAM	12	0	20.22	20.26	20.27	22	2
5	16QAM	12	6	20.37	20.24	20.28		
5	16QAM	12	11	20.27	20.20	20.26		
5	16QAM	25	0	20.20	20.20	20.23		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.22	22.22	22.26	24	0
3	QPSK	1	7	22.25	22.24	22.24		
3	QPSK	1	14	22.03	22.05	22.09		
3	QPSK	8	0	21.37	21.14	21.14	23	1
3	QPSK	8	4	21.27	21.21	21.17		
3	QPSK	8	7	21.21	21.15	21.12		
3	QPSK	15	0	21.17	21.11	21.08		
3	16QAM	1	0	21.68	21.54	21.73	23	1
3	16QAM	1	7	21.64	21.53	21.59		
3	16QAM	1	14	21.37	21.46	21.39		
3	16QAM	8	0	20.21	20.22	20.24	22	2
3	16QAM	8	4	20.29	20.24	20.24		
3	16QAM	8	7	20.21	20.13	20.24		
3	16QAM	15	0	20.17	20.18	20.21		

Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.14	22.12	22.12	24	0
1.4	QPSK	1	2	22.10	22.04	22.08		
1.4	QPSK	1	5	22.07	22.08	22.03		
1.4	QPSK	3	0	22.03	22.06	22.04		
1.4	QPSK	3	1	22.11	22.05	22.05		
1.4	QPSK	3	2	22.10	22.07	22.03		
1.4	QPSK	6	0	21.17	21.15	21.20	23	1
1.4	16QAM	1	0	21.50	21.48	21.42	23	1
1.4	16QAM	1	2	21.47	21.42	21.46		
1.4	16QAM	1	5	21.40	21.40	21.51		
1.4	16QAM	3	0	21.12	21.14	21.15		
1.4	16QAM	3	1	21.04	21.06	21.06		
1.4	16QAM	3	2	21.14	21.08	21.13		
1.4	16QAM	6	0	20.03	20.11	20.05	22	2



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.43	22.69	22.28		
15	QPSK	1	37	22.28	22.27	22.24	24	0
15	QPSK	1	74	22.35	22.33	22.20		
15	QPSK	36	0	21.45	21.43	21.28		
15	QPSK	36	18	21.43	21.35	21.25	23	1
15	QPSK	36	37	21.43	21.32	21.23		
15	QPSK	75	0	21.34	21.37	21.23		
15	16QAM	1	0	21.75	21.82	21.51	23	1
15	16QAM	1	37	21.74	21.68	21.67		
15	16QAM	1	74	21.64	21.58	21.42		
15	16QAM	36	0	20.28	20.29	20.20	22	2
15	16QAM	36	18	20.41	20.38	20.20		
15	16QAM	36	37	20.36	20.31	20.15		
15	16QAM	75	0	20.32	20.32	20.25		
Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.40	22.30	22.22		
10	QPSK	1	24	22.25	22.19	22.16	24	0
10	QPSK	1	49	22.35	22.33	22.14		
10	QPSK	25	0	21.35	21.42	21.26		
10	QPSK	25	12	21.41	21.35	21.16	23	1
10	QPSK	25	24	21.34	21.24	21.23		
10	QPSK	50	0	21.25	21.27	21.21		
10	16QAM	1	0	21.73	21.82	21.46	23	1
10	16QAM	1	24	21.69	21.64	21.65		
10	16QAM	1	49	21.60	21.55	21.36		
10	16QAM	25	0	20.26	20.19	20.17	22	2
10	16QAM	25	12	20.38	20.37	20.19		
10	16QAM	25	24	20.30	20.31	20.14		
10	16QAM	50	0	20.25	20.25	20.16		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.38	22.23	22.13		
5	QPSK	1	12	22.19	22.16	22.08	24	0
5	QPSK	1	24	22.34	22.28	22.13		
5	QPSK	12	0	21.33	21.33	21.26		
5	QPSK	12	6	21.38	21.29	21.06	23	1
5	QPSK	12	11	21.28	21.24	21.13		
5	QPSK	25	0	21.15	21.18	21.13		
5	16QAM	1	0	21.67	21.82	21.40	23	1
5	16QAM	1	12	21.58	21.62	21.55		
5	16QAM	1	24	21.59	21.50	21.35		
5	16QAM	12	0	20.24	20.10	20.17	22	2
5	16QAM	12	6	20.34	20.27	20.13		
5	16QAM	12	11	20.24	20.21	20.06		
5	16QAM	25	0	20.23	20.19	20.14		

Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.38	22.22	22.10	24	0
3	QPSK	1	7	22.09	22.11	22.00		
3	QPSK	1	14	22.30	22.27	22.07		
3	QPSK	8	0	21.23	21.23	21.24	23	1
3	QPSK	8	4	21.38	21.25	21.00		
3	QPSK	8	7	21.26	21.20	21.04		
3	QPSK	15	0	21.05	21.10	21.11	23	1
3	16QAM	1	0	21.59	21.74	21.30		
3	16QAM	1	7	21.51	21.53	21.46		
3	16QAM	1	14	21.52	21.49	21.28	22	2
3	16QAM	8	0	20.21	20.00	20.09		
3	16QAM	8	4	20.27	20.26	20.09		
3	16QAM	8	7	20.17	20.12	20.00	22	2
3	16QAM	15	0	20.21	20.19	20.06		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.19	22.65	22.65	24	0
1.4	QPSK	1	2	22.15	22.59	22.54		
1.4	QPSK	1	5	22.12	22.45	22.50		
1.4	QPSK	3	0	22.08	22.56	22.56		
1.4	QPSK	3	1	22.16	22.58	22.52		
1.4	QPSK	3	2	22.15	22.63	22.52	23	1
1.4	QPSK	6	0	21.50	21.54	21.43		
1.4	16QAM	1	0	21.55	22.02	21.89	23	1
1.4	16QAM	1	2	21.52	22.00	21.93		
1.4	16QAM	1	5	21.45	21.99	22.00		
1.4	16QAM	3	0	21.17	21.69	21.70		
1.4	16QAM	3	1	21.09	21.60	21.59		
1.4	16QAM	3	2	21.19	21.61	21.58	22	2
1.4	16QAM	6	0	20.08	20.66	20.59		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590	24	0
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.73	22.90	22.69		
20	QPSK	1	49	22.09	22.28	22.04	23	1
20	QPSK	1	99	22.10	22.27	22.07		
20	QPSK	50	0	21.52	21.49	21.32		
20	QPSK	50	24	21.08	21.29	21.10	23	1
20	QPSK	50	49	21.06	21.24	21.50		
20	QPSK	100	0	21.25	21.36	21.16		
20	16QAM	1	0	22.14	22.15	22.06	23	1
20	16QAM	1	49	21.22	21.43	21.15		
20	16QAM	1	99	21.34	21.52	21.16		
20	16QAM	50	0	20.49	20.47	20.32	22	2
20	16QAM	50	24	20.09	20.27	20.12		
20	16QAM	50	49	20.07	20.20	20.03		
20	16QAM	100	0	20.23	20.34	20.15	24	0
Channel				26115	26340	26615		
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.56	22.63	22.84	24	0
15	QPSK	1	37	22.05	22.03	22.20		
15	QPSK	1	74	22.01	22.11	22.15		
15	QPSK	36	0	21.41	21.33	21.39	23	1
15	QPSK	36	18	21.11	21.25	21.22		
15	QPSK	36	37	21.02	21.19	21.15		
15	QPSK	75	0	21.15	21.20	21.29	23	1
15	16QAM	1	0	21.79	21.86	22.08		
15	16QAM	1	37	21.17	21.44	21.36		
15	16QAM	1	74	21.25	21.35	21.40	22	2
15	16QAM	36	0	20.39	20.36	20.41		
15	16QAM	36	18	20.15	20.24	20.24		
15	16QAM	36	37	20.00	20.18	20.14	24	0
15	16QAM	75	0	20.19	20.23	20.34		
Channel				26090	26340	26640		
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.40	22.59	22.44	24	0
10	QPSK	1	24	22.22	22.22	22.09		
10	QPSK	1	49	22.17	22.20	22.06		
10	QPSK	25	0	21.29	21.23	21.17	23	1
10	QPSK	25	12	21.21	21.15	21.05		
10	QPSK	25	24	21.04	21.07	21.04		
10	QPSK	50	0	21.21	21.21	21.10	23	1
10	16QAM	1	0	21.66	21.80	21.67		
10	16QAM	1	24	21.60	21.53	21.39		
10	16QAM	1	49	21.40	21.46	21.23	22	2
10	16QAM	25	0	20.31	20.26	20.19		
10	16QAM	25	12	20.20	20.15	20.08		
10	16QAM	25	24	20.00	20.08	20.00	22	2
10	16QAM	50	0	20.14	20.16	20.03		



Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.25	22.27	22.15	24	0
5	QPSK	1	12	22.10	22.19	22.04		
5	QPSK	1	24	22.11	22.13	22.03		
5	QPSK	12	0	21.15	21.14	21.10	23	1
5	QPSK	12	6	21.10	21.20	21.11		
5	QPSK	12	11	21.12	21.10	21.01		
5	QPSK	25	0	21.15	21.14	21.10		
5	16QAM	1	0	21.54	21.54	21.43	23	1
5	16QAM	1	12	21.59	21.57	21.42		
5	16QAM	1	24	21.39	21.41	21.32		
5	16QAM	12	0	20.14	20.16	20.01	22	2
5	16QAM	12	6	20.05	20.13	20.12		
5	16QAM	12	11	20.06	20.05	20.05		
5	16QAM	25	0	20.18	20.16	20.03		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.20	22.19	22.09	24	0
3	QPSK	1	7	22.46	22.46	22.30		
3	QPSK	1	14	22.00	22.13	22.03		
3	QPSK	8	0	21.11	21.14	21.02	23	1
3	QPSK	8	4	21.21	21.20	21.17		
3	QPSK	8	7	21.10	21.14	21.14		
3	QPSK	15	0	21.15	21.17	21.01		
3	16QAM	1	0	21.41	21.38	21.27	23	1
3	16QAM	1	7	21.58	21.65	21.44		
3	16QAM	1	14	21.27	21.41	21.24		
3	16QAM	8	0	20.18	20.22	20.07	22	2
3	16QAM	8	4	20.24	20.24	20.16		
3	16QAM	8	7	20.13	20.19	20.17		
3	16QAM	15	0	20.14	20.15	21.05		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.13	22.24	22.03	24	0
1.4	QPSK	1	2	22.09	22.19	22.12		
1.4	QPSK	1	5	22.07	22.13	22.01		
1.4	QPSK	3	0	22.05	22.04	22.03		
1.4	QPSK	3	1	22.06	22.17	22.08		
1.4	QPSK	3	2	22.07	22.16	22.04		
1.4	QPSK	6	0	21.20	21.20	21.10	23	1
1.4	16QAM	1	0	21.44	21.52	21.31	23	1
1.4	16QAM	1	2	21.44	21.51	21.47		
1.4	16QAM	1	5	21.50	21.56	21.42		
1.4	16QAM	3	0	21.14	21.12	21.02		
1.4	16QAM	3	1	21.06	21.15	21.09		
1.4	16QAM	3	2	21.10	21.21	21.14		
1.4	16QAM	6	0	20.06	20.07	20.03	22	2

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

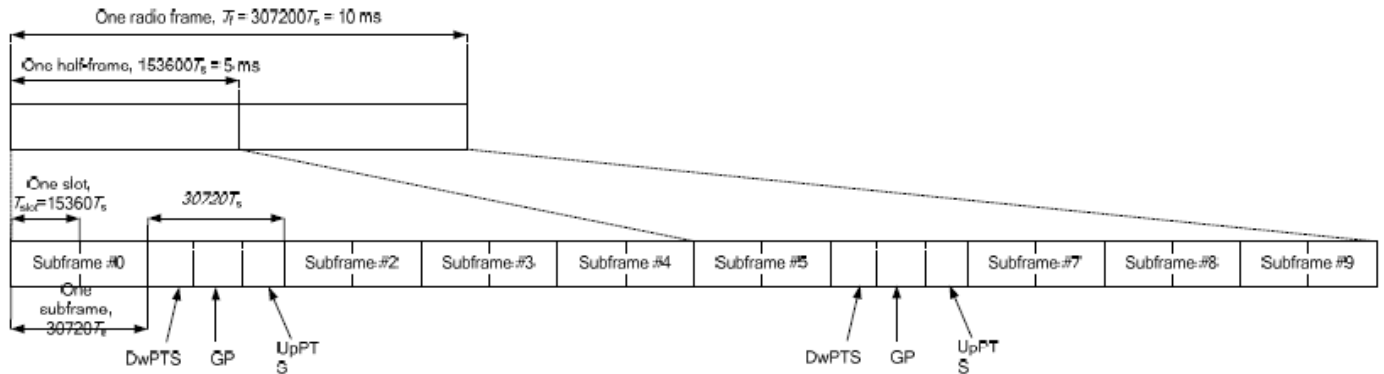


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.35	22.21	22.19		
20	QPSK	1	49	22.21	22.18	22.11	24	0
20	QPSK	1	99	22.05	22.18	22.11		
20	QPSK	50	0	21.45	21.24	21.27		
20	QPSK	50	24	21.43	21.19	21.24	23	1
20	QPSK	50	49	21.16	21.06	21.04		
20	QPSK	100	0	21.31	21.09	21.08		
20	16QAM	1	0	21.52	21.46	21.33	23	1
20	16QAM	1	49	21.55	21.44	21.45		
20	16QAM	1	99	21.09	21.15	21.18		
20	16QAM	50	0	20.37	20.26	20.24	22	2
20	16QAM	50	24	20.45	20.24	20.27		
20	16QAM	50	49	20.14	20.06	20.05		
20	16QAM	100	0	20.34	20.12	20.13		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.30	22.13	22.16		
15	QPSK	1	37	22.18	22.18	22.03	24	0
15	QPSK	1	74	22.04	22.08	22.02		
15	QPSK	36	0	21.45	21.21	21.25		
15	QPSK	36	18	21.40	21.10	21.20	23	1
15	QPSK	36	37	21.07	21.06	21.00		
15	QPSK	75	0	21.27	21.08	21.08		
15	16QAM	1	0	21.52	21.42	21.31	23	1
15	16QAM	1	37	21.53	21.34	21.43		
15	16QAM	1	74	21.06	21.15	21.12		
15	16QAM	36	0	20.37	20.20	20.15	22	2
15	16QAM	36	18	20.45	20.20	20.22		
15	16QAM	36	37	20.12	20.06	20.04		
15	16QAM	75	0	20.29	20.08	20.05		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.22	22.09	22.11		
10	QPSK	1	24	22.13	22.17	22.02	24	0
10	QPSK	1	49	22.04	22.02	22.01		
10	QPSK	25	0	21.43	21.12	21.18		
10	QPSK	25	12	21.38	21.02	21.13	23	1
10	QPSK	25	24	21.06	21.00	21.00		
10	QPSK	50	0	21.18	21.07	21.06		
10	16QAM	1	0	21.47	21.34	21.30	23	1
10	16QAM	1	24	21.44	21.25	21.35		
10	16QAM	1	49	21.02	21.15	21.02		
10	16QAM	25	0	20.31	20.14	20.12	22	2
10	16QAM	25	12	20.44	20.13	20.20		
10	16QAM	25	24	20.06	20.02	20.00		
10	16QAM	50	0	20.25	20.00	20.00		

Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.22	22.17	22.20	24	0
5	QPSK	1	12	22.17	22.18	22.02		
5	QPSK	1	24	22.04	22.09	22.08		
5	QPSK	12	0	21.52	21.18	21.27	23	1
5	QPSK	12	6	21.44	21.04	21.14		
5	QPSK	12	11	21.13	21.04	21.09		
5	QPSK	25	0	21.20	21.16	21.08	23	1
5	16QAM	1	0	21.55	21.35	21.36		
5	16QAM	1	12	21.45	21.35	21.39		
5	16QAM	1	24	21.11	21.18	21.10	22	2
5	16QAM	12	0	20.40	20.21	20.14		
5	16QAM	12	6	20.46	20.23	20.28		
5	16QAM	12	11	20.09	20.07	20.04	22	2
5	16QAM	25	0	20.33	20.09	20.03		

<LTE Carrier Aggregation Conducted Power>

General Note:

1. According to KDB941225 D05A v01, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
2. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
3. The device only supports downlink carrier aggregation. Uplink carrier aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power across all bandwidths, channels and RB configuration for each band.
4. During the carrier aggregation conducted power measurements we have attention to throughput traffic to make sure all the power measurement is corrected.

Configure	PCC						SCC				Measured Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
Inter-Band	Band 2	20M	1860	18700	1	0	Band 4	20M	1732.5	20175	23.59	23.60
	Band 2	20M	1880	18900	1	0	Band 4	20M	1732.5	20175	23.85	23.86
	Band 2	20M	1900	19100	1	0	Band 4	20M	1732.5	20175	23.88	23.90
	Band 4	20M	1720	20050	1	0	Band 2	20M	1880	18900	23.70	23.72
	Band 4	20M	1732.5	20175	1	0	Band 2	20M	1880	18900	23.69	23.71
	Band 4	20M	1745	20300	1	0	Band 2	20M	1880	18900	23.37	23.40
	Band 2	20M	1860	18700	1	0	Band 5	10M	836.5	20525	23.59	23.60
	Band 2	20M	1880	18900	1	0	Band 5	10M	836.5	20525	23.85	23.86
	Band 2	20M	1900	19100	1	0	Band 5	10M	836.5	20525	23.88	23.90
	Band 5	10M	829	20450	1	0	Band 2	20M	1880	18900	22.40	22.41
	Band 5	10M	836.5	20525	1	0	Band 2	20M	1880	18900	22.35	22.36
	Band 5	10M	844	20600	1	0	Band 2	20M	1880	18900	22.38	22.40
	Band 2	20M	1860	18700	1	0	Band 12	10M	707.5	23095	23.59	23.60
	Band 2	20M	1880	18900	1	0	Band 12	10M	707.5	23095	23.85	23.86
	Band 2	20M	1900	19100	1	0	Band 12	10M	707.5	23095	23.88	23.90
	Band 12	10M	704	23060	1	0	Band 2	20M	1880	18900	22.57	22.60
	Band 12	10M	707.5	23095	1	0	Band 2	20M	1880	18900	22.75	22.78
	Band 12	10M	711	23130	1	0	Band 2	20M	1880	18900	22.88	22.89


Configure	PCC						SCC				Measured Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
Inter-Band	Band 2	20M	1860	18700	1	0	Band 13	10M	782	23230	23.59	23.60
	Band 2	20M	1880	18900	1	0	Band 13	10M	782	23230	23.85	23.86
	Band 2	20M	1900	19100	1	0	Band 13	10M	782	23230	23.88	23.90
	Band 13	10M	782	23230	1	0	Band 2	20M	1880	18900	22.23	22.24
	Band 13	10M	782	23230	1	0	Band 2	20M	1880	18900	22.23	22.24
	Band 13	10M	782	23230	1	0	Band 2	20M	1880	18900	22.23	22.24
	Band 2	20M	1860	18700	1	0	Band 17	10M	710	23790	23.59	23.60
	Band 2	20M	1880	18900	1	0	Band 17	10M	710	23790	23.85	23.86
	Band 2	20M	1900	19100	1	0	Band 17	10M	710	23790	23.88	23.90
	Band 17	10M	709	23780	1	0	Band 2	20M	1880	18900	22.77	22.78
	Band 17	10M	710	23790	1	0	Band 2	20M	1880	18900	22.88	22.90
	Band 17	10M	711	23800	1	0	Band 2	20M	1880	18900	22.85	22.86
	Band 4	20M	1720	20050	1	0	Band 5	10M	836.5	20525	23.70	23.72
	Band 4	20M	1732.5	20175	1	0	Band 5	10M	836.5	20525	23.69	23.71
	Band 4	20M	1745	20300	1	0	Band 5	10M	836.5	20525	23.37	23.40
	Band 5	10M	829	20450	1	0	Band 4	20M	1732.5	20175	22.40	22.41
	Band 5	10M	836.5	20525	1	0	Band 4	20M	1732.5	20175	22.35	22.36
	Band 5	10M	844	20600	1	0	Band 4	20M	1732.5	20175	22.38	22.40
	Band 4	20M	1720	20050	1	0	Band 12	10M	707.5	23095	23.70	23.72
	Band 4	20M	1732.5	20175	1	0	Band 12	10M	707.5	23095	23.69	23.71
	Band 4	20M	1745	20300	1	0	Band 12	10M	707.5	23095	23.37	23.40
	Band 12	10M	704	23060	1	0	Band 4	20M	1732.5	20175	22.57	22.60
	Band 12	10M	707.5	23095	1	0	Band 4	20M	1732.5	20175	22.75	22.78
	Band 12	10M	711	23130	1	0	Band 4	20M	1732.5	20175	22.88	22.89
	Band 4	20M	1720	20050	1	0	Band 13	10M	782	23230	23.70	23.72
	Band 4	20M	1732.5	20175	1	0	Band 13	10M	782	23230	23.69	23.71
	Band 4	20M	1745	20300	1	0	Band 13	10M	782	23230	23.37	23.40
	Band 13	10M	782	23230	1	0	Band 4	20M	1732.5	20175	22.23	22.24
	Band 13	10M	782	23230	1	0	Band 4	20M	1732.5	20175	22.23	22.24
	Band 13	10M	782	23230	1	0	Band 4	20M	1732.5	20175	22.23	22.24
	Band 4	20M	1720	20050	1	0	Band 17	10M	710	23790	23.70	23.72
	Band 4	20M	1732.5	20175	1	0	Band 17	10M	710	23790	23.69	23.71
	Band 4	20M	1745	20300	1	0	Band 17	10M	710	23790	23.37	23.40



Configure		PCC						SCC				Measured Power	
		LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
Intra-Band	Non-Contiguous	Band 4	20M	1720	20050	1	0	Band 4	20M	1732.5	20175	23.70	23.72
		Band 4	20M	1720	20050	1	0	Band 4	20M	1745	20300	23.70	23.72
		Band 4	20M	1732.5	20175	1	0	Band 4	20M	1720	20050	23.69	23.71
		Band 4	20M	1732.5	20175	1	0	Band 4	20M	1745	20300	23.69	23.71
		Band 4	20M	1745	20300	1	0	Band 4	20M	1720	20050	23.37	23.40
		Band 4	20M	1745	20300	1	0	Band 4	20M	1732.5	20175	23.37	23.40
	Non-Contiguous	Band 2	20M	1860	18700	1	0	Band 2	20M	1880	18900	23.59	23.60
		Band 2	20M	1860	18700	1	0	Band 2	20M	1900	19100	23.59	23.60
		Band 2	20M	1880	18900	1	0	Band 2	20M	1860	18700	23.85	23.86
		Band 2	20M	1880	18900	1	0	Band 2	20M	1900	19100	23.85	23.86
		Band 2	20M	1900	19100	1	0	Band 2	20M	1860	18700	23.88	23.90
		Band 2	20M	1900	19100	1	0	Band 2	20M	1880	18900	23.88	23.90
	Contiguous	Band 2	20M	1860	18700	1	0	Band 2	20M	1880	18900	23.59	23.60
		Band 2	20M	1880	18900	1	0	Band 2	20M	1860	18700	23.85	23.86
		Band 2	20M	1880	18900	1	0	Band 2	20M	2000	20100	23.85	23.86
		Band 2	20M	1900	19100	1	0	Band 2	20M	1880	18900	23.88	23.90
	Contiguous	Band 41	20M	2506	39750	1	0	Band 7	20M	2526	39950	21.73	21.74
		Band 41	20M	2535	2549.5	1	0	Band 7	20M	2515	39840	21.54	21.55
		Band 41	20M	2535	2549.5	1	0	Band 7	20M	2555	40240	21.54	21.55
		Band 41	20M	2593	40620	1	0	Band 7	20M	2573	40420	21.44	21.46
		Band 41	20M	2593	40620	1	0	Band 7	20M	2613	40820	21.44	21.46
		Band 41	20M	2636.5	41055	1	0	Band 7	20M	2616.5	40855	21.27	21.29
		Band 41	20M	2636.5	41055	1	0	Band 7	20M	2656.5	41255	21.27	21.29
		Band 41	20M	2680	41490	1	0	Band 7	20M	2660	41290	21.75	21.79

13. Antenna Location

<Mobile Phone>

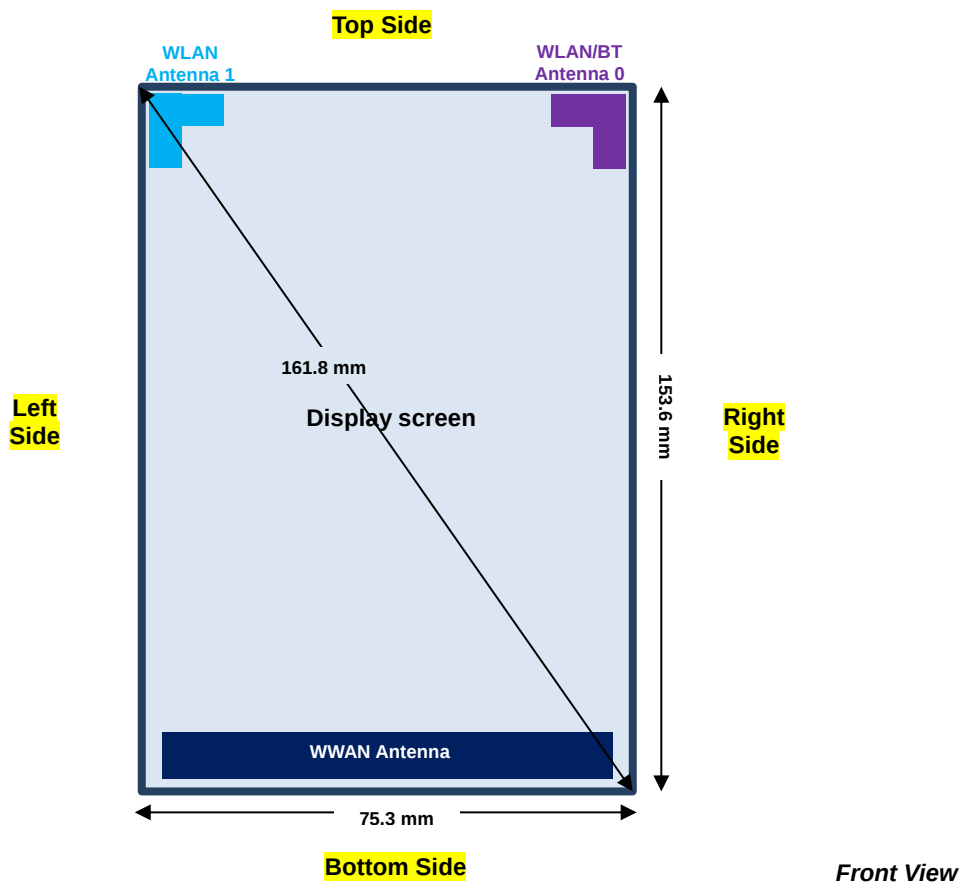

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes

General Note:

- Referring to KDB 941225 D06 v02, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - d. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - e. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - f. For WWAN: Reported SAR (W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - g. For WLAN: Reported SAR (W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor.
 - h. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB648474 D04v01r02, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
4. Pre KDB648474 D04v01r02, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
5. While operating in body-adjacent exposure configurations during a mobile hotspot session, reduced power limits are enforced on the GSM850, WCDMA B5, CDMA BC0 and LTE B13 / B17 / B5 / B26 transmitter. More detailed information which can be referred to "operational description".

UMTS Note:

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

CDMA Note:

1. Per KDB 941225 D01v03, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

LTE Note:

1. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

14.1 Head SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	22.74	24.00	1.337	-0.01	0.255	0.341
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	22.74	24.00	1.337	-0.03	0.112	0.150
01	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	22.74	24.00	1.337	-0.02	0.263	0.352
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	22.74	24.00	1.337	-0.04	0.124	0.166

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC10	1xRTT RC3 SO55	Right Cheek	0mm	580	820.5	23.69	24.00	1.074	0.05	0.269	0.289
	CDMA2000 BC10	1xRTT RC3 SO55	Right Tilted	0mm	580	820.5	23.69	24.00	1.074	-0.06	0.144	0.155
02	CDMA2000 BC10	1xRTT RC3 SO55	Left Cheek	0mm	580	820.5	23.69	24.00	1.074	-0.05	0.306	0.329
	CDMA2000 BC10	1xRTT RC3 SO55	Left Tilted	0mm	580	820.5	23.69	24.00	1.074	-0.01	0.153	0.164
	CDMA2000 BC0	1xRTT RC3 SO55	Right Cheek	0mm	777	848.31	23.93	24.00	1.016	0.18	0.330	0.335
	CDMA2000 BC0	1xRTT RC3 SO55	Right Tilted	0mm	777	848.31	23.93	24.00	1.016	-0.03	0.153	0.155
03	CDMA2000 BC0	1xRTT RC3 SO55	Left Cheek	0mm	777	848.31	23.93	24.00	1.016	-0.06	0.338	0.343
	CDMA2000 BC0	1xRTT RC3 SO55	Left Tilted	0mm	777	848.31	23.93	24.00	1.016	-0.01	0.189	0.192
	CDMA2000 BC1	1xRTT RC3 SO55	Right Cheek	0mm	25	1851.25	23.43	24.00	1.140	-0.07	0.227	0.259
	CDMA2000 BC1	1xRTT RC3 SO55	Right Tilted	0mm	25	1851.25	23.43	24.00	1.140	-0.06	0.143	0.163
04	CDMA2000 BC1	1xRTT RC3 SO55	Left Cheek	0mm	25	1851.25	23.43	24.00	1.140	-0.03	0.255	0.291
	CDMA2000 BC1	1xRTT RC3 SO55	Left Tilted	0mm	25	1851.25	23.43	24.00	1.140	-0.01	0.154	0.176



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	LTE Band 13	10M	QPSK	1RB	0offset	Right Cheek	0mm	23230	782	22.24	24.00	1.500	0.11	0.329	0.493
	LTE Band 13	10M	QPSK	25RB	12offset	Right Cheek	0mm	23230	782	21.15	23.00	1.531	-0.03	0.223	0.341
	LTE Band 13	10M	QPSK	1RB	0offset	Right Tilted	0mm	23230	782	22.24	24.00	1.500	0	0.093	0.139
	LTE Band 13	10M	QPSK	25RB	12offset	Right Tilted	0mm	23230	782	21.15	23.00	1.531	-0.06	0.061	0.093
	LTE Band 13	10M	QPSK	1RB	0offset	Left Cheek	0mm	23230	782	22.24	24.00	1.500	-0.1	0.243	0.364
	LTE Band 13	10M	QPSK	25RB	12offset	Left Cheek	0mm	23230	782	21.15	23.00	1.531	0.01	0.163	0.250
	LTE Band 13	10M	QPSK	1RB	0offset	Left Tilted	0mm	23230	782	22.24	24.00	1.500	-0.02	0.104	0.156
	LTE Band 13	10M	QPSK	25RB	12offset	Left Tilted	0mm	23230	782	21.15	23.00	1.531	-0.09	0.067	0.103
	LTE Band 5	10M	QPSK	1RB	0offset	Right Cheek	0mm	20450	829	22.41	24.00	1.442	-0.03	0.219	0.316
	LTE Band 5	10M	QPSK	25RB	0offset	Right Cheek	0mm	20450	829	21.38	23.00	1.452	-0.09	0.145	0.211
	LTE Band 5	10M	QPSK	1RB	0offset	Right Tilted	0mm	20450	829	22.41	24.00	1.442	-0.05	0.100	0.144
	LTE Band 5	10M	QPSK	25RB	0offset	Right Tilted	0mm	20450	829	21.38	23.00	1.452	-0.06	0.066	0.096
06	LTE Band 5	10M	QPSK	1RB	0offset	Left Cheek	0mm	20450	829	22.41	24.00	1.442	-0.02	0.248	0.358
	LTE Band 5	10M	QPSK	25RB	0offset	Left Cheek	0mm	20450	829	21.38	23.00	1.452	-0.05	0.166	0.241
	LTE Band 5	10M	QPSK	1RB	0offset	Left Tilted	0mm	20450	829	22.41	24.00	1.442	0.04	0.139	0.200
	LTE Band 5	10M	QPSK	25RB	0offset	Left Tilted	0mm	20450	829	22.41	24.00	1.442	-0.04	0.094	0.136
	LTE Band 26	15M	QPSK	1RB	0offset	Right Cheek	0mm	26865	831.5	22.69	24.00	1.352	0.01	0.267	0.361
	LTE Band 26	15M	QPSK	36RB	0offset	Right Cheek	0mm	26765	821.5	21.45	23.00	1.429	0.03	0.136	0.194
	LTE Band 26	15M	QPSK	1RB	0offset	Right Tilted	0mm	26865	831.5	22.69	24.00	1.352	0.04	0.157	0.212
	LTE Band 26	15M	QPSK	36RB	0offset	Right Tilted	0mm	26765	821.5	21.45	23.00	1.429	-0.08	0.068	0.097
07	LTE Band 26	15M	QPSK	1RB	0offset	Left Cheek	0mm	26865	831.5	22.69	24.00	1.352	0.01	0.348	0.471
	LTE Band 26	15M	QPSK	36RB	0offset	Left Cheek	0mm	26765	821.5	21.45	23.00	1.429	0.08	0.186	0.266
	LTE Band 26	15M	QPSK	1RB	0offset	Left Tilted	0mm	26865	831.5	22.69	24.00	1.352	-0.03	0.163	0.220
	LTE Band 26	15M	QPSK	36RB	0offset	Left Tilted	0mm	26765	821.5	21.45	23.00	1.429	-0.04	0.104	0.149
	LTE Band 25	20M	QPSK	1RB	0offset	Right Cheek	0mm	26340	1880	22.90	24.00	1.288	-0.13	0.181	0.233
	LTE Band 25	20M	QPSK	50RB	0offset	Right Cheek	0mm	26140	1860	21.52	23.00	1.406	-0.16	0.137	0.193
	LTE Band 25	20M	QPSK	1RB	0offset	Right Tilted	0mm	26340	1880	22.90	24.00	1.288	0.13	0.140	0.180
	LTE Band 25	20M	QPSK	50RB	0offset	Right Tilted	0mm	26140	1860	21.52	23.00	1.406	0.05	0.106	0.149
08	LTE Band 25	20M	QPSK	1RB	0offset	Left Cheek	0mm	26340	1880	22.90	24.00	1.288	0.09	0.211	0.272
	LTE Band 25	20M	QPSK	50RB	0offset	Left Cheek	0mm	26140	1860	21.52	23.00	1.406	0.1	0.163	0.229
	LTE Band 25	20M	QPSK	1RB	0offset	Left Tilted	0mm	26340	1880	22.90	24.00	1.288	-0.07	0.125	0.161
	LTE Band 25	20M	QPSK	50RB	0offset	Left Tilted	0mm	26140	1860	21.52	23.00	1.406	-0.02	0.086	0.121

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1RB	0offset	Right Cheek	0mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.1	0.060	0.088
	LTE Band 38	20M	QPSK	50RB	0offset	Right Cheek	0mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.11	0.046	0.066
	LTE Band 38	20M	QPSK	1RB	0offset	Right Tilted	0mm	37850	2580	22.35	24.00	1.462	62.9	1.006	0.03	0.044	0.065
	LTE Band 38	20M	QPSK	50RB	0offset	Right Tilted	0mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.16	0.039	0.056
09	LTE Band 38	20M	QPSK	1RB	0offset	Left Cheek	0mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.06	0.154	0.227
	LTE Band 38	20M	QPSK	50RB	0offset	Left Cheek	0mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.05	0.119	0.171
	LTE Band 38	20M	QPSK	1RB	0offset	Left Tilted	0mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.03	0.045	0.066
	LTE Band 38	20M	QPSK	50RB	0offset	Left Tilted	0mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.04	0.033	0.047

14.2 Hotspot SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
10	WCDMA V	RMC 12.2Kbps	Front	10mm	ON	4233	846.6		20.50	1.000	0	0.722	0.722
	WCDMA V	RMC 12.2Kbps	Back	10mm	ON	4233	846.6		20.50	1.000	-0.03	0.527	0.527
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	ON	4233	846.6		20.50	1.000	-0.03	0.332	0.332
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	ON	4233	846.6		20.50	1.000	0	0.196	0.196
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	ON	4233	846.6		20.50	1.000	0	0.334	0.334

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
11	CDMA2000 BC10	RTAP 153.6Kbps	Front	10mm	OFF	580	820.5	23.77	24.00	1.054	-0.03	1.180	1.244
	CDMA2000 BC10	RTAP 153.6Kbps	Back	10mm	OFF	580	820.5	23.77	24.00	1.054	-0.01	0.868	0.915
	CDMA2000 BC10	RTAP 153.6Kbps	Left Side	10mm	OFF	580	820.5	23.77	24.00	1.054	-0.02	0.397	0.419
	CDMA2000 BC10	RTAP 153.6Kbps	Right Side	10mm	OFF	580	820.5	23.77	24.00	1.054	0.07	0.253	0.267
	CDMA2000 BC10	RTAP 153.6Kbps	Bottom Side	10mm	OFF	580	820.5	23.77	24.00	1.054	0.13	0.572	0.603
	CDMA2000 BC0	RTAP 153.6Kbps	Front	10mm	ON	777	848.31		21.50	1.000	0.01	0.868	0.868
	CDMA2000 BC0	RTAP 153.6Kbps	Front	10mm	ON	1013	824.7		21.50	1.000	-0.04	0.774	0.774
12	CDMA2000 BC0	RTAP 153.6Kbps	Front	10mm	ON	384	836.52		21.50	1.000	-0.03	0.908	0.908
	CDMA2000 BC0	RTAP 153.6Kbps	Back	10mm	ON	777	848.31		21.50	1.000	0.17	0.527	0.527
	CDMA2000 BC0	RTAP 153.6Kbps	Left Side	10mm	ON	777	848.31		21.50	1.000	-0.01	0.340	0.340
	CDMA2000 BC0	RTAP 153.6Kbps	Right Side	10mm	ON	777	848.31		21.50	1.000	-0.04	0.060	0.060
	CDMA2000 BC0	RTAP 153.6Kbps	Bottom Side	10mm	ON	777	848.31		21.50	1.000	-0.01	0.384	0.384
	CDMA2000 BC1	RTAP 153.6Kbps	Front	10mm	OFF	25	1851.25	23.46	24.00	1.132	-0.06	0.665	0.753
	CDMA2000 BC1	RTAP 153.6Kbps	Back	10mm	OFF	25	1851.25	23.46	24.00	1.132	0	0.433	0.490
	CDMA2000 BC1	RTAP 153.6Kbps	Left Side	10mm	OFF	25	1851.25	23.46	24.00	1.132	-0.13	0.287	0.325
	CDMA2000 BC1	RTAP 153.6Kbps	Right Side	10mm	OFF	25	1851.25	23.46	24.00	1.132	0.04	0.363	0.411
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	10mm	OFF	25	1851.25	23.46	24.00	1.132	-0.01	0.877	0.993
	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	10mm	OFF	600	1880	23.33	24.00	1.167	0	0.897	1.047
13	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	10mm	OFF	1175	1908.75	22.97	24.00	1.268	-0.05	0.836	1.060



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
14	LTE Band 13	10M	QPSK	1RB	0offset	Front	10mm	ON	23230	782		22.00	1.000	0.01	1.110	1.110
	LTE Band 13	10M	QPSK	25RB	12offset	Front	10mm	ON	23230	782		22.00	1.000	0	0.851	0.851
	LTE Band 13	10M	QPSK	50RB	0offset	Front	10mm	ON	23230	782		22.00	1.000	-0.01	0.853	0.853
	LTE Band 13	10M	QPSK	1RB	0offset	Back	10mm	ON	23230	782		22.00	1.000	-0.17	0.914	0.914
	LTE Band 13	10M	QPSK	25RB	12offset	Back	10mm	ON	23230	782		22.00	1.000	-0.05	0.769	0.769
	LTE Band 13	10M	QPSK	50RB	0offset	Back	10mm	ON	23230	782		22.00	1.000	-0.12	0.781	0.781
	LTE Band 13	10M	QPSK	1RB	0offset	Left Side	10mm	ON	23230	782		22.00	1.000	-0.03	0.170	0.170
	LTE Band 13	10M	QPSK	25RB	12offset	Left Side	10mm	ON	23230	782		22.00	1.000	-0.04	0.146	0.146
	LTE Band 13	10M	QPSK	1RB	0offset	Right Side	10mm	ON	23230	782		22.00	1.000	-0.02	0.587	0.587
	LTE Band 13	10M	QPSK	25RB	12offset	Right Side	10mm	ON	23230	782		22.00	1.000	-0.03	0.487	0.487
	LTE Band 13	10M	QPSK	1RB	0offset	Bottom Side	10mm	ON	23230	782		22.00	1.000	-0.05	0.480	0.480
	LTE Band 13	10M	QPSK	25RB	12offset	Bottom Side	10mm	ON	23230	782		22.00	1.000	-0.03	0.353	0.353
	LTE Band 5	10M	QPSK	1RB	0offset	Front	10mm	ON	20450	829		21.50	1.000	-0.07	1.200	1.200
	LTE Band 5	10M	QPSK	1RB	0offset	Front	10mm	ON	20525	836.5		21.50	1.000	-0.07	1.190	1.190
15	LTE Band 5	10M	QPSK	1RB	0offset	Front	10mm	ON	20600	844		21.50	1.000	-0.16	1.220	1.220
	LTE Band 5	10M	QPSK	25RB	0offset	Front	10mm	ON	20450	829		21.50	1.000	0.01	0.882	0.882
	LTE Band 5	10M	QPSK	25RB	0offset	Front	10mm	ON	20525	836.5		21.50	1.000	0.02	0.949	0.949
	LTE Band 5	10M	QPSK	25RB	0offset	Front	10mm	ON	20600	844		21.50	1.000	0.09	0.969	0.969
	LTE Band 5	10M	QPSK	50RB	0offset	Front	10mm	ON	20450	829		21.50	1.000	0.01	0.897	0.897
	LTE Band 5	10M	QPSK	1RB	0offset	Back	10mm	ON	20450	829		21.50	1.000	0.12	0.880	0.880
	LTE Band 5	10M	QPSK	1RB	0offset	Back	10mm	ON	20525	836.5		21.50	1.000	0.02	0.937	0.937
	LTE Band 5	10M	QPSK	1RB	0offset	Back	10mm	ON	20600	844		21.50	1.000	-0.14	0.957	0.957
	LTE Band 5	10M	QPSK	25RB	0offset	Back	10mm	ON	20450	829		21.50	1.000	0.03	0.711	0.711
	LTE Band 5	10M	QPSK	50RB	0offset	Back	10mm	ON	20450	829		21.50	1.000	0.04	0.736	0.736
	LTE Band 5	10M	QPSK	1RB	0offset	Left Side	10mm	ON	20450	829		21.50	1.000	0.05	0.462	0.462
	LTE Band 5	10M	QPSK	25RB	0offset	Left Side	10mm	ON	20450	829		21.50	1.000	0.07	0.361	0.361
	LTE Band 5	10M	QPSK	1RB	0offset	Right Side	10mm	ON	20450	829		21.50	1.000	0.13	0.081	0.081
	LTE Band 5	10M	QPSK	25RB	0offset	Right Side	10mm	ON	20450	829		21.50	1.000	-0.03	0.063	0.063
	LTE Band 5	10M	QPSK	1RB	0offset	Bottom Side	10mm	ON	20450	829		21.50	1.000	0.01	0.688	0.688
	LTE Band 5	10M	QPSK	25RB	0offset	Bottom Side	10mm	ON	20450	829		21.50	1.000	-0.05	0.528	0.528
16	LTE Band 26	15M	QPSK	1RB	0offset	Front	10mm	ON	26865	831.5		22.50	1.000	0.02	1.360	1.360
	LTE Band 26	15M	QPSK	1RB	0offset	Front	10mm	ON	26765	821.5		22.50	1.000	-0.01	1.350	1.350
	LTE Band 26	15M	QPSK	1RB	0offset	Front	10mm	ON	26965	841.5		22.50	1.000	-0.03	1.240	1.240
	LTE Band 26	15M	QPSK	36RB	0offset	Front	10mm	ON	26765	821.5		22.50	1.000	-0.03	1.130	1.130
	LTE Band 26	15M	QPSK	36RB	0offset	Front	10mm	ON	26865	831.5		22.50	1.000	-0.09	1.160	1.160
	LTE Band 26	15M	QPSK	36RB	0offset	Front	10mm	ON	26965	841.5		22.50	1.000	-0.1	1.200	1.200
	LTE Band 26	15M	QPSK	75RB	0offset	Front	10mm	ON	26865	831.5		22.50	1.000	0.01	1.080	1.080
	LTE Band 26	15M	QPSK	1RB	0offset	Back	10mm	ON	26865	831.5		22.50	1.000	0.04	0.897	0.897
	LTE Band 26	15M	QPSK	1RB	0offset	Back	10mm	ON	26765	821.5		22.50	1.000	-0.01	0.949	0.949
	LTE Band 26	15M	QPSK	1RB	0offset	Back	10mm	ON	26965	841.5		22.50	1.000	0.01	1.050	1.050
	LTE Band 26	15M	QPSK	36RB	0offset	Back	10mm	ON	26765	821.5		22.50	1.000	-0.02	0.783	0.783
	LTE Band 26	15M	QPSK	75RB	0offset	Back	10mm	ON	26765	821.5		22.50	1.000	0.03	0.799	0.799
	LTE Band 26	15M	QPSK	1RB	0offset	Left Side	10mm	ON	26865	831.5		22.50	1.000	-0.03	0.548	0.548
	LTE Band 26	15M	QPSK	36RB	0offset	Left Side	10mm	ON	26765	821.5		22.50	1.000	-0.02	0.421	0.421
	LTE Band 26	15M	QPSK	1RB	0offset	Right Side	10mm	ON	26865	831.5		22.50	1.000	-0.04	0.101	0.101
	LTE Band 26	15M	QPSK	36RB	0offset	Right Side	10mm	ON	26765	821.5		22.50	1.000	-0.01	0.071	0.071
	LTE Band 26	15M	QPSK	1RB	0offset	Bottom Side	10mm	ON	26865	831.5		22.50	1.000	-0.08	0.738	0.738
	LTE Band 26	15M	QPSK	36RB	0offset	Bottom Side	10mm	ON	26765	821.5		22.50	1.000	-0.02	0.513	0.513

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1RB	0offset	Front	10mm	OFF	26340	1880	22.90	24.00	1.288	-0.13	0.598	0.770
	LTE Band 25	20M	QPSK	50RB	0offset	Front	10mm	OFF	26140	1860	21.52	23.00	1.406	-0.04	0.462	0.650
	LTE Band 25	20M	QPSK	1RB	0offset	Back	10mm	OFF	26340	1880	22.90	24.00	1.288	0.01	0.373	0.481
	LTE Band 25	20M	QPSK	50RB	0offset	Back	10mm	OFF	26140	1860	21.52	23.00	1.406	-0.02	0.293	0.412
	LTE Band 25	20M	QPSK	1RB	0offset	Left Side	10mm	OFF	26340	1880	22.90	24.00	1.288	-0.06	0.246	0.317
	LTE Band 25	20M	QPSK	50RB	0offset	Left Side	10mm	OFF	26140	1860	21.52	23.00	1.406	-0.03	0.190	0.267
	LTE Band 25	20M	QPSK	1RB	0offset	Right Side	10mm	OFF	26340	1880	22.90	24.00	1.288	-0.05	0.289	0.372
	LTE Band 25	20M	QPSK	50RB	0offset	Right Side	10mm	OFF	26140	1860	21.52	23.00	1.406	-0.04	0.225	0.316
	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Side	10mm	OFF	26340	1880	22.90	24.00	1.288	-0.01	0.828	1.067
17	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Side	10mm	OFF	26140	1860	22.73	24.00	1.340	-0.01	0.830	1.112
	LTE Band 25	20M	QPSK	1RB	0offset	Bottom Side	10mm	OFF	26590	1905	22.69	24.00	1.352	-0.04	0.805	1.088
	LTE Band 25	20M	QPSK	50RB	0offset	Bottom Side	10mm	OFF	26140	1860	21.52	23.00	1.406	0	0.593	0.834
	LTE Band 25	20M	QPSK	50RB	0offset	Bottom Side	10mm	OFF	26340	1880	21.49	23.00	1.416	-0.03	0.556	0.787
	LTE Band 25	20M	QPSK	50RB	49offset	Bottom Side	10mm	OFF	26590	1905	21.50	23.00	1.413	-0.01	0.515	0.727
	LTE Band 25	20M	QPSK	100RB	0offset	Bottom Side	10mm	OFF	26340	1880	21.36	23.00	1.459	0.03	0.549	0.801

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1RB	0offset	Front	10mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.01	0.181	0.266
	LTE Band 38	20M	QPSK	50RB	0offset	Front	10mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.02	0.153	0.220
	LTE Band 38	20M	QPSK	1RB	0offset	Back	10mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.04	0.117	0.172
	LTE Band 38	20M	QPSK	50RB	0offset	Back	10mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.06	0.091	0.131
	LTE Band 38	20M	QPSK	1RB	0offset	Left Side	10mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.15	0.075	0.110
	LTE Band 38	20M	QPSK	50RB	0offset	Left Side	10mm	37850	2580	21.45	23.00	1.429	62.9	1.006	0.12	0.058	0.083
	LTE Band 38	20M	QPSK	1RB	0offset	Right Side	10mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.1	0.031	0.046
	LTE Band 38	20M	QPSK	50RB	0offset	Right Side	10mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.08	0.023	0.033
18	LTE Band 38	20M	QPSK	1RB	0offset	Bottom Side	10mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.15	0.271	0.399
	LTE Band 38	20M	QPSK	50RB	0offset	Bottom Side	10mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.13	0.207	0.298

14.3 Extremity SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
19	WCDMA V	RMC 12.2Kbps	Front	0mm	4233	846.6	22.74	24.00	1.337	-0.12	1.140	1.524

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
20	CDMA2000 BC10	RTAP 153.6Kbps	Front	0mm	580	820.5	23.77	24.00	1.054	0	1.420	1.497
21	CDMA2000 BC0	RTAP 153.6Kbps	Front	0mm	384	836.52	23.91	24.00	1.021	-0.09	1.610	1.644
	CDMA2000 BC0	RTAP 153.6Kbps	Front	0mm	777	836.52	24.00	24.00	1.000	0.06	1.520	1.520
	CDMA2000 BC0	RTAP 153.6Kbps	Front	0mm	1013	824.7	23.84	24.00	1.038	0	1.580	1.639

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
22	LTE Band 13	10M	QPSK	1RB	0offset	Front	0mm	23230	782	22.24	24.00	1.500	-0.14	1.210	1.815
	LTE Band 13	10M	QPSK	1RB	0offset	Back	0mm	23230	782	21.15	23.00	1.531	-0.07	0.871	1.334
	LTE Band 5	10M	QPSK	1RB	0offset	Front	0mm	20600	844	22.40	24.00	1.445	-0.09	1.430	2.067
	LTE Band 5	10M	QPSK	1RB	0offset	Front	0mm	20450	829	22.41	24.00	1.442	-0.01	1.430	2.062
23	LTE Band 5	10M	QPSK	1RB	0offset	Front	0mm	20525	836.5	22.36	24.00	1.459	-0.11	1.490	2.174
	LTE Band 5	10M	QPSK	1RB	0offset	Back	0mm	20600	844	22.40	24.00	1.445	0.03	1.350	1.951
	LTE Band 5	10M	QPSK	1RB	0offset	Back	0mm	20450	829	22.41	24.00	1.442	0.01	1.340	1.932
	LTE Band 5	10M	QPSK	1RB	0offset	Back	0mm	20525	836.5	22.36	24.00	1.459	0.05	1.400	2.042
	LTE Band 26	15M	QPSK	1RB	0offset	Front	0mm	26865	831.5	22.69	24.00	1.352	-0.09	1.480	2.001
	LTE Band 26	15M	QPSK	1RB	0offset	Front	0mm	26765	821.5	22.43	24.00	1.435	-0.09	1.460	2.096
24	LTE Band 26	15M	QPSK	1RB	0offset	Front	0mm	26965	841.5	22.28	24.00	1.486	-0.08	1.550	2.303
	LTE Band 26	15M	QPSK	1RB	0offset	Back	0mm	26865	831.5	22.69	24.00	1.352	-0.03	1.370	1.852
	LTE Band 26	15M	QPSK	1RB	0offset	Back	0mm	26765	821.5	22.43	24.00	1.435	-0.02	1.350	1.938
	LTE Band 26	15M	QPSK	1RB	0offset	Back	0mm	26965	841.5	22.28	24.00	1.486	-0.14	1.450	2.155

14.4 Body Worn Accessory SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
25	WCDMA V	RMC 12.2Kbps	Front	15mm	4233	846.6	22.74	24.00	1.337	-0.08	0.826	1.104
	WCDMA V	RMC 12.2Kbps	Front	15mm	4132	826.4	22.60	24.00	1.380	-0.06	0.661	0.912
	WCDMA V	RMC 12.2Kbps	Front	15mm	4182	836.4	22.62	24.00	1.374	-0.06	0.796	1.094
	WCDMA V	RMC 12.2Kbps	Back	15mm	4233	846.6	22.74	24.00	1.337	-0.07	0.663	0.886
	WCDMA V	RMC 12.2Kbps	Back	15mm	4132	826.4	22.60	24.00	1.380	-0.14	0.531	0.733
	WCDMA V	RMC 12.2Kbps	Back	15mm	4182	836.4	22.62	24.00	1.374	-0.04	0.650	0.893

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
26	CDMA2000 BC10	1xRTT RC3 SO32	Front	15mm	580	820.5	23.75	24.00	1.059	0	0.661	0.700
	CDMA2000 BC10	1xRTT RC3 SO32	Back	15mm	580	820.5	23.75	24.00	1.059	0	0.544	0.576
	CDMA2000 BC0	1xRTT RC3 SO32	Front	15mm	777	848.31	23.92	24.00	1.019	0.15	1.030	1.049
	CDMA2000 BC0	1xRTT RC3 SO32	Front	15mm	1013	824.7	23.84	24.00	1.038	-0.01	0.920	0.955
27	CDMA2000 BC0	1xRTT RC3 SO32	Front	15mm	384	836.52	23.91	24.00	1.021	-0.03	1.050	1.072
	CDMA2000 BC0	1xRTT RC3 SO32	Back	15mm	777	848.31	23.92	24.00	1.019	-0.04	0.812	0.827
	CDMA2000 BC0	1xRTT RC3 SO32	Back	15mm	1013	824.7	23.84	24.00	1.038	-0.07	0.696	0.722
	CDMA2000 BC0	1xRTT RC3 SO32	Back	15mm	384	836.52	23.91	24.00	1.021	-0.04	0.794	0.811
28	CDMA2000 BC1	1xRTT RC3 SO32	Front	15mm	25	1851.25	23.36	24.00	1.159	0.03	0.327	0.379
	CDMA2000 BC1	1xRTT RC3 SO32	Back	15mm	25	1851.25	23.36	24.00	1.159	0	0.273	0.316

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
29	LTE Band 13	10M	QPSK	1RB	0offset	Front	15mm		23230	782	22.24	24.00	1.500	0	0.907	1.360
	LTE Band 13	10M	QPSK	25RB	12offset	Front	15mm		23230	782	21.15	23.00	1.531	0.02	0.531	0.813
	LTE Band 13	10M	QPSK	50RB	0offset	Front	15mm		23230	782	21.19	23.00	1.517	0	0.520	0.789
	LTE Band 13	10M	QPSK	1RB	0offset	Front	15mm	Headset	23230	782	22.24	24.00	1.500	0	0.878	1.317
	LTE Band 13	10M	QPSK	1RB	0offset	Back	15mm		23230	782	22.24	24.00	1.500	0.01	0.750	1.125
	LTE Band 13	10M	QPSK	25RB	12offset	Back	15mm		23230	782	21.15	23.00	1.531	-0.12	0.437	0.669
	LTE Band 13	10M	QPSK	50RB	0offset	Back	15mm		23230	782	21.19	23.00	1.517	-0.08	0.418	0.634
	LTE Band 5	10M	QPSK	1RB	0offset	Front	15mm		20450	829	22.41	24.00	1.442	0.09	0.748	1.079
	LTE Band 5	10M	QPSK	1RB	0offset	Front	15mm		20525	836.5	22.36	24.00	1.459	-0.02	0.795	1.160
30	LTE Band 5	10M	QPSK	1RB	0offset	Front	15mm		20600	844	22.40	24.00	1.445	-0.01	0.818	1.182
	LTE Band 5	10M	QPSK	25RB	0offset	Front	15mm		20450	829	21.38	23.00	1.452	-0.06	0.471	0.684
	LTE Band 5	10M	QPSK	50RB	0offset	Front	15mm		20450	829	21.28	23.00	1.486	-0.05	0.480	0.713
	LTE Band 5	10M	QPSK	1RB	0offset	Back	15mm		20450	829	22.41	24.00	1.442	-0.06	0.563	0.812
	LTE Band 5	10M	QPSK	1RB	0offset	Back	15mm		20525	836.5	22.36	24.00	1.459	-0.05	0.596	0.869
	LTE Band 5	10M	QPSK	1RB	0offset	Back	15mm		20600	844	22.40	24.00	1.445	-0.02	0.659	0.953
	LTE Band 5	10M	QPSK	25RB	0offset	Back	15mm		20450	829	21.38	23.00	1.452	0.04	0.350	0.508
	LTE Band 5	10M	QPSK	50RB	0offset	Back	15mm		20450	829	21.28	23.00	1.486	-0.01	0.357	0.530

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1RB	0offset	Front	15mm		26865	831.5	22.69	24.00	1.352	-0.1	0.884	1.195
	LTE Band 26	15M	QPSK	1RB	0offset	Front	15mm		26765	821.5	22.43	24.00	1.435	-0.12	0.873	1.253
	LTE Band 26	15M	QPSK	1RB	0offset	Front	15mm		26965	841.5	22.28	24.00	1.486	-0.07	0.955	1.419
31	LTE Band 26	15M	QPSK	1RB	0offset	Front	15mm	Headset	26965	841.5	22.28	24.00	1.486	-0.04	0.961	1.428
	LTE Band 26	15M	QPSK	1RB	0offset	Front	15mm	Headset	26765	821.5	22.43	24.00	1.435	-0.08	0.840	1.206
	LTE Band 26	15M	QPSK	1RB	0offset	Front	15mm	Headset	26865	831.5	22.69	24.00	1.352	-0.08	0.871	1.178
	LTE Band 26	15M	QPSK	36RB	0offset	Front	15mm		26765	821.5	21.45	23.00	1.429	-0.08	0.499	0.713
	LTE Band 26	15M	QPSK	75RB	0offset	Front	15mm		26865	831.5	21.37	23.00	1.455	-0.09	0.545	0.793
	LTE Band 26	15M	QPSK	1RB	0offset	Back	15mm		26865	831.5	22.69	24.00	1.352	-0.04	0.656	0.887
	LTE Band 26	15M	QPSK	1RB	0offset	Back	15mm		26765	821.5	22.43	24.00	1.435	0.02	0.628	0.901
	LTE Band 26	15M	QPSK	1RB	0offset	Back	15mm		26965	841.5	22.28	24.00	1.486	0	0.717	1.065
	LTE Band 26	15M	QPSK	36RB	0offset	Back	15mm		26765	821.5	21.45	23.00	1.429	0	0.356	0.509
	LTE Band 26	15M	QPSK	75RB	0offset	Back	15mm		26865	831.5	21.37	23.00	1.455	-0.03	0.395	0.575
32	LTE Band 25	20M	QPSK	1RB	0offset	Front	15mm		26340	1880	22.90	24.00	1.288	-0.02	0.312	0.402
	LTE Band 25	20M	QPSK	50RB	0offset	Front	15mm		26140	1860	21.52	23.00	1.406	0.01	0.231	0.325
	LTE Band 25	20M	QPSK	1RB	0offset	Back	15mm		26340	1880	22.90	24.00	1.288	-0.04	0.196	0.252
	LTE Band 25	20M	QPSK	50RB	0offset	Back	15mm		26140	1860	21.52	23.00	1.406	-0.02	0.150	0.211

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
33	LTE Band 38	20M	QPSK	1RB	0offset	Front	15mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.12	0.092	0.135
	LTE Band 38	20M	QPSK	50RB	0offset	Front	15mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.03	0.072	0.103
	LTE Band 38	20M	QPSK	1RB	0offset	Back	15mm	37850	2580	22.35	24.00	1.462	62.9	1.006	-0.02	0.062	0.091
	LTE Band 38	20M	QPSK	50RB	0offset	Back	15mm	37850	2580	21.45	23.00	1.429	62.9	1.006	-0.12	0.048	0.069

14.5 Repeated SAR Measurement

General Note:

- Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	10mm	OFF	600	1880	23.33	24.00	1.167	0	0.897	-	1.047
2nd	CDMA2000 BC1	RTAP 153.6Kbps	Bottom Side	10mm	OFF	600	1880	23.33	24.00	1.167	-0.05	0.861	1.04	1.005

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 13	10M	QPSK	1RB	0offset	Front	10mm	ON	23230	782		22.00	1.000	0.01	1.110	-	1.110
2nd	LTE Band 13	10M	QPSK	1RB	0offset	Front	10mm	ON	23230	782		22.00	1.000	-0.04	1.030	1.08	1.030
1st	LTE Band 26	15M	QPSK	1RB	0offset	Front	10mm	ON	26865	831.5		22.50	1.000	0.02	1.360	-	1.360
2nd	LTE Band 26	15M	QPSK	1RB	0offset	Front	10mm	ON	26865	831.5		22.50	1.000	0.01	1.320	1.03	1.320

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset				Note
		Head	Body-worn	Wireless Router	Extremity	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		Yes	
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		Yes	
3.	CDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		Yes	
4.	LTE(Voice) + WLAN2.4GHz(data)	Yes	Yes		Yes	
5.	GSM(Voice) + Bluetooth(data)	Yes	Yes		Yes	
6.	WCDMA((Voice) + Bluetooth(data)	Yes	Yes		Yes	
7.	CDMA((Voice) + Bluetooth(data)	Yes	Yes		Yes	
8.	LTE((Voice) + Bluetooth(data)	Yes	Yes		Yes	
9.	GSM(Voice) + WLAN5GHz(data)	Yes	Yes		Yes	
10.	WCDMA((Voice) + WLAN5GHz(data)	Yes	Yes		Yes	
11.	CDMA((Voice) + WLAN5GHz(data)	Yes	Yes		Yes	
12.	LTE((Voice) + WLAN5GHz(data)	Yes	Yes		Yes	
13.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	Yes	2.4GHz Hotspot
14.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	Yes	2.4GHz Hotspot
15.	CDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	Yes	2.4GHz Hotspot
16.	LTE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	Yes	2.4GHz Hotspot
17.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Yes	Yes	Yes	Bluetooth Tethering
18.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Yes	Bluetooth Tethering
19.	CDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Yes	Bluetooth Tethering
20.	LTE(Data) + Bluetooth(data)	Yes	Yes	Yes	Yes	Bluetooth Tethering
21.	GPRS/EDGE(data) + WLAN5GHz(data)	Yes	Yes	Yes	Yes	WiFi Direct
22.	WCDMA(data) + WLAN5GHz(data)	Yes	Yes	Yes	Yes	WiFi Direct
23.	CDMA(data) + WLAN5GHz(data)	Yes	Yes	Yes	Yes	WiFi Direct
24.	LTE(data) + WLAN5GHz(data)	Yes	Yes	Yes	Yes	WiFi Direct

General Note:

1. This device supported VoIP in EGPRS, WCDMA, LTE (e.g. 3rd party VoIP).
2. This report only assessed WCDMA B5, CDMA BC10 / BC0, BC1 and LTE B13 / B5 / B26 / B25 / B38, other cellular frequency band and BT/WiFi evaluation which refer to the Sporton FCC SAR Report, FCC ID: IHDT56UC2, Report No: FA541573A or Appendix D, and these SAR results also used perform simultaneous transmission analysis.
3. This device 2.4GHz / 5.2GHz / 5.8GHz WLAN supports Hotspot operation and WiFi Direct (Group Client / Group Owner), and 5.3GHz / 5.5GHz WLAN supports WiFi Direct (Group Client).
4. The worst case 5 GHz WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has WiFi Direct and Hotspot capability. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with 5 GHz WLAN.
5. In body-worn exposure condition, the WWAN connection a headset SAR simultaneously transmission was select WLAN without connect a headset SAR for conservatively summation.
6. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
7. The Scaled SAR summation is calculated based on the same configuration and test position.
8. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN ANT 0	2.4GHz WLAN ANT 1	2.4GHz Bluetooth	5GHz WLAN ANT 0	5GHz WLAN ANT 1			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.338	0.403	0.497	0.027	0.170	0.789	1.24	0.37	1.30
		Right Tilted	0.159	0.453	0.384	0.037	0.202	0.993	1.00	0.20	1.35
		Left Cheek	0.365	0.790	0.186	0.056	0.359	0.461	1.34	0.42	1.19
		Left Tilted	0.179	0.653	0.150	0.042	0.272	0.527	0.98	0.22	0.98
	GSM1900	Right Cheek	0.249	0.403	0.497	0.027	0.170	0.789	1.15	0.28	1.21
		Right Tilted	0.127	0.453	0.384	0.037	0.202	0.993	0.96	0.16	1.32
		Left Cheek	0.249	0.790	0.186	0.056	0.359	0.461	1.23	0.31	1.07
		Left Tilted	0.146	0.653	0.150	0.042	0.272	0.527	0.95	0.19	0.95
WCDMA	WCDMA V	Right Cheek	0.341	0.403	0.497	0.027	0.170	0.789	1.24	0.37	1.30
		Right Tilted	0.150	0.453	0.384	0.037	0.202	0.993	0.99	0.19	1.35
		Left Cheek	0.352	0.790	0.186	0.056	0.359	0.461	1.33	0.41	1.17
		Left Tilted	0.166	0.653	0.150	0.042	0.272	0.527	0.97	0.21	0.97
	WCDMA IV	Right Cheek	0.133	0.403	0.497	0.027	0.170	0.789	1.03	0.16	1.09
		Right Tilted	0.076	0.453	0.384	0.037	0.202	0.993	0.91	0.11	1.27
		Left Cheek	0.214	0.790	0.186	0.056	0.359	0.461	1.19	0.27	1.03
		Left Tilted	0.072	0.653	0.150	0.042	0.272	0.527	0.88	0.11	0.87
	WCDMA II	Right Cheek	0.336	0.403	0.497	0.027	0.170	0.789	1.24	0.36	1.30
		Right Tilted	0.181	0.453	0.384	0.037	0.202	0.993	1.02	0.22	1.38
		Left Cheek	0.347	0.790	0.186	0.056	0.359	0.461	1.32	0.40	1.17
		Left Tilted	0.170	0.653	0.150	0.042	0.272	0.527	0.97	0.21	0.97
CDMA	CDMA2000 BC10	Right Cheek	0.289	0.403	0.497	0.027	0.170	0.789	1.19	0.32	1.25
		Right Tilted	0.155	0.453	0.384	0.037	0.202	0.993	0.99	0.19	1.35
		Left Cheek	0.329	0.790	0.186	0.056	0.359	0.461	1.31	0.39	1.15
		Left Tilted	0.164	0.653	0.150	0.042	0.272	0.527	0.97	0.21	0.96
	CDMA2000 BC0	Right Cheek	0.335	0.403	0.497	0.027	0.170	0.789	1.24	0.36	1.29
		Right Tilted	0.155	0.453	0.384	0.037	0.202	0.993	0.99	0.19	1.35
		Left Cheek	0.343	0.790	0.186	0.056	0.359	0.461	1.32	0.40	1.16
		Left Tilted	0.192	0.653	0.150	0.042	0.272	0.527	1.00	0.23	0.99
	CDMA2000 BC1	Right Cheek	0.259	0.403	0.497	0.027	0.170	0.789	1.16	0.29	1.22
		Right Tilted	0.163	0.453	0.384	0.037	0.202	0.993	1.00	0.20	1.36
		Left Cheek	0.291	0.790	0.186	0.056	0.359	0.461	1.27	0.35	1.11
		Left Tilted	0.176	0.653	0.150	0.042	0.272	0.527	0.98	0.22	0.98



WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN ANT 0	2.4GHz WLAN ANT 1	2.4GHz Bluetooth	5GHz WLAN ANT 0	5GHz WLAN ANT 1			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE	LTE Band 12	Right Cheek	0.287	0.403	0.497	0.027	0.170	0.789	1.19	0.31	1.25
		Right Tilted	0.066	0.453	0.384	0.037	0.202	0.993	0.90	0.10	1.26
		Left Cheek	0.239	0.790	0.186	0.056	0.359	0.461	1.22	0.30	1.06
		Left Tilted	0.092	0.653	0.150	0.042	0.272	0.527	0.90	0.13	0.89
	LTE Band 17	Right Cheek	0.374	0.403	0.497	0.027	0.170	0.789	1.27	0.40	1.33
		Right Tilted	0.082	0.453	0.384	0.037	0.202	0.993	0.92	0.12	1.28
		Left Cheek	0.262	0.790	0.186	0.056	0.359	0.461	1.24	0.32	1.08
		Left Tilted	0.095	0.653	0.150	0.042	0.272	0.527	0.90	0.14	0.89
	LTE Band 13	Right Cheek	0.493	0.403	0.497	0.027	0.170	0.789	1.39	0.52	1.45
		Right Tilted	0.139	0.453	0.384	0.037	0.202	0.993	0.98	0.18	1.33
		Left Cheek	0.364	0.790	0.186	0.056	0.359	0.461	1.34	0.42	1.18
		Left Tilted	0.156	0.653	0.150	0.042	0.272	0.527	0.96	0.20	0.96
	LTE Band 5	Right Cheek	0.316	0.403	0.497	0.027	0.170	0.789	1.22	0.34	1.28
		Right Tilted	0.144	0.453	0.384	0.037	0.202	0.993	0.98	0.18	1.34
		Left Cheek	0.358	0.790	0.186	0.056	0.359	0.461	1.33	0.41	1.18
		Left Tilted	0.200	0.653	0.150	0.042	0.272	0.527	1.00	0.24	1.00
	LTE Band 26	Right Cheek	0.361	0.403	0.497	0.027	0.170	0.789	1.26	0.39	1.32
		Right Tilted	0.212	0.453	0.384	0.037	0.202	0.993	1.05	0.25	1.41
		Left Cheek	0.471	0.790	0.186	0.056	0.359	0.461	1.45	0.53	1.29
		Left Tilted	0.220	0.653	0.150	0.042	0.272	0.527	1.02	0.26	1.02
	LTE Band 4	Right Cheek	0.237	0.403	0.497	0.027	0.170	0.789	1.14	0.26	1.20
		Right Tilted	0.132	0.453	0.384	0.037	0.202	0.993	0.97	0.17	1.33
		Left Cheek	0.339	0.790	0.186	0.056	0.359	0.461	1.32	0.40	1.16
		Left Tilted	0.129	0.653	0.150	0.042	0.272	0.527	0.93	0.17	0.93
	LTE Band 2	Right Cheek	0.379	0.403	0.497	0.027	0.170	0.789	1.28	0.41	1.34
		Right Tilted	0.168	0.453	0.384	0.037	0.202	0.993	1.01	0.21	1.36
		Left Cheek	0.357	0.790	0.186	0.056	0.359	0.461	1.33	0.41	1.18
		Left Tilted	0.184	0.653	0.150	0.042	0.272	0.527	0.99	0.23	0.98
	LTE Band 25	Right Cheek	0.233	0.403	0.497	0.027	0.170	0.789	1.13	0.26	1.19
		Right Tilted	0.180	0.453	0.384	0.037	0.202	0.993	1.02	0.22	1.38
		Left Cheek	0.272	0.790	0.186	0.056	0.359	0.461	1.25	0.33	1.09
		Left Tilted	0.161	0.653	0.150	0.042	0.272	0.527	0.96	0.20	0.96
	LTE Band 7	Right Cheek	0.311	0.403	0.497	0.027	0.170	0.789	1.21	0.34	1.27
		Right Tilted	0.206	0.453	0.384	0.037	0.202	0.993	1.04	0.24	1.40
		Left Cheek	0.618	0.790	0.186	0.056	0.359	0.461	1.59	0.67	1.44
		Left Tilted	0.221	0.653	0.150	0.042	0.272	0.527	1.02	0.26	1.02
	LTE Band 38	Right Cheek	0.088	0.403	0.497	0.027	0.170	0.789	0.99	0.12	1.05
		Right Tilted	0.065	0.453	0.384	0.037	0.202	0.993	0.90	0.10	1.26
		Left Cheek	0.227	0.790	0.186	0.056	0.359	0.461	1.20	0.28	1.05
		Left Tilted	0.066	0.653	0.150	0.042	0.272	0.527	0.87	0.11	0.87
	LTE Band 41	Right Cheek	0.108	0.403	0.497	0.027	0.170	0.789	1.01	0.14	1.07
		Right Tilted	0.120	0.453	0.384	0.037	0.202	0.993	0.96	0.16	1.32
		Left Cheek	0.294	0.790	0.186	0.056	0.359	0.461	1.27	0.35	1.11
		Left Tilted	0.090	0.653	0.150	0.042	0.272	0.527	0.89	0.13	0.89

15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN ANT 0	2.4GHz WLAN ANT 1	2.4GHz Bluetooth	5GHz WLAN ANT 0	5GHz WLAN ANT 1			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Front	0.474	0.147	0.082	0.007	0.051	0.069	0.70	0.48	0.59
		Back	0.322	0.141	0.037	0.005	0.137	0.059	0.50	0.33	0.52
		Left side	0.213	0.012	0.041	0.001	0.032	0.076	0.27	0.21	0.32
		Right side	0.118	0.108	0.002	0.004	0.120	0.007	0.23	0.12	0.25
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.175						0.18	0.18	0.18
	GSM1900	Front	0.782	0.147	0.082	0.007	0.051	0.069	1.01	0.79	0.90
		Back	0.391	0.141	0.037	0.005	0.137	0.059	0.57	0.40	0.59
		Left side	0.278	0.012	0.041	0.001	0.032	0.076	0.33	0.28	0.39
		Right side	0.301	0.108	0.002	0.004	0.120	0.007	0.41	0.31	0.43
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.957						0.96	0.96	0.96
WCDMA	WCDMA V	Front	0.722	0.147	0.082	0.007	0.051	0.069	0.95	0.73	0.84
		Back	0.527	0.141	0.037	0.005	0.137	0.059	0.71	0.53	0.72
		Left side	0.332	0.012	0.041	0.001	0.032	0.076	0.39	0.33	0.44
		Right side	0.196	0.108	0.002	0.004	0.120	0.007	0.31	0.20	0.32
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.334						0.33	0.33	0.33
	WCDMA IV	Front	0.607	0.147	0.082	0.007	0.051	0.069	0.84	0.61	0.73
		Back	0.490	0.141	0.037	0.005	0.137	0.059	0.67	0.50	0.69
		Left side	0.164	0.012	0.041	0.001	0.032	0.076	0.22	0.17	0.27
		Right side	0.239	0.108	0.002	0.004	0.120	0.007	0.35	0.24	0.37
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	1.090						1.09	1.09	1.09
	WCDMA II	Front	1.028	0.147	0.082	0.007	0.051	0.069	1.26	1.04	1.15
		Back	0.611	0.141	0.037	0.005	0.137	0.059	0.79	0.62	0.81
		Left side	0.361	0.012	0.041	0.001	0.032	0.076	0.41	0.36	0.47
		Right side	0.429	0.108	0.002	0.004	0.120	0.007	0.54	0.43	0.56
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	1.309						1.31	1.31	1.31
CDMA	CDMA2000 BC10	Front	1.244	0.147	0.082	0.007	0.051	0.069	1.47	1.25	1.36
		Back	0.915	0.141	0.037	0.005	0.137	0.059	1.09	0.92	1.11
		Left side	0.419	0.012	0.041	0.001	0.032	0.076	0.47	0.42	0.53
		Right side	0.267	0.108	0.002	0.004	0.120	0.007	0.38	0.27	0.39
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.603						0.60	0.60	0.60
	CDMA2000 BC0	Front	0.908	0.147	0.082	0.007	0.051	0.069	1.14	0.92	1.03
		Back	0.527	0.141	0.037	0.005	0.137	0.059	0.71	0.53	0.72
		Left side	0.340	0.012	0.041	0.001	0.032	0.076	0.39	0.34	0.45
		Right side	0.060	0.108	0.002	0.004	0.120	0.007	0.17	0.06	0.19
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.384						0.38	0.38	0.38
	CDMA2000 BC1	Front	0.753	0.147	0.082	0.007	0.051	0.069	0.98	0.76	0.87
		Back	0.490	0.141	0.037	0.005	0.137	0.059	0.67	0.50	0.69
		Left side	0.325	0.012	0.041	0.001	0.032	0.076	0.38	0.33	0.43
		Right side	0.411	0.108	0.002	0.004	0.120	0.007	0.52	0.42	0.54
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	1.060						1.06	1.06	1.06



WWAN Band		Exposure Position	1 WWAN 1g SAR (W/kg)	2 2.4GHz WLAN ANT 0 1g SAR (W/kg)	3 2.4GHz WLAN ANT 1 1g SAR (W/kg)	4 2.4GHz Bluetooth 1g SAR (W/kg)	5 5GHz WLAN ANT 0 1g SAR (W/kg)	6 5GHz WLAN ANT 1 1g SAR (W/kg)	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)
LTE	LTE Band 12	Front	1.356	0.147	0.082	0.007	0.051	0.069	1.59	1.36	1.48
		Back	1.077	0.141	0.037	0.005	0.137	0.059	1.26	1.08	1.27
		Left side	0.200	0.012	0.041	0.001	0.032	0.076	0.25	0.20	0.31
		Right side	0.753	0.108	0.002	0.004	0.120	0.007	0.86	0.76	0.88
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.855						0.86	0.86	0.86
	LTE Band 17	Front	0.829	0.147	0.082	0.007	0.051	0.069	1.06	0.84	0.95
		Back	0.563	0.141	0.037	0.005	0.137	0.059	0.74	0.57	0.76
		Left side	0.111	0.012	0.041	0.001	0.032	0.076	0.16	0.11	0.22
		Right side	0.519	0.108	0.002	0.004	0.120	0.007	0.63	0.52	0.65
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.600						0.60	0.60	0.60
	LTE Band 13	Front	1.110	0.147	0.082	0.007	0.051	0.069	1.34	1.12	1.23
		Back	0.914	0.141	0.037	0.005	0.137	0.059	1.09	0.92	1.11
		Left side	0.170	0.012	0.041	0.001	0.032	0.076	0.22	0.17	0.28
		Right side	0.587	0.108	0.002	0.004	0.120	0.007	0.70	0.59	0.71
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.480						0.48	0.48	0.48
	LTE Band 5	Front	1.220	0.147	0.082	0.007	0.051	0.069	1.45	1.23	1.34
		Back	0.957	0.141	0.037	0.005	0.137	0.059	1.14	0.96	1.15
		Left side	0.462	0.012	0.041	0.001	0.032	0.076	0.52	0.46	0.57
		Right side	0.081	0.108	0.002	0.004	0.120	0.007	0.19	0.09	0.21
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.688						0.69	0.69	0.69
	LTE Band 26	Front	1.360	0.147	0.082	0.007	0.051	0.069	1.59	1.37	1.48
		Back	1.050	0.141	0.037	0.005	0.137	0.059	1.23	1.06	1.25
		Left side	0.548	0.012	0.041	0.001	0.032	0.076	0.60	0.55	0.66
		Right side	0.101	0.108	0.002	0.004	0.120	0.007	0.21	0.11	0.23
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.738						0.74	0.74	0.74
	LTE Band 4	Front	0.718	0.147	0.082	0.007	0.051	0.069	0.95	0.73	0.84
		Back	0.628	0.141	0.037	0.005	0.137	0.059	0.81	0.63	0.82
		Left side	0.245	0.012	0.041	0.001	0.032	0.076	0.30	0.25	0.35
		Right side	0.309	0.108	0.002	0.004	0.120	0.007	0.42	0.31	0.44
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	1.171						1.17	1.17	1.17
	LTE Band 2	Front	0.907	0.147	0.082	0.007	0.051	0.069	1.14	0.91	1.03
		Back	0.488	0.141	0.037	0.005	0.137	0.059	0.67	0.49	0.68
		Left side	0.398	0.012	0.041	0.001	0.032	0.076	0.45	0.40	0.51
		Right side	0.451	0.108	0.002	0.004	0.120	0.007	0.56	0.46	0.58
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	1.283						1.28	1.28	1.28
	LTE Band 25	Front	0.770	0.147	0.082	0.007	0.051	0.069	1.00	0.78	0.89
		Back	0.481	0.141	0.037	0.005	0.137	0.059	0.66	0.49	0.68
		Left side	0.317	0.012	0.041	0.001	0.032	0.076	0.37	0.32	0.43
		Right side	0.372	0.108	0.002	0.004	0.120	0.007	0.48	0.38	0.50
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	1.112						1.11	1.11	1.11
	LTE Band 7	Front	0.957	0.147	0.082	0.007	0.051	0.069	1.19	0.96	1.08
		Back	0.595	0.141	0.037	0.005	0.137	0.059	0.77	0.60	0.79
		Left side	0.561	0.012	0.041	0.001	0.032	0.076	0.61	0.56	0.67
		Right side	0.236	0.108	0.002	0.004	0.120	0.007	0.35	0.24	0.36
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	1.192						1.19	1.19	1.19
	LTE Band 38	Front	0.266	0.147	0.082	0.007	0.051	0.069	0.50	0.27	0.39
		Back	0.172	0.141	0.037	0.005	0.137	0.059	0.35	0.18	0.37
		Left side	0.110	0.012	0.041	0.001	0.032	0.076	0.16	0.11	0.22
		Right side	0.046	0.108	0.002	0.004	0.120	0.007	0.16	0.05	0.17
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.399						0.40	0.40	0.40
	LTE Band 41	Front	0.355	0.147	0.082	0.007	0.051	0.069	0.58	0.36	0.48
		Back	0.264	0.141	0.037	0.005	0.137	0.059	0.44	0.27	0.46
		Left side	0.210	0.012	0.041	0.001	0.032	0.076	0.26	0.21	0.32
		Right side	0.070	0.108	0.002	0.004	0.120	0.007	0.18	0.07	0.20
		Top side		0.303	0.060	0.021	0.077	0.120	0.36	0.02	0.20
		Bottom side	0.476						0.48	0.48	0.48



15.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN ANT 0	2.4GHz WLAN ANT 1	2.4GHz Bluetooth	5GHz WLAN ANT 0	5GHz WLAN ANT 1			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Front	0.943	0.086	0.038	0.003	0.067	0.074	1.07	0.95	1.08
		Back	0.699	0.080	0.012	0.004	0.101	0.085	0.79	0.70	0.89
	GSM1900	Front	0.338	0.086	0.038	0.003	0.067	0.074	0.46	0.34	0.48
		Back	0.221	0.080	0.012	0.004	0.101	0.085	0.31	0.23	0.41
WCDMA	WCDMA V	Front	1.104	0.086	0.038	0.003	0.067	0.074	1.23	1.11	1.25
		Back	0.893	0.080	0.012	0.004	0.101	0.085	0.99	0.90	1.08
	WCDMA IV	Front	0.376	0.086	0.038	0.003	0.067	0.074	0.50	0.38	0.52
		Back	0.317	0.080	0.012	0.004	0.101	0.085	0.41	0.32	0.50
	WCDMA II	Front	0.513	0.086	0.038	0.003	0.067	0.074	0.64	0.52	0.65
		Back	0.287	0.080	0.012	0.004	0.101	0.085	0.38	0.29	0.47
CDMA	CDMA2000 BC10	Front	0.700	0.086	0.038	0.003	0.067	0.074	0.82	0.70	0.84
		Back	0.576	0.080	0.012	0.004	0.101	0.085	0.67	0.58	0.76
	CDMA2000 BC0	Front	1.072	0.086	0.038	0.003	0.067	0.074	1.20	1.08	1.21
		Back	0.827	0.080	0.012	0.004	0.101	0.085	0.92	0.83	1.01
	CDMA2000 BC1	Front	0.379	0.086	0.038	0.003	0.067	0.074	0.50	0.38	0.52
		Back	0.316	0.080	0.012	0.004	0.101	0.085	0.41	0.32	0.50
LTE	LTE Band 12	Front	0.795	0.086	0.038	0.003	0.067	0.074	0.92	0.80	0.94
		Back	0.677	0.080	0.012	0.004	0.101	0.085	0.77	0.68	0.86
	LTE Band 17	Front	0.884	0.086	0.038	0.003	0.067	0.074	1.01	0.89	1.03
		Back	0.743	0.080	0.012	0.004	0.101	0.085	0.84	0.75	0.93
	LTE Band 13	Front	1.360	0.086	0.038	0.003	0.067	0.074	1.48	1.36	1.50
		Back	1.125	0.080	0.012	0.004	0.101	0.085	1.22	1.13	1.31
		Front with Headset	1.317	0.086	0.038	0.003	0.067	0.074	1.44	1.32	1.46
	LTE Band 5	Front	1.182	0.086	0.038	0.003	0.067	0.074	1.31	1.19	1.32
		Back	0.953	0.080	0.012	0.004	0.101	0.085	1.05	0.96	1.14
	LTE Band 26	Front	1.419	0.086	0.038	0.003	0.067	0.074	1.54	1.42	1.56
		Back	1.065	0.080	0.012	0.004	0.101	0.085	1.16	1.07	1.25
		Front with Headset	1.428	0.086	0.038	0.003	0.067	0.074	1.55	1.43	1.57
	LTE Band 4	Front	0.514	0.086	0.038	0.003	0.067	0.074	0.64	0.52	0.66
		Back	0.331	0.080	0.012	0.004	0.101	0.085	0.42	0.34	0.52
	LTE Band 2	Front	0.480	0.086	0.038	0.003	0.067	0.074	0.60	0.48	0.62
		Back	0.330	0.080	0.012	0.004	0.101	0.085	0.42	0.33	0.52
	LTE Band 25	Front	0.402	0.086	0.038	0.003	0.067	0.074	0.53	0.41	0.54
		Back	0.252	0.080	0.012	0.004	0.101	0.085	0.34	0.26	0.44
	LTE Band 7	Front	0.471	0.086	0.038	0.003	0.067	0.074	0.60	0.47	0.61
		Back	0.365	0.080	0.012	0.004	0.101	0.085	0.46	0.37	0.55
	LTE Band 38	Front	0.135	0.086	0.038	0.003	0.067	0.074	0.26	0.14	0.28
		Back	0.091	0.080	0.012	0.004	0.101	0.085	0.18	0.10	0.28
	LTE Band 41	Front	0.166	0.086	0.038	0.003	0.067	0.074	0.29	0.17	0.31
		Back	0.114	0.080	0.012	0.004	0.101	0.085	0.21	0.12	0.30

Test Engineer : Thomas Wang, Steven Chang, Tommy Chen, Kurt Liu, Iran Wang, Galen Zhang,
, Tom Jiang, Angelo Chang, and Jerry Hu

16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Mar 2015.
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [9] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [10] FCC KDB 941225 D05A v01r01, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Aug 2014
- [11] FCC KDB 941225 D06 v02, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2014.
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.