



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2063-3
FCC ID : IHDT56YU2
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jan. 08, 2020 and testing was completed on Mar. 14, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Specification of Accessory.....	8
1.6 Modification of EUT	9
1.7 Testing Location	9
1.8 Test Software.....	9
1.9 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 26dB & 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement	21
3.5 AC Conducted Emission Measurement.....	26
3.6 Automatically Discontinue Transmission	28
3.7 Antenna Requirements	29
4 LIST OF MEASURING EQUIPMENT	30
5 UNCERTAINTY OF EVALUATION	31
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR010812E	Rev. 01	Initial issue of report	Mar. 20, 2020
FR010812E	Rev. 02		Apr. 10, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.18 dB at 5468.40 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.80 dB at 0.179 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2063-3
FCC ID	IHDT56YU2
EUT supports Radios application	GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/FM Receiver
IMEI Code	Conducted: N/A Conduction: 353585110016691/353585110016709 Radiation: 353585110016691/353585110016709
HW Version	DVT2
SW Version	QPD30.65
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<MIMO Ant. 1+2> <5180 MHz ~ 5240 MHz> 802.11a : 20.71 dBm / 0.1178 W 802.11n HT20 : 19.55 dBm / 0.0902 W 802.11n HT40 : 19.68 dBm / 0.0929 W 802.11ac VHT20 : 19.51 dBm / 0.0893 W 802.11ac VHT40 : 19.72 dBm / 0.0938 W 802.11ac VHT80 : 12.47 dBm / 0.0177 W <5260 MHz ~ 5320 MHz> 802.11a : 19.95 dBm / 0.0989 W 802.11n HT20 : 18.75 dBm / 0.0750 W 802.11n HT40 : 19.10 dBm / 0.0813 W 802.11ac VHT20 : 18.75 dBm / 0.0750 W 802.11ac VHT40 : 19.18 dBm / 0.0828 W 802.11ac VHT80 : 14.01 dBm / 0.0252 W <5500 MHz ~ 5700 MHz > 802.11a : 20.42 dBm / 0.1102 W 802.11n HT20 : 19.25 dBm / 0.0841 W 802.11n HT40 : 20.18 dBm / 0.1042 W 802.11ac VHT20 : 19.29 dBm / 0.0849 W 802.11ac VHT40 : 20.11 dBm / 0.1026 W 802.11ac VHT80 : 17.86 dBm / 0.0611 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 18.78 MHz 802.11n HT20 : 18.78 MHz 802.11ac VHT40 : 36.56 MHz 802.11ac VHT80 : 75.76 MHz <5260 MHz ~ 5320 MHz> 802.11a : 18.63 MHz 802.11n HT20 : 18.68 MHz 802.11ac VHT40 : 36.46 MHz 802.11ac VHT80 : 75.76 MHz <5500 MHz ~ 5700 MHz > 802.11a : 18.73 MHz 802.11n HT20 : 18.73 MHz 802.11ac VHT40 : 36.56 MHz 802.11ac VHT80 : 75.76 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> <Ant. 1> : Loop Antenna with gain -2.0 dBi <Ant. 2> : IFA Antenna with gain -3.0 dBi <5260 MHz ~ 5320 MHz> <Ant. 1> : Loop Antenna with gain -2.0 dBi <Ant. 2> : IFA Antenna with gain -2.5 dBi <5500 MHz ~ 5720 MHz> <Ant. 1> : Loop Antenna with gain -2.5 dBi <Ant. 2> : IFA Antenna with gain -2.5 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



	802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Function Description		Ant. 1	Ant. 2
	802.11 a/n/ac MIMO	V	V

Note:

1. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing is assessed only their higher conducted power.
2. EUT only supports MIMO mode.



1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	SC-53UK
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	SC-55AU
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 1(AR)	Brand Name	Motorola (Chenyang)	Model Name	SC-56
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name	SC-51
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 2(AR)	Brand Name	Motorola (Acbel)	Model Name	SC-56
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 3(Chile)	Brand Name	Motorola (Salom)	Model Name	SC-52
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 3(BR)	Brand Name	Motorola (Salom)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 3 (BR Local Build)	Brand Name	Motorola (Flex/Salom)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter 4(IN)	Brand Name	Motorola (Salom)	Model Name	SC-54
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
AC Adapter5 (BR Local Build)	Brand Name	Motorola (Cliptech/Tenpao)	Model Name	SC-57
	Power Rating	I/P: 100-240 Vac, 600mA O/P: 5/9/12Vdc, 3000/2000/1500mA		
Battery	Brand Name	Motorola(ATL)	Model Name	LR50
	Power Rating	3.87Vdc,4235/4500mAh	Type	Li-ion Polymer
Earphone 1	Brand Name	Motorola (Lianyun)	Model Name	SH38C37773
	Signal Line Type	1.1 meter, shielded cable, without ferrite core		
Earphone 2	Brand Name	Motorola (Cosonic)	Model Name	SH38C44959
	Signal Line Type	1.1 meter, shielded cable, without ferrite core		
USB Cable 1	Brand Name	Motorola (Sai bao)	Model Name	SC18C24367
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 2	Brand Name	Motorola (Luxshare)	Model Name	SC18C24368
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		
USB Cable 3	Brand Name	Motorola (I SHENG)	Model Name	SC18C28955
	Signal Line Type	1.0 meter, shielded cable, without ferrite core		



1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable 2(Charging from Adapter 5) + Earphone 1
Remark: For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable.	



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-

2.3 Connection Diagram of Test System

For Radiation

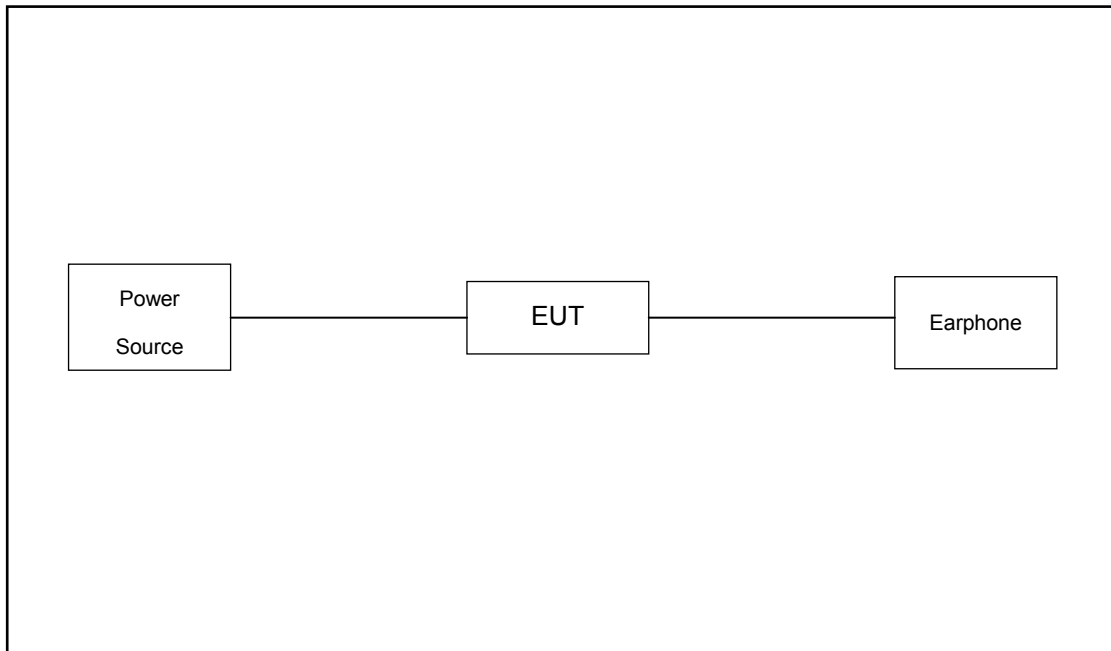

For Conduction

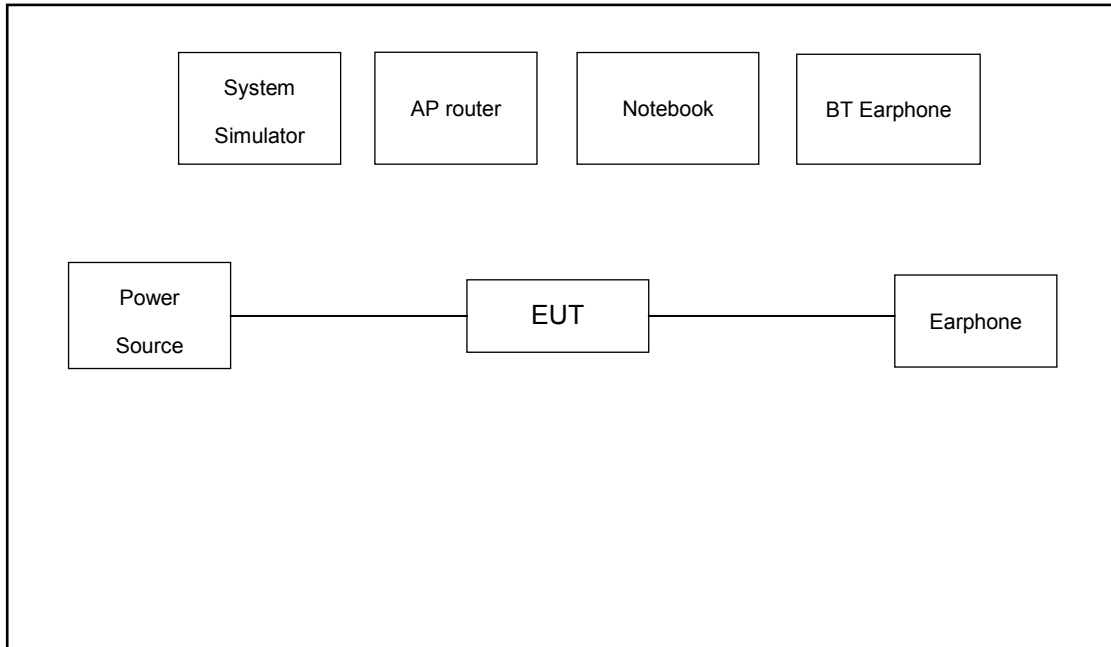

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.2 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\
 &= 7.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

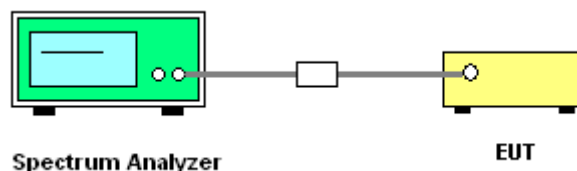

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

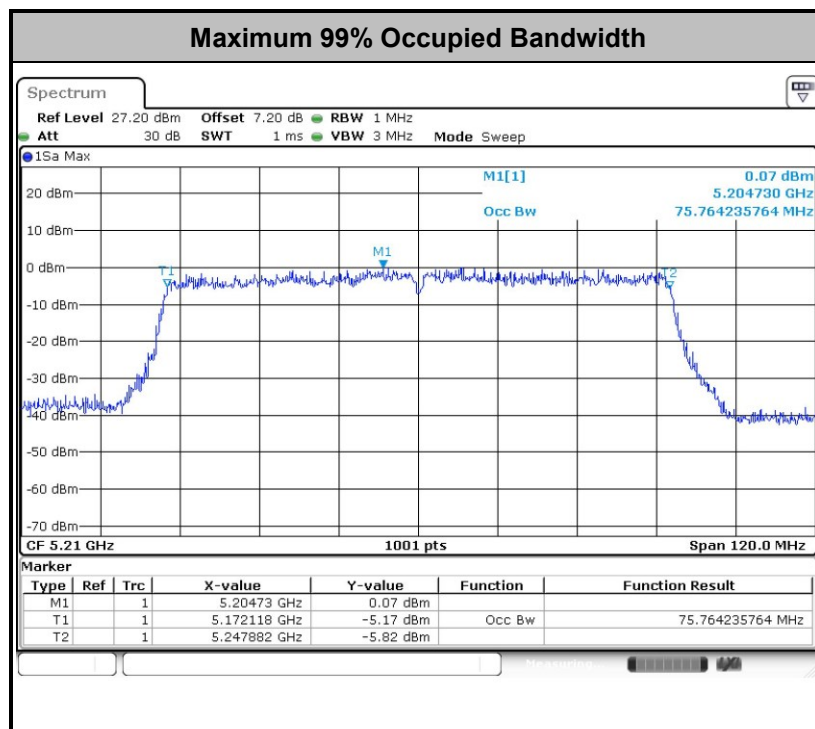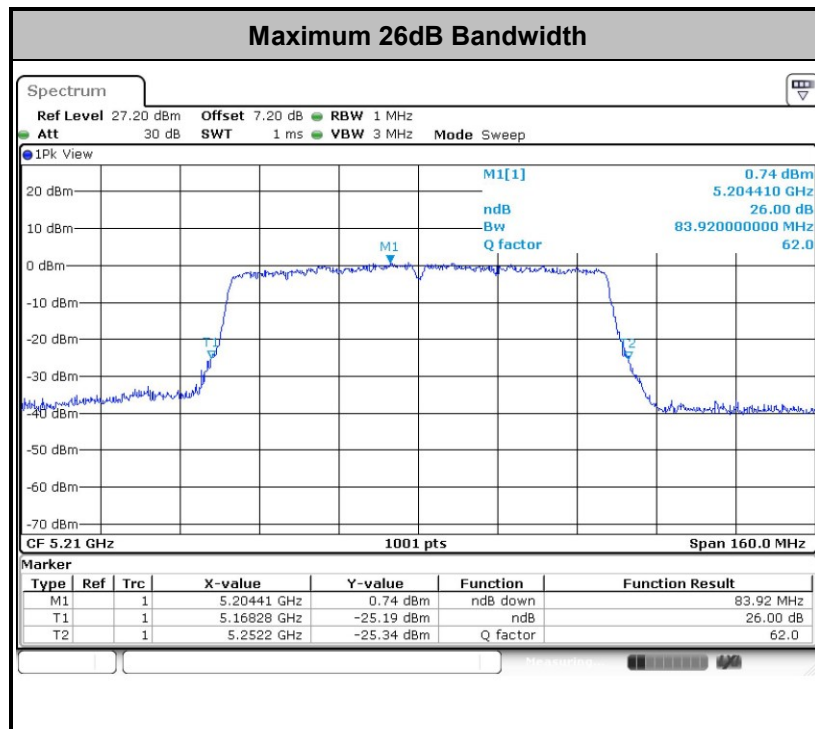

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


<CDD Modes>

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

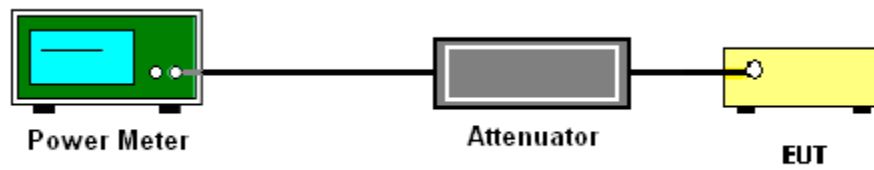

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

<CDD Modes>

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.


The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

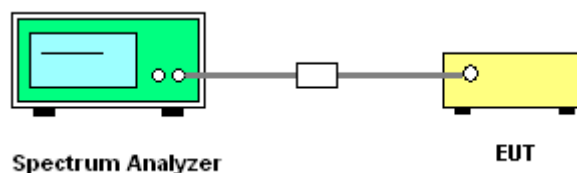

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

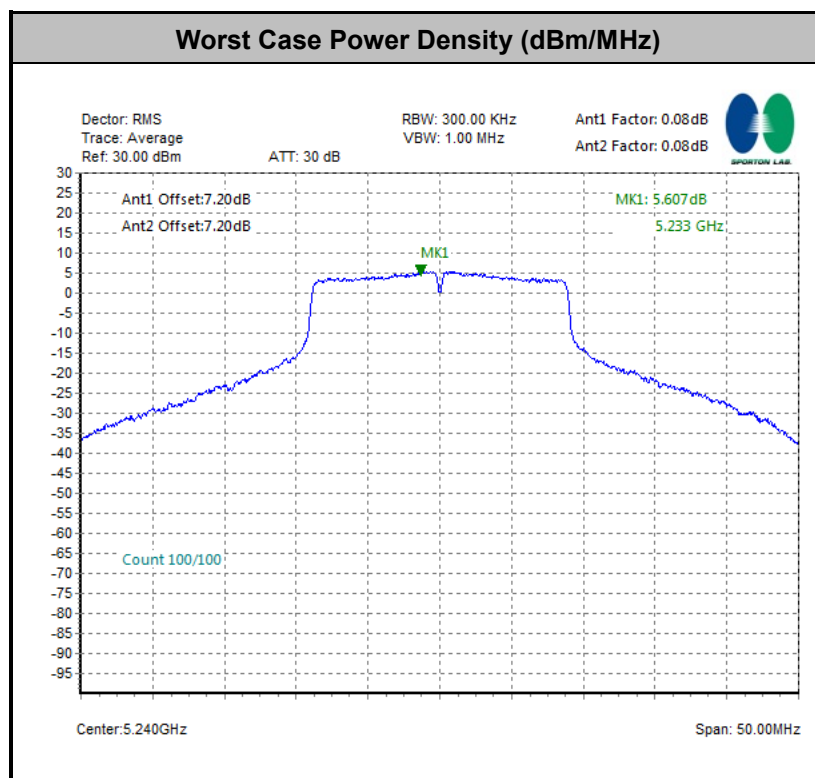

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.77$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW ≥ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal

polarization and vertical polarization of the antenna.

5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


3.4.4 Test Setup

For radiated emissions below 30MHz

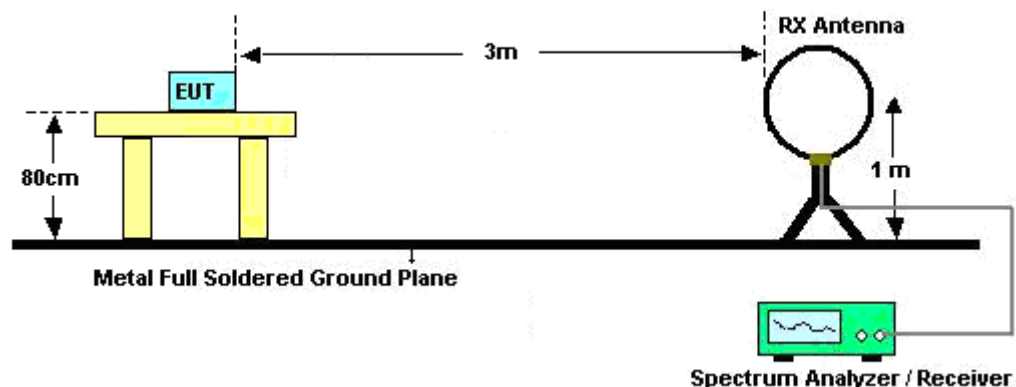


For radiated emissions from 30MHz to 1GHz

<CDD Mode>

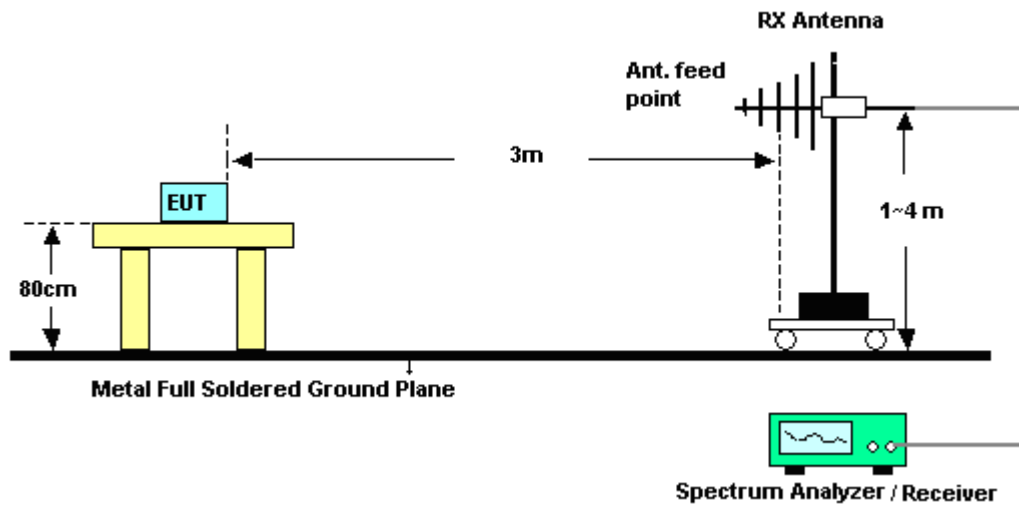

For radiated emissions above 1GHz

<CDD Mode>

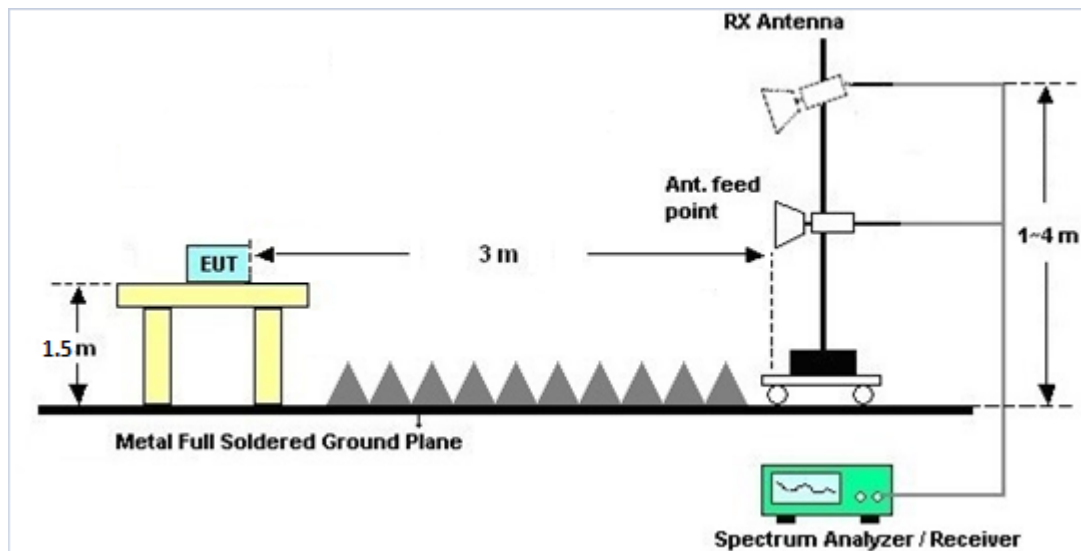



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

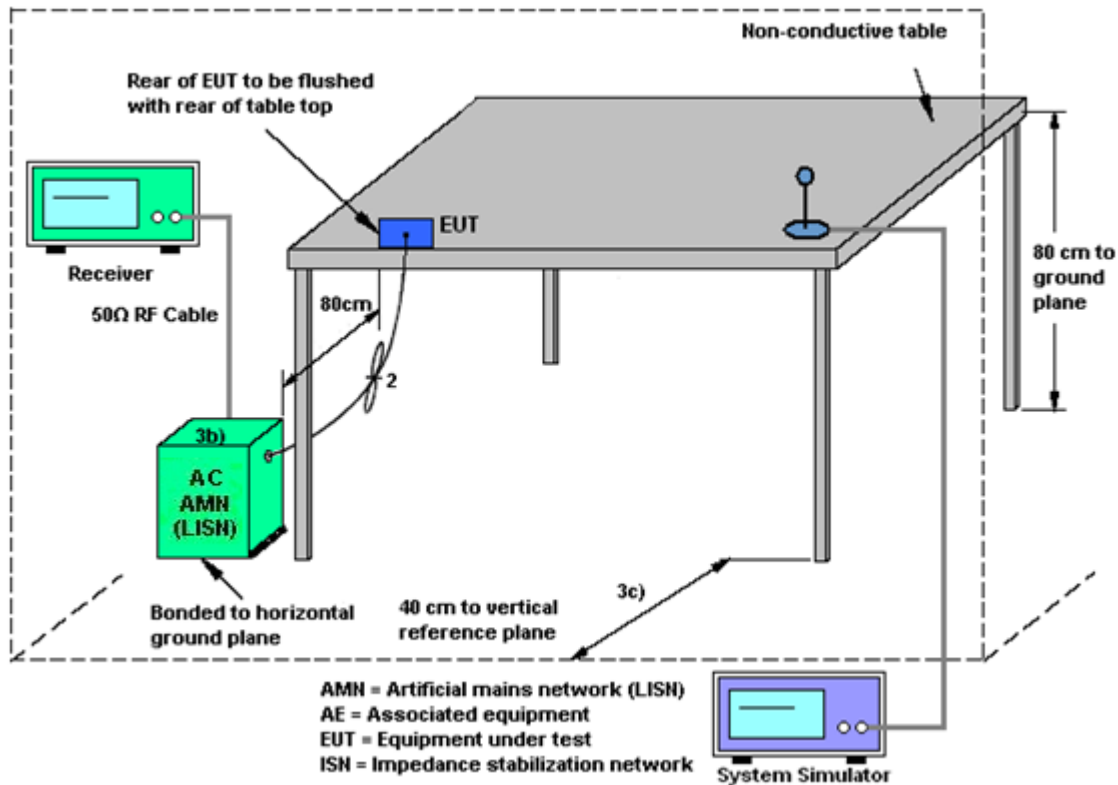

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
Band I	-2.00	-3.00	-2.00	-2.00	0.00	0.00
Band II	-2.00	-2.50	-2.00	-2.00	0.00	0.00
Band III	-2.50	-2.50	-2.50	-2.50	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Mar. 14, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 08, 2020	Mar. 14, 2020	Jan. 07, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Mar. 14, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 18, 2019	Mar. 09, 2020	Jul. 17, 2020	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G, MAX 30dB	Apr. 16, 2019	Mar. 09, 2020	Apr. 15, 2020	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Mar. 09, 2020	Nov. 09, 2020	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 30, 2019	Mar. 09, 2020	May 29, 2020	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Apr. 27, 2019	Mar. 09, 2020	Apr. 26, 2020	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Mar. 23, 2019	Mar. 09, 2020	Mar. 22, 2020	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Aug. 06, 2019	Mar. 09, 2020	Aug. 05, 2020	Radiation (03CH05-KS)
Amplifier	MITEQ	TTA1840-35-HG	2014749	18~40GHz	Aug. 14, 2019	Mar. 09, 2020	Aug. 13, 2020	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz~18Ghz	Aug. 17, 2019	Mar. 09, 2020	Aug. 16, 2020	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 18, 2019	Mar. 09, 2020	Oct. 17, 2020	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 09, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 09, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 09, 2020	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2019	Mar. 07, 2020	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Mar. 07, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Mar. 07, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Mar. 07, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.9dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------



Appendix A. Conducted Test Results

Test Engineer:	Aly Cao	Temperature:	21~25	°C
Test Date:	2020/3/14	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	2	36	5180	18.63	18.58	24.68	24.48
11a	6Mbps	2	44	5220	18.78	18.58	25.82	24.13
11a	6Mbps	2	48	5240	18.63	18.68	25.13	25.03
HT20	MCS0	2	36	5180	18.78	18.58	24.83	24.08
HT20	MCS0	2	44	5220	18.73	18.58	24.88	24.83
HT20	MCS0	2	48	5240	18.68	18.68	25.18	24.63
VHT40	MCS0	2	38	5190	36.56	36.36	41.90	41.63
VHT40	MCS0	2	46	5230	36.46	36.56	41.72	41.54
VHT80	MCS0	2	42	5210	75.76	75.52	83.92	82.64

TEST RESULTS DATA
Average Power Table

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.08	0.08	16.70	15.64	19.21	24.00		-2.00	Pass	
11a	6Mbps	2	44	5220	0.08	0.08	17.76	16.36	20.13	24.00		-2.00	Pass	
11a	6Mbps	2	48	5240	0.08	0.08	17.89	17.51	20.71	24.00		-2.00	Pass	
HT20	MCS0	2	36	5180	0.08	0.08	15.51	14.66	18.12	24.00		-2.00	Pass	
HT20	MCS0	2	44	5220	0.08	0.08	16.67	15.21	19.01	24.00		-2.00	Pass	
HT20	MCS0	2	48	5240	0.08	0.08	16.70	16.37	19.55	24.00		-2.00	Pass	
HT40	MCS0	2	38	5190	0.16	0.18	11.23	11.44	14.35	24.00		-2.00	Pass	
HT40	MCS0	2	46	5230	0.16	0.18	17.00	16.30	19.68	24.00		-2.00	Pass	
VHT20	MCS0	2	36	5180	0.08	0.09	15.50	14.60	18.08	24.00		-2.00	Pass	
VHT20	MCS0	2	44	5220	0.08	0.09	16.66	15.31	19.05	24.00		-2.00	Pass	
VHT20	MCS0	2	48	5240	0.08	0.09	16.75	16.23	19.51	24.00		-2.00	Pass	
VHT40	MCS0	2	38	5190	0.16	0.18	11.30	11.51	14.42	24.00		-2.00	Pass	
VHT40	MCS0	2	46	5230	0.16	0.18	17.03	16.37	19.72	24.00		-2.00	Pass	
VHT80	MCS0	2	42	5210	0.29	0.30	9.51	9.41	12.47	24.00		-2.00	Pass	

TEST RESULTS DATA
Power Spectral Density

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	0.08	0.08			3.87	11.00		-2.00	Pass	
11a	6Mbps	2	44	5220	0.08	0.08			5.12	11.00		-2.00	Pass	
11a	6Mbps	2	48	5240	0.08	0.08			5.61	11.00		-2.00	Pass	
HT20	MCS0	2	36	5180	0.08	0.08			2.55	11.00		-2.00	Pass	
HT20	MCS0	2	44	5220	0.08	0.08			3.60	11.00		-2.00	Pass	
HT20	MCS0	2	48	5240	0.08	0.08			4.04	11.00		-2.00	Pass	
VHT40	MCS0	2	38	5190	0.16	0.18			-4.87	11.00		-2.00	Pass	
VHT40	MCS0	2	46	5230	0.16	0.18			0.80	11.00		-2.00	Pass	
VHT80	MCS0	2	42	5210	0.29	0.30		-9.57	11.00		-2.00	Pass		

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		FCC 26dB Bandwidth Power Limit (dBm)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	2	52	5260	18.63	18.63	25.28	24.38	23.98	
11a	6Mbps	2	60	5300	18.58	18.63	24.88	24.73	23.98	
11a	6Mbps	2	64	5320	18.63	18.58	25.43	24.28	23.98	
HT20	MCS0	2	52	5260	18.58	18.68	25.08	24.43	23.98	
HT20	MCS0	2	60	5300	18.63	18.68	24.53	25.03	23.98	
HT20	MCS0	2	64	5320	18.58	18.68	25.08	24.78	23.98	
VHT40	MCS0	2	54	5270	36.46	36.26	41.80	41.80	23.98	
VHT40	MCS0	2	62	5310	36.46	36.36	41.99	41.72	23.98	
VHT80	MCS0	2	58	5290	75.76	75.52	83.28	82.32	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II															
Mod.	Data Rate	NtX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	52	5260	0.08	0.08	17.04	16.83	19.95	23.98		-2.00		26.99	Pass
11a	6Mbps	2	60	5300	0.08	0.08	16.57	15.97	19.29	23.98		-2.00		26.99	Pass
11a	6Mbps	2	64	5320	0.08	0.08	16.70	15.36	19.09	23.98		-2.00		26.99	Pass
HT20	MCS0	2	52	5260	0.08	0.08	15.84	15.64	18.75	23.98		-2.00		26.99	Pass
HT20	MCS0	2	60	5300	0.08	0.08	15.21	14.74	17.99	23.98		-2.00		26.99	Pass
HT20	MCS0	2	64	5320	0.08	0.08	15.56	14.41	18.03	23.98		-2.00		26.99	Pass
HT40	MCS0	2	54	5270	0.16	0.18	16.08	16.10	19.10	23.98		-2.00		26.99	Pass
HT40	MCS0	2	62	5310	0.16	0.18	12.85	14.27	16.63	23.98		-2.00		26.99	Pass
VHT20	MCS0	2	52	5260	0.08	0.09	15.83	15.65	18.75	23.98		-2.00		26.99	Pass
VHT20	MCS0	2	60	5300	0.08	0.09	15.30	14.87	18.10	23.98		-2.00		26.99	Pass
VHT20	MCS0	2	64	5320	0.08	0.09	15.50	14.43	18.01	23.98		-2.00		26.99	Pass
VHT40	MCS0	2	54	5270	0.16	0.18	16.18	16.15	19.18	23.98		-2.00		26.99	Pass
VHT40	MCS0	2	62	5310	0.16	0.18	12.85	14.24	16.61	23.98		-2.00		26.99	Pass
VHT80	MCS0	2	58	5290	0.29	0.30	10.25	11.64	14.01	23.98		-2.00		26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band II														
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	0.08	0.08			5.03	11.00		-2.00	Pass	
11a	6Mbps	2	60	5300	0.08	0.08			3.89	11.00		-2.00	Pass	
11a	6Mbps	2	64	5320	0.08	0.08			3.66	11.00		-2.00	Pass	
HT20	MCS0	2	52	5260	0.08	0.08			3.39	11.00		-2.00	Pass	
HT20	MCS0	2	60	5300	0.08	0.08			2.49	11.00		-2.00	Pass	
HT20	MCS0	2	64	5320	0.08	0.08			2.51	11.00		-2.00	Pass	
VHT40	MCS0	2	54	5270	0.16	0.18			0.45	11.00		-2.00	Pass	
VHT40	MCS0	2	62	5310	0.16	0.18			-2.27	11.00		-2.00	Pass	
VHT80	MCS0	2	58	5290	0.29	0.30			-8.00	11.00		-2.00	Pass	

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		FCC 26dB Bandwidth Power Limit (dBm)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	2	100	5500	18.73	18.58	25.43	24.33	23.98	
11a	6Mbps	2	116	5580	18.73	18.58	25.03	24.43	23.98	
11a	6Mbps	2	140	5700	18.58	18.63	25.23	25.08	23.98	
VHT20	MCS0	2	100	5500	18.73	18.58	25.72	24.13	23.98	
VHT20	MCS0	2	116	5580	18.73	18.63	25.43	24.38	23.98	
VHT20	MCS0	2	140	5700	18.63	18.68	24.18	24.58	23.98	
HT40	MCS0	2	102	5510	36.56	36.36	41.81	41.72	23.98	
HT40	MCS0	2	110	5550	36.46	36.46	41.54	41.81	23.98	
HT40	MCS0	2	134	5670	36.56	36.36	42.17	41.81	23.98	
VHT80	MCS0	2	106	5530	75.52	75.64	83.60	82.80	23.98	
VHT80	MCS0	2	122	5610	75.76	75.64	83.28	83.12	23.98	

TEST RESULTS DATA
Average Power Table


FCC Band III															
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	5500	0.08	0.08	18.00	16.56	20.35	23.98		-2.50		26.99	Pass
11a	6Mbps	2	116	5580	0.08	0.08	17.77	17.02	20.42	23.98		-2.50		26.99	Pass
11a	6Mbps	2	140	5700	0.08	0.08	16.06	16.67	19.39	23.98		-2.50		26.99	Pass
HT20	MCS0	2	100	5500	0.08	0.08	16.83	15.54	19.24	23.98		-2.50		26.99	Pass
HT20	MCS0	2	116	5580	0.08	0.08	16.60	15.85	19.25	23.98		-2.50		26.99	Pass
HT20	MCS0	2	140	5700	0.08	0.08	15.14	15.63	18.40	23.98		-2.50		26.99	Pass
HT40	MCS0	2	102	5510	0.16	0.18	14.37	14.29	17.34	23.98		-2.50		26.99	Pass
HT40	MCS0	2	110	5550	0.16	0.18	17.89	16.29	20.18	23.98		-2.50		26.99	Pass
HT40	MCS0	2	134	5670	0.16	0.18	15.38	16.20	18.82	23.98		-2.50		26.99	Pass
VHT20	MCS0	2	100	5500	0.08	0.09	16.85	15.62	19.29	23.98		-2.50		26.99	Pass
VHT20	MCS0	2	116	5580	0.08	0.09	16.47	15.84	19.18	23.98		-2.50		26.99	Pass
VHT20	MCS0	2	140	5700	0.08	0.09	15.00	15.68	18.36	23.98		-2.50		26.99	Pass
VHT40	MCS0	2	102	5510	0.16	0.18	14.28	14.31	17.31	23.98		-2.50		26.99	Pass
VHT40	MCS0	2	110	5550	0.16	0.18	17.77	16.31	20.11	23.98		-2.50		26.99	Pass
VHT40	MCS0	2	134	5670	0.16	0.18	15.24	16.10	18.70	23.98		-2.50		26.99	Pass
VHT80	MCS0	2	106	5530	0.29	0.30	12.30	11.71	15.02	23.98		-2.50		26.99	Pass
VHT80	MCS0	2	122	5610	0.29	0.30	14.67	15.02	17.86	23.98		-2.50		26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band III														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	0.08	0.08			4.47	11.00		-2.50	Pass	
11a	6Mbps	2	116	5580	0.08	0.08			4.49	11.00		-2.50	Pass	
11a	6Mbps	2	140	5700	0.08	0.08			3.13	11.00		-2.50	Pass	
VHT20	MCS0	2	100	5500	0.08	0.08			3.44	11.00		-2.50	Pass	
VHT20	MCS0	2	116	5580	0.08	0.08			3.05	11.00		-2.50	Pass	
VHT20	MCS0	2	140	5700	0.08	0.08			2.43	11.00		-2.50	Pass	
HT40	MCS0	2	102	5510	0.16	0.18			-1.78	11.00		-2.50	Pass	
HT40	MCS0	2	110	5550	0.16	0.18			1.40	11.00		-2.50	Pass	
HT40	MCS0	2	134	5670	0.16	0.18			-0.84	11.00		-2.50	Pass	
VHT80	MCS0	2	106	5530	0.29	0.30			-7.25	11.00		-2.50	Pass	
VHT80	MCS0	2	122	5610	0.29	0.30			-3.94	11.00		-2.50	Pass	




Appendix B. AC Conducted Emission Test Results

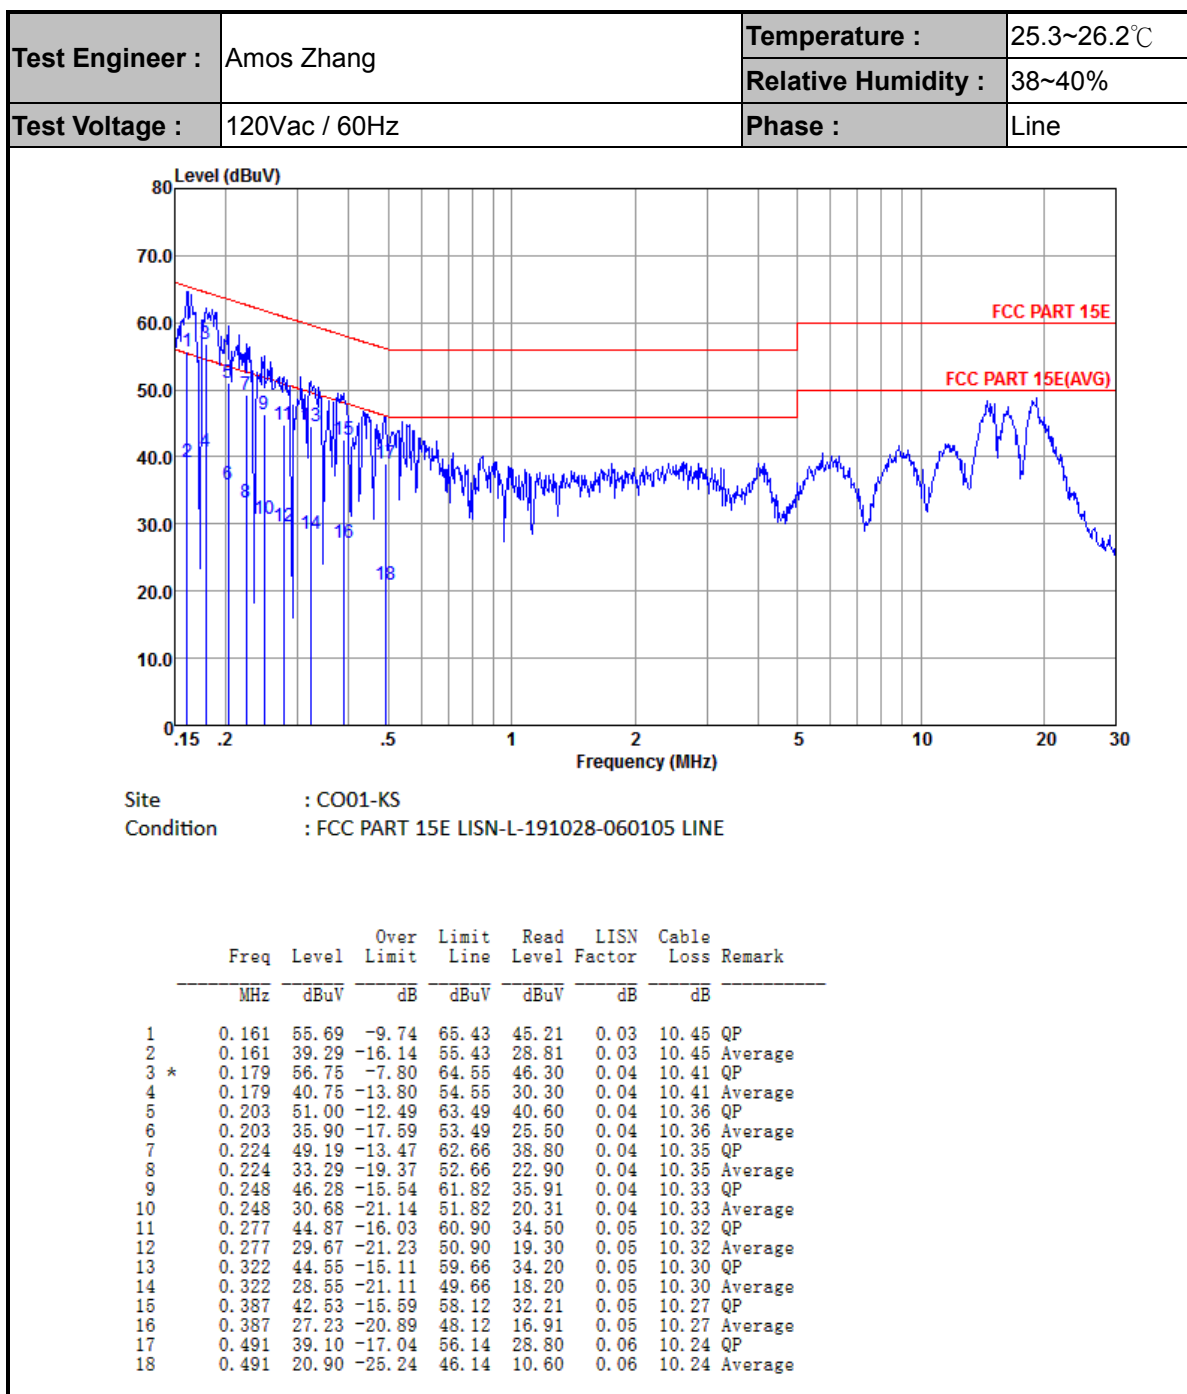



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

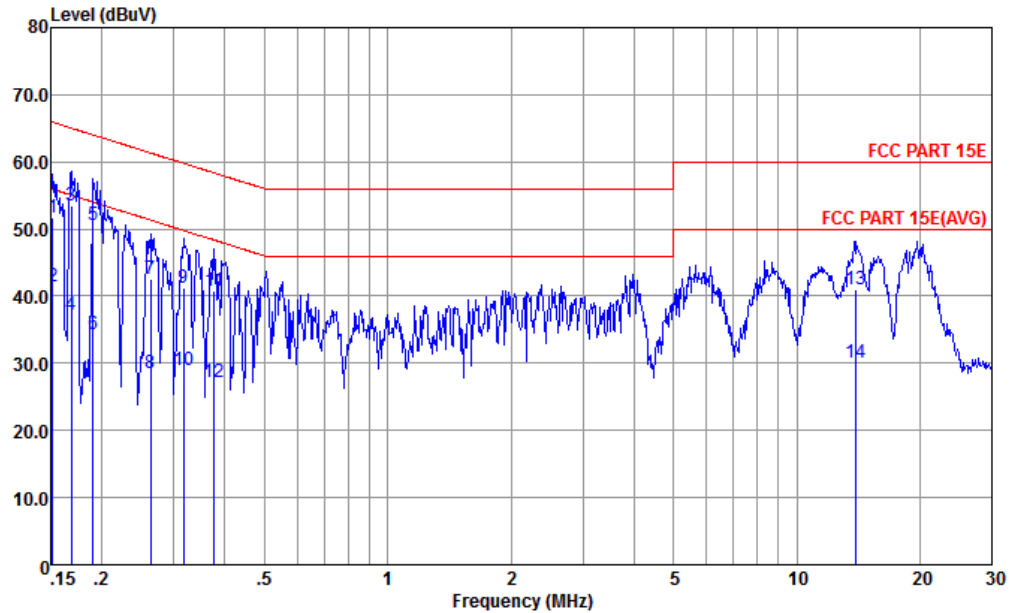

Site : CO01-KS
Condition : FCC PART 15E LISN-N-191028-060105 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	51.66	-14.25	65.91	41.10	0.08	10.48	QP
2	0.152	41.46	-14.45	55.91	30.90	0.08	10.48	Average
3 *	0.169	53.41	-11.62	65.03	42.90	0.08	10.43	QP
4	0.169	37.11	-17.92	55.03	26.60	0.08	10.43	Average
5	0.190	50.66	-13.36	64.02	40.20	0.08	10.38	QP
6	0.190	34.36	-19.66	54.02	23.90	0.08	10.38	Average
7	0.263	42.51	-18.83	61.34	32.09	0.09	10.33	QP
8	0.263	28.61	-22.73	51.34	18.19	0.09	10.33	Average
9	0.317	41.29	-18.51	59.80	30.90	0.09	10.30	QP
10	0.317	28.99	-20.81	49.80	18.60	0.09	10.30	Average
11	0.377	40.67	-17.67	58.34	30.30	0.09	10.28	QP
12	0.377	27.27	-21.07	48.34	16.90	0.09	10.28	Average
13	13.989	40.94	-19.06	60.00	30.19	0.36	10.39	QP
14	13.989	30.04	-19.96	50.00	19.29	0.36	10.39	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.98	57.41	-16.59	74	44.16	34.07	10.43	31.25	191	1	P	H
		5149.98	46.91	-7.09	54	33.66	34.07	10.43	31.25	191	1	A	H
	*	5182	106.26	-	-	92.92	34.12	10.48	31.26	191	1	P	H
		5182	99.87	-	-	86.53	34.12	10.48	31.26	191	1	A	H
		5149.12	58.59	-15.41	74	45.34	34.07	10.43	31.25	400	19	P	V
		5149.6	48.33	-5.67	54	35.08	34.07	10.43	31.25	400	19	A	V
		5176	108.96	-	-	95.62	34.12	10.48	31.26	400	19	P	V
		5176	101.66	-	-	88.32	34.12	10.48	31.26	400	19	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	39.68	-28.62	68.3	52.16	37.02	15.27	64.77	100	360	P	H
		10360	39.75	-28.55	68.3	52.23	37.02	15.27	64.77	100	360	P	V
802.11a CH 44 5220MHz		10440	40.13	-28.17	68.3	52.52	37.06	15.32	64.77	100	360	P	H
		10440	41.21	-27.09	68.3	53.6	37.06	15.32	64.77	100	360	P	V
802.11a CH 48 5240MHz		10480	40.8	-27.5	68.3	53.12	37.09	15.36	64.77	100	360	P	H
		10480	41.03	-27.27	68.3	53.35	37.09	15.36	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5148.96	55.72	-18.28	74	42.47	34.07	10.43	31.25	173	13	P	H
		5149.98	45.52	-8.48	54	32.27	34.07	10.43	31.25	173	13	A	H
	*	5176	104.87	-	-	91.53	34.12	10.48	31.26	173	13	P	H
		5176	97.41	-	-	84.07	34.12	10.48	31.26	173	13	A	H
		5148.16	57.3	-16.7	74	44.05	34.07	10.43	31.25	270	3	P	V
		5147.36	46.74	-7.26	54	33.49	34.07	10.43	31.25	270	3	A	V
		5182	108.76	-	-	95.42	34.12	10.48	31.26	270	3	P	V
		5182	101.12	-	-	87.78	34.12	10.48	31.26	270	3	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	41.05	-27.25	68.3	53.53	37.02	15.27	64.77	100	360	P	H
		10360	40.63	-27.67	68.3	53.11	37.02	15.27	64.77	100	360	P	V
802.11n HT20 CH 44 5220MHz		10440	40.36	-27.94	68.3	52.75	37.06	15.32	64.77	100	360	P	H
		10440	40.74	-27.56	68.3	53.13	37.06	15.32	64.77	100	360	P	V
802.11n HT20 CH 48 5240MHz		10480	40.95	-27.35	68.3	53.27	37.09	15.36	64.77	100	360	P	H
		10480	40.41	-27.89	68.3	52.73	37.09	15.36	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 38 5190MHz		5149.44	58.81	-15.19	74	45.56	34.07	10.43	31.25	106	52	P	H
		5150	47.7	-6.3	54	34.45	34.07	10.43	31.25	106	52	A	H
	*	5188	98.15	-	-	84.81	34.12	10.48	31.26	106	52	P	H
		5188	91.06	-	-	77.72	34.12	10.48	31.26	106	52	A	H
		5389.56	54.33	-19.67	74	40.48	34.38	10.75	31.28	106	52	P	H
		5376.24	44.25	-9.75	54	30.45	34.35	10.73	31.28	106	52	A	H
		5142.24	59.13	-14.87	74	45.88	34.07	10.43	31.25	151	344	P	V
		5149.76	50.32	-3.68	54	37.07	34.07	10.43	31.25	266	0	P	V
	*	5182	101.75	-	-	88.41	34.12	10.48	31.26	151	344	P	V
		5182	94.13	-	-	80.79	34.12	10.48	31.26	151	344	A	V
		5359.14	53.51	-20.49	74	39.75	34.33	10.71	31.28	151	344	P	V
		5359.68	44.19	-9.81	54	30.43	34.33	10.71	31.28	151	344	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40		10380	41.04	-27.26	68.3	53.5	37.03	15.28	64.77	100	360	P	H
CH 38 5190MHz		10380	40.46	-27.84	68.3	52.92	37.03	15.28	64.77	100	360	P	V
802.11ac VHT40		10460	40.92	-27.38	68.3	53.29	37.07	15.33	64.77	100	360	P	H
CH 46 5230MHz		10460	41.07	-27.23	68.3	53.44	37.07	15.33	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5143.04	56.71	-17.29	74	43.46	34.07	10.43	31.25	169	1	P	H
		5144.32	48.17	-5.83	54	34.92	34.07	10.43	31.25	169	1	A	H
	*	5224	94.13	-	-	80.7	34.16	10.53	31.26	169	1	P	H
		5224	87.24	-	-	73.81	34.16	10.53	31.26	169	1	A	H
		5369.58	53.85	-20.15	74	40.05	34.35	10.73	31.28	169	1	P	H
		5365.8	44.64	-9.36	54	30.84	34.35	10.73	31.28	169	1	A	H
		5131.04	59.55	-14.45	74	46.35	34.05	10.4	31.25	229	360	P	V
		5150	49.53	-4.47	54	36.28	34.07	10.43	31.25	229	360	A	V
	*	5218	99.32	-	-	85.89	34.16	10.53	31.26	229	360	P	V
		5218	91.78	-	-	78.35	34.16	10.53	31.26	229	360	A	V
		5372.28	54.69	-19.31	74	40.89	34.35	10.73	31.28	229	360	P	V
		5365.8	44.62	-9.38	54	30.82	34.35	10.73	31.28	229	360	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 1 5150~5250MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10420	40.26	-28.04	68.3	52.67	37.05	15.31	64.77	100	360	P	H
CH 42 5210MHz		10420	40.18	-28.12	68.3	52.59	37.05	15.31	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz		5380.3	53.41	-20.59	74	39.56	34.38	10.75	31.28	105	26	P	H
		5352.3	43.44	-10.56	54	29.68	34.33	10.71	31.28	105	26	A	H
	*	5320	102.01	-	-	88.33	34.29	10.66	31.27	105	26	P	H
		5320	94.46	-	-	80.78	34.29	10.66	31.27	105	26	A	H
		5354.5	55.03	-18.97	74	41.27	34.33	10.71	31.28	247	1	P	V
		5350	45.26	-8.74	54	31.5	34.33	10.71	31.28	247	1	A	V
		5320	109.22	-	-	95.54	34.29	10.66	31.27	247	1	P	V
		5320	102.12	-	-	88.44	34.29	10.66	31.27	247	1	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	41.89	-26.41	68.3	54.16	37.11	15.39	64.77	100	360	P	H
		10520	41.49	-26.81	68.3	53.76	37.11	15.39	64.77	100	360	P	V
802.11a CH 60 5300MHz		10600.02	40.48	-33.52	74	52.64	37.16	15.45	64.77	100	360	P	H
		10600.02	41.76	-32.24	74	53.92	37.16	15.45	64.77	100	360	P	V
802.11a CH 64 5320MHz		10640	41.98	-32.02	74	54.09	37.18	15.48	64.77	100	360	P	H
		10640	42.2	-31.8	74	54.31	37.18	15.48	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz		5362.8	53.49	-20.51	74	39.69	34.35	10.73	31.28	179	67	P	H
		5350	43.66	-10.34	54	29.9	34.33	10.71	31.28	179	67	A	H
	*	5326	102.56	-	-	88.88	34.29	10.66	31.27	179	67	P	H
		5326	95.24	-	-	81.56	34.29	10.66	31.27	179	67	A	H
		5352.9	55.42	-18.58	74	41.66	34.33	10.71	31.28	236	349	P	V
		5351.1	45.83	-8.17	54	32.07	34.33	10.71	31.28	236	349	A	V
	*	5320	108.09	-	-	94.41	34.29	10.66	31.27	236	349	P	V
		5320	101.27	-	-	87.59	34.29	10.66	31.27	236	349	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	41.98	-26.32	68.3	54.25	37.11	15.39	64.77	100	360	P	H
		10520	41.66	-26.64	68.3	53.93	37.11	15.39	64.77	100	360	P	V
802.11n HT20 CH 60 5300MHz		10600.02	41.65	-32.35	74	53.81	37.16	15.45	64.77	100	360	P	H
		10600.02	40.97	-33.03	74	53.13	37.16	15.45	64.77	100	360	P	V
802.11n HT20 CH 64 5320MHz		10640	41.4	-32.6	74	53.51	37.18	15.48	64.77	100	360	P	H
		10640	41.52	-32.48	74	53.63	37.18	15.48	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 62 5310MHz		5132.48	54.97	-19.03	74	41.77	34.05	10.4	31.25	148	1	P	H
		5146.08	45.72	-8.28	54	32.47	34.07	10.43	31.25	148	1	A	H
	*	5314	101.25	-	-	87.57	34.29	10.66	31.27	148	1	P	H
		5314	93.8	-	-	80.12	34.29	10.66	31.27	148	1	A	H
		5352.6	60.23	-13.77	74	46.47	34.33	10.71	31.28	148	1	P	H
		5350.6	48.74	-5.26	54	34.98	34.33	10.71	31.28	148	1	A	H
		5110.24	54.7	-19.3	74	41.54	34.03	10.38	31.25	255	342	P	V
		5110.56	45.76	-8.24	54	32.6	34.03	10.38	31.25	255	342	A	V
	*	5308	105.38	-	-	91.74	34.27	10.64	31.27	255	342	P	V
		5308	97.71	-	-	84.07	34.27	10.64	31.27	255	342	A	V
		5350.3	59.19	-14.81	74	45.43	34.33	10.71	31.28	255	342	P	V
		5350	50.59	-3.41	54	36.83	34.33	10.71	31.28	255	342	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40		10540	41.88	-26.42	68.3	54.13	37.12	15.4	64.77	100	360	P	H
CH 54 5270MHz		10540	41.9	-26.4	68.3	54.15	37.12	15.4	64.77	100	360	P	V
802.11ac VHT40		10620	41.09	-32.91	74	53.22	37.17	15.47	64.77	100	360	P	H
CH 62 5310MHz		10620	41.27	-32.73	74	53.4	37.17	15.47	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5146.56	55.26	-18.74	74	42.01	34.07	10.43	31.25	163	0	P	H
		5124.32	46.01	-7.99	54	32.81	34.05	10.4	31.25	163	0	A	H
	*	5284	95.69	-	-	82.09	34.25	10.62	31.27	163	0	P	H
		5284	88.75	-	-	75.15	34.25	10.62	31.27	163	0	A	H
		5363.3	56.22	-17.78	74	42.42	34.35	10.73	31.28	163	0	P	H
		5362.9	47.28	-6.72	54	33.48	34.35	10.73	31.28	163	0	A	H
		5125.28	55.07	-18.93	74	41.87	34.05	10.4	31.25	239	360	A	V
		5119.04	46.15	-7.85	54	32.99	34.03	10.38	31.25	239	360	A	V
	*	5284	100.09	-	-	86.49	34.25	10.62	31.27	239	360	P	V
		5284	92.14	-	-	78.54	34.25	10.62	31.27	239	360	A	V
		5376	57.59	-16.41	74	43.79	34.35	10.73	31.28	239	360	P	V
		5356.1	50.06	-3.94	54	36.3	34.33	10.71	31.28	239	360	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 2 5250~5350MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10580	41.03	-27.27	68.3	53.21	37.15	15.44	64.77	100	360	P	H
CH 58 5290MHz		10580	41.28	-27.02	68.3	53.46	37.15	15.44	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5458.16	55.07	-18.93	74	41.13	34.46	10.77	31.29	140	2	P	H
		5468.72	55.54	-12.76	68.3	41.58	34.48	10.77	31.29	140	2	P	H
		5458.96	44.12	-9.88	54	30.18	34.46	10.77	31.29	140	2	A	H
	*	5506	104.85	-	-	90.84	34.53	10.77	31.29	140	2	P	H
		5506	97.72	-	-	83.71	34.53	10.77	31.29	140	2	A	H
		5456.08	54.6	-19.4	74	40.66	34.46	10.77	31.29	212	0	P	V
		5466.8	55.84	-12.46	68.3	41.88	34.48	10.77	31.29	212	0	P	V
		5459.98	45.04	-8.96	54	31.1	34.46	10.77	31.29	212	0	A	V
		5500	107.8	-	-	93.79	34.53	10.77	31.29	212	0	P	V
		5500	100.67	-	-	86.66	34.53	10.77	31.29	212	0	A	V
802.11a CH 140 5700MHz		5727.08	54.41	-13.89	68.3	40.75	34.78	10.8	31.92	130	1	P	H
	*	5704	100.35	-	-	86.56	34.76	10.8	31.77	130	1	P	H
		5704	93.77	-	-	79.98	34.76	10.8	31.77	130	1	A	H
		5727.72	54.91	-13.39	68.3	41.25	34.78	10.8	31.92	221	2	P	V
	*	5698	105.12	-	-	91.35	34.75	10.79	31.77	221	2	P	V
		5698	98.63	-	-	84.86	34.75	10.79	31.77	221	2	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	40.51	-33.49	74	52.12	37.4	15.76	64.77	100	360	P	H
		11000	41.24	-32.76	74	52.85	37.4	15.76	64.77	100	360	P	V
802.11a CH 116 5580MHz		11158	40.52	-33.48	74	51.91	37.5	15.88	64.77	100	360	P	H
		11158	40.96	-33.04	74	52.35	37.5	15.88	64.77	100	360	P	V
802.11a CH 140 5700MHz		11400	41.73	-32.27	74	52.81	37.64	16.05	64.77	100	360	P	H
		11400	43.81	-30.19	74	54.89	37.64	16.05	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5457.04	57.44	-16.56	74	43.5	34.46	10.77	31.29	130	360	P	H
		5462	58.66	-9.64	68.3	44.72	34.46	10.77	31.29	130	360	P	H
		5459.92	48.22	-5.78	54	34.28	34.46	10.77	31.29	130	360	A	H
	*	5512	102.35	-	-	88.34	34.53	10.77	31.29	130	360	P	H
		5512	94.83	-	-	80.82	34.53	10.77	31.29	130	360	A	H
		5759.4	55.49	-12.81	68.3	42.1	34.81	10.81	32.23	130	360	P	H
		5459.92	55.54	-18.46	74	41.6	34.46	10.77	31.29	210	339	P	V
		5468.4	65.12	-3.18	68.3	51.16	34.48	10.77	31.29	210	339	P	V
		5460	48.18	-5.82	54	34.24	34.46	10.77	31.29	210	339	A	V
	*	5506	104.33	-	-	90.32	34.53	10.77	31.29	210	339	P	V
		5506	97.5	-	-	83.49	34.53	10.77	31.29	210	339	A	V
		5741.64	56.27	-12.03	68.3	42.74	34.79	10.81	32.07	210	339	P	V
802.11n HT40 CH 134 5670MHz		5446.8	57	-17	74	43.06	34.46	10.77	31.29	110	353	P	H
		5469.52	53.2	-15.1	68.3	39.24	34.48	10.77	31.29	110	353	P	H
		5447.6	48.67	-5.33	54	34.73	34.46	10.77	31.29	110	353	A	H
	*	5668	100.87	-	-	86.81	34.73	10.79	31.46	110	353	P	H
		5668	93.41	-	-	79.35	34.73	10.79	31.46	110	353	A	H
		5761.4	55.71	-12.59	68.3	42.32	34.81	10.81	32.23	110	353	P	H
		5446.64	55.8	-18.2	74	41.86	34.46	10.77	31.29	100	7	P	V
		5463.28	52.86	-15.44	68.3	38.9	34.48	10.77	31.29	100	7	P	V
		5447.6	48.18	-5.82	54	34.24	34.46	10.77	31.29	100	7	A	V
	*	5668	104.49	-	-	90.43	34.73	10.79	31.46	100	7	P	V
		5668	97.24	-	-	83.18	34.73	10.79	31.46	100	7	A	V
		5746.84	56.27	-12.03	68.3	42.74	34.79	10.81	32.07	100	7	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	42.11	-31.89	74	53.69	37.41	15.78	64.77	100	360	P	H
		11020	39.99	-34.01	74	51.57	37.41	15.78	64.77	100	360	P	V
802.11n HT40 CH 110 5550MHz		11100	41.04	-32.96	74	52.52	37.46	15.83	64.77	100	360	P	H
		11100	41.35	-32.65	74	52.83	37.46	15.83	64.77	100	360	P	V
802.11n HT40 CH 134 5670MHz		11340	40.35	-33.65	74	51.52	37.6	16	64.77	100	360	P	H
		11340	40.76	-33.24	74	51.93	37.6	16	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 100 5500MHz		5451.76	53.14	-20.86	74	39.2	34.46	10.77	31.29	135	5	P	H
		5467.92	54.48	-13.82	68.3	40.52	34.48	10.77	31.29	135	5	P	H
		5459.76	44.16	-9.84	54	30.22	34.46	10.77	31.29	135	5	A	H
	*	5494	104.86	-	-	90.87	34.51	10.77	31.29	135	5	P	H
		5494	97.37	-	-	83.38	34.51	10.77	31.29	135	5	A	H
		5448.56	54.24	-19.76	74	40.3	34.46	10.77	31.29	210	1	P	V
		5468.88	56.56	-11.74	68.3	42.6	34.48	10.77	31.29	210	1	P	V
		5459.98	44.91	-9.09	54	30.97	34.46	10.77	31.29	210	1	A	V
	*	5506	107.79	-	-	93.78	34.53	10.77	31.29	210	1	P	V
		5506	100.6	-	-	86.59	34.53	10.77	31.29	210	1	A	V
802.11ac VHT20 CH 140 5700MHz		5729.16	54.9	-13.4	68.3	41.24	34.78	10.8	31.92	132	0	P	H
	*	5704	100.67	-	-	86.88	34.76	10.8	31.77	132	0	P	H
		5704	93.26	-	-	79.47	34.76	10.8	31.77	132	0	A	H
		5727.8	56.33	-11.97	68.3	42.67	34.78	10.8	31.92	326	9	P	V
	*	5698	104.01	-	-	90.24	34.75	10.79	31.77	326	9	P	V
		5698	98.08	-	-	84.31	34.75	10.79	31.77	326	9	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20		11000	41.49	-32.51	74	53.1	37.4	15.76	64.77	100	360	P	H
CH 100 5500MHz		11000	41.34	-32.66	74	52.95	37.4	15.76	64.77	100	360	P	V
802.11ac VHT20		11160	40.42	-33.58	74	51.81	37.5	15.88	64.77	100	360	P	H
CH 116 5580MHz		11160	40.87	-33.13	74	52.26	37.5	15.88	64.77	100	360	P	V
802.11ac VHT20		11400	42.03	-31.97	74	53.11	37.64	16.05	64.77	100	360	P	H
CH 140 5700MHz		11400	41.96	-32.04	74	53.04	37.64	16.05	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5459.76	57.82	-16.18	74	43.88	34.46	10.77	31.29	129	2	P	H
		5460.24	58.19	-10.11	68.3	44.25	34.46	10.77	31.29	129	2	P	H
		5458.48	50.31	-3.69	54	36.37	34.46	10.77	31.29	129	2	A	H
	*	5536	97.39	-	-	83.35	34.57	10.77	31.3	129	2	P	H
		5536	90.39	-	-	76.35	34.57	10.77	31.3	129	2	A	H
		5725.16	54.43	-13.87	68.3	40.77	34.78	10.8	31.92	129	2	P	H
		5448.08	58.38	-15.62	74	44.44	34.46	10.77	31.29	242	0	P	V
		5467.92	61.11	-7.19	68.3	47.15	34.48	10.77	31.29	242	0	P	V
		5446.64	50.41	-3.59	54	36.47	34.46	10.77	31.29	242	0	A	V
	*	5530	99.87	-	-	85.85	34.55	10.77	31.3	242	0	P	V
		5530	92.56	-	-	78.54	34.55	10.77	31.3	242	0	A	V
		5750.36	54.63	-13.67	68.3	41.1	34.79	10.81	32.07	242	0	P	V
802.11ac VHT80 CH 122 5610MHz		5441.68	53.72	-20.28	74	39.8	34.44	10.77	31.29	112	0	P	H
		5462.96	53.48	-14.82	68.3	39.52	34.48	10.77	31.29	112	0	P	H
		5454.96	45.07	-8.93	54	31.13	34.46	10.77	31.29	112	0	A	H
	*	5602	97.85	-	-	83.73	34.66	10.77	31.31	112	0	P	H
		5602	91.14	-	-	77.02	34.66	10.77	31.31	112	0	A	H
		5738.52	55.73	-12.57	68.3	42.2	34.79	10.81	32.07	112	0	P	H
		5357.68	54.11	-19.89	74	40.35	34.33	10.71	31.28	237	353	P	V
		5466.16	53.81	-14.49	68.3	39.85	34.48	10.77	31.29	237	353	P	V
		5454.96	45.18	-8.82	54	31.24	34.46	10.77	31.29	237	353	A	V
	*	5614	100.7	-	-	86.58	34.66	10.77	31.31	237	353	P	V
		5614	93.97	-	-	79.85	34.66	10.77	31.31	237	353	A	V
		5738.84	55.22	-13.08	68.3	41.69	34.79	10.81	32.07	237	353	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11060	41.26	-32.74	74	52.78	37.44	15.81	64.77	100	360	P	H
CH 106 5530MHz		11060	40.49	-33.51	74	52.01	37.44	15.81	64.77	100	360	P	V
802.11ac VHT80		11220	40.23	-33.77	74	51.55	37.53	15.92	64.77	100	360	P	H
CH 122 5610MHz		11220	40.8	-33.2	74	52.12	37.53	15.92	64.77	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		30	23.46	-16.54	40	30.23	25.7	0.63	33.1	100	0	P	H
		96.93	16.16	-27.34	43.5	30.67	17.38	1.09	32.98	-	-	P	H
		146.4	17.76	-25.74	43.5	31.92	17.52	1.33	33.01	-	-	P	H
		188.11	18.63	-24.87	43.5	33.45	16.58	1.52	32.92	-	-	P	H
		396.66	22.6	-23.4	46	30.21	22.52	2.2	32.33	-	-	P	H
		909.79	28.28	-17.72	46	29.68	27.46	3.32	32.18	-	-	P	H
		32.91	22.95	-17.05	40	32.81	22.52	0.66	33.04	100	0	P	V
		45.52	20.58	-19.42	40	36.75	16.15	0.78	33.1	-	-	P	V
		71.71	18.09	-21.91	40	37.21	12.82	0.94	32.88	-	-	P	V
		93.05	19.17	-24.33	43.5	35.66	15.3	1.07	32.86	-	-	P	V
		180.35	18.89	-24.61	43.5	35.14	15.2	1.49	32.94	-	-	P	V
		261.83	18.86	-27.14	46	29.87	19.99	1.78	32.78	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For co-location:

WIFI 802.11n HT40 + BLE CH39 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 102 5510MHz		5458.96	56.71	-17.29	74	42.77	34.46	10.77	31.29	100	4	P	H
		5470	56.61	-11.69	68.3	42.65	34.48	10.77	31.29	100	4	A	H
	*	5459.44	47.22	-6.78	54	33.28	34.46	10.77	31.29	100	4	P	H
		5506	99.47	-	-	85.46	34.53	10.77	31.29	100	4	A	H
		5506	92.83	-	-	78.82	34.53	10.77	31.29	100	4	P	H
		5743.56	55.16	-13.14	68.3	41.63	34.79	10.81	32.07	100	4	A	H
		5459.92	58.86	-15.14	74	44.92	34.46	10.77	31.29	253	0	P	V
		5461.2	57.49	-10.81	68.3	43.55	34.46	10.77	31.29	253	0	A	V
	*	5459.76	48.27	-5.73	54	34.33	34.46	10.77	31.29	253	0	P	V
		5518	103.81	-	-	89.78	34.55	10.77	31.29	253	0	A	V
		5518	95.93	-	-	81.9	34.55	10.77	31.29	253	0	P	V
		5733.72	56.72	-11.58	68.3	43.06	34.78	10.8	31.92	253	0	A	V
Remark	3. No other spurious found.												
	4. All results are PASS against Peak and Average limit line.												



WIFI 802.11n HT40 + BLE CH39 (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		2495.56	54.79	-19.21	74	48.32	31.89	7.18	32.6	124	170	P	H
		2483.5	43.98	-10.02	54	37.65	31.77	7.16	32.6	124	170	A	H
	*	2480	93.56	-	-	87.23	31.77	7.16	32.6	124	170	P	H
	*	2480	89.49	-	-	83.16	31.77	7.16	32.6	124	170	A	H
		2492.86	54.82	-19.18	74	48.35	31.89	7.18	32.6	159	0	P	V
		2483.5	43.93	-10.07	54	37.6	31.77	7.16	32.6	159	0	A	V
	*	2480	92.68	-	-	86.35	31.77	7.16	32.6	159	0	P	V
	*	2480	88.66	-	-	82.33	31.77	7.16	32.6	159	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI 802.11n HT40 + BLE CH39 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz + BLE CH39 2480MHz		4962	45.61	-28.39	74	64.14	33.85	10.13	62.51	100	360	P	H
		7440	39.86	-34.14	74	55.68	36.11	12.84	64.77	100	360	P	H
		11016	40.84	-33.16	74	52.42	37.41	15.78	64.77	100	0	P	H
		4962	50.47	-23.53	74	69	33.85	10.13	62.51	100	360	P	V
		7440	38.73	-35.27	74	54.55	36.11	12.84	64.77	100	360	P	V
		11016	39.89	-34.11	74	51.47	37.41	15.78	64.77	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	98.28	-	-	10Hz
1+2	802.11n HT20	98.16	-	-	10Hz
1+2	802.11n HT40	95.89	0.946	1.057	1.1kHz
1+2	802.11ac VHT20	98.16	-	-	10Hz
1+2	802.11ac VHT40	96.32	0.949	1.053	1.1kHz
1+2	802.11ac VHT80	93.35	0.468	2.136	2.2kHz

MIMO <Ant. 1+2>


802.11a

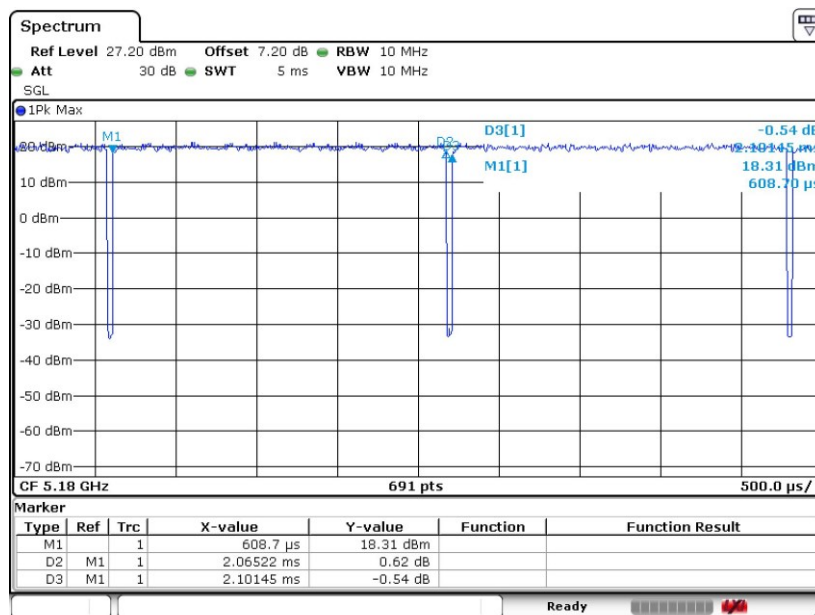


802.11n HT20

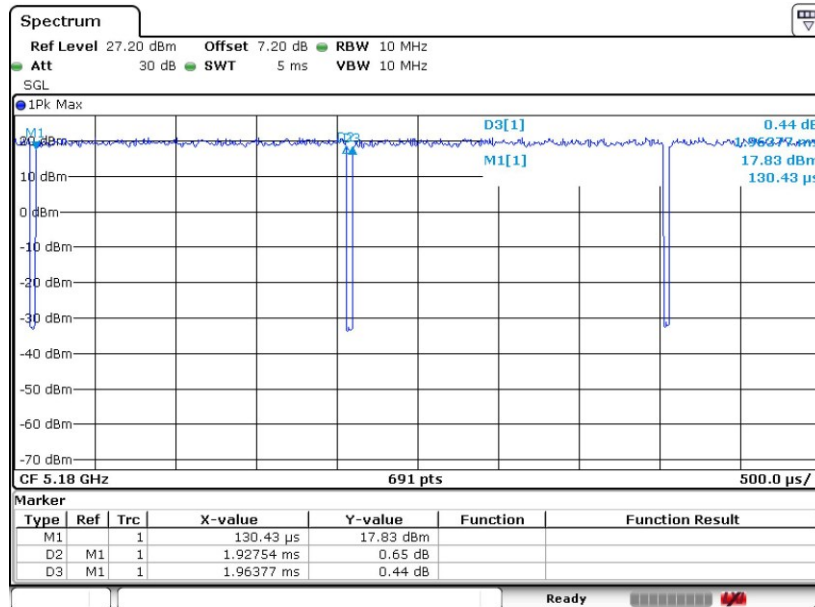


802.11n HT40

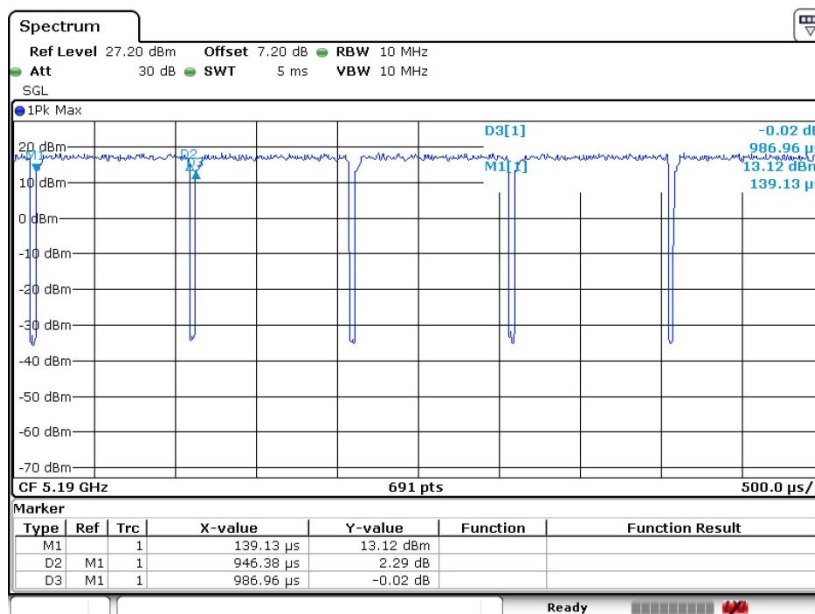

Date: 23.JAN.2020 10:57:13

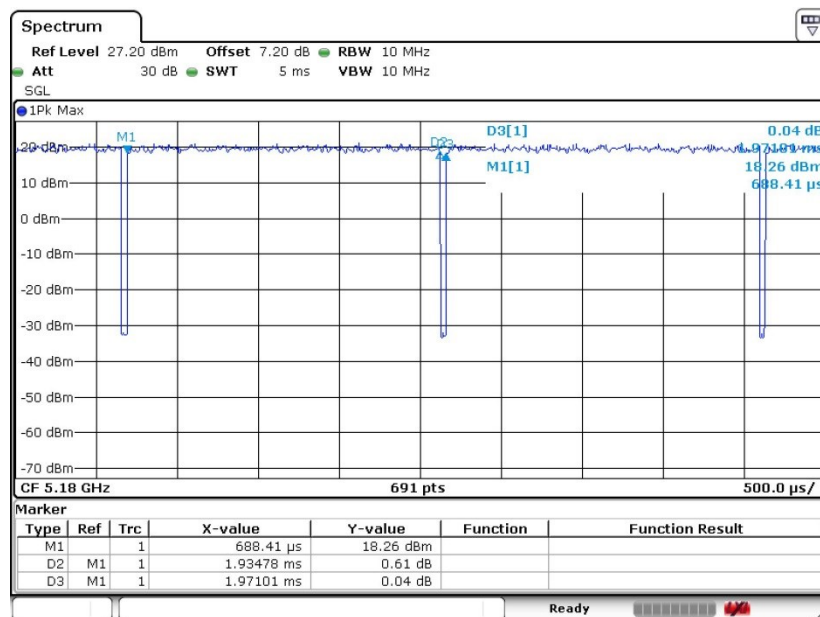802.11ac VHT20


Date: 23 JAN 2020 10:51:31

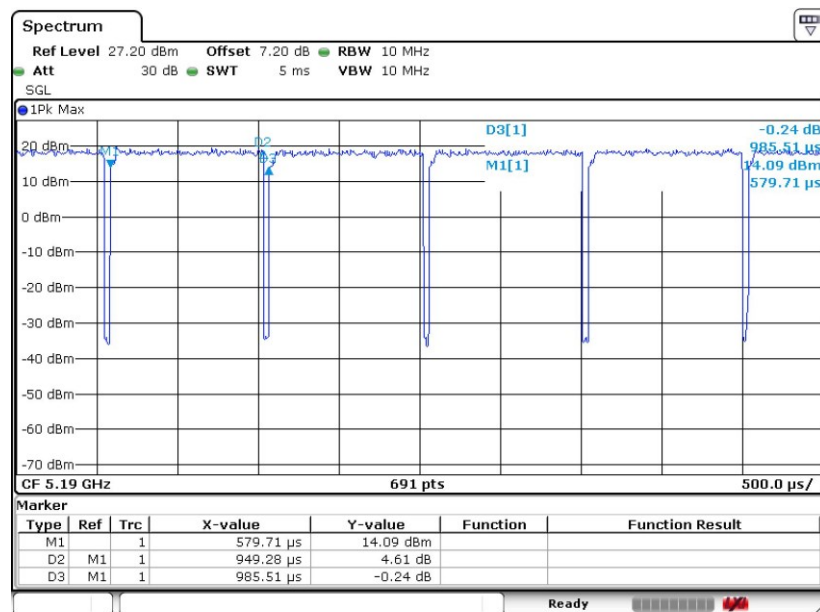802.11ac VHT40


802.11ac VHT80
