



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V04

Report Template Revision Date: 2018-07-06

Test Report

Report No. : CQASZ20191101242E-02

Applicant: Winstars Technology Limited

Address of Applicant: Block 4, Taisong Industrial Park, Dalang Street, Longhua Town, Bao'an District, Shenzhen, China

Equipment Under Test (EUT):

Product: Wi-Fi Router

Model No.: WS-WN531G3, WL-WN531G3, WS-WN531A3, WL-WN531A3, WS-WN531A6, WL-WN531A6, WS-WN530H4, WL-WN530H4, WS-WN530HG4, WL-WN530HG4, WS-WN533A8, WL-WN533A8, WS-WN536A8, WL-WN536A8, QUANTUM D4, QUANTUM D4C, QUANTUM D4G, QUANTUM S4, QUANTUM D6, QUANTUM D6Q, QUANTUM T6, QUANTUM T8, QUANTUM T10, QUANTUM T12, QUANTUM MAX

Test Model No.: WL-WN531G3

Brand Name: N/A

FCC ID: NZ3-WN0002

Standards: 47 CFR Part 15, Subpart E
KDB 789033 D02 General UNII Test Procedures New Rules v02
KDB 558074 D01 Meas Guidance v05

Date of Receipt: 2019-11-29


Date of Test: 2019-11-29 to 2019-12-23


Date of Issue: 2019-12-23

Test Result : PASS*

*In the configuration tested, the EUT complied with the standards specified above

Tested By: 
(Tom chen)

Reviewed By: 
(Aaron Ma)

Approved By: 
(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20191101242E-02	Rev.01	Initial report	2019-12-23

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	ANSI C63.10-2013	PASS
Conducted Output Power and transmit power control mechanism	47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(4)(h)(1)	ANSI C63.10-2013	PASS
Emission Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)	ANSI C63.10-2013	PASS
Peak Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(5)	ANSI C63.10-2013	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	ANSI C63.10-2013	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(5) (6)(7)(8)	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart E Section 15.407 (b)(6)(7)(8)	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

Model No.: WS-WN531G3, WL-WN531G3, WS-WN531A3, WL-WN531A3, WS-WN531A6, WL-WN531A6, WS-WN530H4, WL-WN530H4, WS-WN530HG4, WL-WN530HG4, WS-WN533A8, WL-WN533A8, WS-WN536A8, WL-WN536A8, QUANTUM D4, QUANTUM D4C, QUANTUM D4G, QUANTUM S4, QUANTUM D6, QUANTUM D6Q, QUANTUM T6, QUANTUM T8, QUANTUM T10, QUANTUM T12, QUANTUM MAX

Only the model WL-WN531G3 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance, pack and model name.


3 Content

1	VERSION.....	2
2	TEST SUMMARY.....	3
3	CONTENT.....	4
4	TEST REQUIREMENT.....	5
4.1	TEST SETUP.....	5
4.1.1	For Conducted test setup.....	5
4.1.2	For Radiated Emissions test setup.....	5
4.1.3	For Conducted Emissions test setup.....	6
4.2	TEST ENVIRONMENT.....	6
4.3	TEST CONDITION.....	7
5	GENERAL INFORMATION.....	9
5.1	CLIENT INFORMATION.....	9
5.2	GENERAL DESCRIPTION OF EUT.....	9
5.3	PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	9
5.4	DESCRIPTION OF SUPPORT UNITS.....	10
5.5	TEST LOCATION.....	11
5.6	TEST FACILITY.....	11
5.7	DEVIATION FROM STANDARDS.....	11
5.8	ABNORMALITIES FROM STANDARD CONDITIONS.....	11
5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	11
5.10	MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	11
6	EQUIPMENT LIST.....	12
7	RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....	13
	Appendix A): Emission Bandwidth.....	14
	Appendix B): Maximum Conduct Output Power.....	57
	Appendix C): Power Spectral Density.....	82
	Appendix D): Frequency Stability.....	104
	Appendix E): Antenna Requirement.....	105
	Appendix F): Operation in the absence of information to the transmit.....	106
	Appendix G): AC Power Line Conducted Emission.....	107
	Appendix H) Restricted bands around fundamental frequency (Radiated Emission).....	110
	Appendix I): Radiated Spurious Emissions.....	125
	PHOTOGRAPHS OF TEST SETUP.....	129
	PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	131

4 Test Requirement

4.1 Test setup

4.1.1 For Conducted test setup

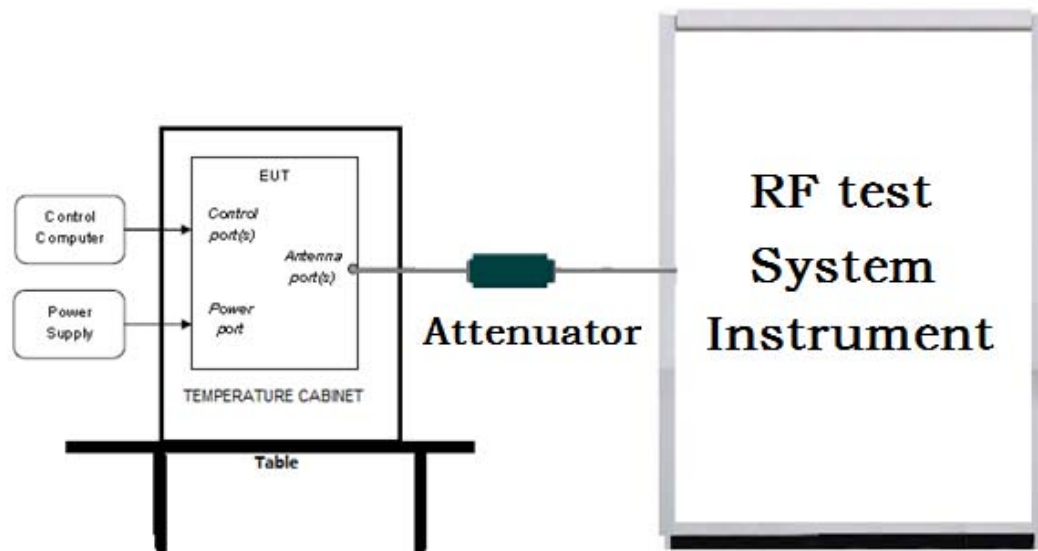

4.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

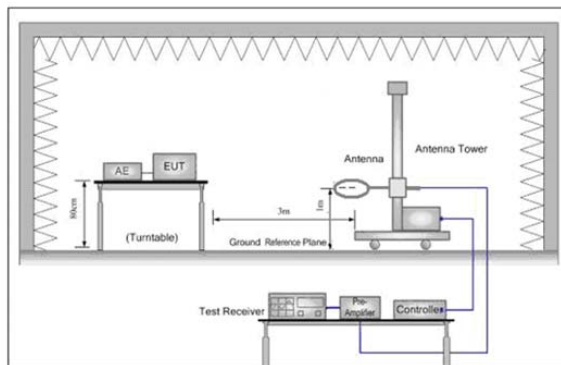


Figure 1. Below 30MHz

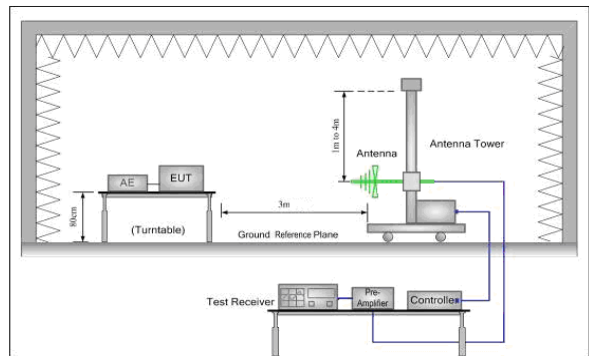


Figure 2. 30MHz to 1GHz


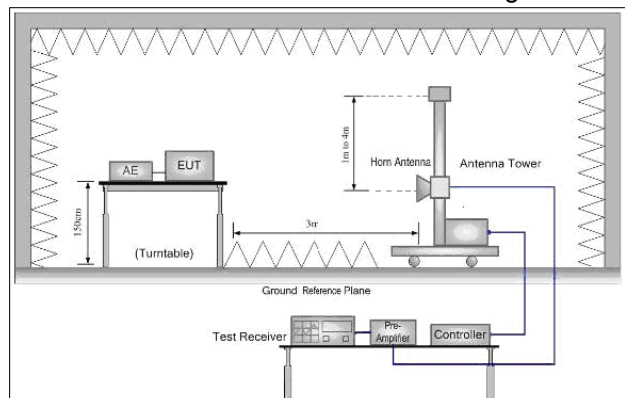


Figure 3. Above 1GHz

4.1.3 For Conducted Emissions test setup

Conducted Emissions setup

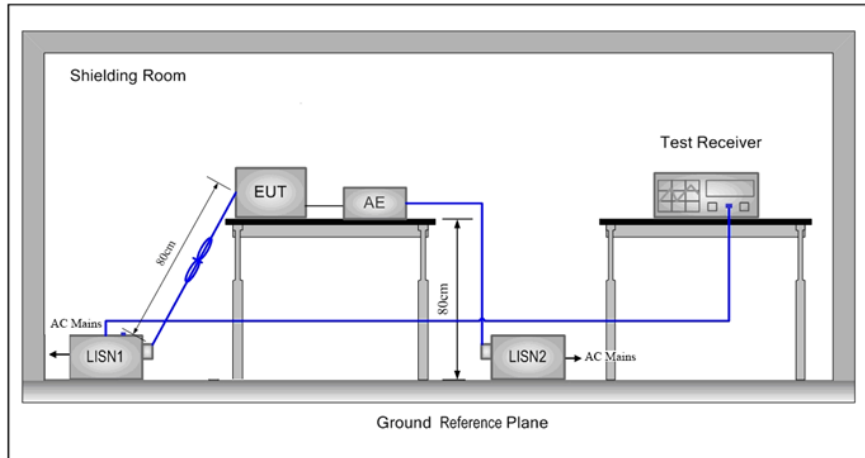

4.2 Test Environment

Operating Environment:		
Radiated Emissions:		
Temperature:	25.2 °C	
Humidity:	51 % RH	
Atmospheric Pressure:	1015 mbar	
Conducted Emissions:		
Temperature:	22.5 °C	
Humidity:	39 % RH	
Atmospheric Pressure:	1015 mbar	
Radio conducted item test (RF Conducted test room):		
Temperature:	24.5 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1015 mbar	
Test Condition	Temperature (°C)	Voltage (V)
TN/VN	+15 to +35	DC5.0V
TL/VL	-20	DC4.5V
TH/VL	50	DC5.5V
TL/VH	-20	DC4.5V
TH/VH	50	DC5.5V
Remark:		
1)The EUT just work in such extreme temperature of -20 °C to 50 °C and the extreme voltage of DC4.5V to DC5.5V, so here the EUT is tested in the temperature of -20 °C to 50 °C and the voltage of DC4.5V to DC5.5V.		
2) VN: Normal Voltage: TN: Normal Temperature:		


TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)	5150MHz ~5250 MHz	Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5150MHz ~5250 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac(20M)	5725MHz ~5850 MHz	Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac(40M)	5725MHz ~5850 MHz	Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11ac(80M)	5725MHz ~5850 MHz	N/A	Channel 155	N/A
		N/A	5775MHz	N/A

Run Software:

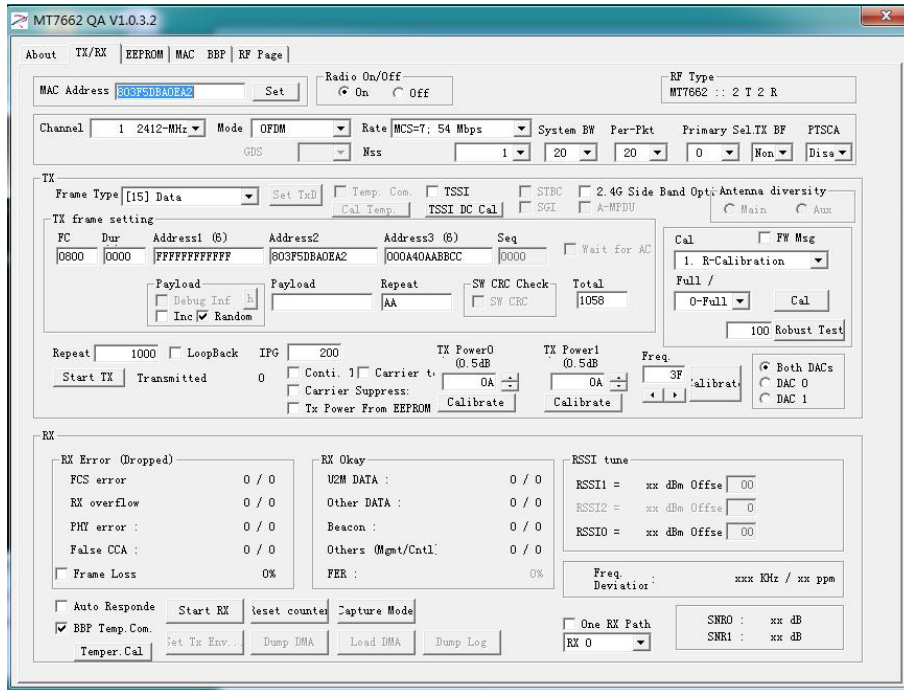

MT7662 QA V1.0.3.2

Radio On/Off: ☒ On ☐ OFF

RF Type: MT7662 :: 2 T 2 R

Channel: 1 2412-MHz Mode: OFDM Rate: MCS=7: 54 Mbps System BW: 20 Fer-Pkt: 20 Primary Sel.TX BF: 0 PTSCA: Non Disc

TX Frame Type: [15] Data Set TxID Temp. Com. TSSI STBC 2.4G Side Band Opt. Antenna diversity

TX frame setting: FC Dur Address1 (6) Address2 Address3 (6) Seq Wait for AC

Cal: 1. R-Calibration Full / 0-Full Cal 100 Robust Test

Repeat: 1000 LoopBack IPG: 200 TX Power0 (0.5dB) TX Power1 (0.5dB) Freq: 3F Calibrat. Both DACs DAC 0 DAC 1

RX Error (Dropped): FCS error 0 / 0 RX overflow 0 / 0 PHY error 0 / 0 False CCA 0 / 0 Frame Loss 0%

RX Okay: U2M DATA 0 / 0 Other DATA 0 / 0 Beacon 0 / 0 Others (Mgmt/Cntl) 0 / 0 FER 0%

RSSI tune: RSSI1 = xx dBm Offse 00 RSSI2 = xx dBm Offse 0 RSSI0 = xx dBm Offse 00

Freq. Deviation: xxx KHz / xx ppm

One RX Path: RX 0 SNR0: xx dB SNR1: xx dB

Test mode:**Pre-scan under all rate at lowest channel for Ant1 and Ant2**

Through Pre-scan, 6Mbps is the worst case of 802.11a (20M) for 5150MHz ~5250 MHz; MCS0 is the worst case of 802.11n (20M) for 5150MHz ~5250 MHz; MCS0 is the worst case of 802.11ac (20M) for 5150MHz ~5250 MHz; MCS0 is the worst case of 802.11n(40M) for 5150MHz ~5250 MHz; MCS0 is the worst case of 802.11ac (40M) for 5150MHz ~5250 MHz; MCS0 is the worst case of 802.11ac(80M)for 5150MHz ~5250 MHz; 6Mbps is the worst case of 802.11a (20M) for 5725MHz ~5850 MHz; MCS0 is the worst case of 802.11n (20M) for 5725MHz ~5850 MHz; MCS0 is the worst case of 802.11ac (20M) for 5725MHz ~5850 MHz; MCS0 is the worst case of 802.11n (40M) for 5725MHz ~5850 MHz; MCS0 is the worst case of 802.11ac (40M) for 5725MHz ~5850 MHz; MCS0 is the worst case of 802.11ac(80M)for 5725MHz ~5850 MHz.

5 General Information

5.1 Client Information

Applicant:	Winstars Technology Limited
Address of Applicant:	Block 4, Taisong Industrial Park, Dalang Street, Longhua Town, Bao'an District, Shenzhen, China
Manufacturer:	Winstars Technology Limited
Address of Manufacturer:	Block 4, Taisong Industrial Park, Dalang Street, Longhua Town, Bao'an District, Shenzhen, China

5.2 General Description of EUT

Product Name:	Wi-Fi Router
Model No.:	WS-WN531G3, WL-WN531G3, WS-WN531A3, WL-WN531A3, WS-WN531A6, WL-WN531A6, WS-WN530H4, WL-WN530H4, WS-WN530HG4, WL-WN530HG4, WS-WN533A8, WL-WN533A8, WS-WN536A8, WL-WN536A8, QUANTUM D4, QUANTUM D4C, QUANTUM D4G, QUANTUM S4, QUANTUM D6, QUANTUM D6Q, QUANTUM T6, QUANTUM T8, QUANTUM T10, QUANTUM T12, QUANTUM MAX
Test Model No.:	WL-WN531G3
Trade Mark:	N/A
Power Supply:	DC5V, by Adapter
Adapter:	Model: P050W2000U Input: AC100-240V 50/60Hz 0.25A Output: DC5V, 2000mA

5.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250 MHz IEEE802.11n/ac(40M): 5150MHz ~5250 MHz IEEE802.11ac(80M): 5150MHz ~5250 MHz IEEE 802.11a/n/ac(20M): 5725MHz ~5850 MHz IEEE802.11n/ac(40M): 5725MHz ~5850 MHz IEEE802.11ac(80M): 5725MHz ~5850 MHz
Channel Numbers:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Channel Separation:	IEEE 802.11a/n-HT20/ac-VHT20: 20 MHz IEEE 802.11n-HT40/ac-VHT40: 40 MHz IEEE 802.11ac-VHT80: 80 MHz
Type of Modulation:	OFDM
Sample Type:	☐ Mobile ☐ Portable ☒ Fix Location
Hardware version:	WS-WN531G3-A-V1.2
Software version:	M31G3.V5030.191123
Test Software of EUT:	MT7662 QA V1.0.3.2 (manufacturer declare)
Antenna Type:	Omni Directional Antennas
Antenna gain:	ANT1: 5.0dBi ANT2: 5.0dBi

Operation Frequency each of channel

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
155	5775MHz	NA	NA

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Remark	FCC certification
PC	Lenovo	ThinkPad E450c	FCC ID and DOC	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

5.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

5.6 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	3×10^{-8}
2	RF power, conducted	0.86dB
3	Radiated Spurious emission test	5.12dB (Below 1GHz)
		4.6dB (Above 1GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.8°C
6	Humidity test	2.0%
7	DC power voltages	0.5%

6 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2019/10/25	2020/10/24
Spectrum analyzer	R&S	FSU26	CQA-038	2019/10/25	2020/10/24
Spectrum analyzer	R&S	FSV40	CQA-075	2019/6/11	2020/6/10
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	4012339	2019/10/25	2020/10/24
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2019/10/25	2020/10/24
Preamplifier	EMCI	EMC184055SE	CQA-089	2019/9/25	2020/9/24
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2019/10/21	2020/10/20
Bilog Antenna	R&S	HL562	CQA-011	2019/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2019/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2019/9/25	2020/9/24
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2019/9/26	2020/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2019/9/26	2020/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2019/9/26	2020/9/25
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2019/9/26	2020/9/25
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2019/9/26	2020/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2019/9/26	2020/9/25
EMI Test Receiver	R&S	ESR7	CQA-005	2019/10/25	2020/10/24
LISN	R&S	ENV216	CQA-003	2019/10/23	2020/10/22
Coaxial cable	CQA	N/A	CQA-C009	2019/9/26	2020/9/25
high-low temperature chamber	Auchno	OJN-9606	CQA-S003	2019/9/25	2020/9/24
DC power	KEYSIGHT	E3631A	CQA-028	2019/9/26	2020/9/25

7 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	RSS-247 Issue 2	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
4	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15E Section 15.407 (a)(1)(2)	KDB789033	Emission Bandwidth and Occupied Bandwidth	PASS	Appendix A)
Part15E Section 15.407 (a)(1)(2)(4)(h)(1)	KDB789033 / KDB 662911	Conducted Output Power and transmit power control mechanism	PASS	Appendix B)
Part15E Section 15.407 (a)(1)(2)(5)	KDB789033 / KDB 662911	Power Spectral Density	PASS	Appendix C)
Part15E Section 15.407 (g)	KDB789033	Frequency stability	PASS	Appendix D)
Part15C Section 15.203	ANSI C63.10	Antenna Requirement	PASS	Appendix E)
Part15E Section 15.407 (c)	Section 15.407	Operation in the absence of information to the transmit	PASS	Appendix F)
Part15E Section 15.407 (b)(6)	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15E Section 15.407 (b)(6)(7)(8)	KDB789033	Restricted bands around fundamental frequency(Radiated Emission)	PASS	Appendix H)
Part15E Section 15.407 (b)(1)(2)(3)(5)(6)(7)(8)	KDB789033	Radiated Spurious Emissions	PASS	Appendix I)

Appendix A): Emission Bandwidth


26dB emission Bandwidth:


Measurement Data


Test Mode	Test Channel	Ant	EBW[MHz]	Limit[MHz]	Verdict
11A	5180	Ant1	19.600	---	PASS
11A	5180	Ant2	19.680	---	PASS
11A	5200	Ant1	22.560	---	PASS
11A	5200	Ant2	19.680	---	PASS
11A	5240	Ant1	21.080	---	PASS
11A	5240	Ant2	19.600	---	PASS
11N20SISO	5180	Ant1	20.480	---	PASS
11N20SISO	5180	Ant2	20.080	---	PASS
11N20SISO	5200	Ant1	20.280	---	PASS
11N20SISO	5200	Ant2	20.080	---	PASS
11N20SISO	5240	Ant1	20.080	---	PASS
11N20SISO	5240	Ant2	20.120	---	PASS
11N40SISO	5190	Ant1	40.720	---	PASS
11N40SISO	5190	Ant2	40.880	---	PASS
11N40SISO	5230	Ant1	41.360	---	PASS
11N40SISO	5230	Ant2	41.280	---	PASS
11AC20SISO	5180	Ant1	20.440	---	PASS
11AC20SISO	5180	Ant2	20.040	---	PASS
11AC20SISO	5200	Ant1	20.160	---	PASS
11AC20SISO	5200	Ant2	20.080	---	PASS
11AC20SISO	5240	Ant1	20.040	---	PASS
11AC20SISO	5240	Ant2	20.200	---	PASS
11AC40SISO	5190	Ant1	46.800	---	PASS
11AC40SISO	5190	Ant2	40.800	---	PASS
11AC40SISO	5230	Ant1	46.960	---	PASS
11AC40SISO	5230	Ant2	40.960	---	PASS


11AC80SISO	5210	Ant1	81.920	---	PASS
11AC80SISO	5210	Ant2	81.600	---	PASS
11N20MIMO	5180	Ant1	20.120	---	PASS
11N20MIMO	5180	Ant2	20.080	---	PASS
11N20MIMO	5200	Ant1	20.240	---	PASS
11N20MIMO	5200	Ant2	20.240	---	PASS
11N20MIMO	5240	Ant1	20.040	---	PASS
11N20MIMO	5240	Ant2	20.120	---	PASS
11N40MIMO	5190	Ant1	40.960	---	PASS
11N40MIMO	5190	Ant2	40.320	---	PASS
11N40MIMO	5230	Ant1	41.280	---	PASS
11N40MIMO	5230	Ant2	41.120	---	PASS
11AC20MIMO	5180	Ant1	20.200	---	PASS
11AC20MIMO	5180	Ant2	20.080	---	PASS
11AC20MIMO	5200	Ant1	20.200	---	PASS
11AC20MIMO	5200	Ant2	20.160	---	PASS
11AC20MIMO	5240	Ant1	20.080	---	PASS
11AC20MIMO	5240	Ant2	20.160	---	PASS
11AC40MIMO	5190	Ant1	46.160	---	PASS
11AC40MIMO	5190	Ant2	40.720	---	PASS
11AC40MIMO	5230	Ant1	41.040	---	PASS
11AC40MIMO	5230	Ant2	40.800	---	PASS
11AC80MIMO	5210	Ant1	82.400	---	PASS
11AC80MIMO	5210	Ant2	82.240	---	PASS


Test plot as follows:

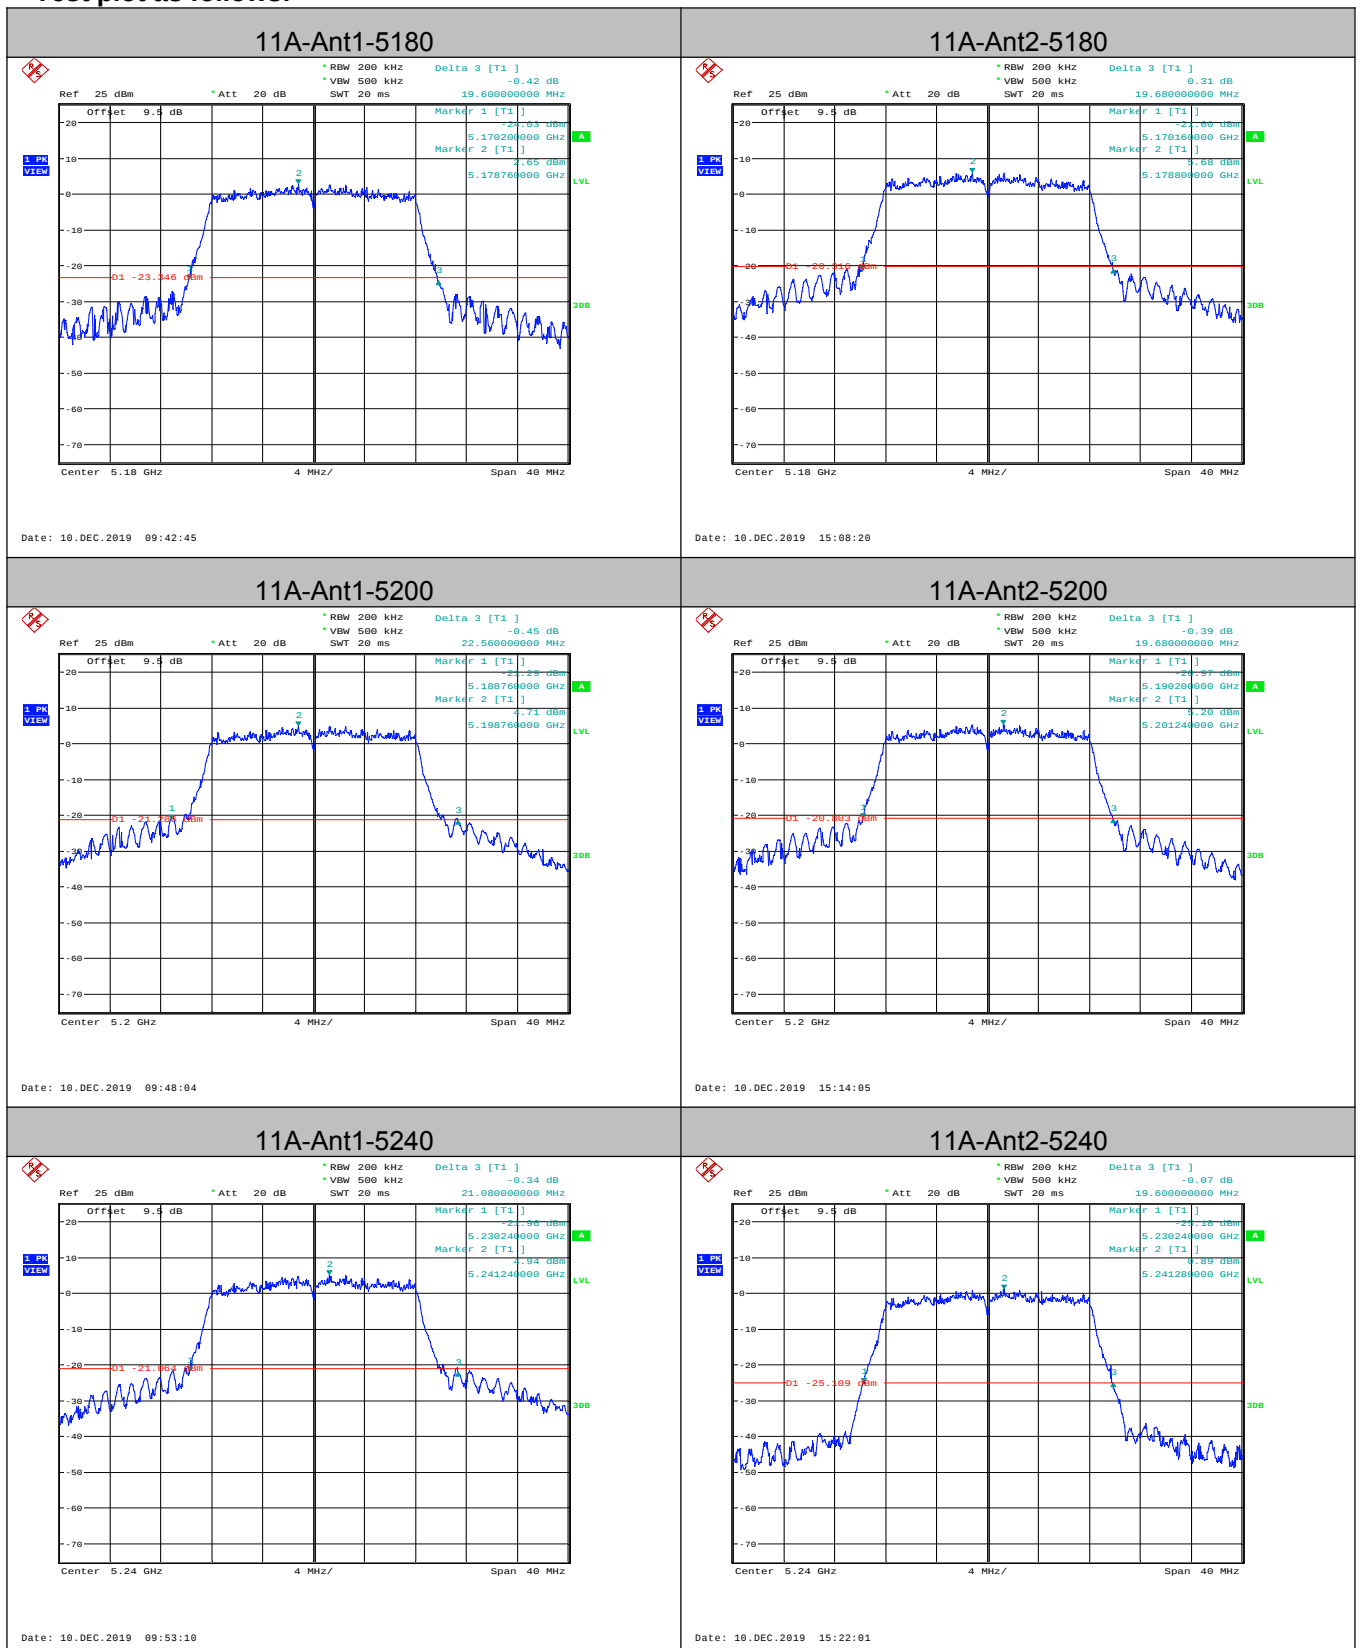


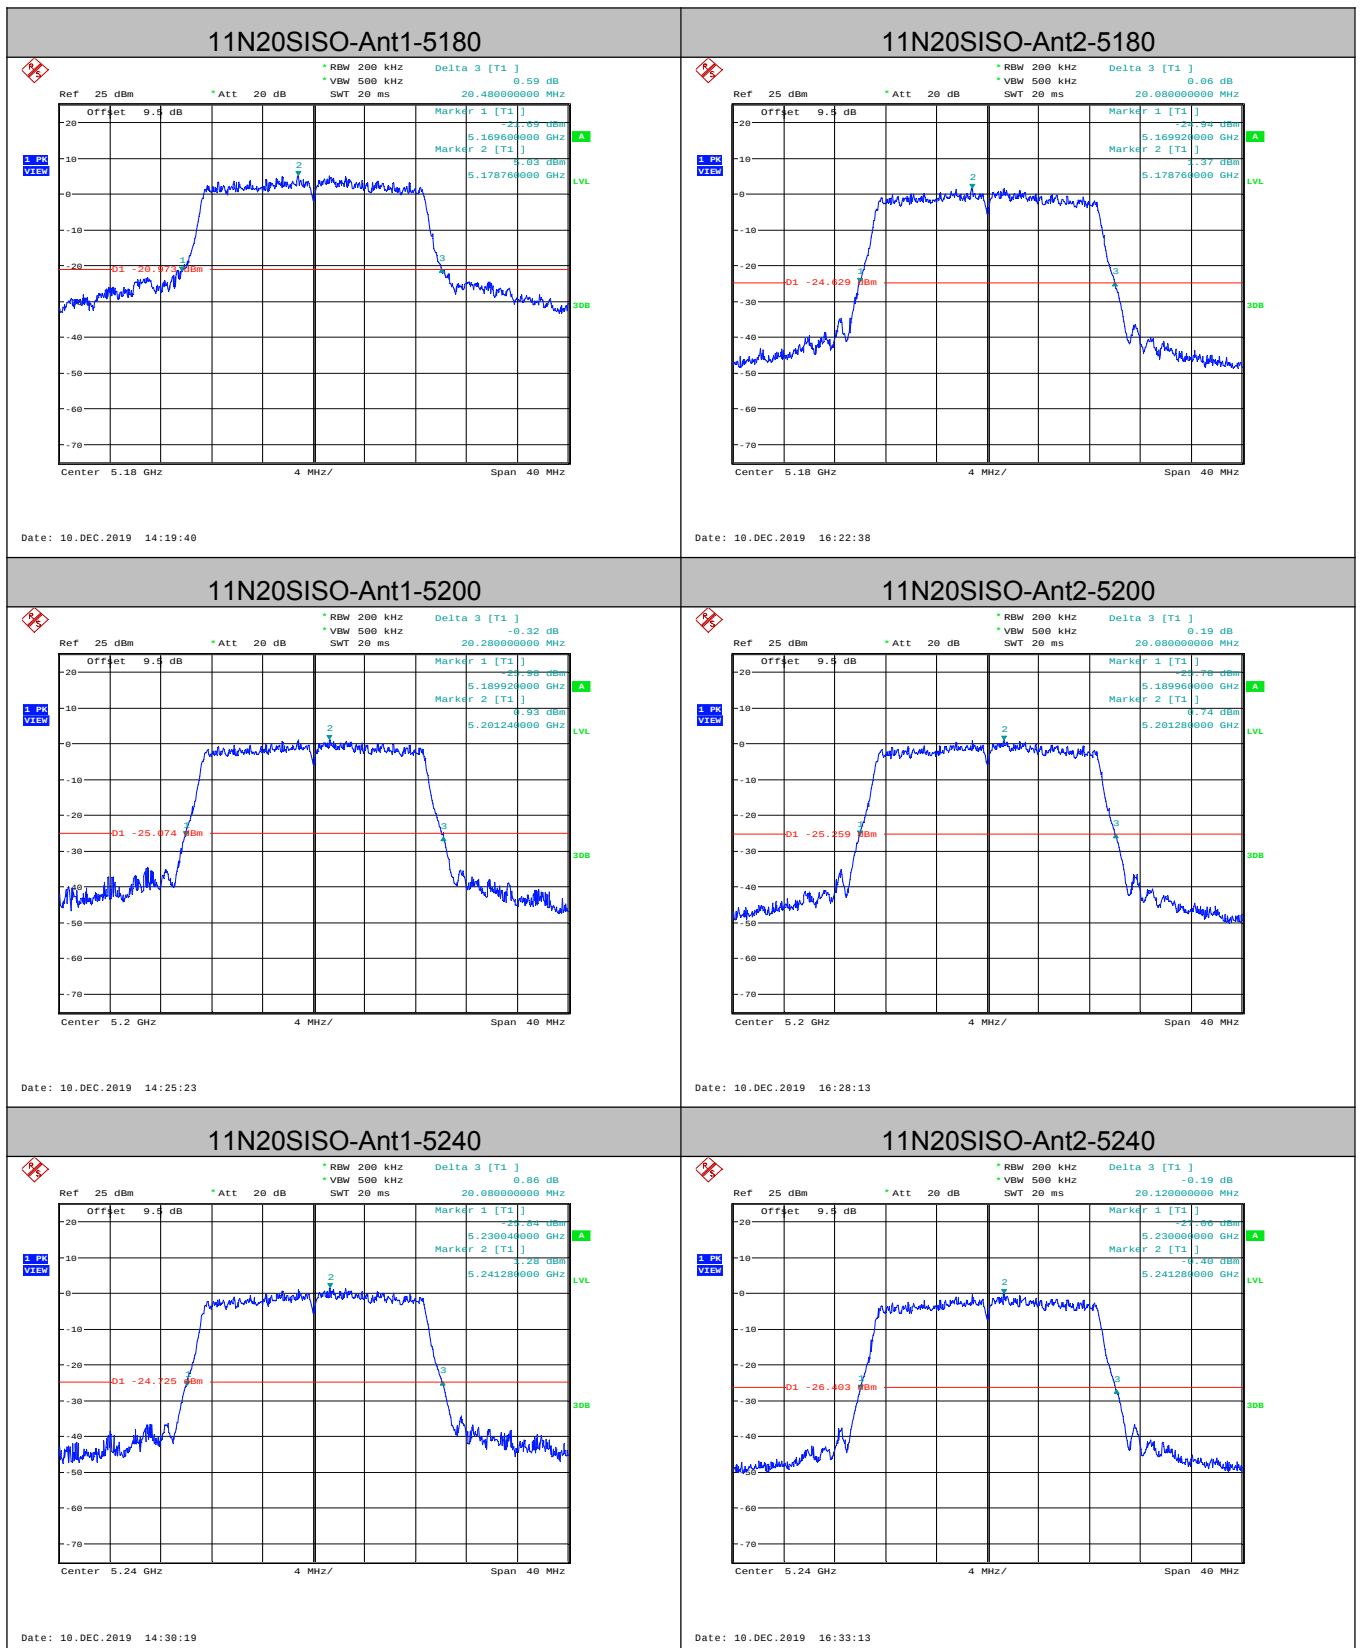


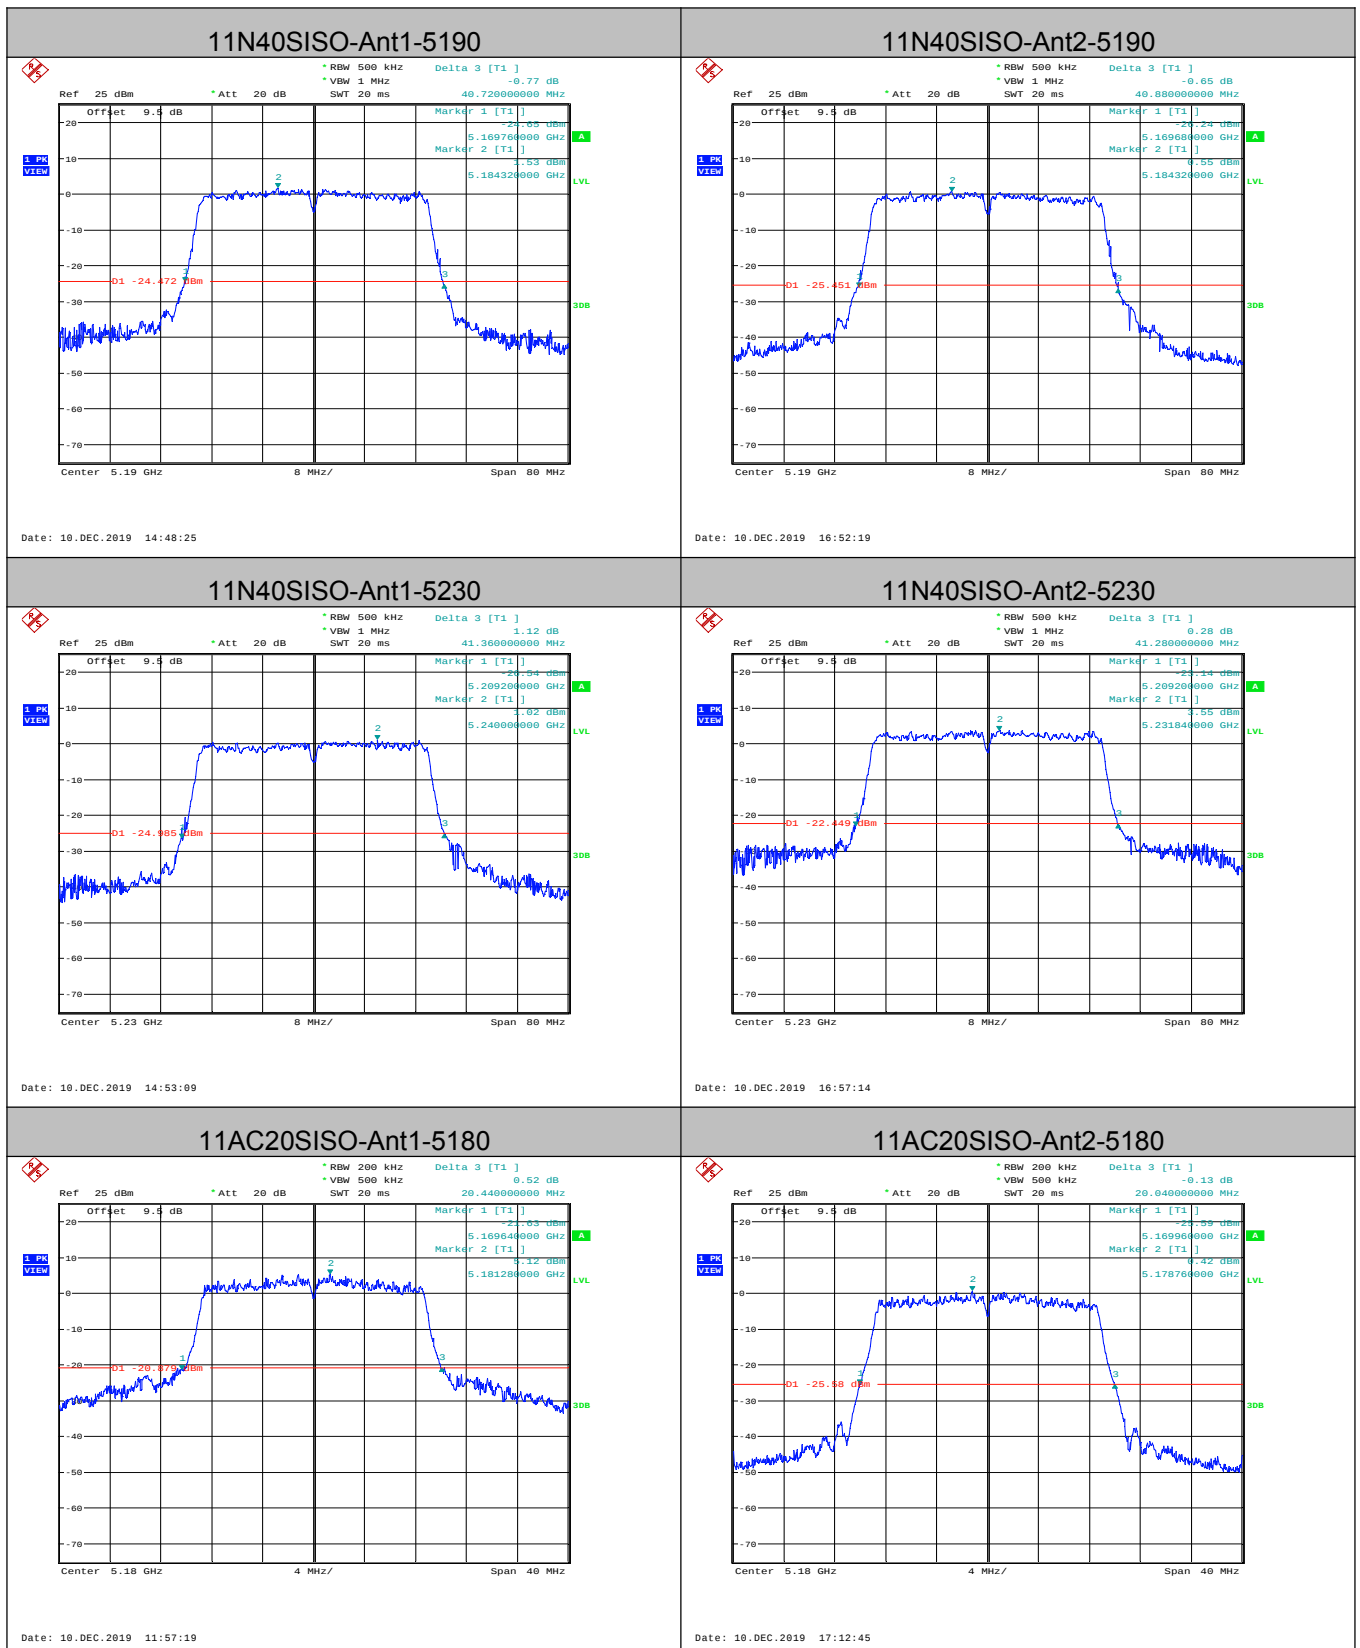


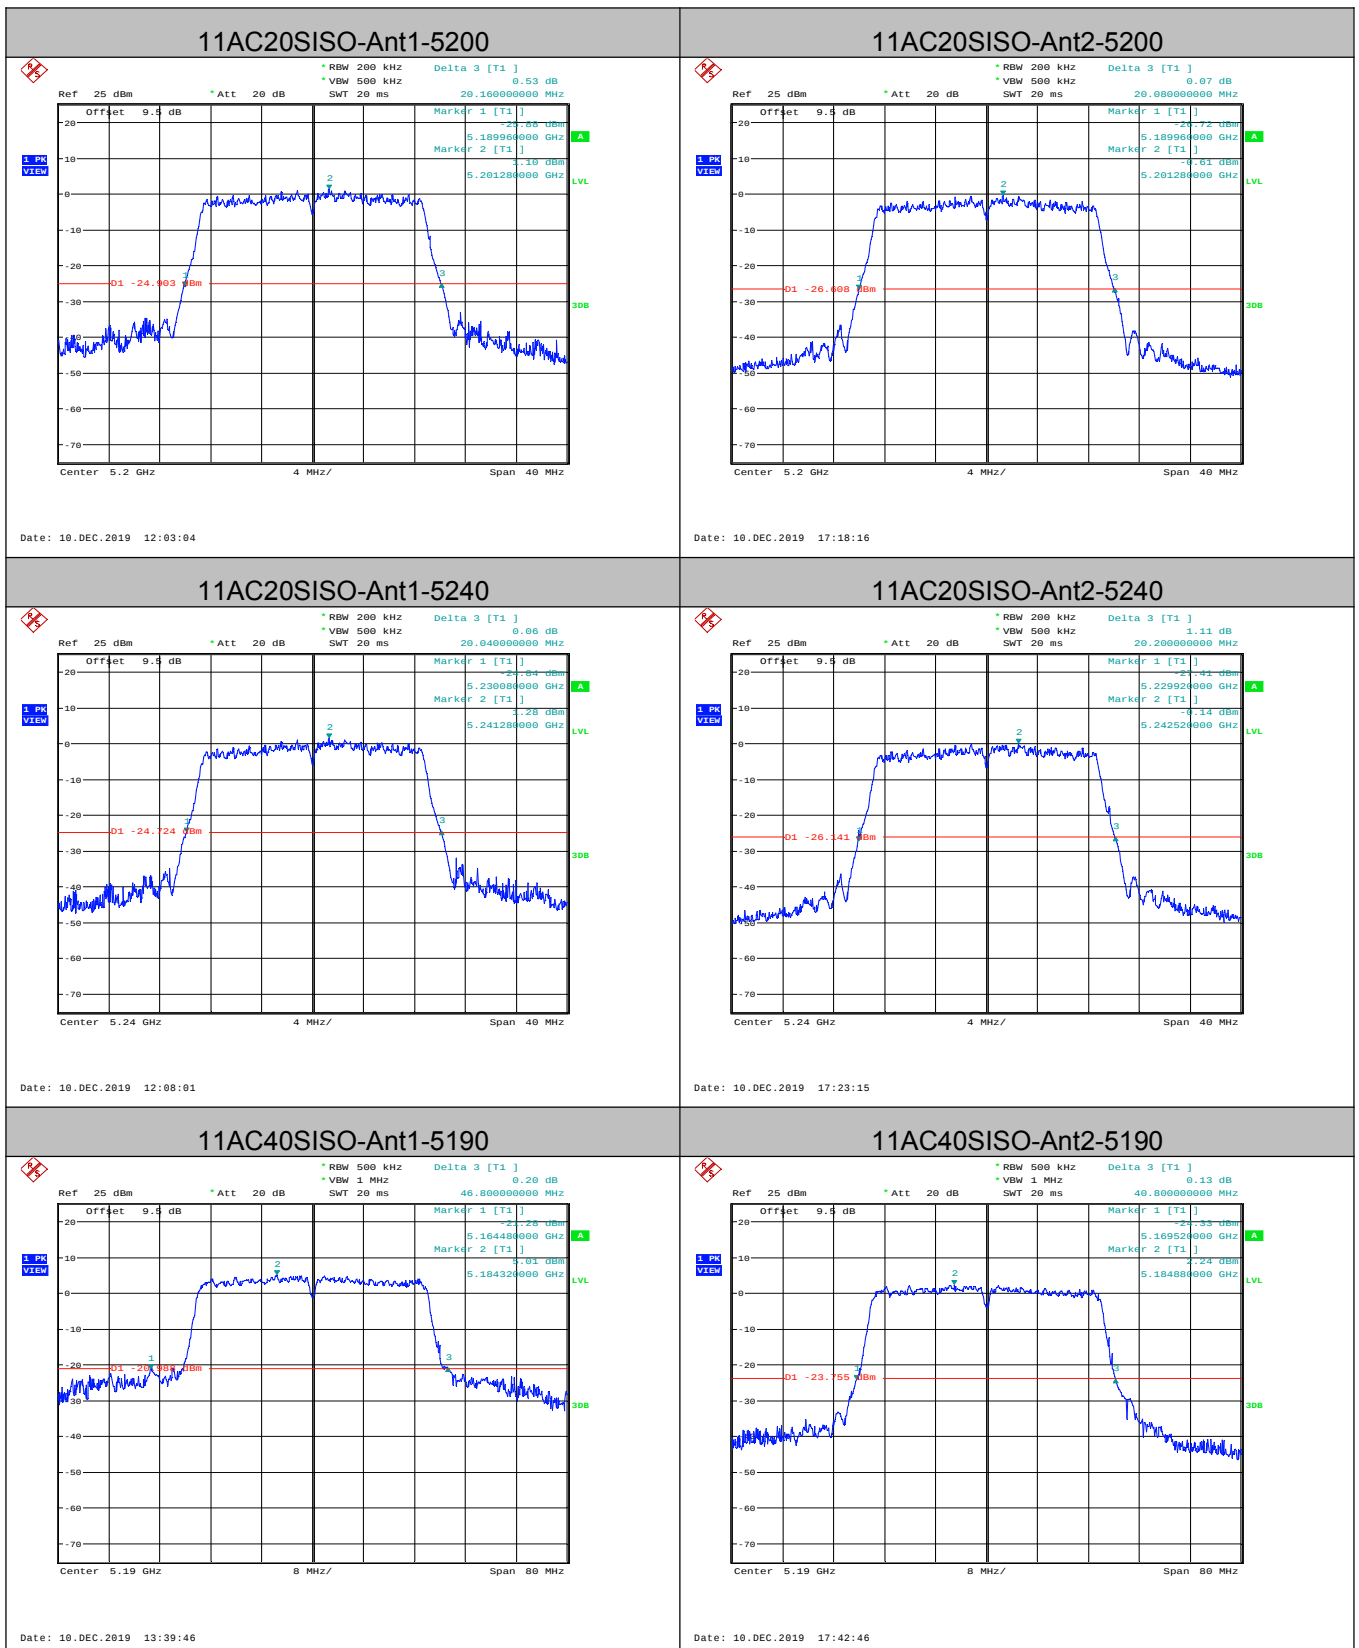


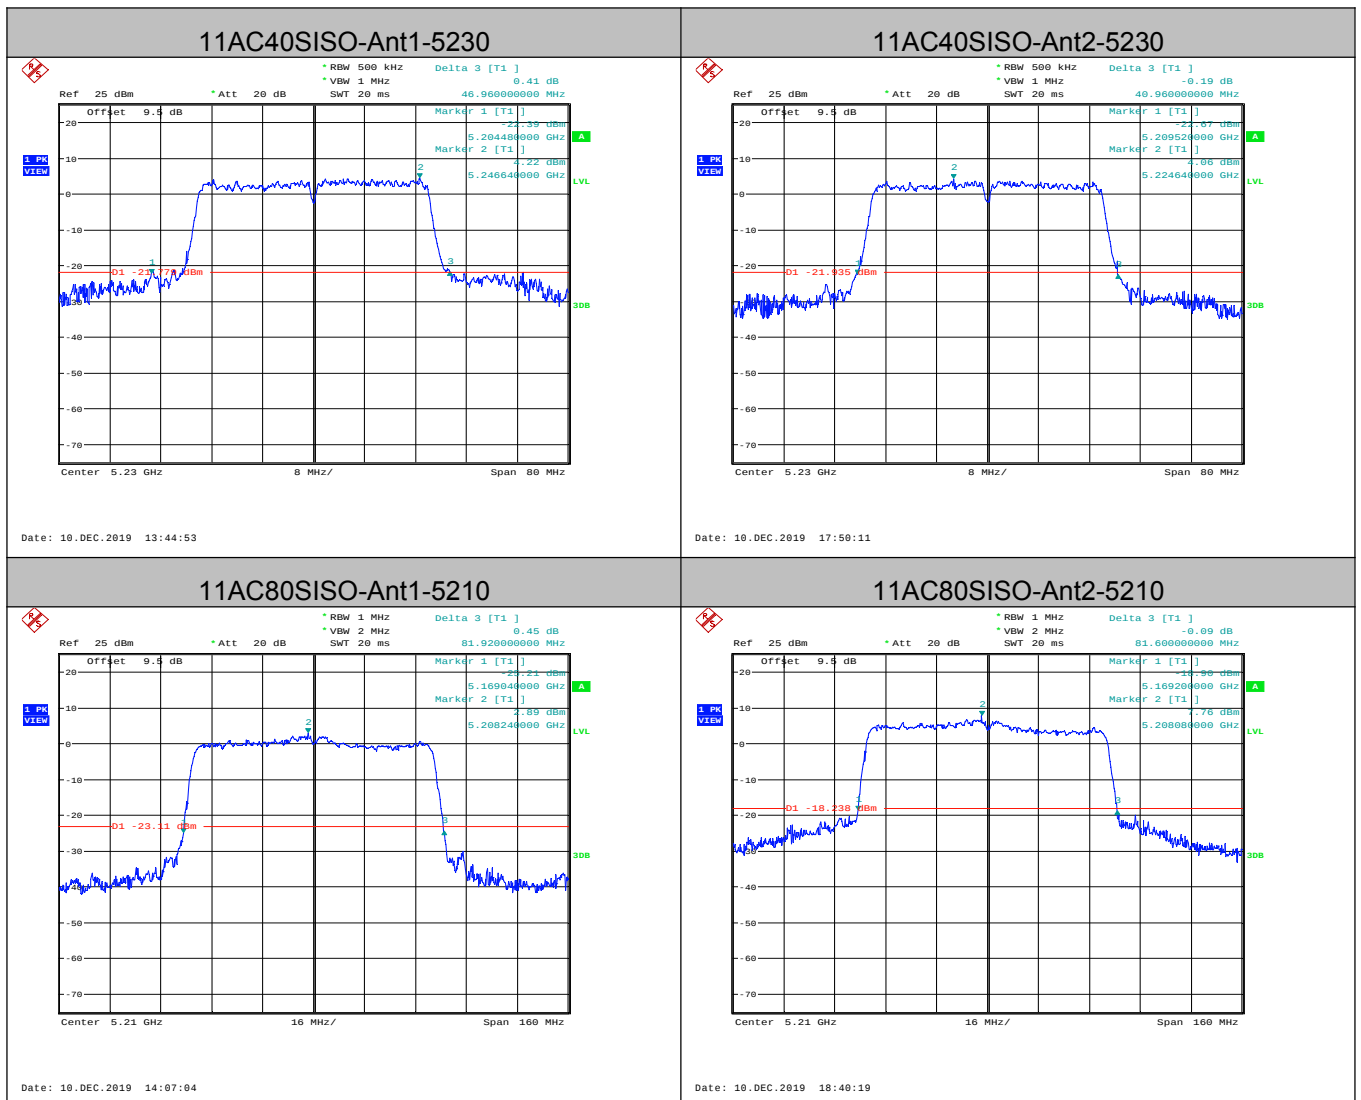

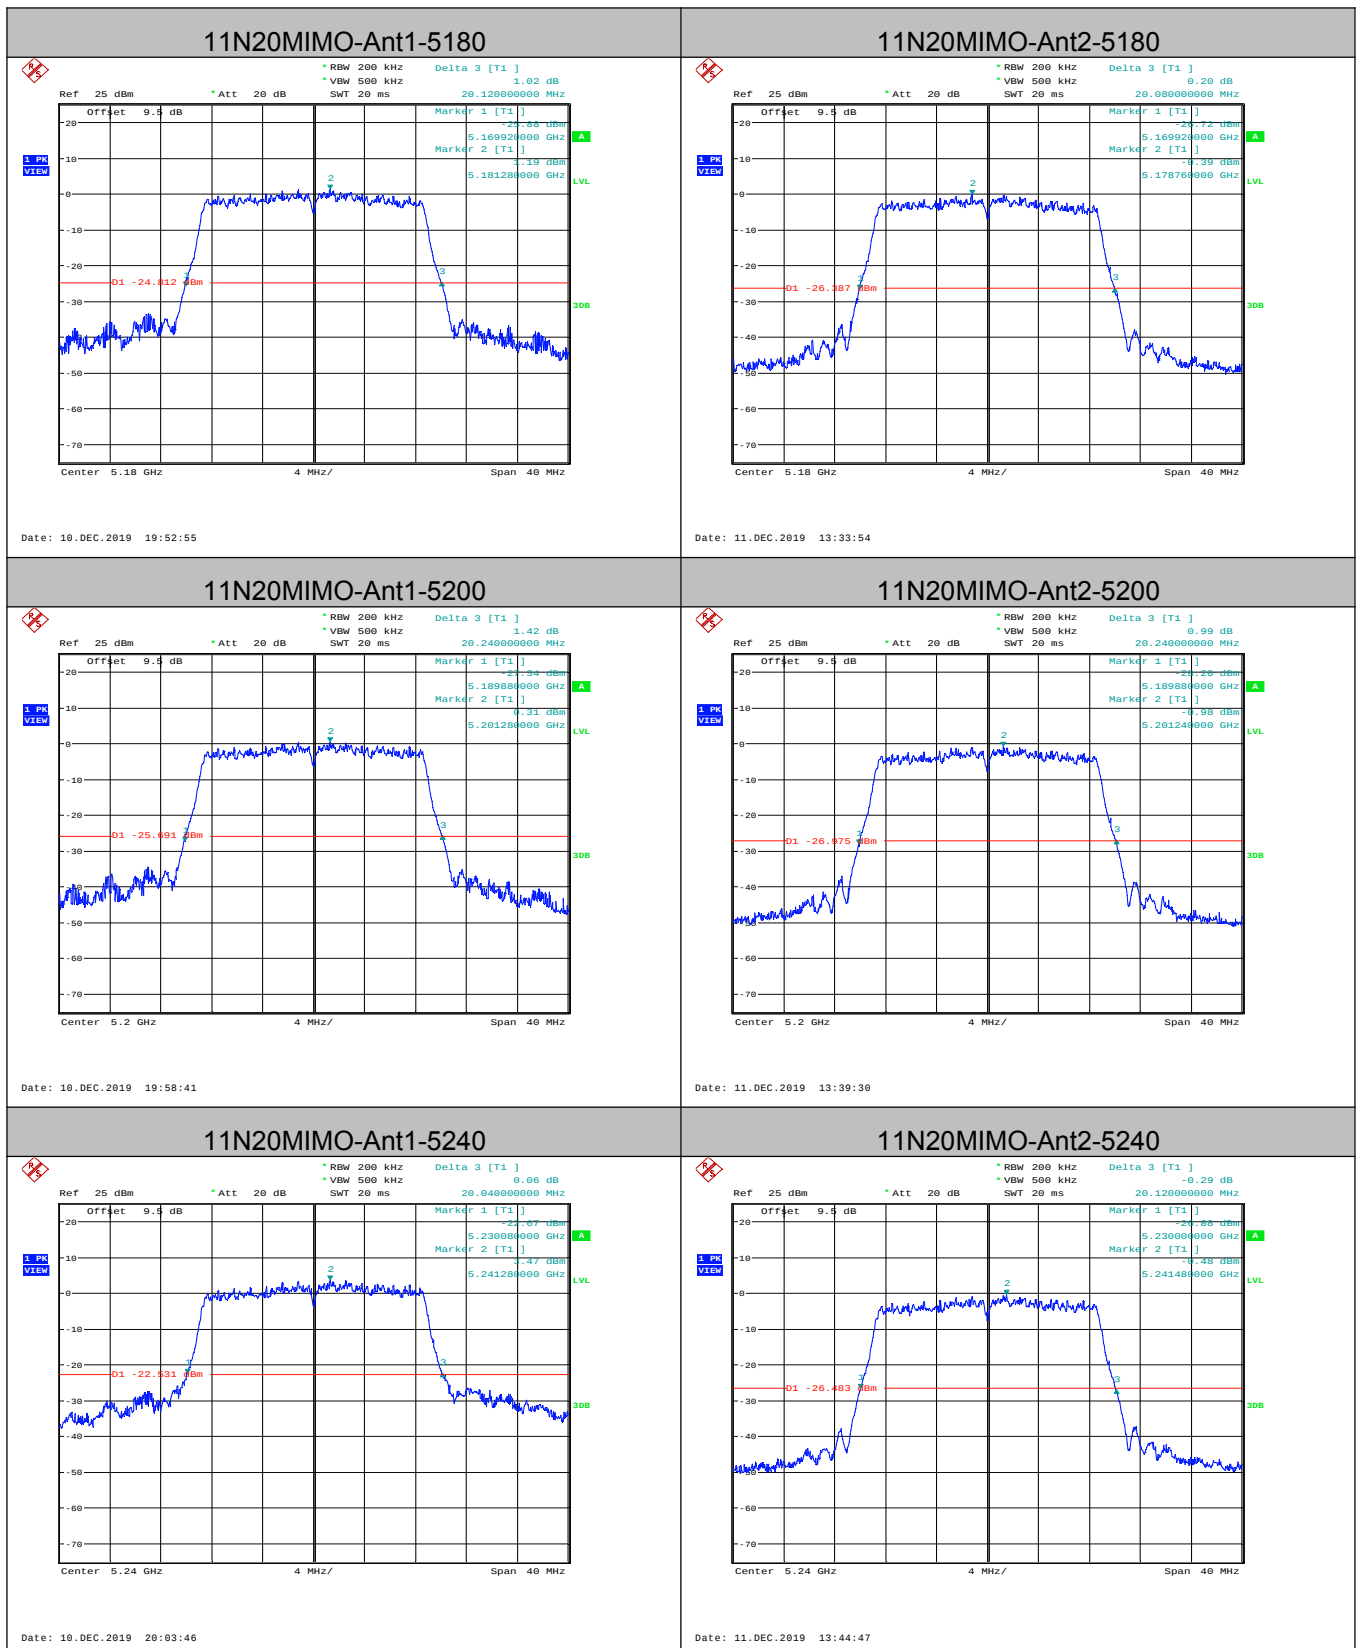

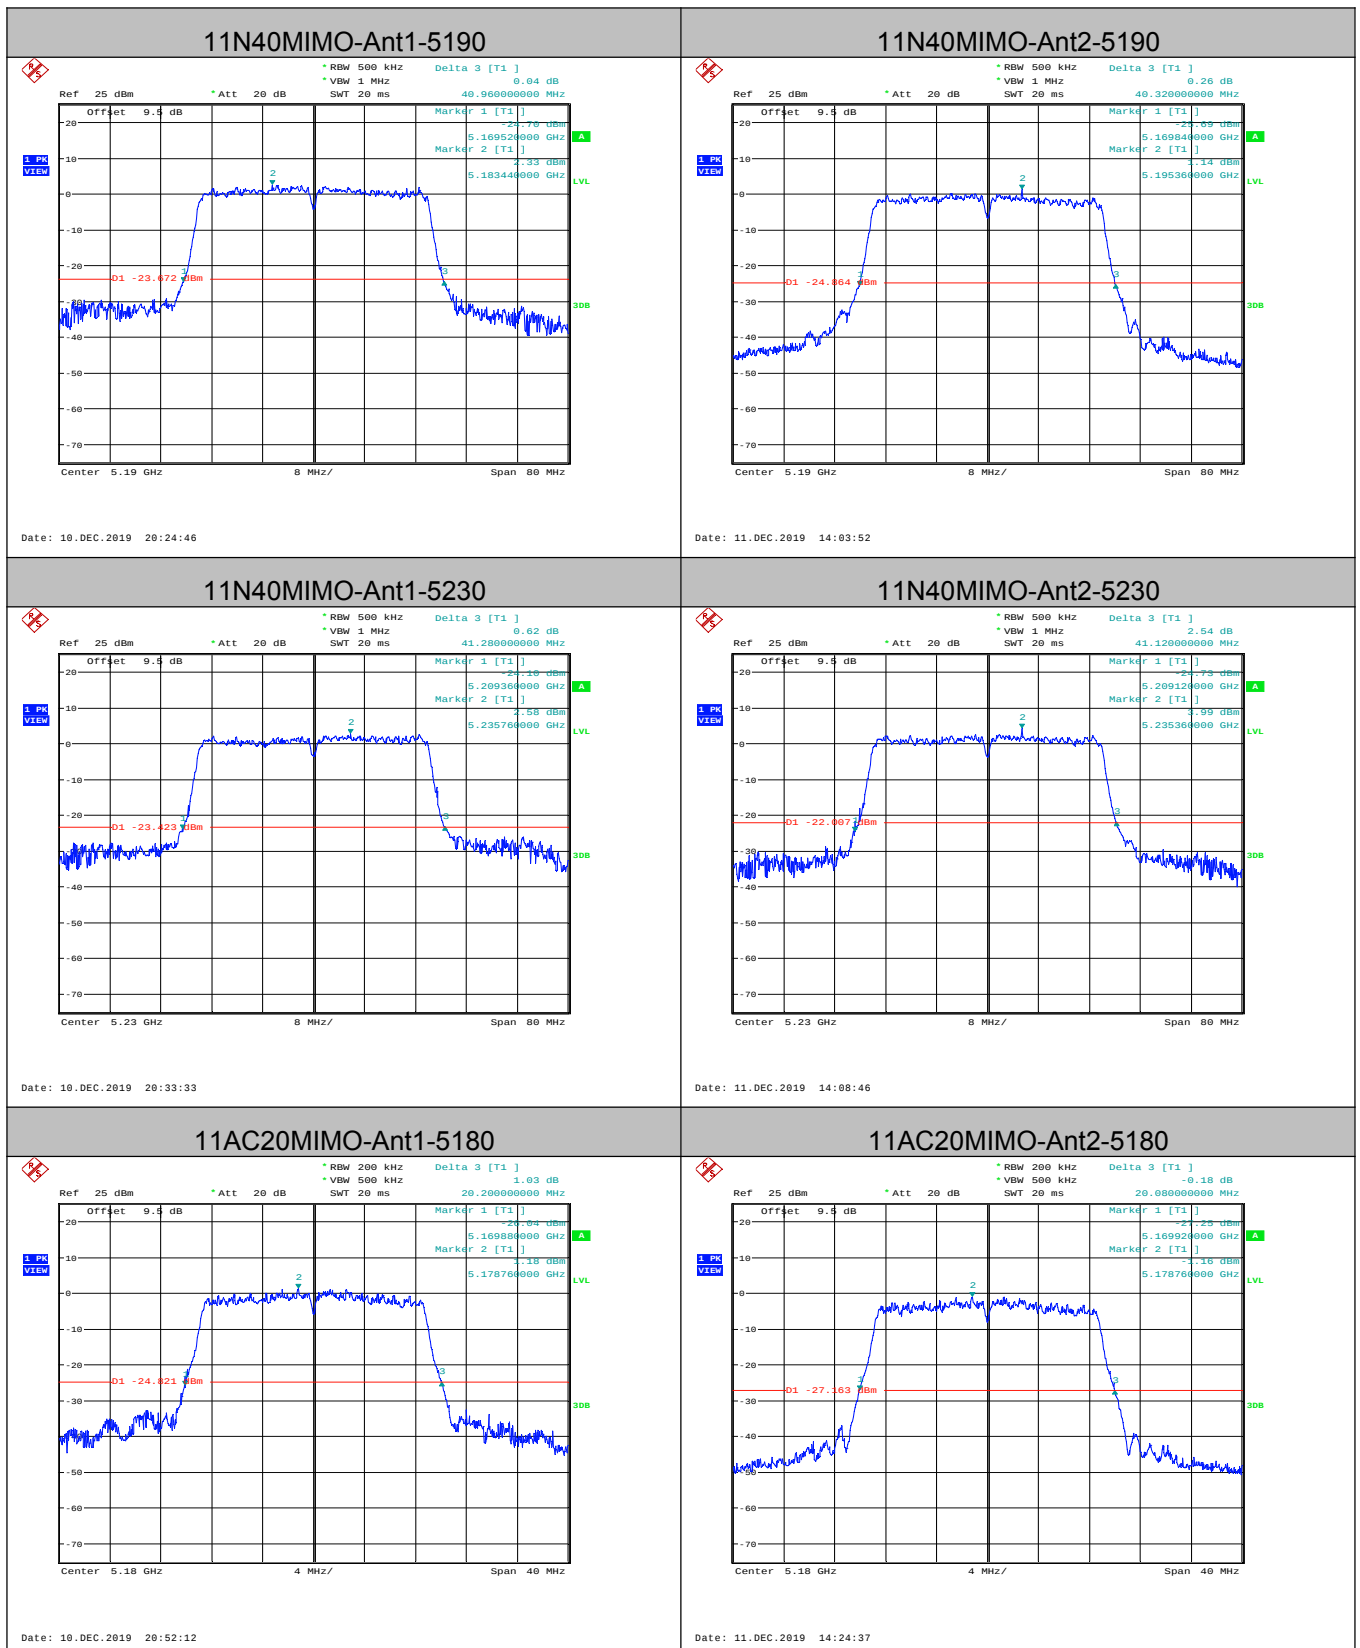

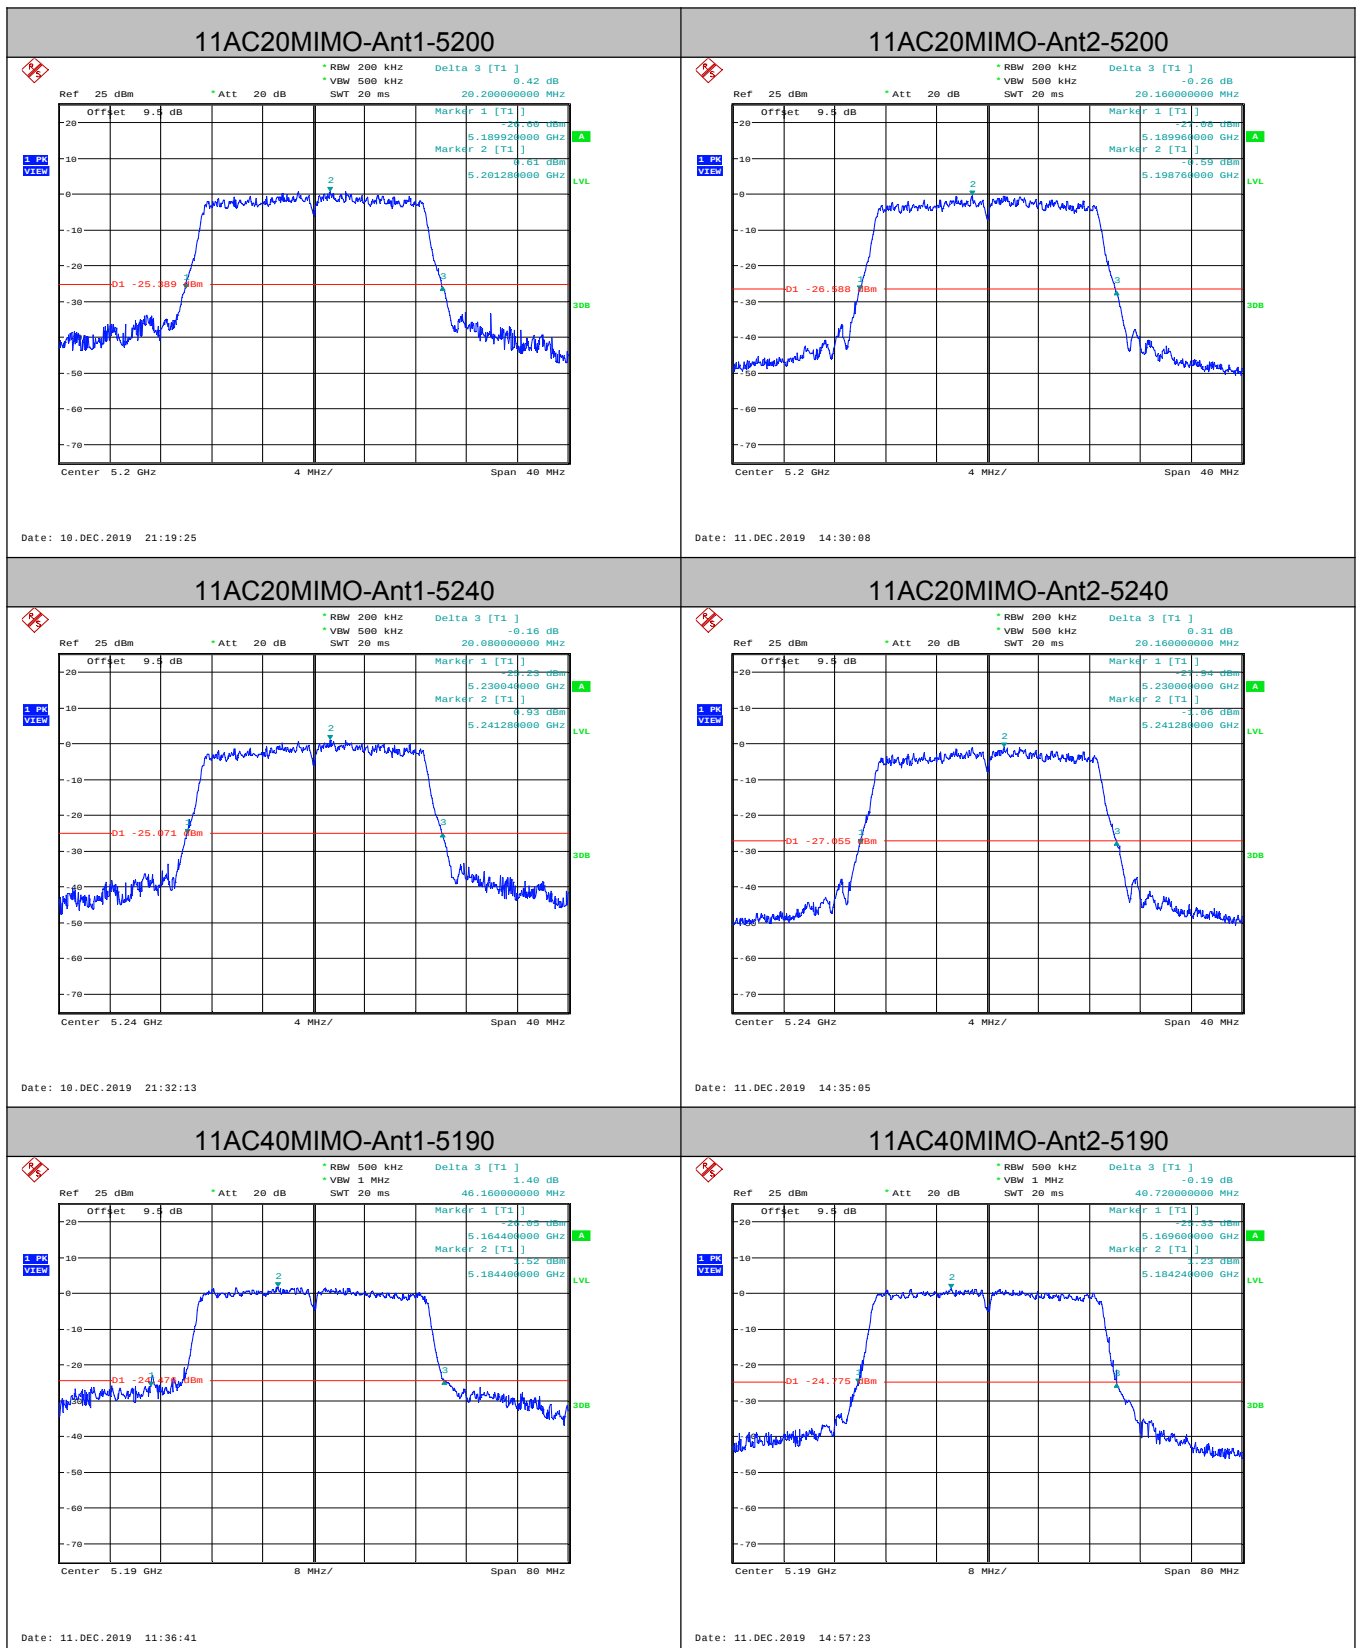

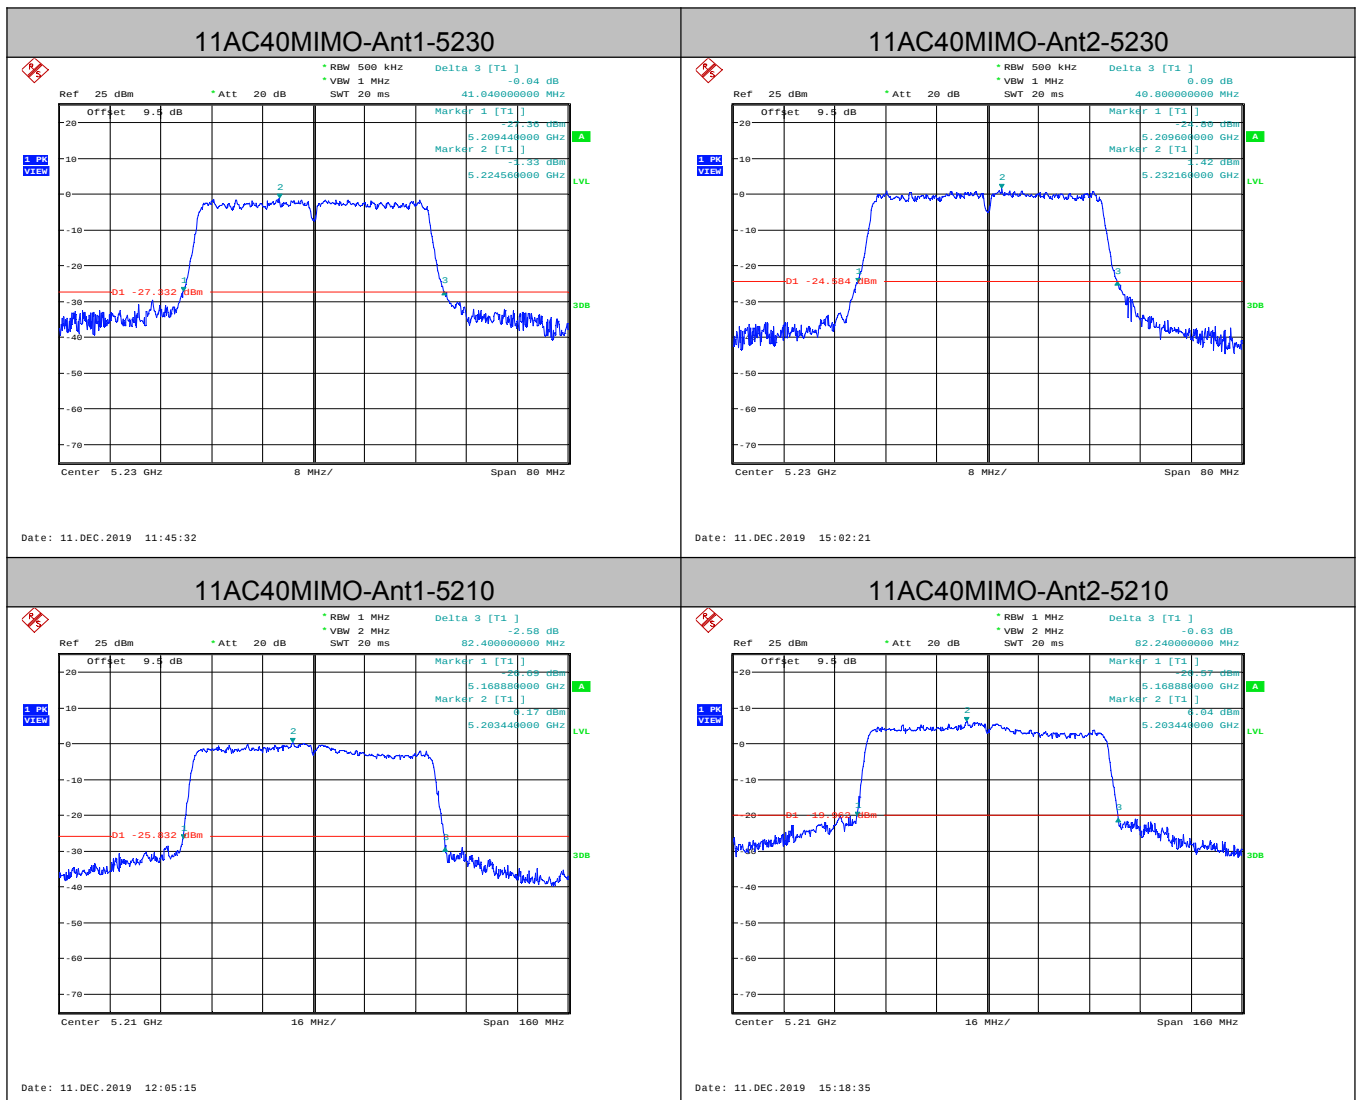


6dB Occupied Bandwidth:


Measurement Data


Test Mode	Test Channel	Ant	EBW[MHz]	Limit[MHz]	Verdict
11A	5745	Ant1	15.840	0.5	PASS
11A	5745	Ant2	16.080	0.5	PASS
11A	5785	Ant1	15.680	0.5	PASS
11A	5785	Ant2	16.000	0.5	PASS
11A	5825	Ant1	16.400	0.5	PASS
11A	5825	Ant2	16.320	0.5	PASS
11N20SISO	5745	Ant1	15.440	0.5	PASS
11N20SISO	5745	Ant2	16.360	0.5	PASS
11N20SISO	5785	Ant1	16.400	0.5	PASS
11N20SISO	5785	Ant2	16.360	0.5	PASS
11N20SISO	5825	Ant1	17.160	0.5	PASS
11N20SISO	5825	Ant2	17.120	0.5	PASS
11N40SISO	5755	Ant1	35.280	0.5	PASS
11N40SISO	5755	Ant2	35.200	0.5	PASS
11N40SISO	5795	Ant1	35.280	0.5	PASS
11N40SISO	5795	Ant2	35.280	0.5	PASS
11AC20SISO	5745	Ant1	16.400	0.5	PASS
11AC20SISO	5745	Ant2	16.520	0.5	PASS
11AC20SISO	5785	Ant1	16.400	0.5	PASS
11AC20SISO	5785	Ant2	16.720	0.5	PASS
11AC20SISO	5825	Ant1	17.000	0.5	PASS
11AC20SISO	5825	Ant2	16.960	0.5	PASS
11AC40SISO	5755	Ant1	35.360	0.5	PASS
11AC40SISO	5755	Ant2	35.360	0.5	PASS
11AC40SISO	5795	Ant1	35.280	0.5	PASS
11AC40SISO	5795	Ant2	35.200	0.5	PASS


11AC80SISO	5775	Ant1	75.520	0.5	PASS
11AC80SISO	5775	Ant2	75.520	0.5	PASS
11N20MIMO	5745	Ant1	16.400	0.5	PASS
11N20MIMO	5745	Ant2	16.360	0.5	PASS
11N20MIMO	5785	Ant1	16.360	0.5	PASS
11N20MIMO	5785	Ant2	16.720	0.5	PASS
11N20MIMO	5825	Ant1	17.120	0.5	PASS
11N20MIMO	5825	Ant2	17.120	0.5	PASS
11N40MIMO	5755	Ant1	35.280	0.5	PASS
11N40MIMO	5755	Ant2	35.280	0.5	PASS
11N40MIMO	5795	Ant1	35.280	0.5	PASS
11N40MIMO	5795	Ant2	35.200	0.5	PASS
11AC20MIMO	5745	Ant1	16.480	0.5	PASS
11AC20MIMO	5745	Ant2	16.160	0.5	PASS
11AC20MIMO	5785	Ant1	16.760	0.5	PASS
11AC20MIMO	5785	Ant2	16.720	0.5	PASS
11AC20MIMO	5825	Ant1	17.160	0.5	PASS
11AC20MIMO	5825	Ant2	17.080	0.5	PASS
11AC40MIMO	5755	Ant1	35.280	0.5	PASS
11AC40MIMO	5755	Ant2	35.360	0.5	PASS
11AC40MIMO	5795	Ant1	35.200	0.5	PASS
11AC40MIMO	5795	Ant2	35.200	0.5	PASS
11AC80MIMO	5775	Ant1	75.520	0.5	PASS
11AC80MIMO	5775	Ant2	75.360	0.5	PASS


Test plot as follows:

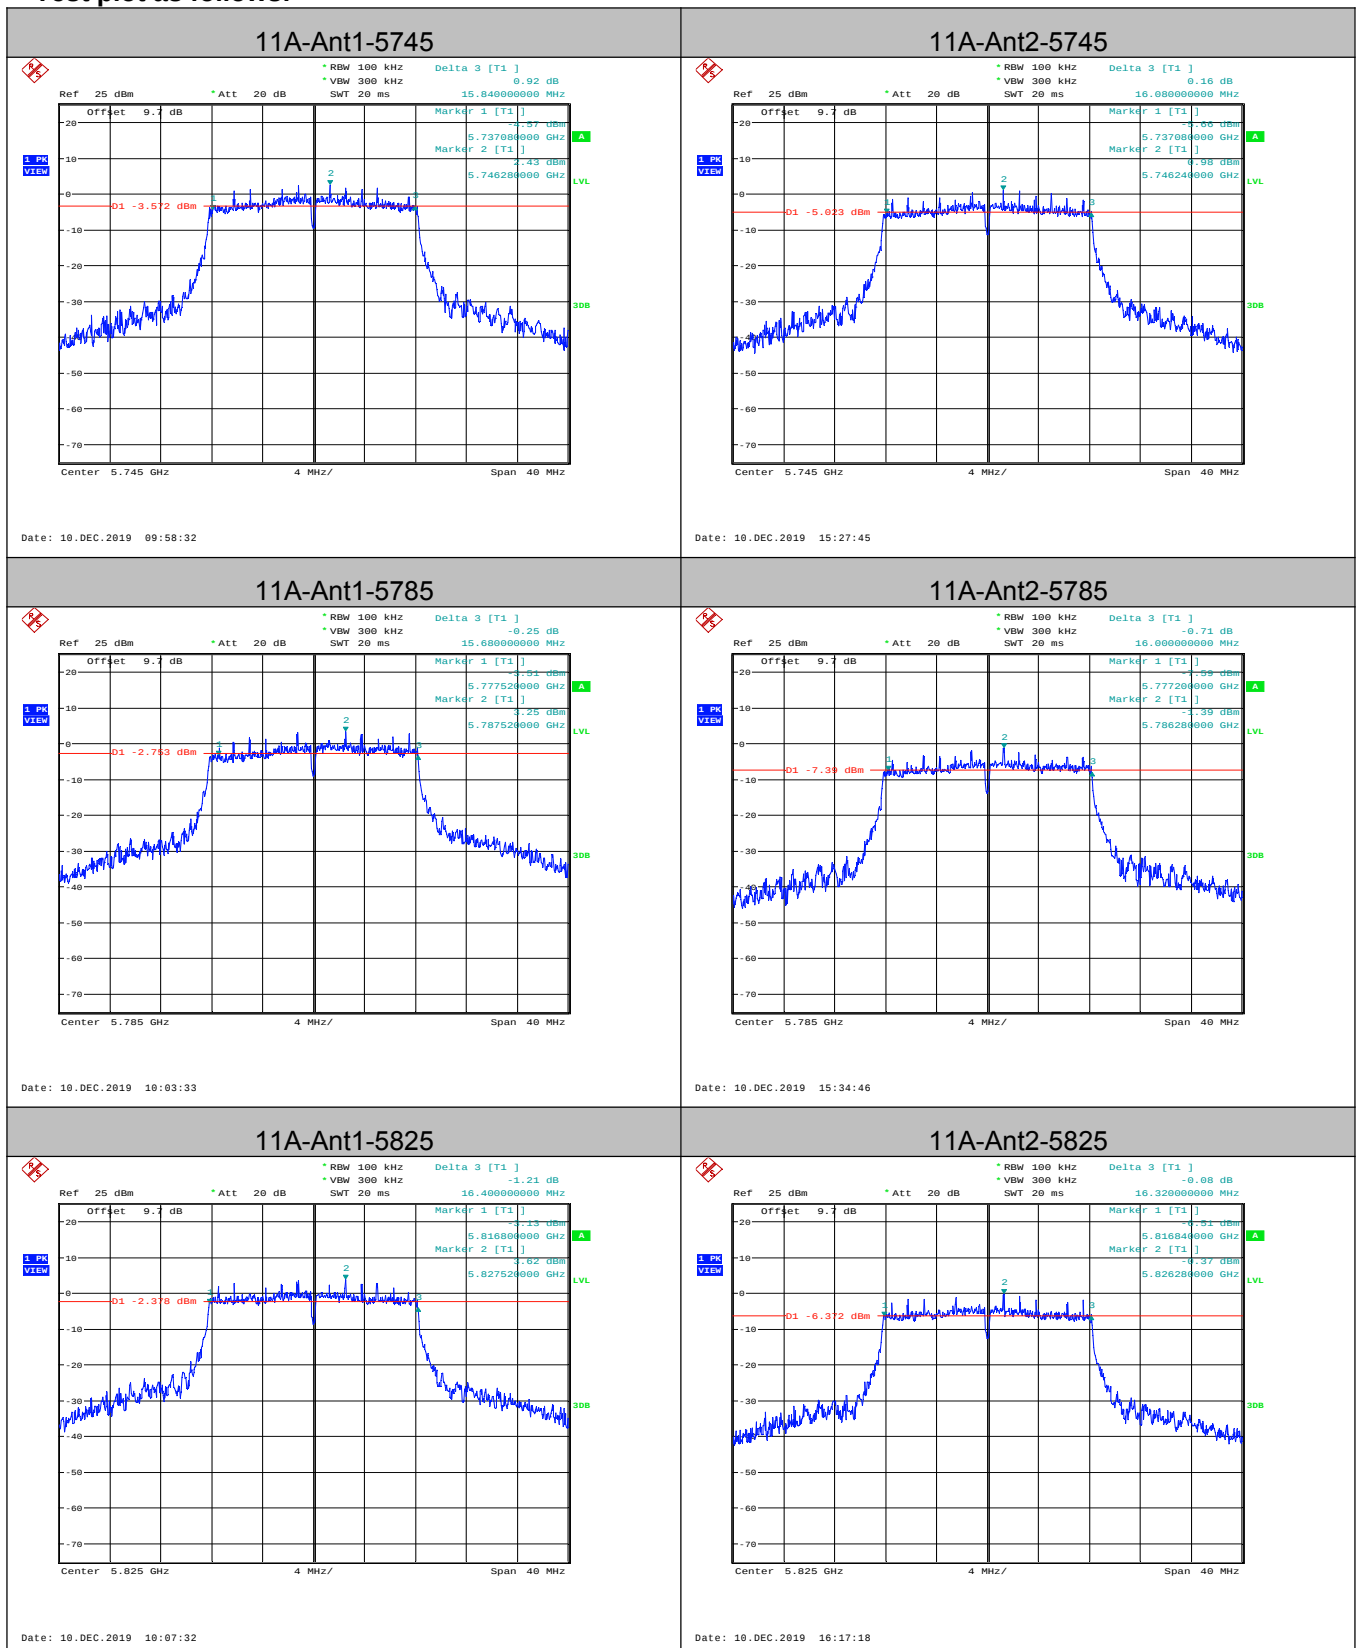


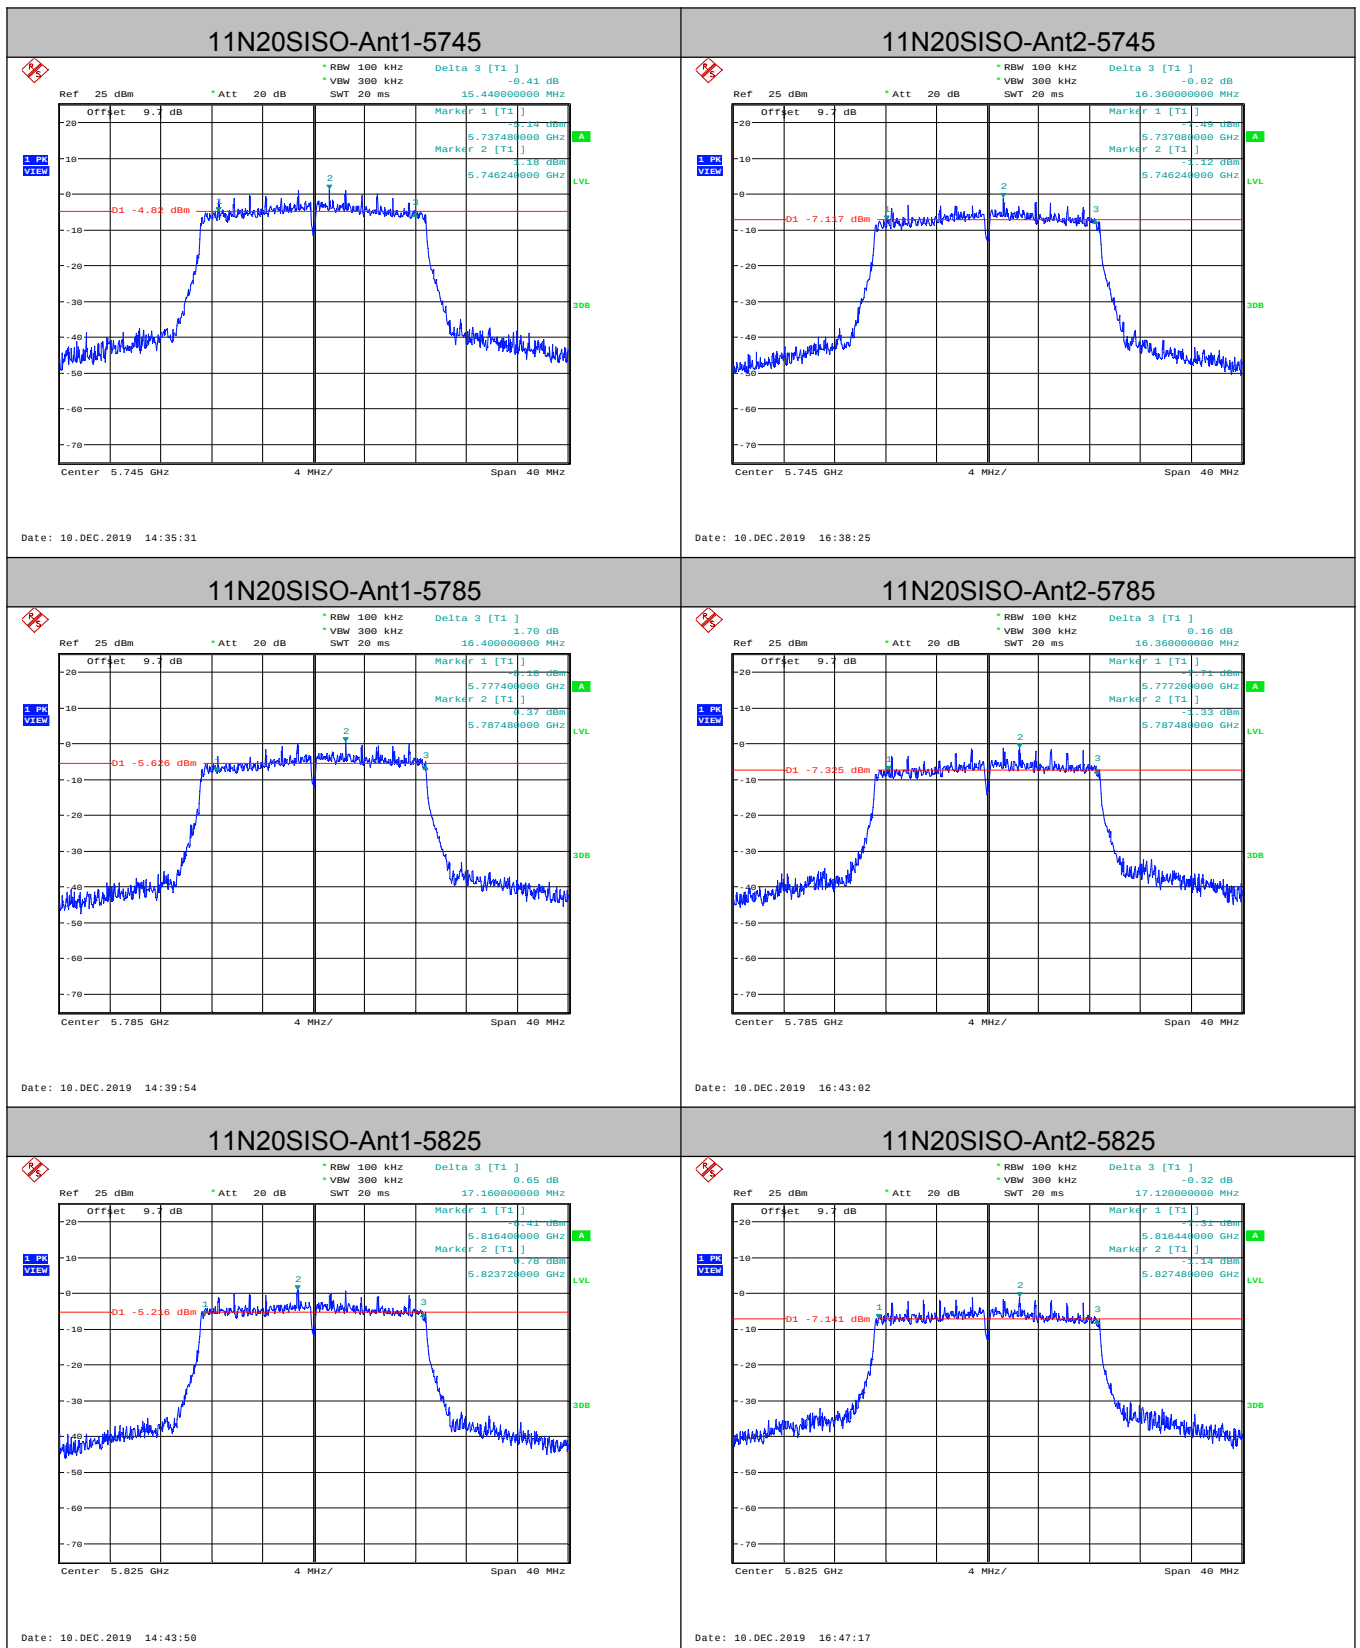


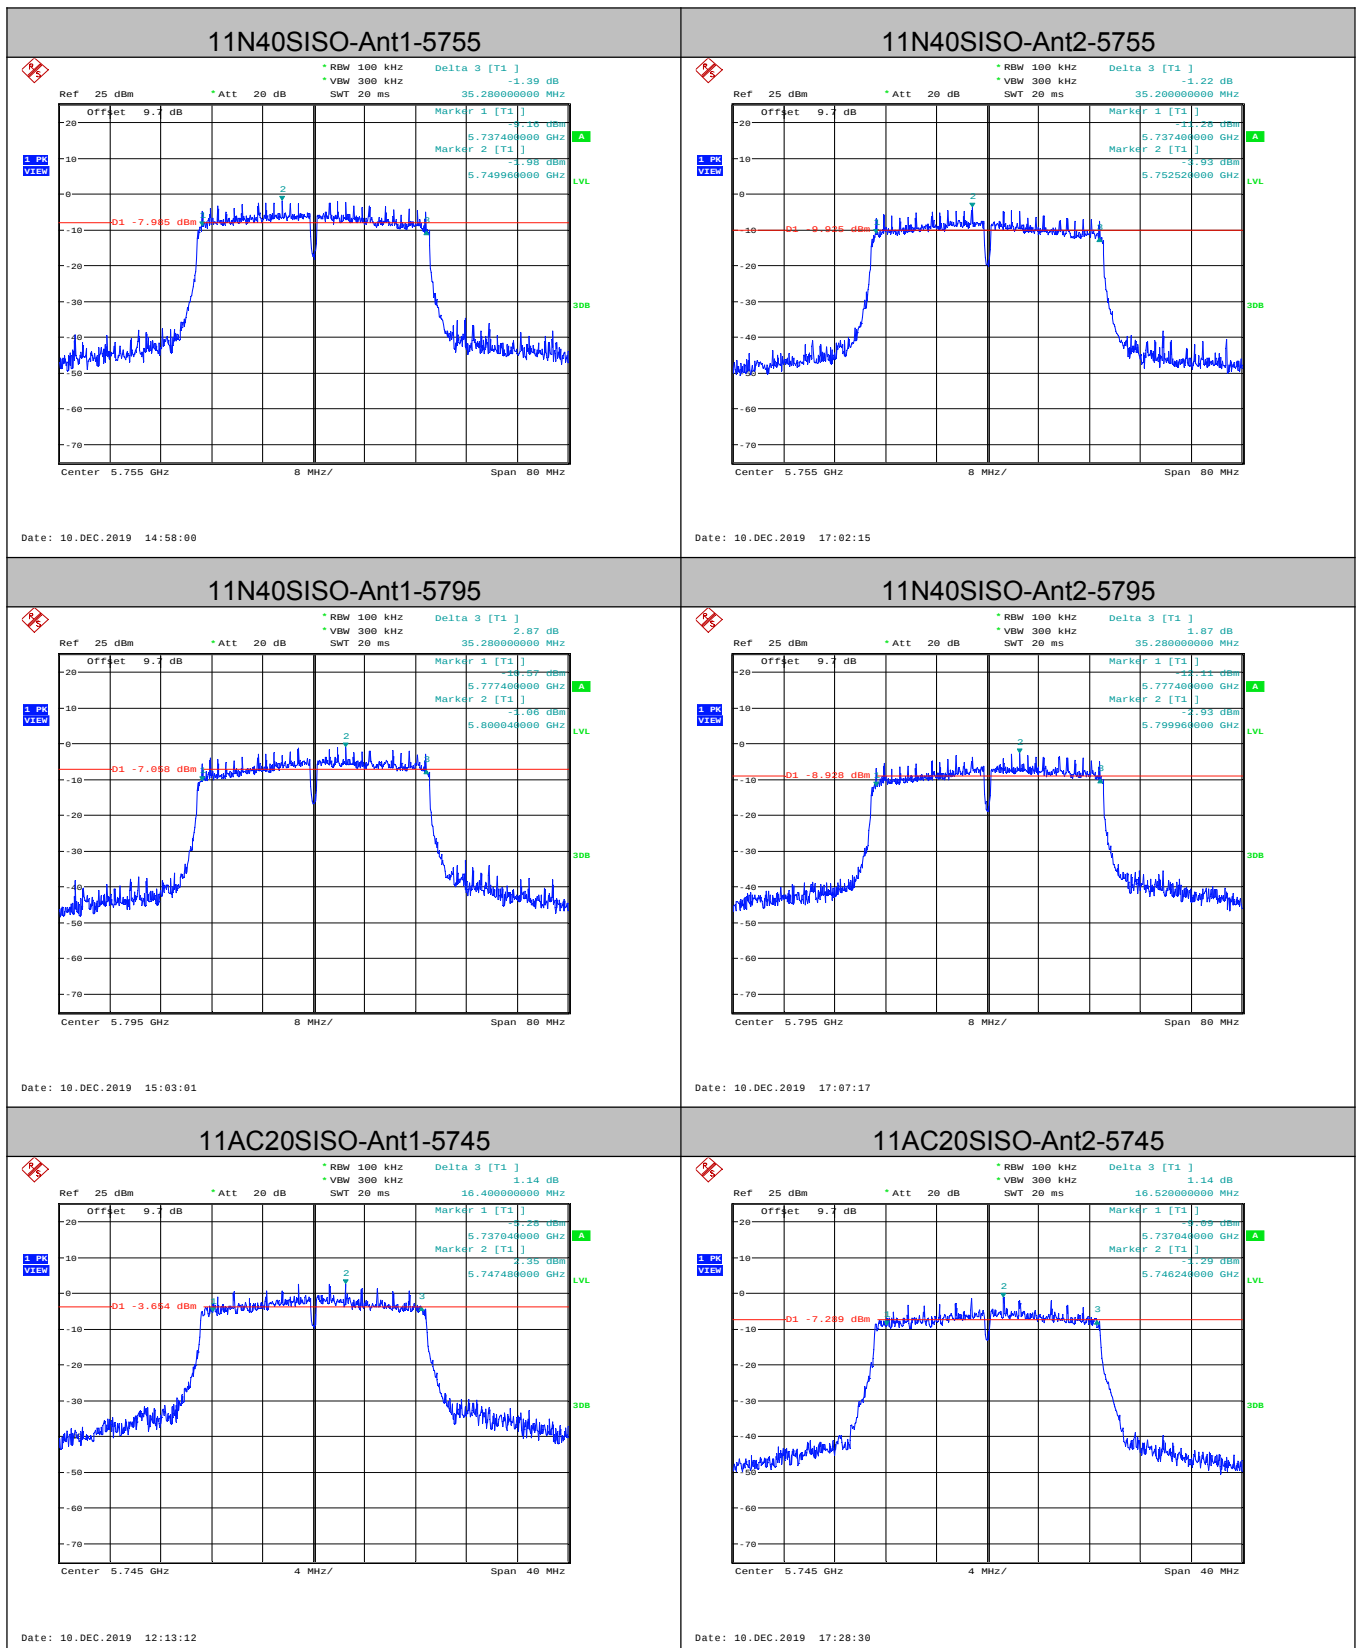


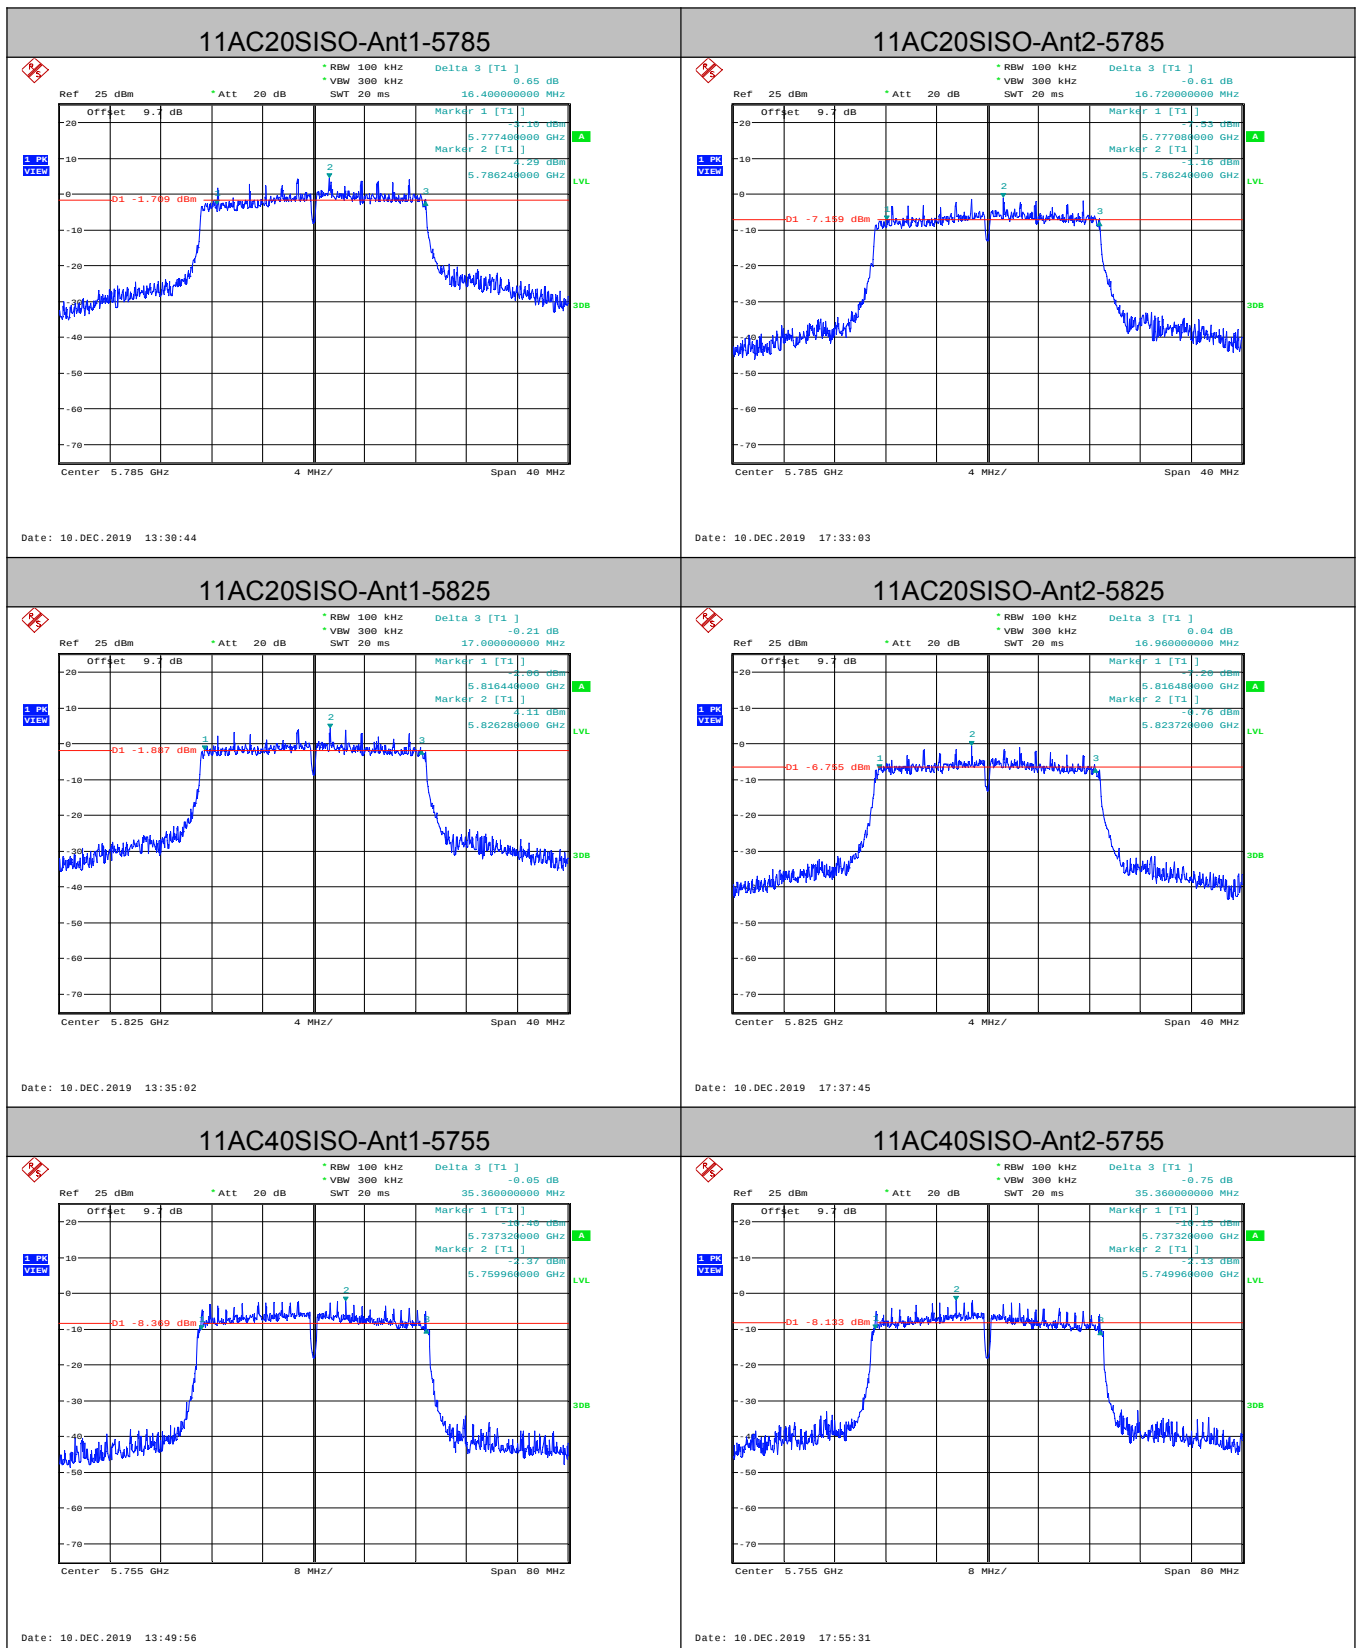


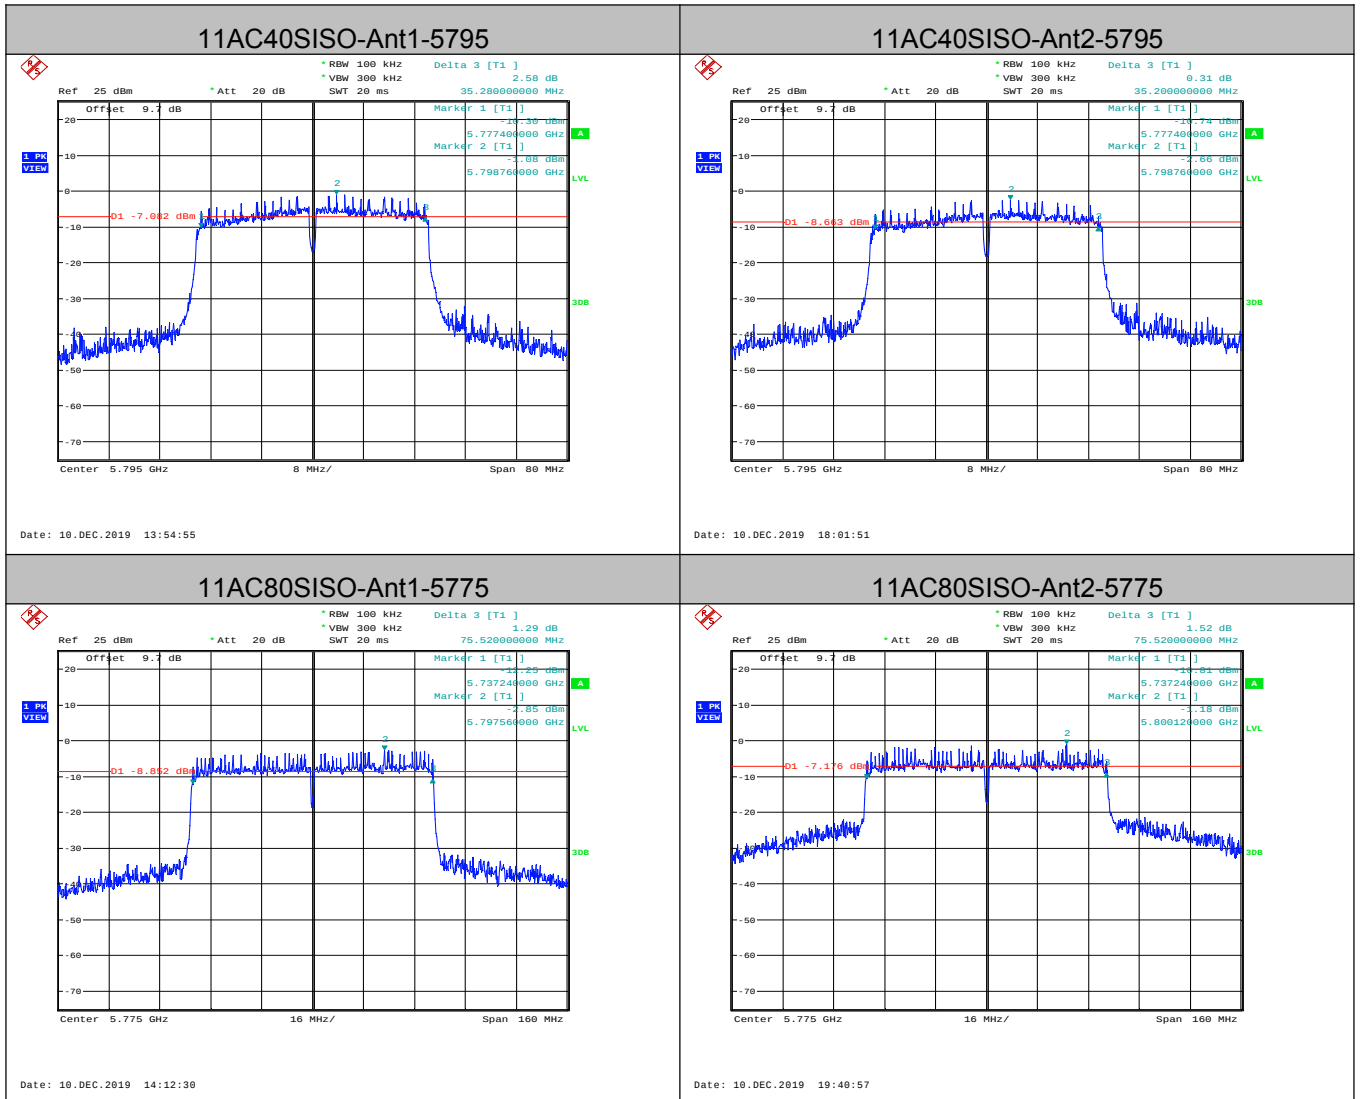

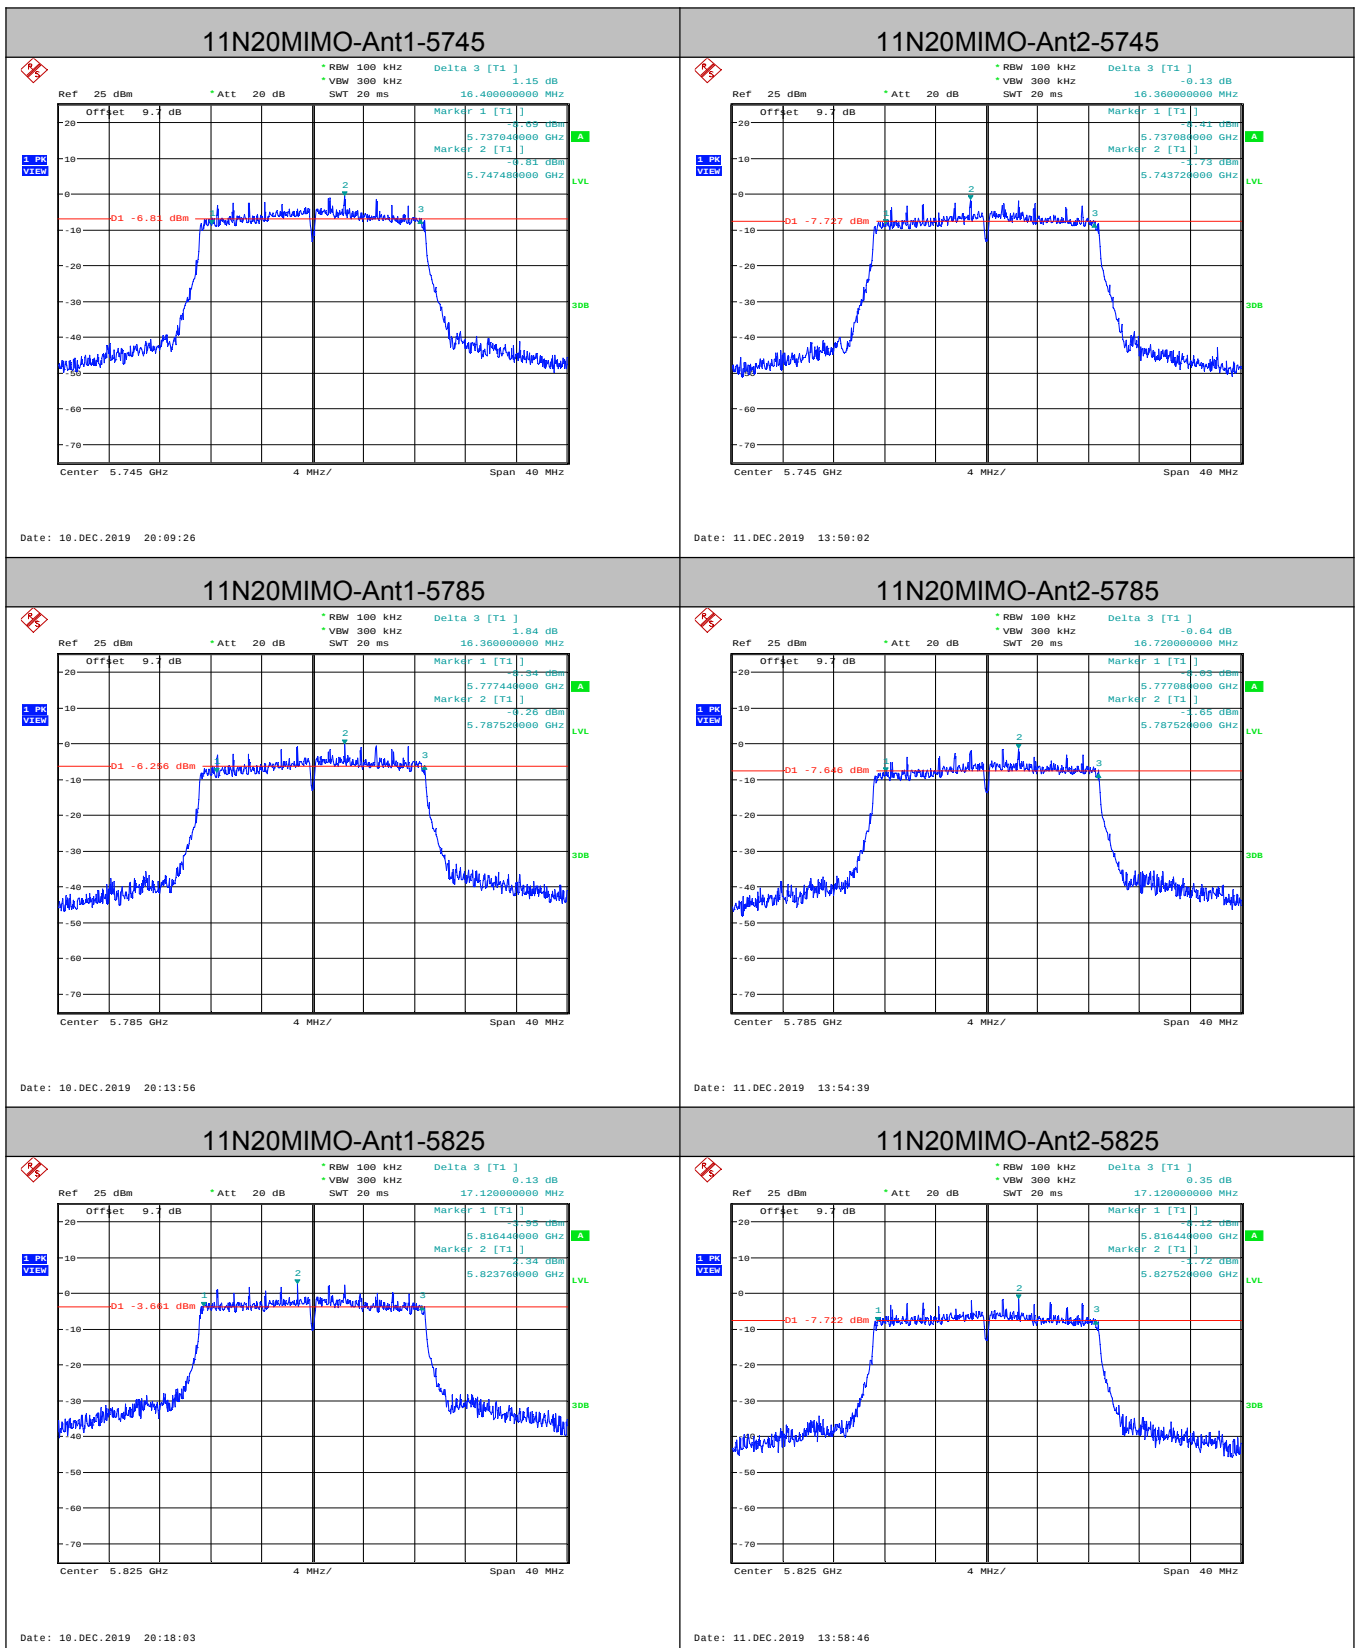

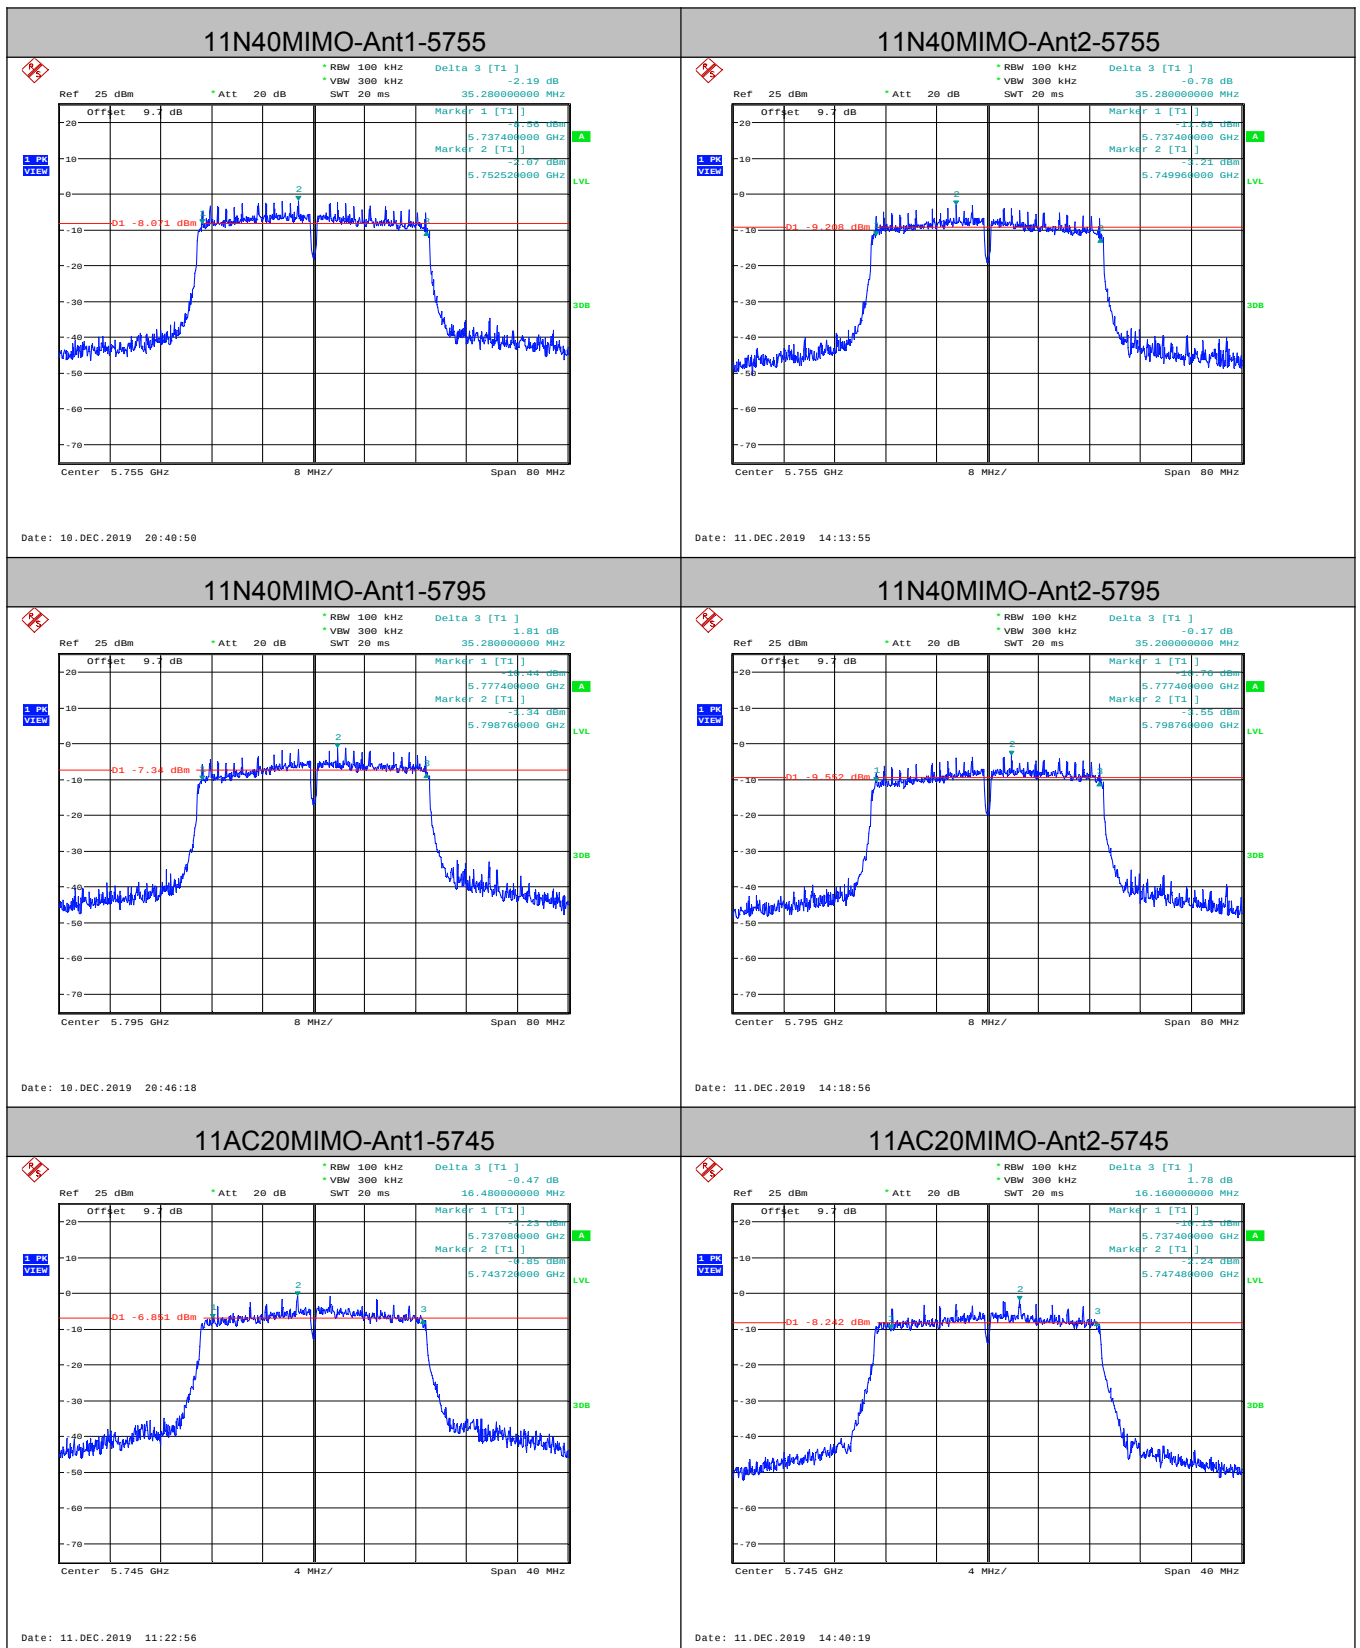

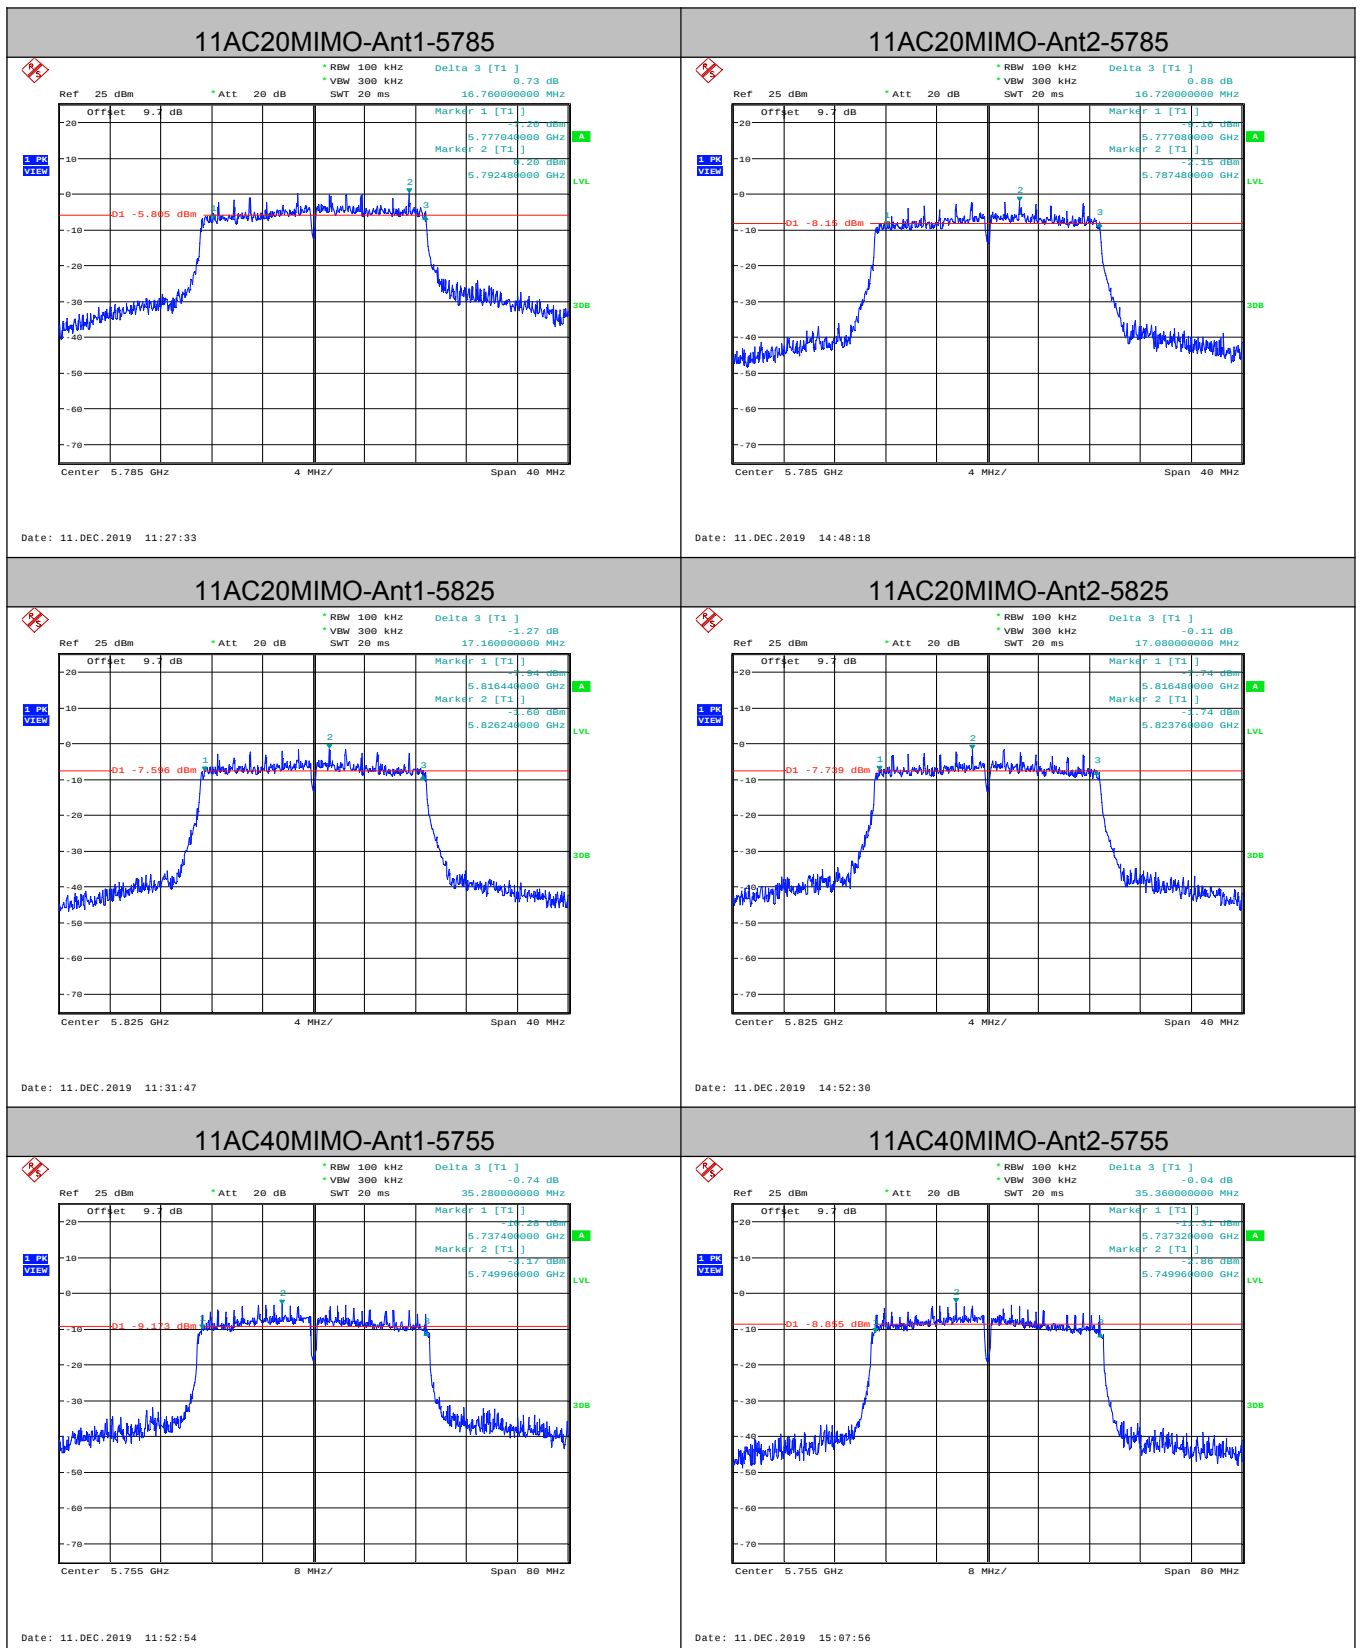

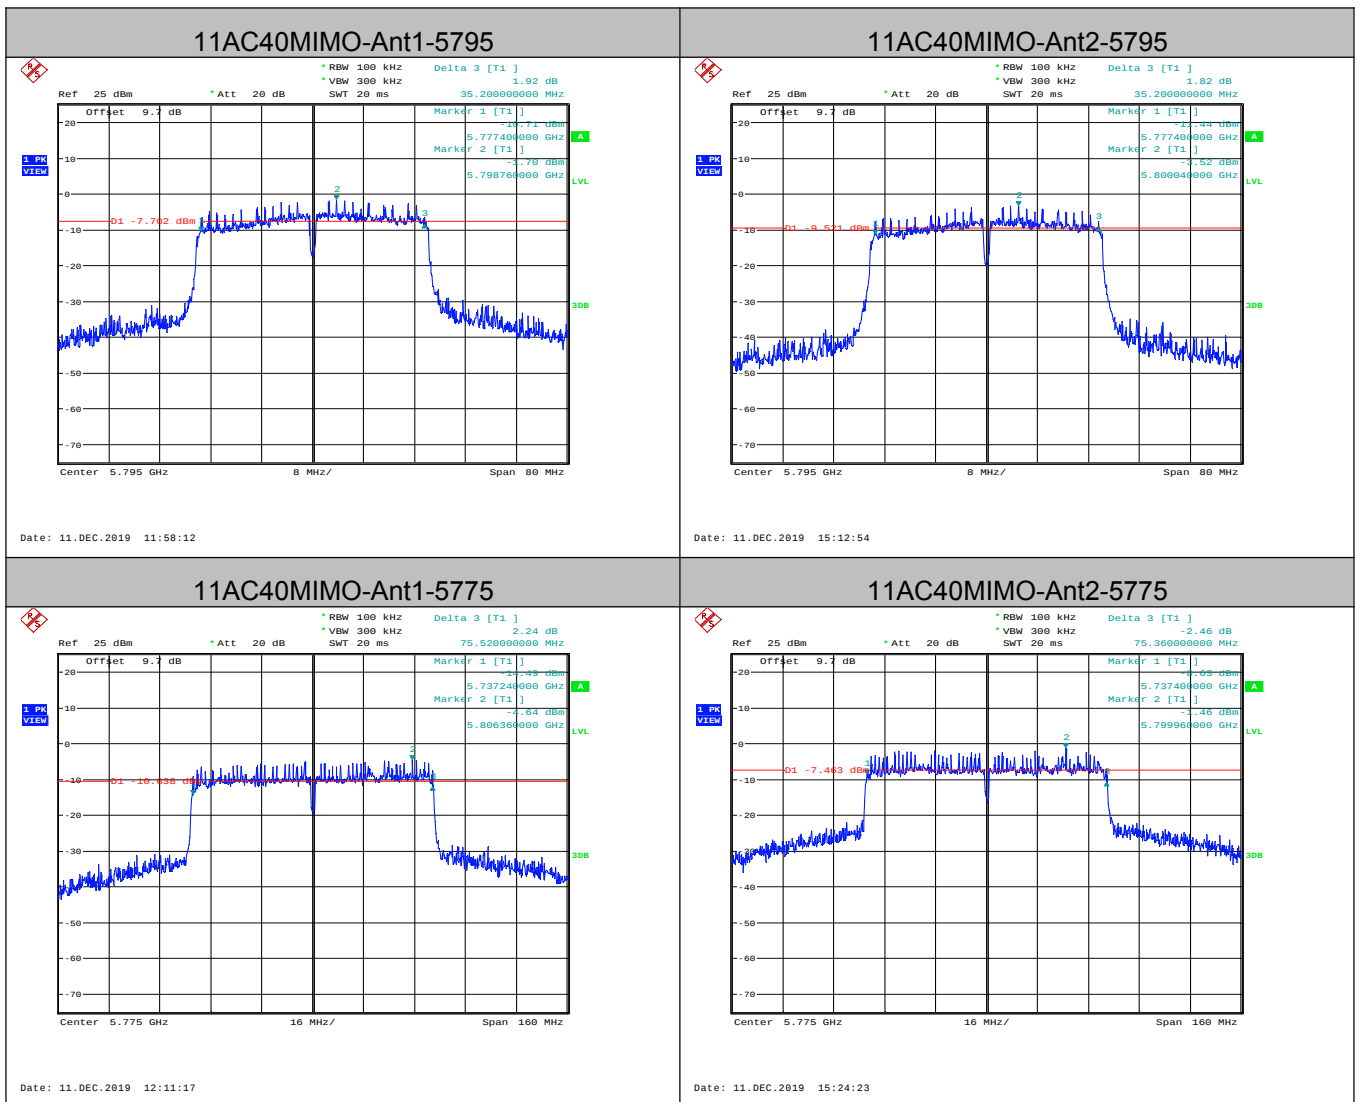

99% Occupied Bandwidth:

Measurement Data


Test Mode	Test Channel	Ant	EBW[MHz]	Limit[MHz]	Verdict
11A	5180	Ant1	17.720	---	PASS
11A	5180	Ant2	17.695	---	PASS
11A	5200	Ant1	17.730	---	PASS
11A	5200	Ant2	17.710	---	PASS
11A	5240	Ant1	17.675	---	PASS
11A	5240	Ant2	17.680	---	PASS
11A	5745	Ant1	17.590	---	PASS
11A	5745	Ant2	17.670	---	PASS
11A	5785	Ant1	17.720	---	PASS
11A	5785	Ant2	17.705	---	PASS
11A	5825	Ant1	17.730	---	PASS
11A	5825	Ant2	17.760	---	PASS
11N20SISO	5180	Ant1	17.690	---	PASS
11N20SISO	5180	Ant2	17.690	---	PASS
11N20SISO	5200	Ant1	17.730	---	PASS
11N20SISO	5200	Ant2	17.725	---	PASS
11N20SISO	5240	Ant1	17.685	---	PASS
11N20SISO	5240	Ant2	17.685	---	PASS
11N20SISO	5745	Ant1	17.700	---	PASS
11N20SISO	5745	Ant2	17.655	---	PASS
11N20SISO	5785	Ant1	17.825	---	PASS
11N20SISO	5785	Ant2	17.725	---	PASS
11N20SISO	5825	Ant1	17.780	---	PASS
11N20SISO	5825	Ant2	17.745	---	PASS
11N40SISO	5190	Ant1	36.100	---	PASS
11N40SISO	5190	Ant2	36.080	---	PASS


11N40SISO	5230	Ant1	36.240	---	PASS
11N40SISO	5230	Ant2	36.210	---	PASS
11N40SISO	5755	Ant1	36.090	---	PASS
11N40SISO	5755	Ant2	36.060	---	PASS
11N40SISO	5795	Ant1	36.080	---	PASS
11N40SISO	5795	Ant2	36.000	---	PASS
11AC20SISO	5180	Ant1	17.705	---	PASS
11AC20SISO	5180	Ant2	17.690	---	PASS
11AC20SISO	5200	Ant1	17.725	---	PASS
11AC20SISO	5200	Ant2	17.705	---	PASS
11AC20SISO	5240	Ant1	17.680	---	PASS
11AC20SISO	5240	Ant2	17.680	---	PASS
11AC20SISO	5745	Ant1	17.665	---	PASS
11AC20SISO	5745	Ant2	17.655	---	PASS
11AC20SISO	5785	Ant1	17.750	---	PASS
11AC20SISO	5785	Ant2	17.700	---	PASS
11AC20SISO	5825	Ant1	17.750	---	PASS
11AC20SISO	5825	Ant2	17.755	---	PASS
11AC40SISO	5190	Ant1	36.120	---	PASS
11AC40SISO	5190	Ant2	36.080	---	PASS
11AC40SISO	5230	Ant1	36.250	---	PASS
11AC40SISO	5230	Ant2	36.210	---	PASS
11AC40SISO	5755	Ant1	36.160	---	PASS
11AC40SISO	5755	Ant2	36.040	---	PASS
11AC40SISO	5795	Ant1	36.040	---	PASS
11AC40SISO	5795	Ant2	36.030	---	PASS
11AC80SISO	5210	Ant1	75.380	---	PASS
11AC80SISO	5210	Ant2	75.280	---	PASS
11AC80SISO	5775	Ant1	75.380	---	PASS


11AC80SISO	5775	Ant2	75.320	---	PASS
11N20MIMO	5180	Ant1	17.695	---	PASS
11N20MIMO	5180	Ant2	17.695	---	PASS
11N20MIMO	5200	Ant1	17.730	---	PASS
11N20MIMO	5200	Ant2	17.725	---	PASS
11N20MIMO	5240	Ant1	17.685	---	PASS
11N20MIMO	5240	Ant2	17.675	---	PASS
11N20MIMO	5745	Ant1	17.660	---	PASS
11N20MIMO	5745	Ant2	17.650	---	PASS
11N20MIMO	5785	Ant1	17.745	---	PASS
11N20MIMO	5785	Ant2	17.700	---	PASS
11N20MIMO	5825	Ant1	17.745	---	PASS
11N20MIMO	5825	Ant2	17.735	---	PASS
11N40MIMO	5190	Ant1	36.100	---	PASS
11N40MIMO	5190	Ant2	36.080	---	PASS
11N40MIMO	5230	Ant1	36.280	---	PASS
11N40MIMO	5230	Ant2	36.220	---	PASS
11N40MIMO	5755	Ant1	36.060	---	PASS
11N40MIMO	5755	Ant2	36.060	---	PASS
11N40MIMO	5795	Ant1	36.030	---	PASS
11N40MIMO	5795	Ant2	36.020	---	PASS
11AC20MIMO	5180	Ant1	17.720	---	PASS
11AC20MIMO	5180	Ant2	17.670	---	PASS
11AC20MIMO	5200	Ant1	17.735	---	PASS
11AC20MIMO	5200	Ant2	17.710	---	PASS
11AC20MIMO	5240	Ant1	17.690	---	PASS
11AC20MIMO	5240	Ant2	17.690	---	PASS
11AC20MIMO	5745	Ant1	17.655	---	PASS
11AC20MIMO	5745	Ant2	17.660	---	PASS


11AC20MIMO	5785	Ant1	17.740	---	PASS
11AC20MIMO	5785	Ant2	17.725	---	PASS
11AC20MIMO	5825	Ant1	17.750	---	PASS
11AC20MIMO	5825	Ant2	17.735	---	PASS
11AC40MIMO	5190	Ant1	36.090	---	PASS
11AC40MIMO	5190	Ant2	36.090	---	PASS
11AC40MIMO	5230	Ant1	36.270	---	PASS
11AC40MIMO	5230	Ant2	36.260	---	PASS
11AC40MIMO	5755	Ant1	36.070	---	PASS
11AC40MIMO	5755	Ant2	36.050	---	PASS
11AC40MIMO	5795	Ant1	36.040	---	PASS
11AC40MIMO	5795	Ant2	36.010	---	PASS
11AC80MIMO	5210	Ant1	75.420	---	PASS
11AC80MIMO	5210	Ant2	75.280	---	PASS
11AC80MIMO	5775	Ant1	75.400	---	PASS
11AC80MIMO	5775	Ant2	75.340	---	PASS


Test plot as follows:

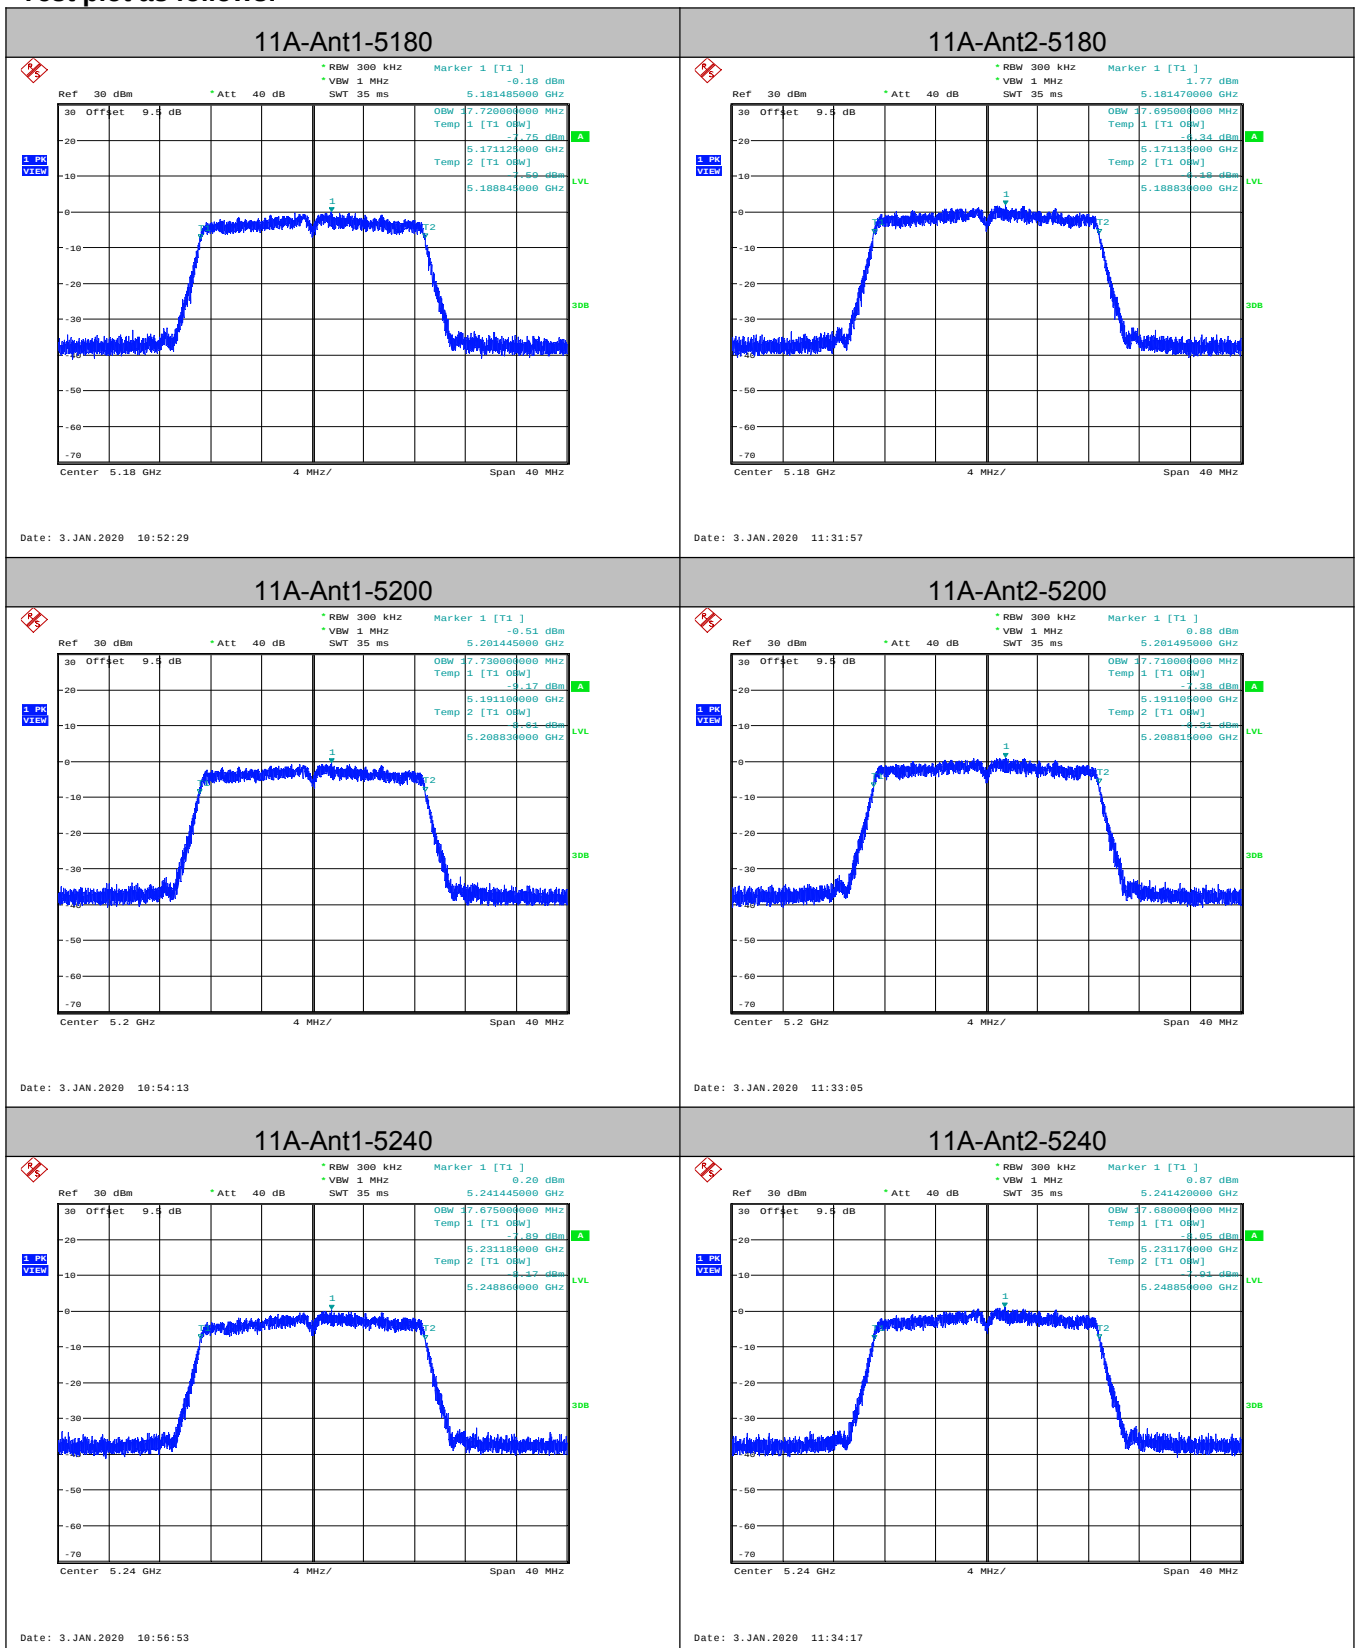


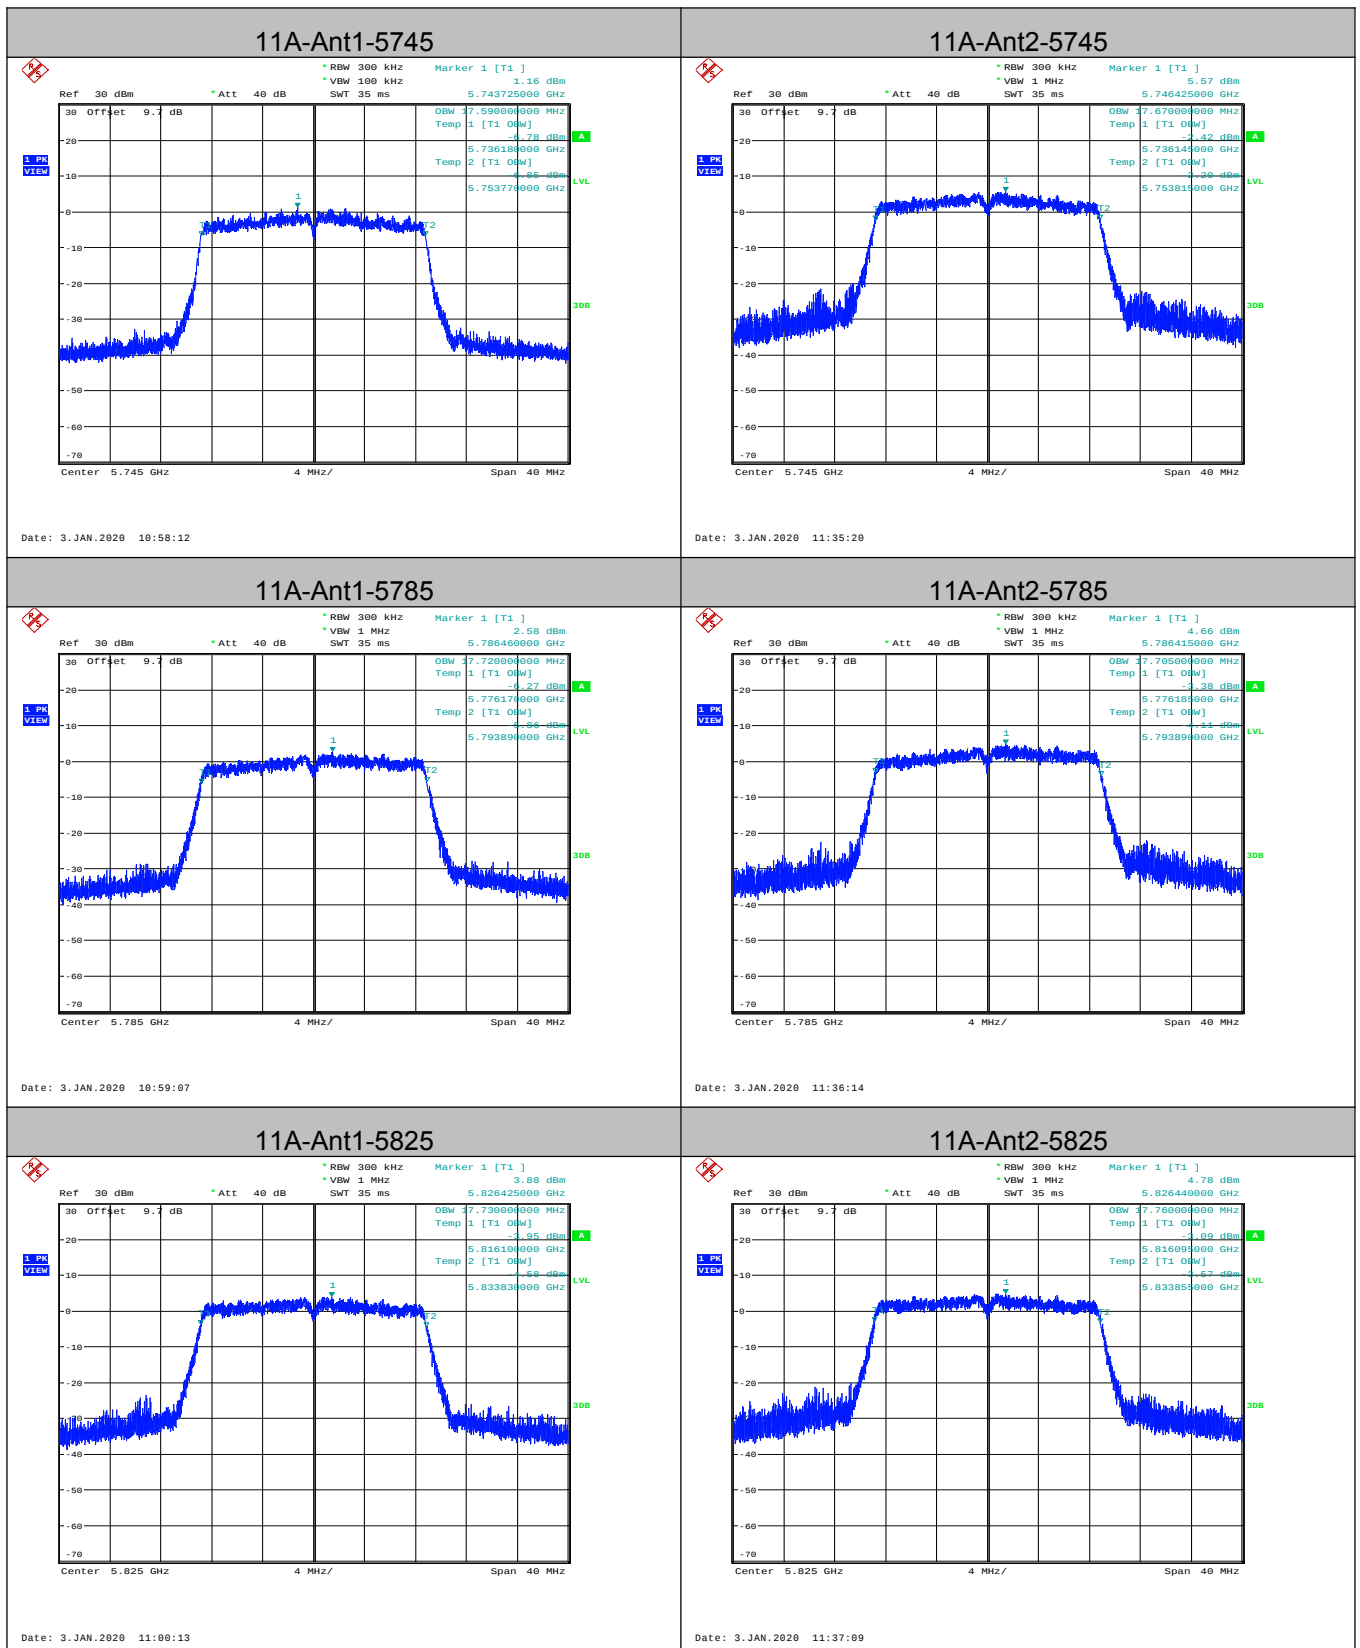


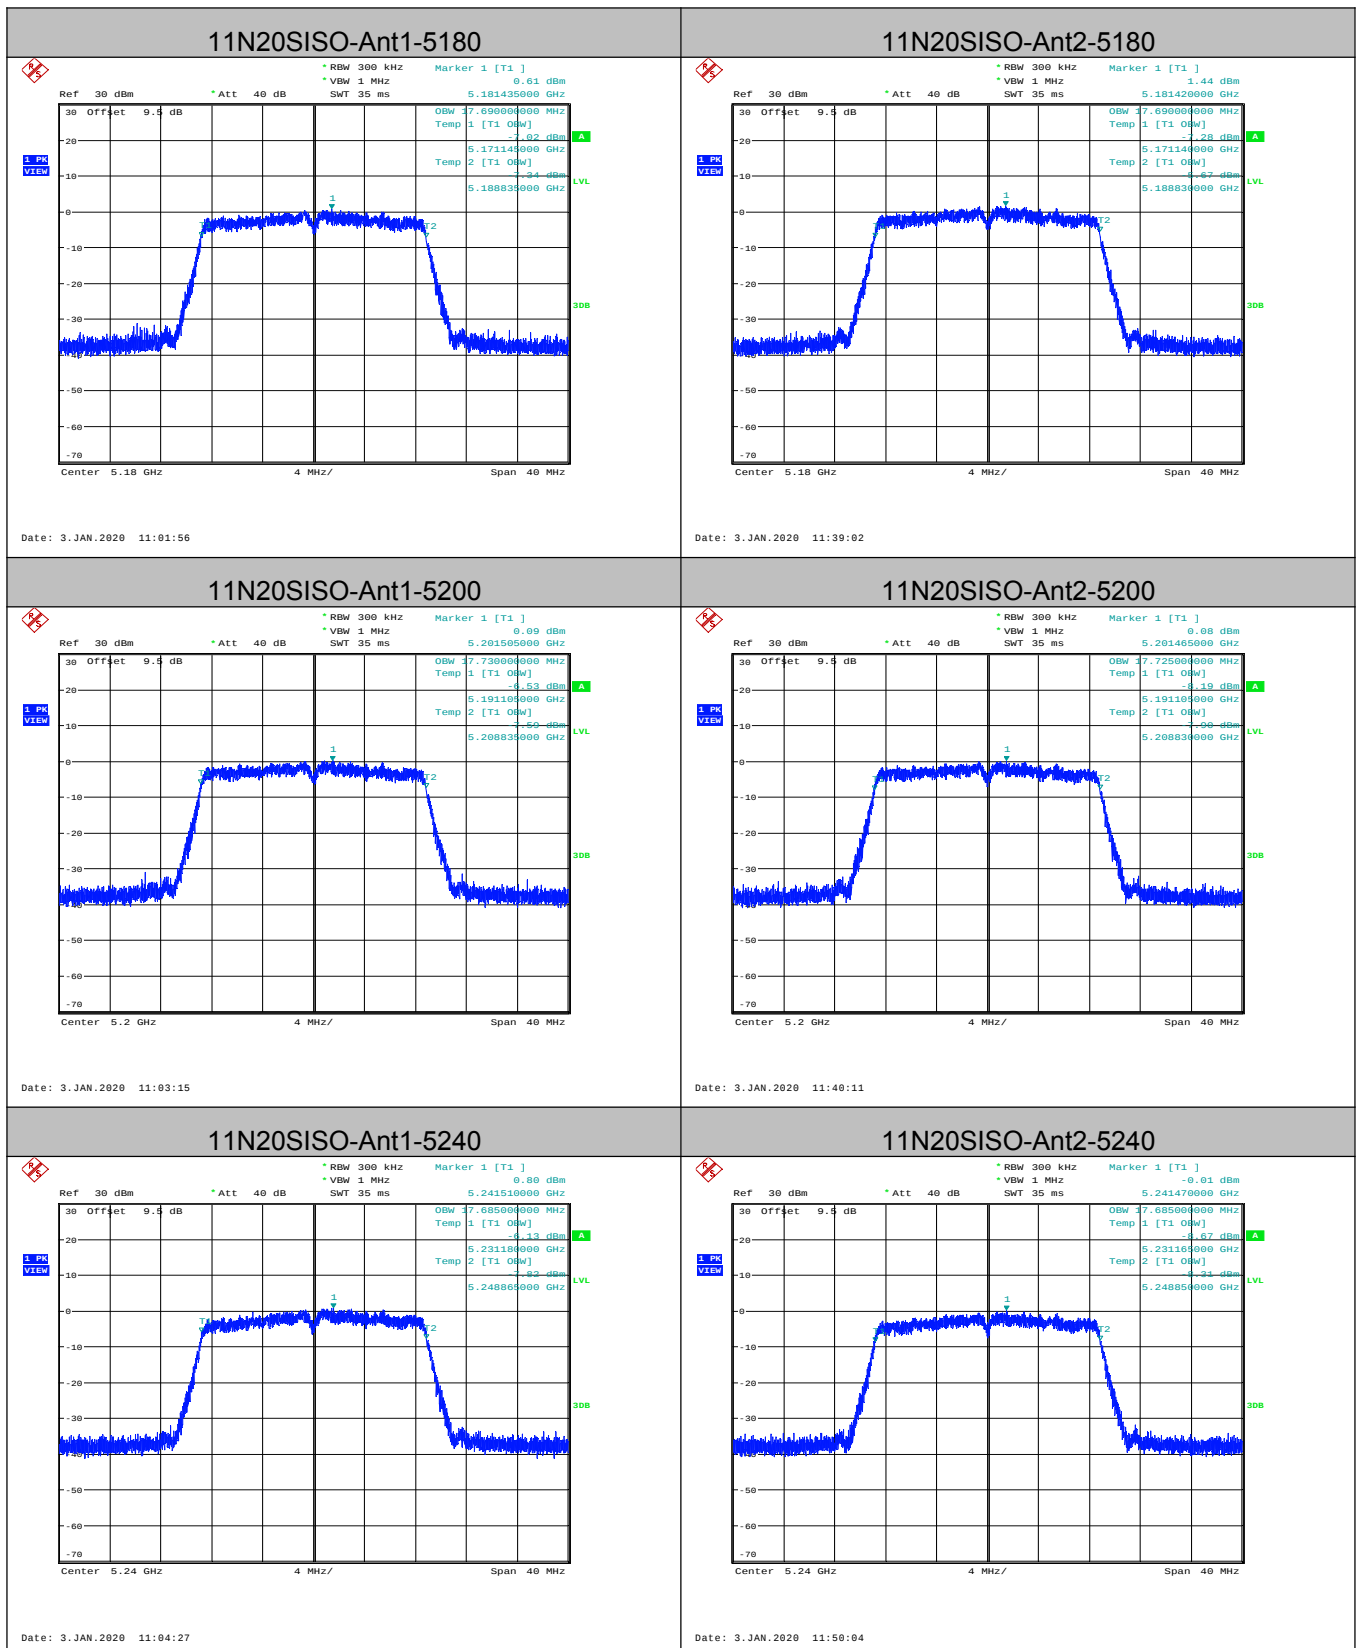


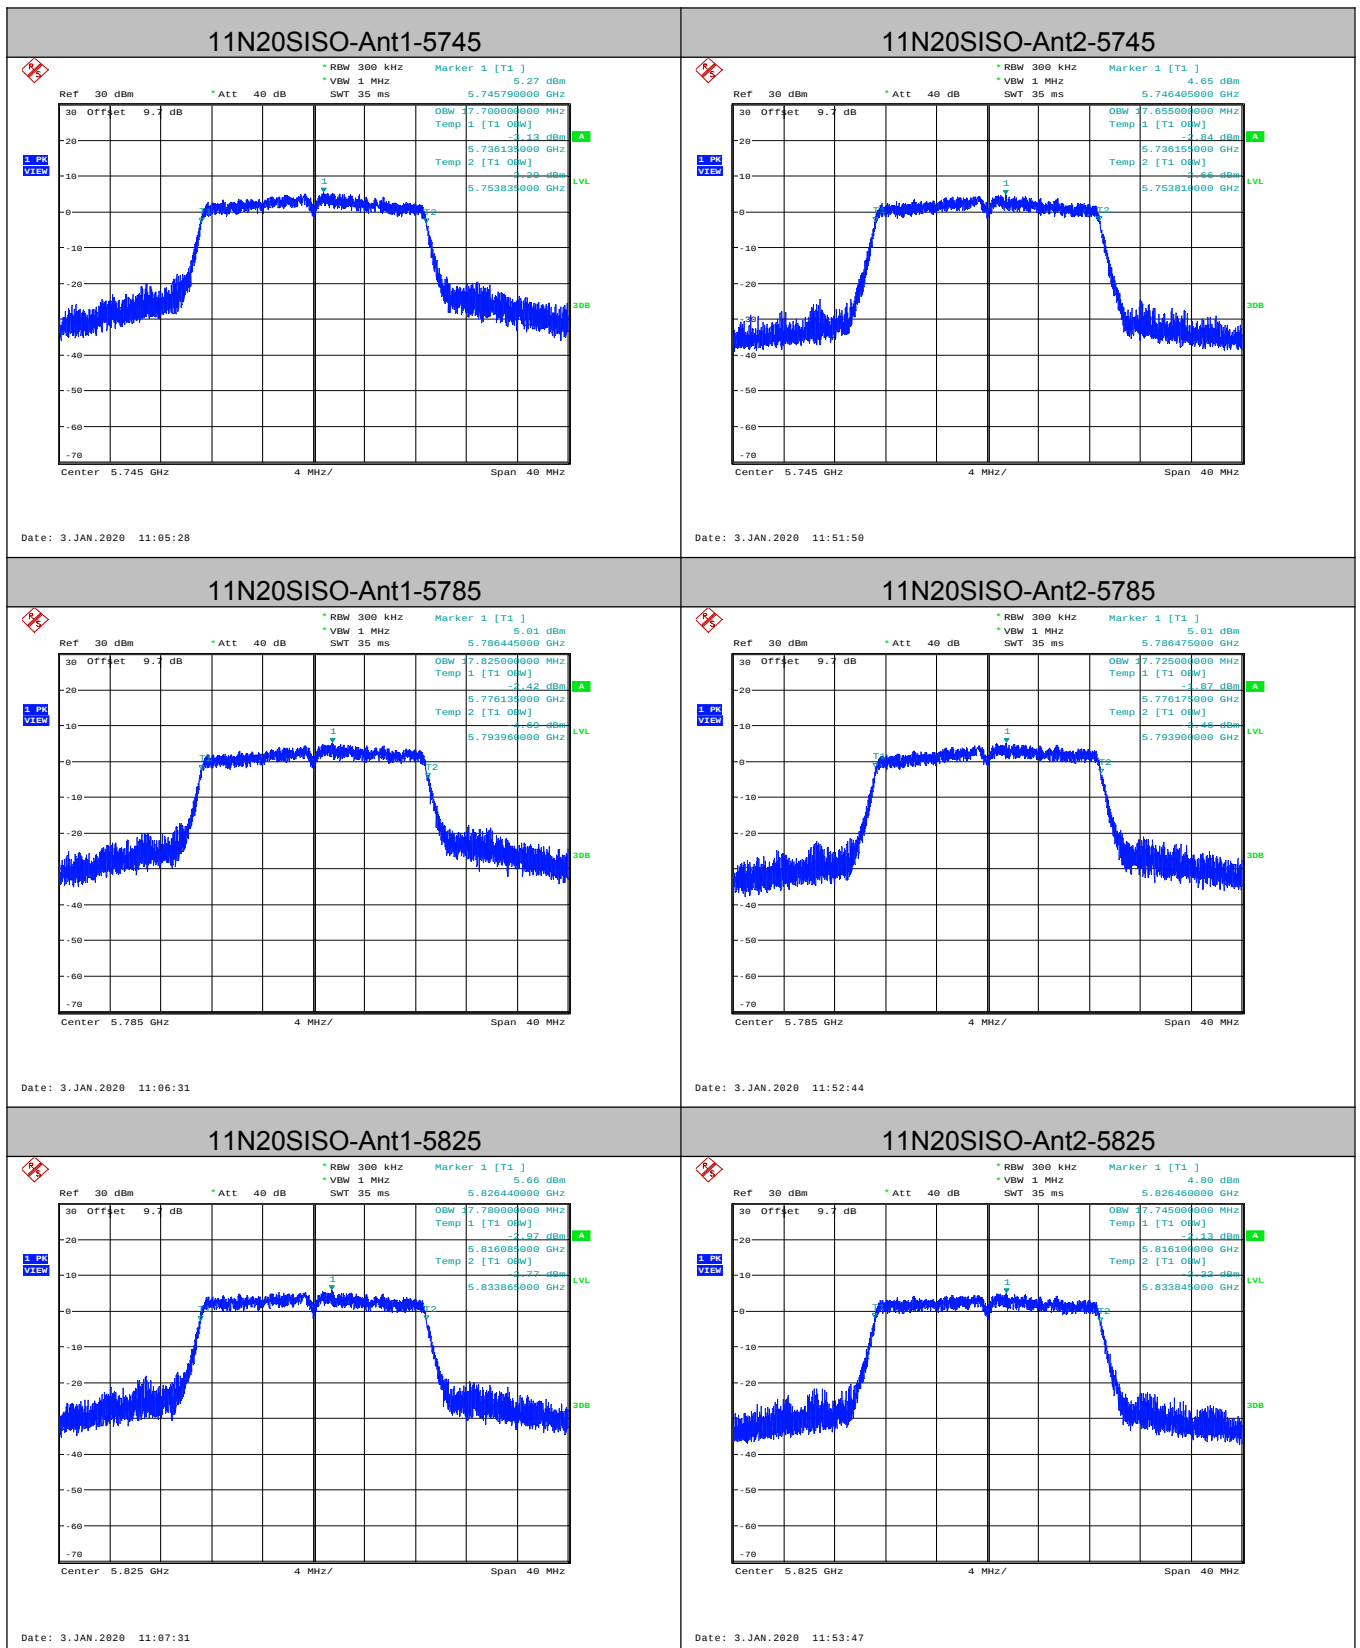


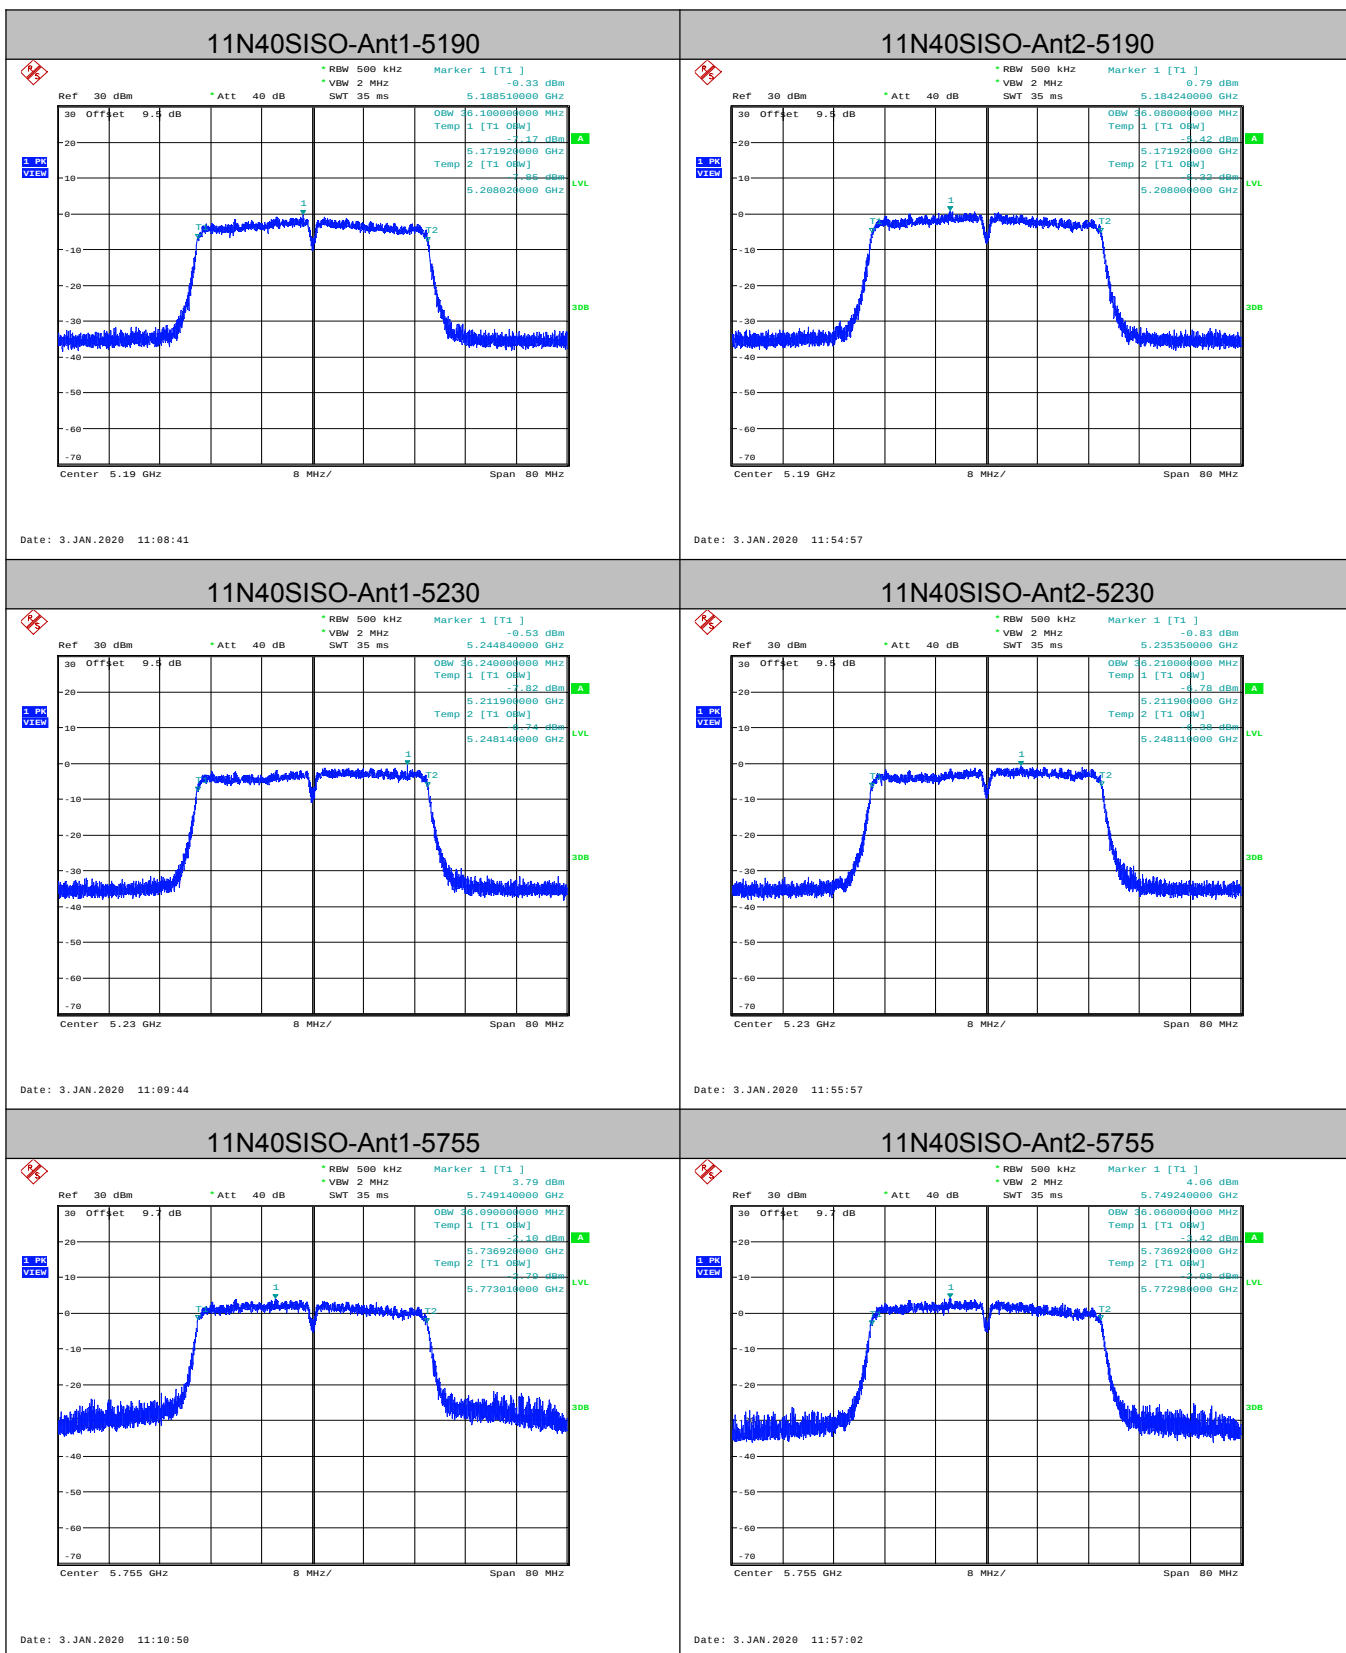


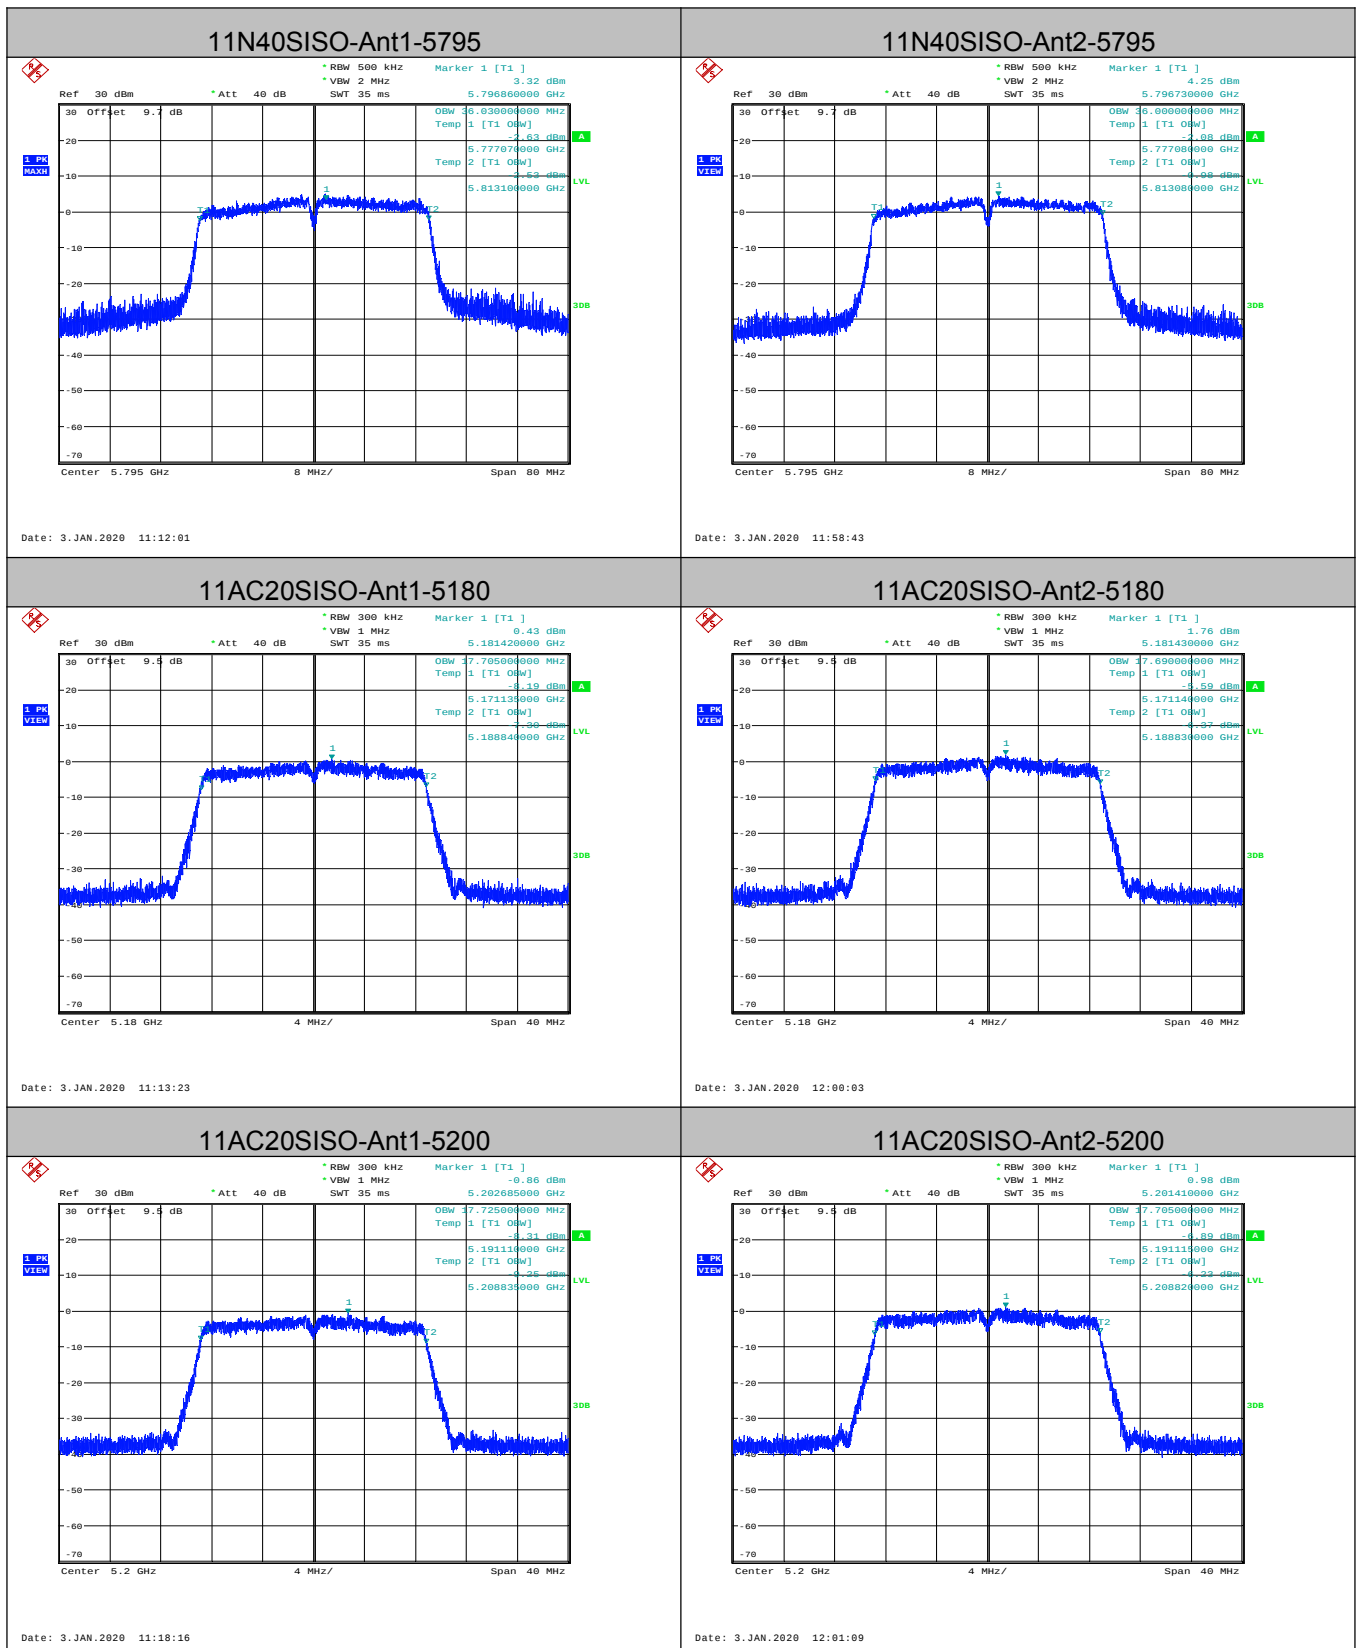


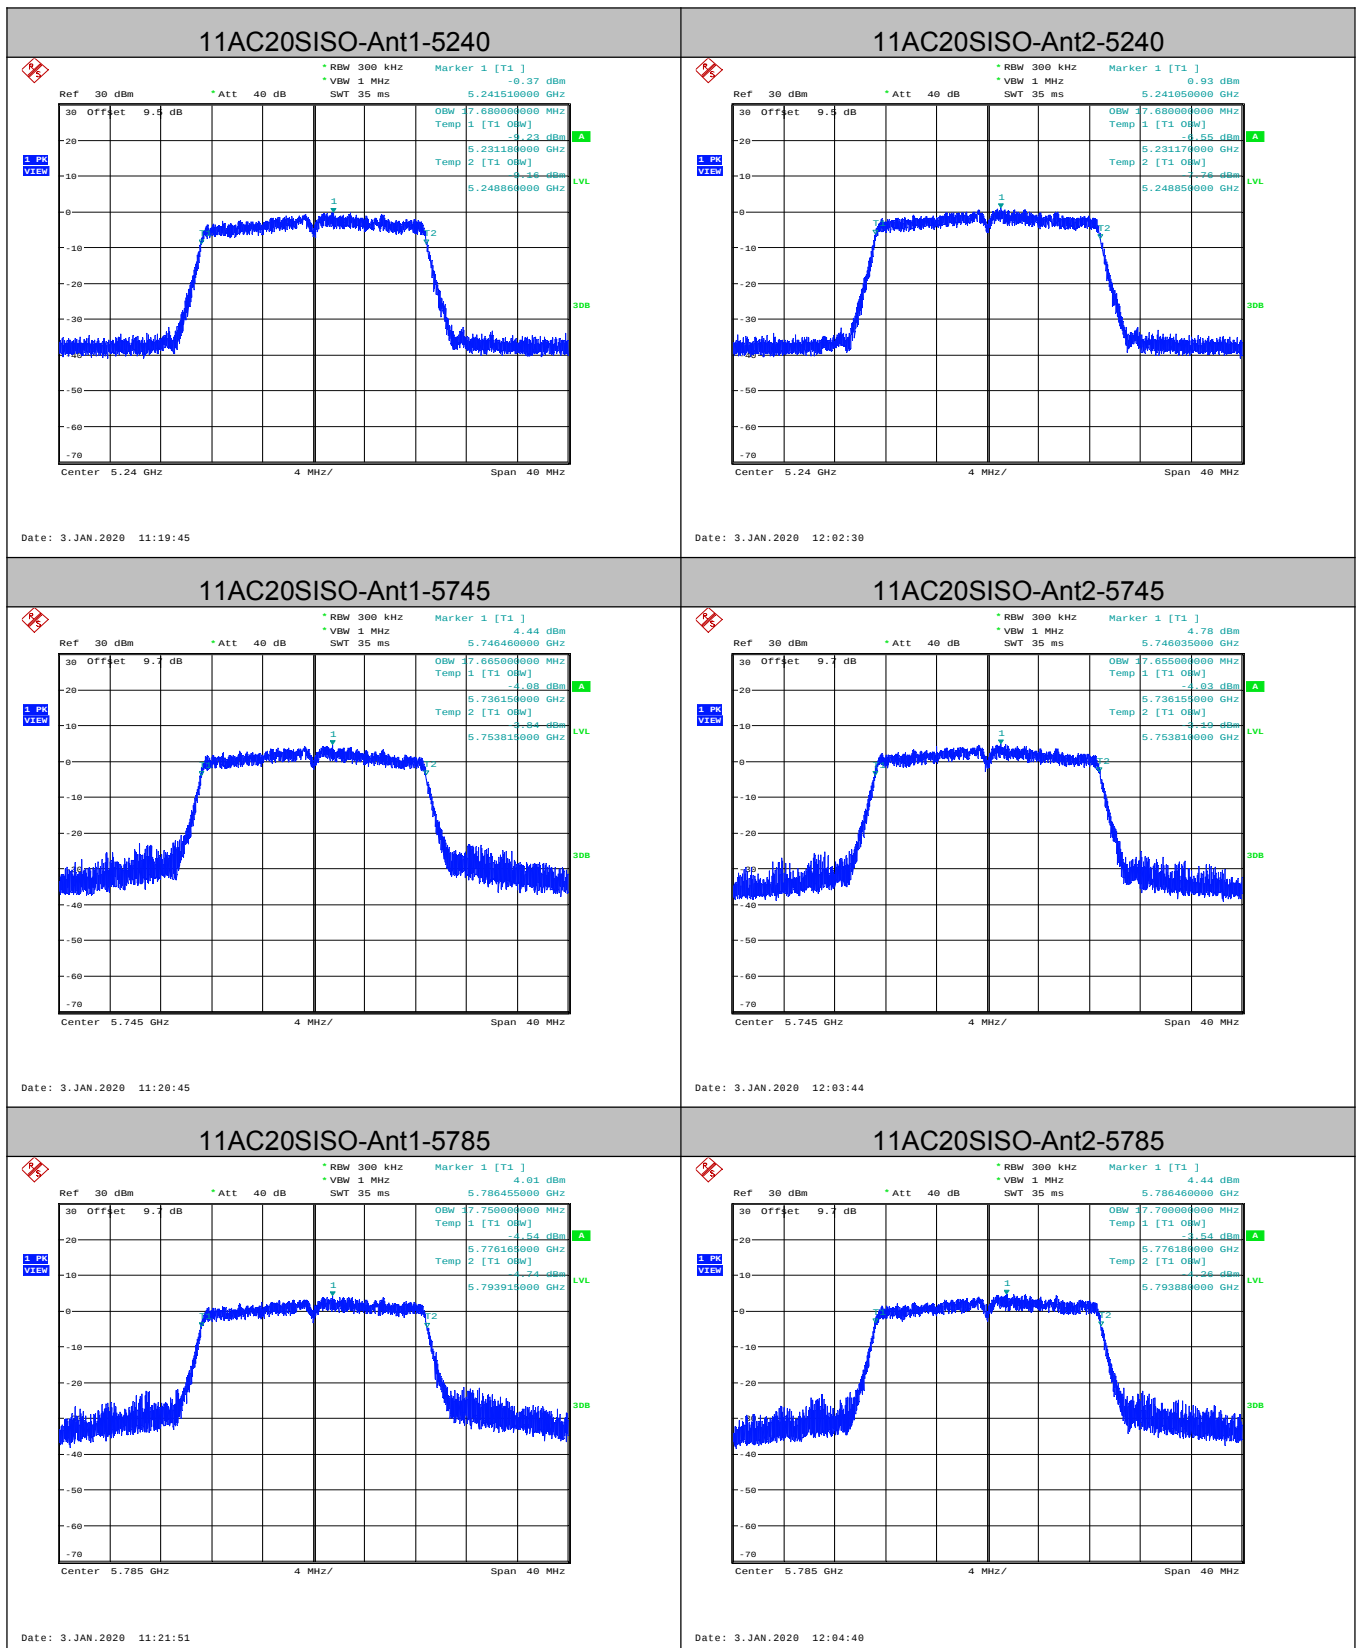


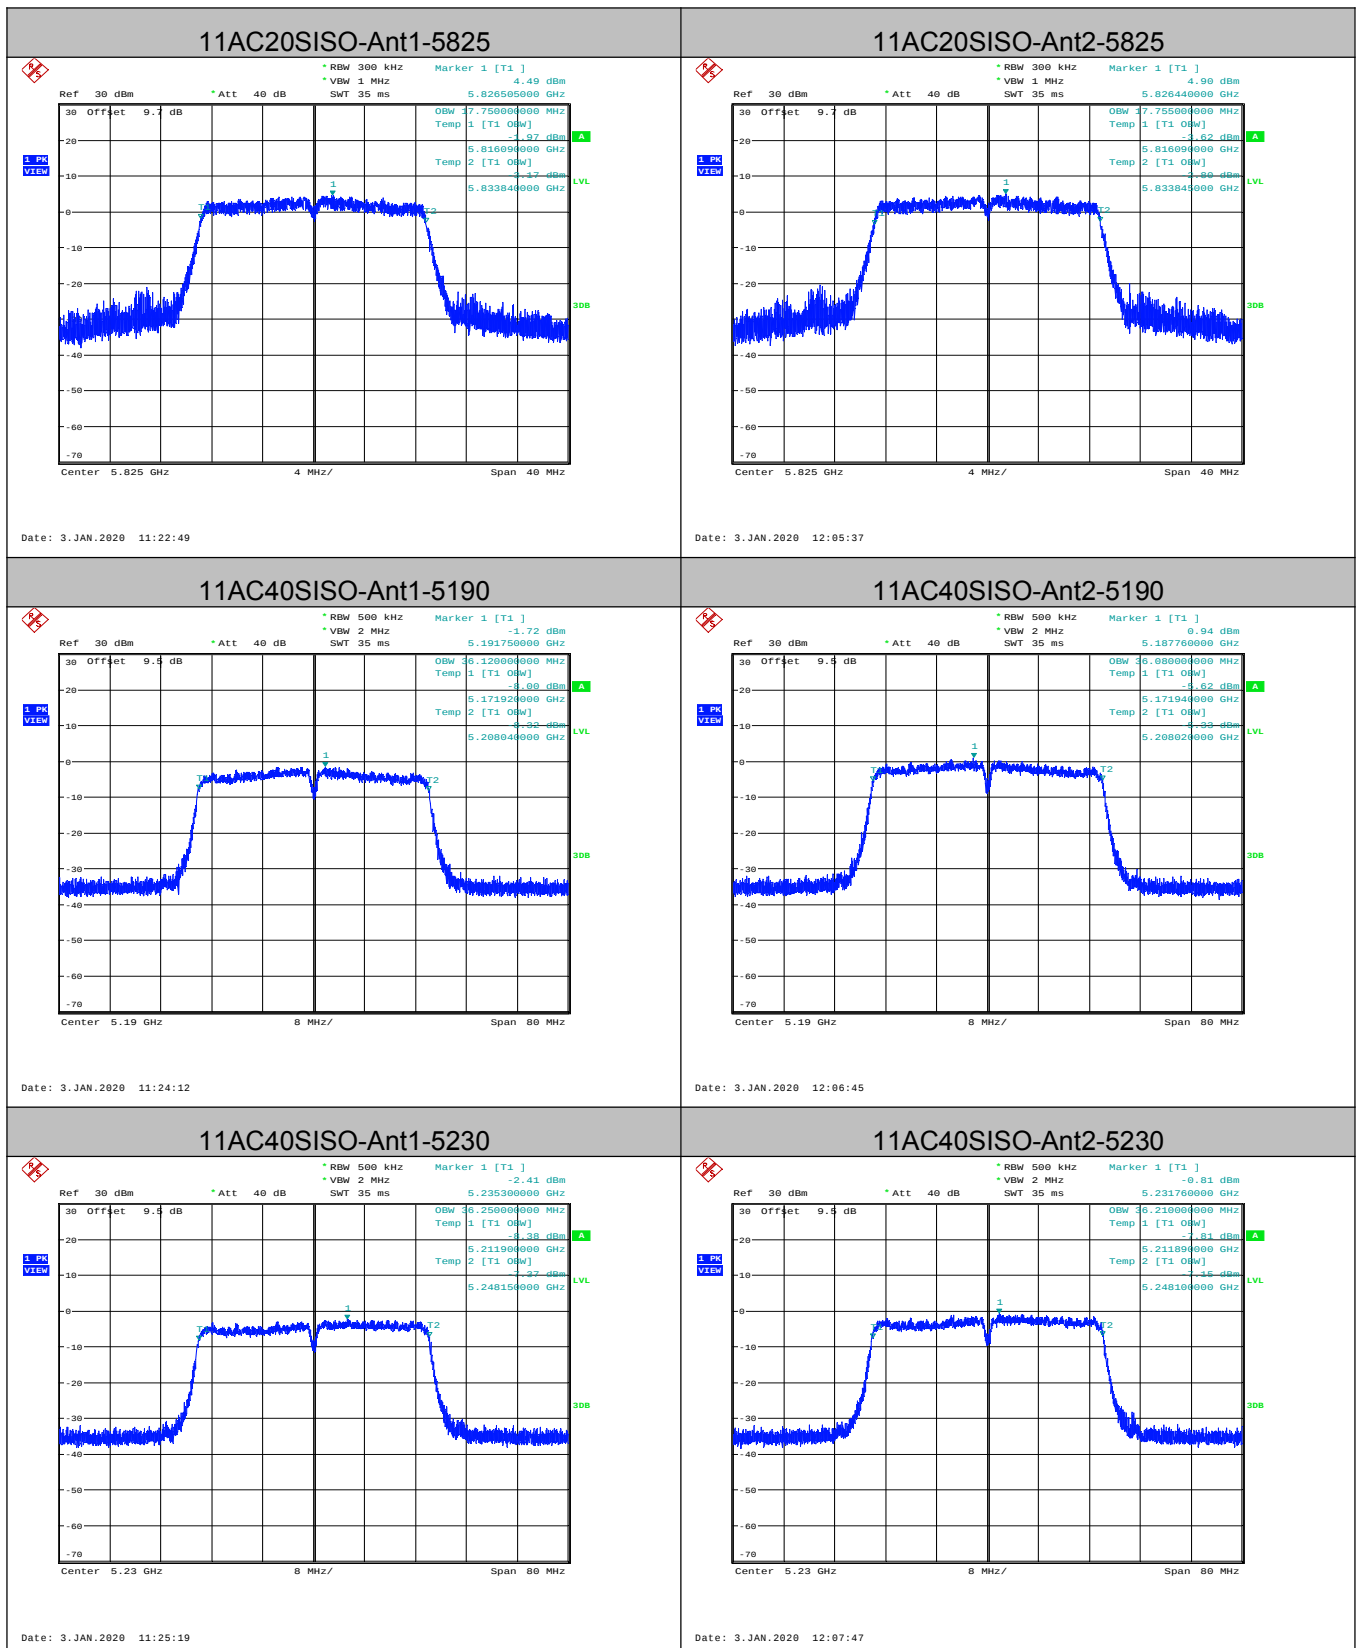


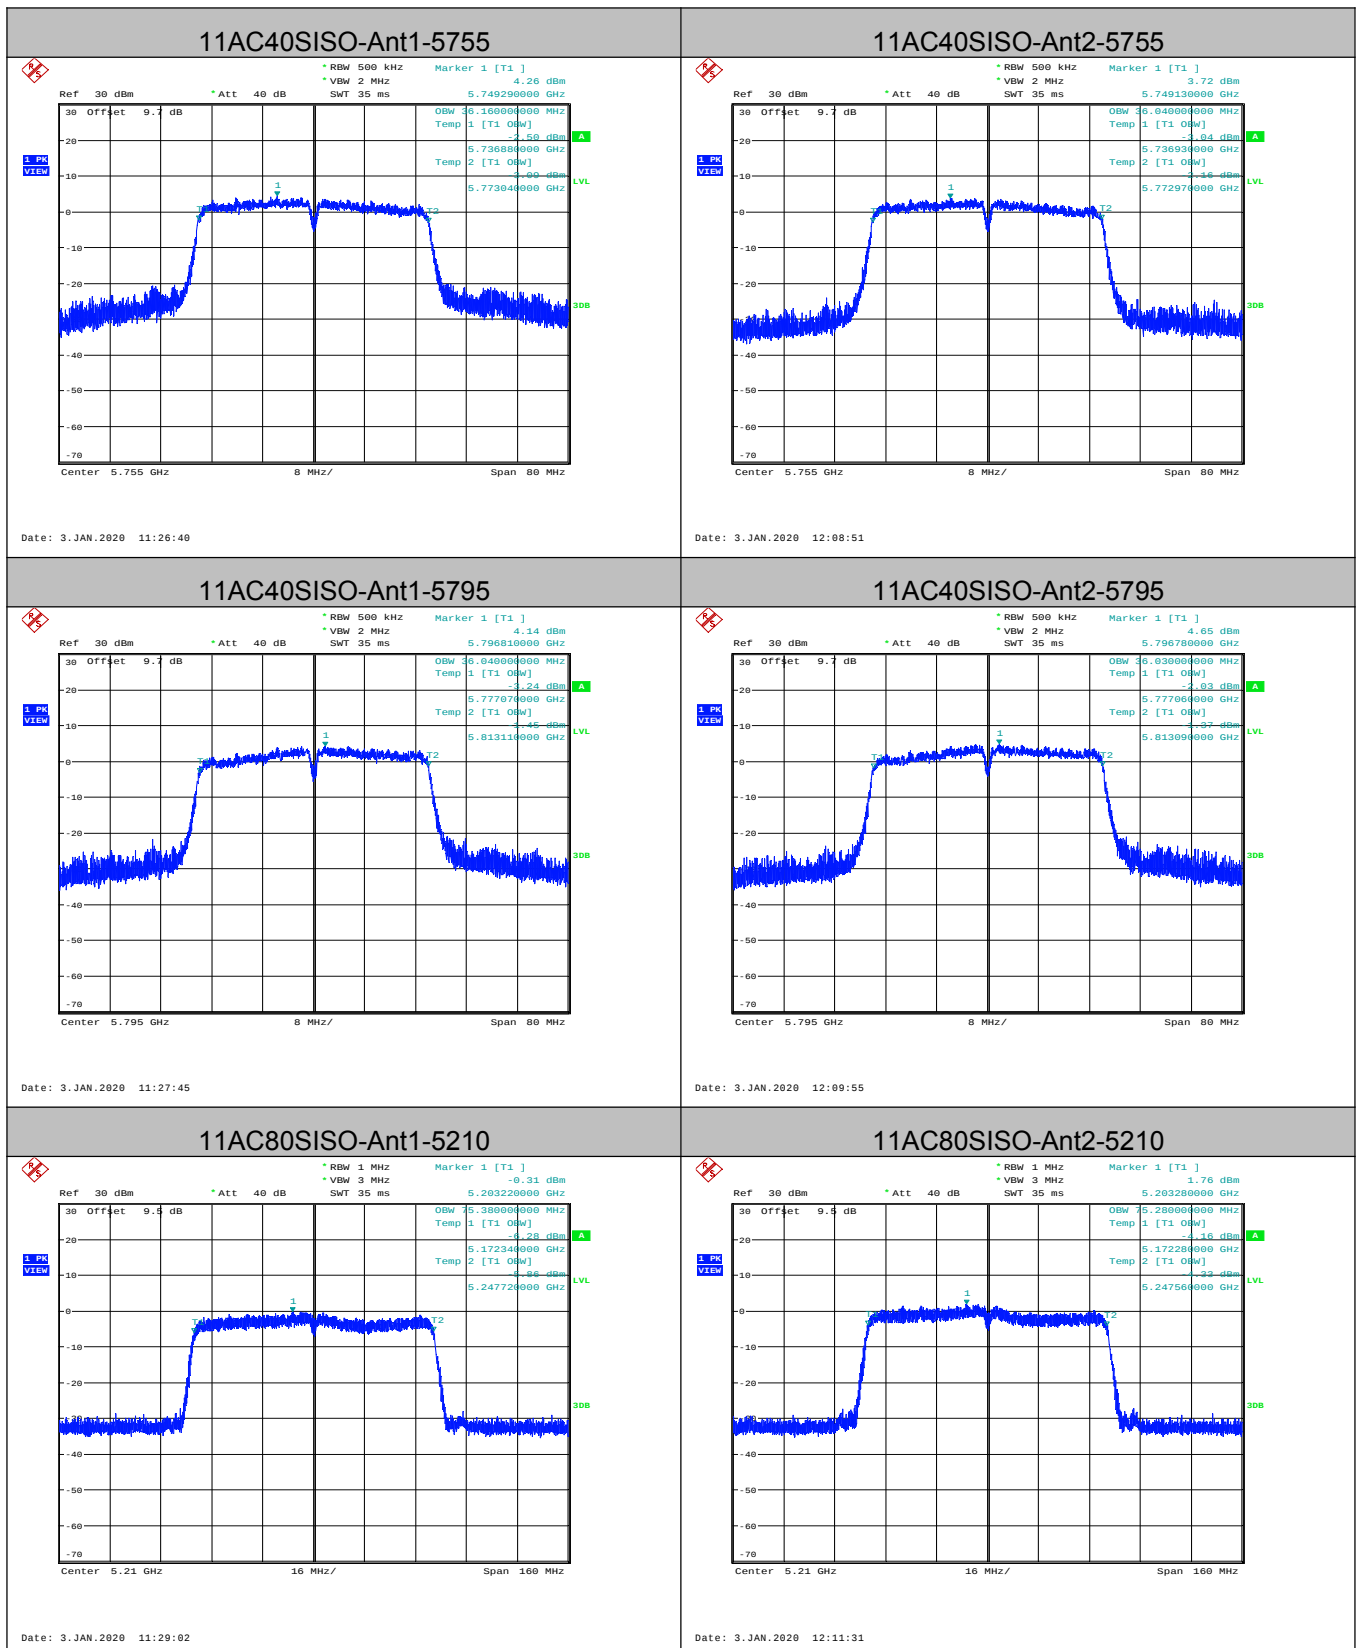


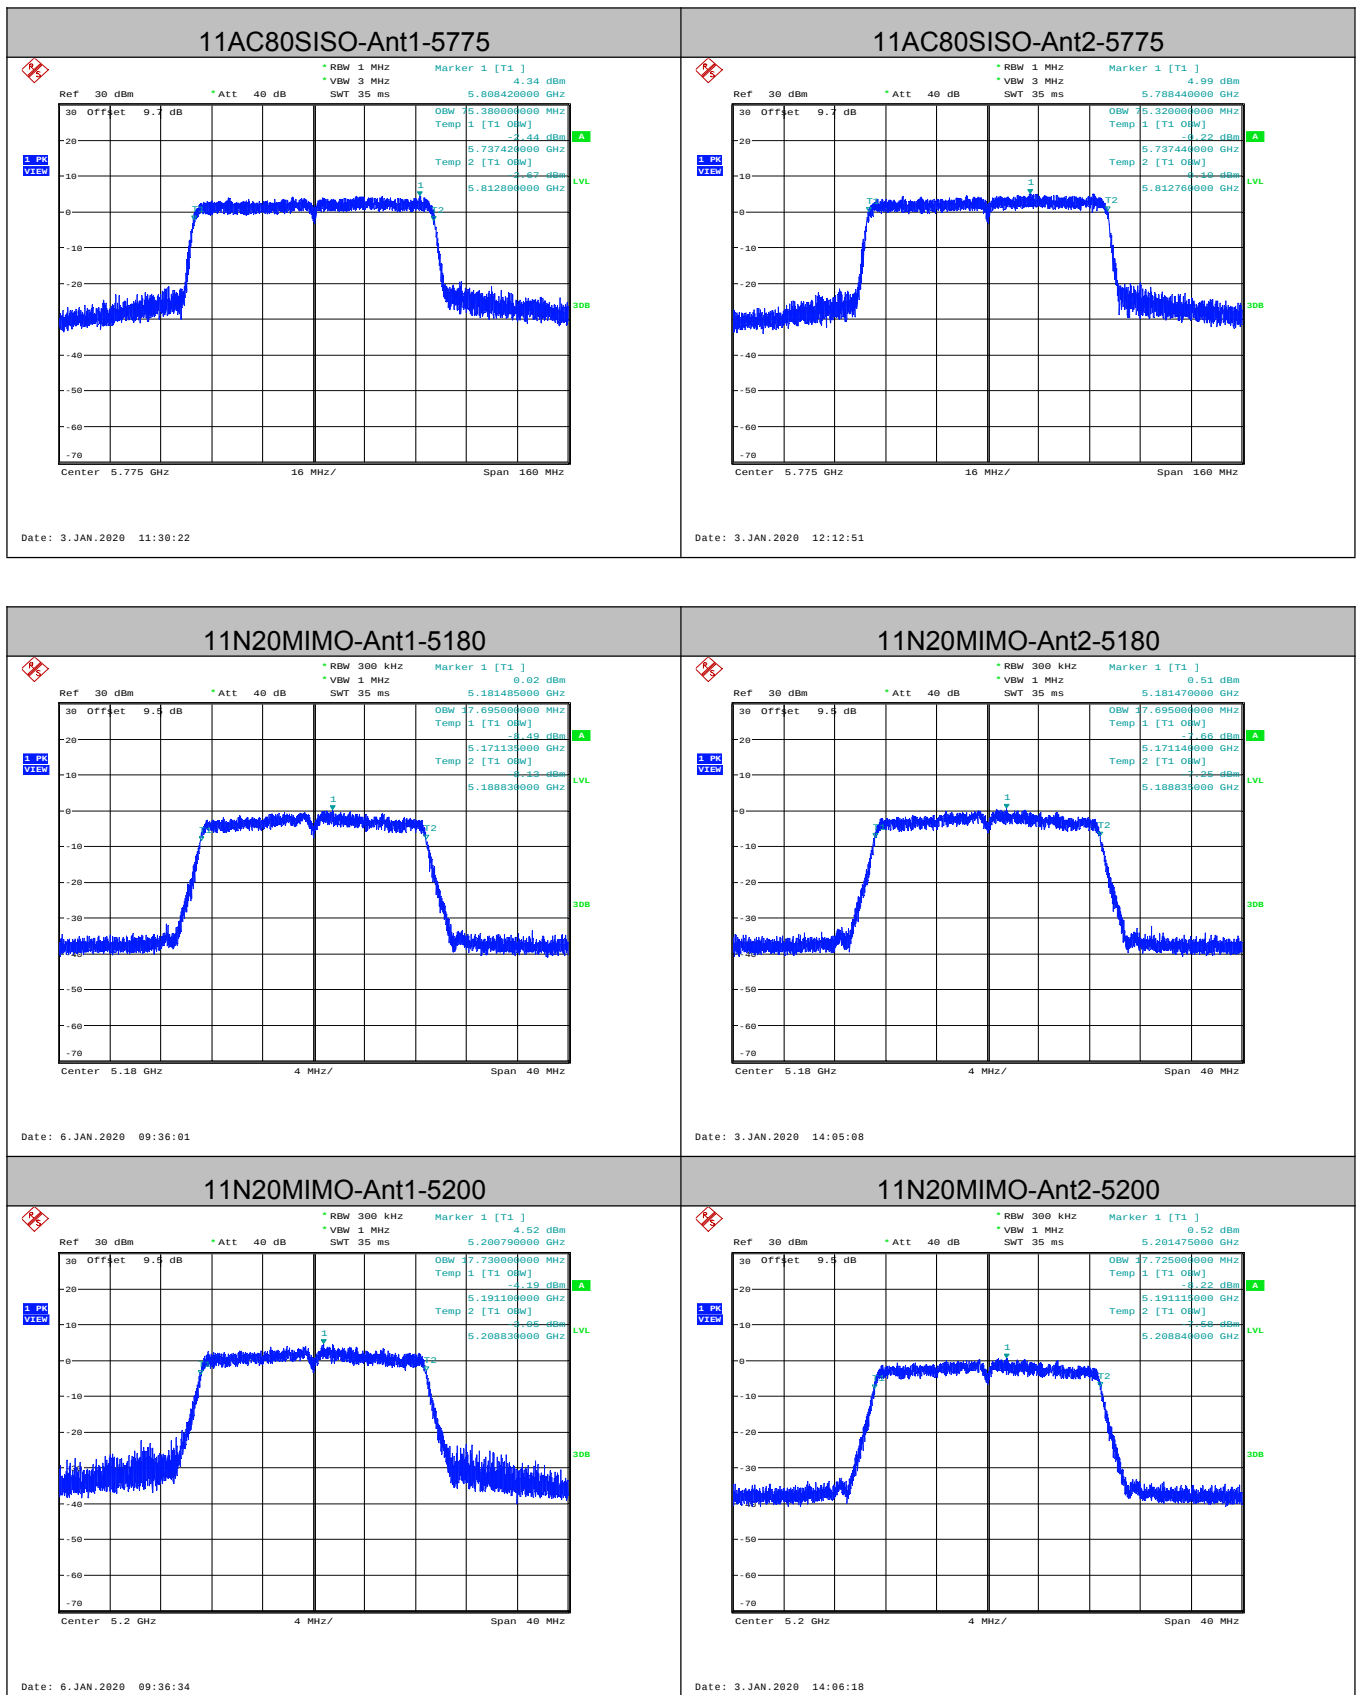


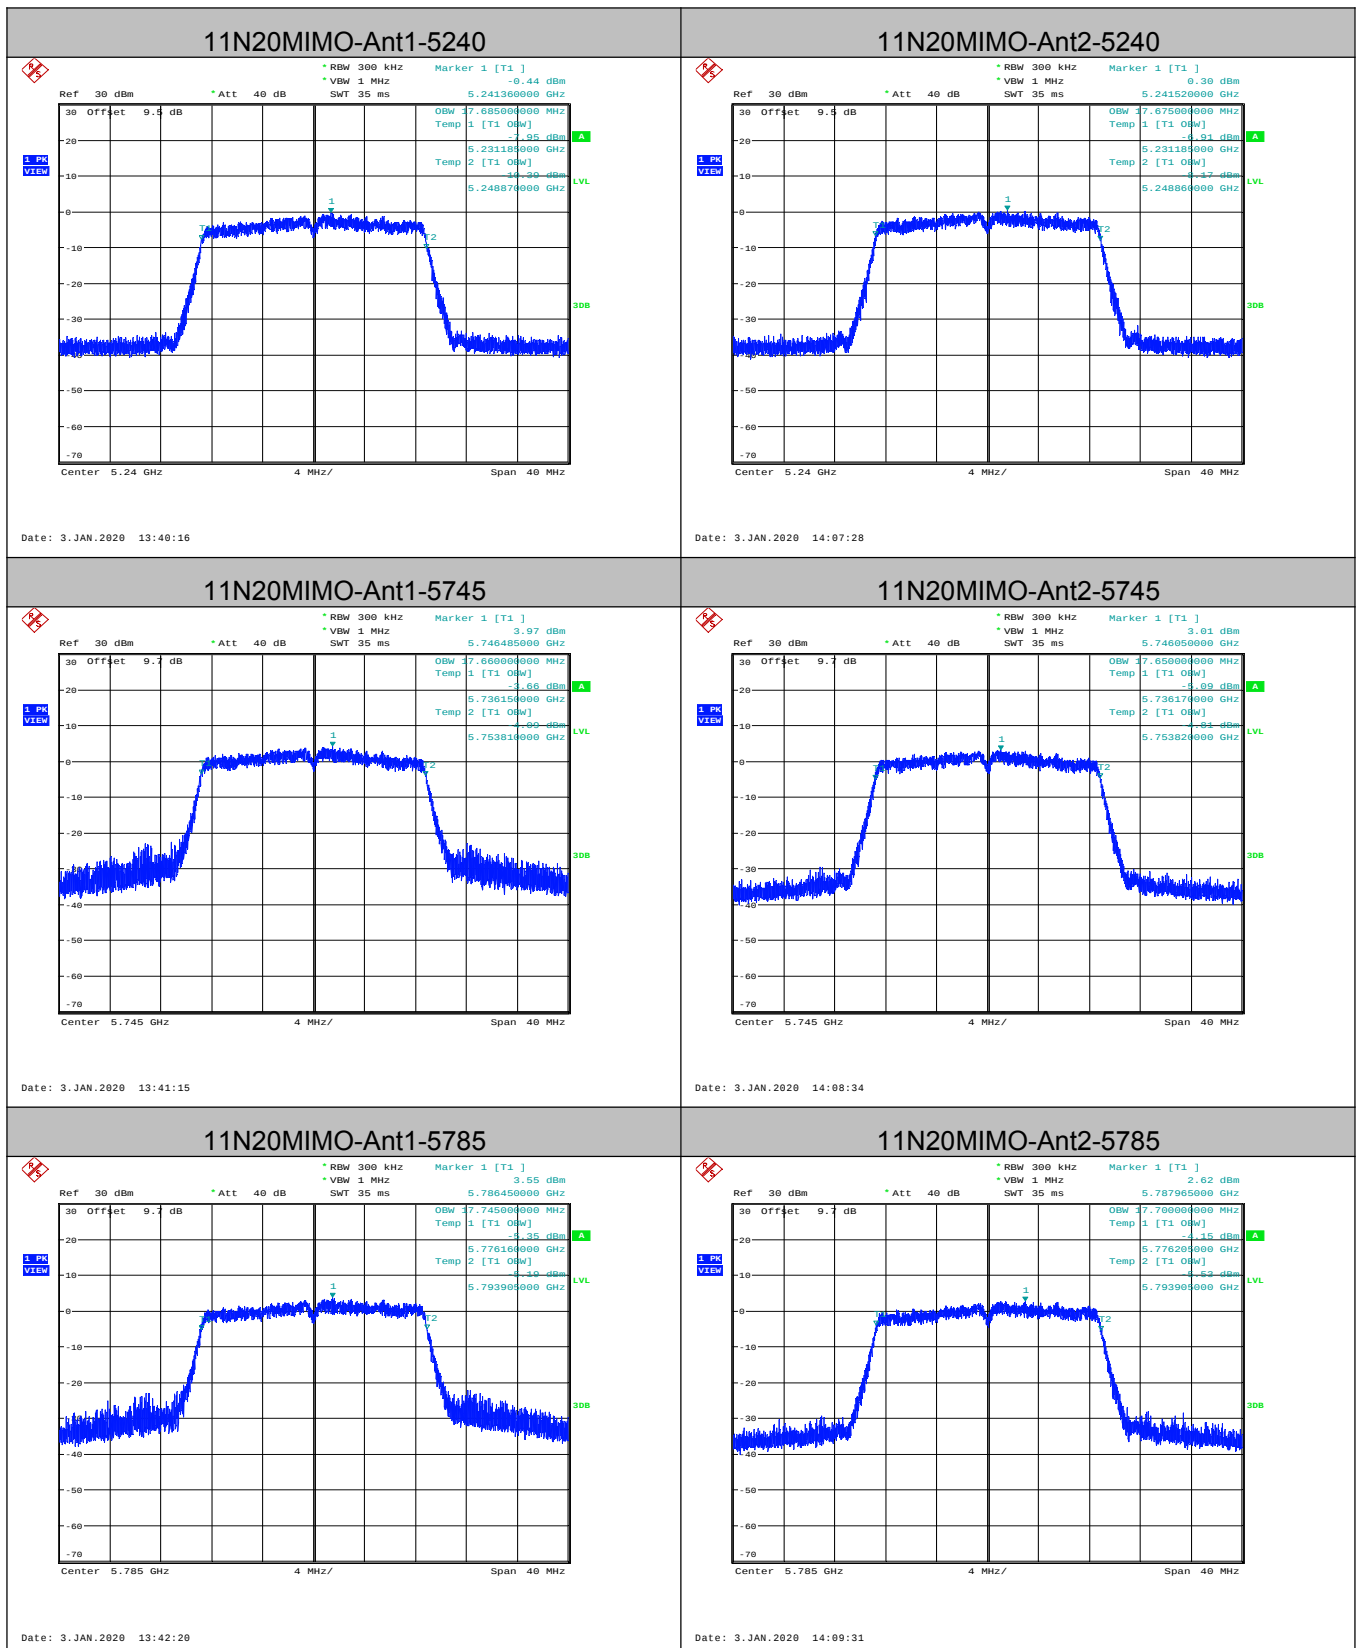


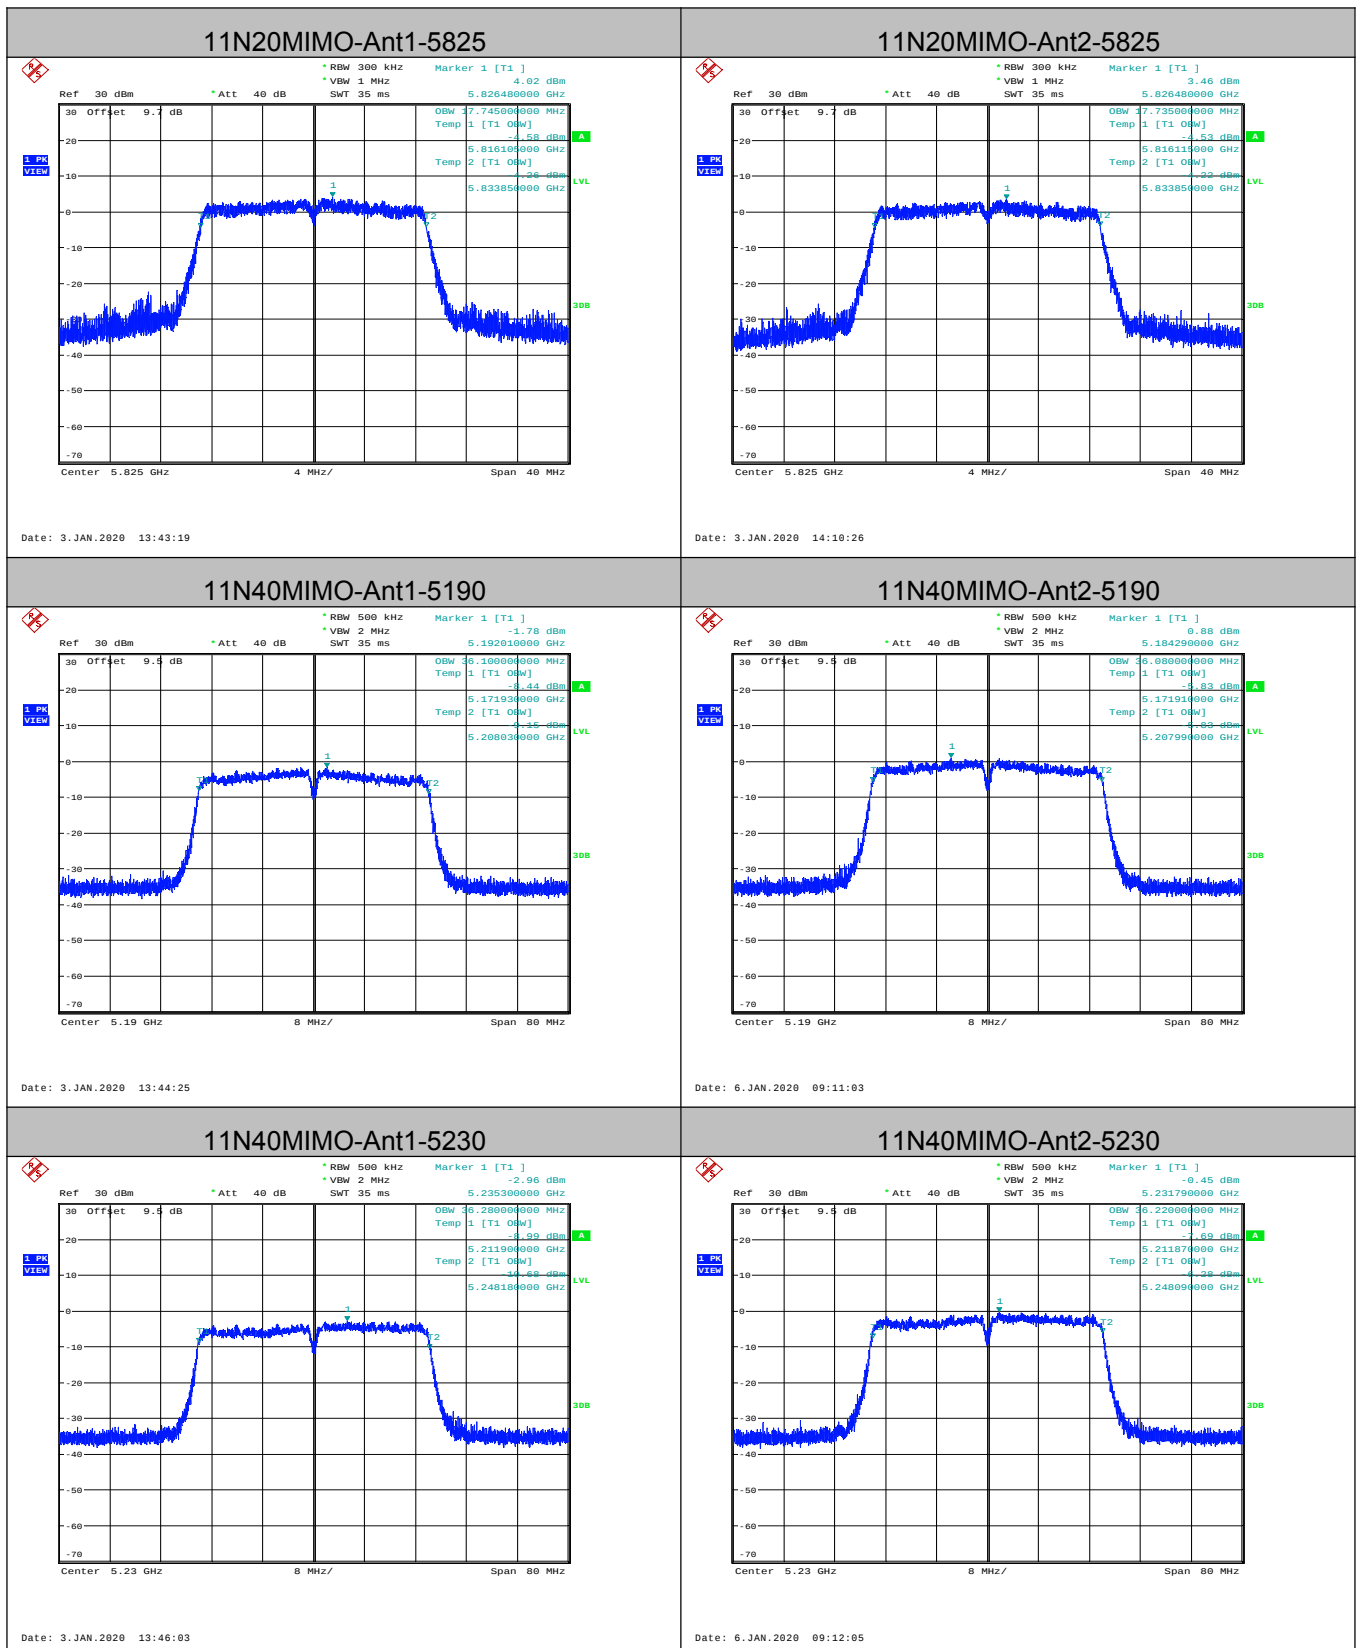


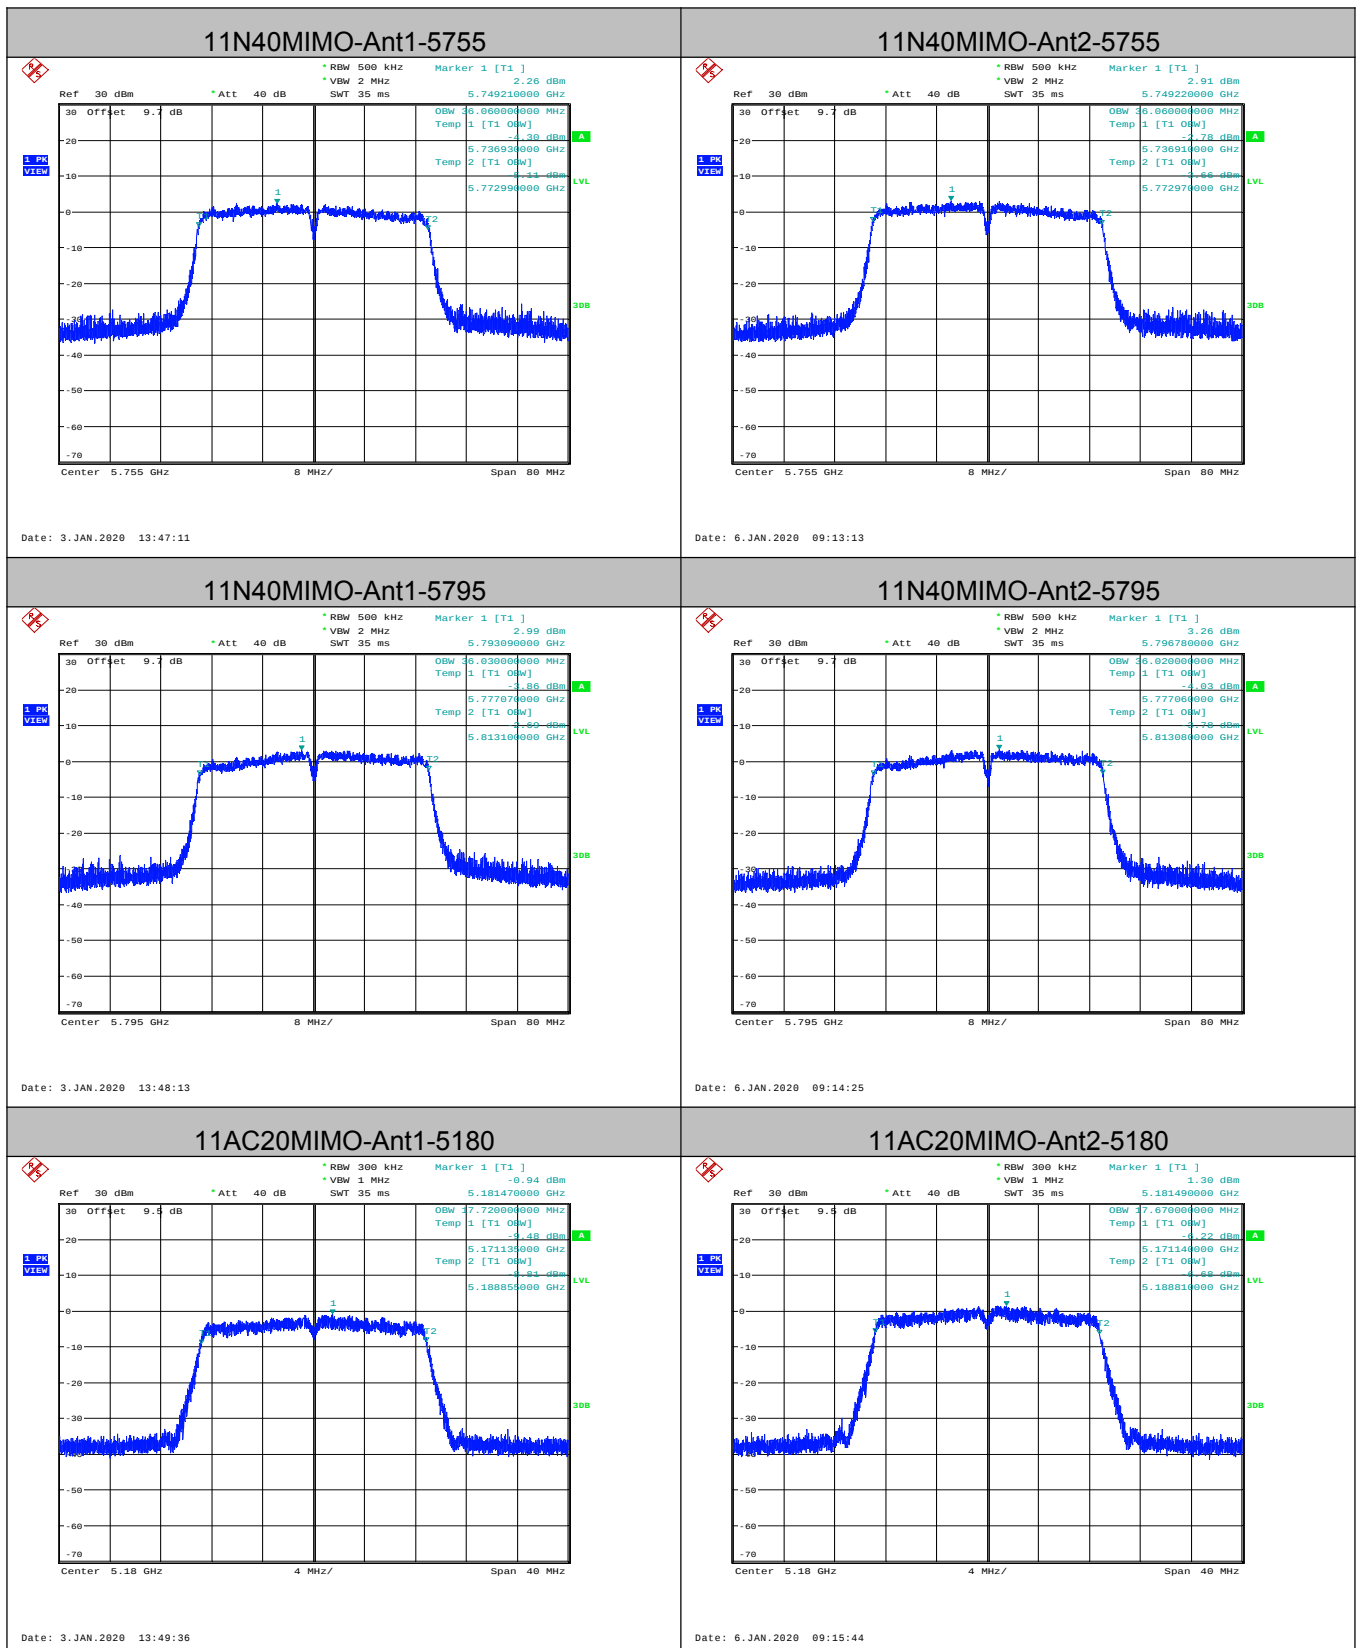

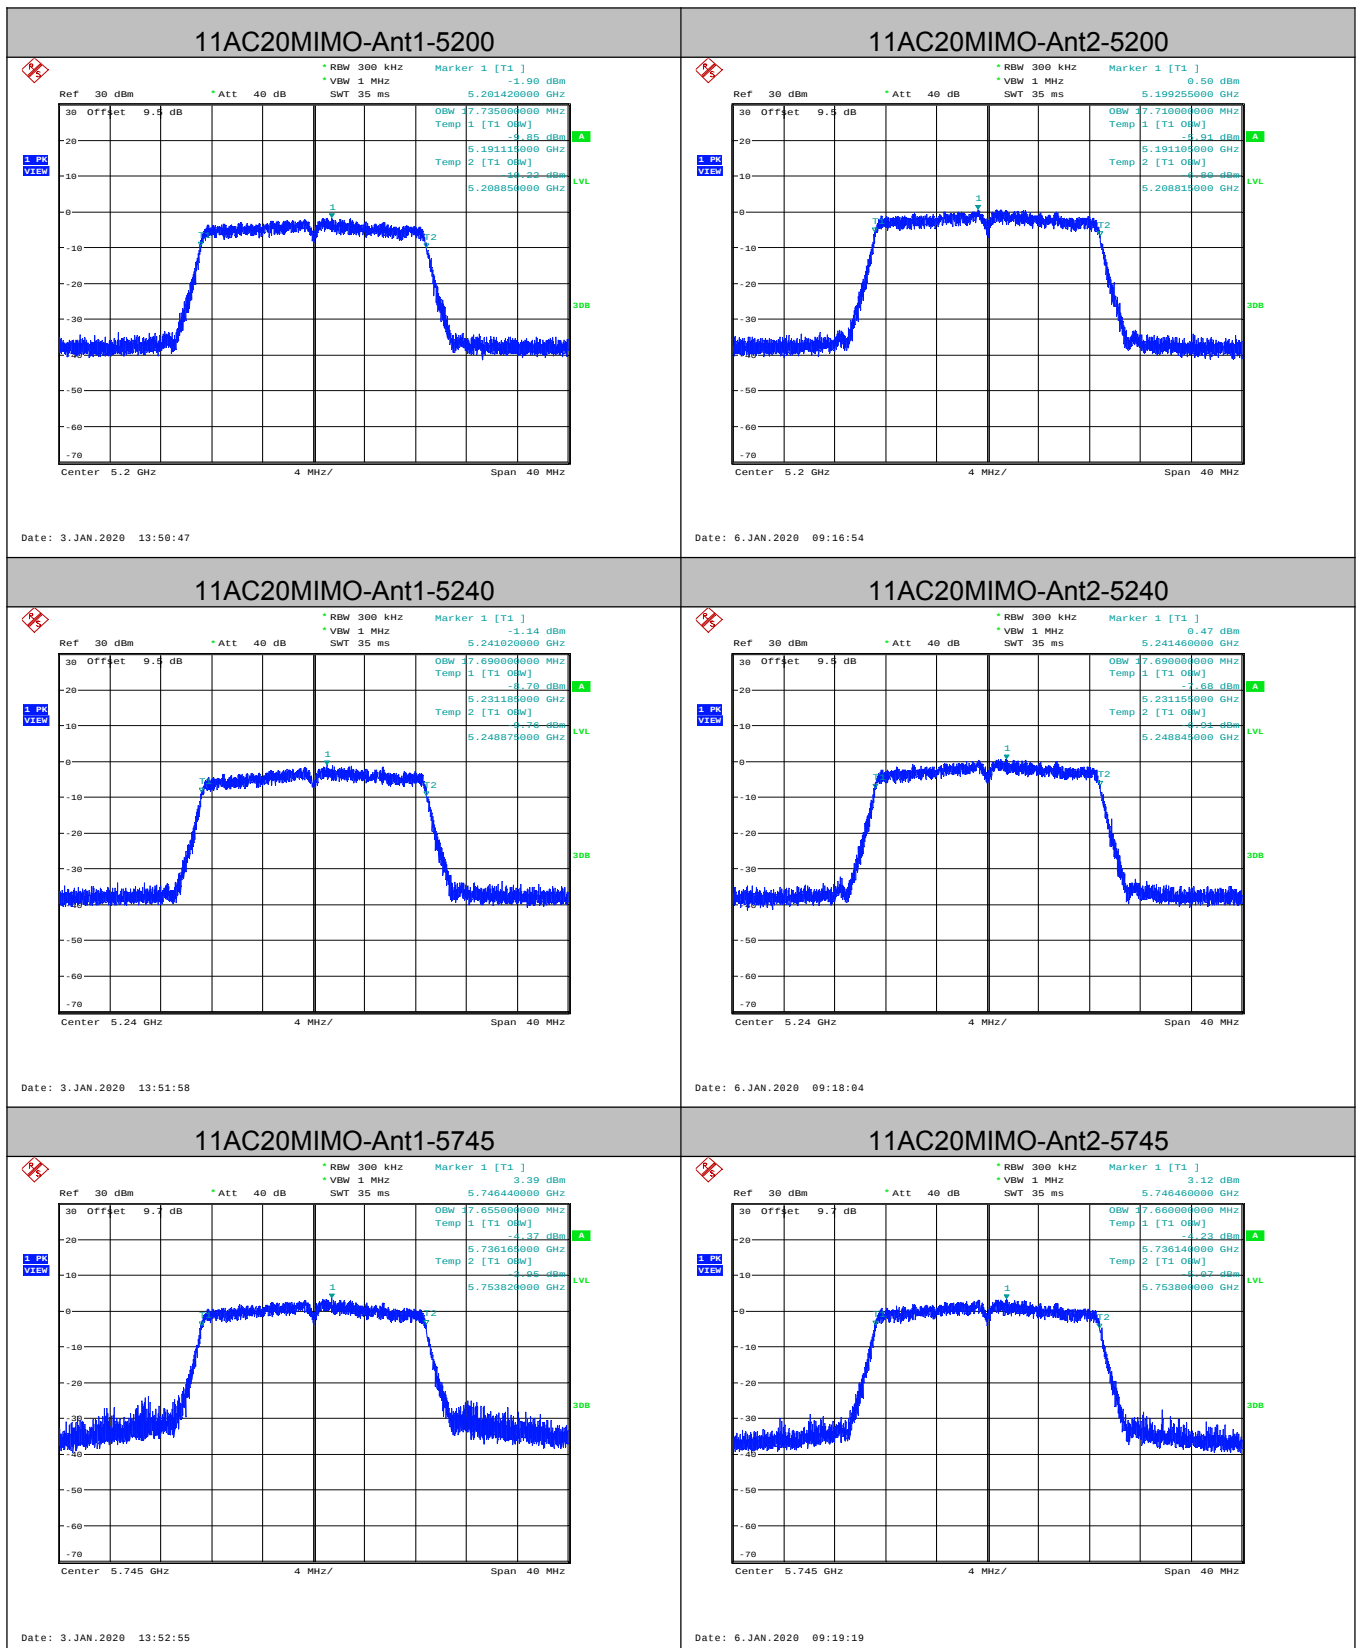

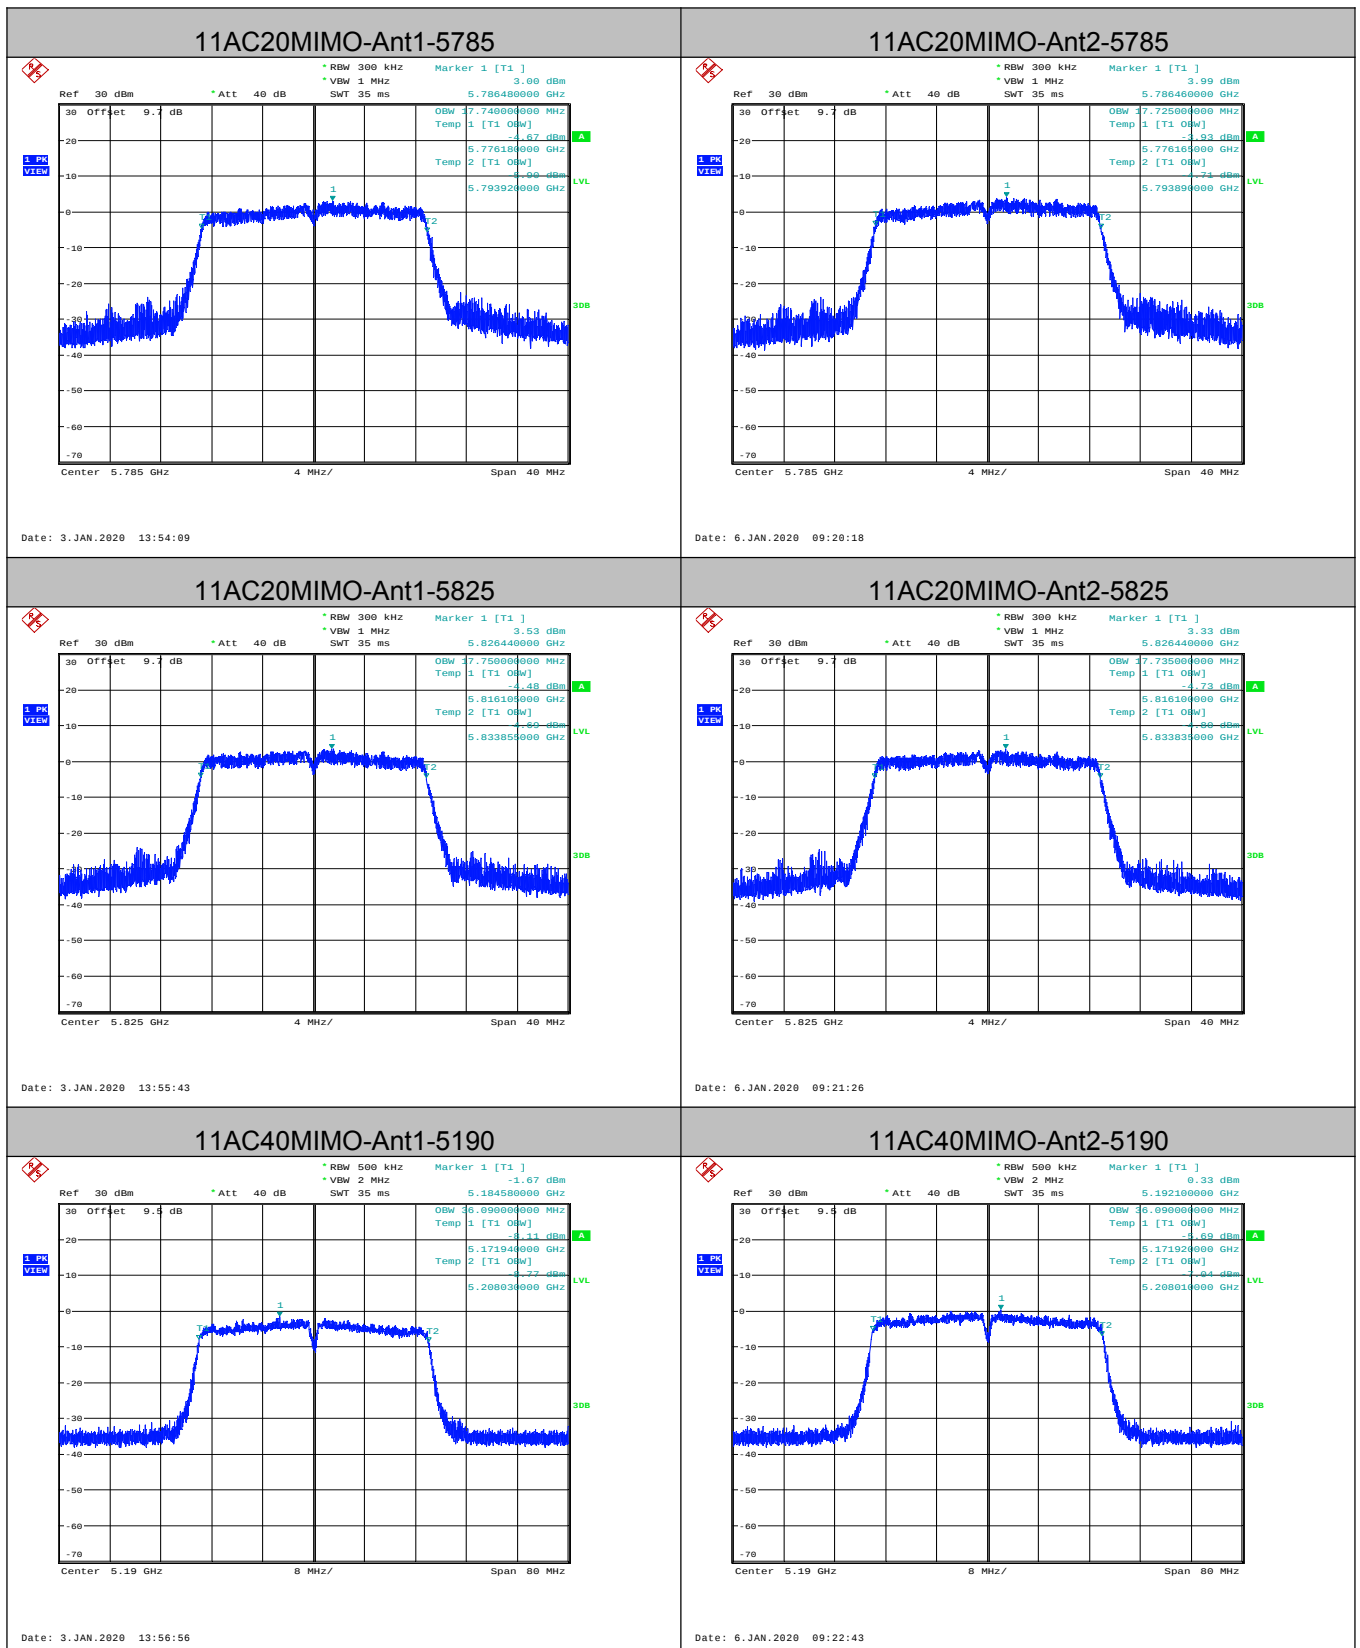

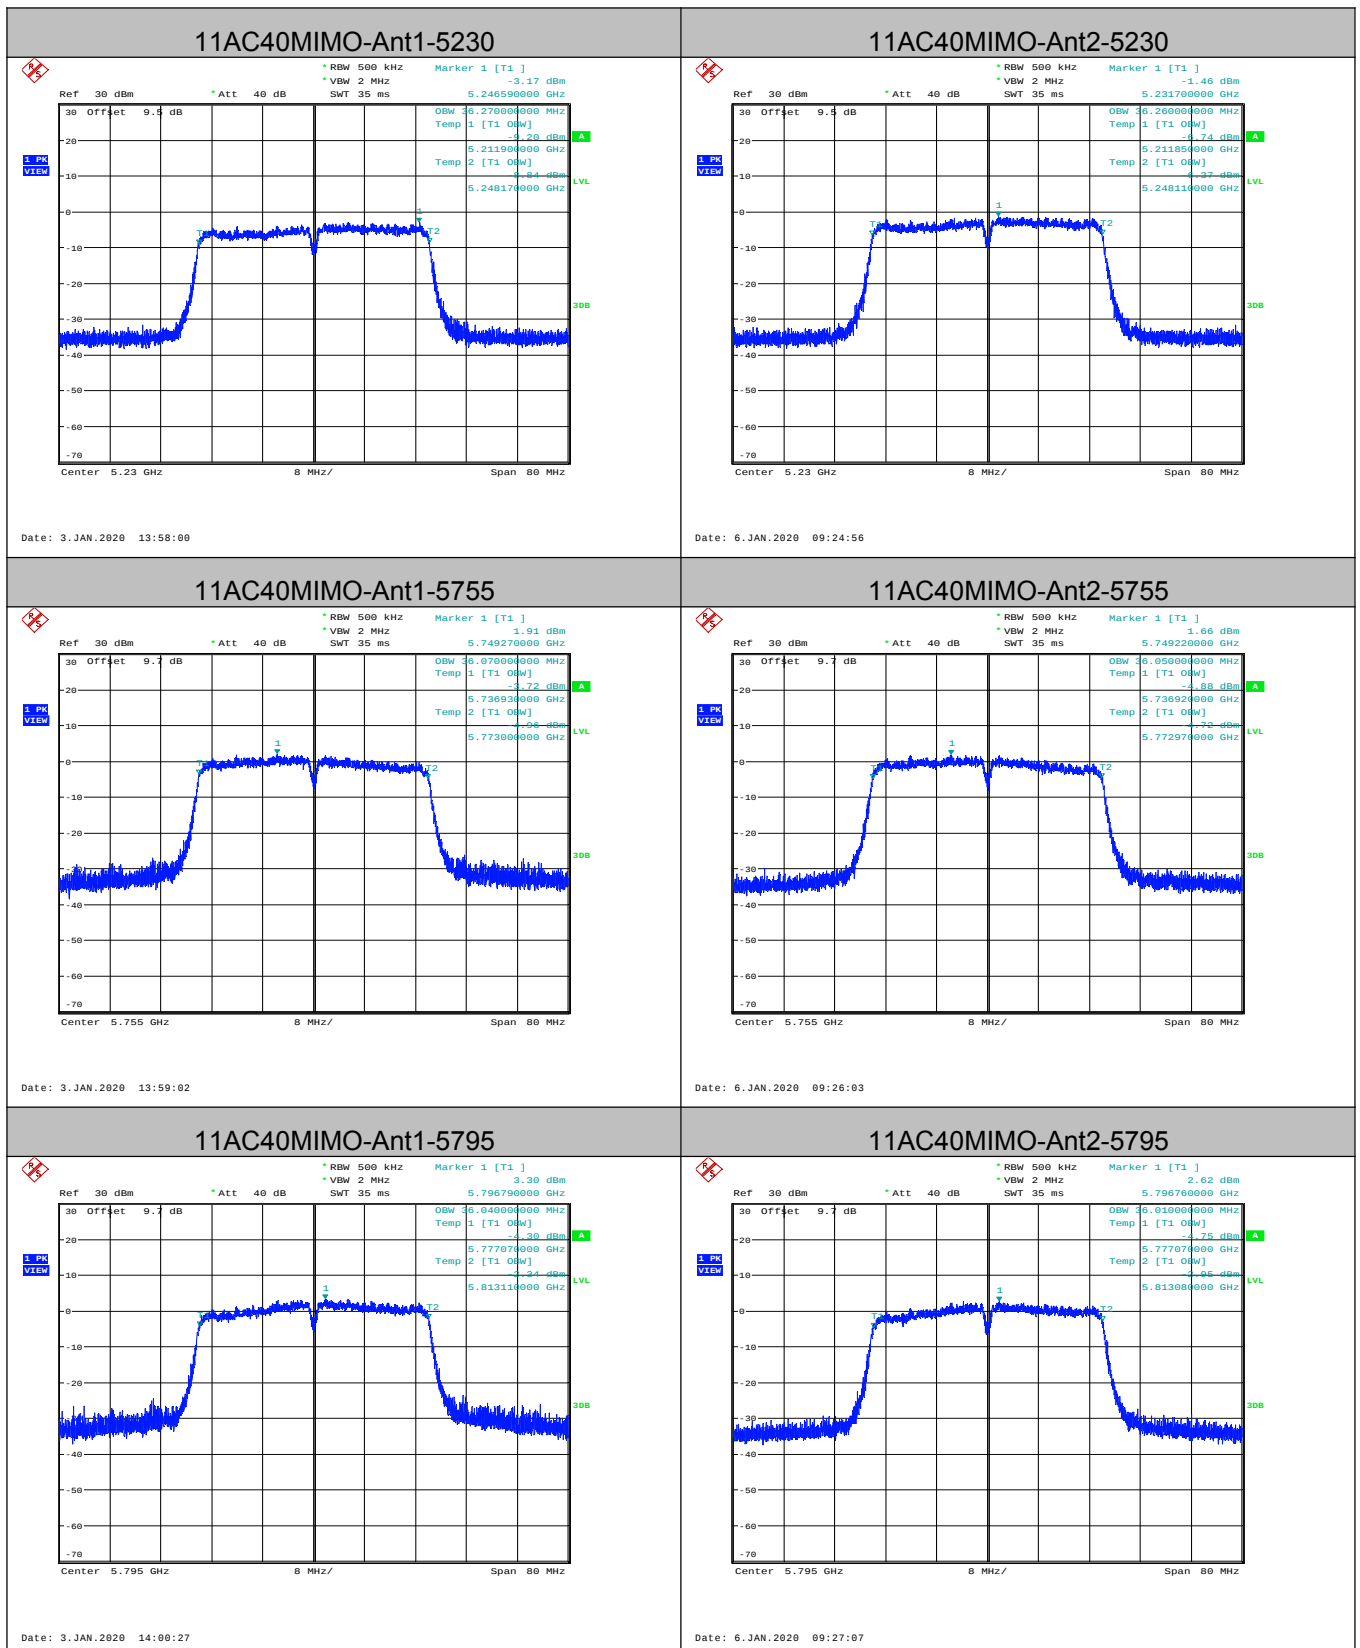

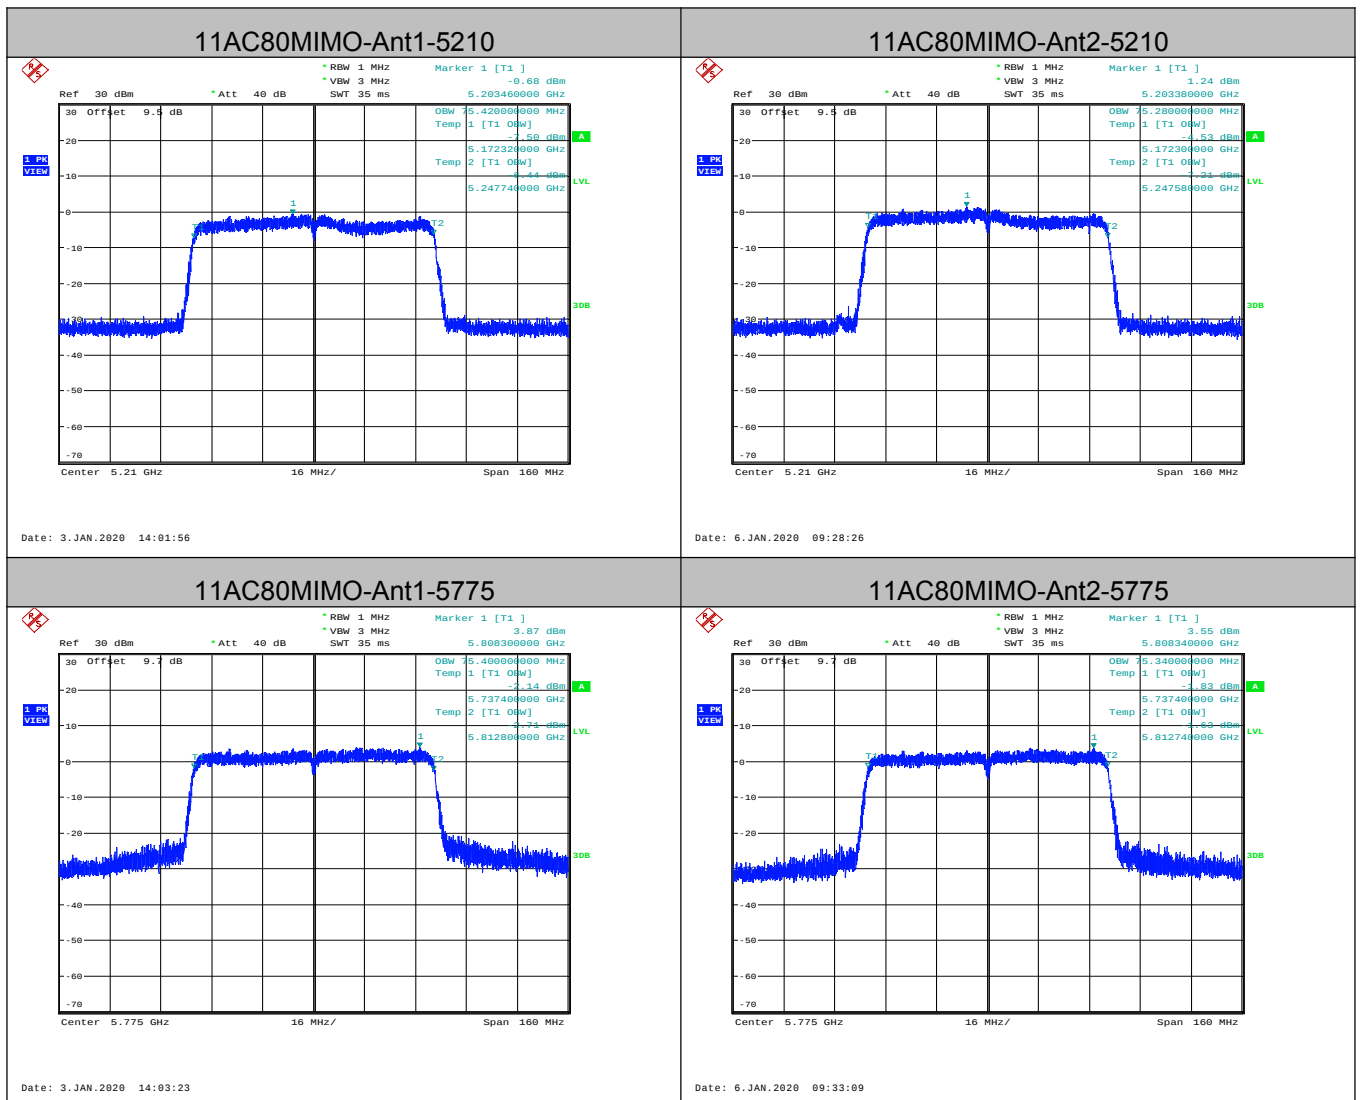

Appendix B): Maximum Conduct Output Power

Directional Antenna Gain

The TX chains are correlated, the antenna gain is equal among the chains.

Employs an antenna that operates simultaneously on multiple directional beams using the same frequency channels. No carrier aggregation techniques.

The directional gainis:

Antenna 1 Gain(dBi)	Antenna 2 Gain(dBi)
5.0	5.0

Duty Cycle:

ANT1			
Test Mode	Channel	Duty Cycle[%]	Duty Cycle factor (dB)
11A	5180	92.89	0.32
11A	5200	92.89	0.32
11A	5240	95.12	0.22
11A	5745	92.89	0.32
11A	5785	95.12	0.22
11A	5825	96.8	0.14
11N20SISO	5180	94.09	0.26
11N20SISO	5200	92.94	0.32
11N20SISO	5240	95.95	0.18
11N20SISO	5745	95.95	0.18
11N20SISO	5785	92.38	0.34
11N20SISO	5825	91.82	0.37
11N40SISO	5190	81.66	0.88
11N40SISO	5230	81.82	0.87
11N40SISO	5755	78.41	1.06
11N40SISO	5795	93.56	0.29
11N20MIMO	5180	92.38	0.34
11N20MIMO	5200	90.11	0.45
11N20MIMO	5240	94.17	0.26
11N20MIMO	5745	95.35	0.21
11N20MIMO	5785	95.35	0.21
11N20MIMO	5825	89.07	0.50
11N40MIMO	5190	92.05	0.36
11N40MIMO	5230	78.26	1.06
11N40MIMO	5755	84.74	0.72
11N40MIMO	5795	85.88	0.66
11AC20SISO	5180	93.06	0.31
11AC20SISO	5200	88.73	0.52
11AC20SISO	5240	90.88	0.42
11AC20SISO	5745	88.73	0.52
11AC20SISO	5785	94.85	0.23
11AC20SISO	5825	94.27	0.26

11AC40SISO	5190	78.62	1.04
11AC40SISO	5230	88.05	0.55
11AC40SISO	5755	90.28	0.44
11AC40SISO	5795	91.36	0.39
11AC80SISO	5210	72.55	1.39
11AC80SISO	5775	74.17	1.30
11AC20MIMO	5180	89.24	0.49
11AC20MIMO	5200	89.75	0.47
11AC20MIMO	5240	93.06	0.31
11AC20MIMO	5745	91.41	0.39
11AC20MIMO	5785	93.05	0.31
11AC20MIMO	5825	95.43	0.20
11AC40MIMO	5190	88.05	0.55
11AC40MIMO	5230	93.57	0.29
11AC40MIMO	5755	82.42	0.84
11AC40MIMO	5795	78.92	1.03
11AC80MIMO	5210	64.72	1.89
11AC80MIMO	5775	83.91	0.76

ANT2			
Test Mode	Channel	Duty Cycle[%]	Duty Cycle factor (dB)
11A	5180	93.5	0.29
11A	5200	96.8	0.14
11A	5240	92.89	0.32
11A	5745	90.77	0.42
11A	5785	88.73	0.52
11A	5825	92.37	0.34
11N20SISO	5180	93.6	0.29
11N20SISO	5200	89.07	0.50
11N20SISO	5240	93.03	0.31
11N20SISO	5745	88.04	0.55
11N20SISO	5785	92.29	0.35
11N20SISO	5825	95.35	0.21
11N40SISO	5190	80.09	0.96
11N40SISO	5230	88.95	0.51
11N40SISO	5755	84.9	0.71
11N40SISO	5795	79.24	1.01
11N20MIMO	5180	89.59	0.48
11N20MIMO	5200	95.95	0.18

11N20MIMO	5240	89.59	0.48
11N20MIMO	5745	89.07	0.50
11N20MIMO	5785	94.09	0.26
11N20MIMO	5825	92.94	0.32
11N40MIMO	5190	84.74	0.72
11N40MIMO	5230	92.23	0.35
11N40MIMO	5755	79.24	1.01
11N40MIMO	5795	82.73	0.82
11AC20SISO	5180	93.06	0.31
11AC20SISO	5200	89.75	0.47
11AC20SISO	5240	94.76	0.23
11AC20SISO	5745	88.64	0.52
11AC20SISO	5785	96.02	0.18
11AC20SISO	5825	88.22	0.54
11AC40SISO	5190	89.24	0.49
11AC40SISO	5230	82.42	0.84
11AC40SISO	5755	88.22	0.54
11AC40SISO	5795	91.36	0.39
11AC80SISO	5210	72.28	1.41
11AC80SISO	5775	78.7	1.04
11AC20MIMO	5180	94.85	0.23
11AC20MIMO	5200	90.88	0.42
11AC20MIMO	5240	93.62	0.29
11AC20MIMO	5745	89.24	0.49
11AC20MIMO	5785	90.8	0.42
11AC20MIMO	5825	90.27	0.44
11AC40MIMO	5190	80.57	0.94
11AC40MIMO	5230	86.1	0.65
11AC40MIMO	5755	84.19	0.75
11AC40MIMO	5795	82.26	0.85
11AC80MIMO	5210	69.63	1.57
11AC80MIMO	5775	85.81	0.66

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test plot as follows:

